

JLR No.: 29803-000.1
Revision: 0

August 12, 2021

Prepared for:

WILDPINE TRAILS INC
1202 Carp Road
Stittsville, ON
K2S 1B9

Prepared by:

J.L. RICHARDS & ASSOCIATES LIMITED
864 Lady Ellen Place
Ottawa, ON
K1Z 5M2
Tel: 613-728-3571
Fax: 613-728-6012

Noise Control Feasibility Study

Wildpine Trails



Noise Control Feasibility Study

Wildpine Trails

Table of Contents

1.0	INTRODUCTION.....	1
2.0	PROJECT DESCRIPTION.....	1
3.0	TRANSPORTATION NOISE SOURCE.....	1
3.1	Transportation Sound Level Criteria.....	1
3.2	Transportation Noise Attenuation Requirements.....	2
3.3	Prediction of Noise Levels.....	4
	3.3.1 Road Traffic Data.....	4
	3.3.2 Noise Level Calculations (Transportation).....	4
3.4	Summary of Findings (Transportation).....	5
4.0	CONCLUSION AND RECOMMENDATIONS.....	5

List of Tables

Table 1:	Outdoor Noise Control Measures for Surface Transportation Noise.....	2
Table 2:	Indoor Noise Control Measures for Surface Transportation Noise.....	2
Table 3:	Outdoor Living Area (OLA) Noise Limit for Surface Transportation.....	3
Table 4:	Indoor Noise Limit for Surface Transportation.....	3
Table 5:	Road Traffic Data to Predict Noise Levels.....	4
Table 6:	Predicted Freefield Noise Levels and Distances from Individual Noise Sources.....	5

List of Figures

FIGURE 1 – Location Plan

List of Appendices

Appendix A	Draft Plan of Subdivision Site Plan Freefield Daytime Noise Contours (Roads) – N1
Appendix B	City of Ottawa Surface Transportation Sample Warning Clauses
Appendix C	<u>Transportation Noise Source Predictions</u> Detailed Predicted Freefield Noise Level Calculations

Noise Control Feasibility Study

Wildpine Trails

1.0 INTRODUCTION

In 2020, J.L. Richards & Associates Limited (JLR) was retained by Wildpine Trails Inc (WT) to prepare a Noise Control Feasibility Study for their development known as Wildpine Trails, located in the Village of Stittsville at 37 Wildpine Court, within the City of Ottawa. The legal description of the subject property is Part of Lot 24, Concession 11 Geographic Township of Goulbourn, City of Ottawa. The purpose of this study is to assess the potential environmental noise impact on the Development, due to vehicular traffic on Stittsville Main Street. This Noise Control Feasibility Study develops a strategy for subdivision development that minimizes the reliance upon noise barriers, ventilation requirements and air conditioning as a means of addressing roadway noise and instead examines land use, roadway layout and building orientation as a principal means to mitigate roadway noise. Land use and building orientation identified in this study will then be examined in detail as part of the Noise Control Detailed Design Study prepared for the subdivision application.

This report is prepared to satisfy the Ministry of the Environment (MOE) Environmental Noise Guidelines NPC-300 and the City of Ottawa Environmental Noise Control Guidelines (approved by City Council January 2016) and in particular Part 4 Section 3.1 Noise Control Feasibility Study Requirements.

2.0 PROJECT DESCRIPTION

The proposed Wildpine Trails development is situated on a ± 2.1 ha parcel of land that is bounded by existing residential to the west and south, wetlands to the north and east, as shown on Figure 1 - Location Plan.

WT's proposed Wildpine Trails development consists of 29 townhouse units on 5 blocks as shown on the Site Plan provided in Appendix 'A'. In addition, the development has one block for a private lane and two blocks for open space, as shown on the Draft Plan of Subdivision provided in Appendix 'A'.


3.0 TRANSPORTATION NOISE SOURCE

The transportation noise source is Stittsville Main Street. Drawing N1 shows the location of the existing roadway in relation to the proposed development.

3.1 Transportation Sound Level Criteria

For the purpose of determining the predicted noise levels, and based on the sound level criteria established by the City of Ottawa Environmental Noise Control Guidelines (ENCG), the following will be used as the maximum acceptable sound levels (Leq) for residential development and other land uses, such as nursing homes, schools and daycare centres:

File Location: P:\29000\29803-000 - Wildpine Trails\5-Production\1-Civil\Figures\29803-LocationPlan.mxd

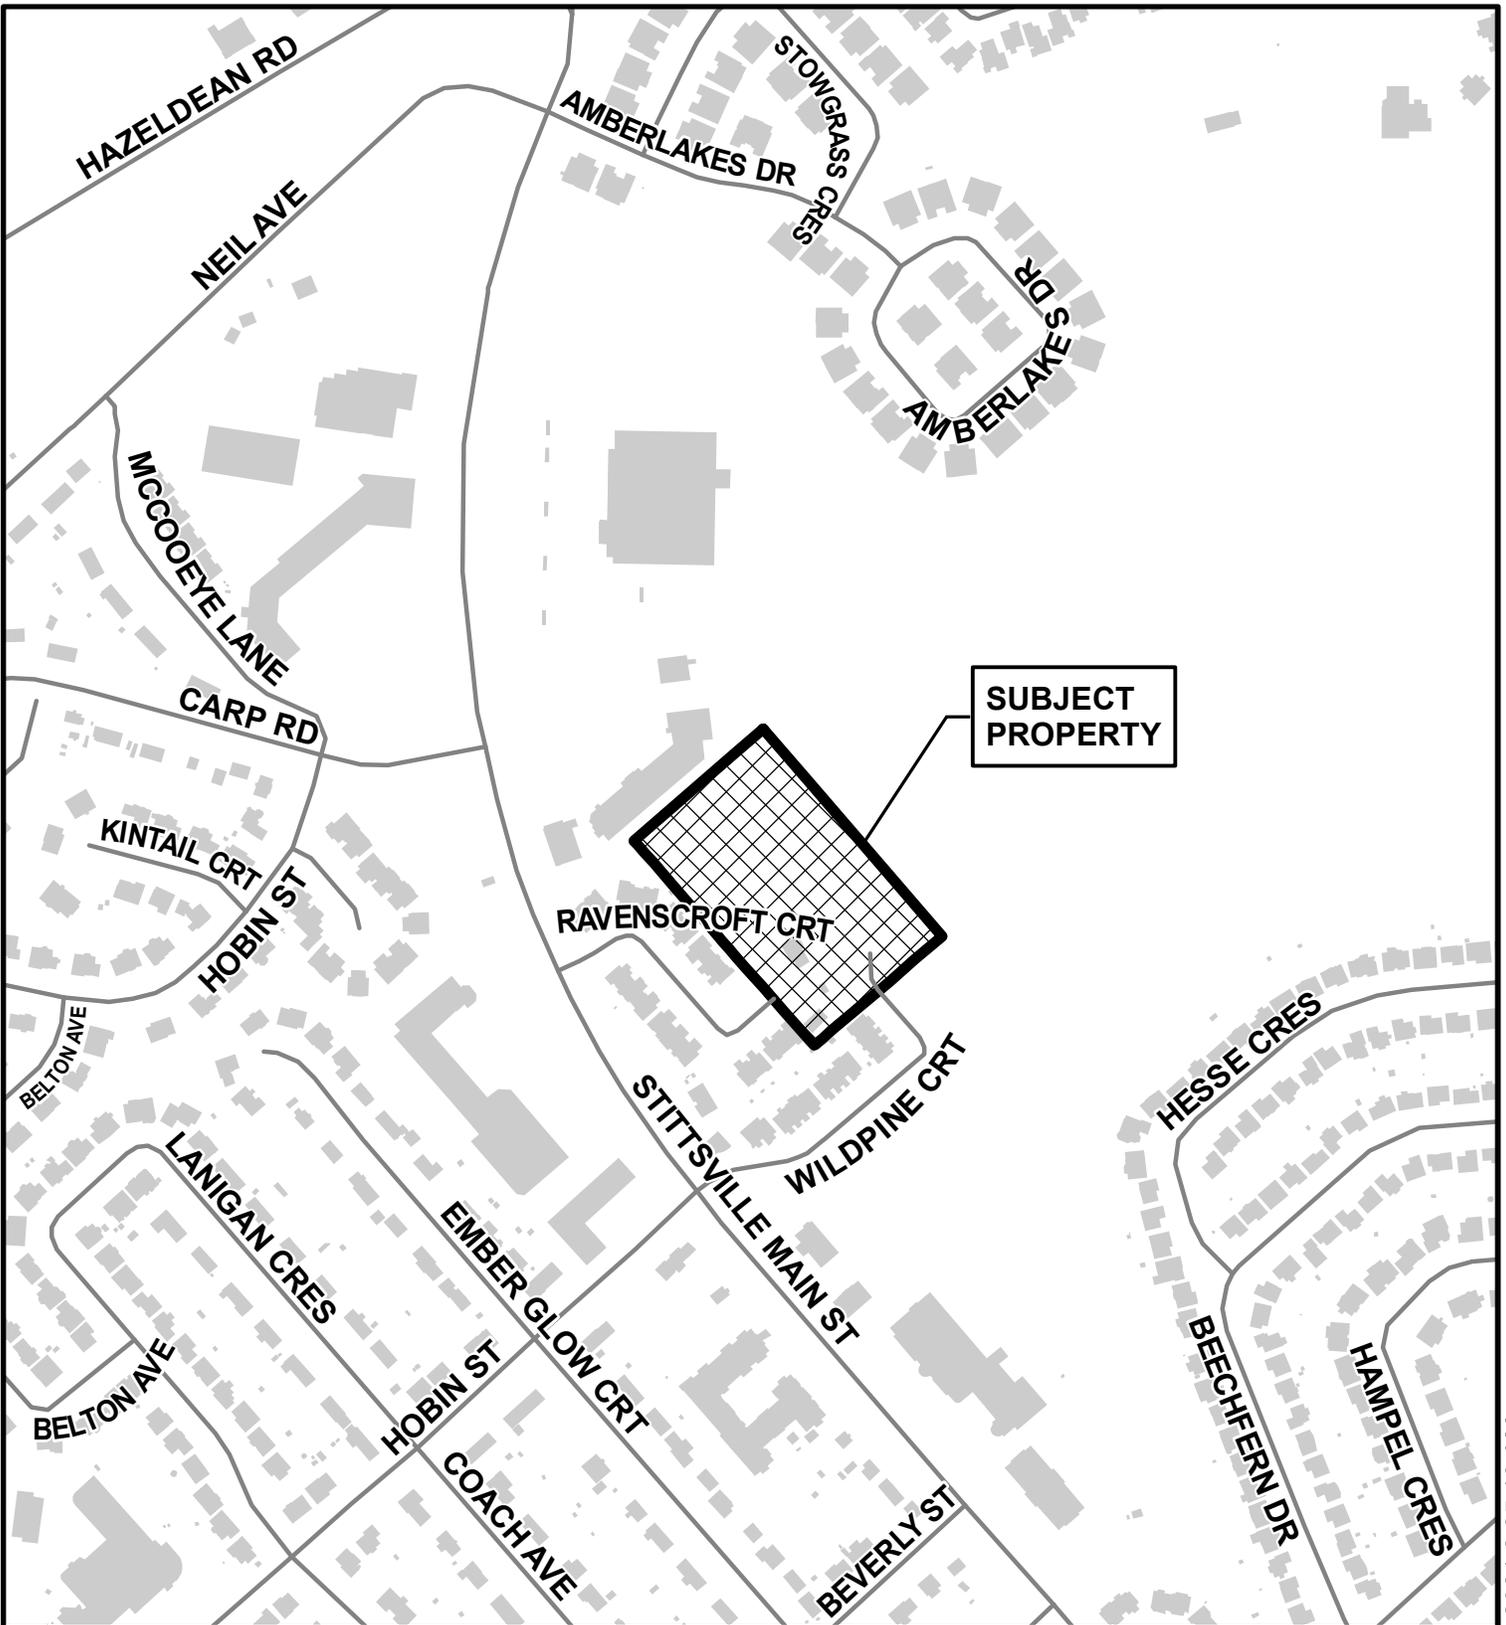

PROJECT:

WILDPINE TRAILS INC.
 WILDPINE TRAILS
 37 WILDPINE COURT, OTTAWA

DRAWING:

LOCATION PLAN



This drawing is copyright protected and may not be reproduced or used for purposes other than execution of the described work without the express written consent of J.L. Richards & Associates Limited.

DESIGN: TB
 DRAWN: TB
 CHECKED: LJ
 JLR #: 29803

DRAWING #:

FIGURE 1

Plot Date: Thursday, August 12, 2021 8:35:13 AM

Noise Control Feasibility Study

Wildpine Trails

<u>Receiver Location</u>	<u>Criteria</u>	<u>Time Period</u>
Outdoor Living Area:	55 dBA	Daytime (0700 - 2300 hrs.)
Indoor Living/Dining Rooms (inside):	45 dBA	Daytime (0700 - 2300 hrs.)
General Office, Reception Area (inside):	50 dBA	Daytime (0700 - 2300 hrs.)
Sleeping Quarters (inside):	40 dBA	Nighttime (2300 - 0700 hrs.)

Outdoor Living Areas (OLA) are defined as that portion of the outdoor amenity area of a dwelling for the quiet enjoyment of the outdoor environment during the daytime period. Typically, the point of assessment in an OLA is 3.0 m from the building façade mid-point and 1.5 m above the ground within the designated OLA for each individual unit. OLAs commonly include backyards, balconies (with a minimum depth of 4 m as per NPC-300), common outdoor living areas, and passive recreational areas.

3.2 Transportation Noise Attenuation Requirements

When the sound levels are equal to or less than the specified criteria, per the City of Ottawa ENCG and/or MOE NPC-300, no noise attenuation (control) measures are required.

The following tables outline noise attenuation measures to achieve required dBA Leq for surface transportation noise, per the City of Ottawa ENCG.

Table 1: Outdoor Noise Control Measures for Surface Transportation Noise

Primary Mitigation Measure (in order of preference)	Secondary Mitigation Measures	
	Landscape Plantings and/or Non-acoustic Fence to Obscure Noise Source	Warning Clauses
Distance setback with soft ground	Recommended	
Insertion of Noise insensitive land uses between the source and receiver receptor		
Orientation of buildings to provide sheltered zones in rear yards	Required	Warning Clauses necessary and to include: <ul style="list-style-type: none"> - Reference to specific noise mitigation measures in the development. - Whether noise is expected to increase in the future. - That there is a need to maintain mitigation.
Shared outdoor amenity areas		
Earth berms (sound barriers)		
Acoustic barriers (acoustic barriers)		

Table 2: Indoor Noise Control Measures for Surface Transportation Noise

Primary Mitigation Measure (in order of preference)	Secondary Mitigation Measures	
	Landscape Plantings and/or Non-acoustic Fence to Obscure Noise Source	Warning Clauses
Distance setback with soft ground	Recommended	Not necessary

Noise Control Feasibility Study

Wildpine Trails

Insertion of Noise insensitive land uses between the source and receiver receptor		
Orientation of buildings to provide sheltered zones or modified interior spaces and amenity areas	Required	Warning Clauses necessary and to include: <ul style="list-style-type: none"> - Reference to specific noise mitigation measures in the development. - Whether noise is expected to increase in the future. - That there is a need to maintain mitigation.
Enhanced construction techniques and construction quality		
Earth berms (sound barriers)		
Indoor isolation – air conditioning and ventilation, enhanced dampening materials (indoor isolation)		

The following tables outline the noise level limits per the MOE NPC-300 and City of Ottawa ENCG.

Table 3: Outdoor Living Area (OLA) Noise Limit for Surface Transportation

Time Period	Leq (16 hr) (dBA)
16 hr., 07:00 am - 23:00	55

Table 4: Indoor Noise Limit for Surface Transportation

Type of Space	Time Period	Leq (dBA)	
		Road	Rail
Living/dining, den areas of residences, hospitals, nursing homes, schools, daycare centres, etc.	07:00-23:00	45	40
Living/dining, den areas of residences, hospitals, nursing homes, etc. (except schools or daycare centres)	23:00-07:00	45	40
Sleeping quarters	07:00-23:00	45	40
	23:00-07:00	40	35

In addition to the implementation of noise attenuation features, if required, and depending on the severity of the noise problem, warning clauses may be recommended to advise the prospective purchasers/tenants of affected units of the potential environmental noise. These warning clauses should be included in the Site Plan and Subdivision Agreements, in the Offers of Purchase and Sale, and should be registered on Title. Warning clauses may be included for any development, irrespective of whether it is considered a noise sensitive land use.

Where site measures are required to mitigate noise levels, the City of Ottawa requires that notices be placed on Title informing potential buyers and/or tenants of the site conditions. Sample templates of the notices that could be registered on Title are included in Appendix 'B' as presented in the City of Ottawa ENCG.

Detailed wording for clauses should be provided as part of a detailed Noise Impact Study to be completed in support of the Subdivision Application. Clauses are to be worded to describe the

Noise Control Feasibility Study

Wildpine Trails

mitigation measures and noise conditions applicable where MOE and City of Ottawa noise criteria are exceeded.

3.3 Prediction of Noise Levels

3.3.1 Road Traffic Data

The following traffic data was used to predict noise levels:

Table 5: Road Traffic Data to Predict Noise Levels

	Stittsville Main Street
Total Traffic Volume (AADT)	15,000
Day/Night Split (%)	92/8
Medium Trucks (%)	7
Heavy Trucks (%)	5
Posted Speed (km/hr.)	50
Road Gradient (%)	1
Road Classification	2-Lane Urban Arterial (2-UAU)

Schedule 'E' and Annex 1 of the City of Ottawa Official Plan (May 2003) were utilized to determine the road classification and protected right-of-way. These road classifications were compared to Map 6 of the City of Ottawa Transportation Master Plan (Road Network – Urban). All findings were then compared to Table B1 (Part 4, Appendix 'B') of the City of Ottawa Environmental Noise Control Guidelines in order to determine an appropriate AADT value.

3.3.2 Noise Level Calculations (Transportation)

Noise contours for the daytime periods were developed using the MOE Road Traffic Noise Computer program STAMSON, Version 5.03.

Distances were calculated from the centre of the roadway to even 5 dBA freefield noise levels ranging from 50 dBA to 65 dBA for each of the roadways. Table 6 below presents this information. Computer printouts are included in Appendix 'C'. Drawing N1 identifies the receiver locations as contours for the calculations of the roadway freefield noise levels.

Noise Control Feasibility Study

Wildpine Trails

Table 6: Predicted Freefield Noise Levels and Distances from Individual Noise Sources

Roads	Contour (dBA)	OLA (Freefield) Distance (m)
		Daytime
2-UAU (Stittsville Main Street) 50 km/hr.	50	158.98
	55	79.53
	60	39.75
	65	19.85
	70	n/a

3.4 Summary of Findings (Transportation)

Wildpine Trails will result in multiple blocks of residential units that will not be impacted by roadway traffic noise. Freefield noise levels at the property lines are estimated to be approximately 50-55 dBA as presented on Drawing N1. In addition, there is existing residential and commercial buildings between Wildpine Trails and Stittsville Main Street.

At the time this study was completed, a detailed grading plan was not available. For the purposes of this analysis, JLR assumed the topography to be flat/gentle slope.

Computer printouts are included in Appendix 'C'.

Based on the freefield noise contours, as presented on Drawing N1, no lots/units require any noise mitigation measures or warning clauses. Furthermore, a preliminary building component analysis is not required as part of this study.

4.0 CONCLUSION AND RECOMMENDATIONS

Predicted noise levels are not expected to exceed the City of Ottawa ENCG and MOE criteria for the proposed units within Wildpine Trails due to the distance between the noise source and units as well as the existing residential and commercial buildings.

Based on the freefield noise contours, as presented on Drawing N1, no lots/units require any noise mitigation measures or warning clauses.

It is recommended that the City of Ottawa accept the draft plan of subdivision submitted and exclude the condition for the proponent to complete a Noise Control Detailed Study as per the City of Ottawa ENCG 2016 Wildpine Trails development as well as exclude the requirement for a Detailed Building Components Study for building permits.

Noise Control Feasibility Study

Wildpine Trails

This report has been prepared for the exclusive use of Wildpine Trails Inc., for the stated purpose, for the named facility. Its discussions and conclusions are summary in nature and cannot be properly used, interpreted or extended to other purposes without a detailed understanding and discussions with the client as to its mandated purpose, scope and limitations. This report was prepared for the sole benefit and use of Wildpine Trails Inc. and may not be used or relied on by any other party without the express written consent of J.L. Richards & Associates Limited.

This report is copyright protected and may not be reproduced or used, other than by Wildpine Trails Inc. for the stated purpose, without the express written consent of J.L. Richards & Associates Limited.


J.L. RICHARDS & ASSOCIATES LIMITED

Prepared by:



Thomas Blais, A.Sc.T.
Senior GIS Technologist

Reviewed by:




Lee Jablonski, P.Eng.
Associate
Senior Civil Engineer

Appendix A

Draft Plan of Subdivision

Site Plan

Freefield Daytime Noise
Contours (Roads) – N1



SUBJECT TO THE CONDITIONS, IF ANY, SET FORTH IN OUR LETTER DATED _____

THIS DRAFT PLAN IS APPROVED BY THE CITY OF OTTAWA UNDER SECTION 51 OF THE PLANNING ACT, THIS _____ DAY OF _____, 20__.

--- DERRICK MOODIE, MANAGER ---
DEVELOPMENT REVIEW-WEST
PLANNING, INFRASTRUCTURE AND ECONOMIC DEVELOPMENT DEPARTMENT, CITY OF OTTAWA



DRAFT PLAN OF SUBDIVISION OF PART OF LOT 24 CONCESSION 11
Geographic Township of Goulbourn
CITY OF OTTAWA
Prepared by Annis, O'Sullivan, Vollebek Ltd.

Scale 1 : 400
16 12 8 4 0 4 8 16 Metres

Metric
DISTANCES SHOWN ON THIS PLAN ARE IN METRES AND CAN BE CONVERTED TO FEET BY DIVIDING BY 0.3048

SURVEYOR'S CERTIFICATE

I CERTIFY THAT:
The boundaries of the lands to be subdivided and their relationship to adjoining lands have been accurately and correctly shown.

Date _____
T. Hartwick
ONTARIO LAND SURVEYOR


OWNER'S CERTIFICATE

This is to certify that I am the owner of the lands to be subdivided and that this plan was prepared in accordance with my instructions.


Date _____
Wild Pine Trails Inc.
I have authority to bind the corporation.

ADDITIONAL INFORMATION REQUIRED UNDER SECTION 51-17 OF THE PLANNING ACT

- (a) see plan
- (b) see plan
- (c) see plan
- (d) multi-family residential housing, open space
- (e) see plan
- (f) see plan
- (g) see plan
- (h) City of Ottawa
- (i) see soils report
- (j) see plan
- (k) sanitary, storm sewers, municipal water, bell, hydro, cable and gas to be available
- (l) see plan

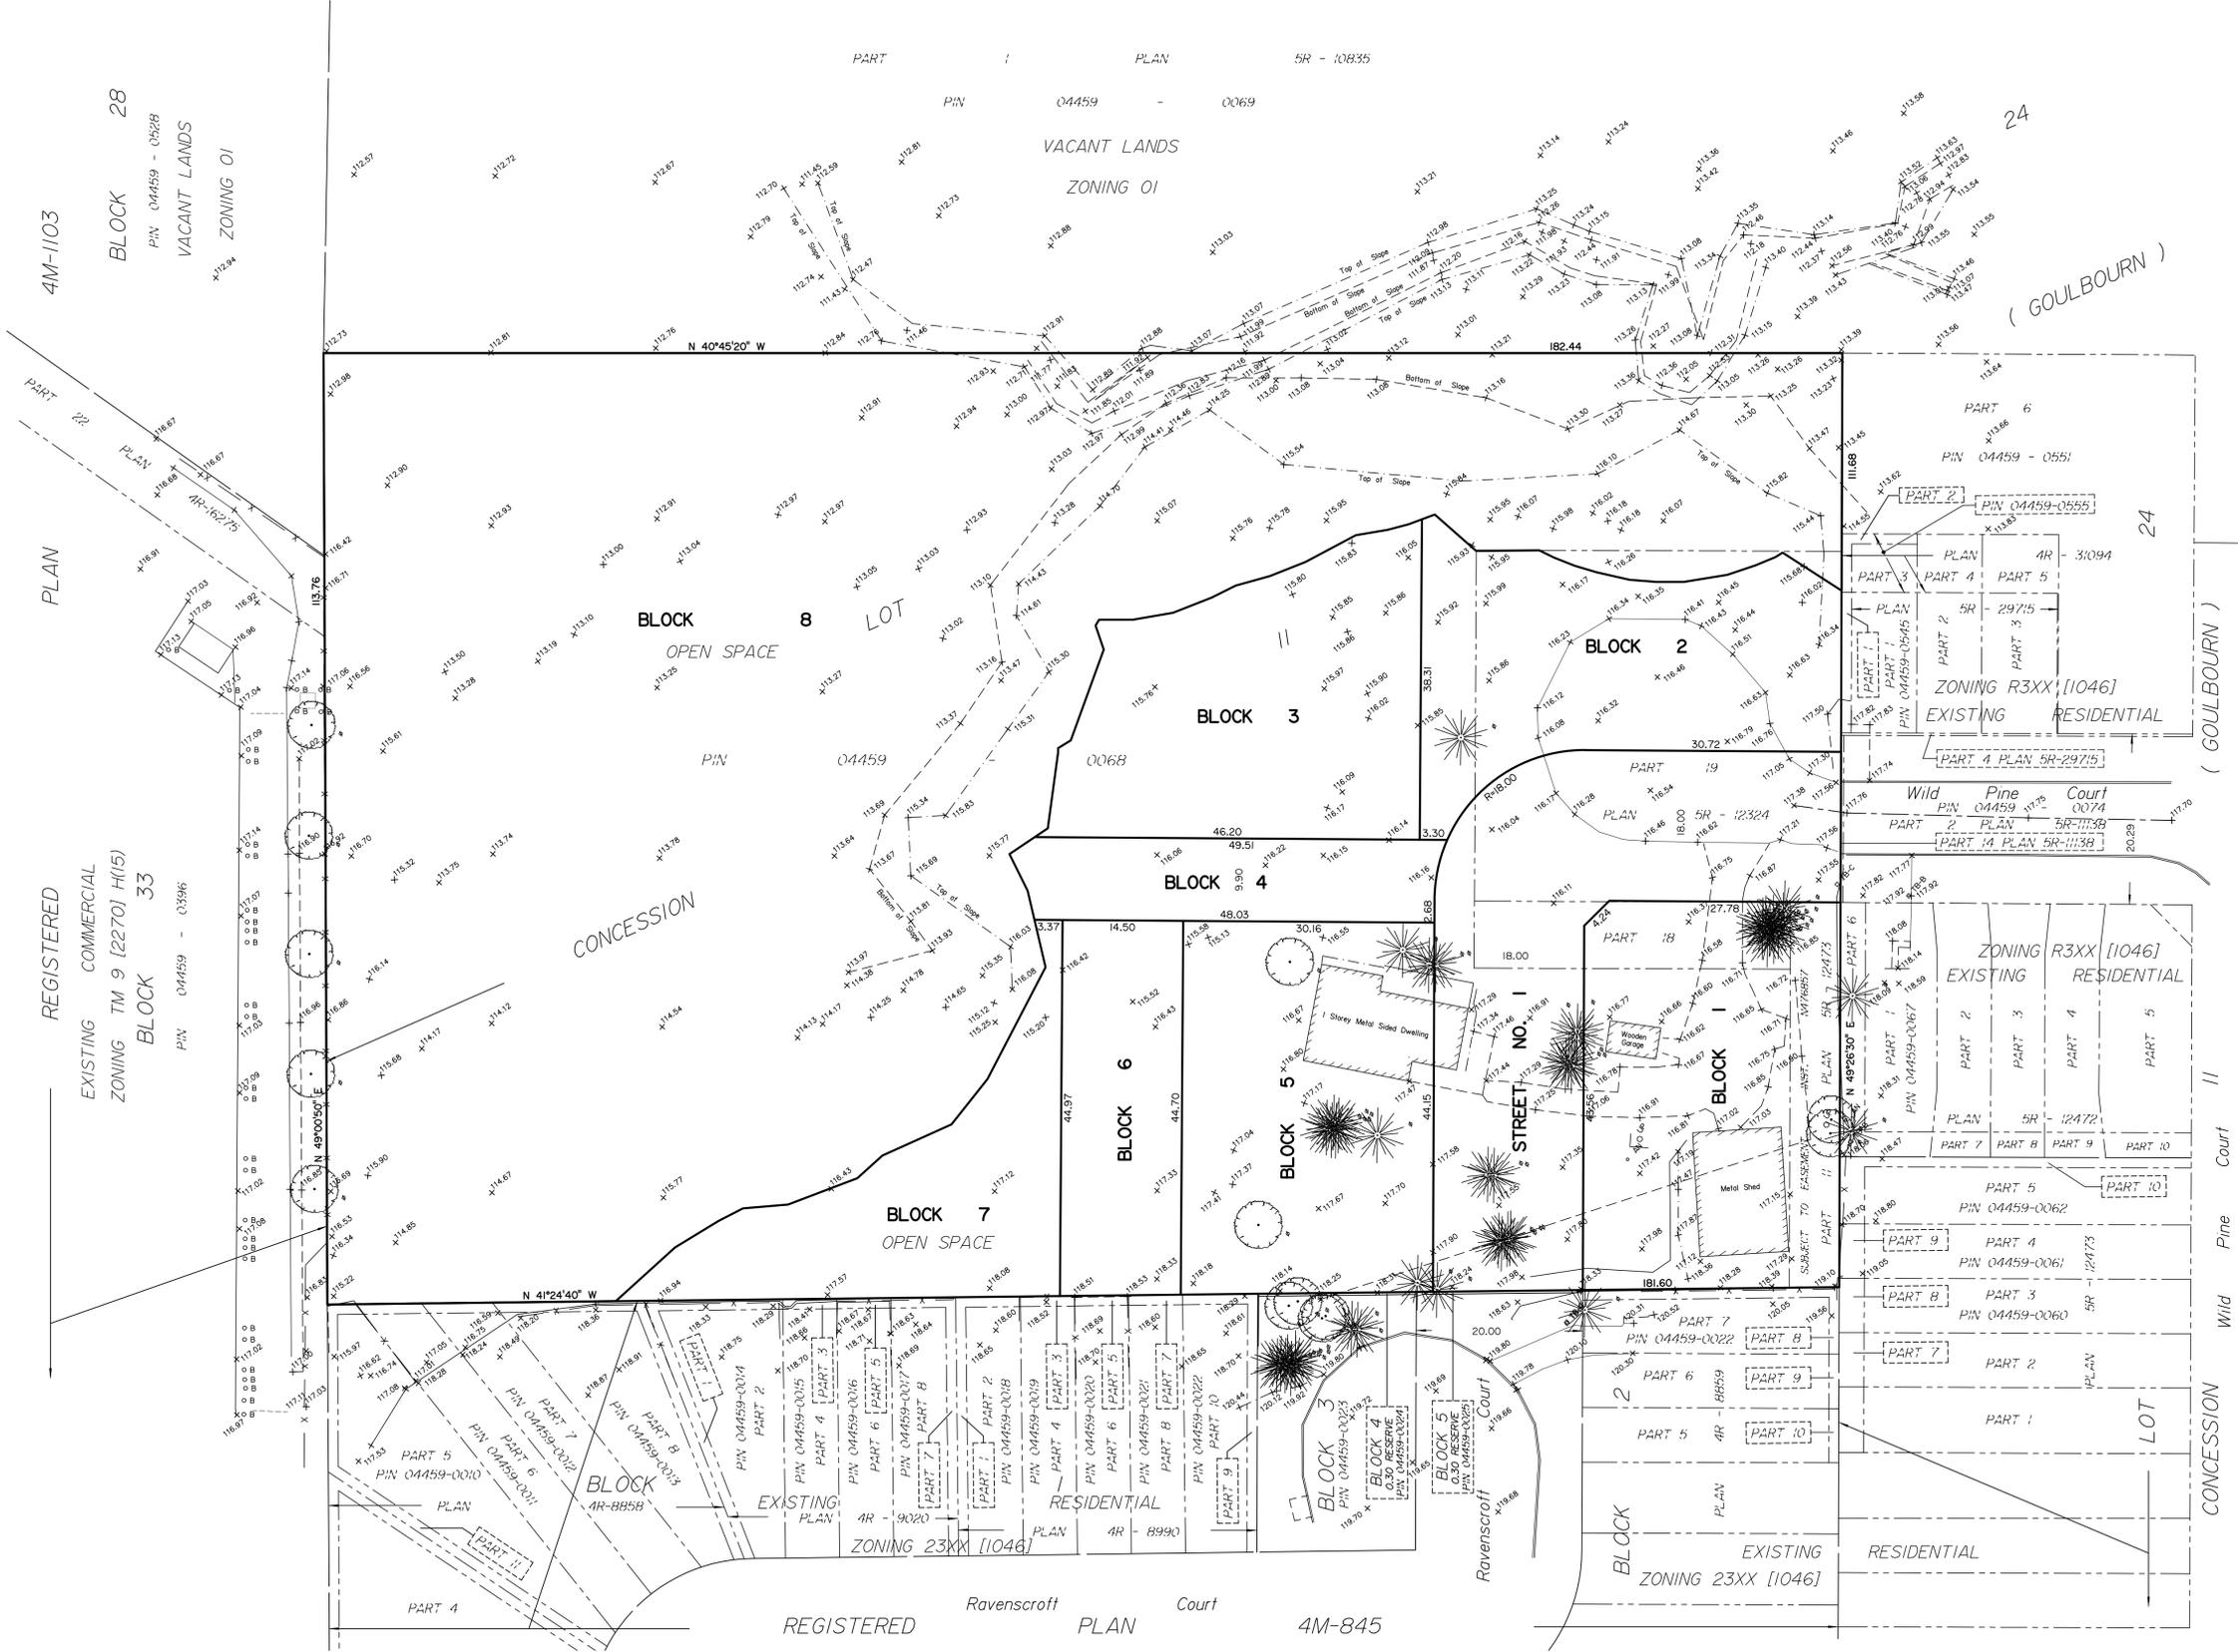

File Location: V:\29000\29803-000 - Wildpine Trails\2-Design\1-Civil\Noise\1. Noise Feasibility - June 2021\29803 C.N1.dwg

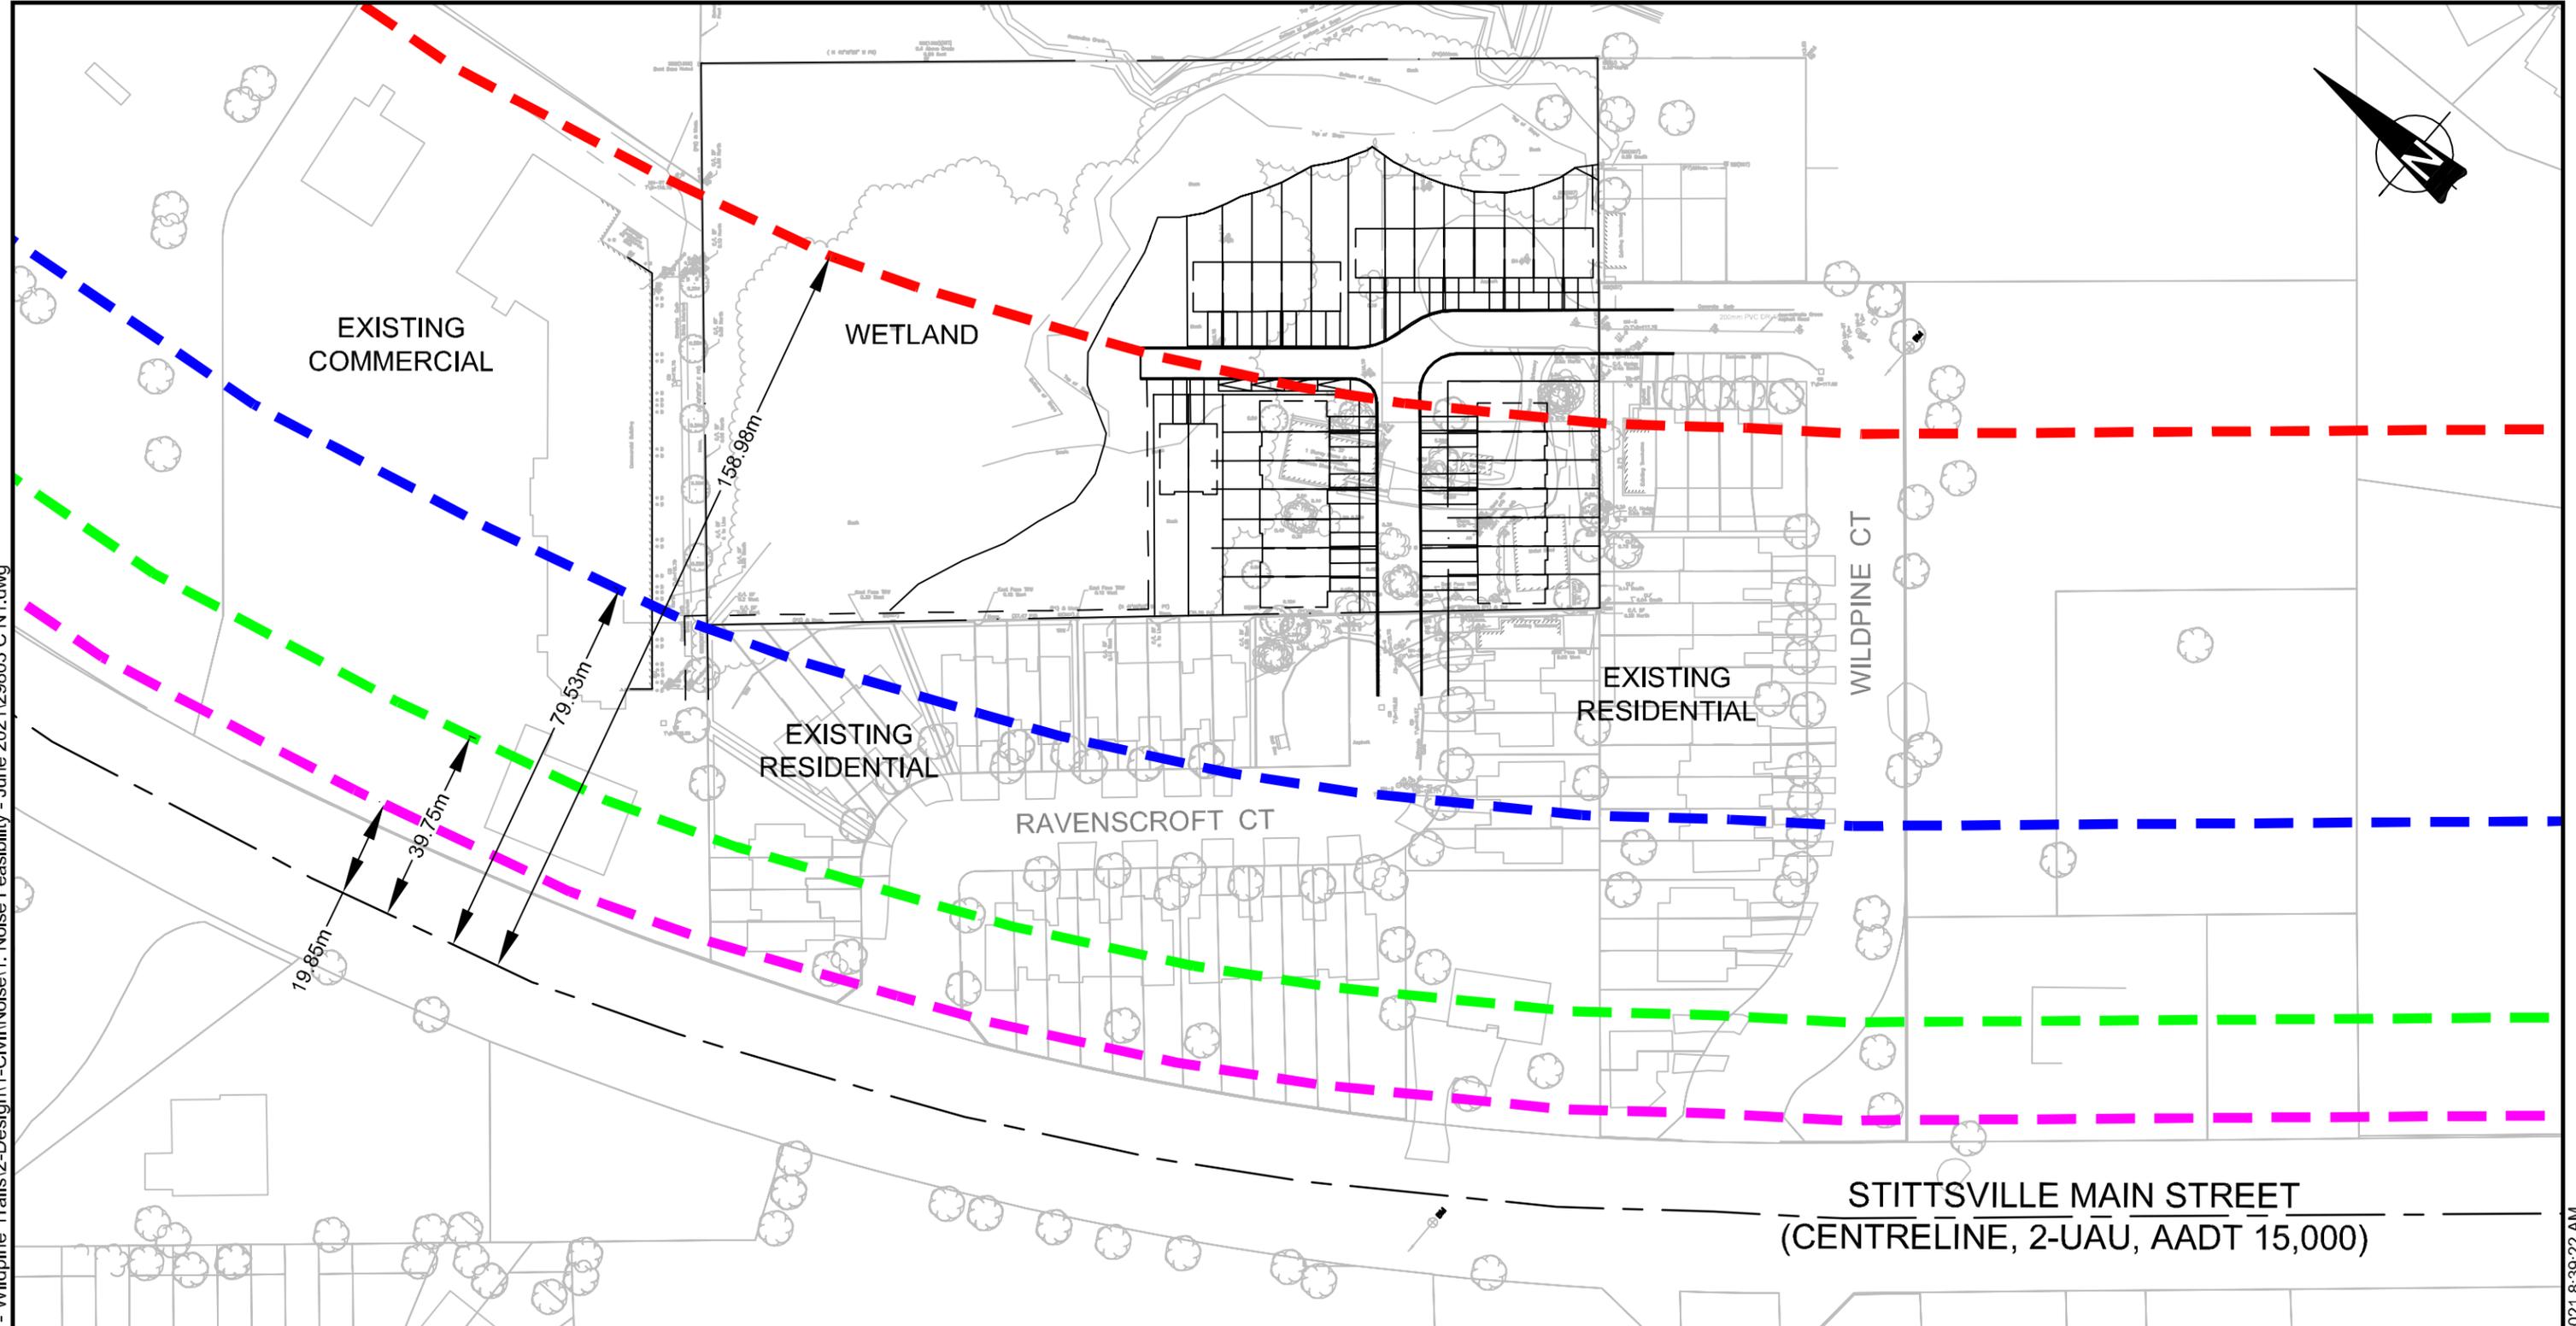

LEGEND

--- CENTRELINE (STITTSVILLE MAIN STREET)

NOISE CONTOURS

Red dashed line	50 dBA
Blue dashed line	55 dBA
Green dashed line	60 dBA
Magenta dashed line	65 dBA

PROJECT:		WILDPINE TRAILS INC. WILDPINE TRAILS 37 WILDPINE COURT	
DRAWING:		FREEFIELD DAYTIME NOISE CONTOURS (ROADS)	
 <p>J.L. Richards ENGINEERS · ARCHITECTS · PLANNERS</p>	<p>This drawing is copyright protected and may not be reproduced or used for purposes other than execution of the described work without the express written consent of J.L. Richards & Associates Limited.</p>		<p>DESIGN: TB</p> <p>DRAWN: TB</p> <p>CHECKED: LJ</p> <p>JLR #: 29803-001</p>
	Scale: 1:1,250		DRAWING #:
			N1

PLOT DATE: Thursday, August 12, 2021 8:39:22 AM

Appendix B

City of Ottawa Surface
Transportation Sample
Warning Clauses

City of Ottawa Environmental Noise Control Guidelines Sample Warning Clauses

Generic

Purchasers/tenants are advised that sound levels due to increasing road/rail/Light Rail/transitway traffic may occasionally interfere with some outdoor activities as the sound levels may exceed the sound level limits of the City and the Ministry of the Environment.

To help address the need for sound attenuation this development has been designed so as to provide an outdoor amenity area that is within provincial guidelines. Measures for sound attenuation could include:

- A setback of buildings from the noise source and/or
- An acoustic barrier.

To ensure that provincial sound level limits are not exceeded it is important to maintain sound attenuation features.

The acoustic barrier shall be maintained and kept in good repair by the property owner. Any maintenance, repair or replacement is the responsibility of the owner and shall be with the same material or to the same standards, having the same colour, appearance and function of the original.

Additionally this development includes trees and shrubs to screen the source of noise from occupants.

Extensive mitigation of indoor and outdoor amenity area

Purchasers/tenants are advised that despite the inclusion of noise control features in the development and within the building units, sound levels due to increasing road/rail/Light Rail/transitway traffic may, on occasion, interfere with some activities of the dwelling occupants as the sound levels exceed the sound level limits of the City and the Ministry of the Environment.

To help address the need for sound attenuation this development includes:

- multi-pane glass;
- double brick veneer;
- an earth berm; and
- an acoustic barrier.

To ensure that provincial sound level limits are not exceeded it is important to maintain these sound attenuation features.

The acoustic barrier shall be maintained and kept in good repair by the property owner. Any maintenance, repair or replacement is the responsibility of the owner and shall be with the same material or to the same standards, having the same colour, appearance and function of the original.

This dwelling unit has also been designed with the provision for adding central air conditioning at the occupant's discretion. Installation of central air conditioning will allow windows and exterior doors to remain closed, thereby ensuring that the indoor sound levels are within the sound level limits of the City and the Ministry of the Environment. Additionally this development includes trees and shrubs to screen the source of noise from occupants.

No Outdoor amenity area

Purchasers/tenants are advised that sound levels due to increasing road/rail/Light Rail/transitway traffic will interfere with outdoor activities as the sound levels exceed the sound level limits of the City and the Ministry of the Environment.

To help address the need for sound attenuation this development includes:

- multi-pane glass;
- double brick veneer;
- high sound transmission class walls.

To ensure that provincial sound level limits are not exceeded it is important to maintain these sound attenuation features.

This dwelling unit has been supplied with a central air conditioning system and other measures which will allow windows and exterior doors to remain closed, thereby ensuring that the indoor sound levels are within the sound level limits of the City and the Ministry of the Environment

Appendix C

Transportation Noise Source Predictions

- Detailed Predicted Freefield
Noise Level Calculations

Filename: 2uau50.te Time Period: Day/Night 16/8 hours
 Description: Wildpine Trails 2UAU ff 50 dBA

Road data, segment # 1: 2-UAU (day/night)

```
-----
Car traffic volume : 12144/1056 veh/TimePeriod *
Medium truck volume : 966/84 veh/TimePeriod *
Heavy truck volume : 690/60 veh/TimePeriod *
Posted speed limit : 50 km/h
Road gradient : 1 %
Road pavement : 1 (Typical asphalt or concrete)
```

* Refers to calculated road volumes based on the following input:

```
24 hr Traffic Volume (AADT or SADT): 15000
Percentage of Annual Growth : 0.00
Number of Years of Growth : 0.00
Medium Truck % of Total Volume : 7.00
Heavy Truck % of Total Volume : 5.00
Day (16 hrs) % of Total Volume : 92.00
```

Data for Segment # 1: 2-UAU (day/night)

```
-----
Angle1 Angle2 : -90.00 deg 90.00 deg
Wood depth : 0 (No woods.)
No of house rows : 0 / 0
Surface : 1 (Absorptive ground surface)
Receiver source distance : 158.98 / 158.98 m
Receiver height : 1.50 / 4.50 m
Topography : 1 (Flat/gentle slope; no barrier)
Reference angle : 0.00
```

↑
 Results segment # 1: 2-UAU (day)

Source height = 1.50 m

ROAD (0.00 + 50.00 + 0.00) = 50.00 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.66	68.48	0.00	-17.02	-1.46	0.00	0.00	0.00	50.00

Segment Leq : 50.00 dBA

Total Leq All Segments: 50.00 dBA

↑
Results segment # 1: 2-UAU (night)

Source height = 1.50 m

ROAD (0.00 + 43.48 + 0.00) = 43.48 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.57	60.88	0.00	-16.10	-1.30	0.00	0.00	0.00	43.48

Segment Leq : 43.48 dBA

Total Leq All Segments: 43.48 dBA

↑

TOTAL Leq FROM ALL SOURCES (DAY): 50.00
(NIGHT): 43.48

↑
STAMSON 5.0 NORMAL REPORT Date: 10-06-2021 08:47:55
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: 2uau55.te Time Period: Day/Night 16/8 hours
Description: Wildpine Trails 2UAU ff 55 dBA

Road data, segment # 1: 2-UAU (day/night)

Car traffic volume : 12144/1056 veh/TimePeriod *

Medium truck volume : 966/84 veh/TimePeriod *

Heavy truck volume : 690/60 veh/TimePeriod *

Posted speed limit : 50 km/h

Road gradient : 1 %

Road pavement : 1 (Typical asphalt or concrete)

* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT): 15000

Percentage of Annual Growth : 0.00

Number of Years of Growth : 0.00

Medium Truck % of Total Volume : 7.00

Heavy Truck % of Total Volume : 5.00

Day (16 hrs) % of Total Volume : 92.00

Data for Segment # 1: 2-UAU (day/night)

```

-----
Angle1   Angle2           : -90.00 deg   90.00 deg
Wood depth           :           0   (No woods.)
No of house rows     :           0 / 0
Surface              :           1   (Absorptive ground surface)
Receiver source distance : 79.53 / 79.53 m
Receiver height      :  1.50 / 4.50 m
Topography           :           1   (Flat/gentle slope; no barrier)
Reference angle      :           0.00

```

↑
Results segment # 1: 2-UAU (day)

Source height = 1.50 m

ROAD (0.00 + 55.00 + 0.00) = 55.00 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.66	68.48	0.00	-12.03	-1.46	0.00	0.00	0.00	55.00

Segment Leq : 55.00 dBA

Total Leq All Segments: 55.00 dBA

↑
Results segment # 1: 2-UAU (night)

Source height = 1.50 m

ROAD (0.00 + 48.21 + 0.00) = 48.21 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.57	60.88	0.00	-11.37	-1.30	0.00	0.00	0.00	48.21

Segment Leq : 48.21 dBA

Total Leq All Segments: 48.21 dBA

↑
TOTAL Leq FROM ALL SOURCES (DAY): 55.00
(NIGHT): 48.21

↑
↑

STAMSON 5.0 NORMAL REPORT Date: 10-06-2021 08:59:32
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: 2uau60.te Time Period: Day/Night 16/8 hours
Description: Wildpine Trails 2UAU ff 60 dBA

Road data, segment # 1: 2-UAU (day/night)

Car traffic volume : 12144/1056 veh/TimePeriod *
Medium truck volume : 966/84 veh/TimePeriod *
Heavy truck volume : 690/60 veh/TimePeriod *
Posted speed limit : 50 km/h
Road gradient : 1 %
Road pavement : 1 (Typical asphalt or concrete)

* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT): 15000
Percentage of Annual Growth : 0.00
Number of Years of Growth : 0.00
Medium Truck % of Total Volume : 7.00
Heavy Truck % of Total Volume : 5.00
Day (16 hrs) % of Total Volume : 92.00

Data for Segment # 1: 2-UAU (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg
Wood depth : 0 (No woods.)
No of house rows : 0 / 0
Surface : 1 (Absorptive ground surface)
Receiver source distance : 39.75 / 39.75 m
Receiver height : 1.50 / 4.50 m
Topography : 1 (Flat/gentle slope; no barrier)
Reference angle : 0.00

↑

Results segment # 1: 2-UAU (day)

Source height = 1.50 m

ROAD (0.00 + 60.00 + 0.00) = 60.00 dBA
Angle1 Angle2 Alpha RefLeq P.Adj D.Adj F.Adj W.Adj H.Adj B.Adj SubLeq

-90 90 0.66 68.48 0.00 -7.03 -1.46 0.00 0.00 0.00 60.00

Segment Leq : 60.00 dBA

Total Leq All Segments: 60.00 dBA

↑
Results segment # 1: 2-UAU (night)

Source height = 1.50 m

ROAD (0.00 + 52.94 + 0.00) = 52.94 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.57	60.88	0.00	-6.65	-1.30	0.00	0.00	0.00	52.94

Segment Leq : 52.94 dBA

Total Leq All Segments: 52.94 dBA

↑

TOTAL Leq FROM ALL SOURCES (DAY): 60.00
(NIGHT): 52.94

↑

↑

STAMSON 5.0 NORMAL REPORT Date: 10-06-2021 09:00:33
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: 2uau65.te Time Period: Day/Night 16/8 hours
Description: Wildpine Trails 2UAU ff 65 dBA

Road data, segment # 1: 2-UAU (day/night)

Car traffic volume : 12144/1056 veh/TimePeriod *

Medium truck volume : 966/84 veh/TimePeriod *

Heavy truck volume : 690/60 veh/TimePeriod *

Posted speed limit : 50 km/h

Road gradient : 1 %

Road pavement : 1 (Typical asphalt or concrete)

* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT): 15000

Percentage of Annual Growth : 0.00

Number of Years of Growth : 0.00

Medium Truck % of Total Volume : 7.00

Heavy Truck % of Total Volume : 5.00
Day (16 hrs) % of Total Volume : 92.00

Data for Segment # 1: 2-UAU (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg
Wood depth : 0 (No woods.)
No of house rows : 0 / 0
Surface : 1 (Absorptive ground surface)
Receiver source distance : 19.85 / 19.85 m
Receiver height : 1.50 / 4.50 m
Topography : 1 (Flat/gentle slope; no barrier)
Reference angle : 0.00

↑

Results segment # 1: 2-UAU (day)

Source height = 1.50 m

ROAD (0.00 + 65.00 + 0.00) = 65.00 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.66	68.48	0.00	-2.02	-1.46	0.00	0.00	0.00	65.00

Segment Leq : 65.00 dBA

Total Leq All Segments: 65.00 dBA

↑

Results segment # 1: 2-UAU (night)

Source height = 1.50 m

ROAD (0.00 + 57.67 + 0.00) = 57.67 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.57	60.88	0.00	-1.91	-1.30	0.00	0.00	0.00	57.67

Segment Leq : 57.67 dBA

Total Leq All Segments: 57.67 dBA

↑

TOTAL Leq FROM ALL SOURCES (DAY): 65.00
(NIGHT): 57.67

↑
↑
[]



Platinum
member

www.jlrichards.ca

Ottawa

864 Lady Ellen Place
Ottawa ON Canada
K1Z 5M2
Tel: 613 728-3571

ottawa@jlrichards.ca

Kingston

203-863 Princess Street
Kingston ON Canada
K7L 5N4
Tel: 613 544-1424

kingston@jlrichards.ca

Sudbury

314 Countryside Drive
Sudbury ON Canada
P3E 6G2
Tel: 705 522-8174

sudbury@jlrichards.ca

Timmins

834 Mountjoy Street S
Timmins ON Canada
P4N 7C5
Tel: 705 360-1899

timmins@jlrichards.ca

North Bay

501-555 Oak Street E
North Bay ON Canada
P1B 8L3
Tel: 705 495-7597

northbay@jlrichards.ca

Hawkesbury

326 Bertha Street
Hawkesbury ON Canada
K6A 2A8
Tel: 613 632-0287

hawkesbury@jlrichards.ca

Guelph

107-450 Speedvale Ave. West
Guelph ON Canada
N1H 7Y6
Tel: 519 763-0713

guelph@jlrichards.ca

