


LEGEND


- STRAW BALES C/W "I" BARS
- SILTATION CURTAIN
- EXISTING ELEVATION CONTOUR
- EXISTING SPOT ELEVATION

TEMPORARY SWALE CROSS-SECTION (WHERE REQUIRED) N.T.S.

- NOTES**
- ADDITIONAL TO THIS PLAN, THE CONTRACTOR SHALL IMPLEMENT THE "BEST MANAGEMENT PRACTICE" ALL ALONG CONSTRUCTION. THE CONTRACTOR SHALL BE RESPONSIBLE TO INSTALL, INSPECT, REPAIR AND REMOVE THE SEDIMENT AND EROSION CONTROL METHODS.
 - A SUMP OF 600mm IN DEPTH WILL BE PROVIDED IN ALL CATCHBASINS IN ORDER TO MINIMIZE THE AMOUNT OF SUSPENDED SOLIDS FROM ENTERING THE SEWER SYSTEM.
 - DURING CONSTRUCTION, FILTER CLOTH WILL BE PLACED UNDER ALL CATCHBASIN AND MANHOLE FRAMES AND COVERS AND STRAW BALES WILL BE PLACED WHERE WATER RUNOFF CAN CARRY EXCESSIVE SEDIMENTS INTO THE SEWER SYSTEM.
 - STRAW BALES SHALL BE INSTALLED ALONG THE VARIOUS SWALES (NEW MADE OR EXISTING) WHERE REQUIRED NECESSARY BY THE ENGINEER AND/OR THE CITY OF OTTAWA'S INSPECTOR.
 - STRAW BALES SHOULD BE INSTALLED AS PER OPSD 219.100 AND OPSD 219.110 AS APPROPRIATE.
 - STRAW BALES SHALL BE INSTALLED AT EVERY MAJOR POINT OF WATER ENTRY INCLUDING DITCH INLET CATCHBASINS AND CULVERTS.
 - ALL SEDIMENT CONTROL LOCATIONS MUST BE INSPECTED ON A REGULAR BASIS ESPECIALLY FOLLOWING A RAINFALL EVENT. SEDIMENTS SHALL BE REMOVED AND CONTROLS REINSTALLED AS NECESSARY.
 - SHOULD IT BE IMPOSSIBLE TO PREVENT OVERLAND SHEET FLOW TO AN EXTERNAL AREA DURING THE CONSTRUCTION PHASE, SUCH AREA SHALL BE PROTECTED WITH A SILT FENCE AS PER OPSD 219.110 AND/OR FILTER CLOTH IN CATCHBASINS.
 - FILTER CLOTH IN CBs SHOULD BE INSTALLED WITH GENEROUS EXCESS OF MATERIAL AROUND PERIMETER TO FACILITATE REMOVAL FOR CBs POTENTIALLY SUBJECTED TO HEAVY SEDIMENT LOADING. A GRANULAR "PRE-FILTERED" SHOULD BE PROVIDED AROUND PERIMETER OF CB OR AT INTERVALS ALONG THE CURB.
 - ANY MATERIAL STOCKPILES SHOULD BE LOCATED ON FLAT AREAS WELL AWAY FROM ANY DRAINAGE INLETS.
 - NO SEDIMENT CONTROL STRUCTURES SHALL BE REMOVED UNLESS FOUND UNNECESSARY OR ANOTHER SEDIMENT CONTROL POINT IS INSTALLED ELSEWHERE TO REPLACE THE LATTER.
 - THE SEDIMENT AND EROSION CONTROL MEASURES MAY BE MODIFIED IN THE FIELD AT THE DISCRETION OF THE CITY OF OTTAWA SITE INSPECTOR OR CONSERVATION AUTHORITY.

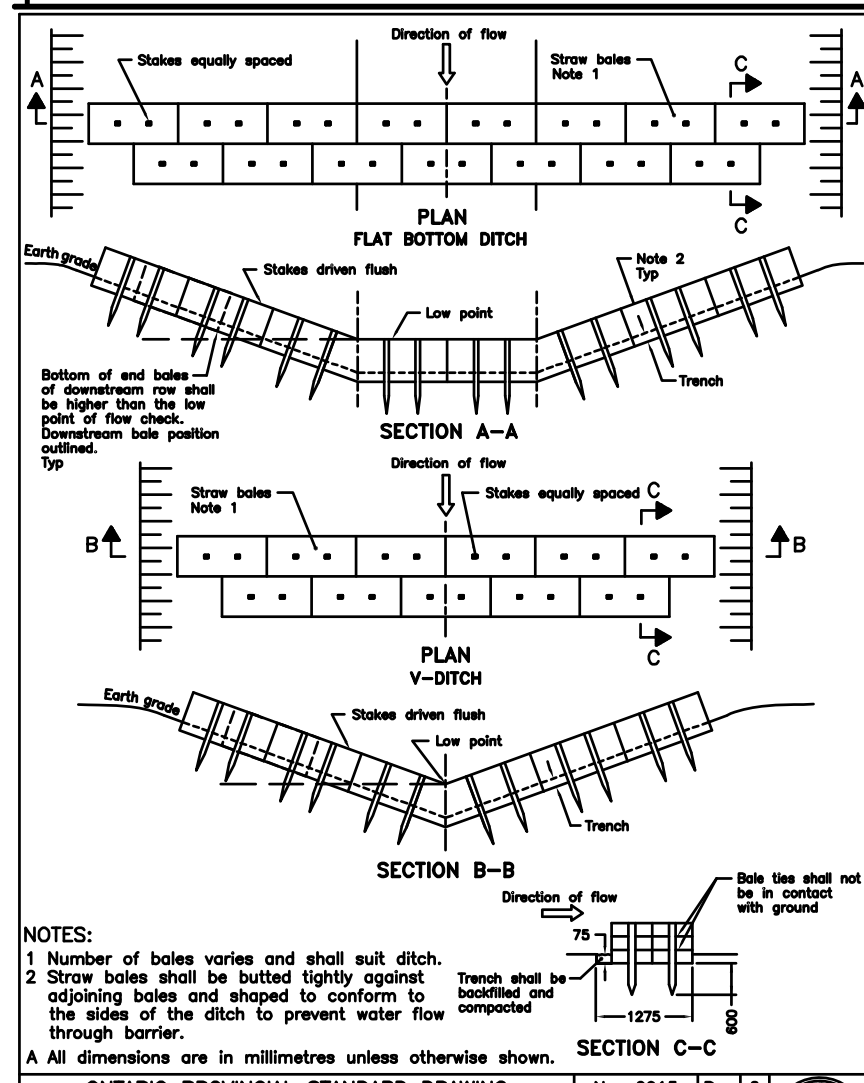

ONTARIO PROVINCIAL STANDARD DRAWING Nov 2015 Rev 2
STRAW BALE FLOW CHECK DAM
 OPSD 219.180

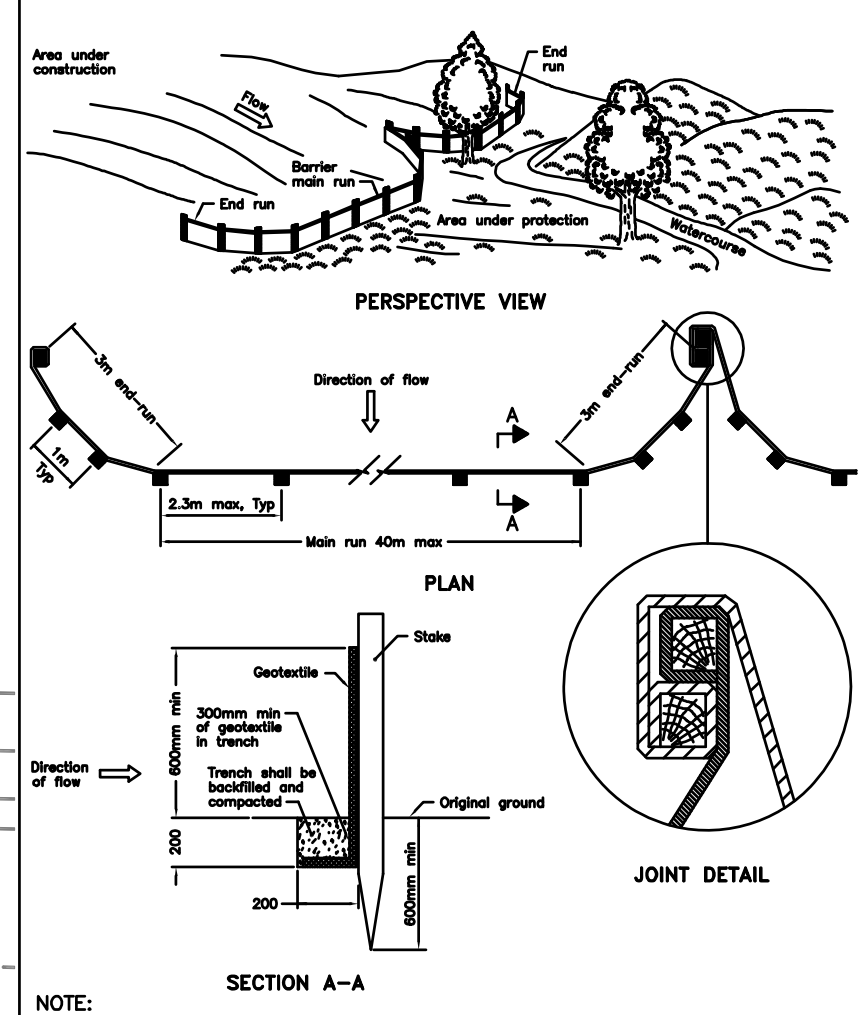

ONTARIO PROVINCIAL STANDARD DRAWING Nov 2015 Rev 2
LIGHT-DUTY SILT FENCE BARRIER
 OPSD 219.110

THE POSITION OF ALL POLE LINES, CONDUITS, WATERMANS, SEWERS AND OTHER UNDERGROUND AND OVERGROUND UTILITIES AND STRUCTURES IS NOT NECESSARILY SHOWN ON THE CONTRACT DRAWINGS, AND WHERE SHOWN, THE ACCURACY OF THE POSITION OF SUCH UTILITIES AND STRUCTURES IS NOT GUARANTEED. BEFORE STARTING WORK, DETERMINE THE EXACT LOCATION OF ALL SUCH UTILITIES AND STRUCTURES AND ASSUME ALL LIABILITY FOR DAMAGE TO THEM.

No.	REVISION	APPLIES WHEN DRAWING MODIFIED	DATE	BY
1	ISSUED FOR CITY REVIEW		JAN 30/18	AGS

SCALE

1:300

HORIZONTAL

DESIGN AGS

CHECKED AGS

DRAWN MAC

CHECKED AGS

APPROVED AGS

ATREL Engineering Ltd.
 Engineers - Ingénieurs

1-2884 CHAMBERLAND STREET, ROCKLAND, ONTARIO K4K 3A6
 TEL.: (613) 446-7423

CITY OF OTTAWA
 BOONE PLUMBING
 WAREHOUSE
 52 ALTI PLACE

PLAN **EROSION AND SEDIMENT CONTROL PLAN**

6393250
 CANADA INC.

CLIENT No.

PROJECT No.
 170902

DRAWING No.
 170902-ESCI