


C.I.P. CONCRETE PAVING (PEDESTRIAN LOAD) L-500 1:10



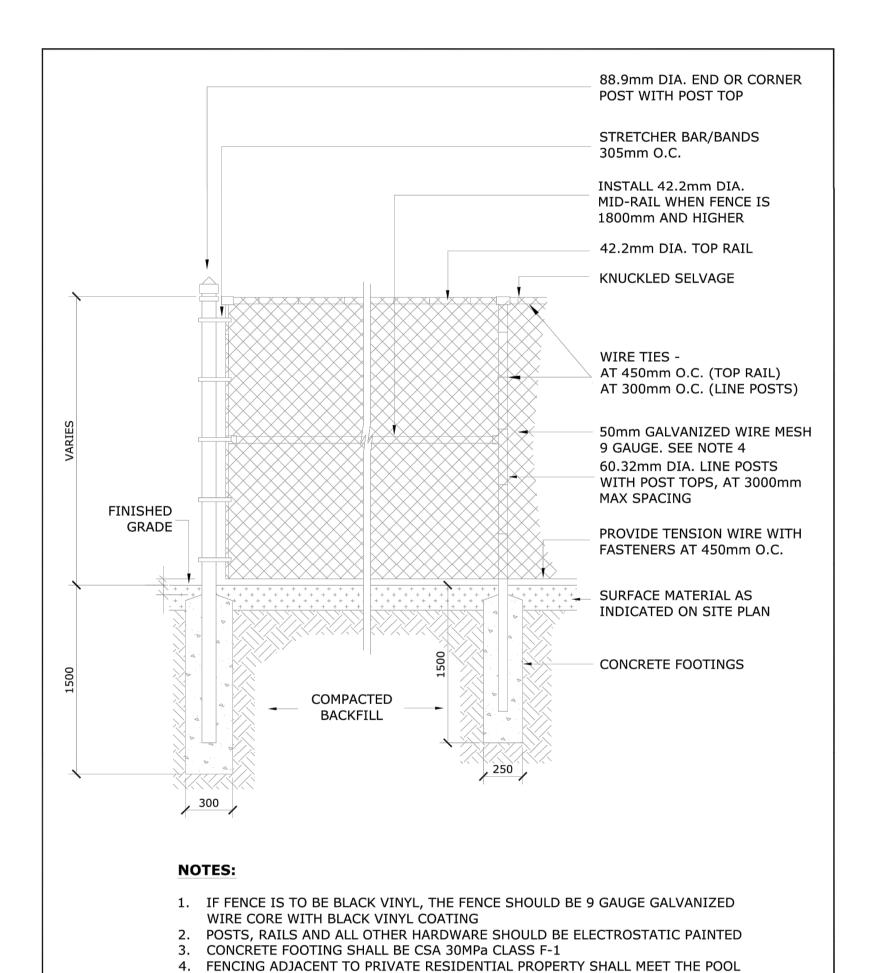

ENCLOSURE BY-LAW, NAMELY THE MESH SHALL BE 38mm AND THE GAUGE OF



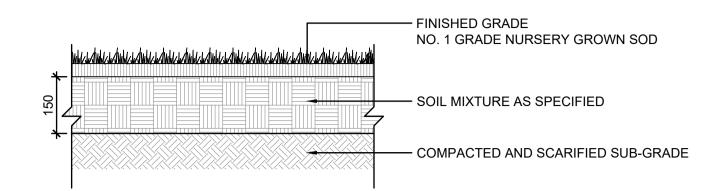

2 C.I.P. CONCRETE PAVING (PEDESTRIAN LOAD) L-500 1:10

450mm MIN. BACK OF

PLANTING BED EDGING

## NOTES: OBTAIN WRITTEN CONFIRMATION OF UTILITY

- LOCATES PRIOR TO COMMENCEMENT OF DIGGING.
- PREPARATION: EXCAVATE SHRUB BED TO SIZE OUTLINED ON DRAWINGS. MAINTAIN MINIMUM 450mm DEPTH.

CONIFEROUS OR

**DECIDUOUS SHRUB** 

- SET SHRUB 50mm HIGHER THAN SURROUNDING GRADE TO ALLOW FOR SETTLEMENT. ALL ROOT BALLS REMOVED FROM POTS TO
- BE SCARIFIED PRIOR TO SETTING IN GROUND.
- PRUNING TO SUIT SPECIES.
- TRIM BRANCHES AND TWIGS TO RETAIN NATURAL FORM OF SHRUB, DO NOT PRUNE LEADERS.
- SPACING AS DIRECTED.

## FERTILIZER:

- APPLY APPROVED WATER SOLUABLE FERTILIZER AT A RATE OF 9kg PER 100m<sup>2</sup>.
- ENSURE FERTILIZER IS CONTAINED WITHIN SAUCER AND EVENLY RAKED INTO



— SOD AS SPECIFIED - PLANTING SOIL MIXTURE AS SPECIFIED. TAMP SOIL MIXTURE IN LAYERS TO PREVENT AIR POCKETS - CUT AND REMOVE ALL WIRE, BURLAP, ROPE AND TWINE FROM TOP  $\frac{1}{3}$  OF ROOT BALL

- SCARIFY 150mm TAMPED PLANTING BED WIDTH VARIES SHRUB PLANTING

L-500 1:30

CUT CLEAN -BED EDGE

**FINISHED** 

GRADE

L-500/1:30

- PREPARATION: EXCAVATE PLANTING BED TO SIZE OUTLINED ON DRAWINGS. MAINTAIN MINIMUM 350mm DEPTH.
- PLANTING BED TO BE RAISED A MINIMUM OF 150mm ABOVE THE FINISHED GRADE OF SOD AND/OR SURROUNDING AREA.

EXISTING SUB-GRADE

- SET PERENNIAL 50mm HIGHER THAN SURROUNDING GRADE TO ALLOW FOR
- SETTLEMENT.

\PERENNIAL PLANTING

 PLANTING IN GROUPS SHALL BE SET IN EQUAL O.C. SPACING, AS DIRECTED.

O.C. O.C.

SPACING AS SPACING AS

## BARE ROOT (B.R. IN PLANT LIST): SET ALL PLANT MATERIAL SLIGHTLY

FERTILIZER:

HIGHER THAN ADJACENT GRADE. SET BARE ROOT PLANT MATERIAL SO THAT ROOTS LIE IN NATURAL STATE. GENTLY BACKFILL WITH SOIL MIXTURE, WORKING SOIL BETWEEN ROOTS.

APPLY APPROVED WATER SOLUABLE

ENSURE FERTILIZER IS CONTAINED

INTO PLANTING SOIL MIXTURE.

WITHIN SAUCER AND EVENLY RAKED

FERTILIZER AT A RATE OF 9kg PER 100m<sup>2</sup>.

- SPECIFIED , SPECIFIED LIGHTLY TAMP SOIL TO ELIMINATE AIR POCKETS AND REDUCE SETTLEMENT. WATER PLANTING BED THOROUGHLY, IMMEDIATELY AFTER PLANTING. - 75mm COMPACTED MULCH — SOIL MIXTURE AS SPECIFIED

  - SCARIFY TAMPED SETTING BED AT BOTTOM OF PLANTING BED EXISTING SUB-GRADES



6 BIKE RACK

**BIKE RACK - 9 BIKES** BY MAGLIN OR APPROVED EQUAL


MODEL: MBR-900-S COLOUR: BLACK MOUNTING: SURFACE MOUNT U-Haul Canada Inc.

COPYRIGHT

CONTRACTOR SHALL CHECK ALL DIMENSIONS ON THE WORK AND REPORT ANY DISCREPANCY TO THE CONSULTANT BEFORE PROCEEDING. THIS DRAWING IS NOT TO BE USED FOR CONSTRUCTION UNTIL AUTHORIZED IN WRITING BY CONSULTANT.


**IBI Group (Canada) Inc.** is a member of the IBI Group of companie

ISSUES DESCRIPTION DATE ISSUED FOR SPA 2020-02-13



CONSULTANTS

SEAL



7th Floor-230 55 St. Clair Avenue West Toronto ON M4V 2Y7 Canada tel 416 596 1930 fax 416 596 0644 ibigroup.com

PROJECT

**U-Haul Storage** 3636 Innes Road, Ottawa, ON

K1C

PROJECT NO: 122637 DRAWN BY: CHECKED BY: PROJECT MGR: APPROVED BY:

SHEET TITLE

LANDSCAPE DETAILS

SHEET NUMBER L-500

ISSUE