

AT INSULATION (50mm THICK) MINIMUM BE INSTALLED AT THE BUILDING FOOTING AND FOUNDATION TO PROVIDE SUFFICIENT FROST COVER FOR THE FOUNDATION STRUCTURES. E FOOTINGS WILL NEED TO BE REVIEWED FOR INSULATION BY THE OWNER'S SOILS ENGINEER. EXACT INSULATION REQUIREMENTS SHALL BE AS PER HOUSE DESIGNER'S INSULATION DETAILS AS SHOWN ON THEIR ARCHITECTURAL DRAWINGS AND CONFIRMED BY THE OWNER'S SITE SOILS ENGINEER.

POLY DOME.

MULTI-NEW BARRIER WITH INTEGRATED CLAMP COLLAR AND GRAVEL GUARD.

GRAVEL.

ROOFING MEMBRANE.

INSULATION.

EXTENSION WITH GASKET.


VAPOUR BARRIER.

ROOF SUMP RECEIVER.

METAL DECK.


BODY.

UNDER DECK CLAMP.

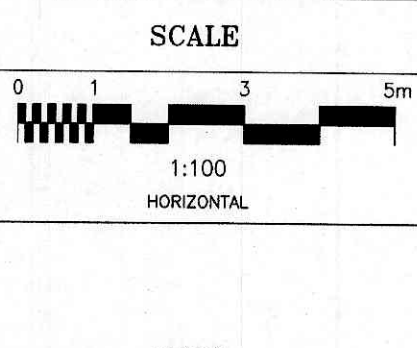

DESIGN	T.L.M.	
CHECKED	T.L.M.	
DRAWN BY	G.U.	
CHECKED	T.L.M.	
APPROVED	T.L.M.	

PROJECT	368 CHAPEL STREET NORTH HALF OF LOT 17 (WEST CHAPEL STREET) REGISTERED PLAN 58319 CITY OF OTTAWA
DRAWING TITLE	PROPOSED GRADING AND SERVICING PLAN

		T.L. MAK ENGINEERING CONSULTANTS LTD. CONSULTING ENGINEERS	
PROJECT No.	DATE	DRAWING No.	
817-61	OCTOBER 2017	C-1	