


- A. ALL STREET TREES, IN THE ROAD RIGHT OF WAY ARE PROPOSED A MINIMUM OF 5.5m FROM BUILDINGS
- B. THE SOIL PLASTICITY INDEX FOR BORE HOLE 14-12 PROVIDED IN GEOTECHNICAL REPORT PREPARED BY GOLDER ASSOCIATES INC. AND DATED JULY 2015 IS 23% AND AS SUCH CONSIDERED A SOIL INTERMEDIATE OR MEDIUM PLASTICITY. OTHER SOIL SAMPLES FROM PHASE 8 OF RIVERSIDE SOUTH DEVELOPMENT INDICATED SOIL PLASTICITY INDEX BETWEEN 20 AND 43% AND AS SUCH ARE CONSIDERED SOILS OF INTERMEDIATE TO HIGH PLASTICITY.
- C. THE UNDERSIDE OF FOOTING (USF), AS INDICATED ON THE CIVIL ENGINEERING DRAWINGS PREPARED BY STANTEC CONSULTING, MINIMUM 2.20m BELOW THE FINISHED GRADE AT BLOCKS 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11 WHERE STREET TREES ARE PROPOSED.
- D. SOIL VOLUMES FOR ALL STREET TREES (NON BOULEVARD SITUATION) EXCEED THE MINIMUM VOLUMES REQUIRED OF 25m³ TO 30m³ LONG X 3.5m WIDE X 1.5m DEEP.
- E. ALL DECIDUOUS TREE SPECIES PROPOSED ARE SMALL TO MEDIUM SIZE (LESS THAN 14m IN HEIGHT AT MATURITY)
- F. THE FOUNDATION WALLS OF BUILDINGS ARE TO BE REINFORCED LOCALLY MINIMALLY WITH MINIMUM OF TWO UPPER AND TWO LOWER 15M BARS TO PROVIDE DUCTILITY.
- G. GRADING AROUND STREET TREES PLANTED IN SENSITIVE MARINE SOIL MUST PROMOTE DRAINAGE TO THE TREE ROOT ZONE IN SENSITIVE MARINE SOIL.


1. THE DETAILS ON THIS SHEET DO NOT REPRESENT ANY PARTICULAR SPECIES.
2. TREES AND SHRUBS AS INDICATED IN THE DETAILS REPRESENT BOTH CONIFEROUS AND DECIDUOUS SPECIES.
3. MATERIAL PLANTED IN ROWS SHALL BE SET IN CONTINUOUS PLANTING BEDS.
4. CENTRE LINE OF SHRUBS SHALL NOT BE CLOSER THAN 2.4m FROM BUILDING FACE TO PROTECT BUILDING FOOTINGS AND INSULATION.
5. PRUNING - TO SUIT SPECIES - PRUNE BRANCHES BY 1/3 TO REMOVE DAMAGED OR OBJECTIONABLE BRANCHES FOLLOWING PROPER HORTICULTURAL PRACTICE. DO NOT PRUNE LEADERS.
6. FIRMLY COMPACT BACKFILLED PLANTING MIXTURE TO ELIMINATE AIR POCKETS OR PREVENT SETTLEMENT.
7. PLANTING MATERIAL QUALITY STANDARDS:
 - ALL PLANT MATERIALS TO CONFORM TO THE CANADIAN NURSERY LANDSCAPE ASSOCIATION FOR VARIETY, SIZE AND CONDITION;
 - PLANT MATERIAL COLLECTED FROM WILD SOURCES WILL NOT BE ACCEPTED.
 - LANDSCAPE ARCHITECT RESERVES THE RIGHT TO REFUSE ACCEPTANCE OF ANY PLANT DISPLAYING POOR GROWTH HABITS, INJURY OR DISEASE;
 - ANY PLANTS THAT DO NOT CONFORM TO THE ABOVE STANDARDS WILL BE PROMPTLY REMOVED FROM THE SITE BY THE CONTRACTOR AND REPLACED WITH MATERIAL OF ACCEPTABLE QUALITY AT NO ADDITIONAL COST TO THE PROJECT.
8. TOPSOIL:
 - SOIL TEXTURE BASED ON THE CANADIAN SYSTEM OF SOIL CLASSIFICATION TO CONSIST OF:
 - CLAY: 14-20%
 - SILT: 0-35%
 - SAND: 45-70%
 - ORGANIC MATERIAL: 4-10%
 - pH: 6-8
 - SPREAD TOPSOIL TO FOLLOWING MINIMUM DEPTHS AFTER SETTLEMENTS UNLESS OTHERWISE NOTED ON DETAILS:
 - 300mm FOR PERENNIALS
 - 500mm FOR SHRUB BEDS
 - 1000mm FOR TREE PLANTING

1. EXISTING VEGETATED AREAS ON ADJACENT PROPERTIES SHALL REMAIN AND BE PROTECTED BEFORE, DURING, AND AFTER CONSTRUCTION.
2. SOD SHALL BE KENTUCKY BLUEGRASS SOD INSTALLED OVER 135mm OF TOPSOIL. SOD SHALL BE INSTALLED THROUGHOUT WITHIN LIMIT OF WORK AND IN ALL DISTURBED AREAS OUTSIDE THE LIMIT OF WORK EXCEPT WHERE INDICATED. SOD SHALL BE INSTALLED AS PER OPSS 803.
3. CONTRACTOR TO LOCATE AND STAKE ALL UTILITIES PRIOR TO ANY WORK ON THE SITE. DO NOT PLANT DIRECTLY ABOVE UNDERGROUND UTILITIES. REPORT ANY DISCREPANCIES TO THE LANDSCAPE ARCHITECT FOR DIRECTION.
4. MAINTAIN A MINIMUM DISTANCE OF 2.0m FROM ALL UNDERGROUND UTILITIES.
5. NO TREES SHALL BE PLANTED UNDER OVERHEAD WIRES.
6. THE LANDSCAPE ARCHITECT MAY ADJUST THE LOCATION OF PLANTING PRIOR TO PLANTING TO MINIMIZE CONFLICTS WITH UTILITIES, DRIVEWAYS AND INTERSECTION VISIBILITY.
7. CONTRACTOR SHALL SUPPLY ALL MATERIALS IN QUANTITIES SUFFICIENT TO COMPLETE WORK SHOWN ON THESE DRAWINGS. ANY DISCREPANCIES SHALL BE REPORTED TO THE LANDSCAPE ARCHITECT FOR DIRECTION.
8. DO NOT MAKE SUBSTITUTIONS OF MATERIALS, PRODUCTS OR QUANTITIES WITHOUT PRIOR WRITTEN PERMISSION OF THE LANDSCAPE ARCHITECT.
9. THE CONTRACTOR TO MAKE GOOD TO THE SATISFACTION OF THE LANDSCAPE ARCHITECT ANY AREAS DAMAGED BY THE WORK.
10. UPON THE COMPLETION OF WORK EACH DAY, REMOVE ALL DEBRIS, GARBAGE AND SURPLUS MATERIALS FROM THE SITE. KEEP THE SITE CLEAN AND USEABLE AT ALL TIMES.
11. ALL WORKMANSHIP AND MATERIALS (INCLUDING PLANTS) TO BE GUARANTEED FOR ONE FULL YEAR FOLLOWING FINAL ACCEPTANCE OF THE PROJECT BY THE LANDSCAPE ARCHITECT.
12. THE CONTRACTOR SHALL REMOVE ALL T-BAR AND WOODEN TREE STAKES PRIOR TO ASSUMPTION BY THE OWNER.
13. AT THE TIME OF INSPECTION FOR ACCEPTANCE ALL TREE PITS SHALL BE CULTIVATED, FREE OR WEEDS, LEAVES, BROKEN BRANCHES AND DEBRIS.

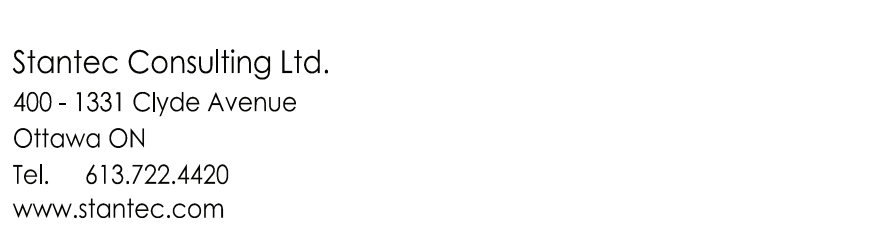

The Contractor shall verify and be responsible for all dimensions. DO NOT scale the drawing - any errors or omissions shall be reported to Stantec without delay.
The Copyrights to all designs and drawings are the property of Stantec. Reproduction or use for any purpose other than that authorized by Stantec is forbidden.

1. SITE PLAN PREPARED BY M. DAVID BLAKELY ARCHITECT INC., REVISION 19, DATED MARCH 2020.
2. TOPOGRAPHIC SURVEY SUPPLIED BY ANNIS, O'SULLIVAN, VOLLEBEKK LTD.
PROJECT No 19060-18 RICH CRAFT BLK 221, REGISTERED PLAN 4M-1573, CITY OF OTTAWA, DATED 2018-08-15

Permit-Seal

RIVERSIDE SOUTH PHASE 8
BLOCK 221
OTTAWA, ON

L300 2 of 2 3

W:\active\160401422_Richcraft Block 221 Riverside\design\drawing\160401422_18.dwg
2020/04/02 8:14 AM By: Mackin, Gregory