


26 GAUGE WHITE PAINTED
INTERLOCKING STEEL PANEL
THAT COVERS 36" PER SHEET
ATTACHED WITH 12 SCREWS
PER SHEET

2" SPACE FROM TOP OF POLE
TO TOP OF CEE CHANNEL

3" O.D. SS 40 POST WITH
MINIMUM .160 WALL THICKNESS


#12 HEX 3/4 IN
PAINTED SCREWS

4x2 GALV. CEE
CHANNEL (VAGA)
WELDED TO POST
TOP & BOTTOM

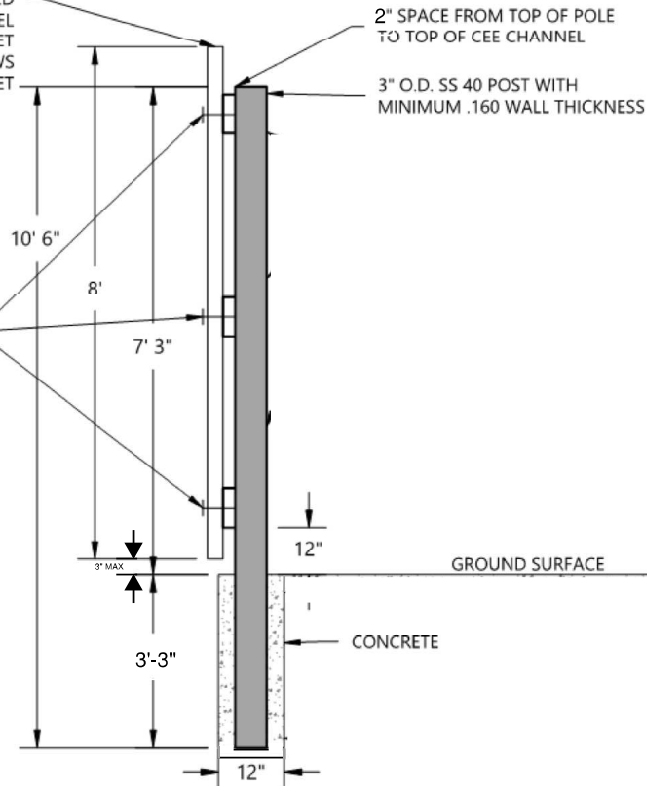

NOTE: POST TO BE SPACED 10' O.C.

- 3" GAP AT THE
BOTTOM (MAX)
- 12" TO FIRST
RUNNER

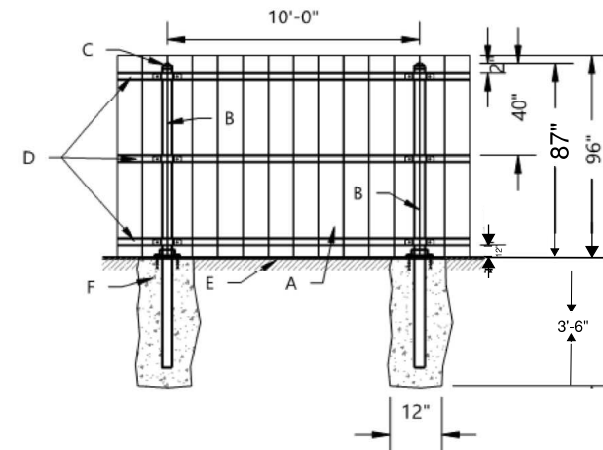

LEGEND

- A. CORRUGATED METAL PANELS 36"x96" (26 GA) ATTACHED TO 3 -2x4 (14 GA) "C" CHANNELS BY 9 HARDENED STEEL RING SHANKED NAILS
- B. GALVANIZED POSTS (AS REQUIRED) 3" SCHED 40 (35MPH WIND LOAD) OR 4" SCHED 40 (90MPH WIND LOAD) OR 6 5/8" SCHED 40 (130MPH WIND LOAD)
- C. ALUMINUM POST CAP
- D. RAIL CHANNELS 3-WELDED 2x4 (14GA) GALV. G90 "C" CHANNELS. CHANNELS TO BE WELDED TOP AND BOTTOM AT EACH POST
- E. GRADE
- F. CONCRETE FOOTINGS 3000PSI CONCRETE TO DEPTH ACCORDING TO FROST LINE