PROPOSED MIXED USE RESIDENTIAL-COMMERCIAL DEVELOPMENT 3996 INNES ROAD, OTTAWA

FINAL REPORT

Presented to:

Ms. Neeti Paudel Project Manager, City of Ottawa 110 Laurier Avenue West Ottawa, Ontario K1P 1J1



November 22, 2021

CASTLEGLENN CONSULTANTS LTD.

THIRD PARTY DISCLAIMER

This study has been prepared by Castleglenn Consultants Inc. ("CGI") for the benefit of the Client to whom it is addressed. The information and data contained herein represents CGI's best professional judgment in light of the knowledge and information available to CGI at the time of preparation. Except as required by law, this study and the information and data contained herein are to be treated as confidential and may be used and relied upon only by the Client, its officers and employees. CGI denies any liability whatsoever to other parties who may obtain access to this study for any injury, loss or damage suffered by such parties arising from their use of, or reliance upon, this study or any of its contents without the express written consent of CGI and the Client.

TABLE OF CONTENTS

1.0	EXI	STING AND PLANNED CONDITIONS	1					
	1.1	PROPOSED DEVELOPMENT	1					
	1.2	EXISTING CONDITIONS	3					
	1.3	PLANNED CONDITIONS	11					
2.0	SCR	SCREENING RESULTS, THE STUDY AREA AND TIME PERIODS						
	2.1	SCREENING RESULTS	13					
	2.2	Study Area	13					
	2.3	TIME PERIODS	13					
	2.4	HORIZON YEARS	13					
3.0	EXE	EMPTION REVIEW	14					
4.0	BAC	CKGROUND NETWORK TRAFFIC	15					
	4.1	HISTORICAL BACKGROUND GROWTH RATE	15					
	4.2	ADJACENT DEVELOPMENT TRAFFIC	15					
5.0	DEMAND RATIONALIZATION							
	5.1	REVIEW OF EXISTING (2021) NETWORK CONSTRAINTS	16					
	5.2	REVIEW OF 2022 BACKGROUND NETWORK CONSTRAINTS	17					
6.0	ANA	ALYSIS	19					
	6.1	DEVELOPMENT DESIGN	19					
		6.1.1 Design for Sustainable Modes	19					
		6.1.2 Circulation and Access	19					
	6.2	Parking						
		6.2.1 Motor Vehicle Parking						
		6.2.2 Bicycle Parking						
	6.3	BOUNDARY STREET DESIGN						
		6.3.1 Mobility – Segment MMLOS Analysis						
	6.4	INTERSECTION DESIGN						
		6.4.1 Intersection MMLOS Analysis						
7.0	СТD	ATEGY						
7.0	7.1	RECOMMENDED IMPROVEMENTS						
	7.1	CONCLUSION						
	1.4	CONCLUSION	∠೨					

APPENDICES

APPENDIX A: SITE PLAN.	A
APPENDIX B: CERTIFICATION FORM FOR TIA STUDY PROJECT MANAGER	B
APPENDIX C: SCREENING FORM	C
APPENDIX D: EXISTING TRAFFIC VOLUMES AND COLLISIONS	D
APPENDIX E: EXISTING (2021) AND BACKGROUND (2022) SYNCHRO ANALYSIS	E
APPENDIX F: CITY OF OTTAWA TDM CHECKLISTS	F
APPENDIX G: ON-SITE TURNING MOVEMENTS	G
APPENDIX H: INTERSECTION MMLOS ANALYSIS	Н
LIST OF EXHIBITS	
EXHIBIT 1-1: SITE LOCATION CONTEXT	1
EXHIBIT 1-2: DRAFT SITE PLAN (OCTOBER, 2021)	2
EXHIBIT 1-3 INNES RD/ MER BLEUE (JEANNE D'ARC S) INTERSECTION	4
EXHIBIT 1-4 INNES Rd/ WALMART ENTRANCE INTERSECTION	4
EXHIBIT 1-5 INNES RD/ FRANK BENDER ST INTERSECTION	5
EXHIBIT 1-6: TRANSIT SERVICE IN VICINITY OF THE DEVELOPMENT	6
EXHIBIT 1-7: EXISTING (2021) MORNING AND AFTERNOON PEAK HOUR TRAFFIC VOLUMES	9
EXHIBIT 5-1: BACKGROUND (2022) MORNING AND AFTERNOON PEAK HOUR TRAFFIC VOLUMES	18
LIST OF TABLES	
TABLE 1-1: ADJACENT DEVELOPMENTS FORECAST TO OCCUR BEYOND 2022	12
TABLE 3-1: EXEMPTIONS AS PER TIA GUIDELINES	
TABLE 5-1: EXISTING (2021) INTERSECTION CAPACITY ANALYSIS	16
TABLE 5-2: BACKGROUND (2022) INTERSECTION CAPACITY ANALYSIS	17
Table 6-1: Parking Requirements for the 3996 Innes Road Development	20
TABLE 6-2: BICYCLE PARKING REQUIREMENTS FOR THE 3996 INNES ROAD DEVELOPMENT	20
TABLE 6-3: ROADWAY SEGMENT MMLOS ANALYSIS	21
TABLE 6-4: INTERSECTION MMLOS ANALYSIS	23

1.0 EXISTING AND PLANNED CONDITIONS

1.1 PROPOSED DEVELOPMENT

Exhibit 1-1 illustrates the location of the proposed 3996 Innes Road mixed-use residential and commercial development, located on the south side of Innes Road west of Mer Bleue Road in Ottawa, Ontario. This Traffic Impact Study is in support of an application for Site Plan Control Approval.



Exhibit 1-1: Site Location Context

Exhibit 1-2 illustrates the proposed site plan (November, 2021) for the proposed 5 storey mixed-use building, providing for:

- 20 residential apartment units;
- 175 m² of pharmacy and 200 m² of medical area; and
- 37 parking spaces.

The parcel is zoned "AM - Arterial Mainstreet", which is an acceptable zoning for the abovementioned uses.

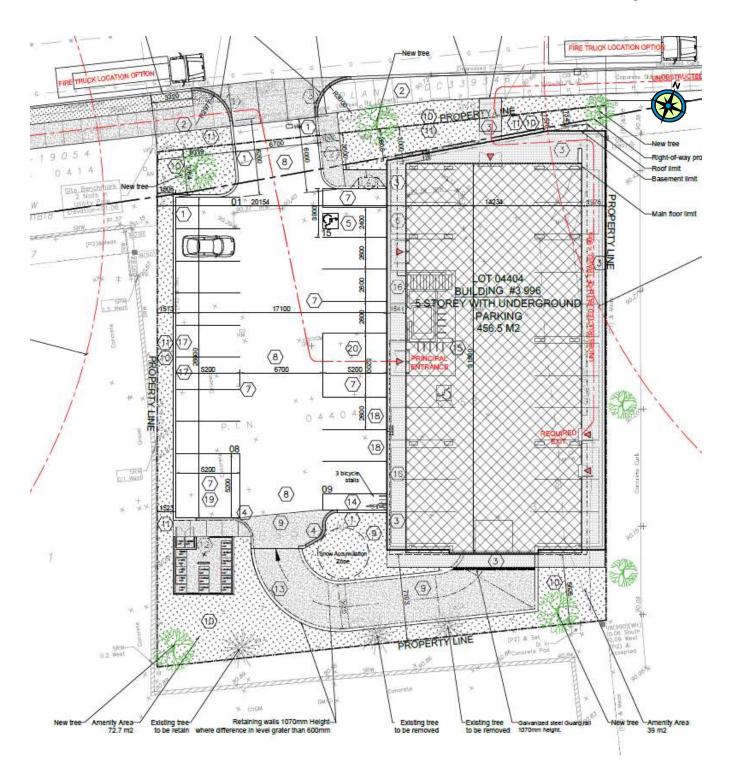


Exhibit 1-2: Draft Site Plan (November, 2021)

A review of Exhibit 1-2 illustrates that the site is to be accessed using a single right-in right-out eastbound access from Innes Road. The site currently contains a single semi-detached residential dwelling with two existing accesses. The existing dwelling is to be demolished, the east access is to be closed and the depressed curb is to be reinstated.

The site access from the Innes Road corridor provides for approximately 6 meters of throat length capable of accommodating a single passenger vehicle and 6.7 meters in width to permit the entry and exit movements of motor-vehicles.

1.2 EXISTING CONDITIONS

Study Area Roadways

The City of Ottawa TMP (Map 8) was referenced along with a desktop review of aerial photography to document the existing roadways that would serve the proposed development and surrounding area. The roadways in the vicinity of the proposed development include:

- *Innes Road:* This corridor is an existing 4-lane east-west divided two-lane arterial roadway (with a posted speed of 60 km/hr) fronting the site. The road also serves as a designated "full loads" truck route1. Pedestrian sidewalks are present on both sides of the road and on-street cycling lanes are provided in both directions.
- *Mer Bleue Road Jeanne D'Arc Boulevard:* This corridor is an existing 4-lane north-south divided two-lane arterial roadway located east of the proposed development. The road serves as a "half load" truck route. Pedestrian sidewalks are present on both sides of the roadway while onstreet cycling facilities are provided in each direction nearest the site.
- Frank Bender Street: This is an existing 2-lane north-south collector roadway connecting Innes Road and Jeanne D'Arc Boulevard. The roadway provides for 4 travel lanes and is designated as a major collector south of Innes Road, where its future connection will take place into the East Urban Community Phase III lands. Pedestrian sidewalks are present on both sides of the roadway. Cycling facilities are not provided on the existing cross section.

Area Traffic Management

No Area Traffic Management strategies have been identified for the boundary roads within the study area.

^{1 &}quot;Rural Truck Routes" exhibit, Traffic Services, City of Ottawa, March 1st 2021

Study Area Intersections

Innes Road/Mer Bleue (Jeanne D'Arc S): This intersection is a 4-leg signal-controlled intersection.

- The northbound approach provides for two auxiliary NB-LT bays, two NB-Th lanes, and one auxiliary NB-RT bay with YIELD condition.
- The southbound approach provides for two auxiliary SB-LT lanes, two SB-Th lanes, and one auxiliary SB-RT lane with YIELD condition.
- The westbound approach provides for two WB-Th lanes, one auxiliary WB-LT lane, and one auxiliary WB-RT lane with YIELD condition.
- The eastbound approach provides for two EB-Th lanes, one auxiliary EB-LT bay and one auxiliary EB-RT lane with YIELD condition.
- Sidewalks are provided in each quadrant of the intersection. Bike lanes are also provided on all 4 approaches



Exhibit 1-3 Innes Rd/ Mer Bleue (Jeanne D'Arc S) intersection



Exhibit 1-4 Innes Rd/ Walmart Entrance intersection

Innes Rd/ Walmart Entrance (260 m. East of Frank Bender St.): This existing intersection is a 3-leg signal-controlled intersection.

- The northbound approach of the intersection provides for one NB-LT lane, and one NB-RT lane.
- The eastbound approach provides for one EB-TH lane and one shared EB-Th/RT lane.
- The westbound approach provides for an auxiliary WB-LT bay and two EB-TH lanes.
- Sidewalks are provided in each quadrant of the intersection. Bike lanes are also provided on major road approaches

Innes Road / Frank Bender Street: This intersection is a 4-leg traffic signal-controlled intersection.

- The northbound approach provides for one auxiliary NB-LT bay, one NB-Th lane, and one NB-RT lane.
- The southbound approach provides for one auxiliary SB-LT bay, and one shared SB-Th/RT lane.
- The westbound approach provides for one WB-Th lane, one shared WB-Th/RT lane, and one auxiliary WB-LT bay.
- The eastbound approach provides for two EB-Th lanes, one auxiliary EB-LT bay and one auxiliary EB-RT lane.
- Sidewalks are provided in each quadrant of the intersection. Bike lanes are provided on the east-west approaches only.



Exhibit 1-5 Innes Rd/ Frank Bender St Intersection

Existing Surrounding Driveways

The proposed Innes Road development is anticipated to remove the existing accesses to 3998 Innes Road, and modify the existing access to 3996 Innes Road.

The following active existing driveways and accesses are adjacent to the development:

- 4030 Innes Road (Kingdom Hall of Jehovah's Witnesses) is accessed by a right-in right-out access just east of the site and a right-in right-out access from Mer Bleue Road;
- 4042 Innes Road (Mr. Gas Service Station) is accessed by two right-in right-out entrances off Innes Road and one right-in right-out entrance off Mer Bleue Road
- SmartCentres "Walmart" Commercial Plaza (3940 Innes Road, 3910 Innes Road, 3880 Innes Road, 2002 Mer Bleue Road, 2010 Mer Bleue Road) is accessed from:
- a signalized intersection on Innes Road 260 meters east of Belcourt Blvd;
- a right-in right-out entrance from Innes Road; and
- a signalized intersection of Mer Bleue Road / Roger Pharand Street.

Existing Transit Provisions

Exhibit 1-6 illustrates the existing transit (July 2021) operations provided by OC Transpo buses along Innes Road and Mer Bleue Road/Jeanne D'Arc Boulevard South corridors. The proposed development would likely utilize the following bus routes along Innes Road corridor:

Route 25: Connects the proposed development to Millennium station in the east and Blair LRT station and La Cite College via Blackburn Hamlet in the west. The buses have 10-minute headways during



Exhibit 1-6: Transit Service in Vicinity of the Development

peak times and 15-to-30-minute headways outside of peak times.

- Route 131: Local route that connects the development to the neighbourhoods of Chapel Hill and Fallingbrook, as well as Place D'Orleans shopping centre and future LRT station. Buses run with 30-minute headways without an increase in frequency during peak periods
- **Route 138:** Local route that connects the proposed development to the neighbouthood of Covent Glen and Place D'Orleans shopping centre. Buses run with 1-hour headways during regular hours and 30-minute headways during peak periods.
- Route 302: Rural "shopper" bus connecting the development to rural communities of Cumberland, Sarsfield and Navan. The route then runs along Innes Road and Tenth Line Road to Place D'Orleans, Blair and St. Laurent stations. A review of route's schedule indicated that the route runs once a week on Tuesdays.

Alternatively, the proposed development could utilize the Jeanne D'Arc / Innes Road bus stop to access the following transit routes along the Mer Bleue-Jeanne D'Arc corridor:

- Route 30: Connects the proposed development to Blair LRT station in the west via Jeanne D'Arc Boulevard corridor. The route connects to Millennium station via Brian Coburn Boulevard corridor in the east. Buses run with 30-minute headways during regular hours and 15-minute headways in the peak direction during peak periods.
- Route 32: Connects the proposed development to Blair LRT station in the west via Sunview Drive and St. Joseph Boulevard corridors. The route connects to Chapel Hill South neighbourhood via Fern Casey Street and Renaud Road corridors. The route's schedule indicated weekday 30-minute peak hour Chapel Hill South service in the Westbound direction during in the morning and eastbound during the afternoon peak periods.
- **Route 37:** Local route that connects the proposed development to Place d'Orleans Shopping Centre via Queenswood Heights neighbourhood. The route offers a 30-minute weekday headway.

Existing Multi-Modal Facilities

A review of the City of Ottawa's "Map 1: Cycling Network – Primary Urban" from the Transportation Master Plan indicated Innes Road as designated spine route and cross-town bikeway route. Mer Bleue Road and Jeanne D'Arc Boulevard are designated as spine routes. The study area provides for 4-lane roadways with bike lane shoulders on Innes Road, Jeanne D'Arc Boulevard and Mer Bleue Road. Pedestrian sidewalks are provided at all nearby roadways.

A review of the January, 9th 2020 traffic count conducted at the Innes Road / Mer Bleue Road-Jeanne D'Arc Boulevard intersection indicated the following pedestrian and cyclist activity during the 8-hour turning movement count:

- 84 pedestrians crossing the north leg of the intersection;
- 40 pedestrians crossing the east leg of the intersection;
- 34 pedestrians crossing the south leg of the intersection;
- 40 pedestrians crossing the west leg of the intersection;
- 2 cyclists travelling in the westbound direction;
- 1 cyclist travelling in the northbound direction;
- 7 cyclists travelling in the eastbound direction.

A review of the February 20, 2020 traffic count conducted at the Innes Road /"Walmart Entrance" intersection, count results indicated the following pedestrian and cyclist activity:

- 36 pedestrians crossing the east leg of the intersection;
- 16 pedestrians crossing the south leg of the intersection;
- 15 pedestrians crossing the west leg of the intersection;
- 1 cyclist traveling in the eastbound direction;
- 1 cyclist travelling in the westbound direction

A review of the January 9, 2020 traffic count conducted at the Innes Road / Frank Bender St/Belcourt Blvd intersection indicated the following pedestrian and cyclist activity:

- 36 pedestrians crossing the north leg of the intersection;
- 56 pedestrians crossing the east leg of the intersection;
- 53 pedestrians crossing the south leg of the intersection;
- 51 pedestrians crossing the west leg of the intersection;
- 1 cyclist travelling in the eastbound direction;
- 1 cyclist travelling in the northbound direction;
- 1 cyclist travelling in the southbound direction.

It's noted that each of the City's traffic counts were undertaken during the Winter of 2020 season. Spring, Summer and Fall pedestrian and cyclist activity would be expected to be higher than the results indicated.

Existing (2021) Traffic Volumes

Exhibit 1-7 illustrates the existing morning and afternoon peak hour traffic volume collected from City of Ottawa available information at the following intersections.

- Innes Road / Mer Bleue Road Jeanne D'Arc Boulevard South (January, 2020);
- Innes Road / Walmart Entrance, (February, 2020); and
- Innes Road / Frank Bender Road (February, 2020).

The Effects of Covid-19

It was March 16th, 2020 when the Ontario Government recommended the closure of all recreation programs, libraries, private schools, daycares, and churches and other faith settings, as well as bars and restaurants, except those that offer takeout or delivery and on March 17th, 2020 the Province declared a state of emergency and ordered some business to be closed, including daycares, bars and restaurants, theatres and private schools. The effect of Covid on the above traffic counts was determined to be negligible.

In general, the review of the traffic volumes indicated:

- During the morning peak hour, westbound Innes Road traffic represents the peak direction as vehicles travel towards downtown Ottawa;
- During the afternoon peak hour, the peak direction reversed to eastbound on Innes Road, as vehicles travel back into Orleans
- Heavy vehicle volumes were found to be greatest during the morning peak hour, where approximately 15% of both the eastbound Innes Road and southbound Mer Bleue Road traffic volume were found to be heavy vehicles;
- For the remainder of the approaches during the morning and afternoon peak hours, the heavy vehicle portion of traffic ranged from 1%-to-5%.

Existing Road Safety Information

Five (5) year (January 1st, 2015 to December 31st, 2019) historical collision information was reviewed for the study area intersections and segments. The collision information provides:

- the date and time of each collision:
- the type of collision (i.e. angle collision, rear-end);
- the level of damage involved (property damage only, injuries, fatalities);
- vehicle details (truck, passenger vehicle, etc.);
- vehicle path/maneuver characteristics; and
- the number of pedestrians involved (in the collision).

A standard collision rate based on the number of collisions- per-million-entering-vehicles (MEV) was calculated where a rate greater than 1.0 collisions/MEV was considered to indicate a potential concern.



Morning (Afternoon)

Exhibit 1-7: Existing (2021) Morning and Afternoon Peak Hour Traffic Volumes

Intersection Collisions

The following provides a summary of the collision intersection information:

- Innes Road / Mer Bleue Road (Jeanne D'Arc Boulevard S): A total of 110 collisions occurred at this intersection in the past 5 years.
 - 53% (58) of the collisions were rear-end collisions;
 - 7% (8) of the collisions were angle collisions;
 - 80% (88) of the collisions resulted in property damage only;
 - 20% (22) of the collisions resulted in a non-fatal injury;
 - This resulted in a collision rate of 1.28 collisions/MEV which is considered above an acceptable range of collision frequency and may merit further evaluation.
- Innes Road / Walmart Entrance (E of Frank Bender St.): A total of 14 collisions occurred at this intersection in the past 5 years:
 - 57% (8) of the collisions were rear-end collisions;
 - 7% (1) of the collisions were angle collisions;
 - 86% (12) of the collisions were found to result in property damage only (PDO);
 - 14% (2) of the collisions were found to result in non-fatal injury;
 - This resulted in an overall collision rate of 0.26 collisions/MEV which is considered within an acceptable range.
- Innes Road / Frank Bender St.: A total of 34 collisions were found to occur:
 - 53% (18) of the collisions were rear end collisions;
 - 6% (2) of the collisions were angle collisions;
 - 71% (24) collisions were found to result in property damage only (PDO);
 - 29% (10) of the collisions were found to result in non-fatal injury;
 - The collision rate for this segment was found to be 0.57/MEV which is considered within an acceptable range.

Mid-Block Collisions

The following provides a summary of the mid-block collisions:

- Innes Road between Frank bender St. and Walmart Entrance: A total of 12 collisions occurred at this intersection in the past 5 years:
 - 42% (5) of the collisions were rear end collisions;
 - 8% (1) of the collisions were angle collisions;
 - All 12 collisions were found to result in property damage only (PDO);
 - The collision rate for this segment was found to be 0.24/MEV which is considered within an acceptable range.
- Innes Road between Walmart Entrance and Mer Bleue Road Jeanne D'Arc Boulevard: A total of 21 collisions occurred at this intersection in the past 5 years:
 - 62% (13) of the collisions were rear end collisions;

- 10% (2) of the collisions were angle collisions;
- 57% (12) collisions were found to result in property damage only (PDO);
- 43% (9) of the collisions were found to result in non-fatal injury;
- The collision rate for this segment was found to be 0.44/MEV which is considered within an acceptable range.

A review of the mid-block collisions did not indicate any significant patterns of poor safety operations along the Innes Road corridor.

1.3 PLANNED CONDITIONS

Planned Transportation Network Changes

A review of the City of Ottawa's planning documents² indicated that Innes Road could receive transit signal priority measures (queue jumps and transit signal priority) in the vicinity of the development which could potentially serve to improve transit ridership subsequent to the opening of the proposed development. However, it is thought unlikely that significant changes to the Innes Road corridor would be undertaken prior to build-out of the proposed site.

Outside the immediate vicinity of the proposed development, a review of the City of Ottawa's documents indicated that:

- The Blackburn Hamlet Bypass Extension between Navan Road and Orleans Boulevard is scheduled to occur prior to 2024;
- For the purposes of this TIA, the following facilities have been assumed to occur sometime within the 2031 horizon
 - Brian Coburn Boulevard is anticipated to be upgraded with transit signal priority ("Isolated") measures between Blackburn Hamlet Bypass and Tenth Line Road³; and
 - The northern extension of Fern Cassey Street between Brian Coburn Blvd and Innes Road.
- The Brian Coburn extension (from Navan Road to Blair Road) is anticipated to occur sometime after 2031, with potentially an interim phase taking place within the 2031 horizon.
- For the purposes of this TIA, the following facilities have been assumed to occur well beyond the current Transportation Master Plan horizon of 2031:
 - The Cumberland Transitway / Blackburn Hamlet By-Pass Extension would be located south of the proposed development, adjacent to the Hydro corridor⁴ driven by the Trailsedge Phase 5 development and the long-term planning horizons for the entire east urban community; and
 - The future widenings of Brian Coburn Boulevard and Mer Bleue Road⁵.

^{2.} Ottawa Transportation Master Plan (Nov. 2013) Map 11 (Road Network Affordable Transportation Network), Map 5 (Rapid Transit and Transit Priority Network – 2031 Affordable Network), Appendix "E" of the 2019 DC Background Study and other planning documents

^{3.} The "Rapid Transit and Transit Priority Map" for the 2031 Affordable Network (Map 5) within the City of Ottawa Transportation Master Plan indicated that Brian Coburn Boulevard is a designated "Transit Priority Corridor (Isolated Measures)" corridor

^{4.} City of Ottawa's Transportation Master Plan Map 4 (Rapid Transit and Transit Priority Network – 2031 Conceptual Network)

^{5.} City of Ottawa Transportation Master Plan (Nov. 2013) Map 10 "Road Network - 2031 Network Concept"

Other Adjacent Development Initiatives

A review of adjacent developments that are planned, or recently completed, within the immediate study area identified the following developments that are anticipated to impact the Innes Road corridor by the time of the anticipated 2022 build-out of the proposed development:

- *3636 Innes Road*: This proposed development is to construct a three-storey self-storage warehouse building at an existing U-Haul storage site.
- 3604 Innes Road Glenview Residential Development (EUC Phase III Lands)⁶: The Glenview development is located on the west side of the EUC Phase 3 lands adjacent to the Caivan development. Glenview proposes 457 dwellings which would consist of 180 singles, 109 townhouses and 168 stacked townhouses.

The following residential developments are located outside the study area, and were considered to be completed well outside the proposed anticipated buildout (2022) of the proposed development.

Table 1-1: Adjacent Developments Forecast to Occur Beyond 2022

Development	Description
3817, 3835 and 3843 Innes Road:	Planned as a residential complex consisting of 3 low-rise rental apartment structures with a total of 97 units on the north side of Innes Road with a centre 5-storey building flanked by two 3-storey buildings. A combination of surface and underground parking will be constructed along with two right in/right out accesses to Innes Road WB. Anticipated full build-out of the development is 2024.
Caivan and Lepine: 3490 Innes Road	The Caivan subdivision is currently in development of a mixed-use high-rise (534 residential units) development west of the proposed Trailsedge North site. The mixed-used Lepine High Rise Development anticipates 1,320 apartment dwellings and 28,000 ft ² of commercial retail.
Richcraft Trailsedge East: Stage 3:	The Stage 3 development is bounded by Fern Casey in the west, Mer Bleue in the east, Renaud Road in the south and the Couloir Road-Copperhead Street corridor in the north and located immediately south of the proposed Stage 4 development. Stage 3 of the development is currently proceeding from west-to-east and would involve approximately 753 residential units by 2029;
6429 Renaud & 2284 Mer Bleue Roads (Trailsedge Phase 4):	The proposed Trailsedge Phase 4 development is a subdivision consisting of residential and mixed-use lots, a park and public streets. The development is due to accommodate up to 675 dwellings and commercial lots. The development will consist of 142 single detached lots, several blocks for 167 townhouse and 116 back-to-back townhouse dwellings fronting along a network of rectilinear public streets. Up to 250 future residential units are planned for the two proposed mixed-use blocks.
Mer Bleue Expansion Area7:	This area is located to the south and east of the proposed site. It proposes approximately 3,600 residential units, 175,000 SF of institutional development and approximately 4 hectares of commercial development by the time of ultimate build-out. This development will largely affect background traffic growth along existing corridors such as Navan Road, Mer Bleue Drive and Renaud Road corridors ⁸ .

^{6.} Proposed Subdivision, Innes Road TIA, Novatech, October 2019

^{7. (}IBI MTS, April 2017)

^{8.} The Summerside West Phase 4-6 TIA (Parsons, 2018) was referenced for the adjacent background traffic.

2.0 SCREENING RESULTS, THE STUDY AREA AND TIME PERIODS

2.1 SCREENING RESULTS

A review of the Screening Form and the triggers within the City of Ottawa's Traffic Impact Assessment Guidelines (2017) indicated that the proposed development at 3996 Innes Road does not meet the "trip generation" trigger; however, the review did indicate that the "location" trigger and the "safety" trigger were satisfied, thereby necessitating completion of the "Design Review" component which requires the following tasks to be completed.

- Evaluate the alignment of the development proposal with the City's policy objectives;
- Confirm that the site includes appropriate network elements for all modes of travel on site and on the boundary streets to connect the development into the City-wide networks;
- Confirm that the layout of the development and the proposed network facilities encourage use of sustainable modes;
- Confirm that basic access and circulation for motorized vehicles can be achieved;
- Identify any network modifications required to accommodate new accesses; and
- Provide RMA and functional design drawings to support required approvals

2.2 STUDY AREA

The study area is to include the section of Innes Road fronting the site and the following key intersections:

- Innes Road / Mer Bleue Road / Jeanne D'Arc Boulevard (Traffic Signal Controlled);
- Innes Road / Walmart Entrance (E of Frank Bender St.) (Traffic Signal Controlled); and
- Innes Road / Frank Bender Street (Traffic Signal Controlled);

2.3 TIME PERIODS

The study will analyze the morning and afternoon peak hours of travel demand as they were envisioned to represent the "worst-case" scenario in terms of traffic volumes generated by the development.

2.4 HORIZON YEARS

To meet the expectations of a Design Review component, the analysis considered the first year of build-out and occupancy of the development which for the purposes of this transportation analysis was assumed to be 2022.

3.0 EXEMPTION REVIEW

Table 3.1 represents the exemptions that were requested as part of the Scoping stage of this development's submission on July 9th, 2021. The scoping document was reviewed and approved by way of e-mail on July 27th, 2021. Approval of the scoping document by the City has resulted in the reduction in scope of work to the following tasks associated with this traffic study.

Network Impact Components:

- Module 3.1 Development Generated Travel Demand component;
- Elements 4.1.3 & 4.2.2; and
- Modules 4.5, 4.6 and 4.8.

Table 3-1: Exemptions as per TIA Guidelines

Module	Element	Exemption Considerations	Include Module in TIA
	Design Review	v Component	
3.1 Development Generated Travel	3.1.1 Trip Generation and Mode Shares	"Design Review TIA" does not require this.	No
Demand	3.1.2 Trip Distribution	"Design Review TIA" does not require this.	No
Demand	3.1.3 Trip Assignment	"Design Review TIA" does not require this.	No
4.1 Development		Only required for plans of subdivision	No
4.2 Parking	4.2.2 Spillover Parking	The parking supply is not anticipated to be deficient	No
	Network Impa	ct Component	
4.5 Transportation Demand Management	All elements	The proposed development is not expected to have more than 60 employees/students on-site.	No
4.6 Neighborhood Traffic Management	4.6.1 Adjacent Neighbourhoods	The proposed development relies exclusively on the arterial network for access	No
4.8 Network Concept		The development is not expected to generate more than 200 person-trips during the peak hour in excess of the equivalent volume permitted by established zoning.	No

4.0 BACKGROUND NETWORK TRAFFIC

The proposed development is located in an urban area outside the greenbelt. The parcel is zoned "AM – Arterial Mainstreet" and is fronting the Innes Road corridor. The surrounding area is characterized by commercial developments along Innes Road and low-to-medium density residential developments along adjacent streets.

A review of City of Ottawa Transportation Master Plan (TMP) indicated the following upcoming changes to the surrounding road network, as outlined in section 1.3:

- Extension of Brian Coburn Boulevard from Navan Road to Innes Road (Planned)
- Extension of Brian Coburn Boulevard from Navan Road to Blair Road (Ultimate)
- Extension of Blackburn Hamlet bypass to Orleans Boulevard

These changes are expected to have an impact on the adjacent road network well beyond the 2022 development build-out horizon year.

4.1 HISTORICAL BACKGROUND GROWTH RATE

The 2011 and 2031 Long-Range Transportation Model was reviewed to determine an appropriate background growth rate to be applied for the study area, given the long-term planning horizons. The average 20-year growth rate was found to be approximately 1% across the Innes Road- Brian Coburn Boulevard-Renaud Road screenline within the model horizons.

To develop a 2022 traffic forecast, a 1% background growth rate was applied to the existing traffic movements in all directions.

4.2 ADJACENT DEVELOPMENT TRAFFIC

Adjacent developments in the study area were identified in Section 1.3. Many of the identified developments are anticipated to be completed well beyond the forecast horizon year of this proposed development of 2022. Since the developments are not anticipated to impact the adjacent road traffic in the build-out year, they have been excluded from this traffic analyses.

5.0 DEMAND RATIONALIZATION

This section provides a rationalization of forecast travel demands for the study area to assess the presence of auto capacity limitations upon the transportation network <u>in the absence of</u> the future 3996 Innes Road development. The following sections present an intersection capacity analysis used to identify existing and future transportation network constraints associated with:

- Existing (2021) Traffic Conditions; and
- Background (2022) Traffic Conditions

The analysis was undertaken with SynchroTM 10 traffic software for signal control intersections. The level of service for the traffic signal control intersections are based on Section 6.1 of the City of Ottawa MMLOS Guidelines. Appendix "E" provides the relevant Synchro output for both existing and background 2022 conditions.

5.1 REVIEW OF EXISTING (2021) NETWORK CONSTRAINTS

Table 5-1 indicates congested conditions at the:

- Innes Road and Mer Bleue Road-Jeanne D'Arc Boulevard traffic signal-controlled intersection. This intersection was found to operate at an overall LOS "D" during the afternoon peak hour. The SB-LT was found to operate with an unacceptable volume-to-capacity ratio of 1.09, resulting in LOS "F" during the afternoon peak hour of travel demand.
- Innes Road and Frank Bender Street intersection was found to operate with an overall LOS "D", while the NB-LT was found to operate with a volume-to-capacity ratio of 0.90, resulting in LOS "E".

Intersection:		Weekday Morning Peak Hour (Afternoon Peak Hour)							
	Control		Critical Movement				Overall Intersection		
Innes Road and	Type	Approach / Movement	95 th Percentile Queue (m)	Delay (seconds)	LOS	v/c	Delay (seconds)	LOS	v/c
Mer Bleue Rd-		WB-Th	163	29.0	С	0.78			
Jeanne D'Ard	Traffic	(WB-Th)	(101)	(31.6)	(A)	(0.57)	27.5	С	0.72
Boulevard	Signal	SB-LT	29	63.7	В	0.62	(54.3)	(D)	(0.89)
boulevaru		(SB-LT)	(104)	(120)	(F)	(1.09)			
"Walmart		WB-Th	56	2.8	Α	0.49			
Access" (E of	Traffic Signal	(WB-Th)	(46)	(4.4)	(A)	(0.39)	3.0	Α	0.52
Frank Bender		EB-Th	14	1.6	Α	0.19	(17.8)	(C)	(0.74)
Street)		(EB-Th)	(205)	(22.4)	(D)	(0.82)			
		WB-Th	69	4.9	Α	0.52			
Frank Bender	Traffic	(WB-Th)	(60)	(6.6)	(A)	(0.38)	8.0	Α	0.58
Street	Signal	NB-LT	10	44.4	Α	0.15	(23.9)	(D)	(0.82)
		(NB-LT)	(50)	(106)	(E)	(0.90)			

Table 5-1: Existing (2021) Intersection Capacity Analysis

5.2 REVIEW OF 2022 BACKGROUND NETWORK CONSTRAINTS

As this document is intended to address the "design review" component of the TIA, an assessment of the "impact of the addition of development trips and infrastructure on the performance of the transportation network" (TIA guidelines page 8) is unnecessary. The following tables and exhibits exclude the proposed development and consider the impact of existing traffic combined with network changes anticipated to be in place during background 2022 (build-out) horizon year.


Exhibit 5-1 illustrates the 2022 background morning and afternoon peak hour traffic volumes within the study area. Table 5-2 indicates similar issues found in the existing conditions analysis. Adoption of 1.00 peak hour factor (PHF) for future conditions as per City of Ottawa TIA guidelines resulted in marginal improvement of delays and volume-to-capacity ratios in the study area. This resulted in slight improvement to the levels of service at:

- the Innes Road and Mer Bleue Rd.-Jeanne D'Arc Blvd. intersection from "F" to "E"; and
- Innes Road and Frank Bender St. from "E" to "C".

Despite the improvement offered by the 1.00 peak hour factor assumption, Innes Road continues to exhibit operational characteristics that are close to, or at capacity during the afternoon peak hour of travel demand.

Table 5-2: Background (2022) Intersection Capacity Analysis

Intersection:		Weekday Morning Peak Hour (Afternoon Peak Hour)							
	Control		Critical Ma	ovement			Over	all Inter	rsection
Innes Road	Type	Approach /	95 th Percentile	Delay	LOS	v/c	Delay	LOS	v/c
and		Movement	Queue (m)	(seconds)	LOS	V/C	(seconds)	LOS	V/C
Mor Dlava Dd		WB-Th	141	25.7	С	0.70			
Mer Bleue Rd-	Traffic	(WB-Th)	(90)	(30.1)	(A)	(0.51)	25.4	С	0.72
Jeanne D'Ard	Signal	SB-LT	27	60.8	Α	0.56	(44.4)	(D)	(0.89)
Blvd		(SB-LT)	(91)	(93.8)	(E)	(0.98)			
"Walmart		WB-Th	46	2.5	Α	0.44			
Access" (260 m	Traffic	(WB-Th)	(39)	(4.0)	(A)	(0.35)	2.7	Α	0.53
E of Frank	Signal	EB-Th	13	1.6	Α	0.17	(15.2)	(C)	(0.74)
Bender St.)		(EB-Th)	(167)	(18.8)	(C)	(0.75)			
		WB-Th	57	4.4	Α	0.48			
Frank Bender	Traffic	(WB-Th)	(54)	(6.5)	(A)	(0.35)	8.0	Α	0.58
St.	Signal	NB-LT	9	44.3	Α	0.13	(23.9)	(D)	(0.82)
		(NB-LT)	(43)	(76)	(C)	(0.73)			

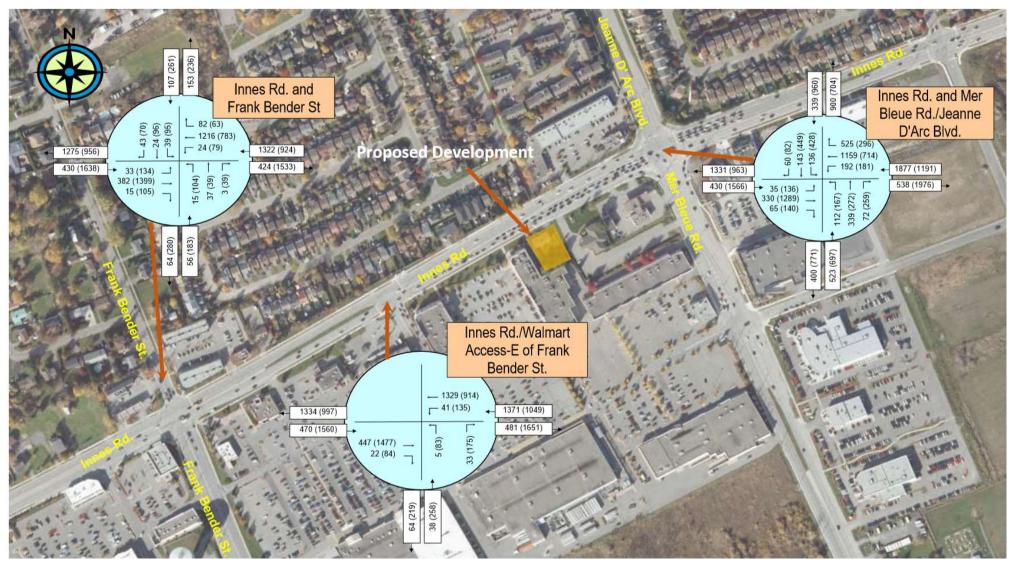

Morning (Afternoon)

Exhibit 5-1: Background (2022) Morning and Afternoon Peak Hour Traffic Volumes

6.0 ANALYSIS

6.1 DEVELOPMENT DESIGN

6.1.1 Design for Sustainable Modes

Appendix "F" provides two City of Ottawa's TDM-Supportive Design and Infrastructure Checklists for the proposed 3996 Innes Road mixed-use development for residential and commercial components of the development.

The proposed development demonstrates good pedestrian connectivity, and does not provide excess vehicle parking spots, thus encouraging other modes of transportation. It is recommended that the development proponent consider:

- securing part of outdoor bicycle stalls for use by residents;
- provide for additional bicycle storage facilities within the interior of the building;
- assure the appointment of a designated TDM coordinator (to encourage such advents as ride sharing);
 and/or
- include information concerning nearby transit options for employees and visitors to the site.

6.1.2 Circulation and Access

Appendix "G" provides turning movement diagrams from a "Light Single Unit" (LSU) design vehicle, as well as heavy vehicles which are dimensioned at 22.5-feet and 20-feet lengths. The sample of design vehicles were selected to represent the turning movements for moving trucks, municipal and emergency service vehicles.

The turning movement diagrams illustrate that the design vehicles can enter the site through the right-in entrance from Innes Road, complete their turning movements on-site and exit the site through the right-out egress back onto Innes Road. The following considerations are recommended to be reviewed/considered by the development proponent:

- The parking spaces provided on the site plan have been designed to accommodate passenger cars and may not be sufficient to accommodate larger loading/moving vehicles which might require bigger dimensions (approx. 3.5m x 6m) with wider aisles to accommodate the vehicle maneuvers;
- A layup area with a width of 5.2m (equivalent to 2 parking stalls) as derived from the provided vehicles turning capabilities, which take into account the limitation in the length of parking stalls and the aisle width for backing up is suggested. This can be achieved by designating two adjacent parking spots as the loading move-in/move-out area;
- Installation of a traffic mirror for blind corners to alert the drivers coming from the underground parking area when a garbage truck could potentially block their line of sight. Approximate proposed location of a traffic mirror is indicated on the site plan (Appendix "A"). The exact location is to be determined at the construction stage based on site characteristics.

6.2 PARKING

6.2.1 Motor Vehicle Parking

The proposed 3996 Innes Road mixed-use development is expected to provide a total of 37 parking spaces, of which 18 are surface stalls and 19 are underground stalls.

Table 6-1 indicates that the required minimum amount of parking stalls to be provided is 34 stalls based on the site being located in Area "C' of Schedule 1A (Zoning By-law No.2008-250). Therefore, the on-site parking supply was found to satisfy the parking provisions outlined in the City's zoning by-law.

Parking Type	Rate	Unit	Parking Required	Provided Parking*
Dwelling units in a mixed-use building (Table 101 – R15)	1 stall / dwelling unit	20 units	20 Stalls	
Visitor parking (Table 102)	0.2 stalls / dwelling unit	20 units	4 stalls	
Medical Facility (Table 101 – N51)	4 Stalls / 100 m ² of GFA	200 m ²	8 Stalls	18 Surface stalls +
Retail Store (pharmacy) (Table 101 – N79)	3.4 Stalls / 100 m ²	175 m²	6 Stalls	19 underground stalls
10 % reduction as per Sec. 101 6(c)	-10%	20 units	-2 Stalls	
Shared parking reduction – weekday afternoon (Table 104)	-25% of visitor parking -15% of retail store	N/A	-2 stalls	
Total Pa		34 Stalls	37 Stalls Provided	

Table 6-1: Parking Requirements for the 3996 Innes Road Development

6.2.2 Bicycle Parking

The proposed 3996 Innes Road mixed-use development is expected to provide a total of 12 bicycle parking spaces, of which 3 are above ground and 9 are underground. Table 6-2 indicates that the required minimum amount of bicycle parking spaces to be provided is 12 spaces based on the site being located in Area "C' of Schedule 1A (Zoning By-law No.2008-250). Therefore, the on-site bicycle parking supply was found to satisfy the parking provisions outlined in the zoning by-law.

Parking **Provided** Parking Type Rate Unit Required Parking* Dwelling units in a mixed-use building 0.5 / dwelling unit 20 units 10 Spaces (Table 101 - R15) 12 Spaces **Medical Facility** 1 / 1000 m² of GFA 200 m² 1 Space Retail Store (Pharmacy) 1 / 250 m² of GFA 175 m² 1 Space **Total Bicycle Parking Spaces** 12 Spaces 12 Spaces Provided

Table 6-2: Bicycle Parking Requirements for the 3996 Innes Road Development

6.3 BOUNDARY STREET DESIGN

6.3.1 Mobility – Segment MMLOS Analysis

City of Ottawa Multi-Modal Level-of-Service (MMLOS) guidelines were used to evaluate the segment level of service for all modes of transportation along Innes Road eastbound that fronts the proposed development site. Table 6-3 summarizes the segment MMLOS analysis fronting the proposed development.

Table 6-3: Roadway Segment MMLOS Analysis

Performance Measure	Roadway Segment Adjacent to the Development			
Pedestrian LO	Eastbound Innes Road			
Sidewalk Width (m)	2.0			
Boulevard Width (m)	1.2			
Average Daily Curb Lane Traffic Volume	~6,400			
Presence of On-Street Parking	No			
Operating Speed (km/h)	INO			
Posted +10 km/hr	70			
Segment PLOS	E			
Target PLOS	C			
Bicycle LOS				
Bikeway Type	Bike Lane, not adjacent to street parking			
Number of Lanes per direction	2 (marked centreline)			
Bike Lane Width (m)	1.8 m			
Operating Speed (km/h)	70			
Posted +10 km/hr	70			
Bike Lane Blockage	N/A			
Segment BLOS	E			
Target BLOS Cross-Town Bikeway	В			
Transit LOS	(TLOS)			
Facility Type	Mixed Traffic			
Level/Exposure to Parking/Driveway Friction	Low			
Average Transit Travel Speed (km/h)	N/A			
Posted Speed Limit (km/h)	60			
Segment TLOS	D			
Target TLOS	D			
Truck LOS (1	rkLOS)			
Number of lanes (in each direction)	2			
Curb Lane Width (m)	>3.7			
Segment TkLOS	A			
Target TkLOS	D			

For the purpose of determining the MMLOS targets:

- the Innes Road corridor was assumed to be an "Arterial Main Street" corridor, as shown on Schedule B, City of Ottawa official plan.
- The City of Ottawa's official cycling plan⁹ indicates the Innes Road corridor as a "cross-town" bikeway.
- For the pedestrian and bike LOS analysis, the analysis has adopted the assumption that the operating speed is 10 km/hr greater than the roadway posted speed 10.

Table 6-3 indicates a pedestrian (PLOS) and bicycle (BLOS) levels of service "E" along the segment.

- The target pedestrian PLOS for an arterial main street policy area is "C". Achieving the target PLOS along eastbound Innes Road would require a reduction of posted speed limit to 50 km/h and an increase of the boulevard width to 2 m. These measures cannot be justified on the basis of this proposed development alone in recognition of the limited size of the development and given the high traffic volumes and width constraints along the Innes Road corridor;
- Achieving target BLOS of "B" for a cross-town bikeway requires a reduction of posted speed limit to 40 km/h, which is also not currently justified.

The eastbound Innes Road segment satisfies the set target TLOS of "D" for transit level of service; and The truck level of service (TkLOS) was found to be "A" which exceeds the target level of service.

6.4 Intersection Design

6.4.1 Intersection MMLOS Analysis

Table 6-4 provides a summary of the intersection MMLOS (providing PLOS, BLOS, TLOS and TkLOS) results for the two traffic-signal controlled intersections within the study area.

- The pedestrian levels of service (PLOS) was determined through a Pedestrian Exposure to Traffic at Signalized Intersection (PETSI) points analyses. The PETSI analyses involved measuring the required crossing distance and dividing by a typical lane width of 3.7m to derive an equivalent number of lanes that a pedestrian would be required to cross. The PETSI analysis considered a channelized right turn as a single lane;
- the bicycle level of service (BLOS) was based on left turn bicycle maneuvers, operating speed and road geometry;
- the transit level of service (TLOS) was based on forecast 2022 delay results presented in Table 5-2
- the truck level of service (TkLOS) was based on existing intersection curve radii and the number of receiving lanes.

^{9.} Section 5.3.2.1, "City of Ottawa Cycling Plan", City of Ottawa, November 2013, Exhibit 5-10.

^{10.} Section 2.5, "Addendum to MMLOS Guidelines", City of Ottawa, May 2017.

Appendix "H" provides detail calculations for the MMLOS analysis for each of the study area intersection. The following sections provide a summary review of the critical intersections by mode. Level of service targets are based on "Arterial Mainstreet" policy area targets.

Table 6-4: Intersection MMLOS Analysis

	Intersection			
MMLOS Measures	Innes Road / Mer Bleue Rd-Jeanne D'Arc Blvd	Innes Road / "Walmart Entrance"	Innes Road / Frank Bender Street	
Pedestrian Level of Service (PLOS)	F	E	F	
Target PLOS		D		
Bicycle Level of Service (BLOS)	E	E	E	
Target BLOS		В		
Transit Level of Service (TLOS)	F	В	С	
Target TLOS		D		
Truck Level of Service (TkLOS)	А	А	С	
Target TkLOS		С		

The following sections provide a summary review of the critical intersections by mode. Level of service targets are based on "Arterial Mainstreet" policy area targets.

Pedestrian Level of Service (PLOS)

None of the three intersections in the study area meet the target PLOS "D", which can be primarily attributed to the width of Innes Road resulting in a long time for pedestrians to cross.

Bicycle Level of Service (BLOS)

Despite the provision of bike lanes on Innes Road, none of the study area intersections meet the desired level BLOS "B" for a cross-town bike route. This is attributed to a 70 km/h operating speed on Innes Road, which yields a BLOS "E".

Transit Level of Service (TLOS)

The Innes Road / Mer Bleue Road – Jeanne D'Arc Boulevard intersection has an overall unacceptable TLOS "F". This is attributed to long delays (see Table 5-2) on minor leg approaches of the intersection. The other two study area intersections exceed the target TLOS "D".

Truck Level of Service (TkLOS)

All study area intersections meet or exceed the target TkLOS of "C".

6.4.2 Location and Design of Site Access

The Innes Road access to the site is located approximately 160 meters west of the Innes Road / Mer Bleue Rd.- Jeanne D'Arc Boulevard intersection. There are no existing, nor planned, median opening along Innes Road at the proposed location of the access to the site. The planned access to the site will be a right-in right-out configuration from the eastbound direction of Innes Road.

- The planned access provides for about 6 metres of clear throat length measured from the curb edge. However, the suggested minimal throat length for an access connecting with an arterial road is 15 metres¹¹; However, considering the access is a right-in right-out configuration and driveway traffic volumes are sufficiently low, the clear throat length of 6 metres from a technical standpoint is sufficient to meet estimated queue requirements and considered acceptable.
- The curb edge of the proposed access is located about 6.3 metres east of the property line. The minimum desired distance from the property line is identified as 3.0 metres as per section 25.1 of the Private Approach By-Law¹². Therefore, the proposed development's access meets the by-law requirements.
- The proposed access location offers acceptable sight distance in both east and west directions along Innes Road.

Given the above, the development proponent is encouraged to monitor traffic conditions at the entrance to the site.

^{11.} TAC 2017, Chapter 8 Table 8.9.3 Suggested Minimum Clear Throat Lengths for Major Driveways, Transportation Association of Canada, July 2017

By-law No. 2003-447, City of Ottawa, September 2003

7.0 STRATEGY

7.1 RECOMMENDED IMPROVEMENTS

The development proponent is encouraged to review and implement the following:

- Implement the following TDM measures:
 - assure the appointment of a designated TDM coordinator (to encourage such advents as ride sharing); and/or
 - include information concerning nearby transit options for employees and visitors to the site.
- Designate 2 outdoor vehicle parking spaces as lay-up area for moving/delivery/loading/unloading trucks;
- Monitor traffic conditions at the entrance to the site for any circulation issues related to access width.

7.2 CONCLUSION

The proposed 3996 Innes Road development is expected to generate 22 and 28 two-way vehicle trips in the morning peak hour of travel demand and afternoon peak hour of travel demand, respectively. This translates to less than a single vehicle every 2 minutes, which is anticipated to have a negligible impact on the adjacent road network.

The City of Ottawa is encouraged to monitor traffic volumes along the Innes Road corridor, particularly at the Innes Road and Mer Bleue Road-Jeanne D'Arc Boulevard intersection.

From a traffic and transportation standpoint, it is recommended that the City of Ottawa assemble the required conditions for the Site Plan Control Approval to permit the development application to proceed.

Yours truly,

Mr. Arthur Gordon B.A. P.Eng Principal Engineer


Castleglenn Consultants Inc.

Mr. Andrey Kirillov B. Eng. Transportation Planner

Castleglenn Consultants Inc.



APPENDIX A: SITE PLAN

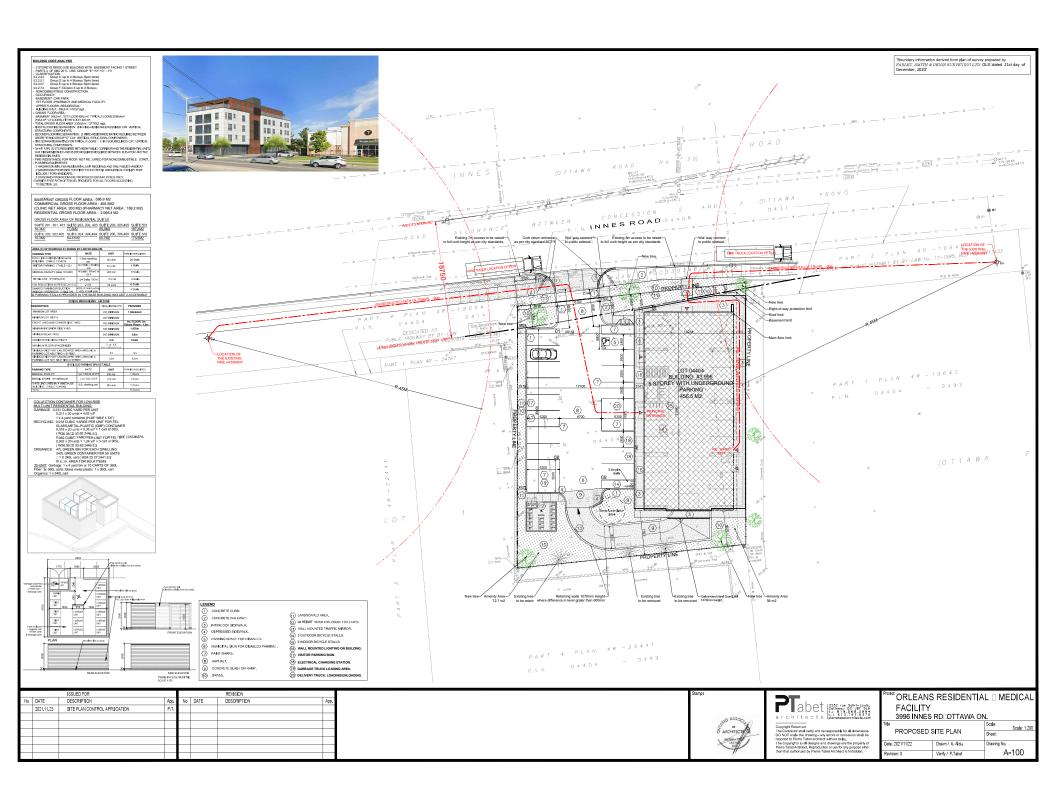



APPENDIX B: CERTIFICATION FORM FOR TIA STUDY PROJECT MANAGER



TIA Plan Reports

On 14 June 2017, the Council of the City of Ottawa adopted new Transportation Impact Assessment (TIA) Guidelines. In adopting the guidelines, Council established a requirement for those preparing and delivering transportation impact assessments and reports to sign a letter of certification.

Individuals submitting TIA reports will be responsible for all aspects of development-related transportation assessment and reporting, and undertaking such work, in accordance and compliance with the City of Ottawa's Official Plan, the Transportation Master Plan and the Transportation Impact Assessment (2017) Guidelines.

By submitting the attached TIA report (and any associated documents) and signing this document, the individual acknowledges that s/he meets the four criteria listed below.

CERTIFICATION


- 1. I have reviewed and have a sound understanding of the objectives, needs and requirements of the City of Ottawa's Official Plan, Transportation Master Plan and the Transportation Impact Assessment (2017) Guidelines;
- 2. I have a sound knowledge of industry standard practice with respect to the preparation of transportation impact assessment reports, including multi modal level of service review;
- 3. I have substantial experience (more than 5 years) in undertaking and delivering transportation impact studies (analysis, reporting and geometric design) with strong background knowledge in transportation planning, engineering or traffic operations; and
- 4. I am either a licensed¹ or registered² professional in good standing, whose field of expertise [check $\sqrt{\text{appropriate field(s)}}$] is either transportation engineering \blacksquare or transportation planning \blacksquare .

License of registration body that oversees the profession is required to have a code of conduct and ethics guidelines that will ensure appropriate conduct and representation for transportation planning and/or transportation engineering works.



Dated at _	Ottawa	this 9 day of July , 20 21.	
	(City)		
Name:		Arthur Gordon	
		(Please Print)	
Professional Title:		Principal Engineer	
		18 for	_
	Signatur	e of Individual certifier that s/he meets the above four criteria	

Office Contact Information (Please Print)
Address: Sutie 200 - 2460 Lancaster Road
City / Postal Code: Ottawa / K1B 4S5
Telephone / Extension: 613 - 731 - 4052
E-Mail Address: agordon@castleglenn.ca

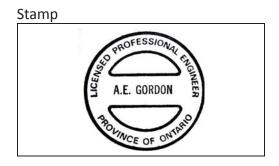



APPENDIX C: SCREENING FORM



2460 Lancaster Road, Suite 200, Ottawa, Ontario, K1B 485 Tel: 613-731-4052

City of Ottawa 2017 TIA Guidelines Screening Form

Ms. Neeti Paudel July 09, 2021

Project Manager, City of Ottawa 110 Laurier Avenue West, Ottawa, ON, K1G 6J9

Please see below the completed screening form for the proposed mixed-use, residential and medical office development proposed for 3996 Innes Road. The development is located east of Mer Bleue Road and proposed to re-development the existing residential homes into a mixed-use offering.

In summary, the combined proposed residential units and medical space does not satisfy the trip generation trigger, but does meet both the Location and Safety triggers, therefore it is recommended that a "Design Review" TIA be carried forward.

1. Description of Proposed Development

Municipal Address	3996 Innes Road, Orleans, Ottawa			
Description of Location	Located immediately west of Mer Bleue Road, lot is currently occupied by a single dwelling unit			
Land Use Classification	Mixed-Use Residential and Commercial			
Development Size (units)	20 Apartment Units			
Development Size (m ²)	200 m ² of Medical Office 175 m ² of Pharmacy Space			
Number of Accesses and Locations	A single right-in right-out access Removal of the two existing residential drivways			
Phase of Development	Submission of Site Plan Control Application			
Buildout Year	2022 (Anticipated)			

2. Trip Generation Trigger

The development proposes the following uses:

- 20 mid-rise apartment units; and
- A total of 375 m2 (4,050 sq.ft.) of combined medical office and pharmacy space.

Table 1 summarizes the proposed auto trip generation rates for the residential and medical spaces proposed by the application. The medical-dental office building (Land use 720) is believed to best represent the trip generation potential for the upper floors of the development.

Table 2 summarizes the trip generation associated with the development. It is anticipated that the development would generate less than 30 two-way vehicles during the morning and afternoon peak hours of travel demand.



2460 Lancaster Road, Suite 200, Ottawa, Ontario, K1B 4S5 Tel: 613-731-4052

Adopting mode shares consistent with developments within the vicinity of Innes Road, it would be expected that, during the peak hours of travel demand:

- The residential portion would result in 18-to-20 two-way persons trips; and
- The medical office areas would result in 15-to-19 two-way person-trips.

Therefore, the development is anticipated to generate up to 40 person trips in a single peak hour which is below the threshold to meet the trip generation trigger.

Table 1: Summary of Proposed Auto Trip Generation Rates

I and IIIaa	Carrage	Independent	Mor	ning Peak Hou	r	Afterno	on Peak Ho	our
Land Use	Source	Variable	Rate	In	Out	Rate	In	Out
Mid-Rise Apartments	TRANS	Units	0.6	30%	70%	0.66	56%	44%
Medical-Dental Office Building	ITE - Land Use 720	Gross Floor Area (1000 ft2)	2.78	78%	22%	3.46	28%	72%

Table 1: Summary of Proposed Auto Trip Generation Rates

Land Use	Source	Size	Morni	ng Peak Ho	ur (veh/hr)	Afte	ernoon Peak (veh/hr)	Hour
Lana Ose	Source	Size	In	Out	Total	In	Out	Total
Mid-Rise Apartments	TRANS	274 Units	4	6	10	7	6	13
Medical- Dental Office Building	ITE - Land Use 720	4.05 thousands of sq. ft.	9	3	12	4	11	15
	Total		13	9	22	11	17	28



2460 Lancaster Road, Suite 200, Ottawa, Ontario, K1B 485 Tel: 613-731-4052

3. Location Triggers

	Yes	No
Does the development propose a new driveway to a boundary street that is designated as part of the City's Transit Priority, Rapid Transit or Spine Bicycle Networks?	X	
Is the development in a Design Priority Area (DPA) or Transit-oriented Development (TOD) zone? *		X

^{*}DPA and TOD are identified in the City of Ottawa Official Plan (DPA in Section 2.5.1 and Schedules A and B; TOD in Annex 6). See Chapter 4 for a list of City of Ottawa Planning and Engineering documents that support the completion of TIA).

The development proposes a relocated driveway to Innes Road which is considered a City Transit Priority and Spine Bicycle Network Route.

Innes Road is not considered a DPA or TOD zone.

4. Safety Triggers

	Yes	No
Are posted speed limits on a boundary street are 80 km/hr or greater?		X
Are there any horizontal/vertical curvatures on a boundary street limits sight lines at a proposed driveway?		X
Is the proposed driveway within the area of influence of an adjacent traffic signal or roundabout (i.e. within 300 m of intersection in rural conditions, or within 150 m of intersection in urban/ suburban conditions)?	X	
Is the proposed driveway within auxiliary lanes of an intersection?	X	
Does the proposed driveway make use of an existing median break that serves an existing site?		X
Is there is a documented history of traffic operations or safety concerns on the boundary streets within 500 m of the development?	X	
Does the development include a drive-thru facility?		X

The proposed right-in right-out access is approximately 140m from the Innes Road/ Mer Bleue Road intersection. The proposed access is located within the EB-RT taper.

Innes Road is considered near capacity in the peak directions of the peak hours of travel demand, particularly due to afternoon retail activity nearest the site.

Therefore, the **Safety Trigger** is satisfied.



2460 Lancaster Road, Suite 200, Ottawa, Ontario, K1B 4S5 Tel: 613-731-4052

5. Summary

	Yes	No
Does the development satisfy the Trip Generation Trigger?		X
Does the development satisfy the Location Trigger?	X	
Does the development satisfy the Safety Trigger?	X	

Yours truly,

Mr. Arthur Gordon B.A. P.Eng

Principal Engineer

Castleglenn Consultants Inc.




APPENDIX D: EXISTING TRAFFIC VOLUMES AND COLLISIONS



Turning Movement Count - Study Results

BELCOURT BLVD @ INNES RD

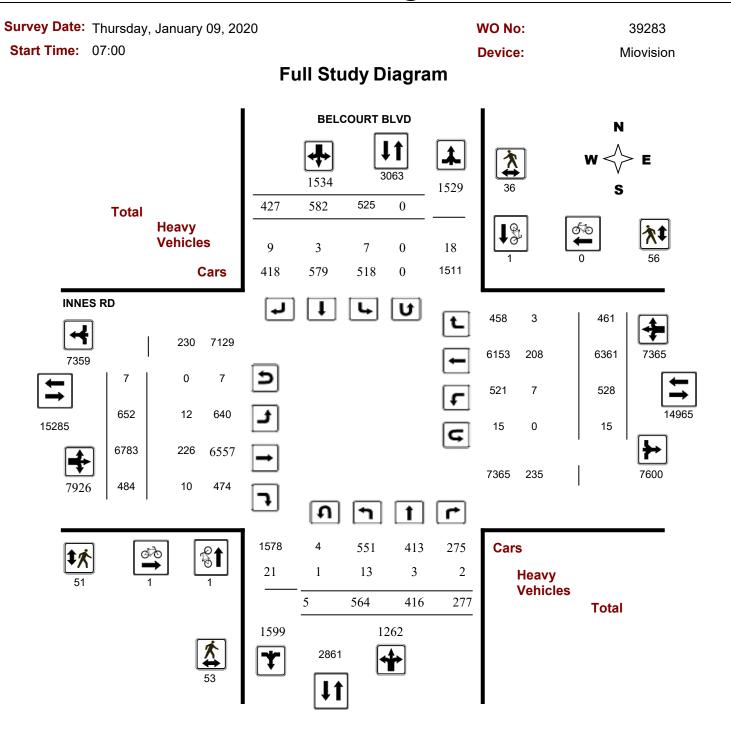

5469224 - THU JAN 09, 2020 - 8HRS - LORETTA

June 30, 2021 Page 1 of 8




Turning Movement Count - Study Results

BELCOURT BLVD @ INNES RD

Survey Date: Thursday, January 09, 2020 WO No: 39283

Start Time: 07:00 Device: Miovision

Full Study Peak Hour Diagram

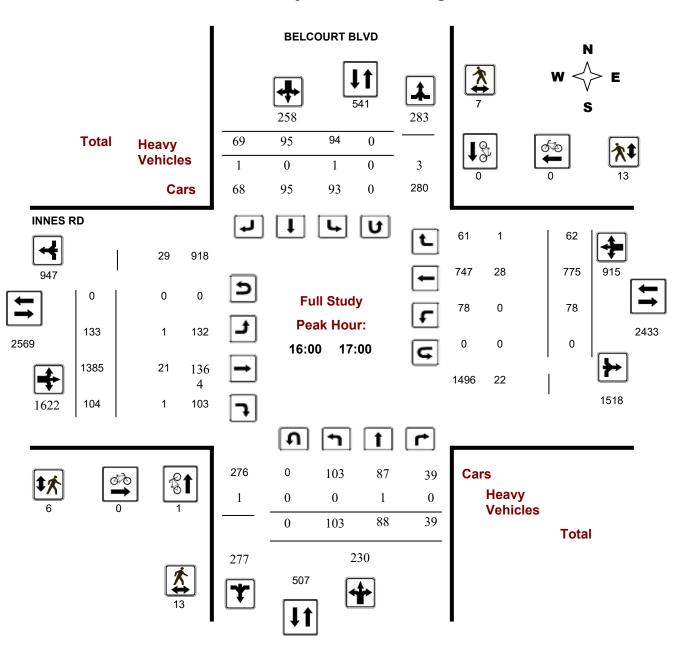


5469224 - THU JAN 09, 2020 - 8HRS - LORETTA

June 30, 2021 Page 2 of 8



Turning Movement Count - Peak Hour Diagram

BELCOURT BLVD @ INNES RD

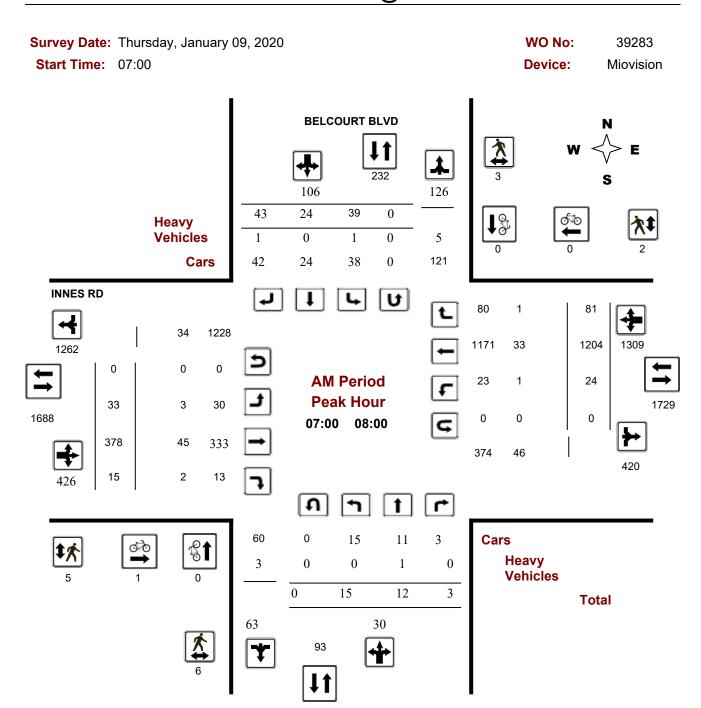


Comments 5469224 - THU JAN 09, 2020 - 8HRS - LORETTA

2021-Jun-30 Page 1 of 3



Turning Movement Count - Peak Hour Diagram

BELCOURT BLVD @ INNES RD

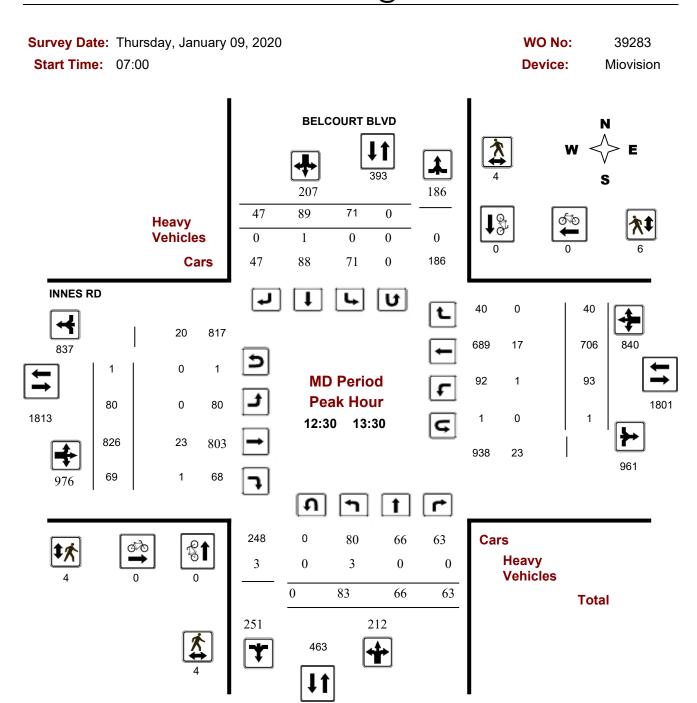


Comments 5469224 - THU JAN 09, 2020 - 8HRS - LORETTA

2021-Jun-30 Page 2 of 3



Turning Movement Count - Peak Hour Diagram

BELCOURT BLVD @ INNES RD

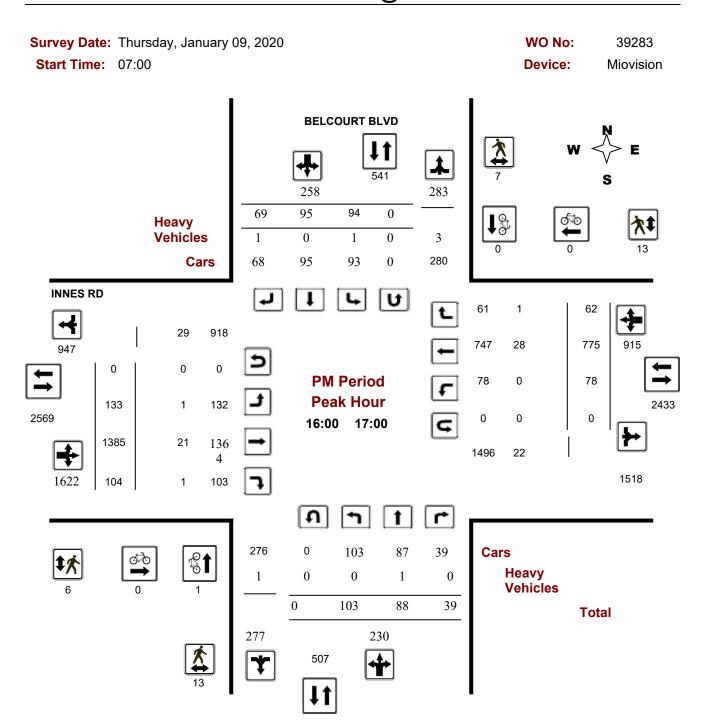

Comments 5469224 - THU JAN 09, 2020 - 8HRS - LORETTA

2021-Jun-30 Page 3 of 3



Turning Movement Count - Study Results

BELCOURT BLVD @ INNES RD

Survey Date: Thursday, January 09, 2020 WO No: 39283

Start Time: 07:00 Device: Miovision

Full Study Summary (8 HR Standard)

Survey Date: Thursday, January 09, 2020 Total Observed U-Turns AADT Factor

Northbound: 5 Southbound: 0 1.00

Eastbound: 7 Westbound: 15

		ı	BELC	OURT	BLVD							II	NNES	RD					
	Nor	thbou	nd		So	uthbou	ınd			Е	astbou	ınd		V	Vestbo	und			
Period	LT	ST	RT	NB TOT	LT	ST	RT	SB TOT	STR TOT	LT	ST	RT	EB TOT	LT	ST	RT	WB TOT	STR TOT	Grand Total
07:00 08:00	15	12	3	30	39	24	43	106	136	33	378	15	426	24	1204	81	1309	1735	1871
08:00 09:00	43	15	8	66	42	35	58	135	201	52	416	23	491	39	906	71	1016	1507	1708
09:00 10:00	51	34	16	101	51	64	38	153	254	67	537	47	651	53	646	61	760	1411	1665
11:30 12:30	78	62	50	190	69	90	50	209	399	98	761	78	937	84	655	50	789	1726	2125
12:30 13:30	83	66	63	212	71	89	47	207	419	80	826	69	975	93	706	40	839	1814	2233
15:00 16:00	90	71	49	210	77	100	62	239	449	94	1189	76	1359	89	709	58	856	2215	2664
16:00 17:00	103	88	39	230	94	95	69	258	488	133	1385	104	1622	78	775	62	915	2537	3025
17:00 18:00	101	68	49	218	82	85	60	227	445	95	1291	72	1458	68	760	38	866	2324	2769
Sub Total	564	416	277	1257	525	582	427	1534	2791	652	6783	484	7919	528	6361	461	7350	15269	18060
U Turns	5			5	0			0	5	7			7	15			15	22	27
Total	569	416	277	1262	525	582	427	1534	2796	659	6783	484	7926	543	6361	461	7365	15291	18087
EQ 12Hr	791	578	385	1754	730	809	594	2133	3887	916	9428	673	11017	755	8842	641	10238	21255	25142
Note: These	values ar	e calcu	lated by	y multiply	ing the	totals b	y the a _l	opropriat	e expans	sion fac	tor.			1.39					
AVG 12Hr	791	578	385	1754	730	809	594	2133	3887	916	9428	673	11017	755	8842	641	10238	21255	25142
Note: These v	volumes	are calc	culated	by multi	olying th	ne Equiv	alent 1	2 hr. tota	ls by the	AADT	factor.			1.00					
AVG 24Hr	1036	757	504	2297	956	1060	778	2794	5091	1200	12351	882	14433	989	11583	840	13412	27845	32936
Note: These	volumes	are calc	culated	by multi	olying th	ne Avera	age Dai	ly 12 hr.	totals by	12 to 2	4 expans	sion fac	ctor.	1.31					

Note: U-Turns provided for approach totals. Refer to 'U-Turn' Report for specific breakdown.

June 30, 2021 Page 3 of 8



Turning Movement Count - Study Results

BELCOURT BLVD @ INNES RD

Survey Date: Thursday, January 09, 2020 WO No: 39283

Start Time: 07:00 Device: Miovision

Full Study 15 Minute Increments

BELCOURT BLVD

INNES RD

		No	orthbou	ınd		Sc	uthbou	nd			Е	astbour	nd		W	estbour	nd			
Time I	Period	LT	ST	RT	N TOT	LT	ST	RT	S TOT	STR TOT	LT	ST	RT	E TOT	LT	ST	RT	W TOT	STR TOT	Grand Total
07:00	07:15	3	1	0	4	7	2	12	21	25	6	74	4	84	9	310	19	338	422	447
07:15	07:30	2	3	2	7	9	9	15	33	40	8	95	4	107	5	347	18	370	477	517
07:30	07:45	5	6	0	11	9	3	7	19	30	8	119	3	130	6	285	28	319	449	479
07:45	08:00	5	2	1	8	14	10	9	33	41	11	90	4	105	4	262	16	282	387	428
08:00	08:15	6	3	0	9	11	4	19	34	43	10	80	3	93	6	227	19	252	345	388
08:15	08:30	9	3	1	13	10	10	15	35	48	16	109	4	129	10	249	12	271	400	448
08:30	08:45	10	2	4	16	6	9	13	28	44	10	105	10	125	12	235	26	273	398	442
08:45	09:00	18	7	3	28	15	12	11	38	66	17	122	6	145	13	195	14	222	367	433
09:00	09:15	6	12	3	21	12	6	11	29	50	17	118	10	145	16	163	22	201	346	396
09:15	09:30	20	5	4	29	7	21	9	37	66	15	152	15	182	15	162	14	191	373	439
09:30	09:45	13	7	6	26	17	17	13	47	73	18	123	7	148	14	155	14	183	331	404
09:45	10:00	13	10	3	26	15	20	5	40	66	18	144	15	177	11	166	11	188	365	431
11:30	11:45	20	22	8	50	13	19	16	48	98	21	208	25	254	23	162	9	194	448	546
11:45	12:00	17	11	14	42	13	18	11	42	84	22	171	18	211	27	197	16	240	451	535
12:00	12:15	20	13	13	46	18	26	11	55	101	28	197	19	244	18	141	14	173	417	518
12:15	12:30	22	16	15	53	25	27	12	64	117	27	185	16	228	19	155	11	185	413	530
12:30	12:45	12	17	18	47	15	14	11	40	87	22	197	21	240	15	194	10	219	459	546
12:45	13:00	23	19	17	59	22	19	16	57	116	14	214	16	244	32	163	4	199	443	559
13:00	13:15	28	21	11	60	17	22	12	51	111	17	212	18	247	27	164	16	207	454	565
13:15	13:30	20	9	17	46	17	34	8	59	105	28	203	14	245	20	185	10	215	460	565
15:00	15:15	21	16	17	54	13	22	16	51	105	15	273	20	308	20	172	10	202	510	615
15:15	15:30	24	15	17	56	19	27	18	64	120	15	302	20	337	28	184	19	231	568	688
15:30	15:45	23	16	11	50	19	21	14	54	104	29	314	20	363	17	174	17	208	571	675
15:45	16:00	23	24	4	51	26	30	14	70	121	35	300	16	351	26	179	12	217	568	689
16:00	16:15	23	23	7	53	22	27	15	64	117	34	317	35	386	24	225	19	268	654	771
16:15	16:30	29	22	7	58	19	24	14	57	115	35	381	23	439	20	170	18	208	647	762
16:30	16:45	22	22	8	52	22	23	17	62	114	39	352	18	409	22	196	13	231	640	754
16:45	17:00	29	21	17	67	31	21	23	75	142	25	335	28	388	12	184	12	208	596	738
17:00	17:15	18	17	13	48	17	20	20	57	105	23	343	17	383	18	210	5	233	616	721
17:15	17:30	32	19	13	64	20	24	15	59	123	27	332	18	377	24	184	9	217	594	717
17:30	17:45	29	19	12	60	18	22	15	55	115	23	335	21	379	14	182	10	206	585	700
17:45	18:00	24	13	11	48	27	19	10	56	104	26	281	16	323	16	184	14	214	537	641
Total:		569	416	277	1262	525	582	427	1534	2796	659	6783	484	7926	543	6361	461	7365	2796	18,087

Note: U-Turns are included in Totals.

June 30, 2021 Page 4 of 8



Turning Movement Count - Study Results

BELCOURT BLVD @ INNES RD

Survey Date: Thursday, January 09, 2020 WO No: 39283

Start Time: 07:00 Device: Miovision

Full Study Cyclist Volume

BELCOURT BLVD INNES RD

		DELOCORT DE			INITEORE		<u></u>
Time Period	Northbound	Southbound	Street Total	Eastbound	Westbound	Street Total	Grand Total
07:00 07:15	0	0	0	0	0	0	0
07:15 07:30	0	0	0	0	0	0	0
07:30 07:45	0	0	0	0	0	0	0
07:45 08:00	0	0	0	1	0	1	1
08:00 08:15	0	0	0	0	0	0	0
08:15 08:30	0	0	0	0	0	0	0
08:30 08:45	0	0	0	0	0	0	0
08:45 09:00	0	0	0	0	0	0	0
09:00 09:15	0	0	0	0	0	0	0
09:15 09:30	0	0	0	0	0	0	0
09:30 09:45	0	0	0	0	0	0	0
09:45 10:00	0	0	0	0	0	0	0
11:30 11:45	0	0	0	0	0	0	0
11:45 12:00	0	0	0	0	0	0	0
12:00 12:15	0	0	0	0	0	0	0
12:15 12:30	0	0	0	0	0	0	0
12:30 12:45	0	0	0	0	0	0	0
12:45 13:00	0	0	0	0	0	0	0
13:00 13:15	0	0	0	0	0	0	0
13:15 13:30	0	0	0	0	0	0	0
15:00 15:15	0	0	0	0	0	0	0
15:15 15:30	0	0	0	0	0	0	0
15:30 15:45	0	1	1	0	0	0	1
15:45 16:00	0	0	0	0	0	0	0
16:00 16:15	1	0	1	0	0	0	1
16:15 16:30	0	0	0	0	0	0	0
16:30 16:45	0	0	0	0	0	0	0
16:45 17:00	0	0	0	0	0	0	0
17:00 17:15	0	0	0	0	0	0	0
17:15 17:30	0	0	0	0	0	0	0
17:30 17:45	0	0	0	0	0	0	0
17:45 18:00	0	0	0	0	0	0	0
Total	1	1	2	1	0	1	3

June 30, 2021 Page 5 of 8



Turning Movement Count - Study Results

BELCOURT BLVD @ INNES RD

Survey Date: Thursday, January 09, 2020 WO No: 39283

Start Time: 07:00 Device: Miovision

Full Study Pedestrian Volume BELCOURT BLVD INNES RD

NB Approach SB Approach EB Approach WB Approach Time Period Total Total **Grand Total** (E or W Crossing) (E or W Crossing) (N or S Crossing) (N or S Crossing) 07:00 07:15 07:15 07:30 07:30 07:45 07:45 08:00 08:00 08:15 08:15 08:30 08:30 08:45 08:45 09:00 09:00 09:15 09:15 09:30 09:30 09:45 09:45 10:00 11:30 11:45 11:45 12:00 12:00 12:15 12:15 12:30 12:30 12:45 12:45 13:00 13:00 13:15 13:15 13:30 15:00 15:15 15:15 15:30 15:30 15:45 15:45 16:00 16:00 16:15 16:15 16:30 16:30 16:45 16:45 17:00 17:00 17:15 17:15 17:30 17:30 17:45 17:45 18:00

5469224 - THU JAN 09, 2020 - 8HRS - LORETTA

June 30, 2021 Page 6 of 8



Turning Movement Count - Study Results

BELCOURT BLVD @ INNES RD

Survey Date: Thursday, January 09, 2020 WO No: 39283

Start Time: 07:00 Device: Miovision

Full Study Heavy Vehicles

BELCOURT BLVD INNES RD

	No	orthbou	und		Sc	uthbou	ınd			Е	astbour	nd		We	estbour	nd			
Time Period	LT	ST	RT	N TOT	LT	ST	RT	S TOT	STR TOT	LT	ST	RT	E TOT	LT	ST	RT	W TOT	STR TOT	Grand Total
07:00 07:15	0	1	0	1	1	0	0	1	2	0	13	0	13	0	5	0	5	18	20
07:15 07:30	0	0	0	0	0	0	1	1	1	1	12	1	14	1	8	0	9	23	24
07:30 07:45	0	0	0	0	0	0	0	0	0	0	14	0	14	0	7	0	7	21	21
07:45 08:00	0	0	0	0	0	0	0	0	0	2	6	1	9	0	13	1	14	23	23
08:00 08:15	1	0	0	1	1	0	0	1	2	1	6	0	7	0	9	0	9	16	18
08:15 08:30	1	0	0	1	1	0	0	1	2	1	8	1	10	1	11	0	12	22	24
08:30 08:45	0	0	2	2	0	0	0	0	2	1	12	0	13	1	12	1	14	27	29
08:45 09:00	1	0	0	1	0	0	2	2	3	1	7	0	8	0	11	0	11	19	22
09:00 09:15	0	0	0	0	0	0	1	1	1	0	12	0	12	0	8	0	8	20	21
09:15 09:30	0	0	0	0	0	1	0	1	1	0	12	1	13	0	7	0	7	20	21
09:30 09:45	2	1	0	3	0	0	1	1	4	0	9	0	9	0	2	0	2	11	16
09:45 10:00	1	0	0	1	1	1	0	2	3	0	9	1	10	1	5	0	6	16	19
11:30 11:45	1	0	0	1	0	0	0	0	1	1	7	1	9	0	4	0	4	13	14
11:45 12:00	0	0	0	0	0	0	0	0	0	0	5	1	6	1	7	0	8	14	14
12:00 12:15	0	0	0	0	0	0	0	0	0	1	4	0	5	1	3	0	4	9	9
12:15 12:30	2	0	0	2	2	0	0	2	4	1	5	0	6	0	4	0	4	10	14
12:30 12:45	1	0	0	1	0	1	0	1	2	0	4	0	4	0	4	0	4	8	10
12:45 13:00	0	0	0	0	0	0	0	0	0	0	3	0	3	0	5	0	5	8	8
13:00 13:15	2	0	0	2	0	0	0	0	2	0	10	1	11	0	5	0	5	16	18
13:15 13:30	0	0	0	0	0	0	0	0	0	0	6	0	6	1	3	0	4	10	10
15:00 15:15	0	0	0	0	0	0	0	0	0	0	2	1	3	0	4	0	4	7	7
15:15 15:30	1	0	0	1	0	0	1	1	2	0	7	0	7	0	9	0	9	16	18
15:30 15:45	0	0	0	0	0	0	0	0	0	0	3	0	3	0	6	0	6	9	9
15:45 16:00	0	0	0	0	0	0	1	1	1	1	10	0	11	0	10	0	10	21	22
16:00 16:15	0	0	0	0	0	0	0	0	0	0	8	0	8	0	8	0	8	16	16
16:15 16:30	0	0	0	0	0	0	1	1	1	1	4	0	5	0	10	1	11	16	17
16:30 16:45	0	1	0	1	1	0	0	1	2	0	3	0	3	0	6	0	6	9	11
16:45 17:00	0	0	0	0	0	0	0	0	0	0	6	1	7	0	4	0	4	11	11
17:00 17:15	0	0	0	0	0	0	0	0	0	0	6	0	6	0	5	0	5	11	11
17:15 17:30	0	0	0	0	0	0	0	0	0	0	3	0	3	0	6	0	6	9	9
17:30 17:45	0	0	0	0	0	0	1	1	1	0	7	0	7	0	3	0	3	10	11
17:45 18:00	0	0	0	0	0	0	0	0	0	0	3	0	3	0	4	0	4	7	7
Total: None	13	3	2	18	7	3	9	19	37	12	226	10	248	7	208	3	218	466	504

June 30, 2021 Page 7 of 8



Turning Movement Count - Study Results

BELCOURT BLVD @ INNES RD

Survey Date: Thursday, January 09, 2020 WO No: 39283

Start Time: 07:00 Device: Miovision

Full Study 15 Minute U-Turn Total BELCOURT BLVD INNES RD

Time P	eriod	Northbound U-Turn Total	Southbound U-Turn Total	Eastbound U-Turn Total	Westbound U-Turn Total	Total
07:00	07:15	0	0	0	0	0
07:15	07:30	0	0	0	0	0
07:30	07:45	0	0	0	0	0
07:45	08:00	0	0	0	0	0
08:00	08:15	0	0	0	0	0
08:15	08:30	0	0	0	0	0
08:30	08:45	0	0	0	1	1
08:45	09:00	0	0	1	1	2
09:00	09:15	0	0	0	2	2
09:15	09:30	0	0	0	0	0
09:30	09:45	1	0	1	1	3
09:45	10:00	0	0	0	0	0
11:30	11:45	0	0	0	1	1
11:45	12:00	0	0	0	0	0
12:00	12:15	1	0	0	2	3
12:15	12:30	0	0	0	0	0
12:30	12:45	0	0	0	0	0
12:45	13:00	0	0	0	1	1
13:00	13:15	0	0	0	0	0
13:15	13:30	0	0	1	0	1
15:00	15:15	0	0	0	0	0
15:15	15:30	0	0	0	2	2
15:30	15:45	1	0	0	0	1
15:45	16:00	0	0	0	0	0
16:00	16:15	0	0	0	0	0
16:15	16:30	0	0	0	0	0
16:30	16:45	0	0	0	0	0
16:45	17:00	0	0	0	0	0
17:00	17:15	0	0	3	0	3
17:15	17:30	1	0	1	1	3
17:30	17:45	0	0	0	2	2
17:45	18:00	1	0	0	1	2
Tot	tal	5	0	7	15	27

June 30, 2021 Page 8 of 8




Turning Movement Count - Study Results

INNES RD @ 260 E OF BELCOURT BLVD/WALMART SC

Survey Date: Thursday, February 20, 2020 WO No: 39520
Start Time: 07:00 Device: Miovision

Full Study Diagram

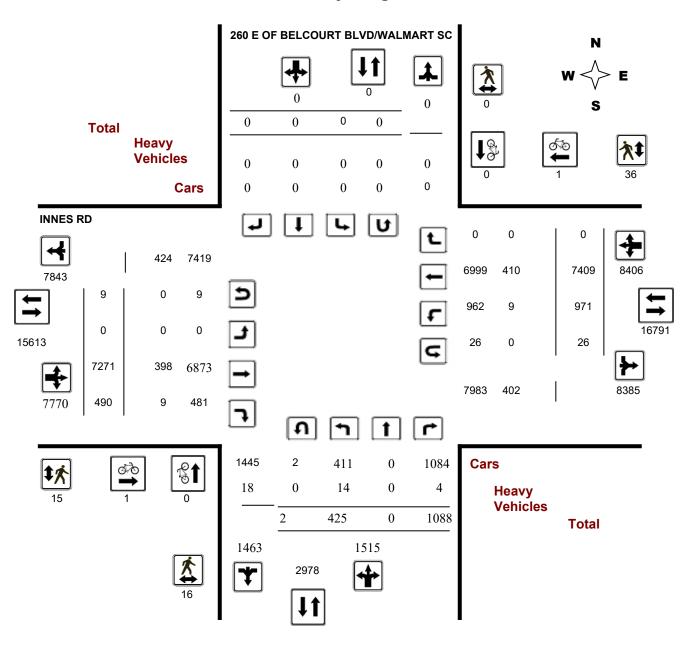

5474762 - FEB 20, 2020 - 8HRS - LORETTA

June 30, 2021 Page 1 of 8



Turning Movement Count - Study Results


INNES RD @ 260 E OF BELCOURT BLVD/WALMART SC

Survey Date: Thursday, February 20, 2020 WO No: 39520 **Start Time:** 07:00

Full Study Peak Hour Diagram

Device:

Miovision

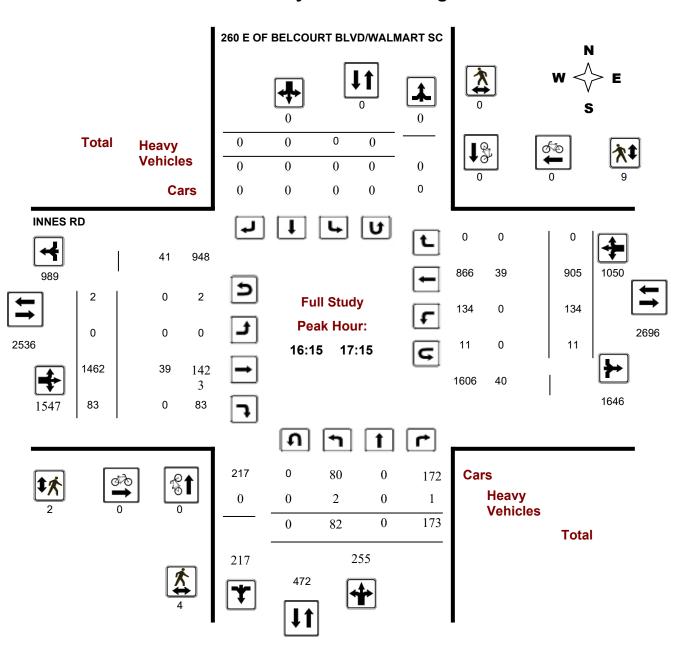

5474762 - FEB 20, 2020 - 8HRS - LORETTA


Page 2 of 8 June 30, 2021



Turning Movement Count - Peak Hour Diagram

INNES RD @ 260 E OF BELCOURT BLVD/WALMART SC

Survey Date: Thursday, February 20, 2020 WO No: 39520
Start Time: 07:00 Device: Miovision

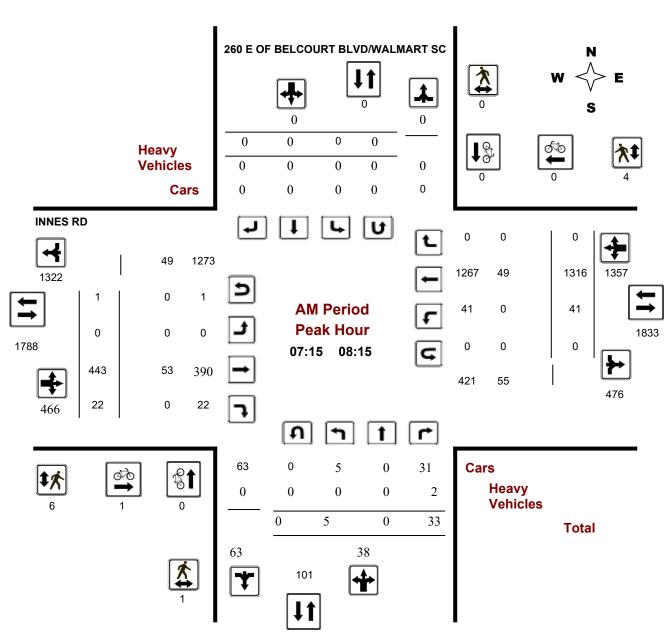

Comments 5474762 - FEB 20, 2020 - 8HRS - LORETTA


2021-Jun-30 Page 1 of 3



Turning Movement Count - Peak Hour Diagram

INNES RD @ 260 E OF BELCOURT BLVD/WALMART SC

Survey Date: Thursday, February 20, 2020 WO No: 39520
Start Time: 07:00 Device: Miovision

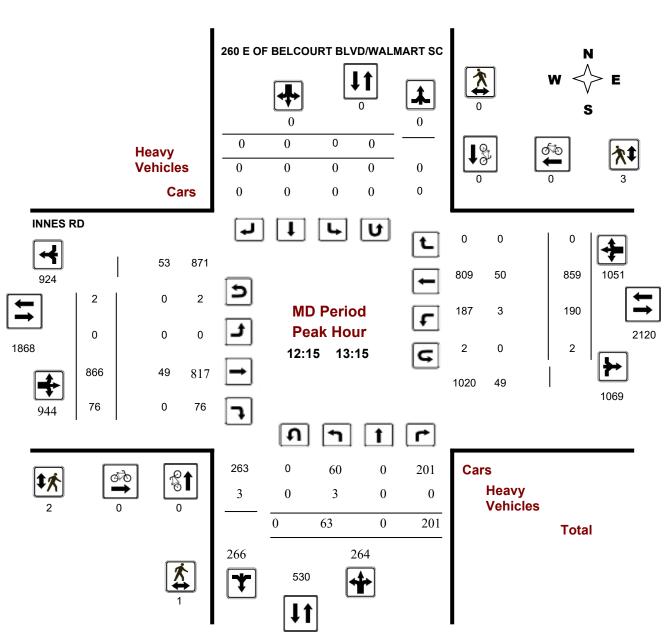


Comments 5474762 - FEB 20, 2020 - 8HRS - LORETTA

2021-Jun-30 Page 2 of 3



Turning Movement Count - Peak Hour Diagram

INNES RD @ 260 E OF BELCOURT BLVD/WALMART SC

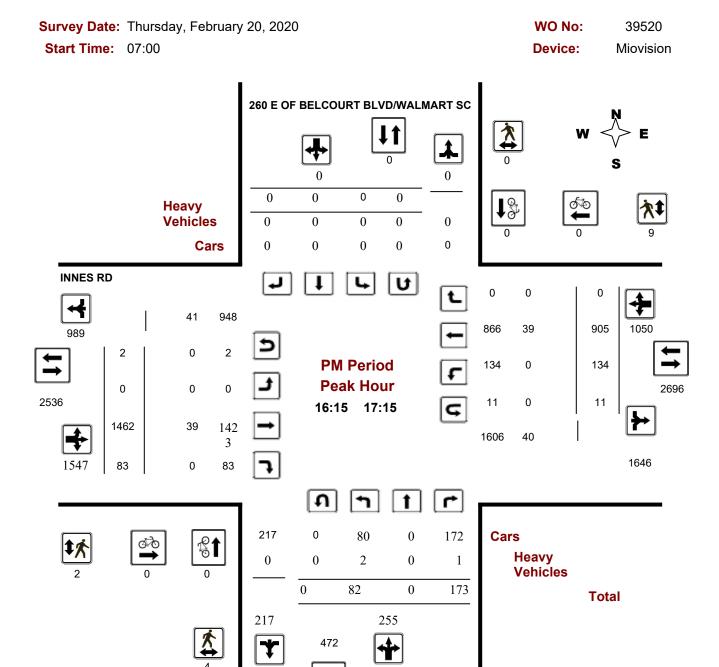

Comments 5474762 - FEB 20, 2020 - 8HRS - LORETTA

2021-Jun-30 Page 3 of 3



Turning Movement Count - Study Results

INNES RD @ 260 E OF BELCOURT BLVD/WALMART SC

Survey Date: Thursday, February 20, 2020 WO No: 39520

Start Time: 07:00 Device: Miovision

Full Study Summary (8 HR Standard)

Survey Date: Thursday, February 20, 2020 Total Observed U-Turns AADT Factor

Northbound: 2 Southbound: 0 .90

INNES RD

Eastbound: 9 Westbound: 26

260 E OF BELCOURT BLVD/WALMART SC

	200 E C		LCOC	IN I DL	V D/ VV	ALIVIAI	11 30	<u></u>				- 11	NINES	רט					
	Nor	thbou	ınd		Sou	ıthbou	nd			Е	Eastbou	ınd		V	Vestbou	ınd			
Period	LT	ST	RT	NB TOT	LT	ST	RT	SB TOT	STR TOT	LT	ST	RT	EB TOT	LT	ST	RT	WB TOT	STR TOT	Grand Tota
07:00 08:00	2	0	29	31	0	0	0	0	31	0	450	16	466	30	1277	0	1307	1773	1804
08:00 09:00	17	0	38	55	0	0	0	0	55	0	500	24	524	70	1091	0	1161	1685	1740
09:00 10:00	45	0	93	138	0	0	0	0	138	0	583	63	646	116	787	0	903	1549	1687
11:30 12:30	79	0	189	268	0	0	0	0	268	0	839	72	911	168	867	0	1035	1946	2214
12:30 13:30	59	0	207	266	0	0	0	0	266	0	875	76	951	178	818	0	996	1947	2213
15:00 16:00	75	0	194	269	0	0	0	0	269	0	1224	81	1305	142	828	0	970	2275	2544
16:00 17:00	75	0	166	241	0	0	0	0	241	0	1443	79	1522	132	896	0	1028	2550	2791
17:00 18:00	73	0	172	245	0	0	0	0	245	0	1357	79	1436	135	845	0	980	2416	2661
Sub Total	425	0	1088	1513	0	0	0	0	1513	0	7271	490	7761	971	7409	0	8380	16141	17654
U Turns	2			2	0			0	2	9			9	26			26	35	37
Total	427	0	1088	1515	0	0	0	0	1515	9	7271	490	7770	997	7409	0	8406	16176	17691
EQ 12Hr Note: These	594 values ar	0 e calcu		2106	0 vina the	0 totals b	0 v the ar	0 ppropriate	2106 e expans	13 ion fac	10107	681	10801	1386 1.39	10299	0	11685	22486	24592
AVG 12Hr	535	0		1896	0	0	0	0	1896	12	9096	613	9721	1247	9269	0	10516	20237	22133
Note: These	volumes	are cal	culated	by multip	olying th	e Equiv	alent 12	2 hr. tota	ls by the	AADT	factor.			.90					
AVG 24Hr	701	0	1783	2484	0	0	0	0	2484	16	11916	803	12735	1634	12142	0	13776	26511	28995
Note: These	volumes	are cal	culated	by multip	olying th	e Avera	ige Dail	y 12 hr. i	totals by	12 to 2	24 expan	sion fac	ctor.	1.31					

Note: U-Turns provided for approach totals. Refer to 'U-Turn' Report for specific breakdown.

June 30, 2021 Page 3 of 8



Turning Movement Count - Study Results

INNES RD @ 260 E OF BELCOURT BLVD/WALMART SC

Survey Date: Thursday, February 20, 2020 WO No: 39520

Start Time: 07:00 Device: Miovision

Full Study 15 Minute Increments

Eastbound

260 E OF BELCOURT BLVD/WALMART SC

Southbound

Northbound

Westbound

INNES RD

Time Period Tr ST RT No Tot Tot ST RT No Tot ST RT ST RT ST RT Tot T			יטמווווכ	unu		- 00	ullibou	ii u			_	aotocai	iu		***	ootboan	ıu			
07:15 07:30 1 0 1 0 1 2 0 0 0 0 0 2 0 116 4 120 10 349 0 359 479 481 07:30 07:45 0 0 0 10 10 10 0 0 0 0 0 10 0 112 5 117 6 327 0 333 450 460 07:45 08:00 1 0 13 14 0 0 0 0 0 14 0 112 5 117 6 327 0 333 450 460 460 07:45 08:00 1 0 13 14 0 0 0 0 0 14 0 112 7 119 8 317 0 325 444 458 08:00 08:15 3 0 9 12 0 0 0 0 0 12 1 1 103 6 110 17 323 0 340 460 462 08:15 08:30 2 0 8 110 0 0 0 0 0 12 1 1 103 6 110 17 323 0 340 460 462 08:30 08:45 3 0 9 12 0 0 0 0 0 0 12 1 1 103 6 110 17 323 0 340 450 462 08:30 08:45 3 0 8 11 0 0 0 0 0 0 10 0 124 4 128 16 272 0 288 416 426 08:30 08:45 3 0 8 11 0 0 0 0 0 0 110 0 124 4 128 16 272 0 288 416 426 08:30 08:45 3 0 8 11 0 0 0 0 0 0 110 0 124 4 128 16 272 0 285 436 447 08:45 08:45 09:00 9 0 13 22 0 0 0 0 0 22 1 1 140 6 147 20 221 0 241 388 410 09:00 09:15 8 0 19 27 0 0 0 0 0 22 1 1 140 6 147 20 221 0 241 388 410 09:00 09:15 8 0 19 27 0 0 0 0 0 27 0 128 13 141 36 228 0 264 405 432 09:15 09:30 12 0 17 29 0 0 0 0 0 29 0 151 14 165 22 201 0 23 388 417 09:30 09:45 110 0 25 36 0 0 0 0 0 36 0 156 19 175 25 160 0 185 360 396 09:45 10:00 14 0 32 46 0 0 0 0 36 6 0 156 19 175 25 160 0 185 360 396 19:40 11:45 18 0 47 65 0 0 0 0 0 85 0 192 19 211 37 205 10 288 514 566 12:15 12:30 20 0 46 66 0 0 0 0 0 552 0 231 15 246 47 221 0 268 514 566 12:15 12:30 20 0 46 66 0 0 0 0 0 552 0 231 15 246 47 221 0 268 514 566 12:15 12:30 20 0 46 66 0 0 0 0 0 56 0 192 19 211 37 205 0 242 453 538 12:20 12:15 14 0 0 51 62 0 0 0 0 0 552 0 231 15 246 47 221 0 268 514 566 12:15 13:30 15 0 62 77 0 0 0 0 0 0 552 0 231 15 246 47 221 0 268 514 566 11:15 13:30 17 0 52 69 0 0 0 0 0 56 0 34 22 12 12 14 45 12 10 26 0 245 476 535 12:35 13:35 14 10 0 51 62 0 0 0 0 0 0 66 0 232 17 249 30 184 0 214 463 532 15:35 13:35 14 0 0 51 62 0 0 0 0 0 0 66 0 232 17 249 30 184 0 214 463 532 15:35 146 13:30 15 0 66 0 0 0 0 0 0 66 0 231 17 249 30 184 0 214 463 532 15:35 15:30 15:45 17 0 52 69 0 0 0 0 0 0 66 0 344 25 369 31 211 0 242 611 677 16:30 15:45 16:30 20 0 550 70 0 0 0 0 0 0 66 0 344 25 369 31 211 0 242 611 677 16:30 15:45 16:30 20 0 550 70 0 0 0	Time Period	LT	ST	RT		LT	ST	RT	_		LT	ST	RT		LT	ST	RT		_	
07:30 07:45 0 0 10 10 0 0 0 0 10 0 112 5 117 6 327 0 333 450 460 07:45 08:00 1 0 13 14 0 0 0 0 112 7 119 8 317 0 325 444 458 08:00 08:15 38:30 2 0 8 10 0 0 0 110 0 124 4 128 16 272 0 288 416 426 08:30 08:45 3 0 8 11 0 0 0 0 124 4 128 16 272 0 228 447 0 221 0 0 229 1 14 0 221 0 221 0 14 2 221 0 221 0 0 <	07:00 07:15	0	0	5	5	0	0	0	0	5	3	110	0	113	6	284	0	290	403	408
07:45 08:00 1 0 13 14 0 0 0 14 0 112 7 119 8 317 0 325 444 458 08:00 08:15 3 0 9 12 0 0 0 0 12 1 103 6 110 17 323 0 340 450 462 08:15 08:30 28:45 1 0 0 0 0 11 0 12 4 128 16 272 0 288 416 426 08:30 08:45 3 0 8 11 0 0 0 0 124 4 128 16 272 0 28 446 447 20 221 0 241 388 410 09:00 99:0 91:3 27 0 0 0 227 0 128 13 141 <th>07:15 07:30</th> <td>1</td> <td>0</td> <td>1</td> <td>2</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> <td>2</td> <td>0</td> <td>116</td> <td>4</td> <td>120</td> <td>10</td> <td>349</td> <td>0</td> <td>359</td> <td>479</td> <td>481</td>	07:15 07:30	1	0	1	2	0	0	0	0	2	0	116	4	120	10	349	0	359	479	481
08:00 08:15 3 0 9 12 0 0 0 0 12 1 103 6 110 17 323 0 340 450 462 08:15 08:30 2 0 8 10 0 0 0 0 0 10 0 124 4 128 16 272 0 288 416 428 08:30 08:45 3 0 8 11 0 0 0 0 0 0 11 0 0 124 4 128 16 272 0 288 416 428 470 08:45 09:00 9 0 133 22 0 0 0 0 0 22 1 140 6 147 20 221 0 241 388 410 09:00 09:15 8 0 19 27 0 0 0 0 27 0 128 13 141 36 228 0 264 405 432 09:15 09:30 12 0 17 29 0 0 0 0 0 27 0 128 13 141 36 22 201 0 223 388 417 09:30 09:45 11 0 25 36 0 0 0 0 0 29 0 151 14 165 22 201 0 223 388 417 09:30 09:45 11 0 25 36 0 0 0 0 0 36 0 156 19 175 25 160 0 185 360 396 11:45 11 0 32 46 0 0 0 0 0 46 0 148 17 165 33 188 0 231 396 442 11:30 11:45 18 0 47 65 0 0 0 0 0 85 0 193 21 214 45 216 0 261 475 540 11:45 12:00 27 0 58 85 0 0 0 0 0 85 0 193 21 214 45 216 0 261 475 540 11:45 12:00 27 0 58 85 0 0 0 0 0 0 85 0 193 21 214 45 216 0 261 475 540 11:45 12:00 27 0 58 85 0 0 0 0 0 0 85 0 193 21 211 37 205 0 242 453 538 12:00 12:15 14 0 38 52 0 0 0 0 0 66 0 223 17 240 42 225 0 268 514 566 11:45 13:00 15 1 1 0 0 38 52 0 0 0 0 0 0 52 0 231 15 246 47 221 0 268 514 566 11:45 13:00 15 1 1 0 0 15 1 62 0 0 0 0 0 0 66 0 223 17 240 42 225 0 267 507 573 12:30 12:45 17 0 42 59 0 0 0 0 0 66 0 223 17 240 42 225 0 267 507 573 13:15 13:15 13:30 17 0 52 69 0 0 0 0 0 68 0 232 17 249 30 184 0 214 463 552 15:00 15:18 18 0 50 68 0 0 0 0 0 68 0 232 17 249 30 184 0 214 463 552 15:00 15:18 18 0 50 68 0 0 0 0 0 68 0 232 17 249 30 184 0 245 476 535 11:573 13:15 13:30 17 0 52 69 0 0 0 0 0 68 0 232 17 249 30 184 0 214 463 552 15:00 15:15 15:30 15:45 17 0 0 44 64 0 0 0 0 0 64 0 349 20 369 35 234 0 269 638 702 15:00 15:15 16:00 20 0 44 64 0 0 0 0 0 64 0 349 20 369 35 234 0 269 638 702 15:00 15:15 16:00 20 0 44 64 0 0 0 0 0 64 0 349 20 369 35 234 0 269 638 702 15:00 15:15 16:00 20 0 44 64 0 0 0 0 0 64 0 349 20 369 35 234 0 269 638 702 15:00 15:15 16:00 20 0 44 64 0 0 0 0 0 64 0 349 20 369 35 234 0 269 638 702 15:00 15:15 16:00 20 0 44 64 0 0 0 0 0 64 0 349 20 369 35 234 0 269 638 702 15:00 15:15 16:00 20 0 44 64 0 0 0 0 0 0 64 0 349 20 369 35 234 0 269 638 702 15:00 15:	07:30 07:45	0	0	10	10	0	0	0	0	10	0	112	5	117	6	327	0	333	450	460
08:15 08:30 2 0 8 10 0 0 0 0 0 0 10 10 0 124 4 128 16 272 0 288 416 426 08:30 08:45 3 0 8 11 0 0 0 0 0 0 11 0 0 124 4 128 16 272 0 288 416 426 08:30 08:45 3 0 8 11 0 0 0 0 0 0 11 1 0 133 8 141 20 275 0 295 436 447 08:45 09:00 9 0 13 22 0 0 0 0 0 0 22 1 1 140 6 147 20 221 0 241 388 410 09:00 09:15 8 0 19 27 0 0 0 0 0 27 0 128 13 141 36 228 0 264 405 432 09:15 09:30 12 0 17 29 0 0 0 0 0 29 0 151 14 165 22 201 0 223 388 417 09:30 09:45 11 0 25 36 0 0 0 0 0 0 29 0 151 14 165 22 201 0 223 388 417 09:30 09:45 11 0 25 36 0 0 0 0 0 0 46 0 148 17 165 33 198 0 231 396 442 11:30 11:45 18 0 47 65 0 0 0 0 0 65 0 193 21 21 4 45 216 0 261 475 540 11:45 18 0 47 65 0 0 0 0 0 0 88 0 192 19 211 37 205 0 242 453 538 12:00 12:15 14 0 38 52 0 0 0 0 0 0 88 0 192 19 211 37 205 0 242 453 538 12:00 12:15 14 0 38 52 0 0 0 0 0 0 66 0 223 17 240 42 225 0 267 507 573 12:30 12:45 17 0 42 59 0 0 0 0 0 66 0 223 17 240 42 225 0 267 507 573 12:30 12:45 17 0 42 59 0 0 0 0 0 68 0 223 17 245 49 207 0 256 501 578 13:15 13:30 15 0 50 245 476 535 13:15 11 0 51 62 0 0 0 0 0 68 0 231 17 249 30 184 0 214 463 532 15:15 13:30 17 0 52 69 0 0 0 0 0 68 0 231 17 249 30 184 0 214 463 532 15:15 13:30 17 0 52 69 0 0 0 0 0 68 0 277 19 296 30 184 0 214 63 532 15:15 15:30 15:15 18 0 50 68 0 0 0 0 0 68 0 277 19 296 30 184 0 214 63 532 15:15 15:30 15:15 18 0 50 68 0 0 0 0 0 66 0 23 17 249 30 184 0 244 255 0 588 15:15 15:30 15:45 17 0 50 68 0 0 0 0 0 66 0 23 17 249 30 184 0 244 255 0 588 15:15 15:30 15:45 17 0 50 68 0 0 0 0 0 66 0 23 17 249 30 184 0 244 255 0 588 15:15 15:30 15:45 17 0 50 68 0 0 0 0 0 66 0 23 17 240 34 34 191 0 255 539 606 15:45 16:00 20 0 446 64 0 0 0 0 0 64 0 349 20 369 35 234 0 269 638 702 15:15 15:30 15:45 17 0 50 68 0 0 0 0 0 66 0 23 17 240 34 34 191 0 255 539 606 15:45 15:00 15:15 18 0 0 50 67 0 0 0 0 0 66 0 0 0 0 68 0 356 16 372 35 207 0 242 614 672 16:15 16:30 29 0 37 66 0 0 0 0 0 66 0 344 25 369 31 211 0 242 51 663 716 17:00 17:15 19 0 53 72 0 0 0 0 0 0 67 0 324 20 344 29 215 0 244 647 672 16:15 16:30 29 0 37 66 0 0 0 0 0 66 0 0 0 0 66 0 344 2	07:45 08:00	1	0	13	14	0	0	0	0	14	0	112	7	119	8	317	0	325	444	458
08:30 08:45 3 0 8 11 0 0 0 0 0 11 0 133 8 141 20 275 0 295 436 447 08:45 09:00 9 0 13 22 0 0 0 0 0 22 1 140 6 147 20 221 0 241 388 410 09:00 09:15 8 0 19 27 0 0 0 0 0 27 0 128 13 141 36 228 0 264 405 432 09:15 09:30 12 0 17 29 0 0 0 0 0 29 0 151 14 165 22 201 0 223 388 417 09:30 09:45 11 0 25 36 0 0 0 0 0 36 0 156 19 175 25 160 0 185 360 396 09:45 11 0 25 36 0 0 0 0 0 0 46 0 148 17 165 33 198 0 231 396 442 11:30 11:45 18 0 47 65 0 0 0 0 0 65 0 193 21 214 45 216 0 261 475 540 11:45 12:00 27 0 58 85 0 0 0 0 0 85 0 193 21 214 45 216 0 261 475 540 11:45 12:00 27 0 58 85 0 0 0 0 0 52 0 231 15 244 47 221 0 268 514 566 12:15 12:30 20 0 46 66 0 0 0 0 0 59 1 215 15 15 231 47 198 0 245 476 535 12:45 13:00 15 0 62 77 0 0 0 0 0 66 0 223 17 240 42 225 0 267 507 573 12:30 13:15 13 0 0 15 0 62 77 0 0 0 0 0 0 68 0 232 17 249 30 184 0 245 476 535 13:15 13:30 17 0 52 69 0 0 0 0 0 68 0 232 17 249 30 184 0 241 463 332 15:15 15:30 20 0 50 70 0 0 0 0 68 0 0 232 17 249 30 184 0 245 476 535 15:30 15:15 15 13 0 50 68 0 0 0 0 0 69 0 232 17 249 30 184 0 244 463 332 15:15 15:30 20 0 50 70 0 0 0 0 69 0 232 17 249 30 184 0 244 463 332 15:15 15:30 20 0 50 70 0 0 0 0 69 0 232 17 249 30 184 0 244 463 332 15:15 15:30 20 0 50 70 0 0 0 0 69 0 232 17 249 30 184 0 244 463 332 15:15 15:30 20 0 50 70 0 0 0 0 69 0 232 17 249 30 184 0 244 663 332 15:15 15:30 20 0 50 70 0 0 0 0 69 0 232 17 249 30 184 0 244 663 532 15:50 15:15 18 0 50 67 0 0 0 0 0 64 0 349 20 369 35 234 0 269 638 702 16:51 16:50 16:51 18 0 50 67 0 0 0 0 0 64 0 349 20 369 35 234 0 269 638 702 16:51 16:50 16:51 16 0 48 64 0 0 0 0 0 64 0 349 20 369 35 234 0 269 638 702 16:51 16:50 16:51 16 0 48 64 0 0 0 0 0 64 0 349 20 369 35 234 0 269 638 702 16:51 16:50 16:51 16 0 48 64 0 0 0 0 0 0 64 0 349 20 369 35 234 0 269 638 702 16:51 16:50 16:51 19 0 53 72 0 0 0 0 0 0 64 0 349 20 369 35 234 0 269 638 702 16:51 16:50 16:51 19 0 53 72 0 0 0 0 0 0 64 0 349 20 369 35 234 0 269 638 702 16:51 16:50 16:51 19 0 53 72 0 0 0 0 0 0 64 0 349 20 369 35 234 0 269 638 702 16:51 16:50 16:50 16:51 19 0 53 72 0 0 0	08:00 08:15	3	0	9	12	0	0	0	0	12	1	103	6	110	17	323	0	340	450	462
08:45 09:00 9 0 13 22 0 0 0 0 0 22 1 140 6 147 20 221 0 241 388 410 09:00 09:15 8 0 19 27 0 0 0 0 0 0 27 0 128 13 141 36 228 0 264 405 432 09:15 09:30 12 0 17 29 0 0 0 0 0 27 0 151 14 165 22 201 0 223 388 417 09:30 09:45 11 0 25 36 0 0 0 0 36 0 156 19 17 15 25 160 0 185 360 396 09:45 10:00 14 0 32 46 0 0 0 0 0 46 0 148 17 165 33 188 0 231 396 442 11:30 11:45 18 0 47 65 0 0 0 0 0 65 0 193 21 214 45 216 0 261 475 540 11:45 12:00 27 0 58 85 0 0 0 0 0 55 0 192 19 211 37 205 0 242 453 538 12:00 12:15 12:30 20 0 46 66 0 0 0 0 5 52 0 231 15 246 47 221 0 268 514 566 11:45 12:30 20 0 46 66 0 0 0 0 0 58 0 125 15 15 231 47 198 0 245 476 535 12:45 13:00 15 0 62 77 0 0 0 0 0 66 0 223 17 240 42 225 0 267 507 573 12:30 13:15 11 0 51 62 0 0 0 0 0 69 0 233 17 240 42 225 0 267 507 573 13:15 13:30 17 0 52 69 0 0 0 0 0 68 0 277 10 28 54 229 0 283 511 573 13:15 13:30 15:15 18 0 50 68 0 0 0 0 0 68 0 277 10 294 20 283 511 573 13:15 13:00 15:15 18 0 50 68 0 0 0 0 0 68 0 277 10 294 20 244 643 322 13:15 13:30 15:15 18 0 50 68 0 0 0 0 0 68 0 277 10 294 20 314 34 191 0 225 539 606 15:45 16:00 20 0 44 64 64 0 0 0 0 0 69 0 233 17 240 42 25 0 283 511 573 13:15 13:30 17 0 52 69 0 0 0 0 0 69 0 233 17 240 17 228 54 29 0 283 511 573 13:15 13:00 15:15 18 0 50 68 0 0 0 0 0 69 0 232 17 249 30 184 0 214 463 532 15:50 15:15 15 15 16 20 0 0 0 0 0 69 0 233 17 249 20 20 283 511 573 13:15 17 0 50 68 0 0 0 0 0 68 0 277 19 296 36 188 0 224 520 588 15:15 15:30 15:45 17 0 50 68 0 0 0 0 0 68 0 277 19 296 36 188 0 224 520 588 15:15 15:30 15:45 17 0 50 68 0 0 0 0 0 64 0 349 20 369 35 234 0 296 633 702 16:00 16:15 12 0 46 58 0 0 0 0 0 64 0 349 20 369 35 234 0 296 633 702 16:00 16:15 12 0 46 58 0 0 0 0 0 64 0 349 20 369 35 234 0 296 633 702 16:00 16:15 12 0 46 58 0 0 0 0 0 64 0 349 20 369 35 234 0 296 633 702 16:00 16:15 12 0 46 58 0 0 0 0 0 64 0 349 20 369 35 234 0 296 633 702 16:00 16:15 12 0 46 58 0 0 0 0 0 64 0 349 20 369 35 234 0 296 633 702 16:00 16:15 16:00 16:15 16:00 16:15 16:00 16:15 16:00 16:15 16:00 16:15 16:00 16:15 16:00 16:15 16:00 16:15 16:00 16:1	08:15 08:30	2	0	8	10	0	0	0	0	10	0	124	4	128	16	272	0	288	416	426
09:00 09:15 8 0 19 27 0 0 0 27 0 128 13 141 36 228 0 264 405 432 09:15 09:30 12 0 17 29 0 0 0 29 0 151 14 165 22 201 0 223 388 417 09:30 09:45 111 0 25 36 0 0 0 0 46 0 146 0 231 396 396 09:45 10:00 14 0 32 46 0 0 0 0 66 0 146 0 231 396 442 11:30 11:45 18:0 47 65 0 0 0 0 65 0 193 21 214 45 216 0 261 475 540 11:45 <td< th=""><th>08:30 08:45</th><td>3</td><td>0</td><td>8</td><td>11</td><td>0</td><td>0</td><td>0</td><td>0</td><td>11</td><td>0</td><td>133</td><td>8</td><td>141</td><td>20</td><td>275</td><td>0</td><td>295</td><td>436</td><td>447</td></td<>	08:30 08:45	3	0	8	11	0	0	0	0	11	0	133	8	141	20	275	0	295	436	447
09:15	08:45 09:00	9	0	13	22	0	0	0	0	22	1	140	6	147	20	221	0	241	388	410
09:30 09:45 11 0 25 36 0 0 0 0 0 36 0 156 19 175 25 160 0 185 360 396 09:45 10:00 14 0 32 46 0 0 0 0 0 46 0 148 17 165 33 198 0 231 396 442 11:30 11:45 18 0 47 65 0 0 0 0 0 65 0 193 21 214 45 216 0 261 475 540 11:45 12:00 27 0 58 85 0 0 0 0 0 85 0 192 19 211 37 205 0 242 453 538 12:00 12:15 14 0 38 52 0 0 0 0 0 52 0 231 15 246 47 221 0 268 514 566 12:15 12:30 20 0 46 66 0 0 0 0 0 59 1 215 15 231 47 188 0 245 476 535 12:45 13:00 15 0 62 77 0 0 0 0 59 1 215 15 231 47 188 0 245 476 535 13:15 13:30 17 0 52 69 0 0 0 0 62 1 210 17 228 54 229 0 283 511 573 13:15 13:30 17 0 52 69 0 0 0 0 68 0 277 19 296 36 188 0 224 520 588 15:15 15:30 20 0 44 64 0 0 0 0 64 0 349 20 369 35 234 0 269 638 702 16:00 16:15 12 0 46 58 0 0 0 0 66 0 344 25 369 31 211 0 225 539 606 15:45 16:00 20 0 44 64 0 0 0 0 66 0 344 25 369 31 211 0 242 611 677 16:30 16:45 17 0 53 53 0 0 0 0 66 0 344 25 369 31 211 0 242 611 677 16:30 16:45 17 0 53 53 0 0 0 0 67 0 323 20 343 29 215 0 244 587 654 17:00 17:15 18 0 35 53 0 0 0 0 67 0 323 20 343 29 215 0 244 587 654 17:00 17:15 18 0 35 53 0 0 0 0 67 0 323 20 343 29 215 0 244 587 654 17:00 17:15 18 0 35 53 0 0 0 0 67 0 323 20 343 29 215 0 244 587 654 17:00 17:45 18 0 22 0 32 54 0 0 0 0 54 0 341 21 362 33 201 0 234 596 650	09:00 09:15	8	0	19	27	0	0	0	0	27	0	128	13	141	36	228	0	264	405	432
09:45 10:00 14 0 32 46 0 0 0 46 0 148 17 165 33 198 0 231 396 442 11:30 11:45 18 0 47 65 0 0 0 65 0 193 21 214 45 216 0 261 475 540 11:45 12:00 27 0 58 85 0 0 0 85 0 192 19 211 37 205 0 242 453 538 12:00 12:15 14 0 38 52 0 0 0 552 0 231 15 246 47 221 0 268 514 566 12:15 12:30 20 0 46 60 0 0 0 531 12:15 15 231 47 198 0	09:15 09:30	12	0	17	29	0	0	0	0	29	0	151	14	165	22	201	0	223	388	417
11:30 11:45 18 0 47 65 0 0 0 65 0 193 21 214 45 216 0 261 475 540 11:45 12:00 27 0 58 85 0 0 0 0 85 0 192 19 211 37 205 0 242 453 538 12:00 12:15 14 0 38 52 0 0 0 52 0 231 15 246 47 221 0 268 514 566 12:15 12:30 20 0 46 66 0 0 0 66 0 223 17 240 42 225 0 267 507 573 12:30 12:45 17 0 42 59 0 0 0 77 0 218 27 245 49 2	09:30 09:45	11	0	25	36	0	0	0	0	36	0	156	19	175	25	160	0	185	360	396
11:45 12:00 27 0 58 85 0 0 0 85 0 192 19 211 37 205 0 242 453 538 12:00 12:15 14 0 38 52 0 0 0 52 0 231 15 246 47 221 0 268 514 566 12:15 12:30 20 0 46 66 0 0 0 66 0 223 17 240 42 225 0 267 507 573 12:30 12:45 17 0 42 59 0 0 0 59 1 215 15 231 47 198 0 245 476 535 12:45 13:00 15 0 62 77 0 0 0 62 1 210 17 228 54 229 <td< th=""><th>09:45 10:00</th><td>14</td><td>0</td><td>32</td><td>46</td><td>0</td><td>0</td><td>0</td><td>0</td><td>46</td><td>0</td><td>148</td><td>17</td><td>165</td><td>33</td><td>198</td><td>0</td><td>231</td><td>396</td><td>442</td></td<>	09:45 10:00	14	0	32	46	0	0	0	0	46	0	148	17	165	33	198	0	231	396	442
12:00 12:15 14 0 38 52 0 0 0 52 0 231 15 246 47 221 0 268 514 566 12:15 12:30 20 0 46 66 0 0 0 66 0 223 17 240 42 225 0 267 507 573 12:30 12:45 17 0 42 59 0 0 0 59 1 215 15 231 47 198 0 245 476 535 12:45 13:00 15 0 62 77 0 0 0 77 0 218 27 245 49 207 0 256 501 578 13:00 13:15 11 0 51 62 0 0 0 62 1 210 17 228 54 229 <td< th=""><th>11:30 11:45</th><td>18</td><td>0</td><td>47</td><td>65</td><td>0</td><td>0</td><td>0</td><td>0</td><td>65</td><td>0</td><td>193</td><td>21</td><td>214</td><td>45</td><td>216</td><td>0</td><td>261</td><td>475</td><td>540</td></td<>	11:30 11:45	18	0	47	65	0	0	0	0	65	0	193	21	214	45	216	0	261	475	540
12:15 12:30 20 0 46 66 0 0 0 66 0 223 17 240 42 225 0 267 507 573 12:30 12:45 17 0 42 59 0 0 0 59 1 215 15 231 47 198 0 245 476 535 12:45 13:00 15 0 62 77 0 0 0 77 0 218 27 245 49 207 0 256 501 578 13:00 13:15 11 0 51 62 0 0 0 62 1 210 17 228 54 229 0 283 511 573 13:15 13:30 17 0 52 69 0 0 0 68 0 277 19 296 36 188 <td< th=""><th>11:45 12:00</th><td>27</td><td>0</td><td>58</td><td>85</td><td>0</td><td>0</td><td>0</td><td>0</td><td>85</td><td>0</td><td>192</td><td>19</td><td>211</td><td>37</td><td>205</td><td>0</td><td>242</td><td>453</td><td>538</td></td<>	11:45 12:00	27	0	58	85	0	0	0	0	85	0	192	19	211	37	205	0	242	453	538
12:30 12:45 17 0 42 59 0 0 0 59 1 215 15 231 47 198 0 245 476 535 12:45 13:00 15 0 62 77 0 0 0 77 0 218 27 245 49 207 0 256 501 578 13:00 13:15 11 0 51 62 0 0 0 62 1 210 17 228 54 229 0 283 511 573 13:15 13:30 17 0 52 69 0 0 0 669 0 232 17 249 30 184 0 214 463 532 15:00 15:15 18 0 50 68 0 0 0 68 0 277 19 296 36 188 <t< th=""><th>12:00 12:15</th><td>14</td><td>0</td><td>38</td><td>52</td><td>0</td><td>0</td><td>0</td><td>0</td><td>52</td><td>0</td><td>231</td><td>15</td><td>246</td><td>47</td><td>221</td><td>0</td><td>268</td><td>514</td><td>566</td></t<>	12:00 12:15	14	0	38	52	0	0	0	0	52	0	231	15	246	47	221	0	268	514	566
12:45 13:00 15 0 62 77 0 0 0 77 0 218 27 245 49 207 0 256 501 578 13:00 13:15 11 0 51 62 0 0 0 62 1 210 17 228 54 229 0 283 511 573 13:15 13:30 17 0 52 69 0 0 0 69 0 232 17 249 30 184 0 214 463 532 15:00 15:15 18 0 50 88 0 0 0 68 0 277 19 296 36 188 0 224 520 588 15:15 15:30 20 0 50 70 0 0 0 70 0 304 22 326 41 215 <td< th=""><th>12:15 12:30</th><td>20</td><td>0</td><td>46</td><td>66</td><td>0</td><td>0</td><td>0</td><td>0</td><td>66</td><td>0</td><td>223</td><td>17</td><td>240</td><td>42</td><td>225</td><td>0</td><td>267</td><td>507</td><td>573</td></td<>	12:15 12:30	20	0	46	66	0	0	0	0	66	0	223	17	240	42	225	0	267	507	573
13:00 13:15 11 0 51 62 0 0 0 62 1 210 17 228 54 229 0 283 511 573 13:15 13:30 17 0 52 69 0 0 0 69 0 232 17 249 30 184 0 214 463 532 15:00 15:15 18 0 50 68 0 0 0 68 0 277 19 296 36 188 0 224 520 588 15:15 15:30 20 0 50 70 0 0 0 70 0 304 22 326 41 215 0 256 582 652 15:30 15:45 17 0 50 67 0 0 0 67 0 294 20 314 34 191 <td< th=""><th>12:30 12:45</th><td>17</td><td>0</td><td>42</td><td>59</td><td>0</td><td>0</td><td>0</td><td>0</td><td>59</td><td>1</td><td>215</td><td>15</td><td>231</td><td>47</td><td>198</td><td>0</td><td>245</td><td>476</td><td>535</td></td<>	12:30 12:45	17	0	42	59	0	0	0	0	59	1	215	15	231	47	198	0	245	476	535
13:15 13:30 17 0 52 69 0 0 0 0 232 17 249 30 184 0 214 463 532 15:00 15:15 18 0 50 68 0 0 0 0 68 0 277 19 296 36 188 0 224 520 588 15:15 15:30 20 0 50 70 0 0 0 70 0 304 22 326 41 215 0 256 582 652 15:30 15:45 17 0 50 67 0 0 0 67 0 294 20 314 34 191 0 225 539 606 15:45 16:00 20 0 44 64 0 0 0 64 0 349 20 369 35 234 0 269 638 702 16:00 16:15 12 0 46	12:45 13:00	15	0	62	77	0	0	0	0	77	0	218	27	245	49	207	0	256	501	578
15:00 15:15 18 0 50 68 0 0 0 68 0 277 19 296 36 188 0 224 520 588 15:15 15:30 20 0 50 70 0 0 0 70 0 304 22 326 41 215 0 256 582 652 15:30 15:45 17 0 50 67 0 0 0 67 0 294 20 314 34 191 0 225 539 606 15:45 16:00 20 0 44 64 0 0 0 64 0 349 20 369 35 234 0 269 638 702 16:00 16:15 12 0 46 58 0 0 0 58 0 356 16 372 35 207 <td< th=""><th>13:00 13:15</th><td>11</td><td>0</td><td>51</td><td>62</td><td>0</td><td>0</td><td>0</td><td>0</td><td>62</td><td>1</td><td>210</td><td>17</td><td>228</td><td>54</td><td>229</td><td>0</td><td>283</td><td>511</td><td>573</td></td<>	13:00 13:15	11	0	51	62	0	0	0	0	62	1	210	17	228	54	229	0	283	511	573
15:15 15:30 20 0 50 70 0 0 0 70 0 304 22 326 41 215 0 256 582 652 15:30 15:45 17 0 50 67 0 0 0 67 0 294 20 314 34 191 0 225 539 606 15:45 16:00 20 0 44 64 0 0 0 64 0 349 20 369 35 234 0 269 638 702 16:00 16:15 12 0 46 58 0 0 0 58 0 356 16 372 35 207 0 242 614 672 16:15 16:30 29 0 37 66 0 0 0 66 0 344 25 369 31 211 <td< th=""><th>13:15 13:30</th><td>17</td><td>0</td><td>52</td><td>69</td><td>0</td><td>0</td><td>0</td><td>0</td><td>69</td><td>0</td><td>232</td><td>17</td><td>249</td><td>30</td><td>184</td><td>0</td><td>214</td><td>463</td><td>532</td></td<>	13:15 13:30	17	0	52	69	0	0	0	0	69	0	232	17	249	30	184	0	214	463	532
15:30 15:45 17 0 50 67 0 0 0 67 0 294 20 314 34 191 0 225 539 606 15:45 16:00 20 0 44 64 0 0 0 64 0 349 20 369 35 234 0 269 638 702 16:00 16:15 12 0 46 58 0 0 0 58 0 356 16 372 35 207 0 242 614 672 16:15 16:30 29 0 37 66 0 0 0 66 0 344 25 369 31 211 0 242 611 677 16:30 16:45 16 0 48 64 0 0 0 64 0 369 21 390 38 242 <th< th=""><th>15:00 15:15</th><td>18</td><td>0</td><td>50</td><td>68</td><td>0</td><td>0</td><td>0</td><td>0</td><td>68</td><td>0</td><td>277</td><td>19</td><td>296</td><td>36</td><td>188</td><td>0</td><td>224</td><td>520</td><td>588</td></th<>	15:00 15:15	18	0	50	68	0	0	0	0	68	0	277	19	296	36	188	0	224	520	588
15:45 16:00 20 0 44 64 0 0 0 64 0 349 20 369 35 234 0 269 638 702 16:00 16:15 12 0 46 58 0 0 0 58 0 356 16 372 35 207 0 242 614 672 16:15 16:30 29 0 37 66 0 0 0 66 0 344 25 369 31 211 0 242 611 677 16:30 16:45 16 0 48 64 0 0 0 64 0 369 21 390 38 242 0 280 670 734 16:45 17:00 18 0 35 53 0 0 0 53 1 374 17 392 35 236 <th< th=""><th>15:15 15:30</th><td>20</td><td>0</td><td>50</td><td>70</td><td>0</td><td>0</td><td>0</td><td>0</td><td>70</td><td>0</td><td>304</td><td>22</td><td>326</td><td>41</td><td>215</td><td>0</td><td>256</td><td>582</td><td>652</td></th<>	15:15 15:30	20	0	50	70	0	0	0	0	70	0	304	22	326	41	215	0	256	582	652
16:00 16:15 12 0 46 58 0 0 0 58 0 356 16 372 35 207 0 242 614 672 16:15 16:30 29 0 37 66 0 0 0 66 0 344 25 369 31 211 0 242 611 677 16:30 16:45 16 0 48 64 0 0 0 64 0 369 21 390 38 242 0 280 670 734 16:45 17:00 18 0 35 53 0 0 0 53 1 374 17 392 35 236 0 271 663 716 17:00 17:15 19 0 53 72 0 0 0 72 1 375 20 396 41 216 <th< th=""><th>15:30 15:45</th><td>17</td><td>0</td><td>50</td><td>67</td><td>0</td><td>0</td><td>0</td><td>0</td><td>67</td><td>0</td><td>294</td><td>20</td><td>314</td><td>34</td><td>191</td><td>0</td><td>225</td><td>539</td><td>606</td></th<>	15:30 15:45	17	0	50	67	0	0	0	0	67	0	294	20	314	34	191	0	225	539	606
16:15 16:30 29 0 37 66 0 0 0 0 66 0 344 25 369 31 211 0 242 611 677 16:30 16:45 16 0 48 64 0 0 0 0 64 0 369 21 390 38 242 0 280 670 734 16:45 17:00 18 0 35 53 0 0 0 53 1 374 17 392 35 236 0 271 663 716 17:00 17:15 19 0 53 72 0 0 0 72 1 375 20 396 41 216 0 257 653 725 17:15 17:30 15 0 52 67 0 0 0 67 0 323 20 343 29 215 0 244 587 654 17:30 17:45 18	15:45 16:00	20	0	44	64	0	0	0	0	64	0	349	20	369	35	234	0	269	638	702
16:30 16:45 16 0 48 64 0 0 0 64 0 369 21 390 38 242 0 280 670 734 16:45 17:00 18 0 35 53 0 0 0 53 1 374 17 392 35 236 0 271 663 716 17:00 17:15 19 0 53 72 0 0 0 72 1 375 20 396 41 216 0 257 653 725 17:15 17:30 15 0 52 67 0 0 0 67 0 323 20 343 29 215 0 244 587 654 17:30 17:45 18 0 35 53 0 0 0 53 0 318 18 336 39 213 <th< th=""><th>16:00 16:15</th><td>12</td><td>0</td><td>46</td><td>58</td><td>0</td><td>0</td><td>0</td><td>0</td><td>58</td><td>0</td><td>356</td><td>16</td><td>372</td><td>35</td><td>207</td><td>0</td><td>242</td><td>614</td><td>672</td></th<>	16:00 16:15	12	0	46	58	0	0	0	0	58	0	356	16	372	35	207	0	242	614	672
16:45 17:00 18 0 35 53 0 0 0 0 53 1 374 17 392 35 236 0 271 663 716 17:00 17:15 19 0 53 72 0 0 0 0 72 1 375 20 396 41 216 0 257 653 725 17:15 17:30 15 0 52 67 0 0 0 67 0 323 20 343 29 215 0 244 587 654 17:30 17:45 18 0 35 53 0 0 0 53 0 318 18 336 39 213 0 252 588 641 17:45 18:00 22 0 32 54 0 0 0 54 0 341 21 362 33 201 0 234 596 650	16:15 16:30	29	0	37	66	0	0	0	0	66	0	344	25	369	31	211	0	242	611	677
17:00 17:15 19 0 53 72 0 0 0 0 72 1 375 20 396 41 216 0 257 653 725 17:15 17:30 15 0 52 67 0 0 0 67 0 323 20 343 29 215 0 244 587 654 17:30 17:45 18 0 35 53 0 0 0 53 0 318 18 336 39 213 0 252 588 641 17:45 18:00 22 0 32 54 0 0 0 54 0 341 21 362 33 201 0 234 596 650	16:30 16:45	16	0	48	64	0	0	0	0	64	0	369	21	390	38	242	0	280	670	734
17:15 17:30 15 0 52 67 0 0 0 67 0 323 20 343 29 215 0 244 587 654 17:30 17:45 18 0 35 53 0 0 0 53 0 318 18 336 39 213 0 252 588 641 17:45 18:00 22 0 32 54 0 0 0 54 0 341 21 362 33 201 0 234 596 650	16:45 17:00	18	0	35	53	0	0	0	0	53	1	374	17	392	35	236	0	271	663	716
17:30 17:45 18 0 35 53 0 0 0 0 53 0 318 18 336 39 213 0 252 588 641 17:45 18:00 22 0 32 54 0 0 0 54 0 341 21 362 33 201 0 234 596 650	17:00 17:15	19	0	53	72	0	0	0	0	72	1	375	20	396	41	216	0	257	653	725
17:45 18:00 22 0 32 54 0 0 0 0 54 0 341 21 362 33 201 0 234 596 650	17:15 17:30	15	0	52	67	0	0	0	0	67	0	323	20	343	29	215	0	244	587	654
	17:30 17:45	18	0	35	53	0	0	0	0	53	0	318	18	336	39	213	0	252	588	641
Total: 427 0 1088 1515 0 0 0 0 1515 9 7271 490 7770 997 7409 0 8406 1515 17,691	17:45 18:00	22	0	32	54	0	0	0	0	54	0	341	21	362	33	201	0	234	596	650
	Total:	427	0	1088	1515	0	0	0	0	1515	9	7271	490	7770	997	7409	0	8406	1515	17,691

Note: U-Turns are included in Totals.

June 30, 2021 Page 4 of 8



Turning Movement Count - Study Results

INNES RD @ 260 E OF BELCOURT BLVD/WALMART SC

Survey Date: Thursday, February 20, 2020 WO No: 39520

Start Time: 07:00 Device: Miovision

Full Study Cyclist Volume

260 E OF BELCOURT BLVD/WALMART SC INNES RD

Time Period	Northbound	Southbound	Street Total	Eastbound	Westbound	Street Total	 Grand Total
07:00 07:15	0	0	0	0	0	0	0
07:15 07:30	0	0	0	0	0	0	0
07:30 07:45	0	0	0	0	0	0	0
07:45 08:00	0	0	0	0	0	0	0
08:00 08:15	0	0	0	1	0	1	1
08:15 08:30	0	0	0	0	0	0	0
08:30 08:45	0	0	0	0	0	0	0
08:45 09:00	0	0	0	0	0	0	0
09:00 09:15	0	0	0	0	0	0	0
09:15 09:30	0	0	0	0	0	0	0
09:30 09:45	0	0	0	0	0	0	0
09:45 10:00	0	0	0	0	0	0	0
11:30 11:45	0	0	0	0	1	1	1
11:45 12:00	0	0	0	0	0	0	0
12:00 12:15	0	0	0	0	0	0	0
12:15 12:30	0	0	0	0	0	0	0
12:30 12:45	0	0	0	0	0	0	0
12:45 13:00	0	0	0	0	0	0	0
13:00 13:15	0	0	0	0	0	0	0
13:15 13:30	0	0	0	0	0	0	0
15:00 15:15	0	0	0	0	0	0	0
15:15 15:30	0	0	0	0	0	0	0
15:30 15:45	0	0	0	0	0	0	0
15:45 16:00	0	0	0	0	0	0	0
16:00 16:15	0	0	0	0	0	0	0
16:15 16:30	0	0	0	0	0	0	0
16:30 16:45	0	0	0	0	0	0	0
16:45 17:00	0	0	0	0	0	0	0
17:00 17:15	0	0	0	0	0	0	0
17:15 17:30	0	0	0	0	0	0	0
17:30 17:45	0	0	0	0	0	0	0
17:45 18:00	0	0	0	0	0	0	0
Total	0	0	0	1	1	2	2

June 30, 2021 Page 5 of 8



Turning Movement Count - Study Results

INNES RD @ 260 E OF BELCOURT BLVD/WALMART SC

Survey Date: Thursday, February 20, 2020 WO No: 39520

Start Time: 07:00 Device: Miovision

Full Study Pedestrian Volume

260 E OF BELCOURT BLVD/WALMART SC

INNES RD

Time Period	NB Approach (E or W Crossing)	SB Approach (E or W Crossing)	Total	EB Approach (N or S Crossing)	WB Approach (N or S Crossing)	Total	Grand Total
07:00 07:15	0	0	0	0	0	0	0
07:15 07:30	1	0	1	3	0	3	4
07:30 07:45	0	0	0	1	1	2	2
07:45 08:00	0	0	0	0	2	2	2
08:00 08:15	0	0	0	2	1	3	3
08:15 08:30	0	0	0	0	0	0	0
08:30 08:45	0	0	0	0	0	0	0
08:45 09:00	0	0	0	1	0	1	1
09:00 09:15	0	0	0	0	1	1	1
09:15 09:30	0	0	0	0	0	0	0
09:30 09:45	0	0	0	0	1	1	1
09:45 10:00	0	0	0	0	0	0	0
11:30 11:45	1	0	1	0	2	2	3
11:45 12:00	0	0	0	0	0	0	0
12:00 12:15	1	0	1	0	1	1	2
12:15 12:30	1	0	1	2	0	2	3
12:30 12:45	0	0	0	0	2	2	2
12:45 13:00	0	0	0	0	0	0	0
13:00 13:15	0	0	0	0	1	1	1
13:15 13:30	1	0	1	0	0	0	1
15:00 15:15	2	0	2	3	0	3	5
15:15 15:30	1	0	1	0	1	1	2
15:30 15:45	1	0	1	0	0	0	1
15:45 16:00	0	0	0	0	3	3	3
16:00 16:15	0	0	0	0	7	7	7
16:15 16:30	1	0	1	1	5	6	7
16:30 16:45	2	0	2	1	1	2	4
16:45 17:00	0	0	0	0	1	1	1
17:00 17:15	1	0	1	0	2	2	3
17:15 17:30	2	0	2	1	1	2	4
17:30 17:45	1	0	1	0	0	0	1
17:45 18:00	0	0	0	0	3	3	3
Total	16	0	16	15	36	51	67

5474762 - FEB 20, 2020 - 8HRS - LORETTA

June 30, 2021 Page 6 of 8



Turning Movement Count - Study Results

INNES RD @ 260 E OF BELCOURT BLVD/WALMART SC

Survey Date: Thursday, February 20, 2020 **WO No:** 39520

Start Time: 07:00 Device: Miovision

Full Study Heavy Vehicles

260 E OF BELCOURT BLVD/WALMART SC **INNES RD**

	No	orthbou	und		Sc	uthbou	nd			Е	astbour	nd		We	estbour	nd			
Time Period	LT	ST	RT	N TOT	LT	ST	RT	S TOT	STR TOT	LT	ST	RT	E TOT	LT	ST	RT	W TOT	STR TOT	Grand Total
07:00 07:15	0	0	0	0	0	0	0	0	0	0	18	0	18	0	6	0	6	24	24
07:15 07:30	0	0	0	0	0	0	0	0	0	0	19	0	19	0	5	0	5	24	24
07:30 07:45	0	0	0	0	0	0	0	0	0	0	16	0	16	0	14	0	14	30	30
07:45 08:00	0	0	1	1	0	0	0	0	1	0	6	0	6	0	18	0	18	24	25
08:00 08:15	0	0	1	1	0	0	0	0	1	0	12	0	12	0	12	0	12	24	25
08:15 08:30	0	0	0	0	0	0	0	0	0	0	18	2	20	0	13	0	13	33	33
08:30 08:45	0	0	0	0	0	0	0	0	0	0	12	0	12	1	20	0	21	33	33
08:45 09:00	1	0	0	1	0	0	0	0	1	0	14	0	14	0	15	0	15	29	30
09:00 09:15	1	0	0	1	0	0	0	0	1	0	14	0	14	0	18	0	18	32	33
09:15 09:30	0	0	0	0	0	0	0	0	0	0	16	0	16	0	16	0	16	32	32
09:30 09:45	1	0	0	1	0	0	0	0	1	0	19	3	22	1	9	0	10	32	33
09:45 10:00	2	0	1	3	0	0	0	0	3	0	11	1	12	1	20	0	21	33	36
11:30 11:45	0	0	0	0	0	0	0	0	0	0	11	2	13	0	14	0	14	27	27
11:45 12:00	1	0	0	1	0	0	0	0	1	0	10	0	10	1	15	0	16	26	27
12:00 12:15	2	0	0	2	0	0	0	0	2	0	13	0	13	0	10	0	10	23	25
12:15 12:30	2	0	0	2	0	0	0	0	2	0	7	0	7	0	10	0	10	17	19
12:30 12:45	0	0	0	0	0	0	0	0	0	0	11	0	11	1	11	0	12	23	23
12:45 13:00	0	0	0	0	0	0	0	0	0	0	13	0	13	2	14	0	16	29	29
13:00 13:15	1	0	0	1	0	0	0	0	1	0	18	0	18	0	15	0	15	33	34
13:15 13:30	0	0	0	0	0	0	0	0	0	0	19	0	19	1	15	0	16	35	35
15:00 15:15	0	0	0	0	0	0	0	0	0	0	20	0	20	0	17	0	17	37	37
15:15 15:30	1	0	0	1	0	0	0	0	1	0	14	1	15	1	16	0	17	32	33
15:30 15:45	0	0	0	0	0	0	0	0	0	0	7	0	7	0	14	0	14	21	21
15:45 16:00	0	0	0	0	0	0	0	0	0	0	13	0	13	0	21	0	21	34	34
16:00 16:15	0	0	0	0	0	0	0	0	0	0	15	0	15	0	16	0	16	31	31
16:15 16:30	1	0	1	2	0	0	0	0	2	0	10	0	10	0	10	0	10	20	22
16:30 16:45	0	0	0	0	0	0	0	0	0	0	10	0	10	0	13	0	13	23	23
16:45 17:00	0	0	0	0	0	0	0	0	0	0	10	0	10	0	6	0	6	16	16
17:00 17:15	1	0	0	1	0	0	0	0	1	0	9	0	9	0	10	0	10	19	20
17:15 17:30	0	0	0	0	0	0	0	0	0	0	5	0	5	0	4	0	4	9	9
17:30 17:45	0	0	0	0	0	0	0	0	0	0	4	0	4	0	5	0	5	9	9
17:45 18:00	0	0	0	0	0	0	0	0	0	0	4	0	4	0	8	0	8	12	12
Total: None	14	0	4	18	0	0	0	0	18	0	398	9	407	9	410	0	419	826	844

June 30, 2021 Page 7 of 8



Turning Movement Count - Study Results

INNES RD @ 260 E OF BELCOURT BLVD/WALMART SC

Survey Date: Thursday, February 20, 2020 **WO No:** 39520

Start Time: 07:00 Device: Miovision

Full Study 15 Minute U-Turn Total


		260 E OF BEL		IN	INES RD	
Time I	Period	BLVD/WALM/ Northbound U-Turn Total	Southbound U-Turn Total	Eastbound U-Turn Total	Westbound U-Turn Total	Total
07:00	07:15	0	0	3	0	3
07:15	07:30	0	0	0	0	0
07:30	07:45	0	0	0	0	0
07:45	08:00	0	0	0	0	0
08:00	08:15	0	0	1	0	1
08:15	08:30	0	0	0	3	3
08:30	08:45	0	0	0	0	0
08:45	09:00	0	0	1	0	1
09:00	09:15	0	0	0	0	0
09:15	09:30	0	0	0	0	0
09:30	09:45	0	0	0	0	0
09:45	10:00	0	0	0	0	0
11:30	11:45	0	0	0	2	2
11:45	12:00	0	0	0	0	0
12:00	12:15	0	0	0	0	0
12:15	12:30	0	0	0	1	1
12:30	12:45	0	0	1	0	1
12:45	13:00	0	0	0	0	0
13:00	13:15	0	0	1	1	2
13:15	13:30	1	0	0	1	2
15:00	15:15	0	0	0	2	2
15:15	15:30	0	0	0	0	0
15:30	15:45	0	0	0	1	1
15:45	16:00	0	0	0	1	1
16:00	16:15	0	0	0	0	0
16:15	16:30	0	0	0	3	3
16:30	16:45	0	0	0	3	3
16:45	17:00	0	0	1	1	2
17:00	17:15	0	0	1	4	5
17:15	17:30	0	0	0	2	2
17:30	17:45	0	0	0	1	1
17:45	18:00	1	0	0	0	1
To	otal	2	0	9	26	37

June 30, 2021 Page 8 of 8



Turning Movement Count - Study Results

INNES RD @ JEANNE D'ARC BLVD/MER BLEUE RD

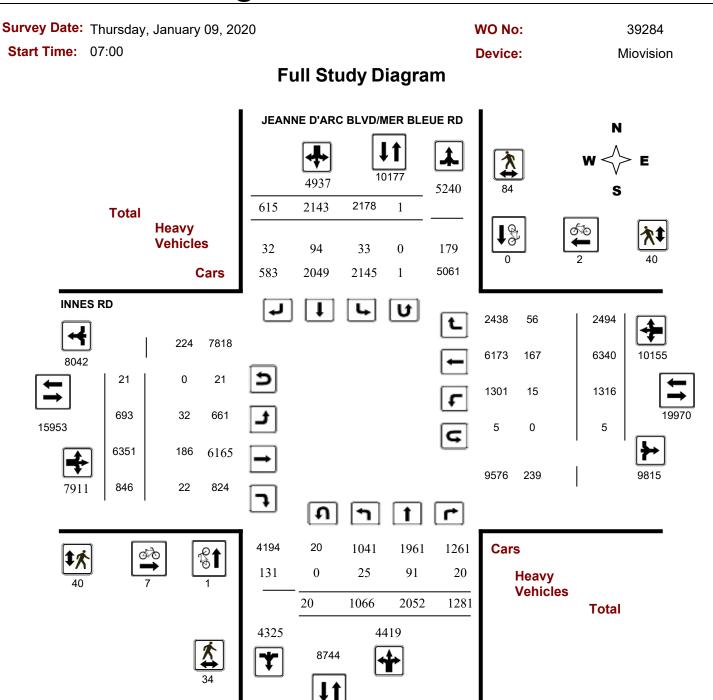

5469225 - THU JAN 09, 2020 - 8HRS - LORETTA

August 10, 2020 Page 1 of 8




Turning Movement Count - Study Results

INNES RD @ JEANNE D'ARC BLVD/MER BLEUE RD

Survey Date: Thursday, January 09, 2020 WO No: 39284

Start Time: 07:00 Device: Miovision

Full Study Peak Hour Diagram

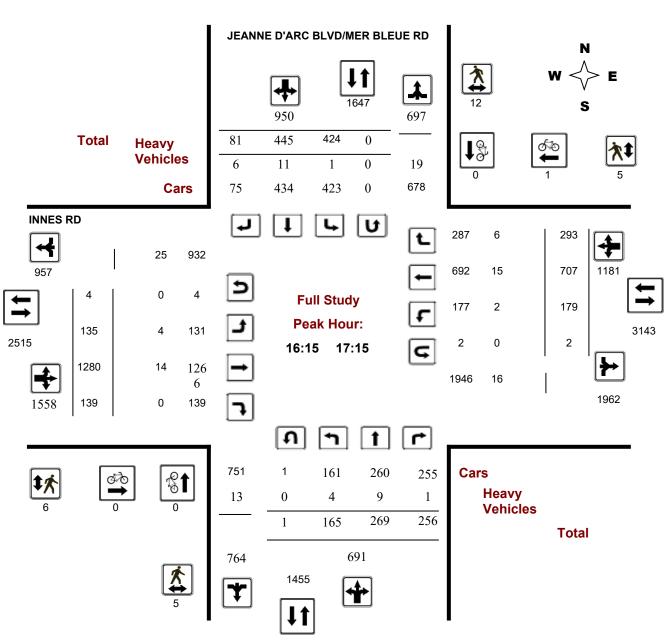

5469225 - THU JAN 09, 2020 - 8HRS - LORETTA


August 10, 2020 Page 2 of 8



Turning Movement Count - Peak Hour Diagram

INNES RD @ JEANNE D'ARC BLVD/MER BLEUE RD

Survey Date: Thursday, January 09, 2020 WO No: 39284
Start Time: 07:00 Device: Miovision

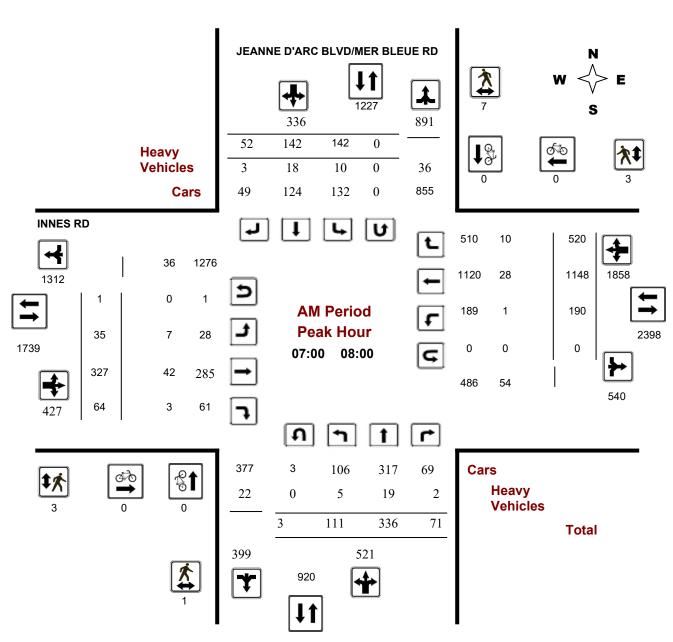

Comments 5469225 - THU JAN 09, 2020 - 8HRS - LORETTA


2020-Aug-10 Page 1 of 3



Turning Movement Count - Peak Hour Diagram

INNES RD @ JEANNE D'ARC BLVD/MER BLEUE RD

Survey Date: Thursday, January 09, 2020 WO No: 39284
Start Time: 07:00 Device: Miovision

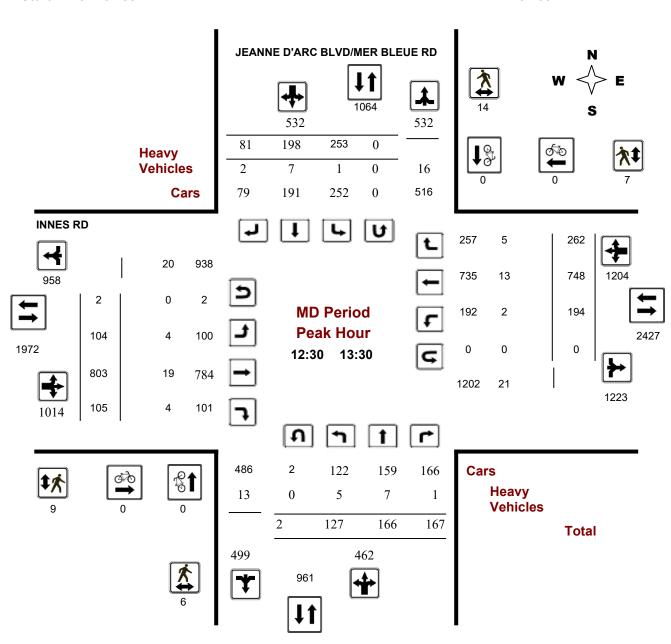

Comments 5469225 - THU JAN 09, 2020 - 8HRS - LORETTA


2020-Aug-10 Page 2 of 3



Turning Movement Count - Peak Hour Diagram

INNES RD @ JEANNE D'ARC BLVD/MER BLEUE RD

Survey Date:Thursday, January 09, 2020WO No:39284Start Time:07:00Device:Miovision

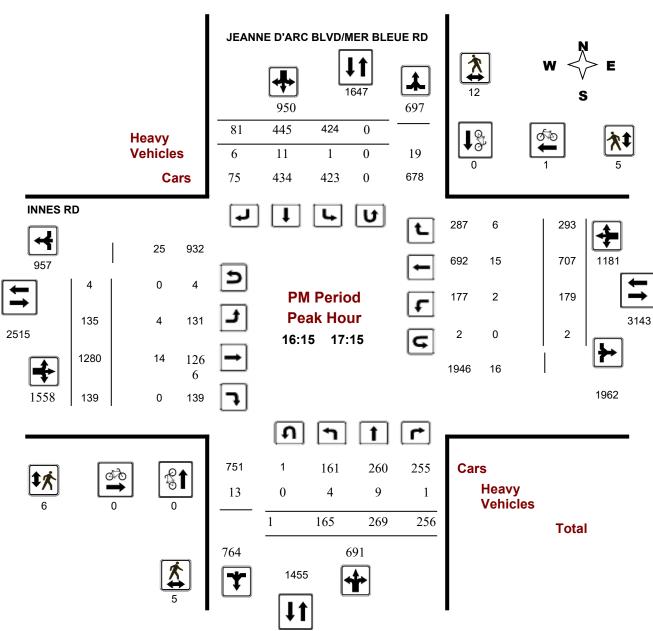

Comments 5469225 - THU JAN 09, 2020 - 8HRS - LORETTA

2020-Aug-10 Page 3 of 3



Turning Movement Count - Study Results

INNES RD @ JEANNE D'ARC BLVD/MER BLEUE RD

Survey Date: Thursday, January 09, 2020 WO No: 39284

Start Time: 07:00 Device: Miovision

Full Study Summary (8 HR Standard)

Survey Date: Thursday, January 09, 2020 Total Observed U-Turns AADT Factor

Northbound: 20 Southbound: 1 1.00

Eastbound: 21 Westbound: 5

	JEAI	NNE D	'ARC	BLVD	MER	BLEUE	RD					II	NNES	RD					
	No	rthbou	nd		So	uthbou	ınd			Е	astbou	ınd		V	Vestbo	und			
Period	LT	ST	RT	NB TOT	LT	ST	RT	SB TOT	STR TOT	LT	ST	RT	EB TOT	LT	ST	RT	WB TOT	STR TOT	Grand Total
07:00 08:00	111	336	71	518	142	142	52	336	854	35	327	64	426	190	1148	520	1858	2284	3138
08:00 09:00	121	361	63	545	173	168	57	398	943	45	355	64	464	117	911	388	1416	1880	2823
09:00 10:00	94	230	110	434	153	147	63	363	797	53	459	80	592	125	657	236	1018	1610	2407
11:30 12:30	127	171	182	480	244	226	92	562	1042	94	791	109	994	164	737	243	1144	2138	3180
12:30 13:30	127	166	167	460	253	198	81	532	992	104	803	105	1012	194	748	262	1204	2216	3208
15:00 16:00	152	270	231	653	412	398	92	902	1555	107	1156	129	1392	175	730	278	1183	2575	4130
16:00 17:00	163	259	245	667	427	435	94	956	1623	135	1255	137	1527	168	713	308	1189	2716	4339
17:00 18:00	171	259	212	642	374	429	84	887	1529	120	1205	158	1483	183	696	259	1138	2621	4150
Sub Total	1066	2052	1281	4399	2178	2143	615	4936	9335	693	6351	846	7890	1316	6340	2494	10150	18040	27375
U Turns				20				1	21				21				5	26	47
Total	1066	2052	1281	4419	2178	2143	615	4937	9356	693	6351	846	7911	1316	6340	2494	10155	18066	27422
EQ 12Hr	1482	2852	1781	6142	3027	2979	855	6862	13005	963	8828	1176	10996	1829	8813	3467	14115	25112	38117
Note: These	values a	re calcu	ılated by	y multipl	ying the	totals b	y the a	opropriat	te expans	ion fac	tor.			1.39					
AVG 12Hr	1396	2688	1678	5789	2853	2807	806	6467	13005	908	8320	1108	10363	1724	8305	3267	13303	25112	38117
Note: These	volumes	are cal	culated	by multi	plying t	he Equiv	/alent 1	2 hr. tota	als by the	AADT	factor.			1					
AVG 24Hr	1829	3521	2198	7583	3738	3678	1055	8472	16055	1189	10899	1452	13576	2258	10880	4280	17427	31003	47058
Note: These	volumes	are cal	culated	by multi	plying t	he Avera	age Dai	ly 12 hr.	totals by	12 to 2	4 expan	sion fac	ctor.	1.31					

Note: U-Turns provided for approach totals. Refer to 'U-Turn' Report for specific breakdown.

August 10, 2020 Page 3 of 8



Turning Movement Count - Study Results

INNES RD @ JEANNE D'ARC BLVD/MER BLEUE RD

Survey Date: Thursday, January 09, 2020 WO No: 39284

Start Time: 07:00 Device: Miovision

Full Study 15 Minute Increments

JEANNE D'ARC BLVD/MER BLEUE RD **INNES RD**

		N	orthbou	und	עט	Sc	uthbou	nd	Eastbound							estbour	nd			
Time I	Period	LT	ST	RT	N TOT	LT	ST	RT	S TOT	STR TOT	LT	ST	RT	E TOT	LT	ST	RT	W TOT	STR TOT	Grand Total
07:00	07:15	29	84	6	119	21	29	14	64	5	14	53	16	83	34	295	129	458	5	724
07:15	07:30	24	82	16	123	28	37	16	81	14	8	91	15	114	37	348	155	540	14	858
07:30	07:45	30	92	20	142	39	48	11	98	20	4	94	21	120	65	245	123	433	20	793
07:45	08:00	28	78	29	137	54	28	11	93	18	9	89	12	110	54	260	113	427	18	767
08:00	08:15	20	90	17	128	33	42	12	87	12	8	71	21	100	32	218	109	360	12	675
08:15	08:30	29	79	13	121	49	44	12	105	14	12	90	18	120	32	265	105	402	14	748
08:30	08:45	36	104	14	154	40	50	14	104	9	9	80	13	102	24	219	98	341	9	701
08:45	09:00	36	88	19	143	51	32	19	102	11	16	114	12	142	29	209	76	314	11	701
09:00	09:15	27	61	29	121	37	48	15	100	16	13	92	13	118	28	154	60	242	16	581
09:15	09:30	24	69	33	126	50	33	19	102	10	14	122	20	156	31	171	67	269	10	653
09:30	09:45	26	40	26	92	31	34	16	81	11	11	115	24	150	31	178	63	272	11	595
09:45	10:00	17	60	22	100	35	32	13	80	6	15	130	23	168	35	154	46	235	6	583
11:30	11:45	26	43	51	123	60	62	22	144	9	19	194	32	247	42	189	55	288	9	802
11:45	12:00	38	52	27	117	61	56	26	143	14	28	171	20	219	39	198	58	295	14	774
12:00	12:15	34	42	50	127	65	55	22	142	6	26	194	33	254	34	171	63	268	6	791
12:15	12:30	29	34	54	117	58	53	22	133	7	21	232	24	277	49	179	67	295	7	822
12:30	12:45	27	51	39	117	73	43	23	139	5	28	197	25	251	48	177	62	287	5	794
12:45	13:00	34	45	39	118	61	57	22	140	5	32	203	24	259	38	172	65	275	5	792
13:00	13:15	33	32	45	112	60	49	16	125	8	18	203	27	249	58	188	62	308	8	794
13:15	13:30	33	38	44	115	59	49	20	128	5	26	200	29	255	50	211	73	334	5	832
15:00	15:15	30	75	59	164	99	89	22	210	8	23	268	40	331	46	164	67	277	8	982
15:15	15:30	41	69	58	168	113	103	31	247	13	26	303	30	360	41	196	69	306	13	1081
15:30	15:45	42	54	53	149	95	89	17	201	6	32	297	36	366	38	176	74	288	6	1004
15:45	16:00	39	72	61	173	105	117	22	244	10	26	288	23	338	50	194	68	312	10	1067
16:00	16:15	50	52	57	159	106	94	36	236	8	30	276	40	350	37	186	77	300	8	1045
16:15	16:30	38	59	56	153	110	120	15	245	12	36	337	32	406	49	173	71	294	12	1098
16:30	16:45	35	74	62	171	95	107	19	221	9	30	312	28	370	38	187	84	309	9	1071
16:45	17:00	40	74	70	184	116	114	24	254	7	39	330	37	407	44	167	76	288	7	1133
17:00	17:15	52	62	68	183	103	104	23	230	4	30	301	42	375	48	180	62	290	4	1078
17:15	17:30	38	60	49	147	84	123	18	225	4	35	313	37	386	45	180	80	305	4	1063
17:30	17:45	40	63	44	148	103	115	20	238	4	27	321	43	392	41	171	54	266	4	1044
17:45	18:00	41	74	51	168	84	87	23	195	5	28	270	36	336	49	165	63	277	5	976
Total:		1066	2052	1281	4419	2178	2143	615	4937	295	693	6351	846	7911	1316	6340	2494	10155	295	27,422

Note: U-Turns are included in Totals.

August 10, 2020 Page 4 of 8



Turning Movement Count - Study Results

INNES RD @ JEANNE D'ARC BLVD/MER BLEUE RD

Survey Date: Thursday, January 09, 2020 WO No: 39284

Start Time: 07:00 Device: Miovision

Full Study Cyclist Volume

JEANNE D'ARC BLVD/MER BLEUE RD INNES RD

_		AITO DE VOMILI			INITEORE		
Time Period	Northbound	Southbound	Street Total	Eastbound	Westbound	Street Total	Grand Total
07:00 07:15	0	0	0	0	0	0	0
07:15 07:30	0	0	0	0	0	0	0
07:30 07:45	0	0	0	0	0	0	0
07:45 08:00	0	0	0	0	0	0	0
08:00 08:15	0	0	0	1	0	1	1
08:15 08:30	0	0	0	0	1	1	1
08:30 08:45	0	0	0	0	0	0	0
08:45 09:00	0	0	0	0	0	0	0
09:00 09:15	0	0	0	2	0	2	2
09:15 09:30	1	0	1	1	0	1	2
09:30 09:45	0	0	0	1	0	1	1
09:45 10:00	0	0	0	2	0	2	2
11:30 11:45	0	0	0	0	0	0	0
11:45 12:00	0	0	0	0	0	0	0
12:00 12:15	0	0	0	0	0	0	0
12:15 12:30	0	0	0	0	0	0	0
12:30 12:45	0	0	0	0	0	0	0
12:45 13:00	0	0	0	0	0	0	0
13:00 13:15	0	0	0	0	0	0	0
13:15 13:30	0	0	0	0	0	0	0
15:00 15:15	0	0	0	0	0	0	0
15:15 15:30	0	0	0	0	0	0	0
15:30 15:45	0	0	0	0	0	0	0
15:45 16:00	0	0	0	0	0	0	0
16:00 16:15	0	0	0	0	0	0	0
16:15 16:30	0	0	0	0	1	1	1
16:30 16:45	0	0	0	0	0	0	0
16:45 17:00	0	0	0	0	0	0	0
17:00 17:15	0	0	0	0	0	0	0
17:15 17:30	0	0	0	0	0	0	0
17:30 17:45	0	0	0	0	0	0	0
17:45 18:00	0	0	0	0	0	0	0
Total	1	0	1	7	2	9	10

August 10, 2020 Page 5 of 8



Turning Movement Count - Study Results

INNES RD @ JEANNE D'ARC BLVD/MER BLEUE RD

Survey Date: Thursday, January 09, 2020 WO No: 39284

Start Time: 07:00 Device: Miovision

Full Study Pedestrian Volume

JEANNE D'ARC BLVD/MER BLEUE

INNES RD

RD

Time Period	NB Approach (E or W Crossing)	SB Approach (E or W Crossing)	Total	EB Approach (N or S Crossing)	WB Approach (N or S Crossing)	Total	Grand Total
07:00 07:15	0	0	0	1	0	1	1
07:15 07:30	0	4	4	0	1	1	5
07:30 07:45	0	1	1	0	1	1	2
07:45 08:00	1	2	3	2	1	3	6
08:00 08:15	0	0	0	0	0	0	0
08:15 08:30	0	1	1	1	0	1	2
08:30 08:45	1	8	9	1	7	8	17
08:45 09:00	0	0	0	1	0	1	1
09:00 09:15	1	3	4	2	0	2	6
09:15 09:30	0	1	1	0	0	0	1
09:30 09:45	1	2	3	1	0	1	4
09:45 10:00	0	3	3	3	1	4	7
11:30 11:45	1	4	5	1	2	3	8
11:45 12:00	1	0	1	1	2	3	4
12:00 12:15	2	1	3	1	0	1	4
12:15 12:30	1	1	2	1	0	1	3
12:30 12:45	1	2	3	1	1	2	5
12:45 13:00	1	2	3	2	2	4	7
13:00 13:15	3	8	11	4	3	7	18
13:15 13:30	1	2	3	2	1	3	6
15:00 15:15	2	1	3	0	4	4	7
15:15 15:30	1	4	5	0	1	1	6
15:30 15:45	1	3	4	2	2	4	8
15:45 16:00	2	12	14	1	0	1	15
16:00 16:15	2	1	3	0	3	3	6
16:15 16:30	2	6	8	4	3	7	15
16:30 16:45	2	3	5	0	1	1	6
16:45 17:00	1	2	3	0	1	1	4
17:00 17:15	0	1	1	2	0	2	3
17:15 17:30	2	3	5	3	2	5	10
17:30 17:45	3	2	5	3	1	4	9
17:45 18:00	1	1	2	0	0	0	2
Total	34	84	118	40	40	80	198

5469225 - THU JAN 09, 2020 - 8HRS - LORETTA

August 10, 2020 Page 6 of 8



Turning Movement Count - Study Results

INNES RD @ JEANNE D'ARC BLVD/MER BLEUE RD

Survey Date: Thursday, January 09, 2020 WO No: 39284

Start Time: 07:00 Device: Miovision

Full Study Heavy Vehicles

JEANNE D'ARC BLVD/MER BLEUE RD **INNES RD**

	No	orthbou	und		Sc	uthbou	ınd			E	astbour	nd		We	estbour	nd			
Time Period	LT	ST	RT	N TOT	LT	ST	RT	S TOT	STR TOT	LT	ST	RT	E TOT	LT	ST	RT	W TOT	STR TOT	Grand Total
07:00 07:15	0	3	0	3	0	2	0	2	5	2	8	1	11	0	7	6	13	24	29
07:15 07:30	1	4	0	5	2	5	2	9	14	2	16	1	19	0	6	0	6	25	39
07:30 07:45	2	7	2	11	2	7	0	9	20	1	12	1	14	1	5	1	7	21	41
07:45 08:00	2	5	0	7	6	4	1	11	18	2	6	0	8	0	10	3	13	21	39
08:00 08:15	1	5	2	8	1	3	0	4	12	1	7	0	8	0	9	2	11	19	31
08:15 08:30	0	6	0	6	1	4	3	8	14	1	7	1	9	2	11	1	14	23	37
08:30 08:45	0	3	0	3	2	3	1	6	9	1	12	0	13	0	9	4	13	26	35
08:45 09:00	1	3	0	4	1	5	1	7	11	1	7	0	8	0	10	1	11	19	30
09:00 09:15	0	7	0	7	3	3	3	9	16	0	8	1	9	0	6	5	11	20	36
09:15 09:30	0	3	0	3	1	3	3	7	10	1	12	0	13	0	4	1	5	18	28
09:30 09:45	1	3	2	6	3	2	0	5	11	0	7	2	9	0	2	4	6	15	26
09:45 10:00	0	2	1	3	1	0	2	3	6	3	3	2	8	2	4	0	6	14	20
11:30 11:45	0	1	1	2	2	5	0	7	9	0	5	2	7	0	4	0	4	11	20
11:45 12:00	2	7	2	11	1	1	1	3	14	1	3	0	4	1	8	0	9	13	27
12:00 12:15	0	1	0	1	2	3	0	5	6	0	4	0	4	0	4	3	7	11	17
12:15 12:30	0	0	2	2	2	2	1	5	7	1	7	3	11	2	4	0	6	17	24
12:30 12:45	1	3	0	4	0	1	0	1	5	0	3	2	5	0	3	1	4	9	14
12:45 13:00	1	0	0	1	1	2	1	4	5	1	4	0	5	1	3	2	6	11	16
13:00 13:15	2	3	0	5	0	3	0	3	8	1	7	0	8	0	4	2	6	14	22
13:15 13:30	1	1	1	3	0	1	1	2	5	2	5	2	9	1	3	0	4	13	18
15:00 15:15	0	1	3	4	0	4	0	4	8	0	2	1	3	2	5	3	10	13	21
15:15 15:30	1	5	2	8	0	3	2	5	13	1	4	1	6	0	6	2	8	14	27
15:30 15:45	1	2	0	3	0	2	1	3	6	0	3	0	3	1	4	3	8	11	17
15:45 16:00	0	3	0	3	0	7	0	7	10	3	7	0	10	0	6	1	7	17	27
16:00 16:15	3	1	0	4	0	3	1	4	8	1	5	2	8	0	6	1	7	15	23
16:15 16:30	1	3	0	4	1	4	3	8	12	1	3	0	4	1	5	2	8	12	24
16:30 16:45	2	2	1	5	0	3	1	4	9	0	3	0	3	0	4	2	6	9	18
16:45 17:00	0	3	0	3	0	2	2	4	7	2	2	0	4	1	3	0	4	8	15
17:00 17:15	1	1	0	2	0	2	0	2	4	1	6	0	7	0	3	2	5	12	16
17:15 17:30	0	0	0	0	1	2	1	4	4	1	1	0	2	0	4	1	5	7	11
17:30 17:45	1	2	0	3	0	1	0	1	4	0	5	0	5	0	2	0	2	7	11
17:45 18:00	0	1	1	2	0	2	1	3	5	1	2	0	3	0	3	3	6	9	14
Total: None	25	91	20	136	33	94	32	159	295	32	186	22	240	15	167	56	238	478	773

August 10, 2020 Page 7 of 8



Turning Movement Count - Study Results

INNES RD @ JEANNE D'ARC BLVD/MER BLEUE RD

Survey Date: Thursday, January 09, 2020 WO No: 39284

Start Time: 07:00 Device: Miovision

Full Study 15 Minute U-Turn Total

JEANNE D'ARC BLVD/MER BLEUE INNES RD

	JEA	NNE D'ARC BLV	D/MER BLEUE	II	NNES RD	
Time	Period	RD Northbound U-Turn Total	Southbound U-Turn Total	Eastbound U-Turn Total	Westbound U-Turn Total	Total
07:00	07:15	0	0	0	0	0
07:15	07:30	1	0	0	0	1
07:30	07:45	0	0	1	0	1
07:45	08:00	2	0	0	0	2
08:00	08:15	1	0	0	1	2
08:15	08:30	0	0	0	0	0
08:30	08:45	0	0	0	0	0
08:45	09:00	0	0	0	0	0
09:00	09:15	4	0	0	0	4
09:15	09:30	0	0	0	0	0
09:30	09:45	0	0	0	0	0
09:45	10:00	1	0	0	0	1
11:30	11:45	3	0	2	2	7
11:45	12:00	0	0	0	0	0
12:00	12:15	1	0	1	0	2
12:15	12:30	0	0	0	0	0
12:30	12:45	0	0	1	0	1
12:45	13:00	0	0	0	0	0
13:00	13:15	2	0	1	0	3
13:15	13:30	0	0	0	0	0
15:00	15:15	0	0	0	0	0
15:15	15:30	0	0	1	0	1
15:30	15:45	0	0	1	0	1
15:45	16:00	1	0	1	0	2
16:00	16:15	0	0	4	0	4
16:15	16:30	0	0	1	1	2
16:30	16:45	0	0	0	0	0
16:45	17:00	0	0	1	1	2
17:00	17:15	1	0	2	0	3
17:15	17:30	0	0	1	0	1
17:30	17:45	1	0	1	0	2
17:45	18:00	2	1	2	0	5
Te	otal	20	1	21	5	47

August 10, 2020 Page 8 of 8



Collision Details Report - Public Version

From: January 1, 2015 **To:** December 31, 2019

Location: INNES RD @ 260 E OF BELCOURT BLVD/WALMART SC

Traffic Control: Traffic signal Total Collisions: 14

Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuve	er Vehicle type	First Event	No. Ped
2015-Sep-13, Sun,15:20	Clear	Rear end	P.D. only	Dry	West	Slowing or stoppin	g Pick-up truck	Other motor vehicle	0
					West	Slowing or stoppin	g Automobile, station wagon	Other motor vehicle	
2015-Nov-13, Fri,17:26	Rain	Rear end	P.D. only	Wet	East	Going ahead	Passenger van	Other motor vehicle	0
					East	Stopped	Automobile, station wagon	Other motor vehicle	
					East	Stopped	Pick-up truck	Other motor vehicle	
					East	Stopped	Pick-up truck	Other motor vehicle	
2015-Dec-11, Fri,18:00	Rain	Angle	P.D. only	Wet	North	Turning right	Automobile, station wagon	Other motor vehicle	0
					East	Going ahead	Automobile, station wagon	Other motor vehicle	
2015-Dec-18, Fri,12:10	Clear	Rear end	P.D. only	Dry	East	Going ahead	Automobile, station wagon	Other motor vehicle	0
					East	Stopped	Automobile, station wagon	Other motor vehicle	
					East	Stopped	Pick-up truck	Other motor vehicle	
2016-Jun-17, Fri,14:21	Clear	Rear end	P.D. only	Dry	East	Going ahead	Automobile, station wagon	Other motor vehicle	0
					East	Stopped	Automobile, station wagon	Other motor vehicle	
2016-Dec-23, Fri,12:23	Clear	Rear end	Non-fatal injury	Loose snow	East	Slowing or stoppin	g Automobile, station wagon	Other motor vehicle	0
					East	Stopped	Automobile, station wagon	Other motor vehicle	
					East	Stopped	Automobile, station wagon	Other motor vehicle	
2017-Mar-24, Fri,20:26	Snow	SMV other	P.D. only	Wet	East	Turning right	Truck and trailer	Pole (utility, power)	0
2017-May-01, Mon,12:10	Rain	Rear end	P.D. only	Wet	West	Going ahead	Pick-up truck	Other motor vehicle	0
					West	Stopped	Automobile, station wagon	Other motor vehicle	
2017-Jul-15, Sat,21:09	Clear	Turning movement	P.D. only	Dry	West	Turning left	Automobile, station wagon	Other motor vehicle	0
					East	Going ahead	Automobile, station wagon	Other motor vehicle	
2018-Mar-18, Sun,10:54	Clear	SMV other	Non-fatal injury	Dry	West	Turning left	Automobile, station wagon	Pedestrian	1

June 30, 2021 Page 1 of 16



Collision Details Report - Public Version

From: January 1, 2015 **To:** December 31, 2019

Location: INNES RD @ 260 E OF BELCOURT BLVD/WALMART SC

Traffic Control: Traffic signal Total Collisions: 14

Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuve	r Vehicle type	First Event	No. Ped
2018-Jul-08, Sun,12:10	Clear	Sideswipe	P.D. only	Dry	West	Changing lanes	Truck - closed	Other motor vehicle	0
					West	Going ahead	Automobile, station wagon	Other motor vehicle	
2018-Dec-12, Wed,16:50	Clear	Rear end	P.D. only	Dry	East	Unknown	Unknown	Other motor vehicle	0
					East	Stopped	Automobile, station wagon	Other motor vehicle	
2019-Feb-21, Thu,20:20	Snow	Rear end	P.D. only	Wet	East	Going ahead	Automobile, station wagon	Other motor vehicle	0
					East	Stopped	Automobile, station wagon	Other motor vehicle	
					East	Stopped	Pick-up truck	Other motor vehicle	
2019-May-28, Tue,15:00	Clear	Sideswipe	P.D. only	Dry	East	Changing lanes	Automobile, station wagon	Other motor vehicle	0
					East	Going ahead	Automobile, station wagon	Other motor vehicle	

Location: INNES RD @ JEANNE D'ARC BLVD/MER BLEUE RD

Traffic Control: Traffic signal Total Collisions: 110

Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuver	Vehicle type	First Event	No. Ped
2015-Jan-20, Tue,13:41	Clear	Rear end	P.D. only	Dry	North	Turning right	Unknown	Other motor vehicle	0
					North	Turning right	Automobile, station wagon	Other motor vehicle	
2015-Jan-31, Sat,18:30	Clear	Rear end	P.D. only	Dry	North	Turning right	Automobile, station wagon	Other motor vehicle	0
					North	Turning right	Automobile, station wagon	Other motor vehicle	
2015-Feb-02, Mon,09:54	Snow	SMV other	P.D. only	Loose snow	North	Slowing or stopping	Pick-up truck	Skidding/sliding	0
2015-Feb-02, Mon,11:05	Snow	SMV other	P.D. only	Loose snow	East	Slowing or stopping	Pick-up truck	Curb	0
2015-Mar-16, Mon,17:47	Clear	Rear end	P.D. only	Dry	North	Turning right	Automobile, station wagon	Other motor vehicle	0
					North	Turning right	Pick-up truck	Other motor vehicle	
2015-May-06, Wed,08:40	Clear	Rear end	Non-fatal injury	Dry	North	Unknown	Pick-up truck	Other motor vehicle	0
					North	Unknown	Pick-up truck	Other motor vehicle	

June 30, 2021 Page 2 of 16



Collision Details Report - Public Version

From: January 1, 2015 **To:** December 31, 2019

Location: INNES RD @ JEANNE D'ARC BLVD/MER BLEUE RD

Traffic Control: Traffic signal Total Collisions: 110

	•								
Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuve	r Vehicle type	First Event	No. Ped
2015-Jun-07, Sun,13:18	Clear	Rear end	Non-fatal injury	Dry	West	Going ahead	Automobile, station wagon	Other motor vehicle	0
					West	Stopped	Automobile, station wagon	Other motor vehicle	
2015-Jul-31, Fri,14:50	Clear	Rear end	P.D. only	Dry	East	Slowing or stoppin	g Automobile, station wagon	Other motor vehicle	0
					East	Stopped	Automobile, station wagon	Other motor vehicle	
					East	Stopped	Pick-up truck	Other motor vehicle	
2015-Aug-10, Mon,12:00	Clear	Rear end	Non-fatal injury	Dry	East	Going ahead	Automobile, station wagon	Other motor vehicle	0
					East	Stopped	Automobile, station wagon	Other motor vehicle	
2015-Aug-14, Fri,17:15	Clear	Rear end	P.D. only	Dry	West	Turning left	Pick-up truck	Other motor vehicle	0
					West	Turning left	Pick-up truck	Other motor vehicle	
2015-Aug-28, Fri,20:44	Clear	Rear end	P.D. only	Dry	West	Going ahead	Automobile, station wagon	Other motor vehicle	0
					West	Stopped	Pick-up truck	Other motor vehicle	
2015-Sep-02, Wed,13:49	Clear	Rear end	P.D. only	Dry	North	Going ahead	Automobile, station wagon	Other motor vehicle	0
					North	Slowing or stoppin	g Automobile, station wagon	Other motor vehicle	
2015-Sep-21, Mon,18:24	Clear	Angle	P.D. only	Dry	West	Going ahead	Automobile, station wagon	Other motor vehicle	0
					South	Going ahead	Pick-up truck	Other motor vehicle	
2015-Oct-02, Fri,10:17	Clear	Turning movement	Non-fatal injury	Dry	West	Turning left	Pick-up truck	Other motor vehicle	0
					East	Going ahead	Automobile, station wagon	Other motor vehicle	
2015-Nov-10, Tue,16:25	Clear	Rear end	P.D. only	Dry	East	Unknown	Unknown	Other motor vehicle	0
					East	Stopped	Automobile, station wagon	Other motor vehicle	
2015-Nov-12, Thu,15:22	Rain	Rear end	P.D. only	Wet	South	Slowing or stoppin	g Passenger van	Other motor vehicle	0
					South	Slowing or stoppin	g Automobile, station wagon	Other motor vehicle	
					South	Slowing or stoppin	g Automobile, station wagon	Other motor vehicle	

June 30, 2021 Page 3 of 16



Collision Details Report - Public Version

From: January 1, 2015 **To:** December 31, 2019

Location: INNES RD @ JEANNE D'ARC BLVD/MER BLEUE RD

Traffic Control: Traffic signal Total Collisions: 110

Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuve	r Vehicle type	First Event	No. Ped
2016-Jan-28, Thu,13:14	Clear	Angle	P.D. only	Wet	North	Going ahead	Automobile, station wagon	Other motor vehicle	0
					West	Going ahead	Automobile, station wagon	Other motor vehicle	
2016-Jan-29, Fri,07:20	Rain	Sideswipe	P.D. only	Wet	East	Changing lanes	Automobile, station wagon	Other motor vehicle	0
					East	Going ahead	Passenger van	Other motor vehicle	
2016-Feb-10, Wed,23:53	Drifting Snow	SMV other	P.D. only	Loose snow	West	Going ahead	Automobile, station wagon	Pole (sign, parking meter	0 (
2016-Feb-17, Wed,08:29	Clear	Turning movement	P.D. only	Wet	West	Going ahead	Automobile, station wagon	Other motor vehicle	0
					East	Turning left	Automobile, station wagon	Other motor vehicle	
2016-Mar-05, Sat,15:15	Clear	Rear end	P.D. only	Dry	South	Changing lanes	Passenger van	Other motor vehicle	0
					South	Slowing or stopping	g Pick-up truck	Other motor vehicle	
2016-Mar-21, Mon,09:16	Clear	Turning movement	P.D. only	Dry	East	Turning left	Pick-up truck	Other motor vehicle	0
					West	Going ahead	Automobile, station wagon	Other motor vehicle	
2016-May-22, Sun,17:20	Clear	Rear end	P.D. only	Dry	North	Turning right	Pick-up truck	Other motor vehicle	0
					North	Turning right	Automobile, station wagon	Other motor vehicle	
2016-May-31, Tue,18:38	Clear	Turning movement	Non-fatal injury	Dry	West	Turning left	Pick-up truck	Other motor vehicle	0
					East	Going ahead	Automobile, station wagon	Other motor vehicle	
					West	Stopped	Pick-up truck	Other motor vehicle	
2016-Jul-05, Tue,13:36	Clear	Rear end	P.D. only	Dry	West	Slowing or stopping	g Pick-up truck	Other motor vehicle	0
					West	Stopped	Automobile, station wagon	Other motor vehicle	
2016-Aug-03, Wed,21:20	Clear	Turning movement	Non-fatal injury	Dry	South	Turning left	Pick-up truck	Other motor vehicle	0
					North	Going ahead	Automobile, station wagon	Other motor vehicle	
2016-Aug-21, Sun,15:50	Clear	Rear end	P.D. only	Dry	West	Stopped	Automobile, station wagon	Other motor vehicle	0
					West	Going ahead	Pick-up truck	Other motor vehicle	

June 30, 2021 Page 4 of 16



Collision Details Report - Public Version

From: January 1, 2015 **To:** December 31, 2019

Location: INNES RD @ JEANNE D'ARC BLVD/MER BLEUE RD

Traffic Control: Traffic signal Total Collisions: 110

							. Otal Combionion	110	
Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuve	r Vehicle type	First Event	No. Ped
2016-Aug-22, Mon,20:31	Clear	Rear end	P.D. only	Dry	North	Turning right	Automobile, station wagon	Other motor vehicle	0
					North	Turning right	Automobile, station wagon	Other motor vehicle	
2016-Aug-28, Sun,12:20	Clear	Rear end	Non-fatal injury	Dry	North	Turning right	Automobile, station wagon	Other motor vehicle	0
					North	Turning right	Automobile, station wagon	Other motor vehicle	
2016-Aug-28, Sun,17:41	Clear	Rear end	P.D. only	Dry	North	Turning right	Automobile, station wagon	Other motor vehicle	0
					North	Turning right	Automobile, station wagon	Other motor vehicle	
2016-Aug-28, Sun,23:10	Clear	Turning movement	P.D. only	Dry	East	Turning left	Automobile, station wagon	Other motor vehicle	0
					West	Going ahead	Unknown	Other motor vehicle	
2016-Sep-09, Fri,11:37	Clear	Rear end	P.D. only	Dry	East	Slowing or stopping	g Automobile, station wagon	Other motor vehicle	0
					East	Stopped	Automobile, station wagon	Other motor vehicle	
2016-Sep-11, Sun,19:30	Clear	Turning movement	Non-fatal injury	Dry	South	Going ahead	Automobile, station wagon	Other motor vehicle	0
					North	Turning left	Automobile, station wagon	Other motor vehicle	
2016-Dec-15, Thu,12:06	Clear	Sideswipe	P.D. only	Dry	West	Changing lanes	Automobile, station wagon	Other motor vehicle	0
					West	Going ahead	Automobile, station wagon	Other motor vehicle	
					West	Stopped	Automobile, station wagon	Other motor vehicle	
2016-Dec-16, Fri,17:22	Clear	Rear end	P.D. only	Ice	East	Slowing or stopping	g Automobile, station wagon	Other motor vehicle	0
					East	Stopped	Automobile, station wagon	Other motor vehicle	
					East	Stopped	Automobile, station wagon	Other motor vehicle	
2017-Jan-02, Mon,14:41	Clear	Rear end	P.D. only	Wet	South	Turning right	Passenger van	Other motor vehicle	0
					South	Turning right	Passenger van	Other motor vehicle	
2017-Jan-06, Fri,20:35	Clear	Turning movement	P.D. only	Ice	West	Turning left	Automobile, station wagon	Other motor vehicle	0
					East	Going ahead	Pick-up truck	Other motor vehicle	
					North	Stopped	Pick-up truck	Other motor vehicle	

June 30, 2021 Page 5 of 16



Collision Details Report - Public Version

From: January 1, 2015 **To:** December 31, 2019

Location: INNES RD @ JEANNE D'ARC BLVD/MER BLEUE RD

Traffic Control: Traffic signal Total Collisions: 110

Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuve	r Vehicle type	First Event	No. Ped
2017-Jan-14, Sat,01:02	Clear	Angle	P.D. only	Dry	East	Turning right	Automobile, station wagon	Other motor vehicle	0
					North	Turning left	Automobile, station wagon	Other motor vehicle	
2017-Jan-24, Tue,16:27	Clear	Turning movement	Non-fatal injury	Wet	West	Turning left	Automobile, station wagon	Other motor vehicle	0
					East	Going ahead	Automobile, station wagon	Other motor vehicle	
2017-Jan-29, Sun,13:02	Snow	Rear end	P.D. only	Wet	West	Going ahead	Passenger van	Other motor vehicle	0
					West	Stopped	Automobile, station wagon	Other motor vehicle	
					West	Stopped	Pick-up truck	Other motor vehicle	
2017-Feb-01, Wed,14:30	Clear	Rear end	P.D. only	Wet	South	Going ahead	Pick-up truck	Other motor vehicle	0
					South	Stopped	Automobile, station wagon	Other motor vehicle	
2017-Feb-07, Tue,18:09	Freezing Rain	Turning movement	P.D. only	Ice	West	Turning left	Automobile, station wagon	Other motor vehicle	0
					East	Going ahead	Automobile, station wagon	Other motor vehicle	
2017-Feb-08, Wed,16:26	Clear	Angle	P.D. only	Wet	North	Turning right	Automobile, station wagon	Other motor vehicle	0
					East	Stopped	Municipal transit bus	Other motor vehicle	
2017-Mar-08, Wed,19:45	Clear	Rear end	P.D. only	Dry	North	Turning right	Pick-up truck	Other motor vehicle	0
					North	Turning right	Pick-up truck	Other motor vehicle	
2017-Mar-21, Tue,18:06	Clear	Turning movement	P.D. only	Dry	West	Turning left	Pick-up truck	Other motor vehicle	0
					East	Going ahead	Pick-up truck	Other motor vehicle	
2017-Mar-22, Wed,08:12	Clear	Turning movement	Non-fatal injury	Dry	West	Turning left	Automobile, station wagon	Other motor vehicle	0
					East	Going ahead	Pick-up truck	Other motor vehicle	
2017-Apr-13, Thu,12:30	Clear	Rear end	P.D. only	Dry	West	Going ahead	Automobile, station wagon	Other motor vehicle	0
					West	Slowing or stopping	g Automobile, station wagon	Other motor vehicle	
2017-May-06, Sat,20:08	Rain	Turning movement	Non-fatal injury	Wet	West	Turning left	Automobile, station wagon	Other motor vehicle	0
					East	Going ahead	Automobile, station wagon	Other motor vehicle	

June 30, 2021 Page 6 of 16



Collision Details Report - Public Version

From: January 1, 2015 **To:** December 31, 2019

Location: INNES RD @ JEANNE D'ARC BLVD/MER BLEUE RD

Traffic Control: Traffic signal Total Collisions: 110

	3								
Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuve	er Vehicle type	First Event	No. Ped
2017-Jul-17, Mon,15:56	Clear	Rear end	P.D. only	Dry	East	Going ahead	Automobile, station wagon	Other motor vehicle	0
					East	Stopped	Automobile, station wagon	Other motor vehicle	
					East	Stopped	Automobile, station wagon	Other motor vehicle	
2017-Aug-19, Sat,15:06	Clear	Angle	P.D. only	Dry	East	Going ahead	Automobile, station wagon	Other motor vehicle	0
					North	Going ahead	Automobile, station wagon	Other motor vehicle	
2017-Sep-22, Fri,16:35	Clear	Rear end	P.D. only	Dry	East	Going ahead	Automobile, station wagon	Other motor vehicle	0
					East	Slowing or stoppin	g Pick-up truck	Other motor vehicle	
2017-Oct-08, Sun,09:50	Clear	Rear end	Non-fatal injury	Dry	North	Turning right	Automobile, station wagon	Other motor vehicle	0
					North	Turning right	Passenger van	Other motor vehicle	
2017-Oct-12, Thu,08:06	Clear	Turning movement	P.D. only	Dry	West	Turning left	Automobile, station wagon	Other motor vehicle	0
					East	Going ahead	Automobile, station wagon	Other motor vehicle	
2017-Oct-13, Fri,18:32	Clear	Sideswipe	P.D. only	Dry	North	Turning left	Pick-up truck	Other motor vehicle	0
					North	Turning left	Pick-up truck	Other motor vehicle	
2017-Oct-18, Wed,01:47	Clear	SMV other	P.D. only	Dry	North	Turning left	Pick-up truck	Pole (utility, power)	0
2017-Nov-06, Mon,11:20	Clear	Sideswipe	P.D. only	Dry	East	Going ahead	Automobile, station wagon	Other motor vehicle	0
					East	Going ahead	Automobile, station wagon	Other motor vehicle	
2017-Nov-20, Mon,15:01	Clear	Turning movement	P.D. only	Dry	West	Turning left	Pick-up truck	Other motor vehicle	0
					East	Going ahead	Pick-up truck	Other motor vehicle	
2017-Dec-19, Tue,08:26	Clear	Angle	P.D. only	Loose snow	West	Slowing or stoppin	g Automobile, station wagon	Skidding/sliding	0
					North	Going ahead	Automobile, station wagon	Other motor vehicle	
2017-Dec-20, Wed,17:45	Clear	Rear end	P.D. only	Wet	East	Slowing or stoppin	g Automobile, station wagon	Other motor vehicle	0
					East	Stopped	Automobile, station wagon	Other motor vehicle	

June 30, 2021 Page 7 of 16



Collision Details Report - Public Version

From: January 1, 2015 **To:** December 31, 2019

Location: INNES RD @ JEANNE D'ARC BLVD/MER BLEUE RD

Traffic Control: Traffic signal Total Collisions: 110

	3								
Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuve	r Vehicle type	First Event	No. Ped
2017-Dec-23, Sat,16:30	Snow	Turning movement	P.D. only	Loose snow	East	Turning left	Automobile, station wagon	Other motor vehicle	0
					West	Going ahead	Automobile, station wagon	Other motor vehicle	
2017-Dec-26, Tue,08:58	Drifting Snow	Rear end	P.D. only	Packed snow	South	Slowing or stopping	g Pick-up truck	Other motor vehicle	0
					South	Turning left	Automobile, station wagon	Other motor vehicle	
2017-Dec-26, Tue,13:37	Clear	Rear end	P.D. only	Dry	West	Going ahead	Automobile, station wagon	Other motor vehicle	0
					West	Stopped	Automobile, station wagon	Other motor vehicle	
2017-Dec-26, Tue,15:17	Clear	Sideswipe	P.D. only	Dry	West	Changing lanes	Automobile, station wagon	Other motor vehicle	0
					West	Going ahead	Automobile, station wagon	Other motor vehicle	
2018-Jan-11, Thu,19:56	Rain	Turning movement	P.D. only	Wet	East	Turning left	Automobile, station wagon	Other motor vehicle	0
					West	Going ahead	Automobile, station wagon	Other motor vehicle	
2018-Jan-25, Thu,16:00	Clear	Turning movement	P.D. only	Dry	West	Turning left	Automobile, station wagon	Other motor vehicle	0
					East	Going ahead	Automobile, station wagon	Other motor vehicle	
2018-Feb-05, Mon,13:10	Clear	Rear end	P.D. only	Wet	North	Merging	Automobile, station wagon	Other motor vehicle	0
					North	Merging	Automobile, station wagon	Other motor vehicle	
2018-Mar-11, Sun,18:00	Clear	Sideswipe	P.D. only	Dry	East	Unknown	Unknown	Other motor vehicle	0
					East	Going ahead	Automobile, station wagon	Other motor vehicle	
2018-Apr-03, Tue,15:48	Clear	Rear end	Non-fatal injury	Dry	West	Turning right	Automobile, station wagon	Other motor vehicle	0
					West	Turning right	Automobile, station wagon	Other motor vehicle	
2018-May-21, Mon,16:35	Clear	Angle	Non-fatal injury	Dry	East	Going ahead	Automobile, station wagon	Other motor vehicle	0
					South	Going ahead	Automobile, station wagon	Other motor vehicle	
2018-May-25, Fri,20:55	Clear	Rear end	P.D. only	Dry	East	Going ahead	Automobile, station wagon	Other motor vehicle	0
					East	Stopped	Automobile, station wagon	Other motor vehicle	

June 30, 2021 Page 8 of 16



Collision Details Report - Public Version

From: January 1, 2015 **To:** December 31, 2019

Location: INNES RD @ JEANNE D'ARC BLVD/MER BLEUE RD

Traffic Control: Traffic signal Total Collisions: 110

								110	
Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuve	r Vehicle type	First Event	No. Ped
2018-Jun-13, Wed,16:27	Clear	Sideswipe	P.D. only	Dry	West	Changing lanes	Automobile, station wagon	Other motor vehicle	0
					West	Going ahead	Automobile, station wagon	Other motor vehicle	
2018-Jun-21, Thu,11:00	Clear	Rear end	P.D. only	Dry	East	Going ahead	Automobile, station wagon	Other motor vehicle	0
					East	Stopped	Automobile, station wagon	Other motor vehicle	
					East	Stopped	Automobile, station wagon	Other motor vehicle	
2018-Jul-18, Wed,16:35	Clear	Rear end	P.D. only	Dry	East	Going ahead	Pick-up truck	Other motor vehicle	0
					East	Stopped	Automobile, station wagon	Other motor vehicle	
2018-Aug-16, Thu,13:19	Clear	Turning movement	Non-fatal injury	Dry	East	Going ahead	Automobile, station wagon	Other motor vehicle	0
					West	Turning left	Automobile, station wagon	Other motor vehicle	
2018-Aug-18, Sat,18:37	Clear	Rear end	P.D. only	Dry	North	Going ahead	Automobile, station wagon	Other motor vehicle	0
					North	Stopped	Automobile, station wagon	Other motor vehicle	
2018-Aug-28, Tue,20:10	Clear	Turning movement	Non-fatal injury	Dry	North	Turning left	Automobile, station wagon	Other motor vehicle	0
					South	Going ahead	Automobile, station wagon	Other motor vehicle	
					East	Stopped	Automobile, station wagon	Other motor vehicle	
2018-Aug-31, Fri,09:01	Clear	Rear end	P.D. only	Dry	South	Going ahead	Automobile, station wagon	Other motor vehicle	0
					South	Stopped	Automobile, station wagon	Other motor vehicle	
2018-Sep-24, Mon,10:41	Clear	Turning movement	P.D. only	Dry	West	Turning right	Automobile, station wagon	Other motor vehicle	0
					West	Turning right	Automobile, station wagon	Other motor vehicle	
2018-Nov-06, Tue,09:44	Rain	Rear end	P.D. only	Wet	West	Changing lanes	Automobile, station wagon	Other motor vehicle	0
					West	Going ahead	Automobile, station wagon	Other motor vehicle	
					West	Going ahead	Automobile, station wagon	Other motor vehicle	
					West	Going ahead	Automobile, station wagon	Other motor vehicle	
2018-Nov-14, Wed,19:15	Clear	Rear end	P.D. only	Dry	East	Turning right	Automobile, station wagon	Other motor vehicle	0
					East	Turning right	Automobile, station wagon	Other motor vehicle	

June 30, 2021 Page 9 of 16



Collision Details Report - Public Version

From: January 1, 2015 **To:** December 31, 2019

Location: INNES RD @ JEANNE D'ARC BLVD/MER BLEUE RD

Traffic Control: Traffic signal Total Collisions: 110

	Ü								
Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuve	er Vehicle type	First Event	No. Ped
2018-Nov-22, Thu,09:41	Clear	Rear end	P.D. only	Dry	North	Turning right	Automobile, station wagon	Other motor vehicle	0
					North	Turning right	Automobile, station wagon	Other motor vehicle	
2018-Nov-22, Thu,18:08	Clear	Turning movement	P.D. only	Dry	East	Turning left	Automobile, station wagon	Other motor vehicle	0
					West	Going ahead	Automobile, station wagon	Other motor vehicle	
2018-Nov-29, Thu,14:45	Clear	Sideswipe	P.D. only	Wet	East	Unknown	Unknown	Other motor vehicle	0
					East	Going ahead	Automobile, station wagon	Other motor vehicle	
2018-Dec-02, Sun,11:19	Freezing Rain	Rear end	P.D. only	Ice	North	Going ahead	Automobile, station wagon	Other motor vehicle	0
					North	Stopped	Automobile, station wagon	Other motor vehicle	
2018-Dec-16, Sun,18:05	Clear	Rear end	P.D. only	Wet	West	Going ahead	Automobile, station wagon	Other motor vehicle	0
					West	Stopped	Automobile, station wagon	Other motor vehicle	
2019-Jan-03, Thu,17:40	Snow	Turning movement	P.D. only	Loose snow	East	Turning left	Automobile, station wagon	Other motor vehicle	0
					West	Going ahead	Automobile, station wagon	Other motor vehicle	
2019-Jan-14, Mon,20:16	Clear	Turning movement	P.D. only	Dry	East	Turning left	Automobile, station wagon	Other motor vehicle	0
					West	Going ahead	Automobile, station wagon	Other motor vehicle	
					South	Stopped	Automobile, station wagon	Other motor vehicle	
2019-Jan-19, Sat,15:27	Clear	Rear end	Non-fatal injury	Wet	West	Slowing or stoppin	g Unknown	Other motor vehicle	0
					West	Stopped	Automobile, station wagon	Other motor vehicle	
2019-Feb-08, Fri,18:31	Freezing Rain	Rear end	P.D. only	Wet	East	Going ahead	Automobile, station wagon	Other motor vehicle	0
					East	Stopped	Automobile, station wagon	Other motor vehicle	
2019-Mar-11, Mon,18:06	Clear	Rear end	P.D. only	Wet	North	Turning right	Automobile, station wagon	Other motor vehicle	0
					North	Turning right	Automobile, station wagon	Other motor vehicle	
2019-Mar-14, Thu,13:12	Clear	Turning movement	P.D. only	Wet	East	Going ahead	Automobile, station wagon	Other motor vehicle	0
					West	Turning left	Automobile, station wagon	Other motor vehicle	

June 30, 2021 Page 10 of 16



Collision Details Report - Public Version

From: January 1, 2015 **To:** December 31, 2019

Location: INNES RD @ JEANNE D'ARC BLVD/MER BLEUE RD

Traffic Control: Traffic signal Total Collisions: 110

	=								
Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuve	r Vehicle type	First Event	No. Ped
2019-Apr-28, Sun,18:06	Clear	Rear end	P.D. only	Dry	North	Unknown	Pick-up truck	Other motor vehicle	0
					North	Stopped	Automobile, station wagon	Other motor vehicle	
2019-May-08, Wed,12:15	Clear	Turning movement	P.D. only	Dry	East	Turning left	Automobile, station wagon	Other motor vehicle	0
					West	Going ahead	Automobile, station wagon	Other motor vehicle	
2019-May-18, Sat,13:30	Clear	Sideswipe	P.D. only	Dry	West	Changing lanes	Pick-up truck	Other motor vehicle	0
					West	Turning left	Pick-up truck	Other motor vehicle	
2019-Jun-03, Mon,13:00	Clear	Rear end	Non-fatal injury	Dry	East	Slowing or stopping	g Automobile, station wagon	Other motor vehicle	0
					East	Stopped	Automobile, station wagon	Other motor vehicle	
2019-Jul-06, Sat,20:16	Clear	Turning movement	P.D. only	Dry	East	Turning left	Pick-up truck	Other motor vehicle	0
					West	Going ahead	Automobile, station wagon	Other motor vehicle	
					South	Stopped	Automobile, station wagon	Other motor vehicle	
					South	Stopped	Automobile, station wagon	Other motor vehicle	
2019-Jul-17, Wed,06:56	Clear	Rear end	P.D. only	Dry	South	Turning right	Pick-up truck	Other motor vehicle	0
					South	Turning right	Automobile, station wagon	Other motor vehicle	
2019-Aug-08, Thu,13:47	Clear	Angle	P.D. only	Dry	South	Turning right	Automobile, station wagon	Other motor vehicle	0
					West	Going ahead	Automobile, station wagon	Other motor vehicle	
2019-Aug-09, Fri,11:30	Clear	Rear end	P.D. only	Dry	East	Going ahead	Automobile, station wagon	Other motor vehicle	0
					East	Stopped	Automobile, station wagon	Other motor vehicle	
2019-Aug-17, Sat,16:30	Clear	Rear end	Non-fatal injury	Dry	East	Going ahead	Automobile, station wagon	Other motor vehicle	0
					East	Stopped	Automobile, station wagon	Other motor vehicle	
2019-Aug-19, Mon,18:55	Clear	Sideswipe	P.D. only	Dry	North	Changing lanes	Automobile, station wagon	Other motor vehicle	0
					North	Stopped	Automobile, station wagon	Other motor vehicle	

June 30, 2021 Page 11 of 16



Collision Details Report - Public Version

From: January 1, 2015 **To:** December 31, 2019

Location: INNES RD @ JEANNE D'ARC BLVD/MER BLEUE RD

Traffic Control: Traffic signal Total Collisions: 110

Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuve	er Vehicle type	First Event	No. Ped
2019-Sep-16, Mon,21:01	Clear	Turning movement	P.D. only	Dry	West	Turning left	Automobile, station wagon	Other motor vehicle	0
					East	Going ahead	Automobile, station wagon	Other motor vehicle	
2019-Oct-05, Sat,13:55	Clear	Rear end	P.D. only	Dry	North	Turning right	Automobile, station wagon	Other motor vehicle	0
					North	Turning right	Automobile, station wagon	Other motor vehicle	
2019-Oct-17, Thu,10:30	Clear	Sideswipe	P.D. only	Wet	South	Changing lanes	Automobile, station wagon	Other motor vehicle	0
					South	Turning right	Unknown	Other motor vehicle	
2019-Oct-18, Fri,19:00	Clear	Rear end	P.D. only	Dry	East	Going ahead	Pick-up truck	Other motor vehicle	0
					East	Stopped	Automobile, station wagon	Other motor vehicle	
					East	Stopped	Automobile, station wagon	Other motor vehicle	
2019-Nov-07, Thu,15:18	Clear	Rear end	P.D. only	Dry	East	Slowing or stoppin	g Pick-up truck	Other motor vehicle	0
					East	Slowing or stoppin	g Automobile, station wagon	Other motor vehicle	
					East	Going ahead	Automobile, station wagon	Other motor vehicle	
2019-Nov-08, Fri,11:29	Clear	Rear end	Non-fatal injury	Dry	West	Going ahead	Automobile, station wagon	Other motor vehicle	0
					West	Stopped	Automobile, station wagon	Other motor vehicle	
					West	Stopped	Automobile, station wagon	Other motor vehicle	
2019-Dec-01, Sun,14:15	Clear	Rear end	Non-fatal injury	Dry	South	Turning right	Automobile, station wagon	Other motor vehicle	0
					South	Turning right	Automobile, station wagon	Other motor vehicle	
2019-Dec-05, Thu,15:49	Clear	Rear end	P.D. only	Wet	North	Going ahead	Automobile, station wagon	Other motor vehicle	0
					North	Stopped	Truck - dump	Other motor vehicle	
2019-Dec-17, Tue,20:31	Clear	Turning movement	Non-fatal injury	Dry	West	Turning left	Passenger van	Other motor vehicle	0
					East	Going ahead	Automobile, station wagon	Other motor vehicle	

June 30, 2021 Page 12 of 16



Collision Details Report - Public Version

From: January 1, 2015 **To:** December 31, 2019

Location: INNES RD btwn 260 E OF BELCOURT BLVD/WALMART SC & JEANNE D'ARC BLVD/ME

Traffic Control: No control

Total Collisions: 21

Trainic Control. No	00111101						rotal comsions.	Z I	
Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuve	er Vehicle type	First Event	No. Ped
2015-Feb-05, Thu,16:59	Clear	Rear end	Non-fatal injury	Wet	West	Going ahead	Automobile, station wagon	Other motor vehicle	0
					West	Pulling away from shoulder or curb	Municipal transit bus	Other motor vehicle	
2015-Mar-06, Fri,07:12	Clear	Rear end	P.D. only	Dry	West	Slowing or stoppin	g Pick-up truck	Other motor vehicle	0
					West	Slowing or stoppin	g Pick-up truck	Other motor vehicle	
					West	Slowing or stoppin	g Pick-up truck	Other motor vehicle	
					West	Slowing or stopping	g Pick-up truck	Other motor vehicle	
2015-May-06, Wed,08:31	Clear	Sideswipe	P.D. only	Dry	West	Changing lanes	Pick-up truck	Other motor vehicle	0
					West	Going ahead	Passenger van	Other motor vehicle	
2015-May-14, Thu,15:30	Clear	Sideswipe	P.D. only	Dry	East	Changing lanes	Passenger van	Other motor vehicle	0
					East	Going ahead	Pick-up truck	Other motor vehicle	
2015-Sep-08, Tue,13:28	Clear	Sideswipe	Non-fatal injury	Dry	East	Changing lanes	Automobile, station wagon	Other motor vehicle	0
					East	Going ahead	Automobile, station wagon	Other motor vehicle	
2015-Oct-05, Mon,21:23	Clear	Angle	P.D. only	Dry	South	Turning left	Automobile, station wagon	Other motor vehicle	0
					West	Changing lanes	Automobile, station wagon	Other motor vehicle	
2015-Oct-08, Thu,16:43	Clear	Rear end	Non-fatal injury	Dry	East	Going ahead	Pick-up truck	Other motor vehicle	0
					East	Stopped	Automobile, station wagon	Other motor vehicle	
					East	Stopped	Pick-up truck	Other motor vehicle	
2016-Jan-05, Tue,17:26	Clear	Rear end	Non-fatal injury	Wet	East	Slowing or stoppin	g Pick-up truck	Other motor vehicle	0
					East	Slowing or stopping	g Automobile, station wagon	Other motor vehicle	
					South	Stopped	Automobile, station wagon	Other motor vehicle	
2016-Mar-23, Wed,12:04	Clear	Rear end	Non-fatal injury	Dry	East	Going ahead	Pick-up truck	Other motor vehicle	0
					East	Stopped	Passenger van	Other motor vehicle	
					East	Stopped	Automobile, station wagon	Other motor vehicle	

June 30, 2021 Page 13 of 16



Collision Details Report - Public Version

From: January 1, 2015 **To:** December 31, 2019

Location: INNES RD btwn 260 E OF BELCOURT BLVD/WALMART SC & JEANNE D'ARC BLVD/ME

Traffic Control: No control

Total Collisions: 21

Trainic Control. No	COLLIGI						i otal Collisions.	21	
Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuve	er Vehicle type	First Event	No. Ped
2016-May-19, Thu,21:41	Clear	Rear end	P.D. only	Dry	East	Slowing or stoppin	g Automobile, station wagon	Other motor vehicle	0
					East	Stopped	Pick-up truck	Other motor vehicle	
2016-Jun-21, Tue,16:58	Clear	Rear end	Non-fatal injury	Dry	East	Going ahead	Pick-up truck	Other motor vehicle	0
					East	Stopped	Passenger van	Other motor vehicle	
					East	Stopped	Pick-up truck	Other motor vehicle	
2016-Jun-27, Mon,16:50	Clear	Rear end	Non-fatal injury	Dry	East	Going ahead	Pick-up truck	Other motor vehicle	0
					East	Slowing or stoppin	g Pick-up truck	Other motor vehicle	
					East	Slowing or stoppin	g Delivery van	Other motor vehicle	
					East	Slowing or stoppin	g Automobile, station wagon	Other motor vehicle	
2016-Oct-23, Sun,12:38	Clear	Angle	P.D. only	Dry	North	Turning right	Automobile, station wagon	Other motor vehicle	0
					East	Going ahead	Pick-up truck	Other motor vehicle	
2017-Aug-02, Wed,11:00	Clear	SMV other	P.D. only	Dry	West	Going ahead	Automobile, station wagon	Debris on road	0
2017-Dec-15, Fri,18:50	Snow	Rear end	Non-fatal injury	Loose snow	East	Going ahead	Automobile, station wagon	Other motor vehicle	0
					East	Going ahead	Automobile, station wagon	Other motor vehicle	
2018-Jan-25, Thu,14:25	Clear	Rear end	P.D. only	Ice	East	Slowing or stoppin	g Passenger van	Skidding/sliding	0
					East	Stopped	Automobile, station wagon	Other motor vehicle	
					East	Stopped	Automobile, station wagon	Other motor vehicle	
2018-Oct-03, Wed,19:00	Clear	Rear end	Non-fatal injury	Dry	East	Going ahead	Unknown	Other motor vehicle	0
					East	Stopped	Automobile, station wagon	Other motor vehicle	
2018-Oct-04, Thu,16:50	Clear	Rear end	P.D. only	Dry	East	Going ahead	Automobile, station wagon	Other motor vehicle	0
					East	Stopped	Automobile, station wagon	Other motor vehicle	
2019-Jan-10, Thu,21:38	Clear	Turning movement	P.D. only	Dry	East	Turning right	Automobile, station wagon	Other motor vehicle	0
					East	Going ahead	Automobile, station wagon	Other motor vehicle	

June 30, 2021 Page 14 of 16



Collision Details Report - Public Version

From: January 1, 2015 To: December 31, 2019

Location: INNES RD btwn 260 E OF BELCOURT BLVD/WALMART SC & JEANNE D'ARC BLVD/ME

Traffic Control: No control Total Collisions: 21

Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuve	r Vehicle type	First Event	No. Ped
2019-Mar-11, Mon,21:00	Snow	Sideswipe	P.D. only	Ice	East	Changing lanes	Automobile, station wagon	Other motor vehicle	0
					East	Going ahead	Automobile, station wagon	Other motor vehicle	
2019-Dec-06, Fri,14:50	Clear	Rear end	P.D. only	Dry	West	Going ahead	Automobile, station wagon	Other motor vehicle	0
					West	Going ahead	Pick-up truck	Other motor vehicle	

Location: INNES RD btwn BELCOURT BLVD & 260 E OF BELCOURT BLVD/WALMART SC

Traffic Control: No control Total Collisions: 12

Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuve	r Vehicle type	First Event	No. Ped
2015-Oct-27, Tue,09:00	Clear	Angle	P.D. only	Dry	East	Going ahead	Passenger van	Other motor vehicle	0
					North	Going ahead	Pick-up truck	Other motor vehicle	
2016-May-03, Tue,15:45	Clear	Sideswipe	P.D. only	Dry	East	Changing lanes	Automobile, station wagon	Other motor vehicle	0
					East	Going ahead	Automobile, station wagon	Other motor vehicle	
2016-May-16, Mon,23:54	Clear	SMV other	P.D. only	Dry	East	Going ahead	Pick-up truck	Curb	0
2016-Nov-10, Thu,09:30	Clear	Turning movement	P.D. only	Dry	West	Turning left	Automobile, station wagon	Other motor vehicle	0
					East	Going ahead	Passenger van	Other motor vehicle	
2017-May-23, Tue,18:56	Clear	Rear end	P.D. only	Dry	East	Going ahead	Automobile, station wagon	Other motor vehicle	0
					East	Stopped	Passenger van	Other motor vehicle	
					East	Stopped	Automobile, station wagon	Other motor vehicle	
2017-Aug-31, Thu,19:15	Clear	Sideswipe	P.D. only	Dry	East	Unknown	Automobile, station wagon	Other motor vehicle	0
					East	Going ahead	Automobile, station wagon	Other motor vehicle	
2017-Sep-22, Fri,13:00	Clear	Rear end	P.D. only	Dry	East	Going ahead	Unknown	Other motor vehicle	0
					East	Turning right	Automobile, station wagon	Other motor vehicle	
2017-Dec-09, Sat,15:45	Clear	Turning movement	P.D. only	Dry	East	Turning right	Pick-up truck	Other motor vehicle	0
					East	Turning right	Pick-up truck	Other motor vehicle	

June 30, 2021 Page 15 of 16



Collision Details Report - Public Version

From: January 1, 2015 **To:** December 31, 2019

Location: INNES RD btwn BELCOURT BLVD & 260 E OF BELCOURT BLVD/WALMART SC

Traffic Control: No control

Total Collisions: 12

Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuve	er Vehicle type	First Event	No. Ped
2018-Mar-26, Mon,14:01	Clear	Rear end	P.D. only	Dry	East	Slowing or stopping Automobile, station		Other motor vehicle	0
					East	Slowing or stopping	ng Automobile, station wagon	Other motor vehicle	
2018-Nov-16, Fri,18:38	Snow	Rear end	P.D. only	Loose snow	West	Going ahead	Automobile, station wagon	Other motor vehicle	0
					West	Going ahead	Automobile, station wagon	Other motor vehicle	
					West	Going ahead	Unknown	Other motor vehicle	
2018-Nov-20, Tue,04:13	Rain	Sideswipe	P.D. only	Loose snow	West	Going ahead	Automobile, station wagon	Other motor vehicle	0
					West	Going ahead	Police vehicle	Other motor vehicle	
2018-Dec-19, Wed,12:37	Clear	Rear end	P.D. only	Dry	East	Going ahead	Passenger van	Other motor vehicle	0
					East	Stopped	Automobile, station wagon	Other motor vehicle	
					East	Stopped	Automobile, station wagon	Other motor vehicle	

June 30, 2021 Page 16 of 16

Traffic Signal Timing

City of Ottawa, Transportation Services Department

Traffic Signal Operations Unit

 Intersection:
 Main:
 Innes
 side:
 260m E of Frank Bender

 Controller:
 ATC 3
 TSD:
 6609


 Author:
 Matthew Anderson
 Date:
 06-Jul-2021

Existing Timing Plans[†]


	Plan						Ped Mi	nimum T	ime
	AM Peak	Off Peak	PM Peak	Night	Weekend	AM Heavy	Walk	DW	A+R
	1	2	3	4	5	11			
Cycle	110	110	130	90	130	120			
Offset	30	101	1	Х	68	30			
EB Thru	80	66	80	60	68	90	10	15	3.7+2.9
WB Thru	80	80	100	60	96	90	10	15	3.7+2.9
NB Thru	30	30	30	30	34	30	7	17	3.3+2.8
WB Left	-	14	20	-	28	-	-	-	3.7+2.1

Phasing Sequence[‡]

Plan: 2,3,5



Plan: 1,4,11



Schedule

Weekday								
Time	Plan							
0:15	4							
6:00	11							
9:00	1							
9:30	2							
15:00	3							
18:30	2							
22:00	1							

Saturday

	•
Time	Plan
0:10	4
7:00	2
9:00	5
19:00	2
20:00	4

Sunday

Time	Plan
0:10	4
7:00	2
10:00	5
18:00	2
19:00	4

Notes

(fp): Fully Protected Left Turn

→ Pedestrian signal

Cost is \$59.96 (\$53.06 + HST)

^{†:} Time for each direction includes amber and all red intervals

^{‡:} Start of first phase should be used as reference point for offset Asterisk (*) Indicates actuated phase

Traffic Signal Timing

City of Ottawa, Transportation Services Department

Traffic Signal Operations Unit

Intersection:	Main:	Innes	Side:	Frank Bender			
Controller:	ATC 3			TSD:	6599		
Author:	Matthey	w Anderson		Date:	06-Jul-2021		

Existing Timing Plans[†]

Plan


Ped Minimum Time

					1 04 1111111111111111111111111111111111					
	Post AM	Off Peak	PM Peak	Night 4	Weekend 5	AM Peak	Walk	DW	A+R	
Cycle	110	110	130	80	130	120				
Offset	33	64	116	Х	64	33				
EB Thru	62	59	74	54	60	74	7	23	3.7 + 2.9	
WB Thru	74	74	94	54	85	84	7	23	3.7 + 2.9	
NB Thru	36	36	36	36	45	36	7	22	3.0 + 3.8	
SB Thru	36	36	36	36	45	36	7	22	3.0 + 3.8	
WB Left	12	15	20	-	25	10	-	-	3.7 + 1.0	


Phasing Sequence[‡]

Plan:

1,2,3,5,11



Plan:



Schedule

Weekday

Time	Plan
0:10	4
6:00	11
9:00	1
9:30	2
15:00	3
18:30	2
22:00	4

Saturday

Time	Plan
0:10	4
7:00	2
9:00	5
19:00	2
20:00	4

Sunday

Time	Plan
0:10	4
7:00	2
10:00	5
18:00	2
19:00	4

Notes

- †: Time for each direction includes amber and all red intervals
- ‡: Start of first phase should be used as reference point for offset Asterisk (*) Indicates actuated phase

(fp): Fully Protected Left Turn

← Pedestrian signal

Traffic Signal Timing

City of Ottawa, Transportation Services Department


Traffic Signal Operations Unit


Intersection: Jeanne d'Arc / Mer Bleue Innes Main: Side: Controller: MS 3200 TSD: 5907 Author: Matthew Anderson Date: 06-Jul-2021


Existing Timing Plans[†]

	Plan			Ped Minimum Time					
	Post AM	Off Peak	PM Peak	Night	Weekend	AM Peak	Walk	DW	A+R
	1	2	3	4	5	11			
Cycle	110	110	130	90	130	120			
Offset	0	0	0	Х	0	0			
EB Thru	52	41	59	41	49	62	7	20	3.7+2.7
WB Thru	52	41	59	41	49	62	7	20	3.7+2.7
NB Thru	31	31	31	31	31	31	7	17	3.7+2.5
SB Thru	31	31	31	31	31	31	7	17	3.7+2.5
NB Left (fp)	15	25	23	18	23	15	-	ı	3.7+2.6
SB Left (fp)	15	25	23	18	23	15	-	ı	3.7+2.6
EB Left	12	13	17	-	27	12	-	-	3.7+2.4
WB Left	12	13	17	-	27	12	-	-	3.7+2.4

Phasing Sequence[‡]







Schedule

Weekday

Time	Plan
0:15	4
6:00	11
9:00	1
9:30	2
45.00	

Time	Plan
0:15	4
6:00	11
9:00	1
9:30	2
15:00	3
18:30	2
22:00	4

Saturda	У
Time	Plan
0:10	4
7:00	2
9:00	5
19:00	2
20:00	4

Sunday									
Time	Plan								
0:10	4								
7:00	2								
10:00	5								
18:00	2								
19:00	4								

Notes

Asterisk (*) Indicates actuated phase

(fp): Fully Protected Left Turn

Pedestrian signal

^{†:} Time for each direction includes amber and all red intervals

^{‡:} Start of first phase should be used as reference point for offset



APPENDIX E: EXISTING (2021) AND BACKGROUND (2022) SYNCHRO ANALYSIS

	۶	-+	*	~		•	1	1	1	1	ļ	1
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	7	*	7	7	**	7	44	^	7	14	**	7
Volume (vph)	35	327	64	190	1148	520	111	336	71	135	142	59
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	120.0		120.0	120.0		100.0	100.0		20.0	70.0		20.0
Storage Lanes	1		1	1		1	2		1	2		1
Taper Length (m)	2.5			2.5			2.5			2.5		
Lane Util. Factor	1.00	0.95	1.00	1.00	0.95	1.00	0.97	0.95	1.00	0.97	0.95	1.00
Frt			0.850			0.850			0.850			0.850
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1383	3007	1473	1712	3357	1517	3195	3262	1502	3288	3007	1289
Flt Permitted	0.107			0.530			0.950			0.950		
Satd. Flow (perm)	156	3007	1473	955	3357	1517	3195	3262	1502	3288	3007	1289
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			142			404			144			144
Link Speed (k/h)		60			60			60			60	
Link Distance (m)		317.9			302.5			358.6			236.2	
Travel Time (s)		19.1			18.2			21.5			14.2	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Heavy Vehicles (%)	25%	15%	5%	1%	3%	2%	5%	6%	3%	2%	15%	20%
Adj. Flow (vph)	39	363	71	211	1276	578	123	373	79	150	158	66
Shared Lane Traffic (%)												
Lane Group Flow (vph)	39	363	71	211	1276	578	123	373	79	150	158	66
Turn Type	pm+pt	NA	Perm	pm+pt	NA	Perm	Prot	NA	Perm	Prot	NA	Perm
Protected Phases	4	1		4	1		3	2		3	2	
Permitted Phases	1		1	1		1			2			2
Detector Phase	4	1	1	4	1	1	3	2	2	3	2	2
Switch Phase												
Minimum Initial (s)	1.0	4.0	4.0	1.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
Minimum Split (s)	7.1	28.4	28.4	7.1	28.4	28.4	14.5	28.2	28.2	14.5	28.2	28.2
Total Split (s)	12.0	62.0	62.0	12.0	62.0	62.0	15.0	31.0	31.0	15.0	31.0	31.0
Total Split (%)	10.0%	51.7%	51.7%	10.0%	51.7%	51.7%	12.5%	25.8%	25.8%	12.5%	25.8%	25.8%
Maximum Green (s)	5.9	55.6	55.6	5.9	55.6	55.6	8.7	24.8	24.8	8.7	24.8	24.8
Yellow Time (s)	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7
All-Red Time (s)	2.4	2.7	2.7	2.4	2.7	2.7	2.6	2.5	2.5	2.6	2.5	2.5
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.1	6.4	6.4	6.1	6.4	6.4	6.3	6.2	6.2	6.3	6.2	6.2
Lead/Lag	Lag	Lead	Lead	Lag	Lead	Lead	Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes							
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	None	Max	Max	None	Max	Max	None	None	None	None	None	None
Walk Time (s)		7.0	7.0		7.0	7.0		7.0	7.0		7.0	7.0
Flash Dont Walk (s)		15.0	15.0		15.0	15.0		15.0	15.0		15.0	15.0
Pedestrian Calls (#/hr)		0	0		0	0		0	0		0	0
Act Effct Green (s)	61.9	55.7	55.7	61.9	55.7	55.7	8.5	19.1	19.1	8.5	19.1	19.1
Actuated g/C Ratio	0.54	0.49	0.49	0.54	0.49	0.49	0.07	0.17	0.17	0.07	0.17	0.17
v/c Ratio	0.27	0.25	0.09	0.38	0.78	0.61	0.52	0.68	0.21	0.62	0.31	0.20
Control Delay	15.5	18.2	0.2	14.9	29.0	9.3	60.2	51.5	1.3	63.7	43.2	1.3
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	15.5	18.2	0.2	14.9	29.0	9.3	60.2	51.5	1.3	63.7	43.2	1.3

	•	-	•	-	-	*	4	†	~	1	1	1
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
LOS	В	В	Α	В	С	Α	Е	D	Α	Е	D	Α
Approach Delay		15.3			22.1			46.4			44.0	
Approach LOS		В			С			D			D	
Queue Length 50th (m)	3.4	24.1	0.0	20.6	120.5	23.1	13.8	41.7	0.0	17.0	16.5	0.0
Queue Length 95th (m)	8.9	37.2	0.0	36.6	163.2	63.2	24.5	57.4	0.0	28.8	26.3	0.0
Internal Link Dist (m)		293.9			278.5			334.6			212.2	
Turn Bay Length (m)	120.0		120.0	120.0		100.0	100.0		20.0	70.0		20.0
Base Capacity (vph)	147	1466	791	556	1637	946	243	709	439	250	654	393
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.27	0.25	0.09	0.38	0.78	0.61	0.51	0.53	0.18	0.60	0.24	0.17

Intersection Summary

Area Type: Other

Cycle Length: 120

Actuated Cycle Length: 114.2


Natural Cycle: 90

Control Type: Semi Act-Uncoord Maximum v/c Ratio: 0.78 Intersection Signal Delay: 27.5 Intersection Capacity Utilization 71.5%

Intersection LOS: C
ICU Level of Service C

Analysis Period (min) 15

Splits and Phases: 1: Mer Bleue Road/Jeanne D'Arc Blvd & Innes Road



		*	1	4	1	1
Lane Group	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations	†		ሻ	**	ች	7
Volume (vph)	443	22	41	1316	5	33
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800
Storage Length (m)		0.0	150.0		0.0	0.0
Storage Lanes		0.0	1		1	1
Taper Length (m)			2.5		2.5	-
Lane Util. Factor	0.95	0.95	1.00	0.95	1.00	1.00
Frt	0.993					0.850
Flt Protected			0.950		0.950	
Satd. Flow (prot)	3029	0	1729	3325	1729	1459
Flt Permitted	**=*		0.461		0.950	
Satd. Flow (perm)	3029	0	839	3325	1729	1459
Right Turn on Red	3020	Yes	300	- 5525		Yes
Satd. Flow (RTOR)	10	. 00				37
Link Speed (k/h)	60			60	60	- 01
Link Distance (m)	263.3			317.9	112.7	
Travel Time (s)	15.8			19.1	6.8	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90
Heavy Vehicles (%)	14%	0.90	0.90	4%	0.90	6%
Adj. Flow (vph)	492	24	46	1462	6	37
Shared Lane Traffic (%)	732	27	70	1702	U	31
Lane Group Flow (vph)	516	0	46	1462	6	37
Turn Type	NA	U	Perm	NA	Prot	Perm
Protected Phases	1		i Cilli	1	2	ı Gilli
Permitted Phases			1			2
Detector Phase	1		1	1	2	2
Switch Phase						
Minimum Initial (s)	4.0		4.0	4.0	4.0	4.0
Minimum Split (s)	24.6		24.6	24.6	28.1	28.1
Total Split (s)	90.0		90.0	90.0	30.0	30.0
. ()	75.0%		75.0%	75.0%	25.0%	25.0%
Total Split (%)	83.4					
Maximum Green (s)			83.4	83.4	23.9	23.9
Yellow Time (s)	3.7		3.7	3.7	3.3	3.3
All-Red Time (s)	2.9		2.9	2.9	2.8	2.8
Lost Time Adjust (s)	0.0		0.0	0.0	0.0	0.0
Total Lost Time (s)	6.6		6.6	6.6	6.1	6.1
Lead/Lag	Lead		Lead	Lead	Lag	Lag
Lead-Lag Optimize?	Yes		Yes	Yes	Yes	Yes
Vehicle Extension (s)	3.0		3.0	3.0	3.0	3.0
Recall Mode	Max		Max	Max	None	None
Walk Time (s)	7.0		7.0	7.0	7.0	7.0
Flash Dont Walk (s)	11.0		11.0	11.0	15.0	15.0
Pedestrian Calls (#/hr)	0		0	0	0	0
Act Effct Green (s)	100.7		100.7	100.7	6.5	6.5
Actuated g/C Ratio	0.90		0.90	0.90	0.06	0.06
v/c Ratio	0.19		0.06	0.49	0.06	0.31
Control Delay	1.6		1.9	2.8	52.4	23.4
Queue Delay	0.0		0.0	0.0	0.0	0.0
Total Delay	1.6		1.9	2.8	52.4	23.4

	-	•	1	4-	4	1
Lane Group	EBT	EBR	WBL	WBT	NBL	NBR
LOS	А		Α	Α	D	С
Approach Delay	1.6			2.7	27.5	
Approach LOS	Α			Α	С	
Queue Length 50th (m)	8.4		1.3	36.4	1.3	0.0
Queue Length 95th (m)	14.1		3.6	55.7	5.4	10.3
Internal Link Dist (m)	239.3			293.9	88.7	
Turn Bay Length (m)			150.0			
Base Capacity (vph)	2720		753	2985	369	340
Starvation Cap Reductn	0		0	0	0	0
Spillback Cap Reductn	0		0	0	0	0
Storage Cap Reductn	0		0	0	0	0
Reduced v/c Ratio	0.19		0.06	0.49	0.02	0.11
Intersection Summary						
Area Type:	Other					
Cycle Length: 120						
Actuated Cycle Length: 17	12.1					
Natural Cycle: 65						
Control Type: Semi Act-II	ncoord					

Control Type: Semi Act-Uncoord Maximum v/c Ratio: 0.49 Intersection Signal Delay: 3.0

Intersection Signal Delay: 3.0 Intersection LOS: A Intersection Capacity Utilization 52.3% ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 3: "Walmart Entrance" & Innes Road



	۶	-	•	1		•	1	†	~	1	ļ	1
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	7	**	7	7	1		7	†	7	7	1	
Volume (vph)	33	378	15	24	1204	81	15	37	3	39	24	43
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	0.0		100.0	100.0		0.0	100.0		0.0	0.0		0.0
Storage Lanes	1		1	1		0	1		1	1		0
Taper Length (m)	2.5			2.5			2.5			2.5		
Lane Util. Factor	1.00	0.95	1.00	1.00	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.850		0.991				0.850		0.904	
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1572	3033	1345	1662	3331	0	1729	1670	1547	1679	1624	0
Flt Permitted	0.187			0.474			0.708			0.730		
Satd. Flow (perm)	309	3033	1345	830	3331	0	1289	1670	1547	1290	1624	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			77		11				75		48	
Link Speed (k/h)		60			60			40			40	
Link Distance (m)		238.0			263.3			225.6			203.5	
Travel Time (s)		14.3			15.8			20.3			18.3	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Heavy Vehicles (%)	10%	14%	15%	4%	3%	1%	0%	9%	0%	3%	0%	2%
Adj. Flow (vph)	37	420	17	27	1338	90	17	41	3	43	27	48
Shared Lane Traffic (%)												
Lane Group Flow (vph)	37	420	17	27	1428	0	17	41	3	43	75	0
Turn Type	Perm	NA	Perm	pm+pt	NA		Perm	NA	Perm	Perm	NA	
Protected Phases		2		1	5			3			7	
Permitted Phases	2		2	5			3		3	7		
Detector Phase	2	2	2	1	5		3	3	3	7	7	
Switch Phase												
Minimum Initial (s)	4.0	4.0	4.0	4.0	4.0		4.0	4.0	4.0	4.0	4.0	
Minimum Split (s)	24.6	24.6	24.6	8.7	24.6		28.8	28.8	28.8	28.8	28.8	
Total Split (s)	74.0	74.0	74.0	10.0	84.0		36.0	36.0	36.0	36.0	36.0	
Total Split (%)	61.7%	61.7%	61.7%	8.3%	70.0%		30.0%	30.0%	30.0%	30.0%	30.0%	
Maximum Green (s)	67.4	67.4	67.4	5.3	77.4		29.2	29.2	29.2	29.2	29.2	
Yellow Time (s)	3.7	3.7	3.7	3.7	3.7		3.0	3.0	3.0	3.0	3.0	
All-Red Time (s)	2.9	2.9	2.9	1.0	2.9		3.8	3.8	3.8	3.8	3.8	
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Total Lost Time (s)	6.6	6.6	6.6	4.7	6.6		6.8	6.8	6.8	6.8	6.8	
Lead/Lag	Lag	Lag	Lag	Lead								
Lead-Lag Optimize?	Yes	Yes	Yes	Yes								
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0	3.0	3.0	3.0	
Recall Mode	None	None	None	Max	Max		None	None	None	None	None	
Walk Time (s)	7.0	7.0	7.0		7.0		7.0	7.0	7.0	7.0	7.0	
Flash Dont Walk (s)	11.0	11.0	11.0		11.0		15.0	15.0	15.0	15.0	15.0	
Pedestrian Calls (#/hr)	0	0	0		0		0	0	0	0	0	
Act Effct Green (s)	67.7	67.7	67.7	79.7	79.3		8.7	8.7	8.7	8.7	8.7	
Actuated g/C Ratio	0.70	0.70	0.70	0.82	0.82		0.09	0.09	0.09	0.09	0.09	
v/c Ratio	0.17	0.20	0.02	0.04	0.52		0.15	0.28	0.01	0.37	0.40	
Control Delay	8.9	6.2	0.1	2.6	4.9		44.4	46.8	0.0	52.0	26.2	
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Total Delay	8.9	6.2	0.1	2.6	4.9		44.4	46.8	0.0	52.0	26.2	

	•		•	-	•	*	1	†	1	1	Ţ	1
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
LOS	А	Α	Α	Α	А		D	D	Α	D	С	
Approach Delay		6.2			4.9			43.9			35.6	
Approach LOS		Α			Α			D			D	
Queue Length 50th (m)	2.3	14.1	0.0	0.8	44.4		3.1	7.5	0.0	8.0	4.9	
Queue Length 95th (m)	7.5	22.6	0.0	2.7	68.5		9.5	17.6	0.0	18.6	18.1	
Internal Link Dist (m)		214.0			239.3			201.6			179.5	
Turn Bay Length (m)			100.0	100.0			100.0					
Base Capacity (vph)	215	2115	961	726	2723		389	504	519	389	524	
Starvation Cap Reductn	0	0	0	0	0		0	0	0	0	0	
Spillback Cap Reductn	0	0	0	0	0		0	0	0	0	0	
Storage Cap Reductn	0	0	0	0	0		0	0	0	0	0	
Reduced v/c Ratio	0.17	0.20	0.02	0.04	0.52		0.04	0.08	0.01	0.11	0.14	

Intersection Summary

Area Type: Other

Cycle Length: 120

Actuated Cycle Length: 97.1

Natural Cycle: 65

Control Type: Semi Act-Uncoord Maximum v/c Ratio: 0.52 Intersection Signal Delay: 8.0 Intersection Capacity Utilization 58.0%

Intersection LOS: A ICU Level of Service B

Analysis Period (min) 15

Splits and Phases: 4: Frank Bender St. & Innes Road



	٠		*	~		•	1	†	~	1	ļ	1
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	ሽ	**	7	7	**	7	14	^	7	14	^	7
Volume (vph)	135	1276	139	179	707	293	165	269	256	424	445	81
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	120.0		120.0	120.0		100.0	100.0		20.0	70.0		20.0
Storage Lanes	1		1	1		1	2		1	2		1
Taper Length (m)	2.5			2.5			2.5			2.5		
Lane Util. Factor	1.00	0.95	1.00	1.00	0.95	1.00	0.97	0.95	1.00	0.97	0.95	1.00
Frt			0.850			0.850			0.850			0.850
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1679	3424	1547	1712	3390	1517	3288	3357	1547	3354	3357	1432
Flt Permitted	0.244			0.076			0.950			0.950		
Satd. Flow (perm)	431	3424	1547	137	3390	1517	3288	3357	1547	3354	3357	1432
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			154			326			155			133
Link Speed (k/h)		60			60			60			60	
Link Distance (m)		317.9			302.5			358.6			236.2	
Travel Time (s)		19.1			18.2			21.5			14.2	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Heavy Vehicles (%)	3%	1%	0%	1%	2%	2%	2%	3%	0%	0%	3%	8%
Adj. Flow (vph)	150	1418	154	199	786	326	183	299	284	471	494	90
Shared Lane Traffic (%)												
Lane Group Flow (vph)	150	1418	154	199	786	326	183	299	284	471	494	90
Turn Type	pm+pt	NA	Perm	pm+pt	NA	Perm	Prot	NA	Perm	Prot	NA	Perm
Protected Phases	4	1		4	1		3	2		3	2	
Permitted Phases	1		1	1		1			2			2
Detector Phase	4	1	1	4	1	1	3	2	2	3	2	2
Switch Phase												
Minimum Initial (s)	1.0	4.0	4.0	1.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
Minimum Split (s)	7.1	28.4	28.4	7.1	28.4	28.4	14.5	28.2	28.2	14.5	28.2	28.2
Total Split (s)	17.0	59.0	59.0	17.0	59.0	59.0	23.0	31.0	31.0	23.0	31.0	31.0
Total Split (%)	13.1%	45.4%	45.4%	13.1%	45.4%	45.4%	17.7%	23.8%	23.8%	17.7%	23.8%	23.8%
Maximum Green (s)	10.9	52.6	52.6	10.9	52.6	52.6	16.7	24.8	24.8	16.7	24.8	24.8
Yellow Time (s)	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7
All-Red Time (s)	2.4	2.7	2.7	2.4	2.7	2.7	2.6	2.5	2.5	2.6	2.5	2.5
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.1	6.4	6.4	6.1	6.4	6.4	6.3	6.2	6.2	6.3	6.2	6.2
Lead/Lag	Lag	Lead	Lead	Lag	Lead	Lead	Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes							
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	None	Max	Max	None	Max	Max	None	None	None	None	None	None
Walk Time (s)		7.0	7.0		7.0	7.0		7.0	7.0		7.0	7.0
Flash Dont Walk (s)		15.0	15.0		15.0	15.0		15.0	15.0		15.0	15.0
Pedestrian Calls (#/hr)		0	0		0	0		0	0		0	0
Act Effct Green (s)	63.8	52.6	52.6	63.8	52.6	52.6	16.7	23.7	23.7	16.7	23.7	23.7
Actuated g/C Ratio	0.49	0.41	0.41	0.49	0.41	0.41	0.13	0.18	0.18	0.13	0.18	0.18
v/c Ratio	0.47	1.02	0.21	0.99	0.57	0.40	0.43	0.48	0.69	1.09	0.80	0.24
Control Delay	20.5	66.0	4.4	95.5	31.6	4.1	55.5	50.0	31.4	120.0	61.1	3.6
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	20.5	66.0	4.4	95.5	31.6	4.1	55.5	50.0	31.4	120.0	61.1	3.6

1: Mer Bleue Road/Jeanne D'Arc Blvd & Innes Road

	•	-	*	1		•	1	1	1	1	Į.	1
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
LOS	С	Е	Α	F	С	Α	Е	D	С	F	Е	Α
Approach Delay		56.5			34.5			44.4			82.5	
Approach LOS		Е			С			D			F	
Queue Length 50th (m)	18.8	~203.1	0.0	36.4	81.1	0.0	22.6	36.1	30.7	~70.1	63.8	0.0
Queue Length 95th (m)	30.5	#245.7	12.9	#86.2	101.1	17.6	34.3	50.6	62.2	#103.6	83.3	4.7
Internal Link Dist (m)		293.9			278.5			334.6			212.2	
Turn Bay Length (m)	120.0		120.0	120.0		100.0	100.0		20.0	70.0		20.0
Base Capacity (vph)	319	1397	722	201	1383	811	426	646	422	434	646	382
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.47	1.02	0.21	0.99	0.57	0.40	0.43	0.46	0.67	1.09	0.76	0.24

Intersection Summary

Area Type: Other

Cycle Length: 130

Actuated Cycle Length: 128.9

Natural Cycle: 130

Control Type: Semi Act-Uncoord Maximum v/c Ratio: 1.09 Intersection Signal Delay: 54.3 Intersection Capacity Utilization 89.1%

Intersection LOS: D
ICU Level of Service E

Analysis Period (min) 15

Volume exceeds capacity, queue is theoretically infinite.

Queue shown is maximum after two cycles.

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 1: Mer Bleue Road/Jeanne D'Arc Blvd & Innes Road



	-	*	1	4	1	1
Lane Group	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations	1		*	**	ች	7
Volume (vph)	1462	83	134	905	82	173
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800
Storage Length (m)	1000	0.0	150.0	.500	0.0	0.0
Storage Lanes		0.0	1		1	1
Taper Length (m)		<u> </u>	2.5		2.5	
Lane Util. Factor	0.95	0.95	1.00	0.95	1.00	1.00
Frt	0.992	0.55	1.00	0.00	1.00	0.850
Flt Protected	0.002		0.950		0.950	0.000
Satd. Flow (prot)	3336	0	1729	3293	1679	1532
Flt Permitted	3330	U	0.073	3233	0.950	1002
Satd. Flow (perm)	3336	0	133	3293	1679	1532
\ . ,	JJJ0	Yes	133	3293	10/9	
Right Turn on Red	7	res				Yes
Satd. Flow (RTOR)	7			00	40	187
Link Speed (k/h)	60			60	40	
Link Distance (m)	263.3			317.9	112.7	
Travel Time (s)	15.8		• • • •	19.1	10.1	• • •
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90
Heavy Vehicles (%)	3%	0%	0%	5%	3%	1%
Adj. Flow (vph)	1624	92	149	1006	91	192
Shared Lane Traffic (%)						
Lane Group Flow (vph)	1716	0	149	1006	91	192
Turn Type	NA		pm+pt	NA	Prot	Perm
Protected Phases	1		2	5	3	
Permitted Phases			5			3
Detector Phase	1		2	5	3	3
Switch Phase						
Minimum Initial (s)	4.0		3.9	4.0	4.0	4.0
Minimum Split (s)	24.6		12.0	24.6	28.1	28.1
Total Split (s)	80.0		20.0	100.0	30.0	30.0
Total Split (%)	61.5%		15.4%	76.9%	23.1%	23.1%
Maximum Green (s)	73.4		14.2	93.4	23.170	23.176
Yellow Time (s)	3.7		3.7	3.7	3.3	3.3
			3. <i>1</i> 2.1		2.8	2.8
All-Red Time (s)	2.9			2.9		
Lost Time Adjust (s)	0.0		0.0	0.0	0.0	0.0
Total Lost Time (s)	6.6		5.8	6.6	6.1	6.1
Lead/Lag	Lead		Lag			
Lead-Lag Optimize?	Yes		Yes			
Vehicle Extension (s)	3.0		3.0	3.0	3.0	3.0
Recall Mode	Max		None	Max	None	None
Walk Time (s)	7.0		7.0	7.0	7.0	7.0
Flash Dont Walk (s)	11.0		15.0	11.0	15.0	15.0
Pedestrian Calls (#/hr)	0		0	0	0	0
Act Effct Green (s)	73.5		94.3	93.5	11.7	11.7
Actuated g/C Ratio	0.62		0.80	0.79	0.10	0.10
v/c Ratio	0.82		0.50	0.39	0.55	0.60
Control Delay	22.0		30.6	4.4	63.0	15.9
Queue Delay	0.4		0.0	0.0	0.0	0.0
•	22.4		30.6	4.4	63.0	15.9
Total Delay	ZZ.4		0.0	4.4	03.0	15.9

		*	1	200	1	1
Lane Group	EBT	EBR	WBL	WBT	NBL	NBR
LOS	С		С	Α	Е	В
Approach Delay	22.4			7.7	31.0	
Approach LOS	С			Α	С	
Queue Length 50th (m)	150.2		10.0	29.6	20.4	1.1
Queue Length 95th (m)	205.1		32.0	46.2	36.9	22.3
Internal Link Dist (m)	239.3			293.9	88.7	
Turn Bay Length (m)			150.0			
Base Capacity (vph)	2081		298	2611	340	459
Starvation Cap Reductn	82		0	0	0	0
Spillback Cap Reductn	0		0	0	0	0
Storage Cap Reductn	0		0	0	0	0
Reduced v/c Ratio	0.86		0.50	0.39	0.27	0.42
Intersection Summary						

Other Area Type:

Cycle Length: 130

Actuated Cycle Length: 117.9

Natural Cycle: 90

Control Type: Semi Act-Uncoord Maximum v/c Ratio: 0.82 Intersection Signal Delay: 17.8 Intersection Capacity Utilization 73.5%

Intersection LOS: B ICU Level of Service D

Analysis Period (min) 15

Splits and Phases: 3: "Walmart Entrance" & Innes Road



	۶	→	•	1	+	•	1	1	~	/	ļ	1
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	7	^	7	7	1		7	^	7	ሻ	1	
Volume (vph)	133	1385	104	78	775	62	103	39	39	94	95	69
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	0.0		100.0	100.0		0.0	100.0		0.0	0.0		0.0
Storage Lanes	1		1	1		0	1		1	1		0
Taper Length (m)	2.5			2.5			2.5			2.5		
Lane Util. Factor	1.00	0.95	1.00	1.00	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.850		0.989				0.850		0.937	
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1712	3390	1532	1729	3293	0	1729	1802	1547	1712	1698	0
Flt Permitted	0.307		.002	0.075	0200		0.473			0.729		•
Satd. Flow (perm)	553	3390	1532	136	3293	0	861	1802	1547	1314	1698	0
Right Turn on Red			Yes		0200	Yes			Yes			Yes
Satd. Flow (RTOR)			116		14				70		26	. 00
Link Speed (k/h)		60	110		60			40	10		40	
Link Distance (m)		238.0			263.3			225.6			203.5	
Travel Time (s)		14.3			15.8			20.3			18.3	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Heavy Vehicles (%)	1%	2%	1%	0%	4%	2%	0%	1%	0%	1%	0%	1%
Adj. Flow (vph)	148	1539	116	87	861	69	114	43	43	104	106	77
Shared Lane Traffic (%)	170	1000	110	O1	001	03	117	70	70	104	100	11
Lane Group Flow (vph)	148	1539	116	87	930	0	114	43	43	104	183	0
Turn Type	Perm	NA	Perm	pm+pt	NA	U	Perm	NA	Perm	Perm	NA	U
Protected Phases	1 61111	2	1 Cilli	1	5		1 Cilli	3	1 Cilli	1 Cilli	7	
Permitted Phases	2		2	5	U		3	U	3	7	•	
Detector Phase	2	2	2	1	5		3	3	3	7	7	
Switch Phase	_	_	_	•			•		· ·	•	•	
Minimum Initial (s)	4.0	4.0	4.0	4.0	4.0		4.0	4.0	4.0	4.0	4.0	
Minimum Split (s)	24.6	24.6	24.6	8.7	24.6		28.8	28.8	28.8	28.8	28.8	
Total Split (s)	74.0	74.0	74.0	20.0	94.0		36.0	36.0	36.0	36.0	36.0	
Total Split (%)	56.9%	56.9%	56.9%	15.4%	72.3%		27.7%	27.7%	27.7%	27.7%	27.7%	
Maximum Green (s)	67.4	67.4	67.4	15.3	87.4		29.2	29.2	29.2	29.2	29.2	
Yellow Time (s)	3.7	3.7	3.7	3.7	3.7		3.0	3.0	3.0	3.0	3.0	
All-Red Time (s)	2.9	2.9	2.9	1.0	2.9		3.8	3.8	3.8	3.8	3.8	
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Total Lost Time (s)	6.6	6.6	6.6	4.7	6.6		6.8	6.8	6.8	6.8	6.8	
Lead/Lag	Lag	Lag	Lag	Lead	0.0		0.0	0.0	0.0	0.0	0.0	
Lead-Lag Optimize?	Yes	Yes	Yes	Yes								
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0	3.0	3.0	3.0	
Recall Mode	None	None	None	Max	Max		None	None	None	None	None	
Walk Time (s)	7.0	7.0	7.0	WICK	7.0		7.0	7.0	7.0	7.0	7.0	
Flash Dont Walk (s)	11.0	11.0	11.0		11.0		15.0	15.0	15.0	15.0	15.0	
Pedestrian Calls (#/hr)	0	0	0		0		0	0	0	0	0	
Act Effct Green (s)	67.5	67.5	67.5	89.5	87.6		17.6	17.6	17.6	17.6	17.6	
Actuated g/C Ratio	0.57	0.57	0.57	0.75	0.74		0.15	0.15	0.15	0.15	0.15	
v/c Ratio	0.37	0.80	0.37	0.73	0.74		0.13	0.15	0.15	0.13	0.13	
Control Delay	22.8	25.1	2.9	8.6	6.6		105.6	44.3	4.4	56.5	52.7	
·	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Queue Delay	22.8	25.1					105.6					
Total Delay	22.8	∠5. I	2.9	8.6	6.6		0.001	44.3	4.4	56.5	52.7	

	•	-	•	-	-	•	1	†	-	1	Ţ	1
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
LOS	С	С	Α	Α	Α		F	D	Α	Е	D	
Approach Delay		23.5			6.8			70.6			54.1	
Approach LOS		С			Α			Е			D	
Queue Length 50th (m)	19.2	140.6	0.0	4.5	35.2		26.3	8.8	0.0	22.6	34.9	
Queue Length 95th (m)	44.7	203.5	8.8	14.1	59.7		#50.0	19.0	4.1	40.1	58.0	
Internal Link Dist (m)		214.0			239.3			201.6			179.5	
Turn Bay Length (m)			100.0	100.0			100.0					
Base Capacity (vph)	315	1930	922	308	2435		212	444	434	324	438	
Starvation Cap Reductn	0	0	0	0	0		0	0	0	0	0	
Spillback Cap Reductn	0	0	0	0	0		0	0	0	0	0	
Storage Cap Reductn	0	0	0	0	0		0	0	0	0	0	
Reduced v/c Ratio	0.47	0.80	0.13	0.28	0.38		0.54	0.10	0.10	0.32	0.42	

Intersection Summary

Area Type: Other

Cycle Length: 130

Actuated Cycle Length: 118.6

Natural Cycle: 90

Control Type: Semi Act-Uncoord Maximum v/c Ratio: 0.90 Intersection Signal Delay: 23.9 Intersection Capacity Utilization 81.5%

Intersection LOS: C
ICU Level of Service D

Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 4: Frank Bender St. & Innes Road



	۶	-	•	~		•	1	1	~	/	ļ	1
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	7	^	7	7	^	7	ሻሻ	^	7	ሻሻ	^	7
Volume (vph)	35	330	65	192	1159	525	112	339	72	136	143	60
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	120.0	1000	120.0	120.0	1000	100.0	100.0	1000	20.0	70.0	1000	20.0
Storage Lanes	1		1	1		1	2		1	2		1
Taper Length (m)	2.5		•	2.5			2.5		•	2.5		·
Lane Util. Factor	1.00	0.95	1.00	1.00	0.95	1.00	0.97	0.95	1.00	0.97	0.95	1.00
Frt	1.00	0.00	0.850	1.00	0.00	0.850	0.01	0.00	0.850	0.01	0.00	0.850
Flt Protected	0.950		0.000	0.950		0.000	0.950		0.000	0.950		0.000
Satd. Flow (prot)	1383	3007	1473	1712	3357	1517	3195	3262	1502	3288	3007	1289
Flt Permitted	0.144	0007	1470	0.553	0001	1017	0.950	0202	1002	0.950	0001	1200
Satd. Flow (perm)	210	3007	1473	996	3357	1517	3195	3262	1502	3288	3007	1289
Right Turn on Red	210	0007	Yes	330	0001	Yes	0100	0202	Yes	0200	0001	Yes
Satd. Flow (RTOR)			142			432			144			144
Link Speed (k/h)		60	172		60	702		60	דדו		60	דדו
Link Distance (m)		317.9			302.5			358.6			236.2	
Travel Time (s)		19.1			18.2			21.5			14.2	
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Heavy Vehicles (%)	25%	15%	5%	1.00	3%	2%	5%	6%	3%	2%	15%	20%
Adj. Flow (vph)	35	330	65	192	1159	525	112	339	72	136	143	60
Shared Lane Traffic (%)	33	330	00	132	1100	323	112	303	12	100	170	00
Lane Group Flow (vph)	35	330	65	192	1159	525	112	339	72	136	143	60
Turn Type	pm+pt	NA	Perm	pm+pt	NA	Perm	Prot	NA	Perm	Prot	NA	Perm
Protected Phases	4	1	i Giiii	4	1	i Giiii	3	2	I GIIII	3	2	i Giiii
Permitted Phases	1		1	1		1	0		2	3	2	2
Detector Phase	4	1	1	4	1	1	3	2	2	3	2	2
Switch Phase	7			7		·	0			3	2	
Minimum Initial (s)	1.0	4.0	4.0	1.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
Minimum Split (s)	7.1	28.4	28.4	7.1	28.4	28.4	14.5	28.2	28.2	14.5	28.2	28.2
Total Split (s)	12.0	62.0	62.0	12.0	62.0	62.0	15.0	31.0	31.0	15.0	31.0	31.0
Total Split (%)	10.0%	51.7%	51.7%	10.0%	51.7%	51.7%	12.5%	25.8%	25.8%	12.5%	25.8%	25.8%
Maximum Green (s)	5.9	55.6	55.6	5.9	55.6	55.6	8.7	24.8	24.8	8.7	24.8	24.8
Yellow Time (s)	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7
All-Red Time (s)	2.4	2.7	2.7	2.4	2.7	2.7	2.6	2.5	2.5	2.6	2.5	2.5
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.1	6.4	6.4	6.1	6.4	6.4	6.3	6.2	6.2	6.3	6.2	6.2
Lead/Lag	Lag	Lead	Lead	Lag	Lead	Lead	Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	None	Max	Max	None	Max	Max	None	None	None	None	None	None
Walk Time (s)	None	7.0	7.0	INOILE	7.0	7.0	INOTIC	7.0	7.0	NONE	7.0	7.0
Flash Dont Walk (s)		15.0	15.0		15.0	15.0		15.0	15.0		15.0	15.0
Pedestrian Calls (#/hr)		0	0		0	0		0	0		0	0
Act Effct Green (s)	61.9	55.7	55.7	61.9	55.7	55.7	8.4	17.9	17.9	8.4	17.9	17.9
Actuated g/C Ratio	0.55	0.49	0.49	0.55	0.49	0.49	0.07	0.16	0.16	0.07	0.16	0.16
v/c Ratio	0.33	0.49	0.49	0.33	0.49	0.49	0.07	0.16	0.16	0.07	0.10	0.18
Control Delay	13.3	17.5	0.06	13.6	25.7	6.2	58.2	50.9	1.2	60.8	43.2	1.2
•	0.0	0.0	0.2	0.0	0.0	0.2	0.0	0.0	0.0	0.0	0.0	0.0
Queue Delay	13.3	17.5	0.0	13.6	25.7	6.2	58.2		1.2	60.8	43.2	1.2
Total Delay	13.3	17.5	0.2	13.0	23.7	0.2	30.2	50.9	1.2	٥.J	43.2	1.2

	•		7	1	•	*	4	†	1	1	Ţ	1
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
LOS	В	В	Α	В	С	Α	Е	D	Α	Е	D	Α
Approach Delay		14.6			19.0			45.6			42.8	
Approach LOS		В			В			D			D	
Queue Length 50th (m)	3.0	21.1	0.0	17.9	101.0	10.8	12.4	37.5	0.0	15.2	14.8	0.0
Queue Length 95th (m)	8.1	33.8	0.0	33.3	141.0	39.7	22.6	52.4	0.0	26.6	24.2	0.0
Internal Link Dist (m)		293.9			278.5			334.6			212.2	
Turn Bay Length (m)	120.0		120.0	120.0		100.0	100.0		20.0	70.0		20.0
Base Capacity (vph)	176	1483	798	583	1655	967	246	717	442	253	661	395
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.20	0.22	0.08	0.33	0.70	0.54	0.46	0.47	0.16	0.54	0.22	0.15

Intersection Summary

Area Type: Other

Cycle Length: 120

Actuated Cycle Length: 112.9


Natural Cycle: 90

Control Type: Semi Act-Uncoord Maximum v/c Ratio: 0.70 Intersection Signal Delay: 25.4 Intersection Capacity Utilization 72.0%

Intersection LOS: C
ICU Level of Service C

Analysis Period (min) 15

Splits and Phases: 1: Mer Bleue Road/Jeanne D'Arc Blvd & Innes Road



Lane Group EBT EBR WBL WBT NBL NBR Lane Configurations ↑↑ ↑			*	1	4-	1	1
Lane Configurations	Lane Group	EBT	EBR	WBI	WBT	NBI	NBR
Volume (vph) 447 22 41 1329 5 33 Ideal Flow (vphpl) 1800 1800 1800 1800 1800 1800 Storage Length (m) 0.0 150.0 0.0 0.0 0.0 Storage Lanes 0 1 1 1 1 Taper Length (m) 2.5 2.5 2.5 1.00 0.950 0.950 0.850 Flt Protected 0.950 0.950 0.950 0.950 1459							
Ideal Flow (vphpl)	•		22	1.1			
Storage Length (m)	\						
Storage Lanes	,	1000			1300		
Taper Length (m)							
Lane Util. Factor				-			
Fit Protected 0.993 0.950 0.950 Fit Protected 0.950 0.950 Satd. Flow (prot) 3030 0 1729 3325 1729 1459 Fit Permitted 0.483 0.950 Satd. Flow (perm) 3030 0 879 3325 1729 1459 Right Turn on Red Yes		0.95	0.95		0.95		1 00
Fit Protected			0.50	1.00	0.00	1.00	
Satd. Flow (prot) 3030 0 1729 3325 1729 1459 Fit Permitted 0.483 0.950 1459 Satd. Flow (perm) 3030 0 879 3325 1729 1459 Right Turn on Red Yes Yes Yes Yes Satd. Flow (RTOR) 10 60 60 60 Link Distance (m) 263.3 317.9 112.7 Travel Time (s) 15.8 19.1 6.8 Peak Hour Factor 1.00 1.00 1.00 1.00 1.00 1.00 Heavy Vehicles (%) 14% 0% 0% 4% 0% 6% Adj. Flow (vph) 447 22 41 1329 5 33 Shared Lane Traffic (%) Lane Group Flow (vph) 469 0 41 1329 5 33 Turn Type NA Permitted Phases 1 1 2 2 Permitted Phases 1 1 2 2		0.000		0.950		0.950	0.000
Fit Permitted 30.483 0.950 Satd. Flow (perm) 3030 0 879 3325 1729 1459 Right Turn on Red Yes Satd. Flow (RTOR) 10 33 317.9 112.7 33 31.5 317.9 112.7 33 31.5 317.9 112.7 33 31.7 311.2 31.7 311.2 31.7 31.7 31.2 31.7 31.3		3030	Λ		3325		1459
Satd. Flow (perm) 3030 0 879 3325 1729 1459 Right Turn on Red Yes Yes Yes Yes Satd. Flow (RTOR) 10 33 33 33 Link Speed (k/h) 60 60 60 60 Link Distance (m) 263.3 317.9 112.7 Travel Time (s) 15.8 19.1 6.8 Peak Hour Factor 1.00		3030	U		3323		1400
Right Turn on Red Yes Yes Satd. Flow (RTOR) 10 33 Link Speed (k/h) 60 60 60 Link Distance (m) 263.3 317.9 112.7 Travel Time (s) 15.8 19.1 6.8 Peak Hour Factor 1.00 1.00 1.00 1.00 1.00 Heavy Vehicles (%) 14% 0% 0% 4% 0% 6% Adj. Flow (vph) 447 22 41 1329 5 33 Shared Lane Traffic (%) Lane Group Flow (vph) 469 0 41 1329 5 33 Turn Type NA Perm NA Perm NA Perm Protected Phases 1 1 2 2 Detector Phase 1 1 1 2 2 Switch Phase 1 1 1 2 2 2 2 2 2 2 2 2 2 2 2 <td></td> <td>3030</td> <td>0</td> <td></td> <td>3325</td> <td></td> <td>1//50</td>		3030	0		3325		1//50
Satd. Flow (RTOR) 10 60 60 60 Link Speed (k/h) 60 60 60 60 Link Distance (m) 263.3 317.9 112.7 Travel Time (s) 15.8 19.1 6.8 Peak Hour Factor 1.00 6% 6% 6% 6% 6% 6% 6% 6% 6% 6% 6% 6% 6% 6% 6% 20 20 1.00 1.00 1.00 1.00 <t< td=""><td></td><td>3030</td><td></td><td>019</td><td>3323</td><td>1729</td><td></td></t<>		3030		019	3323	1729	
Link Speed (k/h) 60 60 60 Link Distance (m) 263.3 317.9 112.7 Travel Time (s) 15.8 19.1 6.8 Peak Hour Factor 1.00 1.00 1.00 1.00 1.00 1.00 1.00 Heavy Vehicles (%) 14% 0% 0% 4% 0% 6% Adj. Flow (vph) 447 22 41 1329 5 33 Shared Lane Traffic (%) Lane Group Flow (vph) 469 0 41 1329 5 33 Turn Type NA Perm NA Prot Perm Protected Phases 1 2 Permitted Phases 1 1 2 Permitted Phases 1 1 2 Permitted Phase 1 1 1 2 Switch Phase Minimum Initial (s) 4.0 4.0 4.0 4.0 4.0 Minimum Split (s) 24.6 24.6 24.6 28.1 28.1 Total Split (%) 75.0% 75.0% 25.0% 25.0% Maximum Green (s) 83.4 83.4 83.4 23.9 23.9 Yellow Time (s) 3.7 3.7 3.7 3.7 3.3 3.3 All-Red Time (s) 2.9 2.9 2.9 2.9 2.8 2.8 Lost Time Adjust (s) 0.0 0.0 0.0 0.0 0.0 Total Lost Time (s) 4.0 4.0 4.0 4.0 4.0 4.0 4.0 4.0 4.0 4.0		40	res				
Link Distance (m) 263.3 317.9 112.7 Travel Time (s) 15.8 19.1 6.8 Peak Hour Factor 1.00 4.0<					00	00	33
Travel Time (s) 15.8 19.1 6.8 Peak Hour Factor 1.00 6% 9 33 3							
Peak Hour Factor 1.00 1.00 1.00 1.00 1.00 1.00 1.00 1.00 1.00 1.00 1.00 1.00 1.00 1.00 6% 6% Adj. Flow (vph) 6% 6% Adj. Flow (vph) 447 22 41 1329 5 33 33 Shared Lane Traffic (%) Lane Group Flow (vph) 469 0 41 1329 5 33 Turn Type NA Perm NA Prot Perm Permitted Phases 1 1 2 2 Detector Phase 1 1 1 2 2 Switch Phase 1 1 1 2							
Heavy Vehicles (%)	. ,		4.60	4.00			4.00
Adj. Flow (vph) 447 22 41 1329 5 33 Shared Lane Traffic (%) Lane Group Flow (vph) 469 0 41 1329 5 33 Turn Type NA Perm NA Prot Perm Permitted Phases 1 1 2 2 Detector Phase 1 1 1 2 2 Switch Phase 1 1 1 2 2 2 2 3 3 4.0							
Shared Lane Traffic (%) Lane Group Flow (vph) 469 0 41 1329 5 33 Turn Type NA Perm NA Prot Perm Permitted Phases 1 1 2 2 Detector Phase 1 1 1 2 2 Switch Phase 1 1 1 2 2 Minimum Initial (s) 4.0 4.0 4.0 4.0 4.0 Minimum Split (s) 24.6 24.6 24.6 28.1 28.1 Total Split (s) 90.0 90.0 90.0 30.0 30.0 Total Split (%) 75.0% 75.0% 75.0% 25.0% 25.0% Maximum Green (s) 83.4 83.4 83.4 23.9 23.9 Yellow Time (s) 3.7 3.7 3.7 3.3 3.3 All-Red Time (s) 2.9 2.9 2.9 2.8 2.8 Lost Time Adjust (s) 0.0 0.0 0.0 <t< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td></t<>							
Lane Group Flow (vph) 469 0 41 1329 5 33 Turn Type NA Perm NA Prot Perm Protected Phases 1 1 2 Detector Phase 1 1 1 2 Switch Phase 1 1 1 2 2 Minimum Initial (s) 4.0 4.0 4.0 4.0 4.0 Minimum Split (s) 24.6 24.6 24.6 28.1 28.1 Total Split (s) 90.0 90.0 90.0 30.0 30.0 Total Split (%) 75.0% 75.0% 75.0% 25.0% 25.0% Maximum Green (s) 83.4 83.4 83.4 23.9 23.9 Yellow Time (s) 3.7 3.7 3.7 3.3 3.3 All-Red Time (s) 2.9 2.9 2.9 2.8 2.8 Lost Time Adjust (s) 0.0 0.0 0.0 0.0 0.0 Total Lost Time		447	22	41	1329	5	33
Turn Type NA Perm NA Prot Perm Protected Phases 1 1 2 Detector Phase 1 1 1 2 Switch Phase 1 1 1 2 2 Minimum Initial (s) 4.0 4.0 4.0 4.0 4.0 Minimum Split (s) 24.6 24.6 24.6 28.1 28.1 Total Split (s) 90.0 90.0 90.0 30.0 30.0 Total Split (%) 75.0% 75.0% 75.0% 25.0% 25.0% Maximum Green (s) 83.4 83.4 83.4 23.9 23.9 Yellow Time (s) 3.7 3.7 3.7 3.3 3.3 All-Red Time (s) 2.9 2.9 2.9 2.8 2.8 Lost Time Adjust (s) 0.0 0.0 0.0 0.0 0.0 Total Lost Time (s) 6.6 6.6 6.6 6.1 6.1 Lead/Lag Lead <td>Shared Lane Traffic (%)</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>	Shared Lane Traffic (%)						
Protected Phases 1 1 2 Detector Phase 1 1 1 2 Switch Phase 1 1 1 2 2 Minimum Initial (s) 4.0 4.0 4.0 4.0 4.0 4.0 Minimum Split (s) 24.6 24.6 24.6 28.1 28.1 28.1 Total Split (s) 90.0 90.0 90.0 30.0 30.0 30.0 Total Split (%) 75.0% 75.0% 75.0% 25.0% 25.0% 25.0% Maximum Green (s) 83.4 83.4 83.4 23.9 23.9 Yellow Time (s) 3.7 3.7 3.3 3.3 All-Red Time (s) 2.9 2.9 2.9 2.8 2.8 Lost Time Adjust (s) 0.0 0	Lane Group Flow (vph)		0				
Permitted Phases 1 2 2 Switch Phase 1 1 1 2 2 Minimum Initial (s) 4.0 4.0 4.0 4.0 4.0 Minimum Split (s) 24.6 24.6 24.6 28.1 28.1 Total Split (s) 90.0 90.0 90.0 30.0 30.0 Total Split (%) 75.0% 75.0% 75.0% 25.0% 25.0% Maximum Green (s) 83.4 83.4 83.4 23.9 23.9 Yellow Time (s) 3.7 3.7 3.7 3.3 3.3 All-Red Time (s) 2.9 2.9 2.9 2.8 2.8 Lost Time Adjust (s) 0.0 0.0 0.0 0.0 0.0 Total Lost Time (s) 6.6 6.6 6.6 6.1 6.1 Lead/Lag Lead Lead Lead Lag Lag Lead-Lag Optimize? Yes Yes Yes Yes Yes Yes <t< td=""><td>Turn Type</td><td>NA</td><td></td><td>Perm</td><td>NA</td><td>Prot</td><td>Perm</td></t<>	Turn Type	NA		Perm	NA	Prot	Perm
Detector Phase 1 1 1 2 2 Switch Phase Minimum Initial (s) 4.0 4.0 4.0 4.0 4.0 4.0 4.0 4.0 4.0 4.0 Minimum Initial (s) 4.0 Minimum Initial (s) 2.0 24.6 24.6 28.1 28.1 28.1 28.1 28.1 28.1 28.1 28.1 28.1 28.1 28.1 28.1 25.0% 25.0% 25.0% 25.0% 25.0% 25.0% 23.9 23.9 29.9 29.9 2.8 2.8 2.8 2.8 2.8 2.8 2.8 2.8 2.8 2.8 2.8 2.8 2.8 2.8 2.8 2.8 2.8 </td <td>Protected Phases</td> <td>1</td> <td></td> <td></td> <td>1</td> <td>2</td> <td></td>	Protected Phases	1			1	2	
Switch Phase Minimum Initial (s) 4.0 28.1 28.1 28.1 25.0% 25.0% 25.0% 25.0% 25.0% 23.9 23.9 23.9 23.9 23.9 2.9 2.9 2.9 <td>Permitted Phases</td> <td></td> <td></td> <td>1</td> <td></td> <td></td> <td>2</td>	Permitted Phases			1			2
Minimum Initial (s) 4.0 4.0 4.0 4.0 4.0 Minimum Split (s) 24.6 24.6 24.6 28.1 28.1 Total Split (s) 90.0 90.0 90.0 30.0 30.0 Total Split (%) 75.0% 75.0% 75.0% 25.0% 25.0% Maximum Green (s) 83.4 83.4 83.4 23.9 23.9 Yellow Time (s) 3.7 3.7 3.7 3.3 3.3 All-Red Time (s) 2.9 2.9 2.9 2.8 2.8 Lost Time Adjust (s) 0.0 0.0 0.0 0.0 0.0 Total Lost Time (s) 6.6 6.6 6.6 6.1 6.1 Lead/Lag Lead Lead Lead Lag Lag Lead-Lag Optimize? Yes	Detector Phase	1		1	1	2	2
Minimum Split (s) 24.6 24.6 24.6 28.1 28.1 Total Split (s) 90.0 90.0 90.0 30.0 30.0 Total Split (%) 75.0% 75.0% 75.0% 25.0% 25.0% Maximum Green (s) 83.4 83.4 83.4 23.9 23.9 Yellow Time (s) 3.7 3.7 3.7 3.3 3.3 All-Red Time (s) 2.9 2.9 2.9 2.8 2.8 Lost Time Adjust (s) 0.0 0.0 0.0 0.0 0.0 Total Lost Time (s) 6.6 6.6 6.6 6.6 6.1 6.1 Lead/Lag Lead Lead Lead Lag Lag Lead-Jag Optimize? Yes Yes Yes Yes Yes Vehicle Extension (s) 3.0 3.0 3.0 3.0 3.0 Recall Mode Max Max Max None None Walk Time (s) 7.0 7.0 7.0	Switch Phase						
Minimum Split (s) 24.6 24.6 24.6 28.1 28.1 Total Split (s) 90.0 90.0 90.0 30.0 30.0 Total Split (%) 75.0% 75.0% 75.0% 25.0% 25.0% Maximum Green (s) 83.4 83.4 83.4 23.9 23.9 Yellow Time (s) 3.7 3.7 3.7 3.3 3.3 All-Red Time (s) 2.9 2.9 2.9 2.8 2.8 Lost Time Adjust (s) 0.0 0.0 0.0 0.0 0.0 Total Lost Time (s) 6.6 6.6 6.6 6.1 6.1 Lead/Lag Lead Lead Lead Lag Lag Lead-Jag Optimize? Yes Yes Yes Yes Yes Vehicle Extension (s) 3.0 3.0 3.0 3.0 3.0 3.0 Recall Mode Max Max Max None None None Walk Time (s) 7.0 7.	Minimum Initial (s)	4.0		4.0	4.0	4.0	4.0
Total Split (s) 90.0 90.0 90.0 30.0 30.0 Total Split (%) 75.0% 75.0% 75.0% 25.0% 25.0% Maximum Green (s) 83.4 83.4 83.4 23.9 23.9 Yellow Time (s) 3.7 3.7 3.7 3.3 3.3 All-Red Time (s) 2.9 2.9 2.9 2.8 2.8 Lost Time Adjust (s) 0.0 0.0 0.0 0.0 0.0 Total Lost Time (s) 6.6 6.6 6.6 6.1 6.1 Lead/Lag Lead Lead Lead Lag Lag Lead-Lag Optimize? Yes	` ,						
Total Split (%) 75.0% 75.0% 75.0% 25.0% 25.0% Maximum Green (s) 83.4 83.4 83.4 23.9 23.9 Yellow Time (s) 3.7 3.7 3.7 3.3 3.3 All-Red Time (s) 2.9 2.9 2.9 2.8 2.8 Lost Time Adjust (s) 0.0 0.0 0.0 0.0 0.0 0.0 Total Lost Time (s) 6.6 6.6 6.6 6.6 6.1 6.1 Lead/Lag Lead Lead Lead Lead Lag Lag Lead-Lag Optimize? Yes Yes Yes Yes Yes Yes Vehicle Extension (s) 3.0 3.0 3.0 3.0 3.0 3.0 Recall Mode Max Max Max None None None Walk Time (s) 7.0 7.0 7.0 7.0 7.0 7.0 Flash Dont Walk (s) 11.0 11.0 11.0 15.0							
Maximum Green (s) 83.4 83.4 23.9 23.9 Yellow Time (s) 3.7 3.7 3.3 3.3 All-Red Time (s) 2.9 2.9 2.9 2.8 2.8 Lost Time Adjust (s) 0.0 0.0 0.0 0.0 0.0 0.0 Total Lost Time (s) 6.6 6.6 6.6 6.6 6.1 6.1 Lead/Lag Lead Lead Lead Lag Lag Lead-Lag Optimize? Yes Yes Yes Yes Vehicle Extension (s) 3.0 3.0 3.0 3.0 Recall Mode Max Max Max None None Walk Time (s) 7.0 7.0 7.0 7.0 7.0 Flash Dont Walk (s) 11.0 11.0 11.0 15.0 15.0 Pedestrian Calls (#/hr) 0 0 0 0 0 0 Act Effet Green (s) 101.1 101.1 101.1 101.1 6.4							
Yellow Time (s) 3.7 3.7 3.7 3.3 3.3 All-Red Time (s) 2.9 2.9 2.9 2.8 2.8 Lost Time Adjust (s) 0.0 0.0 0.0 0.0 0.0 Total Lost Time (s) 6.6 6.6 6.6 6.6 6.1 6.1 Lead/Lag Lead Lead Lead Lag Lag Lead-Lag Optimize? Yes Yes Yes Yes Yes Vehicle Extension (s) 3.0 3.0 3.0 3.0 3.0 Recall Mode Max Max Max None None Walk Time (s) 7.0 7.0 7.0 7.0 7.0 Flash Dont Walk (s) 11.0 11.0 11.0 15.0 15.0 Pedestrian Calls (#/hr) 0 0 0 0 0 0 Act Effet Green (s) 101.1 101.1 101.1 6.4 6.4 Actuated g/C Ratio 0.90 0.90							
All-Red Time (s) 2.9 2.9 2.9 2.8 2.8 Lost Time Adjust (s) 0.0 0.0 0.0 0.0 0.0 0.0 Total Lost Time (s) 6.6 6.6 6.6 6.6 6.1 6.1 Lead/Lag Lead Lead Lead Lag Lag Lead-Lag Optimize? Yes Yes Yes Yes Yes Vehicle Extension (s) 3.0 3.0 3.0 3.0 3.0 Recall Mode Max Max Max None None Walk Time (s) 7.0 7.0 7.0 7.0 7.0 7.0 Flash Dont Walk (s) 11.0 11.0 11.0 15.0 15.0 Pedestrian Calls (#/hr) 0 0 0 0 0 Act Effct Green (s) 101.1 101.1 101.1 6.4 6.4 Actuated g/C Ratio 0.90 0.90 0.90 0.06 0.06 v/c Ratio 0.17 0.05 0.44 0.05 0.29							
Lost Time Adjust (s) 0.0 0.0 0.0 0.0 0.0 Total Lost Time (s) 6.6 6.6 6.6 6.1 6.1 Lead/Lag Lead Lead Lead Lag Lag Lead-Lag Optimize? Yes Yes Yes Yes Yes Vehicle Extension (s) 3.0 3.0 3.0 3.0 3.0 Recall Mode Max Max Max None None Walk Time (s) 7.0 7.0 7.0 7.0 7.0 Flash Dont Walk (s) 11.0 11.0 11.0 15.0 15.0 Pedestrian Calls (#/hr) 0 0 0 0 0 0 Act Effet Green (s) 101.1 101.1 101.1 101.1 6.4 6.4 Actuated g/C Ratio 0.90 0.90 0.90 0.06 0.06 v/c Ratio 0.17 0.05 0.44 0.05 0.29	\ /						
Total Lost Time (s) 6.6 6.6 6.6 6.1 6.1 Lead/Lag Lead Lead Lead Lag Lag Lead-Lag Optimize? Yes Yes Yes Yes Yes Vehicle Extension (s) 3.0 3.0 3.0 3.0 3.0 Recall Mode Max Max Max None None Walk Time (s) 7.0 7.0 7.0 7.0 7.0 Flash Dont Walk (s) 11.0 11.0 11.0 15.0 15.0 Pedestrian Calls (#/hr) 0 0 0 0 0 0 Act Effet Green (s) 101.1 101.1 101.1 6.4 6.4 Actuated g/C Ratio 0.90 0.90 0.90 0.06 0.06 v/c Ratio 0.17 0.05 0.44 0.05 0.29							
Lead/Lag Lead Lead Lead Lag Lag Lead-Lag Optimize? Yes Yes Yes Yes Yes Vehicle Extension (s) 3.0 3.0 3.0 3.0 3.0 Recall Mode Max Max Max None None Walk Time (s) 7.0 7.0 7.0 7.0 7.0 Flash Dont Walk (s) 11.0 11.0 11.0 15.0 15.0 Pedestrian Calls (#/hr) 0 0 0 0 0 0 Act Effet Green (s) 101.1 101.1 101.1 6.4 6.4 Actuated g/C Ratio 0.90 0.90 0.90 0.06 0.06 v/c Ratio 0.17 0.05 0.44 0.05 0.29	•						
Lead-Lag Optimize? Yes	` '						
Vehicle Extension (s) 3.0 3.0 3.0 3.0 3.0 Recall Mode Max Max Max None None Walk Time (s) 7.0 7.0 7.0 7.0 7.0 Flash Dont Walk (s) 11.0 11.0 11.0 15.0 15.0 Pedestrian Calls (#/hr) 0 0 0 0 0 Act Effct Green (s) 101.1 101.1 101.1 6.4 6.4 Actuated g/C Ratio 0.90 0.90 0.90 0.06 0.06 v/c Ratio 0.17 0.05 0.44 0.05 0.29							
Recall Mode Max Max Max None None Walk Time (s) 7.0 7.0 7.0 7.0 7.0 Flash Dont Walk (s) 11.0 11.0 11.0 15.0 15.0 Pedestrian Calls (#/hr) 0 0 0 0 0 Act Effct Green (s) 101.1 101.1 101.1 6.4 6.4 Actuated g/C Ratio 0.90 0.90 0.90 0.06 0.06 v/c Ratio 0.17 0.05 0.44 0.05 0.29							
Walk Time (s) 7.0 7.0 7.0 7.0 7.0 Flash Dont Walk (s) 11.0 11.0 11.0 15.0 15.0 Pedestrian Calls (#/hr) 0 0 0 0 0 Act Effct Green (s) 101.1 101.1 101.1 6.4 6.4 Actuated g/C Ratio 0.90 0.90 0.90 0.06 0.06 v/c Ratio 0.17 0.05 0.44 0.05 0.29							
Flash Dont Walk (s) 11.0 11.0 11.0 15.0 Pedestrian Calls (#/hr) 0 0 0 0 0 Act Effct Green (s) 101.1 101.1 101.1 6.4 6.4 Actuated g/C Ratio 0.90 0.90 0.90 0.06 0.06 v/c Ratio 0.17 0.05 0.44 0.05 0.29							
Pedestrian Calls (#/hr) 0 0 0 0 0 Act Effct Green (s) 101.1 101.1 101.1 6.4 6.4 Actuated g/C Ratio 0.90 0.90 0.90 0.06 0.06 v/c Ratio 0.17 0.05 0.44 0.05 0.29							
Act Effct Green (s) 101.1 101.1 101.1 6.4 6.4 Actuated g/C Ratio 0.90 0.90 0.90 0.06 0.06 v/c Ratio 0.17 0.05 0.44 0.05 0.29							
Actuated g/C Ratio 0.90 0.90 0.90 0.06 0.06 v/c Ratio 0.17 0.05 0.44 0.05 0.29							
v/c Ratio 0.17 0.05 0.44 0.05 0.29	` ,						
	Actuated g/C Ratio	0.90		0.90	0.90	0.06	0.06
Control Delay 1.6 1.8 2.5 52.8 23.9	v/c Ratio	0.17		0.05	0.44	0.05	0.29
	Control Delay	1.6		1.8	2.5	52.8	23.9
Queue Delay 0.0 0.0 0.0 0.0 0.0	-						
Total Delay 1.6 1.8 2.5 52.8 23.9	•						

		*	1	-	1	-
Lane Group	EBT	EBR	WBL	WBT	NBL	NBR
LOS	А		Α	Α	D	С
Approach Delay	1.6			2.5	27.7	
Approach LOS	Α			Α	С	
Queue Length 50th (m)	7.5		1.1	30.7	1.1	0.0
Queue Length 95th (m)	12.5		3.2	46.4	5.1	9.9
Internal Link Dist (m)	239.3			293.9	88.7	
Turn Bay Length (m)			150.0			
Base Capacity (vph)	2724		790	2989	368	336
Starvation Cap Reductn	0		0	0	0	0
Spillback Cap Reductn	0		0	0	0	0
Storage Cap Reductn	0		0	0	0	0
Reduced v/c Ratio	0.17		0.05	0.44	0.01	0.10
Intersection Summary						
Area Type:	Other					
Cycle Length: 120						
Actuated Cycle Length: 17	12.5					
Natural Cycle: 60						
Control Type: Semi Act-U	ncoord					
Maximum v/c Ratio: 0.44						
Intersection Signal Delay:	2.7			In	tersection	LOS: A
Intersection Capacity Utiliz	zation 52.7%			IC	U Level o	of Service A

Splits and Phases: 3: "Walmart Entrance" & Innes Road

Analysis Period (min) 15



	٠	-	•	•	+	•	4	1	~	1	ţ	1
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	7	^	7	7	1		ħ	↑	₹	*	7	
Volume (vph)	33	382	15	24	1216	82	15	37	3	39	24	43
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	0.0		100.0	100.0		0.0	100.0		0.0	0.0		0.0
Storage Lanes	1		1	1		0	1		1	1		0
Taper Length (m)	2.5		•	2.5		-	2.5		•	2.5		-
Lane Util. Factor	1.00	0.95	1.00	1.00	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00
Frt	1.00	0.00	0.850	1.00	0.991	0.00	1.00	1.00	0.850	1.00	0.904	1.00
Flt Protected	0.950		0.000	0.950	0.001		0.950		0.000	0.950	0.001	
Satd. Flow (prot)	1572	3033	1345	1662	3331	0	1729	1670	1547	1679	1624	0
Flt Permitted	0.213	0000	10-10	0.491	0001	U	0.713	1070	10-11	0.733	1024	J
Satd. Flow (perm)	352	3033	1345	859	3331	0	1298	1670	1547	1295	1624	0
Right Turn on Red	002	3033	Yes	000	3331	Yes	1230	1070	Yes	1233	1024	Yes
Satd. Flow (RTOR)			77		12	163			75		43	163
Link Speed (k/h)		60	11		60			40	13		40	
Link Distance (m)		238.0			263.3			225.6			203.5	
` ,		14.3			15.8			20.3			18.3	
Travel Time (s)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
												2%
	33	382	15	24	1216	82	15	31	3	39	24	43
. ,	20	200	45	0.4	4000	0	4.5	07	0	20	07	0
						U						0
	Perm		Perm				Perm		Perm	Perm		
		2			5			3		_	1	
					_						_	
	2	2	2	1	5		3	3	3	7	7	
` ,												
` '												
Total Lost Time (s)	6.6	6.6	6.6	4.7	6.6		6.8	6.8	6.8	6.8	6.8	
Lead/Lag	Lag	Lag	Lag	Lead								
Lead-Lag Optimize?	Yes	Yes	Yes	Yes								
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0	3.0	3.0	3.0	
Recall Mode	None	None	None	Max	Max		None	None	None	None	None	
Walk Time (s)	7.0	7.0	7.0		7.0		7.0	7.0	7.0	7.0	7.0	
Flash Dont Walk (s)	11.0	11.0	11.0		11.0		15.0	15.0	15.0	15.0	15.0	
Pedestrian Calls (#/hr)	0	0	0		0		0	0	0	0	0	
Act Effct Green (s)	67.7	67.7	67.7	79.7	79.3		8.4	8.4	8.4	8.4	8.4	
\ ,	0.70	0.70	0.70	0.82	0.82		0.09	0.09	0.09	0.09	0.09	
		0.18	0.02	0.03				0.26	0.01			
Queue Delay											0.0	
Peak Hour Factor Heavy Vehicles (%) Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Turn Type Protected Phases Permitted Phases Detector Phase Switch Phase Minimum Initial (s) Minimum Split (s) Total Split (%) Maximum Green (s) Yellow Time (s) Lost Time Adjust (s) Total Lost Time (s) Lead/Lag Lead-Lag Optimize? Vehicle Extension (s) Recall Mode Walk Time (s) Pedestrian Calls (#/hr) Act Effct Green (s) Actuated g/C Ratio v/c Ratio Control Delay	Yes 3.0 None 7.0 11.0 0 67.7	1.00 14% 382 382 NA 2 2 4.0 24.6 74.0 67.4 3.7 2.9 0.0 6.6 Lag Yes 3.0 None 7.0 11.0 0 67.7 0.70	Yes 3.0 None 7.0 11.0 0 67.7 0.70	Yes 3.0 Max 79.7 0.82	1.00 3% 1216 1298 NA 5 5 4.0 24.6 84.0 70.0% 77.4 3.7 2.9 0.0 6.6	1.00 1% 82 0	7.0 15.0 0 8.4	1.00 9% 37 NA 3 3 4.0 28.8 36.0 30.0% 29.2 3.0 3.8 0.0 6.8 3.0 None 7.0 15.0 0 8.4 0.09	None 7.0 15.0 0 8.4 0.09	None 7.0 15.0 0 8.4	1.00 0% 24 67 NA 7 7 4.0 28.8 36.0 30.0% 29.2 3.0 3.8 0.0 6.8 3.0 None 7.0 15.0 0 8.4 0.09 0.37 26.4	

ΔM	Peak	

	•	-	7	1	•	•	1	†	1	1	Į.	1
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
LOS	Α	Α	Α	Α	А		D	D	Α	D	С	
Approach Delay		5.9			4.3			43.5			35.6	
Approach LOS		Α			Α			D			D	
Queue Length 50th (m)	2.0	12.5	0.0	0.7	36.6		2.7	6.8	0.0	7.2	4.4	
Queue Length 95th (m)	6.4	20.1	0.0	2.5	56.6		8.9	16.3	0.0	17.3	16.9	
Internal Link Dist (m)		214.0			239.3			201.6			179.5	
Turn Bay Length (m)			100.0	100.0			100.0					
Base Capacity (vph)	246	2122	964	751	2731		393	506	521	392	522	
Starvation Cap Reductn	0	0	0	0	0		0	0	0	0	0	
Spillback Cap Reductn	0	0	0	0	0		0	0	0	0	0	
Storage Cap Reductn	0	0	0	0	0		0	0	0	0	0	
Reduced v/c Ratio	0.13	0.18	0.02	0.03	0.48		0.04	0.07	0.01	0.10	0.13	

Intersection Summary

Area Type: Other

Cycle Length: 120

Actuated Cycle Length: 96.8


Natural Cycle: 65

Control Type: Semi Act-Uncoord Maximum v/c Ratio: 0.48 Intersection Signal Delay: 7.5 Intersection Capacity Utilization 58.3%

Intersection LOS: A ICU Level of Service B

Analysis Period (min) 15

Splits and Phases: 4: Frank Bender St. & Innes Road



Lane Group EBL EBT EBR WBL WBT WBR NBL NBT NBR SBL SBT Lane Configurations 1 2 2 25 428 449 1800 <td< th=""><th>82 1800 20.0 1</th></td<>	82 1800 20.0 1
Lane Configurations 1 7 1 7 1 7 1 7 1 7 1 7 1 7 1 1 1 1 1 1 1 1 1 1 1 1 1 1 2 2 2 4 2 4 4 4 9 Ideal Flow (vphpl) 1800	82 1800 20.0 1
Volume (vph) 136 1289 140 181 714 296 167 272 259 428 449 Ideal Flow (vphpl) 1800	82 1800 20.0 1
Ideal Flow (vphpl) 1800 <td>1800 20.0 1</td>	1800 20.0 1
Storage Length (m) 120.0 120.0 120.0 100.0 100.0 20.0 70.0 Storage Lanes 1 1 1 1 2 1 2 Taper Length (m) 2.5 2.5 2.5 2.5 2.5 Lane Util. Factor 1.00 0.95 1.00 0.95 1.00 0.97 0.95 1.00 0.97	20.0
Storage Lanes 1 1 1 1 2 1 2 Taper Length (m) 2.5 2.5 2.5 2.5 2.5 Lane Util. Factor 1.00 0.95 1.00 0.95 1.00 0.97 0.95 1.00 0.97 0.95	1.00
Taper Length (m) 2.5 2.5 2.5 2.5 Lane Util. Factor 1.00 0.95 1.00 0.95 1.00 0.95 1.00 0.97 0.95 1.00 0.97	
Lane Util. Factor 1.00 0.95 1.00 1.00 0.95 1.00 0.97 0.95 1.00 0.97 0.95	
U U U U U U U U U U U U U U U U U U U	0.850
Flt Protected 0.950 0.950 0.950 0.950	0.000
Satd. Flow (prot) 1679 3424 1547 1712 3390 1517 3288 3357 1547 3354 3357	1432
Flt Permitted 0.283 0.076 0.950 0.950	1102
Satd. Flow (perm) 500 3424 1547 137 3390 1517 3288 3357 1547 3354 3357	1432
Right Turn on Red Yes Yes Yes	Yes
Satd. Flow (RTOR) 140 296 160	133
Link Speed (k/h) 60 60 60 60	100
Link Distance (m) 317.9 302.5 358.6 236.2	
Travel Time (s) 19.1 18.2 21.5 14.2	
Peak Hour Factor 1.00 1.00 1.00 1.00 1.00 1.00 1.00 1.0	1.00
Heavy Vehicles (%) 3% 1% 0% 1% 2% 2% 3% 0% 0% 3%	8%
Adj. Flow (vph) 136 1289 140 181 714 296 167 272 259 428 449	82
Shared Lane Traffic (%)	02
Lane Group Flow (vph) 136 1289 140 181 714 296 167 272 259 428 449	82
Turn Type pm+pt NA Perm pm+pt NA Perm Prot NA Perm Prot NA	Perm
Protected Phases 4 1 4 1 3 2 3 2	1 01111
Permitted Phases 1 1 1 1 2	2
Detector Phase 4 1 1 4 1 1 3 2 2 3 2	2
Switch Phase	_
Minimum Initial (s) 1.0 4.0 4.0 1.0 4.0 4.0 4.0 4.0 4.0 4.0 4.0 4.0	4.0
Minimum Split (s) 7.1 28.4 28.4 7.1 28.4 28.4 14.5 28.2 28.2 14.5 28.2	28.2
Total Split (s) 17.0 59.0 59.0 17.0 59.0 23.0 31.0 23.0 31.0	31.0
Total Split (%) 13.1% 45.4% 45.4% 13.1% 45.4% 17.7% 23.8% 23.8% 17.7% 23.8%	23.8%
Maximum Green (s) 10.9 52.6 52.6 10.9 52.6 52.6 16.7 24.8 24.8 16.7 24.8	24.8
Yellow Time (s) 3.7 3.7 3.7 3.7 3.7 3.7 3.7 3.7 3.7 3.7	3.7
All-Red Time (s) 2.4 2.7 2.7 2.4 2.7 2.6 2.5 2.6 2.5	2.5
Lost Time Adjust (s) 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.	0.0
Total Lost Time (s) 6.1 6.4 6.4 6.1 6.4 6.3 6.2 6.2 6.3 6.2	6.2
Lead/Lag Lag Lead Lag Lead Lead Lag	Lag
Lead-Lag Optimize? Yes	Yes
Vehicle Extension (s) 3.0 3.0 3.0 3.0 3.0 3.0 3.0 3.0 3.0 3.0	3.0
Recall Mode None Max Max None Max None None None None None	None
Walk Time (s) 7.0 7.0 7.0 7.0 7.0 7.0 7.0	7.0
Flash Dont Walk (s) 15.0 15.0 15.0 15.0 15.0 15.0	15.0
Pedestrian Calls (#/hr) 0 0 0 0 0 0 0	0
Act Effct Green (s) 63.9 52.6 52.6 63.9 52.6 16.7 22.8 22.8 16.7 22.8	22.8
Actuated g/C Ratio 0.50 0.41 0.41 0.50 0.41 0.41 0.13 0.18 0.18 0.18	0.18
v/c Ratio 0.39 0.92 0.19 0.90 0.51 0.37 0.39 0.46 0.64 0.98 0.75	0.23
Control Delay 18.4 47.2 4.5 72.8 30.1 4.1 54.5 49.6 26.2 93.8 58.5	2.5
Queue Delay 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.	0.0
Total Delay 18.4 47.2 4.5 72.8 30.1 4.1 54.5 49.6 26.2 93.8 58.5	2.5

	•	-	*	1		•	1	1	-	1	Į.	1
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
LOS	В	D	Α	Е	С	Α	D	D	С	F	Е	Α
Approach Delay		40.9			30.1			42.1			69.5	
Approach LOS		D			С			D			Е	
Queue Length 50th (m)	16.9	164.0	0.0	31.2	71.7	0.0	20.5	32.6	22.5	57.2	57.1	0.0
Queue Length 95th (m)	27.9	#209.3	12.4	#74.3	90.1	17.0	31.7	46.4	51.4	#90.6	75.5	2.3
Internal Link Dist (m)		293.9			278.5			334.6			212.2	
Turn Bay Length (m)	120.0		120.0	120.0		100.0	100.0		20.0	70.0		20.0
Base Capacity (vph)	349	1407	718	202	1393	798	429	650	428	437	650	384
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.39	0.92	0.19	0.90	0.51	0.37	0.39	0.42	0.61	0.98	0.69	0.21

Intersection Summary

Area Type: Other

Cycle Length: 130

Actuated Cycle Length: 128.1

Natural Cycle: 110


Control Type: Semi Act-Uncoord Maximum v/c Ratio: 0.98 Intersection Signal Delay: 44.4 Intersection Capacity Utilization 89.9%

Intersection LOS: D
ICU Level of Service E

Analysis Period (min) 15

Queue shown is maximum after two cycles.

Splits and Phases: 1: Mer Bleue Road/Jeanne D'Arc Blvd & Innes Road



^{# 95}th percentile volume exceeds capacity, queue may be longer.

		•	1		4	1
Lane Group	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations	† }		*	**	7	7
Volume (vph)	1477	84	135	914	83	175
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800
Storage Length (m)	,,,,,	0.0	150.0	. 500	0.0	0.0
Storage Lanes		0.0	100.0		1	1
Taper Length (m)			2.5		2.5	
Lane Util. Factor	0.95	0.95	1.00	0.95	1.00	1.00
Frt	0.992	0.00	1.00	0.00	1.00	0.850
Flt Protected	0.002		0.950		0.950	0.000
Satd. Flow (prot)	3336	0	1729	3293	1679	1532
Flt Permitted	3000	U	0.101	0200	0.950	1002
Satd. Flow (perm)	3336	0	184	3293	1679	1532
Right Turn on Red	3330	Yes	104	3233	10/9	Yes
	7	168				175
Satd. Flow (RTOR)				60	40	1/5
Link Speed (k/h)	60			60	40	
Link Distance (m)	263.3			317.9	112.7	
Travel Time (s)	15.8	4.00	4.00	19.1	10.1	4.00
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00
Heavy Vehicles (%)	3%	0%	0%	5%	3%	1%
Adj. Flow (vph)	1477	84	135	914	83	175
Shared Lane Traffic (%)						
Lane Group Flow (vph)	1561	0	135	914	83	175
Turn Type	NA		pm+pt	NA	Prot	Perm
Protected Phases	1		2	5	3	
Permitted Phases			5			3
Detector Phase	1		2	5	3	3
Switch Phase						
Minimum Initial (s)	4.0		3.9	4.0	4.0	4.0
Minimum Split (s)	24.6		12.0	24.6	28.1	28.1
Total Split (s)	80.0		20.0	100.0	30.0	30.0
Total Split (%)	61.5%		15.4%	76.9%	23.1%	23.1%
Maximum Green (s)	73.4		14.2	93.4	23.170	23.170
Yellow Time (s)	3.7		3.7	3.7	3.3	3.3
All-Red Time (s)	2.9		2.1	2.9	2.8	2.8
\ /						
Lost Time Adjust (s)	0.0		0.0	0.0	0.0	0.0
Total Lost Time (s)	6.6		5.8	6.6	6.1	6.1
Lead/Lag	Lead		Lag			
Lead-Lag Optimize?	Yes		Yes			
Vehicle Extension (s)	3.0		3.0	3.0	3.0	3.0
Recall Mode	Max		None	Max	None	None
Walk Time (s)	7.0		7.0	7.0	7.0	7.0
Flash Dont Walk (s)	11.0		15.0	11.0	15.0	15.0
Pedestrian Calls (#/hr)	0		0	0	0	0
Act Effct Green (s)	73.5		94.3	93.5	11.1	11.1
Actuated g/C Ratio	0.63		0.80	0.80	0.09	0.09
v/c Ratio	0.75		0.40	0.35	0.52	0.58
Control Delay	18.6		18.7	4.0	62.4	15.2
Queue Delay	0.2		0.0	0.0	0.0	0.0
Total Delay	18.8		18.7	4.0	62.4	15.2
Total Delay	10.0		10.1	4.0	02.4	10.2

		*	1	+	1	1
Lane Group	EBT	EBR	WBL	WBT	NBL	NBR
LOS	В		В	Α	Е	В
Approach Delay	18.8			5.9	30.4	
Approach LOS	В			Α	С	
Queue Length 50th (m)	122.7		5.3	25.0	18.5	0.0
Queue Length 95th (m)	166.8		17.7	39.1	34.6	20.1
Internal Link Dist (m)	239.3			293.9	88.7	
Turn Bay Length (m)			150.0			
Base Capacity (vph)	2092		335	2624	342	451
Starvation Cap Reductn	92		0	0	0	0
Spillback Cap Reductn	0		0	0	0	0
Storage Cap Reductn	0		0	0	0	0
Reduced v/c Ratio	0.78		0.40	0.35	0.24	0.39
Intersection Summary						
Area Type:	Other					
Cycle Length: 130						
	47.0					

Actuated Cycle Length: 117.3

Natural Cycle: 90

Control Type: Semi Act-Uncoord Maximum v/c Ratio: 0.75 Intersection Signal Delay: 15.1 Intersection Capacity Utilization 74.1%

Intersection LOS: B
ICU Level of Service D

Analysis Period (min) 15

Splits and Phases: 3: "Walmart Entrance" & Innes Road



	۶	→	7	1	+	•	1	1	~	/	ļ	1
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	7	^	7	7	1		7	†	7	7	1	
Volume (vph)	134	1399	105	79	783	63	104	39	39	95	96	70
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	0.0		100.0	100.0		0.0	100.0		0.0	0.0		0.0
Storage Lanes	1		1	1		0	1		1	1		0
Taper Length (m)	2.5			2.5			2.5			2.5		
Lane Util. Factor	1.00	0.95	1.00	1.00	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.850		0.989				0.850		0.937	
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1712	3390	1532	1729	3293	0	1729	1802	1547	1712	1698	0
Flt Permitted	0.334			0.103	0200	•	0.525			0.732		
Satd. Flow (perm)	602	3390	1532	187	3293	0	956	1802	1547	1319	1698	0
Right Turn on Red			Yes		0200	Yes			Yes			Yes
Satd. Flow (RTOR)			105		14				70		26	. 00
Link Speed (k/h)		60	100		60			40	10		40	
Link Distance (m)		238.0			263.3			225.6			203.5	
Travel Time (s)		14.3			15.8			20.3			18.3	
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Heavy Vehicles (%)	1%	2%	1%	0%	4%	2%	0%	1%	0%	1%	0%	1%
Adj. Flow (vph)	134	1399	105	79	783	63	104	39	39	95	96	70
Shared Lane Traffic (%)	104	1000	100	7.5	700	00	104	00	00	33	30	10
Lane Group Flow (vph)	134	1399	105	79	846	0	104	39	39	95	166	0
Turn Type	Perm	NA	Perm	pm+pt	NA	U	Perm	NA	Perm	Perm	NA	U
Protected Phases	1 01111	2	1 01111	1	5		1 01111	3	1 01111	1 01111	7	
Permitted Phases	2	_	2	5			3		3	7	•	
Detector Phase	2	2	2	1	5		3	3	3	7	7	
Switch Phase	_	_	_	•	· ·				Ū	•	•	
Minimum Initial (s)	4.0	4.0	4.0	4.0	4.0		4.0	4.0	4.0	4.0	4.0	
Minimum Split (s)	24.6	24.6	24.6	8.7	24.6		28.8	28.8	28.8	28.8	28.8	
Total Split (s)	74.0	74.0	74.0	20.0	94.0		36.0	36.0	36.0	36.0	36.0	
Total Split (%)	56.9%	56.9%	56.9%	15.4%	72.3%		27.7%	27.7%	27.7%	27.7%	27.7%	
Maximum Green (s)	67.4	67.4	67.4	15.3	87.4		29.2	29.2	29.2	29.2	29.2	
Yellow Time (s)	3.7	3.7	3.7	3.7	3.7		3.0	3.0	3.0	3.0	3.0	
All-Red Time (s)	2.9	2.9	2.9	1.0	2.9		3.8	3.8	3.8	3.8	3.8	
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Total Lost Time (s)	6.6	6.6	6.6	4.7	6.6		6.8	6.8	6.8	6.8	6.8	
Lead/Lag	Lag	Lag	Lag	Lead	0.0		0.0	0.0	0.0	0.0	0.0	
Lead-Lag Optimize?	Yes	Yes	Yes	Yes								
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0	3.0	3.0	3.0	
Recall Mode	None	None	None	Max	Max		None	None	None	None	None	
Walk Time (s)	7.0	7.0	7.0	max	7.0		7.0	7.0	7.0	7.0	7.0	
Flash Dont Walk (s)	11.0	11.0	11.0		11.0		15.0	15.0	15.0	15.0	15.0	
Pedestrian Calls (#/hr)	0	0	0		0		0	0	0	0	0	
Act Effct Green (s)	67.6	67.6	67.6	89.5	87.6		17.8	17.8	17.8	17.8	17.8	
Actuated g/C Ratio	0.57	0.57	0.57	0.75	0.74		0.15	0.15	0.15	0.15	0.15	
v/c Ratio	0.39	0.73	0.37	0.73	0.74		0.73	0.13	0.13	0.13	0.60	
Control Delay	20.2	22.7	3.0	6.4	6.5		75.5	43.7	3.2	53.9	48.4	
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Total Delay	20.2	22.7	3.0	6.4	6.5		75.5	43.7	3.2	53.9	48.4	
Total Delay	20.2	22.1	5.0	0.4	0.5		10.0	73.1	J.Z	JJ.J	70.4	

PM	Peak

	•	-	7	1	+	•	1	Ť	-	1	Į.	1
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
LOS	С	С	Α	Α	А		Е	D	Α	D	D	
Approach Delay		21.2			6.5			53.2			50.4	
Approach LOS		С			Α			D			D	
Queue Length 50th (m)	16.5	119.6	0.0	4.1	31.2		23.4	8.0	0.0	20.5	30.7	
Queue Length 95th (m)	38.1	175.5	8.5	10.7	54.2		42.6	17.6	2.8	37.0	52.2	
Internal Link Dist (m)		214.0			239.3			201.6			179.5	
Turn Bay Length (m)			100.0	100.0			100.0					
Base Capacity (vph)	342	1926	915	339	2430		235	443	433	324	437	
Starvation Cap Reductn	0	0	0	0	0		0	0	0	0	0	
Spillback Cap Reductn	0	0	0	0	0		0	0	0	0	0	
Storage Cap Reductn	0	0	0	0	0		0	0	0	0	0	
Reduced v/c Ratio	0.39	0.73	0.11	0.23	0.35		0.44	0.09	0.09	0.29	0.38	

Intersection Summary

Area Type: Other

Cycle Length: 130

Actuated Cycle Length: 118.9

Natural Cycle: 80

Control Type: Semi Act-Uncoord Maximum v/c Ratio: 0.73 Intersection Signal Delay: 21.2 Intersection Capacity Utilization 82.1%

Intersection LOS: C ICU Level of Service E

Analysis Period (min) 15

Splits and Phases: 4: Frank Bender St. & Innes Road






APPENDIX F: CITY OF OTTAWA TDM CHECKLISTS

TDM Measures Checklist:

Non-Residential Developments (office, institutional, retail or industrial)

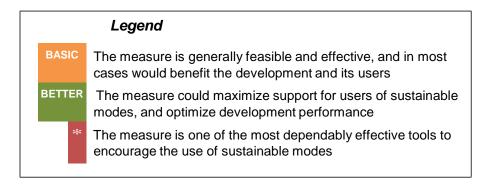

	TDM	measures: Non-residential developments	Check if proposed & add descriptions
	1.	TDM PROGRAM MANAGEMENT	
	1.1	Program coordinator	
BASIC	* 1.1.1	Designate an internal coordinator, or contract with an external coordinator	□ Recommended
	1.2	Travel surveys	
BETTER	1.2.1	Conduct periodic surveys to identify travel-related behaviours, attitudes, challenges and solutions, and to track progress	
	2.	WALKING AND CYCLING	
	2.1	Information on walking/cycling routes & destination	ations
BASIC	2.1.1	Display local area maps with walking/cycling access routes and key destinations at major entrances	Recommended
	2.2	Bicycle skills training	
		Commuter travel	
BETTER	* 2.2.1	Offer on-site cycling courses for commuters, or subsidize off-site courses	Low number of employees; not feasible
	2.3	Valet bike parking	
		Visitor travel	
BETTER	2.3.1	Offer secure valet bike parking during public events when demand exceeds fixed supply (e.g. for festivals, concerts, games)	No such events expected

	TDM measures: Non-residential developments		measures: Non-residential developments	Check if proposed & add descriptions
	,	3.	TRANSIT	
	;	3.1	Transit information	
BASIC	;	3.1.1	Display relevant transit schedules and route maps at entrances	
BASIC	;	3.1.2	Provide online links to OC Transpo and STO information	□ Recommended
BETTER	;	3.1.3	Provide real-time arrival information display at entrances	
	;	3.2	Transit fare incentives	
			Commuter travel	
BETTER	;	3.2.1	Offer preloaded PRESTO cards to encourage commuters to use transit	
BETTER	*	3.2.2	Subsidize or reimburse monthly transit pass purchases by employees	
			Visitor travel	
BETTER	;	3.2.3	Arrange inclusion of same-day transit fare in price of tickets (e.g. for festivals, concerts, games)	
	;	3.3	Enhanced public transit service	
			Commuter travel	
BETTER	;	3.3.1	Contract with OC Transpo to provide enhanced transit services (e.g. for shift changes, weekends)	
			Visitor travel	
BETTER	;	3.3.2	Contract with OC Transpo to provide enhanced transit services (e.g. for festivals, concerts, games)	
	;	3.4	Private transit service	
			Commuter travel	
BETTER	;	3.4.1	Provide shuttle service when OC Transpo cannot offer sufficient quality or capacity to serve demand (e.g. for shift changes, weekends)	
			Visitor travel	
BETTER	;	3.4.2	Provide shuttle service when OC Transpo cannot offer sufficient quality or capacity to serve demand (e.g. for festivals, concerts, games)	

	TDM	measures: Non-residential developments	Check if proposed & add descriptions	
	4.	RIDESHARING		
	4.1	Ridematching service Commuter travel		
BASIC	* 4.1.1	Provide a dedicated ridematching portal at	☐ Not feasible due to low number of employees	
	4.2	Carpool parking price incentives	, , , , , , , , , , , , , , , , , , , ,	
		Commuter travel		
BETTER	4.2.1	Provide discounts on parking costs for registered carpools		
	4.3	Vanpool service		
		Commuter travel		
BETTER	4.3.1	Provide a vanpooling service for long-distance commuters		
	5.	CARSHARING & BIKESHARING		
	5.1	Bikeshare stations & memberships		
BETTER	5.1.1	Contract with provider to install on-site bikeshare station for use by commuters and visitors		
		Commuter travel		
BETTER	5.1.2	Provide employees with bikeshare memberships for local business travel		
	5.2	Carshare vehicles & memberships		
		Commuter travel		
BETTER	5.2.1	Contract with provider to install on-site carshare vehicles and promote their use by tenants		
BETTER	5.2.2	Provide employees with carshare memberships for local business travel		
	6.	PARKING		
	6.1	Priced parking		
		Commuter travel		
BASIC	* 6.1.1	Charge for long-term parking (daily, weekly, monthly)		
BASIC	6.1.2	Unbundle parking cost from lease rates at multi-tenant sites		
		Visitor travel		
BETTER	6.1.3	Charge for short-term parking (hourly)		

	TDM	measures: Non-residential developments	Check if proposed & add descriptions	
	7.	TDM MARKETING & COMMUNICATIONS		
	7.1	Multimodal travel information		
		Commuter travel		
BASIC *	7.1.1	Provide a multimodal travel option information package to new/relocating employees and students		
		Visitor travel		
BETTER *	7.1.2	Include multimodal travel option information in invitations or advertising that attract visitors or customers (e.g. for festivals, concerts, games)		
	7.2	Personalized trip planning		
	_	Commuter travel		
BETTER *	7.2.1	Offer personalized trip planning to new/relocating employees		
	7.3	Promotions		
		Commuter travel		
BETTER	7.3.1	Deliver promotions and incentives to maintain awareness, build understanding, and encourage trial of sustainable modes		
	8.	OTHER INCENTIVES & AMENITIES		
	8.1	Emergency ride home		
		Commuter travel	ı	
BETTER *	8.1.1	Provide emergency ride home service to non-driving commuters		
	8.2	Alternative work arrangements		
	_	Commuter travel		
BASIC *	8.2.1	Encourage flexible work hours		
BETTER	8.2.2	Encourage compressed workweeks		
BETTER *	8.2.3	Encourage telework		
	8.3	Local business travel options		
		Commuter travel		
BASIC *	8.3.1	Provide local business travel options that minimize the need for employees to bring a personal car to work		
	8.4	Commuter incentives		
		Commuter travel		
BETTER	8.4.1	Offer employees a taxable, mode-neutral commuting allowance		
	8.5	On-site amenities		
		Commuter travel		
BETTER	8.5.1	Provide on-site amenities/services to minimize mid-day or mid-commute errands		

TDM Measures Checklist:

Residential Developments (multi-family, condominium or subdivision)

BASIC The measure is generally feasible and effective, and in most cases would benefit the development and its users The measure could maximize support for users of sustainable modes, and optimize development performance The measure is one of the most dependably effective tools to encourage the use of sustainable modes

	TDM	measures: Residential developments	Check if proposed & add descriptions
	1.	TDM PROGRAM MANAGEMENT	
	1.1	Program coordinator	
BASIC	* 1.1.1	Designate an internal coordinator, or contract with an external coordinator	
	1.2	Travel surveys	
BETTER	1.2.1	Conduct periodic surveys to identify travel-related behaviours, attitudes, challenges and solutions, and to track progress	
	2.	WALKING AND CYCLING	
	2.1	Information on walking/cycling routes & dest	inations
BASIC	2.1.1	Display local area maps with walking/cycling access routes and key destinations at major entrances (multi-family, condominium)	
	2.2	Bicycle skills training	
BETTER	2.2.1	Offer on-site cycling courses for residents, or subsidize off-site courses	

		TDM	measures: Residential developments	Check if proposed & add descriptions
		3.	TRANSIT	
		3.1	Transit information	
BASIC		3.1.1	Display relevant transit schedules and route maps at entrances (multi-family, condominium)	
BETTER		3.1.2	Provide real-time arrival information display at entrances (multi-family, condominium)	
		3.2	Transit fare incentives	
BASIC	*	3.2.1	Offer PRESTO cards preloaded with one monthly transit pass on residence purchase/move-in, to encourage residents to use transit	
BETTER		3.2.2	Offer at least one year of free monthly transit passes on residence purchase/move-in	
		3.3	Enhanced public transit service	
BETTER	*	3.3.1	Contract with OC Transpo to provide early transit services until regular services are warranted by occupancy levels (subdivision)	
		3.4	Private transit service	
BETTER		3.4.1	Provide shuttle service for seniors homes or lifestyle communities (e.g. scheduled mall or supermarket runs)	
		4.	CARSHARING & BIKESHARING	
	_	4.1	Bikeshare stations & memberships	
BETTER		4.1.1	Contract with provider to install on-site bikeshare station (<i>multi-family</i>)	
BETTER		4.1.2	Provide residents with bikeshare memberships, either free or subsidized (multi-family)	
		4.2	Carshare vehicles & memberships	
BETTER		4.2.1	Contract with provider to install on-site carshare vehicles and promote their use by residents	
BETTER		4.2.2	Provide residents with carshare memberships, either free or subsidized	
		5.	PARKING	
		5.1	Priced parking	
BASIC	*	5.1.1	Unbundle parking cost from purchase price (condominium)	
BASIC	*	5.1.2	Unbundle parking cost from monthly rent (multi-family)	

		TDM	measures: Residential developments	Check if proposed & add descriptions
		6.	TDM MARKETING & COMMUNICATIONS	
	(6.1	Multimodal travel information	
BASIC	*	6.1.1	Provide a multimodal travel option information package to new residents	
		6.2	Personalized trip planning	
BETTER	*	6.2.1	Offer personalized trip planning to new residents	

TDM-Supportive Development Design and Infrastructure Checklist:

Residential Developments (multi-family or condominium)

Legend The Official Plan or Zoning By-law provides related guidance that must be followed The measure is generally feasible and effective, and in most cases would benefit the development and its users The measure could maximize support for users of sustainable modes, and optimize development performance

	TDM-	supportive design & infrastructure measures: Residential developments	Check if completed & add descriptions, explanations or plan/drawing references
	1.	WALKING & CYCLING: ROUTES	
	1.1	Building location & access points	
BASIC	1.1.1	Locate building close to the street, and do not locate parking areas between the street and building entrances	Parking area is located on the side of the building. Direct pedestrian connection to building's entrance is provided
BASIC	1.1.2	Locate building entrances in order to minimize walking distances to sidewalks and transit stops/stations	☑ Direct pedestrian connection to sidewalk is provided
BASIC	1.1.3	Locate building doors and windows to ensure visibility of pedestrians from the building, for their security and comfort	Building front door oriented to street
	1.2	Facilities for walking & cycling	
REQUIRED	1.2.1	Provide convenient, direct access to stations or major stops along rapid transit routes within 600 metres; minimize walking distances from buildings to rapid transit; provide pedestrian-friendly, weather-protected (where possible) environment between rapid transit accesses and building entrances; ensure quality linkages from sidewalks through building entrances to integrated stops/stations (see Official Plan policy 4.3.3)	Sidewalk to be provided fronting to site; direct access to the building's entrance to be provided
REQUIRED	1.2.2	Provide safe, direct and attractive pedestrian access from public sidewalks to building entrances through such measures as: reducing distances between public sidewalks and major building entrances; providing walkways from public streets to major building entrances; within a site, providing walkways along the front of adjoining buildings, between adjacent buildings, and connecting areas where people may congregate, such as courtyards and transit stops; and providing weather protection through canopies, colonnades, and	Pedestrian connectivity is maintained throughout the site, street sidewalk access is provided


	TDM-s	supportive design & infrastructure measures: Residential developments	Check if completed & add descriptions, explanations or plan/drawing references
		other design elements wherever possible (see Official Plan policy 4.3.12)	
REQUIRED	1.2.3	Provide sidewalks of smooth, well-drained walking surfaces of contrasting materials or treatments to differentiate pedestrian areas from vehicle areas, and provide marked pedestrian crosswalks at intersection sidewalks (see Official Plan policy 4.3.10)	On-site pedestrian areas designated by interlock pavers.
REQUIRED	1.2.4	Make sidewalks and open space areas easily accessible through features such as gradual grade transition, depressed curbs at street corners and convenient access to extra-wide parking spaces and ramps (see Official Plan policy 4.3.10)	Sidewalks / hard surfaces connect building entrances to accessible parking stall.
REQUIRED	1.2.5	Include adequately spaced inter-block/street cycling and pedestrian connections to facilitate travel by active transportation. Provide links to the existing or planned network of public sidewalks, multi-use pathways and onroad cycle routes. Where public sidewalks and multi-use pathways intersect with roads, consider providing traffic control devices to give priority to cyclists and pedestrians (see Official Plan policy 4.3.11)	Sidewalk to be continuous across site access
BASIC	1.2.6	Provide safe, direct and attractive walking routes from building entrances to nearby transit stops	\boxtimes
BASIC	1.2.7	Ensure that walking routes to transit stops are secure, visible, lighted, shaded and wind-protected wherever possible	
BASIC	1.2.8	Design roads used for access or circulation by cyclists using a target operating speed of no more than 30 km/h, or provide a separated cycling facility	□ N/A
	1.3	Amenities for walking & cycling	
BASIC	1.3.1	Provide lighting, landscaping and benches along walking and cycling routes between building entrances and streets, sidewalks and trails	
BASIC	1.3.2	Provide wayfinding signage for site access (where required, e.g. when multiple buildings or entrances exist) and egress (where warranted, such as when directions to reach transit stops/stations, trails or other common destinations are not obvious)	□ N/A


	TDM-s	supportive design & infrastructure measures: Residential developments	Check if completed & add descriptions, explanations or plan/drawing references	
	2.	WALKING & CYCLING: END-OF-TRIP FACILITY	ΓIES	
	2.1	Bicycle parking		
REQUIRED	2.1.1	Provide bicycle parking in highly visible and lighted areas, sheltered from the weather wherever possible (see Official Plan policy 4.3.6)	6 Outside cycle stalls	
REQUIRED	2.1.2	Provide the number of bicycle parking spaces specified for various land uses in different parts of Ottawa; provide convenient access to main entrances or well-used areas (see Zoning By-law Section 111)	6 indoor and secure cycle stalls Recommended to secure 4 out of 6 outdoor stalls for residents' use or move them	
REQUIRED	2.1.3	Ensure that bicycle parking spaces and access aisles meet minimum dimensions; that no more than 50% of spaces are vertical spaces; and that parking racks are securely anchored (see Zoning By-law Section 111)	inside	
BASIC	2.1.4	Provide bicycle parking spaces equivalent to the expected number of resident-owned bicycles, plus the expected peak number of visitor cyclists		
	2.2	Secure bicycle parking		
REQUIRED	2.2.1	Where more than 50 bicycle parking spaces are provided for a single residential building, locate at least 25% of spaces within a building/structure, a secure area (e.g. supervised parking lot or enclosure) or bicycle lockers (see Zoning By-law Section 111)		
BETTER	2.2.2	Provide secure bicycle parking spaces equivalent to at least the number of units at condominiums or multifamily residential developments	Recommended to increase number of bicycle stalls	
	2.3	Bicycle repair station		
BETTER	2.3.1	Provide a permanent bike repair station, with commonly used tools and an air pump, adjacent to the main bicycle parking area (or secure bicycle parking area, if provided)		
	3.	TRANSIT		
	3.1	Customer amenities		
BASIC	3.1.1	Provide shelters, lighting and benches at any on-site transit stops	□ N/A	
BASIC	3.1.2	Where the site abuts an off-site transit stop and insufficient space exists for a transit shelter in the public right-of-way, protect land for a shelter and/or install a shelter	□ N/A	
BETTER	3.1.3	Provide a secure and comfortable interior waiting area by integrating any on-site transit stops into the building		


	TDM-s	supportive design & infrastructure measures: Residential developments	Check if completed & add descriptions, explanations or plan/drawing references
	4.	RIDESHARING	
	4.1	Pick-up & drop-off facilities	
BASIC	4.1.1	Provide a designated area for carpool drivers (plus taxis and ride-hailing services) to drop off or pick up passengers without using fire lanes or other no-stopping zones	□ N/A
	5.	CARSHARING & BIKESHARING	
	5.1	Carshare parking spaces	
BETTER	5.1.1	Provide up to three carshare parking spaces in an R3, R4 or R5 Zone for specified residential uses (see Zoning By-law Section 94)	
	5.2	Bikeshare station location	
BETTER	5.2.1	Provide a designated bikeshare station area near a major building entrance, preferably lighted and sheltered with a direct walkway connection	
	6.	PARKING	
	6.1	Number of parking spaces	
REQUIRED	6.1.1	Do not provide more parking than permitted by zoning, nor less than required by zoning, unless a variance is being applied for	Parking does not exceed minimum zoning requirement
BASIC	6.1.2	Provide parking for long-term and short-term users that is consistent with mode share targets, considering the potential for visitors to use off-site public parking	
BASIC	6.1.3	Where a site features more than one use, provide shared parking and reduce the cumulative number of parking spaces accordingly (see Zoning By-law Section 104)	Parking provision in accordance with "shared parking provisions"
BETTER	6.1.4	Reduce the minimum number of parking spaces required by zoning by one space for each 13 square metres of gross floor area provided as shower rooms, change rooms, locker rooms and other facilities for cyclists in conjunction with bicycle parking (see Zoning By-law Section 111)	
	6.2	Separate long-term & short-term parking areas	
BETTER	6.2.1	Provide separate areas for short-term and long-term parking (using signage or physical barriers) to permit access controls and simplify enforcement (i.e. to discourage residents from parking in visitor spaces, and vice versa)	



APPENDIX G: ON-SITE TURNING MOVEMENTS

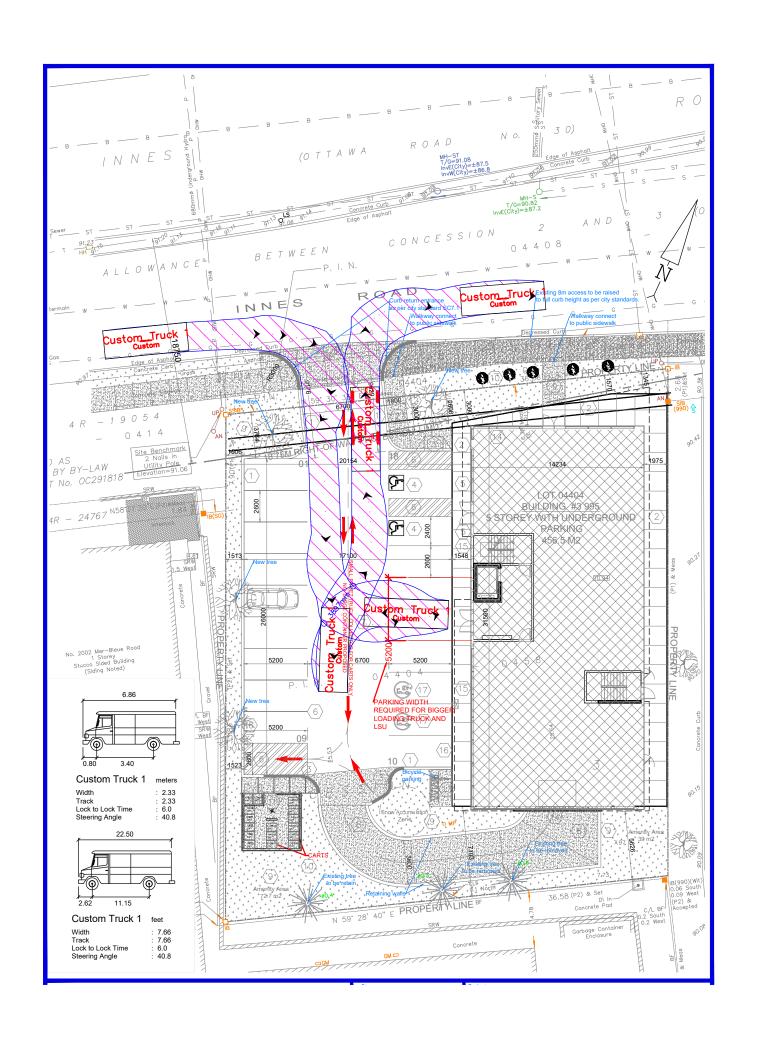

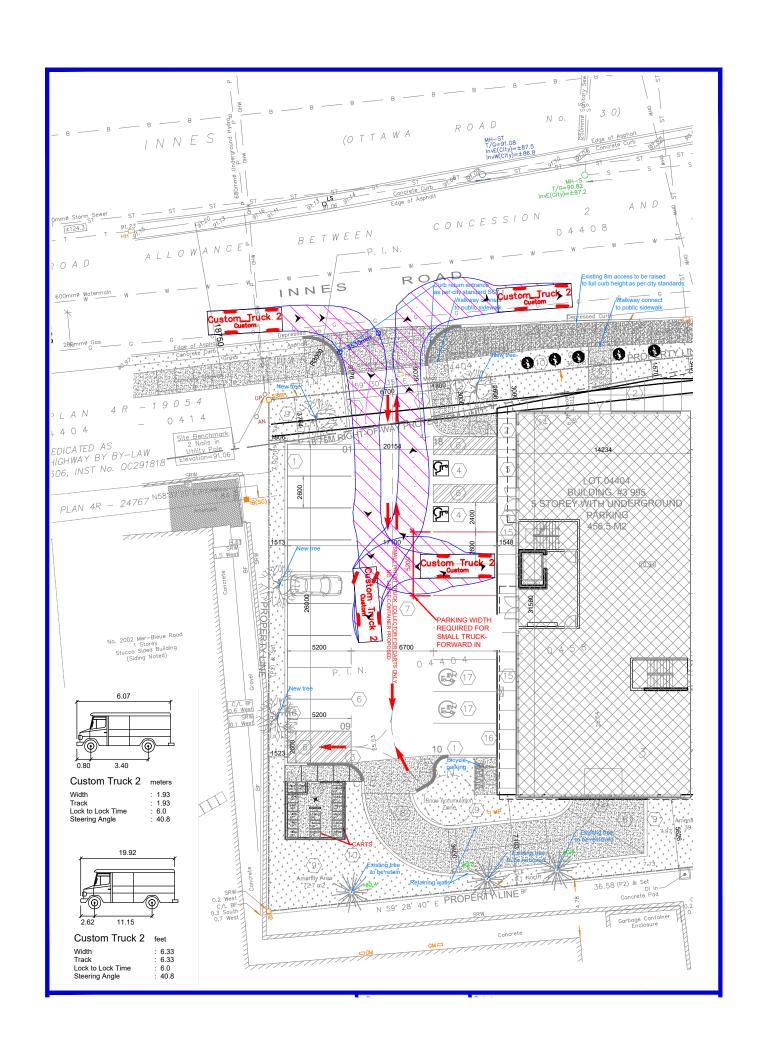

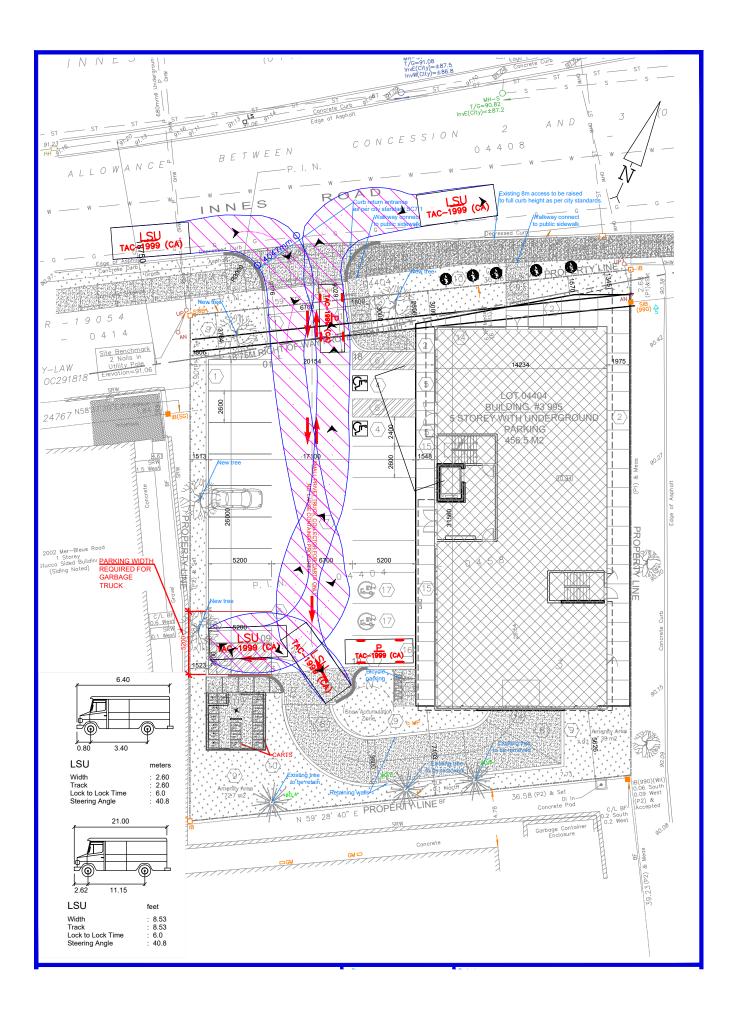



APPENDIX H: INTERSECTION MMLOS ANALYSIS

Table 1: Multi-Modal Level of Service -Innes Road ad Mer Bleue-Jeanne D'Arc

	Intersection Leg				
Performance Measure	West Leg - Innes Road	East leg - Innes Road	North Leg - Jeanne D'Arc Blvd	South Leg - Mer Bleue Rd	
Pedestrian LOS (PLOS)					
Total Travel Lanes (Assume 3.7 m lane width)	8	8	9	9	
Median > 2.4m	No	No	No	No	
Island Refuge Left Turn Type	No	No nm+nt	No protected	No protected	
	pm+pt Permissive	pm+pt Permissive	Permissive	Permissive	
Right Turn Type Right Turns on Red	yield	yield	yield	yield	
Tright Turns on Roa	yield	yield	yield	yield	
Leading Pedestrian Interval	No	No	No	No	
Corner Radius	>25 m	>25 m	>25 m	>25 m	
Right Turn Channel	conventional no receiving lane (0)				
Crosswalk Treatment	Standard Transverse	Standard Transverse	Standard Transverse	Standard Transverse	
PETSI Points	<0	<0	<0	<0	
Intersection PLOS	F	F	F	F	
Target PLOS	С	C Bicycle LOS (BLOS)	С	С	
		Bicycle LOS (BLOS)			
Bikeway Type	Bike Lane	Bike Lane	Bike Lane	Bike Lane	
Left Turn Approach	2 lanes crossed	2 lanes crossed	dual left	dual left	
Right Turn Lane Configuration of Approach	Exclusive RT	Exclusive RT	Exclusive RT	Exclusive RT	
Length of Right Turn Lane	>50	>50	<50	<50	
Turning Speed of Right Turning Vehicles	< 25	< 25	< 25	< 25	
Operating Speed (km/h)	70	70	70	70	
Intersection BLOS	E	Е	Е	Е	
Target BLOS	В	B Transit LOS (TLOS)	В	В	
Delay 2022 Background - AM (PM)	14.6(40.9)	19.0(30.1)	42.8(69.5)	45.6(42.1)	
Intersection TLOS	D	D	F	F	
Target TLOS	D	D D	D	D	
Effective Come: D - 1:		Truck LOS (TkLOS)			
Effective Corner Radius (m)	>15 m	>15 m	>15 m	>15 m	
Number of Receiving Lanes on Departing Leg	2	2	2	2	
Intersection TkLOS	A	A	A	A	
Target TkLOS	С	С	С	С	

Table 2: Multi-Modal Level of Service - Innes Road and Walmart Access

Performance Measure	West Leg - Innes Road	East Leg - Innes Road	South Leg - Walmart Access	N/A		
Pedestrian LOS (PLOS)						
Total Travel Lanes	6	6	5			
Median > 2.4m	No	No	No			
Island Refuge Left Turn Type	YES no	No nm+nt	No permissive			
		pm+pt				
Right Turn Type	Permissive	no	permissive			
Right Turns on Red	Allowed	no RT	allowed			
Leading Pedestrian Interval	No	No	No			
Corner Radius	10 to 15 m	N/A	5 to 10 m			
Right Turn Channel	No Right Turn Channel (-4)	N/A	No Right Turn Channel (-4)			
Crosswalk Treatment	Standard Transverse	Standard Transverse	Standard Transverse			
PETSI Points	28	34	40			
Intersection PLOS	F	Е	Е			
Target PLOS	C	ycle LOS (BLOS)	C			
	Bic	ycie LOS (BLOS)				
Bikeway Type	Bike Lane	Bike Lane	Mixed Traffic			
Left Turn Approach	2 lanes crossed	2 lanes crossed	1 lane crossed			
Right Turn Lane Configuration of Approach	Shared TH/Turn	no RT	Shared TH/Turn			
Length of Right Turn Lane	N/A	N/A	N/A			
Turning Speed of Right Turning Vehicles	< 25	> 25	< 25			
Operating Speed (km/h)	70	70	50			
Intersection BLOS	E	Е	Е			
Target BLOS	B Tra	msit LOS (TLOS)	В			
Delay 2022 Background - AM (PM)	1.6 (18.8)	2.5 (5.9)	27.7 (30.5)			
Intersection TLOS	В	В	N/A			
Target TLOS	D Two	D	N/A			
Effective Corner		ick LOS (TkLOS)				
Radius (m)	>15 m	>15 m	>15 m			
Number of Receiving Lanes on Departing Leg	2	2	2			
Intersection TkLOS	A	A	A			
Target TkLOS	С	С	С			

Table 3: Multi-Modal Level of Service - Innes Road and Frank Bender St

	Intersection Leg			
Performance Measure	West Leg - Innes Road	East leg - Innes Road	North Leg - Frank Bender St	South Leg - Frank Bender St
Pedestrian LOS (PLOS)				
Total Travel Lanes	8	8	6	8
Median > 2.4m	No	No	No	No
Island Refuge	No	No	No	No
Left Turn Type	Permissive	Permissive	Permissive	Permissive
Right Turn Type	Permissive	pm+pt	Permissive	Permissive
Right Turns on Red	Allowed	Allowed	Allowed	Allowed
Leading Pedestrian Interval	No	No	No	No
Corner Radius	10 to 15 m	15 to 20 m	10 to 15 m	15 to 20 m
Right Turn Channel	No Right Turn Channel (-4)	No Right Turn Channel (-4)	No Right Turn Channel (-4)	No Right Turn Channel (-4)
Crosswalk Treatment	Standard Transverse	Standard Transverse	Standard Transverse	Standard Transverse
PETSI Points	<30	<30	<30	<30
Intersection PLOS	F	F	F	F
Target PLOS	С	С	С	С
Bicycle LOS (BLOS)				
Bikeway Type	Bike Lane	Bike Lane	Mixed Traffic	Mixed Traffic
Left Turn Approach	2 lanes crossed	2 lanes crossed	One lane crossed	2 lanes crossed
Right Turn Lane Configuration of Approach	Exclusive RT	Shared Th/RT	Shared Th/RT	Exclusive RT
Length of Right Turn Lane	>50	N/A	>50	N/A
Turning Speed of Right Turning Vehicles	< 25	< 25	< 25	< 25
Operating Speed (km/h)	70	70	50	50
Intersection BLOS	Е	Е	D	Е
Target BLOS	В	В	В	В
Transit LOS (TLOS)				
Delay 2022 Background - AM (PM)	5.9 (21.2)	4.3 (6.5)	35.6 (50.4)	43.5 (53.2)
Intersection TLOS	С	В	N/A	N/A
Target TLOS	D	D	N/A	N/A
Truck LOS (TkLOS)				
Effective Corner Radius (m)	>15 m	>15 m	>15 m	>15 m
Number of Receiving Lanes on Departing Leg	2	2	1	2
Intersection TkLOS	A	A	С	A
Target TkLOS	С	С	С	С