

Geotechnical  
Engineering

Environmental  
Engineering

Hydrogeology

Geological  
Engineering

Materials Testing

Building Science

Archaeological Services

## Geotechnical Investigation

Proposed Multi-Storey Building  
70 Beech Street and 75 Norman Street  
Ottawa, Ontario

Prepared For

Beech Holdings Ltd.  
c/o The Properties Group Ltd.

### Paterson Group Inc.

Consulting Engineers  
154 Colonnade Road South  
Ottawa (Nepean), Ontario  
Canada K2E 7J5

Tel: (613) 226-7381  
Fax: (613) 226-6344  
[www.patersongroup.ca](http://www.patersongroup.ca)

February 8, 2019

Report: PG4430-1

## Table of Contents

	<b>Page</b>
<b>1.0 Introduction.....</b>	<b>1</b>
<b>2.0 Proposed Project.....</b>	<b>1</b>
<b>3.0 Method of Investigation</b>	
3.1 Field Investigation .....	2
3.2 Field Survey.....	3
3.3 Laboratory Testing.....	3
<b>4.0 Observations</b>	
4.1 Surface Conditions .....	4
4.2 Subsurface Profile.....	4
4.3 Groundwater .....	5
<b>5.0 Discussion</b>	
5.1 Geotechnical Assessment.....	6
5.2 Site Grading and Preparation .....	6
5.3 Foundation Design .....	9
5.4 Design for Earthquakes.....	10
5.5 Slab on Grade / Basement Slab .....	10
5.6 Basement Wall .....	11
5.7 Pavement Structure.....	13
<b>6.0 Design and Construction Precautions</b>	
6.1 Foundation Drainage and Backfill .....	14
6.2 Protection Against Frost Action .....	15
6.3 Excavation Side Slopes.....	15
6.4 Pipe Bedding and Backfill .....	17
6.5 Groundwater Control.....	18
6.6 Winter Construction.....	19
<b>7.0 Recommendations .....</b>	<b>20</b>
<b>8.0 Statement of Limitations .....</b>	<b>21</b>

## **Appendices**

Appendix 1    Soil Profile and Test Data Sheets  
                    Symbols and Terms

Appendix 2    Figure 1 - Key Plan  
                    Drawing PG4430-1 - Test Hole Location Plan

## 1.0 Introduction

Paterson Group (Paterson) was commissioned by Beech Holdings Ltd. to conduct a geotechnical investigation for the proposed multi-storey building to be located at 70 Beech Street and 75 Norman Street in the City of Ottawa (refer to Figure 1 - Key Plan presented in Appendix 2).

The objectives of the geotechnical investigation were to:

- ☐ Determine the subsoil and groundwater conditions at this site by means of boreholes.
- ☐ Provide geotechnical recommendations for the design of the proposed development including construction considerations which may affect its design.

The following report has been prepared specifically and solely for the aforementioned project which is described herein. It contains our findings and includes geotechnical recommendations pertaining to the design and construction of the subject development as they are understood at the time of writing this report.

Investigating the presence or potential presence of contamination on the subject property was not part of the scope of work of this present investigation. A report addressing environmental issues for the subject site was prepared under separate cover.

## 2.0 Proposed Project

It is our understanding that the proposed project consists of a multi-storey building which encompasses the majority of the 70 Beech Street property. The southeast portion of the building will include 1 basement level to be utilized as storage and mechanical space. The remainder of the building will consist of a slab-on-grade. To the south, the 75 Norman Street property will be utilized for vehicle and bicycle parking.

## **3.0 Method of Investigation**

### **3.1 Field Investigation**

The field program for our geotechnical investigation consisted of a total of 9 boreholes, 6 boreholes completed on October 12, 2012 (BH 1 through BH 6), 2 boreholes completed on March 26, 2018 (BH 7 and BH 8), and 1 borehole completed on May 4, 2018 (BH 9). The boreholes were advanced to a maximum depth of 6.7 m below the existing ground surface. The borehole locations were determined in the field by Paterson personnel taking into consideration site features and underground services. The locations of the boreholes are shown on Drawing PG4430-1 - Test Hole Location Plan included in Appendix 2.

The boreholes were advanced using a truck-mounted auger drill rig operated by a two person crew. All fieldwork was conducted under the full-time supervision of personnel from Paterson's geotechnical division under the direction of a senior engineer. The test hole procedures consisted of augering to the required depths at the selected locations, sampling the overburden, and, where required, rock coring.

#### **Sampling and In Situ Testing**

Soil samples were collected from the boreholes using two different techniques, namely, sampled directly from the auger flights (AU) or collected using a 50 mm diameter split-spoon (SS) sampler. Rock cores (RC) were obtained using 47.6 mm inside diameter coring equipment. All samples were visually inspected and initially classified on site. The auger and split-spoon samples were placed in sealed plastic bags, and rock cores were placed in cardboard boxes. All samples were transported to our laboratory for further examination and classification. The depths at which the auger, split spoon and rock core samples were recovered from the boreholes are shown as AU, SS and RC, respectively, on the Soil Profile and Test Data sheets presented in Appendix 1.

The Standard Penetration Test (SPT) was conducted in conjunction with the recovery of the split-spoon samples. The SPT results are recorded as "N" values on the Soil Profile and Test Data sheets. The "N" value is the number of blows required to drive the split-spoon sampler 300 mm into the soil after a 150 mm initial penetration using a 63.5 kg hammer falling from a height of 760 mm.

The recovery value and a Rock Quality Designation (RQD) value were calculated for each drilled section of bedrock and are presented on the borehole logs. The recovery value is the length of the bedrock sample recovered over the length of the drilled section. The RQD value is the total length of intact rock pieces longer than 100 mm over the length of the core run. The values indicate the bedrock quality.

The subsurface conditions observed in the boreholes were recorded in detail in the field. The soil profiles are presented on the Soil Profile and Test Data sheets in Appendix 1 of this report.

### **Groundwater**

Monitoring wells were installed in boreholes BH 4, BH 7, BH 8, and BH 9 to permit monitoring of the groundwater levels subsequent to the completion of the sampling program.

## **3.2 Field Survey**

The test hole locations were selected by Paterson to provide general coverage of the proposed development taking into consideration the existing site features and underground utilities. The test hole locations and ground surface elevation at each test hole location were surveyed by Paterson. The ground surface elevation at the borehole locations were surveyed with respect to a temporary benchmark (TBM), consisting of the top of catch basin located on Beech Street, in front of the subject site. An assumed elevation of 100.00 m was assigned to the TBM. The borehole locations and ground surface elevation at each borehole location are presented on Drawing PG4430-1 - Test Hole Location Plan in Appendix 2.

## **3.3 Laboratory Testing**

The soil samples and rock cores recovered from the subject site were examined in our laboratory to review the results of the field logging.

## **4.0 Observations**

### **4.1 Surface Conditions**

The subject site consists of 2 contiguous properties, 70 Beech Street and 75 Norman Street, which are located north and south of each other, respectively. The site is bordered by Beech Street to the north, commercial properties to the northeast and northwest, residential properties to the southeast and southwest, and Norman Street to the south. The existing ground surface slopes upward gradually from north to south, from approximately elevation 61.5 m at Beech Street to elevation 63 m at Norman Street.

The north end of the site (70 Beech St.) is currently occupied by an automobile repair shop with associated gravel access lanes and parking areas. The south end of the site (75 Norman Street) is currently occupied by a single-family home and a detached garage with asphalt-paved access lanes and parking areas.

### **4.2 Subsurface Profile**

#### **Overburden**

Generally, the subsurface profile encountered at the test hole locations consists of fill underlain by bedrock. The fill was generally observed to consist of a sand and gravel to silty clay with cobbles, boulders, and occasional brick and coal. Refer to the Soil Profile and Test Data sheets in Appendix 1 for specific details of the soil profiles encountered at each test hole location.

#### **Bedrock**

Limestone bedrock was encountered underlying the fill. The bedrock was cored at boreholes BH 4, BH 7, BH 8, and BH 9 to a maximum depth of 6.7 m below the existing ground surface. Based on the RQDs of the recovered rock core, the limestone bedrock can be classified as good to excellent in quality.

Based on available geological mapping, the subject site is located in an area where the bedrock consists of interbedded limestone and shale of the Verulam Formation with an overburden drift thickness of 1 to 5 m.

### 4.3 Groundwater

The groundwater level readings were recorded at borehole BH 4 on October 18, 2012 and boreholes BH 7 through BH 9 on June 12, 2018. The results are presented in Table 1 below and on the Soil Profile and Test Data sheets in Appendix 1. It should be noted that groundwater levels are subject to seasonal fluctuations. Therefore, the groundwater level could vary at the time of construction.

<b>Table 1 - Measured Groundwater Levels</b>				
<b>Test Hole Location</b>	<b>Ground Surface Elevation (m)</b>	<b>Groundwater Level</b>		<b>Date</b>
		<b>Depth (m)</b>	<b>Elevation (m)</b>	
BH 4	100.43	5.09	95.34	October 8, 2012
BH 7	100.53	4.57	95.96	June 12, 2018
BH 8	100.31	4.93	95.38	June 12, 2018
BH 9	100.51	5.28	95.23	June 12, 2018
<b>Note:</b> - The ground surface elevations are referenced to a temporary benchmark (TBM), consisting of the top of catch basin on Beech Street, in front of the subject site. An elevation of 100.00 m was assigned to the TBM.				



## **5.0 Discussion**

### **5.1 Geotechnical Assessment**

From a geotechnical perspective, the subject site is adequate for the proposed multi-storey building. The proposed building is expected to be founded on conventional shallow footings placed on clean, surface sounded bedrock. Bedrock removal will be required to complete the basement level.

The above and other considerations are further discussed in the following sections.

### **5.2 Site Preparation**

#### **Stripping Depth**

Topsoil and fill, such as those containing organic or deleterious materials, should be stripped from under any buildings and other settlement sensitive structures. For the basement area, due to the relatively shallow bedrock depth at the subject site, it is anticipated that all existing overburden material will be excavated. For the slab-on-grade portion of the building, it is anticipated that the existing granular fill, free of deleterious material and significant amounts of organics, can be left in place outside of lateral support zones for the footings. However, it is recommended that the existing fill layer be proof-rolled several times and approved by the geotechnical consultant at the time of construction. Any poor performing areas noted during the proof-rolling operation should be removed and replaced with an approved fill.

#### **Bedrock Removal**

Based on the bedrock encountered in the area, it is expected that line-drilling in conjunction with hoe-ramming or controlled blasting will be required to remove the bedrock. In areas of weathered bedrock and where only a small quantity of bedrock is to be removed, bedrock removal may be possible by hoe-ramming.

Prior to considering blasting operations, the effects on the existing services, buildings and other structures should be addressed. A pre-blast or construction survey located in proximity of the blasting operations should be conducted prior to commencing construction. The extent of the survey should be determined by the blasting consultant and sufficient to respond to any inquiries/claims related to the blasting operations.

As a general guideline, peak particle velocity (measured at the structures) should not exceed 25 mm/s during the blasting program to reduce the risks of damage to the existing structures.

The blasting operations should be planned and conducted under the supervision of a licensed professional engineer who is an experienced blasting consultant.

Excavation side slopes in sound bedrock could be completed with almost vertical side walls. Where bedrock is of lower quality, the excavation face should be free of any loose rock. An area specific review should be completed by the geotechnical consultant at the time of construction to determine if rock bolting or other remedial measures are required to provide a safe excavation face for areas where low quality bedrock is encountered.

### **Vibration Considerations**

Construction operations could cause vibrations, and possibly, sources of nuisance to the community. Therefore, means to reduce the vibration levels as much as possible should be incorporated in the construction operations to maintain a cooperative environment with the residents.

The following construction equipment could cause vibrations: piling equipment, hoe ram, compactor, dozer, crane, truck traffic, etc. The construction of the shoring system with soldier piles, should it be utilized, would require these pieces of equipments. Vibrations, caused by blasting or construction operations could cause detrimental vibrations on the adjoining buildings and structures. Therefore, it is recommended that all vibrations be limited.

Two parameters determine the recommended vibration limit, the maximum peak particle velocity and the frequency. For low frequency vibrations, the maximum allowable peak particle velocity is less than that for high frequency vibrations. As a guideline, the peak particle velocity should be less than 15 mm/s between frequencies of 4 to 12 Hz, and 50 mm/s above a frequency of 40 Hz (interpolate between 12 and 40 Hz). These guidelines are for current construction standards. These guidelines are above perceptible human level and, in some cases, could be very disturbing to some people. Therefore, a pre-construction survey is recommended to minimize the risks of claims during or following the construction of the proposed building.

## **Horizontal Rock Anchors**

Due to the weathered nature of the bedrock near surface and potential founding level of the slab on grade portion of the building, bedrock stabilization may be required. In addition, horizontal rock anchors may be required at specific locations to prevent pop-outs of the bedrock, especially in areas where bedrock fractures are conducive to the failure of the bedrock surface.

The requirement for horizontal rock anchors should be evaluated during the excavation operations and should be discussed with the structural engineer during the design stage.

## **Fill Placement**

Fill used for grading beneath the building areas should consist, unless otherwise specified, of clean imported granular fill, such as Ontario Provincial Standard Specifications (OPSS) Granular A or Granular B Type II. This material should be tested and approved prior to delivery to the site. The fill should be placed in lifts no greater than 300 mm thick and compacted using suitable compaction equipment for the lift thickness. Fill placed beneath the proposed building areas should be compacted to at least 98% of its standard Proctor maximum dry density (SPMDD).

Non-specified existing fill along with site-excavated soil can be used as general landscaping fill and beneath parking areas where settlement of the ground surface is of minor concern. In landscaped areas, these materials should be spread in thin lifts and at least compacted by the tracks of the spreading equipment to minimize voids. If these materials are to be used to build up the subgrade level for areas to be paved, they should be compacted in thin lifts to a minimum density of 95% of their respective SPMDD. Non-specified existing fill and site-excavated soils are not suitable for use as backfill against foundation walls unless a composite drainage blanket connected to a perimeter drainage system is provided.

## **Lean Concrete Filled Trenches**

For the slab-on-grade portion of the proposed building, should the bedrock surface be encountered below the underside of footing elevation, vertical trenches should be excavated to the bedrock and backfilled with lean concrete to the founding elevation (minimum **17 MPa** 28-day compressive strength). Typically, the excavation side walls will be used as the form to support the concrete. The additional width of the concrete poured against an undisturbed trench sidewall will suffice in providing a direct transfer of the footing load to the underlying bedrock. The trench excavation should be at least 150 mm wider than all sides of the footing (strip and pad footings) at the base of the excavation. Once the trench excavation is approved by the geotechnical engineer, lean concrete can be poured up to the proposed founding elevation.

## **5.3 Foundation Design**

### **Bearing Resistance Values**

Footings placed on a clean, surface sounded limestone bedrock surface can be designed using a factored bearing resistance value at ultimate limit states (ULS) of **1,000 kPa**, incorporating a geotechnical resistance factor of 0.5.

A clean, surface-sounded bedrock bearing surface should be free of loose materials, and have no near surface seams, voids, fissures or open joints which can be detected from surface sounding with a rock hammer.

Footings bearing on an acceptable bedrock bearing surface and designed for the bearing resistance values provided herein will be subjected to negligible potential post-construction total and differential settlements.

### **Lateral Support**

The bearing medium under footing-supported structures is required to be provided with adequate lateral support with respect to excavations and different foundation levels. Adequate lateral support is provided to a sound bedrock bearing medium when a plane extending down and out from the bottom edge of the footing at a minimum of 1H:6V (or flatter) passes only through sound bedrock or a material of the same or higher capacity as the bedrock, such as concrete. A weathered bedrock bearing medium will require a lateral support zone of 1H:1V (or flatter).

## 5.4 Design for Earthquakes

The site class for seismic site response can be taken as **Class C**. If a higher seismic site class is required (Class A or B), a site specific shear wave velocity test may be completed to accurately determine the applicable seismic site classification for foundation design of the proposed building, as presented in Table 4.1.8.4.A of the Ontario Building Code 2012.

Soils underlying the subject site are not susceptible to liquefaction. Reference should be made to the latest revision of the Ontario Building Code 2012 for a full discussion of the earthquake design requirements.

## 5.5 Slab on Grade / Basement Slab

### Slab on Grade

With the removal of all topsoil and fill, containing significant amounts of deleterious or organic materials, the existing fill subgrade approved by the geotechnical consultant at the time of excavation will be considered an acceptable subgrade surface on which to commence backfilling for slab-on-grade construction. A vibratory drum roller should complete several passes over the subgrade surface as a proof-rolling program. Any poor performing areas should be removed and reinstated with an engineered fill, such as Granular B Type II.

It is recommended that the upper 200 mm of sub-floor fill consist of OPSS Granular A crushed stone. All backfill materials required to raise grade within the footprint of the proposed buildings should be placed in maximum 300 mm thick loose layers and compacted to at least 98% of its SPMDD.

### Basement Slab

For the basement area, all overburden soil will be removed during the excavation and the basement floor slab will be founded on a bedrock medium. OPSS Granular A or Granular B Type II, with a maximum particle size of 50 mm, are recommended for backfilling below the floor slab. It is recommended that the upper 200 mm of sub-slab fill consists of a 19 mm clear crushed stone. All backfill materials required to raise grade within the footprint of the proposed buildings should be placed in maximum 300 mm thick loose lifts and compacted to at least 98% of its SPMDD.

In consideration of the groundwater conditions encountered during the investigation, a subslab drainage system, consisting of lines of perforated drainage pipe subdrains connected to a positive outlet, should be provided in the clear crushed stone backfill under the lower basement floor.

## 5.6 Basement Wall

It is expected that a portion of the basement walls are to be poured against a composite drainage blanket, which will be placed against the exposed bedrock face. A nominal coefficient of at-rest earth pressure of 0.05 is recommended in conjunction with a dry unit weight of  $23.5 \text{ kN/m}^3$  (effective unit weight of  $15.5 \text{ kN/m}^3$ ). A seismic earth pressure component will not be applicable for the foundation wall, which is to be poured against the bedrock face. It is expected that the seismic earth pressure will be transferred to the underground floor slabs, which should be designed to accommodate these pressures.

Two distinct conditions, static and seismic, should be reviewed for design calculations. The parameters for design calculations for the two conditions are presented below.

### Static Conditions

The static horizontal earth pressure ( $p_o$ ) could be calculated with a triangular earth pressure distribution equal to  $K_o \cdot \gamma \cdot H$  where:

- $K_o$  = at-rest earth pressure coefficient of the applicable retained soil or bedrock
- $\gamma$  = unit weight of fill of the applicable retained soil ( $\text{kN/m}^3$ )
- $H$  = height of the wall (m)

An additional pressure with a magnitude equal to  $K_o \cdot q$  and acting on the entire height of the wall should be added to the above diagram for any surcharge loading,  $q$  (kPa), that may be placed at ground surface adjacent to the wall. The surcharge pressure will only be applicable for static analyses and should not be used in conjunction with the seismic loading case.

Actual earth pressures could be higher than the “at-rest” case if care is not exercised during the compaction of the backfill materials to maintain a minimum separation of 0.3 m from the walls with the compaction equipment.

## Seismic Conditions

The total seismic force ( $P_{AE}$ ) includes both the earth force component ( $P_o$ ) and the seismic component ( $\Delta P_{AE}$ ).

The seismic earth force ( $\Delta P_{AE}$ ) could be calculated using  $\Delta P_{AE} = 0.375 \cdot a_c \cdot \gamma \cdot H^2 / g$ , where:

$$a_c = (1.45 - a_{max}/g) a_{max}$$

$\gamma$  = unit weight of fill of the applicable retained soil (kN/m<sup>3</sup>)

H = height of the wall (m)

g = gravity, 9.81 m/s<sup>2</sup>

The peak ground acceleration, ( $a_{max}$ ), for the Ottawa area is 0.32g according to OBC 2012. The vertical seismic coefficient is assumed to be zero.

The earth force component ( $P_o$ ) under seismic conditions could be calculated using  $P_o = 0.5 K_o \gamma H^2$ , where  $K_o = 0.05$  for the bedrock conditions presented above.

The total earth force ( $P_{AE}$ ) is considered to act at a height, h (m), from the base of the wall, where:

$$h = \{P_o \cdot (H/3) + \Delta P_{AE} \cdot (0.6 \cdot H)\} / P_{AE}$$

The earth forces calculated are unfactored. For the ULS case, the earth loads should be factored as live loads, as per OBC 2012.

## 5.7 Pavement Structure

For design purposes, the pavement structure presented in the following tables are recommended to be used for the design of car parking areas and access lanes.

<b>Table 2 - Recommended Pavement Structure - Car Only Parking Areas</b>	
<b>Thickness (mm)</b>	<b>Material Description</b>
50	<b>Wear Course</b> - HL 3 or Superpave 12.5 Asphaltic Concrete
150	<b>BASE</b> - OPSS Granular A Crushed Stone
300	<b>SUBBASE</b> - OPSS Granular B Type II
<b>SUBGRADE</b> - Either fill, in situ soil or OPSS Granular B Type I or II material placed over in situ soil or existing fill	

<b>Table 3 - Recommended Pavement Structure - Access Lanes</b>	
<b>Thickness (mm)</b>	<b>Material Description</b>
40	<b>Wear Course</b> - HL3 or Superpave 12.5 Asphaltic Concrete
50	<b>Binder Course</b> - HL8 or Superpave 19.0 Asphaltic Concrete
150	<b>BASE</b> - OPSS Granular A Crushed Stone
400	<b>SUBBASE</b> - OPSS Granular B Type II
<b>SUBGRADE</b> - Either fill, in situ soil or OPSS Granular B Type I or II material placed over in situ soil or existing fill	

Minimum Performance Graded (PG) 58-34 asphalt cement should be used for this project.

If soft spots develop in the subgrade during compaction or due to construction traffic, the affected areas should be excavated and replaced with OPSS Granular B Type I or II material.

The pavement granular base and subbase should be placed in maximum 300 mm thick lifts and compacted to a minimum of 100% of the SPMDD using suitable vibratory equipment.



## **6.0 Design and Construction Precautions**

### **6.1 Foundation Drainage and Backfill**

#### **Foundation Drainage and Backfill**

It is recommended that a perimeter foundation drainage system be provided for the proposed structure as an outlet for perched water below the sidewalks anticipated to surround the proposed building. Perched water below the sidewalks can lead to heaved sidewalks due to freeze/thaw cycles. The system should consist of a 100 to 150 mm diameter perforated corrugated plastic pipe, surrounded on all sides by 150 mm of 10 mm clear crushed stone, placed at the footing level around the exterior perimeter of the structure. The pipe should have a positive outlet, such as a gravity connection to the storm sewer.

Where insufficient room is available for exterior backfill, such as for the basement area, it is suggested that the foundation drainage system could be as follows:

- ☐ Bedrock vertical surface (Hoe ram any irregularities and prepare bedrock surface. Shotcrete areas to fill in cavities and smooth out angular features at the bedrock surface);
- ☐ Place a composite drainage layer extending from finished grade to underside of footing level.
- ☐ Pour the foundation wall against the composite drainage system.

It is recommended that the composite drainage system (such as Delta Drain 6000 or equivalent) extend down to the footing level. It is recommended that 150 mm diameter sleeves at 3 m centres be cast in the footing or at the foundation wall/footing interface to allow the infiltration of water to flow to the interior perimeter drainage pipe. The perimeter drainage pipe and subslab drainage system should direct water to sump pit(s) within the lower basement area.

#### **Underfloor Drainage**

It is anticipated that subslab drainage will be required to control water infiltration in the basement area. For preliminary design purposes, we recommend that 100 or 150 mm perforated pipes be placed at 3 to 6 m centres. The spacing of the subslab drainage system should be confirmed at the time of completing the excavation when water infiltration can be better assessed.

## **Backfill**

Where space is available, backfill against the exterior sides of the foundation walls should consist of free-draining, non frost susceptible granular materials. The greater part of the site excavated materials will be frost susceptible and, as such, are not recommended for re-use as backfill against the foundation walls unless used in conjunction with a composite drainage system, such as Delta Drain 6000 or an approved equivalent. Imported granular materials, such as clean sand or OPSS Granular B Type I granular material, should otherwise be used for this purpose.

## **6.2 Protection Against Frost Action**

Perimeter footings of heated structures are required to be insulated against the deleterious effects of frost action. A minimum 1.5 m thick soil cover (or equivalent) should be provided in this regard. If perimeter footings of heated structures are founded directly on clean, surface-sounded bedrock with no cracks or fissures and approved by the geotechnical consultant at the time of excavation can be provided with a minimum of 0.6 m of soil cover for frost protection.

A minimum of 2.1 m thick soil cover (or equivalent) should be provided for other exterior unheated footings.

## **6.3 Excavation Side Slopes**

The side slopes of excavations in the soil and fill overburden materials should be either cut back at acceptable slopes or should be retained by shoring systems from the start of the excavation until the structure is backfilled.

### **Unsupported Excavations**

The excavation side slopes above the groundwater level extending to a maximum depth of 3 m should be cut back at 1H:1V or flatter. The flatter slope is required for excavation below groundwater level. The subsoil at this site is considered to be mainly Type 2 and 3 soil according to the Occupational Health and Safety Act and Regulations for Construction Projects.

Excavated soil should not be stockpiled directly at the top of excavations and heavy equipment should be kept away from the excavation sides.

Slopes in excess of 3 m in height should be periodically inspected by the geotechnical consultant in order to detect if the slopes are exhibiting signs of distress.

It is recommended that a trench box be used at all times to protect personnel working in trenches with steep or vertical sides. It is expected that services will be installed by “cut and cover” methods and excavations will not be left open for extended periods of time.

### Temporary Shoring

The design and approval of the shoring system, should it be required, will be the responsibility of the shoring contractor and the shoring designer who is a licensed professional engineer and is hired by the shoring contractor. It is the responsibility of the shoring contractor to ensure that the temporary shoring is in compliance with safety requirements, designed to avoid any damage to adjacent structures and include dewatering control measures. In the event that subsurface conditions differ from the approved design during the actual installation, it is the responsibility of the shoring contractor to commission the required experts to re-assess the design and implement the required changes. Furthermore, the design of the temporary shoring system should take into consideration, a full hydrostatic condition which can occur during significant precipitation events.

The temporary shoring system could consist of a soldier pile and lagging system. Any additional loading due to street traffic, construction equipment, adjacent structures and facilities, etc., should be included to the earth pressures described below. These shoring systems could be cantilevered, anchored or braced. Generally, the shoring system should be provided with tie-back rock anchors to ensure the stability. The shoring system is recommended to be adequately supported to resist toe failure, if required, by means of rock bolts or extending the piles into the bedrock through pre-augered holes if a soldier pile and lagging system is the preferred method.

The earth pressures acting on the shoring system may be calculated with the following parameters.

<b>Table 4 - Soil Parameters</b>	
<b>Parameters</b>	<b>Values</b>
Active Earth Pressure Coefficient ( $K_a$ )	0.33
Passive Earth Pressure Coefficient ( $K_p$ )	3
At-Rest Earth Pressure Coefficient ( $K_o$ )	0.5
Dry Unit Weight ( $\gamma$ ), kN/m <sup>3</sup>	20
Effective Unit Weight ( $\gamma$ ), kN/m <sup>3</sup>	13

The active earth pressure should be calculated where wall movements are permissible while the at-rest pressure should be calculated if no movement is permissible. The dry unit weight should be calculated above the groundwater level while the effective unit weight should be calculated below the groundwater level.

The hydrostatic groundwater pressure should be included to the earth pressure distribution wherever the effective unit weight are calculated for earth pressures. If the groundwater level is lowered, the dry unit weight for the soil/bedrock should be calculated full weight, with no hydrostatic groundwater pressure component.

For design purposes, a minimum factor of safety of 1.5 should be calculated.

### **Underpinning of Adjacent Structures**

If the footings of the proposed basement area extend below the footings of the neighbouring building, underpinning of this structure may be required, or, if the neighbouring building footings are supported on bedrock, shoring of the bedrock may be required.

Prior to construction, it is recommended that test pits be completed along the foundation walls of the neighbouring building to evaluate the existing underside of footing elevations and the bearing soils or bedrock underlying the footings for underpinning and/or shoring design requirements.

## **6.4 Pipe Bedding and Backfill**

A minimum of 300 mm of OPSS Granular A should be placed for bedding for sewer or water pipes when placed on a bedrock subgrade. The bedding should extend to the spring line of the pipe. Cover material, from the spring line to a minimum of 300 mm above the pipe obvert should consist of OPSS Granular A (concrete or PSM PVC pipes) or sand (concrete pipe). The bedding and cover materials should be placed in maximum 225 mm thick lifts compacted to a minimum of 95% of the SPMDD.

Where hard surface areas are considered above the trench backfill, the trench backfill material within the frost zone (about 1.8 m below finished grade) should match the soils exposed at the trench walls to reduce the potential differential frost heaving. The trench backfill should be placed in maximum 300 mm thick loose lifts and compacted to a minimum of 95% of the SPMDD.

## **6.5 Groundwater Control**

### **Groundwater Control for Building Construction**

The contractor should be prepared to direct water away from all bearing surfaces and subgrades, regardless of the source, to prevent disturbance to the founding medium.

Infiltration levels are anticipated to be low through the excavation face. The groundwater infiltration will be controllable with open sumps and pumps.

A temporary Ministry of the Environment, Conservation, and Parks (MECP) permit to take water (PTTW) may be required for this project if more than 400,000 L/day of ground and/or surface water is to be pumped during the construction phase. A minimum 4 to 5 months should be allowed for completion of the PTTW application package and issuance of the permit by the MECP.

For typical ground or surface water volumes being pumped during the construction phase, typically between 25,000 to 400,000 L/day, it is required to register on the Environmental Activity and Sector Registry (EASR). A minimum of two to four weeks should be allotted for completion of the EASR registration and the Water Taking and Discharge Plan to be prepared by a Qualified Person as stipulated under O.Reg. 63/16. If a project qualifies for a PTTW based upon anticipated conditions, an EASR will not be allowed as a temporary dewatering measure while awaiting the MECP review of the PTTW application.

### **Long-term Groundwater Control**

Our recommendations for the proposed building's long-term groundwater control are presented in Subsection 6.1. Any groundwater encountered along the building's perimeter or subslab drainage system will be directed to the proposed building's cistern/sump pit. Provided the proposed groundwater infiltration control system is properly implemented and approved by the geotechnical consultant at the time of construction, it is expected that groundwater flow will be low (i.e.- less than 25,000 L/day) with peak periods noted after rain events. A more accurate estimate can be provided at the time of construction, once groundwater infiltration levels are observed.

## **Impacts on Neighbouring Structures**

It is understood that one basement level is planned for the proposed building. Based on the existing groundwater level, the extent of any significant groundwater lowering will take place within a limited range of the proposed building. Based on the proximity of neighbouring buildings and minimal zone impacted by the groundwater lowering, the proposed development will not negatively impact the neighbouring structures.

It should be noted that no issues are expected with respect to groundwater lowering that would cause long term damage to adjacent structures surrounding the proposed building.

## **6.6 Winter Construction**

Precautions must be taken if winter construction is considered for this project.

Where excavations are completed in proximity of existing structures which may be adversely affected due to the freezing conditions. In particular, where a shoring system is constructed, the soil behind the shoring system will be subjected to freezing conditions and could result in heaving of the structure(s) placed within or above frozen soil. Provisions should be made in the contract document to protect the walls of the excavations from freezing, if applicable.

In the event of construction during below zero temperatures, the founding stratum should be protected from freezing temperatures by the installation of straw, propane heaters and tarpaulins or other suitable means. The base of the excavations should be insulated from sub-zero temperatures immediately upon exposure and until such time as heat is adequately supplied to the building and the footings are protected with sufficient soil cover to prevent freezing at founding level.

Trench excavations and pavement construction are difficult activities to complete during freezing conditions without introducing frost in the subgrade or in the excavation walls and bottoms. Precautions should be considered if such activities are to be completed during freezing conditions. Additional information could be provided, if required.

## 7.0 Recommendations

It is a requirement for the foundation design data provided herein to be applicable that a materials testing and observation services program including the following aspects be performed by the geotechnical consultant.

- ☐ Observation of all bearing surfaces prior to the placement of concrete.
- ☐ Review bedrock face during excavation to assess the requirement for horizontal rock anchors and provide bedrock support system, if required.
- ☐ Sampling and testing of the concrete and granular fill materials used.
- ☐ Periodic observation of the condition of unsupported excavation side slopes in excess of 3 m in height, if applicable.
- ☐ Observation of all subgrades prior to backfilling.
- ☐ Field density tests to determine the level of compaction achieved.
- ☐ Sampling and testing of the bituminous concrete including mix design reviews.

A report confirming that these works have been conducted in general accordance with our recommendations could be issued, upon request, following the completion of a satisfactory materials testing and observation program by the geotechnical consultant.

## 8.0 Statement of Limitations

The recommendations provided in this report are in accordance with our present understanding of the project. We request permission to review our recommendations when the drawings and specifications are completed.

A soils investigation is a limited sampling of a site. Should any conditions at the site be encountered which differ from those at the test hole locations, we request immediate notification to permit reassessment of our recommendations.

The present report applies only to the project described in this document. Use of this report for purposes other than those described herein or by person(s) other than Beech Holdings Ltd. or their agent(s) is not authorized without review by this firm for the applicability of our recommendations to the altered use of the report.

### Paterson Group Inc.



Scott S. Dennis, P.Eng.



Faisal I. Abou-Seido, P.Eng.

### Report Distribution:

- ☐ Beech Holdings Ltd. (e-mail copy)
- ☐ Paterson Group (1 copy)



# **APPENDIX 1**

**SOIL PROFILE AND TEST DATA SHEETS**

**SYMBOLS AND TERMS**

## SOIL PROFILE AND TEST DATA

**Geotechnical Investigation  
70 Beech Street and 75 Norman Street  
Ottawa, Ontario**

FILE NO. PG4430

HOLE NO. BH 1

DATE 2012 October 12

SOIL DESCRIPTION	STRATA PLOT	SAMPLE				DEPTH (m)	ELEV. (m)	Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone				Piezometer Construction
		TYPE	NUMBER	% RECOVERY	N VALUE or RQD			○ Water Content %				
								20	40	60	80	
GROUND SURFACE												
FILL: Gravel	0.15	AU	1			0	100.66					
FILL: Dark brown silty sand with gravel and coal		SS	2	29	2	1	99.66					
End of Borehole	1.37											
Practical refusal to augering @ 1.37m depth												

20406080100

Shear Strength (kPa)

▲ Undisturbed    △ Remoulded




## SOIL PROFILE AND TEST DATA

**Geotechnical Investigation  
70 Beech Street and 75 Norman Street  
Ottawa, Ontario**

FILE NO. PG4430

HOLE NO. BH 2

**DATE** 2012 October 12

SOIL DESCRIPTION	STRATA PLOT	SAMPLE				DEPTH (m)	ELEV. (m)	Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone				Piezometer Construction	
		TYPE	NUMBER	% RECOVERY	N VALUE or RQD			○ Water Content %					
								20	40	60	80		
GROUND SURFACE													
FILL: Gravel	0.15		AU	1			0	100.49					
FILL: Brown silty sand with gravel and metal piece													
	1.17		SS	2		50+	1	99.49					
End of Borehole													
Practical refusal to augering at 1.17m depth													

20406080100

Shear Strength (kPa)

▲ Undisturbed    △ Remoulded

[illegible]

## SOIL PROFILE AND TEST DATA

FILE NO. **PG4430**

HOLE NO. **BH 4**

**DATE** 2012 October 12

[illegible]

## SOIL PROFILE AND TEST DATA

**Geotechnical Investigation  
70 Beech Street and 75 Norman Street  
Ottawa, Ontario**

FILE NO. PG4430

HOLE NO. **BH 5**

DATE 2012 October 12

SOIL DESCRIPTION	STRATA PLOT	SAMPLE				DEPTH (m)	ELEV. (m)	Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone				Piezometer Construction
		TYPE	NUMBER	% RECOVERY	N VALUE or RQD			○ Water Content %				
								20	40	60	80	
GROUND SURFACE												
25mm Asphaltic concrete over crushed stone	0.25	AU	1			0	100.51					
FILL: Brown silty sand with clay, gravel	1.09	SS	2	50	50+	1	99.51					
End of Borehole												
Practical refusal to augering @ 1.09m depth												

20406080100

Shear Strength (kPa)

▲ Undisturbed    △ Remoulded

## SOIL PROFILE AND TEST DATA

**Geotechnical Investigation  
70 Beech Street and 75 Norman Street  
Ottawa, Ontario**

FILE NO. PG4430

HOLE NO. **BH 6**

DATE 2012 October 12

[illegible]

## SOIL PROFILE AND TEST DATA

**Geotechnical Investigation  
70 Beech Street and 75 Norman Street  
Ottawa, Ontario**

FILE NO. PG4430

HOLE NO. **BH 7**

**DATE** 2018 March 26

[illegible]



**DATUM** TBM - Top of catch basin located in front of subject site, on Beech Street.  
Assumed elevation = 100.00m.



**REMARKS**

**BORINGS BY** CME 55 Power Auger

**DATE** 2018 March 26

**FILE NO.**  
**PG4430**

**HOLE NO.**  
**BH 8**

SOIL DESCRIPTION	STRATA PLOT	SAMPLE				DEPTH (m)	ELEV. (m)	Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone				Piezometer Construction	
		TYPE	NUMBER	RECOVERY %	N VALUE or RQD			○ Water Content %					
								20	40	60	80		
GROUND SURFACE						0	100.31						
FILL: Brown sand, gravel, cobbles, boulders		SS	1	21	13								
		SS	2	50	50+	1	99.31						
		SS	3	54	50+								
	1.85					2	98.31						
BEDROCK: Good to excellent quality, grey limestone		RC	1	100	78								
		RC	2	100	92	4	96.31						
		RC	3	100	95	5	95.31						
	6.10					6	94.31						
End of Borehole													
(GWL @ 4.93m - June 12, 2018)													
								20	40	60	80	100	
								Shear Strength (kPa)					
								▲ Undisturbed    △ Remoulded					

## SOIL PROFILE AND TEST DATA

<b>DATUM</b>	TBM - Top of catch basin located in front of subject site, on Beech Street. Assumed elevation = 100.00m.
--------------	---

FILE NO. PG4430

HOLE NO. BH 9

**DATE** 2018 May 4

[illegible]

# SYMBOLS AND TERMS

## SOIL DESCRIPTION

Behavioural properties, such as structure and strength, take precedence over particle gradation in describing soils. Terminology describing soil structure are as follows:

Desiccated	-	having visible signs of weathering by oxidation of clay minerals, shrinkage cracks, etc.
Fissured	-	having cracks, and hence a blocky structure.
Varved	-	composed of regular alternating layers of silt and clay.
Stratified	-	composed of alternating layers of different soil types, e.g. silt and sand or silt and clay.
Well-Graded	-	Having wide range in grain sizes and substantial amounts of all intermediate particle sizes (see Grain Size Distribution).
Uniformly-Graded	-	Predominantly of one grain size (see Grain Size Distribution).

The standard terminology to describe the strength of cohesionless soils is the relative density, usually inferred from the results of the Standard Penetration Test (SPT) 'N' value. The SPT N value is the number of blows of a 63.5 kg hammer, falling 760 mm, required to drive a 51 mm O.D. split spoon sampler 300 mm into the soil after an initial penetration of 150 mm.

Relative Density	'N' Value	Relative Density %
Very Loose	<4	<15
Loose	4-10	15-35
Compact	10-30	35-65
Dense	30-50	65-85
Very Dense	>50	>85

The standard terminology to describe the strength of cohesive soils is the consistency, which is based on the undisturbed undrained shear strength as measured by the in situ or laboratory vane tests, penetrometer tests, unconfined compression tests, or occasionally by Standard Penetration Tests.

Consistency	Undrained Shear Strength (kPa)	'N' Value
Very Soft	<12	<2
Soft	12-25	2-4
Firm	25-50	4-8
Stiff	50-100	8-15
Very Stiff	100-200	15-30
Hard	>200	>30

## **SYMBOLS AND TERMS (continued)**

### **SOIL DESCRIPTION (continued)**

Cohesive soils can also be classified according to their “sensitivity”. The sensitivity is the ratio between the undisturbed undrained shear strength and the remoulded undrained shear strength of the soil.

Terminology used for describing soil strata based upon texture, or the proportion of individual particle sizes present is provided on the Textural Soil Classification Chart at the end of this information package.

### **ROCK DESCRIPTION**

The structural description of the bedrock mass is based on the Rock Quality Designation (RQD).

The RQD classification is based on a modified core recovery percentage in which all pieces of sound core over 100 mm long are counted as recovery. The smaller pieces are considered to be a result of closely-spaced discontinuities (resulting from shearing, jointing, faulting, or weathering) in the rock mass and are not counted. RQD is ideally determined from NXL size core. However, it can be used on smaller core sizes, such as BX, if the bulk of the fractures caused by drilling stresses (called “mechanical breaks”) are easily distinguishable from the normal in situ fractures.

<b>RQD %</b>	<b>ROCK QUALITY</b>
90-100	Excellent, intact, very sound
75-90	Good, massive, moderately jointed or sound
50-75	Fair, blocky and seamy, fractured
25-50	Poor, shattered and very seamy or blocky, severely fractured
0-25	Very poor, crushed, very severely fractured

### **SAMPLE TYPES**

SS	-	Split spoon sample (obtained in conjunction with the performing of the Standard Penetration Test (SPT))
TW	-	Thin wall tube or Shelby tube
PS	-	Piston sample
AU	-	Auger sample or bulk sample
WS	-	Wash sample
RC	-	Rock core sample (Core bit size AXT, BXL, etc.). Rock core samples are obtained with the use of standard diamond drilling bits.

## SYMBOLS AND TERMS (continued)

### GRAIN SIZE DISTRIBUTION

MC%	-	Natural moisture content or water content of sample, %
LL	-	Liquid Limit, % (water content above which soil behaves as a liquid)
PL	-	Plastic limit, % (water content above which soil behaves plastically)
PI	-	Plasticity index, % (difference between LL and PL)
Dxx	-	Grain size which xx% of the soil, by weight, is of finer grain sizes These grain size descriptions are not used below 0.075 mm grain size
D10	-	Grain size at which 10% of the soil is finer (effective grain size)
D60	-	Grain size at which 60% of the soil is finer
Cc	-	Concavity coefficient = $(D_{30})^2 / (D_{10} \times D_{60})$
Cu	-	Uniformity coefficient = $D_{60} / D_{10}$

Cc and Cu are used to assess the grading of sands and gravels:

Well-graded gravels have:  $1 < Cc < 3$  and  $Cu > 4$

Well-graded sands have:  $1 < Cc < 3$  and  $Cu > 6$

Sands and gravels not meeting the above requirements are poorly-graded or uniformly-graded.

Cc and Cu are not applicable for the description of soils with more than 10% silt and clay  
(more than 10% finer than 0.075 mm or the #200 sieve)

### CONSOLIDATION TEST


$p'_o$	-	Present effective overburden pressure at sample depth
$p'_c$	-	Preconsolidation pressure of (maximum past pressure on) sample
Ccr	-	Recompression index (in effect at pressures below $p'_c$ )
Cc	-	Compression index (in effect at pressures above $p'_c$ )
OC Ratio		Overconsolidation ratio = $p'_c / p'_o$
Void Ratio		Initial sample void ratio = volume of voids / volume of solids
Wo	-	Initial water content (at start of consolidation test)

### PERMEABILITY TEST

k	-	Coefficient of permeability or hydraulic conductivity is a measure of the ability of water to flow through the sample. The value of k is measured at a specified unit weight for (remoulded) cohesionless soil samples, because its value will vary with the unit weight or density of the sample during the test.
---	---	--

## SYMBOLS AND TERMS (continued)


### STRATA PLOT



Topsoil




Asphalt




Fill




Peat




Sand




Silty Sand




Silt




Sandy Silt




Clay




Silty Clay




Clayey Silty Sand



Glacial Till




Shale




Bedrock

### MONITORING WELL AND PIEZOMETER CONSTRUCTION

#### MONITORING WELL CONSTRUCTION

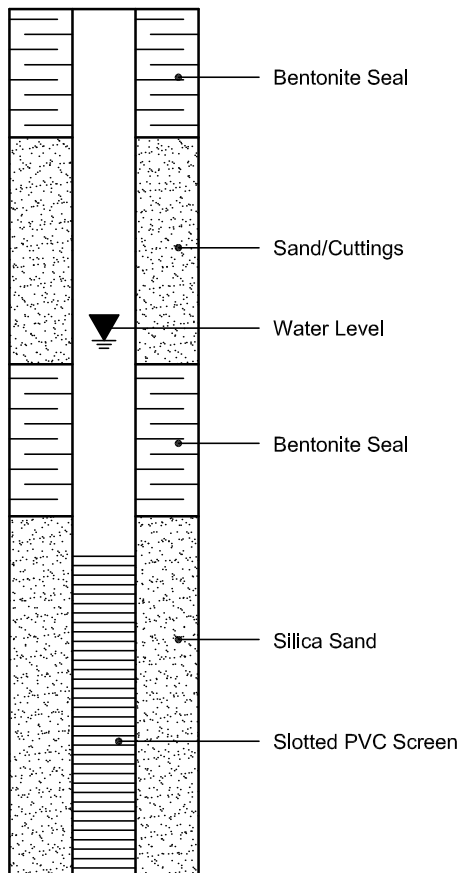


#### PIEZOMETER CONSTRUCTION

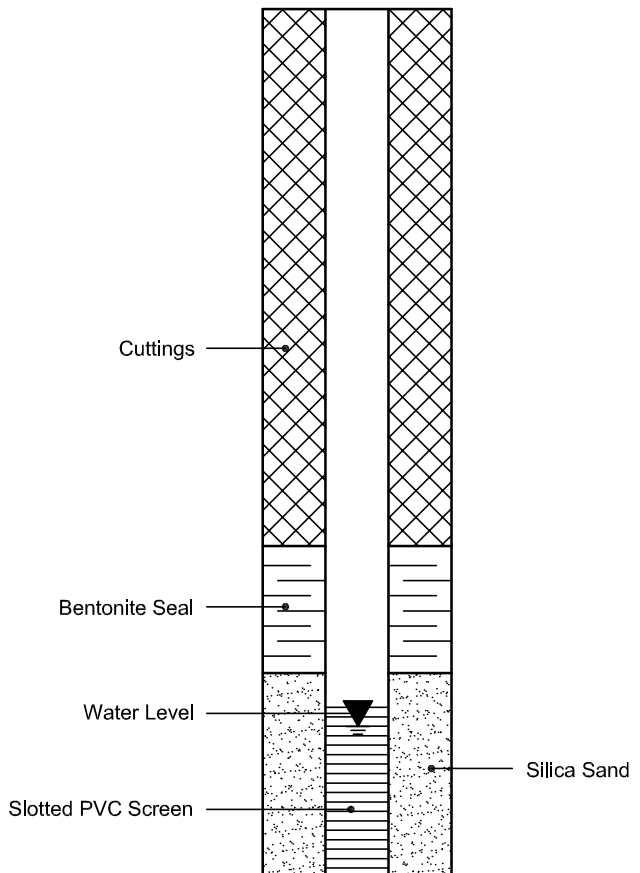

# **APPENDIX 2**

**FIGURE 1 - KEY PLAN**


**DRAWING PG4430-1 - TEST HOLE LOCATION PLAN**

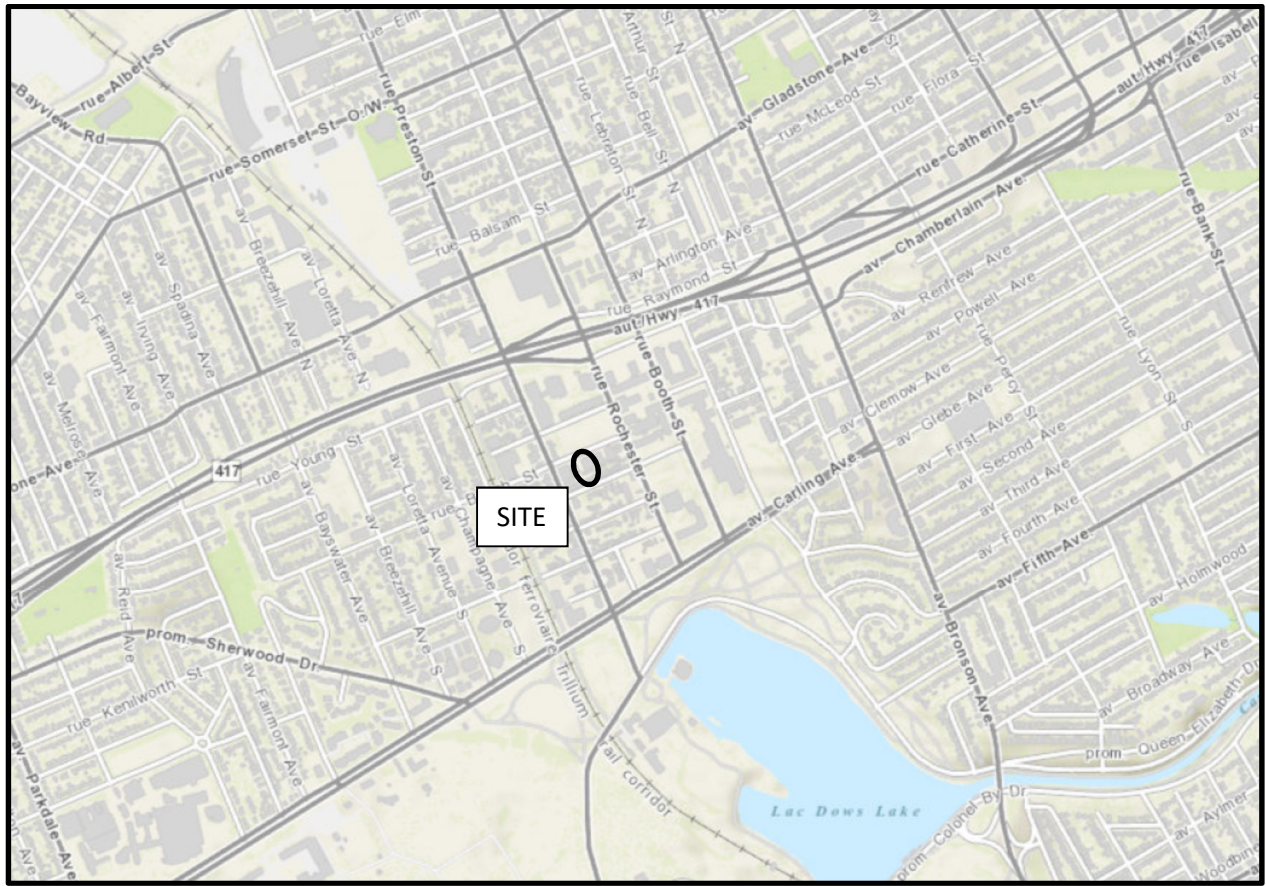

**FIGURE 1**

**KEY PLAN**



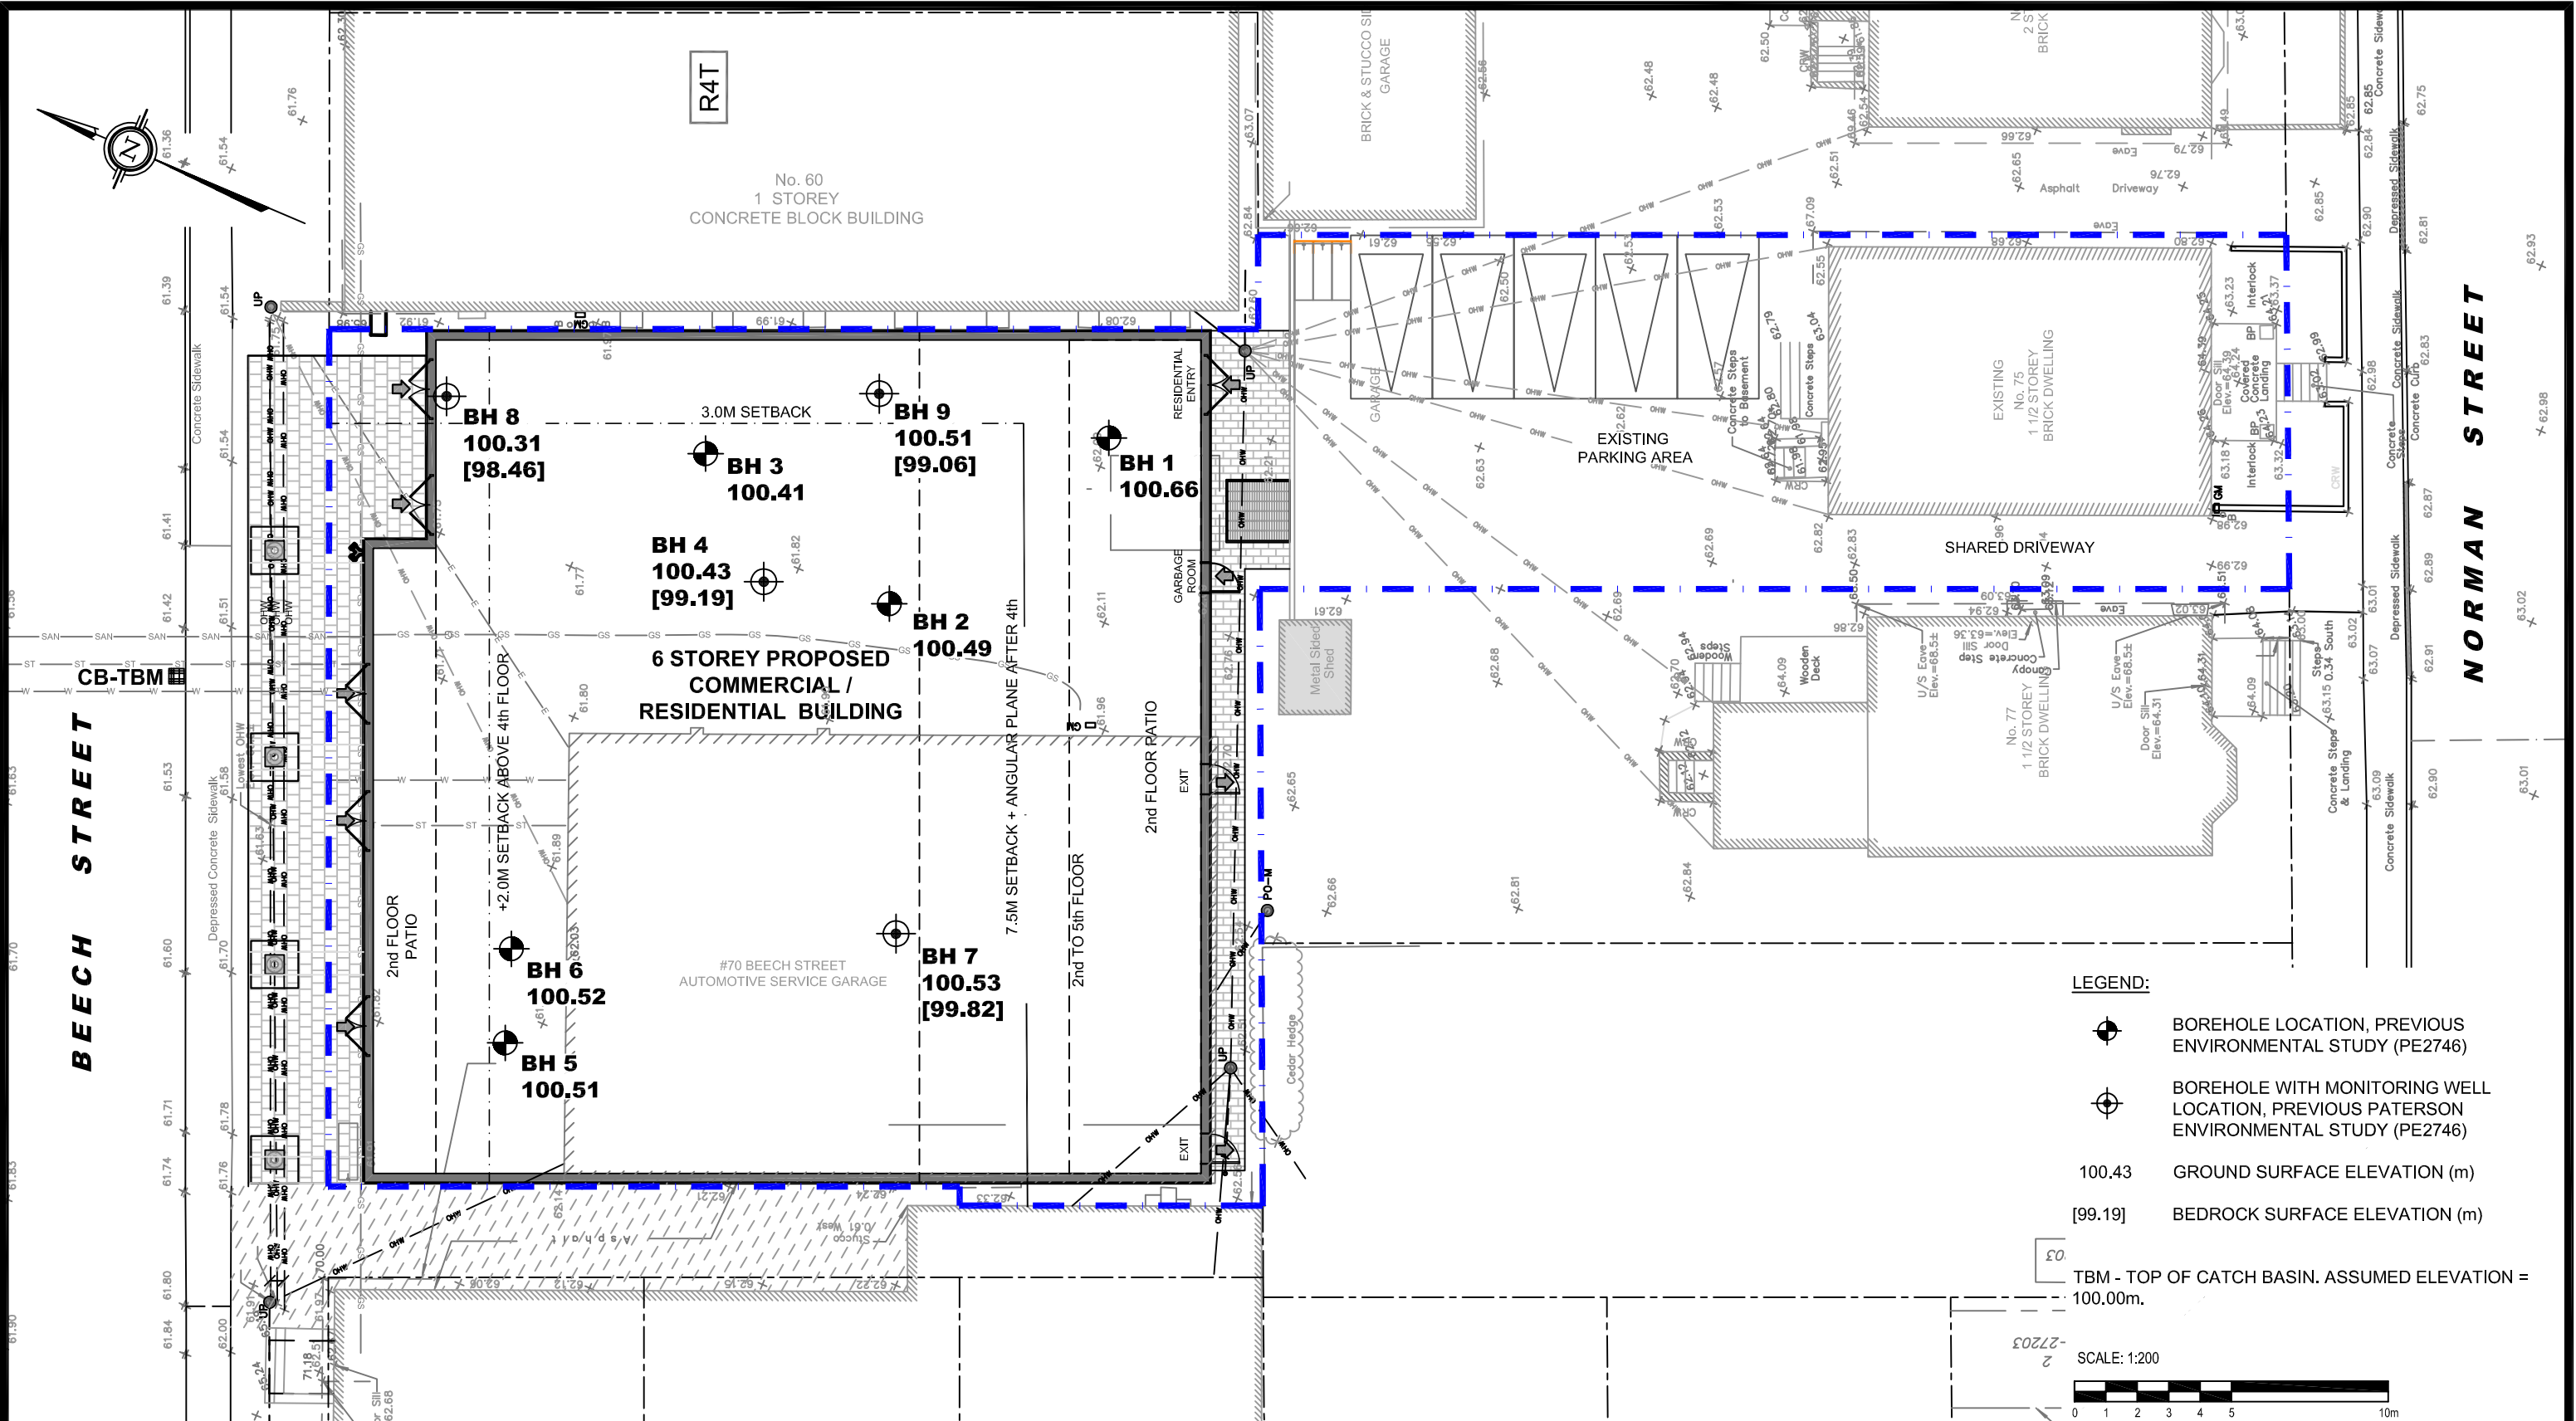

**patersongroup**  
consulting engineers

154 Colonnade Road South  
Ottawa, Ontario K2E 7J5  
Tel: (613) 226-7381 Fax: (613) 226-6344

NO.	REVISIONS	DATE	INITIAL

BEECH HOLDINGS LTD.

GEOTECHNICAL INVESTIGATION - PROPOSED MULTI-STOREY BUILDING

70 BEECH STREET AND 75 NORMAN STREET

OTTAWA,

Title:

ONTARIO

TEST HOLE LOCATION PLAN

Scale:	1:200	Date:	02/2019
Drawn by:	RCG	Report No.:	PG4430-1
Checked by:	SD	PG4430-1	Revision No.:
Approved by:	DJG		