
4840 BANK STREET

PATHWAYS SOUTH REGIONAL GROUP



IBI GROUP 400 – 333 Preston Street Ottawa ON K1S 5N4 Canada tel 613 225 1311 fax 613 225 9868 ibigroup.com

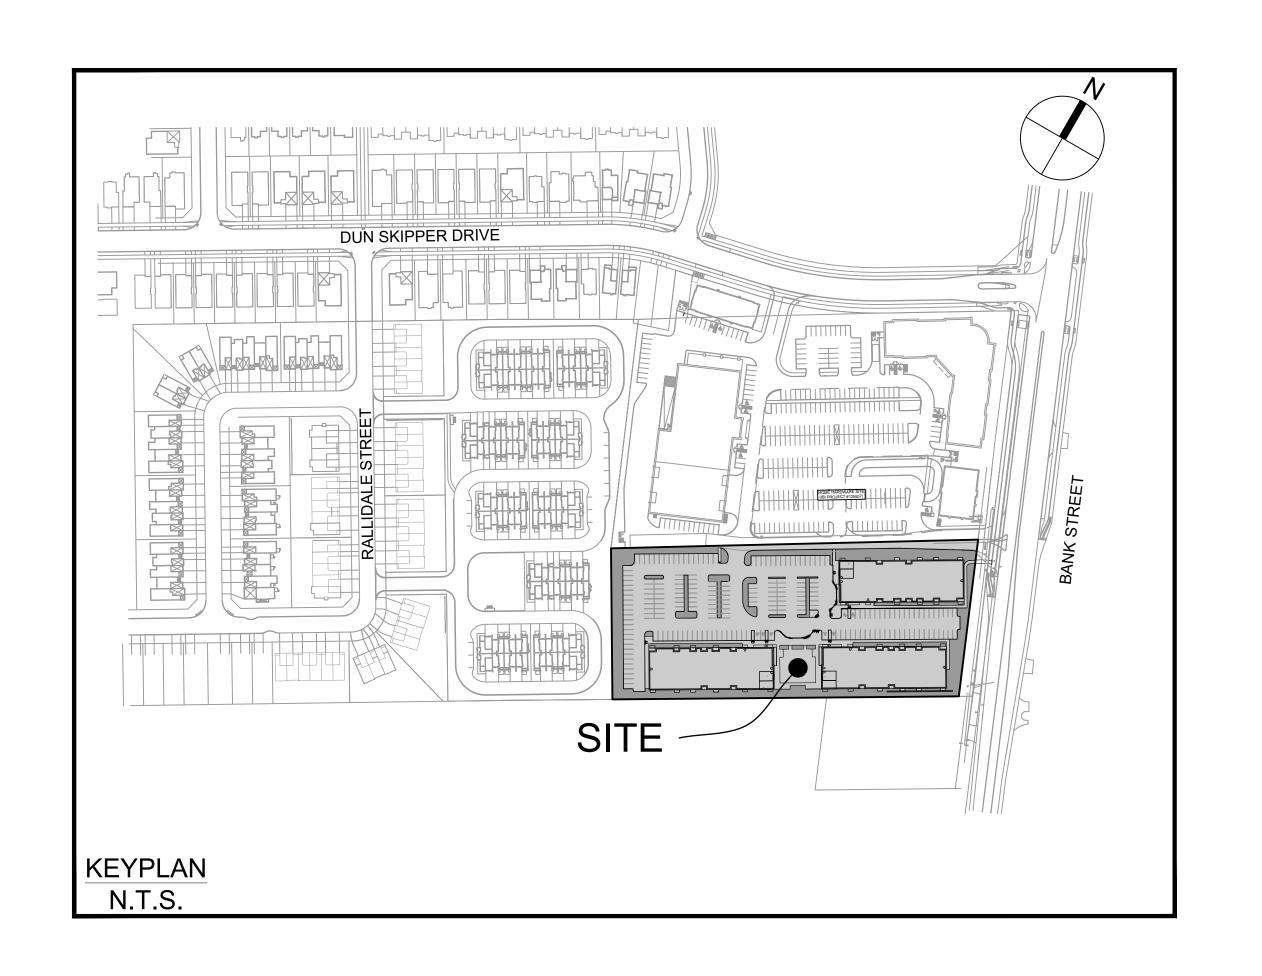

Sheet Number
Sheet Title

C-000
Cover

C-001
GENERAL PLAN OF SERVICES

C-010
NOTES LEGEND CB DATA

C-200
SITE GRADING PLAN

C-400
SANITARY DRAINAGE AREA PLAN


C-500
STORM DRAINAGE AREA PLAN

C-600
PONDING PLAN

C-900
SEDIMENT AND EROSION CONTROL PLAN

CITY OF OTTAWA

CONTRACT NO. 137175

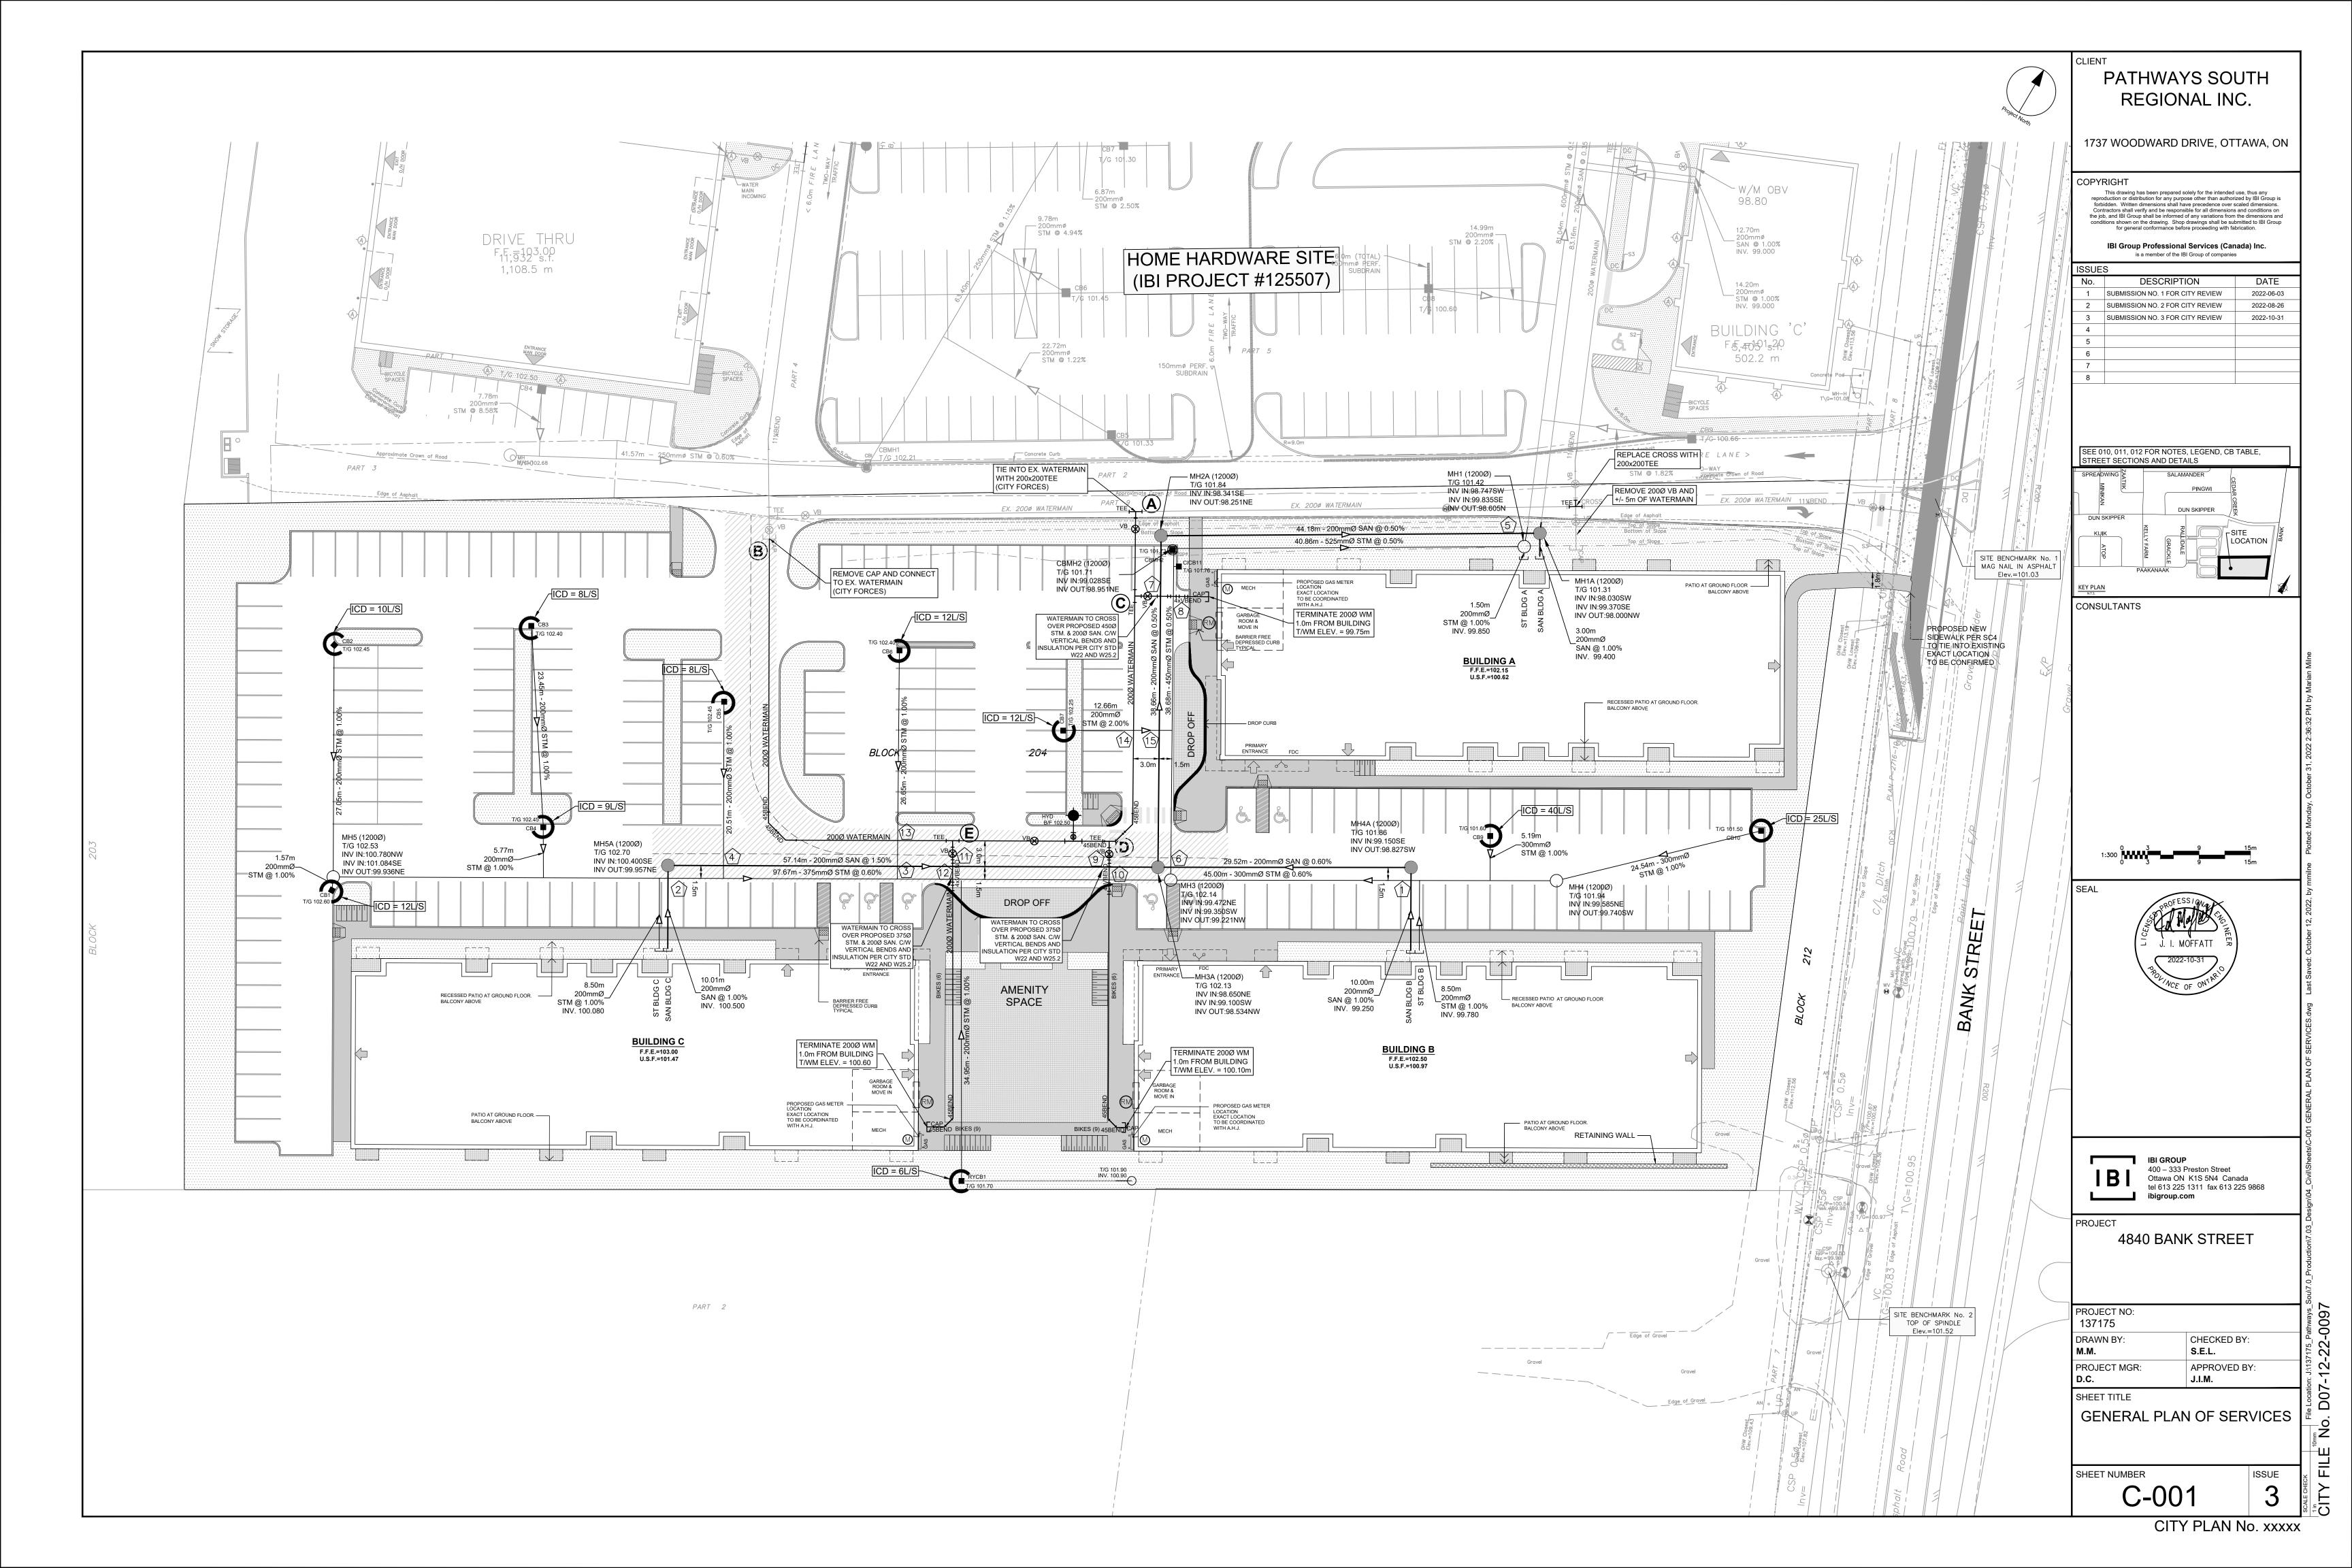

DRAWING NOTES

1.0 GENERAL

1.1 CONTRACTOR TO VERIFY ALL DIMENSIONS PRIOR TO CONSTRUCTION.

1.2 DO NOT SCALE DRAWINGS.

1.3 CONTRACTOR TO REPORT ALL DISCOVERIES OF ERRORS, OMISSIONS OR DISCREPANCIES TO THE

1.4 USE ONLY THE LATEST REVISED DRAWINGS OR THOSE THAT ARE MARKED "ISSUED FOR CONSTRUCTION". 1.5 ALL CONSTRUCTION SHALL COMPLY WITH CURRENT CITY OF OTTAWA STANDARDS AND SPECIFICATIONS. 1.6 THIS DRAWING SHALL BE READ IN CONJUNCTION WITH ALL RELEVANT DRAWINGS AND SPECIFICATIONS. 1.7 FOR LEGAL SURVEY INFORMATION REFER TO REGISTERED PLAN.

1.8 REFER TO SITE PLAN BY CHAMBERLAIN ARCHITECT SERVICES LIMITED.

1.09 CONTRACTOR TO IMPLEMENT EROSION AND SEDIMENT CONTROL MEASURES AS IDENTIFIED IN THE EROSION AND SEDIMENT CONTROL PLAN TO THE SATISFACTION OF THE CITY OF OTTAWA, PRIOR TO UNDERTAKING ANY SITE ALTERATIONS (FILLING, GRADING, REMOVAL OF VEGETATION, ETC.). DURING ALL PHASES OF THE SITE PREPARATION AND CONSTRUCTION THE MEASURES ARE TO BE MAINTAINED TO THE SATISFACTION OF THE ENGINEER AND CITY OF OTTAWA IN ACCORDANCE WITH THE BEST MANAGEMENT PRACTICES FOR EROSION AND SEDIMENT CONTROL. SHOULD ANY ADDITIONAL MEASURES BE REQUIRED TO ADDRESS FIELD CONDITIONS THEY SHALL BE INSTALLED AS DIRECTED BY THE ENGINEER OR THE CITY OF OTTAWA. SUCH ADDITIONAL MEASURES MAY INCLUDE BUT NOT BE LIMITED TO INSTALLATION OF FILTER CLOTHS ACROSS MANHOLE AND CATCHBASIN LIDS TO PREVENT SEDIMENT FROM ENTERING THE STRUCTURE AND INSTALLATION AND MAINTENANCE OF A LIGHT DUTY SILT FENCE BARRIER AS REQUIRED.

1.10 ALL IRON WORK ELEVATIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR ADJUSTMENTS AS

1.11 ALL CONCRETE CURBS AND SIDEWALKS TO CONFORM TO CITY STANDARDS SC1.1 AND SC1.4. ALL ONSITE CURBS TO BE BARRIER TYPE, WITH DEPRESSIONS AS NOTED. 1.12 ALL CONCRETE SHALL BE "NORMAL PORTLAND CEMENT" IN ACCORDANCE WITH O.P.S.S. 1350 AND SHALL

ACHIEVE A MINIMUM STRENGTH OF 30MPa AT 28 DAYS. 1.13 ALL CONSTRUCTION TRAFFIC TO ACCESS SITE FROM BANK STREET.

1.14 FOR GEOTECHNICAL REPORT SEE GEOTECHNICAL INVESTIGATION PROPOSED MULTI-STOREY BUILDINGS IDONE SOUTH APARTMENTS 4840 BANK STREET, OTTAWA, ON, REPORT No. PG6255 BY PATERSON GROUP

1.15 CONTRACTOR TO PROTECT EXISTING INFRASTRUCTURE AND PROPERTY SUCH AS TREES, PARKING ${\tt METERS, SIDEWALKS, CURBS, ASPHALT, AND STREET SIGNS FROM DAMAGE DURING CONSTRUCTION.}\\$ CONTRACTOR TO PAY THE COST TO REINSTATE OR REPLACE ANY DAMAGED INFRASTRUCTURE OR PROPERTY TO THE SATISFACTION OF THE CITY.

1.16 THE POSITION OF POLE LINES, CONDUITS, WATERMAIN, SEWERS, AND OTHER UNDERGROUND AND ABOVEGROUND UTILITIES AND STRUCTURES ARE NOT NECESSARILY SHOWN ON THE CONTRACT DRAWINGS, AND WHERE SHOWN. THE ACCURACY OF THE POSITION OF SUCH UTILITIES AND STRUCTURES IS NOT GUARANTEED. BEFORE STARTING WORK THE CONTRACTOR SHALL INFORM ITSELF OF THE EXACT LOCATION OF ALL SUCH UTILITIES AND STRUCTURES, SHALL PROTECT ALL UTILITIES AND STRUCTURES, AND SHALL ASSUME ALL LIABILITY FOR DAMAGE TO THEM.

1.17 CONTRACTOR TO SUPPLY SUITABLE FILL MATERIAL WHERE REQUIRED TO ROUGH GRADE THE SITE. ALL IMPORTED FILL MATERIAL TO BE CERTIFIED AS ACCEPTABLE BY THE GEOTECHNICAL ENGINEER. 1.18 CONTRACTOR TO HAUL EXCESS MATERIAL OFFSITE AS NECESSARY TO GRADE SITE TO MEET THE PROPOSED GRADES. ALL EXCESS MATERIAL TO BE HAULED OFFSITE AND DISPOSED OF AT AN APPROVED DUMP SITE. SHOULD THE CONTRACTOR DISCOVER ANY HAZARDOUS MATERIAL, CONTRACTOR IS TO NOTIFY

1.19 FILL MATERIAL WITHIN THE PARKING LOT AND BUILDING PAD AREAS. AND SUPPORTING BUILDING FOUNDATIONS SHALL BE COMPACTED TO 98% STANDARD MODIFIED PROCTOR DENSITY AND TO THE SATISFACTION OF THE GEOTECHNICAL ENGINEER.

ENGINEER. ENGINEER TO DETERMINE APPROPRIATE DISPOSAL METHOD/LOCATION.

1.20 ALL COMPACTION METHODS TO BE PERFORMED TO THE SATISFACTION OF THE GEOTECHNICAL ENGINEER TO INCLUDE BUT NOT BE LIMITED TO THE THICKNESS OF LIFTS, AND COMPACTION EQUIPMENT USED.

1.21 ALL DISTURBED BOULEVARDS TO BE REINSTATED WITH SOD ON 100mm TOPSOIL. 1.22 UTILITY DUCTS TO BE INSTALLED PRIOR TO ROAD BASE CONSTRUCTION.

1.23 CLAY DIKES TO BE INSTALLED WHERE INDICATED ON THE DRAWINGS OR AS APPROVED AND DIRECTED BY THE GEOTECHNICAL ENGINEER ALL IN ACCORDANCE WITH CITY OF OTTAWA STANDARDS AND SPECIFICATIONS. 1.24 ALL UTILITY BOXES (i.e. PEDESTALS, TRANSFORMERS, ETC) ARE TO BE INSTALLED IN ACCORDANCE WITH THE LATEST EDITION OF THE CITY OF OTTAWA'S "GUIDELINES FOR UTILITY PEDESTALS WITHIN THE ROAD

1.25 FOR SITE BENCH MARK SEE SURVEY BY ANNIS O'SULLIVAN, VOLLEBEKK LTD. JOB No. 20749-22 REGIONAL BLK 204 4M-1653 T DI.

2.0 SANITARY

2.1 ALL SANITARY SEWER MAINS TO BE CSA CERTIFIED BELL AND SPIGOT TYPE, ONLY FACTORY FITTINGS TO BE USED. SEWER TO BE INSTALLED AS PER OSPD 1005.01. SANITARY SEWER MATERIALS TO BE: 200mmØ AND SMALLER - PVC DR 35

2.2 ALL SANITARY MAINTENANCE HOLES TO BE 1.2m DIAMETER AS PER CITY OF OTTAWA STANDARDS COMPLETE WITH BENCHING, RUNGS, FRAME AND COVER, DROP PIPES AND LANDINGS WHERE NEEDED.

2.3 SANITARY MANHOLE COVERS TO BE CITY OF OTTAWA STD. S25 (MOD. OPSD. 401.020). SANITARY MANHOLE COVER TO BE CLOSED COVER TYPE, AS PER CITY STANDARD S24. 2.4 SANITARY SEWER LEAKAGE TEST AND CCTV INSPECTION SHALL BE COMPLETED AS PER CITY

SPECIFICATIONS PRIOR TO INSTALLATION OF BASE COURSE ASPHALT. 2.5 ANY SANITARY SEWER WITH LESS THAN 2.0m COVER REQUIRES THERMAL INSULATION AS PER CITY OF OTTAWA STANDARD W22, OR AS APPROVED BY THE ENGINEER.

2.6 CONNECTION TO THE EXISTING SANITARY SEWER TO BE INCLUDED IN THE COST FOR SANITARY SEWER INSTALLATION. THIS INCLUDES REINSTATEMENT OF ROAD CUTS TO CITY STANDARDS.

3.1 ALL STORM SEWERS TO BE CSA CERTIFIED, BELL AND SPIGOT TYPE. ALL STORM SEWERS TO BE INSTALLED PER MANUFACTURER'S INSTRUCTIONS. ONLY FACTORY FITTINGS TO BE USED. STORM SEWER MATERIALS TO BE: 375mmØ AND SMALLER - PVC DR 35 450mmØ AND LARGER - 100-D REINFORCED CONCRETE.

 $3.2~\mathrm{ALL}$ STORM MAINTENANCE HOLES TO BE SIZED IN ACCORDANCE WITH THE PLANS AND AS PER CITY OF OTTAWA STANDARDS COMPLETE WITH BENCHING, RUNGS, AND FRAME AND COVER.

3.3 STORM MH COVERS TO BE OPEN TYPE, AS PER CITY STANDARD \$24, FRAMES TO BE PER CITY OF OTTAWA STD. S25. CONTRACTOR TO INSTALL FILTER FABRIC UNDER STORM MH COVER UNTIL SODDING IS COMPLETE. 3.4 STORM MAINTENANCE HOLES TO BE OPSD, SIZE AS SPECIFIED, TAPER TOP.

3.5 ALL CATCH BASINS TO BE AS PER OPSD 705.010, FRAME & FISH TYPE GRATE AS PER CITY OF OTTAWA STD.

3.6 150mm DIAMETER SOCK-WRAPPED PERFORATED PVC SUBDRAINS TO BE INSTALLED AT THE LIMIT OF THE AVY DUTY ROAD STRUCTURE WHERE IT MEETS THE LIGHT DUTY ROAD STRUCTURE AND AT ALL CB'S IN HEAVY DUTY ROADS AS IDENTIFIED ON PLAN. SUBDRAINS TO DISCHARGE TO CB'S AS SHOWN. 3.7 ANY STORM SEWER WITH LESS THAN 2.0m COVER REQUIRES THERMAL INSULATION AS PER CITY OF

OTTAWA STANDARD W22. OR AS APPROVED BY THE ENGINEER 3.8 CONNECTION TO THE EXISTING STORM SEWER TO BE INCLUDED IN THE COST FOR STORM SEWER

INSTALLATION. THIS INCLUDES REINSTATEMENT OF ROAD CUT TO CITY STANDARDS. 3.9 CONTRACTOR TO PROVIDE IPEX-TEMPEST MHF ICD'S SHOP DRAWINGS, OR EQUIVALENT, FOR ENGINEERS REVIEW PRIOR TO ORDERING ICD'S.

4.1 ALL WATERMAINS TO BE PVC DR 18, WITH MINIMUM COVER OF 2.4m AND INSTALLED PER CITY OF OTTAWA STANDARDS W17. ALL DOMESTIC WATER SERVICES ARE TO BE 200mmØ. 4.2 THRUST BLOCKS TO BE INSTALLED AT ALL BENDS, TEES, AND CAPS ALL TO CITY STANDARDS W25.3 AND

4.3 CONTRACTOR TO CONDUCT PRESSURE AND LEAKAGE TESTING OF ALL WATERMAINS AND DISINFECT AND CHLORINATE ALL WATERMAINS TO THE SATISFACTION OF M.O.E. AND THE CITY OF OTTAWA. 4.4 TRACER WIRE TO BE INSTALLED ALONG THE FULL LENGTH OF WATERMAIN AND ATTACHED TO EACH MAIN

STOP AS PER CITY OF OTTAWA STANDARD W36. 4.5 ALL COMPONENTS OF THE WATER DISTRIBUTION SYSTEM SHALL BE CATHODICALLY PROTECTED AS PER 4.6 ALL VALVES & VALVE BOXES AND CHAMBERS, HYDRANTS, AND HYDRANT VALVES AND ASSEMBLIES SHALL

BE INSTALLED AS PER CITY OF OTTAWA STANDARDS W19 & W24. 4.7 ANY WATERMAIN WITH LESS THAN 2.4m COVER REQUIRES THERMAL INSULATION AS PER CITY OF OTTAWA STANDARD W22, OR AS APPROVED BY THE ENGINEER.

4.8 CONTRACTOR IS RESPONSIBLE FOR ACQUIRING THE WATER PERMIT FROM THE CITY OF OTTAWA AND PAYMENT OF ANY FEES ASSOCIATED WITH SECURING THE WATER PERMIT, OWNER IS RESPONSIBLE FOR

REIMBURSING THE CONTRACTOR FOR THE ACTUAL COST OF ACQUIRING THE WATER PERMIT. 4.9 CONNECTION TO EXISTING WATERMAIN TO BE INCLUDED IN THE COST FOR THE WATERMAIN INSTALLATION.

5.0 PARKING LOT AND WORK IN PUBLIC RIGHTS OF WAY

THIS COST INCLUDES REINSTATEMENT OF ROAD CUTS TO CITY STANDARD R10.

5.1 CONTRACTOR TO REINSTATE ROAD CUTS PER CITY OF OTTAWA STANDARD R-10. 5.2 THE CONTRACTOR SHALL PREPARE A TRAFFIC MANAGEMENT PLAN FOR REVIEW AND APPROVAL BY THE CITY OF OTTAWA, CONTRACTOR TO MAINTAIN TRAFFIC FLOW DURING THE ENTIRE CONSTRUCTION PERIOD. MAINTENANCE OF ROAD CUTS SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR. PROVISION OF FLAGMEN,

DETOURS AS NECESSARY, BARRICADES AND SIGNS TO THE FULL SATISFACTION OF THE ENGINEER AND ROAD AUTHORITY SHALL BE THE CONTRACTOR'S RESPONSIBILITY. 5.3 CONTRACTOR TO PREPARE SUBGRADE, INCLUDING PROOFROLLING, TO THE SATISFACTION OF THE GEOTECHNICAL ENGINEER PRIOR TO THE COMMENCEMENT OF PLACEMENT OF GRANULAR B MATERIAL. 5.4 FILL TO BE PLACED AND COMPACTED PER THE GEOTECHNICAL REPORT REQUIREMENTS.

5.5 CONTRACTOR TO SUPPLY, PLACE AND COMPACT GRANULAR B MATERIAL IN ACCORDANCE WITH THE RECOMMENDATIONS OF THE GEOETCHNICAL ENGINEER. CONTRACTOR TO PROVIDE ENGINEER WITH SAMPLES OF GRANULAR B MATERIAL FOR TESTING AND CERTIFICATION FROM THE GEOTECHNICAL ENGINEER THAT THE MATERIAL MEETS THE GRADATION REQUIREMENTS SPECIFIED IN THE GEOTECHNICAL REPORT.

5.6 GRANULAR A MATERIAL TO BE PLACED ONLY UPON APPROVAL BY THE GEOTECHNICAL ENGINEER OF

5.7 CONTRACTOR TO SUPPLY, PLACE AND COMPACT GRANULAR A MATERIAL IN ACCORDANCE WITH THE RECOMMENDATIONS OF THE GEOETCHNICAL ENGINEER. CONTRACTOR TO PROVIDE ENGINEER WITH SAMPLES OF GRANULAR A MATERIAL FOR TESTING AND CERTIFICATION FROM THE GEOTECHNICAL ENGINEER THAT THE MATERIAL MEETS THE GRADATION REQUIREMENTS SPECIFIED IN THE GEOTECHNICAL REPORT 5.8 ASPHALT MATERIAL TO BE PLACED ONLY UPON APPROVAL BY THE GEOTECHNICAL ENGINEER OF

5.9 CONTRACTOR TO SUPPLY, PLACE AND COMPACT ASPHALT MATERIAL IN ACCORDANCE WITH THE RECOMMENDATIONS OF THE GEOTECHNICAL ENGINEER. CONTRACTOR TO PROVIDE ENGINEER WITH SAMPLES OF ASPHALT MATERIAL FOR TESTING AND CERTIFICATION FROM THE GEOTECHNICAL ENGINEER THAT THE MATERIAL MEETS THE REQUIREMENTS SPECIFIED IN THE GEOTECHNICAL REPORT.

AND FOR PROVIDING THE ENGINEER WITH VERIFICATION PRIOR TO PLACEMENT. 5.11 DITCHES DISTURBED DURING CULVERT INSTALLATION AND GRADING OPERATIONS ARE TO BE REINSTATED TO THEIR ORIGINAL CONDITION AND FLOWLINE GRADES.

5.10 CONTRACTOR IS RESPONSIBLE FOR ESTABLISHING LINE AND GRADE IN ACCORDANCE WITH THE PLANS

5.13 ALL EXCESS MATERIAL TO BE HAULED OFFSITE AND DISPOSED OF AT AN APPROVED DUMP SITE. SHOULD THE CONTRACTOR DISCOVER ANY HAZARDOUS MATERIAL, CONTRACTOR IS TO NOTIFY ENGINEER. ENGINEER TO DETERMINE APPROPRIATE DISPOSAL METHOD/LOCATION.

5.14 PAVEMENT STRUCTURE (MATERIAL TYPES AND THICKNESSES) FOR HEAVY DUTY AND LIGHT DUTY AREAS TO BE AS SPECIFIED IN THE GEOTECHNICAL REPORT AND SHOWN ON THE PLANS.

CATCHBASIN DATA TABLE											
STRUCTURE ID	STORM AREAID	STRUCTURE	FRAME & COVER	ELEVATION		OUTLET PIPE		INLET CONTROL DEVICE			
				TOP OF GRATE	INVERT		DIAMETER	TYPE	HEAD	FLOW	ICD TYPE
					INLET	OUTLET	(mm)		(m)	(I/s)	
CB1	MH5A	OPSD 705.010	S19	102.50		101.10	200	PVC DR35	1.650	12.00	IPEX MHF
CB2	MH5	OPSD 705.010	S19	102.45		101.05	200	PVC DR35	1.650	10.00	IPEX MHF
CB3	MH3	OPSD 705.010	S19	102.40		101.00	200	PVC DR35	1.650	8.00	IPEX MHF
CB4	МНЗА	OPSD 705.010	S19	102.45	100.77	100.75	200	PVC DR35	1.650	9.00	IPEX MHF
CB5	мнзв	OPSD 705.010	S19	102.45		101.05	200	PVC DR35	1.650	8.00	IPEX MHF
CB6	мнзс	OPSD 705.010	S19	102.40		101.00	200	PVC DR35	1.650	12.00	IPEX MHF
CB7	CBMH2	OPSD 705.010	S19	102.25		100.85	200	PVC DR35	1.650	12.00	IPEX MHF
CB9	MH3D	OPSD 705.010	S19	101.60		100.10	300	PVC DR35	1.650	40.00	IPEX MHF
CB10	MH4	OPSD 705.010	S19	101.50		100.10	300	PVC DR35	1.650	25.00	IPEX MHF
CICB11	MH1	OPSD 705.010	S19	101.72		100.32	200	PVC DR35	1.650		
RYCB1	RYCB1	OPSD 705.010	S19	101.70		100.30	200	PVC DR35	1.400	6.00	IPEX LMF


			Finished	Top of	As Built	
Station		Description	Grade	Waterain	Waterain	
Α	0+000.00	TEE	101.700	99.300	Viatorani	
	0+002.00	VB	101.830	99.430		
С	0+009.85	TEE	101.940	99.540		
	0+025.66	STM CROSSING	101.970	99.570		
	0+036.47	45° BEND	102.070	99.670		
	0+039.30	45° BEND	102.070	99.670		
D	0+040.02	TEE	102.080	99.680		
	0+044.20	HY DRANT	102.250	99.850		
	0+048.75	VB	102.440	100.040		
E	0+058.28	TEE	102.670	100.270		
	0+064.50	STM CROSSING	102.620	100.220		
	0+077.76	45° BEND	102.680	100.280		
	0+080.59	45° BEND	102.660	100.260		
В	0+113.70	EX CAP	102.580	100.180		
С	0+000	TEE	101.940	99.540		
	0+001.5	VB	101.870	99.470		
	0+002.80	V BEND	101.802	99.402		
	0+003.20	SAN CROSSING	101.790	100.065		
	0+003.90	STM CROSSING	101.810	100.065		
	0+004.00	V BEND	101.784	100.065		
	0+005.00	V BEND	101.830	100.065		
	0+006.00	V BEND	101.859	99.459		
	0+008.6	BLDG A	102.150	99.750		
D	0+000	TEE	102.080	99.680		
	0+001.5	VB	102.090	99.690		
	0+002.00	V BEND	102.091	99.691		
	0+002.75	V BEND	102.097	100.300		
	0+003.14	SAN CROSSING	102.100	100.300		
	0+004.25	STM CROSSING	102.110	100.300		
	0+005.00	V BEND	102.165	100.300		
	0+006.00	V BEND	102.227	99.827		
	0+032.38	45° BEND	102.450	100.050		
	0+033.79	45° BEND	102.460	100.060		
	0+034.80	BLDG B	102.450	100.050		
	0.000	TEE	400.070	400.070		
E	0+000	TEE	102.670	100.270		
	0+001.5	VB	102.700	100.300		
	0+002.00	V BEND	102.702	100.100		

Pipe Interference Table					
Crossing No.	PIPE 1	PIPE 2	Clearance		
1	STM Bottom 99.631	SAN Top 99.371	0.260		
2	SAN Bottom 100.409	STM Top 100.088	0.321		
3	STM Bottom 100.743	SAN Top 99.756	0.987		
4	STM Top 100.853	SAN Top 100.065	0.788		
5	STM Bottom 98.502	SAN Top 98.274	0.258		
6	STM Bottom 99.130	SAN Top 98.965	0.265		
7	WTR Bottom 99.660	SAN Top 98.582	1.077		
8	WTR Bottom 99.839	STM Top 99.589	0.250		
9	WTR Bottom 100.074	SAN Top 99.392	0.682		
10	WTR Bottom 100.074	STM Top 99.779	0.295		
11	WTR Bottom 100.184	SAN Top 99.665	0.519		
12	WTR Bottom 100.184	STM Top 99.889	0.295		
13	STM Top 100.773	WTR Top 99.600	0.553		
14	STM Bottom 100.680	WTR Top 99.600	1.110		
15	STM Bottom 100.620	SAN Top 98.661	1.959		

LEGEND:

○ ^{MH3A}	EXISTING SANITARY MANHOLE
○ ^{MH3}	EXISTING STORM MANHOLE
CB T/G 99.76	EXISTING STREET CATCHBASIN
CICB G/G 99.76	EXISTING CURB INLET CATCHBASIN
⊗ V&VB	EXISTING VALVE AND VALVE BOX
⊗ V&C	EXISTING VALVE AND CHAMBER
→ HYD B/F 100.56	EXISTING HYDRANT
	EXISTING BARRIER CURB
	EXISTING DEPRESSED BARRIER CURB
	EXISTING CONCRETE SIDEWALK
\(\frac{\lambda}{\chi}\)	SIAMESE CONNECTION (IF REQUIRED)
M	METER
RM	REMOTE METER
PRV	PRESSURE REDUCING VALVE
\bigcirc	PIPE CROSSING IDENTIFICATION
	HEAVY DUTY ASPHALT / FIRE ROUTE
	SOD
	CONCRETE SIDEWALK

— - - — PROPERTY LINE

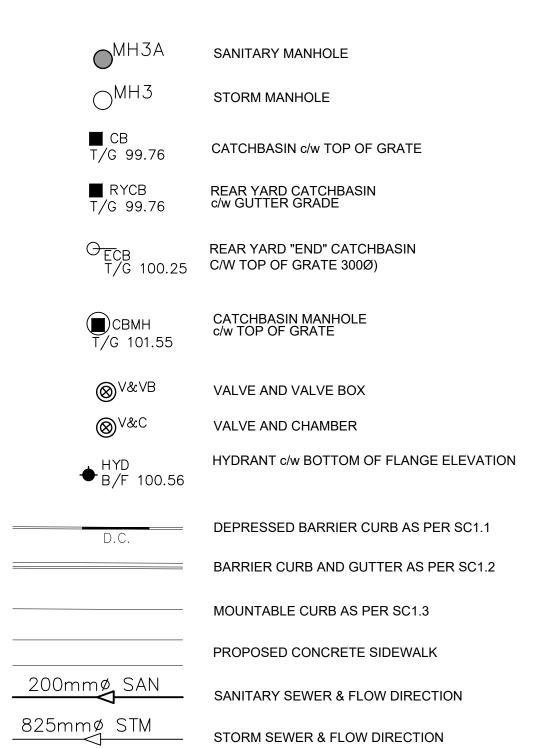

200¢ WATERMAIN WATERMAIN

\longrightarrow \longrightarrow	PROPOSED SWALE C/W FLOW DIRECTION
0.5%	PROPOSED DITCH C/W FLOW DIRECTION AND SLOPE
<u>1.3%</u> →	SLOPE C/W FLOW DIRECTION
	MAJOR OVERLAND FLOW ROUTE
× 104.62	PROPOSED SPOT GRADE
×104.40 (s)	PROPOSED SWALE GRADE
×104.50 (s)HP	PROPOSED SWALE HIGH POINT
104.60 103.59 ×	LOT CORNER GRADE C/W EXISTING GROUND
86.45 EX ×	TIE INTO EXISTING GRADE
-96.79	FULL STATIC PONDING GRADE
	RETAINING WALL
105.30 T/w×	TOP OF RETAINING WALL
103.50 B/W	PROPOSED BOTTOM OF RETAINING WALL
	TERRACING 3:1 MAXIMUM UNLESS NOTED OTHERWISE
F.F.E.=106.30	PROPOSED BUILDING FINISHED FLOOR ELEVATION
U.S.F.=104.30	PROPOSED UNDERSIDE OF FOOTING ELEVATION

PAVEMENT STRUCTURE:

LIGHT WEIGHT AREAS:

50mm - SUPERPAVE 12.5 ASPHALTIC CONCRETE 150mm - OPSS GRANULAR "A" CRUSHED STONE 300mm - OPSS GRANULAR "B" TYPE II

HEAVY DUTY AREAS

- SUPERPAVE 12.5 ASPHALTIC CONCRETE 50mm - SUPERPAVE 19.0 ASPHALTIC CONCRETE - OPSS GRANULAR "A" CRUSHED STONE 450mm - OPSS GRANULAR "B" TYPE II

PATHWAYS SOUTH REGIONAL INC. 1737 WOODWARD DRIVE, OTTAWA, ON **COPYRIGHT** This drawing has been prepared solely for the intended use, thus any reproduction or distribution for any purpose other than authorized by IBI Group is forbidden. Written dimensions shall have precedence over scaled dimensions. Contractors shall verify and be responsible for all dimensions and conditions on

the job, and IBI Group shall be informed of any variations from the dimensions and conditions shown on the drawing. Shop drawings shall be submitted to IBI Group for general conformance before proceeding with fabrication. IBI Group Professional Services (Canada) Inc. is a member of the IBI Group of companies DESCRIPTION DATE SUBMISSION NO. 1 FOR CITY REVIEW 2022-06-03 SUBMISSION NO. 2 FOR CITY REVIEW 2022-08-26 SUBMISSION NO. 3 FOR CITY REVIEW 2022-10-31

SEE 010, 011, 012 FOR NOTES, LEGEND, CB TABLE, STREET SECTIONS AND DETAILS SPREADWING SALAMANDER DUN SKIPPER **CONSULTANTS**

IBI GROUP 400 – 333 Preston Street Ottawa ON K1S 5N4 Canada tel 613 225 1311 fax 613 225 9868 ibigroup.com

PROJECT 4840 BANK STREET

PROJECT NO: 137175 DRAWN BY: CHECKED BY: S.E.L. PROJECT MGR: APPROVED BY: J.I.M.


SHEET TITLE NOTES LEGEND CB DATA


SHEET NUMBER C-010


CITY PLAN No. xxxxx


ISSUE


D07-12-22-

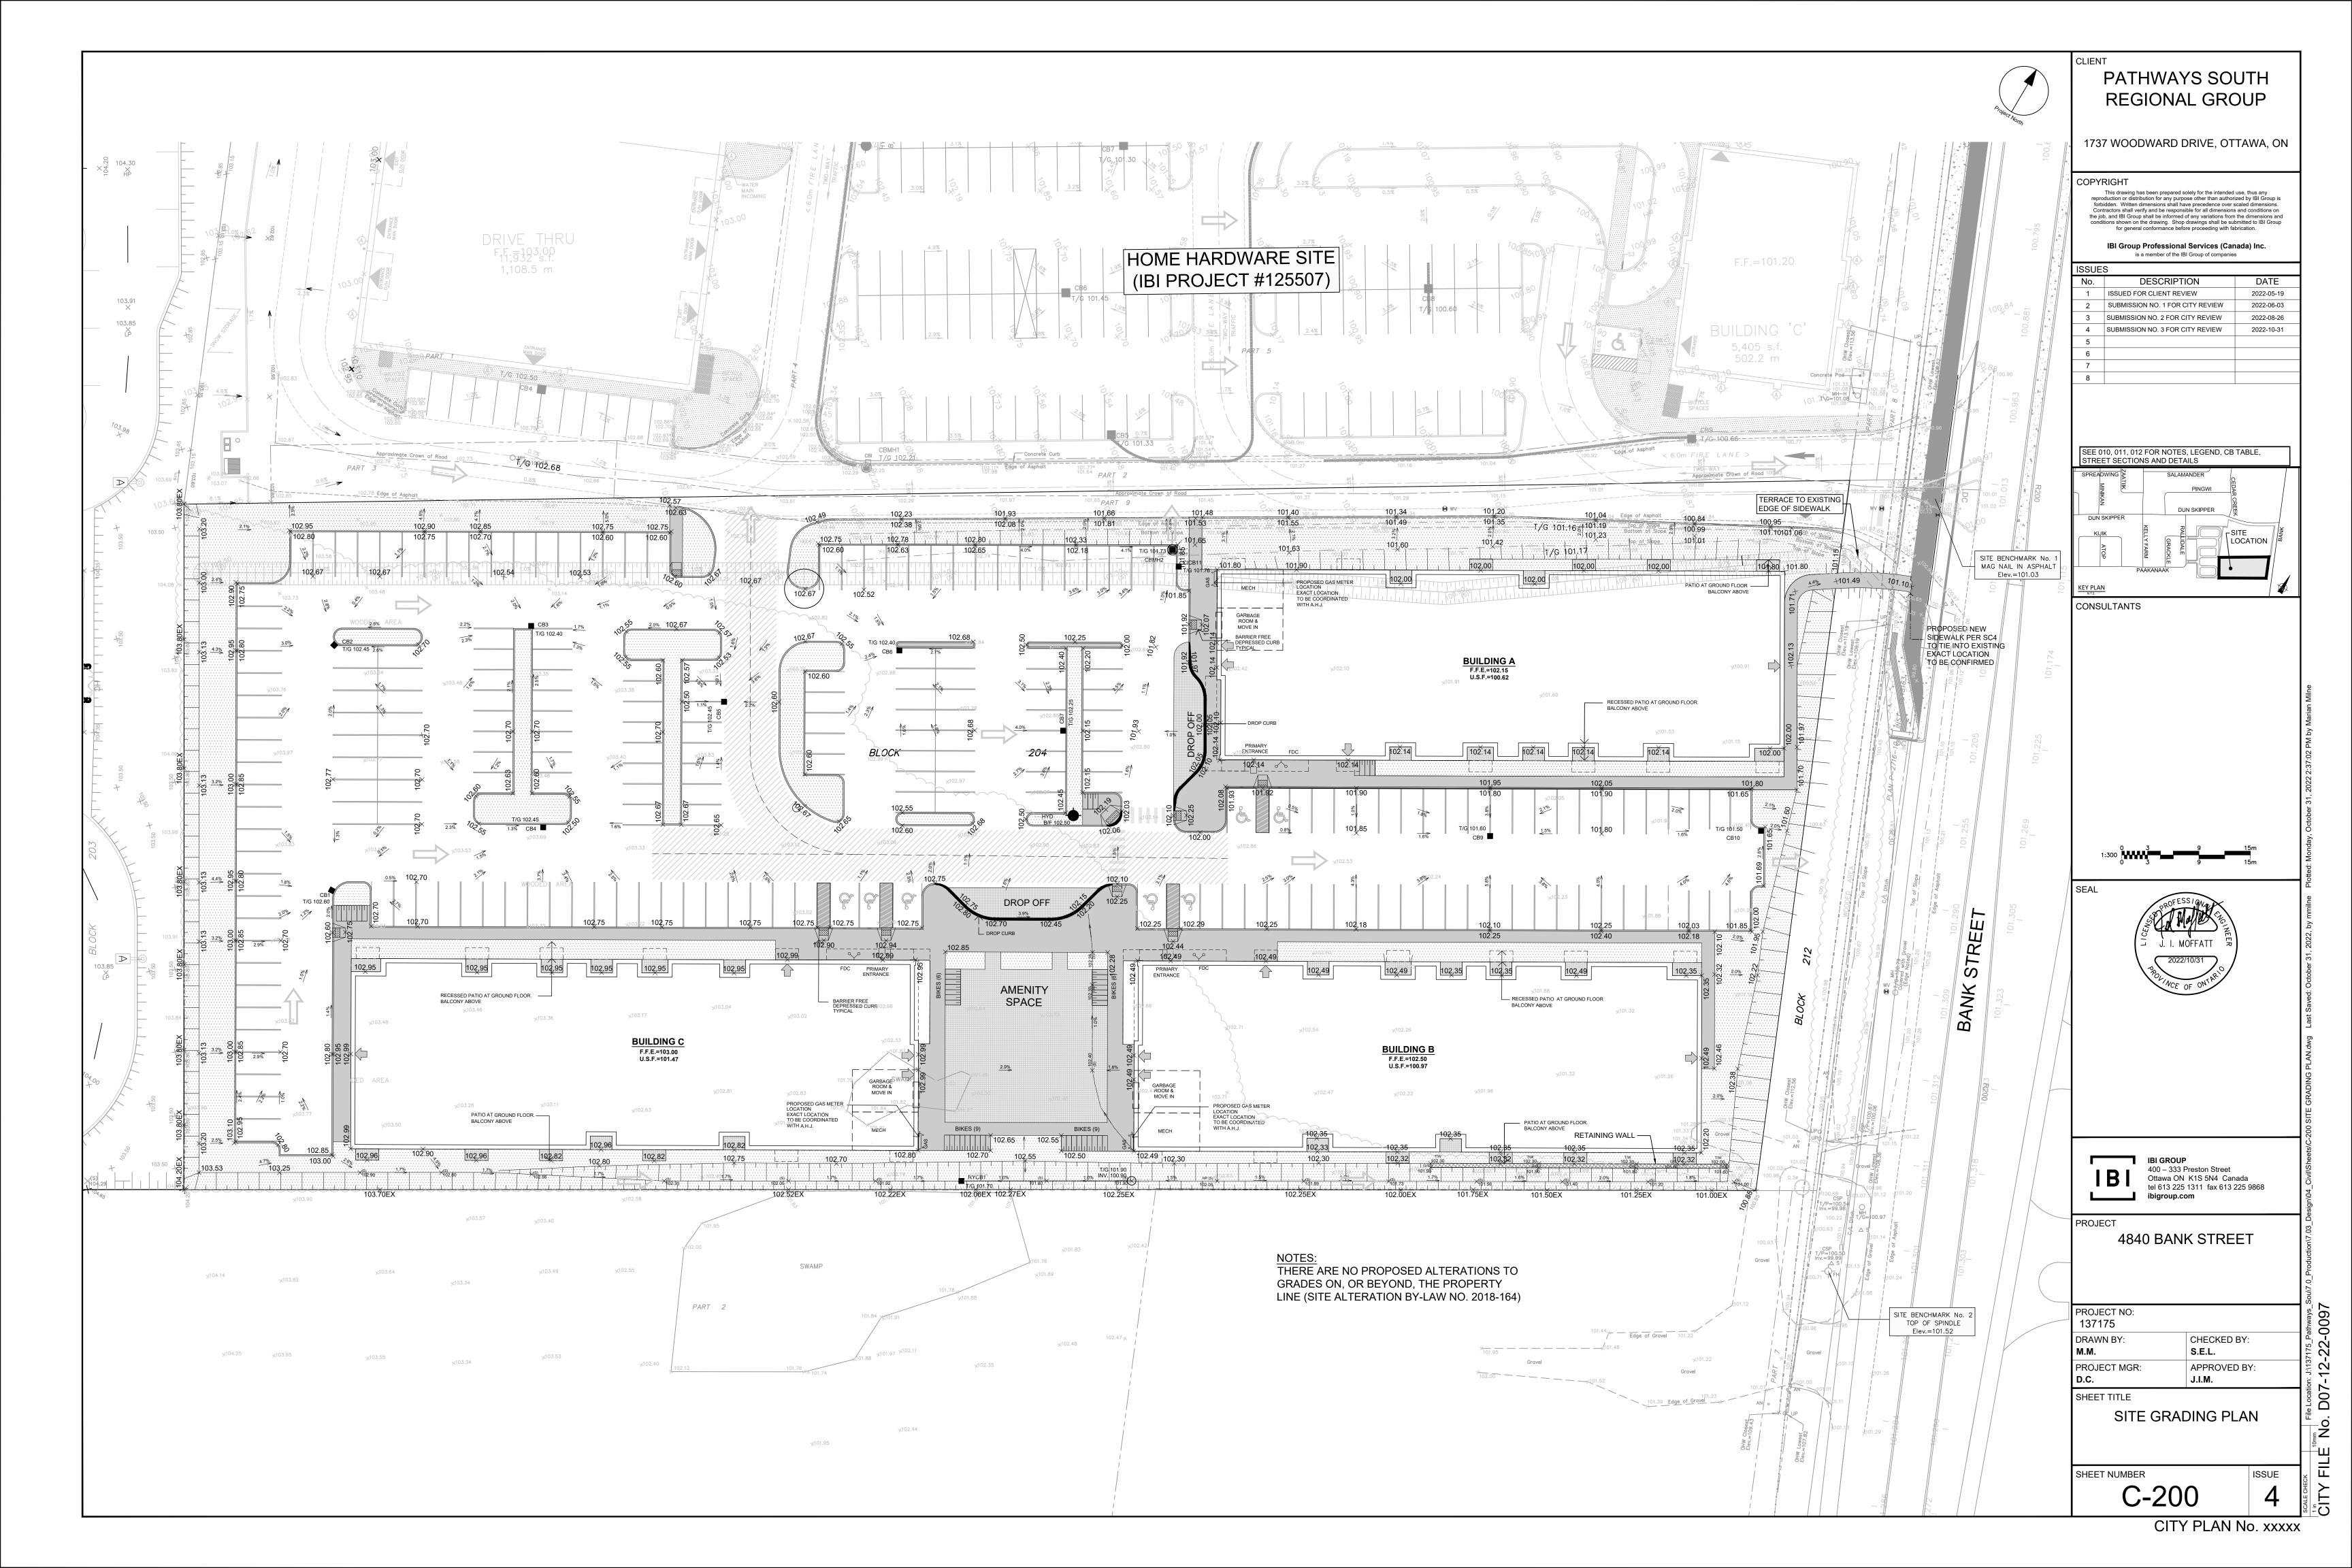

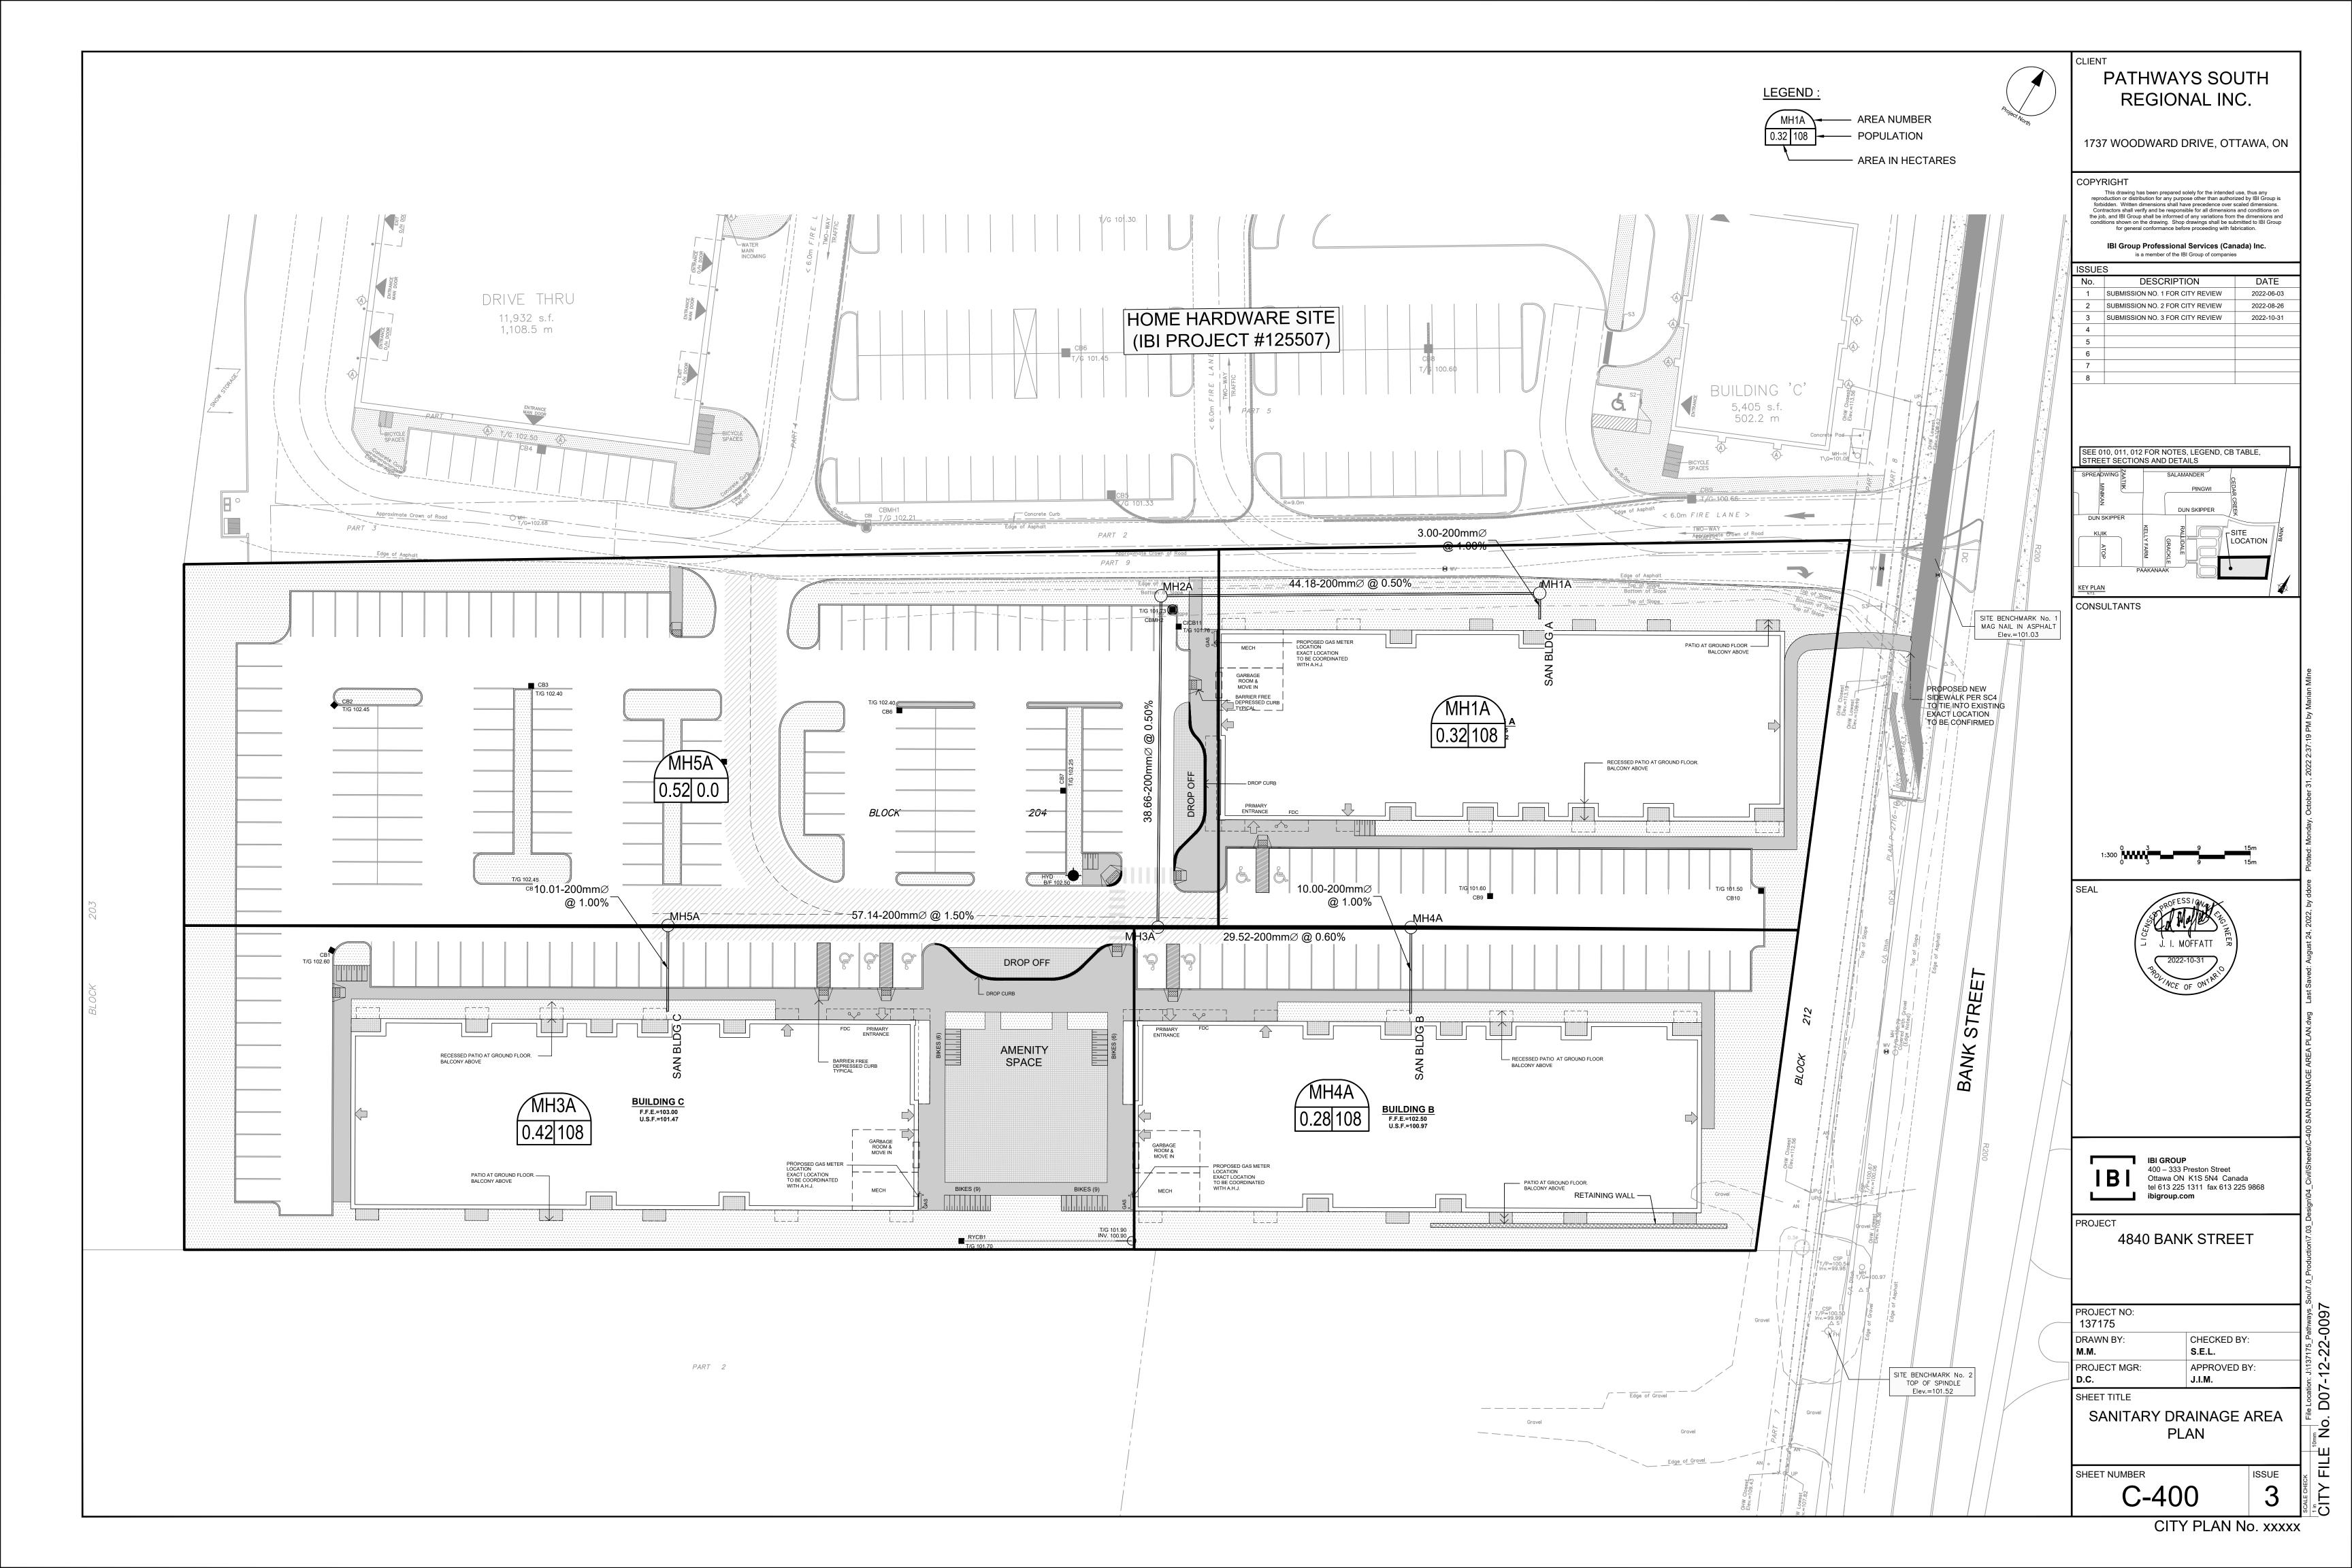

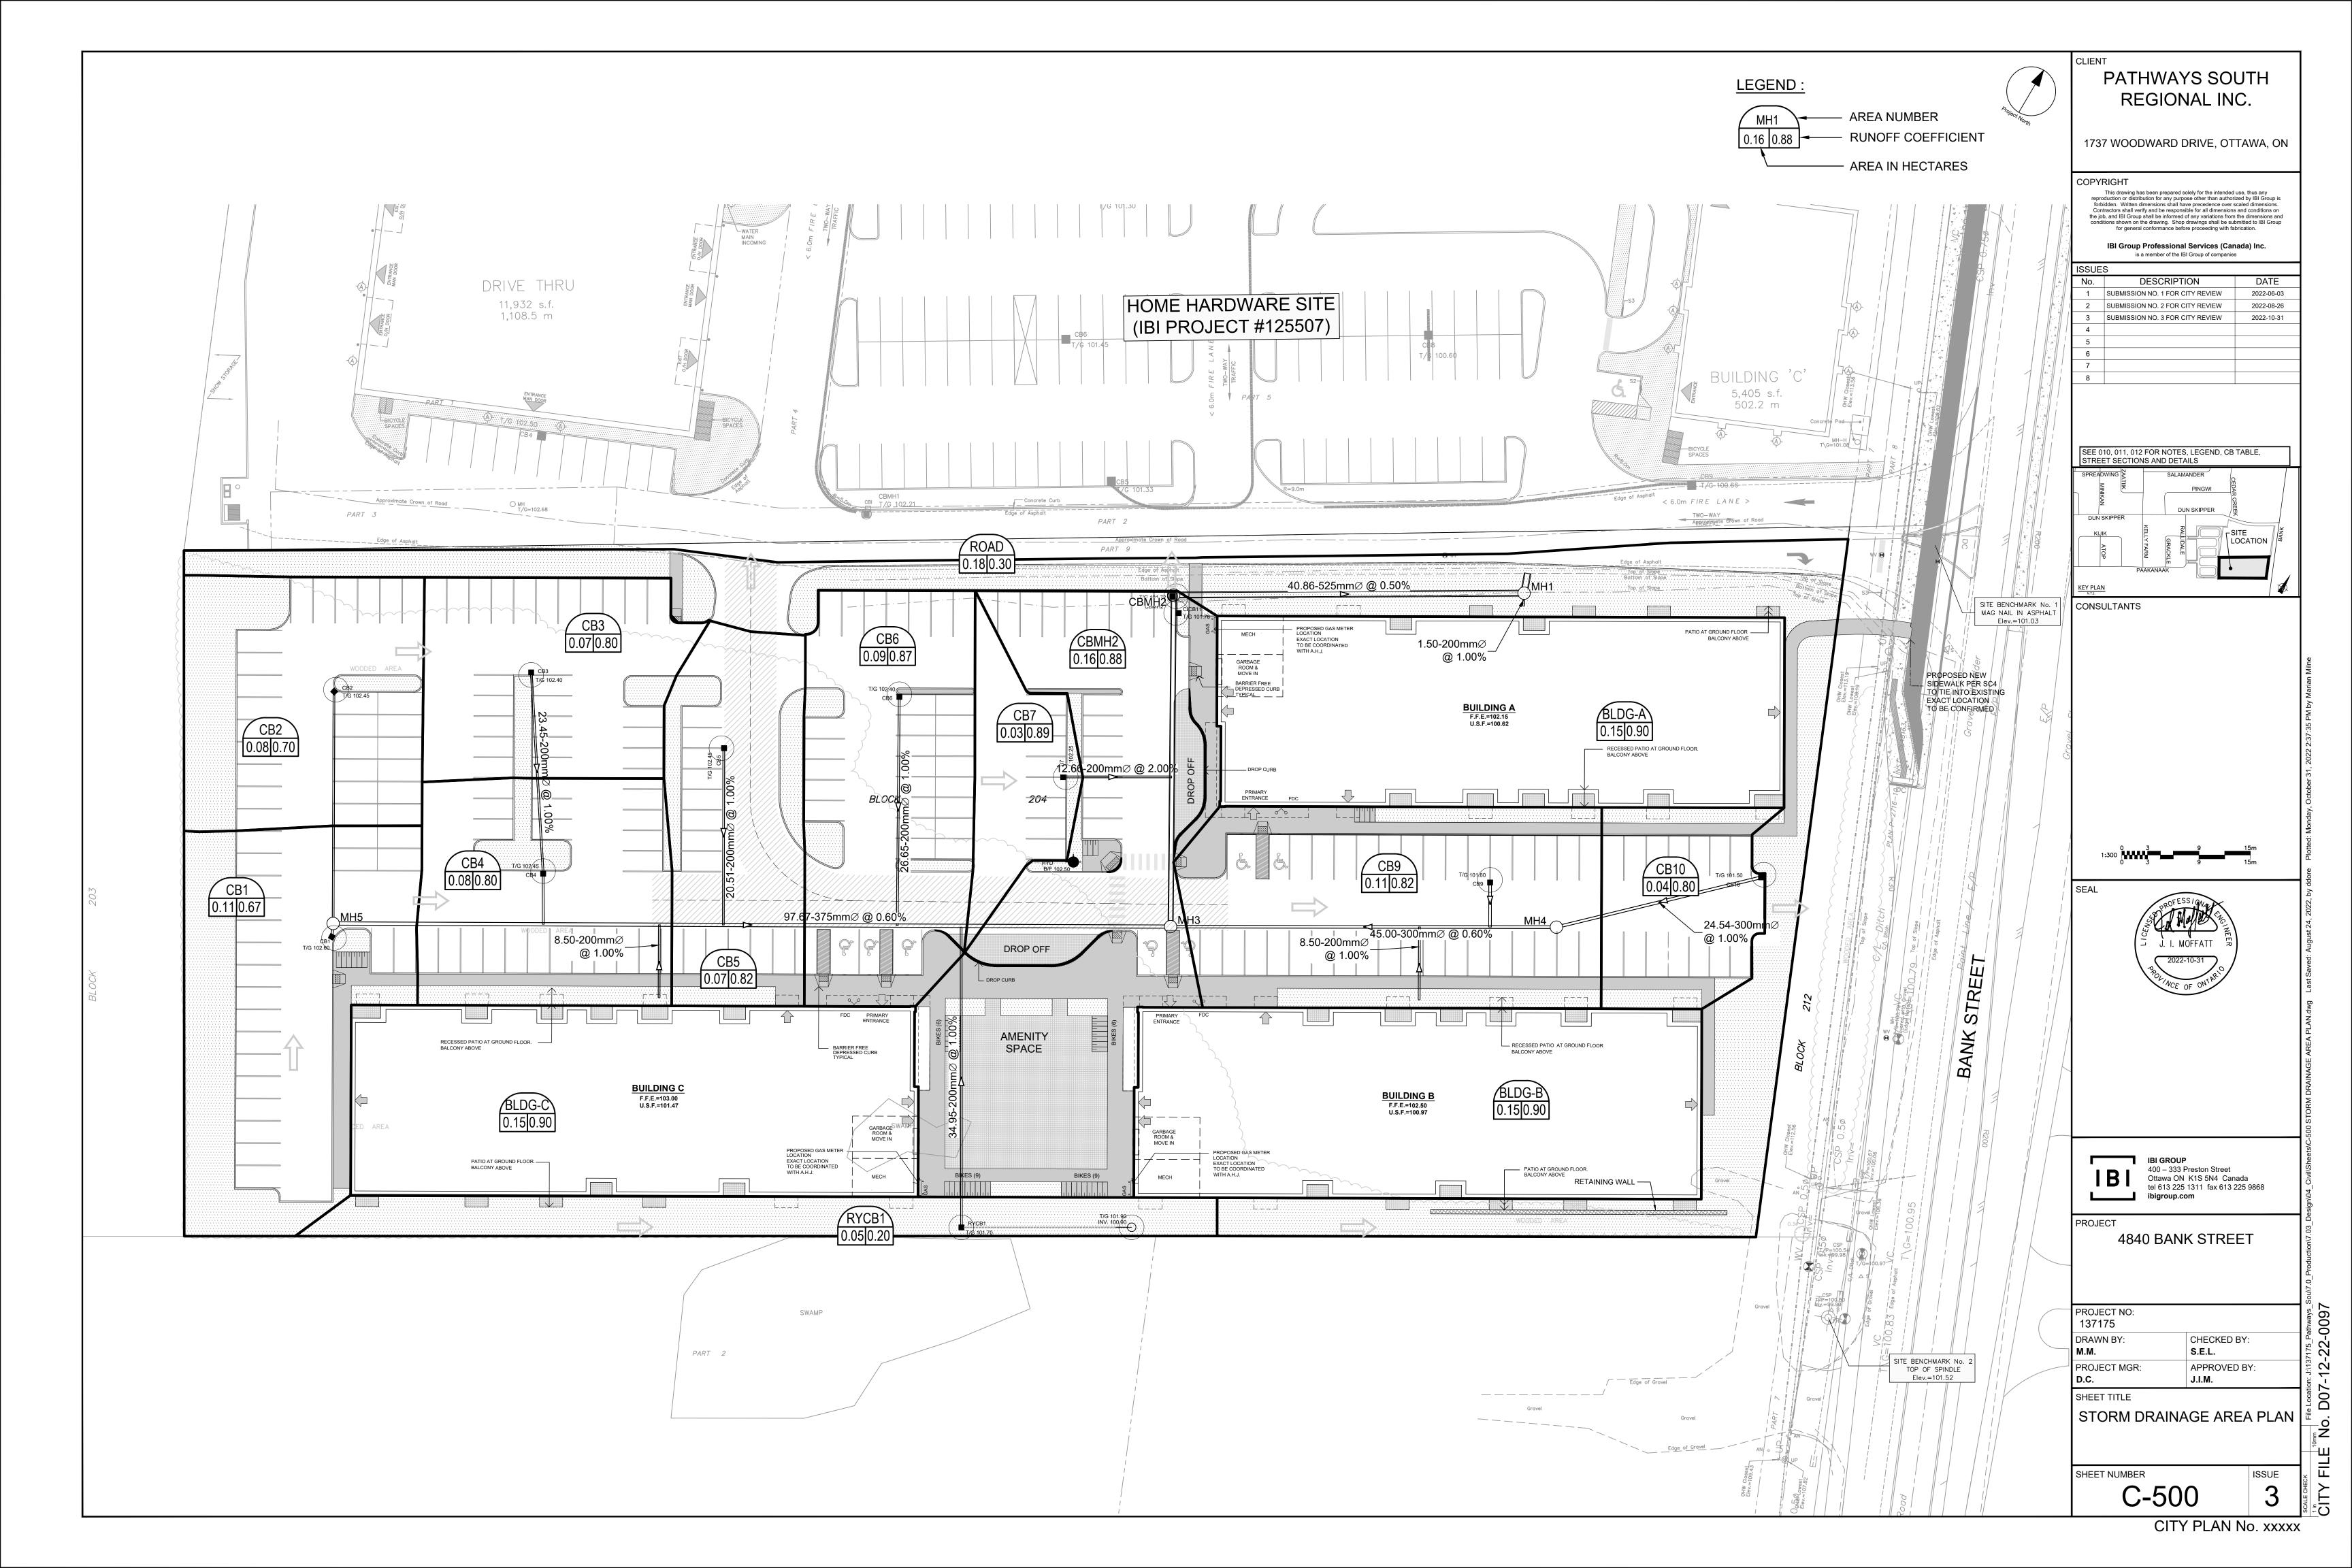

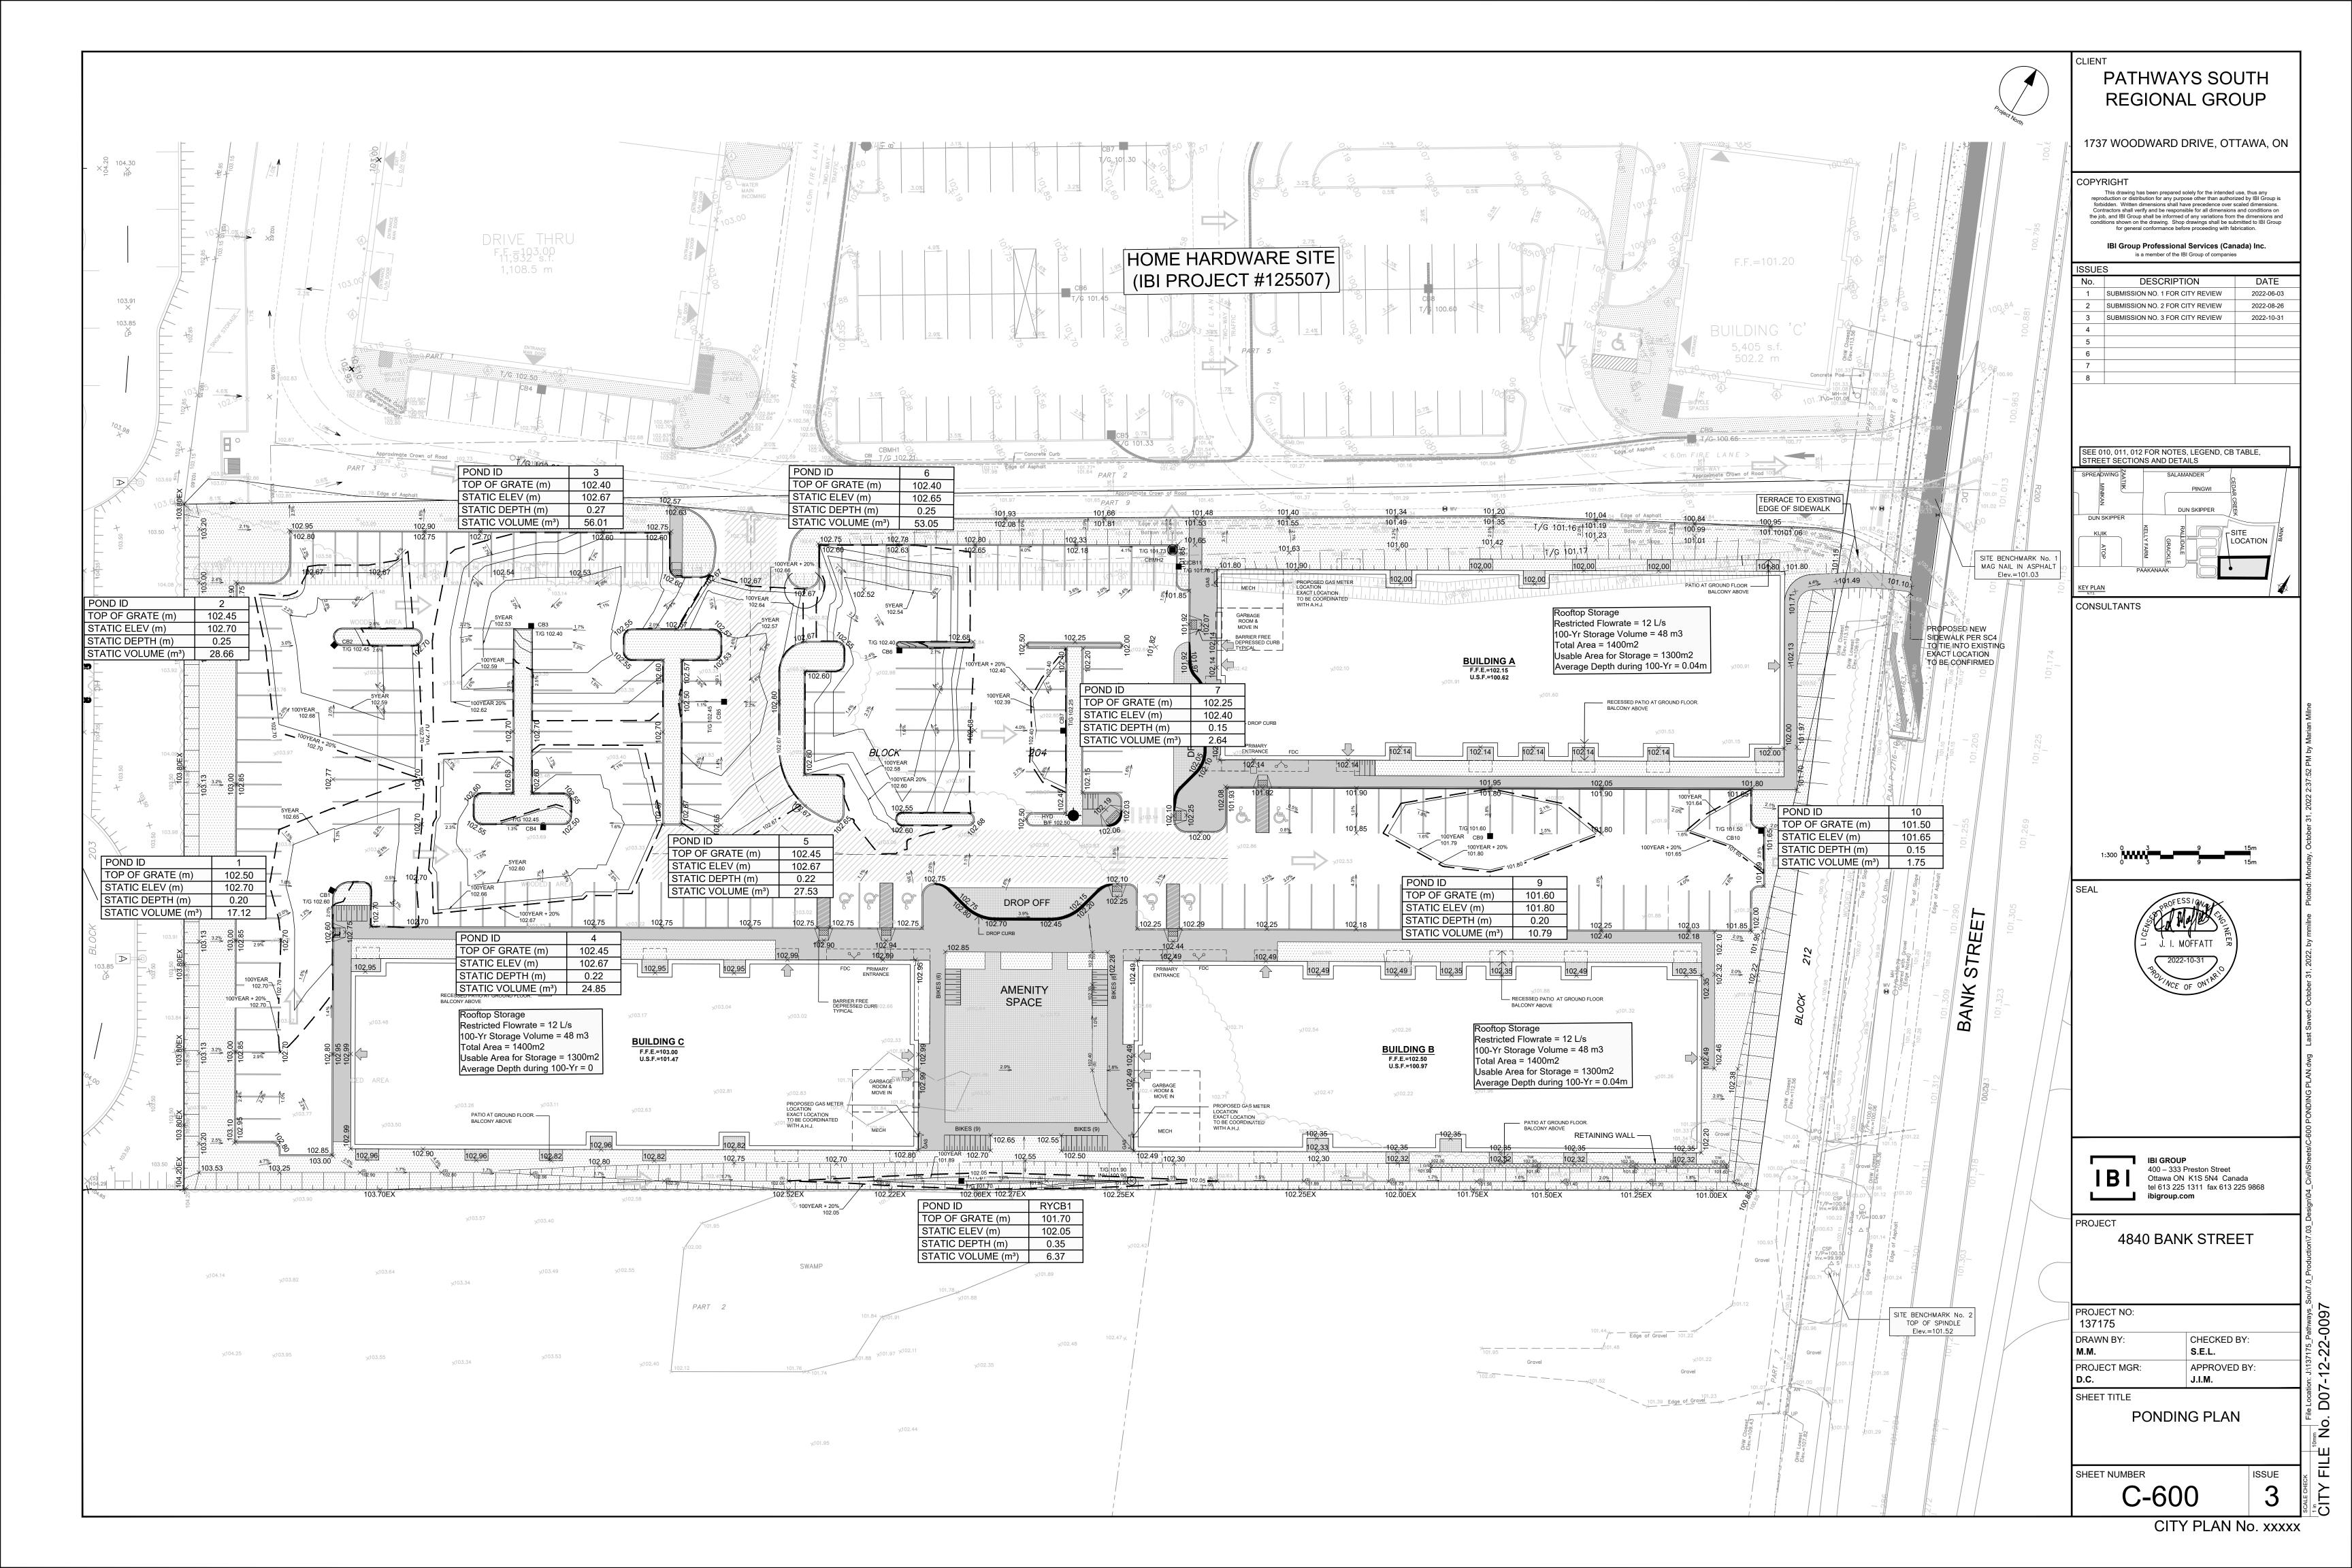

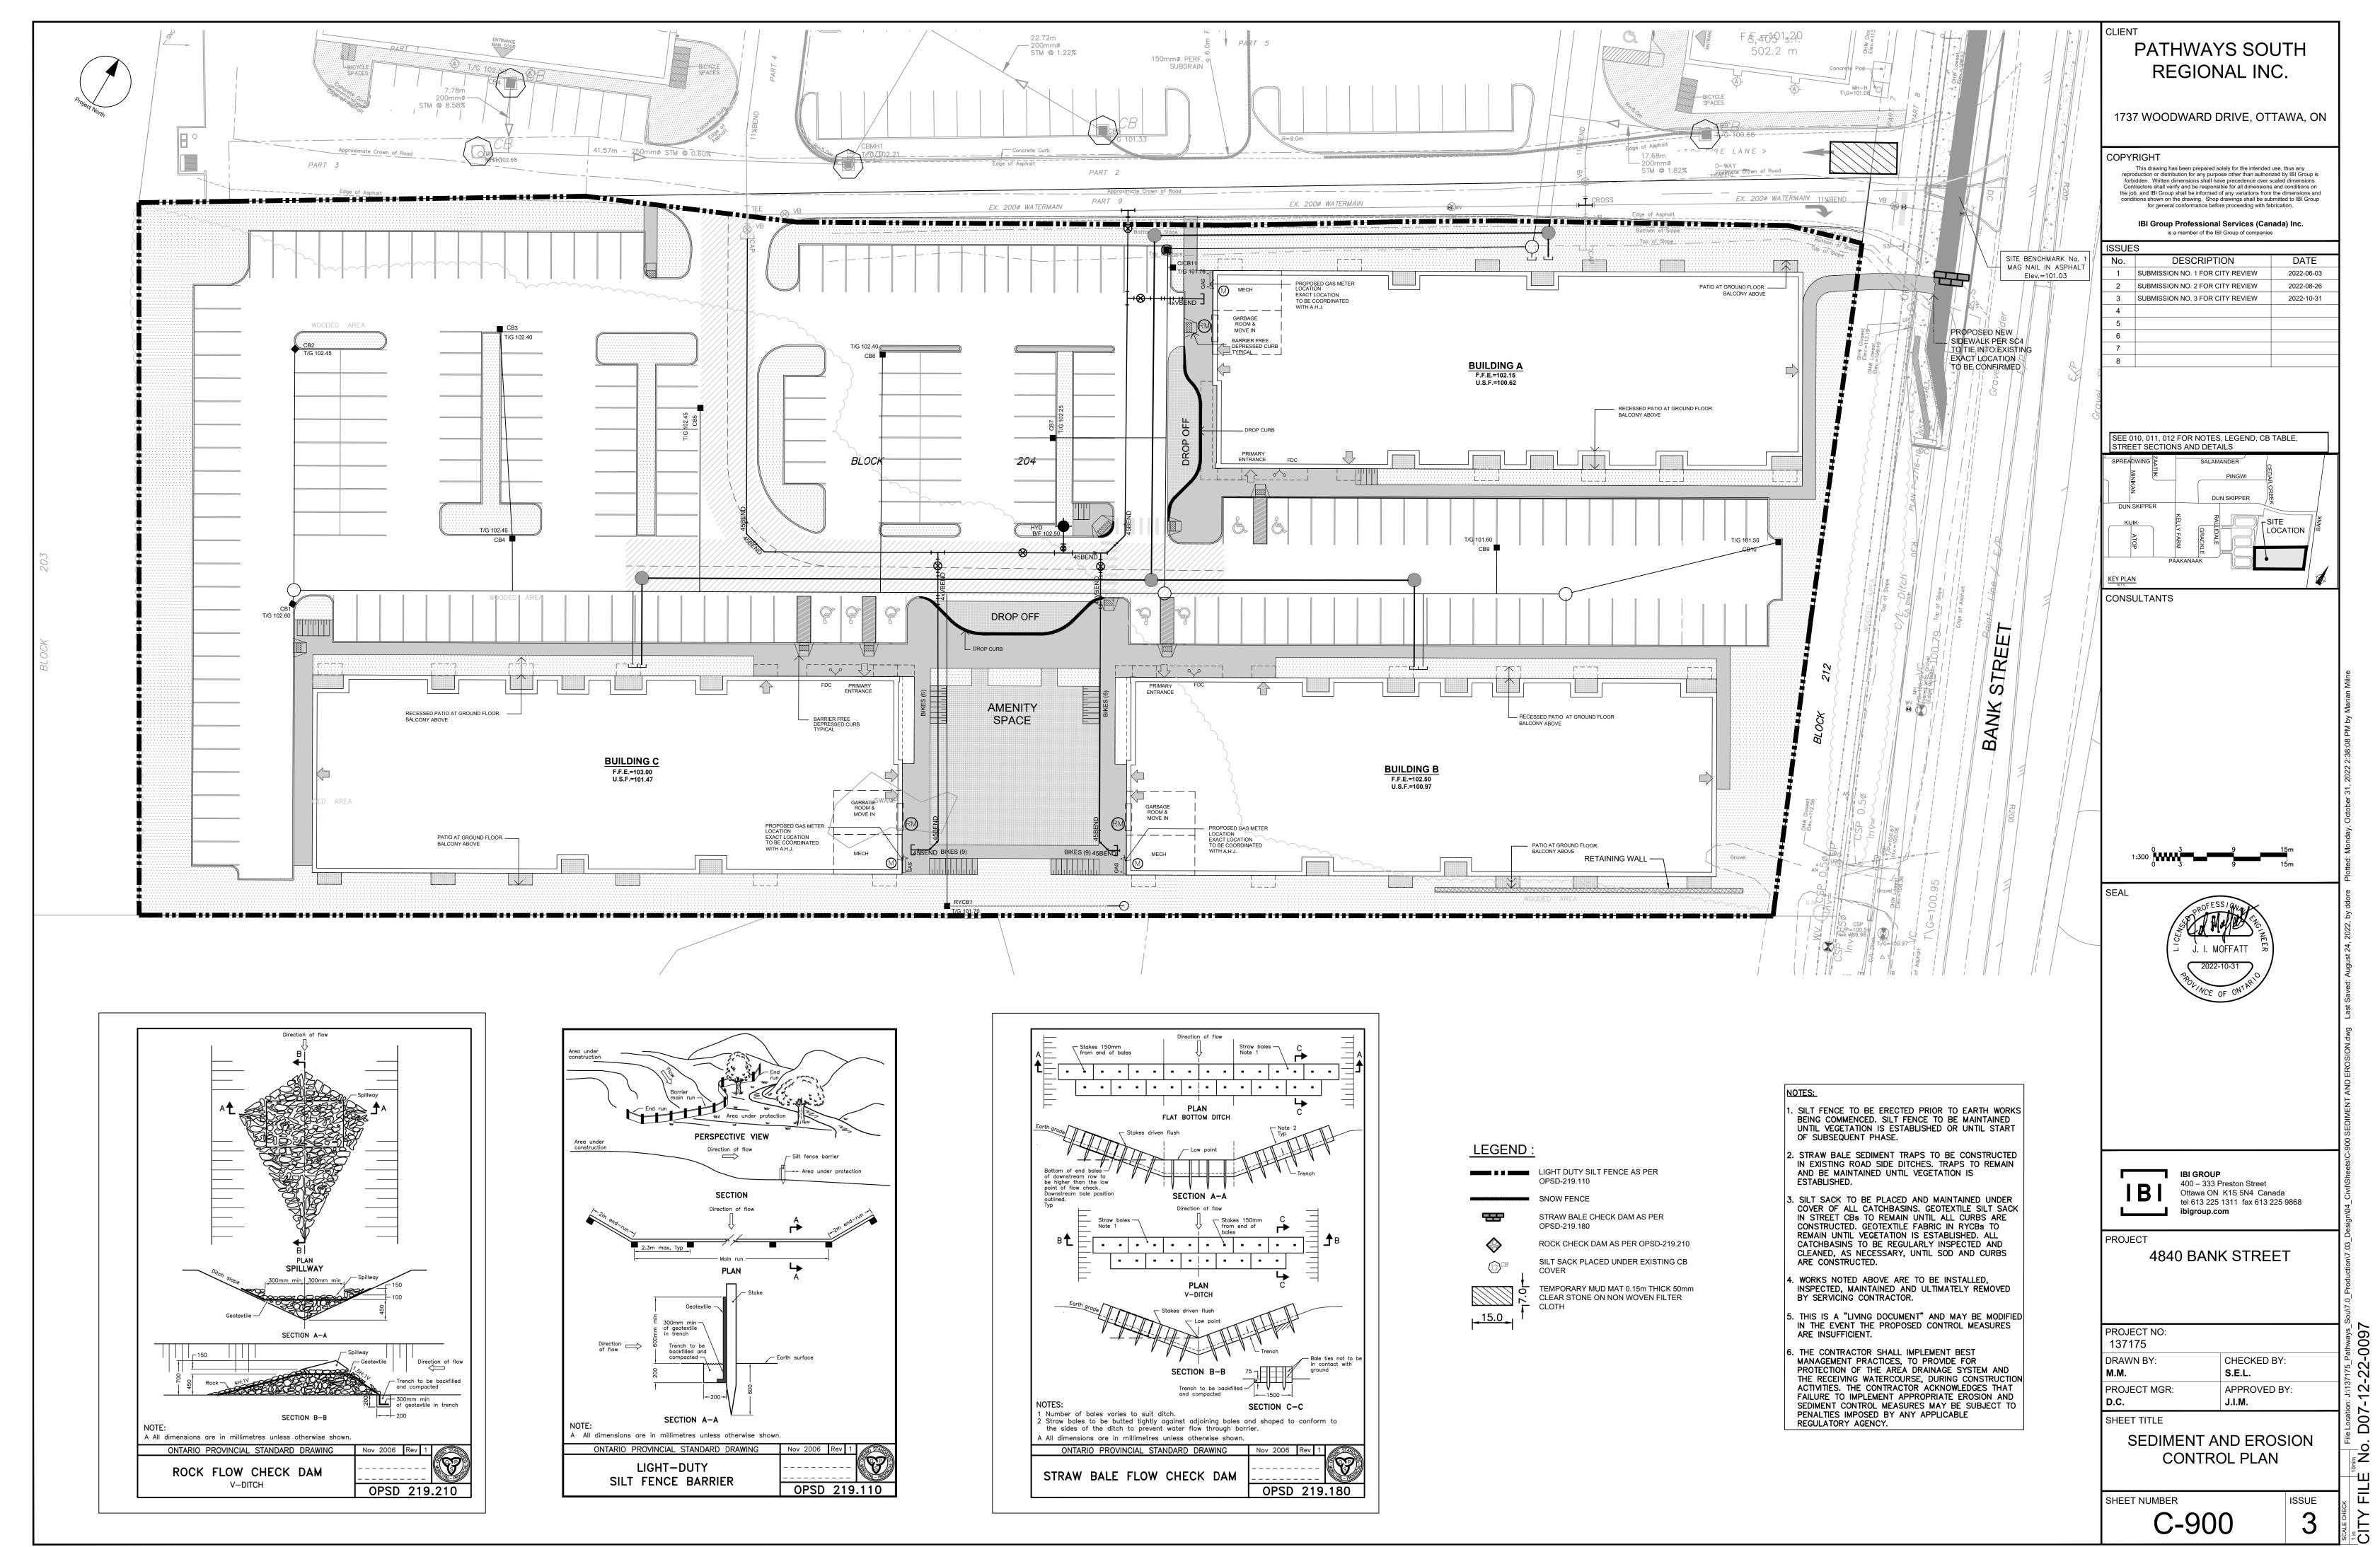

CITY PLAN No. xxxxx