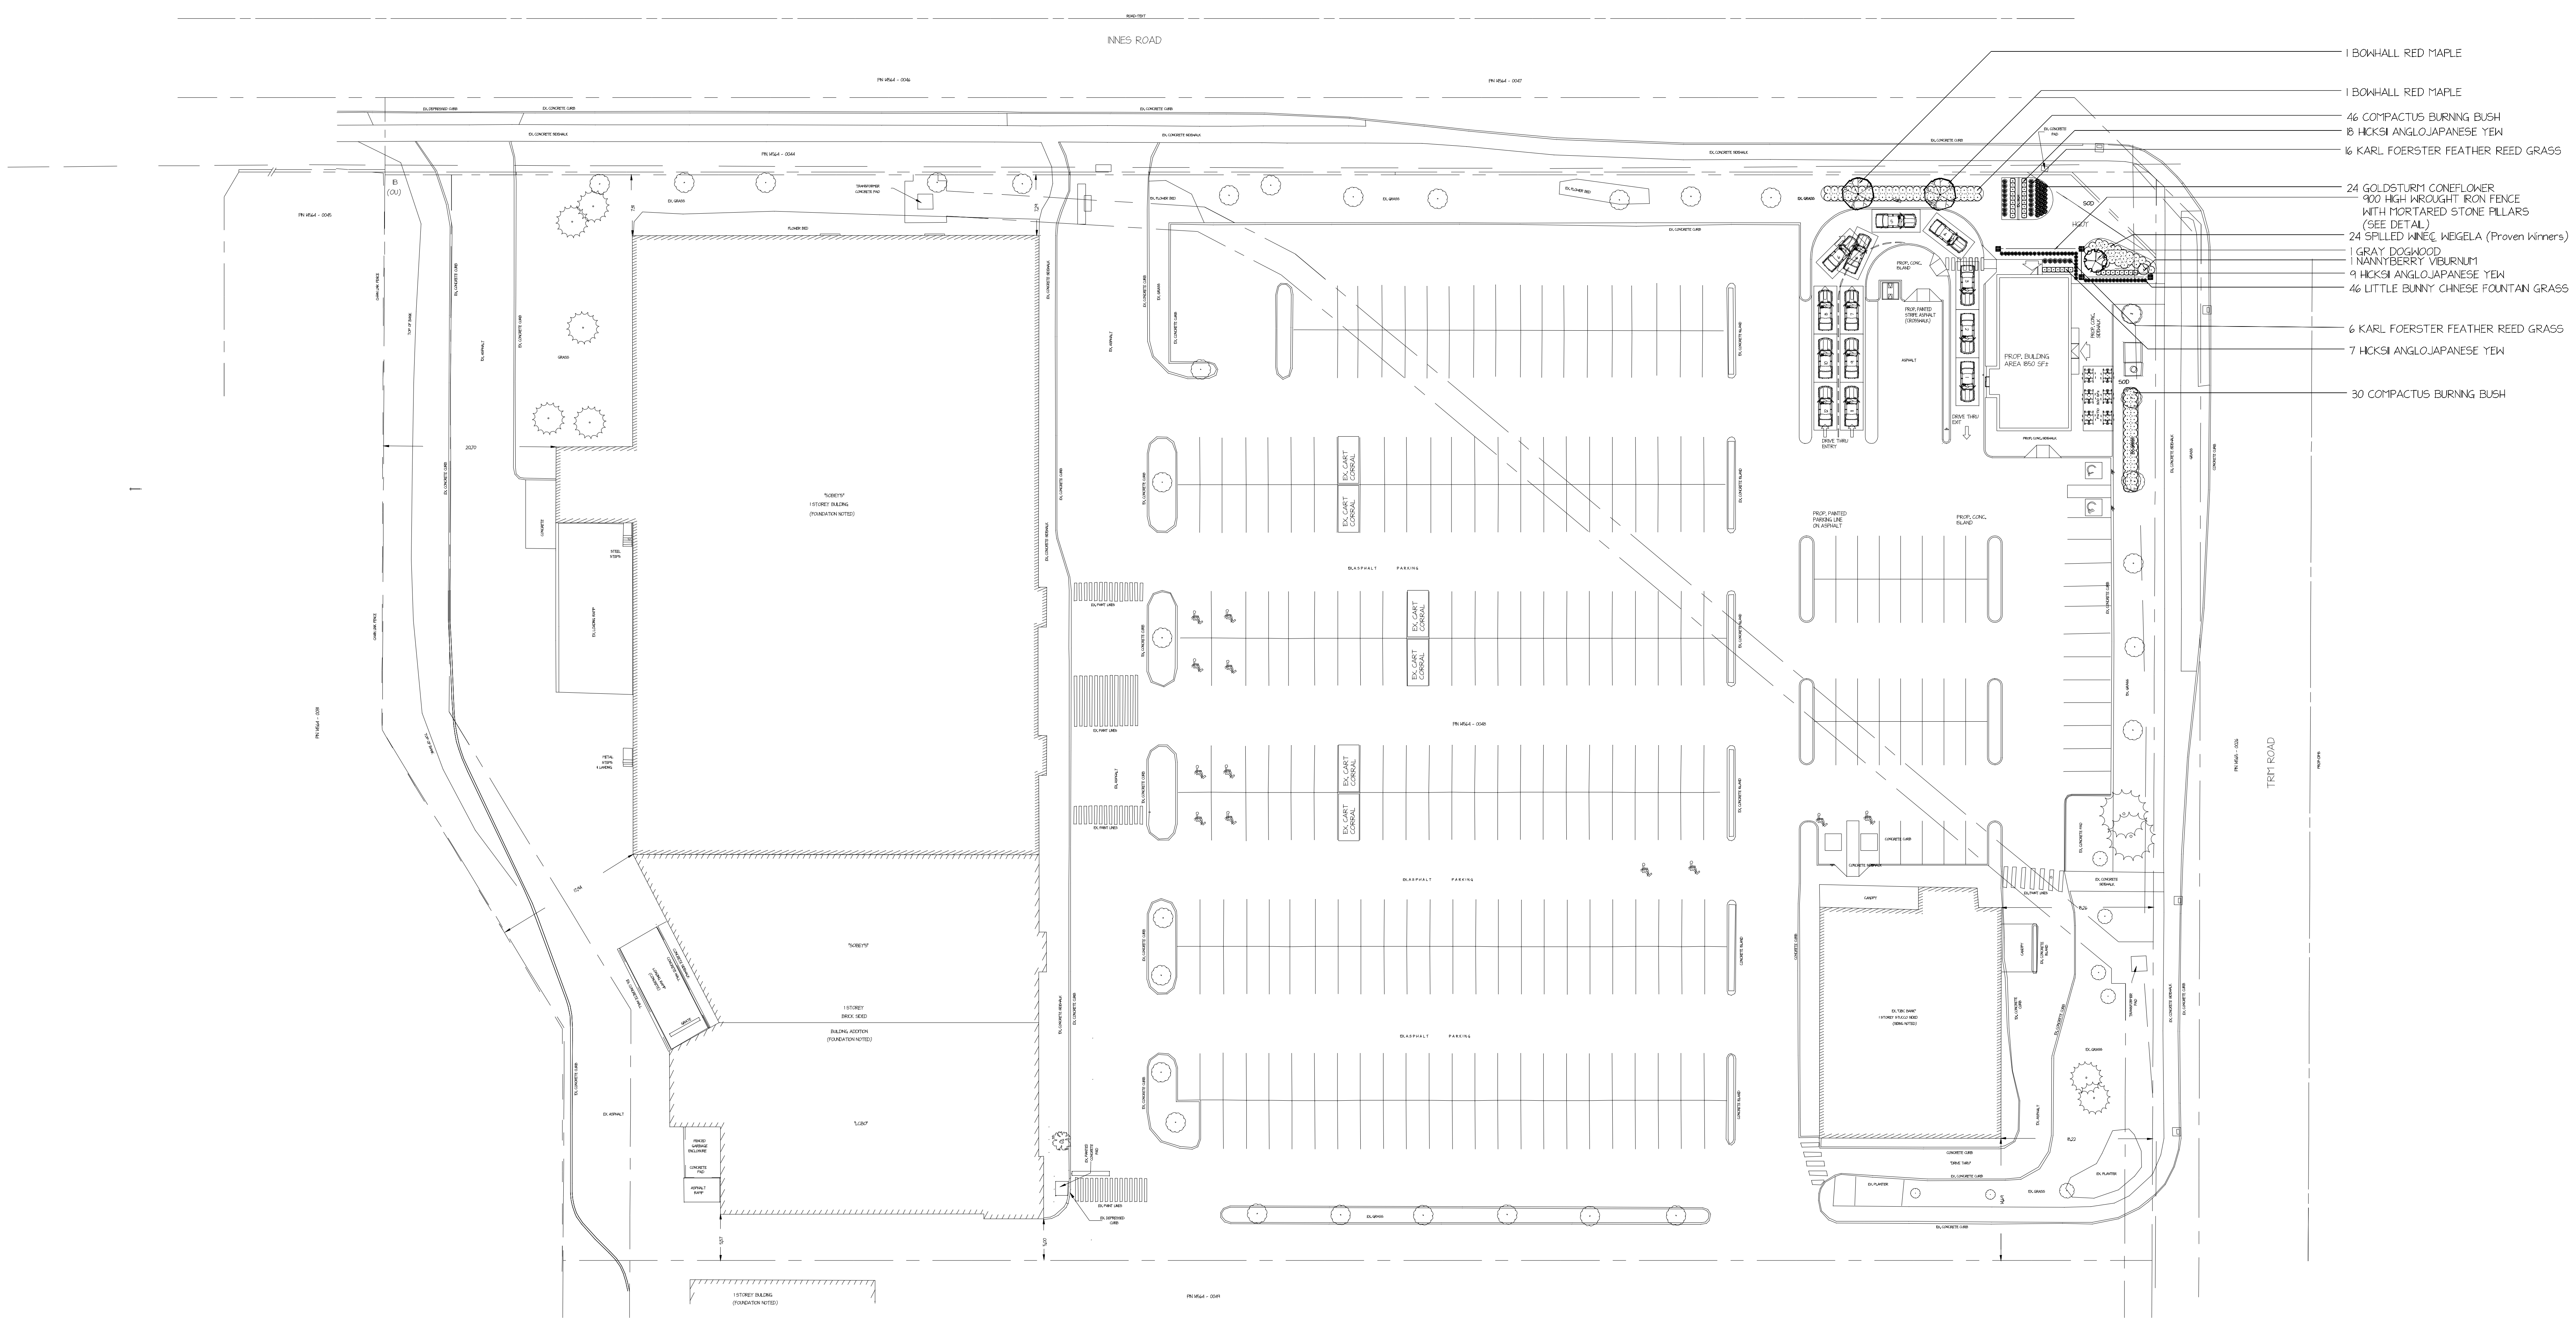
INNES ROAD
PIN 14564 - 0044
PIN 14564 - 0046
PIN 14564 - 0047
PIN 14564 - 0045
PIN 14564 - 0018
PIN 14564 - 0048
PIN 14564 - 0049
PIN 14566 - 0026
TRIM ROAD
"SOBEY'S"
1 STOREY BUILDING
(FOUNDATION NOTED)
"SOBEY'S"
1 STOREY
BRICK SIDED
BUILDING ADDITION
(FOUNDATION NOTED)
"LCBO"
1 STOREY BUILDING
(FOUNDATION NOTED)
EX. CART CORRAL
EX. ASPHALT PARKING
PROP. BUILDING
AREA 1850 SF±
DRIVE THRU ENTRY
DRIVE THRU EXIT
PROP. CONC. ISLAND
PROP. PAINTED STRIPE ASPHALT (CROSSWALK)
PROP. PAINTED PARKING LINE ON ASPHALT
PROP. CONC. SIDEWALK
SOD
EX. "CIBC BANK"
1 STOREY STUCCO SIDED
(SIDING NOTED)
1 BOWHALL RED MAPLE
1 BOWHALL RED MAPLE
46 COMPACTUS BURNING BUSH
18 HICKSII ANGLOJAPANESE YEW
16 KARL FOERSTER FEATHER REED GRASS
24 GOLDSTURM CONEFLOWER
900 HIGH WROUGHT IRON FENCE
WITH MORTARED STONE PILLARS
(SEE DETAIL)
24 SPILLED WINE© WEIGELA (Proven Winners)
1 GRAY DOGWOOD
1 NANNYBERRY VIBURNUM
9 HICKSII ANGLOJAPANESE YEW
46 LITTLE BUNNY CHINESE FOUNTAIN GRASS
6 KARL FOERSTER FEATHER REED GRASS
7 HICKSII ANGLOJAPANESE YEW
30 COMPACTUS BURNING BUSH

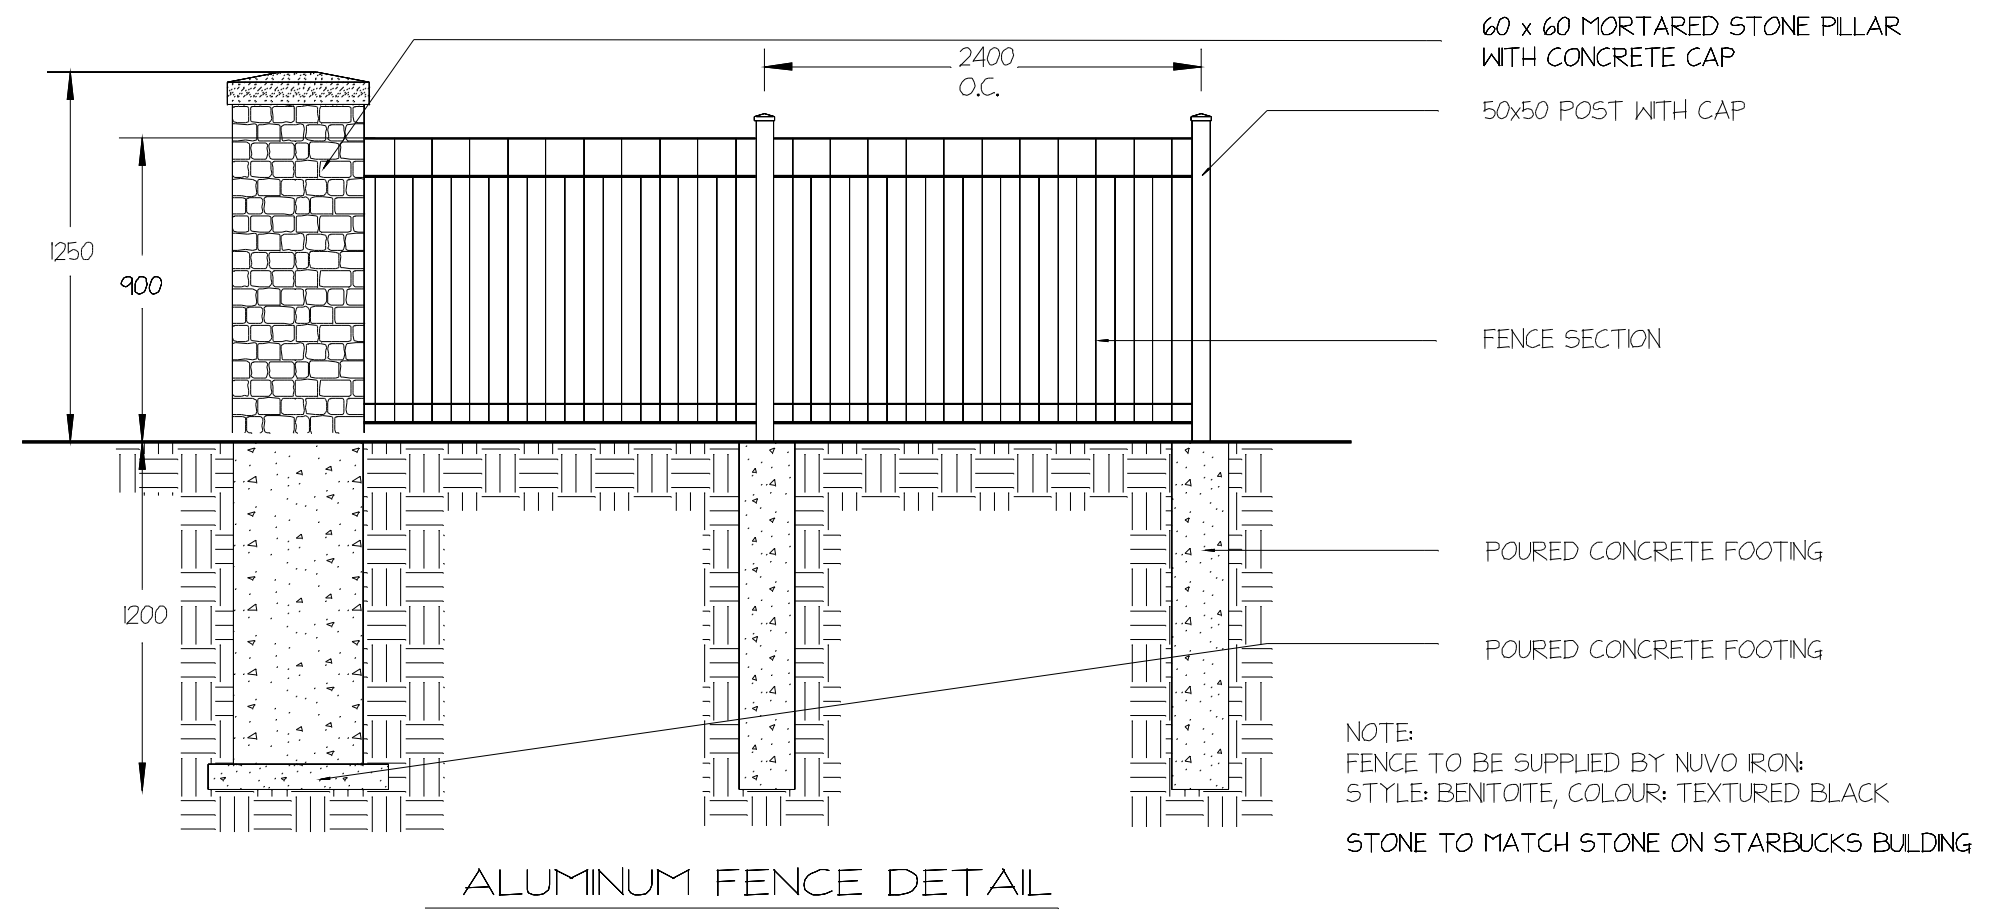
60 x 60 MORTARED STONE PILLAR
WITH CONCRETE CAP
50x50 POST WITH CAP
FENCE SECTION
POURED CONCRETE FOOTING
POURED CONCRETE FOOTING
2400
O.C.
1250
900
1200

NOTE:
FENCE TO BE SUPPLIED BY NUVO IRON:
STYLE: BENITOITE, COLOUR: TEXTURED BLACK

STONE TO MATCH STONE ON STARBUCKS BUILDING

ALUMINUM FENCE DETAIL

TYPICAL INSTALLATION N.T.S.

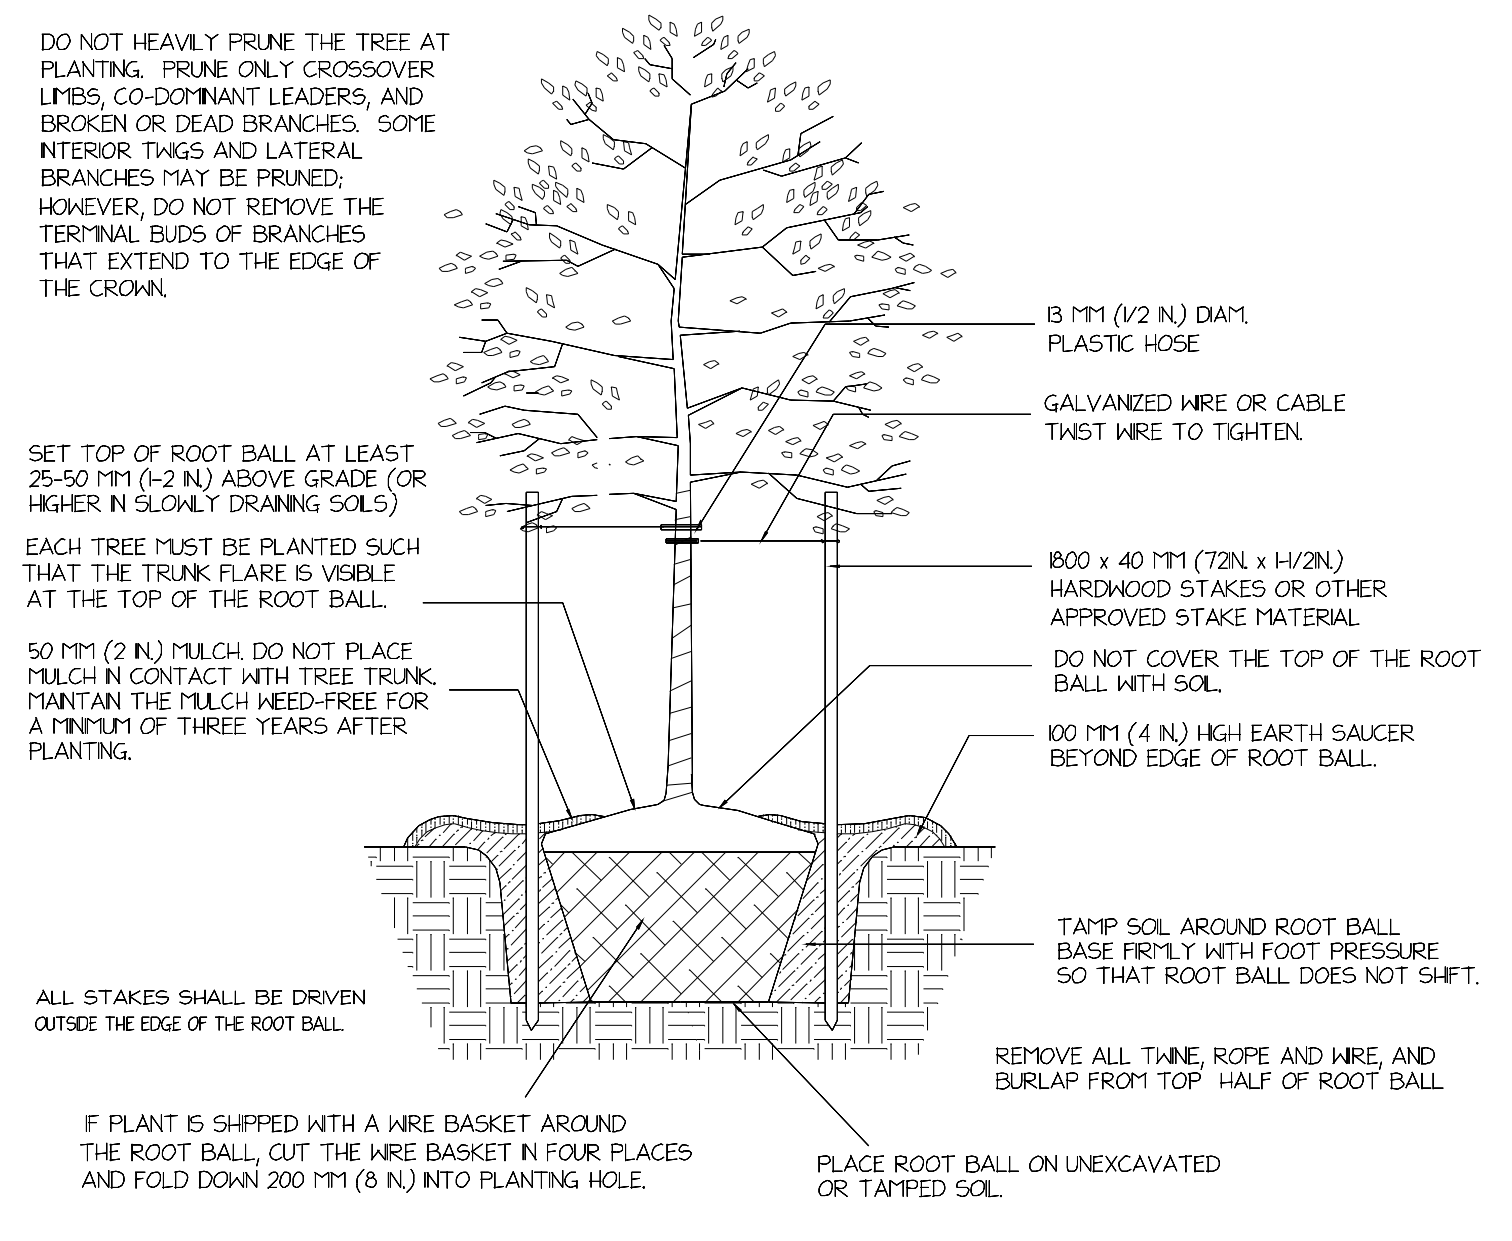
DO NOT HEAVILY PRUNE THE TREE AT PLANTING. PRUNE ONLY CROSSOVER LIMBS, CO-DOMINANT LEADERS, AND BROKEN OR DEAD BRANCHES. SOME INTERIOR TWIGS AND LATERAL BRANCHES MAY BE PRUNED; HOWEVER, DO NOT REMOVE THE TERMINAL BUDS OF BRANCHES THAT EXTEND TO THE EDGE OF THE CROWN.
SET TOP OF ROOT BALL AT LEAST 25-50 MM (1-2 IN.) ABOVE GRADE (OR HIGHER IN SLOWLY DRAINING SOILS)
EACH TREE MUST BE PLANTED SUCH THAT THE TRUNK FLARE IS VISIBLE AT THE TOP OF THE ROOT BALL.
50 MM (2 IN.) MULCH. DO NOT PLACE MULCH IN CONTACT WITH TREE TRUNK. MAINTAIN THE MULCH WEED-FREE FOR A MINIMUM OF THREE YEARS AFTER PLANTING.
ALL STAKES SHALL BE DRIVEN OUTSIDE THE EDGE OF THE ROOT BALL.
IF PLANT IS SHIPPED WITH A WIRE BASKET AROUND THE ROOT BALL, CUT THE WIRE BASKET IN FOUR PLACES AND FOLD DOWN 200 MM (8 IN.) INTO PLANTING HOLE.
13 MM (1/2 IN.) DIAM. PLASTIC HOSE
GALVANIZED WIRE OR CABLE TWIST WIRE TO TIGHTEN.
1800 x 40 MM (72IN. x 1-1/2IN.) HARDWOOD STAKES OR OTHER APPROVED STAKE MATERIAL
DO NOT COVER THE TOP OF THE ROOT BALL WITH SOIL.
100 MM (4 IN.) HIGH EARTH SAUCER BEYOND EDGE OF ROOT BALL.
TAMP SOIL AROUND ROOT BALL BASE FIRMLY WITH FOOT PRESSURE SO THAT ROOT BALL DOES NOT SHIFT.
REMOVE ALL TWINE, ROPE AND WIRE, AND BURLAP FROM TOP HALF OF ROOT BALL
PLACE ROOT BALL ON UNEXCAVATED OR TAMPED SOIL.

DECIDUOUS TREE PLANTING DETAIL

TYPICAL INSTALLATION - 3" (75MM) CALIPER OR LESS

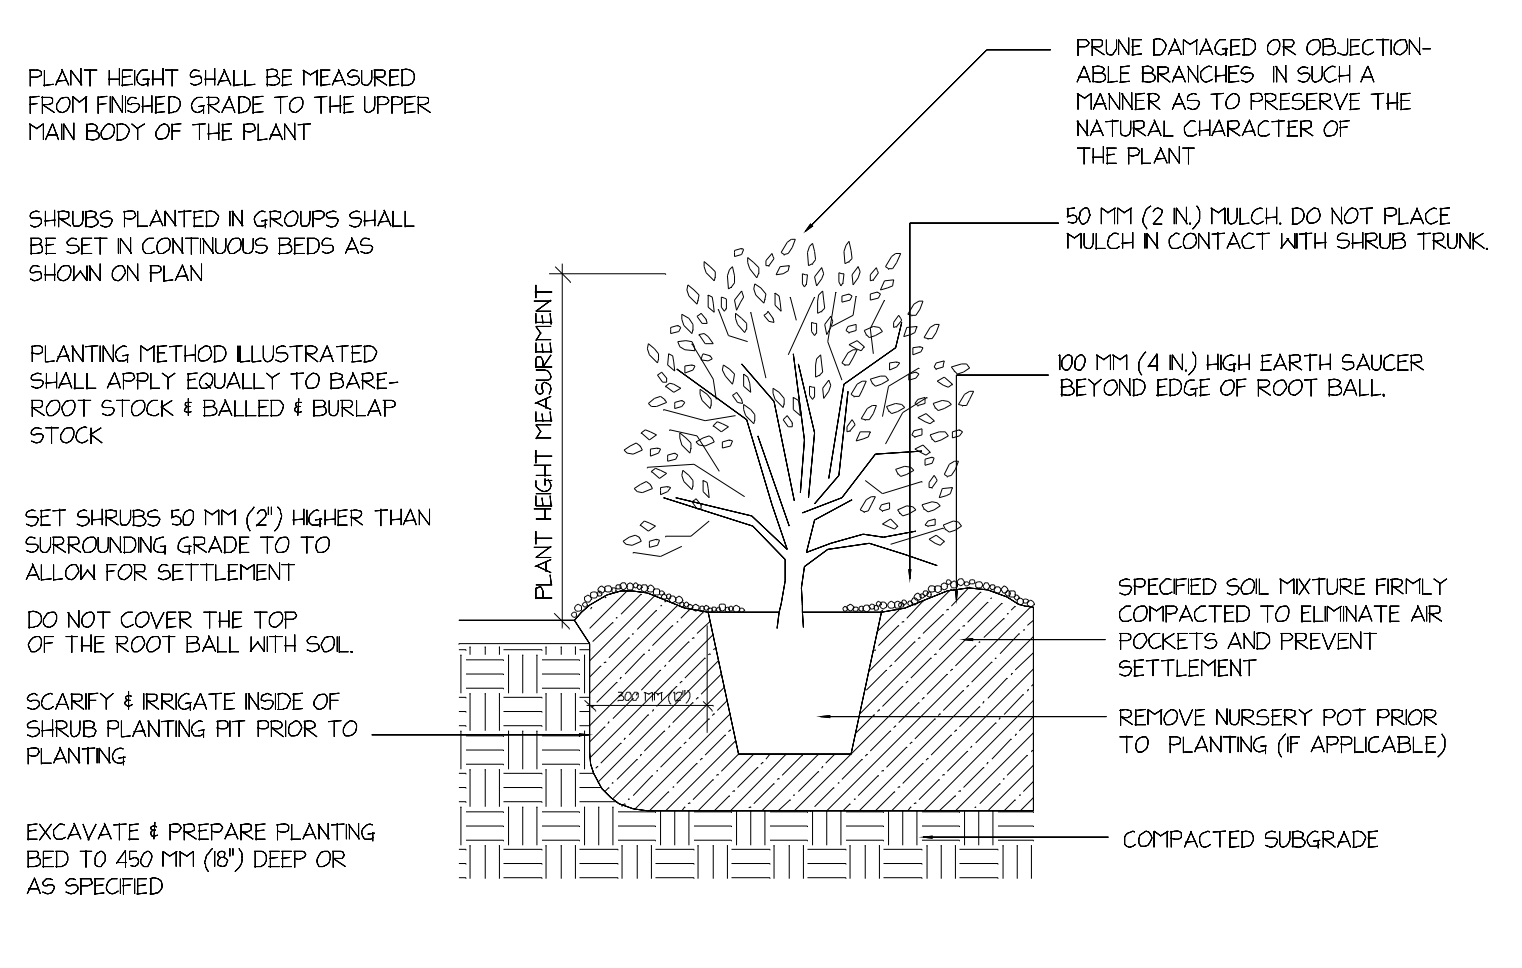
PLANT HEIGHT SHALL BE MEASURED FROM FINISHED GRADE TO THE UPPER MAIN BODY OF THE PLANT
SHRUBS PLANTED IN GROUPS SHALL BE SET IN CONTINUOUS BEDS AS SHOWN ON PLAN
PLANTING METHOD ILLUSTRATED SHALL APPLY EQUALLY TO BARE-ROOT STOCK & BALLED & BURLAP STOCK
SET SHRUBS 50 MM (2") HIGHER THAN SURROUNDING GRADE TO TO ALLOW FOR SETTLEMENT
DO NOT COVER THE TOP OF THE ROOT BALL WITH SOIL.
SCARIFY & IRRIGATE INSIDE OF SHRUB PLANTING PIT PRIOR TO PLANTING
EXCAVATE & PREPARE PLANTING BED TO 450 MM (18") DEEP OR AS SPECIFIED
PLANT HEIGHT MEASUREMENT
300 MM (12")
PRUNE DAMAGED OR OBJECTION-ABLE BRANCHES IN SUCH A MANNER AS TO PRESERVE THE NATURAL CHARACTER OF THE PLANT
50 MM (2 IN.) MULCH. DO NOT PLACE MULCH IN CONTACT WITH SHRUB TRUNK.
100 MM (4 IN.) HIGH EARTH SAUCER BEYOND EDGE OF ROOT BALL.
SPECIFIED SOIL MIXTURE FIRMLY COMPACTED TO ELIMINATE AIR POCKETS AND PREVENT SETTLEMENT
REMOVE NURSERY POT PRIOR TO PLANTING (IF APPLICABLE)
COMPACTED SUBGRADE

SHRUB PLANTING DETAIL

TYPICAL INSTALLATION

NOTES:
CONTRACTOR TO SUPPLY & INSTALL PLANT MATERIAL PER DESIGN, CONTRACTOR TO VERIFY QUANTITIES ON PLANT LIST TO PLAN.

PLANT MATERIAL TO CONFORM TO CANADIAN NURSERY ASSOCIATION METRIC GUIDE TO SPECIFICATIONS FOR NURSERY STOCK.

CONTRACTOR RESPONSIBLE FOR UTILITY LOCATES.

ALL PLANT MATERIAL TO BE GUARANTEED FORONE(1) YEAR.

ALL SHRUB AND PERENNIAL PLANTINGS SHALL BE CONTINUOUS BEDS UNLESS OTHERWISE NOTED.

ALL BEDS TO BE MULCHED WITH SHREDDED PINE OR CEDAR MULCH TO A DEPTH OF 75MM.

ALL REMAINING AREAS TO BE SODDED WITH #1 KENTUCKY BLUE GRASS. AREAS DISTURBED BY CONSTRUCTION TO BE RE-GRADED AND SODDED.

BACKFILL ALL PLANT BEDS WITH SOIL MIXTURE TO A DEPTH OF NO LESS THAN 250MM.
SOIL MIXTURE: 6 PARTS SAND LOAM, TWO PARTS WELL ROTTED MAUNURE AND ONE PART PEATMOSS.

Qty	Botanical Name	Common Name	Size/Condition
Trees			
2	Acer rubrum 'Bowhall'	BOWHALL RED MAPLE	60mm W.B.
1	Cornus racemosa	GRAY DOGWOOD	45 mm W.B.
Conifers			
34	Taxus x media 'Hicksii'	HICKSII ANGLOJAPANESE YEW	80CM B.B.
Shrubs			
76	Euonymus alatus 'Compactus'	COMPACTUS BURNING BUSH	60CM 2GAL POT
1	Viburnum lentago	NANNYBERRY VIBURNUM	150cm W.B.
24	Weigela florida 'Bokraspiwi' pp#23,781, cbr#4655 (Proven Winners)	SPILLED WINE© WEIGELA (Proven Winners)	40cm 3GAL
Ornamental Grasses			
22	Calamagrostis x acutiflora 'Karl Foerster'	KARL FOERSTER FEATHER REED GRASS	2 GAL POT
46	Pennisetum alopecuroides 'Little Bunny'	LITTLE BUNNY CHINESE FOUNTAIN GRASS	1 GAL POT
Perennials and Annuals			
24	Rudbeckia fulgida var. sullivantii 'Goldsturm'	GOLDSTURM CONEFLOWER	1 GAL POT

NOTES

ONTARIO ASSOCIATION OF LANDSCAPE ARCHITECTS
CHRISTOPHER T STANCZAK
OALA
MEMBER

N

No.	Date	Description

REVISIONS

LANDSCAPE
FLORIDA

679 LINCOLN AVE., NIAGARA-ON-THE-LAKE, ON L0S 1J0
P: 9056415250
E: chris@landscapeflorida.ca

LANDSCAPE PLAN

STARBUCKS
5150 INNES RD.

ORLEANS, ON

SCALE 1 : 500
DRAWN BY C.S.
CHECKED BY C.S.
DATE 11/03/19
DATE OF PRINT 11/03/19

PROJECT NO. 19-304
SHEET NO. L1

Powered by DynaSCAPE®