
NOTE THE POSITION OF ALL POLE LINES, CONDUITS, WATERMAINS, SEWERS AND OTHER UNDERGROUND AND OVERGROUND UTILITIES AND STRUCTURES IS NOT NECESSARILY SHOWN ON THE CONTRACT DRAWINGS, AND WHERE SHOWN, THE ACCURACY OF THE POSITION OF SUCH UTILITIES AND STRUCTURES IS NOT GUARANTEED. BEFORE STARTING WORK, DETERMINE THE EXACT LOCATION OF ALL SUCH UTILITIES AND STRUCTURES AND ASSUME ALL LIABILITY FOR DAMAGE TO THEM.



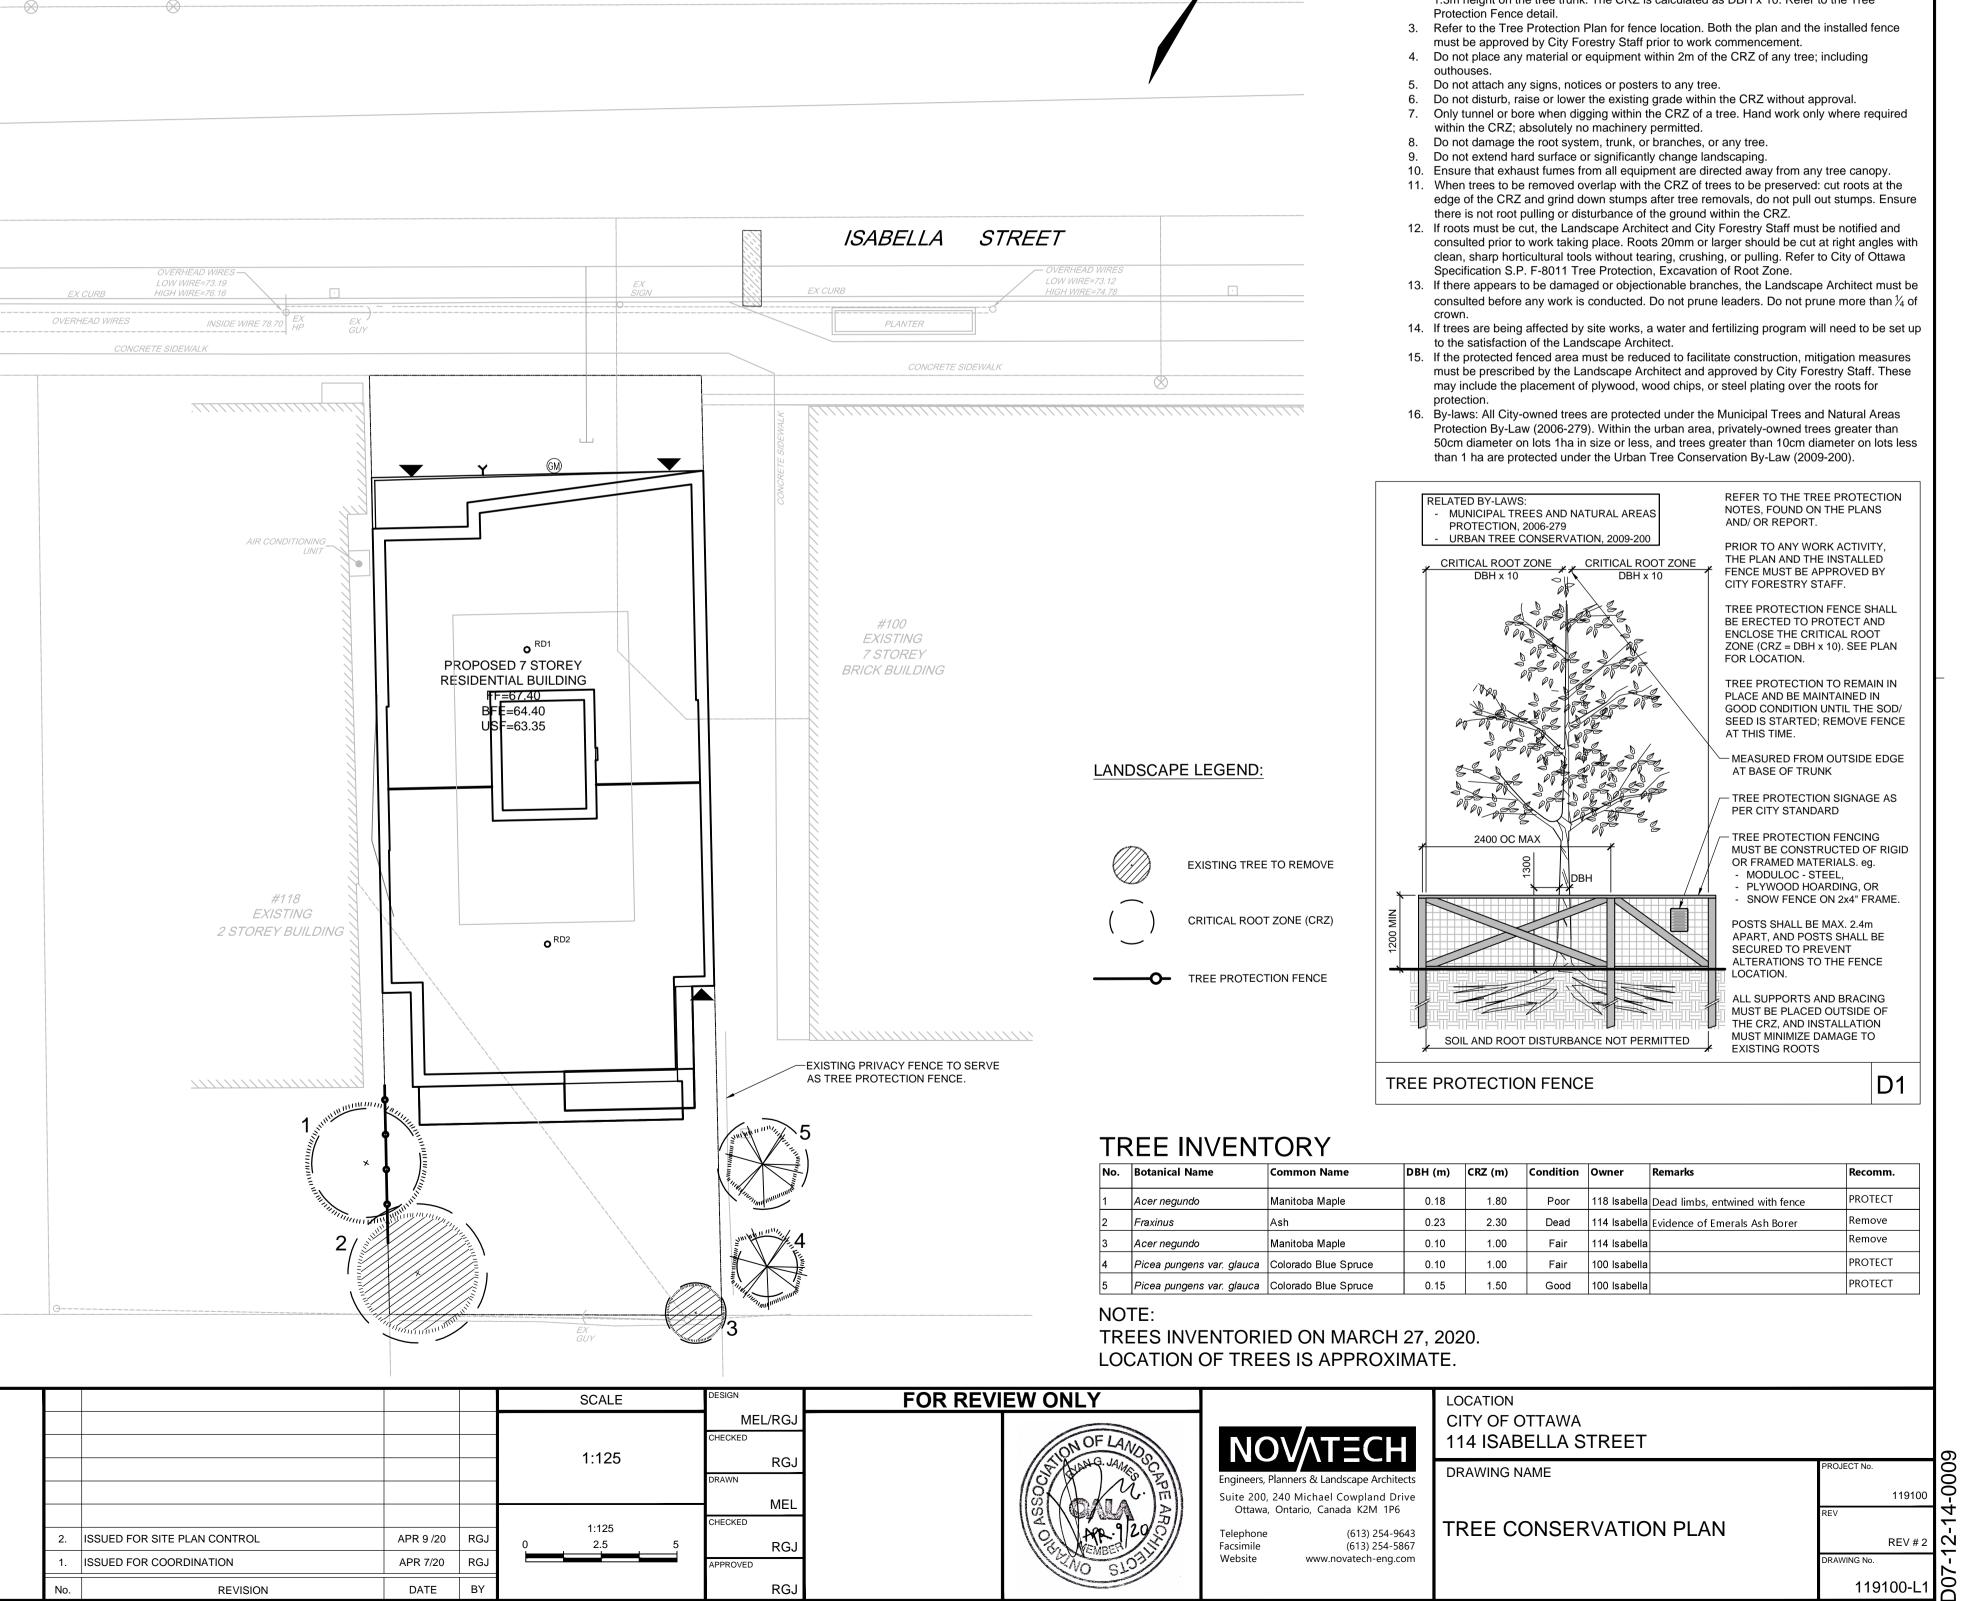


KEY PLAN² N.T.S.

TREE PROTECTION NOTES

The following protection measures must be implemented for retained trees, both on site and on adjacent sites, prior to any work activity, including tree removal. Tree protection fence shall remain in place and be maintained in good condition for the duration of site works:

- 1. The location of the tree protection fencing must be determined by an arborist and detailed on any associated plans for the site (eg. tree conservation report, tree disclosure report, etc.). 2. Under the guidance of a Landscape Architect or Certified Arborist, erect a fence at the critical root zone (CRZ) of trees. Diameter at breast height (DBH) is the trunk diameter measured at 1.3m height on the tree trunk. The CRZ is calculated as DBH x 10. Refer to the Tree

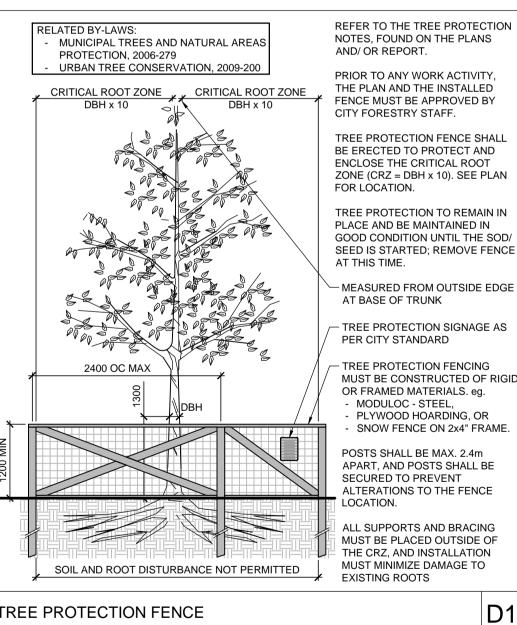

lame	Common Name	DBH (m)	CRZ (m)	Condition	Owner	Remarks	Recomm.
do	Manitoba Maple	0.18	1.80	Poor	118 Isabella	Dead limbs, entwined with fence	PROTECT
	Ash	0.23	2.30	Dead	114 Isabella	Evidence of Emerals Ash Borer	Remove
do	Manitoba Maple	0.10	1.00	Fair	114 Isabella		Remove
ens var. glauca	Colorado Blue Spruce	0.10	1.00	Fair	100 Isabella		PROTECT
ens var. glauca	Colorado Blue Spruce	0.15	1.50	Good	100 Isabella		PROTECT

#17951