



March 13, 2020

Our File Ref.: 170132.04

The Hindu Temple of Ottawa Carleton Inc.
4835 Bank Street
Ottawa, Ontario K1X 1G6

Attention: Mr. Harish Gupta

Subject: Terrain Analysis and Private Sewage Disposal System Impact Assessment
- Proposed Assembly Hall
The Hindu Heritage Centre of Ottawa Carleton, 4835 Bank Street, Ottawa,
Ontario

Dear Mr. Gupta,

LRL Associates Ltd. (LRL) has conducted a Terrain Analysis and Private Sewage Disposal System Impact Study for the proposed Hindu Heritage Centre of Ottawa Carleton Assembly Hall to be constructed on the property located at 4835 Bank Street, Ottawa, Ontario (herein referred to as the "Site"). It is understood that it is proposed that a 1,593 m² assembly hall be constructed at the eastern portion of the existing developed property which will have an available capacity of approximately 500 individuals, increasing the total occupancy of the Site to approximately 750.

The proposed assembly hall will be supplied by municipal water supply and a private septic as is the existing development on the Site.

The assessment was carried out to determine if the proposed development:

- Has soil conditions that are suitable for onsite sewage disposal; and
- Will not impair the use of groundwater resources on the Site or on adjacent lands.

The proposed sewage system for the proposed assembly hall building will be designed for approximately 4.0 m³/day of wastewater, as outlined below. No changes to the two existing sewage systems that service the existing temple are proposed.

The assessment involved a desktop review of available information on the geology and hydrogeology of the Site and adjacent lands in addition to an intrusive subsurface investigation (test pitting program). The Site is serviced by municipal water supply, however, neighbouring properties within 500 m of the Site were found to have records of supply wells present.

1 SITE AND AREA DESCRIPTION

The property is situated at the southern extent of the City of Ottawa at 4385 Bank Street. The property is legally described as Part Lot 22, Concession 5RF Gloucester Parts 1 & 2, 5R3156.

The location of the subject site is shown in **Figure 1**. The Site's area is approximately 3.8 hectares (9.4 acres). The property is currently occupied by the Hindu Heritage Centre of Ottawa Carleton. The footprints of the existing temple building and garage are approximately 1,168 m² and 105 m², respectively. The existing temple is located at the western extent of the Site with the associated septic systems to the north and south of the temple. Based on the previously prepared Use Permit, dated December 5, 1985, issued by the MECP, and associated application, the existing sewage disposal system includes two septic systems: one (1) to service the existing kitchen and washrooms and one (1) to service the remainder of the existing temple building. Each system was originally designed for 3,750 L/day, based on an assumed occupancy of 250 individuals and the use of 15 L/day per individual. However, since no food services are present in the building and none are proposed the use of 8 L/day per individual instead of 15 L/day per individual is deemed more appropriate. This yields a daily sewage flow of 2,000 L/day for each of the existing systems.

The neighbouring land use is as follows:

- Bank street, followed by light industrial/commercial business to the west; and
- Vacant/treed land to the north, south and east.

The topography of the land is generally flat with an approximate elevation of 97 m above mean sea level.

These site features are shown in the **Figure 2**.

2 PROPOSED DEVELOPMENT

It is anticipated that an assembly hall will be constructed at the eastern portion of the Site with the associated septic system along the south of the proposed structure. The estimated proposed building footprint is 1,593 m². The proposed assembly hall is anticipated to include a dining area, a lobby and two (2) halls. No food services are proposed. The proposed development will be equipped with a full basement. Water supply will be obtained from municipal services.

It is proposed that 14 additional parking spaces be created, for a total of 187 parking spaces with a total parking and circulation area of 4,996 m².

The approximate preliminary proposed development plan is shown in **Figure 3**. Further revisions with regards to the proposed septic system footprint and components may be required at a later date.

3 FIELDWORK

On May 8th, 2017, eight (8) test pits were advanced across the Site. The test pits were placed around the general perimeter of the Site so not to disrupt existing Site activities and services. The rationale for the test pits was to determine the general upper soil and perched water conditions. The test pits were advanced using a backhoe operated by a local contractor (Yelle Excavation, Ottawa) and under direct supervision by LRL field staff. The locations of the test pits are presented in **Figure 4** with the test pit logs included in **Appendix A**.



An open tube piezometer was installed in select test pits (TP1, TP3, TP5 and TP7) to allow for the groundwater elevation measurement and sampling of the perched water found in the overburden, herein referred to as groundwater. Groundwater samples were collected from each of the piezometers on May 8th, 2017, with the exception of TP5 which was found to have insufficient water available for sampling (i.e., dry). The samples collected were submitted for laboratory analyses of select nitrogen species parameters. The laboratory Certificate of Analysis is included in **Appendix B**.

Soil samples from two test pits were submitted to LRL's material testing laboratory for sieve and hydrometer analyses. The sieve and hydrometer analysis certificates are included in **Appendix C**.

A ground surface elevation survey was carried out at each test pit location to obtain the elevation of the test pit ground surface and the piezometer stick-up. These elevations would aid in determining the groundwater elevations across the Site. A locally referenced benchmark was established as the top of the east arm of the hydrant located along the west of the southern entrance to the Site. The benchmark was assigned an arbitrary elevation of 100.00 m. The elevations are summarized in **Table 1** and are presented in the test pit logs included in **Appendix A**.

4 TOPOGRAPHY, GEOLOGY AND HYDROGEOLOGY

Local topography indicates that the inferred overburden groundwater flow direction is east towards the North Castor River. The nearest open water body to the Site is an unnamed tributary that flows into the North Castor River, approximately 1.1 km east of the Site.

Surficial soil deposit mapping¹ indicates that the overburden consists of till, plain with local relief less than 5 m. Bedrock mapping² indicates that the underlying bedrock consists of dolomite and limestone, of the Oxford Formation.

The test pits completed across the Site were found to have a thin layer of topsoil over fill material which extended to depths between 0.7 and 1.5 m thick. The fill was underlain with silty sand in TP1. The fill layer generally extended to bedrock refusal, encountered at depths from 0.8 to 2.1 m bgs. Waste debris was observed in the fill material in TP2, TP3 and TP5, which included metal, tire debris and asphalt.

A representative till sample collected during the test pitting activities (TP3-6) was submitted for sieve analysis. The till sample was reported to be 39% silt & clay, 40% sand, and 21% gravel. This represents fine silty sand. A second representative till sample collected (TP1-3) was submitted for hydrometer analysis. The sample was reported to be 22% clay, 64% silt, 9% sand and 5% gravel. This represents a silt loam. These results are presented in the sieve and hydrometer certificates of analysis that are included in **Appendix C** and are summarized in **Table 2**.

LRL was provided with a servicing plan showing the properties within 500 m with a municipal water connection. The plan shows that the majority of properties are on municipal services, with some properties that are spread over multiple parcels having only one (1) connection. It is likely that if these properties are developed in the future, connection to municipal water would be

¹ St-Onge, D.A. (compilation), 2009: Surficial geology, lower Ottawa valley, Ontario-Quebec; Geological Survey of Canada, Map 2140A, scale 1:125000

² Harrison, J.E., 1976. Geological Survey of Canada, Generalized Bedrock Geology, Ottawa-Hull, Ontario and Quebec, Map 1508A, scale 1:125000.



required. One (1) residential property and various industrial properties are situated along the south side of Blais Road to the north, which are unserved.

A search was conducted of the available water well records from the MECP Water Well Record Department. The search by UTM coordinates covered a 500 m radius from the site. The search returned records for twenty-three (23) wells. The well records are included in **Appendix D** and their locations are presented in **Figure 5**.

Review of the records of the wells within 500 m of the site retrieved revealed that the wells are drilled wells extending to depths between 8.2 and 67.1 m. The well records show that the geological conditions within 500 m are relatively similar, and consist generally of mixed till materials including sand, clay, gravel and boulders from 0 to 8.0 m. Unidentified soil conditions, “soil” was described in one (1) of the well records, as noted in the table below. The described bedrock conditions varied slightly between limestone, sandstone and occasionally shale. Bedrock starting depths also vary from 0.6 to 7.9 m.

The general subsurface conditions indicated in the well records within 500 m of the site are as follows:

MOE Well Number	Distance and Direction from Site (m)	Depth (m)	Overburden Details			Bedrock Details	Groundwater Encountered (m)	Static Water Level (m)	Type of water
			Sand/ Fill (m)	Clay/ Loam (m)	Gravel/ Till (m)	Bedrock			
1502181	210 N	14.0	--	--	0 – 6.4	6.4- 14.0 (Limestone)	14.0	2.4	Fresh
7112950	485 N	52.7	--	0 – 3.3	--	3.3 – 52.7 (Limestone)	51.5	4.7	Unspecified
1533566	385 N	67.1	0 – 2.1	--	--	2.1 – 29.8 (Sandstone) 29.8 - 38.7 (Limestone) 38.7 - 67.1 (Sandstone)	65.8	4.8	Unspecified
1531693	385 N	67.1	--	--	0 – 0.9	0.9 – 67.1 (Sandstone)	62.7	9.1	Fresh
1502249	370 N	25.9	0 – 1.2	--	--	1.2 – 25.9 (Sandstone)	25.2	4.5	Unspecified
1502248	330 N	29.9	0 – 0.3	0.3 – 1.8	--	1.8 – 29.9 (Sandstone)	24.3, 29.5	4.2	Fresh
1502246	335 N	24.4	--	--	0 – 1.5	1.5 – 24.4 (Sandstone)	9.1, 18.2, 30.1	1.5	Fresh
1517349	260 N	8.2	0 – 2.4	--	--	2.4 – 8.2 (Granite)	8.2	1.5	Fresh
1509925	215 N	19.2	--	--	0 – 3.9 “Boulders”	3.9 – 19.2 (Sandstone)	18.2	0.6	Fresh
1502175	360 NW	18.3	0 – 6.0	--	--	6.0 – 18.3 (Sandstone)	18.3	3.0	Fresh
1502176	250 NM	13.7	--	0 – 5.4	--	5.4 – 13.7 (Limestone)	13.7	1.8	Fresh
1502179	50 W	27.1	--	--	0 – 4.8	4.8- 7.62 (Limestone) 7.62 – 27.1 (Sandstone)	27.1	6.1	Fresh



MOE Well Number	Distance and Direction from Site (m)	Depth (m)	Overburden Details			Bedrock Details	Groundwater Encountered (m)	Static Water Level (m)	Type of water
			Sand/ Fill (m)	Clay/ Loam (m)	Gravel/ Till (m)	Bedrock			
1513436	100 SW	15.0	--	0 – 3.6 "Soil"	3.6 – 4.8	4.8 – 15 (Limestone)	14.6	4.3	Fresh
1502180	140 S	16.8	--	0 – 1.8 "Loam"	--	1.8 – 16.8 (Limestone)	16.8	1.8	Fresh
1502177	195 S	18.2	0 – 2.1	--	2.1 – 6.1	6.1 – 18.2 (Sandstone)	18.2	1.8	Fresh
1512375	230 S	22.5	0 – 2.7	--	--	2.7 – 22.5 (Sandstone)	22.5	3.6	Fresh
1512265	245 S	14.6	--	0 – 0.9	--	0.9 – 14.6 (Limestone)	2.4, 6.4, 10.3	1.2	Fresh
1514664	220 SW	15.2	--	--	0 – 3.9	3.9 – 9.1 (Shale) 9.1 – 38.1 (Limestone)	9.7, 16.7	6.1	Fresh
1516052	15 S	54.2	0 – 2.8	--	2.8 – 7.9	7.9 – 13.1 (Limestone) 13.1 – 54.4 (Sandstone)	53.3	9.1	Fresh
1502178	310 SW	15.2	--	--	0 – 5.4	5.4 – 15.2 (Limestone)	14.6	3.9	Fresh
1510717	400 S	15.8	0 – 1.8	--	--	1.8 – 15.8 (Limestone)	15.2	2.1	Fresh
1514840	370 S	41.1	0 – 0.9 "Topsoil"	--	--	0.9 – 41.1 (Limestone)	32.0	6.0	Fresh
1502250	370 S	24.1	--	0 – 0.6 "Loam"	--	0.6 – 19.8 (Sandstone) 19.8 – 24.0 (Granite)	18.2, 24.0	6.0	Fresh

4.1 Groundwater from Test Pits

Table 3 summarizes the water quality analysis from the test pit piezometers for nitrates, nitrites, ammonia and total kjeldahl nitrogen (TKN). The Laboratory Certificate of Analysis is included in **Appendix B**.

Nitrites were not detected (<0.05 mg/L) in any of the groundwater samples collected. Nitrate levels were reported to be 0.5 mg/L in TP3 and <0.1 mg/L in both TP1 and TP7, below the ODWS of 10 mg/L. Ammonia was reported to be 0.28, 0.39 and 1.66 mg/L in TP1, TP3 and TP7, respectively. There are no set ODWS for ammonia.

TKN values were reported as 78.1, 65.3 and 131 mg/L in groundwater samples collected from TP1, TP3 and TP7, respectively. There are no set ODWS for TKN; however, based on the measured groundwater levels and corresponding elevations, the overburden groundwater flow direction is inferred to the north. TP7 is located along the extents of one of the existing septic beds on the property, and additionally, during the advancement of TP7, organic material including a tree stump was encountered. Both of which (septic and other organic decomposition) could contribute to the elevated levels of TKN across the central portion of the Site.



At the time of construction, it is recommended that an additional intrusive investigation be implemented (i.e., installation of groundwater monitoring wells) to further delineate and establish the extents of the elevated TKN and to determine whether the previously elevated level is an isolated event. The results of the additional investigation will be used in the design of the sewage disposal systems.

5 RECEIVING GROUNDWATER

The current and potential uses of the aquifers are identified below.

5.1 Overburden Groundwater

The overburden groundwater is unlikely to be used as a water supply based on the following:

- The Site and the adjacent properties are currently serviced by municipal water although water well records were identified in the area.
- Based on the well records reviewed and the shallow overburden conditions, no shallow wells were identified on the subject site or adjacent lands. Generally, the overburden conditions are not suitable for construction of a well.
- The buildings in this area are serviced by private septic systems; therefore, the current use of the overburden groundwater is for the attenuation of the septic system effluent.

5.2 Bedrock Aquifer

Twenty-three (23) well records were available for properties located within a 500 m radius of the Site. The records indicate that all twenty-three (23) wells tap into bedrock aquifer. Although it is our understanding that municipal water is available for the neighbouring properties, it is unknown at this time if these wells are still present or continue to be used for potable purposes.

6 TERRAIN ANALYSIS AND SEPTIC DESIGN

The terrain analysis was conducted to demonstrate that the unconsolidated material on the Site is appropriate for the construction of an on-site subsurface sewage disposal system, with consideration taken regarding the existing installation.

The subsurface conditions indicated for the Site are considered suitable for a Class IV sewage disposal system with a fully raised leaching bed depending on the lot specific soil and groundwater conditions at the actual location of the proposed septic system leaching bed. The leaching bed should be constructed to conform to the specifications set out in the Ontario Building Code (OBC). As part of this assessment, an analysis was carried out to ensure that sufficient space exists at the Site for the construction of a third septic system in accordance with the OBC which will service the proposed assembly hall.

As previously mentioned, the existing temple is serviced with two (2) sewage disposal systems located at the north and south sides of the buildings, respectively. Both are constructed with 9,000 L fibreglass septic tanks and 8 runs of 13.3 m length piping. One (1) of the systems services the kitchen and washrooms and the other services the remainder of the existing temple building. The existing septic systems were each designed for a sewage flow of 3,750 L/day, based on the assumption of 250 individuals and the use of 15 L/day per individual. However, since no food services are present in the building and none are proposed, the use of 8 L/day per individual



instead of 15 L/day per individual is deemed more appropriate. This yields a daily sewage flow of 2,000 L for each of the existing systems.

The daily sewage flow for the proposed assembly hall is based on the assumption that 500 individuals will occupy the building. In accordance with Schedule 8 of the OBC, it is assumed that 8 L/day will be discharged into the septic system for each individual that occupies the building. This is the set value for an assembly hall not equipped with food services. As a conservative approach to determine the expected largest septic system envelope required to service the proposed assembly hall, a septic system envelope size was calculated assuming a fully raised bed with mantle, a percolation rate of 12 min/cm for the imported sand required and a daily sewage flow of 4,000 L. The total length of pipe required for the proposed septic bed for the proposed assembly hall, assuming imported fill, was calculated as approximately 240 m using the following equation:

$$L = QT/200$$

where L = length of pipe (m);

Q = daily sewage flow for the proposed assembly hall (L/day); and

T = percolation rate of the imported sand fill material (min/cm).

Therefore, an area of approximately 360 m² is required for the septic bed assuming 16 pipes, each having a length of 15 m and a spacing of 1.6 m between the pipes. A mantle of 15 m in length would be required along the downgradient portion of the bed. Based on the total coverage of the septic bed (raised portion and mantle plus a replacement area) an area of approximately 1,215 m² would be required. This is a conservative approach based on the OBC.

However, due to the total sewage demand of the existing and proposed buildings (8,000 L/day) and available infiltration area on the site (15,888 m²), a conventional system for the proposed assembly hall is not adequate and tertiary treatment is necessary. It is proposed that a tertiary system such as an Ecoflo® Biofilter be considered for the new assembly hall. No changes to the existing systems servicing the existing building are proposed.

A preliminary design has been provided by Premier Tech Aqua for an Ecoflo® Biofilter system. The Ecoflo® system includes one (1) 12,000 L septic tank and two (2) STB730PR Ecoflo® Biofilters. The effluent will be pumped from the biofilters to an absorption system, consisting of a 0.3 m thick stone layer underlain with a 0.3 m thick sand layer. The stone layer shall be such that the loading on the surface of the stone layer does not exceed 50 L/m² per day for a total daily design sanitary sewage flow exceeding 3,000 L. Therefore, the minimum stone layer area is calculated as follows:

$$A = Q/50$$

where Q = daily sewage flow for the proposed assembly hall (L/day).

This gives a minimum area of the stone layer of 80 m². It is proposed that a stone layer of 8 m length by 10 m width be used. The effluent would be pumped through eight (8) distribution pipes installed on top of the stone layer, each of 9 m in length and spaced 1 m apart.

The stone layer is to be installed on a sand bed. The minimum area of the sand layer is calculated as follows:

$$A = QT/400$$

Where Q = daily sewage flow for the proposed assembly hall (L/day)



T = percolation rate of the imported sand fill material (min/cm); assumed as worst case of 50 min/cm².

This gives a minimum area required for the sand layer of 500 m². It is proposed that a sand layer of 16 m wide by 31.25 m length be used. This gives a mantle length of 20.25 m.

The preliminary configuration for this design is presented in the included **Figure 7**. It is stressed that this is strictly for discussion purposes at this time and the final design may change, however it is anticipated that the approximate size requirement will not vary significantly.

6.1 Average Daily Water Demand Variance

It should be noted that the average daily water demand presented in the Site Servicing Report prepared by LRL, dated September 18, 2017 was calculated for the entire property using Section 7 of the OBC. The demand was calculated assuming a worst-case scenario where all fixtures at the property, both the existing and the proposed buildings, are turned on simultaneously at the applicable flowrate for each fixture as specified in the OBC. The purpose of this calculation is to size the piping required to service the site.

7 PRIVATE SEWAGE DISPOSAL SYSTEM IMPACT STUDY

The groundwater impact assessment addresses the ability of the land to attenuate the sewage effluent created by the development. Three methods for conducting the assessment are outlined in MOE's *Procedure D-5-4 Technical Guideline for Individual On-Site Sewage Systems: Water Quality Impact Risk Assessment* (1996):

- *Lot Size Consideration* for lot greater than 10 000 m² (1 hectare);
- *System Isolation Consideration* for areas where the septic system is hydrogeologically isolated from the potable water source; and
- *Contaminant Attenuation Consideration* for sites that do not meet the above two points.

Bedrock was encountered at depths between less than 2.0 m across the site, therefore the site is considered hydrogeologically sensitive with areas of thin soil over highly permeable soils (i.e., bedrock).

The overburden material generally consisted of a fill material in the test pits with a stratum of till (TP3) or silty sand (TP1) above the bedrock in areas. The receiving groundwater for the septic system effluent is identified as the fill, silty sand and till. This groundwater is not considered an aquifer as it was encountered at depths less than 2.0 m below grade. As stated in Section 5.1, this groundwater is not a suitable supply aquifer for potable water based on its assumed poor yield, poor quality, shallow depth and likely used for the attenuation of the Site's existing and the neighbouring properties septic effluents. This groundwater is considered a suitable attenuation zone because alternative sources of water are available (i.e., municipal water or bedrock aquifer).

As mentioned above, the lot size is 38,000 m², with approximately 15,888 m² available for the installation of the proposed septic system. The lot size consideration for lots greater than 10,000 m² does not apply based on the anticipated total sewage demand of 8,000 L/day, including the existing systems. Therefore, "**Contamination Attenuation**" was considered in this terrain analysis.

The Site has a total area of 38,000 m². In accordance with Section 22.5.8 of the MECPC Design Guidelines for Sewage Works, the stream which is identified to bisect the Site immediately east of the proposed development must be considered the extent of the allowable dilution area. It is

understood that a 20 m setback is required from the bank of the stream and any development on the Site. When the area of the proposed and existing building, septic systems, and other site features (parking facility), are taken into consideration, an area of approximately 3,300 m² is available for the placement of the septic disposal system. This is a sufficient area to accommodate the 500 m² “proposed” septic system, as shown in the proposed site development plan in **Figure 3** and the Available Area for Sewage Disposal (Conservative Approach) in **Figure 6**.

7.1 Contaminant Attenuation Method (Predictive Assessment)

The Contaminant Attenuation Method (Predictive Assessment) was used to determine the impact of the proposed on-Site septic systems at the boundary of the Site. This procedure assesses the risk that the individual on-site systems will cause the concentration of the nitrate-nitrogen exceed 10 mg/L at the property boundaries. Dilution is the attenuation mechanism considered for nitrates, with precipitation being the only source of infiltration. The following parameters and assumptions were used in the nitrate attenuation calculations:

- Infiltration factors for the site;
 - Flat topography;
 - Infiltration Factors:
 - i. An assumption of Sand was used for this calculation;
 - ii. Approximately 15,888 m² of the site is considered Cultivated Land;
 - Moisture Surplus:
 - i. The remaining cultivated land is considered Shallow Rooted Crops;
 - ii. An assumption of Fine Sand was used for this calculation;
 - The average background nitrate concentration was calculated to be 0.2 mg/L;
 - Impervious areas (existing and proposed) were calculated to be of 2,866 m² for the buildings and 4,996 m² of paved driveway and parking areas; and
 - Moisture surplus values from the Ottawa weather station (Environment Canada, 2011).

The moisture surplus printout is included in **Appendix E**. This location is considered representative of the site located at the south-central extent of the City of Ottawa, Ontario.

Based on the total proposed sewage volume for the entire Site of 8,000 L/day, the existing lot size, soil conditions, a nitrate concentration of the sewage of 40 mg/L, the calculated levels of nitrates at the property limits is estimated as 15.1 mg/L as presented in the attached **Table 4A**. This is above the procedure’s guideline limit of 10 mg/L at the property line. Based on the “*Contaminant Attenuation Method*”, without tertiary treatment the current lot size and soil conditions are not suitable to attenuate the nitrate impacts generated by the septic systems of the development in accordance with D-5-4 guideline.

The above calculations are based on the current D-5-4 guideline which requires the use of 40 mg/L as the contaminant source as per Section 5.6.2 (a). Therefore, the use of an advanced tertiary treatment system such as Ecoflo Biofilter is necessary to reduce the levels of nitrates prior to discharge to the disposal field. This particular system is approved by the OBC and the Building Materials Evaluation Commission of the Ontario Ministry of Municipal Affairs and Housing. Furthermore, Section 5.7 of the D-5-4 guideline states that the Ministry recognises “that as



research continues, information and technologies may become available which warrant minor or substantial revisions to this guideline”.

According to the report titled Wastewater Technology, NSF/ANSI standard 245 – Wastewater Treatment Systems – Nitrogen Reduction, prepared by Premier Tech Aqua, the Ecoflo Biofilter tertiary treatment system is capable of reduction of nitrates in the effluent nitrate concentrations to between 0.35 mg/L to 8.54 mg/L. A copy of the report is included in **Appendix F**. For the purpose of this assessment a conservative nitrate effluent concentration of 12 mg/L was used.

The calculated nitrates at the property line is estimated based on the daily sewage volume of the existing systems (2 x 2,000 L) and the daily sewage volume of the proposed system of 4,000 L, treated with an Ecoflo Bioreactor. The detailed calculations for the proposed development are presented in the attached **Table 4B**. It is assumed that the level of nitrates in the effluent from the existing system and the proposed Ecoflo Bioreactor are 40 mg/L and 12 mg/L, respectively. Based on these assumptions the nitrates at the property limits is estimated as 9.9 mg/L. This is below the procedure’s guideline of 10.0 mg/L. Based on the “**Contaminant Attenuation Method**” the current lot size and soil conditions are suitable to attenuate the nitrate impacts generated by the septic systems on the development in accordance with current D-5-4 guidelines, provided an appropriate tertiary treatment is used for the proposed system.

8 CONCLUSIONS

Based on our review of available information and the results of the groundwater sampling and laboratory analytical programs, we conclude the following:

1. Sufficient area exists on the property for the installation of a septic system in accordance with the OBC to service the proposed Assembly Hall with a design sewage flow of up to 4,000 L/day.
2. Pre-treatment of the sewage from the proposed sewage disposal systems with an Ecoflo Biofilter certified treatment system, which has a documented and measured output of between 0.35 mg/L and 8.54 mg/L yields a calculated nitrate concentration at the property line of 9.9 mg/L, based on the “**Contaminant Attenuation Method**”.
3. Hydrogeologically sensitive conditions are present on the site due to thin overburden. The overburden generally consists of fill to bedrock, with till or silty sand observed at two (2) of the test pits.
4. Records of domestic wells were retrieved within 500 m of the site. The potable water source of these wells is the bedrock aquifer. A thin layer of either clay, gravel or till, with some sand in areas, being between 0.9 and 7.6 m thick over bedrock.

9 RECOMMENDATIONS

1. The septic system should be placed at least 15 m from any drilled wells/water service and 30 m from any dug well. It is recommended that the water table be surveyed prior to installation. The 20 m setback from the normal high water mark of the identified stream east of the proposed development footprint.
2. Due to the thin soils and sensitive site conditions it is recommended that the leaching bed of the proposed system be fully raised and an appropriate groundwater monitoring program be implemented. It is recommended that the groundwater monitoring wells be installed in compliance with *O. Reg. 903: Wells* to aid in the interpretation of groundwater flow direction and monitoring potential impacts to the identified supply aquifers. When



no longer required the wells should be decommissioned in accordance with O. Reg. 903.

3. It is recommended that a geodetic benchmark be used for further investigations on the site, including the proposed monitoring wells and groundwater elevations.

10 LIMITATIONS


The findings contained in this report are based on data and information collected during the Terrain Analysis of the subject property conducted by LRL Associates Ltd. The conclusions and recommendations are based solely on site conditions encountered at the time of our fieldwork on May 8th, 2017, supplemented by historical information and data obtained as described in this report. The information presented in this report represents the groundwater conditions at the locations sampled. Due to natural variations in geological conditions, no inference is made to the soil or groundwater conditions between sampling points. No assurance is made regarding changes in conditions subsequent to the time of this investigation. If additional information is discovered or obtained, LRL Associates Ltd. should be requested to re-evaluate the conclusions presented in this report and to provide amendments as required.

In evaluating the subject property, LRL Associates Ltd. has relied in good faith on information provided by individuals as noted in this report. We assume that the information provided is factual and accurate. We accept no responsibility for any deficiencies, misstatements or inaccuracies contained in this report as a result of omissions, misinterpretation or fraudulent acts of the persons contacted.

Yours truly,
LRL Associates Ltd.



Matthew Whitney, P. Eng.



Encl.

Figure 1 – Site Location

Figure 2 – Site Plan

Figure 3 – Proposed Site Layout

Figure 4 – Test Pit Locations, Groundwater Elevations and Groundwater Contours

Figure 5 – Well Locations, Ontario Well Records Within 500 m of the Site

Figure 6 – Available Area for Sewage Disposal (Conservative Approach)

Figure 7 – Proposed Ecoflow Septic Disposal System Layout

Table 1 – Summary of Groundwater Elevations in Test Pits

Table 2 – Summary of Sieve & Hydrometer Analyses

Table 3 – Summary of Analysis of Water Samples Collected from the Test Pits

Table 4A – Nitrate Attenuation Calculations

Table 4B – Nitrate Attenuation Calculations – Tertiary Treatment

Appendix A – Test Pit Logs

Appendix B – Laboratory Certificates of Analysis

Appendix C – Sieve & Hydrometer Analysis

Appendix D – Ontario Well Record Printouts

Appendix E – Moisture Surplus Printout

Appendix F – Premier Tech Aqua Report



FIGURES



LRJ

ENGINEERING | INGÉNIÉRIE

5430 Canotek Road | Ottawa, ON, K1J 9G2
www.lrl.ca | (613) 842-3434

PROJECT
TERRAIN ANALYSIS AND PRIVATE SEWAGE DISPOSAL
SYSTEM IMPACT STUDY
PROPOSED ASSEMBLY HALL
4835 BANK STREET, OTTAWA, ONTARIO

DRAWING TITLE

SITE LOCATION
(NOT TO SCALE)
SOURCE: GEOOTTAWA

CLIENT

THE HINDU TEMPLE OF OTTAWA CARLETON


DATE

JANUARY 2020

PROJECT

170132

FIGURE 1

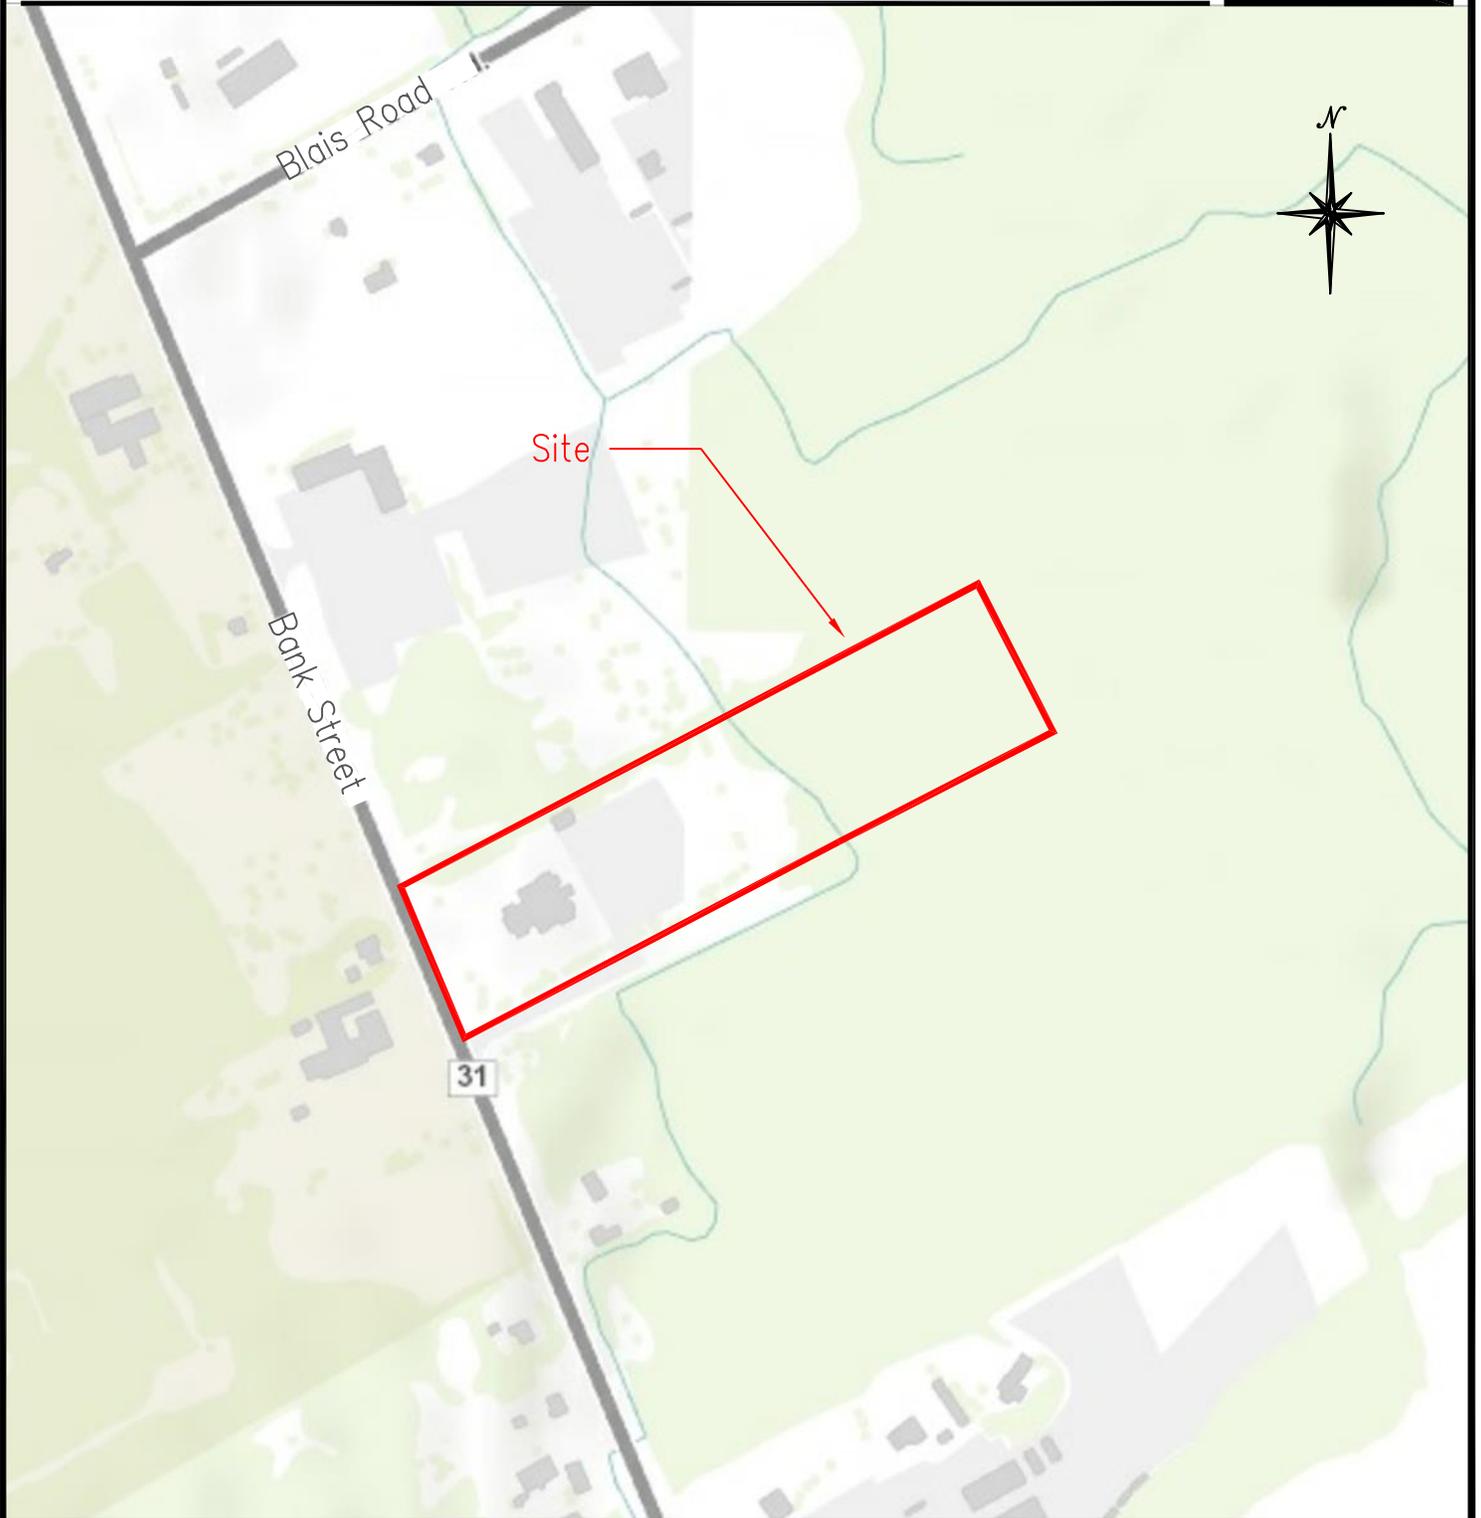



LEGEND

- Existing Building
- Division between various surface materials
- Property Line
- Tree Line
- Tree
- Inferred Stream Location

CLIENT
 THE HINDU TEMPLE OF OTTAWA
 CARLETON

DESIGNED BY: --- **DRAWN BY:** A.S **APPROVED BY:** M.L.W

PROJECT
 TERRAIN ANALYSIS AND PRIVATE
 SEWAGE DISPOSAL SYSTEM IMPACT
 STUDY - PROPOSED ASSEMBLY HALL
 4835 BANK STREET, OTTAWA, ONTARIO

DRAWING TITLE
 SITE PLAN


PROJECT NO.
 170132

DATE
 JANUARY 2020

FIGURE 2

No.	ISSUED FOR REVIEW	BY	DATE
01	ISSUED FOR REVIEW	A.S	05/18/17

LRJ
 4430 Carleton Place, Ottawa, ON, K1J 8K2
 www.lrfca.com (613) 942-3434

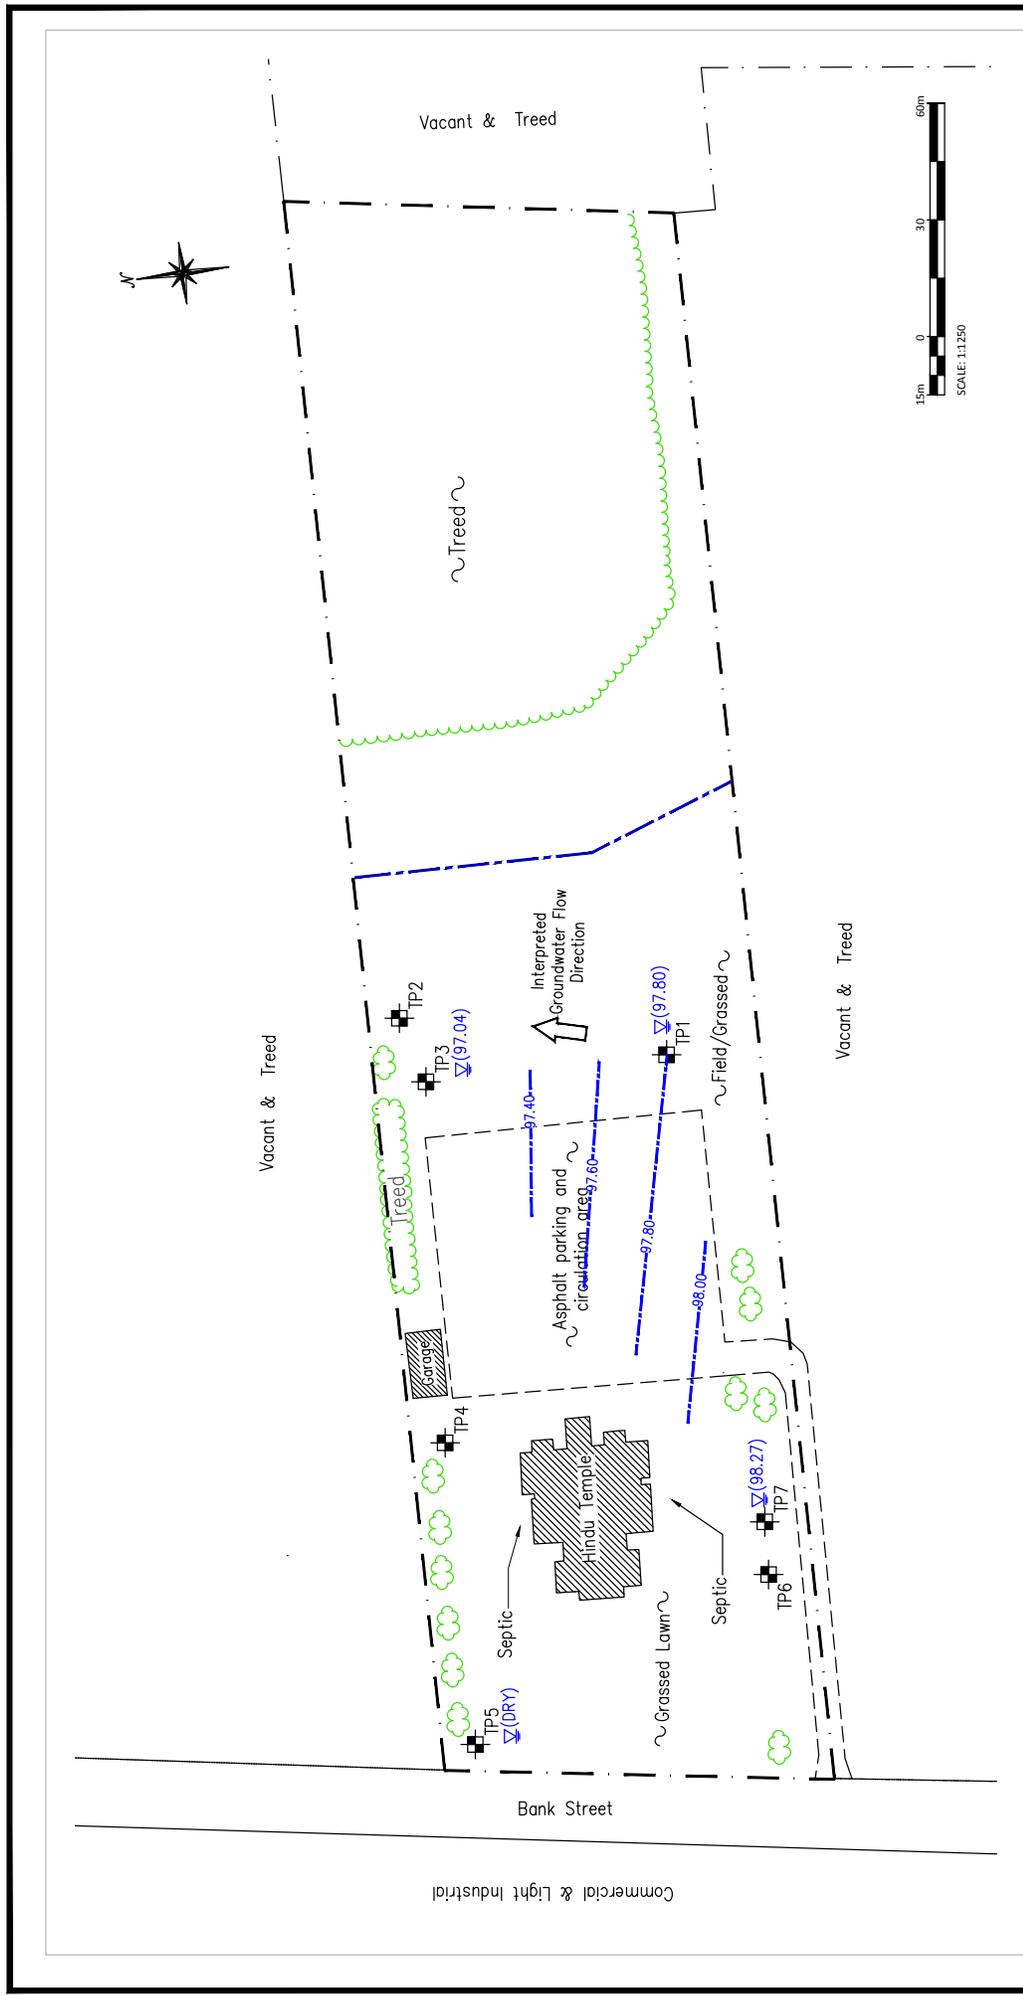

LEGEND

- Existing Building
- Division between various surface materials
- Property Line
- Tree Line
- Test Pit (May 2017)
- Groundwater Elevation (May 8, 2017)
- Groundwater Contour Line
- Inferred Stream Location

CLIENT
THE HINDU TEMPLE OF OTTAWA
 CARLETON

DESIGNED BY: --- DRAWN BY: J.A. APPROVED BY: M.L.W.

PROJECT: TERRAIN ANALYSIS AND PRIVATE SEWAGE DISPOSAL SYSTEM IMPACT STUDY - PROPOSED ASSEMBLY HALL 4835 BANK STREET, OTTAWA, ONTARIO

DRAWING TITLE
 TEST PIT LOCATIONS, GROUNDWATER ELEVATIONS AND GROUNDWATER CONTOUR LINES

PROJECT NO. 170132
 DATE: JANUARY 2020

FIGURE 4

LRJ
 Environmental Engineering
 6430 Carleton Road | Ottawa, ON, K1J 8G2
 www.lrfca.com | (613) 942-3434

No.	REVISIONS	BY	DATE
01	FINAL	J.A.	01/07/20



LRJ

ENGINEERING | INGÉNIERIE

5430 Canotek Road | Ottawa, ON, K1J 9G2
www.lri.ca | (613) 842-3434

PROJECT

TERRAIN ANALYSIS AND PRIVATE SEWAGE DISPOSAL
SYSTEM IMPACT STUDY
PROPOSED ASSEMBLY HALL
4835 BANK STREET, OTTAWA, ONTARIO

DRAWING TITLE

WELL LOCATIONS
ONTARIO WELL RECORDS WITHIN 500 M OF THE SITE
(NOT TO SCALE)

CLIENT

THE HINDU TEMPLE OF OTTAWA CARLETON


DATE


JANUARY 2012

PROJECT

170132

FIGURE 5

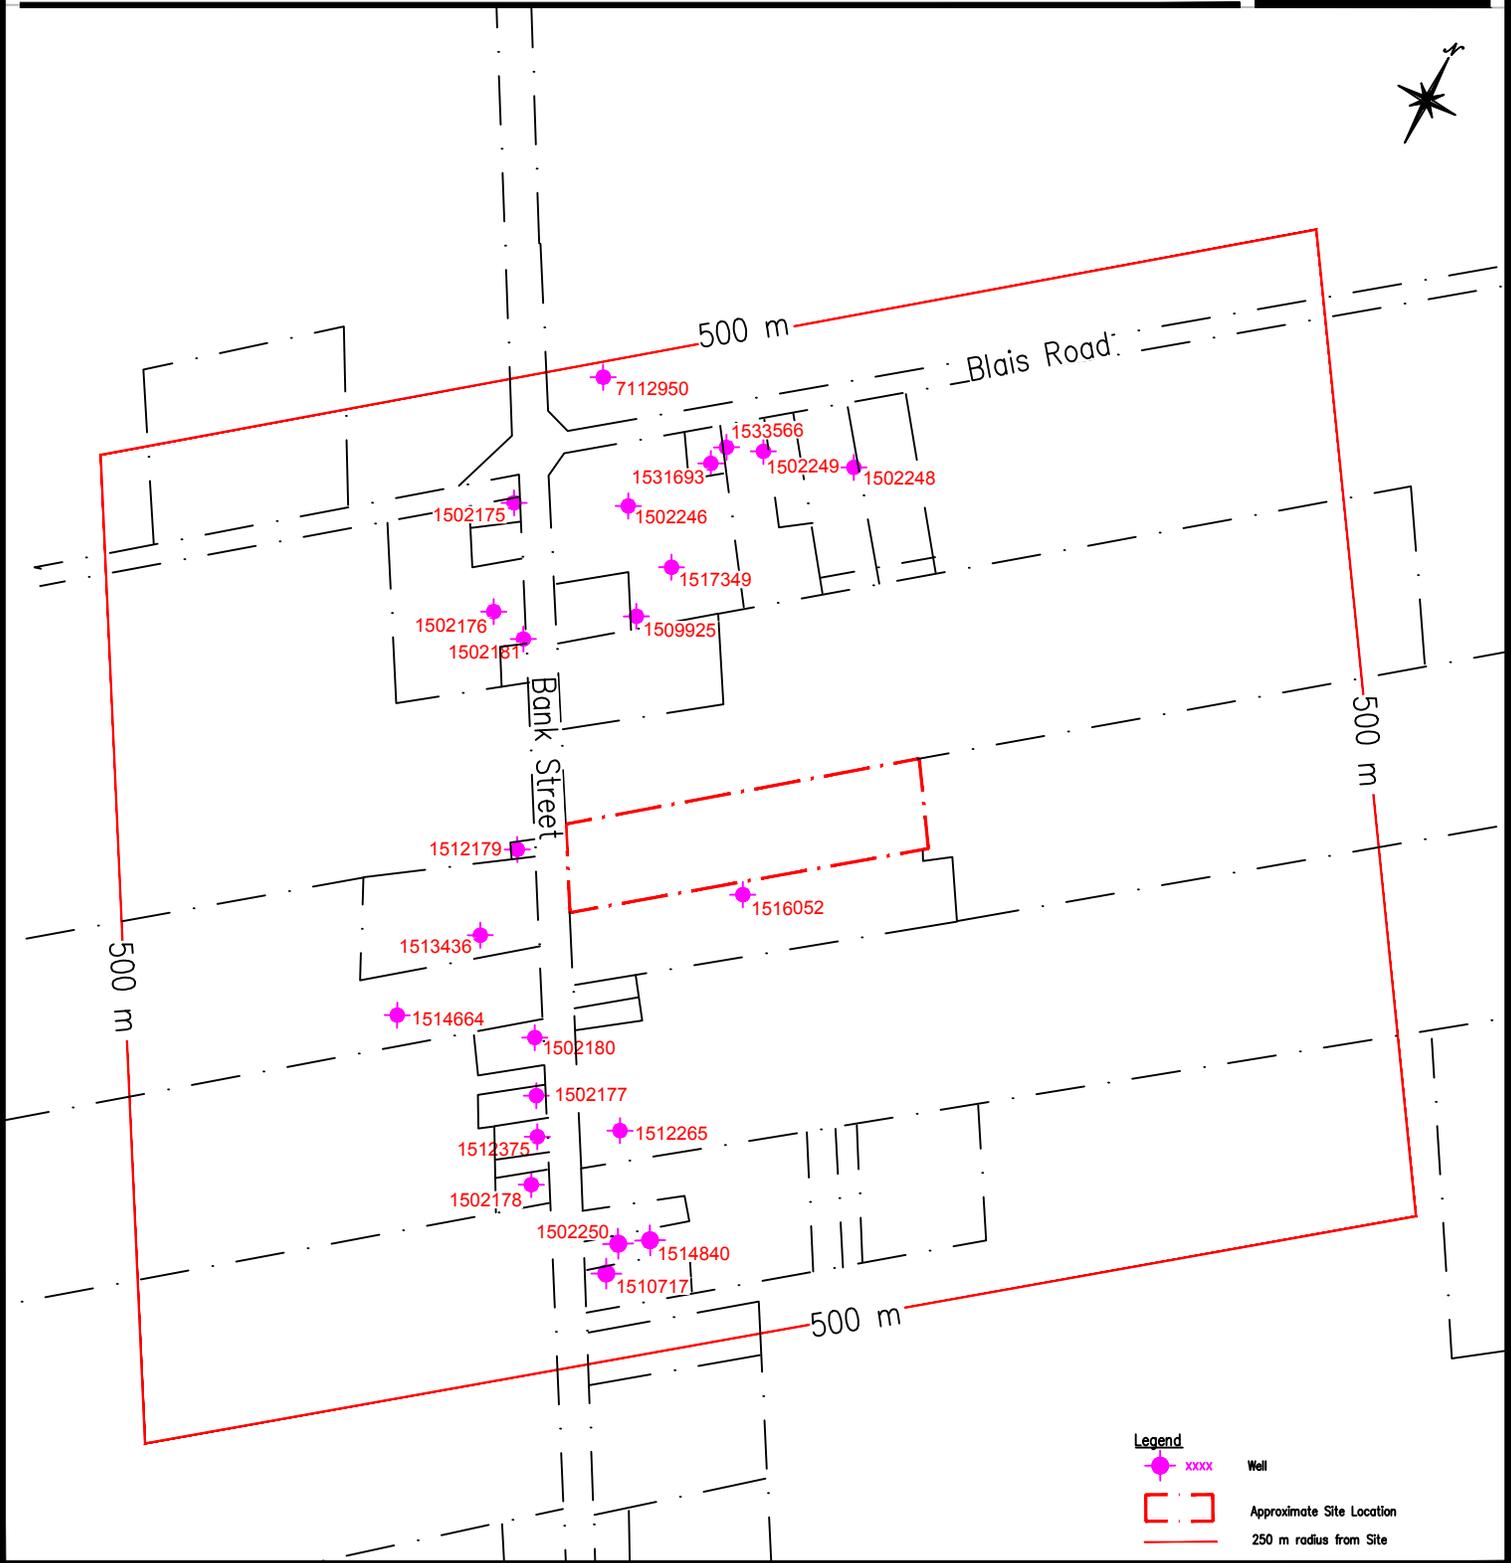

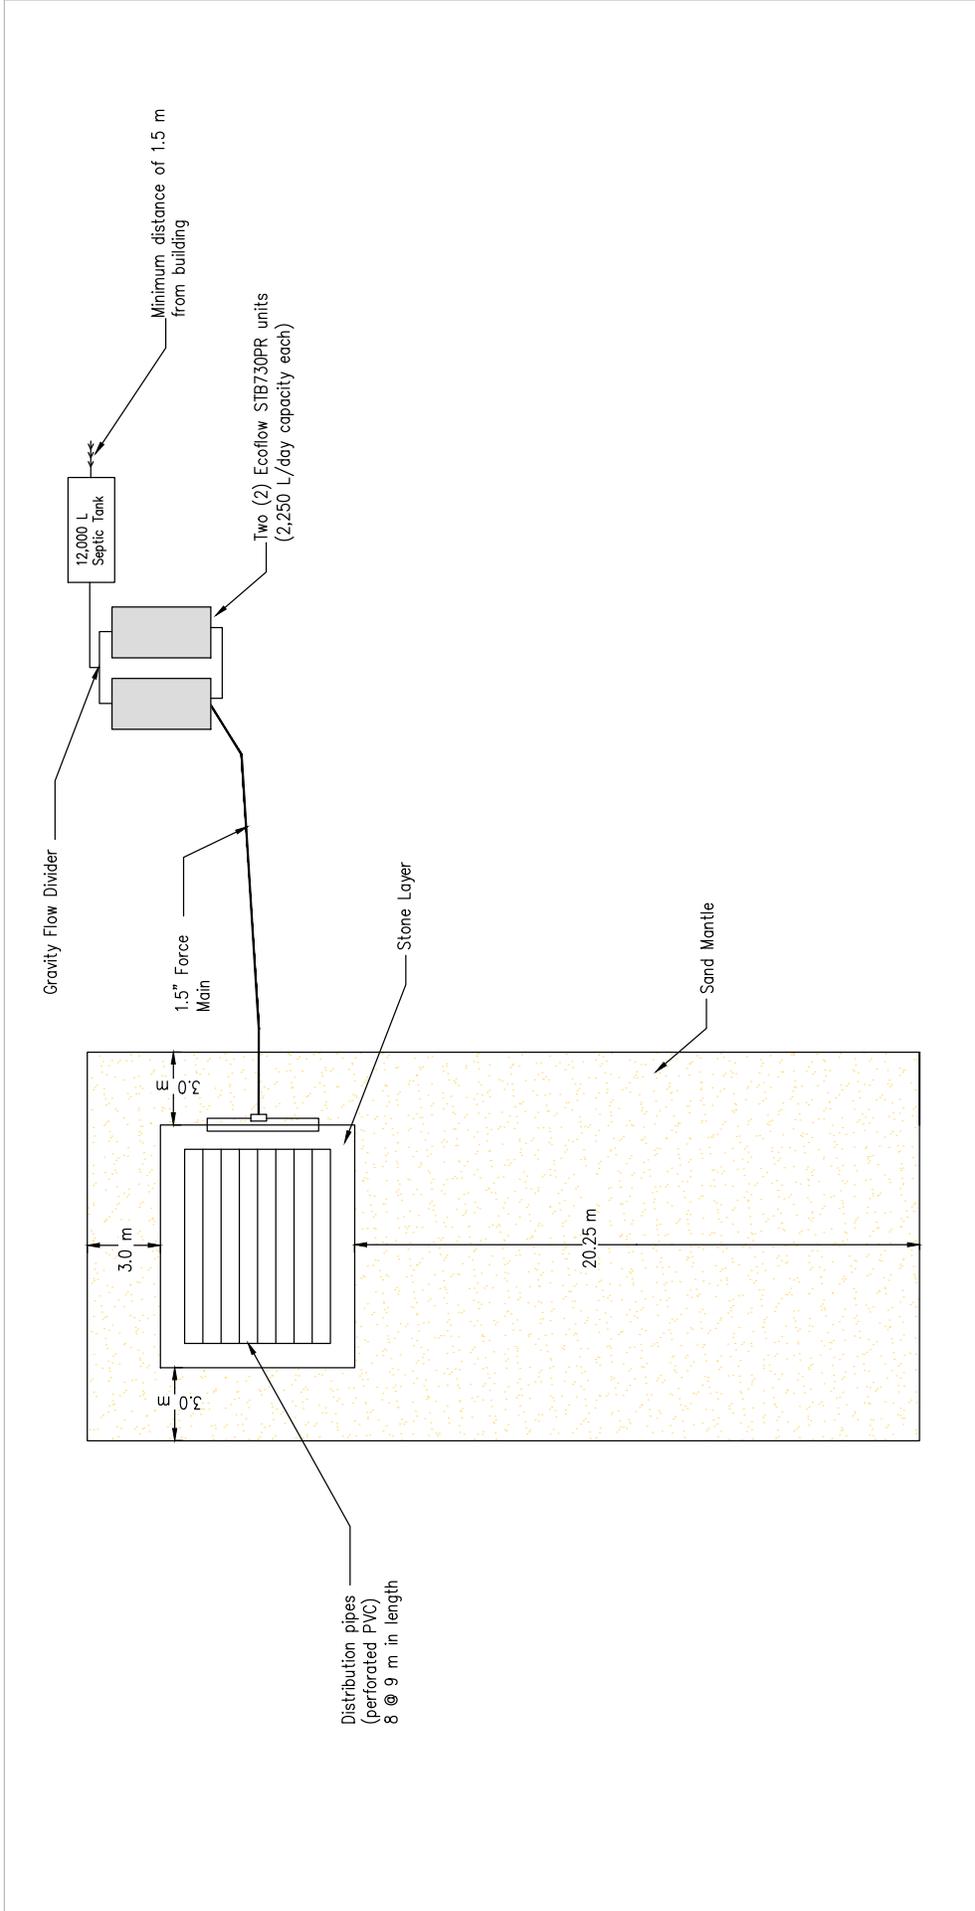

DRAWING TITLE
PROPOSED ECOFLOW SEPTIC DISPOSAL SYSTEM LAYOUT

PROJECT NO.
 170132


DATE
 JANUARY 2020

FIGURE 7

CLIENT
**THE HINDU TEMPLE OF OTTAWA
 CARLETON**

DESIGNED BY: J.A. DRAWN BY: J.A. APPROVED BY: M.W.

PROJECT
**TERRAIN ANALYSIS AND PRIVATE
 SEWAGE DISPOSAL SYSTEM IMPACT
 STUDY - PROPOSED ASSEMBLY HALL
 4835 BANK STREET, OTTAWA, ONTARIO**



NO.	REVISIONS	BY	DATE
01	FINAL	J.A.	01/07/20

01 FINAL J.A. 01/07/20

TABLES

Table 1
Summary of Groundwater Elevations in Test Pits

Terrain Analysis - Proposed Assembly Hall
4835 Bank Street, Ottawa, Ontario
LRL File: 170132

Test Pit	Ground Surface	Reference	Depth To Water Table (m)		Groundwater Elevation (m)
	Elevation ¹ (m)	Elevation ² (m)	Reference Point	Ground Surface	
TP1	98.21	99.15	1.35	0.41	97.80
TP2	97.09	--	--	--	--
TP3	97.75	98.98	1.94	0.71	97.04
TP4	99.54	--	--	--	--
TP5	98.78	99.02	DRY	--	--
TP6	99.38	--	--	--	--
TP7	99.60	100.79	2.52	1.33	98.27

NOTES

- ¹ Elevations are based off of a temporary benchmark established at the top of the east arm of the fire hydrant along the south of the Site (100.00 m).
- ² Reference elevation is top of piezometer.

Table 2
Summary of Sieve & Hydrometer Analyses
 Terrain Analysis - Proposed Assembly Hall
 Part of Lot 16, Concession 7, Hammond, Ontario
 LRL File: 160833

Sample	Depth (m)	Sample Gradation ¹							Soil Texture Classification
		Percent Particles in Each Fraction							
		Gravel >4.75 mm	Sand			Silt	Clay		
		Coarse 2.0 - 4.75 mm	Medium 425 µm - 2.0 mm	Fine 75 - 425 µm	2 - 75 µm	< 2µm			
TP1-3	1.8 - 2.0	4.8	1.2	1.8	6.5	63.8	22.0	Silt Loam	
TP3-6	1.4 - 1.6	21.3	7.0	12.7	20.1	39.0		Fine Silty Sand	

NOTES:
¹ Unified Soil Classification System

Table 3
Summary of analysis of water samples collected from the test pits.

Terrain Analysis - Proposed Assembly Hall
4835 Bank Street, Ottawa, Ontario
LRL File: 170132

Parameter	Units	MRL	Ontario Drinking Water Standards		
			Standard	Type	Sample
Sample Date (d/m/y)			TP1	TP3	TP5
Ammonia	mg/L	0.01	0.28	0.39	1.66
Total Kjeldahl Nitrogen	mg/L	0.1	78.1	65.3	131
Nitrate as N	mg/L	0.1	<0.1	0.5	<0.1
Nitrite as N	mg/L	0.05	<0.05	<0.05	<0.05

NOTES

MAC Maximum Acceptable Concentration

MRL Minimum Reportable Limit

Table 4A
Nitrate Attenuation Calculations
Terrain Analysis and Private Sewage Disposal System Impact Study - Proposed Assembly Hall
4835 Bank Street, Ottawa, Ontario
LRI File: 170132

1. Potential Infiltration

Weather Station		Ottawa		Infiltration Factor (IF) ¹			Moisture Surplus (MS)			Potential Infiltration (PI)				
No.	Section Area (m ²)	Topography	Value	Soil	Value	Cover	Value	Total	Ground Cover	Soil Type	Moisture Retention ² (mm)	Moisture Surplus ³ (mm)	Section (IF*MS) (mm)	Weighted
1	23,750	Flat	0.3	Sand	0.4	Cultivated Land	0.1	0.8	Moderately Rooted Crops	1 Fine Sand	75	384	307.2	307.2
Total⁴	23,750												307.2	307.2

2. Area Available for Infiltration

Approximate footprint of the existing assembly hall	H	1,168 m ²
Approximate footprint of the existing garage	H	105 m ²
Approximate footprint of the proposed assembly hall	H	1,593 m ²
Approximate area of paved parking and circulation (Existing & Proposed)	d ⁴	4,996 m ²
Approximate Length of Road	L	-- m
Approximate Width of Road	w	-- m
Total Area of Property		23,750 m ²
Impervious Area		7,862 m ²
Roads	1 x w	-- m ²
Parking and Circulation	d	4,996.2 m ²
Building	Sum of H's	2,866.0 m ²
Area available Infiltration	A	15,888 m²

3. Nitrate Dilution Calculations

Nitrate Concentration of Infiltration ¹	C _i	0.2 mg/L
Site Infiltration	Q _i = A * PI	4,881 m ³
Existing Development (Status Quo)		
Daily Sewage Volume - Existing Development	Q _d	4.00 m ³
Maximum Yearly Sewage Volume - Existing Development	Q _a = 365 * Q _d	1,460 m ³
Nitrate Concentration in Sewage - Existing Development	C _p	40 mg/L
Proposed Development (Eco-Flow System)		
Daily Sewage Volume - Proposed New Development ⁵	Q _d	4.00 m ³
Maximum Yearly Sewage Volume (water) - Proposed New Development	Q _a = 365 * Q _d	1,460 m ³
Nitrate Concentration in Sewage - Proposed New Development	C _e	40 mg/L
Maximum Allowable Nitrate Concentration at Boundary ²	C _m	10.0 mg/L
Increase in Nitrate Concentration at Boundaries	C = (Q _e / (Q _e + Q _i + Q _e * 2 + Q _d)) * (C _e + Q _e * 2 + Q _i)	15.1 mg/L

- NOTES**
- Table 2: Infiltration Factors, *Hydrological Technical Information: Requirements for Land Development Applications*, Ministry of the Energy and Environment, April 1995.
 - Thornthwaite and Mather's (1957) Instructions and Tables for Computing Potential Evapotranspiration and the Water Balance.
 - Moisture surplus for data for Ottawa ON (Environment Canada Meteorological Service of Canada, 2010).
 - The value is a calculation of the total existing parking & circulation area foot print, and the proposed 202 Vehicle parking & circulation area presented Vector Design Architects site plan, May 2019.
 - As per *Technical Guideline for Individual On-Site Sewage Systems: Water Quality and Impact Risk Assessment*, Ministry of the Energy and Environment, August 1996.
 - The total area of the property used in this calculation is limited to the area of the site located west of the stream.
 - The nitrate concentration of infiltration is calculated based on the average nitrate concentration reported at the time of the 2017 Terrain Analysis. Values reported as <0.1 mg/L were interpreted into the calculation as 0.05 mg/L.

Table 4B
Nitrate Attenuation Calculations - Tertiary Treatment
Terrain Analysis and Private Sewage Disposal System Impact Study - Proposed Assembly Hall
4835 Bank Street, Ottawa, Ontario
LRL File: 170132

Weather Station		Ottawa				Potential Infiltration (PI)							
No.	Section Area (m ²)	Topography	Value	Soil	Value	Cover	Value	Total	Moisture Surplus (MS)	Moisture Retention ² (mm)	Moisture Surplus ³ (mm)	Section	Weighted
1	23,750	Flat	0.3	Sand	0.4	Cultivated Land	0.1	0.8	Ground Cover	Soil Type	1 Fine Sand	307.2	307.2
Total¹									Moderately Rooted Crops	75	394	307.2	307.2
												Total	307.2

2. Area Available for Infiltration

Approximate footprint of the existing assembly hall	H	1,188 m ²
Approximate footprint of the existing garage	H	105 m ²
Approximate footprint of the proposed assembly hall	H	1,593 m ²
Approximate area of paved parking and circulation (Existing & Proposed)	H	4,996 m ²
Approximate Length of Road	L	- m
Approximate Width of Road	W	- m
Total Area of Property		23,750 m ²
Impervious Area		7,862 m ²
Roads	L x W	- m ²
Parking and Circulation	d	4,996.2 m ²
Building	Sum of H's	2,866.0 m ²
Area available for infiltration	A	15,888 m²

3. Nitrate Dilution Calculations

Nitrate Concentration of Infiltration ⁷	C _i	0.2 mg/L
Site Infiltration	Q _i = A*PI	4,881 m ³
Existing Development (Status Quo - Existing Kitchen)		
Daily Sewage Volume - Existing Development	Q _{di}	2.0 m ³
Maximum Yearly Sewage Volume - Existing Development	Q _{di} = 365*Q _{di}	730 m ³
Nitrate Concentration in Sewage - Existing Development	C _{di}	40 mg/L
Existing Development (Status Quo - Existing Temple)		
Daily Sewage Volume - Existing Development	Q _{de}	2.0 m ³
Maximum Yearly Sewage Volume - Existing Development	Q _{de} = 365*Q _{de}	730 m ³
Nitrate Concentration in Sewage - Existing Development	C _{de}	40 mg/L
Proposed Development (Eco-Flow System)		
Daily Sewage Volume - Proposed New Development ⁸	Q _{ds}	4.00 m ³
Maximum Yearly Sewage Volume (Water) - Proposed New Development	Q _{ds} = 365*Q _{ds}	1,460 m ³
Nitrate Concentration in Sewage - Proposed New Development	C _{ds}	12 mg/L
Maximum Allowable Nitrate Concentration at Boundaries ⁵	C _{mi}	10.0 mg/L
Increase in Nitrate Concentration at Boundaries	C = (Q _i C _i + Q _{di} C _{di} + Q _{de} C _{de} + Q _{ds} C _{ds}) / (Q _i + Q _{di} + Q _{de} + Q _{ds})	9.9 mg/L

- NOTES**
- Table 2: Infiltration Factors, *Hydrological Technical Information Requirements for Land Development Applications*, Ministry of the Energy and Environment, April 1995.
 - Thornthwaite and Mather's (1957) Instructions and Tables for Computing Potential Evapotranspiration and the Water Balance.
 - Moisture surplus for data for Ottawa ON (Environment Canada Meteorological Services of Canada, 2010).
 - The value is a calculation of the total existing parking & circulation area foot print, and the proposed 202 Vehicle parking & circulation area presented Vector Design Architects site plan, May 2019.
 - As per *Technical Guideline for Individual On-Site Sewage Systems: Water Quality and Impact Risk Assessment*, Ministry of the Energy and Environment, August 1996.
 - The total area of the property used in this calculation is limited to the area of the Site located west of the stream.
 - The nitrate concentration of infiltration is calculated based on the average nitrate concentration reported at the line of the 2017 Terrain Analysis. Values reported as <0.1 mg/L were interpreted into the calculation as 0.05 mg/L.

APPENDIX A
Test Pit Logs



Project No.: 170132

Client: Hindu Temple of Ottawa Carleton

Date: May 08, 2017

Excavation Method: Backhoe

Test Pit Log: TP1

Project: Terrain Analysis

Location: 4835 Bank Street, Ottawa, ON

Field Personnel: JA

Excavation Contractor: Maurice Yelle Excavation Ltd.

SUBSURFACE PROFILE		SAMPLE DATA					Water Content (%)		Water Level (Standpipe or Open Excavation)
Depth	Soil Description	Elev./Depth (m)	Lithology	Sample Number	Shear Strength (kPa)	Liquid Limit (%)			
						50	150	25	
0	Ground Surface	98.21							
0	TOPSOIL Sandy, dark brown, dry.	0.00							
1	FILL Sandy clay, dark brown, dry.	98.01 0.20							
3	Silty Sand Trace clay, with clay seam from 1.7 to 1.8 m bgs, brown, dry. Sieve analysis completed.	97.31 0.90		1					
4									
5									
6				2					
7									
7	End of Test Pit Refusal over inferred bedrock.	96.11 2.10		3					
8									

0.4 m bgs (08/05/17)

Easting: N/M **Northing:** N/M
Site Datum: Top east arm of hydrant at south entrance (100.00 m)
Groundsurface Elevation: 98.21 **Top of Riser Elev.:** 99.15
Excavation Width: 1.2 m **Excavation Length:** 1.5 m

NOTES:
 BGS- Below Ground Surface



Project No.: 170132

Client: Hindu Temple of Ottawa Carleton

Date: May 08, 2017

Excavation Method: Backhoe

Test Pit Log: TP2

Project: Terrain Analysis

Location: 4835 Bank Street, Ottawa, ON

Field Personnel: JA

Excavation Contractor: Maurice Yelle Excavation Ltd.

SUBSURFACE PROFILE		SAMPLE DATA			Water Content (%)			Water Level (Standpipe or Open Excavation)
Depth	Soil Description	Elev./Depth (m)	Lithology	Sample Number	Shear Strength (kPa)		Liquid Limit (%)	
					50	150	25	50
0	Ground Surface	97.09						
0	FILL Silty sand with some clay, brown, saturated with water infiltration at 0.4 m bgs.	0.00						
1	Buried metal structure/waste at approximately 0.9 m bgs.							
2								
3					4			
3	End of Test Pit	96.19 0.90						
4								
5								
6								
7								
8								

Easting: N/M

Northing: N/M

Site Datum: Top east arm of hydrant at south entrance (100.00 m)

Groundsurface Elevation: 97.09

Top of Riser Elev.: --

Excavation Width: 1.2 m

Excavation Length: 1.5 m

NOTES:

Test pit terminated at 0.9 meters due to volume of water in pit.
BGS- Below Ground Surface



Project No.: 170132

Client: Hindu Temple of Ottawa Carleton

Date: May 08, 2017

Excavation Method: Backhoe

Test Pit Log: TP3

Project: Terrain Analysis

Location: 4835 Bank Street, Ottawa, ON

Field Personnel: JA

Excavation Contractor: Maurice Yelle Excavation Ltd.

SUBSURFACE PROFILE		SAMPLE DATA			Water Content (%)			Water Level (Standpipe or Open Excavation)
Depth	Soil Description	Elev./Depth (m)	Lithology	Sample Number	Liquid Limit (%)			
					50	150	25 50 75	
0	Ground Surface	97.75						
0	TOPSOIL Sandy loam, dark brown, dry.	0.00						
	Brick debris found in top 0.2 m bgs.	97.55						
1	FILL Sandy silt, trace boulders, brown, dry.	0.20		5				
	Tire debris found at approximately 0.8 m bgs.							
2								
3	TILL Silty sand, trace gravel, cobbles and boulders, brown, dry.	96.95						
1	Sieve analysis completed.	0.80						
4								
5				6				
6	End of Test Pit	96.05						
2	Refusal at 1.7 m bgs over inferred bedrock.	1.70						
7								
8								

Easting: 0454091 **Northing:** 5017670
Site Datum: Top east arm of hydrant at south entrance (100.00 m)
Groundsurface Elevation: 97.75 **Top of Riser Elev.:** 98.98
Excavation Width: 1.2 m **Excavation Length:** 1.5 m

NOTES:
 BGS- Below Ground Surface



Project No.: 170132

Client: Hindu Temple of Ottawa Carleton

Date: May 08, 2017

Excavation Method: Backhoe

Test Pit Log: TP4

Project: Terrain Analysis

Location: 4835 Bank Street, Ottawa, ON

Field Personnel: JA

Excavation Contractor: Maurice Yelle Excavation Ltd.

SUBSURFACE PROFILE		SAMPLE DATA			Water Content (%)			Water Level (Standpipe or Open Excavation)	
Depth	Soil Description	Elev./Depth (m)	Lithology	Sample Number	Shear Strength (kPa)		Liquid Limit (%)		
					50	150	25		50
0	Ground Surface	99.54							
0	TOPSOIL Silty loam, trace clay, dark brown, dry.	0.00							
2	FILL Silty sand, trace cobbles and gravel, light brown, dry. Changing to dark brown sandy fill with trace boulders at approximately 0.8 m bgs.	99.04 0.50		7					
4				8					
5	End of Test Pit Refusal at 1.4 m bgs over inferred bedrock or large concrete structure.	98.14 1.40							

Easting: 0454005 **Northing:** 5017628
Site Datum: Top east arm of hydrant at south entrance (100.00 m)
Groundsurface Elevation: 99.54 **Top of Riser Elev.:** --
Excavation Width: N/M **Excavation Length:** N/M

NOTES:
 BGS- Below Ground Surface



Project No.: 170132

Client: Hindu Temple of Ottawa Carleton

Date: May 08, 2017

Excavation Method: Backhoe

Test Pit Log: TP5


Project: Terrain Analysis

Location: 4835 Bank Street, Ottawa, ON

Field Personnel: JA

Excavation Contractor: Maurice Yelle Excavation Ltd.

SUBSURFACE PROFILE		SAMPLE DATA			Shear Strength (kPa)	Water Content (%)			Water Level (Standpipe or Open Excavation)
Depth	Soil Description	Elev./Depth (m)	Lithology	Sample Number		25	50	75	
0	Ground Surface	98.78							
0	TOPSOIL Silty loam some sand, dark brown, dry.	0.00							
0.15	FILL Sand, some silt, trace cobbles, brown, dry. Waste debris of metal and asphalt pieces at approximately 0.9 m bgs.	98.63		10					
1									
2									
3									
3				9					
4									
5									
5	End of Test Pit Refusal at 1.5 m bgs over inferred bedrock.	97.28		11					
1.50									
6									
7									
8									



Easting: 0453945 **Northing:** 5017595
Site Datum: Top east arm of hydrant at south entrance (100.00 m)
Groundsurface Elevation: 98.78 **Top of Riser Elev.:** 99.02
Excavation Width: N/M **Excavation Length:** N/M

NOTES:
 BGS- Below Ground Surface



Project No.: 170132

Client: Hindu Temple of Ottawa Carleton

Date: May 08, 2017

Excavation Method: Backhoe

Test Pit Log: TP6

Project: Terrain Analysis

Location: 4835 Bank Street, Ottawa, ON

Field Personnel: JA

Excavation Contractor: Maurice Yelle Excavation Ltd.

SUBSURFACE PROFILE		SAMPLE DATA			Water Content (%)			Water Level (Standpipe or Open Excavation)	
Depth	Soil Description	Elev./Depth (m)	Lithology	Sample Number	Shear Strength (kPa)		Liquid Limit (%)		
					50	150	25		50
0	Ground Surface	99.38							
	TOPSOIL Sandy loam, dark brown, dry.	0.00							
	FILL Sand, some gravel, cobbles, boulders, silty seam at 0.7 m bgs, brown, dry.	99.23							
1		0.15							
	Refusal at 0.8 m bgs over inferred bedrock.			12					
2				13					
	End of Test Pit	98.58							
3		0.80							
4									
5									
6									
7									
8									

Easting: 0454003

Northing: 5017542

Site Datum: Top east arm of hydrant at south entrance (100.00 m)

Groundsurface Elevation: 99.38

Top of Riser Elev.: --

Excavation Width: N/M

Excavation Length: N/M

NOTES:

BGS- Below Ground Surface



Project No.: 170132

Client: Hindu Temple of Ottawa Carleton

Date: May 08, 2017

Excavation Method: Backhoe

Test Pit Log: TP7

Project: Terrain Analysis

Location: 4835 Bank Street, Ottawa, ON

Field Personnel: JA

Excavation Contractor: Maurice Yelle Excavation Ltd.

SUBSURFACE PROFILE		SAMPLE DATA			Water Content (%)			Water Level (Standpipe or Open Excavation)
Depth	Soil Description	Elev./Depth (m)	Lithology	Sample Number	Shear Strength (kPa)		Liquid Limit (%)	
					50	150	25	50
0	Ground Surface	99.60						
0	TOPSOIL Sandy loam, dark brown, dry.	0.00						
1	FILL Sand, brown, trace metal debris, dry.	99.40 0.20						
3	TILL Silty sand, trace clay, boulders, grey, organics including tree stump, roots, etc. Refusal due to obstruction (tree stump).	98.90 0.70						
6	End of Test Pit	97.80 1.80						



Easting: 0454051

Northing: 5017564

Site Datum: Top east arm of hydrant at south entrance (100.00 m)

Groundsurface Elevation: 99.60

Top of Riser Elev.: 100.79

Excavation Width: N/M

Excavation Length: N/M

NOTES:

BGS- Below Ground Surface

APPENDIX B
Laboratory Certificates of Analysis

Certificate of Analysis

LRL Associates Ltd.

5430 Canotek Road
Ottawa, ON K1J 9G2
Attn: Jessica Arthurs

Client PO:
Project: 170132
Custody: 32310

Report Date: 15-May-2017
Order Date: 11-May-2017

Order #: 1719377

This Certificate of Analysis contains analytical data applicable to the following samples as submitted:

Parcel ID	Client ID
1719377-01	TP1
1719377-02	TP3
1719377-03	TP7

Approved By:



Dale Robertson, BSc
Laboratory Director

Certificate of Analysis
Client: LRL Associates Ltd.
Client PO:

Report Date: 15-May-2017

Order Date: 11-May-2017

Project Description: 170132

Analysis Summary Table

Analysis	Method Reference/Description	Extraction Date	Analysis Date
Ammonia, as N	EPA 351.2 - Auto Colour	12-May-17	12-May-17
Anions	EPA 300.1 - IC	12-May-17	12-May-17
Total Kjeldahl Nitrogen	EPA 351.2 - Auto Colour, digestion	12-May-17	15-May-17

Certificate of Analysis
 Client: LRL Associates Ltd.
 Client PO:

Report Date: 15-May-2017

Order Date: 11-May-2017

Project Description: 170132

Client ID:	TP1	TP3	TP7	-
Sample Date:	08-May-17	08-May-17	08-May-17	-
Sample ID:	1719377-01	1719377-02	1719377-03	-
MDL/Units	Water	Water	Water	-

General Inorganics

Ammonia as N	0.01 mg/L	0.28	0.39	1.66	-
Total Kjeldahl Nitrogen	0.1 mg/L	78.1	65.3	131	-

Anions

Nitrate as N	0.1 mg/L	<0.1	0.5	<0.1	-
Nitrite as N	0.05 mg/L	<0.05	<0.05	<0.05	-

Certificate of Analysis
 Client: LRL Associates Ltd.
 Client PO:

Report Date: 15-May-2017

Order Date: 11-May-2017

Project Description: 170132

Method Quality Control: Blank

Analyte	Result	Reporting Limit	Units	Source Result	%REC	%REC Limit	RPD	RPD Limit	Notes
Anions									
Nitrate as N	ND	0.1	mg/L						
Nitrite as N	ND	0.05	mg/L						
General Inorganics									
Ammonia as N	ND	0.01	mg/L						
Total Kjeldahl Nitrogen	ND	0.1	mg/L						

Certificate of Analysis
 Client: LRL Associates Ltd.
 Client PO:

Report Date: 15-May-2017

Order Date: 11-May-2017

Project Description: 170132

Method Quality Control: Duplicate

Analyte	Result	Reporting Limit	Units	Source Result	%REC	%REC Limit	RPD	RPD Limit	Notes
Anions									
Nitrate as N	ND	0.1	mg/L	ND				20	
Nitrite as N	ND	0.05	mg/L	ND				20	
General Inorganics									
Ammonia as N	0.021	0.01	mg/L	0.022			2.4	8	
Total Kjeldahl Nitrogen	1.50	0.1	mg/L	1.52			1.8	10	

Certificate of Analysis
 Client: LRL Associates Ltd.
 Client PO:

Report Date: 15-May-2017

Order Date: 11-May-2017

Project Description: 170132

Method Quality Control: Spike

Analyte	Result	Reporting Limit	Units	Source Result	%REC	%REC Limit	RPD	RPD Limit	Notes
Anions									
Nitrate as N	1.01	0.1	mg/L	ND	101	81-112			
Nitrite as N	1.02	0.05	mg/L	ND	102	76-117			
General Inorganics									
Ammonia as N	0.280	0.01	mg/L	0.022	103	81-124			
Total Kjeldahl Nitrogen	1.91	0.1	mg/L		95.7	81-126			

Certificate of Analysis
Client: LRL Associates Ltd.
Client PO:

Report Date: 15-May-2017

Order Date: 11-May-2017

Project Description: 170132

Qualifier Notes:

Login Qualifiers :

Samples received submerged in water, possibly melted ice. This condition can compromise sample integrity.

Applies to samples: TP1, TP3, TP7

Sample Data Revisions

None

Work Order Revisions / Comments:

None

Other Report Notes:

n/a: not applicable

ND: Not Detected


MDL: Method Detection Limit

Source Result: Data used as source for matrix and duplicate samples

%REC: Percent recovery.

RPD: Relative percent difference.

APPENDIX C
Sieve & Hydrometer Analysis




LRL Associates Ltd.

PARTICLE SIZE ANALYSIS

Client: Lloyd Phillips & Associates Ltd.
 Project: Hydrogeological Assessment & Terrain Analysis
 Location: 4835 Bank Street., Ottawa, ON.


File No.: 170132
 Report No.: 1
 Date: May 8, 2017

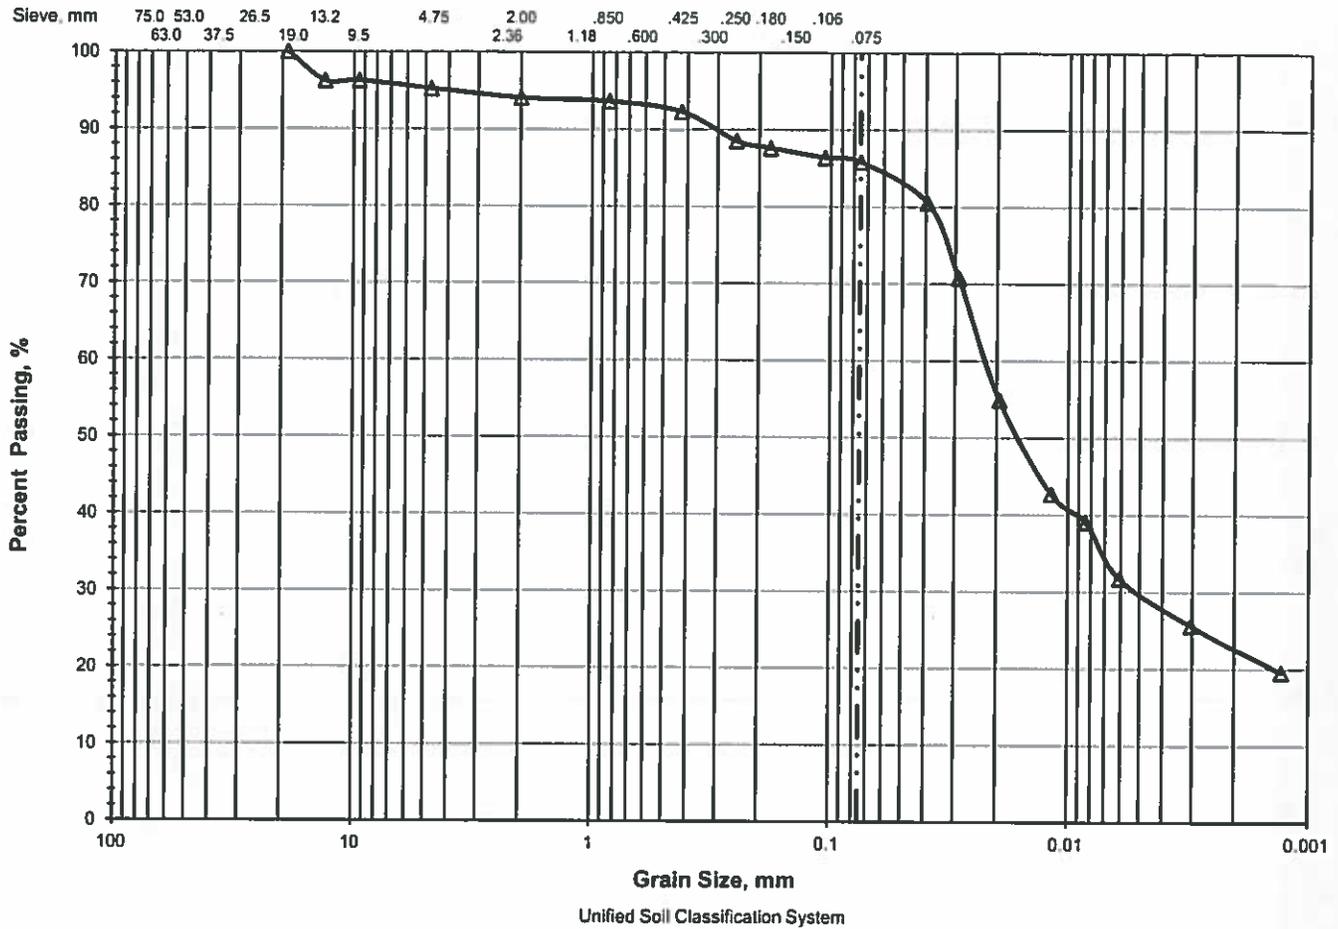

> 75 mm	% GRAVEL		% SAND			% FINES	
	Coarse	Fine	Coarse	Medium	Fine	Silt	Clay
Δ	0.0	4.8	1.2	1.8	6.5	63.8	22.0

Location	Sample	Depth, m	D ₆₀	D ₅₀	D ₃₀	D ₁₅	D ₁₀	C _c	C _u
Δ	TP-1	3	1.80 - 2.00	0.0226	0.0164	0.0052			






LRL Associates Ltd.
PARTICLE SIZE ANALYSIS
 ASTM D 422 / LS-702

Client: Lloyd Phillips & Associates Ltd.
Project: Hydrogeological Assessment & Terrain Analysis
Location: 4835 Bank Street., Ottawa, ON.

File No.: 170132
Report No.: 2
Date: May 8, 2017

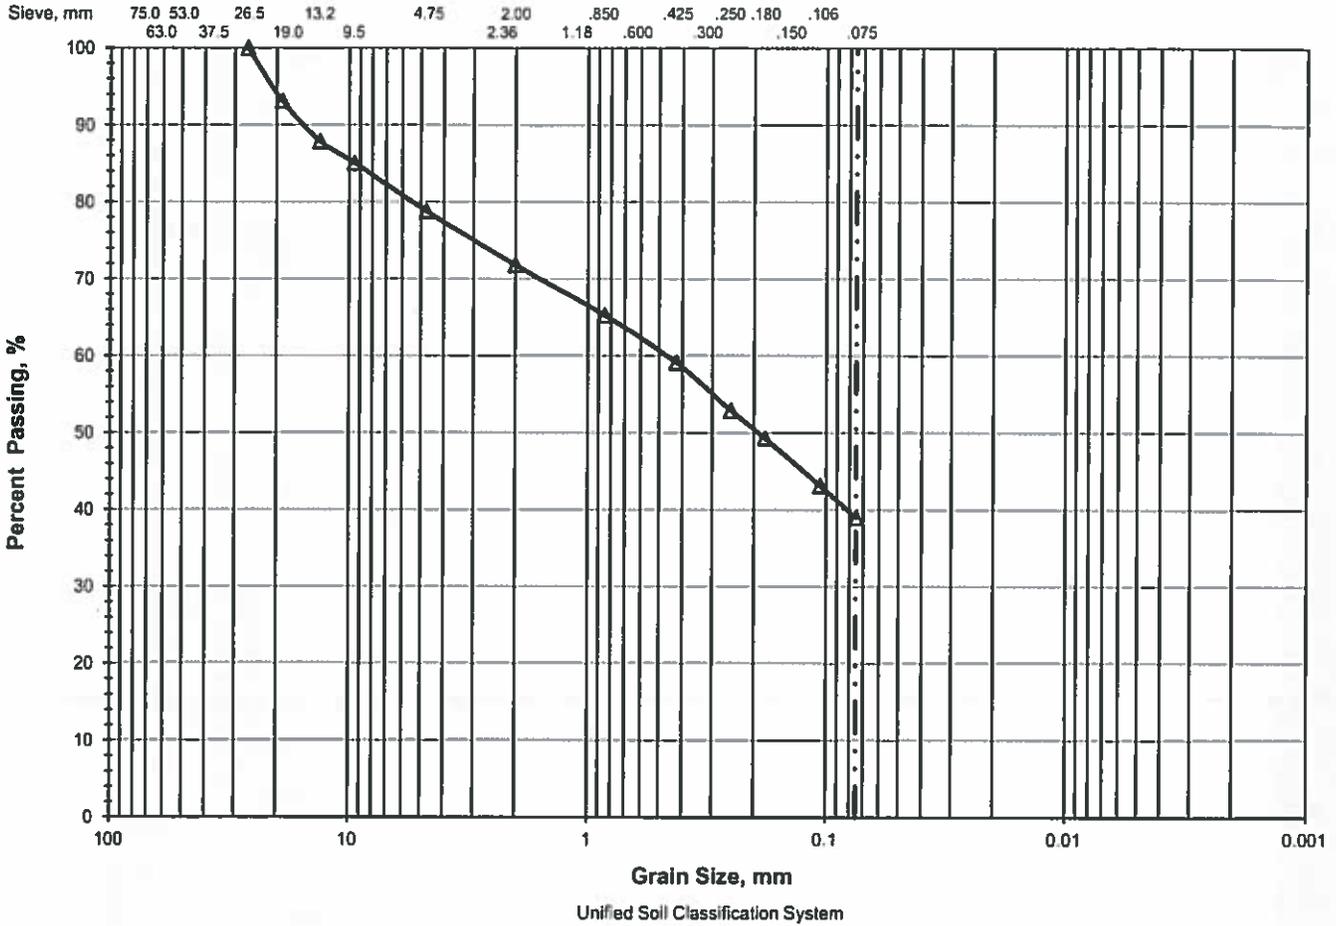

> 75 mm	% GRAVEL		% SAND			% FINES	
	Coarse	Fine	Coarse	Medium	Fine	Silt & Clay	
△	0.0	6.0	15.3	7.0	12.7	20.1	39.0

Location	Sample	Depth, m	D ₆₀	D ₅₀	D ₃₀	D ₁₅	D ₁₀	C _c	C _u
△	TP3	6	1.4 - 1.6	0.4855	0.1932				



APPENDIX D
Ontario Well Record Printouts

316/52



GROUND WATER BRANCH
SEP 15 1962 No 2176
ONTARIO WATER RESOURCES COMMISSION

UTM 118 2 4 5 3 7 6 0 E

15 R 5 6 1 7 5 6 0 N

The Ontario Water Resources Commission Act

Elev: 4 R 0 3 1 1 5

WATER WELL RECORD

Basin 2 5 1 | CARLETON

Township, Village, Town or City GLOUCESTER

Con. HRF Lot 21

Date completed 20 JULY 62
(day month year)

Address BILLINGS BRIDGE

Casing and Screen Record

Inside diameter of casing
Total length of casing 184
Type of screen
Length of screen
Depth to top of screen
Diameter of finished hole 4

Pumping Test

Static level 6
Test-pumping rate 6 G.P.M.
Pumping level 8
Duration of test pumping 1 HR
Water clear or cloudy at end of test CU
Recommended pumping rate 6 G.P.M.
with pump setting of 30 feet below ground surface

Well Log

Water Record

Overburden and Bedrock Record	From ft.	To ft.	Depth(s) at which water(s) found	Kind of water (fresh, salty, sulphur)
CLAY	0	18		
Limestone	18	45	45	F

For what purpose(s) is the water to be used? Home

Is well on upland, in valley, or on hillside? U

Drilling or Boring Firm M MEDSTER

Address 67 DUNDAS

Licence Number 612

Name of Driller or Borer SIMON


Address

Date AUG 28

(Signature of Licensed Drilling or Boring Contractor)

Location of Well

In diagram below show distances of well from road and lot line. Indicate north by arrow.

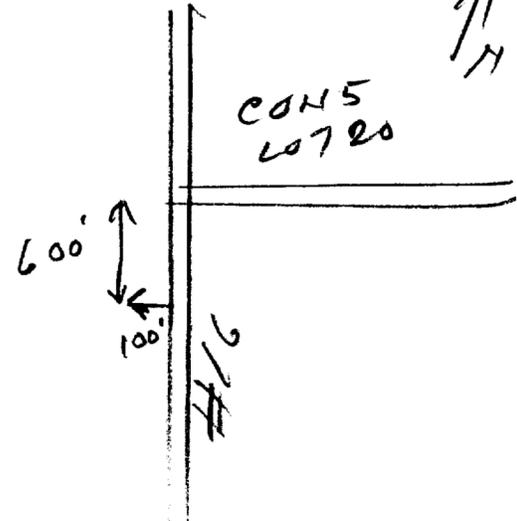

764
 UTM 118Z 453191710 E
 Rideau Front
 5R 50717101810 N
 Elev. 4R 103310
 Basin 215 221

316/52



ONTARIO

The Water-well Drillers Act, 1954
 Department of Mines

15 No 2177

GROUND WATER BRANCH
 19
 MAY 20 1957
 ONTARIO WATER RESOURCES COMMISSION

Water-Well Record

County or Territorial District Carleton Township, Village, Town or City Gloucester



in Village, Town or City
 Address 46 Lawrence St Ottawa

(day) (month) (year)

Pipe and Casing Record	Pumping Test
Casing diameter (s) <u>2"</u>	Static level <u>6</u>
Length (s) <u>21</u>	Pumping rate <u>800 G.P.H</u>
Type of screen	Pumping level <u>2.5 ft</u>
Length of screen	Duration of test <u>2 hr</u>

Well Log	Water Record				
Overburden and Bedrock Record	From ft.	To ft.	Depth (s) at which water (s) found	No. of feet water rises	Kind of water (fresh, salty, or sulphur)
<u>Sand</u>	<u>0</u>	<u>7</u>	<u>60</u>	<u>54</u>	<u>Fresh</u>
<u>Boulders and Sand</u>	<u>7</u>	<u>20</u>			
<u>Wt Sand stone</u>	<u>20</u>	<u>60</u>			


For what purpose(s) is the water to be used? House
 Is water clear or cloudy? clear
 Is well on upland, in valley, or on hillside? Upland
 Drilling firm F.R. Corbett
 Address 1252 Baseline Rd Cityville
 Name of Driller F.R. Corbett
 Address _____
 Licence Number 395

I certify that the foregoing statements of fact are true.

Date May 14/57 F.R. Corbett
 Signature of Licensee

Location of Well

In diagram below show distances of well from road and lot line. Indicate north by arrow.

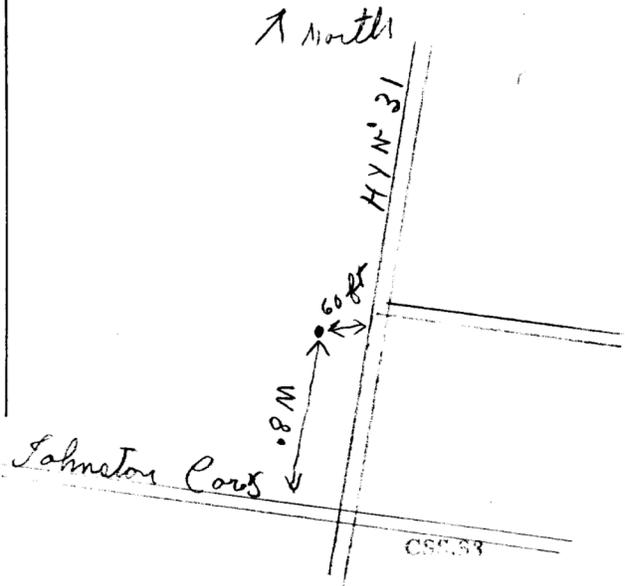

310/52

UTM 1182 415131040E
19R 5101161910N



GRAND WATER BRANCH
AUG 19 1957
ONTARIO WATER RESOURCES COMMISSION

Elev. 19R 0173.5 ft
Basin 215
Con IV
104 22

The Water-well Drillers Act, 1954
Department of Mines

Water-Well Record

County or Territorial District Carleton Township, Village, Town or City Gloucester
Address Bellings Bridge
(day) (month) (year)

Pipe and Casing Record

Pumping Test

Casing diameter (s) <u>4"</u>	Static level <u>13</u>
Length (s) <u>23 feet</u>	Pumping rate <u>240 gal PH</u>
Type of screen <u>1</u>	Pumping level <u>50 feet</u>
Length of screen	Duration of test <u>1 hour</u>

Well Log

Water Record

Overburden and Bedrock Record	From ft.	To ft.	Depth (s) at which water (s) found	No. of feet water rises	Kind of water (fresh, salty, or sulphur)
<u>hard granite</u>	0	18	<u>48 feet</u>	<u>37'</u>	<u>fresh</u>
<u>Clay & Sand & boulders</u>					<u>very hard</u>
<u>Very hard limestone</u>	18	50			
<u>Stone Rock</u>					

For what purpose(s) is the water to be used?
house hold use only

Is water clear or cloudy? Clear

Is well on upland, in valley, or on hillside?
uplands

Drilling firm
Address

Name of Driller James Kettle
Address (P. Ramsayville)


Licence Number 537

I certify that the foregoing statements of fact are true.

Date August 5 James Kettle
Signature of Licensee

Location of Well

In diagram below show distances of well from road and lot line. Indicate north by arrow.

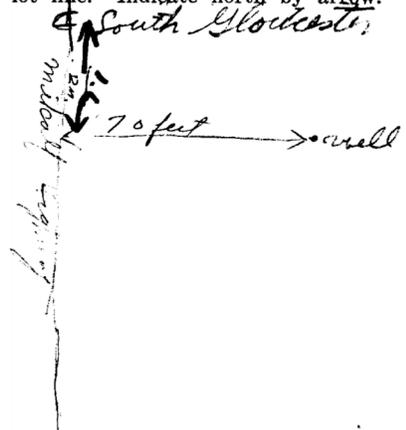

N/V

L.P.

316/52



GROUND WATER BRANCH
NOV 14 1961
15
ONTARIO WATER RESOURCES COMMISSION

2170

UTM 18 Z 41513810 E

15 R 510117310 N

Elev. 7 R 16 31215

Basin 215 | Carleton

The Ontario Water Resources Commission Act

WATER WELL RECORD

Township, Village, Town or City Gloucester

County or District
Con 4 R F Lot P.T.22 Date completed 6 10 1961
(day month year)

Address 28 Clarence St. Ottawa 2, Ont.

Casing and Screen Record

Inside diameter of casing 6 3/16
Total length of casing 21'
Type of screen
Length of screen
Depth to top of screen NONE
Diameter of finished hole 6"

Pumping Test

Static level 20'
Test-pumping rate 80 G.P.M.
Pumping level 70'
Duration of test pumping 1 hr.
Water clear or cloudy at end of test clear
Recommended pumping rate 80 G.P.M.
with pump setting of 80 feet below ground surface

Well Log


Water Record

Overburden and Bedrock Record	From ft.	To ft.	Depth(s) at which water(s) found	Kind of water (fresh, salty, sulphur)
Till and Boulder, Grey hard lime stone and sand stone.	0	16	85	fresh
SAND STONE	16	25		
Boulder Till	0	16		
HARD GREY LIMESTONE	16	25		
SANDSTONE	25	89	<u>85</u>	<u>FRESH</u>

For what purpose(s) is the water to be used?
Co-operative
Is well on upland, in valley, or on hillside? Valley
Drilling or Boring Firm J. B. Dufresne Co. Ltd.
Address Ottawa, Ontario.
Licence Number 194
Name of Driller or Borer W. Roy
Address Hull
Date Oct 10/60
J.B. Dufresne
(Signature of Licensed Drilling or Boring Contractor)

Location of Well

In diagram below show distances of well from road and lot line. Indicate north by arrow.

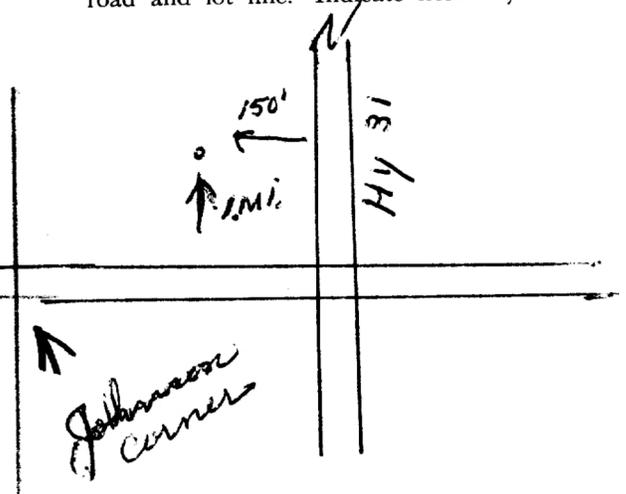

Form 7 15M Sets 60-5930

OWRC COPY

CS-193

316/52



GROUND WATER BRANCH
15 No 2180
AUG 15 1961
ONTARIO WATER
RESOURCES COMMISSION

UTM 11B 45T39710 E

5 R 5011711210 N

The Ontario Water Resources Commission Act

Elev. 4 R 3330

WATER WELL RECORD

Basin 25 County or District CHARLETON

Township, Village, Town or City GLOUCESTER

Con. 4RP Lot 22

Date completed 29 JUNE 61
(day month year)

Address BILLINGS BRIDGE

Casing and Screen Record

Inside diameter of casing 4"
Total length of casing 10'
Type of screen —
Length of screen —
Depth to top of screen —
Diameter of finished hole 4"

Pumping Test

Static level 6'
Test-pumping rate 8 4 G.P.M.
Pumping level 8
Duration of test pumping 1HR
Water clear or cloudy at end of test CLEAR
Recommended pumping rate 4 G.P.M.
with pump setting of 30' feet below ground surface

Well Log

Water Record

Overburden and Bedrock Record	From ft.	To ft.	Depth(s) at which water(s) found	Kind of water (fresh, salty, sulphur)
<u>LOAM</u>	<u>0</u>	<u>6</u>		
<u>GREY Limestone</u>	<u>6</u>	<u>55</u>	<u>55</u>	<u>FRESH</u>

For what purpose(s) is the water to be used?

HOUSE

Is well on upland, in valley, or on hillside?

Drilling or Boring Firm

M MEAGHER

Address

OTTAWA

Licence Number

245

Name of Driller or Borer

SAME

Address

Date

AUG 9/61


(Signature of Licensed Drilling or Boring Contractor)

M Meagher

Form 7 15M Sets 60-5930

Location of Well

In diagram below show distances of well from road and lot line. Indicate north by arrow.

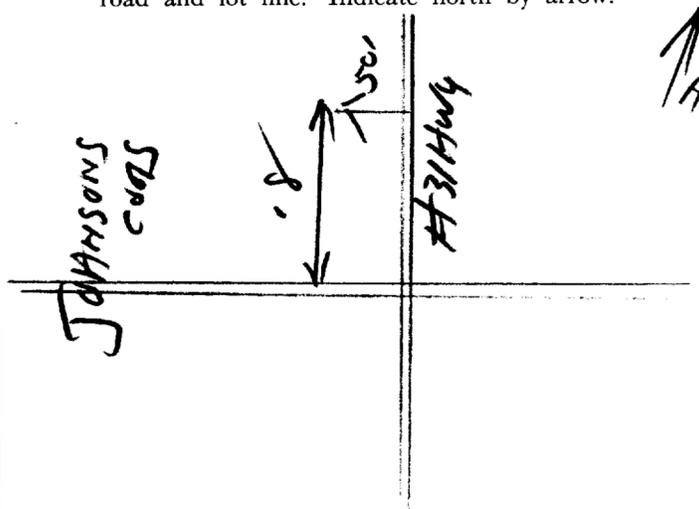

UTM 118^Z 41513181010^E

316/52



GROUND WATER BRANCH
 15 No. 2181
 SEP 5 1962
 ONTARIO WATER RESOURCES COMMISSION

5^R 51011751310^N
 The Ontario Water Resources Commission Act

Elev. 4^R 213115

WATER WELL RECORD

Basin 215 County or District CHARLETON Township, Village, Town or City GLoucester

Con. HRF Lot 2122 Date completed 26 JULY 62
 (day month year)



Address BILLINGS BRIDGE

Casing and Screen Record

Inside diameter of casing 4
 Total length of casing 21
 Type of screen -
 Length of screen -
 Depth to top of screen -
 Diameter of finished hole 4

Pumping Test

Static level 8
 Test-pumping rate 5 G.P.M.
 Pumping level 10
 Duration of test pumping 1 HR
 Water clear or cloudy at end of test cc
 Recommended pumping rate 5 G.P.M.
 with pump setting of 30 feet below ground surface


Well Log

Water Record

Overburden and Bedrock Record	From ft.	To ft.	Depth(s) at which water(s) found	Kind of water (fresh, salty, sulphur)
<u>CLAY</u>	<u>0</u>	<u>21</u>		
<u>LIMESTONE</u>	<u>21</u>	<u>46</u>	<u>46</u>	<u>F</u>

For what purpose(s) is the water to be used? Home
 Is well on upland, in valley, or on hillside? ✓
 Drilling or Boring Firm MEAGHER
 Address OTTAWA
 Licence Number 618
 Name of Driller or Borer same
 Address same
 Date 1962
 (Signature of Licensed Drilling or Boring Contractor)

Location of Well

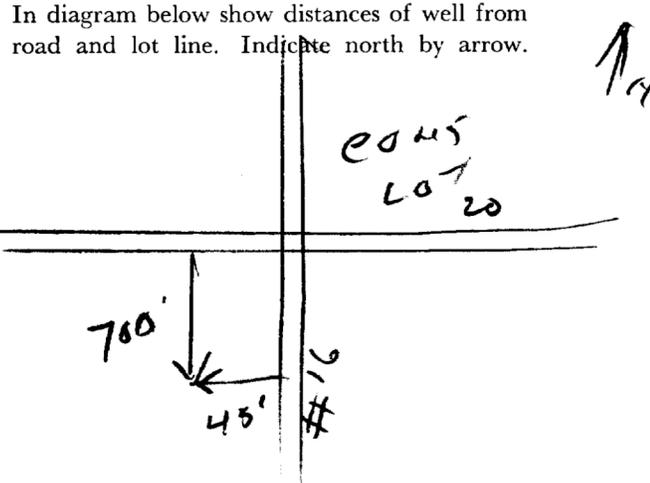

UTR *R.F.* *316/52*
Can 8 Z | *45401610* | E



15 No 2248

15 | *2* | *5* | *0* | *1* | *7* | *8* | *7* | *9* | N
 The Ontario Water Resources Commission Act

Elev. *4* R | *03110*

WATER WELL RECORD

Basin *25* | District *CARLETON*

Township, Village, Town or City *GLOUCESTER*

Con. *5 RP* Lot *21*

Date completed *25* *4* *1966*
 (day month year)

Address *P.O. BOX 212 R.R.#6 OTTAWA, ONT.*



Casing and Screen Record

Inside diameter of casing *6 1/4"*
 Total length of casing *21' 3"*
 Type of screen
 Length of screen
 Depth to top of screen
 Diameter of finished hole *6"*

Pumping Test

Static level *14'*
 Test-pumping rate *3* G.P.M.
 Pumping level *80*
 Duration of test pumping *1 1/2 HRS*
 Water clear or cloudy at end of test *CLEAR*
 Recommended pumping rate *3* G.P.M.
 with pump setting of *90* feet below ground surface

Well Log

Water Record

Overburden and Bedrock Record	From ft.	To ft.	Depth(s) at which water(s) found	Kind of water (fresh, salty, sulphur)
<i>TOP SOIL</i>	<i>0</i>	<i>1</i>		
<i>CLAY</i>	<i>1</i>	<i>6</i>		<i>FRESH</i>
<i>SANDSTONE</i>	<i>6</i>	<i>98</i>	<i>80 - 97</i>	

For what purpose(s) is the water to be used? *INDUSTRY*

Location of Well

In diagram below show distances of well from road and lot line. Indicate north by arrow.

Is well on upland, in valley, or on hillside? *Upland*

Drilling or Boring Firm *MCLEAN WATER SUPPLY LTD.*

Address *1532 RAVEN AVE OTTAWA, ONT.*


Licence Number *2154*

Name of Driller or Borer *LOUIS BURROWS*

Address

Date *APR. 26 - 1966*

A. S. Schaefer
 (Signature of Licensed Drilling or Boring Contractor)

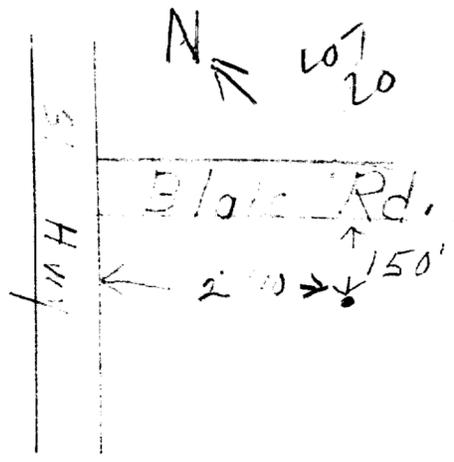



WATER RESOURCES DIVISION
 15 No. 2249
 DEC 14 1966
 ONTARIO WATER RESOURCES COMMISSION

UTM 118Z 4539610E

5R 50117810N

The Ontario Water Resources Commission Act

Elev. 4R 03010

WATER WELL RECORD

Basin 1251 | 1 | Carl
 County or District

Township, Village, Town or City Georgetown

Con. 5 1/2 Lot 21

Date completed 19 Nov. 1966
 (day month year)

Address RR #3 Metcalfe Ont



Casing and Screen Record

Inside diameter of casing 5"
 Total length of casing 20'
 Type of screen
 Length of screen
 Depth to top of screen
 Diameter of finished hole 5"

Pumping Test

Static level 15'
 Test-pumping rate 5 G.P.M.
 Pumping level 45'
 Duration of test pumping 1 hr
 Water clear or cloudy at end of test cloudy
 Recommended pumping rate 5 G.P.M.
 with pump setting of 75' feet below ground surface

Well Log


Water Record

Overburden and Bedrock Record	From ft.	To ft.	Depth(s) at which water(s) found	Kind of water (fresh, salty, sulphur)
<u>sand fill</u>	<u>0</u>	<u>4</u>	<u>83</u>	<u>fresh</u>
<u>sandstone</u>	<u>4</u>	<u>85</u>		

For what purpose(s) is the water to be used? old house
 Is well on upland, in valley, or on hillside? upland
 Drilling or Boring Firm Capital Water Supply
 Address 14 Ashford Dr Ottawa 6
 Licence Number 2158
 Name of Driller or Borer A Scott
 Address
 Date Nov 19, 1966
Walter Lavanagh
 (Signature of Licensed Drilling or Boring Contractor)

Location of Well

In diagram below show distances of well from road and lot line. Indicate north by arrow.

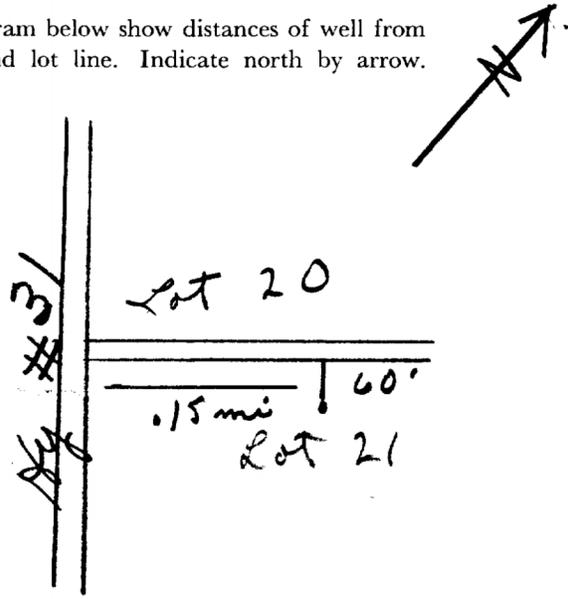

31G/52



WATER RESOURCES
DIVISION
15 No 2250
JAN 19 1965
ONTARIO WATER
RESOURCES COMMISSION

UTM 18Z 4541110E

Radian Point 5R 5011619210N

The Ontario Water Resources Commission Act

Elev. 4R 03413

WATER WELL RECORD

Basin 25 L Curleton

Township, Village, Town or City Gloucester

Con. V BF Lot 23

Date completed 14 Dec 1964
(day month year)

Address Box 254 RR6, Ottawa

Casing and Screen Record

Inside diameter of casing 5"
Total length of casing 10'
Type of screen none
Length of screen —
Depth to top of screen —
Diameter of finished hole 5"

Pumping Test

Static level 20'
Test-pumping rate 4 G.P.M.
Pumping level 65'
Duration of test pumping 1 1/2 hrs
Water clear or cloudy at end of test cloudy
Recommended pumping rate 4 G.P.M.
with pump setting of 75 feet below ground surface

Well Log

Water Record

Overburden and Bedrock Record	From ft.	To ft.	Depth(s) at which water(s) found	Kind of water (fresh, salty, sulphur)
loam	0	2		
Hard Sandstone	2	65		
Red Granite	65	79	60-79	fresh

For what purpose(s) is the water to be used?

house

Is well on upland, in valley, or on hillside? hillside

Drilling or Boring Firm

McWean Water Supply Ltd

Address 1532 Raven Ave

Ottawa

Licence Number 1328

Name of Driller or Borer H. Sally


Address

Date Dec 17, 1964

(Signature of Licensed Drilling or Boring Contractor)

Location of Well

In diagram below show distances of well from road and lot line. Indicate north by arrow.

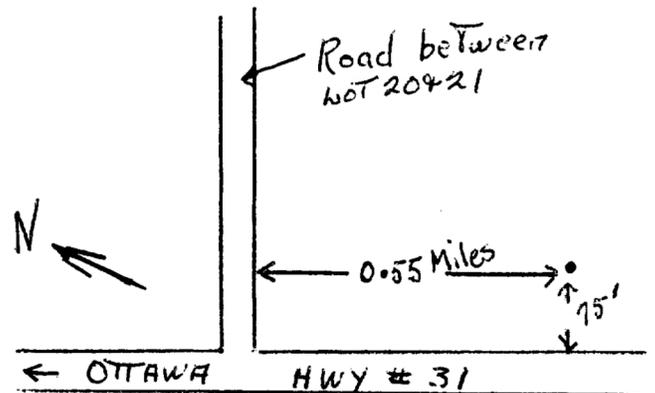

UTM 118 453 890
 584 501 7040
 Elev. 4 0308
 Section 25T



CODED
 The Ontario Water Resources Commission Act
WATER WELL RECORD

County or District **Carleton** Township, Village, Town or City **Gloucester**
 Con. **RF 5** Lot **2021** Date completed **6 December 1968**
 (day month year)
 address **Long Sault, Ontario**

Casing and Screen Record

Inside diameter of casing **6"**
 Total length of casing **15'**
 Type of screen **nil**
 Length of screen **n/a**
 Depth to top of screen **n/a**
 Diameter of finished hole **6"**

Pumping Test

Static level **2'**
 Test-pumping rate **10** G.P.M.
 Pumping level **5'**
 Duration of test pumping **1 Hour**
 Water clear or cloudy at end of test **cloudy**
 Recommended pumping rate **10** G.P.M.
 with pump setting of **25'** feet below ground surface

Well Log

Water Record

Overburden and Bedrock Record	From ft.	To ft.	Depth(s) at which water(s) found	Kind of water (fresh, salty, sulphur)
Closely packed Boulders	0'	13'		
Vary Abrasive Sandstone	13'	63'	60'	fresh

For what purpose(s) is the water to be used?
Trailer Sales Depot

Is well on upland, in valley, or on hillside? **Valley**

Drilling or Boring Firm
Blair Phillips Drilling Co. Ltd.,

Address **1119 Palaise Road, Ottawa 5, Ontario.**

Licence Number **2779**


Name of Driller or Borer **J. Moore**

Address **Kars, Ontario**

Date **6 December 1968**

(Signature of Licensed Drilling or Boring Contractor)

Location of Well

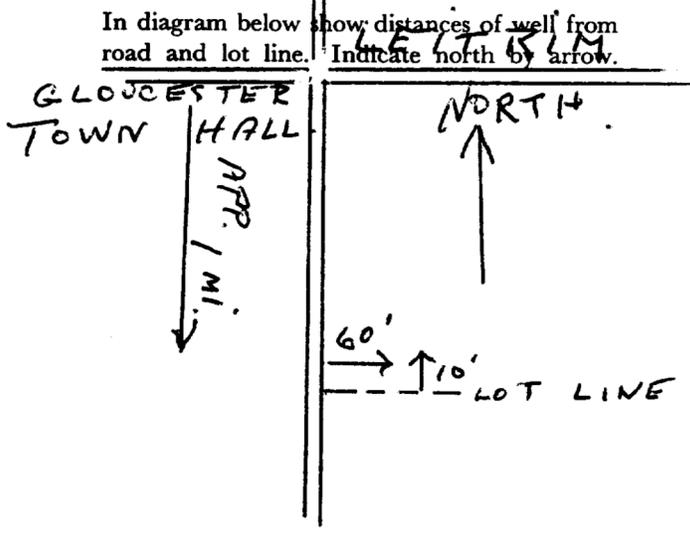



WATER WELL RECORD

Water management in Ontario 1. PRINT ONLY IN SPACES PROVIDED

2. CHECK CORRECT BOX WHERE APPLICABLE

MUNICIP. 11 1510717 15000 RF C. 05
 COUNTY OR DISTRICT CARLETON TOWNSHIP, BOROUGH, CITY, TOWN, VILLAGE GLOUCESTER
 CON., BLOCK, TRACT, SURVEY, ETC. 9 14 15 RF 023
 DATE COMPLETED 11-8-53 DAY 15 MO 00 YR 70
 NO. 016920 RC 4 LEVATION 10342 RC 14 BASIN CODE 25T

LOG OF OVERBURDEN AND BEDROCK MATERIALS (SEE INSTRUCTIONS)

GENERAL COLOUR	MOST COMMON MATERIAL	OTHER MATERIALS	GENERAL DESCRIPTION	DEPTH - FEET	
				FROM	TO
BROWN	RUBBLE	(FILLED IN LOT TO HIGHWAY GRADE)		0	6
GREY	LIMESTONE			6	52

31 000012 0052215
 32

41 WATER RECORD

0050

WATER FOUND AT - FEET	KIND OF WATER
10-13	1 <input checked="" type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL
15-18	1 <input type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL
20-23	1 <input type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL
25-28	1 <input type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL
30-33	1 <input type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL

51 CASING & OPEN HOLE RECORD

INSIDE DIAM. INCHES	MATERIAL	WALL THICKNESS INCHES	DEPTH - FEET	
			FROM	TO
06-10-11	1 <input checked="" type="checkbox"/> STEEL 2 <input type="checkbox"/> GALVANIZED 3 <input type="checkbox"/> CONCRETE 4 <input type="checkbox"/> OPEN HOLE	188	0	0020
17-18	1 <input type="checkbox"/> STEEL 2 <input type="checkbox"/> GALVANIZED 3 <input type="checkbox"/> CONCRETE 4 <input checked="" type="checkbox"/> OPEN HOLE			0052
24-25	1 <input type="checkbox"/> STEEL 2 <input type="checkbox"/> GALVANIZED 3 <input type="checkbox"/> CONCRETE 4 <input type="checkbox"/> OPEN HOLE			

SCREEN

SIZE(S) OF OPENING (SLOT NO.)	DIAMETER	LENGTH

MATERIAL AND TYPE

61 PLUGGING & SEALING RECORD

DEPTH SET AT - FEET		MATERIAL AND TYPE (CEMENT GROUT, LEAD PACKER, ETC.)
FROM	TO	
10-13	14-17	
18-21	22-25	
26-29	30-33	

71 PUMPING TEST

0006

1 PUMP 2 BAILER

STATIC LEVEL 007 FEET

WATER LEVELS DURING PUMPING

15 MINUTES	30 MINUTES	45 MINUTES	60 MINUTES
015	007	007	007


PUMP INTAKE SET AT 30 FEET

RECOMMENDED PUMP TYPE: 1 DEEP 2 SHALLOW

RECOMMENDED PUMP SETTING: 040 FEET

RECOMMENDED PUMPING RATE: 0005 GPM.

000.8 GPM./FT. SPECIFIC CAPACITY

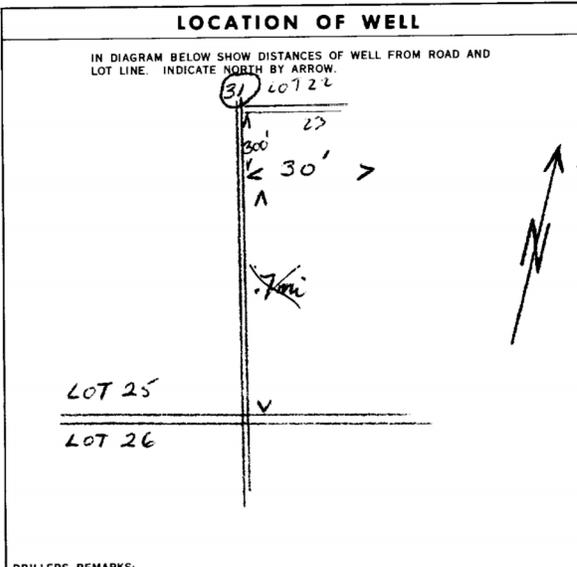

FINAL STATUS OF WELL

1 WATER SUPPLY 5 ABANDONED, INSUFFICIENT SUPPLY
 2 OBSERVATION WELL 6 ABANDONED, POOR QUALITY
 3 TEST HOLE 7 UNFINISHED
 4 RECHARGE WELL

WATER USE

05

1 DOMESTIC 5 COMMERCIAL
 2 STOCK 6 MUNICIPAL
 3 IRRIGATION 7 PUBLIC SUPPLY
 4 INDUSTRIAL 8 COOLING OR AIR CONDITIONING
 9 NOT USED

METHOD OF DRILLING

1 CABLE TOOL 6 BORING
 2 ROTARY (CONVENTIONAL) 7 DIAMOND
 3 ROTARY (REVERSE) 8 JETTING
 4 ROTARY (AIR) 9 DRIVING
 5 AIR PERCUSSION

CONTRACTOR

NAME OF WELL CONTRACTOR: W. MOLOUGHNEY LICENCE NUMBER: 3701
 ADDRESS: 1110 FISHER
 NAME OF DRILLER OR BORER: W. MOLOUGHNEY
 SIGNATURE OF CONTRACTOR: [Signature] SUBMISSION DATE: DAY 11 MO. FEB. YR. 71

OFFICE USE ONLY

DATA SOURCE: 1 CONTRACTOR: 3701 DATE RECEIVED: 230271
 DATE OF INSPECTION: INSPECTOR: [Signature]
 REMARKS: P/WI



The Ontario Water Resources Commission Act WATER WELL RECORD

31/5/50

Water management in Ontario 1. PRINT ONLY IN SPACES PROVIDED
2. CHECK CORRECT BOX WHERE APPLICABLE

MUNICIP. 11 1512265-15002 RF 05
CON. 15 22 23 24

COUNTY OR DISTRICT Carleton TOWNSHIP, BOROUGH, CITY, TOWN, VILLAGE Gloucester 3 9 5 RF
BLOCK, TRACT, SURVEY, ETC. 5 RF
LOT 22 23 24
DATE COMPLETED 8-11-2022
DAY 24 MO. Nov. YR. 72

OWNER (SURNAME, FIRST, MIDDLE) ADDRESS
PHONE NO. 017050 RC. 4 ELEVATION 4336 RC. 31 BASIN CODE 251
24 25 26 30 31

LOG OF OVERBURDEN AND BEDROCK MATERIALS (SEE INSTRUCTIONS)

GENERAL COLOUR	MOST COMMON MATERIAL	OTHER MATERIALS	GENERAL DESCRIPTION	DEPTH - FEET	
				FROM	TO
Brown	Clay	Sand & Stones	Sandy Clay & Stones	0	3
			Med. gray limestone	3	48

31 0003652812 0048215
32

41 WATER RECORD

WATER FOUND AT - FEET	KIND OF WATER
10-13	1 <input checked="" type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL
15-18	1 <input checked="" type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL
20-23	1 <input checked="" type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL
25-28	1 <input type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL
30-33	1 <input type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL

51 CASING & OPEN HOLE RECORD

INSIDE DIA. INCHES	MATERIAL	WALL THICKNESS INCHES	DEPTH - FEET
10-11	1 <input checked="" type="checkbox"/> STEEL 2 <input type="checkbox"/> GALVANIZED 3 <input type="checkbox"/> CONCRETE 4 <input type="checkbox"/> OPEN HOLE		13-16
17-18	1 <input type="checkbox"/> STEEL 2 <input type="checkbox"/> GALVANIZED 3 <input type="checkbox"/> CONCRETE 4 <input checked="" type="checkbox"/> OPEN HOLE	.250	20-23
24-25	1 <input type="checkbox"/> STEEL 2 <input type="checkbox"/> GALVANIZED 3 <input type="checkbox"/> CONCRETE 4 <input type="checkbox"/> OPEN HOLE		27-30

61 PLUGGING & SEALING RECORD

DEPTH SET AT - FEET	MATERIAL AND TYPE
10-13	14-17
18-21	22-25
26-29	30-33

PUMPING TEST

11-14 PUMPING RATE 0008 GPM. 15-16 DURATION OF PUMPING 01 HOURS 17-18 00 MINS.

25 WATER LEVELS DURING PUMPING

STATIC LEVEL	WATER LEVEL END OF PUMPING	WATER LEVELS DURING PUMPING
19-21	22-24	15 MINUTES 25-28 004 FEET 30 MINUTES 29-31 004 FEET 45 MINUTES 32-34 004 FEET 60 MINUTES 35-37 004 FEET


38-41 PUMP INTAKE SET AT 48 FEET

42 WATER AT END OF TEST CLEAR

43-45 RECOMMENDED PUMP SETTING 030 FEET

46-49 RECOMMENDED PUMPING RATE 0008 GPM.

50-53 000.2 GPM./FT. SPECIFIC CAPACITY

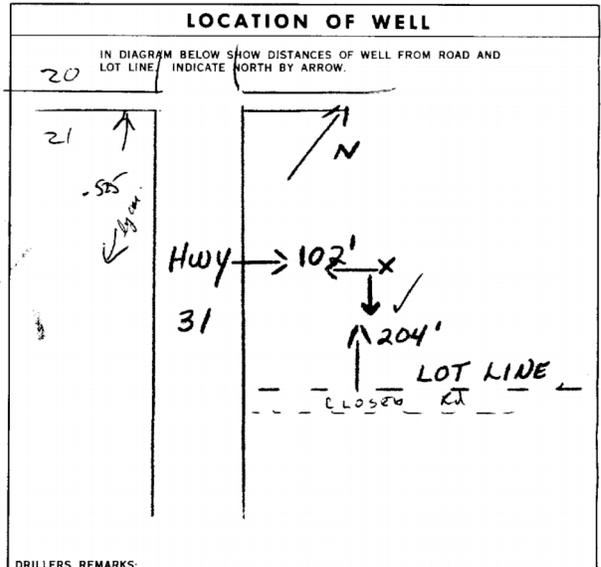

54 FINAL STATUS OF WELL

1 WATER SUPPLY 5 ABANDONED, INSUFFICIENT SUPPLY
2 OBSERVATION WELL 6 ABANDONED, POOR QUALITY
3 TEST HOLE 7 UNFINISHED
4 RECHARGE WELL

55-56 WATER USE 01

1 DOMESTIC 5 COMMERCIAL
2 STOCK 6 MUNICIPAL
3 IRRIGATION 7 PUBLIC SUPPLY
4 INDUSTRIAL 8 COOLING OR AIR CONDITIONING
9 OTHER 9 NOT USED

57 METHOD OF DRILLING

1 CABLE TOOL 6 BORING
2 ROTARY (CONVENTIONAL) 7 DIAMOND
3 ROTARY (REVERSE) 8 JETTING
4 ROTARY (AIR) 9 DRIVING
5 AIR PERCUSSION

DRILLERS REMARKS:

OFFICE USE ONLY

DATA SOURCE 1 58 CONTRACTOR 3002 59-62 DATE RECEIVED 150173 63-68 80

DATE OF INSPECTION 1 3002 INSPECTOR K

REMARKS: P K
WI

NAME OF WELL CONTRACTOR F. E. Johnston Drilling Co. LICENCE NUMBER 3002

ADDRESS P.O. Box 4134 Stn "E" Ottawa, Ont.

NAME OF DRILLER OR BOREMAN Ramon

SUBMISSION DATE DAY MO. YR.

XC COPY

Well ID Number: 1512375
Well Audit Number:
Well Tag Number:

This table contains information from the original well record and any subsequent updates.

Well Location

Address of Well Location	
Township	GLOUCESTER TOWNSHIP
Lot	022
Concession	RF 04
County/District/Municipality	OTTAWA-CARLETON
City/Town/Village	
Province	ON
Postal Code	n/a
UTM Coordinates	NAD83 — Zone 18 Easting: 454020.70 Northing: 5017262.00
Municipal Plan and Sublot Number	
Other	

Overburden and Bedrock Materials Interval

General Colour	Most Common Material	Other Materials	General Description	Depth From	Depth To
BRWN	OBDN	SAND		0 ft	9 ft
WHIT	SNDS			9 ft	74 ft

Annular Space/Abandonment Sealing Record

Depth From	Depth To	Type of Sealant Used (Material and Type)	Volume Placed
------------	----------	--	---------------

Method of Construction & Well Use

Method of Construction	Well Use
Diamond	Domestic

Status of Well

Water Supply

Construction Record - Casing

Inside Diameter	Open Hole or material	Depth From	Depth To
2 inch	GALVANIZED		20 ft
	OPEN HOLE		74 ft

Construction Record - Screen

Outside Diameter	Material	Depth From	Depth To
------------------	----------	------------	----------

Well Contractor and Well Technician Information

Well Contractor's Licence Number: 1703

Results of Well Yield Testing

After test of well yield, water was	CLEAR
If pumping discontinued, give reason	
Pump intake set at	
Pumping Rate	8 GPM
Duration of Pumping	2 h:0 m
Final water level	12 ft
If flowing give rate	
Recommended pump depth	35 ft
Recommended pump rate	8 GPM
Well Production	PUMP
Disinfected?	

Draw Down & Recovery

Draw Down Time(min)	Draw Down Water level	Recovery Time(min)	Recovery Water level
SWL	6 ft		
1		1	
2		2	
3		3	
4		4	
5		5	
10		10	
15	12 ft	15	
20		20	
25		25	
30	12 ft	30	
40		40	
45	12 ft	45	
50		50	
60	12 ft	60	

Water Details

Water Found at Depth	Kind
74 ft	Fresh

Hole Diameter

Depth From	Depth To	Diameter
------------	----------	----------

Audit Number:

Date Well Completed: November 27, 1972

Date Well Record Received by MOE: March 07, 1973

Updated: February 2, 2018

Rate [Rate](#)

Share [facebook](#) [twitter](#) [Print](#)

Tags

- [Environment and energy.](#)



The Ontario Water Resources Act WATER WELL RECORD

1. PRINT ONLY IN SPACES PROVIDED
2. CHECK CORRECT BOX WHERE APPLICABLE

11

1594664

COUNTY OR DISTRICT Carleton	TOWNSHIP, BOROUGH, CITY, TOWN, VILLAGE Gloucester	CON., BLOCK, TRACT, SURVEY, ETC. 111	LOT NO. 22
OWNER (SURNAME FIRST) Canadian Industries Ltd.	ADDRESS Hwy # 31 Ottawa Ont	DATE COMPLETED DAY 20 NO. 2 YR. 25	

21	ZONE	EASTING	NORTHING	RC	ELEVATION	RC	Basin CODE	II	11	IV
----	------	---------	----------	----	-----------	----	------------	----	----	----

LOG OF OVERBURDEN AND BEDROCK MATERIALS (SEE INSTRUCTIONS)					
GENERAL COLOUR	MOST COMMON MATERIAL	OTHER MATERIALS	GENERAL DESCRIPTION	DEPTH - FEET	
				FROM	TO
Brown	Sand Gravel	Boulders	Dense	0	13
Black	Shale		Loose	13	30
Grey	Limestone		Sand	30	111
White	Sandstone		Sand	111	125

31	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
----	---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----


41 WATER RECORD	
WATER FOUND AT - FEET	KIND OF WATER
32	1 <input checked="" type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 14 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL
111	1 <input checked="" type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 19 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL
	20-23 1 <input type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 24 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL
	25-28 1 <input type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 29 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL
	30-33 1 <input type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 34 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL

51 CASING & OPEN HOLE RECORD				
INSIDE DIAM. INCHES	MATERIAL	WALL THICKNESS INCHES	DEPTH - FEET	
			FROM	TO
6 1/4	1 <input checked="" type="checkbox"/> STEEL 12 2 <input type="checkbox"/> GALVANIZED 3 <input type="checkbox"/> CONCRETE 4 <input type="checkbox"/> OPEN HOLE	.185	0	22
5 7/8	1 <input type="checkbox"/> STEEL 19 2 <input type="checkbox"/> GALVANIZED 3 <input type="checkbox"/> CONCRETE 4 <input checked="" type="checkbox"/> OPEN HOLE		22	125
	24-25 1 <input type="checkbox"/> STEEL 28 2 <input type="checkbox"/> GALVANIZED 3 <input type="checkbox"/> CONCRETE 4 <input type="checkbox"/> OPEN HOLE			27-30

SCREEN	SIZE(S) OF OPENING (SLOT NO.)	DIAMETER	LENGTH
		INCHES	FEET
	MATERIAL AND TYPE	DEPTH TO TOP OF SCREEN	
		41-44	FEET

61 PLUGGING & SEALING RECORD		
DEPTH SET AT - FEET		MATERIAL AND TYPE (CEMENT GROUT, LEAD PACKER, ETC.)
FROM	TO	
10-13	18-17	
18-21	22-25	
26-29	30-33	RD

71 PUMPING TEST	PUMPING TEST METHOD	10 PUMPING RATE	11-14 DURATION OF PUMPING	15-16 HOURS	17-18 MINS
	1 <input checked="" type="checkbox"/> PUMP 2 <input type="checkbox"/> BAILER	12	GPM	1	15
	STATIC LEVEL	25 WATER LEVELS DURING	1 <input type="checkbox"/> PUMPING	2 <input type="checkbox"/> RECOVERY	
	19-21 20	22-24 20	25-28 20	30-31 20	32-34 20
	IF FLOWING GIVE RATE	38-41 PUMP INTAKE SET AT	42 WATER AT END OF TEST	1 <input checked="" type="checkbox"/> CLEAR 2 <input type="checkbox"/> CLOUDY	
		80			
	RECOMMENDED PUMP TYPE	43-45 RECOMMENDED PUMP SETTING	46-49 RECOMMENDED PUMPING RATE		
	<input type="checkbox"/> SHALLOW <input checked="" type="checkbox"/> DEEP	80	8		

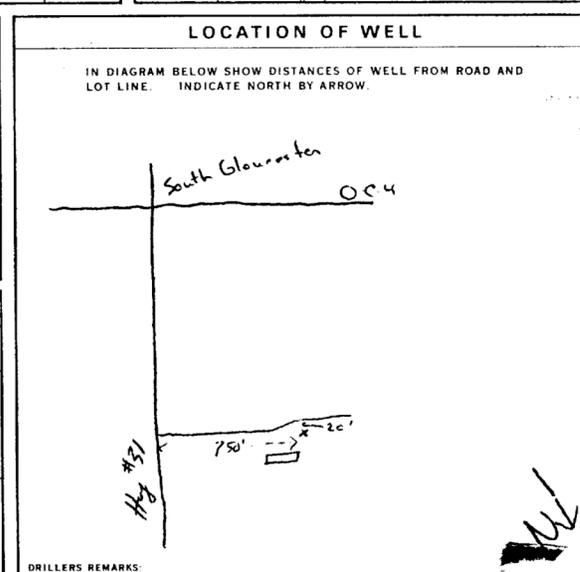

54 FINAL STATUS OF WELL	1 <input checked="" type="checkbox"/> WATER SUPPLY 5 <input type="checkbox"/> ABANDONED, INSUFFICIENT SUPPLY 2 <input type="checkbox"/> OBSERVATION WELL 6 <input type="checkbox"/> ABANDONED, POOR QUALITY 3 <input type="checkbox"/> TEST HOLE 7 <input type="checkbox"/> UNFINISHED 4 <input type="checkbox"/> RECHARGE WELL
55-56 WATER USE	1 <input type="checkbox"/> DOMESTIC 5 <input type="checkbox"/> COMMERCIAL 2 <input type="checkbox"/> STOCK 6 <input type="checkbox"/> MUNICIPAL 3 <input type="checkbox"/> IRRIGATION 7 <input type="checkbox"/> PUBLIC SUPPLY 4 <input checked="" type="checkbox"/> INDUSTRIAL 8 <input type="checkbox"/> COOLING OR AIR CONDITIONING 9 <input type="checkbox"/> OTHER 9 <input type="checkbox"/> NOT USED
57 METHOD OF DRILLING	1 <input type="checkbox"/> CABLE TOOL 6 <input type="checkbox"/> BORING 2 <input type="checkbox"/> ROTARY (CONVENTIONAL) 7 <input type="checkbox"/> DIAMOND 3 <input type="checkbox"/> ROTARY (REVERSE) 8 <input type="checkbox"/> JETTING 4 <input type="checkbox"/> ROTARY (AIR) 9 <input type="checkbox"/> DRIVING 5 <input checked="" type="checkbox"/> AIR PERCUSSION

CONTRACTOR	NAME OF WELL CONTRACTOR Hawthorne Drilling Ltd	LICENCE NUMBER 2558
	ADDRESS PO Box 4218 Stat E	
	NAME OF DRILLER OR BORER A. Emond	LICENCE NUMBER 2558
	SIGNATURE OF CONTRACTOR <i>[Signature]</i>	SUBMISSION DATE DAY 24 MO. 2 YR. 25

OFFICE USE ONLY	DATA SOURCE	58 CONTRACTOR	59-62 DATE RECEIVED	63-68
			6/20/25	
	DATE OF INSPECTION	INSPECTOR		
	REMARKS			
				P WI



Ontario

WATER WELL RECORD

316/5a

1. PRINT ONLY IN SPACES PROVIDED.
2. CHECK CORRECT BOX WHERE APPLICABLE

11 | 1514840 | 15002 RE | 06

COUNTY OR DISTRICT Ottawa	TOWNSHIP, BOROUGH, CITY, TOWN, VILLAGE Gloucester	CON. BLOCK, TRACT, SURVEY, ETC. 23	LOT RE 023
OWNER (SURNAME FIRST) Hume Trading Co Ltd	ADDRESS P.O. Box 254 R.R. #6	DATE COMPLETED DAY 11 MO 07 YR 75	

21	U ZONE 18	EASTING 454143	NORTHING 5016952	PC 4	ELEVATION 0345	RC 4	BSIN CODE 26
----	---------------------	--------------------------	----------------------------	----------------	--------------------------	----------------	------------------------

GENERAL COLOUR	MOST COMMON MATERIAL	OTHER MATERIALS	GENERAL DESCRIPTION	DEPTH - FEET	
				FROM	TO
Brown	Top Soil		Top Soil	0	3
Grey	Limestone		Med	3	135

31 | 0003602 | 0135216

32

2.1 WATER RECORD

WATER FOUND AT - FEET	KIND OF WATER
10-13	1 <input checked="" type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL
15-18	1 <input type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL
20-23	1 <input type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL
25-28	1 <input type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL
30-33	1 <input type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL

51 CASING & OPEN HOLE RECORD

INSIDE DIAM. INCHES	MATERIAL	WALL THICKNESS INCHES	DEPTH - FEET	
			FROM	TO
06	1 STEEL 2 GALVANIZED 3 CONCRETE 4 OPEN HOLE	1.88	0	20
06	1 STEEL 2 GALVANIZED 3 CONCRETE 4 OPEN HOLE		20	0135

61 PLUGGING & SEALING RECORD

DEPTH SET AT - FEET	MATERIAL AND TYPE (CEMENT GROUT, LEAD PACKER, ETC.)
10-13	14-17
18-21	22-25
26-29	30-33

71 PUMPING TEST METHOD

1 PUMP 2 BAILER

PUMPING RATE: 0009 GPM

DURATION OF PUMPING: 01 HOURS 10 MINS


STATIC LEVEL	WATER LEVEL END OF PUMPING	WATER LEVELS DURING
020	090	090 (15 min), 090 (30 min), 090 (45 min), 090 (60 min)

PUMP INTAKE SET AT: 90 FEET

RECOMMENDED PUMP TYPE: SHALLOW DEEP

RECOMMENDED PUMP SETTING: 090 FEET

RECOMMENDED PUMP RATE: 0006 GPM

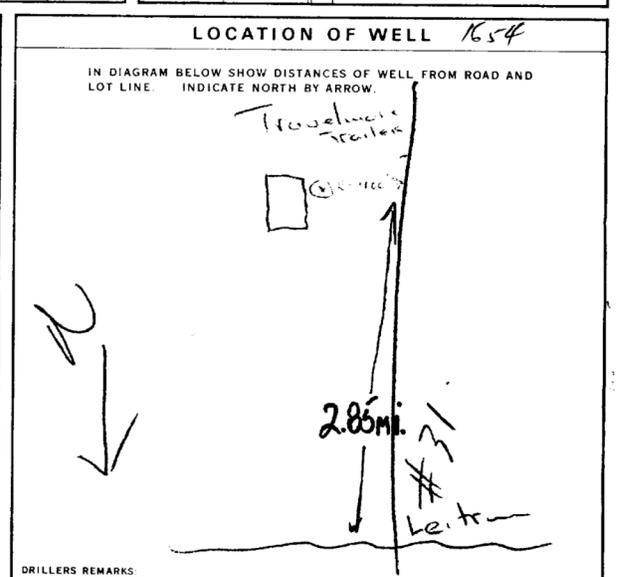

FINAL STATUS OF WELL: 1 WATER SUPPLY

WATER USE: 01 (DOMESTIC)

METHOD OF DRILLING: 5 (AIR PERCUSSION)

CONTRACTOR: Hume Drilling Ltd, Licence Number 2557

Address: P.O. Box 9215, St. E. Ottawa

Name of Driller or Borer: A. Emerald, Licence Number 2557

Submission Date: DAY 15 MO 7 YR 75

OFFICE USE ONLY

DATA SOURCE: 1

CONTRACTOR: 2557

DATE RECEIVED: 06 08 75

DATE OF INSPECTION: [blank]

INSPECTOR: [blank]

REMARKS: [blank]

P

WI



MINISTRY OF THE ENVIRONMENT The Ontario Water Resources Act WATER WELL RECORD

316-5a

1. PRINT ONLY IN SPACES PROVIDED
2. CHECK CORRECT BOX WHERE APPLICABLE

(11) 1516052-1
MUNICIPALITY 15002 CON. BLOCK, TRACT. SURVEY, ETC. RF RF OS

COUNTY OR DISTRICT Carleton	TOWNSHIP, BOROUGH, CITY, TOWN, VILLAGE Gloucester	CON. BLOCK, TRACT. SURVEY, ETC. RF II	LOT NO. 022
OWNER (SURNAME FIRST) Melco Investors Corp.	ADDRESS 934 Sailler Cres. Ottawa, Ont. K2B 5H7	DATE COMPLETED DAY 13 MONTH 07 YEAR 77	

U.T.M. ZONE **18** EASTING **454099** NORTHING **5017399** H.C. **4** ELEVATION **0330** B.A.S. CODE **9 A.6**

GENERAL COLOUR	MOST COMMON MATERIAL	OTHER MATERIALS	GENERAL DESCRIPTION	DEPTH - FEET	
				FROM	TO
brown	sand	clay & boulders	fill	0	7
black	muck		soft	7	9
grey	hardpan	boulders	packed	9	26
grey	limestone		medium	26	43
grey	sandstone		hard	43	178


(31) 00076280519 000980385 00262141379 004321578 017821873
32

WATER FOUND AT - FEET	KIND OF WATER
0175	1 FRESH 3 SULPHUR 2 SALTY 4 MINERAL
15-18	1 FRESH 3 SULPHUR 2 SALTY 4 MINERAL
20-23	1 FRESH 3 SULPHUR 2 SALTY 4 MINERAL
25-28	1 FRESH 3 SULPHUR 2 SALTY 4 MINERAL
30-33	1 FRESH 3 SULPHUR 2 SALTY 4 MINERAL

INSIDE DIAM. INCHES	MATERIAL	WALL THICKNESS INCHES	DEPTH - FEET
6 7/8	1 STEEL 2 GALVANIZED 3 CONCRETE	188	0 0028
06	1 STEEL 2 GALVANIZED 3 CONCRETE 4 OPEN HOLE		28 478
06	1 STEEL 2 GALVANIZED 3 CONCRETE 4 OPEN HOLE		0178
24-25	1 STEEL 2 GALVANIZED 3 CONCRETE 4 OPEN HOLE		27-30

DEPTH SET AT - FEET	MATERIAL AND TYPE	(CEMENT GROUT, LEAD PACKER, ETC.)
10-13	14-17	
18-21	22-25	
26-29	30-33	

PUMPING METHOD	PUMPING RATE	DURATION OF PUMPING
1 PUMP 2 BAILEY	0015 GPM	01 HOURS 00 MINS
STATIC LEVEL	WATER LEVELS DURING	1 PUMPING 2 RECOVERY
030 FEET	19-21 065 FEET 22-24 065 FEET 26-28 065 FEET 29-31 065 FEET 32-34 065 FEET 35-37 065 FEET	
RECOMMENDED PUMP TYPE	RECOMMENDED PUMP SETTING	RECOMMENDED PUMPING RATE
1 SHALLOW 2 DEEP	075 FEET	0005 GPM

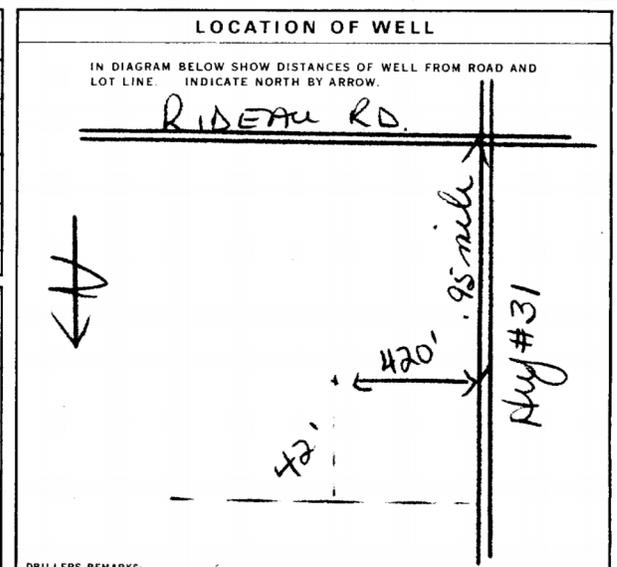

FINAL STATUS OF WELL 1	1 WATER SUPPLY 5 ABANDONED, INSUFFICIENT SUPPLY 2 OBSERVATION WELL 6 ABANDONED, POOR QUALITY 3 TEST HOLE 7 UNFINISHED 4 RECHARGE WELL
WATER USE 01	1 DOMESTIC 5 COMMERCIAL 2 STOCK 6 MUNICIPAL 3 IRRIGATION 7 PUBLIC SUPPLY 4 INDUSTRIAL 8 COOLING OR AIR CONDITIONING 9 OTHER 9 NOT USED
METHOD OF DRILLING 5	1 CABLE TOOL 6 BORING 2 ROTARY (CONVENTIONAL) 7 DIAMOND 3 ROTARY (REVERSE) 8 JETTING 4 ROTARY (AIR) 9 DRIVING 5 AIR PERCUSSION

NAME OF WELL CONTRACTOR Capital Water Supply Ltd.	LICENCE NUMBER 1558
ADDRESS Box 490 Stittsville, Ontario	
NAME OF DRILLER OR BORER Kevin Keenan	LICENCE NUMBER
SUBMISSION DATE DAY 15 MONTH 7 YEAR 77	

DATA SOURCE 1	CONTRACTOR 1558	DATE RECEIVED 080877
DATE OF INSPECTION	INSPECTOR kn.	
REMARKS		P WI



Ministry
of the
Environment
Ontario

The Ontario Water Resources Act

WATER WELL RECORD

316 5a

1517349

MUNICIPALITY 15002

05

1. PRINT ONLY IN SPACES PROVIDED
2. CHECK CORRECT BOX WHERE APPLICABLE

COUNTY OR DISTRICT: Ottawa C. D. T. TOWNSHIP, BOROUGH, CITY, TOWN, VILLAGE: Gloucester CON. BLOCK, TRACT, SURVEY, ETC.: 5 R.F. LOT: 25-27

DATE COMPLETED: 09/06/80

POST OFFICE: #6 Ottawa Ont. ELEVATION: 0305 BASIN CODE: 26

LOG OF OVERBURDEN AND BEDROCK MATERIALS (SEE INSTRUCTIONS)

GENERAL COLOUR	POST COMMON MATERIAL	OTHER MATERIALS	GENERAL DESCRIPTION	DEPTH - FEET	
				FROM	TO
Brown	sandy soil	stone		0	8
Brown	hard	granite rock.		8	27

31 00086021281 00276211373

32

41 WATER RECORD

WATER FOUND AT - FEET	KIND OF WATER
10-13	1 <input checked="" type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL
15-18	1 <input type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL
20-23	1 <input type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL
25-28	1 <input type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL
30-33	1 <input type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL

51 CASING & OPEN HOLE RECORD

INSIDE DIAM. INCHES	MATERIAL	WALL THICKNESS INCHES	DEPTH - FEET
06 10 1/2	2 STEEL		0-18
6 1/4	2 GALVANIZED	188	18-30
17-18	1 STEEL		20-23
24-25	2 GALVANIZED		27-30

SCREEN


SIZE(S) OF OPENING (SLOT NO.)	DIAMETER INCHES	LENGTH FEET
MATERIAL AND TYPE		DEPTH TO TOP OF SCREEN FEET

61 PLUGGING & SEALING RECORD

DEPTH SET AT - FEET	MATERIAL AND TYPE	(CEMENT GROUT LEAD PACKER, ETC.)
10-13		
18-21		
26-29		

71 PUMPING TEST

1 <input type="checkbox"/> PUMP	2 <input checked="" type="checkbox"/> BAILER	10 PUMPING RATE: 0015 GPM	11-14 DURATION OF PUMPING: 01 HOURS 00 MINS
19-21	005 FEET	22-24	014 FEET
26-28	012 FEET	29-31	014 FEET
32-34	014 FEET	35-37	014 FEET
RECOMMENDED PUMP TYPE: <input checked="" type="checkbox"/> SHALLOW <input type="checkbox"/> DEEP		RECOMMENDED PUMP SETTING: 023 FEET	RECOMMENDED PUMPING RATE: 0007 GPM

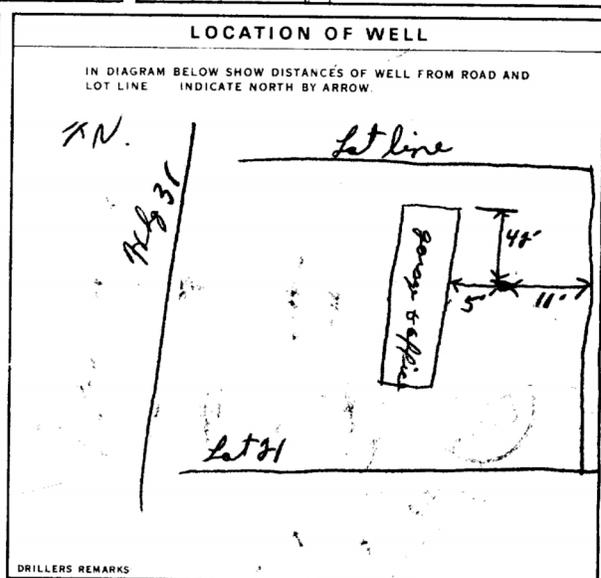

FINAL STATUS OF WELL

1 WATER SUPPLY 5 ABANDONED, INSUFFICIENT SUPPLY
2 OBSERVATION WELL 6 ABANDONED, POOR QUALITY
3 TEST HOLE 7 UNFINISHED
4 RECHARGE WELL

WATER USE

1 DOMESTIC 5 COMMERCIAL
2 STOCK 6 MUNICIPAL
3 IRRIGATION 7 PUBLIC SUPPLY
4 INDUSTRIAL 8 COOLING OR AIR CONDITIONING
9 OTHER 9 NOT USED

METHOD OF DRILLING

1 RIGID FOOT 6 BORING
2 ROTARY (CONVENTIONAL) 7 DIAMOND
3 ROTARY (REVERSE) 8 JETTING
4 ROTARY (AIR) 9 DRIVING
5 AIR PERCUSSION

CONTRACTOR

NAME OF WELL CONTRACTOR: Maxine Cyn Ltd. LICENCE NUMBER: 1517
ADDRESS: Carleton Ont.
NAME OF DRILLER OR BORER: _____ LICENCE NUMBER: _____
SIGNATURE OF CONTRACTOR: Maxine Cyn SUBMISSION DATE: _____

OFFICE USE ONLY

DATA SOURCE: 1 CONTRACTOR: 1517 DAY RECORD NUMBER: 020980
DATE OF INSPECTION: _____ INSPECTOR: Km



Ministry
of the
Environment

The Ontario Water Resources Act

WATER WELL RECORD

1517349

1. PRINT ONLY IN SPACES PROVIDED

2. CHECK CORRECT BOX WHERE APPLICABLE

11

COUNTY OR DISTRICT: Ottawa Carleton TOWNSHIP: Blouin CON. BLOCK, TRACT, SURVEY ETC: 5 LOT: 21
 ADDRESS: R.R. #6 Ottawa Ont. DATE COMPLETED: 9 NOV 80

ZONE EASTING NORTHING ELEVATION BASIN CODE

GENERAL COLOUR	MOST COMMON MATERIAL	OTHER MATERIALS	GENERAL DESCRIPTION	DEPTH - FEET	
				FROM	TO
<u>Brown</u>	<u>sandy soil</u>	<u>stone</u>		<u>0</u>	<u>8</u>
<u>Brown</u>	<u>hard</u>	<u>granite rock</u>		<u>8</u>	<u>29</u>

31
32

<p>41 WATER RECORD</p> <p>WATER FOUND AT - FEET: <u>27</u></p> <p>KIND OF WATER: <input checked="" type="checkbox"/> FRESH <input type="checkbox"/> SALTY <input type="checkbox"/> SULPHUR <input type="checkbox"/> MINERAL</p>	<p>51 CASING & OPEN HOLE RECORD</p> <table border="1"> <tr> <th>INSIDE DIAM INCHES</th> <th>MATERIAL</th> <th>WALL THICKNESS INCHES</th> <th>DEPTH - FEET</th> </tr> <tr> <td><u>6 1/4</u></td> <td><u>STEEL</u></td> <td><u>188</u></td> <td><u>0</u> <u>20</u></td> </tr> </table>	INSIDE DIAM INCHES	MATERIAL	WALL THICKNESS INCHES	DEPTH - FEET	<u>6 1/4</u>	<u>STEEL</u>	<u>188</u>	<u>0</u> <u>20</u>	<p>SCREEN</p> <p>SIZE(S) OF OPENING (SLOT NO.): <u>1</u></p> <p>DIAMETER: <u>1</u> INCHES</p> <p>LENGTH: <u>20</u> FEET</p> <p>MATERIAL AND TYPE: <u>STEEL</u></p> <p>DEPTH TO TOP OF SCREEN: <u>20</u> FEET</p>
INSIDE DIAM INCHES	MATERIAL	WALL THICKNESS INCHES	DEPTH - FEET							
<u>6 1/4</u>	<u>STEEL</u>	<u>188</u>	<u>0</u> <u>20</u>							

<p>71 PUMPING TEST</p> <p>PUMPING TEST METHOD: <input type="checkbox"/> PUMP <input checked="" type="checkbox"/> BAILEY</p> <p>PUMPING RATE: <u>15</u> GPM</p> <p>DURATION OF PUMPING: <u>1</u> HOURS</p> <p>WATER LEVELS DURING PUMPING: <u>14</u> FEET</p> <p>RECOMMENDED PUMP TYPE: <input checked="" type="checkbox"/> SHALLOW <input type="checkbox"/> DEEP</p>	<p>61 PLUGGING & SEALING RECORD</p> <table border="1"> <tr> <th>DEPTH SET AT - FEET</th> <th>MATERIAL AND TYPE</th> </tr> <tr> <td><u>2</u> <u>10-13</u></td> <td><u>1</u> <u>14-17</u></td> </tr> </table>	DEPTH SET AT - FEET	MATERIAL AND TYPE	<u>2</u> <u>10-13</u>	<u>1</u> <u>14-17</u>
DEPTH SET AT - FEET	MATERIAL AND TYPE				
<u>2</u> <u>10-13</u>	<u>1</u> <u>14-17</u>				

<p>FINAL STATUS OF WELL: <input checked="" type="checkbox"/> WATER SUPPLY</p> <p>WATER USE: <input checked="" type="checkbox"/> DOMESTIC</p> <p>METHOD OF DRILLING: <input checked="" type="checkbox"/> RIG</p>	<p>LOCATION OF WELL</p> <p>IN DIAGRAM BELOW SHOW DISTANCES OF WELL FROM ROAD AND LOT LINE. INDICATE NORTH BY ARROW.</p>
---	---

<p>CONTRACTOR</p> <p>NAME OF WELL CONTRACTOR: <u>Maxine Cym</u></p> <p>ADDRESS: <u>Carleton Ont.</u></p> <p>NAME OF DRILLER OR BORE: <u>Maxine Cym</u></p> <p>SIGNATURE OF CONTRACTOR: <u>Maxine Cym</u></p>	<p>LICENCE NUMBER: <u>1517</u></p> <p>CONTRACTOR: <u>020980</u></p> <p>DATE OF INSPECTION: _____</p> <p>INSPECTOR: _____</p>
--	--

Print only in spaces provided.
Mark correct box with a checkmark, where applicable.

11

1531693

Municipality 15002 Con. 05
10 14 15 22 23 24

County or District: *Other* Township/Borough/City/Town/Village: *Gloucester* Con block tract survey, etc.: *5* Lot: *6*
Address: *Greely St* Date completed: *25* day *10* month *00* year

LOG OF OVERBURDEN AND BEDROCK MATERIALS (see instructions)

General colour	Most common material	Other materials	General description	Depth - feet	
				From	To
<i>grey</i>	<i>gravel</i> <i>sandstone</i>			<i>0</i>	<i>3</i>
				<i>3</i>	<i>220</i>

31
32

41 WATER RECORD

Water found at - feet	Kind of water
<i>206</i>	<input checked="" type="checkbox"/> Fresh <input type="checkbox"/> Salty <input type="checkbox"/> Sulphur <input type="checkbox"/> Minerals <input type="checkbox"/> Gas
<i>214</i>	<input checked="" type="checkbox"/> Fresh <input type="checkbox"/> Salty <input type="checkbox"/> Sulphur <input type="checkbox"/> Minerals <input type="checkbox"/> Gas

51 CASING & OPEN HOLE RECORD

Inside diam inches	Material	Wall thickness inches	Depth - feet	
			From	To
<i>6 1/4</i>	<input checked="" type="checkbox"/> Steel <input type="checkbox"/> Galvanized <input type="checkbox"/> Concrete <input type="checkbox"/> Open hole <input type="checkbox"/> Plastic	<i>1 1/8</i>	<i>0</i>	<i>22</i>
<i>8 3/4</i>	<input checked="" type="checkbox"/> Steel <input type="checkbox"/> Galvanized <input type="checkbox"/> Concrete <input type="checkbox"/> Open hole <input type="checkbox"/> Plastic		<i>0</i>	<i>20</i>
<i>6</i>	<input checked="" type="checkbox"/> Steel <input type="checkbox"/> Galvanized <input type="checkbox"/> Concrete <input type="checkbox"/> Open hole <input type="checkbox"/> Plastic		<i>20</i>	<i>220</i>

SCREEN

Sizes of opening (Slot No.)	Diameter inches	Length feet

Material and type: _____ Depth at top of screen: _____ feet

61 PLUGGING & SEALING RECORD

Depth set at - feet		Material and type (Cement grout, bentonite, etc.)
From	To	
<i>7</i>	<i>22</i>	<i>Cement grout</i>


71 PUMPING TEST

Pumping test method	Pumping rate	Duration of pumping
<input checked="" type="checkbox"/> Pump <input type="checkbox"/> Bailor	<i>10</i> GPM	<i>1</i> Hours <i>1</i> Mins

Static level	Water level end of pumping	Water levels during
<i>30</i> feet	<i>120</i> feet	<i>30</i> feet <i>30</i> feet <i>30</i> feet <i>30</i> feet

If flowing give rate: _____ GPM Pump intake set at: _____ feet Water at end of test: _____ Clear Cloudy

Recommended pump type: Shallow Deep Recommended pump setting: *120* feet Recommended pump rate: *10* GPM

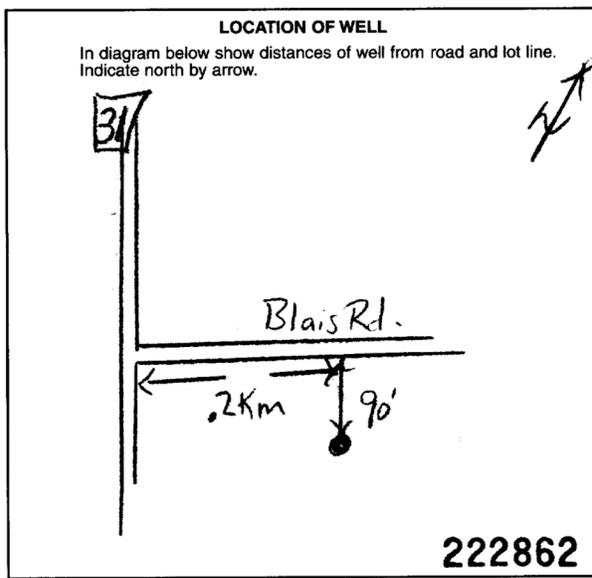

FINAL STATUS OF WELL

<input checked="" type="checkbox"/> Water supply	<input type="checkbox"/> Abandoned, insufficient supply	<input type="checkbox"/> Unfinished
<input type="checkbox"/> Observation well	<input type="checkbox"/> Abandoned, poor quality	<input type="checkbox"/> Replacement well
<input type="checkbox"/> Test hole	<input type="checkbox"/> Abandoned (Other)	
<input type="checkbox"/> Recharge well	<input type="checkbox"/> Dewatering	

WATER USE

<input checked="" type="checkbox"/> Domestic	<input type="checkbox"/> Commercial	<input type="checkbox"/> Not use
<input type="checkbox"/> Stock	<input type="checkbox"/> Municipal	<input type="checkbox"/> Other
<input type="checkbox"/> Irrigation	<input type="checkbox"/> Public supply	
<input type="checkbox"/> Industrial	<input type="checkbox"/> Cooling & air conditioning	

METHOD OF CONSTRUCTION

<input type="checkbox"/> Cable tool	<input checked="" type="checkbox"/> Air percussion	<input type="checkbox"/> Driving
<input type="checkbox"/> Rotary (conventional)	<input type="checkbox"/> Boring	<input type="checkbox"/> Digging
<input type="checkbox"/> Rotary (reverse)	<input type="checkbox"/> Diamond	<input type="checkbox"/> Other
<input type="checkbox"/> Rotary (air)	<input type="checkbox"/> Jetting	

Name of Well Contractor: *Air-Rock Drilling Co Ltd* Well Contractor's Licence No.: *1119*
Address: *RR# 2 Jasper St*
Name of Well Technician: *Shannon Purcell* Well Technician's Licence No.: *T2122*
Signature of Technician/Contractor: _____ Submission date: *02* day *11* month *00* year

MINISTRY USE ONLY

Data source	Contractor	Date received
	<i>11 19</i>	<i>JAN 03 2001</i>
Date of inspection	Inspector	
Remarks		

CSS.ES1

Print only in spaces provided.
Mark correct box with a checkmark, where applicable.

11

1533566

Municipality 15002

Con. RF

05

County or District: Ottawa Carleton Township/Borough/City/Town/Village: Gloucester Con block tract survey, etc.: 5 Lot: 21
Address: Gloucester, Ont Date completed: 07 02 03
day month year

21

LOG OF OVERBURDEN AND BEDROCK MATERIALS (see instructions)					
General colour	Most common material	Other materials	General description	Depth - feet	
				From	To
	<u>Sand</u>			<u>0</u>	<u>7</u>
<u>grey</u>	<u>Sandstone</u>			<u>7</u>	<u>98</u>
<u>"</u>	<u>Limestone</u>			<u>98</u>	<u>127</u>
<u>"</u>	<u>Sandstone</u>			<u>127</u>	<u>220</u>

31

32

41 WATER RECORD

Water found at - feet	Kind of water
<u>216</u>	<input checked="" type="checkbox"/> Fresh <input type="checkbox"/> Sulphur <input type="checkbox"/> Minerals <input type="checkbox"/> Gas
<u>NOT TESTED</u>	<input type="checkbox"/> Fresh <input type="checkbox"/> Sulphur <input type="checkbox"/> Minerals <input type="checkbox"/> Gas
	<input type="checkbox"/> Fresh <input type="checkbox"/> Sulphur <input type="checkbox"/> Minerals <input type="checkbox"/> Gas
	<input type="checkbox"/> Fresh <input type="checkbox"/> Sulphur <input type="checkbox"/> Minerals <input type="checkbox"/> Gas
	<input type="checkbox"/> Fresh <input type="checkbox"/> Sulphur <input type="checkbox"/> Minerals <input type="checkbox"/> Gas

51 CASING & OPEN HOLE RECORD

Inside diam inches	Material	Wall thickness inches	Depth - feet	
			From	To
<u>6 1/4</u>	<input checked="" type="checkbox"/> Steel <input type="checkbox"/> Galvanized <input type="checkbox"/> Concrete <input type="checkbox"/> Open hole <input type="checkbox"/> Plastic	<u>188</u>	<u>0</u>	<u>22</u>
<u>8 3/4</u>	<input type="checkbox"/> Steel <input type="checkbox"/> Galvanized <input type="checkbox"/> Concrete <input type="checkbox"/> Open hole <input type="checkbox"/> Plastic		<u>0</u>	<u>20</u>
<u>6</u>	<input type="checkbox"/> Steel <input type="checkbox"/> Galvanized <input type="checkbox"/> Concrete <input type="checkbox"/> Open hole <input type="checkbox"/> Plastic		<u>20</u>	<u>220</u>

SCREEN

Sizes of opening (Slot No.)	Diameter inches	Length feet

Material and type: _____ Depth at top of screen: _____ feet

61 PLUGGING & SEALING RECORD

Depth set at - feet	Material and type (Cement grout, bentonite, etc.)
<u>2 22</u>	<u>Cement grout</u>

71 PUMPING TEST

Pumping test method	Pumping rate	Duration of pumping
<input checked="" type="checkbox"/> Pump <input type="checkbox"/> Bailor	<u>9</u> GPM	<u>1</u> Hours <u>17</u> Mins
Static level	Water level during	Recovery
<u>16</u> feet	15 minutes: <u>16</u> feet, 30 minutes: <u>16</u> feet, 45 minutes: <u>16</u> feet, 60 minutes: <u>16</u> feet	<input checked="" type="checkbox"/> Pumping <input type="checkbox"/> Recovery
If flowing give rate	Pump intake set at	Water at end of test
<u>2</u> Deep	<u>120</u> feet	<input type="checkbox"/> Clear <input checked="" type="checkbox"/> Cloudy
Recommended pump type	Recommended pump setting	Recommended pump rate
<input checked="" type="checkbox"/> Shallow <input type="checkbox"/> Deep	<u>120</u> feet	<u>9</u> GPM

FINAL STATUS OF WELL


<input checked="" type="checkbox"/> Water supply	<input type="checkbox"/> Abandoned, insufficient supply	<input type="checkbox"/> Unfinished
<input type="checkbox"/> Observation well	<input type="checkbox"/> Abandoned, poor quality	<input type="checkbox"/> Replacement well
<input type="checkbox"/> Test hole	<input type="checkbox"/> Abandoned (Other)	
<input type="checkbox"/> Recharge well	<input type="checkbox"/> Dewatering	

WATER USE

<input checked="" type="checkbox"/> Domestic	<input type="checkbox"/> Commercial	<input type="checkbox"/> Not use
<input type="checkbox"/> Stock	<input type="checkbox"/> Municipal	<input type="checkbox"/> Other
<input type="checkbox"/> Irrigation	<input type="checkbox"/> Public supply	
<input type="checkbox"/> Industrial	<input type="checkbox"/> Cooling & air conditioning	

METHOD OF CONSTRUCTION

<input type="checkbox"/> Cable tool	<input checked="" type="checkbox"/> Air percussion	<input type="checkbox"/> Driving
<input type="checkbox"/> Rotary (conventional)	<input type="checkbox"/> Boring	<input type="checkbox"/> Digging
<input type="checkbox"/> Rotary (reverse)	<input type="checkbox"/> Diamond	<input type="checkbox"/> Other
<input type="checkbox"/> Rotary (air)	<input type="checkbox"/> Jetting	

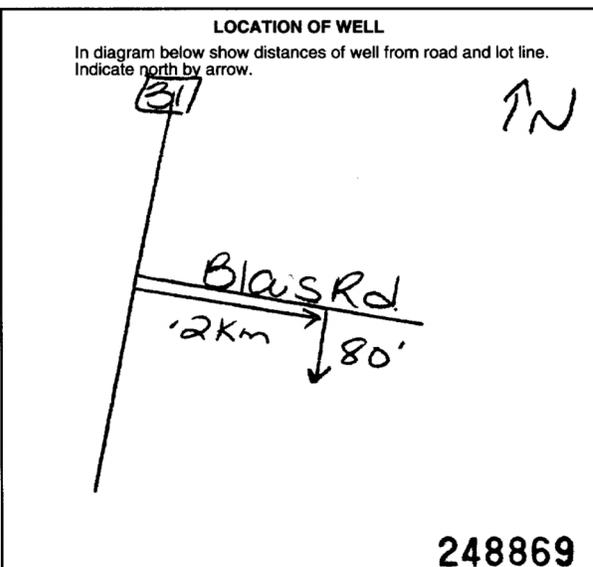

Name of Well Contractor: Arkol Drilling Ltd Well Contractor's Licence No.: 1119
Address: RR#1 Richmond, Ont
Name of Well Technician: Shannon Pulcell Well Technician's Licence No.: T2122
Signature of Technician/Contractor: [Signature] Submission date: 03 02 03
day mo yr

MINISTRY USE ONLY

Data source	Contractor	Date received
	<u>1119</u>	<u>MAR 31 2003</u>
Date of inspection	Inspector	
Remarks	<u>CSS.ES3</u>	

Well Owner's Information

First Name Airport Golfland	Last Name	E-mail Address	<input type="checkbox"/> Well Constructed by Well Owner		
Mailing Address (Street Number/Name, RR) 6357 Emerald Links		Municipality Greely	Province Ontario	Postal Code K4P 1M4	Telephone No. (inc. area code) 613 850 5468

Part A Construction and/or Major Alteration of a Well

Address of Well Location (Street Number/Name, RR) Hwy 31		Township Gloucester	Lot 20	Concession 5
County/District/Municipality Ottawa Carleton		City/Town/Village Gloucester	Province Ontario	Postal Code
UTM Coordinates NAD 83	Zone 18	Easting 453794	Northing 5018088	GPS Unit Make Garmin
Mode of Operation: <input type="checkbox"/> Undifferentiated <input checked="" type="checkbox"/> Averaged		<input type="checkbox"/> Differentiated, specify _____		

Overburden and Bedrock Materials (see instructions on the back of this form)

General Colour	Most Common Material	Other Materials	General Description	Depth (Metres) From	Depth (Metres) To
Brown	Clay	Stones	Packed	0	3.35
Grey	Limestone		Broken	3.35	4.57
Grey	Limestone		Medium Hard	4.57	42.66
Grey	Limestone	Sandstone Layers	Hard	42.66	52.72

Annular Space/Abandonment Sealing Record

Depth Set at (Metres) From	Depth Set at (Metres) To	Type of Sealant Used (Material and Type)	Volume Placed (Cubic Metres)
6.40	0	Grouted Bentonite Slurry	.132m ³


Method of Construction		Water Use	
<input type="checkbox"/> Cable Tool	<input type="checkbox"/> Diamond	<input type="checkbox"/> Public	<input type="checkbox"/> Commercial
<input type="checkbox"/> Rotary (Conventional)	<input type="checkbox"/> Jetting	<input checked="" type="checkbox"/> Domestic	<input type="checkbox"/> Municipal
<input type="checkbox"/> Rotary (Reverse)	<input type="checkbox"/> Driving	<input type="checkbox"/> Livestock	<input type="checkbox"/> Test Hole
<input checked="" type="checkbox"/> Rotary (Air)	<input type="checkbox"/> Digging	<input type="checkbox"/> Irrigation	<input type="checkbox"/> Cooling & Air Conditioning
<input type="checkbox"/> Air percussion	<input type="checkbox"/> Boring	<input type="checkbox"/> Industrial	
<input type="checkbox"/> Other, specify _____		<input type="checkbox"/> Other, specify _____	

Status of Well

<input checked="" type="checkbox"/> Water Supply	<input type="checkbox"/> Dewatering Well	<input type="checkbox"/> Observation and/or Monitoring Hole
<input type="checkbox"/> Replacement Well	<input type="checkbox"/> Abandoned, Insufficient Supply	<input type="checkbox"/> Alteration (Construction)
<input type="checkbox"/> Test Hole	<input type="checkbox"/> Abandoned, Poor Water Quality	<input type="checkbox"/> Other, specify _____
<input type="checkbox"/> Recharge Well	<input type="checkbox"/> Abandoned, other, specify _____	

Location of Well

Please provide a map below showing:
 - all property boundaries, and measurements sufficient to locate the well in relation to fixed points,
 - an arrow indicating the North direction
 - detailed drawings can be provided as attachments no larger than legal size (8.5" by 14")
 - digital pictures of inside of well can also be provided

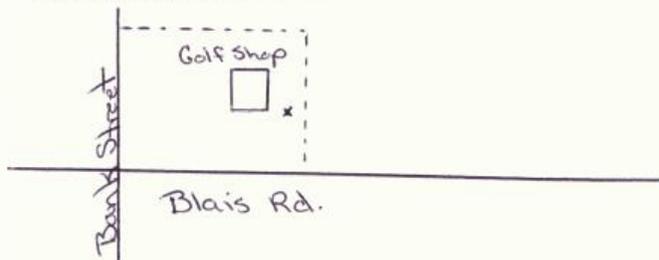

Date Well Completed (yyyy/mm/dd) 2008/07/14	Was the well owner's information package delivered? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	Date the Well Record and Package Delivered to Well Owner (yyyy/mm/dd) 2008/07/15
---	---	--

Well Contractor and Well Technician Information

Business Name of Well Contractor Capital Water Supply Ltd.		Well Contractor's Licence No. 1 5 5 8
Business Address (Street No./Name, number, RR) Box 490		Municipality Stittsville
Province Ontario	Postal Code K2S 1A6	Business E-mail Address office@capitalwater.ca
Bus. Telephone No. (inc. area code) Name of Well Technician (Last Name, First Name) 613 836 1766 Miller, Stephen		
Well Technician's Licence No. 0 0 9 7	Signature of Technician 	Date Submitted (yyyy/mm/dd) 2008/07/16

Results of Well Yield Testing

Check box if after test of well yield, water was: <input checked="" type="checkbox"/> Clear and sand free <input type="checkbox"/> Cannot develop to sand-free state	Draw Down		Recovery	
	Time (Min)	Water Level (Metres)	Time (Min)	Water Level (Metres)
If pumping discontinued, give reason: Pumping test method Submersible Pump intake set at (Metres) 45.71 Pumping rate (Litres/min) 54.6 Duration of pumping 3 hrs + _____ min Final water level end of pumping (Metres) 21.37 Recommended pump type <input type="checkbox"/> Shallow <input checked="" type="checkbox"/> Deep Recommended pump depth 30.47 Metres Recommended pump rate (Litres/min) 45.5 If flowing give rate (Litres/min)	Static Level	4.75	Static Level	
	1	6.42	1	18.19
	2	8.55	2	17.26
	3	9.96	3	15.67
	4	11.18	4	14.50
	5	12.29	5	13.32
10	16.10	10	9.44	
15	18.20	15	7.38	
20	19.51	20	6.24	
25	20.36	25	5.61	
30	20.94	30	5.18	
40	21.64	40	4.75	
50	22.01	50		
60	22.14	60		

Water Details

Water found at Depth 51.50 Metres	Kind of Water <input type="checkbox"/> Gas <input type="checkbox"/> Fresh <input type="checkbox"/> Salty <input type="checkbox"/> Sulphur <input type="checkbox"/> Minerals
Water found at Depth _____ Metres	Kind of Water <input type="checkbox"/> Gas <input type="checkbox"/> Fresh <input type="checkbox"/> Salty <input type="checkbox"/> Sulphur <input type="checkbox"/> Minerals
Water found at Depth _____ Metres	Kind of Water <input type="checkbox"/> Gas <input type="checkbox"/> Fresh <input type="checkbox"/> Salty <input type="checkbox"/> Sulphur <input type="checkbox"/> Minerals

Casing Used
Screen Used
Casing and Well Details

<input checked="" type="checkbox"/> Steel	<input type="checkbox"/> Galvanized	Diameter of the Hole (Centimetres) 15.39
<input type="checkbox"/> Fibreglass	<input type="checkbox"/> Steel	Depth of the Hole (Metres) 52.72
<input type="checkbox"/> Plastic	<input type="checkbox"/> Fibreglass	Wall Thickness (Metres) .48
<input type="checkbox"/> Concrete	<input type="checkbox"/> Plastic	Inside Diameter of the Casing (Metres) 15.86
<input type="checkbox"/> Concrete		Depth of the Casing (Metres) + .45 to 6.40

No Casing and Screen Used

<input type="checkbox"/> Open Hole	Disinfected? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
------------------------------------	--

Ministry Use Only

Audit No. z 77392	Well Contractor No.
Date Received (yyyy/mm/dd) OCT 14 2008	Date of Inspection (yyyy/mm/dd)
Remarks	

APPENDIX E
Moisture Surplus Printout

Ottawa Airport, ON Ottawa_50mm_WBNRMSD.txt
WATER BUDGET MEANS FOR THE PERIOD 1950-2010 DC20492

LAT.... 45.32 WATER HOLDING CAPACITY... 50 MM HEAT INDEX... 36.41
LONG... 75.67 LOWER ZONE..... 30 MM A..... 1.075

DATE	TEMP (C)	PCPN	RAIN	MELT	PE	AE	DEF	SURP	SNOW	SOIL	ACC	P
31- 1	-10.6	64	13	15	0	0	0	27	83	50	299	
28- 2	-8.8	57	12	18	1	1	0	29	110	50	356	
31- 3	-2.7	66	32	80	5	5	0	107	64	50	422	
30- 4	5.9	72	67	69	32	32	0	104	0	50	494	
31- 5	13.0	74	74	0	80	79	-1	13	0	32	568	
30- 6	18.3	82	82	0	116	97	-19	4	0	14	651	
31- 7	20.8	89	89	0	135	94	-41	3	0	5	740	
31- 8	19.5	87	87	0	117	83	-34	1	0	9	827	
30- 9	14.6	84	84	0	75	66	-9	7	0	20	912	
31-10	8.1	77	76	0	36	35	-1	24	0	37	77	
30-11	1.3	80	63	8	10	10	0	50	9	49	157	
31-12	-7.0	78	26	15	1	1	0	38	47	50	236	
AVE	5.9 TTL	911	705	205	608	503	-105	407				

Ottawa Airport, ON STANDARD DEVIATIONS FOR THE PERIOD 1950-2010 DC20492

DATE	TEMP (C)	PCPN	RAIN	MELT	PE	AE	DEF	SURP	SNOW	SOIL	ACC	P
31- 1	3.0	26	16	18	1	1	0	31	43	0	55	
28- 2	2.6	29	15	27	1	1	0	37	59	0	59	
31- 3	2.3	28	22	47	4	4	0	53	83	0	65	
30- 4	1.7	31	31	84	8	8	0	84	0	2	74	
31- 5	1.9	32	32	0	12	11	5	21	0	19	85	
30- 6	1.2	38	38	0	9	26	26	17	0	19	93	
31- 7	1.2	42	42	0	8	30	31	12	0	14	93	
31- 8	1.3	39	39	0	8	30	32	5	0	16	107	
30- 9	1.5	38	38	0	8	14	13	20	0	21	110	
31-10	1.4	37	37	2	7	7	3	27	0	19	37	
30-11	1.7	27	28	9	4	4	0	30	13	6	45	
31-12	3.0	30	22	14	1	1	0	29	34	0	56	

Ottawa Airport, ON Ottawa_75mm_WBNRMSD.txt
WATER BUDGET MEANS FOR THE PERIOD 1950-2010 DC20492

LAT.... 45.32 WATER HOLDING CAPACITY... 75 MM HEAT INDEX... 36.41
LONG... 75.67 LOWER ZONE..... 45 MM A..... 1.075

DATE	TEMP (C)	PCPN	RAIN	MELT	PE	AE	DEF	SURP	SNOW	SOIL	ACC P
31- 1	-10.6	64	13	15	0	0	0	27	83	75	299
28- 2	-8.8	57	12	18	1	1	0	29	110	75	356
31- 3	-2.7	66	32	80	5	5	0	107	64	75	422
30- 4	5.9	72	67	69	32	32	0	104	0	75	494
31- 5	13.0	74	74	0	80	80	0	13	0	56	568
30- 6	18.3	82	82	0	116	107	-10	4	0	28	651
31- 7	20.8	89	89	0	135	104	-32	2	0	10	740
31- 8	19.5	87	87	0	117	85	-32	1	0	12	827
30- 9	14.6	84	84	0	75	66	-9	4	0	26	912
31-10	8.1	77	76	0	36	35	-1	15	0	52	77
30-11	1.3	80	63	8	10	10	0	42	9	71	157
31-12	-7.0	78	26	15	1	1	0	36	47	75	236
AVE	5.9 TTL	911	705	205	608	526	-84	384			

Ottawa Airport, ON STANDARD DEVIATIONS FOR THE PERIOD 1950-2010 DC20492

DATE	TEMP (C)	PCPN	RAIN	MELT	PE	AE	DEF	SURP	SNOW	SOIL	ACC P
31- 1	3.0	26	16	18	1	1	0	30	43	0	55
28- 2	2.6	29	15	27	1	1	0	37	59	0	59
31- 3	2.3	28	22	47	4	4	0	53	83	0	65
30- 4	1.7	31	31	84	8	8	0	84	0	2	74
31- 5	1.9	32	32	0	12	12	0	21	0	22	85
30- 6	1.2	38	38	0	9	19	19	17	0	28	93
31- 7	1.2	42	42	0	8	28	30	11	0	22	93
31- 8	1.3	39	39	0	8	29	31	5	0	23	107
30- 9	1.5	38	38	0	8	14	14	17	0	29	110
31-10	1.4	37	37	2	7	7	2	23	0	28	37
30-11	1.7	27	28	9	4	4	0	33	13	11	45
31-12	3.0	30	22	14	1	1	0	30	34	3	56

Ottawa Airport, ON Ottawa_100mm_WBNRMSD.txt
WATER BUDGET MEANS FOR THE PERIOD 1950-2010 DC20492

LAT.... 45.32 WATER HOLDING CAPACITY...100 MM HEAT INDEX... 36.41
LONG... 75.67 LOWER ZONE..... 60 MM A..... 1.075

DATE	TEMP (C)	PCPN	RAIN	MELT	PE	AE	DEF	SURP	SNOW	SOIL	ACC P
31- 1	-10.6	64	13	15	0	0	0	25	83	99	299
28- 2	-8.8	57	12	18	1	1	0	28	110	99	356
31- 3	-2.7	66	32	80	5	5	0	106	64	100	422
30- 4	5.9	72	67	69	32	32	0	104	0	100	494
31- 5	13.0	74	74	0	80	80	0	13	0	81	568
30- 6	18.3	82	82	0	116	112	-4	4	0	47	651
31- 7	20.8	89	89	0	135	115	-21	2	0	19	740
31- 8	19.5	87	87	0	117	88	-29	1	0	18	827
30- 9	14.6	84	84	0	75	66	-8	3	0	32	912
31-10	8.1	77	76	0	36	35	-1	10	0	63	77
30-11	1.3	80	63	8	10	10	0	34	9	91	157
31-12	-7.0	78	26	15	1	1	0	33	47	97	236
AVE	5.9 TTL	911	705	205	608	545	-63	363			

Ottawa Airport, ON STANDARD DEVIATIONS FOR THE PERIOD 1950-2010 DC20492

DATE	TEMP (C)	PCPN	RAIN	MELT	PE	AE	DEF	SURP	SNOW	SOIL	ACC P
31- 1	3.0	26	16	18	1	1	0	30	43	5	55
28- 2	2.6	29	15	27	1	1	0	37	59	3	59
31- 3	2.3	28	22	47	4	4	0	53	83	0	65
30- 4	1.7	31	31	84	8	8	0	84	0	2	74
31- 5	1.9	32	32	0	12	12	0	21	0	22	85
30- 6	1.2	38	38	0	9	12	11	17	0	34	93
31- 7	1.2	42	42	0	8	25	26	11	0	30	93
31- 8	1.3	39	39	0	8	29	30	5	0	30	107
30- 9	1.5	38	38	0	8	14	13	15	0	35	110
31-10	1.4	37	37	2	7	6	2	21	0	36	37
30-11	1.7	27	28	9	4	4	0	34	13	19	45
31-12	3.0	30	22	14	1	1	0	30	34	8	56

Ottawa Airport, ON Ottawa_125mm_WBNRMSD.txt
WATER BUDGET MEANS FOR THE PERIOD 1950-2010 DC20492

LAT.... 45.32 WATER HOLDING CAPACITY...125 MM HEAT INDEX... 36.41
LONG... 75.67 LOWER ZONE..... 75 MM A..... 1.075

DATE	TEMP (C)	PCPN	RAIN	MELT	PE	AE	DEF	SURP	SNOW	SOIL	ACC P
31- 1	-10.6	64	13	15	0	0	0	24	83	122	299
28- 2	-8.8	57	12	18	1	1	0	28	110	123	356
31- 3	-2.7	66	32	80	5	5	0	105	64	125	422
30- 4	5.9	72	67	69	32	32	0	104	0	125	494
31- 5	13.0	74	74	0	80	80	0	13	0	106	568
30- 6	18.3	82	82	0	116	115	-1	4	0	69	651
31- 7	20.8	89	89	0	135	122	-13	2	0	33	740
31- 8	19.5	87	87	0	117	92	-25	1	0	28	827
30- 9	14.6	84	84	0	75	67	-7	3	0	41	912
31-10	8.1	77	76	0	36	35	-1	9	0	74	77
30-11	1.3	80	63	8	10	10	0	27	9	108	157
31-12	-7.0	78	26	15	1	1	0	29	47	119	236
AVE	5.9 TTL	911	705	205	608	560	-47	349			

Ottawa Airport, ON STANDARD DEVIATIONS FOR THE PERIOD 1950-2010 DC20492

DATE	TEMP (C)	PCPN	RAIN	MELT	PE	AE	DEF	SURP	SNOW	SOIL	ACC P
31- 1	3.0	26	16	18	1	1	0	31	43	10	55
28- 2	2.6	29	15	27	1	1	0	37	59	8	59
31- 3	2.3	28	22	47	4	4	0	54	83	0	65
30- 4	1.7	31	31	84	8	8	0	84	0	2	74
31- 5	1.9	32	32	0	12	12	0	21	0	22	85
30- 6	1.2	38	38	0	9	9	4	17	0	39	93
31- 7	1.2	42	42	0	8	21	23	11	0	37	93
31- 8	1.3	39	39	0	8	26	28	5	0	38	107
30- 9	1.5	38	38	0	8	13	11	14	0	42	110
31-10	1.4	37	37	2	7	6	2	20	0	42	37
30-11	1.7	27	28	9	4	4	0	32	13	25	45
31-12	3.0	30	22	14	1	1	0	30	34	14	56

Ottawa Airport, ON Ottawa_150mm_WBNRMSD.txt
WATER BUDGET MEANS FOR THE PERIOD 1950-2010 DC20492

LAT.... 45.32 WATER HOLDING CAPACITY...150 MM HEAT INDEX... 36.41
LONG... 75.67 LOWER ZONE..... 90 MM A..... 1.075

DATE	TEMP (C)	PCPN	RAIN	MELT	PE	AE	DEF	SURP	SNOW	SOIL	ACC	P
31- 1	-10.6	64	13	15	0	0	0	23	83	144	299	
28- 2	-8.8	57	12	18	1	1	0	26	110	146	356	
31- 3	-2.7	66	32	80	5	5	0	103	64	150	422	
30- 4	5.9	72	67	69	32	32	0	104	0	150	494	
31- 5	13.0	74	74	0	80	80	0	13	0	131	568	
30- 6	18.3	82	82	0	116	116	0	4	0	93	651	
31- 7	20.8	89	89	0	135	127	-8	2	0	52	740	
31- 8	19.5	87	87	0	117	97	-19	1	0	41	827	
30- 9	14.6	84	84	0	75	68	-6	3	0	54	912	
31-10	8.1	77	76	0	36	36	-1	8	0	88	77	
30-11	1.3	80	63	8	10	10	0	23	9	126	157	
31-12	-7.0	78	26	15	1	1	0	26	47	140	236	
AVE	5.9 TTL	911	705	205	608	573	-34	336				

Ottawa Airport, ON STANDARD DEVIATIONS FOR THE PERIOD 1950-2010 DC20492

DATE	TEMP (C)	PCPN	RAIN	MELT	PE	AE	DEF	SURP	SNOW	SOIL	ACC	P
31- 1	3.0	26	16	18	1	1	0	31	43	15	55	
28- 2	2.6	29	15	27	1	1	0	37	59	12	59	
31- 3	2.3	28	22	47	4	4	0	54	83	0	65	
30- 4	1.7	31	31	84	8	8	0	84	0	2	74	
31- 5	1.9	32	32	0	12	12	0	21	0	22	85	
30- 6	1.2	38	38	0	9	8	1	17	0	41	93	
31- 7	1.2	42	42	0	8	18	18	11	0	42	93	
31- 8	1.3	39	39	0	8	22	23	5	0	44	107	
30- 9	1.5	38	38	0	8	12	10	14	0	49	110	
31-10	1.4	37	37	2	7	6	2	19	0	47	37	
30-11	1.7	27	28	9	4	4	0	30	13	31	45	
31-12	3.0	30	22	14	1	1	0	29	34	20	56	

Ottawa Airport, ON Ottawa_200mm_WBNRMSD.txt
WATER BUDGET MEANS FOR THE PERIOD 1950-2010 DC20492

LAT.... 45.32 WATER HOLDING CAPACITY...200 MM HEAT INDEX... 36.41
LONG... 75.67 LOWER ZONE.....120 MM A..... 1.075

DATE	TEMP (C)	PCPN	RAIN	MELT	PE	AE	DEF	SURP	SNOW	SOIL	ACC P
31- 1	-10.6	64	13	15	0	0	0	21	83	187	299
28- 2	-8.8	57	12	18	1	1	0	24	110	191	356
31- 3	-2.7	66	32	80	5	5	0	99	64	199	422
30- 4	5.9	72	67	69	32	32	0	103	0	200	494
31- 5	13.0	74	74	0	80	80	0	13	0	181	568
30- 6	18.3	82	82	0	116	116	0	4	0	143	651
31- 7	20.8	89	89	0	135	132	-3	2	0	97	740
31- 8	19.5	87	87	0	117	106	-11	1	0	78	827
30- 9	14.6	84	84	0	75	70	-4	3	0	89	912
31-10	8.1	77	76	0	36	36	0	7	0	123	77
30-11	1.3	80	63	8	10	10	0	19	9	164	157
31-12	-7.0	78	26	15	1	1	0	22	47	182	236
AVE	5.9 TTL	911	705	205	608	589	-18	318			

Ottawa Airport, ON STANDARD DEVIATIONS FOR THE PERIOD 1950-2010 DC20492

DATE	TEMP (C)	PCPN	RAIN	MELT	PE	AE	DEF	SURP	SNOW	SOIL	ACC P
31- 1	3.0	26	16	18	1	1	0	30	43	24	55
28- 2	2.6	29	15	27	1	1	0	36	59	20	59
31- 3	2.3	28	22	47	4	4	0	55	83	4	65
30- 4	1.7	31	31	84	8	8	0	83	0	2	74
31- 5	1.9	32	32	0	12	12	0	21	0	22	85
30- 6	1.2	38	38	0	9	9	0	17	0	41	93
31- 7	1.2	42	42	0	8	11	10	11	0	48	93
31- 8	1.3	39	39	0	8	16	16	5	0	54	107
30- 9	1.5	38	38	0	8	10	8	14	0	59	110
31-10	1.4	37	37	2	7	6	1	19	0	55	37
30-11	1.7	27	28	9	4	4	0	29	13	41	45
31-12	3.0	30	22	14	1	1	0	28	34	29	56

Ottawa Airport, ON Ottawa_225mm_WBNRMSD.txt
WATER BUDGET MEANS FOR THE PERIOD 1950-2010 DC20492

LAT.... 45.32 WATER HOLDING CAPACITY...225 MM HEAT INDEX... 36.41
LONG... 75.67 LOWER ZONE.....135 MM A..... 1.075

DATE	TEMP (C)	PCPN	RAIN	MELT	PE	AE	DEF	SURP	SNOW	SOIL	ACC P
31- 1	-10.6	64	13	15	0	0	0	21	83	209	299
28- 2	-8.8	57	12	18	1	1	0	24	110	214	356
31- 3	-2.7	66	32	80	5	5	0	97	64	224	422
30- 4	5.9	72	67	69	32	32	0	103	0	225	494
31- 5	13.0	74	74	0	80	80	0	13	0	206	568
30- 6	18.3	82	82	0	116	116	0	4	0	168	651
31- 7	20.8	89	89	0	135	133	-2	2	0	121	740
31- 8	19.5	87	87	0	117	109	-8	1	0	99	827
30- 9	14.6	84	84	0	75	71	-4	3	0	109	912
31-10	8.1	77	76	0	36	36	0	7	0	143	77
30-11	1.3	80	63	8	10	10	0	18	9	185	157
31-12	-7.0	78	26	15	1	1	0	21	47	204	236
AVE	5.9 TTL	911	705	205	608	594	-14	314			

Ottawa Airport, ON STANDARD DEVIATIONS FOR THE PERIOD 1950-2010 DC20492

DATE	TEMP (C)	PCPN	RAIN	MELT	PE	AE	DEF	SURP	SNOW	SOIL	ACC P
31- 1	3.0	26	16	18	1	1	0	30	43	28	55
28- 2	2.6	29	15	27	1	1	0	36	59	24	59
31- 3	2.3	28	22	47	4	4	0	56	83	7	65
30- 4	1.7	31	31	84	8	8	0	82	0	2	74
31- 5	1.9	32	32	0	12	12	0	21	0	22	85
30- 6	1.2	38	38	0	9	9	0	17	0	41	93
31- 7	1.2	42	42	0	8	10	7	11	0	49	93
31- 8	1.3	39	39	0	8	14	13	5	0	58	107
30- 9	1.5	38	38	0	8	10	7	14	0	63	110
31-10	1.4	37	37	2	7	6	1	19	0	58	37
30-11	1.7	27	28	9	4	4	0	29	13	44	45
31-12	3.0	30	22	14	1	1	0	28	34	33	56

Ottawa Airport, ON Ottawa_250mm_WBNRMSD.txt
WATER BUDGET MEANS FOR THE PERIOD 1950-2010 DC20492

LAT.... 45.32 WATER HOLDING CAPACITY...250 MM HEAT INDEX... 36.41
LONG... 75.67 LOWER ZONE.....150 MM A..... 1.075

DATE	TEMP (C)	PCPN	RAIN	MELT	PE	AE	DEF	SURP	SNOW	SOIL	ACC P
31- 1	-10.6	64	13	15	0	0	0	20	83	232	299
28- 2	-8.8	57	12	18	1	1	0	23	110	238	356
31- 3	-2.7	66	32	80	5	5	0	96	64	248	422
30- 4	5.9	72	67	69	32	32	0	102	0	250	494
31- 5	13.0	74	74	0	80	80	0	13	0	231	568
30- 6	18.3	82	82	0	116	116	0	4	0	193	651
31- 7	20.8	89	89	0	135	134	-1	2	0	145	740
31- 8	19.5	87	87	0	117	111	-6	1	0	121	827
30- 9	14.6	84	84	0	75	72	-3	3	0	130	912
31-10	8.1	77	76	0	36	36	0	7	0	164	77
30-11	1.3	80	63	8	10	10	0	18	9	207	157
31-12	-7.0	78	26	15	1	1	0	20	47	226	236
AVE	5.9 TTL	911	705	205	608	598	-10	309			

Ottawa Airport, ON STANDARD DEVIATIONS FOR THE PERIOD 1950-2010 DC20492

DATE	TEMP (C)	PCPN	RAIN	MELT	PE	AE	DEF	SURP	SNOW	SOIL	ACC P
31- 1	3.0	26	16	18	1	1	0	29	43	32	55
28- 2	2.6	29	15	27	1	1	0	36	59	27	59
31- 3	2.3	28	22	47	4	4	0	56	83	9	65
30- 4	1.7	31	31	84	8	8	0	82	0	2	74
31- 5	1.9	32	32	0	12	12	0	21	0	22	85
30- 6	1.2	38	38	0	9	9	0	17	0	41	93
31- 7	1.2	42	42	0	8	9	5	11	0	50	93
31- 8	1.3	39	39	0	8	12	11	5	0	61	107
30- 9	1.5	38	38	0	8	9	6	14	0	66	110
31-10	1.4	37	37	2	7	7	1	19	0	61	37
30-11	1.7	27	28	9	4	4	0	29	13	47	45
31-12	3.0	30	22	14	1	1	0	28	34	36	56

Ottawa Airport, ON Ottawa_265mm_WBNRMSD.txt
WATER BUDGET MEANS FOR THE PERIOD 1950-2010 DC20492

LAT.... 45.32 WATER HOLDING CAPACITY...265 MM HEAT INDEX... 36.41
LONG... 75.67 LOWER ZONE.....159 MM A..... 1.075

DATE	TEMP (C)	PCPN	RAIN	MELT	PE	AE	DEF	SURP	SNOW	SOIL	ACC P
31- 1	-10.6	64	13	15	0	0	0	20	83	246	299
28- 2	-8.8	57	12	18	1	1	0	23	110	252	356
31- 3	-2.7	66	32	80	5	5	0	96	64	263	422
30- 4	5.9	72	67	69	32	32	0	102	0	265	494
31- 5	13.0	74	74	0	80	80	0	13	0	246	568
30- 6	18.3	82	82	0	116	116	0	4	0	208	651
31- 7	20.8	89	89	0	135	134	-1	2	0	160	740
31- 8	19.5	87	87	0	117	112	-5	1	0	135	827
30- 9	14.6	84	84	0	75	72	-3	3	0	144	912
31-10	8.1	77	76	0	36	36	0	7	0	177	77
30-11	1.3	80	63	8	10	10	0	18	9	221	157
31-12	-7.0	78	26	15	1	1	0	20	47	240	236
AVE	5.9 TTL	911	705	205	608	599	-9	309			

Ottawa Airport, ON STANDARD DEVIATIONS FOR THE PERIOD 1950-2010 DC20492

DATE	TEMP (C)	PCPN	RAIN	MELT	PE	AE	DEF	SURP	SNOW	SOIL	ACC P
31- 1	3.0	26	16	18	1	1	0	29	43	34	55
28- 2	2.6	29	15	27	1	1	0	36	59	29	59
31- 3	2.3	28	22	47	4	4	0	56	83	10	65
30- 4	1.7	31	31	84	8	8	0	82	0	2	74
31- 5	1.9	32	32	0	12	12	0	21	0	22	85
30- 6	1.2	38	38	0	9	9	0	17	0	41	93
31- 7	1.2	42	42	0	8	8	4	11	0	51	93
31- 8	1.3	39	39	0	8	11	10	5	0	62	107
30- 9	1.5	38	38	0	8	9	5	14	0	68	110
31-10	1.4	37	37	2	7	7	1	19	0	62	37
30-11	1.7	27	28	9	4	4	0	29	13	49	45
31-12	3.0	30	22	14	1	1	0	28	34	38	56

Ottawa Airport, ON Ottawa_275mm_WBNRMSD.txt
WATER BUDGET MEANS FOR THE PERIOD 1950-2010 DC20492

LAT.... 45.32 WATER HOLDING CAPACITY...275 MM HEAT INDEX... 36.41
LONG... 75.67 LOWER ZONE.....165 MM A..... 1.075

DATE	TEMP (C)	PCPN	RAIN	MELT	PE	AE	DEF	SURP	SNOW	SOIL	ACC P
31- 1	-10.6	64	13	15	0	0	0	19	83	255	299
28- 2	-8.8	57	12	18	1	1	0	23	110	261	356
31- 3	-2.7	66	32	80	5	5	0	96	64	272	422
30- 4	5.9	72	67	69	32	32	0	101	0	275	494
31- 5	13.0	74	74	0	80	80	0	13	0	256	568
30- 6	18.3	82	82	0	116	116	0	4	0	218	651
31- 7	20.8	89	89	0	135	135	-1	2	0	170	740
31- 8	19.5	87	87	0	117	113	-4	1	0	144	827
30- 9	14.6	84	84	0	75	72	-2	3	0	153	912
31-10	8.1	77	76	0	36	36	0	7	0	186	77
30-11	1.3	80	63	8	10	10	0	18	9	230	157
31-12	-7.0	78	26	15	1	1	0	20	47	249	236
AVE	5.9 TTL	911	705	205	608	601	-7	307			

Ottawa Airport, ON STANDARD DEVIATIONS FOR THE PERIOD 1950-2010 DC20492

DATE	TEMP (C)	PCPN	RAIN	MELT	PE	AE	DEF	SURP	SNOW	SOIL	ACC P
31- 1	3.0	26	16	18	1	1	0	29	43	35	55
28- 2	2.6	29	15	27	1	1	0	36	59	30	59
31- 3	2.3	28	22	47	4	4	0	56	83	11	65
30- 4	1.7	31	31	84	8	8	0	81	0	2	74
31- 5	1.9	32	32	0	12	12	0	21	0	22	85
30- 6	1.2	38	38	0	9	9	0	17	0	41	93
31- 7	1.2	42	42	0	8	8	3	11	0	51	93
31- 8	1.3	39	39	0	8	11	9	5	0	63	107
30- 9	1.5	38	38	0	8	9	5	14	0	69	110
31-10	1.4	37	37	2	7	7	1	19	0	63	37
30-11	1.7	27	28	9	4	4	0	29	13	50	45
31-12	3.0	30	22	14	1	1	0	28	34	39	56

Ottawa Airport, ON Ottawa_280mm_WBNRMSD.txt
WATER BUDGET MEANS FOR THE PERIOD 1950-2010 DC20492

LAT.... 45.32 WATER HOLDING CAPACITY...280 MM HEAT INDEX... 36.41
LONG... 75.67 LOWER ZONE.....168 MM A..... 1.075

DATE	TEMP (C)	PCPN	RAIN	MELT	PE	AE	DEF	SURP	SNOW	SOIL	ACC P
31- 1	-10.6	64	13	15	0	0	0	19	83	260	299
28- 2	-8.8	57	12	18	1	1	0	23	110	266	356
31- 3	-2.7	66	32	80	5	5	0	95	64	277	422
30- 4	5.9	72	67	69	32	32	0	101	0	280	494
31- 5	13.0	74	74	0	80	80	0	13	0	261	568
30- 6	18.3	82	82	0	116	116	0	4	0	223	651
31- 7	20.8	89	89	0	135	135	-1	2	0	175	740
31- 8	19.5	87	87	0	117	113	-4	1	0	148	827
30- 9	14.6	84	84	0	75	72	-2	3	0	157	912
31-10	8.1	77	76	0	36	36	0	7	0	191	77
30-11	1.3	80	63	8	10	10	0	18	9	234	157
31-12	-7.0	78	26	15	1	1	0	20	47	254	236
AVE	5.9 TTL	911	705	205	608	601	-7	306			

Ottawa Airport, ON STANDARD DEVIATIONS FOR THE PERIOD 1950-2010 DC20492

DATE	TEMP (C)	PCPN	RAIN	MELT	PE	AE	DEF	SURP	SNOW	SOIL	ACC P
31- 1	3.0	26	16	18	1	1	0	29	43	35	55
28- 2	2.6	29	15	27	1	1	0	36	59	31	59
31- 3	2.3	28	22	47	4	4	0	56	83	12	65
30- 4	1.7	31	31	84	8	8	0	81	0	2	74
31- 5	1.9	32	32	0	12	12	0	21	0	22	85
30- 6	1.2	38	38	0	9	9	0	17	0	41	93
31- 7	1.2	42	42	0	8	8	3	11	0	52	93
31- 8	1.3	39	39	0	8	10	9	5	0	64	107
30- 9	1.5	38	38	0	8	9	5	14	0	69	110
31-10	1.4	37	37	2	7	7	1	19	0	64	37
30-11	1.7	27	28	9	4	4	0	29	13	50	45
31-12	3.0	30	22	14	1	1	0	28	34	39	56

Ottawa Airport, ON Ottawa_300mm_WBNRMSD.txt
WATER BUDGET MEANS FOR THE PERIOD 1950-2010 DC20492

LAT.... 45.32 WATER HOLDING CAPACITY...300 MM HEAT INDEX... 36.41
LONG... 75.67 LOWER ZONE.....180 MM A..... 1.075

DATE	TEMP (C)	PCPN	RAIN	MELT	PE	AE	DEF	SURP	SNOW	SOIL	ACC P
31- 1	-10.6	64	13	15	0	0	0	19	83	279	299
28- 2	-8.8	57	12	18	1	1	0	23	110	285	356
31- 3	-2.7	66	32	80	5	5	0	95	64	297	422
30- 4	5.9	72	67	69	32	32	0	101	0	300	494
31- 5	13.0	74	74	0	80	80	0	13	0	281	568
30- 6	18.3	82	82	0	116	116	0	4	0	243	651
31- 7	20.8	89	89	0	135	135	0	2	0	194	740
31- 8	19.5	87	87	0	117	114	-3	1	0	167	827
30- 9	14.6	84	84	0	75	73	-2	3	0	176	912
31-10	8.1	77	76	0	36	36	0	7	0	209	77
30-11	1.3	80	63	8	10	10	0	18	9	252	157
31-12	-7.0	78	26	15	1	1	0	20	47	272	236
AVE	5.9 TTL	911	705	205	608	603	-5	306			

Ottawa Airport, ON STANDARD DEVIATIONS FOR THE PERIOD 1950-2010 DC20492

DATE	TEMP (C)	PCPN	RAIN	MELT	PE	AE	DEF	SURP	SNOW	SOIL	ACC P
31- 1	3.0	26	16	18	1	1	0	29	43	37	55
28- 2	2.6	29	15	27	1	1	0	36	59	33	59
31- 3	2.3	28	22	47	4	4	0	57	83	13	65
30- 4	1.7	31	31	84	8	8	0	81	0	2	74
31- 5	1.9	32	32	0	12	12	0	21	0	22	85
30- 6	1.2	38	38	0	9	9	0	17	0	41	93
31- 7	1.2	42	42	0	8	8	2	11	0	52	93
31- 8	1.3	39	39	0	8	10	8	5	0	65	107
30- 9	1.5	38	38	0	8	9	5	14	0	71	110
31-10	1.4	37	37	2	7	7	1	19	0	65	37
30-11	1.7	27	28	9	4	4	0	29	13	52	45
31-12	3.0	30	22	14	1	1	0	28	34	41	56

Ottawa Airport, ON Ottawa_400mm_WBNRMSD.txt
WATER BUDGET MEANS FOR THE PERIOD 1950-2010 DC20492

LAT.... 45.32 WATER HOLDING CAPACITY...400 MM HEAT INDEX... 36.41
LONG... 75.67 LOWER ZONE.....240 MM A..... 1.075

DATE	TEMP (C)	PCPN	RAIN	MELT	PE	AE	DEF	SURP	SNOW	SOIL	ACC P
31- 1	-10.6	64	13	15	0	0	0	19	83	375	299
28- 2	-8.8	57	12	18	1	1	0	22	110	382	356
31- 3	-2.7	66	32	80	5	5	0	94	64	395	422
30- 4	5.9	72	67	69	32	32	0	99	0	400	494
31- 5	13.0	74	74	0	80	80	0	13	0	381	568
30- 6	18.3	82	82	0	116	116	0	4	0	343	651
31- 7	20.8	89	89	0	135	135	0	2	0	294	740
31- 8	19.5	87	87	0	117	116	-1	1	0	265	827
30- 9	14.6	84	84	0	75	74	-1	3	0	272	912
31-10	8.1	77	76	0	36	36	0	7	0	305	77
30-11	1.3	80	63	8	10	10	0	18	9	349	157
31-12	-7.0	78	26	15	1	1	0	19	47	369	236
AVE	5.9 TTL	911	705	205	608	606	-2	301			

Ottawa Airport, ON STANDARD DEVIATIONS FOR THE PERIOD 1950-2010 DC20492

DATE	TEMP (C)	PCPN	RAIN	MELT	PE	AE	DEF	SURP	SNOW	SOIL	ACC P
31- 1	3.0	26	16	18	1	1	0	29	43	44	55
28- 2	2.6	29	15	27	1	1	0	36	59	39	59
31- 3	2.3	28	22	47	4	4	0	57	83	20	65
30- 4	1.7	31	31	84	8	8	0	80	0	2	74
31- 5	1.9	32	32	0	12	12	0	21	0	22	85
30- 6	1.2	38	38	0	9	9	0	17	0	41	93
31- 7	1.2	42	42	0	8	8	0	11	0	53	93
31- 8	1.3	39	39	0	8	8	4	5	0	69	107
30- 9	1.5	38	38	0	8	8	2	14	0	76	110
31-10	1.4	37	37	2	7	7	0	19	0	69	37
30-11	1.7	27	28	9	4	4	0	29	13	57	45
31-12	3.0	30	22	14	1	1	0	28	34	46	56

APPENDIX F
Premier Tech Aqua Report

WASTEWATER TECHNOLOGY

NSF/ANSI Standard 245 - *Wastewater Treatment Systems – Nitrogen Reduction*

Final Report:

**Premier Tech Aqua
Ecoflo Coco Filter ECDn Model Series
15/03/055/0030**



NSF International
789 N. Dixboro Road
PO Box 130140
Ann Arbor, Michigan 48113-0140 USA

**Evaluation Report:
Ecoflo Coco Filter ECDn Model Series
Wastewater Treatment System**

**Under the provisions of NSF/ANSI Standard 245
Wastewater Treatment Systems – Nitrogen Reduction**

January 2016

EXECUTIVE SUMMARY

Testing of the Ecoflo Coco Filter ECDn Model Series was conducted under the provisions of NSF/ANSI Standard 245 for Residential Wastewater Treatment Systems (April 2013 revision). NSF/ANSI Standard 245 was developed by the NSF Joint Committee on Wastewater Technology.

The performance evaluation was conducted at the NSF Wastewater Technology Testing Facility located in Waco, Texas, using wastewater diverted from the Waco municipal wastewater collection system, which serves predominantly residential development. The evaluation consisted of sixteen weeks of dosing at design flow, seven and one half weeks of stress testing and an additional two and one half weeks of dosing at design flow. The stress weeks were repeated due to sampling error and the test was extended for 35 weeks. Sampling started in the spring and continued through summer and fall, covering a range of operating temperatures.

Over the course of the evaluation, the average influent Total Nitrogen was 40.4 mg/L, ranging between 20.9 and 77.4 mg/L. The Ecoflo Coco Filter ECDn Model Series produced an average effluent Total Nitrogen of 18.6 mg/L, which resulted in a 53.89% reduction in the influent Total Nitrogen. The Ecoflo Coco Filter ECDn Model Series produced an effluent that successfully met the performance requirements established by NSF/ANSI Standard 245.

The Ecoflo Coco Filter ECDn Model Series produced an effluent that successfully met the performance requirements established by NSF/ANSI Standard 40 for Class I effluent:

The maximum 7-day arithmetic mean was 13 mg/L for CBOD₅ and 9 mg/L for total suspended solids, both below the allowed maximums of 40 and 45 mg/L, respectively. The maximum 30-day arithmetic mean was 5 mg/L for CBOD₅ and 5 mg/L for total suspended solids, both below the allowed maximums of 25 mg/L and 30 mg/L, respectively.

The effluent pH during the entire evaluation ranged between 6.6 and 7.3, within the required range of 6.0 to 9.0. The Ecoflo Coco Filter ECDn Model Series met the requirements for noise levels (less than 60 dbA at a distance of 20 feet), color, threshold odor, oily film and foam.

PREFACE

Performance evaluation of nitrogen reduction for residential wastewater treatment systems is achieved within the provisions of NSF/ANSI Standard 245: Wastewater Treatment Systems – Nitrogen Reduction (April 2013), prepared by the NSF Joint Committee on Wastewater Technology and adopted by the NSF Board of Trustees.

Conformance with the Standard is recognized by issuance of the NSF Mark. This is not to be construed as an approval of the equipment, but a certification of the data provided by the test and an indication of compliance with the requirements expressed in the Standard.

Systems conforming to Standard 245 are classified as having met the requirements of the Standard. Permission to use the NSF Mark is granted only after the equipment has been tested and found to perform satisfactorily, and all other requirements of the Standard have been satisfied. Continued use of the Mark is dependent upon evidence of compliance with the Standard and NSF General and Program Specific Policies, as determined by periodic reinspection of the equipment at the factory, distributors and reports from the field.

NSF Standard 245 requires the testing laboratory to provide the manufacturer of a residential wastewater treatment system a report including significant data and appropriate commentary relative to the performance evaluation of the plant. NSF policy specifies provision of performance evaluation reports to appropriate state regulatory agencies at publication. Subsequent direct distribution of the report by NSF is made only at the specific request of or by permission of the manufacturer.

The following report contains results of the entire testing program, a description of the plant, its operation and key process control equipment, and a narrative summary of the test program, including test location, procedures and significant occurrences. The plant represented herein reflects the equipment authorized to bear the NSF Mark.

CERTIFICATION


NSF International has determined by performance evaluation under the provisions of NSF/ANSI Standard 245 (revised April 2013) that the Model Number Ecoflo Coco Filter ECDn Model Series manufactured by Premier Tech Aqua has fulfilled the requirements of NSF/ANSI Standard 245. The Ecoflo Coco Filter ECDn Model Series has therefore been authorized to bear the NSF Mark so long as Manufacture continues to meet the requirements of Standard 245 and NSF General and Program Specific Policies.

General performance evaluation and stress tests were performed at the Wastewater Technology Site located at the NSF Wastewater Technology Testing Facility located in Waco, Texas. The raw wastewater used in the test was residential wastewater. The characteristics of the wastewater during the test are included in the tabulated data of this report.

The observations and analyses included in this report are certified to be correct and true copies of the data secured during the performance tests conducted by NSF on the wastewater treatment system described herein. The manufacturer has agreed to present the data in this certification in its entirety whenever it is used in advertising, prospectuses, bids or similar uses.



Jenny Oorbeck
General Manager
Sustainability



Sharon Stiener
Business Unit Manager
Wastewater

TABLE OF CONTENTS

	<u>Page</u>
Executive Summary	2
Preface	3
Certification	4
Table of Contents	5
1.0 Process Description	7
2.0 Performance Evaluation.....	7
2.1 Description of Unit Evaluated.....	7
2.2 Test Protocol	8
2.3 Test Chronology.....	9
3.0 Analytical Results	9
3.1 Summary	10
3.2 Biochemical Oxygen Demand.....	11
3.3 Total Suspended Solids	12
3.4 pH.....	13
3.5 Temperature.....	13
3.6 Dissolved Oxygen	14
3.7 Alkalinity	14
3.8 TKN	15
3.9 Ammonia-N	16
3.10 Nitrite/nitrate-N	17
3.11 Total Nitrogen.....	18
4.0 References.....	19
Appendices	
Appendix A - Plant Specifications and Drawings	
Appendix B - Standard 245 Section 8 - Performance testing and evaluation	
Appendix C - Analytical Results – BOD ₅ , CBOD ₅ , TSS, pH and Temperature	
Appendix D - Analytical Results – Nitrogen Analyses	
Appendix E - Owner’s Manual	

This page intentionally blank

1.0 PROCESS DESCRIPTION

To be treated, the wastewater first flows into a Primary tank where a primary treatment, gross solids sedimentation, takes place. The Ecoflo® Coco ECDn Model Series is based on a pre-denitrification approach: The ammonia is first converted into nitrates inside the Ecoflo® Coco filtering media (nitrification); then, nitrates are recirculated in a Primary tank and transformed in gaseous nitrogen (denitrification).

The wastewater entering the Ecoflo® Coco Filter is directed to the tipping bucket and evenly distributed onto distribution plates. These plates include channels and orifices that uniformly distribute the primary tank effluent over the surface of the filtering media. Distributed wastewater trickles downward into the filtering media where microorganisms, naturally attached onto the filtering media, degrade the contaminants through their metabolic reactions. A fraction of the treated wastewater is returned to the Primary/anoxic tank via the pumping station provided for that matter and the remaining fraction is directed toward the final disposal. The recirculation ratio is approximately two (2) times the daily flow (2Q).

2.0 PERFORMANCE EVALUATION

2.1 Description of Plant Evaluated

The Ecoflo® Coco Filter ECDn tested in this evaluation has a rated capacity of 14.1 gpd/ft² for an applied flow rate of 460 gallons per day (gpd). Specifications and drawings are included in Appendix A. The system is composed of a 920 gallon primary/septic tank equipped with an effluent filter, followed by the Ecoflo® Coco Filter operated in recirculation mode. The Ecoflo® Coco Filter was housed in a concrete shell. The filtering media consisted in a natural coco composed of fragments of coconut husks especially shaped and sized to treat residential wastewater. A securely fastened polyethylene lid limited the access to the filter.

The wastewater entered the primary/septic tank for primary treatment (separation of settleable solids). From the Primary tank, the pretreated wastewater flows to the Ecoflo® Coco Filter. Effluent from the primary/septic tank is gravity fed to a tipping bucket to alternately apply wastewater to the distribution plates. These plates included channels and orifices that uniformly distributed the settled wastewater to the top of the filtering media. The wastewater trickled down into the filtering media where microorganisms, naturally attached onto the coco fragments, degraded the contaminants through their metabolic reactions.

The treated effluent was collected at the bottom of the filter and directed to a pumping station with a minimum working capacity of 150 gallons. The pump, controlled by a time dosing control panel, allowed the recirculation, via a specially designed Premier Tech Aqua pressure flow divider (PFS-200DN), of 2/3 of the dose at the beginning of the treatment train (Primary tank) and 1/3 of the dose to the outlet pipe located on the side of the shell.

Normally, an Ecoflo® Coco Filter model with integrated pump would be used to ensure the recirculation. However, for the purpose of the certification, a pumping station was installed downstream of the Ecoflo® Coco Filter in order to recirculate part of the treated water to the Primary tank. To regulate the recirculation rate a minimum working capacity of 0.3Q (Q being the design daily flow rate) is required. As mentioned above, this volume of treated effluent can be provided either at the bottom of the Ecoflo® Coco Filter tank with an integrated pump or in an independent pumping station installed downstream of the filter.

Flow regulation can be achieved either by using a time dosing unit controlling the recirculation pump or, by a gravity flow regulator mounted on the outlet of the septic tank. Both Approaches provide equivalent flow regulation performance.

2.2 Test Protocol

Section 8 of NSF/ANSI Standard 40 protocol, "Performance Testing and Evaluation", is included in Appendix B. Start up of the plant was accomplished by filling the primary tank with 2/3 water and 1/3 raw sewage. The plant was then dosed at the design loading rate of 460 gpd as follows:

- 6 a.m. to 9 a.m. - 35 percent of daily rated capacity (160 gallons)
- 11 a.m. to 2 p.m. - 25 percent of daily rated capacity (120 gallons)
- 5 p.m. to 8 p.m. - 40 percent of daily rated capacity (180 gallons)

Dosing was accomplished by opening an electrically actuated valve to feed wastewater to the test plant. Ten gallon doses were spread uniformly over each dosing period to comprise the total dose volume for the period.

After a start up period (up to three weeks at the manufacturer's discretion), the plant is subjected to the following loading sequence:

- Design loading - 16 weeks
- Stress loading - 7.5 weeks
- Design loading - 2.5 weeks

Note this test was extended to 35 weeks, stress was repeated due to sampling error.

During the design loading periods, flow proportioned 24-hour composite influent and effluent samples are collected three times per week. The influent samples are analyzed for five-day biochemical oxygen demand (BOD₅), total suspended solids (TSS), alkalinity, total Kjeldahl nitrogen (TKN), and ammonia-N. The effluent samples are analyzed for carbonaceous five-day biochemical oxygen demand (CBOD₅), TSS, alkalinity, TKN, ammonia-N and nitrite/nitrate-N concentrations. Onsite determinations of the influent and effluent pH, temperature and dissolved oxygen are made five days per week on grab samples.

Stress testing is designed to evaluate how the plant performs under non-ideal conditions, including varied hydraulic loadings and electrical or system failure. The test sequence includes (1) Wash Day stress, (2) Working Parent stress, (3) Power/Equipment Failure stress, and (4) Vacation stress. Detailed descriptions of the stress sequences are shown in Appendix B.

During the stress test sequences, 24-hour composite samples are collected before and after each stress dosing pattern. The analyses and on-site determinations completed on the samples are the same as described for the design load testing. Each stress is followed by seven consecutive days of dosing at design rated capacity before beginning the next stress test. Sample collection is initiated twenty-four hours after completion of Wash Day, Working Parent, and Vacation stresses, and beginning 48 hours after completion of the Power/Equipment Failure stress.

In order for the system to successfully pass the Standard 245 evaluation:

- (1) CBOD₅: The average of all effluent samples shall not exceed 25 mg/L.
- (2) TSS: The average of all effluent samples shall not exceed 30 mg/L.
- (3) Total Nitrogen: The average total nitrogen concentration of all effluent samples shall be less than 50% of the average total nitrogen concentration of all influent samples.
- (4) pH: Individual effluent values shall remain between 6.0 and 9.0 SU.

2.3 Test Chronology

The system was installed under the direction of the manufacturer from March 3, 2015 through March 11, 2015. The infiltration/exfiltration test, during which the entire system was tested for leaks, was completed on March 2, 2015. The unit was completely pumped out then filled with fresh water to allow set up and adjustment prior to the start of dosing. The fresh water was then pumped down by approximately one-third volume in the treatment unit. Dosing was initiated at the rate of 460 gallons per day beginning March 16, 2015. After a three-week start up period, the test was officially started on April 6, 2015. The stress test sequence was started on July 27, 2015 to September 8, 2015, and repeated September 21, 2015 to November 6, 2015. The stress weeks were repeated due to test site error and the test was extended to 35 weeks. During the second wash day stress, the system was mistakenly dosed at 520 gpd on each of the three wash days. Testing was completed on December 4, 2015.

3.0 ANALYTICAL RESULTS

3.1 Summary

Chemical analyses of samples collected during the evaluation were completed using the procedures in *Standard Methods for the Examination of Water and Wastewater* 21st edition. Copies of the data generated during the evaluation are included in Appendix C. Results of the chemical analyses and on-site observations and measurements made during the evaluation are summarized in Table I.

TABLE I. SUMMARY OF ANALYTICAL RESULTS

	<u>Average</u>	<u>Std. Dev.</u>	<u>Minimum</u>	<u>Maximum</u>	<u>Median</u>	<u>Interquartile Range</u>
Biochemical Oxygen Demand (mg/L)						
<i>Influent (BOD₅)</i>	200	88	39	590	200	200-290
<i>Effluent (CBOD₅)</i>	4	3	1	34	3	3-6
Total Suspended Solids (mg/L)						
<i>Influent</i>	190	83	26	600	180	180-250
<i>Effluent</i>	2	2	1	10	2	2-4
pH						
<i>Influent</i>	-	-	6.8	7.9	7.4	7.3-7.5
<i>Effluent</i>	-	-	6.6	7.3	7.1	7.0-7.2
Temperature (°C)						
<i>Influent</i>	28	3	22	32	28	28-31
<i>Effluent</i>	28	3	20	33	28	28-30
Dissolved Oxygen (mg/L)						
<i>Primary Tank</i>	1.0	1.0	0.2	2.4	0.5	0.4-1.3
<i>Effluent</i>	4.0	2.0	0.5	8.0	4.0	3.9-5.4
Alkalinity (mg/L)						
<i>Influent</i>	320	42	230	420	320	300-350
<i>Effluent</i>	280	42	190	360	270	250-310
Total Kjeldahl Nitrogen						
<i>Influent</i>	40.1	12.6	20.7	76.9	37.8	39.9-47.0
<i>Effluent</i>	14.9	9.3	2.3	33.3	11.5	8.6-21.1
Ammonia-N						
<i>Influent</i>	25.1	8.3	7.1	44.3	24.7	18.4-30.5
<i>Effluent</i>	12.5	8.4	1.0	28.9	10.2	6.8-18.4
Nitrite/nitrate-N (mg/L)						
<i>Influent</i>	0.35	0.46	0.05	2.20	0.10	0.06-0.53
<i>Effluent</i>	3.77	2.01	0.30	8.54	4.20	2.34-5.01
Total Nitrogen						
<i>Influent</i>	40.4	12.6	20.9	77.4	37.9	30.3-47.7
<i>Effluent</i>	18.6	8.1	6.7	34.4	15.9	12.6-24.8

Notes: The median is the point where half of the values are greater and half are less.
The interquartile range is the range of values about the median between the upper and lower 25 percent of all values.

Criteria for evaluating the analytical results from the testing are described in Section 8.5 of NSF/ANSI Standard 40. In completing the pass/fail determination for the data, an allowance is made for effluent TSS and CBOD₅ during the first month of testing. The 30- and 7-day averages during this time may not equal or exceed 1.4 times the effluent limits required for the rest of the test. This provision recognizes that an immature culture of microorganisms within the system may require additional time to achieve adequate treatment efficiency. Effluent CBOD₅ and TSS concentrations from the Ecoflo Coco Filter ECDn Model Series during the first calendar month of testing were within the normal limits and did not need to use this provision.

Section 8.5.1.1 of the Standard provides guidance addressing the impact of unusual testing conditions, including sampling, dosing, or influent characteristics, on operation of a system under test. Specific data points may be excluded from 7- and 30-day average calculations where determined to have an adverse impact on performance of the system, with rationale for the exclusion to be documented in the final report. During the second wash day stress, the system was mistakenly dosed at 520 gpd on each of the three wash days. No impact was observed on the system under test and no data was excluded because of this testing error.

Sections 3.6 and 8.2.1 of the Standard define influent wastewater characteristics as they apply to testing under the Standard. Typical domestic wastewater is defined as having a 30-day average BOD₅ concentration between 100 and 300 mg/L and a 30-day average TSS concentration between 100 and 350 mg/L. The 30-day average influent remained inside this specified range for the duration of the test.

3.2 Biochemical Oxygen Demand

The five-day biochemical oxygen demand (BOD₅) and five-day carbonaceous biochemical oxygen demand (CBOD₅) analyses were completed using *Standard Methods for the Examination of Water and Wastewater* 21st edition. The results of both analyses are shown in Figure 1.

Influent BOD₅:

Individual influent BOD₅ concentrations ranged from 39 to 590 mg/L during the evaluation, with average concentration of 200 mg/L and a median concentration of 200 mg/L. Thirty day average concentrations ranged from 160 to 280 mg/L. The average influent BOD₅ delivered to the treatment unit was within the influent characteristics defined under Section 8.2.1 of NSF/ANSI Standard 245.

Effluent CBOD₅:

Effluent CBOD₅ concentrations ranged from 1 to 34 mg/L over the course of the evaluation, with an average and median effluent CBOD₅ concentrations of 4 and 3 mg/L.

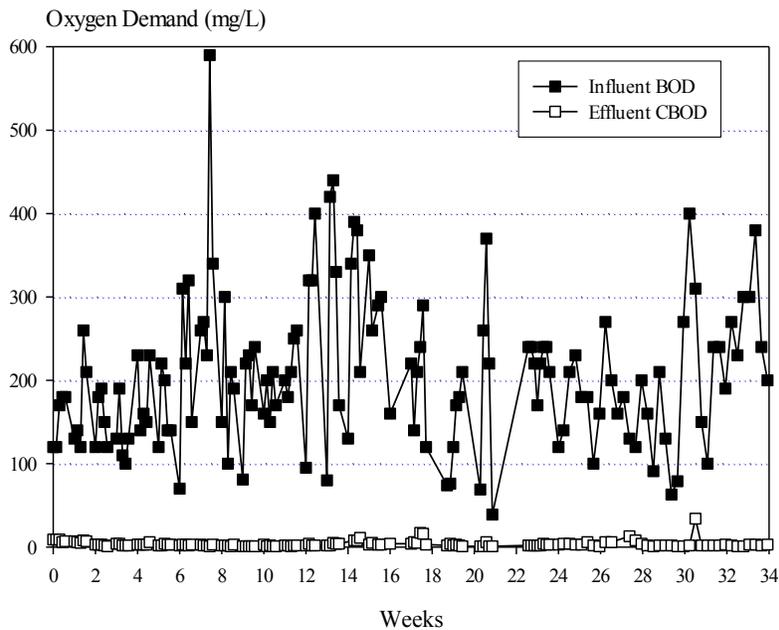


Figure 1. Biochemical Oxygen Demand

3.3 Total Suspended Solids

TSS analyses were completed using *Standard Methods for the Examination of Water and Wastewater* 21st edition. The TSS results over the entire evaluation are shown in Figure 2. Data from the TSS analyses are summarized in Table I.

Influent TSS:

The influent TSS ranged from 26 to 600 mg/L during the evaluation, with an average and median concentrations of 190 and 180 mg/L. The 30-day average concentrations during the test ranged from 130-260 mg/L. The average influent TSS delivered to the treatment unit was within the influent characteristics defined under Section 8.2.1 of NSF/ANSI Standard 245.

Effluent TSS:

The effluent TSS concentration ranged from 1 to 10 mg/L during the evaluation, with an average and median concentrations of 2 mg/L.

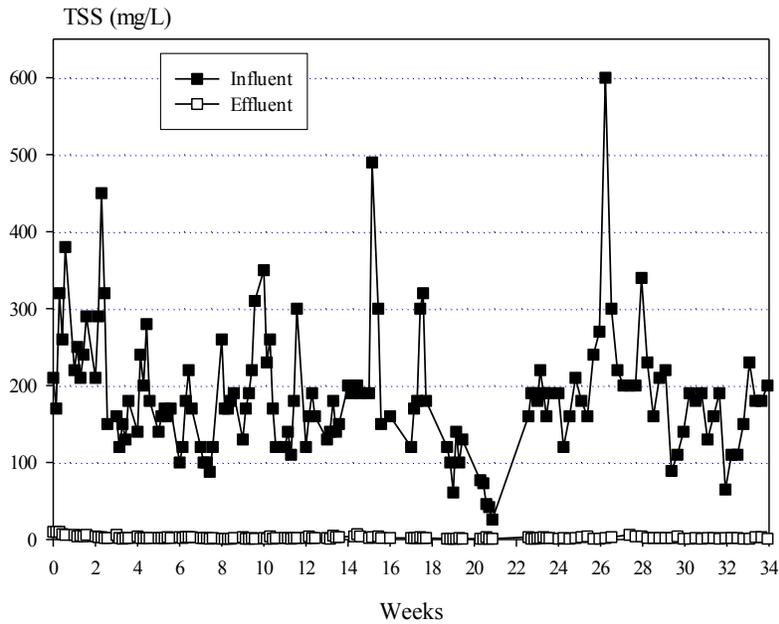


Figure 2. Total Suspended Solids

3.4 pH

Over the entire evaluation period, the influent pH ranged from 6.8 to 7.9 (median of 7.4). The effluent pH ranged 6.6 to 7.3 during the evaluation (median of 7.1); within the 6 to 9 range required by NSF/ANSI Standard 245. The pH data for the evaluation are shown in Appendix C.

3.5 Temperature

Influent temperatures over the evaluation period ranged from 22 to 32°C (median of 29°C). The temperature data are shown in Appendix C. The average influent temperature was within the characteristics defined under Section 8.2.1 of NSF/ANSI Standard 245.

3.6 Dissolved Oxygen

Dissolved Oxygen (DO) was measured in the primary tank effluent and effluent during the evaluation. The primary tank effluent DO ranged between 0.2 and 2.4 mg/L (median of 0.5 mg/L), while the effluent DO ranged between 0.5 and 8.0 mg/L (median of 4.0 mg/L). All dissolved oxygen data are shown in Appendix C.

3.7 Alkalinity

Alkalinity analyses were completed using *Standard Methods for the Examination of Water and Wastewater* 21st edition. The alkalinity results over the entire evaluation are shown in Figure 3. The influent and effluent alkalinities were all well within the range required by the Standard, and review of the nitrogen data indicates that alkalinity was not a limiting factor for nitrification in the system.

Influent Alkalinity

The influent alkalinity averaged 320 mg/L, ranging from 230 to 420 mg/L, with a median concentration of 320 mg/L. The influent alkalinity delivered to the treatment unit was within the influent characteristics defined under Section 8.2.1 of NSF/ANSI Standard 245.

Effluent Alkalinity

The effluent Alkalinity concentration ranged from 190 to 360 mg/L during the period when alkalinity samples were collected, with an average concentration of 280 mg/L and a median concentration of 270 mg/L.

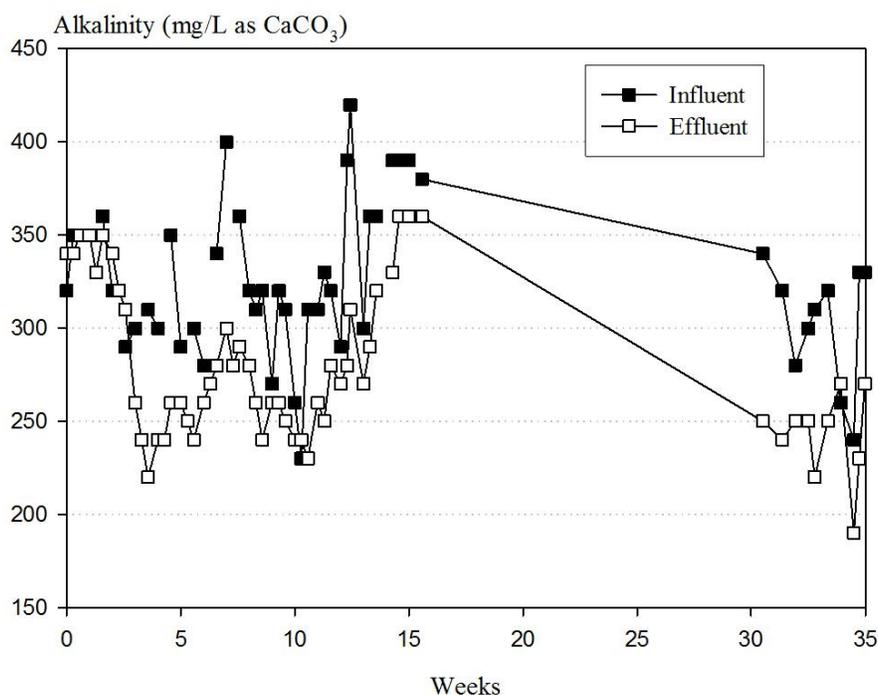


Figure 3: Alkalinity

3.8 Total Kjeldahl Nitrogen (TKN)

TKN analyses were completed using *Standard Methods for the Examination of Water and Wastewater* 21st edition. The TKN results over the entire evaluation are shown in Figure 4.

Influent TKN:

The influent TKN ranged from 20.7 to 76.9 mg/L during the evaluation, with average of 40.1 mg/L and a median concentration of 37.8 mg/L. The influent TKN delivered to the treatment unit was within the influent characteristics defined under Section 8.2.1 of NSF/ANSI Standard 245.

Effluent TKN:

The effluent TKN concentration ranged from 2.3 to 33.3 mg/L during the evaluation, with an average concentration of 14.9 mg/L and a median concentration of 11.5 mg/L.

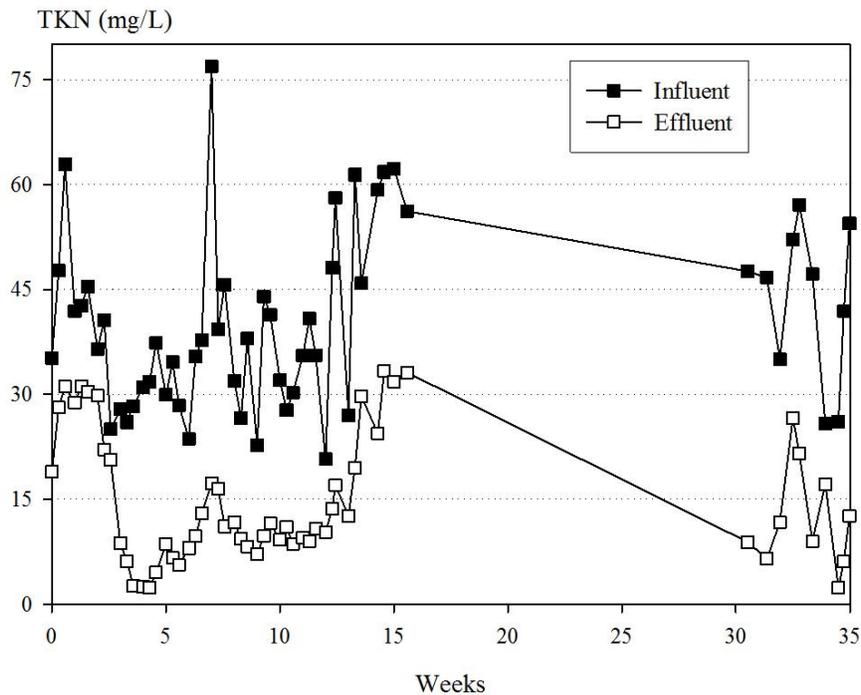


Figure 4: Total Kjeldahl Nitrogen

3.9 Ammonia-N

Ammonia-N analyses were completed using *Standard Methods for the Examination of Water and Wastewater* 21st edition. The Ammonia-N results over the entire evaluation are shown in Figure 5.

Influent Ammonia-N:

The influent Ammonia-N ranged from 7.1 to 44.3 mg/L during the evaluation, with an average and median concentrations of 25.1 and 24.7 mg/L.

Effluent Ammonia-N:

The effluent Ammonia-N concentration ranged from 1.0 to 28.9 mg/L during the evaluation, with an average of 12.5 mg/L and a median concentration of 10.2 mg/L.

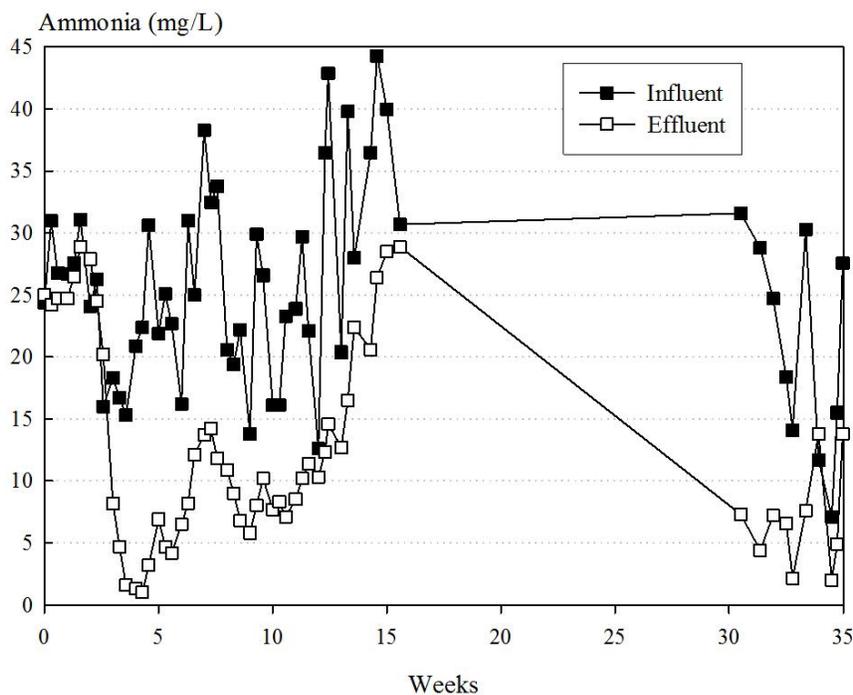


Figure 5: Ammonia

3.10 Nitrite/nitrate-N

Nitrite/nitrate-N analyses were completed using *Standard Methods for the Examination of Water and Wastewater* 21st edition. The Nitrite/nitrate-N results over the entire evaluation are shown in Figure 6.

Influent Nitrite/nitrate-N:

The influent Nitrite/nitrate-N ranged from 0.05 to 2.2 mg/L during the evaluation, with average and median concentrations of 0.35 and 0.1 mg/L.

Effluent Nitrite/nitrate-N:

The effluent Nitrite/nitrate-N concentration ranged from 0.3 to 8.5 mg/L during the evaluation, with an average of 3.8 mg/L and a median concentration of 4.2 mg/L.

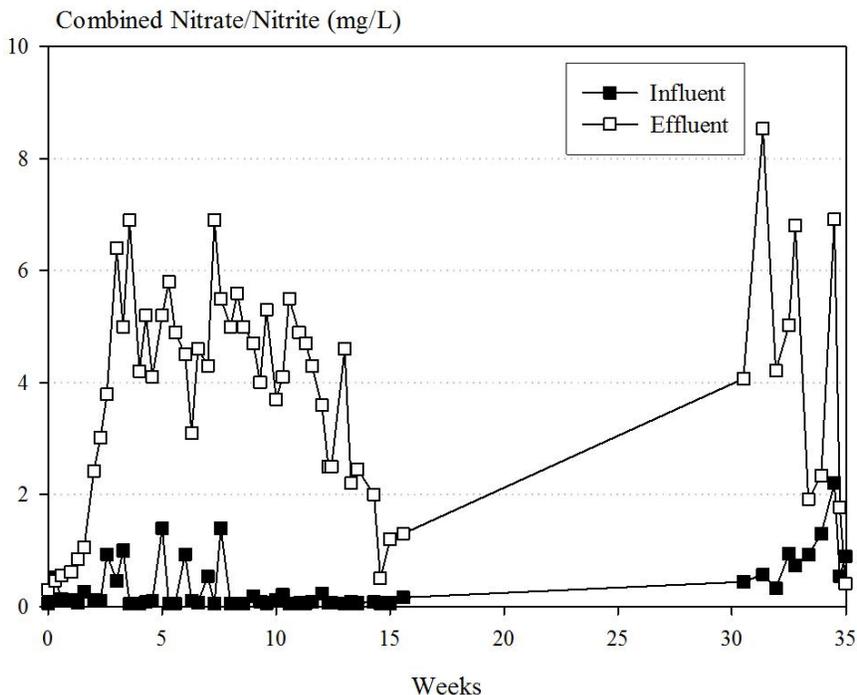


Figure 6: Effluent Nitrate/Nitrite

3.11 Total Nitrogen

Total Nitrogen (TN) is the sum of the total Kjeldahl nitrogen (TKN), nitrite (NO₂) and nitrate (NO₃) in a sample, and is expressed as mg/L as N. The TN results over the entire evaluation are shown in Figure 7.

Influent Total Nitrogen

The influent TN ranged from 20.9 to 77.4 mg/L during the evaluation, with average and median concentrations of 40.4 and 37.9 mg/L.

Effluent Total Nitrogen:

The effluent TN concentration ranged from 6.7 to 34.4 mg/L during the evaluation, with an average concentration of 18.6 mg/L and a median concentration of 15.9 mg/L. The Premier Tech Aqua Ecoflo Coco

Filter ECDn Model Series successfully met the requirements of Standard 245 by reducing the influent TN by 53.89%, which exceeds the pass/fail criteria of 50%.

Nitrogen Loading:

Over the course of the evaluation the influent Total Nitrogen loading averaged 0.15 lb/day. The Premier Tech Aqua Ecoflo Coco Filter ECDn Model Series achieved an average reduction of 0.08 lbs/day.

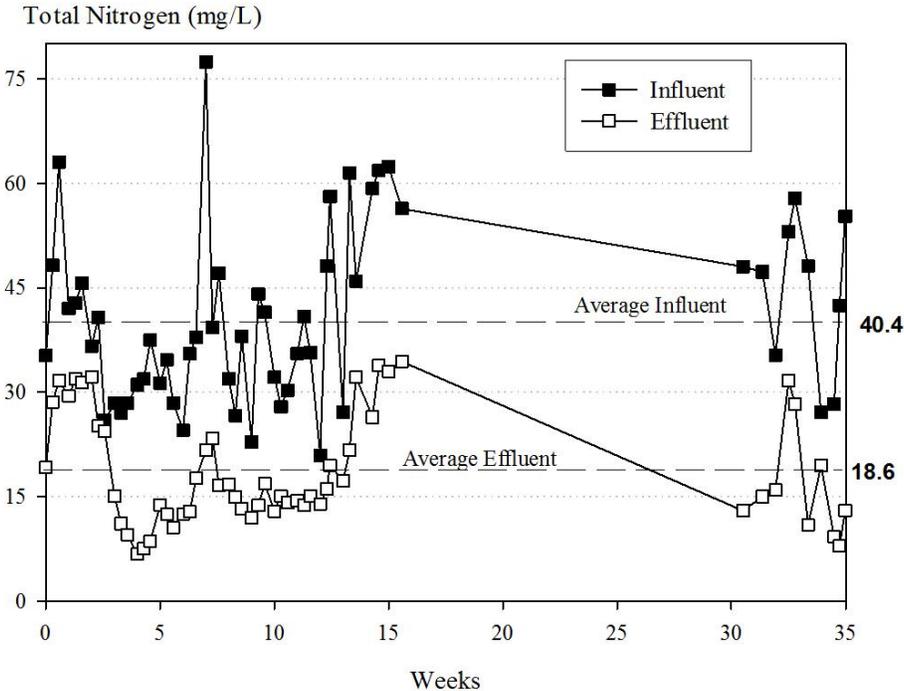


Figure 7: Total Nitrogen

4.0 REFERENCES

1. American Public Health Association (APHA), American Water Works Association (AWWA) & Water Environment Federation (WEF): *Standard Methods for the Examination of Water and Wastewater*, 21st Edition, 2005 (hereinafter referred to as *Standard Methods*)
2. ANSI/AWS D.1.1/D1.1M:2010, *Structural Welding Code – Steel* and ANSI/AWS D1.3/D1.3M:2008, *Structural Welding Code – Sheet Steel*, 5th Edition, with Errata
3. NFPA 70®: *National Electrical Code®* (NEC®), 2011
4. NSF/ANSI 40, *Residential Wastewater Treatment Systems*
5. US EPA, *Code of Federal Regulations (CFR), Title 40: Protection of Environment, July 1, 2010*

This page intentionally blank

APPENDIX A
PLANT SPECIFICATIONS

APPENDIX B

**NSF STANDARD 245 PERFORMANCE EVALUATION
METHOD AND REQUIREMENTS**

8 Performance testing and evaluation

This section describes the methods used to evaluate the performance of residential wastewater treatment systems designed to remove nitrogen from residential wastewater. Performance testing and evaluation shall not be restricted to specific seasons.

8.1 Preparations for testing and evaluation

The system shall be assembled, installed, and filled in accordance with the manufacturer's instructions.

The manufacturer shall inspect the system for proper installation. If no defects are detected and the system is judged to be structurally sound, it shall be placed into operation in accordance with the manufacturer's start-up procedures. If the manufacturer does not provide a start-up procedure, $\frac{2}{3}$ of the system's capacity shall be filled with water and the remaining $\frac{1}{3}$ shall be filled with residential wastewater.

The system shall undergo design loading (see 8.2.2.1) until testing and evaluations are initiated. Sample collection and analysis shall be initiated within three weeks of filling the system and shall continue without interruption until the end of the evaluation period, except as specified in 8.4.2.

If conditions at the test site preclude installation of the system at its normally prescribed depth, the manufacturer shall be permitted to cover the system with soil to achieve normal installation depth.

When possible, electrical or mechanical defects shall be repaired to prevent delays. All repairs made during the performance testing and evaluation shall be documented in the final report.

The system shall be operated in accordance with the manufacturer's instructions. However, routine service and maintenance of the system shall not be allowed during the testing and evaluation period.

NOTE – The manufacturer may recommend or offer more frequent service and maintenance of the system, but for purpose of performance testing and evaluation, the service and maintenance shall not be performed beyond what is specified in this Standard.

8.2 Testing conditions, hydraulic loading and schedules

8.2.1 Influent wastewater characteristics

Except as required by NSF/ANSI 40 for systems seeking concurrent NSF/ANSI 40 and Nitrogen Reduction certification, the average wastewater characteristics delivered to the system over the course of the testing shall fall within:

- BOD₅: 100 to 300 mg/L
- TSS: 100 to 350 mg/L
- TKN: 35 to 70 mg/L as N
- alkalinity: > 175 mg/L as CaCO₃ (alkalinity may be adjusted if inadequate)
- temperature: 10 to 30 °C (50 to 86 °F)
- pH: 6.5 to 9 SU

Unless requested by the manufacturer, the raw influent shall be supplemented with sodium bicarbonate if the wastewater is found to be deficient in alkalinity. In addition, the influent shall be supplemented with urea to meet the required influent TKN concentration. The influent may also be supplemented with methanol to maintain a carbon:nitrogen ratio of no less than 5:1.

NOTE – For this testing, minimum alkalinity may be calculated as described in Annex A.

If the influent temperature drops below 10 °C (50 °F), impacting the nitrification process, sample collection may be suspended until the influent temperature returns to 10 °C (50 °F).

8.2.2 Hydraulic loading

The performance of the system shall be evaluated for a minimum of 26 wks. During the testing and evaluation period, the system shall be subjected to 16 wks of design loading, followed by 7.5 wks (52 d) of stress loading, and an additional period of design loading to obtain a minimum of 55 influent and effluent data sets collected during non-stress dosing period.

8.2.2.1 Design loading

The system shall be dosed 7 d/wk with a wastewater volume equivalent to the daily hydraulic capacity of the system. The following schedule shall be adhered to for dosing:

Time Frame	Approximate % rated daily hydraulic capacity
6 a. m. – 9 a. m.	35
11 a. m. – 2 p. m.	25
5 p. m. – 8 p. m.	40

NOTE – An individual dose shall be no more than 10 gal (37.9 L), unless the dosage system is based on a continuous flow, and the doses shall be uniformly applied over the dosing period.

8.2.2.2 Stress loading

Stress loading sequences shall begin in week 17 of the testing and will be completed in the order listed in the following sections. Each stress sequence shall be separated by 7 d of design loading, as described in 8.2.2.1.

8.2.2.2.1 Wash-day stress

The wash-day stress shall consist of 3 wash-days in a 5-d period. Each wash-day shall be separated by a 24-h period. During a wash-day, the system shall be loaded at times and capacities similar to those delivered during design loading (see 8.2.2.1). However, during the first two dosing periods per day, the design loading shall include 3 wash loads (3 wash cycles and 6 rinse cycles).

8.2.2.2.2 Working-parent stress

For five consecutive days, the system shall be subjected to a working-parent stress. During this stress, the system shall be dosed with 40% of its daily hydraulic capacity between 6:00 a. m. and 9:00 a. m. Between 5:00 p. m. and 8:00 p. m., the system shall be dosed with the remaining 60% of its daily hydraulic capacity,

which shall include 1 wash load (1 wash cycle and 2 rinse cycles).

8.2.2.2.3 Power/equipment failure stress

Power/equipment failure stress simulation shall consist of a flow pattern where approximately 40% of the total daily flow is received between 5 p. m. and 8 p. m. on the day when the power/equipment failure stress is initiated. Power to the system shall then be turned off at 9 p. m. and the flow pattern shall be discontinued for 48 h. After the 48-h period, power shall be restored and the system shall receive approximately 60% of the total daily flow over a 3-h period which shall include 1 wash load (1 wash cycle and 2 rinse cycles).

8.2.2.2.4 Vacation stress

Vacation stress simulation shall consist of a flow pattern where approximately 35% of the total daily flow is received between 6 a. m. and 9 a. m. and approximately 25% of the total daily flow is received between 11 a. m. and 2 p. m. on the day that the vacation stress is initiated. The flow pattern shall be discontinued for 8 consecutive days with power continuing to be supplied to the system. Between 5 p. m. and 8 p. m. of the ninth day, the system shall receive 60% of the total daily flow, which shall include 3 wash loads (3 wash cycles and 6 rinse cycles).

8.2.3 Dosing volumes

The 30-d average volume of the wastewater delivered to the system shall be within $100\% \pm 10\%$ of the system's rated hydraulic capacity.

NOTE – All dosing days, except those with dosing requirements less than the daily hydraulic capacity, shall be included in the 30-d average calculation.

8.3 Sample collection

8.3.1 Sampling frequency

Influent and effluent samples shall be collected three times per week during design loading periods and twice during each stress recovery period (the week following completion of each of the stress simulations described in 8.2.2.2). This schedule shall be continued in the event that testing is extended beyond the 26-wk minimum.

8.3.2 Collection methods

All sample collection shall be in accordance with *Standard Methods*, unless otherwise specified. Influent wastewater samples shall be flow-proportional, 24-h composites obtained during periods of system dosing. Effluent samples shall be flow-proportional, 24-h composites obtained during periods of system discharge. Effluent samples shall be representative of all treated effluent discharged from the system, as sampled from a central point of collection of all treated effluent. Grab samples shall be collected for pH, temperature, and dissolved oxygen (DO). The location of the grab sample shall be appropriate to provide a sample that is representative of the influent or effluent, and shall be determined in conjunction with the manufacturer. Grab samples shall be collected during the morning dosing period for gravity flow systems and during a time of discharge for systems that are pump discharged.

8.3.3 Analyses

The samples collected as described in 8.3.1 and 8.3.2 shall be analyzed as follows:

Parameter	Sample type	Sample location		Testing location
		Raw influent	Treated effluent	
BOD ₅	24 h composite	X		Laboratory
CBOD ₅	24 h composite		X	Laboratory
Total suspended solids	24 h composite	X	X	Laboratory
PH	Grab	X	X	Test site
Temperature (°C)	Grab	X	X	Test site
Dissolved oxygen	Grab		X	Test site
Alkalinity (as CaCO ₃)	24 h composite	X	X	Laboratory
TKN (as N)	24 h composite	X	X	Laboratory
Ammonia-N (as N)	24 h composite	X	X	Laboratory
Nitrite/nitrate-N (as N)	24 h composite	X	X	Laboratory

8.3.4 Analytical methods

The appropriate methods in *Standard Methods* shall be used to complete the analyses indicated in 8.3.3.

8.4 Criteria

8.4.1 Testing conditions

If conditions during the testing and evaluation period result in system upset, improper sampling, improper dosing, or influent characteristics outside the ranges specified in 8.2.1, an assessment shall be conducted to determine the extent to which these conditions adversely affected the performance of the system. Based on this assessment, specific data points may be excluded from the averages. Rationale for all data exclusions shall be documented in the final report.

8.4.2 Catastrophic site problems

In the event that a catastrophic site problem not described in the Standard including, but not limited to, influent characteristics, malfunctions of test site apparatus and acts of God, jeopardizes the validity of the performance testing, manufacturers shall be given the choice to:

- perform maintenance on the system, reinitiate system start-up procedures, and restart the performance testing; or
- with no routine maintenance performed, have the system brought back to pre-existing conditions and resume testing within 3 wks after the site problem has been identified and corrected. Data collected during the system recovery period shall be excluded from the effluent averages.

NOTE – “Pre-existing conditions” shall be defined as the point when the results of 1 wk’s worth of sampling are within 15% of the averages of the samples from the previous 3 wks of sampling.

8.4.3 Effluent quality

For purposes of determining system performance, only samples collected during design loading periods, described in 8.2.2, shall be used in the calculations. The data collected during the stress sequences shall not be included in the calculations, but shall be included in the final report.

8.4.3.1 CBOD5

The average CBOD5 of all effluent samples shall not exceed 25 mg/L.

8.4.3.2 TSS

The average TSS of all effluent samples shall not exceed 30 mg/L.

8.4.3.3 Total nitrogen

The average total nitrogen concentration of all effluent samples shall be less than 50% of the average total nitrogen concentration of all influent samples.

8.4.3.4 pH

The pH of individual effluent samples shall be between 6.0 and 9.0 SU.

8.5 Final report

A final report shall be prepared that presents the following:

- all data collected in accordance with the testing and evaluations within this Standard;
- a table indicating the actual percent reduction over the course of the test (included in the Executive Summary, as well as in the body, of the report);
- observations made during the testing;
- an estimation of the pounds of nitrogen loaded during the test and the pounds removed;
- any adjustments made to the alkalinity of the influent wastewater;
- a copy of the current edition of the Owner’s Manual; and
- process description and detailed dimensioned drawings of the system evaluated.

A supplemental report shall be prepared for any system(s) approved under the performance classification section (1.4) of this Standard, including process description(s) and dimensioned drawings.

APPENDIX C
ANALYTICAL RESULTS

NSF International
Standard 40 - Residential Wastewater Treatment Systems
 Plant Effluent

Week Beginning: 5-Apr-15 Plant Code: Premier Tech Coco DN

Weeks Into Test: 1

Weekend Dosing: Sunday 460 gallons Saturday 460 gallons Friday 460 gallons

Dosed Volume (gallons)	Monday	Tuesday	Wednesday	Thursday	Friday
Dissolved Oxygen (mg/L)	460	460	460	460	460
	0.59	0.63	0.62	0.57	0.64
Temperature (C)	6.61	6.97	8.02	6.15	7.43
	23	23	24	24	24
pH	21	22	22	23	22
	21	22	22	22	22
Biochemical Oxygen Demand (mg/L)	7.1	7.0	7.2	7.0	7.3
	7.2	7.2	7.1	7.1	7.3
Suspended Solids (mg/L)	7.2	7.2	7.1	7.1	7.2
	120	120	170	180	180
Suspended Solids (mg/L)	9	9	9	6	7
	210	170	320	260	380
Suspended Solids (mg/L)	10	10	10	7	6

- Notes:
- (a) Site problem
 - (b) Malfunction of system under test
 - (c) Weather problem
 - (d) Other

NSF International
Standard 40 - Residential Wastewater Treatment Systems
 Plant Effluent

Week Beginning: 12-Apr-15 Plant Code: Premier Tech Coco DN

Weeks Into Test: 2

Weekend Dosing: Sunday 460 gallons Saturday 460 gallons Friday 460 gallons

Dosed Volume (gallons)	Monday	Tuesday	Wednesday	Thursday	Friday
Dissolved Oxygen (mg/L)	460	460	460	460	460
	0.46	0.75	0.59	0.55	0.46
Temperature (C)	5.41	5.88	4.71	4.63	4.61
	25	24	24	25	24
pH	23	23	22	23	23
	22	22	22	23	23
Biochemical Oxygen Demand (mg/L)	7.2	7.1	6.9	7.3	7.0
	7.1	7.2	7.2	7.2	7.1
Suspended Solids (mg/L)	7.1	7.2	7.2	7.1	7.0
	130	140	120	260	210
Suspended Solids (mg/L)	7	6	5	8	7
	220	250	210	240	290
Suspended Solids (mg/L)	6	4	5	4	6

- Notes:
- (a) Site problem
 - (b) Malfunction of system under test
 - (c) Weather problem
 - (d) Other

NSF International
Standard 40 - Residential Wastewater Treatment Systems
 Plant Effluent

Week Beginning: 19-Apr-15 Plant Code: Premier Tech Coco DN

Weeks Into Test: 3

Weekend Dosing: Sunday 460 gallons Saturday 460 gallons

Dosed Volume (gallons)	Monday	Tuesday	Wednesday	Thursday	Friday
Dissolved Oxygen (mg/L)	0.49	0.57	0.36	0.48	0.40
	4.81	6.29	4.87	4.57	5.07
Temperature (C)	22	25	25	24	25
	23	23	23	23	23
pH	22	22	23	23	23
	6.8	7.2	7.0	6.9	7.2
Biochemical Oxygen Demand (mg/L)	7.2	7.2	7.1	7.2	7.1
	7.1	7.2	7.1	7.2	7.2
Suspended Solids (mg/L)	120	180	190	150	120
	3	3	3	2	1
Dosed Volume (gallons)	210	290	450	320	150
	4	3	3	2	2

Notes:
 (a) Site problem
 (b) Malfunction of system under test
 (c) Weather problem
 (d) Other

NSF International
Standard 40 - Residential Wastewater Treatment Systems
 Plant Effluent

Week Beginning: 26-Apr-15 Plant Code: Premier Tech Coco DN

Weeks Into Test: 4

Weekend Dosing: Sunday 460 gallons Saturday 460 gallons

Dosed Volume (gallons)	Monday	Tuesday	Wednesday	Thursday	Friday
Dissolved Oxygen (mg/L)	0.45	0.55	0.59	0.69	0.57
	5.31	5.17	6.89	6.32	6.60
Temperature (C)	25	24	23	24	22
	24	23	23	23	23
pH	24	23	23	23	22
	7.1	6.8	7.1	7.2	7.0
Biochemical Oxygen Demand (mg/L)	7.0	7.0	7.2	7.1	7.1
	7.0	7.0	7.2	7.0	7.1
Suspended Solids (mg/L)	130	190	110	99	130
	4	4	2	2	2
Dosed Volume (gallons)	160	120	150	130	180
	6	2	1	2	2

Notes:
 (a) Site problem
 (b) Malfunction of system under test
 (c) Weather problem
 (d) Other

NSF International
Standard 40 - Residential Wastewater Treatment Systems
 Plant Effluent

Week Beginning: 3-May-15 Plant Code: Premier Teeh Coco DN

Weeks Into Test: 5

Weekend Dosing: Sunday 460 gallons Saturday 460 gallons Friday 460 gallons

Dosed Volume (gallons)	Monday	Tuesday	Wednesday	Thursday	Friday	
Dissolved Oxygen (mg/L)	aeration chamber	0.57	0.49	0.58	0.65	0.57
	effluent	5.49	6.27	6.71	6.86	6.33
Temperature (C)	influent	25	25	26	26	25
	aeration chamber	24	24	25	25	24
pH	influent	24	24	25	25	24
	aeration chamber	6.9	6.8	7.0	7.1	6.9
Biochemical Oxygen Demand (mg/L)	influent	7.1	7.0	7.0	7.0	7.1
	effluent	7.1	7.0	7.0	7.0	7.0
Suspended Solids (mg/L)	influent	230	140	160	150	230
	effluent	3	3	3	3	6
Suspended Solids (mg/L)	influent	140	240	200	280	180
	effluent	4	2	2	2	2

Notes:
 (a) Site problem
 (b) Malfunction of system under test
 (c) Weather problem
 (d) Other

NSF International
Standard 40 - Residential Wastewater Treatment Systems
 Plant Effluent

Week Beginning: 10-May-15 Plant Code: Premier Teeh Coco DN

Weeks Into Test: 6

Weekend Dosing: Sunday 460 gallons Saturday 460 gallons Friday 460 gallons

Dosed Volume (gallons)	Monday	Tuesday	Wednesday	Thursday	Friday	
Dissolved Oxygen (mg/L)	aeration chamber	0.50	0.46	0.64	0.59	0.55
	effluent	5.27	5.52	6.40	7.27	6.12
Temperature (C)	influent	26	26	26	25	26
	aeration chamber	25	25	24	24	25
pH	influent	25	24	24	24	24
	aeration chamber	7.0	6.9	7.1	6.8	7.0
Biochemical Oxygen Demand (mg/L)	influent	7.1	7.0	7.1	7.0	7.0
	effluent	7.0	7.0	7.1	7.0	7.0
Suspended Solids (mg/L)	influent	120	220	200	140	140
	effluent	2	2	4	3	3
Suspended Solids (mg/L)	influent	140	160	170	160	170
	effluent	2	2	2	3	2

Notes:
 (a) Site problem
 (b) Malfunction of system under test
 (c) Weather problem
 (d) Other

NSF International
Standard 40 - Residential Wastewater Treatment Systems
 Plant Effluent
 Plant Code: Premier Teeh Coco DN

Week Beginning: 17-May-15

Weeks Into Test: 7

Weekend Dosing: Sunday 460 gallons Saturday 460 gallons Friday 460 gallons

Dosed Volume (gallons)	Monday	Tuesday	Wednesday	Thursday	Friday
Dissolved Oxygen (mg/L)	0.39	0.45	0.49	0.40	0.55
	5.07	4.89	4.74	4.65	4.95
Temperature (C)	26	26	26	27	26
	25	25	25	26	25
pH	25	25	25	25	25
	6.9	7.0	7.0	6.9	7.1
Biochemical Oxygen Demand (mg/L)	7.2	7.2	7.2	7.2	7.1
	7.0	7.1	7.1	7.1	7.1
Suspended Solids (mg/L)	70	310	220	320	150
	2	3	3	2	3
Suspended Solids (mg/L)	100	120	180	220	170
	3	2	3	3	3

Notes:
 (a) Site problem
 (b) Malfunction of system under test
 (c) Weather problem
 (d) Other

NSF International
Standard 40 - Residential Wastewater Treatment Systems
 Plant Effluent
 Plant Code: Premier Teeh Coco DN

Week Beginning: 24-May-15

Weeks Into Test: 8

Weekend Dosing: Sunday 460 gallons Saturday 460 gallons Friday 460 gallons

Dosed Volume (gallons)	Monday	Tuesday	Wednesday	Thursday	Friday
Dissolved Oxygen (mg/L)	460	460	460	460	460
	d	0.49	0.45	0.69	0.54
Temperature (C)	d	3.89	4.89	4.31	4.36
	d	25	26	26	26
pH	d	25	25	25	25
	d	7.0	7.0	7.5	7.2
Biochemical Oxygen Demand (mg/L)	d	6.8	7.2	6.7	6.9
	d	6.7	7.1	6.6	6.8
Suspended Solids (mg/L)	260	270	230	590	340
	3	2	2	2	<3
Suspended Solids (mg/L)	120	100	100	88	120
	2	2	2	1	2

Notes: No field readings on 5/25 due to the holiday.
 (a) Site problem
 (b) Malfunction of system under test
 (c) Weather problem
 (d) Other

NSF International
Standard 40 - Residential Wastewater Treatment Systems
 Plant Effluent

Week Beginning: 31-May-15 Plant Code: Premier Teeh Coco DN

Weeks Into Test: 9

Weekend Dosing: Sunday 460 gallons Saturday 460 gallons Friday 460 gallons

Dosed Volume (gallons)	Monday	Tuesday	Wednesday	Thursday	Friday
Dissolved Oxygen (mg/L)	460	460	460	460	460
	aeration chamber	a	0.55	0.47	0.47
Temperature (C)	5.07	a	4.33	4.30	4.57
	influent	a	27	26	26
pH	aeration chamber	a	27	27	26
	influent	a	26	26	26
Biochemical Oxygen Demand (mg/L)	aeration chamber	a	a	a	a
	influent	6.9	a	a	a
Suspended Solids (mg/L)	aeration chamber	7.2	a	a	a
	influent	7.0	a	a	a
Biochemical Oxygen Demand (mg/L)	influent (BOD ₅)	150	300	97	210
	effluent (CBOD ₅)	2	2	2	1
Suspended Solids (mg/L)	influent	260	170	170	180
	effluent	<1	1	1	<1

Notes: The pH meter failed on 6/2, resulting in loss of pH, temperature, and D.O. data on that day. pH measurements were not completed until the problem was resolved on 6/12.

(a) Site problem
 (b) Malfunction of system under test
 (c) Weather problem
 (d) Other

NSF International
Standard 40 - Residential Wastewater Treatment Systems
 Plant Effluent

Week Beginning: 7-Jun-15 Plant Code: Premier Teeh Coco DN

Weeks Into Test: 10

Weekend Dosing: Sunday 460 gallons Saturday 460 gallons Friday 460 gallons

Dosed Volume (gallons)	Monday	Tuesday	Wednesday	Thursday	Friday
Dissolved Oxygen (mg/L)	460	460	460	460	460
	aeration chamber	0.57	0.46	0.41	0.48
Temperature (C)	4.38	4.30	3.88	4.19	4.13
	influent	27	27	27	27
pH	aeration chamber	28	28	28	28
	influent	27	25	28	27
Biochemical Oxygen Demand (mg/L)	aeration chamber	a	a	a	a
	influent	a	a	a	a
Suspended Solids (mg/L)	aeration chamber	a	a	a	a
	influent	81	220	230	170
Suspended Solids (mg/L)	influent	1	1	1	1
	effluent	130	170	190	220
Suspended Solids (mg/L)	influent	3	1	1	2
	effluent	<1	<1	<1	<1

Notes: (a) Site problem
 (b) Malfunction of system under test
 (c) Weather problem
 (d) Other

NSF International
Standard 40 - Residential Wastewater Treatment Systems
 Plant Effluent

Week Beginning: 14-Jun-15 Plant Code: Premier Teeh Coco DN

Weeks Into Test: 11

Weekend Dosing: Sunday 460 gallons Saturday 460 gallons Friday 460 gallons

Dosed Volume (gallons)	Monday	Tuesday	Wednesday	Thursday	Friday
Dissolved Oxygen (mg/L)	0.83	1.28	1.09	1.01	1.05
	4.11	4.27	4.35	4.53	4.32
Temperature (C)	27	27	27	27	27
	28	28	28	27	28
pH	28	28	28	28	28
	7.5	7.4	7.5	7.6	7.5
Biochemical Oxygen Demand (mg/L)	7.0	7.0	7.0	7.0	7.0
	7.0	6.9	7.0	6.9	6.9
Suspended Solids (mg/L)	160	200	150	210	170
	3	1	2	1	1
Suspended Solids (mg/L)	350	230	260	170	120
	2	1	<4	<1	2

Notes:
 (a) Site problem
 (b) Malfunction of system under test
 (c) Weather problem
 (d) Other

NSF International
Standard 40 - Residential Wastewater Treatment Systems
 Plant Effluent

Week Beginning: 21-Jun-15 Plant Code: Premier Teeh Coco DN

Weeks Into Test: 12

Weekend Dosing: Sunday 460 gallons Saturday 460 gallons Friday 460 gallons

Dosed Volume (gallons)	Monday	Tuesday	Wednesday	Thursday	Friday
Dissolved Oxygen (mg/L)	1.60	1.58	1.74	1.63	1.64
	5.36	5.45	5.27	5.18	5.32
Temperature (C)	27	27	27	28	28
	27	27	28	28	28
pH	28	28	28	28	28
	7.6	7.3	7.5	7.4	7.5
Biochemical Oxygen Demand (mg/L)	7.1	7.0	7.0	7.0	7.0
	6.9	6.9	7.0	6.9	6.9
Suspended Solids (mg/L)	200	180	210	250	260
	2	2	1	2	2
Suspended Solids (mg/L)	120	140	110	180	300
	2	2	1	2	2

Notes:
 (a) Site problem
 (b) Malfunction of system under test
 (c) Weather problem
 (d) Other

NSF International
Standard 40 - Residential Wastewater Treatment Systems
 Plant Effluent
 Plant Code: Premier Teeh Coco DN

Week Beginning: 28-Jun-15

Weeks Into Test: 13

Weekend Dosing: Sunday 460 gallons Saturday 460 gallons Friday 460 gallons

Dosed Volume (gallons)	Monday	Tuesday	Wednesday	Thursday	Friday	
Dissolved Oxygen (mg/L)	aeration chamber	1.71	1.69	1.87	1.76	d
	effluent	4.96	4.72	5.11	4.93	d
Temperature (C)	influent	28	28	28	28	d
	aeration chamber	28	28	29	28	d
pH	influent	28	28	28	28	d
	aeration chamber	7.6	7.5	7.6	7.5	d
Biochemical Oxygen Demand (mg/L)	influent	7.0	7.0	7.0	7.0	d
	effluent	7.0	6.9	7.0	7.0	d
Suspended Solids (mg/L)	influent	95	320	320	400	d
	effluent	2	4	2	2	d
Suspended Solids (mg/L)	influent	120	160	190	160	d
	effluent	2	4	2	2	d

Notes: No samples on 7/3 due to the holiday.
 (a) Site problem
 (b) Malfunction of system under test
 (c) Weather problem
 (d) Other

NSF International
Standard 40 - Residential Wastewater Treatment Systems
 Plant Effluent
 Plant Code: Premier Teeh Coco DN

Week Beginning: 5-Jul-15

Weeks Into Test: 14

Weekend Dosing: Sunday 460 gallons Saturday 460 gallons Friday 460 gallons

Dosed Volume (gallons)	Monday	Tuesday	Wednesday	Thursday	Friday	
Dissolved Oxygen (mg/L)	aeration chamber	2.24	2.04	2.36	2.42	2.27
	effluent	4.69	5.53	4.82	4.17	4.80
Temperature (C)	influent	28	28	28	28	28
	aeration chamber	29	29	29	29	29
pH	influent	29	29	29	29	29
	aeration chamber	7.7	7.7	7.8	7.8	7.9
Biochemical Oxygen Demand (mg/L)	influent	7.1	7.1	7.1	7.1	7.1
	effluent	7.1	7.1	7.1	7.1	7.1
Suspended Solids (mg/L)	influent	80	420	440	330	170
	effluent	2	2	5	4	4
Suspended Solids (mg/L)	influent	130	140	180	140	150
	effluent	2	<1	5	3	3

Notes:
 (a) Site problem
 (b) Malfunction of system under test
 (c) Weather problem
 (d) Other

NSF International
Standard 40 - Residential Wastewater Treatment Systems
 Plant Effluent

Week Beginning: 12-Jul-15 Plant Code: Premier Teeh Coco DN

Weeks Into Test: 15

Weekend Dosing: Sunday 460 gallons Saturday 460 gallons Friday 460 gallons

Dosed Volume (gallons)	Monday	Tuesday	Wednesday	Thursday	Friday
Dissolved Oxygen (mg/L)	aeration chamber	1.29	1.43	1.39	1.37
	effluent	4.68	2.91	2.73	3.44
Temperature (C)	influent	29	29	29	29
	aeration chamber	30	30	30	30
pH	influent	7.5	7.5	7.3	7.4
	aeration chamber	7.1	7.2	7.0	7.1
Biochemical Oxygen Demand (mg/L)	influent	7.1	7.2	7.1	7.1
	effluent	130	340	390	380
Suspended Solids (mg/L)	influent	a	a	8	8
	effluent	200	190	200	200
		a	a	4	7

- (a) Site problem
 - (b) Malfunction of system under test
 - (c) Weather problem
 - (d) Other
- Notes: On site measurements not completed on 7/13 due to lab error. Effluent TSS and CBOD samples not collected on 7/13 and 7/14 due to a problem with the sampling system.

NSF International
Standard 40 - Residential Wastewater Treatment Systems
 Plant Effluent

Week Beginning: 19-Jul-15 Plant Code: Premier Teeh Coco DN

Weeks Into Test: 16

Weekend Dosing: Sunday 460 gallons Saturday 460 gallons Friday 460 gallons

Dosed Volume (gallons)	Monday	Tuesday	Wednesday	Thursday	Friday
Dissolved Oxygen (mg/L)	aeration chamber	1.27	1.57	1.87	2.15
	effluent	3.32	3.41	3.29	3.38
Temperature (C)	influent	29	31	30	31
	aeration chamber	30	30	30	31
pH	influent	7.2	7.4	7.2	7.3
	aeration chamber	7.0	7.1	7.2	7.1
Biochemical Oxygen Demand (mg/L)	influent	7.1	7.1	7.2	7.1
	effluent	350	260	a	290
Suspended Solids (mg/L)	influent	3	5	a	3
	effluent	190	490	a	300
		2	3	a	4

- (a) Site problem
 - (b) Malfunction of system under test
 - (c) Weather problem
 - (d) Other
- Notes: Evening dosing was missed on 7/21 and morning dosing was missed on 7/22 due to problems with the Waco test site dosing system. TSS, BOD, and CBOD samples were not collected on 7/22 due to the problems with the dosing system.

NSF International
Standard 40 - Residential Wastewater Treatment Systems
 Plant Effluent

Week Beginning: 26-Jul-15 Plant Code: Premier Tech Coco DN

Weeks Into Test: 17

	Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
Dosed Volume (gallons)	460	460	460	460	460	460	460
Dissolved Oxygen (mg/L)	eration chamber	1.69	1.56	1.59	1.65	1.57	1.61
	effluent	2.98	2.81	1.89	1.72	1.96	2.27
Temperature (C)	inlet	30	30	30	30	30	30
	eration chamber	31	31	31	31	31	31
pH	inlet	31	30	30	30	30	30
	eration chamber	7.4	7.7	7.6	7.4	7.4	7.5
Biochemical Oxygen Demand (mg/L)	inlet	7.1	7.2	7.2	7.2	7.1	7.1
	effluent	7.1	7.2	7.2	7.2	7.1	7.2
Suspended Solids (mg/L)	inlet	160	170	180	230	160	
	effluent	4	6	5	5	7	
Suspended Solids (mg/L)	inlet	160	130	140	150	140	
	effluent	2	3	2	2	3	

- (a) Site problem
 - (b) Malfunction of system under test
 - (c) Weather problem
 - (d) Other
- Notes: Wash Day Stress 7/27 through 7/31.
 Additional samples were collected on 7/28, 29, and 30 at the request of the manufacturer.

NSF International
Standard 40 - Residential Wastewater Treatment Systems
 Plant Effluent

Week Beginning: 2-Aug-15 Plant Code: Premier Tech Coco DN

Weeks Into Test: 18

	Sunday	Monday	Tuesday	Wednesday	Thursday
Dosed Volume (gallons)	460	460	460	460	460
Dissolved Oxygen (mg/L)	eration chamber	1.18	1.26	1.38	1.40
	effluent	1.57	1.42	1.74	1.68
Temperature (C)	inlet	31	30	30	30
	eration chamber	31	31	31	31
pH	inlet	30	30	31	31
	eration chamber	7.2	7.6	7.5	7.3
Biochemical Oxygen Demand (mg/L)	inlet	7.2	7.2	7.2	7.2
	effluent	7.2	7.2	7.2	7.2
Suspended Solids (mg/L)	inlet	220	140	210	240
	effluent	4	6	5	17
Suspended Solids (mg/L)	inlet	120	170	180	300
	effluent	2	2	2	3

- (a) Site problem
 - (b) Malfunction of system under test
 - (c) Weather problem
 - (d) Other
- Notes: Working Parent Stress started on 8/8.

NSF International
Standard 40 - Residential Wastewater Treatment Systems
 Plant Effluent

Week Beginning: 9-Aug-15 Plant Code: Premier Tech Coco DN

Weeks Into Test: 19

	Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
Dosed Volume (gallons)	460	460	460	460	460	460	460
Dissolved Oxygen (mg/L)	1.29	1.01	0.47	0.52	0.38	0.37	0.40
	2.48	1.97	2.13	2.59	2.82	1.72	1.83
Temperature (C)	31	32	32	32	32	31	32
	32	32	32	32	32	32	32
	32	31	32	33	33	33	32
pH	7.3	7.5	7.4	7.4	7.5	7.4	7.4
	7.1	7.2	7.2	7.2	7.2	7.2	7.2
	7.2	7.2	7.2	7.3	7.3	7.2	7.2
Biochemical Oxygen Demand (mg/L)	76	160	160	200	180		74
	3	3	3	4	5		2
Suspended Solids (mg/L)	110	150	150	120	160		120
	1	1	<1	1	1		<1

- (a) Site problem
 - (b) Malfunction of system under test
 - (c) Weather problem
 - (d) Other
- Notes: Working Parent Stress completed on 8/12.
 Additional samples were collected on 8/11 and 8/13 at the request of the manufacturer.

NSF International
Standard 40 - Residential Wastewater Treatment Systems
 Plant Effluent

Week Beginning: 16-Aug-15 Plant Code: Premier Tech Coco DN

Weeks Into Test: 20

	Sunday	Monday	Tuesday	Wednesday	Thursday
Dosed Volume (gallons)	460	460	460	460	180
Dissolved Oxygen (mg/L)	0.42	0.33	0.33	0.36	0.39
	1.67	1.58	2.31	3.13	2.43
Temperature (C)	31	32	31	31	31
	32	32	32	32	32
	32	32	32	32	32
pH	7.3	7.4	7.6	7.5	7.5
	7.2	7.2	7.2	7.1	7.1
	7.3	7.2	7.3	7.3	7.2
Biochemical Oxygen Demand (mg/L)	76	120	170	180	210
	4	2	3	2	1
Suspended Solids (mg/L)	95	61	140	99	130
	1	<1	1	2	1

- (a) Site problem
 - (b) Malfunction of system under test
 - (c) Weather problem
 - (d) Other
- Notes: Power/Equipment Failure Stress 8/20th through 8/22.

NSF International
Standard 40 - Residential Wastewater Treatment Systems
 Plant Effluent

Plant Code: Premier Tech Coco DN

Week Beginning: 23-Aug-15

Weeks Into Test: 21

	Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
Dosed Volume (gallons)	460	460	460	460	460	460	460
Dissolved Oxygen (mg/L)	aeration chamber	0.51	0.48	0.40	0.55	0.42	0.49
	effluent	3.68	3.82	3.73	4.22	3.04	3.21
Temperature (C)	influent	31	31	31	31	32	31
	aeration chamber	30	31	31	30	30	30
	effluent	31	31	31	31	30	31
pH	influent	7.4	7.6	7.5	7.5	7.5	7.5
	aeration chamber	7.1	7.1	7.2	7.1	7.1	7.1
	effluent	7.1	7.1	7.1	7.1	7.1	7.1
Biochemical Oxygen Demand (mg/L)	influent (BOD ₅)			69	260	370	220
	effluent (CBOD ₅)			1	1	6	1
Suspended Solids (mg/L)	influent			77	73	46	42
	effluent			<1	<1	3	<1

- Notes: Odor:2 T.O.N were measured on Wed 8/26
- (a) Site problem
 - (b) Malfunction of system under test
 - (c) Weather problem
 - (d) Other

NSF International
Standard 40 - Residential Wastewater Treatment Systems
 Plant Effluent

Plant Code: Premier Tech Coco DN

Week Beginning: 30-Aug-15

Weeks Into Test: 22

	Sunday	Monday	Tuesday	Wednesday	Thursday
Dosed Volume (gallons)	280	0	0	0	0
Dissolved Oxygen (mg/L)	aeration chamber	0.49	0.47	0.38	0.26
	effluent	3.21	-	-	-
Temperature (C)	influent	31	-	-	-
	aeration chamber	31	30	30	30
	effluent	31	-	-	-
pH	influent	7.3	-	-	-
	aeration chamber	7.1	7.1	7.2	7.2
	effluent	7.1	-	-	-
Biochemical Oxygen Demand (mg/L)	influent (BOD ₅)	<39			
	effluent (CBOD ₅)	1			
Suspended Solids (mg/L)	influent	26			
	effluent	<1			

- Notes: Vacation Stress started on 8/30.
- (a) Site problem
 - (b) Malfunction of system under test
 - (c) Weather problem
 - (d) Other

NSF International
Standard 40 - Residential Wastewater Treatment Systems
 Plant Effluent

Plant Code: Premier Tech Coco DN

Week Beginning: 6-Sep-15

Weeks Into Test: 23

Dosed Volume (gallons)	Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
aeration chamber influent	0	0	276	460	460	460	460
aeration chamber effluent	0.27	0.33	0.25	0.35	0.31	0.30	0.28
Temperature (C)	-	-	-	4.09	4.15	4.02	3.89
pH	-	-	-	31	31	30	31
Biochemical Oxygen Demand (mg/L)	31	31	31	30	30	30	30
Suspended Solids (mg/L)	-	-	-	31	30	30	30
	7.4	7.2	7.5	7.0	7.0	7.1	7.2
	-	-	-	7.0	7.0	7.0	7.1
						240	240
						2	2
						160	190
						3	1

- Notes: Vacation Stress completed on 9/8.
- (a) Site problem
 - (b) Malfunction of system under test
 - (c) Weather problem
 - (d) Other

NSF International
Standard 40 - Residential Wastewater Treatment Systems
 Plant Effluent

Plant Code: Premier Tech Coco DN

Week Beginning: 13-Sep-15

Weeks Into Test: 24

Dosed Volume (gallons)	Sunday	Monday	Tuesday	Wednesday	Thursday
aeration chamber influent	460	460	460	460	460
aeration chamber effluent	0.29	0.29	0.33	0.31	0.25
Temperature (C)	3.37	3.34	3.38	2.64	2.42
pH	30	30	30	30	30
Biochemical Oxygen Demand (mg/L)	30	29	29	30	30
Suspended Solids (mg/L)	30	30	29	30	30
	7.5	7.5	7.4	7.4	7.4
	7.2	7.2	7.2	7.2	7.2
	7.1	7.1	7.1	7.1	7.2
	220	170	220	240	240
	2	2	2	4	3
	190	180	220	190	160
	1	2	2	3	2

- Notes: Odor:5 T.O.N were measured on Wed 9/16
- (a) Site problem
 - (b) Malfunction of system under test
 - (c) Weather problem
 - (d) Other

NSF International
Standard 40 - Residential Wastewater Treatment Systems
 Plant Effluent

Plant Code: Premier Tech Coco DN

Week Beginning: 20-Sep-15

Weeks Into Test: 25

Dosed Volume (gallons)	Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
aeration chamber influent	460	560	460	560	460	560	460
Dissolved Oxygen (mg/L)	0.32	0.29	0.31	0.27	0.30	0.33	0.30
aeration chamber effluent	1.92	1.89	1.97	1.91	1.48	1.94	1.85
Temperature (C)	30	30	30	30	29	29	29
aeration chamber influent	30	30	30	30	30	30	30
aeration chamber effluent	30	30	30	30	30	30	30
pH	7.4	7.4	7.4	7.4	7.3	7.3	7.3
aeration chamber influent	7.2	7.2	7.2	7.2	7.2	7.2	7.2
aeration chamber effluent	7.2	7.2	7.2	7.2	7.2	7.2	7.2
Biochemical Oxygen Demand (mg/L)		120		260		140	
Suspended Solids (mg/L)		3		7		8	
		190		220		160	
		1		2		3	

- (a) Site problem
 - (b) Malfunction of system under test
 - (c) Weather problem
 - (d) Other
- Notes: The stress sequences were repeated, starting in week 25 because some of the required sampling was missed during the first set of stress sequences.
 Wash Day Stress 9/21 through 9/25.
 Wash loads were added on the wash days, without adjusting the normal dosing, due to lab error. This resulted in 100 extra gallons of dosing on 9/21, 23, and 25.

NSF International
Standard 40 - Residential Wastewater Treatment Systems
 Plant Effluent

Plant Code: Premier Tech Coco DN

Week Beginning: 27-Sep-15

Weeks Into Test: 26

Dosed Volume (gallons)	Sunday	Monday	Tuesday	Wednesday	Thursday
aeration chamber influent	460	460	460	460	460
Dissolved Oxygen (mg/L)	0.41	0.35	0.36	0.41	0.34
aeration chamber effluent	2.05	2.05	3.14	2.11	2.03
Temperature (C)	29	29	29	30	30
aeration chamber influent	29	29	29	29	29
aeration chamber effluent	30	29	29	29	29
pH	7.1	7.3	7.6	7.4	7.3
aeration chamber influent	7.1	7.1	7.2	7.2	7.2
aeration chamber effluent	7.2	7.2	7.2	7.2	7.2
Biochemical Oxygen Demand (mg/L)		140	210	230	180
Suspended Solids (mg/L)		4	4	3	3
		120	160	210	180
		2	1	2	3

- (a) Site problem
 - (b) Malfunction of system under test
 - (c) Weather problem
 - (d) Other
- Notes: Working Parent Stress didn't start on 10/3 as scheduled, due technical issue with the influent.
 Odor:4 T.O.N were measured on Wed 9/30

NSF International
Standard 40 - Residential Wastewater Treatment Systems
 Plant Effluent

Week Beginning: 4-Oct-15 Plant Cod Premier Tech Coco DN

Weeks Into Test: 27

Dosed Volume (gallons)	Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
460	460	460	460	460	460	460	460
Dissolved Oxygen (mg/L)	aeration chamber effluent	0.47	0.51	0.44	0.39	0.41	0.44
	influent	3.78	3.84	4.02	3.16	1.28	1.41
Temperature (C)	aeration chamber effluent	29	29	30	30	30	30
	influent	28	28	28	28	28	28
pH	aeration chamber effluent	7.2	7.3	7.6	7.3	7.3	7.4
	influent	7.1	7.1	7.2	7.2	7.1	7.2
Biochemical Oxygen Demand (mg/L)	aeration chamber effluent	7.2	7.1	7.1	7.2	7.2	7.2
	influent	a	<39	160	220	250	180
Suspended Solids (mg/L)	aeration chamber effluent	a	1	1	1	7	4
	influent	a	31	270	470	190	230
		a	<1	1	<1	6	4
		a	<1	1	<1	4	2

- (a) Site problem Notes: No sampling on 10/4 because there was site technical issue with the influent on 10/3 and 4, which was resolved on 10/5.
- (b) Malfunction of system under test Working Parent Stress 10/6 through 10/10.
- (c) Weather problem Additional sampling during the stress was at the request of the manufacturer.
- (d) Other

NSF International
Standard 40 - Residential Wastewater Treatment Systems
 Plant Effluent

Week Beginning: 11-Oct-15 Plant Cod Premier Tech Coco DN

Weeks Into Test: 28

Dosed Volume (gallons)	Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
460	460	460	460	276	184	460	460
Dissolved Oxygen (mg/L)	aeration chamber effluent	0.41	0.38	0.73	0.33	0.38	0.39
	influent	1.94	2.02	2.45	2.21	1.16	1.78
Temperature (C)	aeration chamber effluent	30	30	30	30	30	30
	influent	29	29	29	28	28	28
pH	aeration chamber effluent	28	28	28	28	25	27
	influent	7.3	7.3	7.3	7.3	7.4	7.3
Biochemical Oxygen Demand (mg/L)	aeration chamber effluent	7.1	7.2	7.2	7.0	7.1	7.1
	influent	7.2	7.2	7.2	7.2	7.2	7.2
Suspended Solids (mg/L)	aeration chamber effluent			270	200	160	130
	influent			6	6	b	b
			600	300	220	200	200
			2	3	b	b	6

- (a) Site problem Notes: The septic tank effluent filter, which is part of the system under test, was found clogged on 10/13, resulting in the treatment system backing up. Dosing was suspended following the mid-day dosing on 10/14. The effluent filter was serviced according to the manufacturer's instructions on 10/15 after allowing the water level in the septic tank to return to normal. Dosing resumed just prior to evening dosing on 10/15. This meant full 24-hour effluent samples could not be collected on 10/15 and 10/16.
- (b) Malfunction of system under test Color: 40 Pt-Co units
- (c) Weather problem Odor: 10 T.O.N
- (d) Other Only film and foam: Not detected

NSF International
Standard 40 - Residential Wastewater Treatment Systems
 Plant Effluent

Plant Code: Premier Tech Coco DN

Week Beginning: 18-Oct-15

Weeks Into Test: 29

	Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
Dosed Volume (gallons)	460	0	280	460	460	460	460
Dissolved Oxygen (mg/L)	aeration chamber	0.42	0.50	0.41	0.36	0.38	0.33
	effluent	2.13	-	-	0.54	3.42	3.67
Temperature (C)	influent	29	-	29	29	29	28
	aeration chamber	28	28	27	28	28	27
	effluent	27	-	-	24	27	28
pH	influent	7.4	-	-	7.3	7.3	7.3
	aeration chamber	7.2	7.2	7.3	7.2	7.2	7.3
	effluent	7.1	-	-	7.1	7.0	7.1
Biochemical Oxygen Demand (mg/L)	influent (BOD ₅)	120					200
	effluent (CBOD ₅)	8					4
Suspended Solids (mg/L)	influent	200					340
	effluent	4					4

- Notes: Power/Equipment Failure Stress 10/18 through 10/20.
- (a) Site problem
 - (b) Malfunction of system under test
 - (c) Weather problem
 - (d) Other

NSF International
Standard 40 - Residential Wastewater Treatment Systems
 Plant Effluent

Plant Code: Premier Tech Coco DN

Week Beginning: 25-Oct-15

Weeks Into Test: 30

	Sunday	Monday	Tuesday	Wednesday	Thursday
Dosed Volume (gallons)	460	460	460	280	0
Dissolved Oxygen (mg/L)	aeration chamber	0.38	0.46	1.50	0.53
	effluent	3.84	4.17	1.06	4.22
Temperature (C)	influent	27	27	27	27
	aeration chamber	25	25	25	25
	effluent	25	25	25	25
pH	influent	7.3	7.3	7.5	7.4
	aeration chamber	7.2	6.9	7.4	7.1
	effluent	7.0	7.0	7.3	7.1
Biochemical Oxygen Demand (mg/L)	influent (BOD ₅)	160	91	210	130
	effluent (CBOD ₅)	2	1	2	2
Suspended Solids (mg/L)	influent	230	160	210	220
	effluent	2	2	2	2

- Notes: Vacation Stress started on 10/28.
- (a) Site problem
 - (b) Malfunction of system under test
 - (c) Weather problem
 - (d) Other

NSF International
Standard 40 - Residential Wastewater Treatment Systems
 Plant Effluent

Plant Code: Premier Tech Coco DN

Week Beginning: 1-Nov-15

Weeks Into Test: 31

	Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
Dosed Volume (gallons)	0	0	0	0	0	275	460
Dissolved Oxygen (mg/L)	0.64	0.62	0.58	0.45	0.61	0.47	0.63
	-	-	-	-	-	-	2.17
Temperature (C)	-	-	-	-	-	-	27
	23	23	23	23	23	23	23
pH	-	-	-	-	-	-	20
	7.1	7.2	7.2	7.2	7.2	7.2	7.2
Biochemical Oxygen Demand (mg/L)	-	-	-	-	-	-	-
	-	-	-	-	-	-	-
Suspended Solids (mg/L)	-	-	-	-	-	-	-
	-	-	-	-	-	-	-

- Notes: Vacation Stress completed on 11/6.
- (a) Site problem
 - (b) Malfunction of system under test
 - (c) Weather problem
 - (d) Other

NSF International
Standard 40 - Residential Wastewater Treatment Systems
 Plant Effluent

Plant Code: Premier Tech Coco DN

Week Beginning: 8-Nov-15

Weeks Into Test: 32

	Sunday	Monday	Tuesday	Wednesday	Thursday
Dosed Volume (gallons)	460	460	460	460	460
Dissolved Oxygen (mg/L)	0.58	0.54	0.61	0.46	0.39
	3.89	5.62	5.72	5.47	5.12
Temperature (C)	26	26	26	26	26
	23	23	23	23	23
pH	21	22	23	22	23
	7.3	7.3	7.4	7.3	7.4
Biochemical Oxygen Demand (mg/L)	7.2	7.2	7.1	7.2	7.2
	7.2	7.1	7.1	7.1	7.1
Suspended Solids (mg/L)	-	63	79	270	400
	-	2	1	1	2
Suspended Solids (mg/L)	-	89	110	140	190
	-	2	4	1	1

- Notes: 11/11 measurements:
- (a) Site problem
 - (b) Malfunction of system under test
 - (c) Weather problem
 - (d) Other
- Color: 20 Pt-Co units
 Odor 10 T.O.N
 Oily film and foam: Not detected

NSF International
Standard 40 - Residential Wastewater Treatment Systems
 Plant Effluent

Plant Code: Premier Tech Coco DN

Week Beginning: 15-Nov-15

Weeks Into Test: 33

	Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
Dosed Volume (gallons)	460	460	460	460	460	460	460
Dissolved Oxygen (mg/L)	0.39	0.44	0.58	0.52	0.57	0.66	
	4.19	4.01	3.91	3.80	5.55	5.78	
Temperature (C)	26	26	27	31	28	28	
	23	23	22	22	22	22	
pH	22	23	22	22	22	22	
	7.4	7.6	7.4	7.1	7.2	7.3	
Biochemical Oxygen Demand (mg/L)	7.2	7.2	7.2	7.2	7.2	7.1	
	7.1	7.1	7.1	7.1	7.2	7.1	
Suspended Solids (mg/L)	100	240	240	190	270	230	
	2	2	2	3	2	1	
Dissolved Oxygen (mg/L)	130	160	190	65	110	110	
	2	2	1	2	2	2	

- (a) Site problem
 (b) Malfunction of system under test
 (c) Weather problem
 (d) Other
- Notes: D.O., temperature, and pH data collected from 11/14 through 11/20 was measured with an instrument that was past it's calibration due date. However, the instrument was calibrated in house for both pH and DO each day before collecting data.

NSF International
Standard 40 - Residential Wastewater Treatment Systems
 Plant Effluent

Plant Code: Premier Tech Coco DN

Week Beginning: 22-Nov-15

Weeks Into Test: 34

	Sunday	Monday	Tuesday	Wednesday	Thursday
Dosed Volume (gallons)	460	460	460	460	460
Dissolved Oxygen (mg/L)		1.41	1.83	2.21	2.17
		4.99	5.23	5.44	5.37
Temperature (C)		23	23	24	25
		20	21	21	21
pH		20	20	21	21
		7.5	7.6	7.7	7.5
Biochemical Oxygen Demand (mg/L)		7.2	7.2	7.1	7.1
		7.1	7.1	7.2	7.1
Suspended Solids (mg/L)		300	300	380	240
		1	3	3	2
Dissolved Oxygen (mg/L)		150	230	180	180
		1	1	3	3

- (a) Site problem
 (b) Malfunction of system under test
 (c) Weather problem
 (d) Other
- Notes:

APPENDIX D

ANALYTICAL RESULTS – Nitrogen Analyses

	Date	Ammonia Nitrogen (mg/L)		Total Kjeldahl Nitrogen (mg/L)		Nitrate/Nitrite (mg/L)		Total Nitrogen (mg/L)		Total Alkalinity (mg/L CaCO3)		Days	Daily TN Reduction	Avg TN Reduction
		Influent	Effluent	Influent	Effluent	Influent	Effluent	Influent	Effluent	Influent	Effluent			
Week 1	04/06/15	24.4	25	35.2	18.9	0.06	0.3	35.3	19.2	320	340	1	45.55	50.93
	04/08/15	31.0	24.2	47.7	28.1	0.52	0.46	48.2	28.6	350	340	2	40.77	
	04/10/15	26.8	24.7	62.9	31.1	0.14	0.55	63.0	31.7	350	350	3	49.79	
Week 2	04/13/15	26.7	24.7	41.9	28.8	0.12	0.61	42.0	29.4	350	350	4	30.01	
	04/15/15	27.6	26.5	42.7	31.1	0.07	0.84	42.8	31.9		330	5	25.32	
	04/17/15	31.1	28.9	45.4	30.4	0.26	1.05	45.7	31.5	360	350	6	31.12	
Week 3	04/20/15	24.1	27.9	36.5	29.8	0.12	2.42	36.6	32.2	320	340	7	12.02	
	04/22/15	26.3	24.5	40.6	22.1	0.1	3.02	40.7	25.1		320	8	38.28	
	04/24/15	16.0	20.2	25.0	20.6	0.93	3.79	25.9	24.4	290	310	9	5.94	
Week 4	04/27/15	18.3	8.2	27.9	8.7	0.46	6.4	28.4	15.1	300	260	10	46.76	
	04/29/15	16.7	4.7	26.0	6.1	1.0	5.0	27.0	11.1		240	11	58.89	
	05/01/15	15.3	1.6	28.3	2.6	0.05	6.9	28.4	9.5	310	220	12	66.49	
Week 5	05/04/15	20.9	1.3	31.0	2.5	0.05	4.2	31.1	6.7	300	240	13	78.42	
	05/06/15	22.4	1.0	31.8	2.3	0.08	5.2	31.9	7.5		240	14	76.47	
	05/08/15	30.6	3.2	37.4	4.5	0.1	4.1	37.5	8.6	350	260	15	77.07	
Week 6	05/11/15	21.9	6.9	29.9	8.6	1.4	5.2	31.3	13.8	290	260	16	55.91	
	05/13/15	25.1	4.7	34.6	6.6	0.05	5.8	34.7	12.4		250	17	64.21	
	05/15/15	22.7	4.2	28.4	5.6	0.05	4.9	28.5	10.5	300	240	18	63.09	
Week 7	05/18/15	16.2	6.5	23.6	8.0	0.93	4.5	24.5	12.5	280	260	19	49.04	
	05/20/15	31.0	8.2	35.4	9.7	0.1	3.1	35.5	12.8		270	20	63.94	
	05/22/15	25.0	12.1	37.8	13.0	0.07	4.6	37.9	17.6	340	280	21	53.53	
Week 8	05/25/15	38.3	13.7	76.9	17.3	0.54	4.3	77.4	21.6	400	300	22	72.11	
	05/27/15	32.5	14.2	39.3	16.5	0.05	6.9	39.4	23.4		280	23	40.53	
	05/29/15	33.8	11.8	45.7	11.1	1.4	5.5	47.1	16.6	360	290	24	64.76	
Week 9	06/01/15	20.6	10.9	31.9	11.7	0.05	5	32.0	16.7	320	280	24	47.73	
	06/03/15	19.4	9.0	26.6	9.3	0.05	5.6	26.7	14.9	310	260	26	44.09	
	06/05/15	22.2	6.8	38.0	8.2	0.05	5.0	38.1	13.2	320	240	27	65.31	
Week 10	06/08/15	13.8	5.8	22.7	7.2	0.18	4.7	22.9	11.9	270	260	28	47.99	
	06/10/15	29.9	8.0	44.0	9.7	0.09	4	44.1	13.7	320	260	29	68.93	
	06/12/15	26.6	10.2	41.4	11.5	0.06	5.3	41.5	16.8	310	250	30	59.48	
Week 11	06/15/15	16.1	7.7	32.0	9.2	0.12	3.7	32.1	12.9	260	240	31	59.84	
	06/17/15	16.1	8.3	27.7	11	0.22	4.1	27.9	15.1	230	240	32	45.92	
	06/19/15	23.3	7.1	30.2	8.6	0.05	5.5	30.3	14.1	310	230	33	53.39	
Week 12	06/22/15	23.9	8.5	35.5	9.5	0.06	4.9	35.6	14.4	310	260	34	59.51	
	06/24/15	29.7	10.2	40.8	9.0	0.06	4.7	40.9	13.7	330	250	35	66.47	
	06/26/15	22.1	11.4	35.6	10.8	0.08	4.3	35.7	15.1	320	280	36	57.68	
Week 13	06/29/15	12.6	10.3	20.7	10.3	0.23	3.6	20.9	13.9	290	270	37	33.59	
	07/01/15	36.5	12.3	48.1	13.6	0.07	2.5	48.2	16.1	390	280	38	66.58	
	07/02/15	42.9	14.6	58.1	17.0	0.07	2.5	58.2	19.5	420	310	39	66.48	
Week 14	07/06/15	20.4	12.7	27	12.6	0.05	4.6	27.1	17.2	300	270	40	36.41	
	07/08/15	39.8	16.5	61.4	19.5	0.09	2.2	61.5	21.7	360	290	41	64.71	
	07/10/15	28.0	22.4	45.9	29.7	0.06	2.45	46.0	32.2	360	320	42	30.05	

50.93

52.27

53.26

Week 15	07/13/15												
	07/15/15	36.5	20.6	59.2	24.4	0.08	2	59.3	26.4	390	330	43	55.47
	07/17/15	44.3	26.4	61.8	33.3	0.06	0.5	61.9	33.8	390	360	44	45.36
Week 16	07/20/15	40.0	28.5	62.3	31.8	0.06	1.2	62.4	33.0	390	360	45	47.08
	07/22/15												
	07/24/15	30.7	28.9	56.2	33.1	0.16	1.3	56.4	34.4	380	360	46	38.96
week 17-23	08/03/15												
	08/05/15												
	08/07/15												
	08/10/15		24.5		26.7		0.19	0	26.9				
	08/11/15	19.8	22.8	30.6	26.5	2.07	0.83	25.5	29.4				
	08/12/15	18.7	20.7	33.6	26.9	1.6	0.44	24.1	26.7				
	08/13/15	16.6	20.2	26.1	21.7	0.62	0.48	21.4	26.0				
	08/15/15												
	08/17/15												
	08/19/15												
	08/26/15												
	08/28/15												
08/29/15													
09/11/15													
week 24	09/14/15	35.1	15.9	47.3	16.4	0.13	5.98	47.4	22.4	350	280		
	09/16/15	39.5	20	55.6	20.8	0.25	4.79	55.9	25.6	310	290		
	09/18/15	31.5	25.5	47.4	24.4	0.09	3.58	47.5	28.0	340	300		
Week 25	09/21/15	32.7	25.8	45.6	24.2	0.12	3.27	45.7	27.5	320	310		39.92
	09/23/15	44.6	26.7	63.9	29.7	0.11	1.87	64.0	31.6	370	330		50.68
	09/25/15	25.8	29.6	43.4	35.3	0.09	0.87	43.5	36.2	330	370		16.83
Week 26	09/28/15	23.2	33.5	38.9	34.3	1.69	1.32	40.6	35.6	290	340		12.24
	09/30/15	31.3	25.6	50.6	26.9	0.2	2.01	50.8	28.9	310	320		43.09
	10/02/15	30.3	27.4	46.0	31.5	0.23	2.21	46.2	33.7	350	320		27.08
Week 27	10/06/15	28.1	11.1	44.3	13.1	0.27	4.73	44.6	17.8	280	230		60.00
	10/07/15	29.0	13.0	52.0	16.5	0.11	3.46	52.1	20.0	300	240		61.70
	10/09/15	29.9	20.5	47.9	25.5	0.16	1.38	48.1	26.9	310	300		44.07
Week 28	10/13/15	36.9	25.6	76.2	25.7	0.13	0.68	76.3	26.4	350	320		65.44
	10/14/15	23.3	27.7	46.7	33.3	0.14	0.64	46.8	33.9	300	320		27.54
	10/17/15	31.4	29.2	49.5	34.3	0.11	2.61	49.6	36.9	340	330		25.60
Week 29	10/18/15	32.9	29.2	40.6	30	0.5	3.03	41.1	33.0	330	320		19.64
	10/21/15												
	10/24/15	20.0	16.6	33.6	18.0	0.14	5.31	33.7	23.3	260	260		30.91
Week 30	10/26/15	7.4	6.0	18.5	7.3	2.03	9.56	20.5	16.9	200	190		17.88
	10/27/15	19.6	5.3	30.7	10.7	2.31	5.88	33.0	16.6	280	200		49.77
	10/28/15	17.6	4.95	34.8	8.3	0.8	4.93	35.6	13.2	260	200		62.84
Week 31	11/02/15												
	11/04/15												
	11/06/15												

52.22

Extra samples per Premier Tech

Stress data, do not use for 245

Stress data, do not use for 245

wash day stress

working parent stress

power failure stress

vacation stress

Week 33	11/09/15	10.7	0.52	24.3	0.94	1.79	12.7	26.1	13.6	260	190	47.72	
	11/11/15	21.8	0.08	46.3	0.93	0.05	10.4	46.4	11.3	320	190		75.56
	11/13/15	31.6	7.3	47.6	8.88	0.44	4.07	48.0	13.0	340	250		73.04
Week 33	11/16/15	28.8	4.4	46.7	6.45	0.57	8.54	47.3	15.0	320	240	47	68.29
	11/18/15	24.7	7.2	35	11.7	0.32	4.21	35.3	15.9	280	250	48	54.95
	11/20/15	18.4	6.6	52.1	26.6	0.94	5.02	53.0	31.6	300	250	49	40.38
Week 34	11/23/15	14.1	2.15	57.1	21.5	0.73	6.81	57.8	28.3	310	220	50	51.05
	11/25/15	30.3	7.6	47.2	9.0	0.92	1.91	48.1	10.9	320	250	51	77.33
	11/27/15	11.7	13.8	25.8	17.1	1.3	2.34	27.1	19.4	260	270	52	28.27
Week 35	11/30/15	7.1	2.0	26.1	2.3	2.2	6.92	28.3	9.2	240	190	53	67.42
	12/02/15	15.5	4.9	41.9	6.1	0.54	1.77	42.4	7.9	330	230	54	81.46
	12/04/15	27.6	13.8	54.4	12.6	0.9	0.41	55.3	13.0	330	270	55	76.47

53.89

Median	24.7	10.2	37.8	11.5	0.1	4.2	37.9	15.91	320	270
Min	7.1	1.0	20.7	2.3	0.1	0.3	20.9	6.7	230	190
Max	44.3	28.9	76.9	33.3	2.2	8.5	77.4	34.4	420	360
Avg	25.1	12.5	40.1	14.9	0.3	3.8	40.4	18.6	324	278
Std Dev	8.3	8.4	12.6	9.3	0.5	2.0	12.6	8.1	42	42

APPENDIX E
OWNERS MANUAL

Congratulations on your purchase of an Ecoflo[®] Coco Filter- ECDn unit from Premier Tech Aqua (PTA). The Ecoflo[®] Coco Filter-ECDn unit has been tested and listed under NSF standard 40 & 245 and meets requirements for Class I systems.

With the Ecoflo[®] Coco Filter –ECDn unit, you have wisely chosen to protect your health as well as the environment. This manual contains information on the operation, operating guidelines, maintenance and warranties of the Ecoflo[®] Coco Filter- ECDn unit. For additional information, contact our customer service at 1 800 632-6356 or visit our website at PREMIERTECHAQUA.COM.

Operating Principle

Onsite wastewater treatment systems must respect applicable local rules and regulations. These systems are specifically designed to treat residential wastewater to such a level that treated effluent can be safely returned to the environment. Typically, an onsite wastewater treatment system is composed of 2 to 3 main treatment steps depending on site constraints prior to final dispersal of treated effluent: primary treatment, treatment system and if required polishing unit.

Primary treatment

The Primary tank is the first element of this nitrification-denitrification system. The primary tank's main functions are to accomplish a primary treatment which is to retain solids and let only a clarified effluent enter further treatment (Ecoflo[®] Coco Filter-ECDn unit) as well as to offer an anoxic zone in order to promote total nitrogen removal (denitrification).

Treatment system

The wastewater first goes into the Primary tank through an inlet device (tee or baffle) that directs it into the tank. The Primary tank promotes total nitrogen removal (denitrification) under anoxic conditions by creating a rapid mix of the recirculated treated effluent (from the Ecoflo[®] Coco Filter- ECDn unit) with the organic content of the raw wastewater. The recirculation line between the Ecoflo[®] Coco Filter- ECDn unit and the Primary tank is simply connected to the inlet pipe of the Primary tank. From the Primary tank, the pretreated wastewater flows by gravity to the Ecoflo[®] Coco Filter- ECDn unit by first passing into an effluent filter that promotes scum and solids retention in the tank.

Once the wastewater reaches the Ecoflo[®] Coco Filter- ECDn unit, a tipping bucket equally disperses the wastewater on specially designed plates which evenly distribute the wastewater on top of the filtering media. The wastewater then trickles through the natural fibrous filtering media.

The dosing control unit used in this system controls the pump located in the bottom of the biofilter that feeds a flow divider (PFS-200DN). This control unit consists of a "simplex" control panel allowing management of the dosing pump's cycles (start and pause). The controller totalizes and keeps records of the different pump's operating times either in normal cycle or in critical high level situations. It also totalizes and records the number of critical high level events occurred on the system since its installation. This last count allows validation of the dosing cycle used (operation time and pause time).

The flow divider (PFS-200DN) allow a fraction of the treated wastewater to return to the Primary/anoxic tank via the pump located in the bottom of the biofilter and the remaining fraction is directed toward the dispersal/disposal mean in accordance to local regulations. The recirculation ratio is approximately two (2) times the daily flow (2Q).

The Ecoflo[®] Coco Filter-ECDn unit's operating principle allows the system to be used continuously or intermittently without requiring any special precaution or having any impact on the quality of the treatment. No specific action from the owner is required to start the system.

The model and the number of Ecoflo[®] Coco Filter-ECDn unit are determined by the domestic wastewater flow per

day. Other factors such as the available space, the topography of the lot, as well as the type, permeability and depth of the natural occurring soils could influence model selection.

Ecoflo® Coco Filter ECDn unit Models

There are many different models of Ecoflo® Coco Filter-ECDn unit and each model has different characteristics. The letters and numbers associated with the Ecoflo® Coco Filter-ECDn unit specify the model's characteristics, as presented in the following table with model **ECDn-500-P (PACK)** as reference:


EC refers to the Ecoflo® model	EC = Ecoflo® Coco Filter
Dn	Nitrogen removal product with a maximum applicable HLR 575 L/m²-d, i.e. of 14.1 gal /ft²
500 refers to the daily flow capacity	500 = Capacity of 500 US gallons per day 600 = Capacity of 600 US gallons per day 865 = Capacity of 850 US gallons per day 1000 = Capacity of 1000 US gallons per day 1100 = Capacity of 1100 US gallons per day
P refers to the material of the shell	C = Concrete P = Plastic (Polyethylene)
PACK refers to configuration of the primary tank and biofilter	PACK = monobloc configuration, both tight together No mention = In line

Therefore, according to this nomenclature, the **ECDn-500-P (PACK)** model refers to an Ecoflo Coco Filter, Nitrogen removal version, with a daily flow capacity of 500 US gallons, in a polyethylene shell. Both primary tank and biofilter come in a monobloc configuration (pack).

For models that doesn't come into PACK configuration, the recommended Hydraulic Retention Time of the primary/septic tank is a minimum of two days at the design daily flow.

Installation Diagrams

NOTE: The installation diagrams below show the Ecoflo® Coco Filter-ECDn unit with polyethylene shell-PACK configuration.

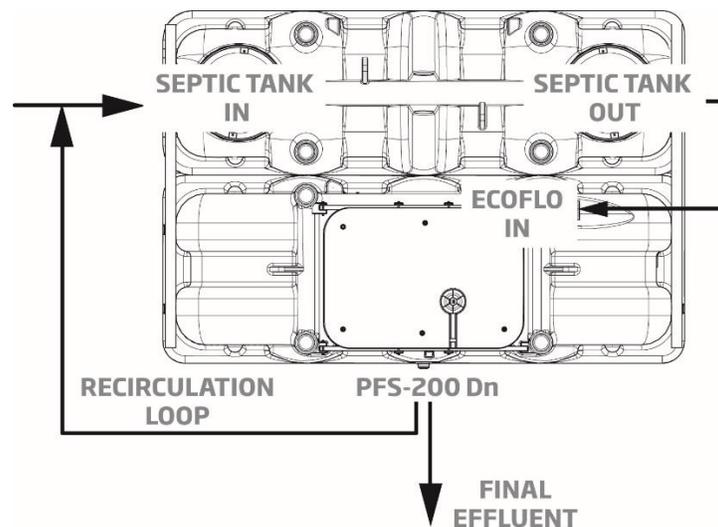

Operating Guidelines

Type of wastewater that can be treated by an Ecoflo® Coco Filter-ECDn unit:

Domestic wastewater (for example: wastewater from isolated dwellings).

It is NOT RECOMMENDED to discharge any of the following substances into the septic system:

- Oil and grease (motor oil, cooking oil, etc.);
- Wax and resins;
- Paints and solvents;
- Any kind of petroleum product;
- Any kind of pesticide;
- Any kind of primary tank additive;
- Any kind of toxic substance;
- Anything not easily biodegradable (for example, coffee beans, cigarette butts, sanitary napkins, tampons, condoms, cotton swab, etc.).



AND

- **NEVER** open or go inside the primary tank or the Ecoflo® Coco Filter-ECDn unit.
- **Keep** all lids of the septic system accessible at all times. **NEVER** cover them with mulch, dirt or any permanent structure (patio, swing, shed, etc.).
- **Make** sure all lids of the septic system are at least 50 mm (2") above the surface of the landscaped lot.
- **NEVER** install a riser on polyethylene Ecoflo® Coco Filter ECDn-865, 1000 and 1100-P models.
- **NEVER** install more than one (1) 6 inch riser on a polyethylene Ecoflo® Coco Filter-ECDn-500 and 600 models.
- **NEVER** install more than ONE (1) 8 inch RISER on a concrete Ecoflo® Coco Filter-ECDn unit main access. Use only PTA products.
- **NEVER** plant trees within 6 m (20') of the Ecoflo® Coco Filter-ECDn unit lid and within 2 m (6' 6") of the absorption bed.
- **NEVER** connect a drain pipe, roof gutter, sump pump or air conditioner drain to the septic system.
- **NEVER** discharge content or water from a water softener backwash, a spa or pool in your septic system.
- **NEVER** discharge wastewater from a recreation vehicle (camping trailer, caravan, etc.) into any of the components of your septic system.
- **NEVER** use automatic toilet bowl cleaners.
- **DO NOT** let anything accumulate on top of the septic system (for example, blown snow, backfill, landscaping, rocks, etc.) less than 5 m (16' 5") of your septic system's lid.
- **Maintain** a minimal distance of 6 m (20') between the bottom of a slope, an embankment or a retaining wall and the lids of your septic installation.

By respecting these guidelines, you contribute to the proper operation of your septic system and help prolong the life of your Ecoflo® Coco Filter-ECDn unit filtering media. Failure to abide by these guidelines may, at Premier Tech Aqua's discretion, render the warranty invalid.

Owner's responsibility

The owner must respect all existing laws and regulations regarding the system's effluent quality and its discharge into the environment. The owner of the wastewater treatment system is responsible for its installation, operation and maintenance.

The system's warranty begins upon purchase. Should the start-up be delayed, it is the customer's responsibility to inform Premier Tech Aqua about it so the first maintenance, which is included in the purchase price, is postponed. If the first maintenance has been performed prior to the client's call, Premier Tech Aqua reserves the right to decide whether another maintenance, free of charge or not, will be carried out the following year. No request for delayed

start-up will be accepted any later than one (1) year after the purchase date without it affecting the product's warranties.

Keep heavy objects off your septic system

Never drive a vehicle or place objects weighing more than 225 kg (500 lb) within 5 m (16' 5") of the lid of your Ecoflo® Coco Filter-ECDn unit. If you are planning any kind of landscaping or any other type of work on the property (i.e.: snow removal, lawn mowing, excavation, etc.), **make sure you advise all those involved**, so they do not damage your septic system. It is recommended to note where of your septic system elements are located.

About your home

Your home must be equipped with an air vent that is in proper working order and all plumbing must comply with the applicable standards of the building code in your location. Every septic tank must be ventilated by an air duct with a diameter of at least 100 mm (4") or be connected to the air vent of the isolated dwelling being served. Premier Tech Aqua strongly recommends using a pipe with a diameter of 100 mm (4") for the air vent.

Any change in the use of your home or any modification to your Ecoflo® Coco Filter-ECDn unit must be authorized by the local authorities, and Premier Tech Aqua must be advised. If this requirement is not fully met, the warranty for your Ecoflo® Coco Filter-ECDn unit will be null and void.

Maintenance

Primary tank

Empty your primary/septic tank every two to four years or if the level of sludge measured exceed the 2/3 of the total height of water in the tank. This helps to keep your septic system in proper working order. Every primary/septic tank and effluent filter shall be inspected and maintained as prescribed by local regulations.

If your home is equipped with a garbage disposal or a sewage pump, we strongly recommend emptying your primary/septic tank more frequently than the frequency noted above. Using this kind of equipment increases the amount of sludge in the primary/septic tank.

To have complete records of the maintenance performed on your septic system, we recommend that you to keep the proof of maintenance (invoice) with this Owner's Manual.

IMPORTANT: Primary tanks can be emptied in several ways that can be classified into two categories: **complete emptying and selective emptying**. Complete emptying, the most common, consists of completely pumping the contents of the primary tank. It's easy to check if the work was properly done because the primary tank will be completely empty when the vacuum truck leaves the site. Selective emptying is divided into two sub-categories: with a filter (or recycled) or without a filter. The method with a filter requires a truck that has been adapted for this type of emptying, that is, one that separates and retains the solids from the wastewater. The mechanically clarified water is then returned to the primary tank. The selective method without a filter allows the solids to settle while in the truck before the water is returned to the primary tank. As such, in an effort to ensure the Ecoflo® Coco Filter-ECDn unit continues to perform optimally, **it is very important that you ensure than the water that is returned to the primary tank has been properly clarified and does not contain or contains very few suspended solids**. We also recommend you to call one of the members of PTA's local partners. He will assist and verify if the work is done according to your specific needs to best protect your Ecoflo® Coco Filter-ECDn unit system.

Effluent filter

Under normal operating conditions, as described in this manual, an effluent filter that complies with local regulations should operate efficiently for many years. It must be cleaned every time the primary tank is emptied, as established or recommended by local authorities.

Ecoflo® Coco Filter-ECDn unit

The owner of a biofiltration system **shall follow the manufacturer's recommendations regarding the maintenance of the system**. For that purpose, he shall at all times have a valid contract with the manufacturer or its local representative and, depending on the local regulations, **a copy of the contract may have to be filed to the authorities**.

Annual maintenance is important to ensure optimal performance of your **Ecoflo® Coco Filter-ECDn unit** and essential to maintain its warranty. Therefore, your biofilter must be serviced annually for the duration of its useful life. According to local regulations, more than 1 visit per year may be required.

The maintenance of your Ecoflo® Coco Filter-ECDn unit shall be carried out by one of our duly trained service providers. This service includes a visual inspection of all components and a verification of the operation, as well as maintenance of the filtering media. **For maintenance purposes and to replace the filtering media, you must ensure that your system's lid is easily accessible at all time.** Never cover or bury the lid of the Ecoflo® Coco Filter-ECDn unit. After each inspection, you will be given a maintenance record. Keep it with this manual in a safe place.

After a minimum of eight (10) years, the filtering media is analyzed by one of our authorized agents. Under normal usage, if the filtering media has not been abused and the operating guidelines have been respected, the filtering media might not have to be replaced and can be used for some additional years. **However, your Ecoflo® Coco Filter-ECDn unit's filtering media must be replaced before the system's treatment capacity and performance begins to deteriorate.** The filtering media is easily pumped out using a truck adapted to emptying primary tanks. The new filtering media is then installed by an authorized agent or the pumper.

To know more about the maintenance of your Ecoflo® Coco Filter-ECDn unit, refer to your Maintenance Agreement. If you need help or more information, please call our Customer Service Department at **1 800 632-6356** or visit our website at **PREMIERTECHAQUA.COM**. Information regarding service of the unit are also available on the dataplate of the unit.



Ecoflo® Coco Filter-ECDn with Pump

Ecoflo® Coco Filters-ECDn unit are equipped with a pump that directs the treated effluent to an appropriate disposal mean according to local regulations and the primary tank via the recirculation line. The electro-mechanical components are included in this system. To learn more about electro-mechanical components, consult the Timed Dosing Units TPA-350DN Installation Guide and Owner's Manual.

Electrical connections

All electrical connections must be done by a **certified electrician** and using seal connectors is mandatory. Premier Tech Aqua recommends installing the power box on top of the pump vault insulating board to avoid humidity problems.

Use two (2) separate circuit-breakers, one to operate the pump and the other to connect the control unit. Do not connect anything else to these circuit-breakers (for example, a household appliance). They must be used exclusively for the pump and the alarm box.

What to do in case of...

An activated alarm

If an alarm is activated, unrelated to a power failure, contact Premier Tech Aqua's After-Sales Service Department so the problem can be identified and corrected.

A prolonged power failure

If a power failure that occurs during winter is prolonged, protect the components of your septic system against freezing. If you have any questions to restart your system, contact Premier Tech Aqua's After-Sales Service Department.

Flooding

Certain sites are prone to flooding or to rises in groundwater levels. This can lead to a malfunction in your septic system or alter the performance of your Ecoflo® Coco Filter-ECDn unit. If this happens, contact Premier Tech Aqua's After-Sales Service Department.

Backflow

Backflow rarely occurs. But if it does happen, the primary tank is usually the cause. Your primary tank installer or primary tank pumper can generally take care of the situation.

Odours

All septic systems are apt to generate gases and odours. The position of the air vent, as well as other factors unrelated to the Ecoflo® Coco Filter-ECDn unit itself, can prevent septic gases from dispersing properly and lead to odours. If this happens, contact Premier Tech Aqua's After-Sales Service Department.

If you have any questions or comments, do not hesitate to contact Premier Tech Aqua at 1 800 632-6356.



☎ **1 800 632-6356**
📠 418 862-6642
pta@premiertech.com
PREMIERTECHAQUA.COM

The information contained in this document is based upon the latest information available at the time of publication and is designed to provide you with a general introduction to our products. We make no warranties or representations as to its accuracy. We are continually updating and improving our products and reserve the right to amend, discontinue, alter or change specifications and prices without prior notice. Ecoflo® is a brand of Premier Tech Ltd. The Ecoflo® Biofilter is protected under patents: CA2499637; US7097768; ES2285173; EP1539325 (BE, FR). Notice issued on 2016-01-12. For current data regarding all patent application(s) and patent(s) for this product or any part thereof, consult the website patentmarking.premiertech.com (references: 3685).

© Premier Tech Ltd, 2016

Certificate of Warranty for Ecoflo® Coco Filters

1. PREAMBLE

Premier Tech Technologies Ltd. (hereinafter called "Premier Tech") is proud to provide its customers with an exclusive wastewater treatment system guaranteed by an innovative Warranty.

For the application and interpretation of this Warranty, "Customer" shall mean the person who has purchased an Ecoflo® Coco Filter (hereinafter called "Initial Purchaser"), for a residential installation, as well as any subsequent purchaser (hereinafter called "Subsequent Purchaser(s)"), in accordance with the provisions of section 8 of this Warranty. "Successor(s)" shall mean any other person entitled to exercise the same rights as the Customer under the law.

2. NATURE OF THE WARRANTY

2.1. Ecoflo® Coco Filter

Premier Tech warrants to the Customer that the filtering media of the Ecoflo® Coco Filter shall function properly for a period of eight (10) years from the date of purchase by the Initial Purchaser (proof of purchase required).

Except as provided in sections 2.2 and 2.3 below, Premier Tech also warrants all parts of the Ecoflo® Coco Filter components against any manufacturing defect for a period of ten (10) years from the date of purchase by the Initial Purchaser (proof of purchase required). The first two years of the warranty also cover the labour.

2.2. Concrete

Premier Tech does not offer any additional Warranty on the shell of the concrete Ecoflo® Coco Filter. Accordingly, the Customer shall rely on the local concrete manufacturer's Warranty policy.

2.3. Pump, floats, alarm box and junction box

The pump, floats, alarm box and junction box included with the Ecoflo® Coco Filter are guaranteed for two (2) years (parts only), from the date of purchase by the Initial Purchaser (proof of purchase required). The first year of the warranty also covers the labour.

Premier Tech's conventional Warranty is expressly limited to the text of this Certificate and valid provided the Ecoflo® Coco Filter was installed in accordance with applicable regulations and with the manufacturer's recommendations.

3. NOTICE

For this Warranty to be valid, the Customer must notify Premier Tech in writing immediately upon the appearance of any indication of an anomaly or irregularity in the Ecoflo® Coco Filter.

Such notice shall be mailed to Premier Tech's Head Office at 1, avenue Premier, Rivière-du-Loup, Québec, G5R 6C1, CANADA or by facsimile at (418) 862-6642.

Upon receipt of this notice, Premier Tech shall examine the situation and, if necessary, take appropriate corrective measures in accordance with the terms of this Warranty.

4. GENERAL EXCLUSIONS

The following damages or problems are excluded from the Warranty:

(a) Any damage or problem caused by a fortuitous event or "force majeure", such as, without limiting the generality of

the foregoing, an earthquake, a flood, frost, hurricane, landslide, explosion or dynamiting;

(b) Any damage or problem caused by the fault or act of a third party including, without limiting the generality of the foregoing, the execution of landscaping work;

(c) Any damage or problem arising from a defective installation carried out by a person trained by Premier Tech, or any installation, modification, correction or addition carried out by a person not trained by Premier Tech;

(d) Any damage or problem arising from any installation, modification, correction or addition to the treatment system carried out after installation of the Ecoflo® Coco Filter without prior written approval from Premier Tech;

(e) Any damage or problem caused by the use of a septic tank that does not comply with the applicable regulations and/or with Premier Tech's specifications, as described in the Owner's Manual;

(f) Any damage or problem, if it is shown that the usage of the Ecoflo® Coco Filter was not in accordance with the instructions and guidelines described in the Owner's Manual;

(g) Any damage or problem, if the maintenance of the Ecoflo® Coco Filter was not carried out by a person authorized by Premier Tech, in accordance with the Maintenance Agreement;

(h) Any damage or problem caused by an omission or act of the Customer or the Customer's Successors including, without limiting the generality of the foregoing, refusal to allow access to the system for maintenance;

(i) Any damage or problem, if it is found that the Customer or the Customer's Successors have modified or changed the use of the property serviced by the Ecoflo® Coco Filter resulting in the alteration of the nature or quality of wastewater being treated and/or that constitutes a violation of the applicable regulations;

(j) Any damage or problem caused by and/or resulting from the work carried out to access to the Ecoflo® Coco Filter, including, without limiting the generality of the foregoing, excavation, snow removal or demolition;

(k) Any damage or problem resulting from the condition of the site or of the soil and not reported or not properly reported to Premier Tech by the Customer or the person undertaking the site investigation.

5. PARTICULAR EXCLUSIONS

It is further expressly understood that the Customer may not carry out or cause to be carried out any repair or verification of the Ecoflo® Coco Filter sold to him, or attempt to carry out any work or to apply any corrective measures whatsoever to said work, before notifying Premier Tech in accordance with the provisions of section 3 of this Warranty and before Premier Tech has visited the site, within a reasonable time following receipt of said notice, to assess the situation.

If the Customer carries out or causes to be carried out repairs, or attempts to repair or to apply corrective measures of any kind whatsoever to the Ecoflo® Coco Filter sold to him without prior authorization by Premier Tech, this Warranty shall be considered null and void and Premier Tech shall be considered completely discharged from any and all of its obligations under this Warranty.

Certificate of Warranty for Ecoflo® Coco Filters

6. INDEMNITIES AND DAMAGES

Subject to the application of the provisions and exclusions provided for in this Warranty, Premier Tech's liability and obligations regarding any corrective measure carried out or any attempt to correct an indicated problem shall be limited to replacing the filtering media and/or one or several components of the Ecoflo® Coco Filter and to supplying the required labour, if applicable.

7. LIMITATION OF LIABILITY

Premier Tech's compensation or indemnification obligation shall be limited to the provisions of section 6 of this Certificate of Warranty and Premier Tech shall not be held liable for any other damage or loss that may have been suffered or incurred by the Customer or any third party in connection with the Ecoflo® Coco Filter, its parts and/or components which originate thereof.

No additional warranty, express or implied, hence excluding any direct or indirect consequential damages (not limited to but including third parties loss) concerning the design, sale or use of the Ecoflo® Coco Filter and/or services provided by Premier Tech is hereby granted. Premier Tech's liability under its warranty obligation shall in no case exceed the cost of the Ecoflo® Coco Filter.

8. TRANSFER OF OWNERSHIP

In the event of transfer of ownership, sale, assignment or disposal in any way whatsoever of the Customer's property to a third party, this Warranty shall continue to apply if and only if the Subsequent Purchaser or the Successor confirms, by forwarding the attached "Notice of New Property Owner" to Premier Tech within a reasonable delay, that he/she is the new owner of the property, he/she understands and is aware of the content of this Certificate of Warranty and accepts its terms and conditions.

The person who proceeds with the transfer, sale, assignment or disposal of any way whatsoever of the property undertakes to hand over to the Subsequent Purchaser or the Successor the Certificate of Warranty provided upon completion of the work, as well as the Owner's Manual and, if applicable, the Maintenance and Environmental Monitoring Program for the Ecoflo® Coco Filter.

Failure to abide by the terms and conditions of section 8 of this Certificate of Warranty may, at Premier Tech's discretion, render it invalid or to be rejected.

9. INSPECTION

The Customer and/or the Customer's Successors shall allow Premier Tech or its duly authorized representatives to carry out all necessary monitoring and inspections, as required, for implementation of this Warranty.

If the Customer and/or the Customer's Successors notify Premier Tech of an alleged defect or malfunction of the Ecoflo® Coco Filter and that, after inspection, it is found that no such defect or malfunction exists or that such defect or malfunction is excluded from or does not apply to the Warranty, a minimum charge of \$150.00 plus direct expenses shall be paid by the Customer and/or the Customer's Successors for the cost of the inspection.

10. INTERPRETATION

The terms and conditions of this Warranty shall be interpreted according to and governed by the provisions of this Warranty and the legislation in effect in the Province of Quebec.

11. PRIORITY OF THE CERTIFICATE OF WARRANTY

This Warranty supersedes any contract or understanding, written or verbal, entered into between the Customer and Premier Tech. In the event of contradiction between this Warranty and any other documents and/or contracts entered into between the Customer and Premier Tech, this Warranty shall prevail.

12. PURCHASERS AND SUCCESSORS

Subject to the provisions of this Warranty and especially those of section 8, this Warranty shall continue to be valid for Subsequent Purchasers and Successors and shall continue to have full effect until the end of the agreed Warranty period provided for in section 2 of this Certificate.

