


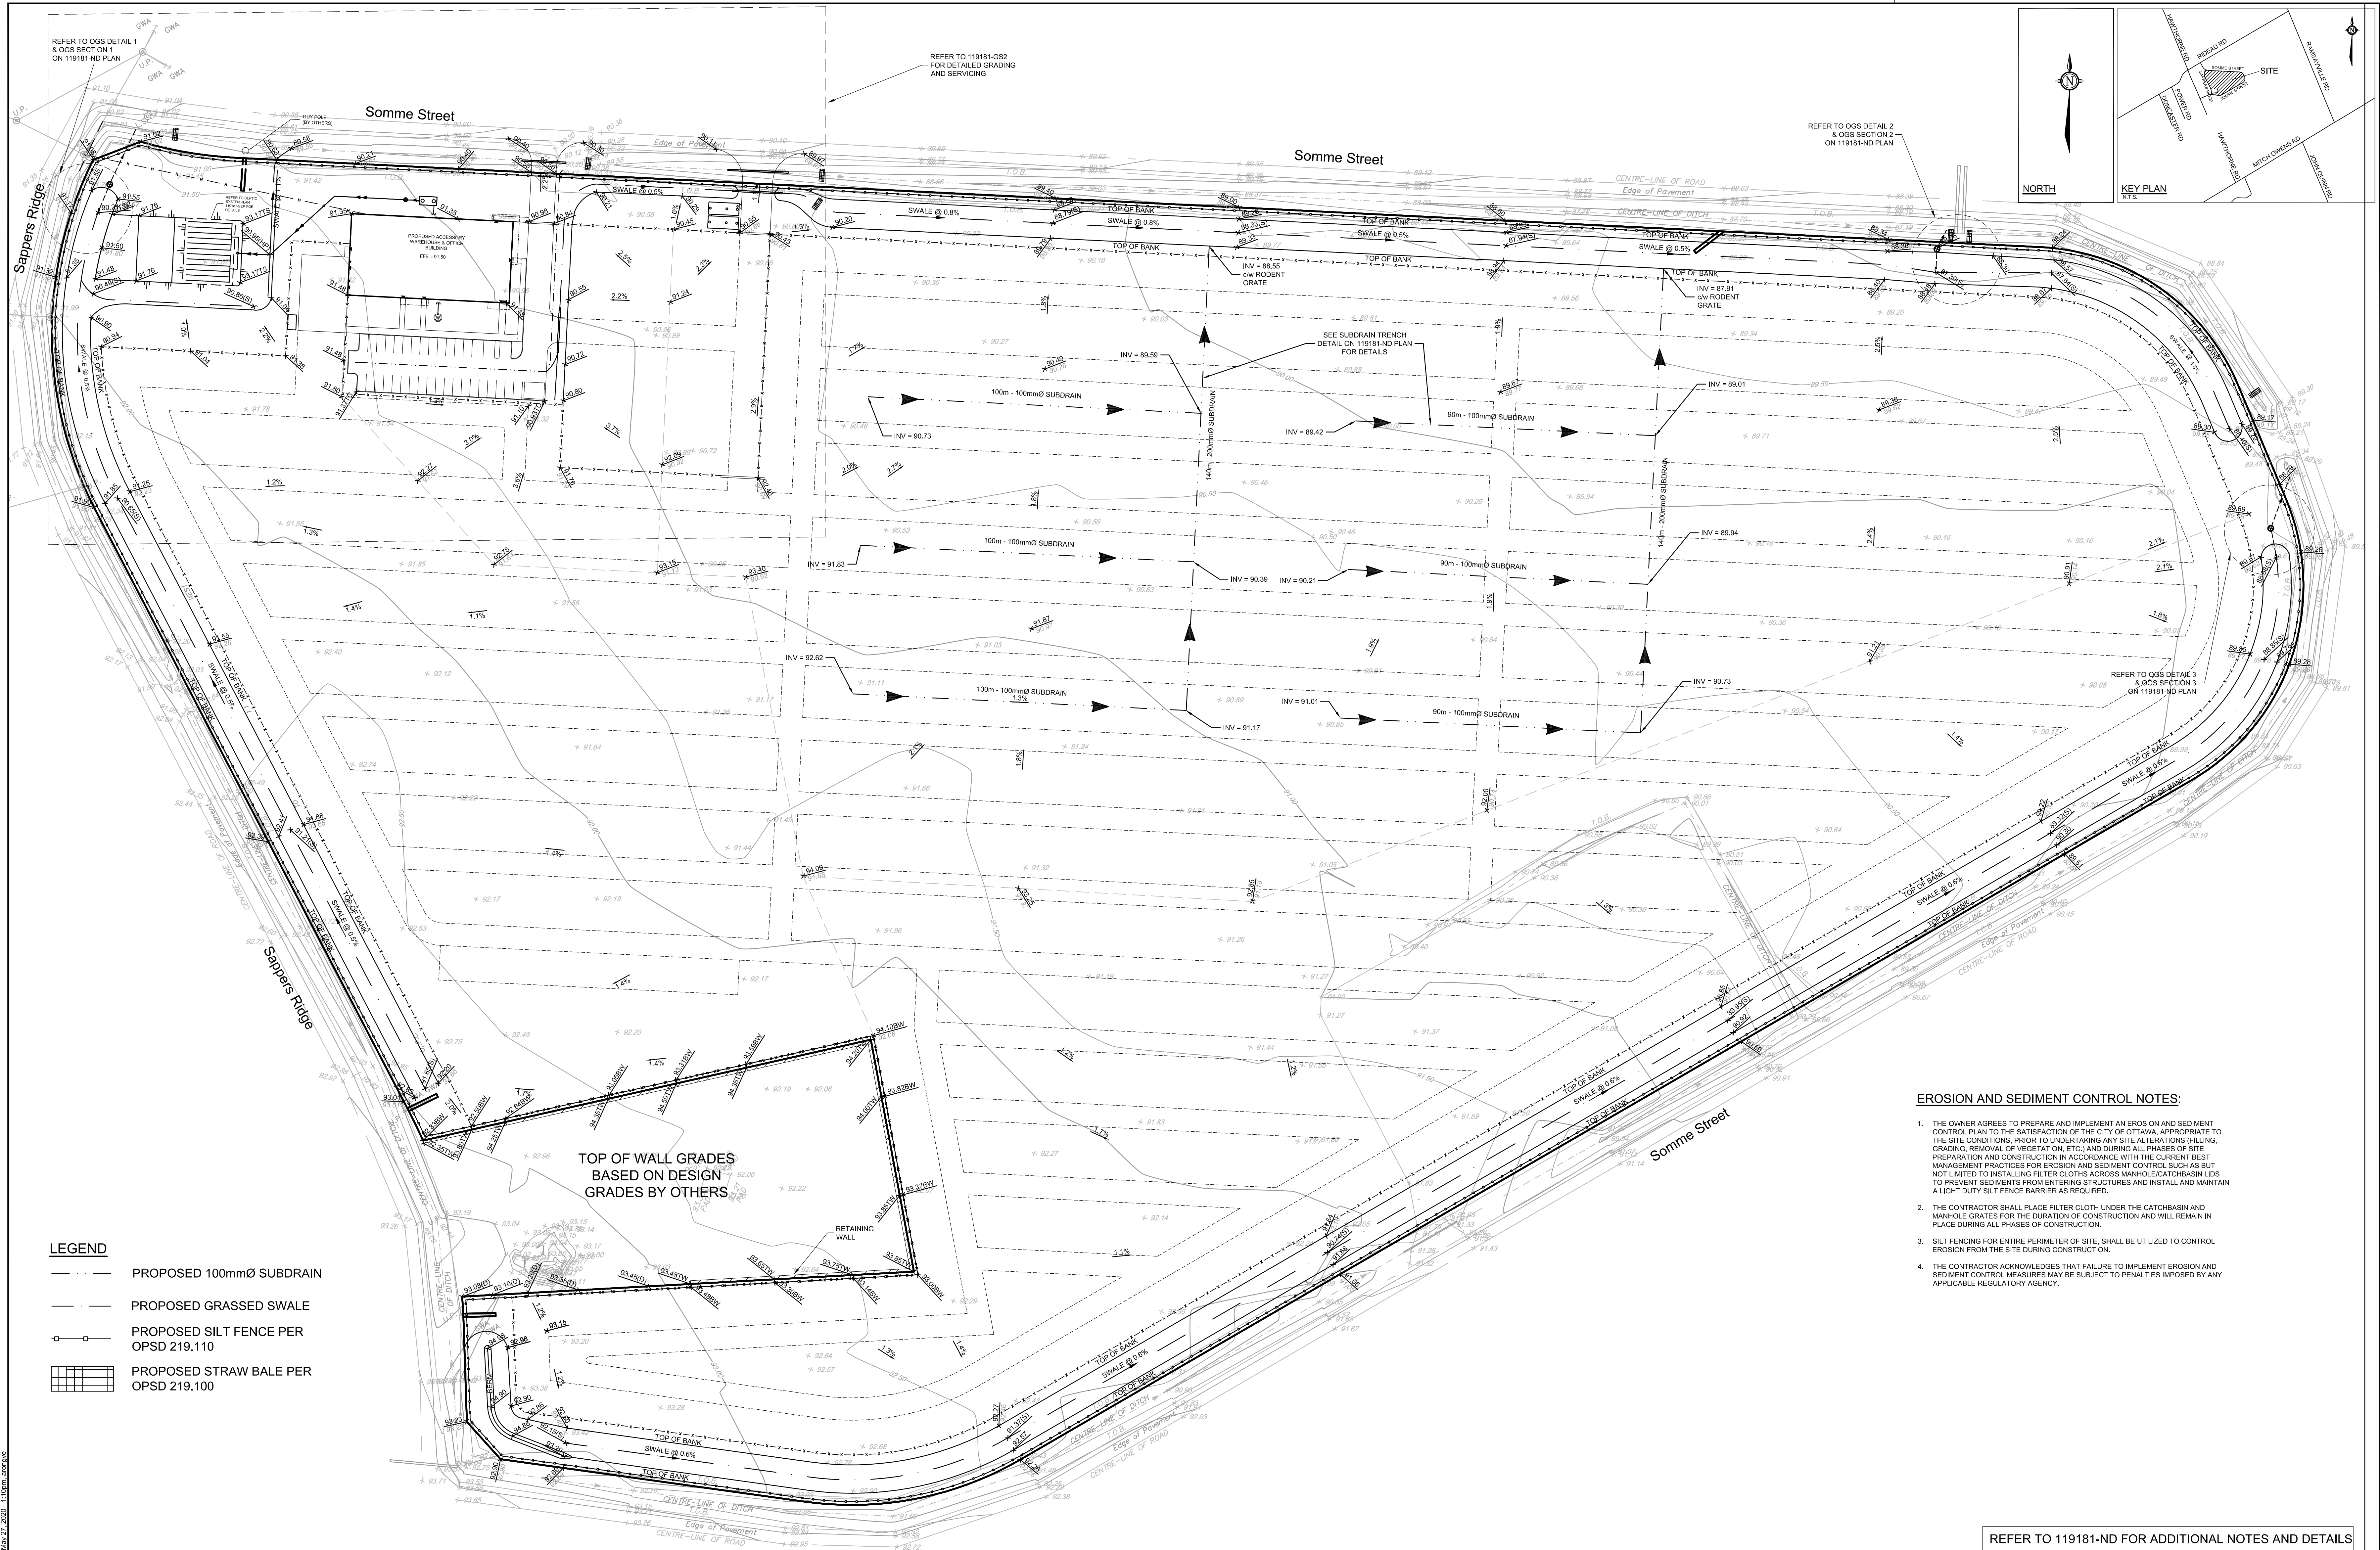

EROSION AND SEDIMENT CONTROL NOTES:

1. THE OWNER AGREES TO PREPARE AND IMPLEMENT AN EROSION AND SEDIMENT CONTROL PLAN TO THE SATISFACTION OF THE CITY OF OTTAWA, APPROPRIATE TO THE SITE CONDITIONS, PRIOR TO UNDERTAKING ANY SITE ALTERATIONS (FILLING, GRADING, REMOVAL OF VEGETATION, ETC.) AND DURING ALL PHASES OF SITE PREPARATION AND CONSTRUCTION IN ACCORDANCE WITH THE CURRENT BEST MANAGEMENT PRACTICES FOR EROSION AND SEDIMENT CONTROL, SUCH AS BUT NOT LIMITED TO INSTALLING FILTER CLOTHS ACROSS MANHOLE/CATCHBASIN LIDS TO PREVENT SEDIMENTS FROM ENTERING STRUCTURES AND INSTALL AND MAINTAIN A LIGHT DUTY SILT FENCE BARRIER AS REQUIRED.
2. THE CONTRACTOR SHALL PLACE FILTER CLOTH UNDER THE CATCH-BASIN AND MANHOLE GRATES FOR THE DURATION OF CONSTRUCTION AND WILL REMAIN IN PLACE DURING ALL PHASES OF CONSTRUCTION.
3. SILT FENCING FOR ENTIRE PERIMETER OF SITE, SHALL BE UTILIZED TO CONTROL EROSION FROM THE SITE DURING CONSTRUCTION.
4. THE CONTRACTOR ACKNOWLEDGES THAT FAILURE TO IMPLEMENT EROSION AND SEDIMENT CONTROL MEASURES MAY BE SUBJECT TO PENALTIES IMPOSED BY ANY APPLICABLE REGULATORY AGENCY.

- LEGEND**
- PROPOSED 100mmØ SUBDRAIN
 - PROPOSED GRASSED SWALE
 - PROPOSED SILT FENCE PER OPSD 219.110
 - PROPOSED STRAW BALE PER OPSD 219.100

NOT FOR
CONSTRUCTION

No.	REVISION	DATE	BY
3.	ISSUED FOR REVIEW	MAY 27/20	AAR
2.	ISSUED FOR CLIENT INFORMATION	MAY 20/20	AAR
1.	ISSUED FOR COORDINATION	MAY 8/20	AAR

SCALE
1:750
0 10 20 30

DESIGN	AAR
CHECKED	ARM
DRAWN	AAR
CHECKED	AAR
APPROVED	SMG

FOR REVIEW ONLY

S.M. GORDON
10014 1256
MAY 27, 2020
PROVINCE OF ONTARIO

K.R. MCALLEY
10014 1256
MAY 27, 2020
PROVINCE OF ONTARIO

NOVATECH
Engineers, Planners & Landscape Architects
Suite 200, 240 Michael Cowland Drive
Ottawa, Ontario, Canada K2M 1P6
Telephone (613) 254-9643
Facsimile (613) 254-5867
Website www.novatech-eng.com

LOCATION
300 SOMME STREET
BLOCK 6

DRAWING NAME
OVERALL GRADING, EROSION,
SEDIMENT CONTROL AND
SERVICING PLAN

PROJECT No. 119181
REV # 3
DRAWING No. 119181-GS1

NOTE:
THE POSITION OF ALL POLE LINES, CONDUITS,
WATERMANS, SEWERS AND OTHER
UNDERGROUND AND OVERGROUND UTILITIES AND
STRUCTURES IS NOT NECESSARILY SHOWN ON
THE CONTRACT DRAWINGS, AND WHERE SHOWN,
THE ACCURACY OF THE POSITION OF SUCH
UTILITIES AND STRUCTURES IS NOT GUARANTEED.
BEFORE STARTING WORK, DETERMINE THE EXACT
LOCATION OF ALL SUCH UTILITIES AND
STRUCTURES AND ASSUME ALL LIABILITY FOR
DAMAGE TO THEM.

REFER TO 119181-ND FOR ADDITIONAL NOTES AND DETAILS