


SERVICING BRIEF & STORMWATER MANAGEMENT REPORT

455-483 Sherbourne Road
(Building C – 483 Sherbourne Road)
Ottawa, Ontario

Report No. 20045C

September 2, 2020



NOT VALID UNLESS
SIGNED & DATED



Stormwater Management - Grading & Drainage - Storm & Sanitary Sewers - Watermains

700 Long Point Circle
Ottawa, ON K1T 4E9

613-425-8044
d.gray@dbgrayengineering.com

SERVICING BRIEF & STORMWATER MANAGEMENT REPORT

455-483 Sherbourne Road
(Building C – 483 Sherbourne Road)
Ottawa, Ontario

Two existing apartment buildings are proposed to be demolished and three new apartment buildings are proposed to be constructed at 455-483 Sherbourne Road in Ottawa. This Servicing Brief & Stormwater Management Report has been prepared for one of the proposed apartment buildings (Building C).

Specifically, this report describes the services and addresses the stormwater management requirements of a property, 1,193 sq.m. in area, located at 455 Sherbourne Road in Ottawa. The property currently has a 6-unit apartment building that will be demolished. A three-storey (plus a basement) 24-unit apartment building (Building C) is proposed.

This report forms part of the stormwater management design for the proposed development. Refer to drawing C-1 to C-8 also prepared by D. B. Gray Engineering Inc.

WATER SUPPLY FOR FIREFIGHTING:

There are four municipal fire hydrants in the municipal road right-of-way in the vicinity of the proposed building. The closest hydrant is located at the corner of Sherbourne Road and Byron Avenue about 73 m unobstructed distance to the front entrance. Another is located in front of 2037 Honeywell Avenue about 79 m unobstructed distance to the front entrance. A third is located near the corner of Keenan and Redwood Avenue about 111 m unobstructed distance to the rear entrance. A fourth is located near the corner of Sherbourne Road and Keenan Avenue about 114 m unobstructed distance to the front entrance.

A fire flow of 266.7 L/s (16,000 L/min) is required, as calculated as per the Fire Underwriter Survey "Water Supply For Fire Protection".

The boundary conditions (based on the city's computer model of the municipal water distribution system) received from the City stated that maximum available fire flow at this location is 247 L/s (14,820 L/min) at 138 kPa (20 psi). Although the available flow about 7% less than the required fire flow it is expected that if the City performed a Multi-Hydrant analysis there would be an adequate water supply for firefighting from the existing municipal water distribution system. Also, note that the fire flow of 9,000 L/min (150 /s) is available, as per the "Required Minimum Water Supply Flow Rate" as calculated using the Ontario Building Code - Appendix A - Article A-3.2.5.7 "Water Supply For Fire Fighting".

As per City of Ottawa Technical Bulletin ISTB-2018-02, the aggregate fire flow of all contributing fire hydrants within 150 m of the building can be used to supply the required fire flow. It is believed all existing municipal hydrants in the vicinity are Class AA. (The bonnets of all the hydrants are colour coded light blue (Class AA) except the hydrant at the corner of Sherbourne Road and Keenan Avenue which is not currently colour coded. However, from Google Street View it can be seen that it was colour coded as Class AA in 2012 and earlier.) The closest hydrant is within 75 m and can contribute 5,700 L/min (95 L/s); and the other three hydrants being between 75 and 150 m can contribute 3,800 L/min (63.3 L/s) each (as per Table 1 of ISTB-2018-02). Therefore, the aggregate flow from all four hydrants is 17,100 L/min (285.0 L/s), which is greater than the required fire flow.

WATER SERVICE:

There is an existing 200 mm municipal watermain in Sherbourne Road.

The 24 apartment units are comprised of 17 one-bedroom and 7 two-bedroom units. Based on the City of Ottawa Water Distribution Design Guidelines for residential properties (one-bedroom apartment units / 1.4 person per unit; and two-bedroom apartment units / 2.1 persons per unit – 350 L/person/day) and Ministry of the Environment Design Guidelines for peaking factors the daily average flow is 0.2 L/s with a maximum daily and maximum hourly demand of 1.4 and 2.2 L/s respectively.

To determine water pressure under these demands, boundary conditions, based on the City of Ottawa computer simulation of the water distribution system, at the subject location, are required. In summary, received the boundary conditions for the subject area based on the following:

Average Daily Demand: 0.2 L/s.
Maximum Daily Demand: 1.4 L/s.
Maximum Hourly Demand: 2.2 L/s

Based on the boundary conditions received from the City, the minimum HGL (hydraulic grade line) is 108.5 m and the maximum is 115.2 m. With these HGLs the water pressure at the water meter is calculated to vary from 438 kPa to 504 kPa (64 to 73 psi). This is an acceptable range of water pressures for the proposed development.

Based on the AWWA water flow demand curve, and a water pressure at the meter of 469 kPa (68 psi), the peak demand for the building is expected to be 3.0 L/s (183 L/min / 48 USgpm). The AWWA method calculates the instantaneous demand and is used to size the water service. This peak demand will produce an acceptable velocity of 1.6 m/s in the proposed 50 mm water service connection (up to 2.4 m/s is acceptable). The water service will connect to the 200 mm municipal watermain in Sherbourne Road.

SANITARY SERVICE:

There is an existing 900 mm municipal sanitary sewer in Sherbourne Road.

Based on the City of Ottawa Sewer Design Guidelines for a residential property (17 one-bedroom apartment units / 1.4 person per unit; and 7 two-bedroom apartment units / 2.1 persons per unit; 280 l/person/day – 3.2 peaking factor); and based on a 0.33 l/s/ha infiltration flow; the post development flow is calculated to be 0.44 L/s. This flow will be adequately handled by the proposed sanitary sewer service connections (150mm at 1% slope - 15.9 L/s capacity) since, at the design flow, it will only be about 3% full.

The proposed 150mm sanitary service connections will connect to the 900mm municipal sanitary sewer in Sherbourne Road which, with a 0.35% slope, has a capacity of 1117 L/s. The existing development of 6-unit apartment building generates 0.15 L/s. Therefore, the 0.29 L/s increase in sanitary flows contributing to the existing 900mm sanitary sewer is expected to have an acceptable impact.

STORMWATER MANAGEMENT:

Water Quality:

With respect to the subject project the Rideau Valley Conservation Authority (RVCA) has stated: *“The downstream outlet is less than 500 metres. There is no downstream stormwater facility. Therefore the appropriate water quality target is enhanced (80% TSS removal). If the configuration of the parking at the rear is changing or the storm pipes (if applicable) are being altered, then water quality needs to be accounted for in those areas as well.” “The trigger for onsite water quality parking would be 6 parking spaces or more.” “Based on the grading Plan, only a small amount of the existing parking is being re-graded. Therefore in this instance we would be looking for some of improvement over the existing condition. Given the amount of grassed area, would there be an opportunity to have some of the flows go through a vegetated swale in order to provide some treatment?” “For this one, we would want to see some sort of improvement with water quality given the large amount of parking spaces. In other instances where grading has been an issue, permeable pavers, control of ponding, swales and sometimes even storage tanks for settling have been considered. We would rely on the Engineer to provide a solution to the issue if not proposing traditional onsite water quality treatment.” “It is only due to the number of new parking spaces being proposed that we could consider an improvement over full water quality targets.”*

More than six parking spaces are proposed so onsite water quality is triggered. The underlying soil (silty clay) is not appropriate for any infiltration measures; however, only about 13% of the site has asphalt or concrete (the rest being the roof or grassed / landscaped); and proposed quantity control measures (see following section) will provide storage for settling. The storm sewers have been oversized to provide about 9 cu.m. of storage; and the sumps of four catch basins and catch basin / manholes will provide an area for sediment to settle. To meet the enhanced water quality target of 80% TSS removal an oil/grit separator (OGS) manholes is proposed to be located downstream of the inlet control device (ICD) in a pipe

sections that will convey 100% of the catchment area draining into municipal storm sewer system. Specifically, an AquaShield Aqua-Swirl Concentrator model AS-2 is selected to achieve a minimum 80% TSS removal. Based on software supplied by the manufacturer, the Aqua-Swirl AS-2 will remove approximately 96% of TSS from the runoff produced by the drainage area. Output from the manufacturer's software is attached to the report. The Aqua-Swirl model AS-2 has a sediment capacity of 0.28 cubic metres and an oil/debris capacity of 140 litres.

An erosion and sediment control plan has been developed to be implemented during construction, (see drawing C-5 and notes 2.1 to 2.6 on drawing C-6). In summary: to filter out construction; sediment capture filter sock inserts will be installed in all existing catch basins adjacent to the site and all new catch basins as they are installed; and any material deposited on a public road will be removed.

Water Quantity:

The stormwater management criteria for quantity control are to control the post development peak flows for the 5-year and 100-year storm events to peak flows during the 5-year storm event using a pre-development runoff coefficient or runoff coefficient of 0.50, whichever is less; and a time of concentration of 20 minutes or calculated (but not less than 10 minutes). It is calculated that the pre-development conditions reflect a 5-year runoff coefficient of 0.55. Therefore, based on runoff coefficient of 0.50, a 20 minute time of concentration; and using the Rational Method; the maximum allowable release rate is 11.65 L/s for all storm events. The runoff coefficients for the 100 year event are increased by 25% to maximum 1.00.

Stormwater will be stored within the development on the roof of the proposed building and underground in the proposed an oversized site storm sewer system.

Drainage Area I (Roof – 507 sq.m.):

The two roof drains will be flow control types which will restrict the flow and cause the storm water to pond on the roof. The flow control type roof drain shall be installed with a parabolic shaped slotted weir (1 slot per weir drain at 0.0124 l/s per mm per slot - 5 USgpm per inch per slot): Watts roof drain with a Watts Accutrol Weir RD-100-A1 or equal. The roof drain will be installed at the low point of the roof which will be 150mm lower than the perimeter of the roof. Four scuppers, each 370 mm wide and installed 150 mm above the roof drains (refer to architectural for exact locations and details). The roof shall be designed to carry the load of water having a 50 mm depth at scupper and 200 mm depth at roof drain (refer to structural). (The storm sewer serving the roof drains will connect to the upstream of the ICD, therefore, the release rate from the roof drains are added to Drainage Area II.)

	100-year	5-year
The maximum release rate:	3.39 L/s	2.59 L/s
The maximum ponding depth:	137 mm	104 mm
The maximum stored volume:	17.32 cu.m.	7.71 cu.m.

Drainage Area II (686 sq.m.):

An inlet control device (ICD) located at the outlet pipe of catch basin / manhole CB/MH-4C will control the release of stormwater from Drainage Area II and the property. The ICD will restrict

the flow and force the stormwater to back up onto upstream sewer pipes and manholes. To calculate the required storage volume an average release rate is assumed to be equal to 50% of the maximum release rate. The ICD shall be a plug style with a round orifice design (with the orifice located at the bottom of the plug) manufactured by Pedro Plastics (or approved equal) and shall be sized by the manufacturer for a discharge rate of 11.65 L/s at 0.64 m head. It is calculated that an orifice area of 5,386 sq.mm. (± 83 mm diameter) and a discharge coefficient of 0.61 will restrict the outflow rate to 11.65 L/s at a head of 0.64 m. Based on this orifice the maximum outflow rate for the 1:5 year storm event is calculated to be 6.96 L/s at 0.23 m.

	100-year	5-year
Maximum release rate:	11.65 L/s	6.96 L/s
Maximum stored volume:	9.06 cu.m.	5.22 cu.m.

The Entire Site:

	100-year	5-year
Maximum permitted release rate:	11.65 L/s	11.36 L/s
Maximum release rate:	11.65 L/s	6.96 L/s
Maximum stored volume:	26.38 cu.m.	12.93 cu.m.

The maximum post-development release rate for the 100-year storm event is calculated to be equal to maximum allowable, and 53% less than the pre-development flow rate. For the 5-year event the maximum post-development release is calculated to be 40% less than the maximum allowable, and 46% less than the pre-development flow rate.

There is an existing 1500 mm municipal storm sewer in Sherbourne Road. The proposed site storm sewer system is proposed to connect to the Sherbourne Road storm sewer. The foundation drains are proposed to drain to a sump and pumped to the proposed site storm sewer system.

The unrestricted flowrate resulting from one in five-year storm event will produce a peak flow of 23.86 L/s which will be adequately handled by the proposed storm sewer system with the last pipe segment (300mm at 0.34% - 58.8 L/s capacity) being only at 41% of its capacity (with the restricted flows through the ICD the last pipe will only be at 12% of its capacity). The flows contributing to the municipal storm sewer system is expected to have a positive impact given the post-development flows from the site are being reduced by 28% during the 5-year event.

CONCLUSIONS:

1. Although the available flow about 7% less than the required fire flow it is expected that if the City performed a Multi-Hydrant analysis there would be an adequate water supply for firefighting from the existing municipal water distribution system.
2. The aggregate flow from the four existing municipal fire hydrants within 150 m of the buildings is greater than the required fire flow.

3. The water pressure in the municipal watermain is adequate for the proposed development.
4. The expected sanitary sewage flow rate will be adequately handled by the proposed sanitary sewer service connection.
5. The sanitary flow contributing to the existing municipal combined sewer is expected to have an acceptable impact.
6. The RVCA has indicated that since more than six parking spaces are proposed so onsite water quality is triggered. The underlying soil (silty clay) is not appropriate for any infiltration measures; however, only about 13% of the site has asphalt or concrete (the rest being the roof or grassed / landscaped); and proposed quantity control measures (see following section) will provide storage for settling. To meet the enhanced water quality target of 80% TSS removal an oil/grit separator (OGS) manholes is proposed. Specifically, an AquaShield Aqua-Swirl Concentrator model AS-2 is selected which will remove approximately 96% of TSS from the runoff produced by the drainage area.
7. An erosion and sediment control plan has been developed to be implemented during construction.
8. The stormwater management criteria for quantity control are to control the post development peak flows for the 5-year and 100-year storm events to peak flows during the 5-year storm event using a pre-development runoff coefficient and a time of concentration of 20 minutes. The maximum allowable release rate is 11.65 L/s for all storm events. Stormwater will be stored within the development on the roof of the proposed building and underground in the proposed an oversized storm sewer system.
9. The maximum post-development release rate for the 100-year storm event is calculated to be equal to maximum allowable, and 53% less than the pre-development flow rate. For the 5-year event the maximum post-development release is calculated to be 40% less than the maximum allowable, and 46% less than the pre-development flow rate.
10. The unrestricted flowrate resulting from one in five-year storm event will produce a peak flow which will be adequately handled by the proposed site storm sewer system.
11. The flows contributing to the municipal storm sewer system is expected to have a positive impact given the post-development flows from the site are being reduced by 46% during the 5-year event.

D. B. GRAY ENGINEERING INC.

Stormwater Management - Grading & Drainage - Storm & Sanitary Sewers - Watermains

700 Long Point Circle
Ottawa, Ontario K1T 4E9

613-425-8044
d.gray@dbgrayengineering.com

23-Jul-20

REVISED 12-Aug-20

455-483 Sherbourne Road
Proposed Building C
Ottawa, Ontario

Fire Flow Requirements

Fire flow requirement as calculated as per Fire Underwriter Survey "Water Supply For Fire Protection".

$F = 220 C A^{0.5}$ = the required fire flow in litres per minute

C = coefficient related to the type of construction
= 1.5 Wood Frame Construction

A = total floor area (all storeys excluding basements at least 50% below grade)

3rd Floor	489 sq.m.
2nd Floor	489 sq.m.
Ground Floor	489 sq.m.
Basement	0 sq.m.
TOTAL FIRE AREA:	1467 sq.m.

F = 12,639 L/min
= 13,000 L/min (rounded off to the nearest 1,000 L/min)

-15% Charge for Limited-combustible Occupancy

= 11,050 L/min

0% Reduction: No Sprinkler System

= - L/min

Increase for Separation Exposed Buildings

		Adjacent Building			Length- Height Factor
		Constuction	Length m	Storeys	
8% North	20.1 to 30m	W-F	23	3	69
17% East	3.1 to 10m	W-F	9	3	27
5% South	30.1 to 45m				0
14% West	10.1 to 20m	Ordinary	20	6	120
44% Total Increase for Exposure (maximum 75%)					
=	4,862 L/min Increase				

= 15,912 L/min

F = 16,000 L/min (rounded off to the nearest 1,000 L/min)

= 266.7 l/s

Elevation at Fire Hydrant
(corner of Sherbourne & Byron)

200 l/s FIRE FLOW: 88.7 m ASL

247 l/s FIRE FLOW: 79.3 m ASL
(estimated)

Static Pressure at Fire Hydrant

33 psi 230 kPa

20 psi 138 kPa

455-483 Sherbourne Road
Proposed Building C
Ottawa, Ontario

Water Supply for Fire-Fighting Calculations:

Calculated as per "Required Minimum Water Supply Flow Rate" as calculated using the Ontario Building Code - Appendix A - Article A-3.2.5.7 "Water Supply For Fire Fighting".

Fire Protection Water Supply $Q = KVS_{Tot}$

$$S_{Tot} = 1.0 + S_{Side1} + S_{Side2} + S_{Side3} + S_{Side4}$$

Spatial Coefficient		Exposure Distance	
		m	
S_{Side1}	0.43	5.7	(to north property line)
S_{Side2}	0.50	2.8	(to east property line)
S_{Side3}	0.00	17.5	(to center line of road)
S_{Side4}	0.05	9.5	(to west property line)
S_{Tot}	1.98	(Need not exceed 2)	

Clinic, Intake & Adoption Areas:

K (Water Supply Coefficient)

23 As per A-3.2.5.7. Table 1 (Group C Occupancy / Combustible construction)

V (Building Volume)

	Area sq.m.	Average Height m	Volume cu.m.
3rd Floor	489	3.05	1,491
2nd Floor	489	3.05	1,491
Ground Floor	489	3.05	1,491
Basement	489	3.05	1,491
			5,966 cu.m.

$$Q = KVS_{Tot}$$

$$Q = 271,957 \text{ L}$$

Required Minimum Water Supply Flow Rate
(As per A-3.2.5.7. Table 2)

9,000 L/min

150 L/sec

D. B. GRAY ENGINEERING INC.

Stormwater Management - Grading & Drainage - Storm & Sanitary Sewers - Watermains

700 Long Point Circle
Ottawa, Ontario K1T 4E9

613-425-8044
d.gray@dbgrayengineering.com

23-Jul-20

REVISED 12-Aug-20

455-483 Sherbourne Road
Proposed Building C
24-Unit 4-Level Apartment Building
Ottawa, Ontario

Water Demand

	Number of Units	Persons Per Unit	Population
UNIT TYPE:			
Single Family:	0	3.4	0
Semi- detached:	0	2.7	0
Duplex:	0	2.3	0
Townhouse:	0	2.7	0
APARTMENTS:			
1 Bedroom:	17	1.4	24
2 Bedroom:	7	2.1	15
3 Bedroom:	0	3.1	0
Average Apartment:	0	1.8	0
TOTAL:	24		39

DAILY AVERAGE

350	litres / person / day			
9.4	l/min	0.2	l/s	2 USgpm

MAXIMUM DAILY DEMAND

(Peaking Factor for a population of 39: Table 3-3 MOE Design Guidelines for Drinking-Water Systems)

9.2				
85.8	l/min	1.4	l/s	23 USgpm

MAXIMUM HOURLY DEMAND

(Peaking Factor for a population of 39: Table 3-3 MOE Design Guidelines for Drinking-Water Systems)

13.8				
129.2	l/min	2.2	l/s	34 USgpm

Elevation of Water Meter: 63.83 m ASL
Basement Floor Elevation: 62.93 m ASL

Static Pressure at Water Meter

MINIMUM HGL:	108.5	m ASL	64	psi	438	kPa
MAXIMUM HGL:	115.2	m ASL	73	psi	504	kPa



Douglas Gray <d.gray@dbgrayengineering.com>

RE: 455-483 Sherbourne Rd

1 message

Valic, Jessica <jessica.valic@ottawa.ca>

Tue, Aug 11, 2020 at 3:46 PM

To: Douglas Gray <d.gray@dbgrayengineering.com>

Cc: Caoimhin Kennedy <c.kennedy@dbgrayengineering.com>

Good afternoon Doug,

Please find attached the water boundary conditions as requested. Note that the conditions provided are based on the worst-case scenario.

The following are boundary conditions, HGL, for hydraulic analysis for 455-483 Sherbourne (zone 1W) assumed to be connected to the 203mm on Sherbourne Road (see attached PDF for location).

Minimum HGL = 108.5m

Maximum HGL = 115.2m

Max Day + FF (200 L/s) = 88.7m

Available Fire Flow @ Residual 20psi = 247 L/s

These are for current conditions and are based on computer model simulation.

Disclaimer: The boundary condition information is based on current operation of the city water distribution system. The computer model simulation is based on the best information available at the time. The operation of the water distribution system can change on a regular basis, resulting in a variation in boundary conditions. The physical properties of watermains deteriorate over time, as such must be assumed in the absence of actual field test data. The variation in physical watermain properties can therefore alter the results of the computer model simulation.

Please do not hesitate to contact me with any questions/concerns.

Regards,

Jessica Valic, E.I.T.

Project Manager

Planning, Infrastructure and Economic Development Department - Services de la planification, de l'infrastructure et du développement économique

Development Review - West

City of Ottawa | [Ville d'Ottawa](#)

[110 Laurier Avenue West](#) Ottawa, ON | 110, avenue. Laurier Ouest. Ottawa (Ontario) K1P 1J1

613.580.2424 ext./poste 15672

jessica.valic@ottawa.ca

****Please note that due to the current situation, I am working remotely. Email is currently the best way to contact me****

From: Douglas Gray <d.gray@dbgrayengineering.com>
Sent: July 23, 2020 3:23 PM
To: Valic, Jessica <jessica.valic@ottawa.ca>
Cc: Caoimhin Kennedy <c.kennedy@dbgrayengineering.com>
Subject: 455-483 Sherbourne Rd

CAUTION: This email originated from an External Sender. Please do not click links or open attachments unless you recognize the source.

ATTENTION : Ce courriel provient d'un expéditeur externe. Ne cliquez sur aucun lien et n'ouvrez pas de pièce jointe, excepté si vous connaissez l'expéditeur.

Hi Jessica

We are working on a project that proposes three new apartment buildings.

Please provide the boundary conditions at [455-483 Sherbourne Rd](#). We have calculated the following expected demands:

Building A:

Average daily demand: 0.2 L/s.

Maximum daily demand: 1.4 L/s.

Maximum hourly daily demand: 2.2 L/s

Fire Flow demand: 266.7 L/s

Fire Flow + Max Day: 268.1 L/s

Building B:

Average daily demand: 0.1 L/s.

Maximum daily demand: 0.7 L/s.

Maximum hourly daily demand: 1.1 L/s

Fire Flow demand: 200.0 L/s

Fire Flow + Max Day: 200.7 L/s

Building C:

Average daily demand: 0.2 L/s.

Maximum daily demand: 1.4 L/s.


Maximum hourly daily demand: 2.2 L/s

Fire Flow demand: 300.0 L/s

Fire Flow + Max Day: 301.4 L/s

Calculations are attached. All of the proposed service connections are to the 200 mm watermain in Sherbourne Rd.

Thanks, Doug

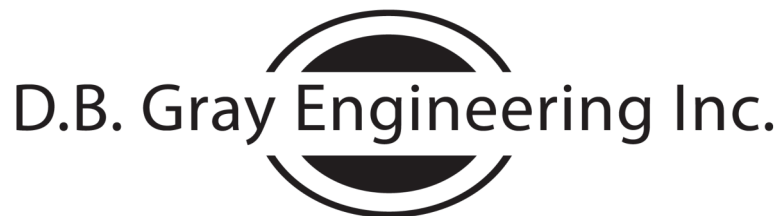

Stormwater Management - Grading & Drainage - Storm & Sanitary Sewers - Watermains

700 Long Point Circle

Tel: 613-425-8044

Ottawa, Ontario K1T 4E9

d.gray@dbgrayengineering.com

This e-mail originates from the City of Ottawa e-mail system. Any distribution, use or copying of this e-mail or the information it contains by other than the intended recipient(s) is unauthorized. Thank you.

Le présent courriel a été expédié par le système de courriels de la Ville d'Ottawa. Toute distribution, utilisation ou reproduction du courriel ou des renseignements qui s'y trouvent par une personne autre que son destinataire prévu est interdite. Je vous remercie de votre collaboration.

 **455-483 Sherbourne July 2020.pdf**
81K

Boundary Conditions for 455-483 Sherbourne



Legend

- PRIVATE
- PUBLIC



455-483 Sherbourne Road (Building C)

Ottawa, Ontario

Peak Water Demand

WATER FIXTURE VALUE
(AWWA Manual M22 - Sizing Water Service Lines and Meters)

	No.	F.V.	Total
Bathtub		8	0
Toilet - tank	24	6	144
Toilet - flush valve		24	0
Lavs.	24	1.5	36
Bidet		2	0
Urinal - wall flush valve		10	0
Shower	24	2.5	60
K. Sink	24	1.8	43.2
Dishwasher	24	1.3	31.2
Clothes Washer	24	6	144
Commercial Sink		4	0
J. Sink		4	0
Commercial Dishwasher		4	0
Commercial Washer		4	0
Hose 1/2 in		5	0
Hose 3/4 in		12	0
			458.4
Peak Demand (fig 4-2 or 4-3 AWWA M22)		45	USgpm
Pressure @ Meter	469	kPa	68 psi
Pressure Factor (table 4-1 AWWA M22)		1.07	
Peak Demand		48	USgpm
Irrigation - hose 1/2 in	0	0	USgpm (includes pressure factor)
TOTAL PEAK DEMAND	183	l/min	48 USgpm 3.0 l/s
Nominal Size	2.0	in	50 mm
	5.1	ft/s	1.6 m/s

SANITARY SEWER DESIGN FORM

Project: 455-483 Sherbourne Rd

Residential:	200	l / capita / day
Commercial:	28000	l / ha / day
Institutional:	28000	l / ha / day
Light Industrial:	35000	l / ha / day
Heavy Industrial:	55000	l / ha / day

$$P = \text{Population} / 1000$$

Designed By: D.B.G.

d.gray@dbgrayengineering.com

Harmon Correction Factor: 0.8

Commercial & Institutional:	1.5	If contribution > 20%
Commercial & Institutional:	1	If contribution < 20%

02-Sep-20

Heavy Industrial: 55000 l / ha / day

Industrial: As per Ottawa Guidelines Appendix 4-B

Page: 1 of 1

Infiltration Allowance: 0.33 l/s/ha

Page: 1 of 1

16

Summary Tables

ONE HUNDRED-YEAR EVENT					
Drainage Area	Pre-Development Release Rate (L/s)	Maximum Allowable Release Rate (L/s)	Maximum Release Rate (L/s)	Maximum Volume Required (cu.m)	Maximum Volume Stored (cu.m)
AREA IC (Roof) * Drains to Area IIC	-	-	3.39	17.32	17.32
AREA IIC	-	-	11.65	9.06	9.06
TOTAL	24.88	11.65	11.65	26.38	26.38

FIVE-YEAR EVENT					
Drainage Area	Pre-Development Release Rate (L/s)	Maximum Allowable Release Rate (L/s)	Maximum Release Rate (L/s)	Maximum Volume Required (cu.m)	Maximum Volume Stored (cu.m)
AREA IC (Roof) * Drains to Area II	-	-	2.59	7.71	7.71
AREA IIC	-	-	6.96	5.22	5.22
TOTAL	12.82	11.65	6.96	12.93	12.93

455-483 Sherbourne Road

Building 'C'

Ottawa, Ontario

STORMWATER MANAGEMENT CALCULATIONS

Rational Method

PRE-DEVELOPMENT CONDITIONS

100-Year Flow Rate

			C
Roof Area:	306	sq.m	1.00
Asphalt/Concrete Area:	291	sq.m	1.00
Gravel Area:	0	sq.m	0.875
Landscaped Area:	596	sq.m	0.25
Total Catchment Area:	1193	sq.m	0.63
Area (A):	1193	sq.m	
Time of Concentration:	20	min	
Rainfall Intensity (i):	120	mm/hr (100-year event)	
Runoff Coefficient (C):	0.63		

100 Year Pre-Development Release Rate (2.78AiC): 24.88 L/s

5-Year Flow Rate

			C
Roof Area:	306	sq.m	0.90
Asphalt/Concrete Area:	291	sq.m	0.90
Gravel Area:	0	sq.m	0.70
Landscaped Area:	596	sq.m	0.20
Total Catchment Area:	1193	sq.m	0.55
Area (A):	1193	sq.m	
Time of Concentration:	20	min	
Rainfall Intensity (i):	70	mm/hr (5-year event)	
Runoff Coefficient (C):	0.55		

5-Year Pre-Development Release Rate (2.78AiC): 12.82 L/s

Maximum Allowable Release Rate

			C
Roof Area:	306	sq.m	0.90
Asphalt/Concrete Area:	291	sq.m	0.90
Gravel Area:	0	sq.m	0.70
Landscaped Area:	596	sq.m	0.20
Total Catchment Area:	1193	sq.m	0.55
Area (A):	1193	sq.m	
Time of Concentration:	20	min	
Rainfall Intensity (i):	70	mm/hr (5 year event)	
Runoff Coefficient (C):	0.50		

Maximum Allowable Release Rate (2.78AiC): 11.65 L/s

ONE HUNDRED-YEAR EVENT

DRAINAGE AREA IC (Roof)

(ONE HUNDRED-YEAR EVENT)

			C
Roof Area:	507	sq.m	1.00
Asphalt/Concrete Area:	0	sq.m	1.00
Gravel Area:	0	sq.m	0.875
Landscaped Area:	0	sq.m	0.25

Total Catchment Area: 507 sq.m 1.00

No. of Roof Drains: 2
Slots per Wier: 1 0.0124 L/s/mm/slot (5 USGPM/in/slot)

Depth at Roof Drain: 137 mm

Maximum Release Rate: 3.39 L/s Pond Area: 380 sq.m

Achieved Volume: 17.32 cu.m

Maximum Volume Required: 17.32 cu.m

Time (min)	i (mm/hr)	2.78AiC (L/s)	Release Rate (L/s)	Stored Rate (L/s)	Stored Volume (cu.m)
5	243	34.21	3.39	30.82	9.25
10	179	25.17	3.39	21.78	13.07
15	143	20.14	3.39	16.75	15.08
20	120	16.91	3.39	13.52	16.22
25	104	14.64	3.39	11.25	16.87
30	92	12.95	3.39	9.56	17.21
35	83	11.64	3.39	8.25	17.32
40	75	10.59	3.39	7.20	17.28
45	69	9.73	3.39	6.34	17.13
50	64	9.01	3.39	5.62	16.87
55	60	8.40	3.39	5.01	16.55
60	56	7.88	3.39	4.49	16.16
65	53	7.42	3.39	4.03	15.72
70	50	7.02	3.39	3.63	15.24
75	47	6.66	3.39	3.27	14.72
80	45	6.34	3.39	2.95	14.17
85	43	6.05	3.39	2.66	13.59
90	41	5.79	3.39	2.40	12.99
95	39	5.56	3.39	2.17	12.36
100	38	5.34	3.39	1.95	11.72
105	36	5.14	3.39	1.75	11.05
110	35	4.96	3.39	1.57	10.38
115	34	4.79	3.39	1.40	9.68
120	33	4.64	3.39	1.25	8.98
125	32	4.49	3.39	1.10	8.26
130	31	4.35	3.39	0.97	7.53
135	30	4.23	3.39	0.84	6.79
140	29	4.11	3.39	0.72	6.04
145	28	4.00	3.39	0.61	5.28
150	28	3.89	3.39	0.50	4.52
180	24	3.37	3.37	0.00	0.00
210	21	2.98	2.98	0.00	0.00
240	19	2.68	2.68	0.00	0.00
270	17	2.44	2.44	0.00	0.00
300	16	2.24	2.24	0.00	0.00

DRAINAGE AREA IIC

(ONE HUNDRED-YEAR EVENT)

			C
Roof Area:	0	sq.m	1.00
Asphalt/Concrete Area:	161	sq.m	1.00
Gravel Area:	0	sq.m	0.875
Landscaped Area:	525	sq.m	0.25

Total Catchment Area: 686 sq.m 0.43

Water Elevation: 63.49 m

Invert of Outlet Pipe - CB/MH-4C: 62.81 m

Centroid of ICD Orifice: 62.85 m
(ICD in Outlet Pipe of CB/MH-4C)

Head: 0.64 m

Orifice Diameter: 83 mm

			CB/MH Storage			
			CB/MH	Invert	Size	Volume
Orifice Area:	5386	sq.mm	CB-1C	62.95	1200	0.63 cu.m
Coefficient of Discharge:	0.61		CB/MH-2C	62.88	1200	0.71 cu.m
			CB/MH-3C	62.92	1200	0.67 cu.m
Maximum Release Rate:	11.65	L/s	CB/MH-4C	62.81	1200	0.80 cu.m

Pipe Storage						
From	Invert	To	Invert	Length	Dia.	Volume
CB-1C	62.95	CB/MH-2C	62.88	17.4	250	0.88 cu.m
CB/MH-2C	62.88	CB/MH-4C	62.81	26.7	375	3.04 cu.m
CB/MH-3C	62.92	CB/MH-4C	62.81	31.8	300	2.32 cu.m

Achieved Volume: 9.06 cu.m

Maximum Volume Required: 9.06 cu.m

Time (min)	i (mm/hr)	2.78AiC (L/s)	Flow from		Total Inflow (L/s)	50% Release Rate (L/s)	Stored Rate (L/s)	Stored Volume (cu.m)
			Roof (L/s)					
5	243	19.72	3.39		23.11	5.82	17.29	5.19
10	179	14.51	3.39		17.90	5.82	12.07	7.24
15	143	11.61	3.39		15.00	5.82	9.18	8.26
20	120	9.75	3.39		13.14	5.82	7.31	8.77
25	104	8.44	3.39		11.83	5.82	6.00	9.01
30	92	7.46	3.39		10.85	5.82	5.03	9.06
35	83	6.71	3.39		10.10	5.82	4.28	8.98
40	75	6.11	3.39		9.49	5.82	3.67	8.81
45	69	5.61	3.39		9.00	5.82	3.18	8.58
50	64	5.20	3.39		8.59	5.82	2.76	8.29
55	60	4.84	3.39		8.23	5.82	2.41	7.96
60	56	4.54	3.39		7.93	5.82	2.11	7.59
65	53	4.28	3.39		7.67	5.82	1.84	7.19
70	50	4.05	3.39		7.43	5.82	1.61	6.77
75	47	3.84	3.39		7.23	5.82	1.41	6.33
80	45	3.66	3.39		7.04	5.82	1.22	5.87
85	43	3.49	3.39		6.88	5.82	1.06	5.39
90	41	3.34	3.39		6.73	5.82	0.91	4.90
95	39	3.20	3.39		6.59	5.82	0.77	4.39
100	38	3.08	3.39		6.47	5.82	0.65	3.88
105	36	2.97	3.39		6.35	5.82	0.53	3.35
110	35	2.86	3.39		6.25	5.82	0.43	2.82
115	34	2.76	3.39		6.15	5.82	0.33	2.27
120	33	2.67	3.39		6.06	5.82	0.24	1.72
125	32	2.59	3.39		5.98	5.82	0.16	1.17
130	31	2.51	3.39		5.90	5.82	0.08	0.60
135	30	2.44	3.39		5.83	5.82	0.00	0.03
140	29	2.37	3.39		5.76	5.76	0.00	0.00
145	28	2.30	3.39		5.69	5.69	0.00	0.00
150	28	2.24	3.39		5.63	5.63	0.00	0.00
180	24	1.94	3.37		5.31	5.31	0.00	0.00
210	21	1.72	2.98		4.70	4.70	0.00	0.00
240	19	1.54	2.68		4.22	4.22	0.00	0.00
270	17	1.41	2.44		3.84	3.84	0.00	0.00
300	16	1.29	2.24		3.53	3.53	0.00	0.00

FIVE-YEAR EVENT

DRAINAGE AREA IC (Roof)

(FIVE-YEAR EVENT)

			C
Roof Area:	507	sq.m	0.90
Asphalt/Concrete Area:	0	sq.m	0.90
Gravel Area:	0	sq.m	0.70
Landscaped Area:	0	sq.m	0.20
Total Catchment Area:	507	sq.m	0.90

No. of Roof Drains: 2
 Slots per Wier: 1 0.0124 L/s/mm/slot (5 USGPM/in/slot)

Depth at Roof Drain: 104 mm

Maximum Release Rate: 2.59 L/s Pond Area: 222 sq.m

Achieved Volume: 7.71 cu.m

Maximum Volume Required: 7.71 cu.m

Time (min)	i (mm/hr)	2.78AiC (L/s)	Release Rate (L/s)	Stored Rate (L/s)	Stored Volume (cu.m)
5	141	17.91	2.59	15.32	4.60
10	104	13.22	2.59	10.63	6.38
15	84	10.60	2.59	8.01	7.21
20	70	8.91	2.59	6.32	7.59
25	61	7.72	2.59	5.14	7.71
30	54	6.84	2.59	4.25	7.66
35	49	6.15	2.59	3.57	7.49
40	44	5.60	2.59	3.02	7.24
45	41	5.15	2.59	2.57	6.93
50	38	4.78	2.59	2.19	6.57
55	35	4.46	2.59	1.87	6.16
60	33	4.18	2.59	1.59	5.73
65	31	3.94	2.59	1.35	5.27
70	29	3.73	2.59	1.14	4.78
75	28	3.54	2.59	0.95	4.28
80	27	3.37	2.59	0.78	3.75
85	25	3.22	2.59	0.63	3.22
90	24	3.08	2.59	0.49	2.66
95	23	2.96	2.59	0.37	2.10
100	22	2.84	2.59	0.25	1.53
105	22	2.74	2.59	0.15	0.95
110	21	2.64	2.59	0.05	0.36
115	20	2.55	2.55	0.00	0.00
120	19	2.47	2.47	0.00	0.00
125	19	2.39	2.39	0.00	0.00
130	18	2.32	2.32	0.00	0.00
135	18	2.25	2.25	0.00	0.00
140	17	2.19	2.19	0.00	0.00
145	17	2.13	2.13	0.00	0.00
150	16	2.08	2.08	0.00	0.00
180	14	1.80	1.80	0.00	0.00
210	13	1.59	1.59	0.00	0.00
240	11	1.43	1.43	0.00	0.00
270	10	1.30	1.30	0.00	0.00
300	9	1.20	1.20	0.00	0.00

DRAINAGE AREA IIC

(FIVE-YEAR EVENT)

			C
Roof Area:	0	sq.m	0.90
Asphalt/Concrete Area:	161	sq.m	0.90
Gravel Area:	0	sq.m	0.70
Landscaped Area:	525	sq.m	0.20

Total Catchment Area: 686 sq.m 0.36

Water Elevation: 63.08 m

Invert of Outlet Pipe - CB/MH-4C: 62.81 m

Centroid of ICD Orifice: 62.85 m
(ICD in Outlet Pipe of CB/MH-4C)

Head: 0.23 m

Orifice Diameter: 83 mm

			CB/MH Storage			
			CB/MH	Invert	Size	Volume
Orifice Area:	5386	sq.mm	CB-1C	62.95	1200	0.15
Coefficient of Discharge:	0.61		CB/MH-2C	62.88	1200	0.23
			CB/MH-3C	62.92	1200	0.19
Maximum Release Rate:	6.96	L/s	CB/MH-4C	62.81	1200	0.32

Pipe Storage						
From	Invert	To	Invert	Length	Dia.	Volume
CB-1C	62.95	CB/MH-2C	62.88	17.4	250	0.61
CB/MH-2C	62.88	CB/MH-4C	62.81	26.7	375	1.98
CB/MH-3C	62.92	CB/MH-4C	62.81	31.8	300	1.75

Achieved Volume: 5.22 cu.m

Maximum Volume Required: 5.22 cu.m

Time (min)	i (mm/hr)	2.78AiC (L/s)	Flow from Roof (L/s)	Total Inflow (L/s)	50% Release Rate (L/s)	Stored Rate (L/s)	Stored Volume (cu.m)
5	141	9.81	2.59	12.40	3.48	8.92	2.67
10	104	7.24	2.59	9.83	3.48	6.35	3.81
15	84	5.80	2.59	8.39	3.48	4.91	4.42
20	70	4.88	2.59	7.47	3.48	3.99	4.79
25	61	4.23	2.59	6.82	3.48	3.34	5.01
30	54	3.75	2.59	6.33	3.48	2.85	5.14
35	49	3.37	2.59	5.96	3.48	2.48	5.20
40	44	3.07	2.59	5.66	3.48	2.18	5.22
45	41	2.82	2.59	5.41	3.48	1.93	5.21
50	38	2.62	2.59	5.20	3.48	1.72	5.17
55	35	2.44	2.59	5.03	3.48	1.55	5.11
60	33	2.29	2.59	4.88	3.48	1.40	5.03
65	31	2.16	2.59	4.74	3.48	1.26	4.93
70	29	2.04	2.59	4.63	3.48	1.15	4.82
75	28	1.94	2.59	4.52	3.48	1.04	4.70
80	27	1.85	2.59	4.43	3.48	0.95	4.57
85	25	1.76	2.59	4.35	3.48	0.87	4.44
90	24	1.69	2.59	4.27	3.48	0.79	4.29
95	23	1.62	2.59	4.21	3.48	0.73	4.14
100	22	1.56	2.59	4.14	3.48	0.66	3.98
105	22	1.50	2.59	4.09	3.48	0.61	3.82
110	21	1.45	2.59	4.03	3.48	0.55	3.66
115	20	1.40	2.55	3.95	3.48	0.47	3.24
120	19	1.35	2.47	3.82	3.48	0.34	2.46
125	19	1.31	2.39	3.70	3.48	0.22	1.67
130	18	1.27	2.32	3.59	3.48	0.11	0.87
135	18	1.23	2.25	3.49	3.48	0.01	0.06
140	17	1.20	2.19	3.39	3.39	0.00	0.00
145	17	1.17	2.13	3.30	3.30	0.00	0.00
150	16	1.14	2.08	3.21	3.21	0.00	0.00
180	14	0.99	1.80	2.78	2.78	0.00	0.00
210	13	0.87	1.59	2.46	2.46	0.00	0.00
240	11	0.78	1.43	2.22	2.22	0.00	0.00
270	10	0.71	1.30	2.02	2.02	0.00	0.00
300	9	0.66	1.20	1.86	1.86	0.00	0.00

Building C - 455-483 Sherbourne Road
 Ottawa, Ontario

STORM SEWER COMPUTATION FORM

FIVE YEAR EVENT

Rational Method

Q = 2.78 A i C

August 28, 2020

n = 0.013

Location			Areas (ha)				Time of Conc. (min)	Rainfall Intensity i (mm/hr)	Peak Flow Q (L/s)	Pipe Data							Notes		
			Hard C = 0.9	Gravel C = 0.7	Landscape C = 0.2	Roof C = 0.9				Individual 2.78AC	Accum. 2.78AC	Actual Diameter (mm)	Nominal Diameter (mm)	Slope (%)	Length (m)	Capacity (L/s)		Velocity (m/s)	Time of Flow (min)
Street	From	To																	
	CB-1C	CB/MH-2C	0.0105					104	2.87	PVC	254.0	250	0.43	17.4	40.7	0.80	0.36	0.07	
	CB/MH-2C	CB/MH-4C	0.0075		0.0023			102	4.74	PVC	381.0	375	0.25	26.7	91.5	0.80	0.55	0.05	
	ROOF	CB/MH-3C				0.0507		104	13.22	PVC	203.2	200	1.00	3.8	34.2	1.06	0.06	0.39	
	CB/MH-3C	CB/MH-4C	0.0012		0.0524			102	16.25	PVC	304.8	300	0.34	31.8	58.8	0.81	0.66	0.28	
	CB/MH-4C	MH-5C	0.0028		0.0505			101	24.24	PVC	304.8	300	0.550	1.8	74.8	1.03	0.03	0.32	
	MH-5C	EXIST						99	23.86	PVC	304.8	300	0.340	24.6	58.8	0.81	0.51	0.41	
		1500 ST							6.96	PVC	304.8	300	0.340	24.6	58.8	0.81	0.51	0.12	ICD FLOW THRU ICD



Douglas Gray <d.gray@dbgrayengineering.com>

RE: FW: 550-560 Redwood Ave & 463-471 Sherbourne Road - Pre-consultation follow-up

1 message

Valic, Jessica <jessica.valic@ottawa.ca>
To: Douglas Gray <d.gray@dbgrayengineering.com>

Fri, May 1, 2020 at 1:11 PM

Good afternoon Doug,

SWM criteria for the Sherbourne properties is:

- Coefficient (C) of runoff will need to be determined **as per existing conditions** but in no case more than 0.5
- TC = 20 minutes or can be calculated (not less than 10min)
- Storm events greater than 5 year, up to 100 year, and including 100 year storm event must be detained on site.

Concerning the trunk connections, pumping will be required as will backwater valves. As these are trunk mains, minimizing the number of connections to the mains is encouraged. I recognize these may not be possible based on the design, but please consider the following approaches:

- Limit to one storm connection per property
- Connect new laterals in same location as existing to minimize additional cuts in sewers
- Reuse existing laterals if in good condition and size is appropriate

There is also a road cut moratorium on Sherbourne Ave until July 2022 so minimizing the number of road cuts for these developments is encouraged.

Please do not hesitate to contact me with any questions/concerns.

Regards,

Jessica Valic, E.I.T.

Engineering Intern

Planning, Infrastructure and Economic Development Department - Services de la planification, de l'infrastructure et du développement économique

Development Review - Central

City of Ottawa | [Ville d'Ottawa](#)

[110 Laurier Avenue West](#) Ottawa, ON | 110, avenue. Laurier²⁴ Ouest. Ottawa (Ontario) K1P 1J1

613.580.2424 ext./poste 15672

jessica.valic@ottawa.ca

From: Douglas Gray <d.gray@dbgrayengineering.com>

Sent: April 29, 2020 4:12 PM

To: Valic, Jessica <jessica.valic@ottawa.ca>

Cc: Ryan Faith <r.faih@dbgrayengineering.com>

Subject: Fwd: FW: 550-560 Redwood Ave & 463-471 Sherbourne Road - Pre-consultation follow-up

CAUTION: This email originated from an External Sender. Please do not click links or open attachments unless you recognize the source.

ATTENTION : Ce courriel provient d'un expéditeur externe. Ne cliquez sur aucun lien et n'ouvrez pas de pièce jointe, excepté si vous connaissez l'expéditeur.


Hi Jessica

We are working on a project at [463-471 Sherbourne Rd.](#)

Please advise us of the criteria we are to follow with respect to SWM and the trunk sewer (see email below from Steve Gauthier). (The project at 550-560 [Redwood Ave](#) is not proceeding at this time.)

Is there any other relevant information that you can provide?

Regards, Doug

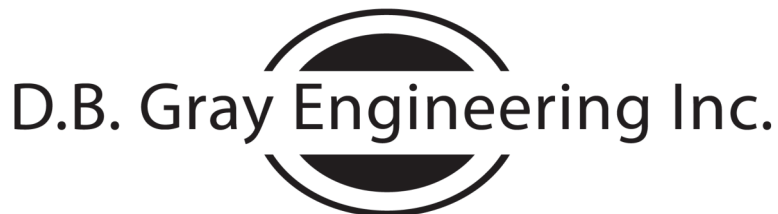

Stormwater Management - Grading & Drainage - Storm & Sanitary Sewers - Watermains

700 Long Point Circle

Tel: 613-425-8044

Ottawa, Ontario K1T 4E9

d.gray@dbgrayengineering.com

----- Forwarded message -----

From: **Jordan Tannis** <jt@concorde-properties.ca>

Date: Mon, Apr 13, 2020 at 8:33 AM

Subject: FW: 550-560 Redwood Ave & [463-471 Sherbourne Road](#) - Pre-consultation follow-up

To: Douglas Gray <d.gray@dbgrayengineering.com>, Brandon Lawrence <brandon@sjlarchitect.com>

Let's arrange a call this week. Thank you.

From: Gauthier, Steve <Steve.Gauthier@ottawa.ca>

Sent: Sunday, April 12, 2020 9:55 PM

To: Jordan Tannis <jt@concorde-properties.ca>

Cc: Valic, Jessica <jessica.valic@ottawa.ca>

Subject: 550-560 Redwood Ave & 463-471 Sherbourne Road - Pre-consultation follow-up

Hi Jordan,

Please find attached the submission list.

The salient points discussed at the meeting were:

- Property is designated Mid-rise Park Frame in the Secondary Plan.
- The proponent wants to avoid any reliefs to the zoning by-law and proceed directly with site plan control.
- Common element will be required for the private lane.
- The proposed side entrances to the building need to be relocated to the front. There could be an entrance for one unit fronting onto the street and a side one for the remaining of the building.
- Minimise window alignment with adjacent existing residential buildings.
- Building C: remove the flag portion to the south to minimise obstruction with the existing building to the east.
- Trees will have to be preserved along the two streets.
- Sherbourne is serviced by a trunk sewer. Additional criteria's will be required. Please have your engineering consultant contact Jessica Valic directly.
- The Stormwater criteria is different for the two streets. Please have your engineering consultant contact Jessica Valic directly.

Regards,

Steve Gauthier RPP

Planner | Urbaniste

Development Review | Examen des projets d'aménagement

Planning Department | Service de l'urbanisme

26

City of Ottawa | Ville d'Ottawa

☎ 613.580.2424 ext./poste 27889

ottawa.ca/planning / ottawa.ca/urbanisme

,

This e-mail originates from the City of Ottawa e-mail system. Any distribution, use or copying of this e-mail or the information it contains by other than the intended recipient(s) is unauthorized. Thank you.

Le présent courriel a été expédié par le système de courriels de la Ville d'Ottawa. Toute distribution, utilisation ou reproduction du courriel ou des renseignements qui s'y trouvent par une personne autre que son destinataire prévu est interdite. Je vous remercie de votre collaboration.

,

,

This e-mail originates from the City of Ottawa e-mail system. Any distribution, use or copying of this e-mail or the information it contains by other than the intended recipient(s) is unauthorized. Thank you.

Le présent courriel a été expédié par le système de courriels de la Ville d'Ottawa. Toute distribution, utilisation ou reproduction du courriel ou des renseignements qui s'y trouvent par une personne autre que son destinataire prévu est interdite. Je vous remercie de votre collaboration.

,



Douglas Gray <d.gray@dbgrayengineering.com>

RE: RVCA Stormwater Management Comments - 455-483 Sherbourne Road

1 message

Jamie Batchelor <jamie.batchelor@rvca.ca>
To: Ryan Faith <r.faith@dbgrayengineering.com>
Cc: Douglas Gray <d.gray@dbgrayengineering.com>

Wed, Aug 26, 2020 at 9:16 AM

Good Morning Ryan,

For this one, we would want to see some sort of improvement with water quality given the large amount of parking spaces. In other instances where grading has been an issue, permeable pavers, control of ponding, swales and sometimes even storage tanks for settling have been considered. We would rely on the Engineer to provide a solution to the issue if not proposing traditional onsite water quality treatment.

It is only due to the number of new parking spaces being proposed that we could consider an improvement over full water quality targets.

Jamie Batchelor, MCIP, RPP

Planner, ext. 1191

[Jamie.batchelor@rvca.ca](mailto:jamie.batchelor@rvca.ca)



3889 Rideau Valley Drive
PO Box 599, Manotick ON K4M 1A5
T 613-692-3571 | 1-800-267-3504 F 613-692-0831 | www.rvca.ca

This message may contain information that is privileged or confidential and is intended to be for the use of the individual(s) or entity named above. This material may contain confidential or personal information which may be subject to the provisions of the *Municipal Freedom of Information & Protection of Privacy Act*. If you are not the intended recipient of this e-mail, any use, review, revision, retransmission, distribution, dissemination, copying, printing or otherwise use of, or taking of any action in reliance upon this e-mail, is strictly prohibited. If you have received this e-mail in error, please contact the sender and delete the original and any copy of the e-mail and any printout thereof, immediately. Your cooperation is appreciated.

From: Ryan Faith <r.faith@dbgrayengineering.com>
Sent: Wednesday, August 26, 2020 9:09 AM
To: Jamie Batchelor <jamie.batchelor@rvca.ca>
Cc: Douglas Gray <d.gray@dbgrayengineering.com>
Subject: Re: RVCA Stormwater Management Comments - 455-483 Sherbourne Road

Jamie,

An update on this one too please.

Ryan Faith



Stormwater Management - Grading & Drainage - Storm & Sanitary Sewers - Watermains
700 Long Point Circle 613-425-8044
Ottawa, Ontario r.faith@dbgrayengineering.com

On Mon, Aug 17, 2020 at 2:36 PM Ryan Faith <r.faith@dbgrayengineering.com> wrote:

Hi Jamie,

28

Just following up on my previous email.

Thanks,

Ryan Faith



Stormwater Management - Grading & Drainage - Storm & Sanitary Sewers - Watermains

700 Long Point Circle
Ottawa, Ontario

613-425-8044
r.faith@dbgrayengineering.com

On Wed, Aug 12, 2020 at 10:52 AM Ryan Faith <r.faith@dbgrayengineering.com> wrote:

Hi Jamie,

It would be difficult to drain the parking area without the use of the catch-basins. There would be some very small longitudinal slopes and some very steep cross slopes, which is not ideal - especially in parking stalls. The small longitudinal slopes would pose a constant risk of flooding at those rear entrances to both the proposed building and existing neighbouring building.

Regards,

Ryan Faith



Stormwater Management - Grading & Drainage - Storm & Sanitary Sewers - Watermains

700 Long Point Circle
Ottawa, Ontario

613-425-8044
r.faith@dbgrayengineering.com

On Wed, Aug 12, 2020 at 10:29 AM Jamie Batchelor <jamie.batchelor@rvca.ca> wrote:

Thanks Ryan,

Based on the grading Plan, only a small amount of the existing parking is being re-graded. Therefore in this instance we would be looking for some of improvement over the existing condition. Given the amount of grassed area, would there be an opportunity to have some of the flows go through a vegetated swale in order to provide some treatment?

Jamie Batchelor, MCIP, RPP

Planner, ext. 1191

jamie.batchelor@rvca.ca



3889 Rideau Valley Drive
PO Box 599, Manotick ON K4M 1A5
T 613-692-3571 | 1-800-267-3504 F 613-692-0831 | www.rvca.ca

This message may contain information that is privileged or confidential and is intended to be for the use of the individual(s) or entity named above. This material may contain confidential or personal information which may be subject to the provisions of the *Municipal Freedom of Information & Protection of Privacy Act*. If you are not the intended recipient of this e-mail, any use, review, revision, retransmission, distribution, dissemination, copying, printing or otherwise use of, or taking of any action in reliance upon this e-mail, is strictly prohibited. If you have received this e-mail in error, please contact the sender and delete the original and any copy of the e-mail and any printout thereof, immediately. Your cooperation is appreciated.

From: Ryan Faith <r.faith@dbgrayengineering.com>
Sent: Wednesday, August 12, 2020 10:22 AM
To: Jamie Batchelor <jamie.batchelor@rvca.ca>
Cc: Douglas Gray <d.gray@dbgrayengineering.com>
Subject: Re: RVCA Stormwater Management Comments - 455-483 Sherbourne Road

Hi Jamie,

Our grading plan is attached. Let me know if you have any questions.

Regards,

Ryan Faith



Stormwater Management - Grading & Drainage - Storm & Sanitary Sewers - Watermains

700 Long Point Circle
Ottawa, Ontario
613-425-8044
r.faith@dbgrayengineering.com

On Tue, Aug 11, 2020 at 5:32 PM Jamie Batchelor <jamie.batchelor@rvca.ca> wrote:

Hi Ryan,

I'm wondering if you have a grading plan that will show the extent of grading required. This may help me better understand the scope of the works required and we can factor that into our comments and perhaps discuss further.

Jamie Batchelor, MCIP, RPP

Planner, ext. 1191

Jamie.batchelor@rvca.ca



3889 Rideau Valley Drive
PO Box 599, Manotick ON K4M 1A5
T 613-692-3571 | 1-800-267-3504 F 613-692-0831 | www.rvca.ca

This message may contain information that is privileged or confidential and is intended to be for the use of the individual(s) or entity named above. This material may contain confidential or personal information which may be subject to the provisions of the *Municipal Freedom of Information & Protection of Privacy Act*. If you are not the intended recipient of this e-mail, any use, review, revision, retransmission, distribution, dissemination, copying, printing or otherwise use of, or taking of any action in reliance upon this e-mail, is strictly prohibited. If you have received this e-mail in error, please contact the sender and delete the original and any copy of the e-mail and any printout thereof, immediately. Your cooperation is appreciated.

From: Ryan Faith <r.faith@dbgrayengineering.com>
Sent: Tuesday, August 11, 2020 4:52 PM
To: Jamie Batchelor <jamie.batchelor@rvca.ca>
Cc: Douglas Gray <d.gray@dbgrayengineering.com>
Subject: Re: RVCA Stormwater Management Comments - 455-483 Sherbourne Road

Hi Jamie,

Thanks for the clarification. I should point out that only 5 parking spaces are proposed behind Building A and 4 parking spaces are proposed behind Building B. I have attached a site plan for your reference.

Regards,

Ryan Faith



Stormwater Management - Grading & Drainage - Storm & Sanitary Sewers - Watermains
700 Long Point Circle 613-425-8044
Ottawa, Ontario r.faith@dbgrayengineering.com

On Tue, Aug 11, 2020 at 4:44 PM Jamie Batchelor <jamie.batchelor@rvca.ca> wrote:

Hi Ryan,

The trigger for onsite water quality parking would be 6 parking spaces or more.

Jamie Batchelor, MCIP, RPP

Planner, ext. 1191

jamie.batchelor@rvca.ca



3889 Rideau Valley Drive
PO Box 599, Manotick ON K4M 1A5
T 613-692-3571 | 1-800-267-3504 F 613-692-0831 | www.rvca.ca

This message may contain information that is privileged or confidential and is intended to be for the use of the individual(s) or entity named above. This material may contain confidential or personal information which may be subject to the provisions of the *Municipal Freedom of Information & Protection of Privacy Act*. If you are not the intended recipient of this e-mail, any use, review, revision, retransmission, distribution, dissemination, copying, printing or otherwise use of, or taking of any action in reliance upon this e-mail, is strictly prohibited. If you have received this e-mail in error, please contact the sender and delete the original and any copy of the e-mail and any printout thereof, immediately. Your cooperation is appreciated.

From: Ryan Faith <r.faith@dbgrayengineering.com>
Sent: Tuesday, August 11, 2020 4:43 PM
To: Jamie Batchelor <jamie.batchelor@rvca.ca>
Cc: Douglas Gray <d.gray@dbgrayengineering.com>
Subject: Re: RVCA Stormwater Management Comments - 455-483 Sherbourne Road

Hi Jamie,

I understand the RVCA can see it as an opportunity, however the asphalt represents such a small percentage of the site. The vast majority of the site is considered to be clean for the purpose of protecting aquatic and fish habitat. What area of asphalt or what number of parking stalls triggers the opportunity?

Regards,

Ryan Faith



Stormwater Management - Grading & Drainage - Storm & Sanitary Sewers - Watermains

700 Long Point Circle
Ottawa, Ontario

613-425-8044
r.faith@dbgrayengineering.com

On Tue, Aug 11, 2020 at 4:35 PM Jamie Batchelor <jamie.batchelor@rvca.ca> wrote:

Hi Ryan,

Thanks for the clarification. However, if the parking spaces are being regraded, then the RVCA would view this as an opportunity to provide water quality controls on the site.

Jamie Batchelor, MCIP, RPP

Planner, ext. 1191

jamie.batchelor@rvca.ca



3889 Rideau Valley Drive
PO Box 599, Manotick ON K4M 1A5
T 613-692-3571 | 1-800-267-3504 F 613-692-0831 | www.rvca.ca

This message may contain information that is privileged or confidential and is intended to be for the use of the individual(s) or entity named above. This material may contain confidential or personal information which may be subject to the provisions of the *Municipal Freedom of Information & Protection of Privacy Act*. If you are not the intended recipient of this e-mail, any use, review, revision, retransmission, distribution, dissemination, copying, printing or otherwise use of, or taking of any action in reliance upon this e-mail, is strictly prohibited. If you have received this e-mail in error, please contact the sender and delete the original and any copy of the e-mail and any printout thereof, immediately. Your cooperation is appreciated.

From: Ryan Faith <r.faith@dbgrayengineering.com>

Sent: Tuesday, August 11, 2020 4:17 PM

To: Jamie Batchelor <jamie.batchelor@rvca.ca>

Cc: Douglas Gray <d.gray@dbgrayengineering.com>

Subject: Re: RVCA Stormwater Management Comments - 455-483 Sherbourne Road

Hi Jamie,

There is no increase in asphalt areas. The parking spaces at the rear of the buildings are existing and are simply being regraded to improve drainage. The only increases in hard surfaces are the roofs.

Ryan Faith

*Stormwater Management - Grading & Drainage - Storm & Sanitary Sewers - Watermains*700 Long Point Circle
Ottawa, Ontario613-425-8044
r.faith@dbgrayengineering.comOn Tue, Aug 11, 2020 at 4:03 PM Jamie Batchelor <jamie.batchelor@rvca.ca> wrote:

Good Afternoon Ryan,

The downstream outlet is less than 500 metres. There is no downstream stormwater facility. Therefore the appropriate water quality target is enhanced (80% TSS removal). If the configuration of the parking at the rear is changing or the storm pipes (if applicable) are being altered, then water quality needs to be accounted for in those areas as well.

Jamie Batchelor, MCIP, RPP

Planner, ext. 1191

[Jamie.batchelor@rvca.ca](mailto:jamie.batchelor@rvca.ca)3889 Rideau Valley Drive
PO Box 599, Manotick ON K4M 1A5
T 613-692-3571 | 1-800-267-3504 F 613-692-0831 | www.rvca.ca

This message may contain information that is privileged or confidential and is intended to be for the use of the individual(s) or entity named above. This material may contain confidential or personal information which may be subject to the provisions of the *Municipal Freedom of Information & Protection of Privacy Act*. If you are not the intended recipient of this e-mail, any use, review, revision, retransmission, distribution, dissemination, copying, printing or otherwise use of, or taking of any action in reliance upon this e-mail, is strictly prohibited. If you have received this e-mail in error, please contact the sender and delete the original and any copy of the e-mail and any printout thereof, immediately. Your cooperation is appreciated.

From: Ryan Faith <r.faith@dbgrayengineering.com>
Sent: Monday, August 10, 2020 9:11 AM
To: Jamie Batchelor <jamie.batchelor@rvca.ca>
Cc: Douglas Gray <d.gray@dbgrayengineering.com>
Subject: Re: RVCA Stormwater Management Comments - 455-483 Sherbourne Road

Hi Jamie,

This is a reminder that we are still waiting on your comments for this one.

Regards,

Ryan Faith

*Stormwater Management - Grading & Drainage - Storm & Sanitary Sewers - Watermains*700 Long Point Circle
Ottawa, Ontario613-425-8044
r.faith@dbgrayengineering.com

9/2/2020

D.B. Gray Engineering Inc. Mail - RE: RVCA Stormwater Management Comments - 455-483 Sherbourne Road

On Fri, Jul 31, 2020 at 11:21 AM Ryan Faith <r.faith@dbgrayengineering.com> wrote:

Hi Jamie,


We are working on a proposed development consisting of 3 apartment buildings on 4250 sq.m of land at 455-483 Sherbourne Road in Ottawa. The parking at the rear is an existing condition to remain.

Please comment on the stormwater management for the site.

I have attached a site plan for your reference.

Thanks,

Ryan Faith



Stormwater Management - Grading & Drainage - Storm & Sanitary Sewers - Watermains

700 Long Point Circle

613-425-8044

Ottawa, Ontario

r.faith@dbgrayengineering.com



Sizing Report

2733 Kanasita Drive • Suite 111 • Chattanooga, TN 37343 • Phone: (423) 870-8888 • Fax: (423) 826-2112 • www.aquashieldinc.com

Site Information

Project Name: 455-483 Sherbourne Rd.

Site Area (hectares): 0.1193

Unit Label: OGS 1

Runoff Coeff. : .59

Unit Location: Ottawa, ON

Target Removal Efficiency(%): 80% based on NJDEP

Product Recommendation

Aqua-Swirl™ Model	Net Annual TSS Removal Efficiency	Chamber Diameter	Maximum Inside Diameter (mm)		Oil/Debris Storage Capacity	Sediment Storage Capacity
AS-2	96.11 %	763 mm.	Offline	BYP ⁵	140 L	0.28 m ³
			205 mm.	381 mm.		

Rainfall Information

NCDC Station¹: OTTAWA MACDONALD-CARTIER INT'L A Data Range⁴: 261,759 readings taken hourly between 1967 to 2007 (~40 years)

Rainfall Event Range (mm/hre)	Rainfall Interval Point (mm/hre)	Operating Rate (Lps/m ²)	Total Rainfall (%)	Removal Efficiency (%) ²	Relative Efficiency(%)
02.00 - 03.00	02.50	01.07	44.18	97.23	42.95
03.00 - 04.00	03.50	01.50	21.52	96.79	20.83
04.00 - 05.00	04.50	01.93	11.68	96.33	11.25
05.00 - 06.00	05.50	02.36	06.68	95.84	06.40
06.00 - 07.00	06.50	02.79	04.03	95.31	03.84
07.00 - 08.00	07.50	03.22	01.99	94.75	01.89
08.00 - 09.00	08.50	03.65	01.84	94.16	01.73
09.00 - 10.00	09.50	04.08	01.81	93.55	01.69
10.00 - 15.00	12.50	05.36	04.12	91.50	03.77
15.00 - 20.00	17.50	07.51	01.02	87.47	00.89
20.00 - 25.00	22.50	09.65	00.54	82.66	00.45
25.00 - 30.00	27.50	11.80	00.24	77.07	00.18
30.00 - 40.00	35.00	15.01	00.33	67.23	00.22
40.00 - 50.00	45.00	19.30	00.03	51.37	00.02
50.00 - 60.00	55.00	23.59	00.00	32.40	00.00
60.00 - 70.00	65.00	27.88	00.00	10.31	00.00
Total Cumulative Rainfall %:			100.01 ³	Net Annual %:	96.11

Sales Agent Information

Agent Name: Dave Kanters

Phone: 416-347-2799

Company Name: Soleno

Fax: _____

Address: 347, 15-75 Bayly St. W.

E-mail: dkanters@soleno.com

City, State Zip: Ajax, ON L1S7K7

Footnotes

- Recorded as hourly precipitation rainfall data (inches), National Climatic Data Center (NCDC)
- Based on Tennessee Tech University laboratory testing of the AquaSwirl™ Model AS-3 for OK-110 silica particles 50-125 microns(Neary, 2002)
- 90% Rainfall Event, calculated as a cumulative percentile of individual events, www.stormwatercenter.net, sizing criteria (Center for Watershed Protection)
- NCDC data may not be consecutive, skipping days, months and/or years in the range of dates.
- The Aqua-Swirl™ Internal Bypass (BYP) provides full treatment of the "first flush," while the peak design storm is diverted and channeled through the main conveyance pipe. Please refer to your local representative for more information.
- When applicable, the performance curve was adjusted via Peclet Scaling to provide estimated sizing per NJDEP PSD (d50 = 67 microns).

To receive pricing and/or technical support on the Aqua-Swirl, please contact Soleno.
(www.Soleno.com)


Paul Antoine
Sales Representative
Tel: 613-292-4094
Email: paul@soleno.com

David Kanters
Engineer, Technical Service
Tel: 416-347-2799
Email: dkanters@soleno.com


Aqua-Swirl High Density Polyethylene (HDPE)
Stormwater Treatment System

Please see accompanied Aqua-Swirl specification notes. See Site Plan for actual system orientation. Approximate dry (pick) weight: 400 kg [800 lbs].



System shall be designed for the following capacities:
Swirl Treatment Flow: 31 L/s [1.1 cfs]
Swirl Sediment Storage: 0.28 m³ [10 ft³]
Swirl Oil/Debris Storage: 140 L [37 gal]



Projected View
SCALE 1:80

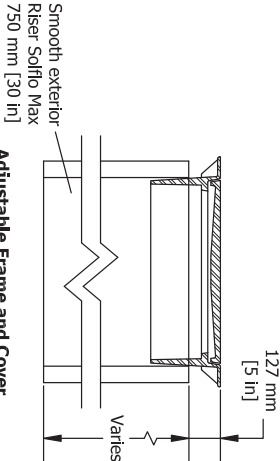

- 1 AS-2 BYP inlet/outlet pipe size ranges from 203 mm [8 in] to 381 mm [15 in].
- 2 AS-2 chamber height may vary from 1321 mm [52 in] to 1524 mm [60 in], depending on inlet/outlet pipe size.
- 3 Orientation may vary from a minimum of 90° to a maximum of 180°.

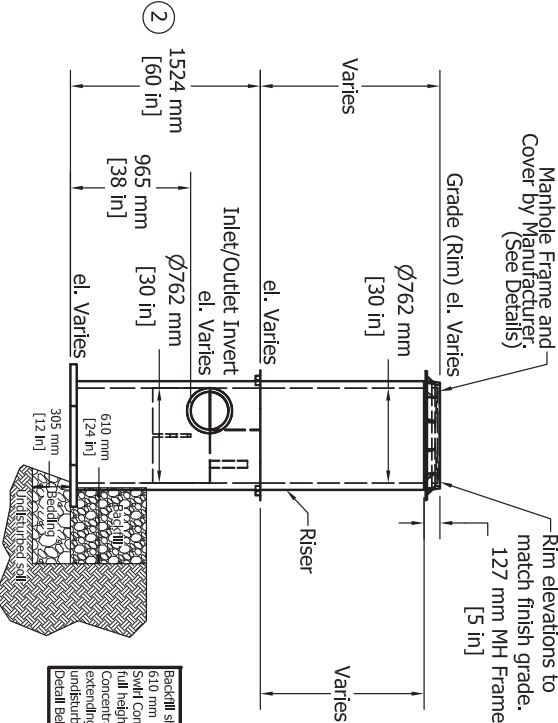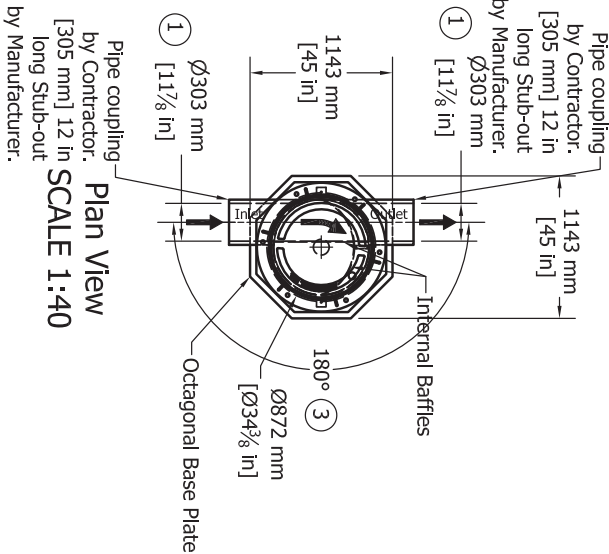

Backfill shall extend at least 610 mm [24 in] outward from Swirl Concentrator and for the full height of the Swirl Concentrator (including riser) extending laterally to undisturbed soils. (See MH Detail Below)

AquaShield
WATER TREATMENT SOLUTIONS
2733 Kanawha Drive, Suite 111, Chattanooga, TN 37243
Phone: (888) 344-9044 Fax: (423) 826-2112
www.aquashieldinc.com

Aqua-Swirl Concentrator	Structure #:	AS-2 STD	Rwled	Rvw. Date
AS-2 BYP CW STD	Drawn By:	O'Hores		
	Scale:	AS Shown		
	Date:	3/7/2018		
Standard Detail	U.S. Patent No. 6524473 and other Patent Pending			

City of Ottawa Servicing Study Checklist

General Content

Executive Summary (for large reports only): not applicable

Date and revision number of the report: see page 1 of Servicing Brief and Stormwater Management Report

Location map and plan showing municipal address, boundary, and layout of proposed development: see drawings C-1 to C-8

Plan showing the site and location of all existing services: see drawings C-1 to C-8

Development statistics, land use, density, adherence to zoning and official plan, and reference to applicable subwatershed and watershed plans that provide context to which individual developments must adhere: not applicable

Summary of Pre-consultation Meetings with City and other approval agencies: not available

Reference and confirm conformance to higher level studies and reports (Master Servicing Studies, Environmental Assessments, Community Design Plans), or in the case where it is not in conformance, the proponent must provide justification and develop a defensible design criteria: not applicable

Statement of objectives and servicing criteria: see page 2 of Servicing Brief and Stormwater Management Report

Identification of existing and proposed infrastructure available in the immediate area: see drawings C-1 to C-8

Identification of Environmentally Significant Areas, watercourses and Municipal Drains potentially impacted by the proposed development (Reference can be made to the Natural Heritage Studies, if available). see drawings C-1 to C-8

Concept level master grading plan to confirm existing and proposed grades in the development and drainage, soil removal and fill constraints, and potential impacts to neighbouring properties. This is also required to confirm that the proposed grading will not impede existing major system flow paths: not applicable

Identification of potential impacts of proposed piped services on private services (such as wells and septic fields on adjacent lands) and mitigation required to address potential impacts: not applicable

Proposed phasing of the development, if applicable: not applicable

Reference to geotechnical studies and recommendations concerning servicing: see note 1.5 on drawing C-6

All preliminary and formal site plan submissions should have the following information:

- **Metric scale:** included
- **North arrow:** included
 - **(including construction North):** not included

- **Key Plan:** included
- **Name and contact information of applicant and property owner:** not available
- **Property limits:** included
 - **including bearings and dimensions:** not included
- **Existing and proposed structures and parking areas:** included
- **Easements, road widening and rights-of-way:** included
- **Adjacent street names:** included

Development Servicing Report: Water

Confirm consistency with Master Servicing Study, if available: not applicable

Availability of public infrastructure to service proposed development: see page 2 & 3 of Servicing Brief

Identification of system constraints: see page 2 & 3 of Servicing Brief

Confirmation of adequate domestic supply and pressure: see page 2 of Servicing Brief

Confirmation of adequate fire flow protection and confirmation that fire flow is calculated as per the Fire Underwriter's Survey. Output should show available fire flow locations throughout the development: see page 2 & 3 of Servicing Brief

Provide a check of high pressures. If pressure is found to be high, an assessment is required to confirm the application of pressure reducing valves: see page 2 & 3 of Servicing Brief

Definition of phasing constraints. Hydraulic modeling is required to confirm servicing for all defined phases of the project including the ultimate design: not applicable

Address reliability requirements such as appropriate location of shut-off valves: not applicable

Check on the necessity of a pressure zone boundary modification: not applicable

Reference to water supply analysis to show that major infrastructure is capable of delivering sufficient water for the proposed land use. This includes data that shows that the expected demands under average day, peak hour and fire flow conditions provide water within the required pressure range: not applicable

Description of the proposed water distribution network, including locations of proposed connections to the existing systems, provisions for necessary looping, and appurtenances (valves, pressure reducing valves, valve chambers, and fire hydrants) including special metering provisions: not applicable

Description of off-site required feeder mains, booster pumping stations, and other water infrastructure that will be ultimately required to service proposed development, including financing, interim facilities, and timing of implementation: not applicable

Confirmation that water demands are calculated based on the City of Ottawa Design Guidelines: see page 2 & 3 of Servicing Brief

Provision of a model schematic showing the boundary conditions locations, streets , parcels, and building locations for reference: not applicable

Development Servicing Report: Wastewater

Summary of proposed design criteria: see page 3 & 4 of Servicing Brief

(Note: Wet-weather flow criteria should not deviate from the City of Ottawa Sewer Design Guidelines. Monitored flow data from relatively new infrastructure cannot be used to justify capacity requirements for proposed infrastructure): not applicable

Confirm consistency with Master Servicing Study and /or justification for deviations: not applicable

Consideration of local conditions that may contribute to extraneous flows that are higher than the recommended flows in the guidelines. This includes groundwater and soil conditions, and age and conditions of sewers: not applicable

Descriptions of existing sanitary sewer available for discharge of wastewater from proposed development: see page 3 & 4 of Servicing Brief

Verify available capacity in downstream sanitary sewer and / or identification of upgrades necessary to service the proposed development. (Reference can be made to previously completed Master Servicing Study if applicable): not applicable

Calculations related to dry-weather and wet-weather flow rates from the development in standard MOE sanitary sewer design table (Appendix C) format. see page 9 of Servicing Brief

Description of proposed sewer network including sewers, pumping stations, and forcemains: see page 3 & 4 of Servicing Brief

Discussion of previously identified environmental constraints and impact on servicing (environmental constraints are related to limitations imposed on the development in order to preserve the physical condition of watercourses, vegetation, soil cover, as well as protecting against water quantity and quality): not applicable

Pumping stations: impacts of proposed development on existing pumping stations or requirements for new pumping station to service development: not applicable

Forcemain capacity in terms of operational redundancy, surge pressure and maximum flow velocity: not applicable

Identification and implementation of the emergency overflow from sanitary pumping stations in relation to the hydraulic grade line to protect against basement flooding: not applicable

Special considerations such as contamination, corrosive environment etc: not applicable

Development Servicing Report: Stormwater Checklist

Description of drainage outlets and downstream constraints including legality of outlets (i.e. municipal drain, right-of-way, watercourse, or private property): see page 4 & 6 of Servicing Brief and Stormwater Management Report

Analysis of available capacity in existing public infrastructure. not applicable

A drawing showing the subject lands, its surroundings, the receiving watercourse, existing drainage patterns, and proposed drainage pattern: see drawing C-4

Water quality control objective (e/g/ controlling post-development peak flows to pre-development level for storm events ranging from the 2 or 5 year event (dependent on the receiving sewer design) to 100 year return period); if other objectives are being applied, a rationale must be included with reference to hydrologic analyses of the potentially affected subwatersheds, taking into account long-term cumulative effects: see Stormwater Management Report Servicing Brief and Stormwater Management Report

Water Quality control objective (basic, normal or enhanced level of protection based on the sensitivities of the receiving watercourse) and storage requirements: Servicing Brief and Stormwater Management Report

Descriptions of the references and supporting information.
Set-back from private sewage disposal systems. not applicable

Watercourse and hazard lands setbacks: not applicable

Record of pre-consultation with the Ontario Ministry of Environment and the Conservation Authority that has jurisdiction on the affected watershed: the pre-application consultation record is not yet been issued

Confirm consistency with sub-watershed and Master Servicing Study, if applicable study exists: not applicable

Storage requirements (complete with calculations) and conveyance capacity for minor events (1:5 year return period) and major events (1:100 year return period). see drawings C-1 to C-4 and Servicing Brief and Stormwater Management Report

Identification of watercourses within the proposed development and how watercourses will be protected, or , if necessary, altered by the proposed development with applicable approvals. see drawings C-1 to C-4 and Servicing Brief and Stormwater Management Report

Calculate pre and post development peak flow rates including a description of existing site conditions and proposed impervious areas and drainage catchments in comparison to existing conditions: see Servicing Brief and Stormwater Management Report

Any proposed diversion of drainage catchment areas from one outlet to another. : not applicable

Proposed minor and major systems including locations and sizes of stormwater trunk sewers, and stormwater management facilities. : not applicable

If quantity control is not proposed, demonstration that downstream system has adequate capacity for the post-development flows up to and including the 100-year return period storm event: not applicable

Identification of potential impacts to receiving watercourses: Servicing Brief and Stormwater Management Report

Identification of municipal drains and related approval requirements. : not applicable

Descriptions of how the conveyance and storage capacity will be achieved for the development: see page 4 to 6 of Servicing Brief and Stormwater Management Report

100 year flood levels and major flow routing to protect proposed development from flooding for establishing minimum building elevations (MBE) and overall grading:

Inclusion of hydraulic analysis including hydraulic grade line elevations. : not applicable

Description of approach to erosion and sediment control during construction for the protection of receiving watercourses of drainage corridors: see notes 2.1 to 2.5 on drawing C-2

Identification of floodplains – proponent to obtain relevant floodplain information from the appropriate Conservation Authority. The proponent may be required to delineate floodplains elevations to the satisfaction of the Conservation Authority if such information is not available or if information does not match current: not applicable

Identification of fill constraints related to floodplain and geotechnical investigation. : not applicable

Approval and Permit Requirements: Checklist

The Servicing Study shall provide a list of applicable permits and regulatory approvals necessary for the proposed development as well as the relevant issues affecting each approval. The approval and permitting shall include but not be limited to the following:

Conservation Authority as the designated approval agency for modification of floodplain, potential impact on fish habitat, proposed works in or adjacent to a watercourse, cut/fill permits and Approval under Lakes and Rivers Improvement Act. The Conservation Authority is not approval authority for the Lakes and Rivers Improvement Act. Where there are Conservation Authority regulations in place, approval under the Lakes and Rivers Improvement Act is not required, except in cases of dams as defined in the Act: see page 19 of Servicing Brief and Stormwater Management Report

Application for Certificate of Approval (CofA) under the Ontario Water Resources Act:

Changes to Municipal Drains. : not applicable

Other permits (National Capital commission, Parks Canada, public Works and Government Services Canada, Ministry of transportation etc.) : not applicable

Conclusion Checklist

Clearly stated conclusions and recommendations: see page 6 & 7 of Servicing Brief

Comments received from review agencies including the City of Ottawa and information on how the comments were addressed. Final sign-off from the responsible reviewing agency.

All draft and final reports shall be signed and stamped by a professional Engineer registered in Ontario: included