

EXISTING TREE LIST




| KEY | QTY | BOTANICAL NAME | COMMON NAME | SIZE | CONDITION | REMARKS |
|-----|-----|---------------------|--------------------|---------------|-----------|-----------|
| AN | * | Acer negundo | Manitoba Maple | 100-200mm DBH | Poor-Good | To remain |
| AS | * | Acer saccharinum | Silver Maple | 100-250mm DBH | Good | To remain |
| PD | * | Populus deltoides | Eastern Cottonwood | 100-200mm DBH | Good | To remain |
| RT | * | Rhus typhina | Staghorn Sumac | 100-150mm DBH | Good | To remain |
| PR | * | Prunus sp. | Cherry | 100-150mm DBH | Good | To remain |
| PT | * | Populus tremuloides | Trembling Aspen | 100-150mm DBH | Good | To remain |
| PG | 4 | Picea glauca | White Spruce | 300-500mm DBH | Good | To remain |
| PA | 3 | Picea abies | Norway Spruce | 400-500mm DBH | Poor-Good | To remain |

*DENOTES NUMEROUS

PROPOSED PLANT LIST

| KEY | QTY | BOTANICAL NAME | COMMON NAME | SIZE | CONDITION | REMARKS |
|-----|-----|------------------------|-----------------|----------|-----------|---------------|
| RM | 2 | Acer rubrum | Freeman's Maple | 60mm ø | B&B | Single leader |
| SM | 3 | Acer saccharum | Sugar Maple | 60mm ø | B&B | |
| SB | 3 | Amelanchier canadensis | Serviceberry | 60mm ø | B&B | |
| WS | 3 | Picea glauca | White Spruce | 1.8m ht. | B&B | |

- #### GENERAL NOTES:
- It is the responsibility of the appropriate contractor or official to report any errors, omissions or discrepancies on this plan with actual site conditions to the Landscape Architect before proceeding with construction.
 - The contractor is to notify all utility companies and authorities prior to any excavation and ascertain locations of underground services.
 - The contractor is to reinstate all areas and items damaged as a result of construction activity.
 - The contractor is to comply with all pertinent codes and by-laws.
 - The contractor is to maintain a positive surface run-off throughout the entire construction period.
 - The Landscape Architect is not responsible for subsurface conditions.
 - The contractor is to identify all existing trees to remain on site with the Landscape Architect prior to construction.
 - The contractor is to stake the proposed location of all plant material in conjunction with the Landscape Architect prior to excavation.
 - Minimum distances for selected deciduous trees are as follows:
 - Building Foundations 7.5m
 - Sidewalks 1.5m
 - Public Streets 2.5m
 - Underground Infrastructure 2.0m
 - All trees within 1m of underground utility trenches are to be excavated by hand.
 - Remove all protective wrapping from tree trunks after installation.
 - Staking of trees shall only be performed if necessary.
 - Ensure that mulch is pulled back a min. distance of 75mm from base of tree trunk.

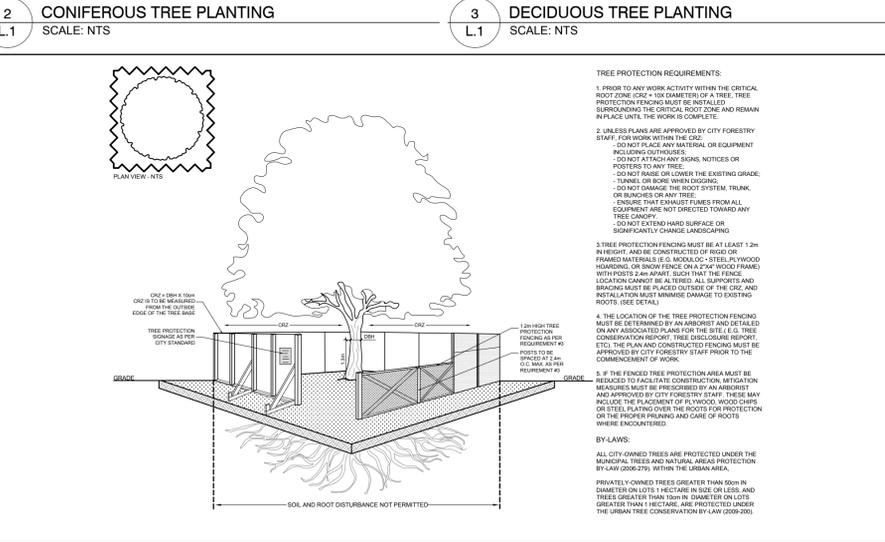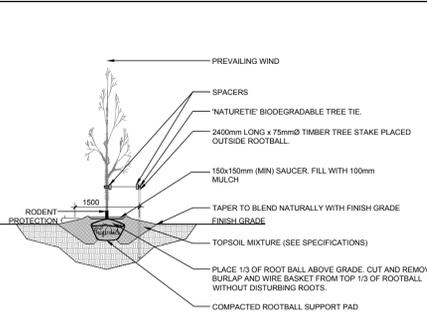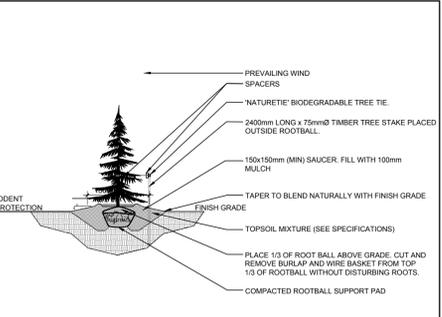

CLIENT: **CLS ROOFING LTD.**

CONSULTANTS
ARCHITECTS: **L5 IMPACT DESIGN AND MANAGEMENT**
96 Holland Avenue, STE 305
Ottawa ON K1T 0Y1
Tel: (613) 322-3776

CIVIL ENGINEERS: **D.B. GRAY ENGINEERING INC.**
700 LONG POINT CIRCLE,
Ottawa ON K1T 4E9
Tel: (613) 425-8044

LEGEND

- EXISTING TREE TO REMAIN
- GROUP OF EXISTING TREES TO REMAIN
- PROPOSED DECIDUOUS TREE
- PROPOSED CONIFEROUS TREE
- PROPOSED SEEDED GRASS AREA
- EXISTING LANDSCAPE AREA TO REMAIN UNDISTURBED
- PROPOSED GRAVEL
- PROPOSED TREE PROTECTION FENCE
- PROPOSED CONCRETE
- PROPOSED HEAVY DUTY PAVEMENT
- PROPOSED LIGHT DUTY PAVEMENT
- PROPOSED RIP-RAP

| | | | | |
|---|----------------------------------|------------|----|----|
| 5 | SCALE CHANGED TO 1:250 | 07/19/2021 | ML | JL |
| 4 | REVISED PER CITY COMMENTS | 06/14/2021 | ML | JL |
| 3 | ISSUED FOR COORDINATION | 05/14/2021 | ML | JL |
| 2 | ISSUED FOR DISCUSSION AND REVIEW | 03/29/2021 | ML | JL |
| 1 | ISSUED FOR DISCUSSION AND REVIEW | 03/19/2021 | ML | JL |

No. Issue Date (MM/DD/YY) DR CK

JAMES B. LENNOX & ASSOCIATES INC.
LANDSCAPE ARCHITECTS
3312 CARLING AVE. OTTAWA, ONTARIO K2H 5A8
Tel: (613) 722-5168 Fax: (866) 343-3942

PROJECT
CLS ROOFING LTD. OFFICE & WAREHOUSE
2167 McGEE SIDE ROAD, OTTAWA ON

DRAWING
TREE CONSERVATION REPORT & LANDSCAPE PLAN

STAMP
ASSOCIATION OF LANDSCAPE ARCHITECTS
MEMBER
JBL

SCALE
AS SHOWN

START DATE
MARCH 2021

PROJECT NO.
21MIS2135

PROJECT NORTH

DRAWING NO.
L.1

PLOT SIZE ARCH-D