

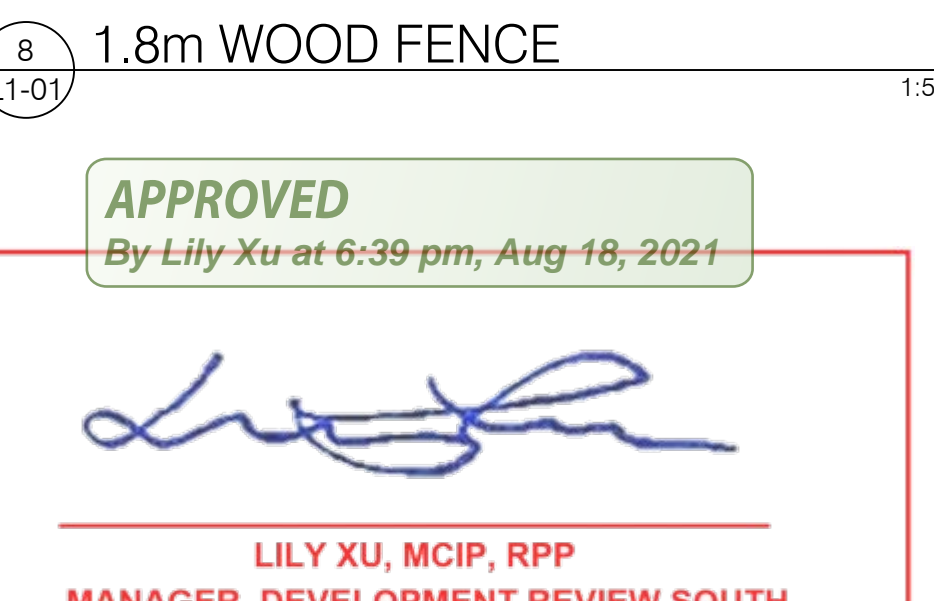
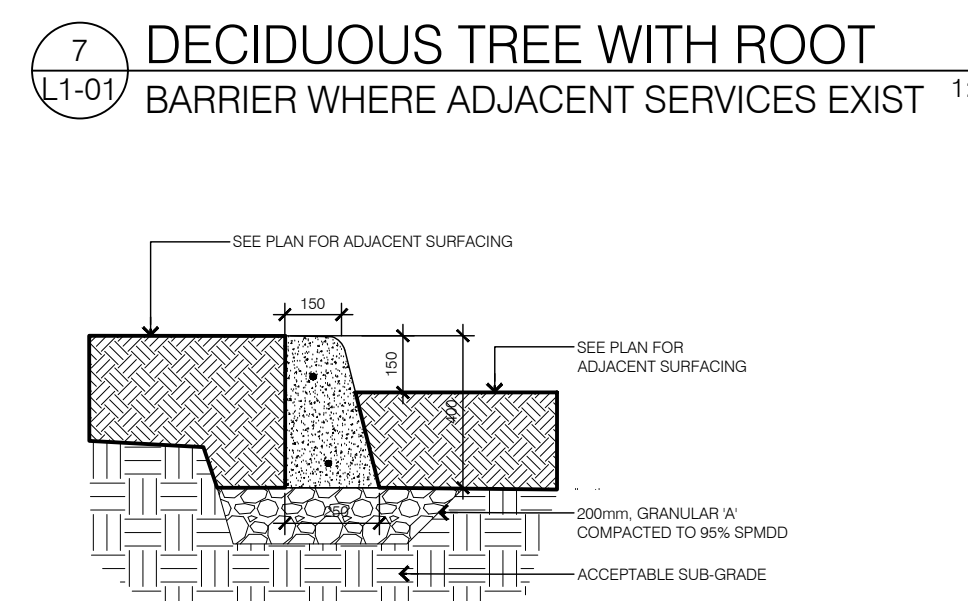
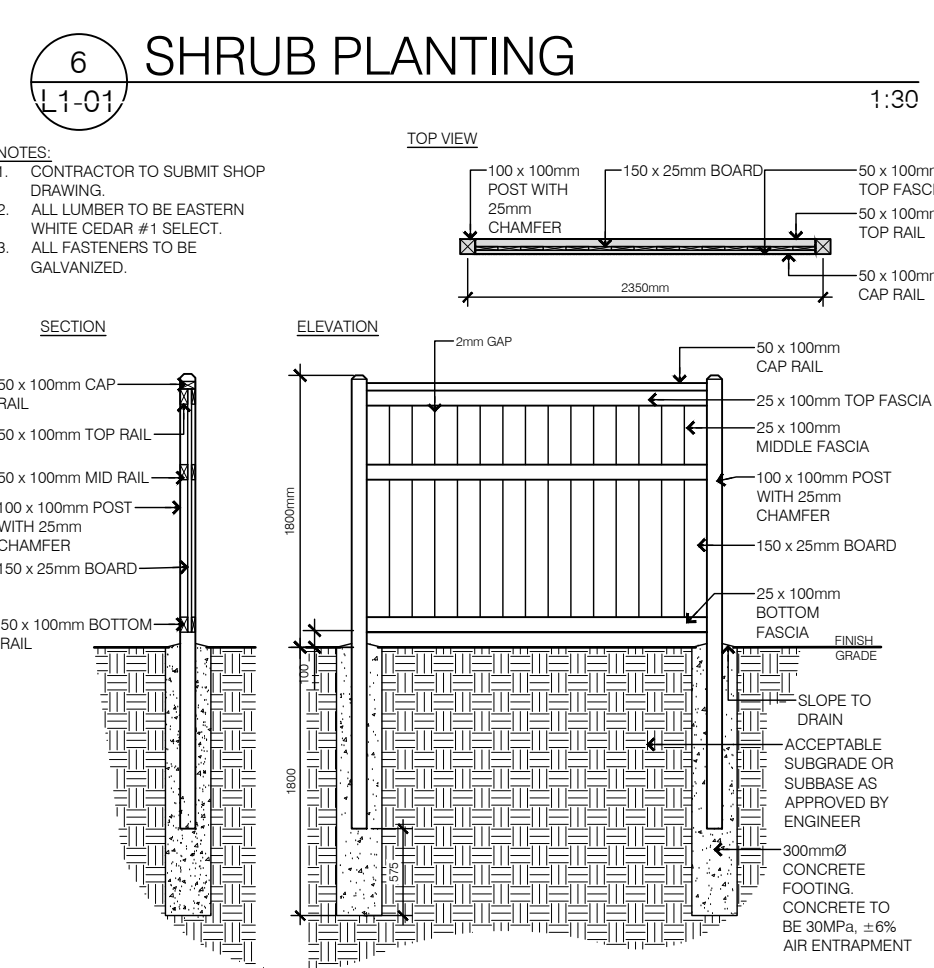
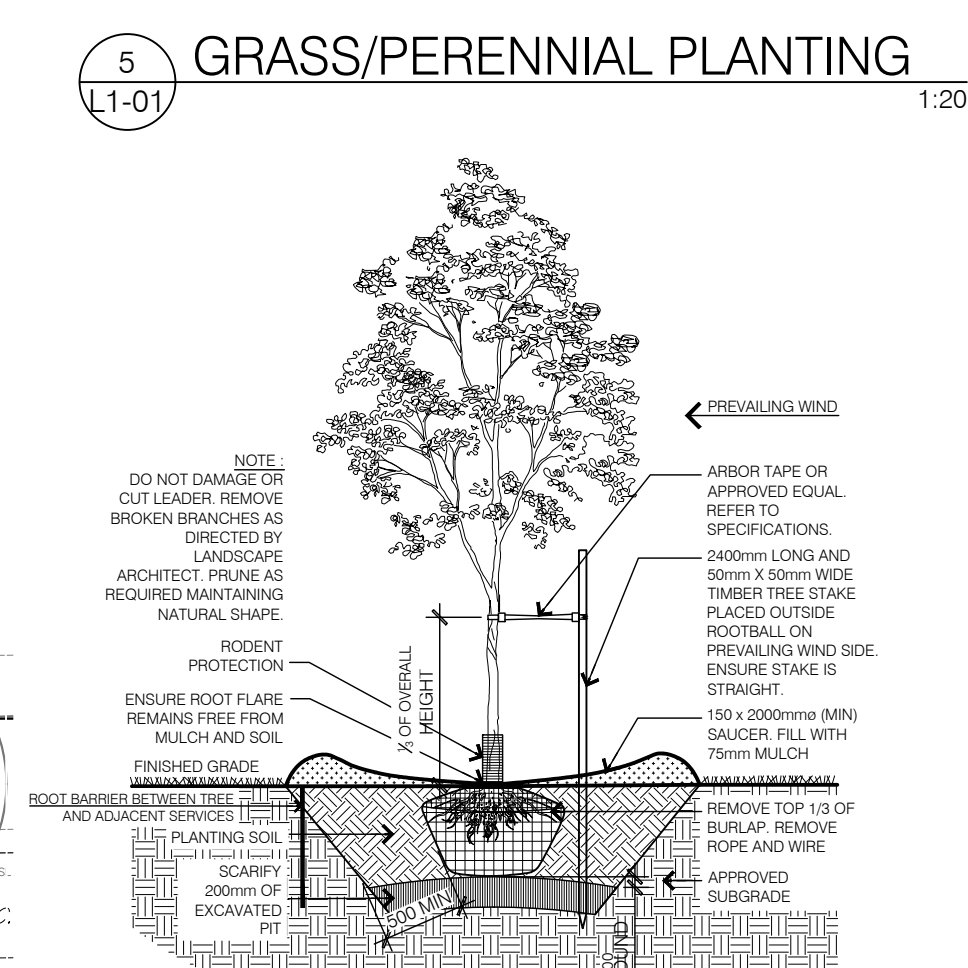
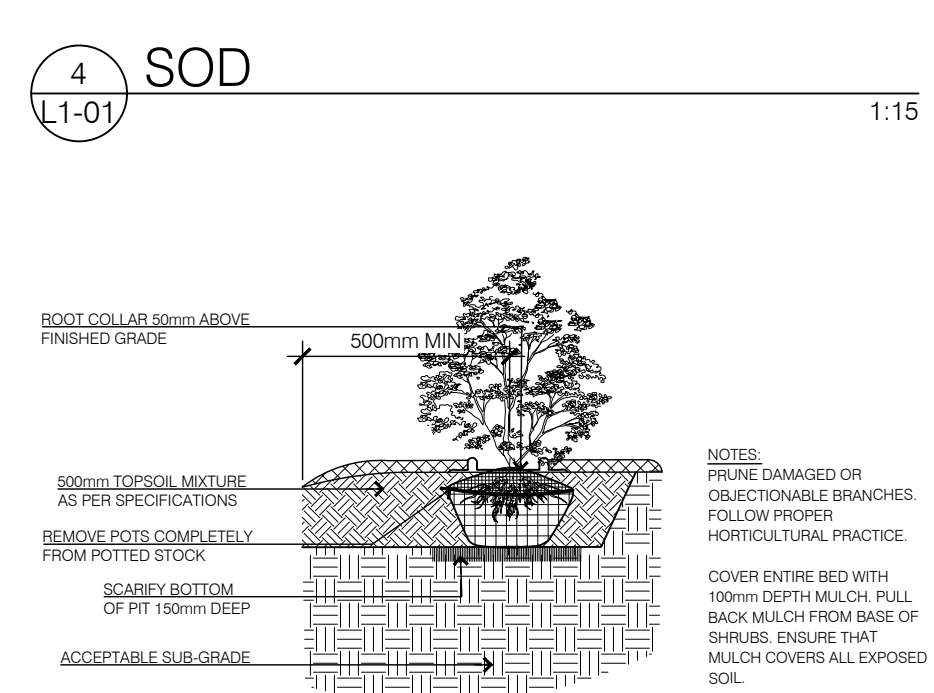
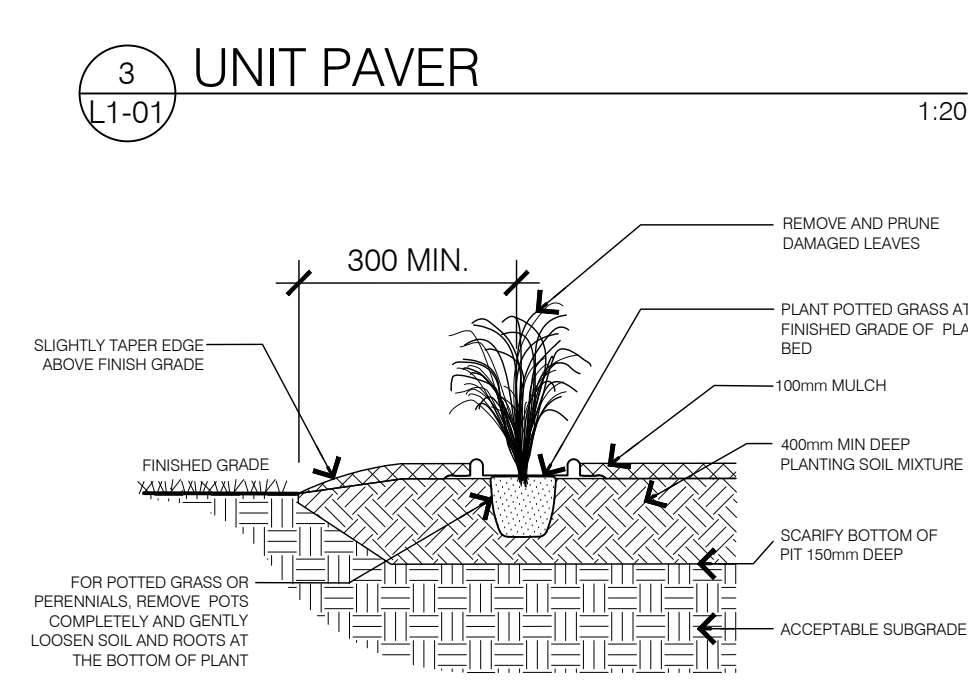


GENERAL PLANT LIST					
KEY	QTY	BOTANICAL NAME	COMMON NAME	SIZE	COMMENTS
DECIDUOUS TREES					
KEY	QTY	BOTANICAL NAME	COMMON NAME	SIZE	COMMENTS
OR	5	<i>Quercus robur</i> 'Fastigiata'	Pyramidal English Oak	50mm CAL	W.B.
SR	3	<i>Syringa reticulata</i>	Japanese Tree Lilac	50mm CAL	W.B.
SHRUBS					
Sa	12	<i>Spiraea x arguta</i> 'Graciosa'	Dwarf Garland Spiraea	1GAL	POTTED
Tc	10	<i>Taxus cuspidata</i> 'Nana'	Dwarf Japanese Yew	1GAL	POTTED
GRASSES					
cb	13	<i>Calamagrostis brachytricha</i>	Autumn Feather Reed Grass	1GAL	POTTED
fg	29	<i>Festuca glauca</i> 'Elijah Blue'	Elijah Blue Fescue	1GAL	POTTED
PERENNIALS					
ad	24	<i>Aster dumosus</i> 'Wood's Purple'	Michaelmas Daisy	1GAL	POTTED
la	6	<i>Linumcatula angustifolia</i>	English Lavender	1GAL	POTTED

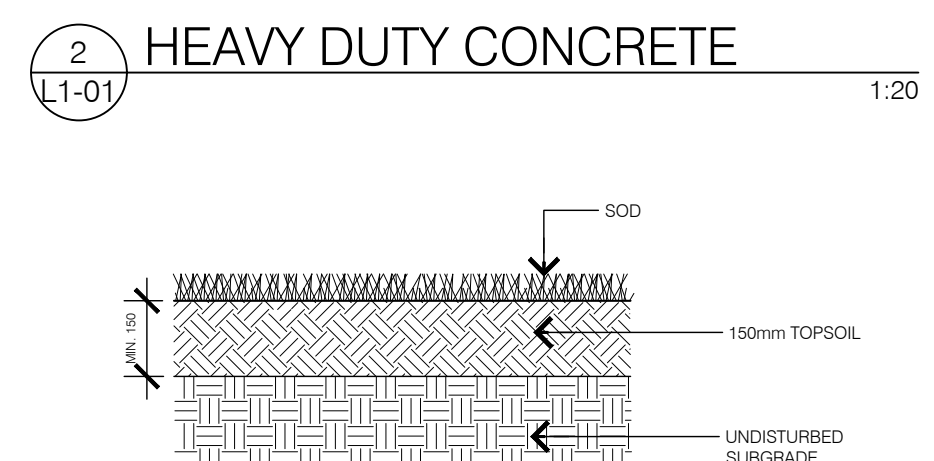

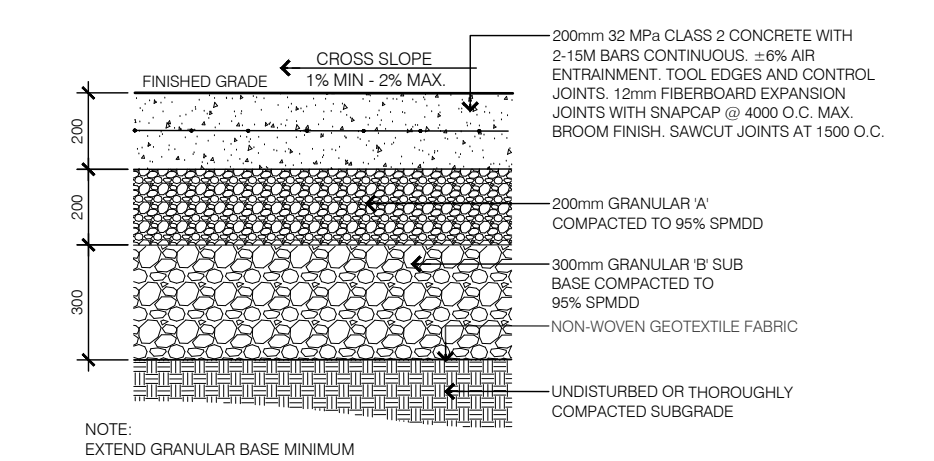

L1-01 GENERAL NOTES

1. All general site information and conditions compiled from architect's and engineer's plans and surveys.
2. Do not scale this drawing.
3. Report any discrepancies prior to commencing work. No responsibility is born by the Landscape Architect for unknown subsurface conditions.
4. Reinstale all areas and items damaged as a result of construction activities to the satisfaction of the Landscape Architect.
5. Drawing may not be used for construction until signed by Landscape Architect as issued for construction.
6. The accuracy of the position of utilities is not guaranteed.
7. Individual utility co. must be contacted for confirmation of utility existence and location prior to digging.
8. This drawing is an instrument of service and requires the permission of the Landscape Architect for use. Copyright is reserved by the Landscape Architect. David M. Lashley.

L1-01 LANDSCAPE NOTES

1. Plant material shall be No. 1 Grade and shall comply with the Metric Guide Specifications for Nursery stock (latest edition), published by Canadian Nursery Trades Association.
2. Plant substitutions shall not be permitted unless approved by the Landscape Architect.
3. Obtain approval of planting prior to digging.
4. Topsoil shall be garden silt mixture sandy loam with min. 5% organic matter and peat moss added at ratio of 1:10. topsoil to be approved by Landscape Architect.

06	2021-07-06	ISSUED FOR COORDINATION
05	2021-04-29	ISSUED FOR SITE PLAN
04	2021-04-20	ISSUED FOR COORDINATION
03	2021-03-05	ISSUED FOR SITE PLAN
02	2021-04-29	ISSUED FOR UDRP
01	2020-11-27	ISSUED FOR SPA

NO.	DATE	DESCRIPTION
SEAL:		NORTH:
		



PROJECT:

20 MOUNTAIN APARTMENTS

DAZE STREET
OTTAWA, ONTARIO

DRAWING TITLE:

SPA - LANDSCAPE PLAN

DATE:	2021/04/20	DRAWING NO.: L1-01
SCALE:	1:100	
DRAWN BY:	EL	
LA PROJECT NO.	20284.1	