

GERALDINE WILDMAN MANAGER, DEVELOPMENT REVIEW SOUTH PLANNING, DEVELOPMENT AND BUILDING SERVICES DEPARTMENT, CITY OF OTTAWA APPROVED By Geraldine Wildman at 3:09 pm, Sep 09, 2025 PROPERTY BOUNDARY EX. BUILDING EXISTING CATCH BASIN #1422 EDGE OF PAVEMENT d₁₀₀=0.21m EL₁₀₀₊₂₀=75.62m EL_{MAX}=75.62m -V_{MAX}=24.9m³ CATCH BASIN WITH 3.0m-150mmø SUBDRAIN STUBS \Box T/G=75.40 ELBOW LANDSCAPE CATCH BASIN (CITY STD. S31) EDGE OF PAVEMENT EDGE OF PAVEMENT SWALE WITH 250mmø PERFORATED SUBDRAIN 5-YEAR PONDING LIMIT EX.CB T/G=75.15 *ASPHALT* 100-YEAR PONDING LIMIT T/G=75.40 *ASPHALT* ---- 100-YEAR + 20% PONDING LIMIT EDGE OF PAVEMENT MAXIMUM STATIC PONDING LIMIT EXISTING BUILDING ENTRANCE EDGE OF PAVEMENT 5-YEAR PONDING ELEVATION 5-YEAR PONDING DEPTH 100-YEAR PONDING ELEVATION 100-YEAR PONDING DEPTH EDGE OF GRAVEL LCB 6 T/G=75.00 INV.NE=74.10 100-YEAR + 20% PONDING ELEVATION MAXIMUM STATIC PONDING ELEVATION MAXIMUM AVAILABLE SURFACE STORAGE NOTE: NO SURFACE PONDING OCCURS DURING THE 2-YEAR DESIGN EVENT. GRAVEL COVERED ENTRY -ROOF OVERHANG EX. BUILDING 1400 COLDREY AVE. $\begin{array}{l} \text{EL}_5 = 75.15\text{m} \\ \text{d}_5 = 0.15\text{m} \\ \text{d}_{100} = 75.32\text{m} \\ \text{d}_{100} = 0.32\text{m} \\ \text{EL}_{100+20} = 75.37\text{r} \\ \text{EL}_{\text{MAX}} = 75.44\text{m} \\ \text{V}_{\text{MAX}} = 146.5\text{m}^3 \end{array}$ BIKE RACK $\begin{array}{l} d_{100} = 0.24 m \\ d_{100} = 0.24 m \\ EL_{100+20} = 75.90 m \\ EL_{MAX} = 75.90 m \\ V_{MAX} = 39.3 m^3 \end{array}$ T/G=75.65 INV.SE=74.15 DICB 5 LIP=75.00 INV.N=73.85 INV.SW=73.85 CB 4 T/G=76.53 INV.NW=74.53 $\Box EX.CB$ T/G = 74.87' EL₅=75.63m $\begin{array}{c} \text{LL}_{5} = 73.03\text{ M} \\ \text{d}_{5} = 0.10\text{ m} \\ \text{EL}_{100} = 76.75\text{ m} \\ \text{d}_{100} = 0.22\text{ m} \\ \text{EL}_{100+20} = 76.75\text{ m} \\ \text{EL}_{MAX} = 76.75\text{ m} \\ \text{V}_{MAX} = 19.3\text{ m}^{3} \end{array}$ EX. GARAGE NOT FOR CONSTRUCTION SCALE THE POSITION OF ALL POLE LINES, CONDUITS, WATERMAINS, SEWERS AND OTHER UNDERGROUND AND OVERGROUND UTILITIES AND STRUCTURES IS NOT NECESSARILY SHOWN ON THE CONTRACT DRAWINGS, AND WHERE SHOWN, THE ACCURACY OF THE POSITION OF SUCH UTILITIES AND STRUCTURES IS NOT GUARANTEED. BEFORE STARTING WORK, DETERMINE THE EXACT LOCATION KEHILLAT BETH ISRAEL CHECKED Robinson 350 Palladium Drive PONDING AREA PLAN OF ALL SUCH UTILITIES AND STRUCTURES AND ASSUME ALL LIABILITY FOR DAMAGE TO THEM. Ottawa, ON K2V 1A8 (613) 592-6060 rcii.com **Land Development** 1400 COLDREY AVENUE PROPERTY BOUNDARIES ARE DERIVED FROM PLAN OF SURVEY OF PART OF LOT I CONCESSION A CHECKED RIDEAU FRONT, GEOGRAPHIC TOWNSHIP OF NEPEAN, CITY OF OTTAWA, SURVEYED BY ANNIS, REVISED PER COMMENTS 21/08/25 BLM

O'SULLIVAN, VOLLEBEKK LTD. BEARINGS ARE GRID, ARE REFERRED TO THE CENTRAL MERIDIAN OF

ISSUED FOR REVIEW

REVISION DESCRIPTION

09/06/25 BLM

MTM ZONE 9, NAD-83 (ORIGINAL).


RCI AUGUST 2025 24060-PA1

CITY OF OTTAWA

APPROVED

24060

KEY PLAN

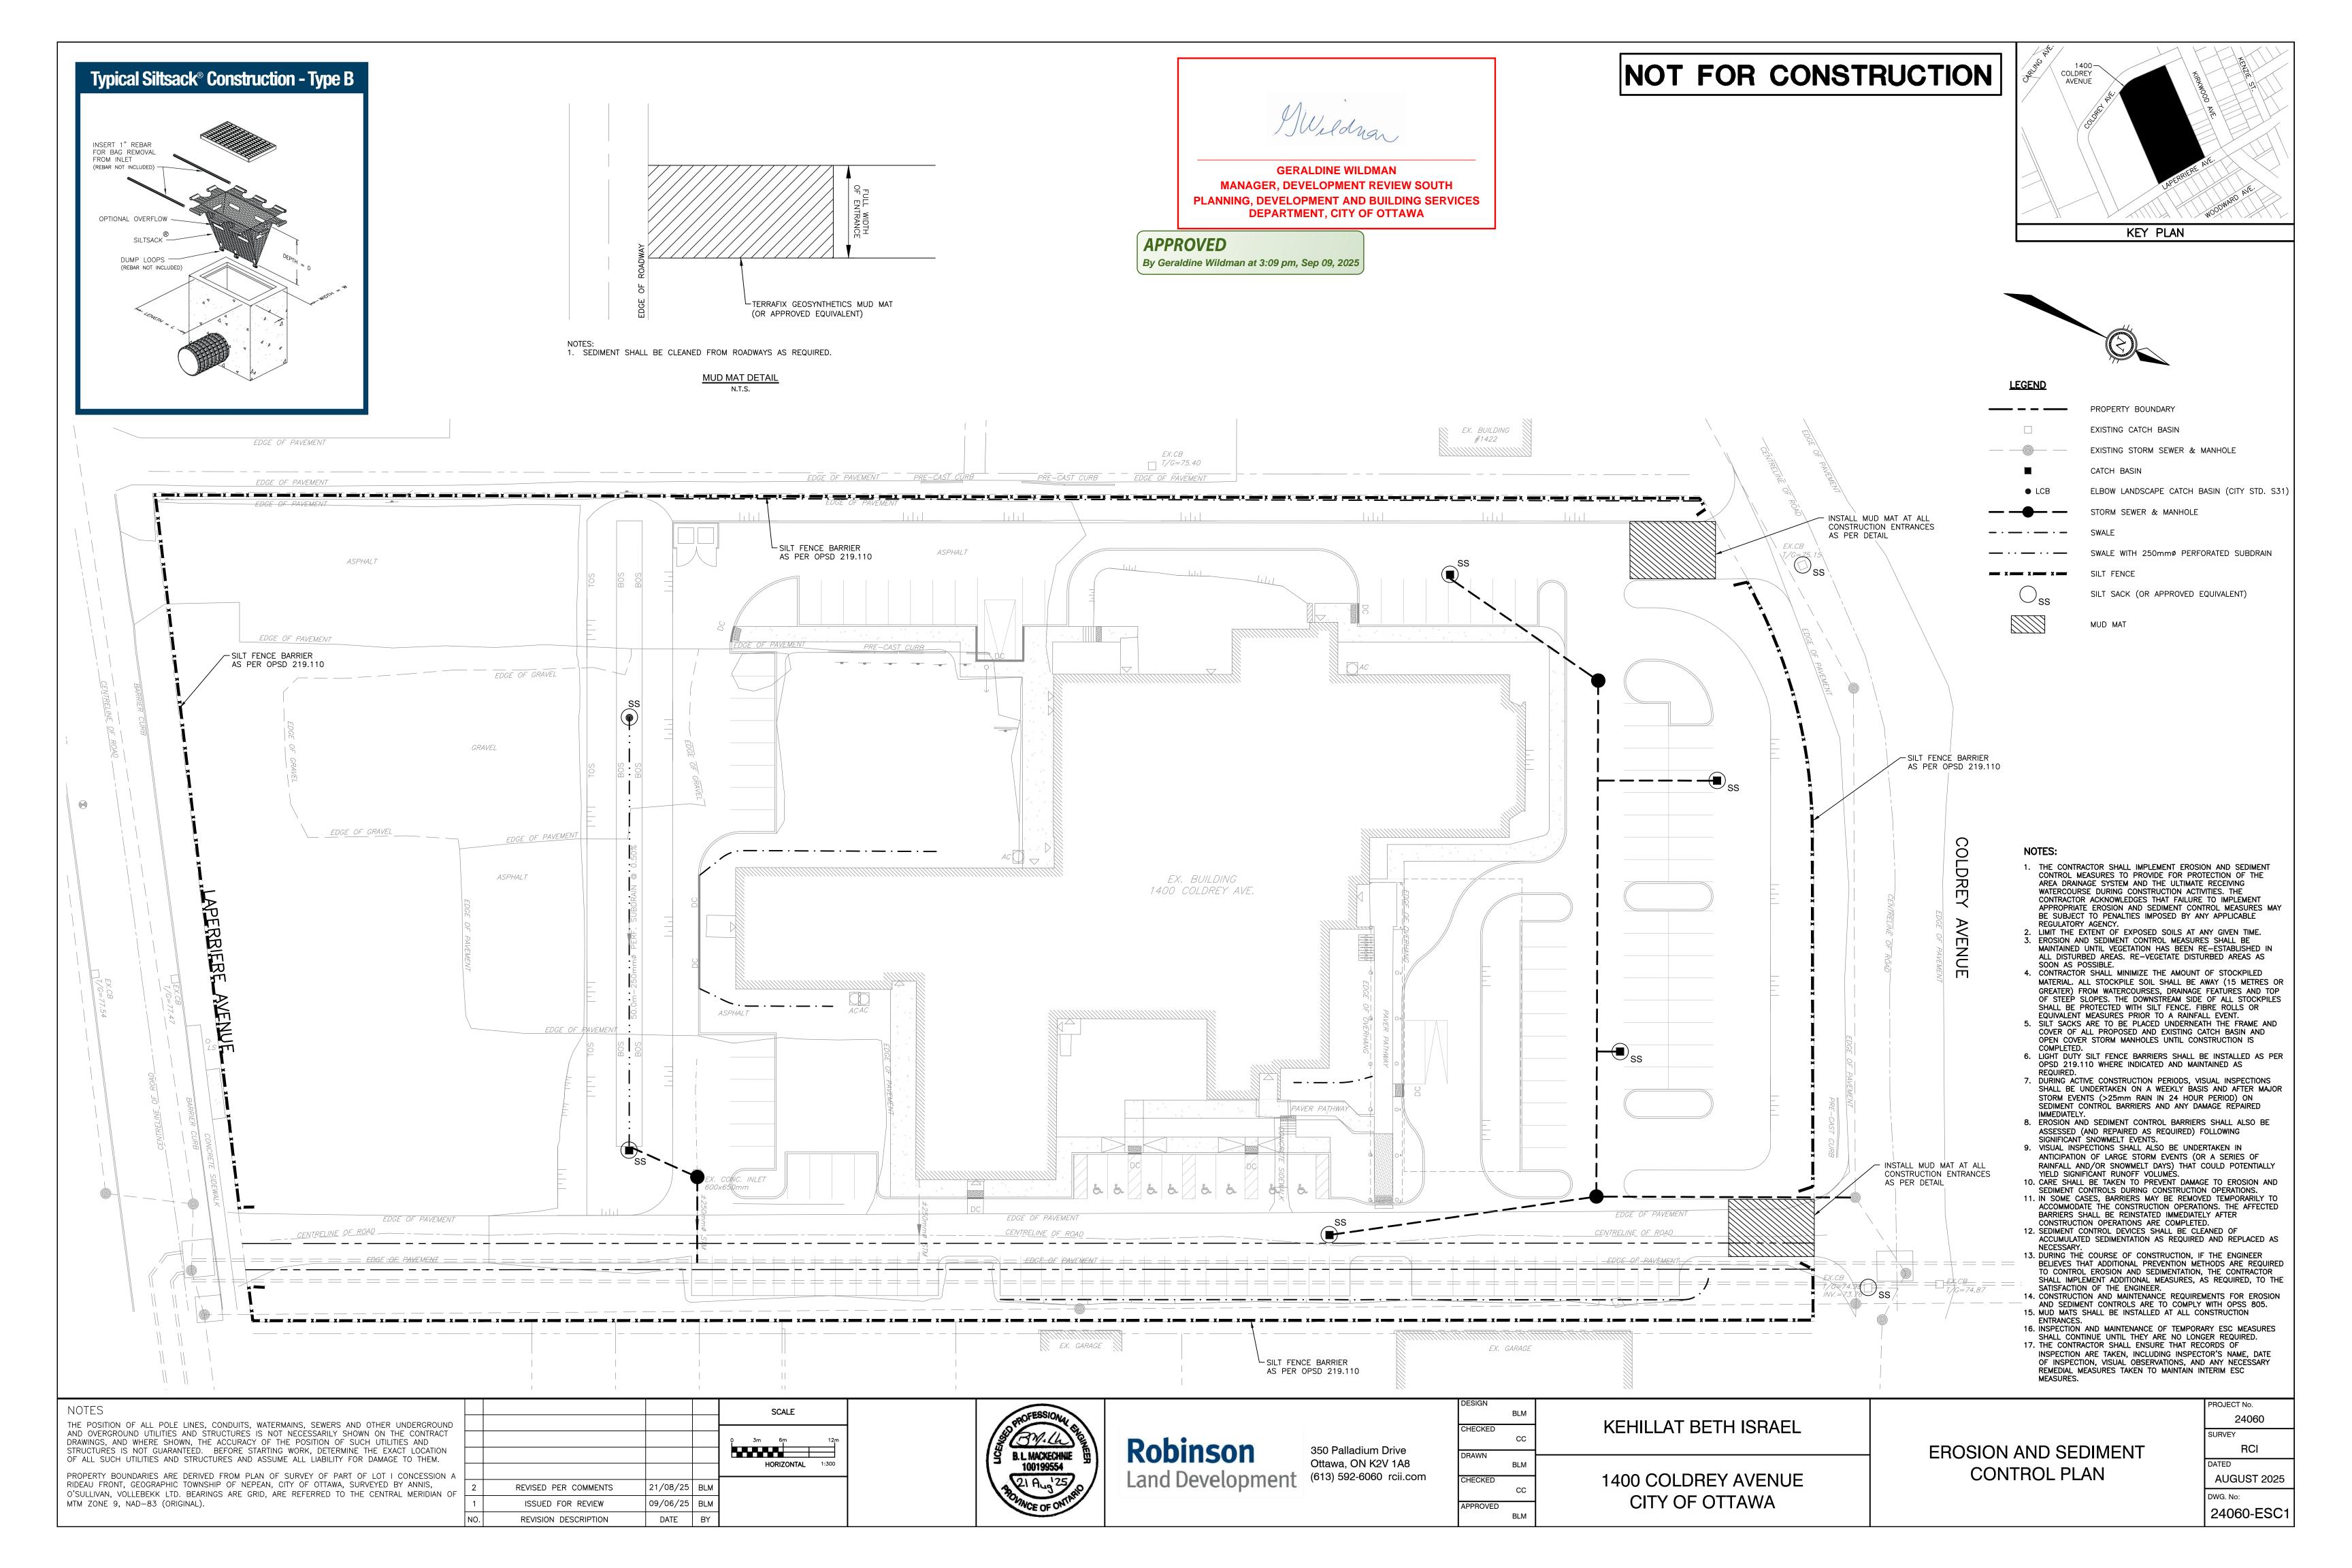

GENERAL NOTES: 1. ALL WORKS AND MATERIALS SHALL CONFORM TO THE LATEST REVISIONS OF THE STANDARDS AND SPECIFICATIONS OF THE CITY OF OTTAWA AND ONTARIO PROVINCIAL STANDARD DRAWINGS (OPSD) AND SPECIFICATIONS (OPSS), AS AMENDED BY THE CITY OF OTTAWA. THE CONTRACTOR SHALL CONFIRM THE LOCATION OF ALL EXISTING UTILITIES WITHIN THE SITE AND ADJACENT WORK AREAS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROTECTING ALL EXISTING UTILITIES TO THE SATISFACTION OF THE AUTHORITY HAVING JURISDICTION. THE CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIR OR REPLACEMENT OF ANY SERVICES OR UTILITIES DISTURBED DURING CONSTRUCTION, TO THE SATISFACTION OF THE AUTHORITY HAVING JURISDICTION. ALL DIMENSIONS AND ELEVATIONS SHALL BE CHECKED AND VERIFIED IN THE FIELD BY THE CONTRACTOR PRIOR TO THE START OF CONSTRUCTION. ANY DISCREPANCIES SHALL BE REPORTED 4. DESIGN ELEVATIONS GIVEN ARE TO BE ADHERED TO WITH NO CHANGES WITHOUT PRIOR WRITTEN APPROVAL BY ROBINSON LAND DEVELOPMENT. 5. ANY AREAS BEYOND THE LIMIT OF THE SITE DISTURBED DURING CONSTRUCTION SHALL BE RESTORED TO ORIGINAL CONDITION OR BETTER TO THE SATISFACTION OF THE AUTHORITY HAVING JURISDICTION AT THE CONTRACTOR'S EXPENSE. 6. RELOCATION OF EXISTING SERVICES AND/OR UTILITIES SHALL BE AS SHOWN ON THE DRAWINGS OR AS DIRECTED BY THE ENGINEER AT THE EXPENSE OF THE CONTRACTOR. 7. ALL WORK SHALL BE COMPLETED IN ACCORDANCE WITH THE "OCCUPATIONAL HEALTH AND SAFETY ACT AND REGULATIONS FOR CONSTRUCTION PROJECTS". THE GENERAL CONTRACTOR SHALL BE DEEMED TO BE THE CONSTRUCTOR AS DEFINED IN THE ACT. 8. ALL CONSTRUCTION SIGNAGE MUST CONFORM TO THE M.T.O. MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES (LATEST AMENDMENT). 9. ALL DIMENSIONS ARE IN METERS UNLESS OTHERWISE SPECIFIED. 10. THE SUPPORT OF ALL UTILITIES SHALL BE IN ACCORDANCE WITH THE REQUIREMENTS OF THE AUTHORITY HAVING JURISDICTION. 11. THE CONTRACTOR WILL BE RESPONSIBLE FOR ADDITIONAL BEDDING OR ADDITIONAL STRENGTH PIPE IF THE MAXIMUM TRENCH WIDTH, AS SPECIFIED BY OPSD, IS EXCEEDED. 12. ALL NECESSARY CLEARING AND GRUBBING SHALL BE COMPLETED BY THE CONTRACTOR. REVIEW WITH THE CITY OF OTTAWA PRIOR TO AND TREE CUTTING. 13. REFER TO GEOTECHNICAL INVESTIGATION PREPARED BY GEOTERRA, DATED MARCH 2025. 14. THE CONTRACTOR IS RESPONSIBLE FOR AND SHALL PROVIDE FOR DEWATERING, SUPPORT AND

PROTECTION OF EXCAVATIONS AND TRENCHING AS WELL AS RELEASE OF ANY PUMPED GROUNDWATER

17. CLAY SEALS SHALL BE INSTALLED WITHIN SEWER TRENCHES IN ACCORDANCE WITH CITY STANDARD S8. 18. MOVEMENT OF MATERIAL ON AND/OR OFF SITE SHALL BE IN ACCORDANCE WITH ONTARIO EXCESS SOIL

19. THE CONTRACTOR SHALL COMPLETE A CCTV INSPECTION OF ALL NEW SANITARY AND STORM SEWERS

20. THE CONTRACTOR SHALL COMPLETE CCTV INSPECTION OF EXISTING MUNICIPAL SEWERS IMMEDIATELY

PRIOR TO PLACEMENT OF TOP LIFT ASPHALT. A COPY OF THE VIDEO INSPECTION SHALL BE PROVIDED

UPSTREAM AND DOWNSTREAM OF ANY PROPOSED CONNECTIONS, INCLUDING SEWER STUBS. THE CCTV

. ALL REINFORCED CONCRETE STORM SEWER PIPE SHALL BE IN ACCORDANCE WITH CSA A257.2 (LATEST

S7 CLASS 'B' UNLESS OTHERWISE SPECIFIED. BEDDING AND COVER MATERIAL SHALL BE SPECIFIED BY

3. ALL PVC STORM SEWERS ARE TO BE SDR 35 APPROVED PER C.S.A. B182.2 OR LATEST AMENDMENT,

4. PIPE MATERIAL FOR ALL STORM SEWERS 375mm IN DIAMETER AND SMALLER SHALL BE PVC SDR 35.

SUMP, FOR STORM SEWERS 900mm AND OVER USE BENCHING IN ACCORDANCE WITH OPSD 701.021. THE STORM SEWER CLASSES HAVE BEEN DESIGNED BASED ON BEDDING CONDITIONS SPECIFIED ABOVE. WHERE THE SPECIFIED TRENCH WIDTH IS EXCEEDED. THE CONTRACTOR SHALL BE REQUIRED TO PROVIDE

EXPENSE AND SHALL ALSO BE RESPONSIBLE FOR EXTRA TEMPORARY AND/OR PERMANENT REPAIRS MADE

ADDITIONAL BEDDING, A DIFFERENT TYPE OF BEDDING OR A HIGHER PIPE STRENGTH AT HIS OWN

10. ALL CATCH BASINS SHALL BE 600mm X 600mm AS PER OPSD 705.010 UNLESS OTHERWISE NOTED.

1. ALL SANITARY SEWERS 200mm IN DIAMETER AND LARGER SHALL BE PVC SDR 35, IN ACCORDANCE WITH

3. SANITARY SEWER TRENCH AND BEDDING SHALL BE AS PER CITY OF OTTAWA STD. S6 AND S7, CLASS 'B'

SANITARY PRE-CAST MANHOLE SHALL BE CONSTRUCTED WITH A HIGHER PERCENTAGE OF SILICA FUME IN THE CONCRETE TO MAKE IT MORE DENSE AND LESS SUSCEPTIBLE TO CORROSION OR PINHOLE LEAKS. 8. FOR SANITARY MANHOLES, DEPENDING ON THE ELEVATION OF THE GROUNDWATER TABLE, AND BASED ON THE RECOMMENDATION OF THE PROJECT GEOTECHNICAL CONSULTANT, CRETEX SEALS, OR A SIMILAR

PRODUCT, SHALL BE INSTALLED IN THE PRE-CAST MANHOLE SECTION TO JUST BELOW THE MANHOLE

SEWERS IN ACCORDANCE WITH OPSS 410 AND OPSS 407. CONTRACTOR SHALL PERFORM VIDEO NSPECTION OF ALL STORM AND SANITARY SEWERS. A COPY OF THE VIDEO AND INSPECTION REPORT

ALL PVC WATERMAINS SHALL BE EQUAL TO AWWA C-900 CLASS 150, SDR 18, OR APPROVED EQUAL.
 WATERMAIN TRENCH AND BEDDING SHALL BE IN ACCORDANCE WITH CITY OF OTTAWA STANDARD W17,

3. ALL PVC WATERMAINS SHALL BE INSTALLED WITH A 10 GAUGE STRANDED COPPER TWU OR RWU TRACER

4. CATHODIC PROTECTION IS REQUIRED ON ALL METALLIC FITTINGS AS PER CITY OF OTTAWA STD. W40 AND

UNLESS OTHERWISE SPECIFIED. BEDDING AND COVER MATERIAL SHALL BE SPECIFIED BY PROJECT

6. FIRE HYDRANTS SHALL BE INSTALLED AS PER CITY OF OTTAWA STD. W19, AND LOCATED AS PER CITY

8. WATERMAIN IN FILL AREAS TO BE INSTALLED WITH RESTRAINED JOINTS AS PER CITY OF OTTAWA STD.

10. THE CONTRACTOR SHALL PROVIDE ALL TEMPORARY CAPS, PLUGS AND BLOW-OFFS AND NOZZLES

THRUST BLOCKING OF WATERMAIN TO BE INSTALLED AS PER CITY OF OTTAWA STD. W25.3 AND W25.4.

11. INSULATION FOR WATERMAIN CROSSING OVER AND BELOW SEWER SHALL BE IN ACCORDANCE WITH CITY OF OTTAWA STD. W25.2 AND W25, RESPECTIVELY, WHERE WATERMAIN COVER IS LESS THAN 2.4m.

12. AS PER CITY GUIDELINE, THE MINIMUM VERTICAL CLEARANCE BETWEEN WATERMAIN AND SEWER / UTILITY

IS 0.25m FOR CROSSING OVER THE SEWER, AS PER CITY STD. W25.2. FOR CROSSING UNDER SEWER. ADEQUATE STRUCTURAL SUPPORT FOR THE SEWERS IS REQUIRED TO PREVENT EXCESSIVE DEFLECTION OF

JOINTS AND SETTLING. THE LENGTH OF WATER PIPE SHALL BE CENTERED AT THE POINT OF CROSSING

SO THAT THE JOINTS WILL BE EQUIDISTANT AND AS FAR AS POSSIBLE FROM THE SEWER AS PER CITY

13. CONNECTION TO EXISTING WATERMAIN TO BE PERFORMED BY CITY FORCES. CONTRACTOR TO PROVIDE

ALL BARRIER CURB TO BE 150mm ABOVE FINISHED ASPHALT GRADE UNLESS OTHERWISE NOTED.

ALL GRANULAR FOR ROADS SHALL BE COMPACTED TO A MINIMUM OF 98% STANDARD PROCTOR DENSITY.

8. ASPHALT WEAR COURSE SHALL NOT BE PLACED UNTIL THE VIDEO INSPECTION OF SEWERS & NECESSARY

. SUB-EXCAVATE SOFT AREAS AND FILL WITH GRANULAR 'B' COMPACTED IN MAXIMUM 300mm LIFTS.

DRAWINGS, AND WHERE SHOWN, THE ACCURACY OF THE POSITION OF SUCH UTILITIES AND

OF ALL SUCH UTILITIES AND STRUCTURES AND ASSUME ALL LIABILITY FOR DAMAGE TO THEM.

RIDEAU FRONT, GEOGRAPHIC TOWNSHIP OF NEPEAN, CITY OF OTTAWA, SURVEYED BY ANNIS,

LABOUR, EQUIPMENT AND MATERIAL REQUIRED FOR EXCAVATION, BEDDING AND REINSTATEMENT. 14. SWABBING, DISINFECTION, AND HYDROSTATIC TESTING TO BE CONDUCTED AS PER CITY OF OTTAWA

5. CONTRACTOR TO SUPPLY HYDRANT EXTENSION TO ADJUST THE LENGTH OF HYDRANT BARREL IF

VALVE IN BOXES SHALL BE INSTALLED AS PER CITY OF OTTAWA STD. W24.

STANDARDS IN THE PRESENCE OF A CITY INSPECTOR AND/OR CONSULTANT.

SHALL BE MADE FOR CURB DEPRESSIONS AT SIDEWALKS AND DRIVEWAYS.

CONCRETE SIDEWALK SHALL BE IN ACCORDANCE WITH CITY OF OTTAWA STD. SC1.4.

TWSIs SHALL BE INSTALLED IN ACCORDANCE WITH CITY OF OTTAWA STD. SC7.3.

REPAIRS HAVE BEEN CARRIED OUT TO THE SATISFACTION OF THE ENGINEER.

11. PAVEMENT DESIGN AS PER GEOTECHNICAL RECOMMENDATIONS

REQUIRED FOR TESTING AND DISINFECTION OF THE WATERMAIN.

CONTRACTOR SHALL PERFORM LEAKAGE TESTING, IN THE PRESENCE OF THE CONSULTANT, FOR SANITARY

SANITARY MANHOLE FRAME AND COVERS SHALL BE WATERTIGHT AS PER CITY OF OTTAWA STD. S24.

2. ALL SANITARY SERVICES 150mm IN DIAMETER AND SMALLER SHALL BE PVC SDR 28, IN ACCORDANCE

4. ALL SANITARY SERVICES ARE TO BE EQUIPPED WITH APPROVED BACKWATER VALVES.

SANITARY SEWER MANHOLES SHALL BE BENCHED AS PER OPSD 701.021.

15. DO NOT CONSTRUCT USING DRAWINGS THAT ARE NOT MARKED "ISSUED FOR CONSTRUCTION".

16. CONTRACTOR IS RESPONSIBLE FOR ALL LAYOUT FOR CONSTRUCTION PURPOSES.

IN A CONTROLLED AND APPROVED MANNER.

INSPECTION IS REQUIRED PRE AND POST CONSTRUCTION.

REGULATION O.REG. 406/19.

STORM SEWERS:

(LATEST AMENDMENT).

SANITARY SEWERS:

WATER SUPPLY:

TO THE ENGINEER FOR REVIEW.

PROJECT GEOTECHNICAL ENGINEER.

NECESSARY BY THE WIDENED TRENCH.

CITY OF OTTAWA STANDARDS.

WITH CITY OF OTTAWA STANDARDS

FRAME TO PREVENT INFILTRATION.

GEOTECHNICAL ENGINEER.

ROADWORK SPECIFICATIONS:

MTM ZONE 9, NAD-83 (ORIGINAL).

PAVFMFNT ARFA.


SHALL BE SUBMITTED TO THE ENGINEER FOR REVIEW.

WIRE IN ACCORDANCE WITH CITY OF OTTAWA STD. W36.

UNLESS OTHERWISE SPECIFIED.

▶ 30 ▶ CONCRETE BARRIER CURB

THE FULL CURB DEPTH SHALL BE CARRIED THROUGH THE DEPRESSED ACCESS CROSSING A CONCRETE SUPPORT IS REQUIRED WHEN BUILT ADJACENT TO THE SIDEWALK IF AN EXTRUSION CURBING MACHINE IS USED, THE EXPANSION BITUMINOUS MATERIAL AND THE #15 DOWELS ARE TO BE PLACED AT THE END OF THE EXTRUSION ALL MEASUREMENTS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED FOR DEPRESSED CURB AT ENTRANCES USE 250 DEPRESSED CURB HEIGHT - FOR PEDESTRIAN CURB RAMPS 0 TO 6 mm AND FOR PRIVATE TITLE: CONCRETE BARRIER CURB FOR GRANULAR BASE PAVEMENT REV: MAR 2025

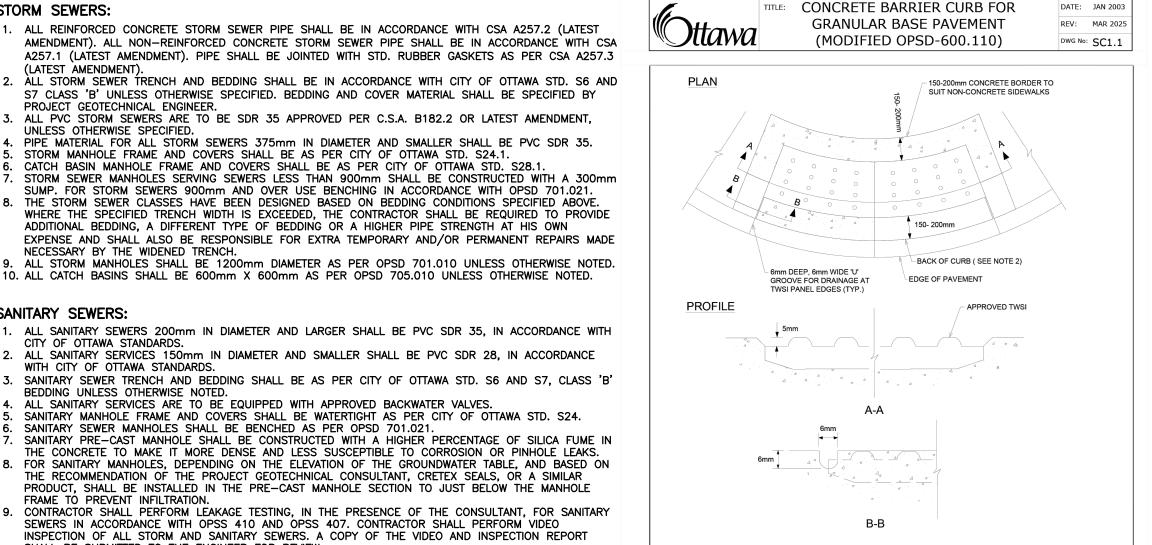

 TOPS OF TWSI'S (TACTILE WALKING SURFACE INDICATOR) SHALL BE ALIGNED & LEVEL WITH THE ADJACENT CONCRETE SURFACE & INSTALLATION IN WET CONCRETE SHALL BE EFFECTIVE IN PERMANENTLY SECURING THE TWSI IN PLACE ONCE DRY


2. FOR MONOLITHIC SIDEWALKS, TWSI SHALL BE 300 TO 350mm BACK FROM THE CURB FACE


3. JOINTS SHALL BE CONSTRUCTED TRANSVERSELY ACROSS THE SIDEWALK, PERPENDICULAR TO THE FACE OF CURB FOR SIDEWALK


4. WHEN JOINTS ARE CONSTRUCTED ADJACENT TO TWSI'S, THE JOINTS SHALL EXTEND FROM THE BACK CORNERS OF THE OUTSIDE TWSI PLATES TO THE BACK OF SIDEWALK, OR TERMINATE AT AN ADJACENT JOINT

5. THE TERMINATION OF THE JOINTS AT BOTH THE FRONT AND BACK OF SIDEWALK SHALL BE NO LESS THAN 600mm APART

6. JOINTS IN ALL CONCRETE ELEMENTS SHALL BE LAID OUT TO ENSURE THAT NO INDIVIDUAL RESULTING CONCRETE PANEL IS LESS THAN 0.5m² OR GREATER THAN 6m² TWSI DETAIL REV: FEB 2025 **Ittawa** DWG No: SC7.3 PROFILE GRADE -

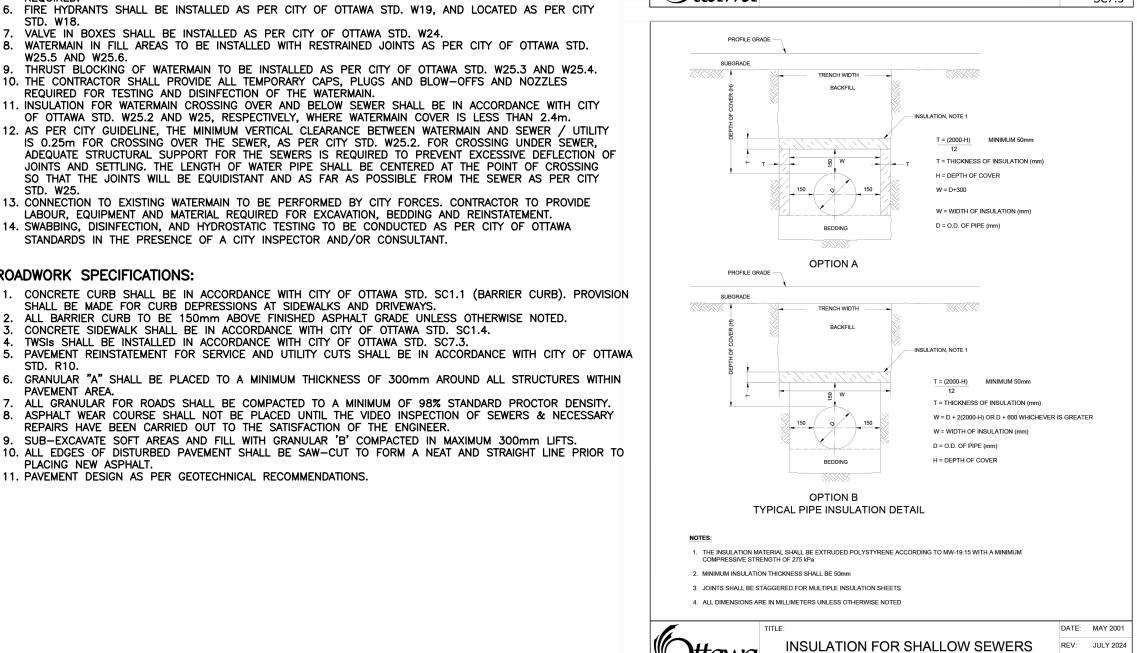


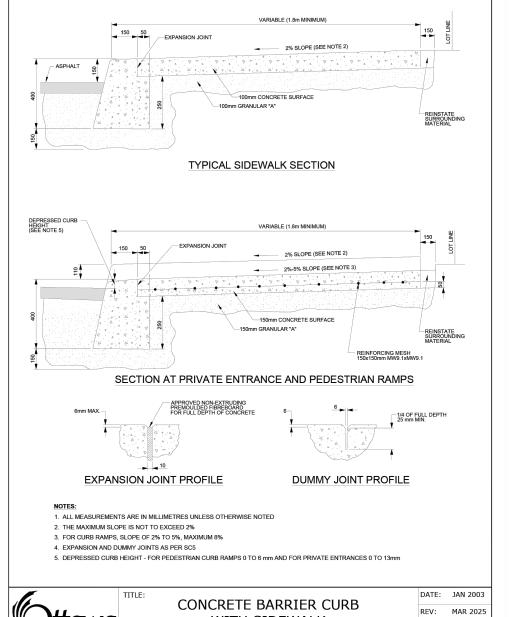


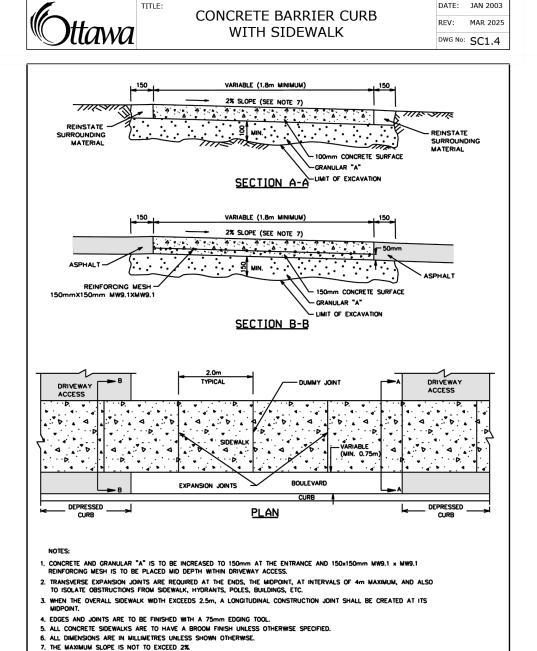


B. INSTALL DUMMY TRANSVERSE JOINTS AS REQUIRED SO THERE IS A MAXIMUM SPACING OF 2m BETWEEN ALL JOINTS.


SIDEWALK NOT TO BE DEPRESSED ACROSS DRIVEWAY ACCESSES.
 EXPANSION AND DUMMY JOINTS AS PER SC5

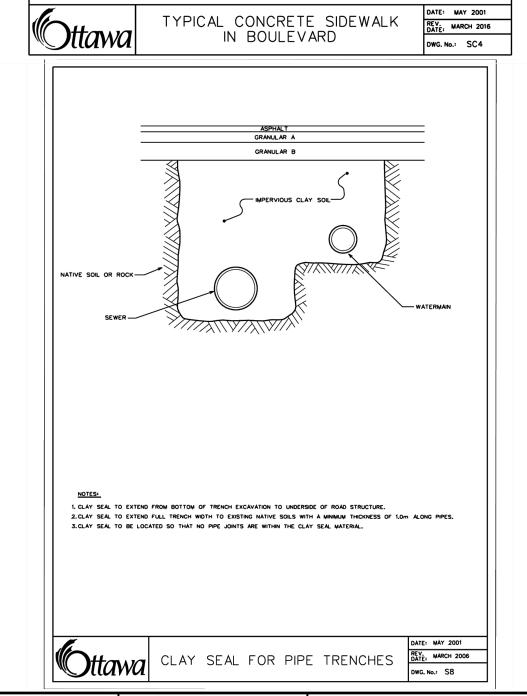


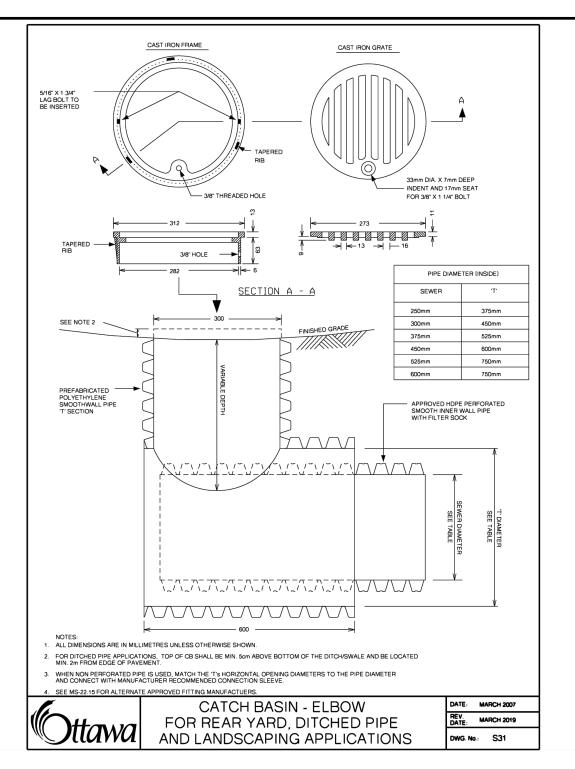


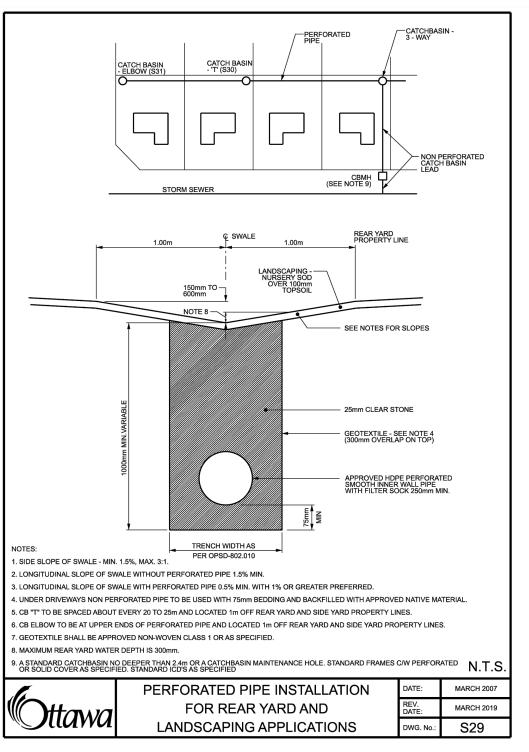




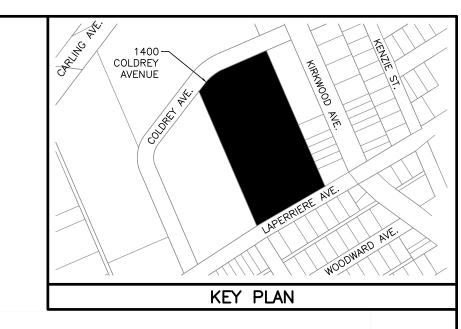


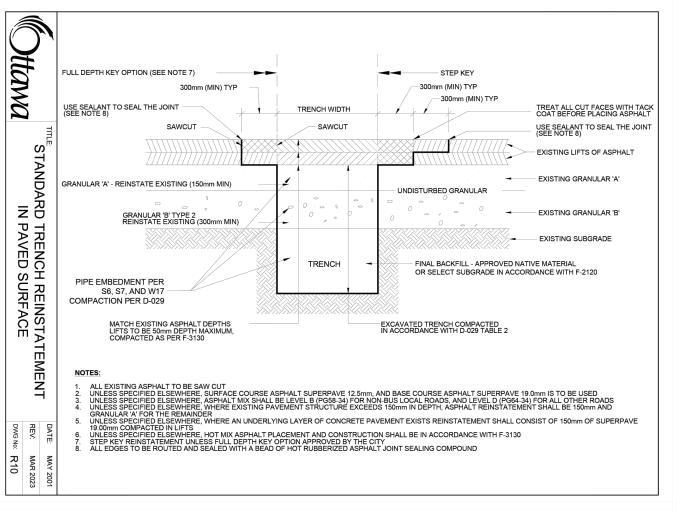

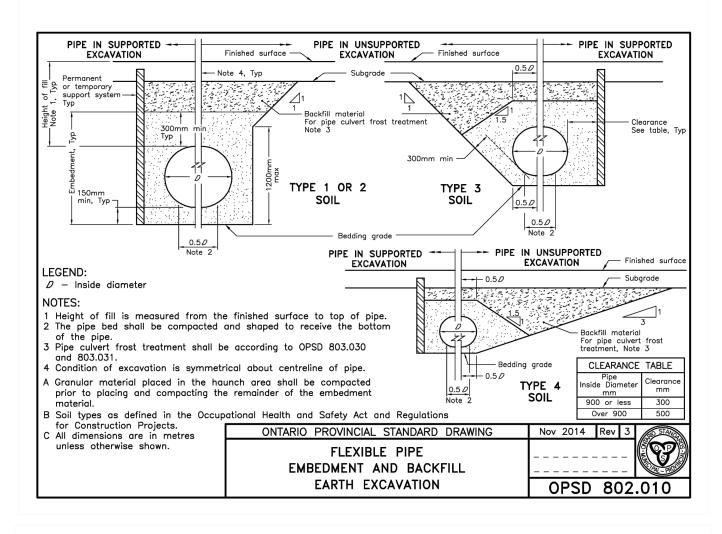

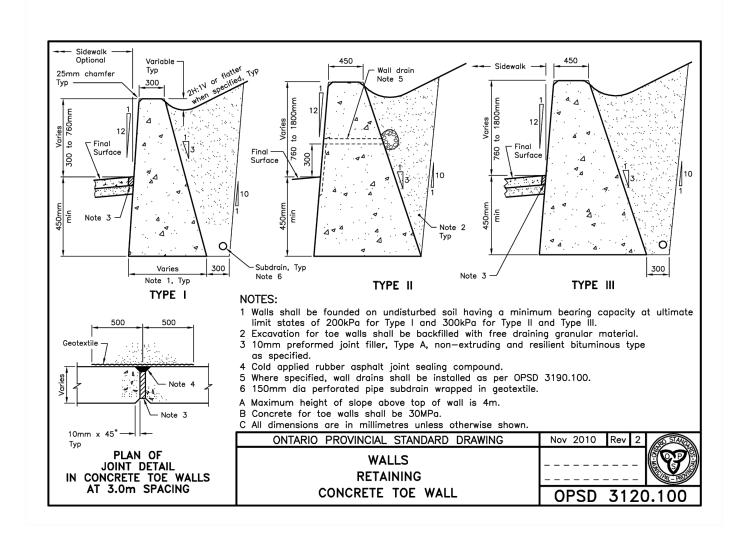

NOT FOR CONSTRUCTION

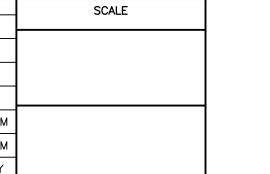

DWG No: S35



Land Development

CHECKED CHECKED

APPROVED

KEHILLAT BETH ISRAEL

NOTES & DETAILS

24060 SURVEY **RCI** AUGUST 2025 DWG. No: 24060-N1

350 Palladium Drive Ottawa, ON K2V 1A8 (613) 592-6060 rcii.com

1400 COLDREY AVENUE **CITY OF OTTAWA**

PLAN No. 19336

THE POSITION OF ALL POLE LINES. CONDUITS. WATERMAINS, SEWERS AND OTHER UNDERGROUND AND OVERGROUND UTILITIES AND STRUCTURES IS NOT NECESSARILY SHOWN ON THE CONTRACT STRUCTURES IS NOT GUARANTEED. BEFORE STARTING WORK, DETERMINE THE EXACT LOCATION PROPERTY BOUNDARIES ARE DERIVED FROM PLAN OF SURVEY OF PART OF LOT I CONCESSION A 21/08/25 BLM REVISED PER COMMENTS O'SULLIVAN, VOLLEBEKK LTD. BEARINGS ARE GRID, ARE REFERRED TO THE CENTRAL MERIDIAN OF ISSUED FOR REVIEW 09/06/25 BLM

REVISION DESCRIPTION

DATE

