

 150mm CONCRETE PAVING - 32MPa C2 -±6% AIR ENTRAINMENT - STIFF BROOM FINISH WITH NO TROWEL, STEEL EDGE,

150x150mm 10/10 WWM

200mm GRANULAR 'A'

UNDISTURBED OR

COMPACTED TO 100% SPMDD

THOROUGHLY COMPACTED

SLOPE TO DRAIN 2% MAX.

LIGHT DUTY CONCRETE PAVING

13mm EXPANSION JOINT

10M x 300 REBAR DOWELS DRILLED @ 4m O.C. DRILLED

AND EPOXIED INTO CURB

CUT AND PATCH EXISTING ASPHALT

GENERAL NOTES:

The General Contractor shall verify all conditions in the field and report any discrepancies to the Landscape Architect prior to construction.

- 2. Any areas outside the limit of work damaged by the General Contractor shall be restored by the General Contractor to the satisfaction of the contract administrator at no additional cost to the Owner.
- of the contract administrator at no additional cost to the Owner.

  3. All underground utilities to be located by the

General Contractor prior to the


commencement of any work.This drawing is a portion of a complete project and shall be read in conjunction with all other drawings, specifications and tender

documents related to the project, regardless

- of origin.


  5. All measurements in millimeters unless
- 6. Do not scale drawing.

otherwise noted.

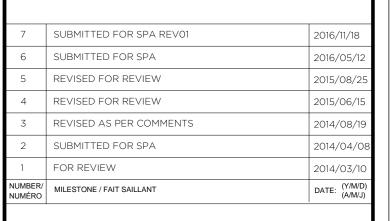







PROJECT/LOCATION / PROJET/ENDROIT

## RIVERSIDE SOUTH SHOPPING CENTRE

1420 EARL ARMSTRONG ROAD OTTAWA, ONTARIO

DRAWING / DESSIN

SCALE / ECHELLE

**DETAILS** 

SHEET NO. / FEUILL SHEEKED BY / VERIFIE PAR

L.M./G.V./E.P.

IE PAR

M.S.

AS SHOWN