

CATCH BASIN (CB)

MANHOLE (MH) OR OTHER OPEN

STRUCTURE

D (DISTANCE TO OPEN STRUCTURE)

1800 TO 2400mm

1500 TO 1800mm

1200 TO 1500mm

900 TO 1200mm


INSULATION THICKNESS


50mm


75mm

125mm


300mm

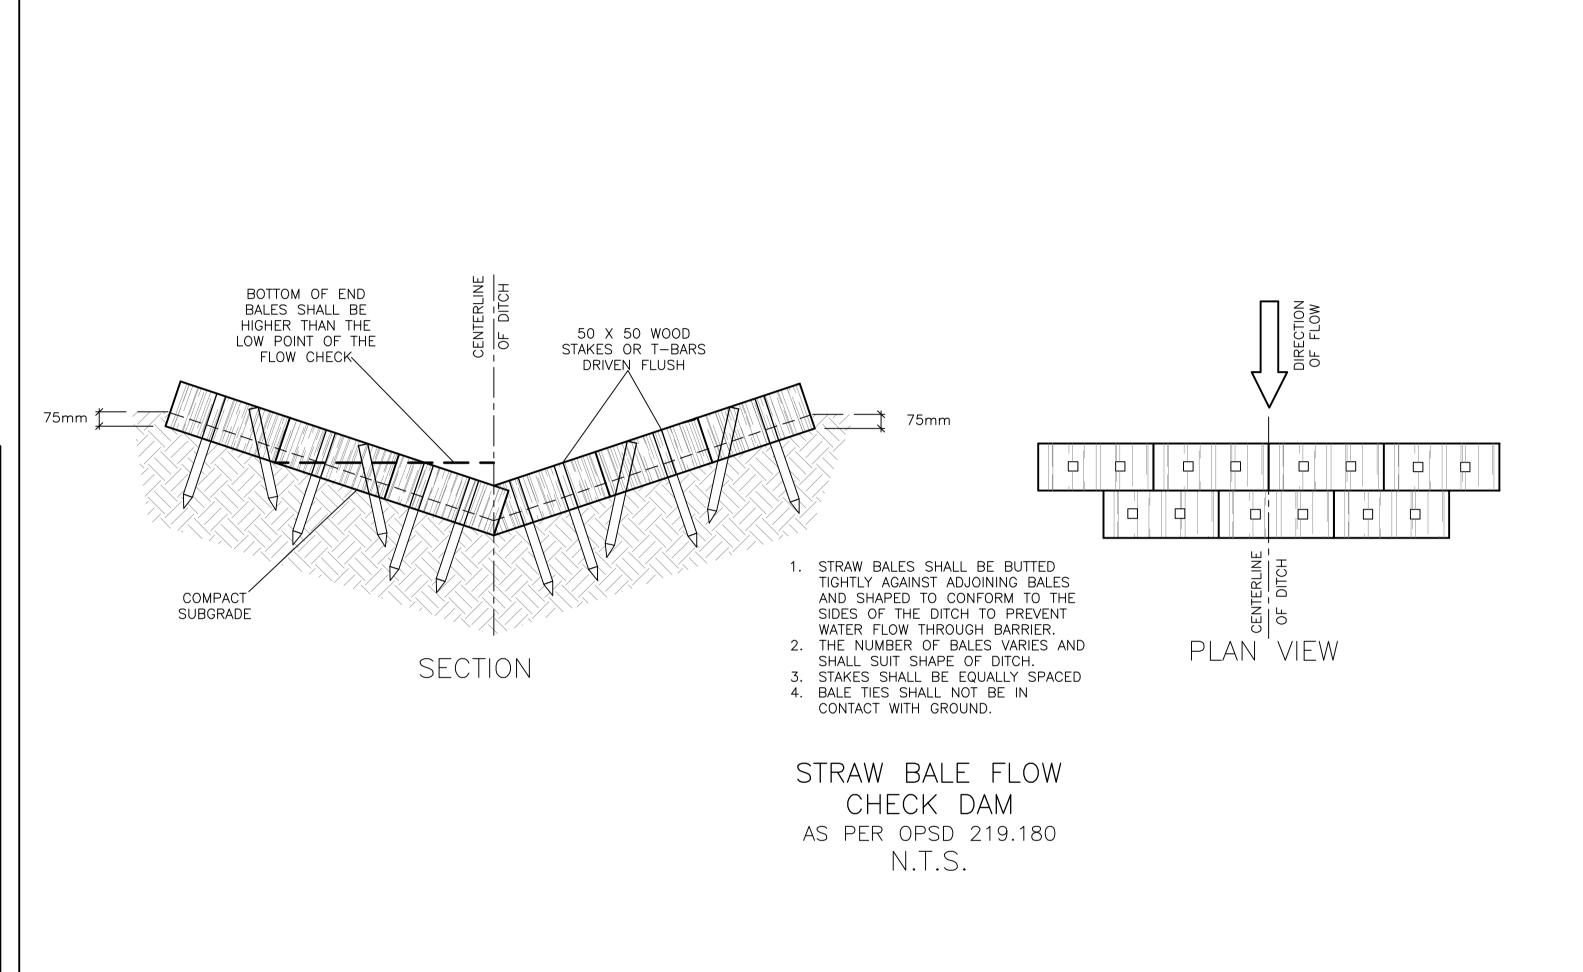

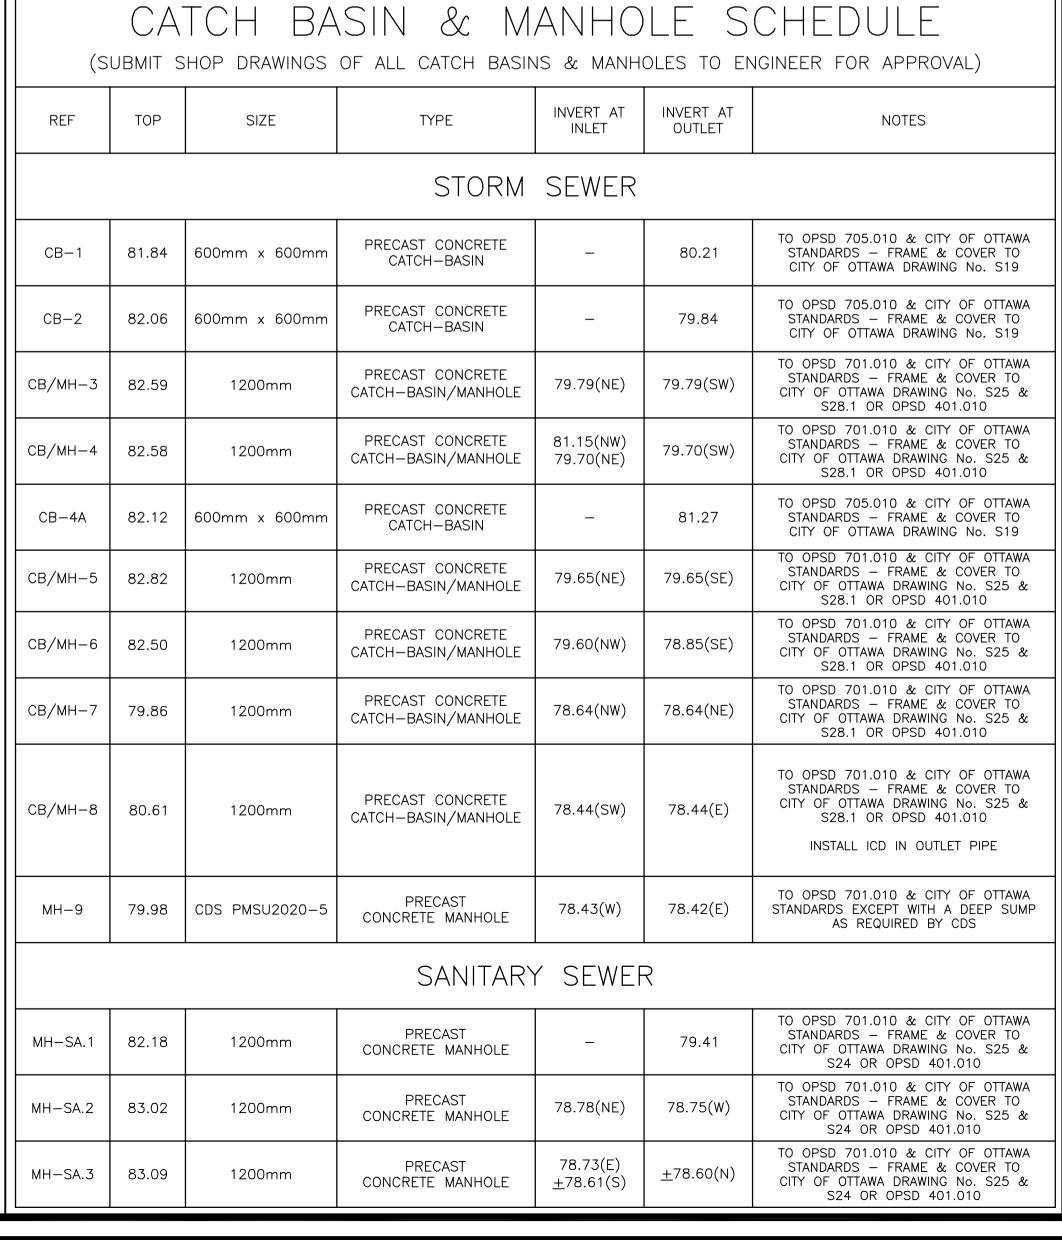

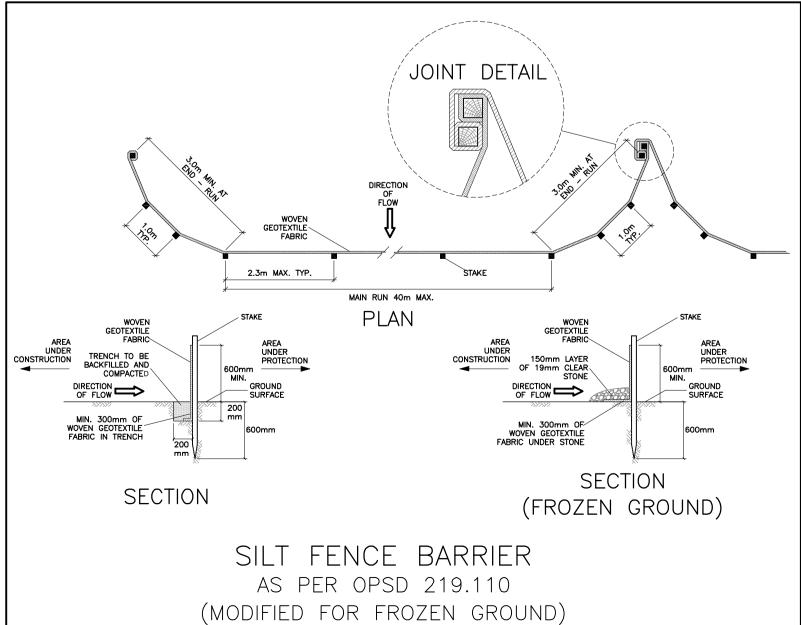

N.T.S.

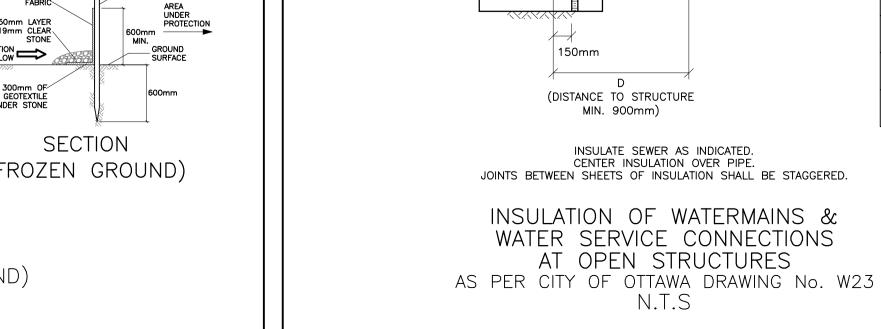

BACKFILL MATERIAL

INSULATION: DOW

STYROFOAM SM-HI-40

OR APPROVED EQUAL.

MIN. 50mm THICK.

SURROUND MATERIAL

BEDDING AND



KEY PLAN

1 JUN 29-23 ISSUED FOR APPROVAL
No. DATE REVISION

D. B. GRAY ENGINEERING INC.


Stormwater Management - Grading & Drainage - Storm & Sanitary Sewers - Watermains


700 Long Point Circle 613-425-8044
Ottawa, Ontario d.gray@dbgrayengineering.com

PROPOSED 7 LOT
DEVELOPMENT
2009-2013 PRINCE OF
WALES DR
OTTAWA, ONTARIO

Drawing Title

DETAILS & SCHEDULES





C-7
of 10