

GRADIENTWIND

ENGINEERS & SCIENTISTS

TRANSPORTATION NOISE AND VIBRATION FEASIBILITY ASSESSMENT

2070 Scott Street
Ottawa, Ontario

GRADIENT WIND REPORT: 19-156 – Traffic Noise and
Vibration Feasibility R1



September 27, 2019

PREPARED FOR

Azure Urban Developments Inc.

Attn: John Thomas
463 Golden Avenue
Ottawa, Ontario
K2A 2E4

PREPARED BY

Giuseppe Garro, MAsc., Junior Environmental Scientist
Joshua Foster, P.Eng., Principal

EXECUTIVE SUMMARY

This feasibility report describes a transportation noise and vibration assessment undertaken in support of a Zoning By-Law Amendment (ZBA) for a proposed mixed-use development located at 2070 Scott Street in Ottawa, Ontario. The development is a 23-storey building with a slender rectangular tower mounted on a 5-storey podium. The ground floor will contain commercial retail units, on the west side, townhouses to the east, and a residential lobby in the centre. The remaining floors will have residential dwellings. Outdoor amenity areas in the form of shared and private terraces are located on the 6th floor along the south side of the development. The primary sources of transportation noise are Scott Street, Churchill Avenue North and the Light Rail Transit (LRT) corridor operated by the OC Transpo. In addition, this report also provides an analysis of ground borne vibration impacts from the LRT. Figure 1 illustrates a complete site plan with surrounding context.

The assessment is based on (i) theoretical noise prediction methods that conform to the Ministry of the Environment, Conservation and Parks (MECP) and City of Ottawa requirements; (ii) noise level criteria as specified by the City of Ottawa's Environmental Noise Control Guidelines (ENCG); (iii) future vehicular traffic volumes based on the City of Ottawa's Official Plan roadway classifications; (iv) ground borne vibration criteria as specified by the Federal Transit Authority (FTA) Protocol; and (v) site plan drawings prepared by Quadrangle Architects Limited in August 2019.

The results of the current analysis indicate that noise levels will range between 56 and 70 dBA during the daytime period (07:00-23:00) and between 58 and 62 dBA during the nighttime period (23:00-07:00). The highest noise level (70 dBA) occurs at the west façade, which is nearest and most exposed to the nearby roadways. The noise levels predicted due to roadway traffic exceed the criteria listed in Section 4.2 for building components. Upgraded building components, including STC rated glazing elements and exterior walls, will be required along the building's north, east and west façades, where noise levels exceed 65 dBA.

Results of the calculations also indicate that the development will require air conditioning, which will allow occupants to keep windows closed and maintain a comfortable living environment. In addition to ventilation requirements, Warning Clauses will also be required to be placed on all Lease, Purchase and Sale Agreements. The results also indicate that outdoor living areas having direct exposure to the noise sources



that are within approximately 30 metres of Scott Street and Churchill Avenue North may require noise control measures. These measures are described in Section 5.2, with the aim to reduce the L_{eq} at the OLA to as close to 55 dBA as technically, economically and administratively feasible.

A detailed roadway traffic noise study will be required at the time of site plan approval to determine specific noise control measures for the development.

Estimated vibration levels at the foundation nearest to the LRT on Scott Street are expected to be 0.019 mm/s RMS (58 dBV), based on the FTA protocol and an offset distance of 40 m to the nearest track centerline. Details of the calculation are provided in Appendix B. Since predicted vibration levels do not exceed the criterion of 0.10 mm/s RMS at the foundation, concerns due to vibration impacts on the site are not expected. As vibration levels are acceptable, correspondingly, regenerated noise levels are also expected to be acceptable.

With regards to stationary noise impacts, a stationary noise study will be performed once mechanical plans for the proposed building become available. This study would assess impacts of stationary noise from rooftop mechanical units serving the proposed building on surrounding noise-sensitive areas. This study will include recommendations for any noise control measures that may be necessary to ensure noise levels fall below ENCG and NPC-300 limits. Noise impacts can generally be minimized by judicious selection and placement of the equipment. Where necessary noise screens and silencers can be placed into the design.

TABLE OF CONTENTS

1. INTRODUCTION	1
2. TERMS OF REFERENCE	1
3. OBJECTIVES	2
4. METHODOLOGY.....	2
4.1 Background.....	2
4.2 Transportation Traffic Noise	3
4.2.1 Criteria for Transportation Traffic Noise	3
4.2.2 Theoretical Roadway Noise Predictions	4
4.2.1 Roadway Traffic Volumes.....	5
4.3 Ground Vibration and Ground-borne Noise.....	6
4.3.1 Ground Vibration Criteria.....	6
4.3.2 Theoretical Ground Vibration Prediction Procedure	7
5. RESULTS AND DISCUSSION	8
5.1 Roadway Traffic Noise Levels.....	8
5.2 Ground Vibrations and Ground-Borne Noise Levels	10
6. CONCLUSIONS AND RECOMMENDATIONS	10

FIGURES

APPENDICES

Appendix A – STAMSON 5.04 Input and Output Data and Supporting Information

Appendix B – FTA Vibration Calculations

1. INTRODUCTION

Gradient Wind Engineering Inc. (Gradient Wind) was retained by Stantec on behalf of Azure Urban Developments Inc. to undertake a transportation noise and vibration feasibility assessment in support of a Zoning By-Law Amendment (ZBA) for a proposed mixed-use development at 2070 Scott Street in Ottawa, Ontario. This report summarizes the methodology, results, and recommendations related to the assessment of exterior and interior noise levels generated by local roadway and light rail traffic.

Our work is based on theoretical noise calculation methods conforming to the City of Ottawa¹ and Ministry of the Environment, Conservation and Parks (MECP)² guidelines. Noise calculations were based on architectural drawings prepared by Quadrangle Architects Limited in August 2019, with future vehicle and light rail traffic volumes corresponding to the City of Ottawa's Official Plan (OP) roadway classifications.

2. TERMS OF REFERENCE

The focus of this transportation and vibration noise feasibility assessment is a proposed mixed-use development at 2070 Scott Street in Ottawa, Ontario. The study site is located on a nearly rectangular parcel of land at the intersection of Scott Street and Churchill Avenue North.

The proposed development is a 23-storey building with a stepped 5-storey podium. The building planform at grade is nearly rectangular with rectangular insets and a curved extension at the southeast corner of the site. Ground floor comprises retail use in the west side of the building, townhouse units along the east perimeter, a residential lobby and a lounge/co-work room centrally located at the north side, and building support function rooms in the remaining space. An outdoor seating area is located adjacent to the retail use at the northwest corner of the site. A loading area and covered ramp to three levels of underground parking are located at the southeast corner of the site, accessed from Winona Avenue. Residential use occupies the floors above. At Level 2, the floorplate sets back at the southeast corner to create a green roof over the covered parking ramp, and private terraces. At Level 6, the floorplate sets back from all sides to create a neatly rectangular building planform, an outdoor amenity area at the southwest corner, and

¹ City of Ottawa Environmental Noise Control Guidelines, January 2016

² Ontario Ministry of the Environment and Climate Change – Environmental Noise Guidelines, Publication NPC-300, Queens Printer for Ontario, Toronto, 2013

private terraces over the remaining rooftop. At the mechanical penthouse level, the floorplate sets back from the east, west and north sides to create an outdoor amenity area, adjacent to a party room at the west side of the floor.

The site is bound by Churchill Avenue North to the west, Scott Street to the north, Winona Avenue to the east and low-rise and medium-rise residential and commercial buildings to the south. Beyond Churchill Avenue North and Winona Avenue lie low-rise and medium-rise residential and commercial buildings. Beyond Scott street lies the OC Transpo Transitway. The transitway is scheduled to become a Light Rail Transit (LRT) corridor as part of Stage 2 of OC Transpo's Confederation Line.

The primary sources of transportation noise are Scott Street, Churchill Avenue North and the Light Rail Transit (LRT) corridor operated by the OC Transpo. The report also provides an analysis of ground borne vibration impacts from light rail traffic from the transit corridor toward the north. Figure 1 illustrates a complete site plan with surrounding context.

3. OBJECTIVES

The principal objectives of this study are to (i) calculate the future noise levels on the study buildings produced by local transportation traffic, (ii) predict vibration levels on the study building produced from passing light rail trains, (iii) ensure that interior and exterior noise levels do not exceed the allowable limits specified by the City of Ottawa's Environmental Noise Control Guidelines as outlined in Section 4.2 of this report, and (iv) ensure vibration levels do not exceed the allowable limits specified by the FTA.

4. METHODOLOGY

4.1 Background

Noise can be defined as any obtrusive sound. It is created at a source, transmitted through a medium, such as air, and intercepted by a receiver. Noise may be characterized in terms of the power of the source or the sound pressure at a specific distance. While the power of a source is characteristic of that particular source, the sound pressure depends on the location of the receiver and the path that the noise takes to reach the receiver. Measurement of noise is based on the decibel unit, dBA, which is a logarithmic ratio referenced to a standard noise level (2×10^{-5} Pascals). The 'A' suffix refers to a weighting scale, which better represents how the noise is perceived by the human ear. With this scale, a doubling of power results in a



3 dBA increase in measured noise levels and is just perceptible to most people. An increase of 10 dBA is often perceived to be twice as loud.

4.2 Transportation Traffic Noise

4.2.1 Criteria for Transportation Traffic Noise

For surface transportation traffic noise, the equivalent sound energy level, L_{eq} , provides a measure of the time varying noise levels, which is well correlated with the annoyance of sound. It is defined as the continuous sound level, which has the same energy as a time varying noise level over a period of time. For roadways, the L_{eq} is commonly calculated on the basis of a 16-hour (L_{eq16}) daytime (07:00-23:00) / 8-hour (L_{eq8}) nighttime (23:00-07:00) split to assess its impact on residential buildings. The City of Ottawa's Environmental Noise Control Guidelines (ENCG) specifies that the recommended indoor noise limit range (that is relevant to this study) is 50, 45 and 40 dBA for retail, living rooms, and sleeping quarters respectively as listed in Table 1. However, to account for deficiencies in building construction and control peak noise, these levels should be targeted toward 47, 42 and 37 dBA respectively.

TABLE 1: INDOOR SOUND LEVEL CRITERIA (ROAD)³

Type of Space	Time Period	Leq (dBA)
General offices, reception areas, retail stores , etc.	07:00 – 23:00	50
Living/dining/den areas of residences , hospitals, schools, nursing/retirement homes, day-care centres, theatres, places of worship, libraries, individual or semi-private offices, conference rooms, etc.	07:00 – 23:00	45
Sleeping quarters of hotels/motels	23:00 – 07:00	45
Sleeping quarters of residences , hospitals, nursing/retirement homes, etc.	23:00 – 07:00	40

Predicted noise levels at the plane of window (POW) dictate the action required to achieve the recommended sound levels. An open window is considered to provide a 10 dBA reduction in noise, while

³ Adapted from ENCG 2016 – Tables 2.2b and 2.2c



a standard closed window is capable of providing a minimum 20 dBA noise reduction⁴. A closed window due to a ventilation requirement will bring noise levels down to achieve an acceptable indoor environment⁵. Therefore, where noise levels exceed 55 dBA daytime and 50 dBA nighttime, the ventilation for the building should consider the need for having windows and doors closed, which triggers the need for forced air heating with provision for central air conditioning. Where noise levels exceed 65 dBA daytime and 60 dBA nighttime, air conditioning will be required and building components will require higher levels of sound attenuation⁶.

The sound level criterion for outdoor living areas is 55 dBA, which applies during the daytime (07:00 to 23:00). When noise levels exceed 55 dBA, mitigation must be provided to reduce noise levels where technically and administratively feasible to acceptable levels at or below the criterion.

4.2.2 Theoretical Roadway Noise Predictions

Noise predictions were performed with the aid of the MECF computerized noise assessment program, STAMSON 5.04, for road analysis. Appendix A includes the STAMSON 5.04 input and output data.

Transportation traffic noise calculations were performed by treating each roadway segment as separate line sources of noise. In addition to the traffic volumes summarized in Table 2, theoretical noise predictions were based on the following parameters:

- Truck traffic on all roadways was taken to comprise 5% heavy trucks and 7% medium trucks, as per ENCG requirements for noise level predictions.
- The day/night split for all streets was taken to be 92%/8%, respectively.
- Ground surfaces were taken to be reflective due to the presence of hard (paved) ground.
- Topography was assumed to be a flat/gentle slope surrounding the study building. Ground elevation was taken to be 65.6m closest to the retail stores (northwest side), and 63.1m closest to the townhouses (northeast side).
- Receptor heights (outlined in Table 3) represent the centre of the plane of window along the building façades, in addition to the outdoor living areas along the perimeter of the building.

⁴ Burberry, P.B. (2014). Mitchell's Environment and Services. Routledge, Page 125

⁵ MOECP, Environmental Noise Guidelines, NPC 300 – Part C, Section 7.8

⁶ MOECP, Environmental Noise Guidelines, NPC 300 – Part C, Section 7.1.3



- For select sources where appropriate, the proposed building was used as a barrier with a height of 17 metres, partially or fully obstructing exposure to the source as illustrated by exposure angles in Figures 3-8.
- Nearby buildings surrounding the site were considered as noise barriers partially or fully obstructing exposure to the source as illustrated by exposure angles in Figures 3-8.
- Noise receptors were strategically placed at 13 locations around the study area (see Figure 2).
- A difference in elevation for the Light Rail Transit (LRT) line was measured to be 6 meters below grade.
- Receptor distances and exposure angles are illustrated in Figures 3-8.
- LRT noise assessed in STAMSON using RT Custom based on 4 car SRT.

4.2.1 Roadway Traffic Volumes

The ENCG dictates that noise calculations should consider future sound levels based on a roadway's classification at the mature state of development. Therefore, traffic volumes are based on the roadway classifications outlined in the City of Ottawa's Official Plan (OP) and Transportation Master Plan⁷ which provide additional details on future roadway expansions. Average Annual Daily Traffic (AADT) volumes are then based on data in Table B1 of the ENCG for each roadway classification. Table 2 (below) summarizes the AADT values used for each roadway included in this assessment.

TABLE 2: ROADWAY TRAFFIC DATA

Segment	Roadway Traffic Data	Speed Limit (km/h)	Traffic Volumes
Scott Street	2-Lane Urban Arterial (2-UAU)	50	15,000
Churchill Avenue North (south of Scott Street)	2-Lane Urban Arterial (2-UAU)	50	15,000
Churchill Avenue North (north of Scott Street)	2-Lane Urban Collector (2-UCU)	50	8,000
O-Train (Confederation Line)	Light Rail Transit (LRT)	70	540/60*

* Daytime/Nighttime volumes based on the City of Ottawa's Environmental Assessment for the LRT Project

⁷ City of Ottawa Transportation Master Plan, November 2013



4.3 Ground Vibration and Ground-borne Noise

Rail systems and heavy vehicles on roadways can produce perceptible levels of ground vibrations, especially when they are in close proximity to residential neighbourhoods or vibration-sensitive buildings. Similar to sound waves in air, vibrations in solids are generated at a source, propagated through a medium, and intercepted by a receiver. In the case of ground vibrations, the medium can be uniform, or more often, a complex layering of soils and rock strata. Also, similar to sound waves in air, ground vibrations produce perceptible motions and regenerated noise known as 'ground-borne noise' when the vibrations encounter a hollow structure such as a building. Ground-borne noise and vibrations are generated when there is excitation of the ground, such as from a train. Repetitive motion of the wheels on the track or rubber tires passing over an uneven surface causes vibrations to propagate through the soil. When they encounter a building, vibrations pass along the structure of the building beginning at the foundation and propagating to all floors. Air inside the building excited by the vibrating walls and floors represents regenerated airborne noise. Characteristics of the soil and the building are imparted to the noise, thereby creating a unique noise signature.

Human response to ground vibrations is dependent on the magnitude of the vibrations, which is measured by the root mean square (RMS) of the movement of a particle on a surface. Typical units of ground vibration measures are millimeters per second (mm/s), or inch per second (in/s). Since vibrations can vary over a wide range, it is also convenient to represent them in decibel units, or dBV. In North America, it is common practice to use the reference value of one micro-inch per second ($\mu\text{in/s}$) to represent vibration levels for this purpose. The threshold level of human perception to vibrations is about 0.10 mm/s RMS or about 72 dBV. Although somewhat variable, the threshold of annoyance for continuous vibrations is 0.5 mm/s RMS (or 85 dBV), five times higher than the perception threshold, whereas the threshold for significant structural damage is 10 mm/s RMS (or 112 dBV), at least one hundred times higher than the perception threshold level.

4.3.1 Ground Vibration Criteria

In the United States, the Federal Transportation Authority (FTA) has set vibration criteria for sensitive land uses next to transit corridors. Similar standards have been developed by the MECP. These standards indicate that the appropriate criteria for residences is 0.10 mm/s RMS for vibrations. For main line



railways, a document titled *Guidelines for New Development in Proximity to Railway Operations*⁸, indicates that vibration conditions should not exceed 0.14 mm/s RMS averaged over a one second time-period at the first floor and above of the proposed building. The Federal Transportation Authority (FTA) criterion was adopted as the appropriate standard for this study. As the main vibration source is due to the light rail line which has frequent events, the 0.10 mm/s RMS (72 dBV) vibration criteria and 35 dBA ground borne noise criteria were adopted for this study.

4.3.2 Theoretical Ground Vibration Prediction Procedure


Potential vibration impacts of the trains were predicted using the Federal Transit Authority's (FTA) *Transit Noise and Vibration Impact Assessment*⁹ protocol. The FTA general vibration assessment is based on an upper bound generic set of curves that show vibration level attenuation with distance. These curves, illustrated in the figure on the following page, are based on ground vibration measurements at various transit systems throughout North America. Vibration levels at points of reception are adjusted by various factors to incorporate known characteristics of the system being analyzed, such as operating speed of vehicle, conditions of the track, construction of the track and geology, as well as the structural type of the impacted building structures. The vibration impact on the building was determined using a set of curves for LRT at a speed of 50 mph. Adjustment factors were considered based on the following information:

- The maximum operating speed of the light rail assumed to be 43 mph (70 km/h) at peak
- The offset distance between the development and the closest track is 40 m
- The vehicles are assumed to have soft primary suspensions
- Tracks are not welded, though in otherwise good condition
- Soil conditions do not efficiently propagate vibrations
- The building's foundation coupling is large masonry on piles

⁸ Dialog and J.E. Coulter Associates Limited, prepared for The Federation of Canadian Municipalities and The Railway Association of Canada, May 2013

⁹ C. E. Hanson; D. A. Towers; and L. D. Meister, Transit Noise and Vibration Impact Assessment, Federal Transit Administration, May 2006



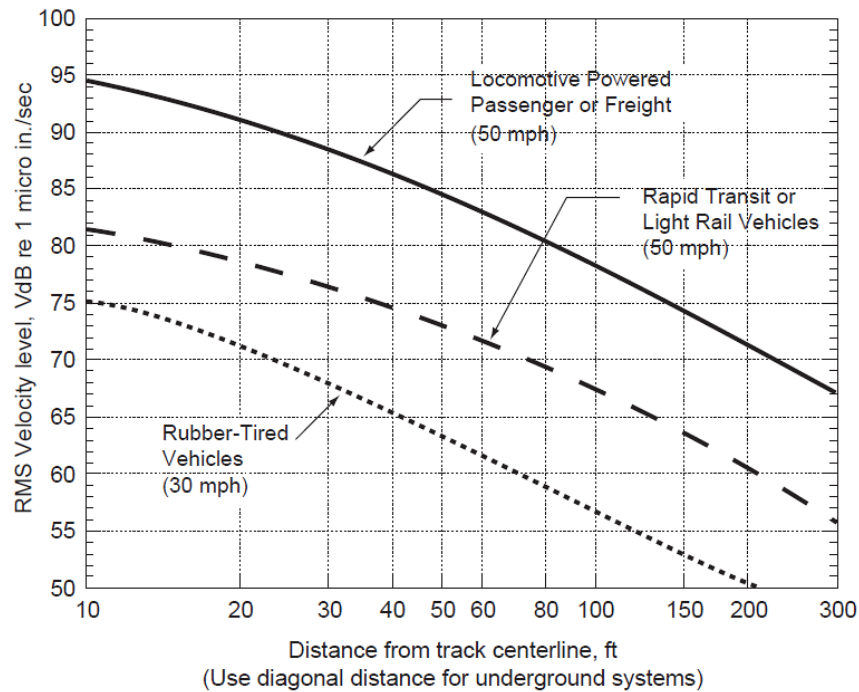

**FTA GENERALIZED CURVES OF VIBRATION LEVELS VERSUS DISTANCE
(ADOPTED FROM FIGURE 10-1, FTA TRANSIT NOISE AND VIBRATION IMPACT
ASSESSMENT)**

5. RESULTS AND DISCUSSION

5.1 Roadway Traffic Noise Levels

The results of the roadway traffic noise calculations are summarized in Table 3 below. A complete set of input and output data from all STAMSON 5.04 calculations are available in Appendix A.



TABLE 3: EXTERIOR NOISE LEVELS DUE TO ROAD TRAFFIC

Receptor Number	Receptor Height Above Grade (m)	Receptor Location	STAMSON 5.04 Noise Level (dBA)	
			Day	Night
1	1.5	POW – Ground Floor – West Façade	68	60
2	1.5	POW – Ground Floor – North Façade	69	62
3	1.5	POW – Ground Floor – North Façade	69	61
4	1.5	POW – Ground Floor – East Façade	66	59
5	14.95	POW – 5 th Floor – West Façade	68	60
6	14.95	POW – 5 th Floor – North Façade	69	62
7	17.45	POW – 5 th Floor – East Façade	66	59
8	69.45	POW – 23 rd Floor – West Façade	70	62
9	69.45	POW – 23 rd Floor – North Façade	69	61
10	71.95	POW – 23 rd Floor – East Façade	66	58
11	18.5	OLA – 6 th Floor Outdoor Amenity Area	57	N/A
12	21	OLA – 6 th Floor Outdoor Amenity Area	62	N/A
13	75.3	OLA – Rooftop Outdoor Amenity Area	56	N/A

The results of the current analysis indicate that noise levels will range between 56 and 70 dBA during the daytime period (07:00-23:00) and between 58 and 62 dBA during the nighttime period (23:00-07:00). The highest noise level (70 dBA) occurs at the west façade, which is nearest and most exposed the nearby roadways. Upgraded building components and air conditioning will be required. Detailed mitigation measures would be subject of a detailed noise assessment during the site plan approval stage.

Results also indicate that outdoor living areas having direct exposure to the noise sources that are within approximately 30 metres of Scott Street and Churchill Avenue North may require noise control measures such as perimeter noise barriers / guards where technically, economically and administratively feasible.



5.2 Ground Vibrations and Ground-Borne Noise Levels

Estimated vibration levels at the foundation nearest to the LRT on Scott Street are expected to be 0.019 mm/s RMS (58 dBV), based on the FTA protocol and an offset distance of 40 m to the nearest track centerline. Details of the calculation are provided in Appendix B. Since predicted vibration levels do not exceed the criterion of 0.10 mm/s RMS at the foundation, concerns due to vibration impacts on the site are not expected. As vibration levels are acceptable, correspondingly, regenerated noise levels are also expected to be acceptable.


6. CONCLUSIONS AND RECOMMENDATIONS

The results of the current analysis indicate that noise levels will range between 56 and 70 dBA during the daytime period (07:00-23:00) and between 58 and 62 dBA during the nighttime period (23:00-07:00). The highest noise level (70 dBA) occurs at the west façade, which is nearest and most exposed the nearby roadways. The noise levels predicted due to roadway traffic exceed the criteria listed in Section 4.2 for building components. Upgraded building components, including STC rated glazing elements and exterior walls, will be required along the building's north, east and west façades, where noise levels exceed 65 dBA.

Results of the calculations also indicate that the development will require air conditioning, which will allow occupants to keep windows closed and maintain a comfortable living environment. In addition to ventilation requirements, Warning Clauses will also be required be placed on all Lease, Purchase and Sale Agreements. The results also indicate that outdoor living areas having direct exposure to the noise sources that are within approximately 30 metres of Scott Street and Churchill Avenue North may require noise control measures. These measures are described in Section 5.2, with the aim to reduce the L_{eq} at the OLA to as close to 55 dBA as technically, economically and administratively feasible.

A detailed roadway traffic noise study will be required at the time of site plan approval to determine specific noise control measures for the development.

Estimated vibration levels at the foundation nearest to the LRT on Scott Street are expected to be 0.019 mm/s RMS (58 dBV), based on the FTA protocol and an offset distance of 40 m to the nearest track centerline. Details of the calculation are provided in Appendix B. Since predicted vibration levels do not




exceed the criterion of 0.10 mm/s RMS at the foundation, concerns due to vibration impacts on the site are not expected. As vibration levels are acceptable, correspondingly, regenerated noise levels are also expected to be acceptable.

Noise impacts from the building itself on sensitive areas around the building are expected to be minimal and a detailed acoustic report will address any potential concerns. This report will be completed once the mechanical information for the building is known. Typically, noise levels can be controlled by judicious selection and placement of the equipment and the introduction of silencers or noise screens where needed.

This concludes our traffic noise assessment and report. If you have any questions or wish to discuss our findings please advise us. In the interim, we thank you for the opportunity to be of service.

Sincerely,

Gradient Wind Engineering Inc.

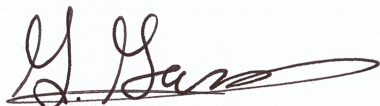


Giuseppe Garro, MAsc.
Junior Environmental Scientist





Joshua Foster, P.Eng.
Principal


GWE19-156 – Transportation Noise and Vibration Feasibility R1




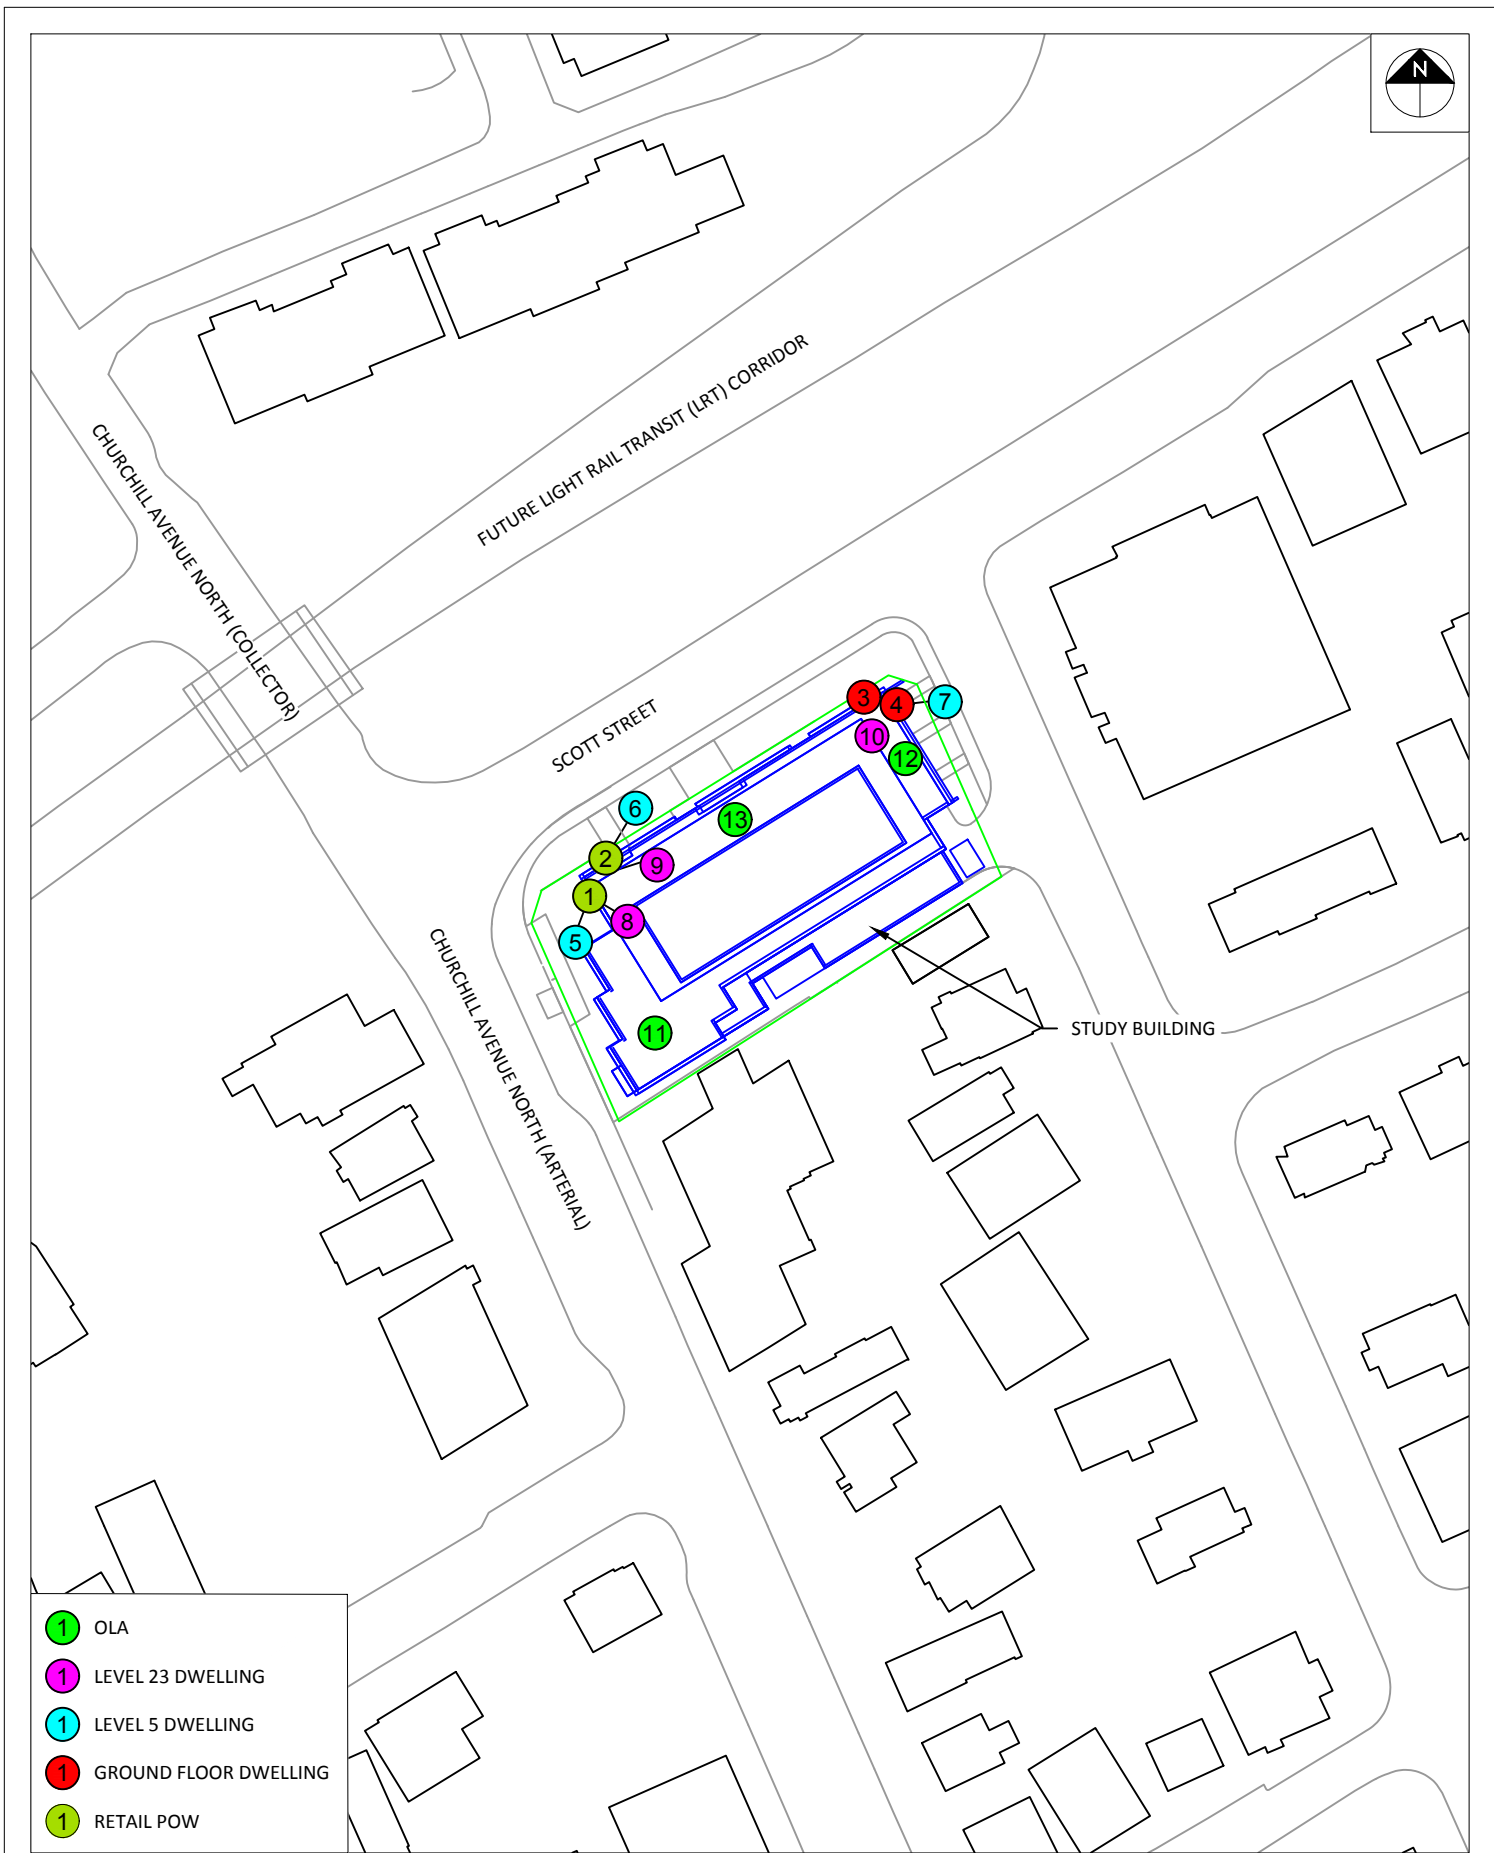


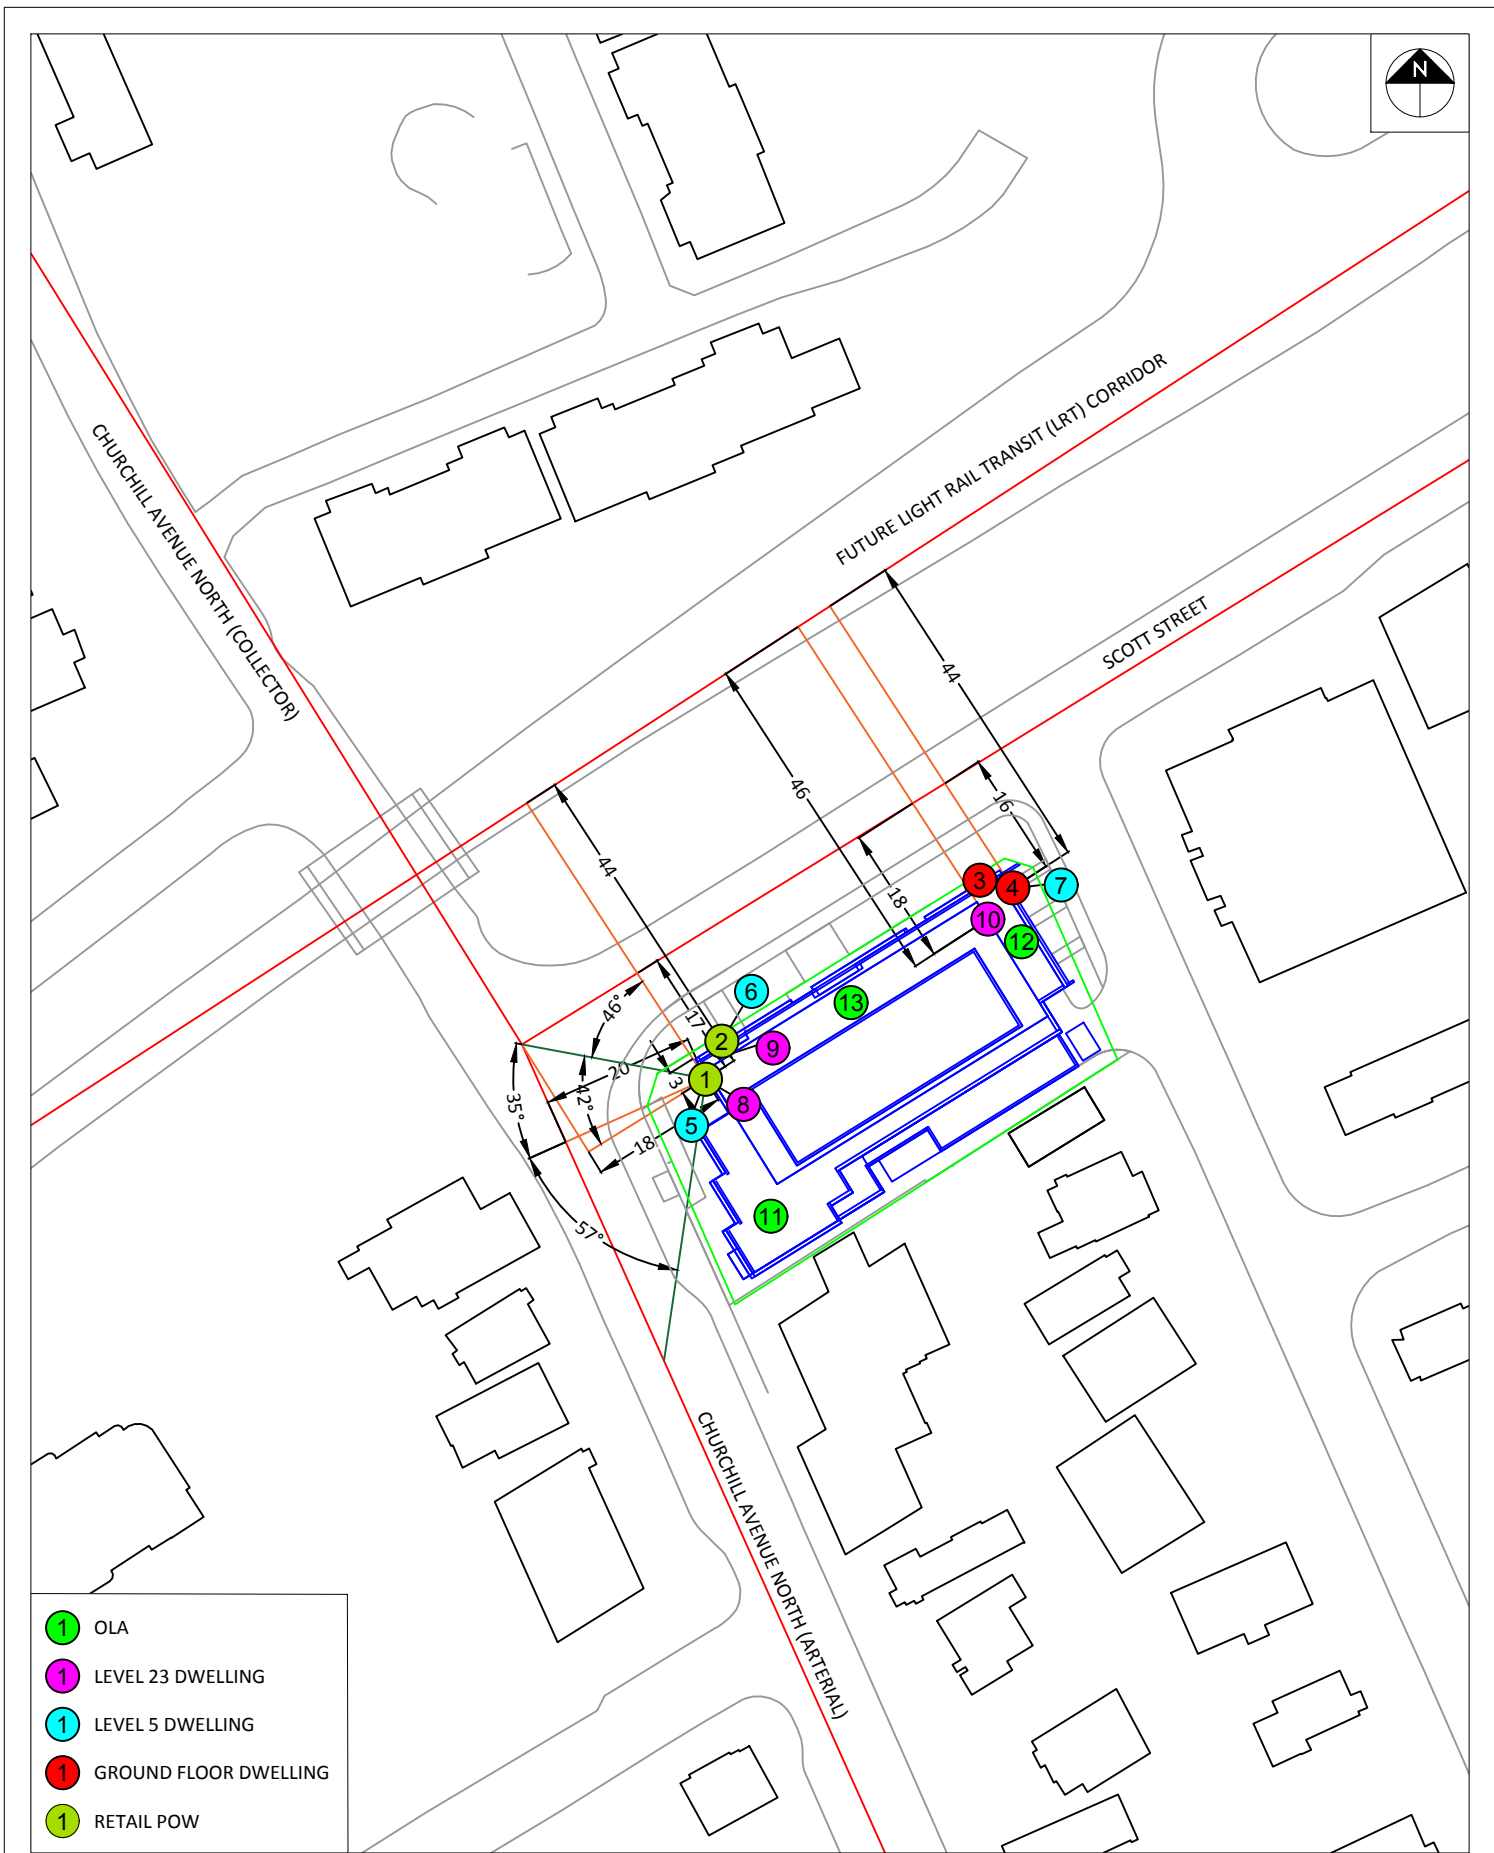


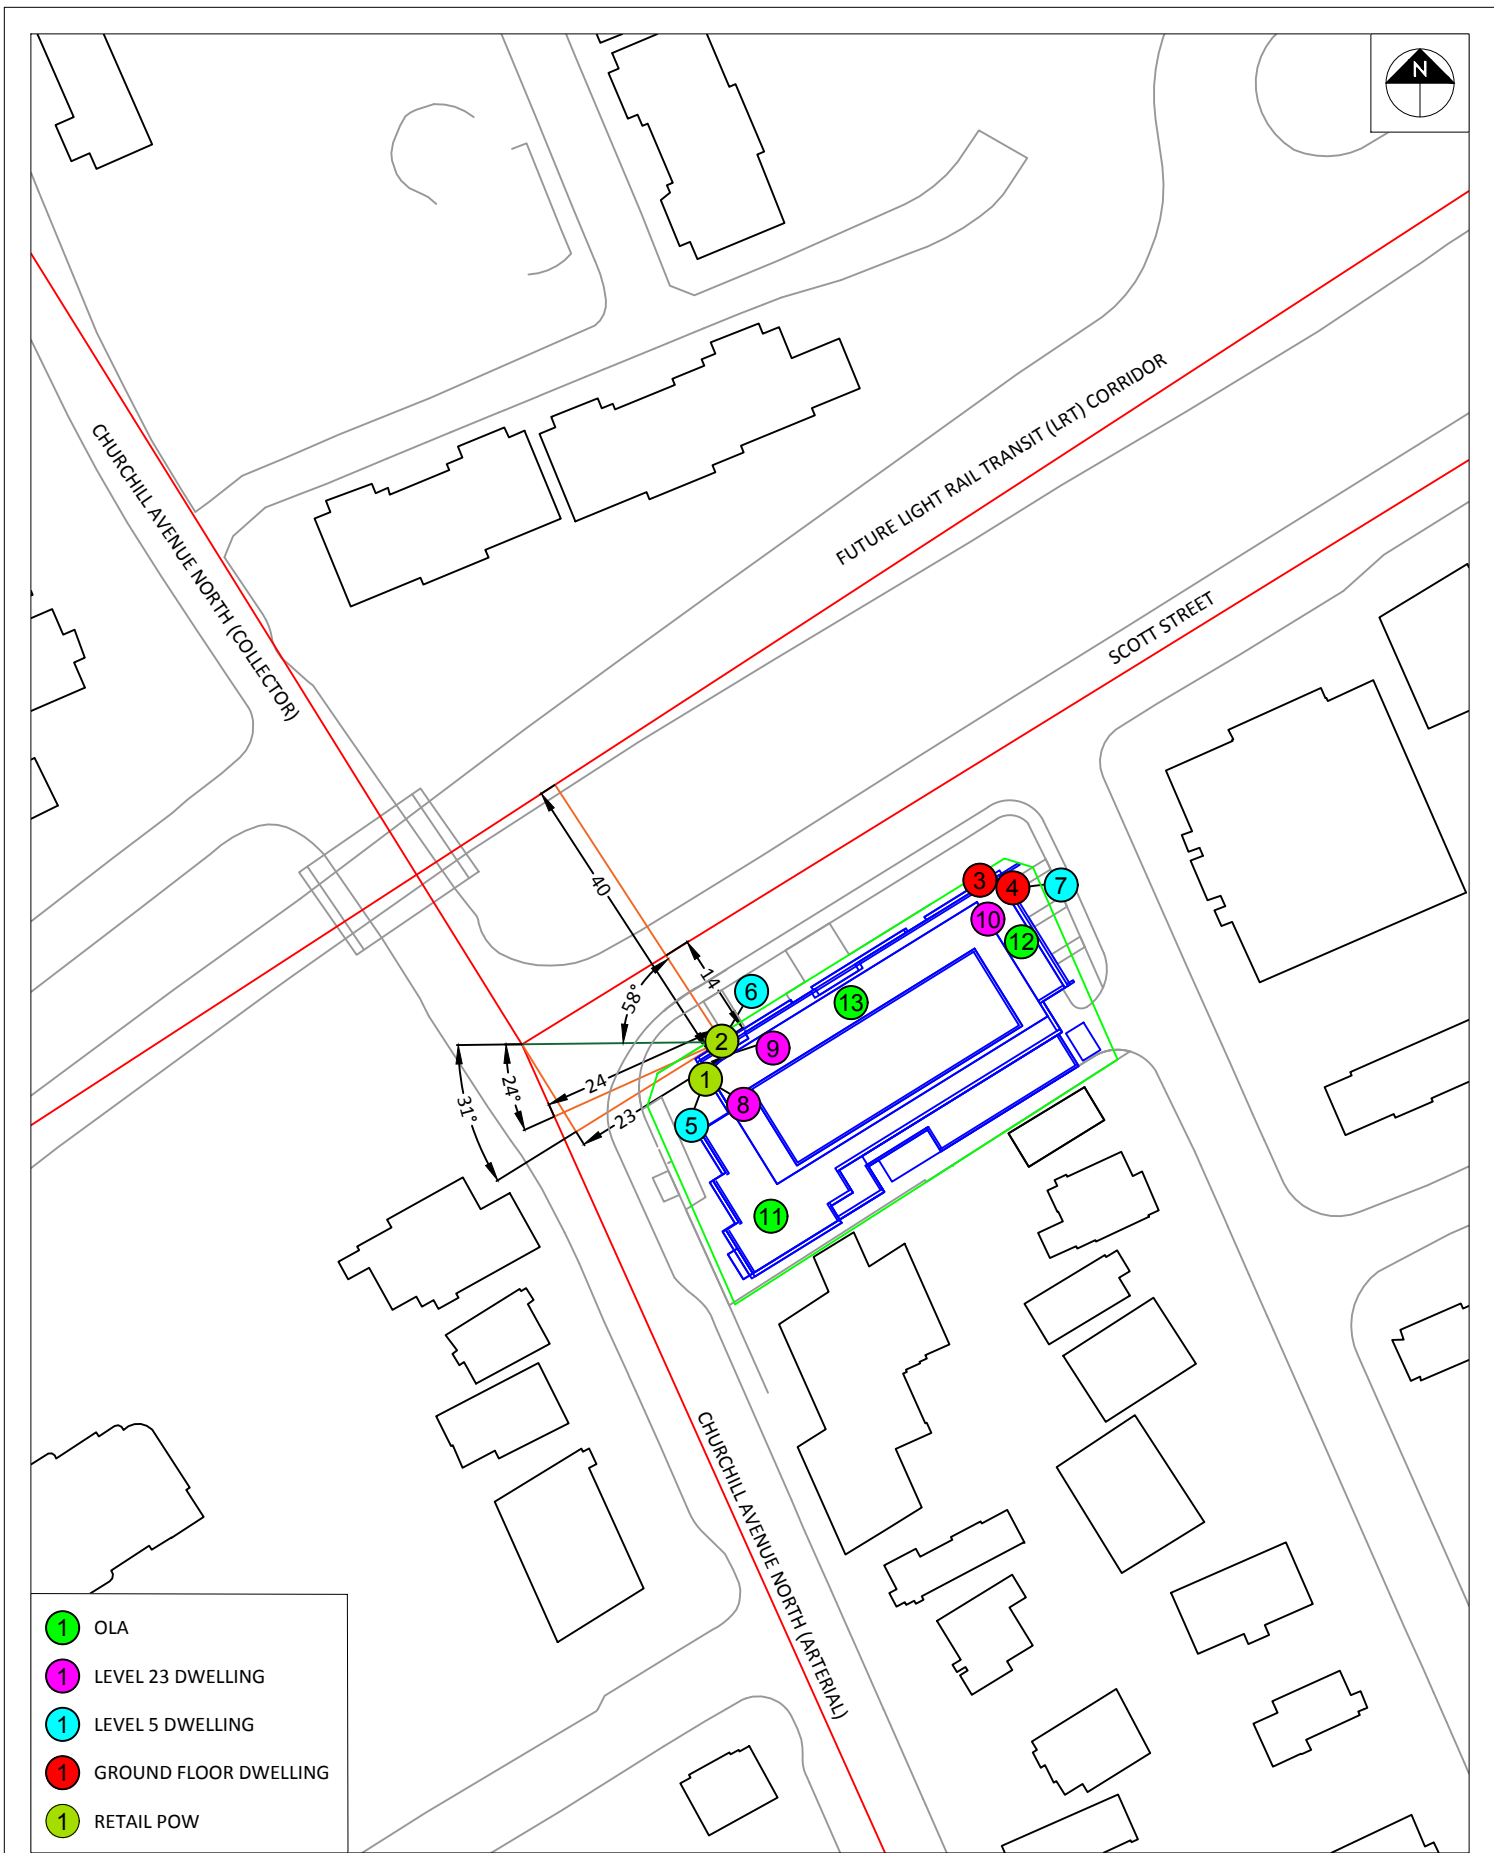

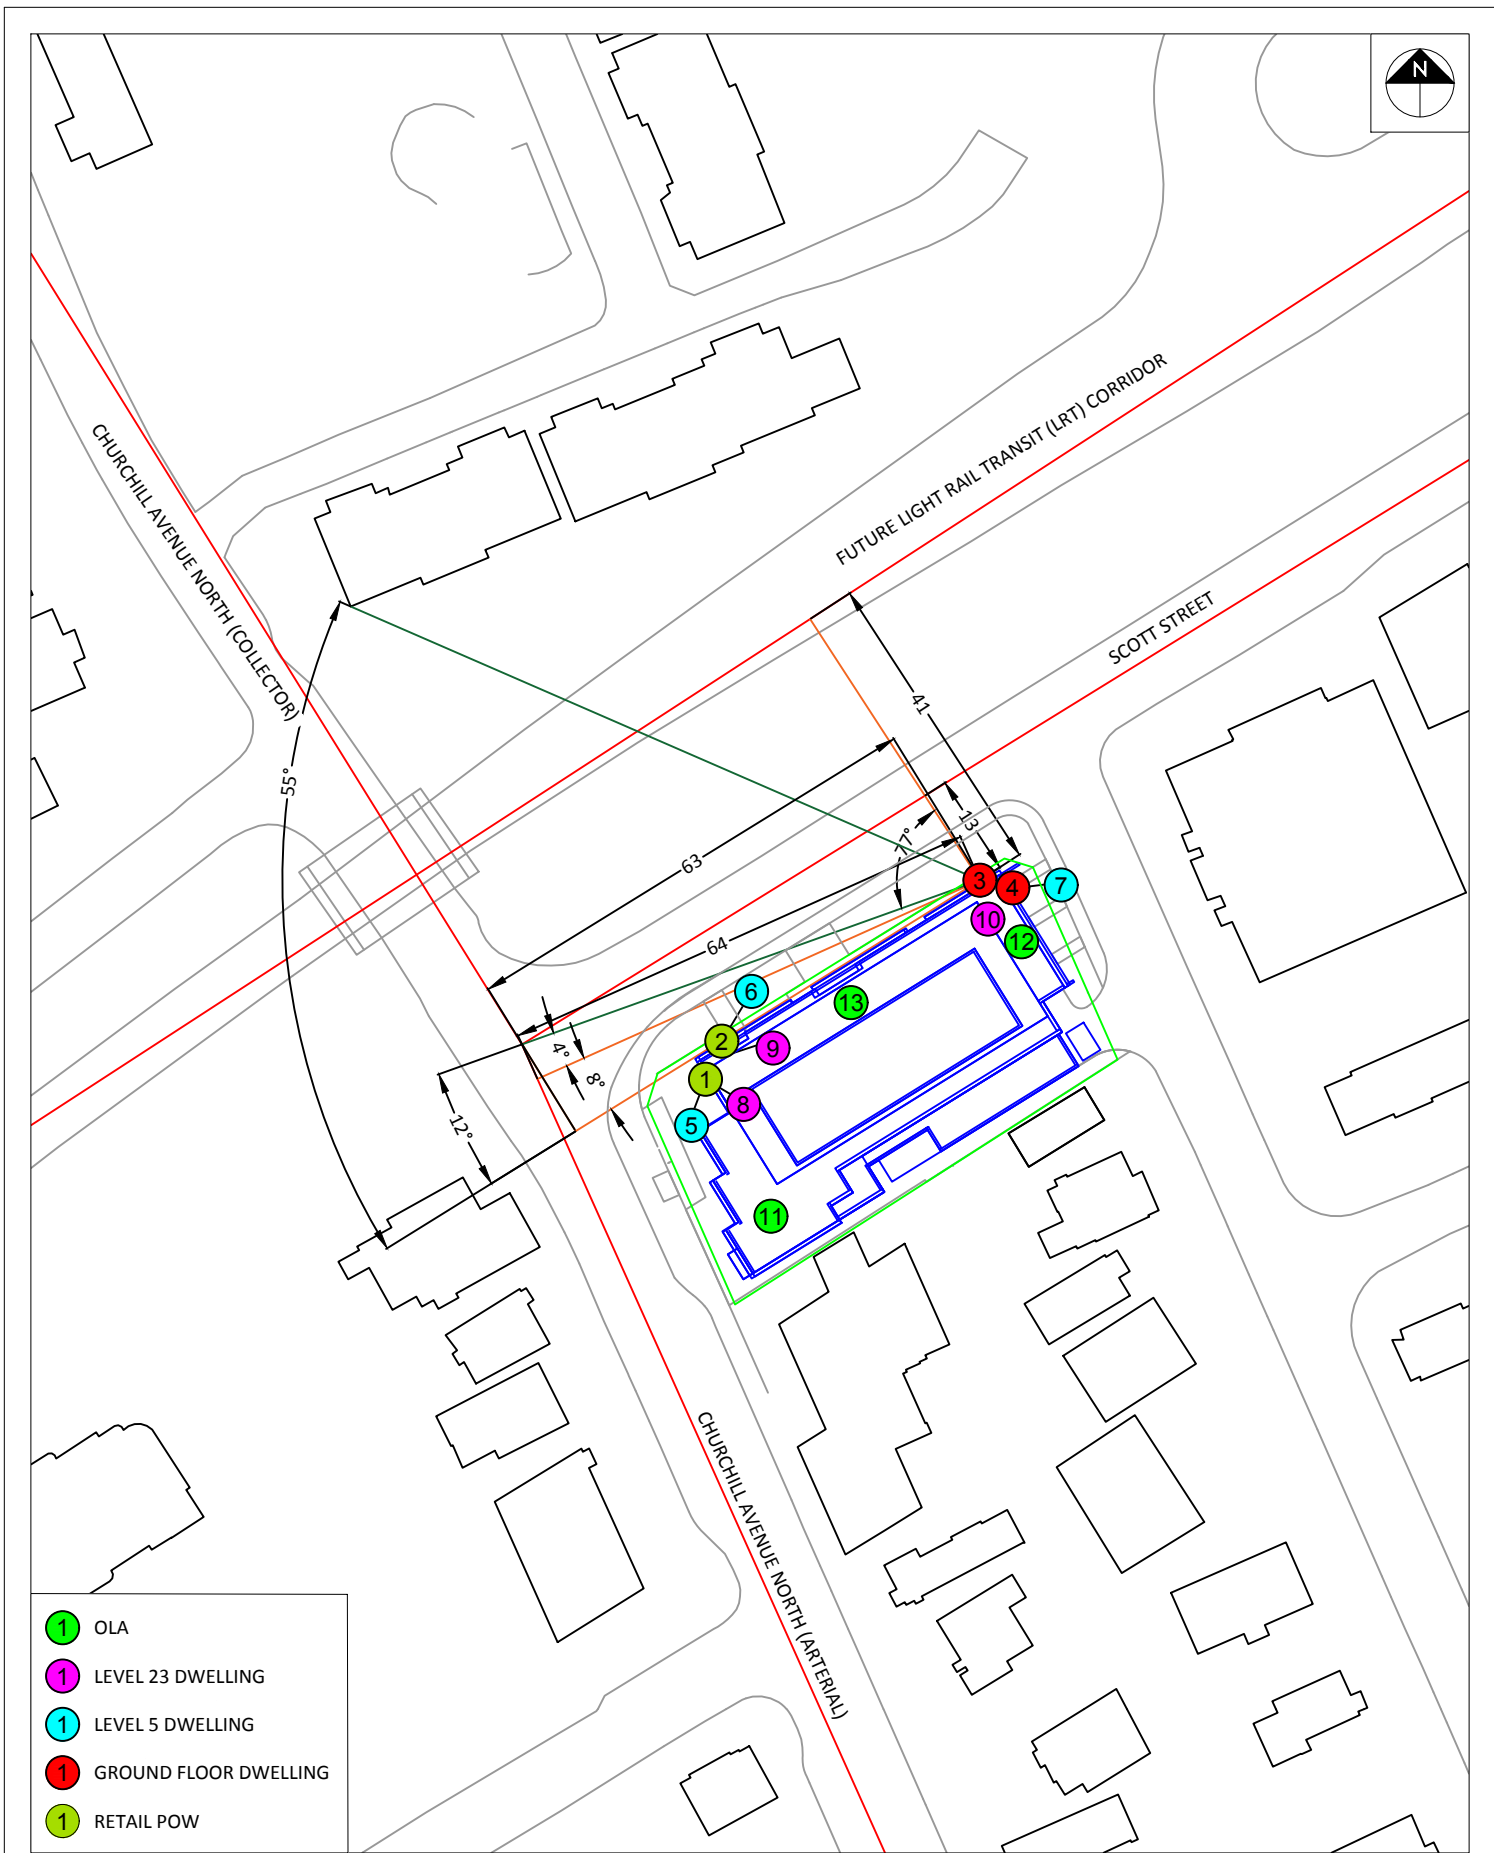

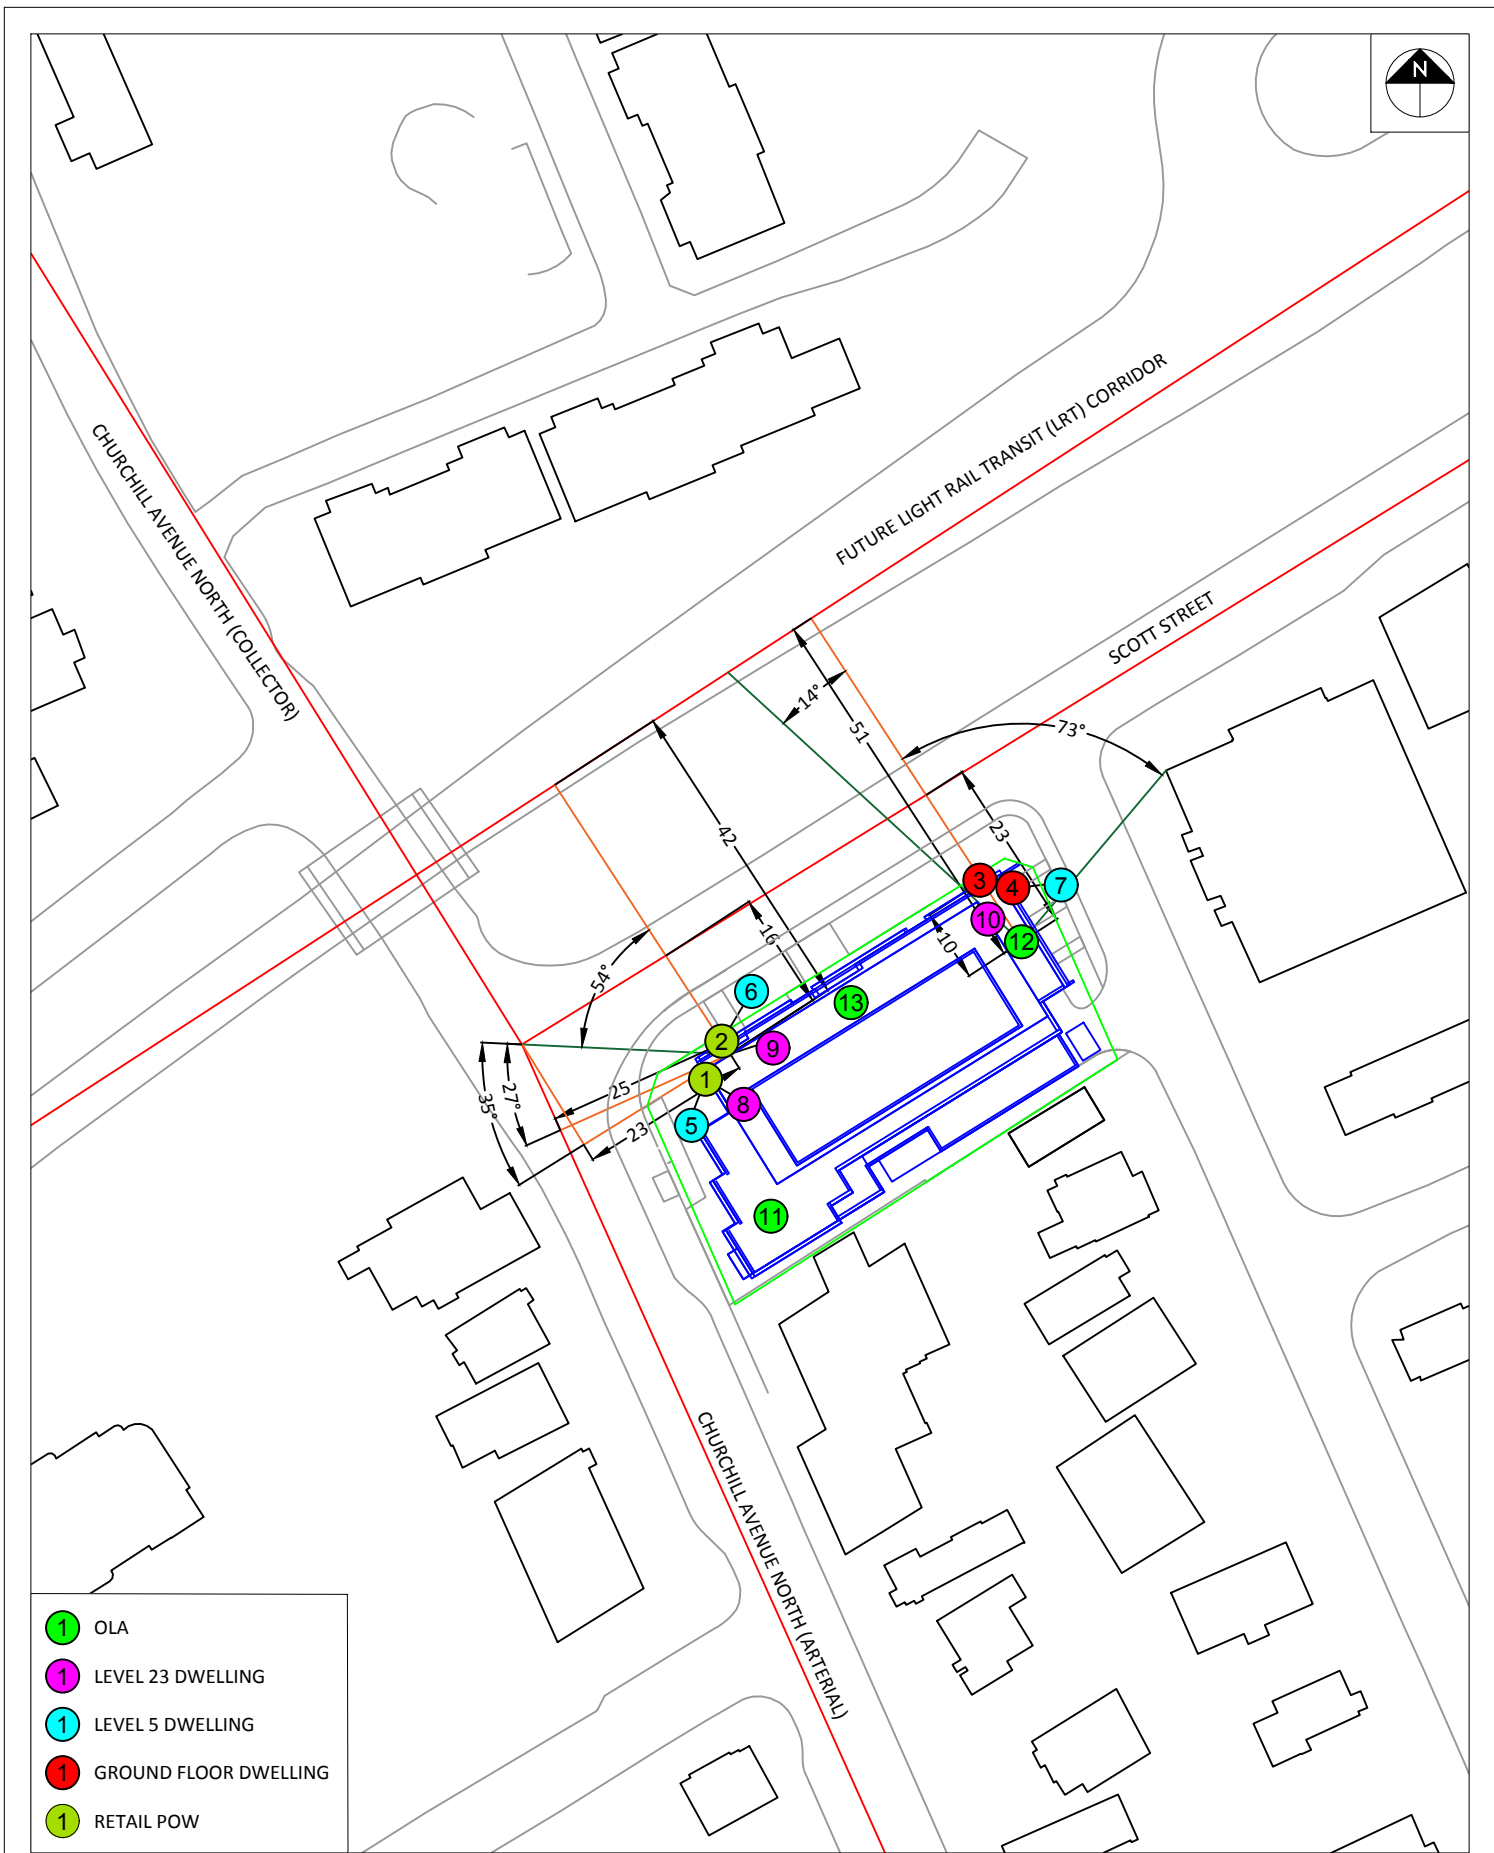

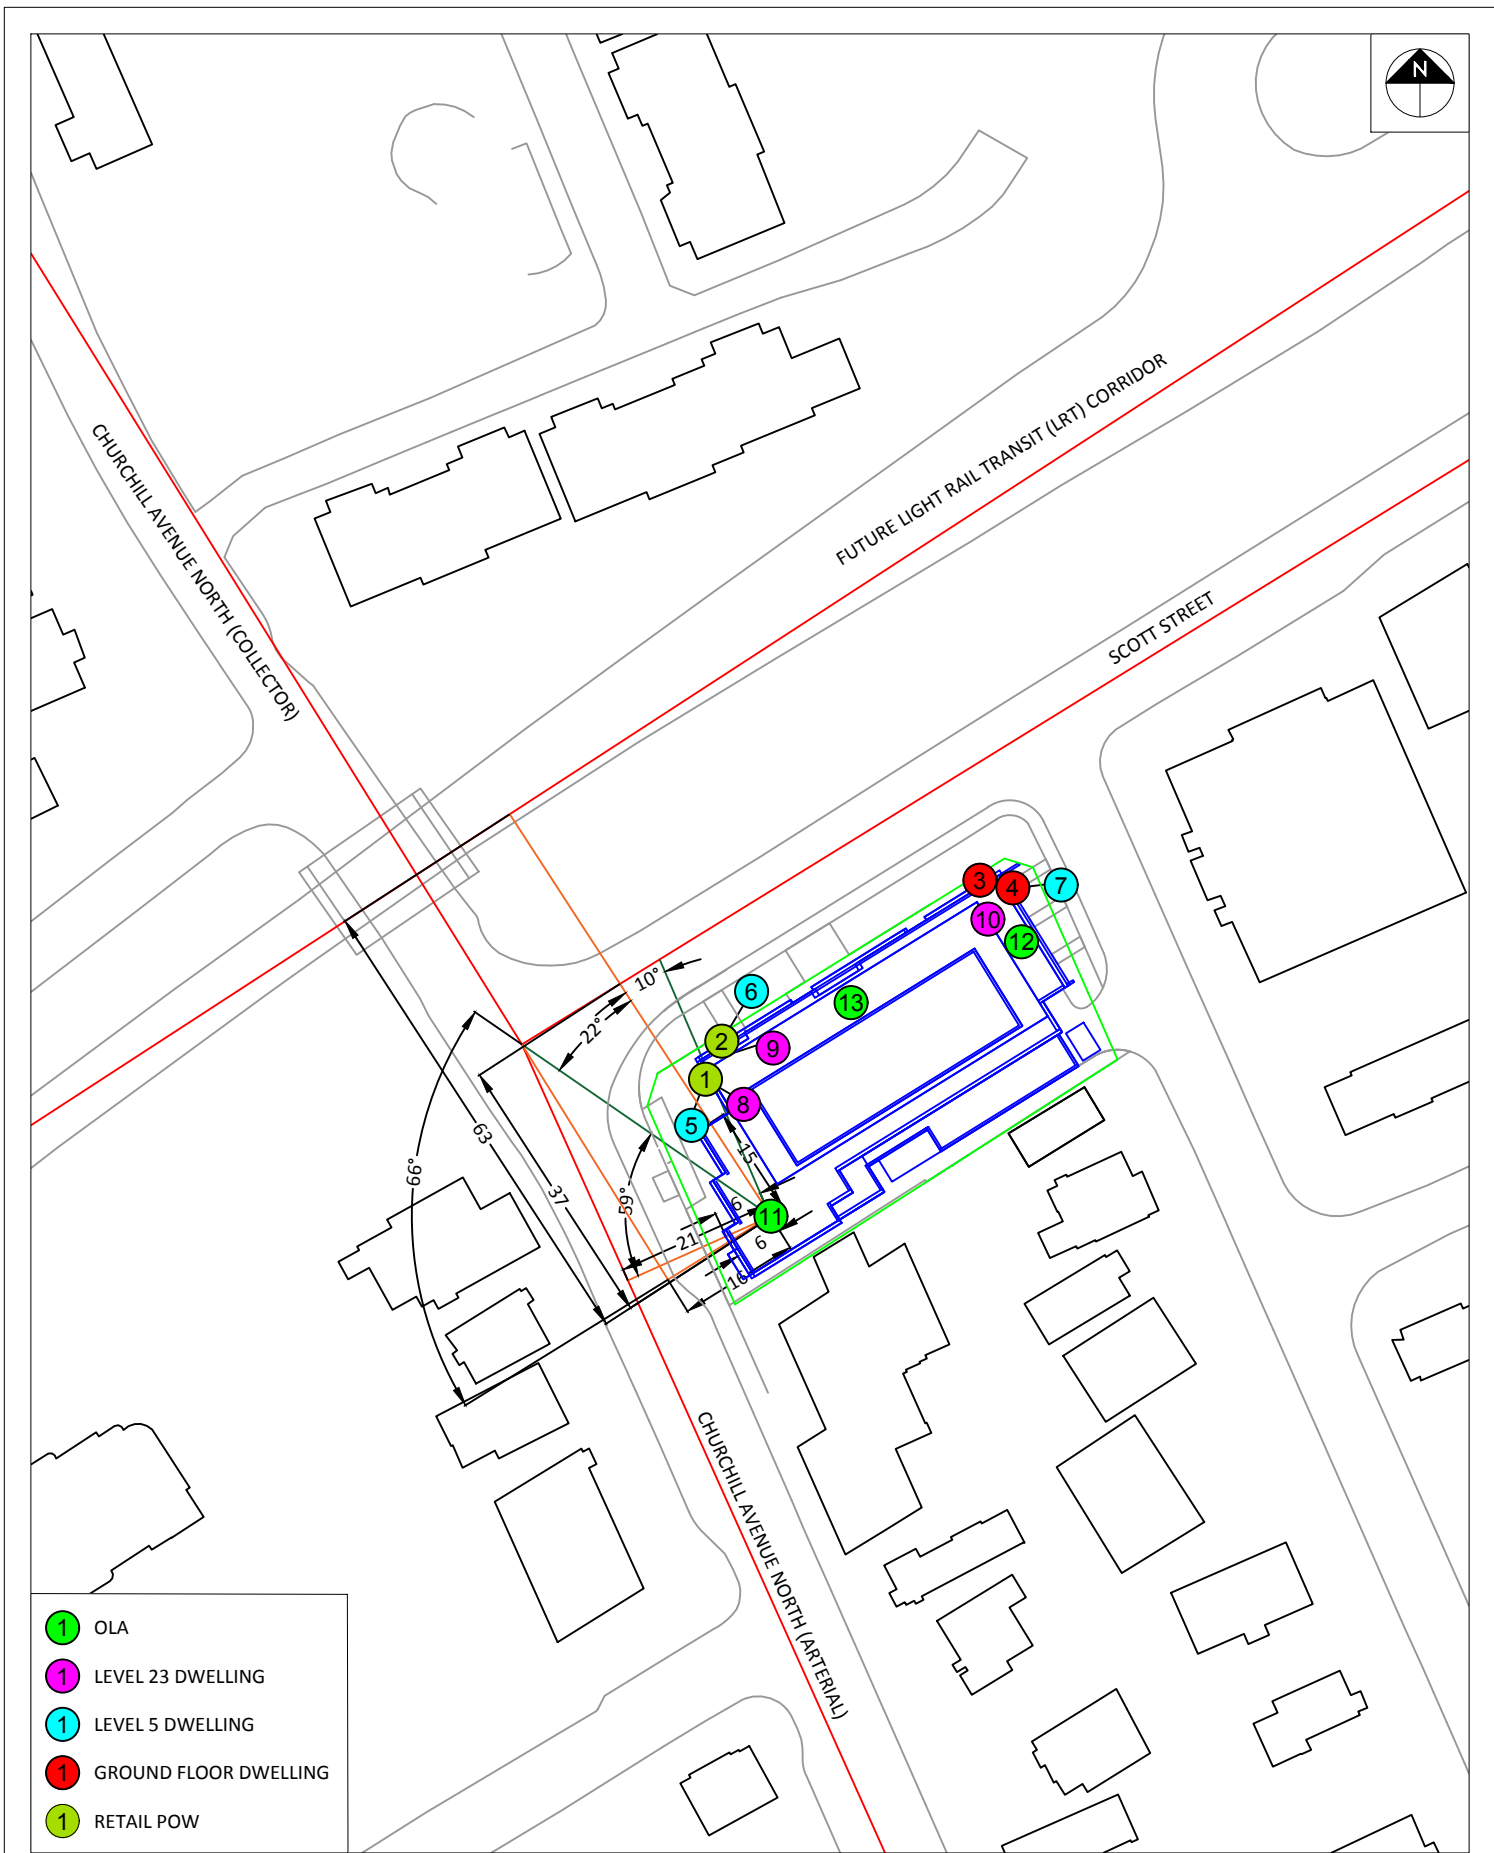

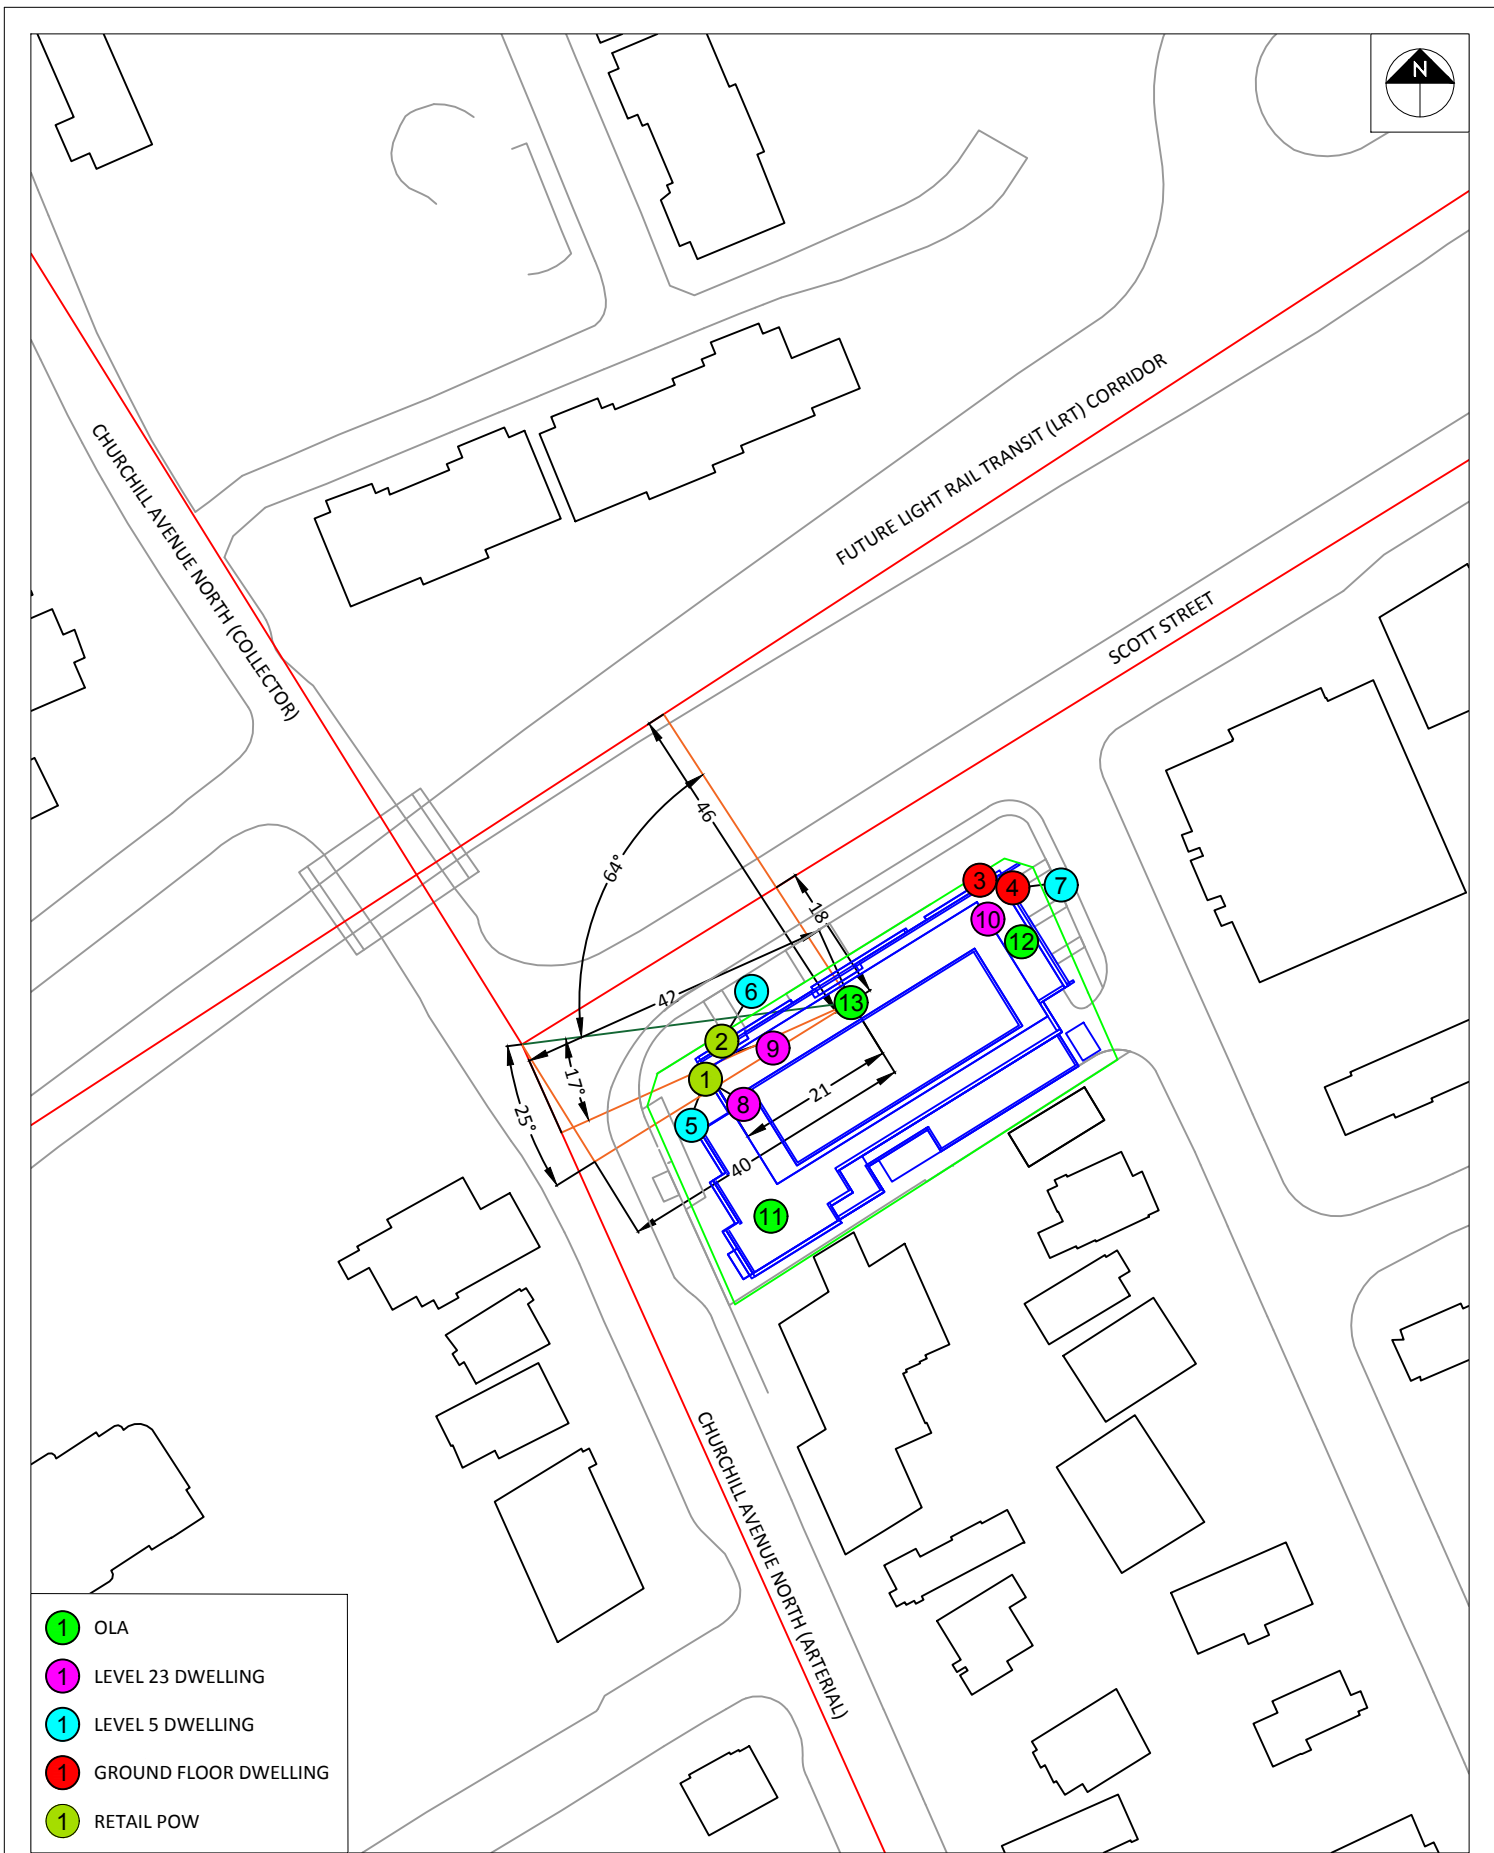

GRADIENTWIND

ENGINEERS & SCIENTISTS



APPENDIX A

STAMSON 5.04 – INPUT AND OUTPUT DATA

GRADIENTWIND

ENGINEERS & SCIENTISTS

STAMSON 5.0 NORMAL REPORT Date: 12-09-2019 16:21:14
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: rl.te Time Period: Day/Night 16/8 hours
Description:

Road data, segment # 1: Scott St (day/night)

Car traffic volume : 12144/1056 veh/TimePeriod *
Medium truck volume : 966/84 veh/TimePeriod *
Heavy truck volume : 690/60 veh/TimePeriod *
Posted speed limit : 50 km/h
Road gradient : 0 %
Road pavement : 1 (Typical asphalt or concrete)

* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT): 15000
Percentage of Annual Growth : 0.00
Number of Years of Growth : 0.00
Medium Truck % of Total Volume : 7.00
Heavy Truck % of Total Volume : 5.00
Day (16 hrs) % of Total Volume : 92.00

Data for Segment # 1: Scott St (day/night)

Angle1 Angle2 : -46.00 deg 90.00 deg
Wood depth : 0 (No woods.)
No of house rows : 0 / 0
Surface : 2 (Reflective ground surface)
Receiver source distance : 17.00 / 17.00 m
Receiver height : 1.50 / 1.50 m
Topography : 2 (Flat/gentle slope; with barrier)
Barrier angle1 : 0.00 deg Angle2 : 90.00 deg
Barrier height : 17.00 m
Barrier receiver distance : 3.00 / 3.00 m
Source elevation : 65.00 m
Receiver elevation : 65.50 m
Barrier elevation : 65.50 m
Reference angle : 0.00



Road data, segment # 2: CHA 1 (day/night)

```
-----
Car traffic volume : 12144/1056 veh/TimePeriod *
Medium truck volume : 966/84 veh/TimePeriod *
Heavy truck volume : 690/60 veh/TimePeriod *
Posted speed limit : 50 km/h
Road gradient : 0 %
Road pavement : 1 (Typical asphalt or concrete)
```

* Refers to calculated road volumes based on the following input:

```
24 hr Traffic Volume (AADT or SADT): 15000
Percentage of Annual Growth : 0.00
Number of Years of Growth : 0.00
Medium Truck % of Total Volume : 7.00
Heavy Truck % of Total Volume : 5.00
Day (16 hrs) % of Total Volume : 92.00
```

Data for Segment # 2: CHA 1 (day/night)

```
-----
Angle1 Angle2 : -90.00 deg 35.00 deg
Wood depth : 0 (No woods.)
No of house rows : 0 / 0
Surface : 2 (Reflective ground surface)
Receiver source distance : 20.00 / 20.00 m
Receiver height : 1.50 / 1.50 m
Topography : 2 (Flat/gentle slope; with barrier)
Barrier angle1 : -90.00 deg Angle2 : -57.00 deg
Barrier height : 17.00 m
Barrier receiver distance : 3.00 / 3.00 m
Source elevation : 65.00 m
Receiver elevation : 65.50 m
Barrier elevation : 65.50 m
Reference angle : 0.00
```

Road data, segment # 3: CHA 2 (day/night)

```
-----
Car traffic volume : 6477/563 veh/TimePeriod *
Medium truck volume : 515/45 veh/TimePeriod *
Heavy truck volume : 368/32 veh/TimePeriod *
Posted speed limit : 50 km/h
Road gradient : 0 %
Road pavement : 1 (Typical asphalt or concrete)
```

* Refers to calculated road volumes based on the following input:

```
24 hr Traffic Volume (AADT or SADT): 8000
Percentage of Annual Growth : 0.00
Number of Years of Growth : 0.00
Medium Truck % of Total Volume : 7.00
```



GRADIENTWIND

ENGINEERS & SCIENTISTS

Heavy Truck % of Total Volume : 5.00
Day (16 hrs) % of Total Volume : 92.00

Data for Segment # 3: CHA 2 (day/night)

Angle1 Angle2 : 42.00 deg 90.00 deg
Wood depth : 0 (No woods.)
No of house rows : 0 / 0
Surface : 2 (Reflective ground surface)
Receiver source distance : 18.00 / 18.00 m
Receiver height : 1.50 / 1.50 m
Topography : 1 (Flat/gentle slope; no barrier)
Reference angle : 0.00

Results segment # 1: Scott St (day)

Source height = 1.50 m

Barrier height for grazing incidence

Source ! Receiver ! Barrier ! Elevation of
Height (m) ! Height (m) ! Height (m) ! Barrier Top (m)
-----+-----+-----+-----
1.50 ! 1.50 ! 1.41 ! 66.91

ROAD (62.01 + 45.56 + 0.00) = 62.11 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									

--
-46 0 0.00 68.48 0.00 -0.54 -5.93 0.00 0.00 0.00
62.01

--
0 90 0.00 68.48 0.00 -0.54 -3.01 0.00 0.00 -19.37
45.56

--

Segment Leq : 62.11 dBA

Results segment # 2: CHA 1 (day)

Source height = 1.50 m

Barrier height for grazing incidence



Source	!	Receiver	!	Barrier	!	Elevation of
Height (m)	!	Height (m)	!	Height (m)	!	Barrier Top (m)
1.50	!	1.50	!	1.42	!	66.92

ROAD (0.00 + 41.48 + 64.32) = 64.34 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									

-90	-57	0.00	68.48	0.00	-1.25	-7.37	0.00	0.00	-18.39
41.48									

-57	35	0.00	68.48	0.00	-1.25	-2.91	0.00	0.00	0.00
64.32									

Segment Leq : 64.34 dBA

Results segment # 3: CHA 2 (day)

Source height = 1.50 m

ROAD (0.00 + 59.22 + 0.00) = 59.22 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									

42	90	0.00	65.75	0.00	-0.79	-5.74	0.00	0.00	0.00
59.22									

Segment Leq : 59.22 dBA

Total Leq All Segments: 67.14 dBA

Results segment # 1: Scott St (night)

Source height = 1.50 m

Barrier height for grazing incidence

Source	!	Receiver	!	Barrier	!	Elevation of
Height (m)	!	Height (m)	!	Height (m)	!	Barrier Top (m)



-----+-----+-----+-----									
	1.50	!		1.50	!		1.41	!	66.91

ROAD (54.41 + 37.96 + 0.00) = 54.51 dBA									
Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									

--									
-46	0	0.00	60.88	0.00	-0.54	-5.93	0.00	0.00	0.00
54.41									

--									
0	90	0.00	60.88	0.00	-0.54	-3.01	0.00	0.00	-19.37
37.96									

Segment Leq : 54.51 dBA

Results segment # 2: CHA 1 (night)

Source height = 1.50 m

Barrier height for grazing incidence

Source	!	Receiver	!	Barrier	!	Elevation of			
Height	(m)	!	Height	(m)	!	Height	(m)	!	Barrier Top (m)
-----+-----+-----+-----									
	1.50	!		1.50	!		1.42	!	66.92

ROAD (0.00 + 33.88 + 56.72) = 56.74 dBA									
Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									

--									
-90	-57	0.00	60.88	0.00	-1.25	-7.37	0.00	0.00	-18.39
33.88									

--									
-57	35	0.00	60.88	0.00	-1.25	-2.91	0.00	0.00	0.00
56.72									

Segment Leq : 56.74 dBA

Results segment # 3: CHA 2 (night)



Source height = 1.50 m

ROAD (0.00 + 51.62 + 0.00) = 51.62 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									

```

-----
--
--      42      90      0.00  58.16      0.00  -0.79  -5.74      0.00      0.00      0.00
51.62
-----
--

```

Segment Leq : 51.62 dBA

Total Leq All Segments: 59.54 dBA

RT/Custom data, segment # 1: LRT (day/night)

1 - 4-car SRT:

Traffic volume	:	540/60	veh/TimePeriod
Speed	:	70 km/h	

Data for Segment # 1: LRT (day/night)

```

-----
Angle1   Angle2           : -90.00 deg   90.00 deg
Wood depth      :           0       (No woods.)
No of house rows :           0 / 0
Surface         :           2       (Reflective ground surface)
Receiver source distance : 44.00 / 44.00 m
Receiver height  :           1.50 / 1.50 m
Topography      :           4       (Elevated; with barrier)
Barrier angle1   : -90.00 deg   Angle2 : 90.00 deg
Barrier height   :           0.00 m
Elevation       :           6.00 m
Barrier receiver distance : 10.00 / 10.00 m
Source elevation :           56.00 m
Receiver elevation :           65.50 m
Barrier elevation :           0.00 m
Reference angle  :           0.00

```

Results segment # 1: LRT (day)

Source height = 0.50 m

Barrier height for grazing incidence

```

-----
Source      ! Receiver      ! Barrier      ! Elevation of

```



GRADIENTWIND

ENGINEERS & SCIENTISTS

Height (m)	!	Height (m)	!	Height (m)	!	Barrier Top (m)
0.50	!	1.50	!	64.61	!	64.61

RT/Custom (0.00 + 58.76 + 0.00) = 58.76 dBA

Angle1	Angle2	Alpha	RefLeq	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.00	63.44	-4.67	0.00	0.00	0.00	-0.00	58.76*
-90	90	0.00	63.44	-4.67	0.00	0.00	0.00	0.00	58.76

* Bright Zone !

Segment Leq : 58.76 dBA

Total Leq All Segments: 58.76 dBA

Results segment # 1: LRT (night)

Source height = 0.50 m

Barrier height for grazing incidence

Source	!	Receiver	!	Barrier	!	Elevation of
Height (m)	!	Height (m)	!	Height (m)	!	Barrier Top (m)
0.50	!	1.50	!	64.61	!	64.61

RT/Custom (0.00 + 52.23 + 0.00) = 52.23 dBA

Angle1	Angle2	Alpha	RefLeq	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.00	56.91	-4.67	0.00	0.00	0.00	-0.00	52.23*
-90	90	0.00	56.91	-4.67	0.00	0.00	0.00	0.00	52.23

* Bright Zone !

Segment Leq : 52.23 dBA

Total Leq All Segments: 52.23 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 67.73
(NIGHT): 60.28



STAMSON 5.0 NORMAL REPORT Date: 12-09-2019 16:21:31
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: r2.te Time Period: Day/Night 16/8 hours
Description:

Road data, segment # 1: Scott St (day/night)

Car traffic volume : 12144/1056 veh/TimePeriod *
Medium truck volume : 966/84 veh/TimePeriod *
Heavy truck volume : 690/60 veh/TimePeriod *
Posted speed limit : 50 km/h
Road gradient : 0 %
Road pavement : 1 (Typical asphalt or concrete)

* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT): 15000
Percentage of Annual Growth : 0.00
Number of Years of Growth : 0.00
Medium Truck % of Total Volume : 7.00
Heavy Truck % of Total Volume : 5.00
Day (16 hrs) % of Total Volume : 92.00

Data for Segment # 1: Scott St (day/night)

Angle1 Angle2 : -58.00 deg 90.00 deg
Wood depth : 0 (No woods.)
No of house rows : 0 / 0
Surface : 2 (Reflective ground surface)
Receiver source distance : 15.00 / 15.00 m
Receiver height : 1.50 / 1.50 m
Topography : 2 (Flat/gentle slope; with barrier)
Barrier angle1 : -58.00 deg Angle2 : 90.00 deg
Barrier height : 0.00 m
Barrier receiver distance : 10.00 / 10.00 m
Source elevation : 65.00 m
Receiver elevation : 65.50 m
Barrier elevation : 0.00 m
Reference angle : 0.00

Road data, segment # 2: CHA 1 (day/night)

Car traffic volume : 12144/1056 veh/TimePeriod *
Medium truck volume : 966/84 veh/TimePeriod *
Heavy truck volume : 690/60 veh/TimePeriod *
Posted speed limit : 50 km/h
Road gradient : 0 %
Road pavement : 1 (Typical asphalt or concrete)



* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT):	15000
Percentage of Annual Growth	: 0.00
Number of Years of Growth	: 0.00
Medium Truck % of Total Volume	: 7.00
Heavy Truck % of Total Volume	: 5.00
Day (16 hrs) % of Total Volume	: 92.00

Data for Segment # 2: CHA 1 (day/night)

Angle1	Angle2	:	0.00 deg	24.00 deg
Wood depth	:	0	(No woods.)	
No of house rows	:	0 / 0		
Surface	:	2	(Reflective ground surface)	
Receiver source distance	:	24.00 / 24.00	m	
Receiver height	:	1.50 / 1.50	m	
Topography	:	2	(Flat/gentle slope; with barrier)	
Barrier angle1	:	0.00 deg	Angle2 :	24.00 deg
Barrier height	:	0.00 m		
Barrier receiver distance	:	10.00 / 10.00	m	
Source elevation	:	65.00 m		
Receiver elevation	:	65.50 m		
Barrier elevation	:	0.00 m		
Reference angle	:	0.00		

Road data, segment # 3: CHA 2 (day/night)

Car traffic volume	:	6477/563	veh/TimePeriod	*
Medium truck volume	:	515/45	veh/TimePeriod	*
Heavy truck volume	:	368/32	veh/TimePeriod	*
Posted speed limit	:	50 km/h		
Road gradient	:	0 %		
Road pavement	:	1	(Typical asphalt or concrete)	

* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT):	8000
Percentage of Annual Growth	: 0.00
Number of Years of Growth	: 0.00
Medium Truck % of Total Volume	: 7.00
Heavy Truck % of Total Volume	: 5.00
Day (16 hrs) % of Total Volume	: 92.00

Data for Segment # 3: CHA 2 (day/night)

Angle1	Angle2	:	31.00 deg	90.00 deg
Wood depth	:	0	(No woods.)	
No of house rows	:	0 / 0		



GRADIENTWIND

ENGINEERS & SCIENTISTS

```

Surface                :      2      (Reflective ground surface)
Receiver source distance : 23.00 / 23.00 m
Receiver height         : 1.50 / 1.50 m
Topography              :      2      (Flat/gentle slope; with barrier)
Barrier angle1          : 31.00 deg   Angle2 : 90.00 deg
Barrier height          : 0.00 m
Barrier receiver distance : 10.00 / 10.00 m
Source elevation        : 65.00 m
Receiver elevation      : 65.50 m
Barrier elevation       : 0.00 m
Reference angle         : 0.00
  
```

Results segment # 1: Scott St (day)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	! Receiver ! Height (m)	! Barrier ! Height (m)	! Elevation of ! Barrier Top (m)
1.50	!	1.50	!
		66.66	!
			66.66

ROAD (0.00 + 67.63 + 0.00) = 67.63 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									

-58	90	0.00	68.48	0.00	0.00	-0.85	0.00	0.00	-0.00
67.63*									
-58	90	0.00	68.48	0.00	0.00	-0.85	0.00	0.00	0.00
67.63									

* Bright Zone !

Segment Leq : 67.63 dBA

Results segment # 2: CHA 1 (day)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	! Receiver ! Height (m)	! Barrier ! Height (m)	! Elevation of ! Barrier Top (m)
----------------------	----------------------------	---------------------------	-------------------------------------



-----+-----+-----+-----									
1.50 !		1.50 !		66.79 !		66.79			
ROAD (0.00 + 57.69 + 0.00) = 57.69 dBA									
Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									

--									
0	24	0.00	68.48	0.00	-2.04	-8.75	0.00	0.00	0.00
57.69*									
0	24	0.00	68.48	0.00	-2.04	-8.75	0.00	0.00	0.00
57.69									

--									

* Bright Zone !

Segment Leq : 57.69 dBA

Results segment # 3: CHA 2 (day)

Source height = 1.50 m

Barrier height for grazing incidence

Source	! Receiver	! Barrier	! Elevation of
Height (m)	! Height (m)	! Height (m)	! Barrier Top (m)
-----+-----+-----+-----			
1.50	!	1.50	!
		66.78	!
66.78			
ROAD (0.00 + 59.05 + 0.00) = 59.05 dBA			
Angle1	Angle2	Alpha	RefLeq
P.Adj	D.Adj	F.Adj	W.Adj
H.Adj	B.Adj		
SubLeq			

--			
31	90	0.00	65.75
0.00	0.00	-1.86	-4.84
0.00	0.00	0.00	0.00
-0.00			
59.05*			
31	90	0.00	65.75
0.00	0.00	-1.86	-4.84
0.00	0.00	0.00	0.00
0.00			
59.05			

--			

* Bright Zone !

Segment Leq : 59.05 dBA

Total Leq All Segments: 68.56 dBA



Results segment # 1: Scott St (night)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	Receiver Height (m)	Barrier Height (m)	Elevation of Barrier Top (m)
1.50	1.50	66.66	66.66

ROAD (0.00 + 60.03 + 0.00) = 60.03 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									

-58	90	0.00	60.88	0.00	0.00	-0.85	0.00	0.00	-0.00
60.03*									
-58	90	0.00	60.88	0.00	0.00	-0.85	0.00	0.00	0.00
60.03									

* Bright Zone !

Segment Leq : 60.03 dBA

Results segment # 2: CHA 1 (night)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	Receiver Height (m)	Barrier Height (m)	Elevation of Barrier Top (m)
1.50	1.50	66.79	66.79

ROAD (0.00 + 50.09 + 0.00) = 50.09 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									

0	24	0.00	60.88	0.00	-2.04	-8.75	0.00	0.00	0.00
50.09*									
0	24	0.00	60.88	0.00	-2.04	-8.75	0.00	0.00	0.00
50.09									



* Bright Zone !

Segment Leq : 50.09 dBA

Results segment # 3: CHA 2 (night)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	Receiver Height (m)	Barrier Height (m)	Elevation of Barrier Top (m)
1.50	1.50	66.78	66.78

ROAD (0.00 + 51.46 + 0.00) = 51.46 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									

31	90	0.00	58.16	0.00	-1.86	-4.84	0.00	0.00	-0.00
51.46*									
31	90	0.00	58.16	0.00	-1.86	-4.84	0.00	0.00	0.00
51.46									

* Bright Zone !

Segment Leq : 51.46 dBA

Total Leq All Segments: 60.97 dBA

RT/Custom data, segment # 1: LRT (day/night)

1 - 4-car SRT:

Traffic volume : 540/60 veh/TimePeriod
Speed : 70 km/h

Data for Segment # 1: LRT (day/night)

Angle1	Angle2	: -90.00 deg	90.00 deg
Wood depth		: 0	(No woods.)
No of house rows		: 0 / 0	
Surface		: 2	(Reflective ground surface)
Receiver source distance		: 40.00 / 40.00	m
Receiver height		: 1.50 / 1.50	m



GRADIENTWIND

ENGINEERS & SCIENTISTS

Topography : 4 (Elevated; with barrier)
 Barrier angle1 : -90.00 deg Angle2 : 90.00 deg
 Barrier height : 0.00 m
 Elevation : 6.00 m
 Barrier receiver distance : 10.00 / 10.00 m
 Source elevation : 56.00 m
 Receiver elevation : 65.50 m
 Barrier elevation : 0.00 m
 Reference angle : 0.00

Results segment # 1: LRT (day)

Source height = 0.50 m

Barrier height for grazing incidence

Source Height (m)	! Receiver ! Height (m)	! Barrier ! Height (m)	! Elevation of ! Barrier Top (m)
0.50 !	1.50 !	64.38 !	64.38

RT/Custom (0.00 + 59.18 + 0.00) = 59.18 dBA

Angle1	Angle2	Alpha	RefLeq	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.00	63.44	-4.26	0.00	0.00	0.00	-0.00	59.18*
-90	90	0.00	63.44	-4.26	0.00	0.00	0.00	0.00	59.18

* Bright Zone !

Segment Leq : 59.18 dBA

Total Leq All Segments: 59.18 dBA

Results segment # 1: LRT (night)

Source height = 0.50 m

Barrier height for grazing incidence

Source Height (m)	! Receiver ! Height (m)	! Barrier ! Height (m)	! Elevation of ! Barrier Top (m)
0.50 !	1.50 !	64.38 !	64.38

RT/Custom (0.00 + 52.65 + 0.00) = 52.65 dBA

Angle1	Angle2	Alpha	RefLeq	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.00	63.44	-4.26	0.00	0.00	0.00	-0.00	59.18*
-90	90	0.00	63.44	-4.26	0.00	0.00	0.00	0.00	59.18



-90	90	0.00	56.91	-4.26	0.00	0.00	0.00	-0.00	52.64*
-90	90	0.00	56.91	-4.26	0.00	0.00	0.00	0.00	52.65

* Bright Zone !

Segment Leq : 52.65 dBA

Total Leq All Segments: 52.65 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 69.04
(NIGHT): 61.56



GRADIENTWIND

ENGINEERS & SCIENTISTS

STAMSON 5.0 NORMAL REPORT Date: 12-09-2019 16:21:47
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: r3.te Time Period: Day/Night 16/8 hours
Description:

Road data, segment # 1: Scott St (day/night)

Car traffic volume : 12144/1056 veh/TimePeriod *
Medium truck volume : 966/84 veh/TimePeriod *
Heavy truck volume : 690/60 veh/TimePeriod *
Posted speed limit : 50 km/h
Road gradient : 0 %
Road pavement : 1 (Typical asphalt or concrete)

* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT): 15000
Percentage of Annual Growth : 0.00
Number of Years of Growth : 0.00
Medium Truck % of Total Volume : 7.00
Heavy Truck % of Total Volume : 5.00
Day (16 hrs) % of Total Volume : 92.00

Data for Segment # 1: Scott St (day/night)

Angle1 Angle2 : -77.00 deg 90.00 deg
Wood depth : 0 (No woods.)
No of house rows : 0 / 0
Surface : 2 (Reflective ground surface)
Receiver source distance : 15.00 / 15.00 m
Receiver height : 1.50 / 1.50 m
Topography : 2 (Flat/gentle slope; with barrier)
Barrier angle1 : -77.00 deg Angle2 : 90.00 deg
Barrier height : 0.00 m
Barrier receiver distance : 10.00 / 10.00 m
Source elevation : 63.00 m
Receiver elevation : 63.00 m
Barrier elevation : 0.00 m
Reference angle : 0.00

Road data, segment # 2: CHA 1 (day/night)

Car traffic volume : 12144/1056 veh/TimePeriod *
Medium truck volume : 966/84 veh/TimePeriod *
Heavy truck volume : 690/60 veh/TimePeriod *
Posted speed limit : 50 km/h
Road gradient : 0 %
Road pavement : 1 (Typical asphalt or concrete)



* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT):	15000
Percentage of Annual Growth	: 0.00
Number of Years of Growth	: 0.00
Medium Truck % of Total Volume	: 7.00
Heavy Truck % of Total Volume	: 5.00
Day (16 hrs) % of Total Volume	: 92.00

Data for Segment # 2: CHA 1 (day/night)

Angle1	Angle2	:	-8.00 deg	4.00 deg
Wood depth	:	0	(No woods.)	
No of house rows	:	0 / 0		
Surface	:	2	(Reflective ground surface)	
Receiver source distance	:	64.00 / 64.00	m	
Receiver height	:	1.50 / 1.50	m	
Topography	:	2	(Flat/gentle slope; with barrier)	
Barrier angle1	:	-8.00 deg	Angle2 :	4.00 deg
Barrier height	:	0.00	m	
Barrier receiver distance	:	10.00 / 10.00	m	
Source elevation	:	65.00	m	
Receiver elevation	:	63.00	m	
Barrier elevation	:	0.00	m	
Reference angle	:	0.00		

Road data, segment # 3: CHA 2 (day/night)

Car traffic volume	:	6477/563	veh/TimePeriod	*
Medium truck volume	:	515/45	veh/TimePeriod	*
Heavy truck volume	:	368/32	veh/TimePeriod	*
Posted speed limit	:	50 km/h		
Road gradient	:	0 %		
Road pavement	:	1	(Typical asphalt or concrete)	

* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT):	8000
Percentage of Annual Growth	: 0.00
Number of Years of Growth	: 0.00
Medium Truck % of Total Volume	: 7.00
Heavy Truck % of Total Volume	: 5.00
Day (16 hrs) % of Total Volume	: 92.00

Data for Segment # 3: CHA 2 (day/night)

Angle1	Angle2	:	12.00 deg	90.00 deg
Wood depth	:	0	(No woods.)	
No of house rows	:	0 / 0		



GRADIENTWIND

ENGINEERS & SCIENTISTS

```

Surface                :      2      (Reflective ground surface)
Receiver source distance : 63.00 / 63.00 m
Receiver height         : 1.50 / 1.50 m
Topography              :      2      (Flat/gentle slope; with barrier)
Barrier angle1          : 12.00 deg   Angle2 : 90.00 deg
Barrier height          : 0.00 m
Barrier receiver distance : 10.00 / 10.00 m
Source elevation        : 65.00 m
Receiver elevation      : 63.00 m
Barrier elevation       : 0.00 m
Reference angle         : 0.00
  
```

Results segment # 1: Scott St (day)

Source height = 1.50 m

Barrier height for grazing incidence

```

-----
Source      ! Receiver      ! Barrier      ! Elevation of
Height (m) ! Height (m) ! Height (m) ! Barrier Top (m)
-----+-----+-----+-----
          1.50 !          1.50 !          64.50 !          64.50
  
```

ROAD (0.00 + 68.15 + 0.00) = 68.15 dBA

```

Angle1 Angle2  Alpha RefLeq  P.Adj  D.Adj  F.Adj  W.Adj  H.Adj  B.Adj
SubLeq
  
```

```

-----
--
-77      90    0.00  68.48    0.00    0.00   -0.33    0.00    0.00   -0.00
68.15*
-77      90    0.00  68.48    0.00    0.00   -0.33    0.00    0.00    0.00
68.15
-----
--
  
```

* Bright Zone !

Segment Leq : 68.15 dBA

Results segment # 2: CHA 1 (day)

Source height = 1.50 m

Barrier height for grazing incidence

```

-----
Source      ! Receiver      ! Barrier      ! Elevation of
Height (m) ! Height (m) ! Height (m) ! Barrier Top (m)
  
```



-----+-----+-----+-----									
	1.50	!		1.50	!		64.81	!	64.81

ROAD (0.00 + 50.42 + 0.00) = 50.42 dBA									
Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									

--									
-8	4	0.00	68.48	0.00	-6.30	-11.76	0.00	0.00	0.00
50.42*									
-8	4	0.00	68.48	0.00	-6.30	-11.76	0.00	0.00	0.00
50.42									

* Bright Zone !

Segment Leq : 50.42 dBA

Results segment # 3: CHA 2 (day)

Source height = 1.50 m

Barrier height for grazing incidence

Source	!	Receiver	!	Barrier	!	Elevation of			
Height (m)	!	Height (m)	!	Height (m)	!	Barrier Top (m)			
-----+-----+-----+-----									
1.50	!	1.50	!	64.82	!	64.82			

ROAD (0.00 + 55.89 + 0.00) = 55.89 dBA									
Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									

--									
12	90	0.00	65.75	0.00	-6.23	-3.63	0.00	0.00	-0.00
55.88*									
12	90	0.00	65.75	0.00	-6.23	-3.63	0.00	0.00	0.00
55.89									

--									

* Bright Zone !

Segment Leq : 55.89 dBA

Total Leq All Segments: 68.47 dBA



Results segment # 1: Scott St (night)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	Receiver Height (m)	Barrier Height (m)	Elevation of Barrier Top (m)
1.50	1.50	64.50	64.50

ROAD (0.00 + 60.56 + 0.00) = 60.56 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									

-77	90	0.00	60.88	0.00	0.00	-0.33	0.00	0.00	-0.00
60.56*									
-77	90	0.00	60.88	0.00	0.00	-0.33	0.00	0.00	0.00
60.56									

* Bright Zone !

Segment Leq : 60.56 dBA

Results segment # 2: CHA 1 (night)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	Receiver Height (m)	Barrier Height (m)	Elevation of Barrier Top (m)
1.50	1.50	64.81	64.81

ROAD (0.00 + 42.82 + 0.00) = 42.82 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									

-8	4	0.00	60.88	0.00	-6.30	-11.76	0.00	0.00	0.00
42.82*									
-8	4	0.00	60.88	0.00	-6.30	-11.76	0.00	0.00	0.00
42.82									



--

* Bright Zone !

Segment Leq : 42.82 dBA

Results segment # 3: CHA 2 (night)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	! Receiver ! Height (m)	! Barrier ! Height (m)	! Elevation of ! Barrier Top (m)
1.50	!	1.50	!
		64.82	!
			64.82

ROAD (0.00 + 48.29 + 0.00) = 48.29 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									

--

12	90	0.00	58.16	0.00	-6.23	-3.63	0.00	0.00	-0.00
48.29*									
12	90	0.00	58.16	0.00	-6.23	-3.63	0.00	0.00	0.00
48.29									

--

* Bright Zone !

Segment Leq : 48.29 dBA

Total Leq All Segments: 60.88 dBA

RT/Custom data, segment # 1: LRT (day/night)

1 - 4-car SRT:

Traffic volume : 540/60 veh/TimePeriod

Speed : 70 km/h

Data for Segment # 1: LRT (day/night)

Angle1	Angle2	: -90.00 deg	90.00 deg
Wood depth	:	0	(No woods.)
No of house rows	:	0 / 0	
Surface	:	2	(Reflective ground surface)



GRADIENTWIND

ENGINEERS & SCIENTISTS

Receiver source distance : 41.00 / 41.00 m
 Receiver height : 1.50 / 1.50 m
 Topography : 4 (Elevated; with barrier)
 Barrier angle1 : -90.00 deg Angle2 : 90.00 deg
 Barrier height : 0.00 m
 Elevation : 6.00 m
 Barrier receiver distance : 10.00 / 10.00 m
 Source elevation : 56.00 m
 Receiver elevation : 63.00 m
 Barrier elevation : 0.00 m
 Reference angle : 0.00

Results segment # 1: LRT (day)

Source height = 0.50 m

Barrier height for grazing incidence

Source Height (m)	! Receiver ! Height (m)	! Barrier ! Height (m)	! Elevation of ! Barrier Top (m)
0.50	!	1.50	!
		62.55	!
			62.55

RT/Custom (0.00 + 59.07 + 0.00) = 59.07 dBA

Angle1	Angle2	Alpha	RefLeq	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.00	63.44	-4.37	0.00	0.00	0.00	-0.00	59.07*
-90	90	0.00	63.44	-4.37	0.00	0.00	0.00	0.00	59.07

* Bright Zone !

Segment Leq : 59.07 dBA

Total Leq All Segments: 59.07 dBA

Results segment # 1: LRT (night)

Source height = 0.50 m

Barrier height for grazing incidence

Source Height (m)	! Receiver ! Height (m)	! Barrier ! Height (m)	! Elevation of ! Barrier Top (m)
0.50	!	1.50	!
		62.55	!
			62.55



RT/Custom (0.00 + 52.54 + 0.00) = 52.54 dBA

Angle1	Angle2	Alpha	RefLeq	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.00	56.91	-4.37	0.00	0.00	0.00	-0.00	52.54*
-90	90	0.00	56.91	-4.37	0.00	0.00	0.00	0.00	52.54

* Bright Zone !

Segment Leq : 52.54 dBA

Total Leq All Segments: 52.54 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 68.94
(NIGHT): 61.47



GRADIENTWIND

ENGINEERS & SCIENTISTS

STAMSON 5.0 NORMAL REPORT Date: 12-09-2019 16:21:58
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: r4.te Time Period: Day/Night 16/8 hours
Description:

Road data, segment # 1: Scott St (day/night)

Car traffic volume : 12144/1056 veh/TimePeriod *
Medium truck volume : 966/84 veh/TimePeriod *
Heavy truck volume : 690/60 veh/TimePeriod *
Posted speed limit : 50 km/h
Road gradient : 0 %
Road pavement : 1 (Typical asphalt or concrete)

* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT): 15000
Percentage of Annual Growth : 0.00
Number of Years of Growth : 0.00
Medium Truck % of Total Volume : 7.00
Heavy Truck % of Total Volume : 5.00
Day (16 hrs) % of Total Volume : 92.00

Data for Segment # 1: Scott St (day/night)

Angle1 Angle2 : 0.00 deg 90.00 deg
Wood depth : 0 (No woods.)
No of house rows : 0 / 0
Surface : 2 (Reflective ground surface)
Receiver source distance : 16.00 / 16.00 m
Receiver height : 1.50 / 1.50 m
Topography : 2 (Flat/gentle slope; with barrier)
Barrier angle1 : 0.00 deg Angle2 : 90.00 deg
Barrier height : 0.00 m
Barrier receiver distance : 10.00 / 10.00 m
Source elevation : 63.00 m
Receiver elevation : 63.00 m
Barrier elevation : 0.00 m
Reference angle : 0.00

Results segment # 1: Scott St (day)

Source height = 1.50 m

Barrier height for grazing incidence

Source ! Receiver ! Barrier ! Elevation of



GRADIENTWIND

ENGINEERS & SCIENTISTS

Height (m)	!	Height (m)	!	Height (m)	!	Barrier Top (m)
1.50	!	1.50	!	64.50	!	64.50

ROAD (0.00 + 65.19 + 0.00) = 65.19 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									

0	90	0.00	68.48	0.00	-0.28	-3.01	0.00	0.00	-0.00
65.19*									
0	90	0.00	68.48	0.00	-0.28	-3.01	0.00	0.00	0.00
65.19									

* Bright Zone !

Segment Leq : 65.19 dBA

Total Leq All Segments: 65.19 dBA

Results segment # 1: Scott St (night)

Source height = 1.50 m

Barrier height for grazing incidence

Source	!	Receiver	!	Barrier	!	Elevation of
Height (m)	!	Height (m)	!	Height (m)	!	Barrier Top (m)
1.50	!	1.50	!	64.50	!	64.50

ROAD (0.00 + 57.59 + 0.00) = 57.59 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									

0	90	0.00	60.88	0.00	-0.28	-3.01	0.00	0.00	-0.00
57.59*									
0	90	0.00	60.88	0.00	-0.28	-3.01	0.00	0.00	0.00
57.59									

* Bright Zone !

Segment Leq : 57.59 dBA

Total Leq All Segments: 57.59 dBA



RT/Custom data, segment # 1: LRT (day/night)

1 - 4-car SRT:

Traffic volume : 540/60 veh/TimePeriod
Speed : 70 km/h

Data for Segment # 1: LRT (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg
Wood depth : 0 (No woods.)
No of house rows : 0 / 0
Surface : 2 (Reflective ground surface)
Receiver source distance : 44.00 / 44.00 m
Receiver height : 1.50 / 1.50 m
Topography : 4 (Elevated; with barrier)
Barrier angle1 : -90.00 deg Angle2 : 90.00 deg
Barrier height : 0.00 m
Elevation : 6.00 m
Barrier receiver distance : 10.00 / 10.00 m
Source elevation : 56.00 m
Receiver elevation : 63.00 m
Barrier elevation : 0.00 m
Reference angle : 0.00

Results segment # 1: LRT (day)

Source height = 0.50 m

Barrier height for grazing incidence

Source Height (m)	Receiver Height (m)	Barrier Height (m)	Elevation of Barrier Top (m)
0.50	1.50	62.68	62.68

RT/Custom (0.00 + 58.76 + 0.00) = 58.76 dBA

Angle1	Angle2	Alpha	RefLeq	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.00	63.44	-4.67	0.00	0.00	0.00	-0.00	58.76*
-90	90	0.00	63.44	-4.67	0.00	0.00	0.00	0.00	58.76

* Bright Zone !

Segment Leq : 58.76 dBA

Total Leq All Segments: 58.76 dBA



Results segment # 1: LRT (night)

Source height = 0.50 m

Barrier height for grazing incidence

Source	!	Receiver	!	Barrier	!	Elevation of
Height (m)	!	Height (m)	!	Height (m)	!	Barrier Top (m)
0.50	!	1.50	!	62.68	!	62.68

RT/Custom (0.00 + 52.23 + 0.00) = 52.23 dBA

Angle1	Angle2	Alpha	RefLeq	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.00	56.91	-4.67	0.00	0.00	0.00	-0.00	52.23*
-90	90	0.00	56.91	-4.67	0.00	0.00	0.00	0.00	52.23

* Bright Zone !

Segment Leq : 52.23 dBA

Total Leq All Segments: 52.23 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 66.08
(NIGHT): 58.70



STAMSON 5.0 NORMAL REPORT Date: 12-09-2019 16:22:07
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: r5.te Time Period: Day/Night 16/8 hours
Description:

Road data, segment # 1: Scott St (day/night)

Car traffic volume : 12144/1056 veh/TimePeriod *
Medium truck volume : 966/84 veh/TimePeriod *
Heavy truck volume : 690/60 veh/TimePeriod *
Posted speed limit : 50 km/h
Road gradient : 0 %
Road pavement : 1 (Typical asphalt or concrete)

* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT): 15000
Percentage of Annual Growth : 0.00
Number of Years of Growth : 0.00
Medium Truck % of Total Volume : 7.00
Heavy Truck % of Total Volume : 5.00
Day (16 hrs) % of Total Volume : 92.00

Data for Segment # 1: Scott St (day/night)

Angle1 Angle2 : -46.00 deg 90.00 deg
Wood depth : 0 (No woods.)
No of house rows : 0 / 0
Surface : 2 (Reflective ground surface)
Receiver source distance : 17.00 / 17.00 m
Receiver height : 14.95 / 14.95 m
Topography : 2 (Flat/gentle slope; with barrier)
Barrier angle1 : 0.00 deg Angle2 : 90.00 deg
Barrier height : 17.00 m
Barrier receiver distance : 3.00 / 3.00 m
Source elevation : 65.00 m
Receiver elevation : 65.50 m
Barrier elevation : 65.50 m
Reference angle : 0.00

Road data, segment # 2: CHA 1 (day/night)

Car traffic volume : 12144/1056 veh/TimePeriod *
Medium truck volume : 966/84 veh/TimePeriod *
Heavy truck volume : 690/60 veh/TimePeriod *
Posted speed limit : 50 km/h
Road gradient : 0 %
Road pavement : 1 (Typical asphalt or concrete)



GRADIENTWIND

ENGINEERS & SCIENTISTS

* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT):	15000
Percentage of Annual Growth	: 0.00
Number of Years of Growth	: 0.00
Medium Truck % of Total Volume	: 7.00
Heavy Truck % of Total Volume	: 5.00
Day (16 hrs) % of Total Volume	: 92.00

Data for Segment # 2: CHA 1 (day/night)

Angle1	Angle2	: -90.00 deg	35.00 deg
Wood depth	:	0	(No woods.)
No of house rows	:	0 / 0	
Surface	:	2	(Reflective ground surface)
Receiver source distance	:	20.00 / 20.00	m
Receiver height	:	14.95 / 14.95	m
Topography	:	2	(Flat/gentle slope; with barrier)
Barrier angle1	:	-90.00 deg	Angle2 : -57.00 deg
Barrier height	:	17.00	m
Barrier receiver distance	:	3.00 / 3.00	m
Source elevation	:	65.00	m
Receiver elevation	:	65.50	m
Barrier elevation	:	65.50	m
Reference angle	:	0.00	

Road data, segment # 3: CHA 2 (day/night)

Car traffic volume	:	6477/563	veh/TimePeriod	*
Medium truck volume	:	515/45	veh/TimePeriod	*
Heavy truck volume	:	368/32	veh/TimePeriod	*
Posted speed limit	:	50	km/h	
Road gradient	:	0	%	
Road pavement	:	1	(Typical asphalt or concrete)	

* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT):	8000
Percentage of Annual Growth	: 0.00
Number of Years of Growth	: 0.00
Medium Truck % of Total Volume	: 7.00
Heavy Truck % of Total Volume	: 5.00
Day (16 hrs) % of Total Volume	: 92.00

Data for Segment # 3: CHA 2 (day/night)

Angle1	Angle2	: 42.00 deg	90.00 deg
Wood depth	:	0	(No woods.)
No of house rows	:	0 / 0	



GRADIENTWIND

ENGINEERS & SCIENTISTS

Surface : 2 (Reflective ground surface)
 Receiver source distance : 18.00 / 18.00 m
 Receiver height : 14.95 / 14.95 m
 Topography : 1 (Flat/gentle slope; no barrier)
 Reference angle : 0.00

Results segment # 1: Scott St (day)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	Receiver Height (m)	Barrier Height (m)	Elevation of Barrier Top (m)
1.50	14.95	12.49	77.99

ROAD (62.01 + 48.14 + 0.00) = 62.19 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									

-46	0	0.00	68.48	0.00	-0.54	-5.93	0.00	0.00	0.00
62.01									

0	90	0.00	68.48	0.00	-0.54	-3.01	0.00	0.00	-16.78
48.14									

Segment Leq : 62.19 dBA

Results segment # 2: CHA 1 (day)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	Receiver Height (m)	Barrier Height (m)	Elevation of Barrier Top (m)
1.50	14.95	12.86	78.36

ROAD (0.00 + 46.23 + 64.32) = 64.38 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									



```

-----
--
-90      -57      0.00  68.48   0.00  -1.25  -7.37   0.00   0.00 -13.63
46.23
-----

```

```

--
-57      35      0.00  68.48   0.00  -1.25  -2.91   0.00   0.00   0.00
64.32
-----

```

Segment Leq : 64.38 dBA

Results segment # 3: CHA 2 (day)

Source height = 1.50 m

ROAD (0.00 + 59.22 + 0.00) = 59.22 dBA

```

Angle1 Angle2  Alpha RefLeq  P.Adj  D.Adj  F.Adj  W.Adj  H.Adj  B.Adj
SubLeq
-----

```

```

--
  42      90      0.00  65.75   0.00  -0.79  -5.74   0.00   0.00   0.00
59.22
-----
--

```

Segment Leq : 59.22 dBA

Total Leq All Segments: 67.19 dBA

Results segment # 1: Scott St (night)

Source height = 1.50 m

Barrier height for grazing incidence

```

-----
Source      ! Receiver      ! Barrier      ! Elevation of
Height      (m) ! Height      (m) ! Height      (m) ! Barrier Top   (m)
-----+-----+-----+-----
          1.50 !       14.95 !       12.49 !       77.99

```

ROAD (54.41 + 40.55 + 0.00) = 54.59 dBA

```

Angle1 Angle2  Alpha RefLeq  P.Adj  D.Adj  F.Adj  W.Adj  H.Adj  B.Adj
SubLeq
-----

```

--



GRADIENTWIND

ENGINEERS & SCIENTISTS

-46	0	0.00	60.88	0.00	-0.54	-5.93	0.00	0.00	0.00
-----	---	------	-------	------	-------	-------	------	------	------

54.41

0	90	0.00	60.88	0.00	-0.54	-3.01	0.00	0.00	-16.78
---	----	------	-------	------	-------	-------	------	------	--------

40.55

Segment Leq : 54.59 dBA

Results segment # 2: CHA 1 (night)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	! Receiver ! Height (m)	! Barrier ! Height (m)	! Elevation of ! Barrier Top (m)
1.50	!	14.95	!
		12.86	!
			78.36

ROAD (0.00 + 38.64 + 56.72) = 56.79 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									

-90	-57	0.00	60.88	0.00	-1.25	-7.37	0.00	0.00	-13.63
-----	-----	------	-------	------	-------	-------	------	------	--------

38.64

-57	35	0.00	60.88	0.00	-1.25	-2.91	0.00	0.00	0.00
-----	----	------	-------	------	-------	-------	------	------	------

56.72

Segment Leq : 56.79 dBA

Results segment # 3: CHA 2 (night)

Source height = 1.50 m

ROAD (0.00 + 51.62 + 0.00) = 51.62 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									



GRADIENTWIND

ENGINEERS & SCIENTISTS

42 90 0.00 58.16 0.00 -0.79 -5.74 0.00 0.00 0.00
51.62

--

Segment Leq : 51.62 dBA

Total Leq All Segments: 59.59 dBA

RT/Custom data, segment # 1: LRT (day/night)

1 - 4-car SRT:

Traffic volume : 540/60 veh/TimePeriod
Speed : 70 km/h

Data for Segment # 1: LRT (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg
Wood depth : 0 (No woods.)
No of house rows : 0 / 0
Surface : 2 (Reflective ground surface)
Receiver source distance : 44.00 / 44.00 m
Receiver height : 14.95 / 14.95 m
Topography : 4 (Elevated; with barrier)
Barrier angle1 : -90.00 deg Angle2 : 90.00 deg
Barrier height : 0.00 m
Elevation : 6.00 m
Barrier receiver distance : 10.00 / 10.00 m
Source elevation : 56.00 m
Receiver elevation : 65.50 m
Barrier elevation : 0.00 m
Reference angle : 0.00

Results segment # 1: LRT (day)

Source height = 0.50 m

Barrier height for grazing incidence

Source ! Receiver ! Barrier ! Elevation of
Height (m) ! Height (m) ! Height (m) ! Barrier Top (m)
-----+-----+-----+-----
0.50 ! 14.95 ! 75.01 ! 75.01

RT/Custom (0.00 + 58.76 + 0.00) = 58.76 dBA

Angle1 Angle2 Alpha RefLeq D.Adj F.Adj W.Adj H.Adj B.Adj SubLeq

-90 90 0.00 63.44 -4.67 0.00 0.00 0.00 -0.00 58.76*



-90	90	0.00	63.44	-4.67	0.00	0.00	0.00	0.00	58.76
-----	----	------	-------	-------	------	------	------	------	-------

* Bright Zone !

Segment Leq : 58.76 dBA

Total Leq All Segments: 58.76 dBA

Results segment # 1: LRT (night)

Source height = 0.50 m

Barrier height for grazing incidence

Source Height (m)	! Receiver ! Height (m)	! Barrier ! Height (m)	! Elevation of ! Barrier Top (m)
0.50	!	14.95	!
		75.01	!
			75.01

RT/Custom (0.00 + 52.23 + 0.00) = 52.23 dBA

Angle1	Angle2	Alpha	RefLeq	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.00	56.91	-4.67	0.00	0.00	0.00	-0.00	52.23*
-90	90	0.00	56.91	-4.67	0.00	0.00	0.00	0.00	52.23

* Bright Zone !

Segment Leq : 52.23 dBA

Total Leq All Segments: 52.23 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 67.77
(NIGHT): 60.32



GRADIENTWIND

ENGINEERS & SCIENTISTS

STAMSON 5.0 NORMAL REPORT Date: 12-09-2019 16:22:16
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: r6.te Time Period: Day/Night 16/8 hours
Description:

Road data, segment # 1: Scott St (day/night)

Car traffic volume : 12144/1056 veh/TimePeriod *
Medium truck volume : 966/84 veh/TimePeriod *
Heavy truck volume : 690/60 veh/TimePeriod *
Posted speed limit : 50 km/h
Road gradient : 0 %
Road pavement : 1 (Typical asphalt or concrete)

* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT): 15000
Percentage of Annual Growth : 0.00
Number of Years of Growth : 0.00
Medium Truck % of Total Volume : 7.00
Heavy Truck % of Total Volume : 5.00
Day (16 hrs) % of Total Volume : 92.00

Data for Segment # 1: Scott St (day/night)

Angle1 Angle2 : -58.00 deg 90.00 deg
Wood depth : 0 (No woods.)
No of house rows : 0 / 0
Surface : 2 (Reflective ground surface)
Receiver source distance : 15.00 / 15.00 m
Receiver height : 14.95 / 14.95 m
Topography : 2 (Flat/gentle slope; with barrier)
Barrier angle1 : -58.00 deg Angle2 : 90.00 deg
Barrier height : 0.00 m
Barrier receiver distance : 10.00 / 10.00 m
Source elevation : 65.00 m
Receiver elevation : 65.50 m
Barrier elevation : 0.00 m
Reference angle : 0.00

Road data, segment # 2: CHA 1 (day/night)

Car traffic volume : 12144/1056 veh/TimePeriod *
Medium truck volume : 966/84 veh/TimePeriod *
Heavy truck volume : 690/60 veh/TimePeriod *
Posted speed limit : 50 km/h
Road gradient : 0 %
Road pavement : 1 (Typical asphalt or concrete)



* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT):	15000
Percentage of Annual Growth	: 0.00
Number of Years of Growth	: 0.00
Medium Truck % of Total Volume	: 7.00
Heavy Truck % of Total Volume	: 5.00
Day (16 hrs) % of Total Volume	: 92.00

Data for Segment # 2: CHA 1 (day/night)

Angle1	Angle2	:	0.00 deg	24.00 deg
Wood depth	:	0	(No woods.)	
No of house rows	:	0 / 0		
Surface	:	2	(Reflective ground surface)	
Receiver source distance	:	24.00 / 24.00	m	
Receiver height	:	14.95 / 14.95	m	
Topography	:	2	(Flat/gentle slope; with barrier)	
Barrier angle1	:	0.00 deg	Angle2 :	24.00 deg
Barrier height	:	0.00 m		
Barrier receiver distance	:	10.00 / 10.00	m	
Source elevation	:	65.00 m		
Receiver elevation	:	65.50 m		
Barrier elevation	:	0.00 m		
Reference angle	:	0.00		

Road data, segment # 3: CHA 2 (day/night)

Car traffic volume	:	6477/563	veh/TimePeriod	*
Medium truck volume	:	515/45	veh/TimePeriod	*
Heavy truck volume	:	368/32	veh/TimePeriod	*
Posted speed limit	:	50 km/h		
Road gradient	:	0 %		
Road pavement	:	1	(Typical asphalt or concrete)	

* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT):	8000
Percentage of Annual Growth	: 0.00
Number of Years of Growth	: 0.00
Medium Truck % of Total Volume	: 7.00
Heavy Truck % of Total Volume	: 5.00
Day (16 hrs) % of Total Volume	: 92.00

Data for Segment # 3: CHA 2 (day/night)

Angle1	Angle2	:	31.00 deg	90.00 deg
Wood depth	:	0	(No woods.)	
No of house rows	:	0 / 0		



GRADIENTWIND

ENGINEERS & SCIENTISTS

```

Surface                :      2      (Reflective ground surface)
Receiver source distance : 23.00 / 23.00 m
Receiver height         : 14.95 / 14.95 m
Topography              :      2      (Flat/gentle slope; with barrier)
Barrier angle1          : 31.00 deg   Angle2 : 90.00 deg
Barrier height          : 0.00 m
Barrier receiver distance : 10.00 / 10.00 m
Source elevation        : 65.00 m
Receiver elevation      : 65.50 m
Barrier elevation       : 0.00 m
Reference angle         : 0.00
  
```

Results segment # 1: Scott St (day)

Source height = 1.50 m

Barrier height for grazing incidence

```

-----
Source      ! Receiver      ! Barrier      ! Elevation of
Height (m) ! Height (m) ! Height (m) ! Barrier Top (m)
-----+-----+-----+-----
          1.50 !          14.95 !          71.15 !          71.15
  
```

ROAD (0.00 + 67.63 + 0.00) = 67.63 dBA

```

Angle1 Angle2 Alpha RefLeq P.Adj D.Adj F.Adj W.Adj H.Adj B.Adj
SubLeq
  
```

```

-----
--
-58      90    0.00  68.48    0.00    0.00   -0.85    0.00    0.00   -0.00
67.63*
-58      90    0.00  68.48    0.00    0.00   -0.85    0.00    0.00    0.00
67.63
-----
--
  
```

* Bright Zone !

Segment Leq : 67.63 dBA

Results segment # 2: CHA 1 (day)

Source height = 1.50 m

Barrier height for grazing incidence

```

-----
Source      ! Receiver      ! Barrier      ! Elevation of
Height (m) ! Height (m) ! Height (m) ! Barrier Top (m)
  
```



-----+-----+-----+-----										
	1.50 !	14.95 !	74.64 !	74.64						
ROAD (0.00 + 57.69 + 0.00) = 57.69 dBA										
Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	
SubLeq										

--										
0	24	0.00	68.48	0.00	-2.04	-8.75	0.00	0.00	0.00	
57.69*										
0	24	0.00	68.48	0.00	-2.04	-8.75	0.00	0.00	0.00	
57.69										

--										

* Bright Zone !

Segment Leq : 57.69 dBA

Results segment # 3: CHA 2 (day)

Source height = 1.50 m

Barrier height for grazing incidence

Source	! Receiver	! Barrier	! Elevation of							
Height (m)	! Height (m)	! Height (m)	! Barrier Top (m)							
-----+-----+-----+-----										
1.50 !	14.95 !	74.38 !	74.38							
ROAD (0.00 + 59.05 + 0.00) = 59.05 dBA										
Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	
SubLeq										

--										
31	90	0.00	65.75	0.00	-1.86	-4.84	0.00	0.00	-0.00	
59.05*										
31	90	0.00	65.75	0.00	-1.86	-4.84	0.00	0.00	0.00	
59.05										

--										

* Bright Zone !

Segment Leq : 59.05 dBA

Total Leq All Segments: 68.56 dBA



Results segment # 1: Scott St (night)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	Receiver Height (m)	Barrier Height (m)	Elevation of Barrier Top (m)
1.50	14.95	71.15	71.15

ROAD (0.00 + 60.03 + 0.00) = 60.03 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									

-58	90	0.00	60.88	0.00	0.00	-0.85	0.00	0.00	-0.00
60.03*									
-58	90	0.00	60.88	0.00	0.00	-0.85	0.00	0.00	0.00
60.03									

* Bright Zone !

Segment Leq : 60.03 dBA

Results segment # 2: CHA 1 (night)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	Receiver Height (m)	Barrier Height (m)	Elevation of Barrier Top (m)
1.50	14.95	74.64	74.64

ROAD (0.00 + 50.09 + 0.00) = 50.09 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									

0	24	0.00	60.88	0.00	-2.04	-8.75	0.00	0.00	0.00
50.09*									
0	24	0.00	60.88	0.00	-2.04	-8.75	0.00	0.00	0.00
50.09									



--

* Bright Zone !

Segment Leq : 50.09 dBA

Results segment # 3: CHA 2 (night)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	Receiver Height (m)	Barrier Height (m)	Elevation of Barrier Top (m)
1.50	14.95	74.38	74.38

ROAD (0.00 + 51.46 + 0.00) = 51.46 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									

31	90	0.00	58.16	0.00	-1.86	-4.84	0.00	0.00	-0.00
51.46*									
31	90	0.00	58.16	0.00	-1.86	-4.84	0.00	0.00	0.00
51.46									

* Bright Zone !

Segment Leq : 51.46 dBA

Total Leq All Segments: 60.97 dBA

RT/Custom data, segment # 1: LRT (day/night)

1 - 4-car SRT:

Traffic volume : 540/60 veh/TimePeriod
Speed : 70 km/h

Data for Segment # 1: LRT (day/night)

Angle1	Angle2	: -90.00 deg	90.00 deg
Wood depth		: 0	(No woods.)
No of house rows		: 0 / 0	
Surface		: 2	(Reflective ground surface)



GRADIENTWIND

ENGINEERS & SCIENTISTS

Receiver source distance : 40.00 / 40.00 m
 Receiver height : 14.95 / 14.95 m
 Topography : 4 (Elevated; with barrier)
 Barrier angle1 : -90.00 deg Angle2 : 90.00 deg
 Barrier height : 0.00 m
 Elevation : 6.00 m
 Barrier receiver distance : 10.00 / 10.00 m
 Source elevation : 56.00 m
 Receiver elevation : 65.50 m
 Barrier elevation : 0.00 m
 Reference angle : 0.00

Results segment # 1: LRT (day)

Source height = 0.50 m

Barrier height for grazing incidence

Source Height (m)	Receiver Height (m)	Barrier Height (m)	Elevation of Barrier Top (m)
0.50	14.95	74.46	74.46

RT/Custom (0.00 + 59.18 + 0.00) = 59.18 dBA

Angle1	Angle2	Alpha	RefLeq	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.00	63.44	-4.26	0.00	0.00	0.00	-0.00	59.18*
-90	90	0.00	63.44	-4.26	0.00	0.00	0.00	0.00	59.18

* Bright Zone !

Segment Leq : 59.18 dBA

Total Leq All Segments: 59.18 dBA

Results segment # 1: LRT (night)

Source height = 0.50 m

Barrier height for grazing incidence

Source Height (m)	Receiver Height (m)	Barrier Height (m)	Elevation of Barrier Top (m)
0.50	14.95	74.46	74.46



RT/Custom (0.00 + 52.65 + 0.00) = 52.65 dBA

Angle1	Angle2	Alpha	RefLeq	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.00	56.91	-4.26	0.00	0.00	0.00	-0.00	52.64*
-90	90	0.00	56.91	-4.26	0.00	0.00	0.00	0.00	52.65

* Bright Zone !

Segment Leq : 52.65 dBA

Total Leq All Segments: 52.65 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 69.04
(NIGHT): 61.56



GRADIENTWIND

ENGINEERS & SCIENTISTS

STAMSON 5.0 NORMAL REPORT Date: 12-09-2019 16:22:30
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: r7.te Time Period: Day/Night 16/8 hours
Description:

Road data, segment # 1: Scott St (day/night)

Car traffic volume : 12144/1056 veh/TimePeriod *
Medium truck volume : 966/84 veh/TimePeriod *
Heavy truck volume : 690/60 veh/TimePeriod *
Posted speed limit : 50 km/h
Road gradient : 0 %
Road pavement : 1 (Typical asphalt or concrete)

* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT): 15000
Percentage of Annual Growth : 0.00
Number of Years of Growth : 0.00
Medium Truck % of Total Volume : 7.00
Heavy Truck % of Total Volume : 5.00
Day (16 hrs) % of Total Volume : 92.00

Data for Segment # 1: Scott St (day/night)

Angle1 Angle2 : 0.00 deg 90.00 deg
Wood depth : 0 (No woods.)
No of house rows : 0 / 0
Surface : 2 (Reflective ground surface)
Receiver source distance : 16.00 / 16.00 m
Receiver height : 17.45 / 17.45 m
Topography : 2 (Flat/gentle slope; with barrier)
Barrier angle1 : 0.00 deg Angle2 : 90.00 deg
Barrier height : 0.00 m
Barrier receiver distance : 10.00 / 10.00 m
Source elevation : 63.00 m
Receiver elevation : 63.00 m
Barrier elevation : 0.00 m
Reference angle : 0.00

Results segment # 1: Scott St (day)

Source height = 1.50 m

Barrier height for grazing incidence

Source ! Receiver ! Barrier ! Elevation of



GRADIENTWIND

ENGINEERS & SCIENTISTS

Height (m)	!	Height (m)	!	Height (m)	!	Barrier Top (m)
1.50	!	17.45	!	70.48	!	70.48

ROAD (0.00 + 65.19 + 0.00) = 65.19 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									

0	90	0.00	68.48	0.00	-0.28	-3.01	0.00	0.00	-0.00
65.19*									
0	90	0.00	68.48	0.00	-0.28	-3.01	0.00	0.00	0.00
65.19									

* Bright Zone !

Segment Leq : 65.19 dBA

Total Leq All Segments: 65.19 dBA

Results segment # 1: Scott St (night)

Source height = 1.50 m

Barrier height for grazing incidence

Source	!	Receiver	!	Barrier	!	Elevation of
Height (m)	!	Height (m)	!	Height (m)	!	Barrier Top (m)
1.50	!	17.45	!	70.48	!	70.48

ROAD (0.00 + 57.59 + 0.00) = 57.59 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									

0	90	0.00	60.88	0.00	-0.28	-3.01	0.00	0.00	-0.00
57.59*									
0	90	0.00	60.88	0.00	-0.28	-3.01	0.00	0.00	0.00
57.59									

* Bright Zone !

Segment Leq : 57.59 dBA



GRADIENTWIND

ENGINEERS & SCIENTISTS

Total Leq All Segments: 57.59 dBA

RT/Custom data, segment # 1: LRT (day/night)

1 - 4-car SRT:

Traffic volume : 540/60 veh/TimePeriod
Speed : 70 km/h

Data for Segment # 1: LRT (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg
Wood depth : 0 (No woods.)
No of house rows : 0 / 0
Surface : 2 (Reflective ground surface)
Receiver source distance : 44.00 / 44.00 m
Receiver height : 17.45 / 17.45 m
Topography : 4 (Elevated; with barrier)
Barrier angle1 : -90.00 deg Angle2 : 90.00 deg
Barrier height : 0.00 m
Elevation : 6.00 m
Barrier receiver distance : 10.00 / 10.00 m
Source elevation : 56.00 m
Receiver elevation : 63.00 m
Barrier elevation : 0.00 m
Reference angle : 0.00

Results segment # 1: LRT (day)

Source height = 0.50 m

Barrier height for grazing incidence

Source ! Receiver ! Barrier ! Elevation of
Height (m) ! Height (m) ! Height (m) ! Barrier Top (m)
-----+-----+-----+-----
0.50 ! 17.45 ! 75.01 ! 75.01

RT/Custom (0.00 + 58.76 + 0.00) = 58.76 dBA

Angle1	Angle2	Alpha	RefLeq	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.00	63.44	-4.67	0.00	0.00	0.00	-0.00	58.76*
-90	90	0.00	63.44	-4.67	0.00	0.00	0.00	0.00	58.76

* Bright Zone !

Segment Leq : 58.76 dBA

Total Leq All Segments: 58.76 dBA



Results segment # 1: LRT (night)

Source height = 0.50 m

Barrier height for grazing incidence

Source Height (m)	Receiver Height (m)	Barrier Height (m)	Elevation of Barrier Top (m)
0.50	17.45	75.01	75.01

RT/Custom (0.00 + 52.23 + 0.00) = 52.23 dBA

Angle1	Angle2	Alpha	RefLeq	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.00	56.91	-4.67	0.00	0.00	0.00	-0.00	52.23*
-90	90	0.00	56.91	-4.67	0.00	0.00	0.00	0.00	52.23

* Bright Zone !

Segment Leq : 52.23 dBA

Total Leq All Segments: 52.23 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 66.08
(NIGHT): 58.70



GRADIENTWIND

ENGINEERS & SCIENTISTS

STAMSON 5.0 NORMAL REPORT Date: 12-09-2019 16:22:40
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: r8.te Time Period: Day/Night 16/8 hours
Description:

Road data, segment # 1: Scott St (day/night)

Car traffic volume : 12144/1056 veh/TimePeriod *
Medium truck volume : 966/84 veh/TimePeriod *
Heavy truck volume : 690/60 veh/TimePeriod *
Posted speed limit : 50 km/h
Road gradient : 0 %
Road pavement : 1 (Typical asphalt or concrete)

* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT): 15000
Percentage of Annual Growth : 0.00
Number of Years of Growth : 0.00
Medium Truck % of Total Volume : 7.00
Heavy Truck % of Total Volume : 5.00
Day (16 hrs) % of Total Volume : 92.00

Data for Segment # 1: Scott St (day/night)

Angle1 Angle2 : -46.00 deg 90.00 deg
Wood depth : 0 (No woods.)
No of house rows : 0 / 0
Surface : 2 (Reflective ground surface)
Receiver source distance : 17.00 / 17.00 m
Receiver height : 69.45 / 69.45 m
Topography : 2 (Flat/gentle slope; with barrier)
Barrier angle1 : 0.00 deg Angle2 : 90.00 deg
Barrier height : 17.00 m
Barrier receiver distance : 3.00 / 3.00 m
Source elevation : 65.00 m
Receiver elevation : 65.50 m
Barrier elevation : 65.50 m
Reference angle : 0.00

Road data, segment # 2: CHA 1 (day/night)

Car traffic volume : 12144/1056 veh/TimePeriod *
Medium truck volume : 966/84 veh/TimePeriod *
Heavy truck volume : 690/60 veh/TimePeriod *
Posted speed limit : 50 km/h
Road gradient : 0 %
Road pavement : 1 (Typical asphalt or concrete)



* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT):	15000
Percentage of Annual Growth	: 0.00
Number of Years of Growth	: 0.00
Medium Truck % of Total Volume	: 7.00
Heavy Truck % of Total Volume	: 5.00
Day (16 hrs) % of Total Volume	: 92.00

Data for Segment # 2: CHA 1 (day/night)

Angle1	Angle2	: -90.00 deg	35.00 deg
Wood depth	:	0	(No woods.)
No of house rows	:	0 / 0	
Surface	:	2	(Reflective ground surface)
Receiver source distance	:	20.00 / 20.00	m
Receiver height	:	69.45 / 69.45	m
Topography	:	2	(Flat/gentle slope; with barrier)
Barrier angle1	:	-90.00 deg	Angle2 : -57.00 deg
Barrier height	:	17.00	m
Barrier receiver distance	:	3.00 / 3.00	m
Source elevation	:	65.00	m
Receiver elevation	:	65.50	m
Barrier elevation	:	65.50	m
Reference angle	:	0.00	

Road data, segment # 3: CHA 2 (day/night)

Car traffic volume	:	6477/563	veh/TimePeriod	*
Medium truck volume	:	515/45	veh/TimePeriod	*
Heavy truck volume	:	368/32	veh/TimePeriod	*
Posted speed limit	:	50	km/h	
Road gradient	:	0	%	
Road pavement	:	1	(Typical asphalt or concrete)	

* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT):	8000
Percentage of Annual Growth	: 0.00
Number of Years of Growth	: 0.00
Medium Truck % of Total Volume	: 7.00
Heavy Truck % of Total Volume	: 5.00
Day (16 hrs) % of Total Volume	: 92.00

Data for Segment # 3: CHA 2 (day/night)

Angle1	Angle2	: 42.00 deg	90.00 deg
Wood depth	:	0	(No woods.)
No of house rows	:	0 / 0	



GRADIENTWIND

ENGINEERS & SCIENTISTS

Surface : 2 (Reflective ground surface)
 Receiver source distance : 18.00 / 18.00 m
 Receiver height : 69.45 / 69.45 m
 Topography : 1 (Flat/gentle slope; no barrier)
 Reference angle : 0.00

Results segment # 1: Scott St (day)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	Receiver Height (m)	Barrier Height (m)	Elevation of Barrier Top (m)
1.50	69.45	57.37	122.87

ROAD (62.01 + 64.93 + 0.00) = 66.72 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									

-46	0	0.00	68.48	0.00	-0.54	-5.93	0.00	0.00	0.00
62.01									

0	90	0.00	68.48	0.00	-0.54	-3.01	0.00	0.00	-0.02
64.90*									

0	90	0.00	68.48	0.00	-0.54	-3.01	0.00	0.00	0.00
64.93									

* Bright Zone !

Segment Leq : 66.72 dBA

Results segment # 2: CHA 1 (day)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	Receiver Height (m)	Barrier Height (m)	Elevation of Barrier Top (m)
1.50	69.45	59.18	124.68



ROAD (0.00 + 59.86 + 64.32) = 65.65 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									

-90	-57	0.00	68.48	0.00	-1.25	-7.37	0.00	0.00	-0.05
59.81*									
-90	-57	0.00	68.48	0.00	-1.25	-7.37	0.00	0.00	0.00
59.86									

-57	35	0.00	68.48	0.00	-1.25	-2.91	0.00	0.00	0.00
64.32									

* Bright Zone !

Segment Leq : 65.65 dBA

Results segment # 3: CHA 2 (day)

Source height = 1.50 m

ROAD (0.00 + 59.22 + 0.00) = 59.22 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									

42	90	0.00	65.75	0.00	-0.79	-5.74	0.00	0.00	0.00
59.22									

Segment Leq : 59.22 dBA

Total Leq All Segments: 69.64 dBA

Results segment # 1: Scott St (night)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	Receiver Height (m)	Barrier Height (m)	Elevation of Barrier Top (m)



GRADIENTWIND

ENGINEERS & SCIENTISTS

1.50	!	69.45	!	57.37	!	122.87				
ROAD (54.41 + 57.33 + 0.00) = 59.12 dBA										
Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	
SubLeq										
--										
-46	0	0.00	60.88	0.00	-0.54	-5.93	0.00	0.00	0.00	
54.41										
--										
0	90	0.00	60.88	0.00	-0.54	-3.01	0.00	0.00	-0.02	
57.30*										
0	90	0.00	60.88	0.00	-0.54	-3.01	0.00	0.00	0.00	
57.33										
--										

* Bright Zone !

Segment Leq : 59.12 dBA

Results segment # 2: CHA 1 (night)

Source height = 1.50 m

Barrier height for grazing incidence

Source	!	Receiver	!	Barrier	!	Elevation of				
Height (m)	!	Height (m)	!	Height (m)	!	Barrier Top (m)				
1.50	!	69.45	!	59.18	!	124.68				

ROAD (0.00 + 52.27 + 56.72) = 58.05 dBA										
Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	
SubLeq										
--										
-90	-57	0.00	60.88	0.00	-1.25	-7.37	0.00	0.00	-0.05	
52.22*										
-90	-57	0.00	60.88	0.00	-1.25	-7.37	0.00	0.00	0.00	
52.27										
--										
-57	35	0.00	60.88	0.00	-1.25	-2.91	0.00	0.00	0.00	
56.72										
--										



* Bright Zone !

Segment Leq : 58.05 dBA

Results segment # 3: CHA 2 (night)

Source height = 1.50 m

ROAD (0.00 + 51.62 + 0.00) = 51.62 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									

42	90	0.00	58.16	0.00	-0.79	-5.74	0.00	0.00	0.00
51.62									

Segment Leq : 51.62 dBA

Total Leq All Segments: 62.04 dBA

RT/Custom data, segment # 1: LRT (day/night)

1 - 4-car SRT:

Traffic volume : 540/60 veh/TimePeriod
Speed : 70 km/h

Data for Segment # 1: LRT (day/night)

Angle1	Angle2	: -90.00 deg	90.00 deg
Wood depth		: 0	(No woods.)
No of house rows		: 0 / 0	
Surface		: 2	(Reflective ground surface)
Receiver source distance		: 44.00 / 44.00 m	
Receiver height		: 69.45 / 69.45 m	
Topography		: 4	(Elevated; with barrier)
Barrier angle1		: -90.00 deg	Angle2 : 90.00 deg
Barrier height		: 0.00 m	
Elevation		: 6.00 m	
Barrier receiver distance		: 10.00 / 10.00 m	
Source elevation		: 56.00 m	
Receiver elevation		: 65.50 m	
Barrier elevation		: 0.00 m	
Reference angle		: 0.00	



Results segment # 1: LRT (day)

Source height = 0.50 m

Barrier height for grazing incidence

Source Height (m)	Receiver Height (m)	Barrier Height (m)	Elevation of Barrier Top (m)
0.50	69.45	117.12	117.12

RT/Custom (0.00 + 58.76 + 0.00) = 58.76 dBA

Angle1	Angle2	Alpha	RefLeq	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.00	63.44	-4.67	0.00	0.00	0.00	-0.00	58.76*
-90	90	0.00	63.44	-4.67	0.00	0.00	0.00	0.00	58.76

* Bright Zone !

Segment Leq : 58.76 dBA

Total Leq All Segments: 58.76 dBA

Results segment # 1: LRT (night)

Source height = 0.50 m

Barrier height for grazing incidence

Source Height (m)	Receiver Height (m)	Barrier Height (m)	Elevation of Barrier Top (m)
0.50	69.45	117.12	117.12

RT/Custom (0.00 + 52.23 + 0.00) = 52.23 dBA

Angle1	Angle2	Alpha	RefLeq	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.00	56.91	-4.67	0.00	0.00	0.00	-0.00	52.23*
-90	90	0.00	56.91	-4.67	0.00	0.00	0.00	0.00	52.23

* Bright Zone !

Segment Leq : 52.23 dBA

Total Leq All Segments: 52.23 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 69.98
(NIGHT): 62.47



GRADIENTWIND

ENGINEERS & SCIENTISTS

STAMSON 5.0 NORMAL REPORT Date: 12-09-2019 16:22:51
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: r9.te Time Period: Day/Night 16/8 hours
Description:

Road data, segment # 1: Scott St (day/night)

Car traffic volume : 12144/1056 veh/TimePeriod *
Medium truck volume : 966/84 veh/TimePeriod *
Heavy truck volume : 690/60 veh/TimePeriod *
Posted speed limit : 50 km/h
Road gradient : 0 %
Road pavement : 1 (Typical asphalt or concrete)

* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT): 15000
Percentage of Annual Growth : 0.00
Number of Years of Growth : 0.00
Medium Truck % of Total Volume : 7.00
Heavy Truck % of Total Volume : 5.00
Day (16 hrs) % of Total Volume : 92.00

Data for Segment # 1: Scott St (day/night)

Angle1 Angle2 : -54.00 deg 90.00 deg
Wood depth : 0 (No woods.)
No of house rows : 0 / 0
Surface : 2 (Reflective ground surface)
Receiver source distance : 16.00 / 16.00 m
Receiver height : 69.45 / 69.45 m
Topography : 2 (Flat/gentle slope; with barrier)
Barrier angle1 : -54.00 deg Angle2 : 90.00 deg
Barrier height : 0.00 m
Barrier receiver distance : 10.00 / 10.00 m
Source elevation : 65.00 m
Receiver elevation : 65.50 m
Barrier elevation : 0.00 m
Reference angle : 0.00

Road data, segment # 2: CHA 1 (day/night)

Car traffic volume : 12144/1056 veh/TimePeriod *
Medium truck volume : 966/84 veh/TimePeriod *
Heavy truck volume : 690/60 veh/TimePeriod *
Posted speed limit : 50 km/h
Road gradient : 0 %
Road pavement : 1 (Typical asphalt or concrete)



GRADIENTWIND

ENGINEERS & SCIENTISTS

* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT):	15000
Percentage of Annual Growth	: 0.00
Number of Years of Growth	: 0.00
Medium Truck % of Total Volume	: 7.00
Heavy Truck % of Total Volume	: 5.00
Day (16 hrs) % of Total Volume	: 92.00

Data for Segment # 2: CHA 1 (day/night)

Angle1	Angle2	:	0.00 deg	27.00 deg
Wood depth	:	0	(No woods.)	
No of house rows	:	0 / 0		
Surface	:	2	(Reflective ground surface)	
Receiver source distance	:	25.00 / 25.00	m	
Receiver height	:	69.45 / 69.45	m	
Topography	:	2	(Flat/gentle slope; with barrier)	
Barrier angle1	:	0.00 deg	Angle2 :	27.00 deg
Barrier height	:	0.00	m	
Barrier receiver distance	:	10.00 / 10.00	m	
Source elevation	:	65.00	m	
Receiver elevation	:	65.50	m	
Barrier elevation	:	0.00	m	
Reference angle	:	0.00		

Road data, segment # 3: CHA 2 (day/night)

Car traffic volume	:	6477/563	veh/TimePeriod	*
Medium truck volume	:	515/45	veh/TimePeriod	*
Heavy truck volume	:	368/32	veh/TimePeriod	*
Posted speed limit	:	50 km/h		
Road gradient	:	0 %		
Road pavement	:	1	(Typical asphalt or concrete)	

* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT):	8000
Percentage of Annual Growth	: 0.00
Number of Years of Growth	: 0.00
Medium Truck % of Total Volume	: 7.00
Heavy Truck % of Total Volume	: 5.00
Day (16 hrs) % of Total Volume	: 92.00

Data for Segment # 3: CHA 2 (day/night)

Angle1	Angle2	:	35.00 deg	90.00 deg
Wood depth	:	0	(No woods.)	
No of house rows	:	0 / 0		



GRADIENTWIND

ENGINEERS & SCIENTISTS

```

Surface                :      2      (Reflective ground surface)
Receiver source distance : 23.00 / 23.00 m
Receiver height         : 69.45 / 69.45 m
Topography              :      2      (Flat/gentle slope; with barrier)
Barrier angle1          : 35.00 deg   Angle2 : 90.00 deg
Barrier height          : 0.00 m
Barrier receiver distance : 10.00 / 10.00 m
Source elevation         : 65.00 m
Receiver elevation       : 65.50 m
Barrier elevation        : 0.00 m
Reference angle         : 0.00
  
```

Results segment # 1: Scott St (day)

Source height = 1.50 m

Barrier height for grazing incidence

```

Source      ! Receiver      ! Barrier      ! Elevation of
Height (m) ! Height (m) ! Height (m) ! Barrier Top (m)
-----+-----+-----+-----
      1.50 !      69.45 !      92.17 !      92.17
  
```

ROAD (0.00 + 67.23 + 0.00) = 67.23 dBA

```

Angle1 Angle2  Alpha RefLeq  P.Adj  D.Adj  F.Adj  W.Adj  H.Adj  B.Adj
SubLeq
  
```

```

-----
--
-54      90    0.00  68.48    0.00  -0.28  -0.97    0.00    0.00   -0.00
67.23*
-54      90    0.00  68.48    0.00  -0.28  -0.97    0.00    0.00    0.00
67.23
-----
--
  
```

* Bright Zone !

Segment Leq : 67.23 dBA

Results segment # 2: CHA 1 (day)

Source height = 1.50 m

Barrier height for grazing incidence

```

Source      ! Receiver      ! Barrier      ! Elevation of
Height (m) ! Height (m) ! Height (m) ! Barrier Top (m)
  
```



1.50	!	69.45	!	107.57	!	107.57				
ROAD (0.00 + 58.02 + 0.00) = 58.02 dBA										
Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq

--										
0	27	0.00	68.48	0.00	-2.22	-8.24	0.00	0.00	0.00	
58.02*										
0	27	0.00	68.48	0.00	-2.22	-8.24	0.00	0.00	0.00	
58.02										

--										

* Bright Zone !

Segment Leq : 58.02 dBA

Results segment # 3: CHA 2 (day)

Source height = 1.50 m

Barrier height for grazing incidence

Source	!	Receiver	!	Barrier	!	Elevation of				
Height	(m)	Height	(m)	Height	(m)	Barrier Top	(m)			
1.50	!	69.45	!	105.19	!	105.19				
ROAD (0.00 + 58.74 + 0.00) = 58.74 dBA										
Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq

--										
35	90	0.00	65.75	0.00	-1.86	-5.15	0.00	0.00	-0.00	
58.74*										
35	90	0.00	65.75	0.00	-1.86	-5.15	0.00	0.00	0.00	
58.74										

--										

* Bright Zone !

Segment Leq : 58.74 dBA

Total Leq All Segments: 68.24 dBA



Results segment # 1: Scott St (night)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	Receiver Height (m)	Barrier Height (m)	Elevation of Barrier Top (m)
1.50	69.45	92.17	92.17

ROAD (0.00 + 59.63 + 0.00) = 59.63 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									

-54	90	0.00	60.88	0.00	-0.28	-0.97	0.00	0.00	-0.00
59.63*									
-54	90	0.00	60.88	0.00	-0.28	-0.97	0.00	0.00	0.00
59.63									

* Bright Zone !

Segment Leq : 59.63 dBA

Results segment # 2: CHA 1 (night)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	Receiver Height (m)	Barrier Height (m)	Elevation of Barrier Top (m)
1.50	69.45	107.57	107.57

ROAD (0.00 + 50.43 + 0.00) = 50.43 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									

0	27	0.00	60.88	0.00	-2.22	-8.24	0.00	0.00	0.00
50.43*									
0	27	0.00	60.88	0.00	-2.22	-8.24	0.00	0.00	0.00
50.43									



--

* Bright Zone !

Segment Leq : 50.43 dBA

Results segment # 3: CHA 2 (night)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	Receiver Height (m)	Barrier Height (m)	Elevation of Barrier Top (m)
1.50	69.45	105.19	105.19

ROAD (0.00 + 51.15 + 0.00) = 51.15 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									

35	90	0.00	58.16	0.00	-1.86	-5.15	0.00	0.00	-0.00
51.15*									
35	90	0.00	58.16	0.00	-1.86	-5.15	0.00	0.00	0.00
51.15									

* Bright Zone !

Segment Leq : 51.15 dBA

Total Leq All Segments: 60.64 dBA

RT/Custom data, segment # 1: LRT (day/night)

1 - 4-car SRT:

Traffic volume	:	540/60	veh/TimePeriod
Speed	:	70 km/h	

Data for Segment # 1: LRT (day/night)

Angle1	Angle2	:	-90.00 deg	90.00 deg
Wood depth	:	0	(No woods.)	
No of house rows	:	0 / 0		
Surface	:	2	(Reflective ground surface)	



GRADIENTWIND

ENGINEERS & SCIENTISTS

Receiver source distance : 42.00 / 42.00 m
 Receiver height : 69.45 / 69.45 m
 Topography : 4 (Elevated; with barrier)
 Barrier angle1 : -90.00 deg Angle2 : 90.00 deg
 Barrier height : 0.00 m
 Elevation : 6.00 m
 Barrier receiver distance : 10.00 / 10.00 m
 Source elevation : 56.00 m
 Receiver elevation : 65.50 m
 Barrier elevation : 0.00 m
 Reference angle : 0.00

Results segment # 1: LRT (day)

Source height = 0.50 m

Barrier height for grazing incidence

Source Height (m)	! Receiver ! Height (m)	! Barrier ! Height (m)	! Elevation of ! Barrier Top (m)
0.50	!	69.45	!
		116.27	!
			116.27

RT/Custom (0.00 + 58.97 + 0.00) = 58.97 dBA

Angle1	Angle2	Alpha	RefLeq	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.00	63.44	-4.47	0.00	0.00	0.00	-0.00	58.97*
-90	90	0.00	63.44	-4.47	0.00	0.00	0.00	0.00	58.97

* Bright Zone !

Segment Leq : 58.97 dBA

Total Leq All Segments: 58.97 dBA

Results segment # 1: LRT (night)

Source height = 0.50 m

Barrier height for grazing incidence

Source Height (m)	! Receiver ! Height (m)	! Barrier ! Height (m)	! Elevation of ! Barrier Top (m)
0.50	!	69.45	!
		116.27	!
			116.27



RT/Custom (0.00 + 52.43 + 0.00) = 52.43 dBA

Angle1	Angle2	Alpha	RefLeq	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.00	56.91	-4.47	0.00	0.00	0.00	-0.00	52.43*
-90	90	0.00	56.91	-4.47	0.00	0.00	0.00	0.00	52.43

* Bright Zone !

Segment Leq : 52.43 dBA

Total Leq All Segments: 52.43 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 68.72
(NIGHT): 61.25



GRADIENTWIND

ENGINEERS & SCIENTISTS

STAMSON 5.0 NORMAL REPORT Date: 12-09-2019 16:23:09
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: r10.te Time Period: Day/Night 16/8 hours
Description:

Road data, segment # 1: Scott St (day/night)

Car traffic volume : 12144/1056 veh/TimePeriod *
Medium truck volume : 966/84 veh/TimePeriod *
Heavy truck volume : 690/60 veh/TimePeriod *
Posted speed limit : 50 km/h
Road gradient : 0 %
Road pavement : 1 (Typical asphalt or concrete)

* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT): 15000
Percentage of Annual Growth : 0.00
Number of Years of Growth : 0.00
Medium Truck % of Total Volume : 7.00
Heavy Truck % of Total Volume : 5.00
Day (16 hrs) % of Total Volume : 92.00

Data for Segment # 1: Scott St (day/night)

Angle1 Angle2 : 0.00 deg 90.00 deg
Wood depth : 0 (No woods.)
No of house rows : 0 / 0
Surface : 2 (Reflective ground surface)
Receiver source distance : 18.00 / 18.00 m
Receiver height : 71.95 / 71.95 m
Topography : 2 (Flat/gentle slope; with barrier)
Barrier angle1 : 0.00 deg Angle2 : 90.00 deg
Barrier height : 0.00 m
Barrier receiver distance : 10.00 / 10.00 m
Source elevation : 63.00 m
Receiver elevation : 63.00 m
Barrier elevation : 0.00 m
Reference angle : 0.00

Results segment # 1: Scott St (day)

Source height = 1.50 m

Barrier height for grazing incidence

Source ! Receiver ! Barrier ! Elevation of



GRADIENTWIND

ENGINEERS & SCIENTISTS

Height (m)	Height (m)	Height (m)	Barrier Top (m)
1.50	71.95	95.81	95.81

ROAD (0.00 + 64.68 + 0.00) = 64.68 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									

--									
	0	90	0.00	68.48	0.00	-0.79	-3.01	0.00	-0.00
64.68*									
	0	90	0.00	68.48	0.00	-0.79	-3.01	0.00	0.00
64.68									

* Bright Zone !

Segment Leq : 64.68 dBA

Total Leq All Segments: 64.68 dBA

Results segment # 1: Scott St (night)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	Receiver Height (m)	Barrier Height (m)	Elevation of Barrier Top (m)
1.50	71.95	95.81	95.81

ROAD (0.00 + 57.08 + 0.00) = 57.08 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									

--									
	0	90	0.00	60.88	0.00	-0.79	-3.01	0.00	-0.00
57.08*									
	0	90	0.00	60.88	0.00	-0.79	-3.01	0.00	0.00
57.08									

* Bright Zone !

Segment Leq : 57.08 dBA



Total Leq All Segments: 57.08 dBA

RT/Custom data, segment # 1: LRT (day/night)

1 - 4-car SRT:

Traffic volume : 540/60 veh/TimePeriod
Speed : 70 km/h

Data for Segment # 1: LRT (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg
Wood depth : 0 (No woods.)
No of house rows : 0 / 0
Surface : 2 (Reflective ground surface)
Receiver source distance : 46.00 / 46.00 m
Receiver height : 71.95 / 71.95 m
Topography : 4 (Elevated; with barrier)
Barrier angle1 : -90.00 deg Angle2 : 90.00 deg
Barrier height : 0.00 m
Elevation : 6.00 m
Barrier receiver distance : 10.00 / 10.00 m
Source elevation : 56.00 m
Receiver elevation : 63.00 m
Barrier elevation : 0.00 m
Reference angle : 0.00

Results segment # 1: LRT (day)

Source height = 0.50 m

Barrier height for grazing incidence

Source ! Receiver ! Barrier ! Elevation of
Height (m) ! Height (m) ! Height (m) ! Barrier Top (m)
-----+-----+-----+-----
0.50 ! 71.95 ! 117.90 ! 117.90

RT/Custom (0.00 + 58.57 + 0.00) = 58.57 dBA

Angle1	Angle2	Alpha	RefLeq	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.00	63.44	-4.87	0.00	0.00	0.00	-0.00	58.57*
-90	90	0.00	63.44	-4.87	0.00	0.00	0.00	0.00	58.57

* Bright Zone !

Segment Leq : 58.57 dBA



Total Leq All Segments: 58.57 dBA

Results segment # 1: LRT (night)

Source height = 0.50 m

Barrier height for grazing incidence

Source Height (m)	Receiver Height (m)	Barrier Height (m)	Elevation of Barrier Top (m)
0.50	71.95	117.90	117.90

RT/Custom (0.00 + 52.04 + 0.00) = 52.04 dBA

Angle1	Angle2	Alpha	RefLeq	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.00	56.91	-4.87	0.00	0.00	0.00	-0.00	52.04*
-90	90	0.00	56.91	-4.87	0.00	0.00	0.00	0.00	52.04

* Bright Zone !

Segment Leq : 52.04 dBA

Total Leq All Segments: 52.04 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 65.63
(NIGHT): 58.26



GRADIENTWIND

ENGINEERS & SCIENTISTS

STAMSON 5.0 NORMAL REPORT Date: 12-09-2019 16:23:19
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: r11.te Time Period: Day/Night 16/8 hours
Description:

Road data, segment # 1: Scott St (day/night)

Car traffic volume : 12144/1056 veh/TimePeriod *
Medium truck volume : 966/84 veh/TimePeriod *
Heavy truck volume : 690/60 veh/TimePeriod *
Posted speed limit : 50 km/h
Road gradient : 0 %
Road pavement : 1 (Typical asphalt or concrete)

* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT): 15000
Percentage of Annual Growth : 0.00
Number of Years of Growth : 0.00
Medium Truck % of Total Volume : 7.00
Heavy Truck % of Total Volume : 5.00
Day (16 hrs) % of Total Volume : 92.00

Data for Segment # 1: Scott St (day/night)

Angle1 Angle2 : -22.00 deg 90.00 deg
Wood depth : 0 (No woods.)
No of house rows : 0 / 0
Surface : 2 (Reflective ground surface)
Receiver source distance : 37.00 / 37.00 m
Receiver height : 18.50 / 18.50 m
Topography : 2 (Flat/gentle slope; with barrier)
Barrier angle1 : -22.00 deg Angle2 : 90.00 deg
Barrier height : 17.00 m
Barrier receiver distance : 15.00 / 15.00 m
Source elevation : 65.00 m
Receiver elevation : 65.50 m
Barrier elevation : 65.50 m
Reference angle : 0.00

Road data, segment # 2: CHA 1 (day/night)

Car traffic volume : 12144/1056 veh/TimePeriod *
Medium truck volume : 966/84 veh/TimePeriod *
Heavy truck volume : 690/60 veh/TimePeriod *
Posted speed limit : 50 km/h
Road gradient : 0 %
Road pavement : 1 (Typical asphalt or concrete)



* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT):	15000
Percentage of Annual Growth	: 0.00
Number of Years of Growth	: 0.00
Medium Truck % of Total Volume	: 7.00
Heavy Truck % of Total Volume	: 5.00
Day (16 hrs) % of Total Volume	: 92.00

Data for Segment # 2: CHA 1 (day/night)

Angle1	Angle2	: -90.00 deg	59.00 deg
Wood depth	:	0	(No woods.)
No of house rows	:	0 / 0	
Surface	:	2	(Reflective ground surface)
Receiver source distance	:	21.00 / 21.00	m
Receiver height	:	18.50 / 18.50	m
Topography	:	2	(Flat/gentle slope; with barrier)
Barrier angle1	:	-90.00 deg	Angle2 : 59.00 deg
Barrier height	:	17.00	m
Barrier receiver distance	:	6.00 / 6.00	m
Source elevation	:	65.00	m
Receiver elevation	:	65.50	m
Barrier elevation	:	65.50	m
Reference angle	:	0.00	

Road data, segment # 3: CHA 2 (day/night)

Car traffic volume	:	6477/563	veh/TimePeriod	*
Medium truck volume	:	515/45	veh/TimePeriod	*
Heavy truck volume	:	368/32	veh/TimePeriod	*
Posted speed limit	:	50	km/h	
Road gradient	:	0	%	
Road pavement	:	1	(Typical asphalt or concrete)	

* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT):	8000
Percentage of Annual Growth	: 0.00
Number of Years of Growth	: 0.00
Medium Truck % of Total Volume	: 7.00
Heavy Truck % of Total Volume	: 5.00
Day (16 hrs) % of Total Volume	: 92.00

Data for Segment # 3: CHA 2 (day/night)

Angle1	Angle2	: 66.00 deg	90.00 deg
Wood depth	:	0	(No woods.)
No of house rows	:	0 / 0	



GRADIENTWIND

ENGINEERS & SCIENTISTS

```

Surface                :      2      (Reflective ground surface)
Receiver source distance : 16.00 / 16.00 m
Receiver height         : 18.50 / 18.50 m
Topography              :      2      (Flat/gentle slope; with barrier)
Barrier angle1          : 66.00 deg   Angle2 : 90.00 deg
Barrier height          : 17.00 m
Barrier receiver distance : 4.00 / 4.00 m
Source elevation        : 65.00 m
Receiver elevation      : 65.50 m
Barrier elevation       : 65.50 m
Reference angle         : 0.00
  
```

Results segment # 1: Scott St (day)

Source height = 1.50 m

Barrier height for grazing incidence

```

Source      ! Receiver      ! Barrier      ! Elevation of
Height (m) ! Height (m) ! Height (m) ! Barrier Top (m)
-----+-----+-----+-----
      1.50 !      18.50 !      11.40 !      76.90
  
```

ROAD (0.00 + 47.37 + 0.00) = 47.37 dBA

```

Angle1 Angle2  Alpha RefLeq  P.Adj  D.Adj  F.Adj  W.Adj  H.Adj  B.Adj
SubLeq
  
```

```

-----
--
-22      90    0.00  68.48    0.00  -3.92  -2.06    0.00    0.00 -15.13
47.37
  
```

Segment Leq : 47.37 dBA

Results segment # 2: CHA 1 (day)

Source height = 1.50 m

Barrier height for grazing incidence

```

Source      ! Receiver      ! Barrier      ! Elevation of
Height (m) ! Height (m) ! Height (m) ! Barrier Top (m)
-----+-----+-----+-----
      1.50 !      18.50 !      13.50 !      79.00
  
```

ROAD (0.00 + 52.51 + 0.00) = 52.51 dBA



GRADIENTWIND

ENGINEERS & SCIENTISTS

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									

--									
-90	59	0.00	68.48	0.00	-1.46	-0.82	0.00	0.00	-13.69
52.51									

Segment Leq : 52.51 dBA

Results segment # 3: CHA 2 (day)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	! Receiver ! Height (m)	! Barrier ! Height (m)	! Elevation of ! Barrier Top (m)
1.50	!	18.50	!
		14.12	!
			79.62

ROAD (0.00 + 48.20 + 0.00) = 48.20 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									

--									
66	90	0.00	65.75	0.00	-0.28	-8.75	0.00	0.00	-8.52
48.20									

Segment Leq : 48.20 dBA

Total Leq All Segments: 54.76 dBA

Results segment # 1: Scott St (night)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	! Receiver ! Height (m)	! Barrier ! Height (m)	! Elevation of ! Barrier Top (m)
1.50	!	18.50	!
		11.40	!
			76.90



ROAD (0.00 + 39.78 + 0.00) = 39.78 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									

-22	90	0.00	60.88	0.00	-3.92	-2.06	0.00	0.00	-15.13
39.78									

Segment Leq : 39.78 dBA

Results segment # 2: CHA 1 (night)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	Receiver Height (m)	Barrier Height (m)	Elevation of Barrier Top (m)
1.50	18.50	13.50	79.00

ROAD (0.00 + 44.91 + 0.00) = 44.91 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									

-90	59	0.00	60.88	0.00	-1.46	-0.82	0.00	0.00	-13.69
44.91									

Segment Leq : 44.91 dBA

Results segment # 3: CHA 2 (night)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	Receiver Height (m)	Barrier Height (m)	Elevation of Barrier Top (m)
1.50	18.50	14.12	79.62

ROAD (0.00 + 40.61 + 0.00) = 40.61 dBA



GRADIENTWIND

ENGINEERS & SCIENTISTS

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									

66	90	0.00	58.16	0.00	-0.28	-8.75	0.00	0.00	-8.52
40.61									

Segment Leq : 40.61 dBA

Total Leq All Segments: 47.16 dBA

RT/Custom data, segment # 1: LRT (day/night)

1 - 4-car SRT:

Traffic volume : 540/60 veh/TimePeriod
Speed : 70 km/h

Data for Segment # 1: LRT (day/night)

Angle1	Angle2	: -90.00 deg	90.00 deg
Wood depth	:	0	(No woods.)
No of house rows	:	0 / 0	
Surface	:	2	(Reflective ground surface)
Receiver source distance	:	63.00 / 63.00 m	
Receiver height	:	18.50 / 18.50 m	
Topography	:	4	(Elevated; with barrier)
Barrier angle1	:	-22.00 deg	Angle2 : 90.00 deg
Barrier height	:	17.00 m	
Elevation	:	6.00 m	
Barrier receiver distance	:	15.00 / 15.00 m	
Source elevation	:	56.00 m	
Receiver elevation	:	65.50 m	
Barrier elevation	:	65.50 m	
Reference angle	:	0.00	

Results segment # 1: LRT (day)

Source height = 0.50 m

Barrier height for grazing incidence

Source Height (m)	! Receiver Height (m)	! Barrier Height (m)	! Elevation of Barrier Top (m)
0.50	!	18.50	!
		11.95	!
			77.45



GRADIENTWIND

ENGINEERS & SCIENTISTS

RT/Custom (52.98 + 41.31 + 0.00) = 53.26 dBA

Angle1	Angle2	Alpha	RefLeq	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	-22	0.00	63.44	-6.23	-4.23	0.00	0.00	0.00	52.98
-22	90	0.00	63.44	-6.23	-2.06	0.00	0.00	-13.84	41.31

Segment Leq : 53.26 dBA

Total Leq All Segments: 53.26 dBA

Results segment # 1: LRT (night)

Source height = 0.50 m

Barrier height for grazing incidence

Source Height (m)	! Receiver ! Height (m)	! Barrier ! Height (m)	! Elevation of ! Barrier Top (m)
0.50	! 18.50	! 11.95	! 77.45

RT/Custom (46.45 + 34.78 + 0.00) = 46.73 dBA

Angle1	Angle2	Alpha	RefLeq	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	-22	0.00	56.91	-6.23	-4.23	0.00	0.00	0.00	46.45
-22	90	0.00	56.91	-6.23	-2.06	0.00	0.00	-13.84	34.78

Segment Leq : 46.73 dBA

Total Leq All Segments: 46.73 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 57.08
(NIGHT): 49.96



GRADIENTWIND

ENGINEERS & SCIENTISTS

STAMSON 5.0 NORMAL REPORT Date: 12-09-2019 16:23:41
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: r12.te Time Period: Day/Night 16/8 hours
Description:

Road data, segment # 1: Scott St (day/night)

Car traffic volume : 12144/1056 veh/TimePeriod *
Medium truck volume : 966/84 veh/TimePeriod *
Heavy truck volume : 690/60 veh/TimePeriod *
Posted speed limit : 50 km/h
Road gradient : 0 %
Road pavement : 1 (Typical asphalt or concrete)

* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT): 15000
Percentage of Annual Growth : 0.00
Number of Years of Growth : 0.00
Medium Truck % of Total Volume : 7.00
Heavy Truck % of Total Volume : 5.00
Day (16 hrs) % of Total Volume : 92.00

Data for Segment # 1: Scott St (day/night)

Angle1 Angle2 : -14.00 deg 73.00 deg
Wood depth : 0 (No woods.)
No of house rows : 0 / 0
Surface : 2 (Reflective ground surface)
Receiver source distance : 23.00 / 23.00 m
Receiver height : 21.00 / 21.00 m
Topography : 2 (Flat/gentle slope; with barrier)
Barrier angle1 : -14.00 deg Angle2 : 30.00 deg
Barrier height : 19.50 m
Barrier receiver distance : 10.00 / 10.00 m
Source elevation : 63.00 m
Receiver elevation : 63.00 m
Barrier elevation : 63.00 m
Reference angle : 0.00

Results segment # 1: Scott St (day)

Source height = 1.50 m

Barrier height for grazing incidence

Source ! Receiver ! Barrier ! Elevation of



GRADIENTWIND

ENGINEERS & SCIENTISTS

Height (m)	!	Height (m)	!	Height (m)	!	Barrier Top (m)
1.50	!	21.00	!	12.52	!	75.52

ROAD (0.00 + 40.51 + 60.41) = 60.45 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									

-14	30	0.00	68.48	0.00	-1.86	-6.12	0.00	0.00	-20.00
40.51									

30	73	0.00	68.48	0.00	-1.86	-6.22	0.00	0.00	0.00
60.41									

Segment Leq : 60.45 dBA

Total Leq All Segments: 60.45 dBA

Results segment # 1: Scott St (night)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	!	Receiver Height (m)	!	Barrier Height (m)	!	Elevation of Barrier Top (m)
1.50	!	21.00	!	12.52	!	75.52

ROAD (0.00 + 32.91 + 52.81) = 52.85 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									

-14	30	0.00	60.88	0.00	-1.86	-6.12	0.00	0.00	-20.00
32.91									

30	73	0.00	60.88	0.00	-1.86	-6.22	0.00	0.00	0.00
52.81									

Segment Leq : 52.85 dBA



Total Leq All Segments: 52.85 dBA

RT/Custom data, segment # 1: LRT (day/night)

1 - 4-car SRT:

Traffic volume : 540/60 veh/TimePeriod
Speed : 70 km/h

Data for Segment # 1: LRT (day/night)

```

-----
Angle1   Angle2       : -90.00 deg   90.00 deg
Wood depth      :      0      (No woods.)
No of house rows :      0 / 0
Surface         :      2      (Reflective ground surface)
Receiver source distance : 51.00 / 51.00 m
Receiver height  : 21.00 / 21.00 m
Topography      :      4      (Elevated; with barrier)
Barrier angle1   : -14.00 deg   Angle2 : 30.00 deg
Barrier height   : 19.50 m
Elevation        : 6.00 m
Barrier receiver distance : 10.00 / 10.00 m
Source elevation : 56.00 m
Receiver elevation : 63.00 m
Barrier elevation : 63.00 m
Reference angle   : 0.00
  
```

Results segment # 1: LRT (day)

Source height = 0.50 m

Barrier height for grazing incidence

```

-----
Source      ! Receiver      ! Barrier      ! Elevation of
Height (m) ! Height (m) ! Height (m) ! Barrier Top (m)
-----+-----+-----+-----
          0.50 !      21.00 !      15.61 !      78.61
  
```

RT/Custom (54.38 + 35.95 + 53.35) = 56.94 dBA

Angle1	Angle2	Alpha	RefLeq	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	-14	0.00	63.44	-5.31	-3.74	0.00	0.00	0.00	54.38
-14	30	0.00	63.44	-5.31	-6.12	0.00	0.00	-16.05	35.95
30	90	0.00	63.44	-5.31	-4.77	0.00	0.00	0.00	53.35

Segment Leq : 56.94 dBA



Total Leq All Segments: 56.94 dBA

Results segment # 1: LRT (night)

Source height = 0.50 m

Barrier height for grazing incidence

Source Height (m)	Receiver Height (m)	Barrier Height (m)	Elevation of Barrier Top (m)
0.50	21.00	15.61	78.61

RT/Custom (47.85 + 29.42 + 46.82) = 50.41 dBA

Angle1	Angle2	Alpha	RefLeq	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	-14	0.00	56.91	-5.31	-3.74	0.00	0.00	0.00	47.85
-14	30	0.00	56.91	-5.31	-6.12	0.00	0.00	-16.05	29.42
30	90	0.00	56.91	-5.31	-4.77	0.00	0.00	0.00	46.82

Segment Leq : 50.41 dBA

Total Leq All Segments: 50.41 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 62.05
(NIGHT): 54.81



GRADIENTWIND

ENGINEERS & SCIENTISTS

STAMSON 5.0 NORMAL REPORT Date: 12-09-2019 16:24:16
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: r13.te Time Period: Day/Night 16/8 hours
Description:

Road data, segment # 1: Scott St (day/night)

Car traffic volume : 12144/1056 veh/TimePeriod *
Medium truck volume : 966/84 veh/TimePeriod *
Heavy truck volume : 690/60 veh/TimePeriod *
Posted speed limit : 50 km/h
Road gradient : 0 %
Road pavement : 1 (Typical asphalt or concrete)

* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT): 15000
Percentage of Annual Growth : 0.00
Number of Years of Growth : 0.00
Medium Truck % of Total Volume : 7.00
Heavy Truck % of Total Volume : 5.00
Day (16 hrs) % of Total Volume : 92.00

Data for Segment # 1: Scott St (day/night)

Angle1 Angle2 : -64.00 deg 90.00 deg
Wood depth : 0 (No woods.)
No of house rows : 0 / 0
Surface : 2 (Reflective ground surface)
Receiver source distance : 18.00 / 18.00 m
Receiver height : 75.30 / 75.30 m
Topography : 2 (Flat/gentle slope; with barrier)
Barrier angle1 : -64.00 deg Angle2 : 90.00 deg
Barrier height : 73.80 m
Barrier receiver distance : 3.00 / 3.00 m
Source elevation : 63.00 m
Receiver elevation : 63.00 m
Barrier elevation : 63.00 m
Reference angle : 0.00

Road data, segment # 2: CHA 1 (day/night)

Car traffic volume : 12144/1056 veh/TimePeriod *
Medium truck volume : 966/84 veh/TimePeriod *
Heavy truck volume : 690/60 veh/TimePeriod *
Posted speed limit : 50 km/h
Road gradient : 0 %
Road pavement : 1 (Typical asphalt or concrete)



* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT):	15000
Percentage of Annual Growth	: 0.00
Number of Years of Growth	: 0.00
Medium Truck % of Total Volume	: 7.00
Heavy Truck % of Total Volume	: 5.00
Day (16 hrs) % of Total Volume	: 92.00

Data for Segment # 2: CHA 1 (day/night)

Angle1	Angle2	: -10.00 deg	17.00 deg
Wood depth	:	0	(No woods.)
No of house rows	:	0 / 0	
Surface	:	2	(Reflective ground surface)
Receiver source distance	:	42.00 / 42.00 m	
Receiver height	:	75.30 / 75.30 m	
Topography	:	2	(Flat/gentle slope; with barrier)
Barrier angle1	:	-10.00 deg	Angle2 : 5.00 deg
Barrier height	:	73.80 m	
Barrier receiver distance	:	21.00 / 21.00 m	
Source elevation	:	65.00 m	
Receiver elevation	:	63.00 m	
Barrier elevation	:	65.00 m	
Reference angle	:	0.00	

Road data, segment # 3: CHA 2 (day/night)

Car traffic volume	:	6477/563	veh/TimePeriod	*
Medium truck volume	:	515/45	veh/TimePeriod	*
Heavy truck volume	:	368/32	veh/TimePeriod	*
Posted speed limit	:	50 km/h		
Road gradient	:	0 %		
Road pavement	:	1	(Typical asphalt or concrete)	

* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT):	8000
Percentage of Annual Growth	: 0.00
Number of Years of Growth	: 0.00
Medium Truck % of Total Volume	: 7.00
Heavy Truck % of Total Volume	: 5.00
Day (16 hrs) % of Total Volume	: 92.00

Data for Segment # 3: CHA 2 (day/night)

Angle1	Angle2	: 25.00 deg	90.00 deg
Wood depth	:	0	(No woods.)
No of house rows	:	0 / 0	



GRADIENTWIND

ENGINEERS & SCIENTISTS

```

Surface                :      2      (Reflective ground surface)
Receiver source distance : 40.00 / 40.00 m
Receiver height         : 75.30 / 75.30 m
Topography              :      2      (Flat/gentle slope; with barrier)
Barrier angle1          : 25.00 deg   Angle2 : 90.00 deg
Barrier height          : 75.30 m
Barrier receiver distance : 3.00 / 3.00 m
Source elevation        : 65.00 m
Receiver elevation      : 63.00 m
Barrier elevation       : 63.00 m
Reference angle         : 0.00
  
```

Results segment # 1: Scott St (day)

Source height = 1.50 m

Barrier height for grazing incidence

```

-----
Source      ! Receiver      ! Barrier      ! Elevation of
Height (m) ! Height (m) ! Height (m) ! Barrier Top (m)
-----+-----+-----+-----
          1.50 !       75.30 !       63.00 !       126.00
  
```

ROAD (0.00 + 51.71 + 0.00) = 51.71 dBA

```

Angle1 Angle2  Alpha RefLeq  P.Adj  D.Adj  F.Adj  W.Adj  H.Adj  B.Adj
SubLeq
  
```

```

-----
--
-64      90    0.00  68.48   0.00  -0.79  -0.68   0.00   0.00 -15.30
51.71
-----
--
  
```

Segment Leq : 51.71 dBA

Results segment # 2: CHA 1 (day)

Source height = 1.50 m

Barrier height for grazing incidence

```

-----
Source      ! Receiver      ! Barrier      ! Elevation of
Height (m) ! Height (m) ! Height (m) ! Barrier Top (m)
-----+-----+-----+-----
          1.50 !       75.30 !       37.40 !       102.40
  
```

ROAD (0.00 + 33.22 + 52.25) = 52.30 dBA



Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									

-10	5	0.00	68.48	0.00	-4.47	-10.79	0.00	0.00	-20.00
33.22									

5	17	0.00	68.48	0.00	-4.47	-11.76	0.00	0.00	0.00
52.25									

Segment Leq : 52.30 dBA

Results segment # 3: CHA 2 (day)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	Receiver Height (m)	Barrier Height (m)	Elevation of Barrier Top (m)
1.50	75.30	69.91	132.91

ROAD (0.00 + 42.94 + 0.00) = 42.94 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									

25	90	0.00	65.75	0.00	-4.26	-4.42	0.00	0.00	-14.13
42.94									

Segment Leq : 42.94 dBA

Total Leq All Segments: 55.29 dBA

Results segment # 1: Scott St (night)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	Receiver Height (m)	Barrier Height (m)	Elevation of Barrier Top (m)



GRADIENTWIND

ENGINEERS & SCIENTISTS

```

-----+-----+-----+-----
          1.50 !          75.30 !          63.00 !          126.00

ROAD (0.00 + 44.11 + 0.00) = 44.11 dBA
Angle1 Angle2  Alpha RefLeq  P.Adj  D.Adj  F.Adj  W.Adj  H.Adj  B.Adj
SubLeq
-----
--
   -64      90    0.00  60.88    0.00  -0.79  -0.68    0.00    0.00 -15.30
44.11
-----
--

```

Segment Leq : 44.11 dBA

Results segment # 2: CHA 1 (night)

Source height = 1.50 m

Barrier height for grazing incidence

```

-----
Source      ! Receiver      ! Barrier      ! Elevation of
Height (m) ! Height (m) ! Height (m) ! Barrier Top (m)
-----+-----+-----+-----
          1.50 !          75.30 !          37.40 !          102.40

```

```

ROAD (0.00 + 25.62 + 44.65) = 44.70 dBA
Angle1 Angle2  Alpha RefLeq  P.Adj  D.Adj  F.Adj  W.Adj  H.Adj  B.Adj
SubLeq
-----
--
   -10      5    0.00  60.88    0.00  -4.47 -10.79    0.00    0.00 -20.00
25.62
-----
--
      5     17    0.00  60.88    0.00  -4.47 -11.76    0.00    0.00  0.00
44.65
-----
--

```

Segment Leq : 44.70 dBA

Results segment # 3: CHA 2 (night)

Source height = 1.50 m

Barrier height for grazing incidence



GRADIENTWIND

ENGINEERS & SCIENTISTS

Source	! Receiver	! Barrier	! Elevation of
Height (m)	! Height (m)	! Height (m)	! Barrier Top (m)
1.50	!	75.30	!
		69.91	!
			132.91

ROAD (0.00 + 35.35 + 0.00) = 35.35 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj
SubLeq									

25	90	0.00	58.16	0.00	-4.26	-4.42	0.00	0.00	-14.13
35.35									

Segment Leq : 35.35 dBA

Total Leq All Segments: 47.69 dBA

RT/Custom data, segment # 1: LRT (day/night)

1 - 4-car SRT:

Traffic volume	:	540/60	veh/TimePeriod
Speed	:	70 km/h	

Data for Segment # 1: LRT (day/night)

Angle1	Angle2	:	-90.00 deg	90.00 deg
Wood depth	:	0	(No woods.)	
No of house rows	:	0 / 0		
Surface	:	2	(Reflective ground surface)	
Receiver source distance	:	46.00 / 46.00	m	
Receiver height	:	75.30 / 75.30	m	
Topography	:	4	(Elevated; with barrier)	
Barrier angle1	:	-90.00 deg	Angle2 : 90.00 deg	
Barrier height	:	73.80 m		
Elevation	:	6.00 m		
Barrier receiver distance	:	3.00 / 3.00	m	
Source elevation	:	56.00 m		
Receiver elevation	:	65.00 m		
Barrier elevation	:	65.00 m		
Reference angle	:	0.00		



Results segment # 1: LRT (day)

Source height = 0.50 m

Barrier height for grazing incidence

Source Height (m)	Receiver Height (m)	Barrier Height (m)	Elevation of Barrier Top (m)
0.50	75.30	69.83	134.83

RT/Custom (0.00 + 46.55 + 0.00) = 46.55 dBA

Angle1	Angle2	Alpha	RefLeq	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.00	63.44	-4.87	0.00	0.00	0.00	-12.02	46.55

Segment Leq : 46.55 dBA

Total Leq All Segments: 46.55 dBA

Results segment # 1: LRT (night)

Source height = 0.50 m

Barrier height for grazing incidence

Source Height (m)	Receiver Height (m)	Barrier Height (m)	Elevation of Barrier Top (m)
0.50	75.30	69.83	134.83

RT/Custom (0.00 + 40.02 + 0.00) = 40.02 dBA

Angle1	Angle2	Alpha	RefLeq	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.00	56.91	-4.87	0.00	0.00	0.00	-12.02	40.02

Segment Leq : 40.02 dBA


Total Leq All Segments: 40.02 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 55.83
(NIGHT): 48.37



GRADIENTWIND

ENGINEERS & SCIENTISTS

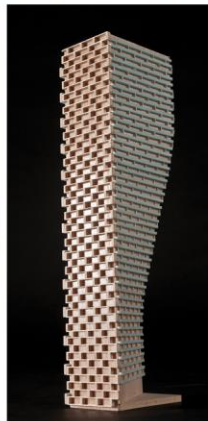

APPENDIX B

FTA VIBRATION CALCULATIONS

GWE19-156

Possible Vibration Impacts on 2090 Scott Street
Predicted using FTA General Assessment

Train Speed

70 km/h

43 mph

	Distance from C/L	
	(m)	(ft)
LRT	40.0	131.2

Vibration

From FTA Manual Fig 10-1

Vibration Levels at distance from track 65 dBV re 1 micro in/sec

Adjustment Factors FTA Table 10-1

Speed reference 50 mph	-1	Speed Limit of 70 km/h (43 mph)
Vehicle Parameters	0	None
Track Condition	0	None
Track Treatments	0	None
Type of Transit Structure	0	Station
Efficient vibration Propagation	0	Propagation through rock
Vibration Levels at Fdn	64	0.039
Coupling to Building Foundation	-10	Large Massonry on Piles
Floor to Floor Attenuation	-2.0	Ground Floor Ocupied
Amplification of Floor and Walls	6	
Total Vibration Level	57.68997	dBV or 0.019 mm/s
Noise Level in dBA	22.68997	dBA



**Table 10-1. Adjustment Factors for Generalized Predictions of
Ground-Borne Vibration and Noise**

Factors Affecting Vibration Source				
Source Factor	Adjustment to Propagation Curve			Comment
Speed		Reference Speed		Vibration level is approximately proportional to $20 \cdot \log(\text{speed}/\text{speed}_{\text{ref}})$. Sometimes the variation with speed has been observed to be as low as 10 to 15 $\log(\text{speed}/\text{speed}_{\text{ref}})$.
	Vehicle Speed	50 mph	30 mph	
	60 mph	+1.6 dB	+6.0 dB	
	50 mph	0.0 dB	+4.4 dB	
	40 mph	-1.9 dB	+2.5 dB	
	30 mph	-4.4 dB	0.0 dB	
	20 mph	-8.0 dB	-3.5 dB	
Vehicle Parameters (not additive, apply greatest value only)				
Vehicle with stiff primary suspension	+8 dB			Transit vehicles with stiff primary suspensions have been shown to create high vibration levels. Include this adjustment when the primary suspension has a vertical resonance frequency greater than 15 Hz.
Resilient Wheels	0 dB			Resilient wheels do not generally affect ground-borne vibration except at frequencies greater than about 80 Hz.
Worn Wheels or Wheels with Flats	+10 dB			Wheel flats or wheels that are unevenly worn can cause high vibration levels. This can be prevented with wheel truing and slip-slide detectors to prevent the wheels from sliding on the track.
Track Conditions (not additive, apply greatest value only)				
Worn or Corrugated Track	+10 dB			If both the wheels and the track are worn, only one adjustment should be used. Corrugated track is a common problem. Mill scale on new rail can cause higher vibration levels until the rail has been in use for some time.
Special Trackwork	+10 dB			Wheel impacts at special trackwork will significantly increase vibration levels. The increase will be less at greater distances from the track.
Jointed Track or Uneven Road Surfaces	+5 dB			Jointed track can cause higher vibration levels than welded track. Rough roads or expansion joints are sources of increased vibration for rubber-tire transit.
Track Treatments (not additive, apply greatest value only)				
Floating Slab Trackbed	-15 dB			The reduction achieved with a floating slab trackbed is strongly dependent on the frequency characteristics of the vibration.
Ballast Mats	-10 dB			Actual reduction is strongly dependent on frequency of vibration.
High-Resilience Fasteners	-5 dB			Slab track with track fasteners that are very compliant in the vertical direction can reduce vibration at frequencies greater than 40 Hz.



**Table 10-1. Adjustment Factors for Generalized Predictions of
Ground-Borne Vibration and Noise (Continued)**

Factors Affecting Vibration Path				
Path Factor	Adjustment to Propagation Curve			Comment
Resiliently Supported Ties	-10 dB			Resiliently supported tie systems have been found to provide very effective control of low-frequency vibration.
Track Configuration (not additive, apply greatest value only)				
Type of Transit Structure	Relative to at-grade tie & ballast: Elevated structure -10 dB Open cut 0 dB			The general rule is the heavier the structure, the lower the vibration levels. Putting the track in cut may reduce the vibration levels slightly. Rock-based subways generate higher-frequency vibration.
	Relative to bored subway tunnel in soil: Station -5 dB Cut and cover -3 dB Rock-based -15 dB			
Ground-borne Propagation Effects				
Geologic conditions that promote efficient vibration propagation	Efficient propagation in soil +10 dB			Refer to the text for guidance on identifying areas where efficient propagation is possible.
	Propagation in rock layer	<u>Dist.</u>	<u>Adjust.</u>	The positive adjustment accounts for the lower attenuation of vibration in rock compared to soil. It is generally more difficult to excite vibrations in rock than in soil at the source.
		50 ft	+2 dB	
		100 ft	+4 dB	
		150 ft	+6 dB	
200 ft	+9 dB			
Coupling to building foundation	Wood Frame Houses -5 dB 1-2 Story Masonry -7 dB 3-4 Story Masonry -10 dB Large Masonry on Piles -10 dB Large Masonry on Spread Footings -13 dB Foundation in Rock 0 dB			The general rule is the heavier the building construction, the greater the coupling loss.
Factors Affecting Vibration Receiver				
Receiver Factor	Adjustment to Propagation Curve			Comment
Floor-to-floor attenuation	1 to 5 floors above grade: -2 dB/floor 5 to 10 floors above grade: -1 dB/floor			This factor accounts for dispersion and attenuation of the vibration energy as it propagates through a building.
Amplification due to resonances of floors, walls, and ceilings	+6 dB			The actual amplification will vary greatly depending on the type of construction. The amplification is lower near the wall/floor and wall/ceiling intersections.
Conversion to Ground-borne Noise				
Noise Level in dBA	Peak frequency of ground vibration: Low frequency (<30 Hz): -50 dB Typical (peak 30 to 60 Hz): -35 dB High frequency (>60 Hz): -20 dB			Use these adjustments to estimate the A-weighted sound level given the average vibration velocity level of the room surfaces. See text for guidelines for selecting low, typical or high frequency characteristics. Use the high-frequency adjustment for subway tunnels in rock or if the dominant frequencies of the vibration spectrum are known to be 60 Hz or greater.

