NOISE AND VIBRATION STUDY REPORT 119-115 DELHOUSIE STREET

Prepared by: ARCH-Nova Design Inc. 45 Banner Rd NEPEAN, Ontario K2H 8X5

February 2022

TABLE OF CONTENTS

1.0	INTRO	DDUCTION AND SUMMARY	2
2.0	ENVIR 2.1 2.1.1 2.1.2 2.1.3 2.2		
3.0	TRAFI 3.1 3.2	FIC NOISE IMPACTApplicable Noise GuidelineTraffic Noise Impact Assessment	4
4.0	VIBRA 4.1 4.2	ATION IMPACTApplicable Vibration GuidelineVibration Impact Assessment	7
5.0	5.1 5.2 5.3 5.4	USION AND RECOMMENDATION Outdoor Leaving Areas (OLA) Indoor Leaving Area Building Façade Construction Warning Clauses	
6.0	CONC	CLUSION	10

LIST OF TABLES

Table Year 2032 Road Traffic Data Used in Analysis
Table City of Ottawa Noise Control Guidelines – Road Traffic Noise
Requirements
Table Predicted Unmitigated Road Traffic Sound Exposures

LIST OF FIGURES

Figure 1 Proposed Development Site Plans

LIST OF APPENDICES

Appendix A Appendix B	Proposed Development Floor and Elevation Plans Land-Use Zoning Maps
Appendix C Appendix D	Road Traffic Data Road Traffic Modelling
Appendix E	City of Ottawa Noise Guidelines

1.0 INTRODUCTION AND SUMMARY

Arch-Nova was retained to investigate the potential impact of environmental noise and vibration on the proposed residential development located at 109-115 Dalhousie Street situated between Bolton Street and Boteler Street in Ottawa Ontario. The assessment is based on the proposed development, existing and future noise and vibration sources, and the environmental noise and vibration guidelines of the Ministry of the Environment, Conservation and Parks ("MECP") and the City of Ottawa. A noise and vibration study is required by the municipality as part of the planning and approvals process.

This report was prepared based on a Site Plan prepared by Rosaline J. Hill Architects, dated November 2021.

The proposed development consists of four (4) storey residential building, located at 109-115 Dalhousie Street. The building consists of twenty-four (24) residential units. The basement contains four (4) units, ground floor contains six (6) units, second floor four (4) units, and both third and fourth floor contains five (5) units.

The proposed balconies located on the third and forth floor located on the front side of the proposed building and balconies associated with ground and first floor units located on the back side of the building qualifies as outdoor living area (OLA) under City of Ottawa or MECP guidelines. In addition, there is the area at the back of the proposed building which was not identified as an amenity area. This study will evaluate this area as OLA to include potential variations in the design of the development.

The site is bounded by residential to the east, west and south side. A 12-story apartment building is located to the west.

Figure 1 shows the proposed site including the surrounding area. Zoning maps for the surrounding area are attached in Appendix B.

2.0 ENVIRONMENTAL NOISE ASSESSMENT

The main environmental noise sources external to the project which were identified and have the potential to adversely affect the development are motor vehicle traffic noise on Dalhousie Street, Bolton Street and Boteler Street.

2.1 Traffic Noise Sources

2.1.1 Road Traffic

Road traffic associated with Dalhousie Street is the dominant environmental noise source in the vicinity of the proposed development. In addition, there is traffic noise from Bolton Street and Boteler Street.

Fully developed road traffic data was used in the analysis. The traffic counts for Dalhousie Street (2019), Bolton Street (2019) and Boteler Street (2016), were obtained from the City of Ottawa transportation department. In addition, a yearly growth rate of 2.5% was used to calculate the traffic data. In order to calculate the fully developed road traffic volumes, numbers were grown to the year 2032. Traffic data was split into daytime/nighttime and autos/medium/heavy using City of Ottawa "Environmental Noise Control Guidelines." Conservatively, the total number of vehicles obtained from the City of Ottawa were increased from 269 to 2930 for Boteler Street and from 560 to 2700 vehicles for Bolton Street to satisfy the minimum of 40 v/hr required by the modeling software. Posted speed limits were used in the analysis. Data used in the noise modelling are found in Table 1.

Table 1: Year 2032 Road Traffic Data Used in Analysis

Table 11 Total 2002 (Country of the Country of the													
Street	Time of Day	Vehicles	Medium Trucks	Heavy Trucks	Total*								
Dalhousie	0700-2300	6906	601	0*	7507								
Street	2300-0700	363	32	0*	395								
Sileet	Total	7269	632	0*	7902								
	0700-2300	3530	186	0*	3716								
Bolton Street	2300-0700	307	16	0*	323								
	Total	3837	202	0*	4039								
	0700-2300	3503	184	0*	3688								
Boteler Street	2300-0700	305	16	0*	321								
	Total	3808	200	0*	4008								

Note: * Streets are small residential streets, with no industry, so no heavy trucks are expected

Provided road traffic data and road traffic calculations used for the study are included in Appendix C.

2.1.2 Rail Traffic

There is no rail traffic within the zone of influence as per City of Ottawa Noise Protocol. Therefore, no further assessment was performed.

2.1.3 Air Traffic

Proposed project is located out of the zone of influence from the Airport Operating Influence Zone (AOIZ) and NEF/NEP contours lines. Therefore, no further assessment was performed.

2.2 Stationary Noise Sources

Based on investigation of the surrounding areas, there are no potential stationary industrial sources of noise in the vicinity of the proposed development. The MOE D-series guidelines were developed as guidance for recommended separation distances and other control measures for land use planning proposals to prevent or minimize 'adverse effects' from the encroachment of incompatible land uses where a facility either exists or is proposed. Additionally, the MECP developed the noise guidelines for stationary source noise impacting residential developments called the MECP Publication NPC-300 "Environmental Noise Guideline – Stationary and Transportation Sources – Approval and Planning" Since no industrial sources are located in the vicinity of the proposed development, neither the D-series guidelines nor NPC-300 have been considered further in this study.

3.0 TRAFFIC NOISE IMPACT

3.1 Applicable Noise Guideline

City of Ottawa noise guidelines for transportation noise impacting residential developments are given in the publication "City of Ottawa Environmental Noise Control Guidelines" (Appendix C). A summary of the City of Ottawa noise requirements is provided Table 2 below.

Table 2: City of Ottawa Noise Control Guidelines – Road Traffic Noise

Requirements

•		Road	Traffic								
Receiver Category	Time Period		Averaged Period ^[1]	Requirements							
		Leq (dBA)	Applies at								
		55 ^[2]		None							
		56 to 60		Warning Clause							
Outdoor	0700-2300		OLA	Alternative Land Use							
Catacoi		> 60	OLA	Alternative Layout							
		> 60		Berm or barrier							
				Possible Warning Clause							
		55 to 65	Diana of	Provision for central air conditioning							
Diama of	0700-2300	33 10 03	Plane of Window	+ warning clause							
Plane of Window		> 65 ^[3]	vviridow	Central air conditioning is required.							
VVIIIGOV		50 to 60 ^[3]	Plane of	Provision for central air conditioning							
	2300-0700		Window	+ warning clause							
		> 60 ^[3]	vviridow	Central air conditioning + warning clause							
	0700-2300	45	Living	If Central AC is required, facade must be							
Indoor	0700-2300	45	Area	designed to meet these levels							
	2300-0700	40	Sleeping								
	2300-0700	70	Area								

Notes: [1] Cumulative Impacts

For OLAs, a design goal of 55 dBA L_{EQ,day} is required. An unmitigated sound exposure due to road traffic of up to 60 dBA is considered a minor excess and is permissible, provided a warning clause advising the occupant of the potential noise levels is used. A sound exposure greater than 60 dBA must be reduced to 60 dBA or less using physical mitigation methods such as berms or barriers, or combination of both.

A central air conditioning system as an alternative means of ventilation to open windows is required for dwellings where nighttime sound levels outside bedroom windows exceed 60 dBA or where daytime sound levels outside living room windows exceed 65 dBA. Forced-air ventilation with ducts sized to accommodate the future installation of air conditioning is required when nighttime sound levels at bedroom windows are in the range of 51 to 60 dBA or when daytime sound levels at living room windows are in the range of 56 to 65 dBA.

Building components such as walls, windows and doors must be designed to achieve indoor sound level criteria when the plane of window sound level is greater than 60 dBA or the daytime sound level is greater than 65 dBA due to road traffic noise and when the plane of window sound level is greater than 55 dBA due to rail traffic noise. The use of warning clauses to notify future residents of possible excesses is also recommended.

^[2] The criterion may be exceeded by an amount not greater than 5 dBA, subject to justification and use of a Warning Clause.

^[3] If façade levels exceed these criteria, building components must be designed to meet Indoor Criteria.

3.2 Traffic Noise Impact Assessment

L_{EQ,night} and L_{EQ,day} attributable to Sweetland Avenue, Somerset Street East and Russell Avenue were calculated using STAMSON v5.0, the computerized road, rail, and transit traffic noise prediction model of the MECP. Since the City of Ottawa requires projected sound exposures be based on ultimate traffic volumes for roadways, sound exposure levels were based on 2026 (future) road traffic predictions. Screening due to surrounding buildings and terrain was accounted for in the analysis.

The proposed development will have four (4) floors. There is a two storey residential houses located to the north and south of the proposed development. Therefore, the noise impact at the ground and second floor units will be reduced, because of the shielding from the existing houses and no direct exposure of proposed units to the noise sources to the south and north. It was assumed, that if the noise impact levels at the upper floors are acceptable (floor with larger exposure), the ground and second floor residential units will be satisfied as well. Similarly, the building façade to the north, south and east will heave lesser noise impact when compared with the exposure of the west side.

Table 3 summarizes the predicted unmitigated daytime and nighttime sound exposures levels at predictable worst-case locations at the proposed development. Sample sound exposure calculation and analysis assumptions are included in Appendix D.

Table 3: Predicted Unmitigated Road Traffic Sound Exposures

Floor	Façade	Street	Sound Le	vel (dBA)	Total Sound Level (dBA)				
FIOOI	raçaue	Street	0700-2300	2300-0700	0700-2300	2300-0700			
Unit 5	West	Dalhousie	62 ¹	54 ¹					
	West	Bolton	44	36	62	54			
	West	Boteler	45	38					
Unit 15	West	Dalhousie	62 ¹	54 ¹					
	West	Bolton	44	37	62	54			
	West	Boteler	46	39					
Unit 20	West	Dalhousie	62 ¹	54 ¹					
	West	Bolton	45	37	62	54			
	West	Boteler	47	39					
Unit 19	West	Dalhousie	62 ¹	54 ¹					
	West	Bolton	46	39	62	54			
	West	Boteler	45	37					
Unit 24	West	Dalhousie	62 ¹	54 ¹					
	West	Bolton	46	39	62	54			
	West	Boteler	45	37					
Backyard	OLA	Dalhousie	52 ²	44 ²					
Backyard	OLA	Bolton	36 ²	29 ²	50	52			
Backyard	OLA	Boteler	35 ²	27 ²					

Note:

¹Sound level adjusted by 2 dBA to account for distance difference (12 m actual vs 15m model)

²Façade and OLA of the east side of building assumed to have lesser noise levels by 10 dBA.

4.0 VIBRATION IMPACT

4.1 Applicable Vibration Guideline

Since the Environmental Assessment Act and the MECP guidelines do not provide distance setbacks within or beyond which vibration assessments are to be prepared, the City is recommending that the necessary submissions address the vibration potential due to Light Rail Transit undertakings based on the following minimum areas of influence containing vibration sensitive receptors measured from the corridor right-of-way:

• 75 metres for its ground-borne vibration assessment

Generally, vibration assessment of the LRT is based on a set of draft protocols developed by the combined efforts of the MECP and the Toronto Transit Commission (TTC). The vibration impact criteria attempt to address two potential impacts from vibration generated by the LRT.

- First, the criteria consider perceptible vibration levels which address vibration that can be felt by occupants in a building. The limit for perceptible vibration levels has been set to 0.10 mm/s rms (root-mean-square) velocity.
- Secondly, the criteria document also mentions the sound from vibration (vibration induced noise) but does not set a limit.

4.2 Vibration Impact Assessment

Since the proposed development is not in the area with Light Rail Transit and the most significant vibration is assumed to come from light vehicle road traffic on Dalhousie Street. It was conservatively assumed that the separation distance for roadways will be at least half of that for Light Rail Transit. Having an insignificant traffic on Dalhousie Street and low speed, it was assumed that vibration levels are insignificant, and no further analysis was performed.

5.0 DISCUSION AND RECOMMENDATION

5.1 Outdoor Leaving Areas (OLA)

The term "Outdoor Living Area" (OLA) is used in reference to an outdoor patio, backyard, terrace, or other area where passive recreation is expected to occur, provided that it has a minimum depth of 4 m, and is outside the exterior building façade and unenclosed.

As per the site plans received from Rosaline J. Hill Architects, dated November 2021 there are balconies located on the west (front) and east (back) sides of the building, but hey have depth less than 4 m. Backyard area located at the back of the building, represent the OLA as part of a proposed future development. Analysis confirmed that the noise levels are acceptable at the proposed OLA (Ref. Table 3).

5.2 Indoor Leaving Area

Most exposed floors of the proposed development have predicted nighttime sound levels that are greater than 50 dBA but less than 60 dBA. To address these excesses, the City of Ottawa "Environmental Noise Control Guidelines" and MECP guidelines recommend that these dwelling units be equipped with a forced air ventilation systems with ducts sized to accommodate the future installation of air conditioning by the occupant.

Window or through-the-wall air conditioning units are not recommended for any residential units because of the noise they produce and because the units penetrate through the exterior wall which degrades the overall noise insulating properties of the envelope. The location, installation and sound ratings of the outdoor air conditioning devices should minimize noise impacts and comply with criteria of MECP publication NPC-216, Residential Air Conditioning Devices.

5.3 Building Façade Construction

Most exposed floors in the development will have nighttime sound levels at the façade that are less than 60 dBA and daytime sound levels at the façade that are less than 65 dBA. Therefore, any exterior wall, and double glazed window construction meeting the minimum requirements of the Ontario Building Code (OBC) will provide adequate sound insulation for the dwelling units.

5.4 Warning Clauses

The City of Ottawa "Environmental Noise Control Guidelines" and MECP guidelines recommend that warning clauses be included in the property and tenancy agreements and offers of purchase and sale for dwelling units with anticipated traffic sound level excesses. Examples are provided below. Suggested wording for future dwelling units which have sound level excesses but do not require mitigation measures is given below.

Type A:

Purchasers/tenants are advised that sound levels due to increasing road and rail traffic may occasionally interfere with some activities of the dwelling unit occupants as the sound levels exceed the Municipality's and the Ministry of the Environment's noise criteria.

Suitable wording for future dwellings requiring forced air ventilation systems is given below.

Type C:

Purchasers/tenants are advised that this dwelling unit has been fitted with a forced air heating system and the ducting etc., was sized to accommodate central air conditioning. Installation of central air conditioning will allow windows and exterior doors to remain closed, thereby ensuring that the indoor sound levels are within the City's and the Ministry of the Environment's noise criteria. Purchasers/tenants are advised that the outdoor air cooled condenser unit itself can produce noise to interfere with outdoor recreational activities. Due consideration should be given to this noise factor when selecting the air cooled condenser units location or an alternative quieter type of unit could be selected. The condenser unit sound rating should not exceed 7.6 bels in accordance with ANSI Standard 270-84 for units 3.5 ton or less. The location and installation of the outdoor air conditioning device should be done so as to minimize the noise impacts and have due regard for compliance with criteria of MOE publication NPC-216, Residential Air Conditioning Devices.

6.0 CONCLUSION

The noise feasibility study was conducted to meet the noise guidelines developed by the City of Ottawa and the MECP under Guideline NPC-300. Noise impacts at the proposed development have been evaluated and are predicted to meet MECP and City of Ottawa noise requirements. Noise abatement measures are not required to mitigate potential impacts. However, warning clauses advising the future occupants of the potential noise impacts will be required. Similarly, the vibration feasibility study was conducted to meet the MOE and TTC draft protocol, It was determined that no further vibration abatement measures are required to mitigate potential impacts.

The development is considered feasible from an environmental noise and vibration impact perspective.

Sincerely,




ARCH-Nova Design Inc

Authorized by Professional Engineers of Ontario to provide professional services to public



Figure 1

Proposed Development Site Plans

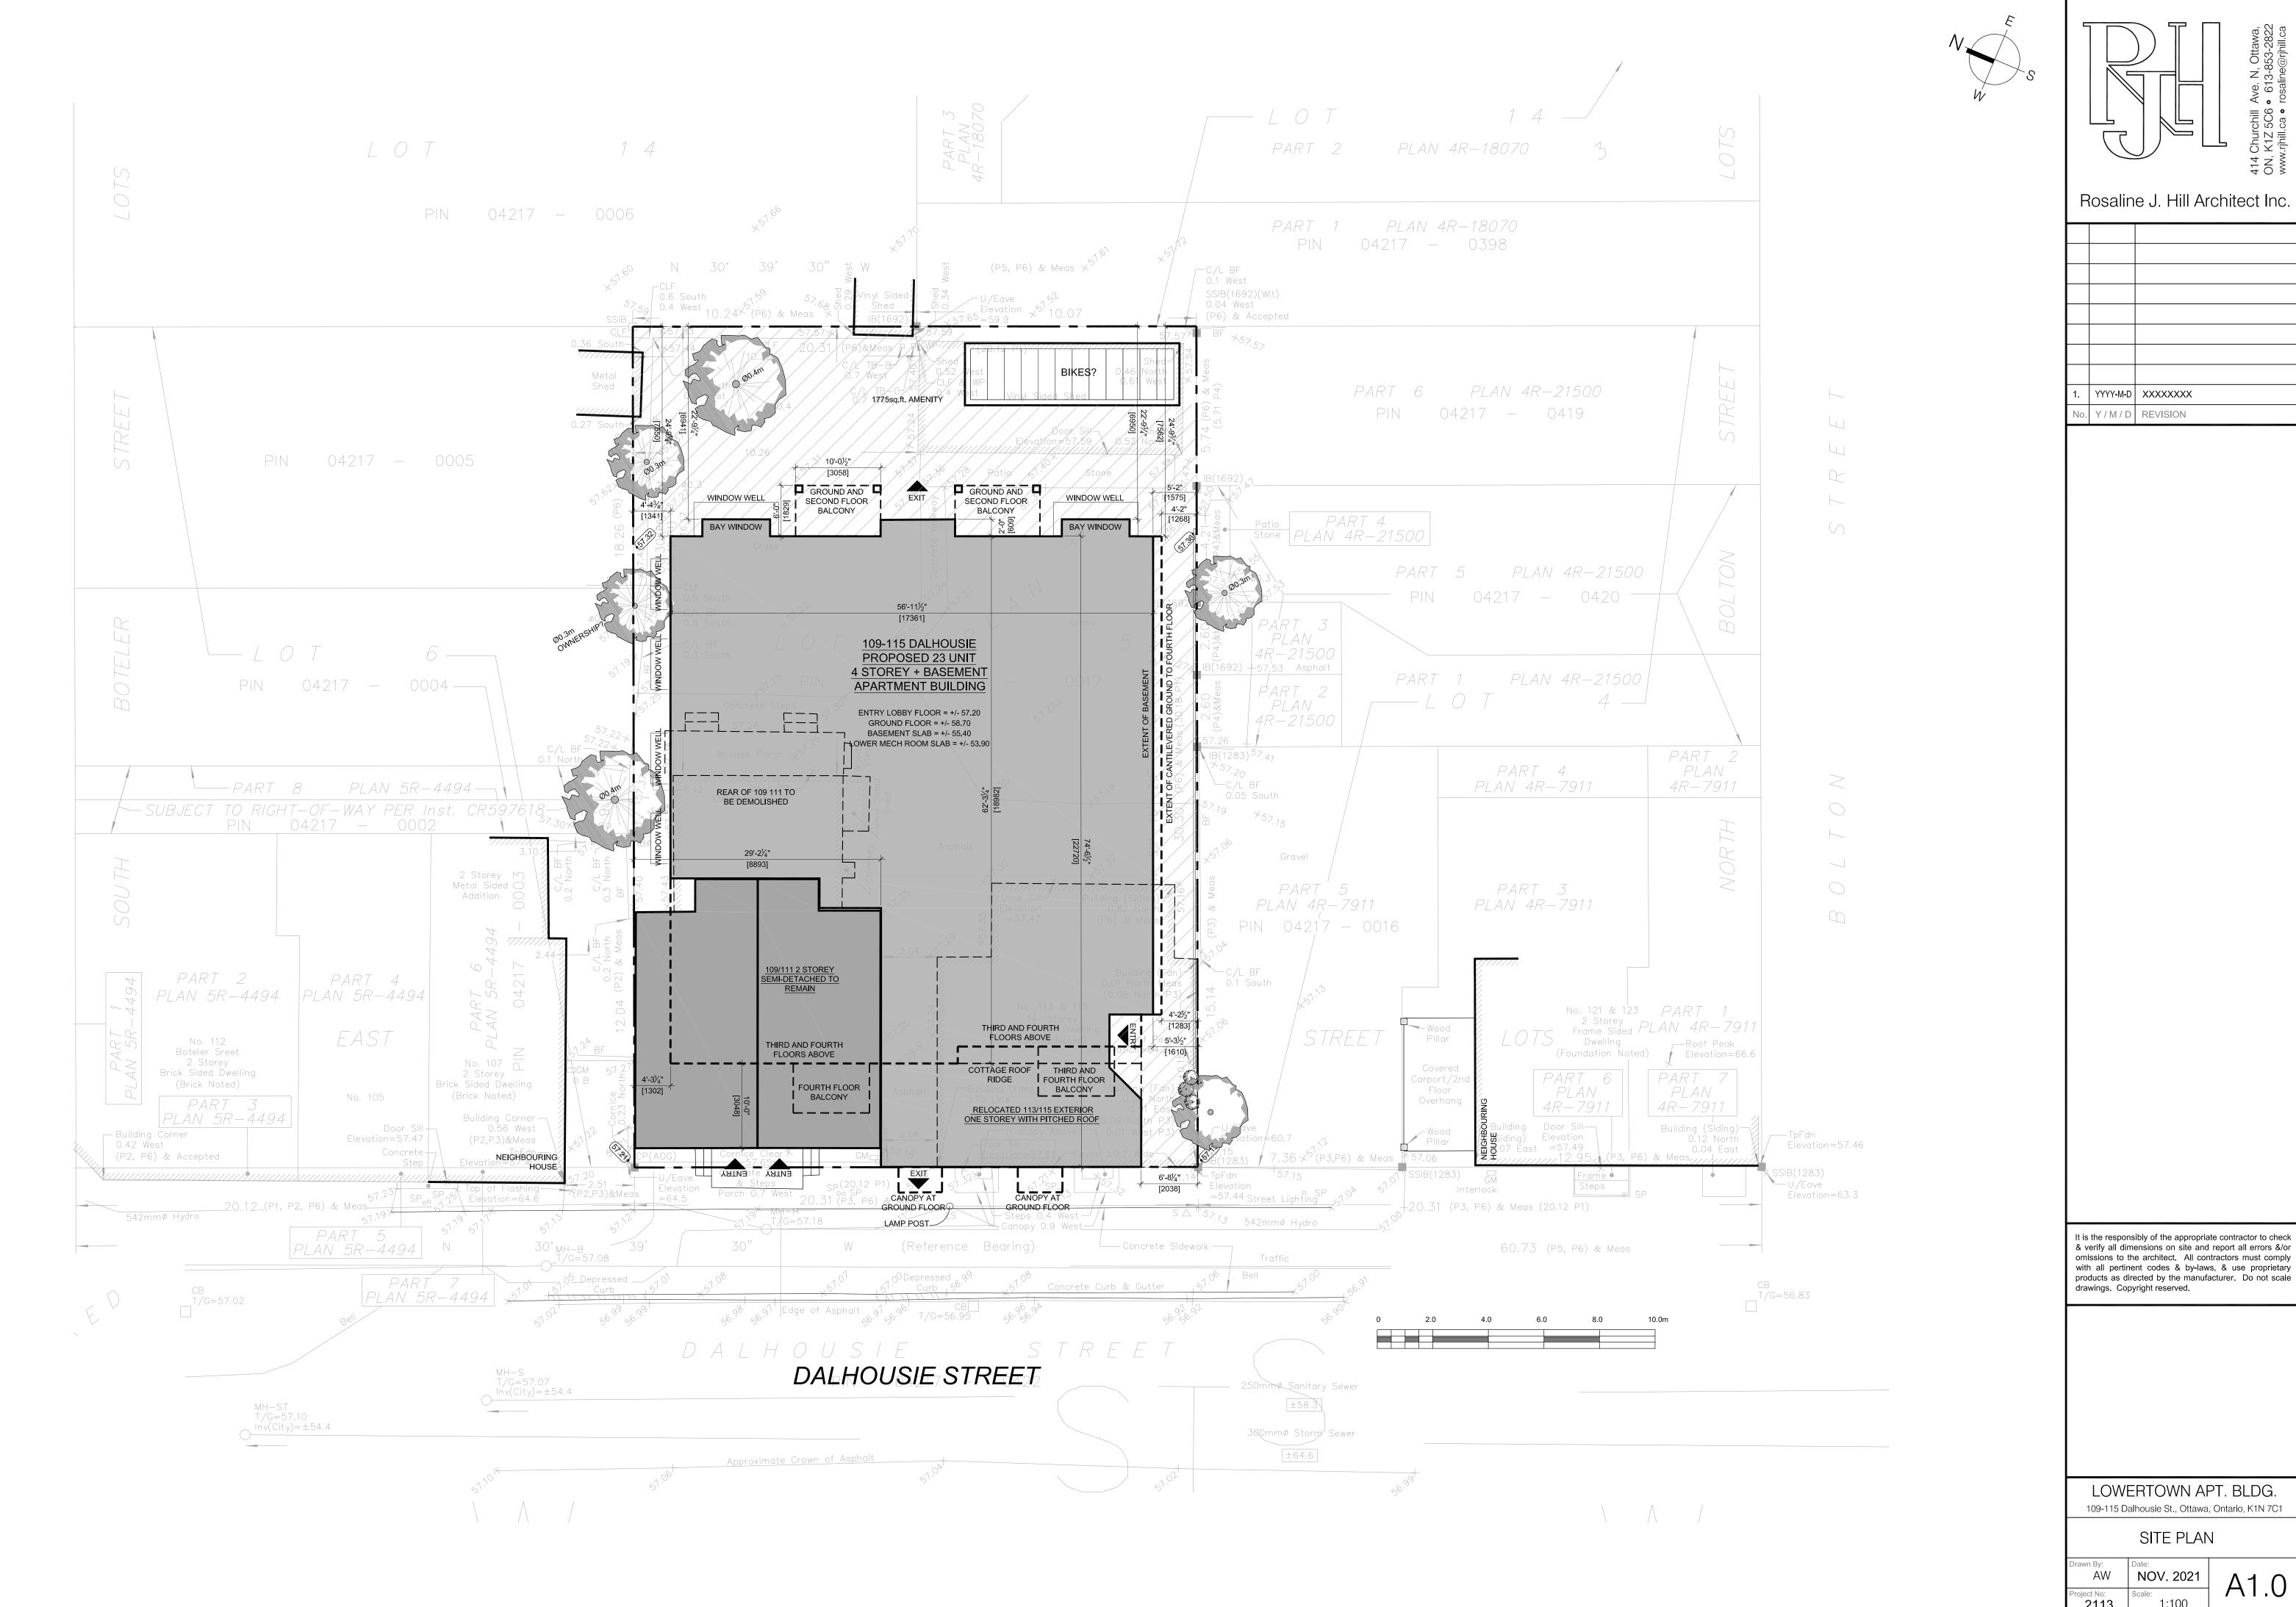

1.	YYYY-M-D	XXXXXXX
NIa	V / N / D	DEV/IOION


& verify all dimensions on site and report all errors &/or omissions to the architect. All contractors must comply with all pertinent codes & by-laws, & use proprietary products as directed by the manufacturer. Do not scale


109-115 Dalhousie St., Ottawa, Ontario, K1N 7C1


roject No: 2113 1:100


Appendix A


Proposed Development Floor and Elevation Plans

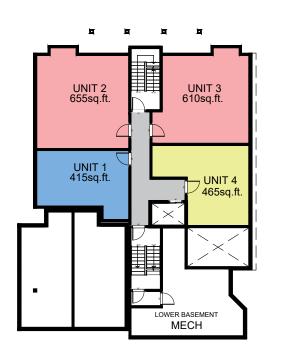

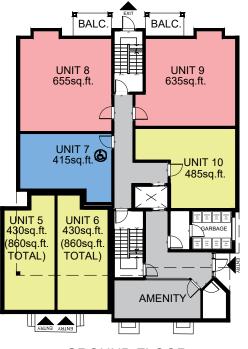

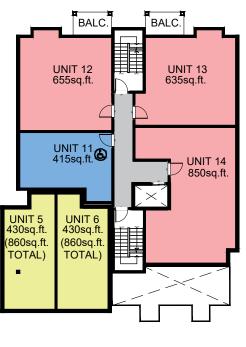

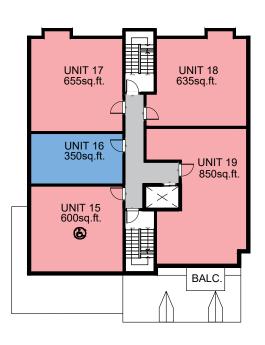

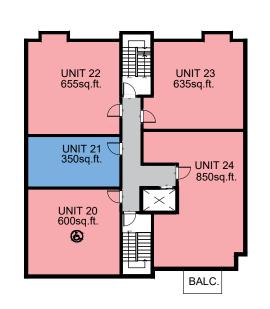

BASEMENT GROUND FLOOR SECOND FLOOR THIRD FLOOR FOURTH FLOOR

ACCESSIBLE UNIT
COMMON
BACHELOR
1 BED
2 BED



LOWERTOWN APT. BLDG.


109-115 Dalhousie St., Ottawa, Ontario, K1N 7C1

Nov. 02 2021

SCALE: 1:300


UNIT DISTRIBUTION



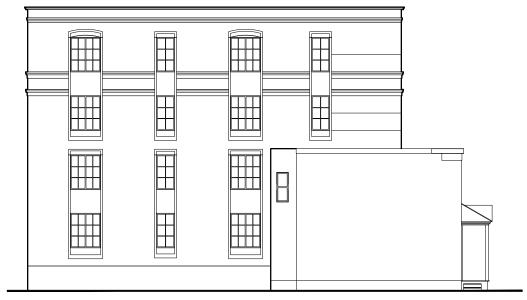

LEFT ELEVATION



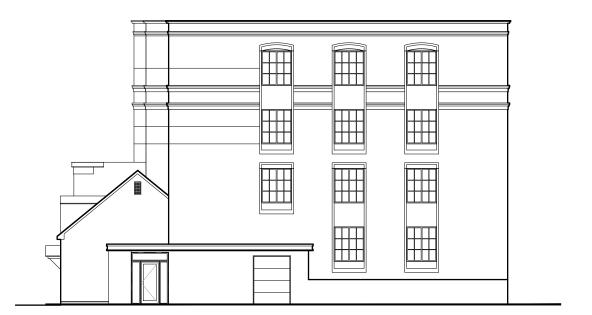

REAR ELEVATION

RIGHT ELEVATION



LOWERTOWN APT. BLDG.

109-115 Dalhousie St., Ottawa, Ontario, K1N 7C1

2022 01 06

SCALE:1/16" = 1'-0"

PRELIMINARY BUILDING ELEV.

Appendix B

Land-Use Zoning Maps

2/6/22, 6:52 PM geoOttawa




Appendix C

Road Traffic Data



Turning Movement Count - Study Results

BOLTON ST @ DALHOUSIE ST

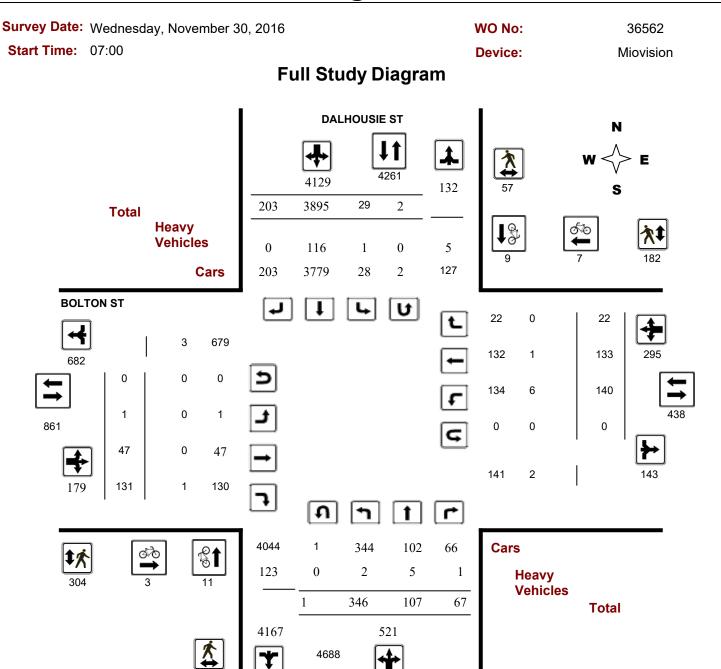

January 31, 2020 Page 1 of 8




Turning Movement Count - Study Results

BOLTON ST @ DALHOUSIE ST

Survey Date: Wednesday, November 30, 2016 WO No: 36562

Start Time: 07:00 Device: Miovision

Full Study Peak Hour Diagram

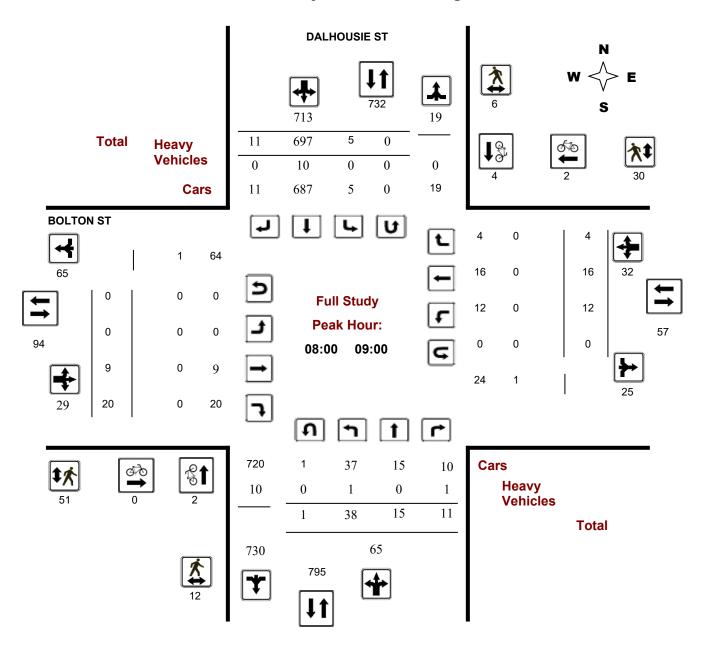


January 31, 2020 Page 2 of 8



Turning Movement Count - Peak Hour Diagram

BOLTON ST @ DALHOUSIE ST

Survey Date: Wednesday, November 30, 2016 WO No: 36562
Start Time: 07:00 Device: Miovision

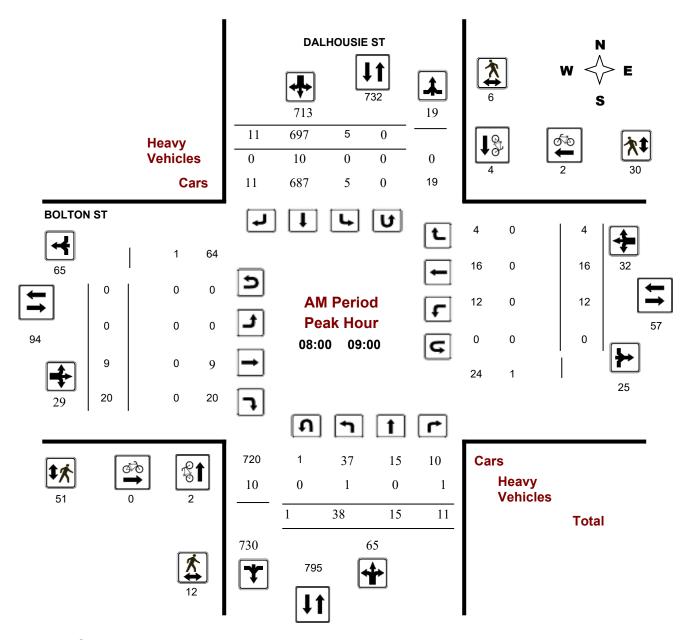

Comments


2020-Jan-31 Page 1 of 3



Turning Movement Count - Peak Hour Diagram

BOLTON ST @ DALHOUSIE ST

Survey Date: Wednesday, November 30, 2016 WO No: 36562
Start Time: 07:00 Device: Miovision

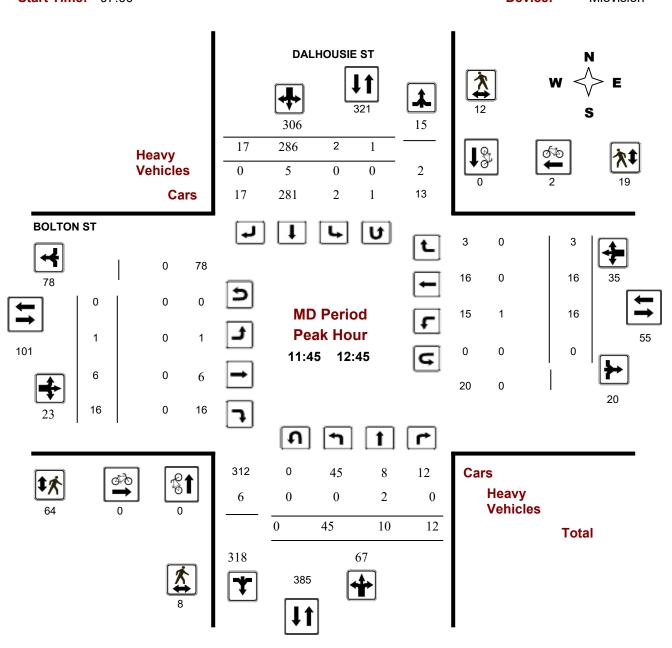

Comments


2020-Jan-31 Page 2 of 3



Turning Movement Count - Peak Hour Diagram

BOLTON ST @ DALHOUSIE ST

Survey Date: Wednesday, November 30, 2016 WO No: 36562
Start Time: 07:00 Device: Miovision

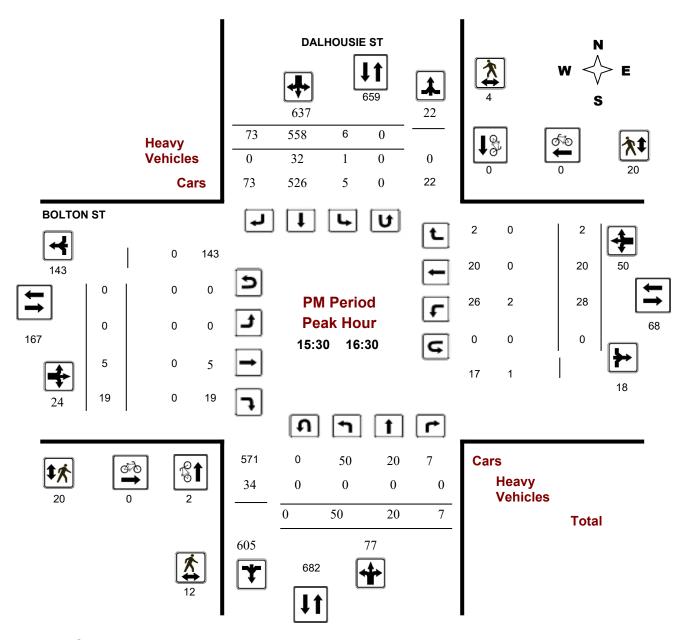

Comments

2020-Jan-31 Page 3 of 3



Turning Movement Count - Study Results

BOLTON ST @ DALHOUSIE ST

Survey Date: Wednesday, November 30, 2016 WO No: 36562

Start Time: 07:00 Device: Miovision

Full Study Summary (8 HR Standard)

Survey Date: Wednesday, November 30, Total Observed U-Turns AADT Factor

2016 Northbound: 1 Southbound: 2

Eastbound: 0 Westbound: 0 1.25

			DALF	HOUSIE	E ST							ВС	DLTON	ST					
	Noi	thbou	nd		So	uthbou	ınd			Ea	astbou	ınd		W	estbou	ınd			
Period	LT	ST	RT	NB TOT	LT	ST	RT	SB TOT	STR TOT	LT	ST	RT	EB TOT	LT	ST	RT	WB TOT	STR TOT	Grand Total
07:00 08:00	28	7	4	39	2	736	12	750	789	0	8	12	20	13	7	2	22	42	831
08:00 09:00	38	15	11	64	5	697	11	713	777	0	9	20	29	12	16	4	32	61	838
09:00 10:00	44	10	9	63	7	452	5	464	527	0	3	13	16	16	19	2	37	53	580
11:30 12:30	43	12	10	65	2	279	19	300	365	0	4	14	18	18	8	3	29	47	412
12:30 13:30	46	16	10	72	4	263	8	275	347	1	4	20	25	17	19	2	38	63	410
15:00 16:00	62	16	7	85	3	477	53	533	618	0	8	21	29	28	26	2	56	85	703
16:00 17:00	43	16	5	64	4	519	60	583	647	0	6	12	18	13	19	1	33	51	698
17:00 18:00	42	15	11	68	2	472	35	509	577	0	5	19	24	23	19	6	48	72	649
Sub Total	346	107	67	520	29	3895	203	4127	4647	1	47	131	179	140	133	22	295	474	5121
U Turns				0				0	0				0				0	0	0
Total	346	107	67	520	29	3895	203	4127	4647	1	47	131	179	140	133	22	295	474	5121
EQ 12Hr	481	149	93	724	40	5414	282	5739	6464	1	65	182	249	195	185	31	410	659	7122
Note: These v	alues a	re calcul	lated by	/ multiply	ing the	totals b	y the a	ppropriate	e expansi	on facto	or.			1.39					
AVG 12Hr	433	134	84	652	36	4873	254	5165	5818	1	59	164	224	175	166	28	369	593	6410
Note: These v	olumes	are calc	culated	by multip	lying t	he Equiv	alent 1	2 hr. total	ls by the	AADT f	actor.			0.9					
AVG 24Hr	567	175	110	854	48	6383	333	6767	7621	2	77	215	293	229	218	36	483	776	8397

1.31

Note: U-Turns provided for approach totals. Refer to 'U-Turn' Report for specific breakdown.

Note: These volumes are calculated by multiplying the Average Daily 12 hr. totals by 12 to 24 expansion factor.

January 31, 2020 Page 3 of 8



Turning Movement Count - Study Results

BOLTON ST @ DALHOUSIE ST

Survey Date: Wednesday, November 30, 2016 WO No: 36562

Start Time: 07:00 Device: Miovision

Full Study 15 Minute Increments

DALHOUSIE ST BOLTON ST

	Northbound			und		Sc	outhbou	nd			Е	astbour	nd		Westbound					
Time I	Period	LT	ST	RT	N TOT	LT	ST	RT	S TOT	STR TOT	LT	ST	RT	E TOT	LT	ST	RT	W TOT	STR TOT	Grand Total
07:00	07:15	4	3	0	7	1	186	2	189	390	0	1	5	6	0	0	0	0	390	202
07:15	07:30	13	3	2	18	0	183	1	184	395	0	2	2	4	5	2	0	7	395	213
07:30	07:45	3	0	1	4	1	191	4	196	396	0	3	3	6	2	1	0	3	396	209
07:45	08:00	8	1	1	10	0	176	5	181	378	0	2	2	4	6	4	2	12	378	207
08:00	08:15	4	3	3	10	2	181	3	186	385	0	4	1	5	3	4	1	8	385	209
08:15	08:30	8	6	2	16	1	172	2	175	378	0	1	5	6	1	3	3	7	378	204
08:30	08:45	14	1	2	18	1	182	3	186	398	0	3	7	10	3	1	0	4	398	218
08:45	09:00	12	5	4	21	1	162	3	166	366	0	1	7	8	5	8	0	13	366	208
09:00	09:15	10	5	5	20	2	151	3	156	346	0	2	7	9	5	5	2	12	346	197
09:15	09:30	11	3	1	15	2	119	2	123	268	0	0	3	3	5	3	0	8	268	149
09:30	09:45	8	0	1	9	1	89	0	90	191	0	0	1	1	2	7	0	9	191	109
09:45	10:00	15	2	2	19	2	93	0	95	215	0	1	2	3	4	4	0	8	215	125
11:30	11:45	8	6	2	16	0	80	6	86	196	0	1	4	5	4	0	0	4	196	111
11:45	12:00	9	2	2	13	0	58	7	66	150	0	1	2	3	7	3	1	11	150	93
12:00	12:15	15	3	2	20	0	70	3	73	174	0	1	5	6	2	3	1	6	174	105
12:15	12:30	11	1	4	16	2	71	3	76	173	0	1	3	4	5	2	1	8	173	104
12:30	12:45	10	4	4	18	0	87	4	91	209	1	3	6	10	2	8	0	10	209	129
12:45	13:00	13	6	0	19	2	56	0	58	149	0	0	3	3	7	3	0	10	149	90
13:00	13:15	11	3	3	17	0	56	0	56	144	0	1	6	7	5	3	1	9	144	89
13:15	13:30	12	3	3	18	2	64	4	71	166	0	0	5	5	3	5	1	9	166	103
15:00	15:15	14	2	1	17	0	77	3	80	178	0	3	1	4	1	10	0	11	178	112
15:15	15:30	17	3	2	22	0	129	17	146	312	0	3	6	9	5	5	1	11	312	188
15:30	15:45	20	9	1	30	2	127	12	141	329	0	2	8	10	13	6	1	20	329	201
15:45	16:00	11	2	3	16	1	144	21	166	343	0	0	6	6	9	5	0	14	343	202
16:00	16:15	10	3	2	15	0	139	20	159	322	0	1	3	4	2	8	1	11	322	189
16:15	16:30	9	6	1	16	3	148	20	171	347	0	2	2	4	4	1	0	5	347	196
16:30	16:45	13	4	1	18	1	97	6	104	228	0	2	4	6	1	6	0	7	228	135
16:45	17:00	11	3	1	15	0	135	14	149	311	0	1	3	4	6	4	0	10	311	178
17:00	17:15	14	2	3	19	1	125	8	134	296	0	1	9	10	4	4	3	11	296	174
17:15	17:30	7	6	3	16	1	134	13	148	316	0	1	4	5	7	6	1	14	316	183
17:30	17:45	13	3	2	18	0	132	11	143	309	0	2	3	5	9	6	1	16	309	182
17:45	18:00	8	4	3	15	0	81	3	84	191	0	1	3	4	3	3	1	7	191	110
Total:		346	107	67	521	29	3895	203	4129	8949	1	47	131	179	140	133	22	295	8949	5,124

Note: U-Turns are included in Totals.

January 31, 2020 Page 4 of 8



Turning Movement Count - Study Results

BOLTON ST @ DALHOUSIE ST

Survey Date: Wednesday, November 30, 2016 WO No: 36562

Start Time: 07:00 Device: Miovision

Full Study Cyclist Volume

DALHOUSIE ST BOLTON ST

		DALHOUSIE 3					
Time Period	Northbound	Southbound	Street Total	Eastbound	Westbound	Street Total	Grand Total
07:00 07:15	0	0	0	0	0	0	0
07:15 07:30	0	0	0	0	0	0	0
07:30 07:45	0	1	1	0	0	0	1
07:45 08:00	0	0	0	1	0	1	1
08:00 08:15	1	3	4	0	0	0	4
08:15 08:30	0	1	1	0	1	1	2
08:30 08:45	0	0	0	0	1	1	1
08:45 09:00	1	0	1	0	0	0	1
09:00 09:15	0	2	2	0	0	0	2
09:15 09:30	0	0	0	0	0	0	0
09:30 09:45	0	1	1	1	0	1	2
09:45 10:00	0	0	0	0	0	0	0
11:30 11:45	0	0	0	0	0	0	0
11:45 12:00	0	0	0	0	0	0	0
12:00 12:15	0	0	0	0	1	1	1
12:15 12:30	0	0	0	0	0	0	0
12:30 12:45	0	0	0	0	1	1	1
12:45 13:00	0	0	0	0	0	0	0
13:00 13:15	1	0	1	0	0	0	1
13:15 13:30	1	0	1	0	0	0	1
15:00 15:15	0	0	0	0	0	0	0
15:15 15:30	0	0	0	0	0	0	0
15:30 15:45	0	0	0	0	0	0	0
15:45 16:00	1	0	1	0	0	0	1
16:00 16:15	0	0	0	0	0	0	0
16:15 16:30	1	0	1	0	0	0	1
16:30 16:45	3	0	3	0	1	1	4
16:45 17:00	0 1		1	1	1	2	3
17:00 17:15	0 0		0	0	0	0	0
17:15 17:30	1 0		1	0	0	0	1
17:30 17:45	0 0		0	0	1	1	1
17:45 18:00	1	0	1	0	0	0	1
Total	11	9	20	3	7	10	30

January 31, 2020 Page 5 of 8



Turning Movement Count - Study Results

BOLTON ST @ DALHOUSIE ST

Survey Date: Wednesday, November 30, 2016 WO No: 36562

Start Time: 07:00 Device: Miovision

Full Study Pedestrian Volume DALHOUSIE ST BOLTON ST

Time Period	NB Approach (E or W Crossing)	SB Approach (E or W Crossing)	Total	EB Approach (N or S Crossing)	WB Approach (N or S Crossing)	Total	Grand Total
07:00 07:15	1	1	2	1	2	3	5
07:15 07:30	4	1	5	9	5	14	19
07:30 07:45	0	1	1	7	4	11	12
07:45 08:00	2	2	4	9	7	16	20
08:00 08:15	1	0	1	7	8	15	16
08:15 08:30	7	1	8	9	9	18	26
08:30 08:45	2	4	6	15	6	21	27
08:45 09:00	2	1	3	20	7	27	30
09:00 09:15	2	1	3	13	6	19	22
09:15 09:30	0	1	1	10	6	16	17
09:30 09:45	1	1	2	10	3	13	15
09:45 10:00	2	0	2	6	3	9	11
11:30 11:45	1	4	5	4	5	9	14
11:45 12:00	2	1	3	13	1	14	17
12:00 12:15	0	1	1	27	5	32	33
12:15 12:30	2	4	6	14	9	23	29
12:30 12:45	4	6	10	10	4	14	24
12:45 13:00	3	2	5	13	8	21	26
13:00 13:15	0	3	3	7	6	13	16
13:15 13:30	4	1	5	10	2	12	17
15:00 15:15	1	2	3	4	4	8	11
15:15 15:30	3	2	5	9	8	17	22
15:30 15:45	7	1	8	4	7	11	19
15:45 16:00	0	0	0	6	0	6	6
16:00 16:15	2	0	2	7	5	12	14
16:15 16:30	3	3	6	3	8	11	17
16:30 16:45	5	1	6	9	6	15	21
16:45 17:00	2	5	7	12	13	25	32
17:00 17:15	2	1	3	10	6	16	19
17:15 17:30	2	0	2	11	8	19	21
17:30 17:45	2	5	7	9	4	13	20
17:45 18:00	1	1	2	6	7	13	15
Total	70	57	127	304	182	486	613

January 31, 2020 Page 6 of 8



Turning Movement Count - Study Results

BOLTON ST @ DALHOUSIE ST

Survey Date: Wednesday, November 30, 2016 WO No: 36562

Start Time: 07:00 Device: Miovision

Full Study Heavy Vehicles

DALHOUSIE ST BOLTON ST

		No	orthbou	und		Sc	uthbou	ınd			Е	astbour	nd		We	estbour	nd			
Time Per	eriod	LT	ST	RT	N TOT	LT	ST	RT	S TOT	STR TOT	LT	ST	RT	E TOT	LT	ST	RT	W TOT	STR TOT	Grand Total
07:00 07	7:15	0	0	0	4	0	4	0	4	8	0	0	0	0	0	0	0	0	0	4
07:15 07	7:30	0	0	0	4	0	2	0	2	6	0	0	0	0	2	0	0	2	2	4
07:30 07	7:45	0	0	0	4	0	4	0	4	8	0	0	0	0	0	0	0	0	0	4
07:45 08	00:80	0	0	0	2	0	2	0	2	4	0	0	0	1	0	1	0	1	2	3
08:00 08	8:15	0	0	1	6	0	5	0	5	11	0	0	0	0	0	0	0	1	1	6
08:15 08	8:30	0	0	0	2	0	2	0	2	4	0	0	0	0	0	0	0	0	0	2
08:30 08	8:45	0	0	0	2	0	2	0	2	4	0	0	0	0	0	0	0	0	0	2
08:45 09	9:00	1	0	0	2	0	1	0	1	3	0	0	0	1	0	0	0	0	1	2
09:00 09	9:15	0	0	0	2	0	1	0	1	3	0	0	1	1	0	0	0	0	1	2
09:15 09	9:30	1	0	0	5	0	3	0	3	8	0	0	0	1	1	0	0	1	2	5
09:30 09	9:45	0	0	0	1	0	1	0	1	2	0	0	0	0	0	0	0	0	0	1
09:45 10	0:00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
11:30 11	1:45	0	2	0	6	0	4	0	6	12	0	0	0	0	0	0	0	0	0	6
11:45 12	2:00	0	1	0	2	0	0	0	1	3	0	0	0	0	1	0	0	1	1	2
	2:15	0	1	0	3	0	2	0	3	6	0	0	0	0	0	0	0	0	0	3
12:15 12	2:30	0	0	0	1	0	1	0	1	2	0	0	0	0	0	0	0	0	0	1
12:30 12	2:45	0	0	0	2	0	2	0	2	4	0	0	0	0	0	0	0	0	0	2
12:45 13	3:00	0	0	0	2	0	2	0	2	4	0	0	0	0	0	0	0	0	0	2
13:00 13	3:15	0	0	0	3	0	3	0	3	6	0	0	0	0	0	0	0	0	0	3
	3:30	0	0	0	1	0	1	0	1	2	0	0	0	0	0	0	0	0	0	1
	5:15	0	0	0	7	0	7	0	7	14	0	0	0	0	0	0	0	0	0	7
	5:30	0	0	0	8	0	8	0	8	16	0	0	0	0	0	0	0	0	0	8
	5:45	0	0	0	10	0	8	0	8	18	0	0	0	0	2	0	0	2	2	10
15:45 16	6:00	0	0	0	6	0	6	0	6	12	0	0	0	0	0	0	0	0	0	6
	6:15	0	0	0	10	0	10	0	10	20	0	0	0	0	0	0	0	0	0	10
	6:30	0	0	0	8	1	8	0	9	17	0	0	0	0	0	0	0	1	1	9
	6:45	0	0	0	3	0	3	0	3	6	0	0	0	0	0	0	0	0	0	3
	7:00	0	0	0	6	0	6	0	6	12	0	0	0	0	0	0	0	0	0	6
	7:15	0	0	0	1	0	1	0	1	2	0	0	0	0	0	0	0	0	0	1
17:15 17	7:30	0	1	0	7	0	6	0	7	14	0	0	0	0	0	0	0	0	0	7
17:30 17	7:45	0	0	0	8	0	8	0	8	16	0	0	0	0	0	0	0	0	0	8
17:45 18	8:00	0	0	0	3	0	3	0	3	6	0	0	0	0	0	0	0	0	0	3
Total: N	None	2	5	1	131	1	116	0	122	253	0	0	1	4	6	1	0	9	13	133

January 31, 2020 Page 7 of 8



Turning Movement Count - Study Results

BOLTON ST @ DALHOUSIE ST

Survey Date: Wednesday, November 30, 2016 WO No: 36562

Start Time: 07:00 Device: Miovision

Full Study 15 Minute U-Turn Total DALHOUSIE ST BOLTON ST

Time P	eriod	Northbound U-Turn Total	Southbound U-Turn Total	Eastbound U-Turn Total	Westbound U-Turn Total	Total		
07:00	07:15	0	0	0	0	0		
07:15	07:30	0	0	0	0	0		
07:30	07:45	0	0	0	0	0		
07:45	08:00	0	0	0	0	0		
08:00	08:15	0	0	0	0	0		
08:15	08:30	0	0	0	0	0		
08:30	08:45	1	0	0	0	1		
08:45	09:00	0	0	0	0	0		
09:00	09:15	0	0	0	0	0		
09:15	09:30	0	0	0	0	0		
09:30	09:45	0	0	0	0	0		
09:45	10:00	0	0	0	0	0		
11:30	11:45	0	0	0	0	0		
11:45	12:00	0	1	0	0	1		
12:00	12:15	0	0	0	0	0		
12:15	12:30	0	0	0	0	0		
12:30	12:45	0	0	0	0	0		
12:45	13:00	0	0	0	0	0		
13:00	13:15	0	0	0	0	0		
13:15	13:30	0	1	0	0	1		
15:00	15:15	0	0	0	0	0		
15:15	15:30	0	0	0	0	0		
15:30	15:45	0	0	0	0	0		
15:45	16:00	0	0	0	0	0		
16:00	16:15	0	0	0	0	0		
16:15	16:30	0	0	0	0	0		
16:30	16:45	0	0	0	0	0		
16:45	17:00	0	0	0	0	0		
17:00	17:15	0	0	0	0	0		
17:15	17:30	0	0	0	0	0		
17:30	17:45	0	0	0	0	0		
17:45	18:00	0	0	0	0	0		
То	tal	1	2	0	0	3		

January 31, 2020 Page 8 of 8




Turning Movement Count - Study Results

BOTELER ST @ DALHOUSIE ST/MACDONALDCARTIER BR

Survey Date:Thursday, November 21, 2019WO No:39072Start Time:07:00Device:Miovision

Full Study Diagram

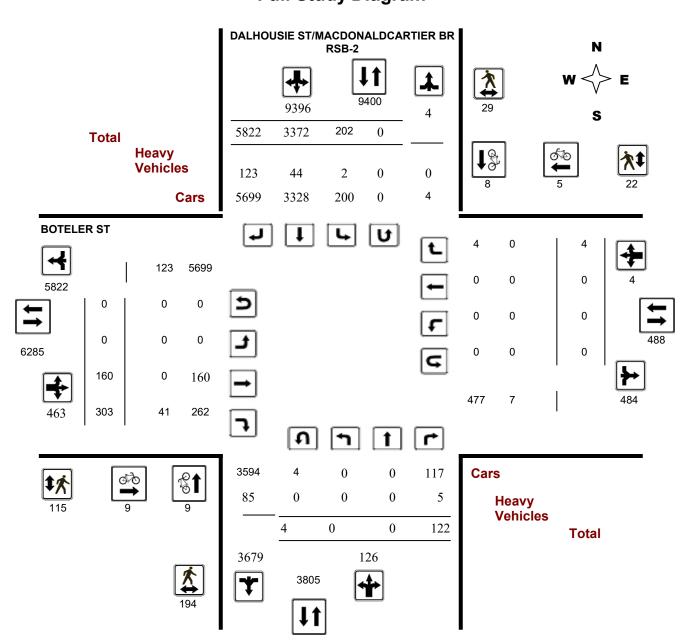

January 31, 2020 Page 1 of 8




Turning Movement Count - Study Results

BOTELER ST @ DALHOUSIE ST/MACDONALDCARTIER BR

Survey Date: Thursday, November 21, 2019 WO No: 39072

Start Time: 07:00 Device: Miovision

Full Study Peak Hour Diagram

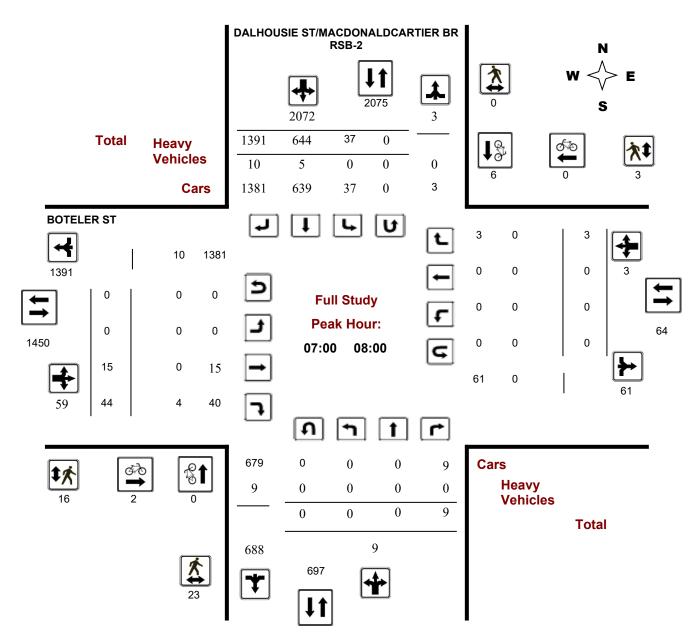


January 31, 2020 Page 2 of 8



Turning Movement Count - Peak Hour Diagram

BOTELER ST @ DALHOUSIE ST/MACDONALDCARTIER BR

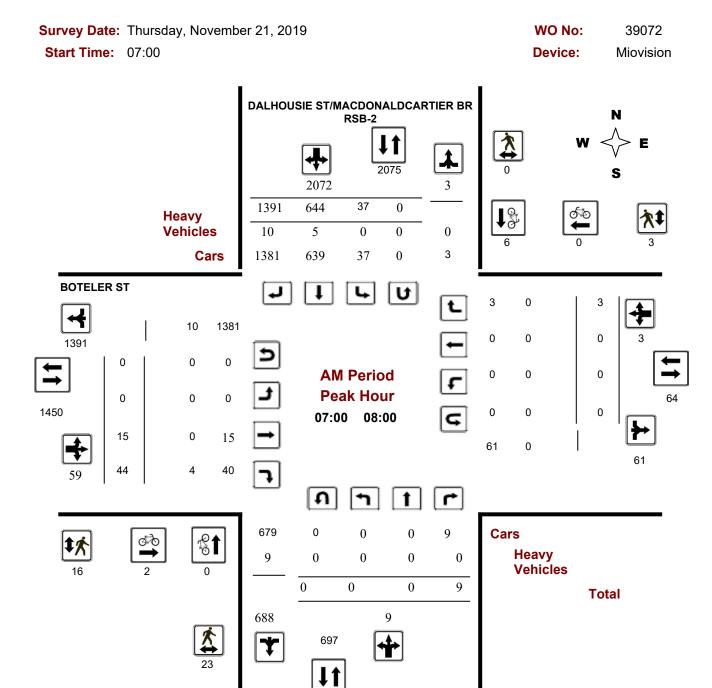


Comments

2020-Jan-31 Page 1 of 3



Turning Movement Count - Peak Hour Diagram

BOTELER ST @ DALHOUSIE ST/MACDONALDCARTIER BR

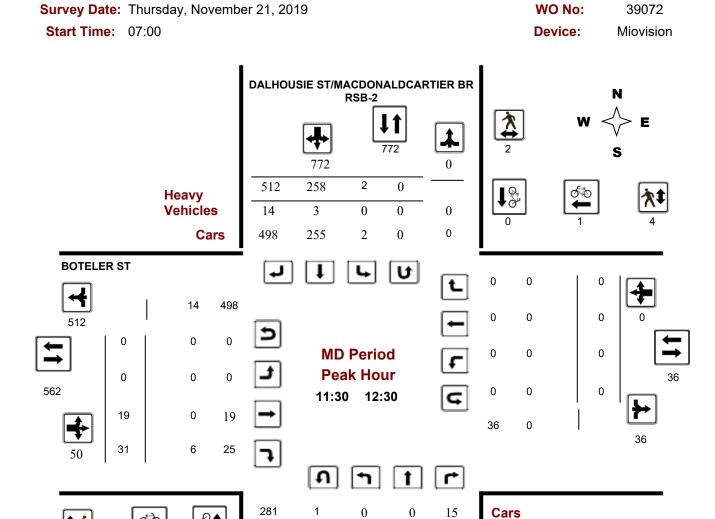

Heavy

Vehicles

Total


Comments

2020-Jan-31 Page 2 of 3



Turning Movement Count - Peak Hour Diagram

BOTELER ST @ DALHOUSIE ST/MACDONALDCARTIER BR

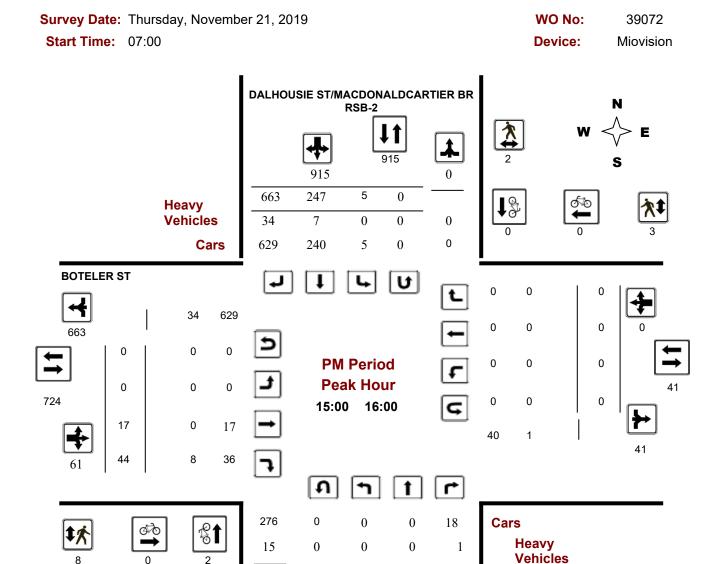

Comments

2020-Jan-31 Page 3 of 3

0

291

0

310

11

0

19

19

Total



Turning Movement Count - Study Results

BOTELER ST @ DALHOUSIE ST/MACDONALDCARTIER BR

Survey Date: Thursday, November 21, 2019 WO No: 39072

Start Time: 07:00 Device: Miovision

Full Study Summary (8 HR Standard)

Survey Date: Thursday, November 21, 2019 Total Observed U-Turns AADT Factor

Northbound: 4 Southbound: 0

1.25

Eastbound: 0 Westbound: 0

DALHOUSIE ST/MACDONALDCARTIER BR

RSB-2

BOTELER ST

Period	Northbound			Southbound					Eastbound				Westbound						
	LT	ST	RT	NB TOT	LT	ST	RT	SB TOT	STR TOT	LT	ST	RT	EB TOT	LT	ST	RT	WB TOT	STR TOT	Grand Total
07:00 08:00	0	0	9	9	37	644	1391	2072	2081	0	15	44	59	0	0	3	3	62	2143
08:00 09:00	0	0	18	18	93	639	1153	1885	1903	0	39	67	106	0	0	0	0	106	2009
09:00 10:00	0	0	18	18	27	462	841	1330	1348	0	22	34	56	0	0	1	1	57	1405
11:30 12:30	0	0	15	15	2	258	512	772	787	0	19	31	50	0	0	0	0	50	837
12:30 13:30	0	0	16	16	5	204	461	670	686	0	13	20	33	0	0	0	0	33	719
15:00 16:00	0	0	19	19	5	247	663	915	934	0	17	44	61	0	0	0	0	61	995
16:00 17:00	0	0	13	13	19	540	296	855	868	0	20	30	50	0	0	0	0	50	918
17:00 18:00	0	0	14	14	14	378	505	897	911	0	15	33	48	0	0	0	0	48	959
Sub Total	0	0	122	122	202	3372	5822	9396	9518	0	160	303	463	0	0	4	4	467	9985
U Turns				4				0	4				0				0	0	4
Total	0	0	122	126	202	3372	5822	9396	9522	0	160	303	463	0	0	4	4	467	9989
EQ 12Hr	0	0	170	175	281	4687	8093	13060	13236	0	222	421	644	0	0	6	6	649	13885
Note: These v	alues ar	e calcul	lated by	multiply	ing the	totals b	y the a	ppropriat	e expansi	ion facto	or.			1.39					
AVG 12Hr	0	0	153	158	253	4218	7283	11754	11912	0	200	379	579	0	0	5	5	584	12496
Note: These v	olumes	are calc	culated	by multip	olying tl	he Equi	valent 1	2 hr. tota	ls by the	AADT f	actor.			0.9					
AVG 24Hr	0	0	200	206	331	5526	9541	15398	15604	0	262	497	759	0	0	7	7	766	16370

Note: These volumes are calculated by multiplying the Average Daily 12 hr. totals by 12 to 24 expansion factor. 1.31

Note: U-Turns provided for approach totals. Refer to 'U-Turn' Report for specific breakdown.

January 31, 2020 Page 3 of 8



Turning Movement Count - Study Results

BOTELER ST @ DALHOUSIE ST/MACDONALDCARTIER BR

Survey Date: Thursday, November 21, 2019 WO No: 39072

Start Time: 07:00 Device: Miovision

Full Study 15 Minute Increments BOTELER ST

DALHOUSIE ST/MACDONALDCARTIER BR RSB-

2

		Northbound			_	Sc	Southbound Eastbound			nd	Westbound									
Time Perio	od	LT	ST	RT	N TOT	LT	ST	RT	S TOT	STR TOT	LT	ST	RT	E TOT	LT	ST	RT	W TOT	STR TOT	Grand Total
07:00 07:	15	0	0	3	3	2	132	367	501	644	0	2	5	7	0	0	3	3	644	514
07:15 07:3	30	0	0	2	2	4	179	354	537	727	0	3	9	12	0	0	0	0	727	551
07:30 07:4	45	0	0	1	1	9	171	351	531	718	0	7	15	22	0	0	0	0	718	554
07:45 08:0	00	0	0	3	3	22	162	319	503	683	0	3	15	18	0	0	0	0	683	524
08:00 08:	15	0	0	2	2	24	167	296	487	673	0	4	17	21	0	0	0	0	673	510
08:15 08:3	30	0	0	4	4	30	156	295	481	658	0	6	17	23	0	0	0	0	658	508
08:30 08:4	45	0	0	9	9	11	159	293	463	652	0	13	21	34	0	0	0	0	652	506
08:45 09:0	00	0	0	3	3	28	157	269	454	626	0	16	12	28	0	0	0	0	626	485
09:00 09:1	15	0	0	6	6	16	159	283	458	634	0	9	10	19	0	0	1	1	634	484
09:15 09:3	30	0	0	5	5	5	118	240	363	496	0	3	10	13	0	0	0	0	496	381
09:30 09:4	45	0	0	3	3	4	83	170	257	350	0	5	7	12	0	0	0	0	350	272
09:45 10:0	00	0	0	4	4	2	102	148	252	365	0	5	7	12	0	0	0	0	365	268
11:30 11:4	45	0	0	2	2	1	68	152	221	300	0	4	9	13	0	0	0	0	300	236
11:45 12:0	00	0	0	4	4	1	75	108	184	269	0	3	6	9	0	0	0	0	269	197
12:00 12:1	15	0	0	5	6	0	60	117	177	248	0	7	4	11	0	0	0	0	248	194
12:15 12:3	30	0	0	4	4	0	55	135	190	261	0	5	12	17	0	0	0	0	261	211
12:30 12:4	45	0	0	3	3	0	57	122	179	245	0	5	6	11	0	0	0	0	245	193
12:45 13:0	00	0	0	6	6	1	61	108	170	244	0	1	7	8	0	0	0	0	244	184
13:00 13:1	15	0	0	5	6	2	52	118	172	234	0	1	3	4	0	0	0	0	234	182
13:15 13:3	30	0	0	2	2	2	34	113	149	189	0	6	4	10	0	0	0	0	189	161
15:00 15:1	15	0	0	5	5	0	63	212	275	353	0	1	10	11	0	0	0	0	353	291
15:15 15:3	30	0	0	5	5	1	62	156	219	301	0	4	15	19	0	0	0	0	301	243
15:30 15:4	45	0	0	6	6	0	51	160	211	275	0	6	7	13	0	0	0	0	275	230
15:45 16:0	00	0	0	3	3	4	71	135	210	296	0	6	12	18	0	0	0	0	296	231
16:00 16:	15	0	0	5	5	4	126	79	209	349	0	7	9	16	0	0	0	0	349	230
16:15 16:3	30	0	0	2	2	4	142	69	215	364	0	4	5	9	0	0	0	0	364	226
16:30 16:4	45	0	0	2	2	4	122	85	211	341	0	2	6	8	0	0	0	0	341	221
16:45 17:0	00	0	0	4	4	7	150	63	220	384	0	7	10	17	0	0	0	0	384	241
17:00 17:1		0	0	2	2	5	156	65	226	398	0	4	14	18	0	0	0	0	398	246
17:15 17:3		0	0	5	7	3	92	143	238	348	0	5	9	14	0	0	0	0	348	259
17:30 17:4	45	0	0	3	3	3	64	152	219	290	0	4	4	8	0	0	0	0	290	230
17:45 18:0	00	0	0	4	4	3	66	145	214	290	0	2	6	8	0	0	0	0	290	226
Total:		0	0	122	126	202	3372	5822	9396	13205	0	160	303	463	0	0	4	4	13205	9,989

Note: U-Turns are included in Totals.

January 31, 2020 Page 4 of 8



Turning Movement Count - Study Results

BOTELER ST @ DALHOUSIE ST/MACDONALDCARTIER BR

Survey Date: Thursday, November 21, 2019 WO No: 39072

Start Time: 07:00 Device: Miovision

Full Study Cyclist Volume

DALHOUSIE ST/MACDONALDCARTIER BR BOTELER ST RSB-2

Time Period	Northbound	Southbound	Street Total	Eastbound	Westbound	Street Total	_ Grand Total
07:00 07:15	0	1	1	0	0	0	1
07:15 07:30	0	1	1	0	0	0	1
07:30 07:45	0	1	1	0	0	0	1
07:45 08:00	0	3	3	2	0	2	5
08:00 08:15	0	0	0	0	0	0	0
08:15 08:30	0	0	0	0	0	0	0
08:30 08:45	0	0	0	0	0	0	0
08:45 09:00	0	0	0	0	0	0	0
09:00 09:15	0	1	1	3	0	3	4
09:15 09:30	1	0	1	0	0	0	1
09:30 09:45	0	0	0	0	0	0	0
09:45 10:00	0	0	0	0	0	0	0
11:30 11:45	0	0	0	0	0	0	0
11:45 12:00	0	0	0	0	0	0	0
12:00 12:15	1	0	1	0	1	1	2
12:15 12:30	0	0	0	1	0	1	1
12:30 12:45	0	0	0	1	0	1	1
12:45 13:00	0	0	0	0	0	0	0
13:00 13:15	1	0	1	0	0	0	1
13:15 13:30	1	0	1	0	0	0	1
15:00 15:15	1	0	1	0	0	0	1
15:15 15:30	0	0	0	0	0	0	0
15:30 15:45	0	0	0	0	0	0	0
15:45 16:00	1	0	1	0	0	0	1
16:00 16:15	0	1	1	0	0	0	1
16:15 16:30	0	0	0	0	0	0	0
16:30 16:45	0	0	0	0	0	0	0
16:45 17:00	1	0	1	0	1	1	2
17:00 17:15	0	0	0	0	0	0	0
17:15 17:30	0	0	0	0	1	1	1
17:30 17:45	2	0	2	2	2	4	6
17:45 18:00	0	0	0	0	0	0	0
Total	9	8	17	9	5	14	31

January 31, 2020 Page 5 of 8



Turning Movement Count - Study Results

BOTELER ST @ DALHOUSIE ST/MACDONALDCARTIER BR

Survey Date: Thursday, November 21, 2019 WO No: 39072

Start Time: 07:00 Device: Miovision

Full Study Pedestrian Volume

DALHOUSIE

BOTELER ST

ST/MACDONALDCARTIER BR RSB-2

Time Period	NB Approach (E or W Crossing)	SB Approach (E or W Crossing)	Total	EB Approach (N or S Crossing)	WB Approach (N or S Crossing)	Total	Grand Total
07:00 07:15	2	0	2	3	2	5	7
07:15 07:30	5	0	5	2	0	2	7
07:30 07:45	4	0	4	4	0	4	8
07:45 08:00	12	0	12	7	1	8	20
08:00 08:15	8	0	8	4	0	4	12
08:15 08:30	7	4	11	6	1	7	18
08:30 08:45	9	1	10	1	0	1	11
08:45 09:00	5	3	8	4	0	4	12
09:00 09:15	9	0	9	6	2	8	17
09:15 09:30	15	0	15	1	0	1	16
09:30 09:45	7	0	7	3	1	4	11
09:45 10:00	2	0	2	3	1	4	6
11:30 11:45	4	0	4	5	0	5	9
11:45 12:00	1	1	2	0	2	2	4
12:00 12:15	7	1	8	0	0	0	8
12:15 12:30	3	0	3	4	2	6	9
12:30 12:45	4	1	5	3	0	3	8
12:45 13:00	5	4	9	5	1	6	15
13:00 13:15	3	0	3	0	2	2	5
13:15 13:30	10	0	10	1	0	1	11
15:00 15:15	3	0	3	1	2	3	6
15:15 15:30	3	0	3	2	0	2	5
15:30 15:45	2	1	3	3	0	3	6
15:45 16:00	4	1	5	2	1	3	8
16:00 16:15	3	0	3	3	0	3	6
16:15 16:30	4	0	4	3	0	3	7
16:30 16:45	10	2	12	6	0	6	18
16:45 17:00	4	4	8	8	2	10	18
17:00 17:15	11	0	11	7	1	8	19
17:15 17:30	14	1	15	7	0	7	22
17:30 17:45	5	2	7	5	0	5	12
17:45 18:00	9	3	12	6	1	7	19
Total	194	29	223	115	22	137	360

January 31, 2020 Page 6 of 8



Turning Movement Count - Study Results

BOTELER ST @ DALHOUSIE ST/MACDONALDCARTIER BR

Survey Date: Thursday, November 21, 2019 WO No: 39072

Start Time: 07:00 Device: Miovision

Full Study Heavy Vehicles

DALHOUSIE BOTELER ST ST/MACDONALDCARTIER BR RSB-

	Northbound			Southbound					Eastbound				Westbound						
Time Perio	d LT	ST	RT	N TOT	LT	ST	RT	S TOT	STR TOT	LT	ST	RT	E TOT	LT	ST	RT	W TOT	STR TOT	Grand Total
07:00 07:	15 0	0	0	2	0	1	3	4	6	0	0	1	4	0	0	0	0	4	5
07:15 07:3	30 0	0	0	2	0	1	0	1	3	0	0	1	1	0	0	0	0	1	2
07:30 07:4	45 0	0	0	2	0	1	4	5	7	0	0	1	5	0	0	0	0	5	6
07:45 08:0	0 00	0	0	3	0	2	3	5	8	0	0	1	4	0	0	0	0	4	6
08:00 08:	15 0	0	0	1	0	0	1	1	2	0	0	1	2	0	0	0	0	2	2
08:15 08:3	30 0	0	0	4	1	3	2	6	10	0	0	1	3	0	0	0	1	4	7
08:30 08:4	45 0	0	0	3	0	1	1	2	5	0	0	2	3	0	0	0	0	3	4
08:45 09:0	0 0	0	0	2	0	2	1	3	5	0	0	0	1	0	0	0	0	1	3
09:00 09:	15 0	0	0	3	0	2	2	4	7	0	0	1	3	0	0	0	0	3	5
09:15 09:3	30 0	0	1	2	0	0	5	5	7	0	0	1	6	0	0	0	1	7	7
09:30 09:4	45 0	0	0	2	0	1	6	7	9	0	0	1	7	0	0	0	0	7	8
09:45 10:0	0 0	0	0	2	0	2	6	8	10	0	0	0	6	0	0	0	0	6	8
11:30 11:4	45 0	0	0	1	0	0	5	5	6	0	0	1	6	0	0	0	0	6	6
11:45 12:0	0 0	0	0	1	0	1	4	5	6	0	0	0	4	0	0	0	0	4	5
12:00 12:1	15 0	0	0	5	0	2	0	2	7	0	0	3	3	0	0	0	0	3	5
12:15 12:3	30 0	0	0	2	0	0	5	5	7	0	0	2	7	0	0	0	0	7	7
12:30 12:4	45 0	0	1	2	0	1	4	5	7	0	0	0	4	0	0	0	1	5	6
12:45 13:0	0 0	0	0	4	0	3	7	10	14	0	0	1	8	0	0	0	0	8	11
13:00 13:1	15 0	0	1	2	0	0	4	4	6	0	0	1	5	0	0	0	1	6	6
13:15 13:3	30 0	0	0	2	0	0	4	4	6	0	0	2	6	0	0	0	0	6	6
15:00 15:1	15 0	0	0	3	0	1	8	9	12	0	0	2	10	0	0	0	0	10	11
15:15 15:3	30 0	0	1	7	0	5	10	15	22	0	0	1	11	0	0	0	1	12	17
15:30 15:4	45 0	0	0	3	0	1	8	9	12	0	0	2	10	0	0	0	0	10	11
15:45 16:0	0 0	0	0	3	0	0	8	8	11	0	0	3	11	0	0	0	0	11	11
16:00 16:1	_	0	1	4	0	2	5	7	11	0	0	1	6	0	0	0	1	7	9
16:15 16:3	30 0	0	0	5	0	3	0	3	8	0	0	2	2	0	0	0	0	2	5
16:30 16:4		0	0	3	0	2	3	5	8	0	0	1	4	0	0	0	0	4	6
16:45 17:0	_	0	0	5	0	2	3	5	10	0	0	3	6	0	0	0	0	6	8
17:00 17:	15 0	0	0	6	1	5	0	6	12	0	0	1	1	0	0	0	1	2	7
17:15 17:3	30 0	0	0	2	0	0	6	6	8	0	0	2	8	0	0	0	0	8	8
17:30 17:4	45 0	0	0	1	0	0	4	4	5	0	0	1	5	0	0	0	0	5	5
17:45 18:0	0 0	0	0	1	0	0	1	1	2	0	0	1	2	0	0	0	0	2	2
Total: Nor	ne 0	0	5	90	2	44	123	169	259	0	0	41	164	0	0	0	7	171	215

January 31, 2020 Page 7 of 8



Turning Movement Count - Study Results

BOTELER ST @ DALHOUSIE ST/MACDONALDCARTIER BR

Survey Date: Thursday, November 21, 2019 WO No: 39072

Start Time: 07:00 Device: Miovision

Full Study 15 Minute U-Turn Total

		DALHOU	SIE	ВО		
Time I		**4CDONALDCAF Northbound U-Turn Total	RTIER BR RSB- Southbound U-Turn Total	Eastbound U-Turn Total	Westbound U-Turn Total	Total
07:00	07:15	0	0	0	0	0
07:15	07:30	0	0	0	0	0
07:30	07:45	0	0	0	0	0
07:45	08:00	0	0	0	0	0
08:00	08:15	0	0	0	0	0
08:15	08:30	0	0	0	0	0
08:30	08:45	0	0	0	0	0
08:45	09:00	0	0	0	0	0
09:00	09:15	0	0	0	0	0
09:15	09:30	0	0	0	0	0
09:30	09:45	0	0	0	0	0
09:45	10:00	0	0	0	0	0
11:30	11:45	0	0	0	0	0
11:45	12:00	0	0	0	0	0
12:00	12:15	1	0	0	0	1
12:15	12:30	0	0	0	0	0
12:30	12:45	0	0	0	0	0
12:45	13:00	0	0	0	0	0
13:00	13:15	1	0	0	0	1
13:15	13:30	0	0	0	0	0
15:00	15:15	0	0	0	0	0
15:15	15:30	0	0	0	0	0
15:30	15:45	0	0	0	0	0
15:45	16:00	0	0	0	0	0
16:00	16:15	0	0	0	0	0
16:15	16:30	0	0	0	0	0
16:30	16:45	0	0	0	0	0
16:45	17:00	0	0	0	0	0
17:00	17:15	0	0	0	0	0
17:15	17:30	2	0	0	0	2
17:30	17:45	0	0	0	0	0
17:45	18:00	0	0	0	0	0
Т.	a+a1	1	0	0	0	1

January 31, 2020 Page 8 of 8

Appendix D

Road Traffic Modelling

STAMSON 5.0 NORMAL REPORT Date: 06-02-2022 17:37:21

MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: unit5.te Time Period: Day/Night 16/8 hours

Description:

Road data, segment # 1: Dalhousie (day/night)

Car traffic volume : 6906/601 veh/TimePeriod * Medium truck volume: 363/32 veh/TimePeriod *
Heavy truck volume: 0/0 veh/TimePeriod *
Posted speed limit: 50 km/h
Road gradient: 0 %
Road pavement: 1 (Typical asphalt or concrete)

* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT): 5732 Percentage of Annual Growth : 2.50 Number of Years of Growth : 13.00 Medium Truck % of Total Volume : 5.00
Heavy Truck % of Total Volume : 0.00
Day (16 hrs) % of Total Volume : 92.00

Data for Segment # 1: Dalhousie (day/night) _____

Angle1 Angle2 : -90.00 deg 90.00 deg Wood depth : 0 (No woods.)
No of house rows : 0 / 0
Surface : 1 (Absorptive ground

surface)

Receiver source distance : 15.00 / 15.00 m Receiver height : 1.50 / 4.00 m
Topography : 1 (Flat/gentle slope; no

Topography

barrier)

Reference angle : 0.00

Road data, segment # 2: Boteler (day/night)

Car traffic volume : 3530/307 veh/TimePeriod * Medium truck volume: 186/16 veh/TimePeriod *
Heavy truck volume: 0/0 veh/TimePeriod *
Posted speed limit: 50 km/h
Road gradient: 0 %

Road pavement : 1 (Typical asphalt or concrete)

* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT): 2930 Percentage of Annual Growth : 2.50 Number of Years of Growth : 13.00

Medium Truck % of Total Volume : 5.00

Heavy Truck % of Total Volume : 0.00

Day (16 hrs) % of Total Volume : 92.00

Data for Segment # 2: Boteler (day/night)

Anglel Angle2 : -45.00 deg 0.00 deg
Wood depth : 0 (No woods.)
No of house rows : 0 / 0
Surface : 1 (Absorptive ground

surface)

Receiver source distance : 34.00 / 34.00 m Receiver height : 1.50 / 4.00 m

Topography : 1 (Flat/gentle slope; no

barrier)

Reference angle : 0.00

Road data, segment # 3: Bolton (day/night)

Car traffic volume : 3503/305 veh/TimePeriod * Medium truck volume: 184/16 veh/TimePeriod *
Heavy truck volume: 0/0 veh/TimePeriod *
Posted speed limit: 50 km/h
Road gradient: 0 %

Road pavement : 1 (Typical asphalt or concrete)

* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT): 2700 Percentage of Annual Growth : Number of Years of Growth : 16.00

Medium Truck % of Total Volume : 5.00

Heavy Truck % of Total Volume : 0.00

Day (16 hrs) % of Total Volume : 92.00

Data for Segment # 3: Bolton (day/night)

Anglel Angle2 : 0.00 deg 45.00 deg
Wood depth : 0 (No woods.)
No of house rows : 0 / 0
Surface : 1 (Absorptive ground

surface)

Receiver source distance : 45.00 / 45.00 m Receiver height : 1.50 / 4.00 m

Topography : 1 (Flat/gentle slope; no

barrier)

Reference angle : 0.00

Results segment # 1: Dalhousie (day)

Source height = 0.50 m

ROAD (0.00 + 59.48 + 0.00) = 59.48 dBA Angle1 Angle2 Alpha RefLeq P.Adj D.Adj F.Adj W.Adj H.Adj B.Adj SubLeq

-90 90 0.66 60.94 0.00 0.00 -1.46 0.00 0.00 0.00 59.48

Segment Leq : 59.48 dBA

Results segment # 2: Boteler (day)

Source height = 0.50 m

ROAD (0.00 + 45.80 + 0.00) = 45.80 dBA Angle1 Angle2 Alpha RefLeq P.Adj D.Adj F.Adj W.Adj H.Adj B.Adj SubLeq

-45 0 0.66 58.03 0.00 -5.90 -6.33 0.00 0.00 0.00 0.00

Segment Leq: 45.80 dBA

Results segment # 3: Bolton (day)

Source height = 0.50 m

ROAD (0.00 + 43.74 + 0.00) = 43.74 dBA Angle1 Angle2 Alpha RefLeq P.Adj D.Adj F.Adj W.Adj H.Adj B.Adj SubLeq

0 45 0.66 57.99 0.00 -7.92 -6.33 0.00 0.00 0.00

Segment Leq: 43.74 dBA

Total Leq All Segments: 59.77 dBA

Results segment # 1: Dalhousie (night)

Source height = 0.50 m

ROAD (0.00 + 51.99 + 0.00) = 51.99 dBAAngle1 Angle2 Alpha RefLeq P.Adj D.Adj F.Adj W.Adj H.Adj B.Adj SubLeq

-90 90 0.62 53.37 0.00 0.00 -1.38 0.00 0.00 0.00 51.99

Segment Leq : 51.99 dBA

Results segment # 2: Boteler (night)

Source height = 0.50 m

ROAD (0.00 + 38.36 + 0.00) = 38.36 dBA Angle1 Angle2 Alpha RefLeq P.Adj D.Adj F.Adj W.Adj H.Adj B.Adj SubLeq

-45 0 0.62 50.41 0.00 -5.74 -6.31 0.00 0.00 0.00 38.36

Segment Leq: 38.36 dBA

Results segment # 3: Bolton (night)


Source height = 0.50 m

ROAD (0.00 + 36.38 + 0.00) = 36.38 dBA Angle1 Angle2 Alpha RefLeq P.Adj D.Adj F.Adj W.Adj H.Adj B.Adj SubLeq

0 45 0.62 50.39 0.00 -7.71 -6.31 0.00 0.00 0.00 36.38

Segment Leq: 36.38 dBA

Total Leq All Segments: 52.29 dBA

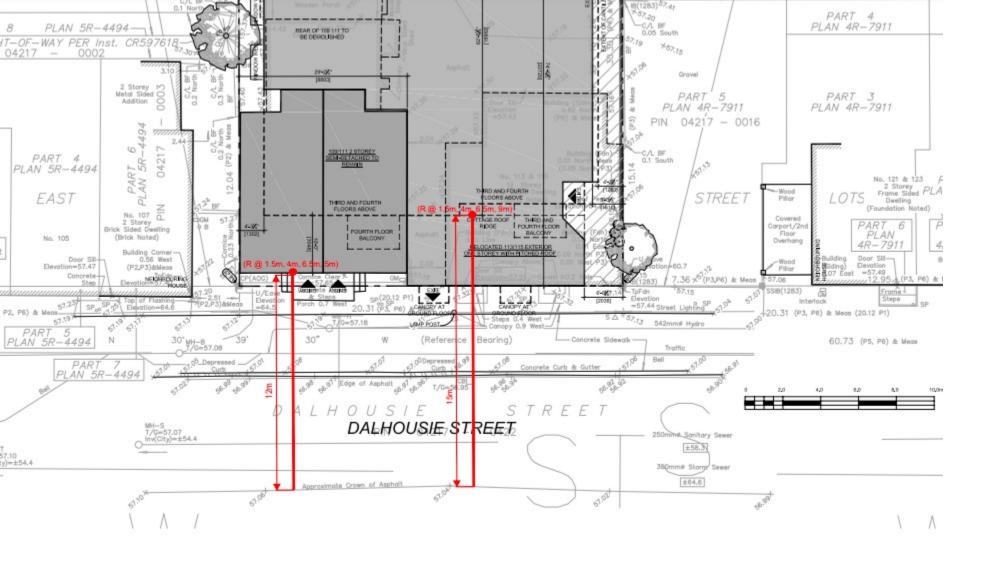

TOTAL Leq FROM ALL SOURCES (DAY): 59.77 (NIGHT): 52.29

Appendix E

City of Ottawa Noise Guidelines





ENVIRONMENTAL NOISE CONTROL GUIDELINES: Introduction and Glossary

January 2016

Visit us: Ottawa.ca/planning Visitez-nous : Ottawa.ca/urbanisme