

Wexcom Developments (March Road) Ltd.

910 March Road

Transportation
Impact
Assessment



910 March Road

Transportation Impact Assessment

Step 1 Screening Report

Step 2 Scoping Report

Step 3 Forecasting Report

Step 4 Strategy Report

Prepared for:

Wexford Commercial Properties Ltd.
Wexcom Developments (March Rd) Ltd.
6 Malabar Court
Hamilton, ON L9C 2B9

Prepared by:



13 Markham Avenue
Ottawa, ON K2G 3Z1

June 2020

PN: 2020-11

Table of Contents

1	Screening	1
2	Existing and Planned Conditions	1
2.1	Proposed Development.....	1
2.2	Existing Conditions	3
2.2.1	Area Road Network	3
2.2.2	Existing Intersections.....	3
2.2.3	Existing Driveways	5
2.2.4	Cycling and Pedestrian Facilities.....	5
2.2.5	Existing Transit.....	6
2.2.6	Existing Area Traffic Management Measures.....	8
2.2.7	Existing Peak Hour Travel Demand.....	8
2.2.8	Collision Analysis	11
2.3	Planned Conditions.....	13
2.3.1	Changes to the Area Transportation Network	13
2.3.2	Other Study Area Developments.....	14
3	Study Area and Time Periods	19
3.1	Study Area	19
3.2	Time Periods	20
3.3	Horizon Years.....	20
4	Exemption Review	20
5	Development-Generated Travel Demand	20
5.1	Trip Generation and Mode Shares	20
5.2	Trip Distribution.....	23
5.3	Trip Assignment.....	23
6	Background Network Travel Demands.....	32
6.1	Transportation Network Plans	32
6.2	Background Growth and Other Developments.....	32
7	Demand Rationalization	35
8	Development Design	38
8.1	Design for Sustainable Modes	38
8.2	Circulation and Access	38
8.3	New Street Networks	38
9	Parking.....	39
9.1	Parking Supply	39
9.2	Spillover Parking	39
10	Boundary Street Design.....	39
11	Access Intersection Design	40
11.1	Location and Design of Access.....	40
11.2	Intersection Control.....	41
11.3	Intersection Design	41
12	Transportation Demand Management	43
13	Neighbourhood Traffic Management.....	43

14	Transit.....	43
15	Review of Network Concept.....	44
16	Intersection Design.....	44
16.1	Intersection Control.....	44
16.2	Intersection Design.....	44
16.2.1	Existing Conditions	44
16.2.2	2022 Future Background	45
16.2.3	2027 Future Background	46
16.2.4	2022 Future Total	47
16.2.5	2027 Future Total	49
16.2.6	Intersection MMLOS.....	52
17	Conclusions.....	54

List of Figures

Figure 1:	Area Context Plan.....	1
Figure 2:	Concept Plan.....	2
Figure 3:	Study Area Pedestrian Facilities	5
Figure 4:	Study Area Cycling Facilities	6
Figure 5:	Existing Study Area Transit Service.....	7
Figure 6:	Existing Study Area Transit Stops	8
Figure 7:	2020 Existing Horizon Traffic Volumes and Traffic Controls	9
Figure 8:	Existing Pedestrian Volumes	10
Figure 9:	Existing Cycling Volumes	11
Figure 10:	Study Area Representation of Collision Locations	12
Figure 11:	1156 March Road Site Generated Primary Volumes.....	15
Figure 12:	788 March Road Site Generated Volumes-Phase 1	16
Figure 13:	788 March Road Site Generated Volumes-Phase 1 &2.....	16
Figure 14:	Kanata North Community Design Plan - 2026 Future Background Volumes	17
Figure 15:	Kanata North Community Design Plan - 2026 Future Total Volumes	17
Figure 16:	936 March Road Site Generated Traffic Volumes	18
Figure 17:	1020 / 1070 March Road Site Generated Volumes.....	19
Figure 18:	Forecasted Site Pass-by Trip Volumes-2022	24
Figure 19:	Forecasted Site Pass-by Trip Volumes-2027	25
Figure 20:	New Site Generation Assignment 2022 (%)	26
Figure 21:	New Site Generation Assignment 2027 (%)	27
Figure 22:	New Site Generation 2022 Auto Volumes.....	28
Figure 23:	New Site Generation 2027 Auto Volumes.....	29
Figure 24:	Net New Site Generation Auto Volumes 2022	30
Figure 25:	Net New Site Generation Auto Volumes 2027	31
Figure 26:	Background 2022 Volumes.....	33
Figure 27:	Background 2027 Volumes.....	34
Figure 28:	Future Total 2022 Volumes	36
Figure 29:	Future Total Traffic 2027 Volumes	37

Table of Tables

Table 1: Intersection Count Date.....	9
Table 2: Summary of Collision Locations	12
Table 3: Collision Summary	13
Table 4: Exemption Review	20
Table 5: Trip Generation Person Trip Rates	21
Table 6: Total Person Trip Generation	21
Table 7: Mode Share.....	21
Table 8: Land Use Pass-by Rates	22
Table 9: Trip Generation Mode	22
Table 10: OD Survey Existing Distribution	23
Table 11: Parking Provisions.....	39
Table 12: Boundary Street MMLOS.....	40
Table 13: 2022 and 2027 Site Access #1 at March Road SBL - Preliminary Design Criteria	41
Table 14: Throat Length by Land Use	43
Table 15: Trip Generation by Transit Mode	43
Table 16: 2020 Existing Intersection Operational Analysis	45
Table 17: 2022 Future Background Conditions Operational Analysis	46
Table 18: 2027 Future Background Conditions Operational Analysis	47
Table 19: 2022 Future Total Conditions Operational Analysis	48
Table 20: 2027 Future Total Conditions Operational Analysis	49
Table 21: Sensitivity Analysis Summary	52
Table 22: Study Area Intersection MMLOS Analysis—All Horizons	53

List of Appendices

Appendix A – TIA Screening Form and Certification Form
Appendix B – Traffic Data
Appendix C – Collision Data
Appendix D – March Road Widening Scenarios
Appendix E – City of Ottawa Forecasting Report Comments
Appendix F – Pass-by Reduction by Land Use
Appendix G – TDM Checklists
Appendix H – Turning Templates
Appendix I – MMLOS Worksheets
Appendix J – Signalization Warrants
Appendix K – Left-turn Lane Warrants
Appendix L – HV% Calculations
Appendix M – 2020 Existing Conditions Synchro Sheets
Appendix N – 2022 Future Background Synchro Sheets
Appendix O – 2027 Future Background Synchro Sheets
Appendix P – 2022 Future Total Synchro Sheets
Appendix Q – 2027 Future Total Synchro Sheets

1 Screening

This study has been prepared according to the City of Ottawa's 2017 Transportation Impact Assessment (TIA) Guidelines. Accordingly, a Step 1 Screening Form has been prepared and is included as Appendix A, along with the Certification Form for TIA Study PM. As shown in the Screening Form, a TIA is required including the Design Review Component and the Network Impact Component.

2 Existing and Planned Conditions

2.1 Proposed Development

The subject property, located at 910 March Road, is currently zoned as Rural [Ru] and Development Reserve [DR] and is undeveloped.

The proposed development consists of a 1,882 square metre hardware store, a 220 square metre restaurant with a drive through, a 335 square metre restaurant, and a 249 square metre gas bar attached to a 192 square metre Tim Hortons with a drive-through. A total of 155 vehicle parking stalls and 15 to 20 bicycle parking spaces will be provided. The site is proposed to have two accesses. Both accesses are located along March Road; the first (Site Access #1) is a full-movement access located approximately 215 metres north of Maxwell Bridge Road, measured from intersection centreline to intersection centreline. Based on professional experience and the development design, signalization of this access is anticipated, however it will be confirmed within this report. The second (Site Access #2) is a right-in / right-out access located approximately 150 metres north of Maxwell Bridge Road, measured intersection centreline to intersection centreline. The anticipated full build-out and occupancy horizon is 2022. Figure 1 illustrates the Study Area Context. Figure 2 illustrates the proposed concept plan.

Figure 1: Area Context Plan




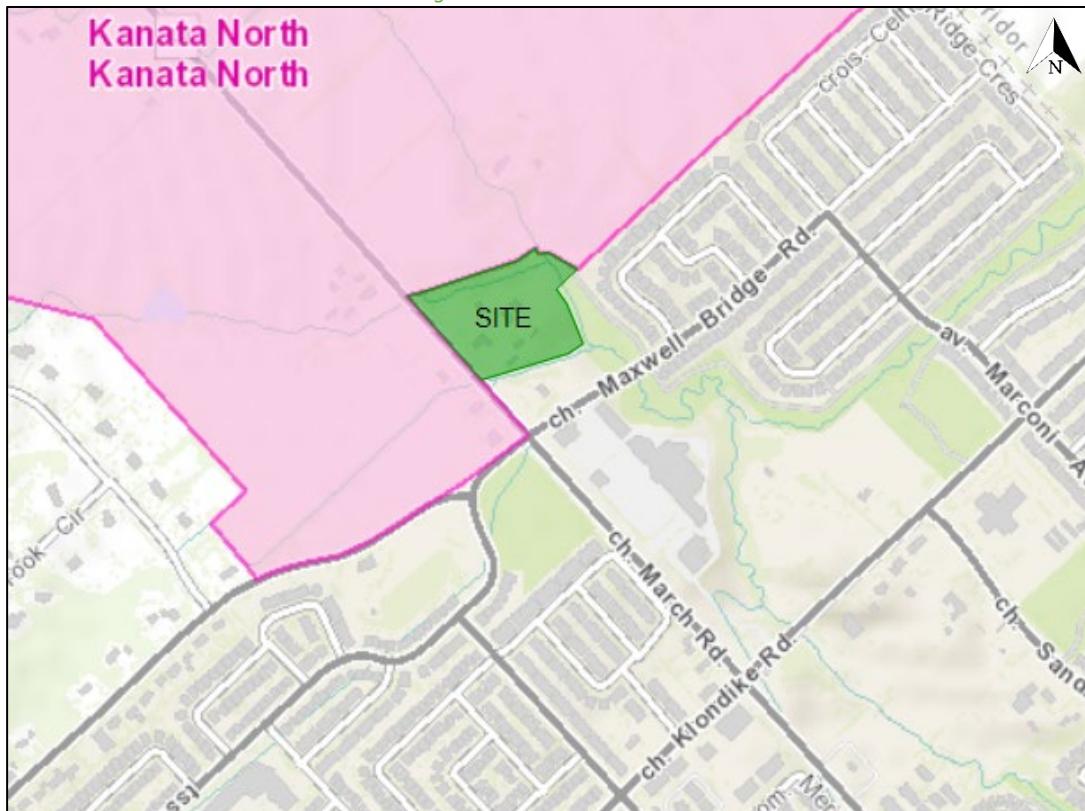


Figure 2: Concept Plan

CONCEPT PLAN

DRAWING IS FOR DISCUSSION PURPOSES ONLY
DRAWING TO BE CONFIRMED UPON RECEIPT:
EXISTING CONDITIONS SURVEY/TOPO:
PLOT DATE:
2020-01-29

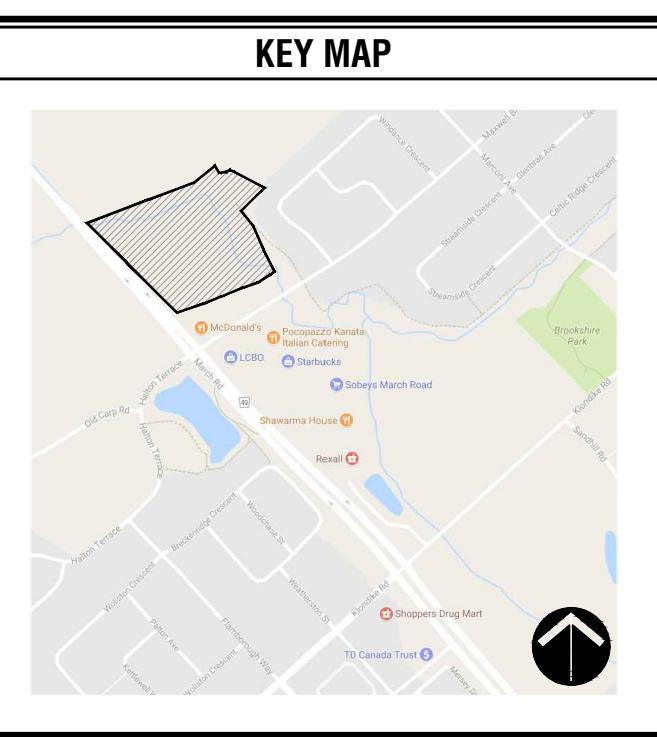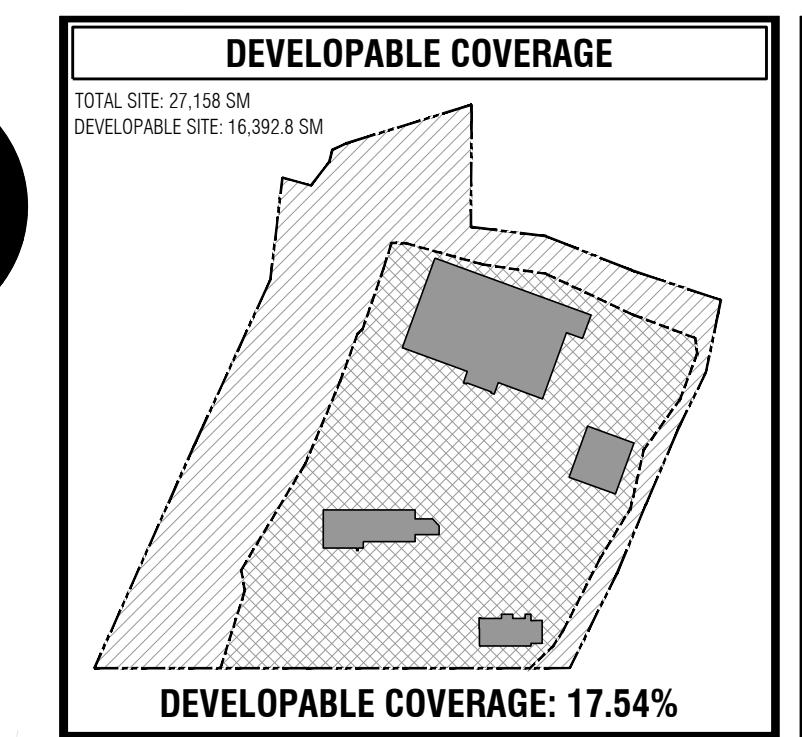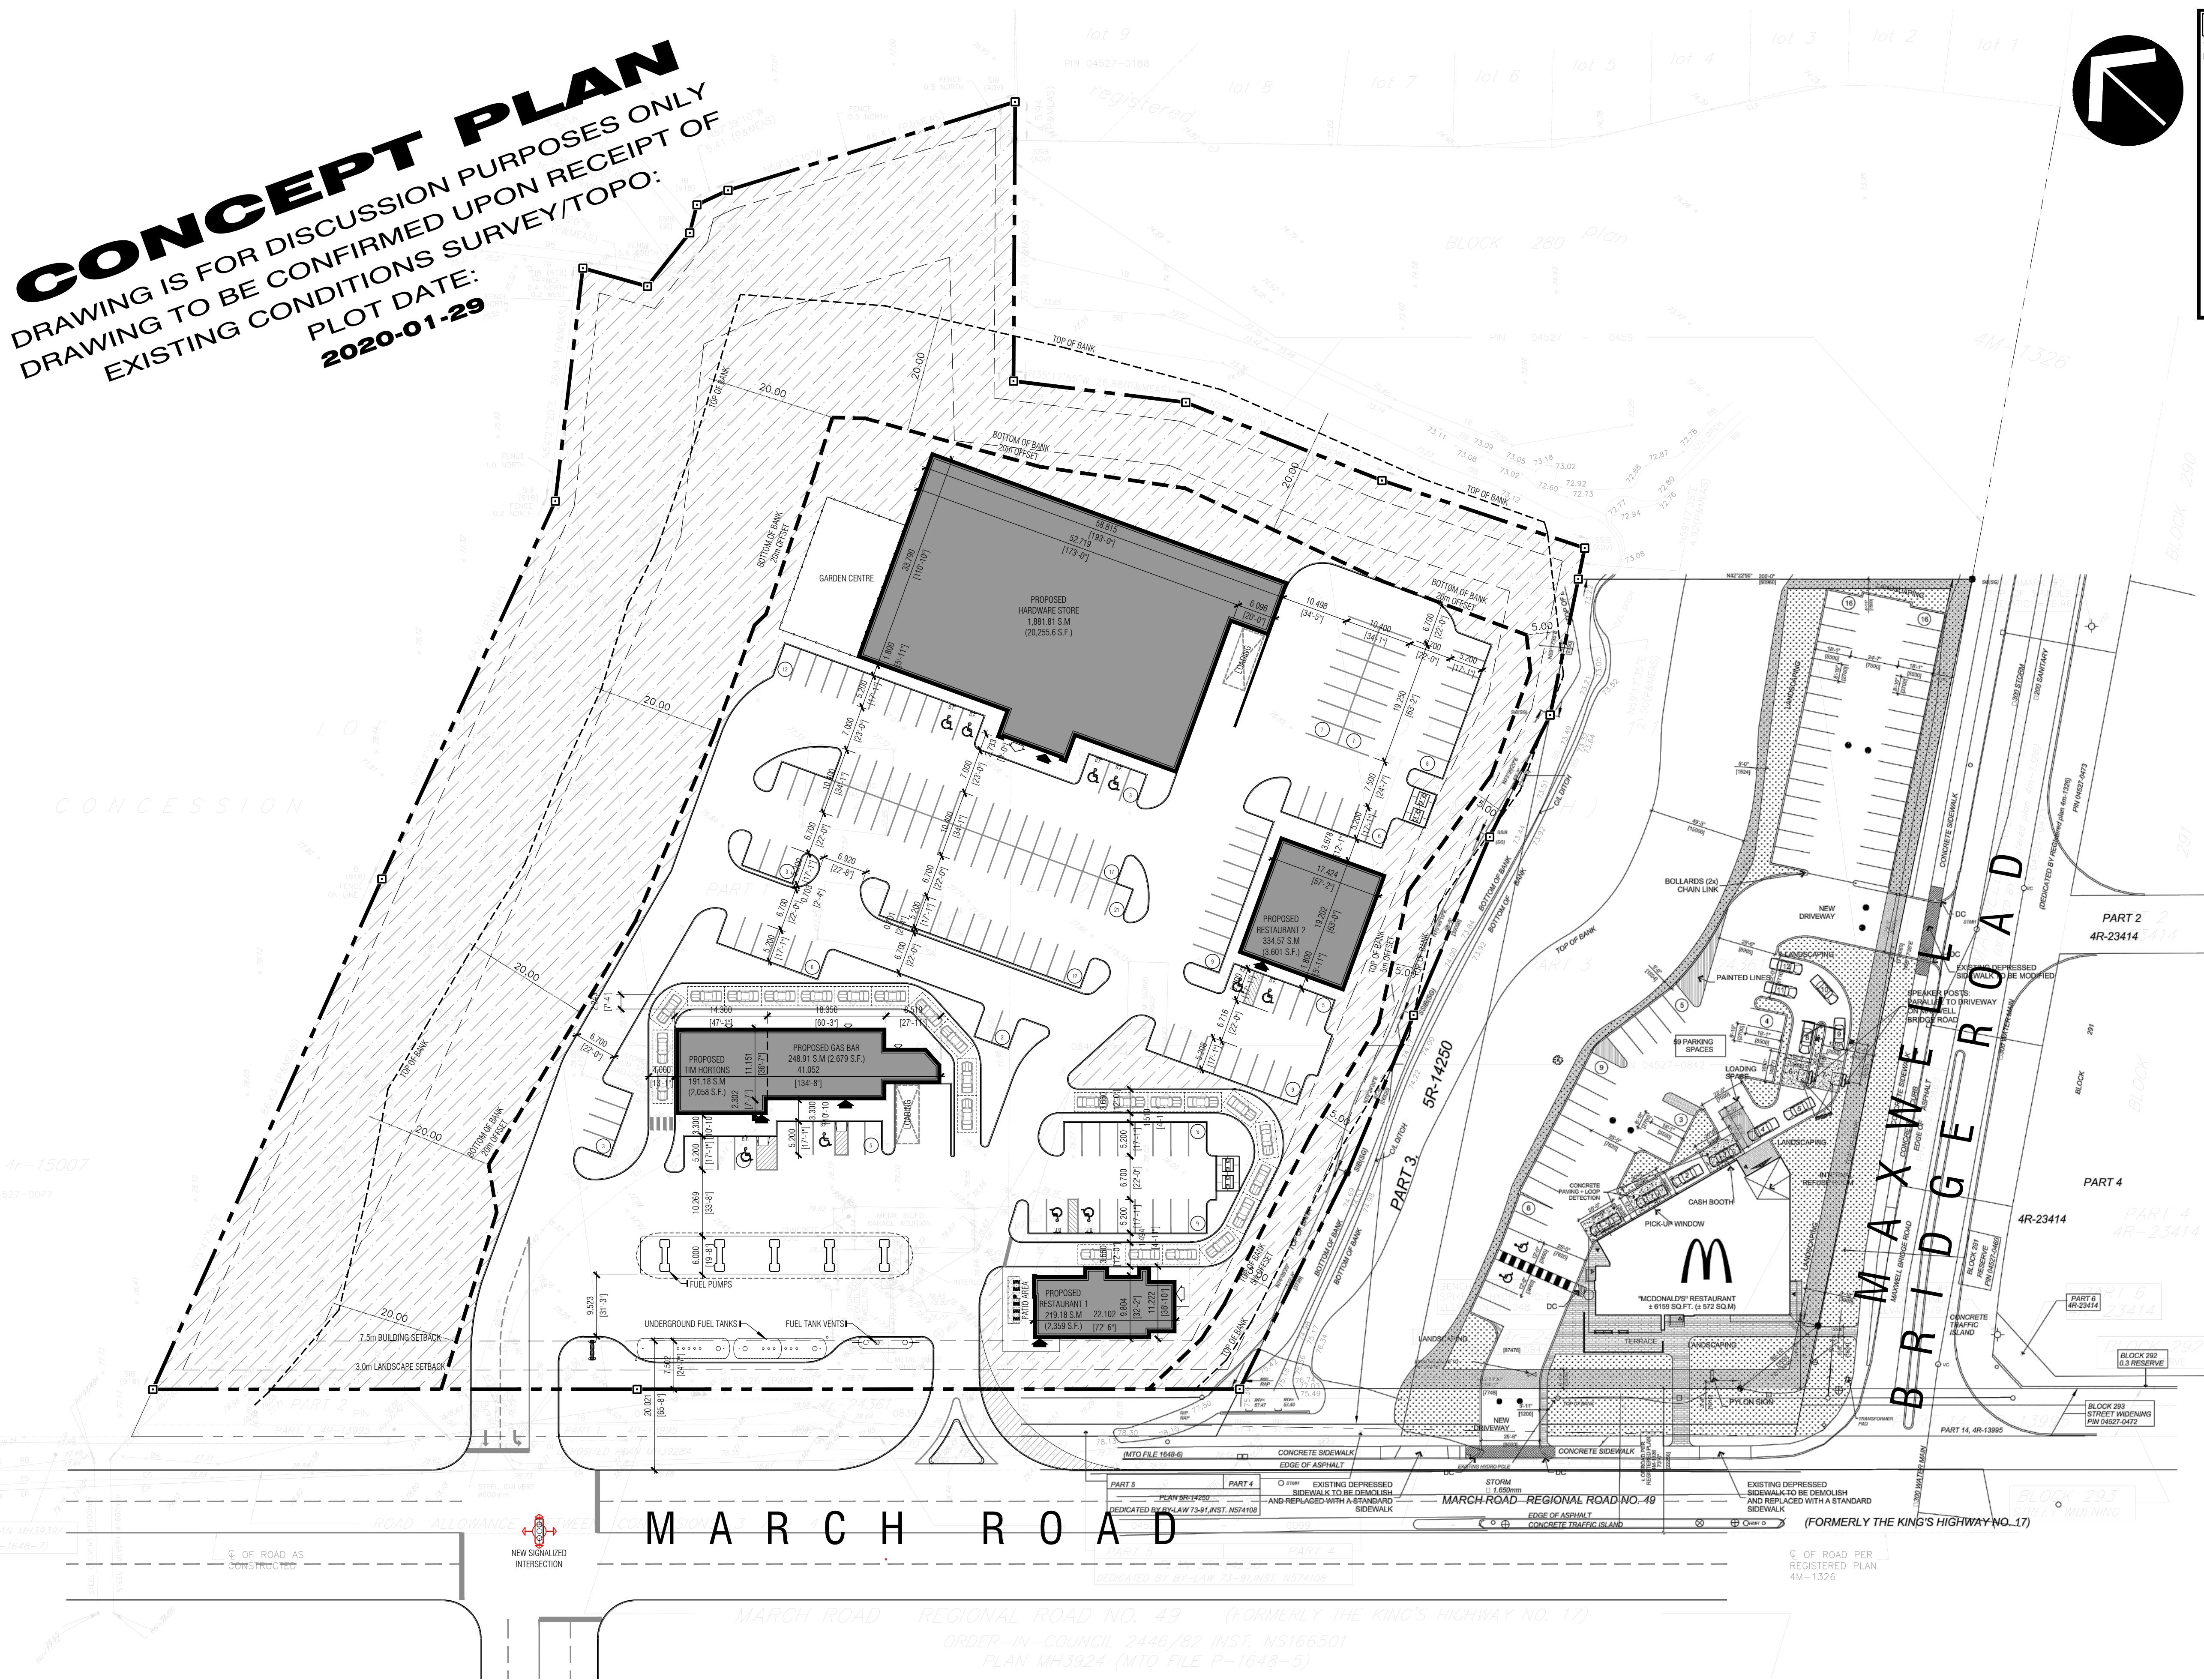

SITE DATA			
	SF	SM	ACRES
TOTAL SITE	292,330	27,158	6.71
TOTAL DEVELOPABLE AREA	176,450	16,392.8	4.05
PROPOSED BUILDING			COVERAGE
GAS BAR C/W TIM HORTONS	4,737	440.10	1.62%
HOME HARDWARE	20,255.6	1,881.81	6.93%
RESTAURANT A	2,359	219.18	0.81%
RESTAURANT B	3,601	334.57	1.23%
TOTAL	31,400.6	2,875.65	10.59%
PARKING DATA			
REQUIRED PARKING (AREA C):			
RETAIL: 3.4/100SM		64 SPACES	
GAS BAR: NONE		0 SPACES	
RESTAURANT: 10/100 SM (74.493 = 75)		75 SPACES	
TOTAL REQUIRED PARKING		139 SPACES	
PROVIDED PARKING		140 SPACES	
PROVIDED BARRIER FREE PARKING		10 SPACES	
TOTAL PROVIDED PARKING		155 SPACES	
REGULAR PARKING SPACE: 2.6m x 5.2m			
BARRIER FREE PARKING SPACE: (WITH 1.5m ACCESS AISLE)			
TYPE A: 3.4m x 5.2m			
TYPE B: 2.4m x 5.2m			
LANDSCAPING REQUIRED		15%	
LANDSCAPING PROVIDED		46.9%	

LEGEND	
	PROPERTY LINE
	BUILDING SETBACK
	EDGE OF BANK
	EDGE OF BANK OFFSET
	IRON BAR
	TRAFFIC FLOW ARROWS
	GARBAGE BIN
	SECONDARY ENTRANCE
	PEDESTRIAN CROSSWALK
	'BARRIER FREE' SIGN
	BARRIER FREE PARKING
	PARKING COUNT
	SIGNALIZED INTERSECTION
	PRINCIPLE ENTRANCE
	'NO PARK' ZONE

WEXFORD

COMMERCIAL DEVELOPMENTS LTD.

MARCH ROAD, KANATA, ON PROPOSED SITE PLAN - SK-20

PROJECT: 17300 DATE: 2020.01.29 SCALE: 1:500

Greystone

2.2 Existing Conditions

2.2.1 Area Road Network

March Road

March Road is a City of Ottawa arterial road with a fluctuating cross-section and a posted speed limit of 80 km/h. South of Klondike Road, March Road has a six-lane cross-section with bike lanes, sidewalks, and curbs and gutters on both sides of the road. Approximately 125 metres north of Klondike Road, March Road becomes a five-lane road with bike lanes, sidewalks, and curbs and gutters on both sides of the road. Approximately 140 metres south of Halton Terrace / Maxwell Bridge Road, March Road becomes a four-lane road with bike lanes, sidewalks, and curbs and gutters on both sides of the road. March Road gradually decreases to a two-lane cross-section with gravel shoulders and no pedestrian or cycling infrastructure starting approximately 110 metres north of Halton Terrace / Maxwell Bridge Road. The Ottawa Official Plan reserves a 44.5 metre right of way. March Road is designated as a trucking route within the Study Area.

Halton Terrace / Maxwell Bridge Road

Halton Terrace / Maxwell Bridge Road is a City of Ottawa collector road that has a two-lane cross-section and a posted speed-limit of 40 km/h. Halton Terrace / Maxwell Bridge Road has curbs and gutters, as well as sidewalks within the Study Area. Halton Terrace / Maxwell Bridge Road has a measured 24.5 metre right-of-way and is not designated as a trucking route.

Klondike Road


Klondike Road is a City of Ottawa collector road that has a three-lane cross-section to the west of March Road and a two-lane cross-section to the east of March Road, as well as a posted speed limit of 50 km/h. Sidewalks and curbs and gutters are present on both sides of the road. To the east of March Road, Klondike Road has bike lanes on the south side. The Ottawa Official Plan reserves a 24.0 metre right-of-way. Klondike Road is not a designated trucking route.

2.2.2 Existing Intersections

A description and accompanying aerial photograph of the existing intersections within the Study Area can be found below.


March Road at Halton Terrace /Maxwell Bridge Road

The intersection of Maxwell Bridge Road / Halton Terrace at March Road is a signalized intersection with auxiliary left-turn lanes on all four approaches. The northbound and southbound approaches both have two through lanes, an auxiliary right-turn lane and at grade cycling lanes between the through lane and the right turn lane. Both the eastbound and westbound approaches have a shared through / right-turn lane. Pedestrian crossings are provided at each leg. No turn restrictions were noted.

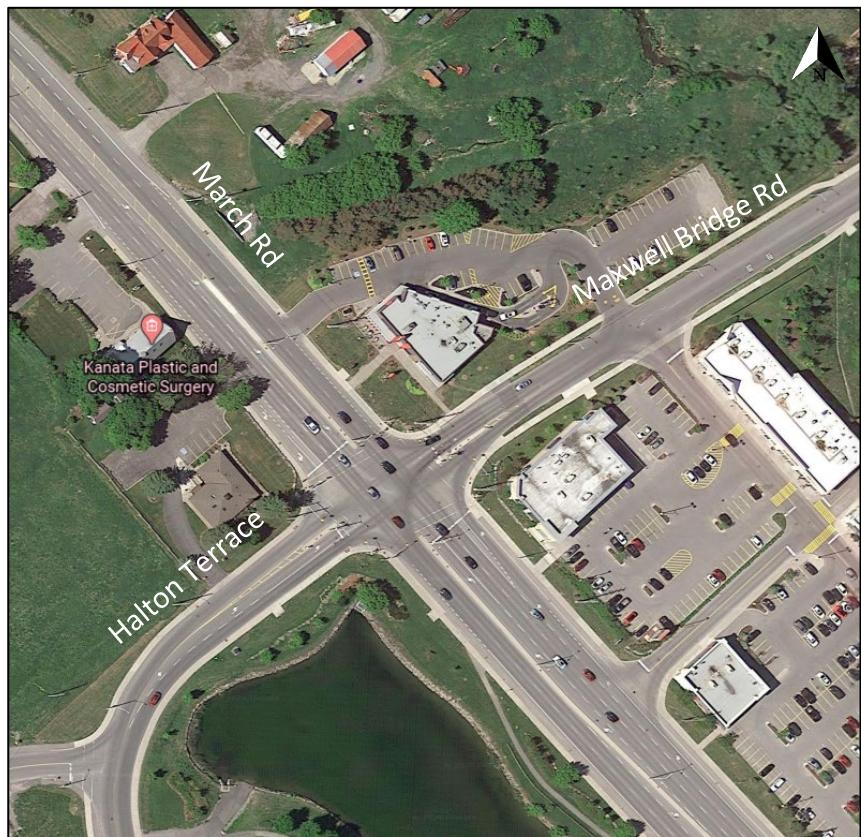

March Road at Klondike Road

The intersection of Klondike Road at March Road is a signalized intersection. The northbound approach consists of two auxiliary left-turn lanes, two through lanes and a shared through / right-turn lane. The westbound approach is made up of an auxiliary left-turn lane and a shared through / right-turn lane. The southbound approach consists of an auxiliary left-turn lane, a through lane and a shared through / right-turn lane. The eastbound approach consists of an auxiliary left-turn lane, a through lane and a channelized right-turn lane. Pedestrian crossings are provided at each leg. No turn restrictions were noted.

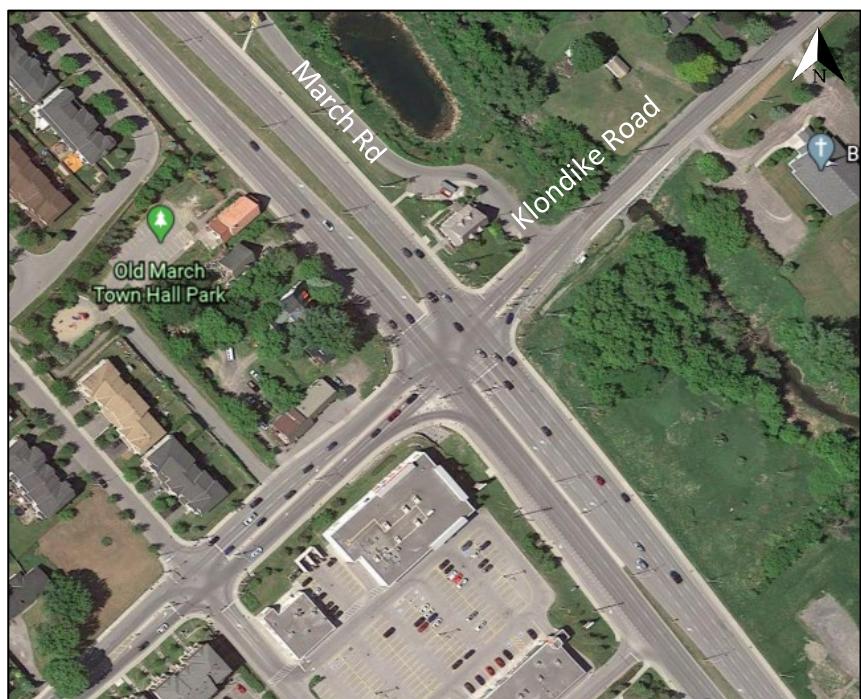


2.2.3 Existing Driveways

Existing driveways are located along March Road within 200 metres of the proposed site accesses. All existing driveways are residential accesses and driveways to existing and future residential developments with the exception of the McDonald's driveway approximately 50 metres north of Maxwell Bridge Road / Halton Terrace. Any significant traffic generation from these driveways and accesses will be considered in the background traffic of future scenarios and explored further in Section 2.3.2.

2.2.4 Cycling and Pedestrian Facilities


Sidewalks are provided along both sides of Maxwell Bridge Road / Halton Terrace, on March Road with the exception of the two-lane cross-section segment, and Klondike Road west of March Road. A multi-use pathway is provided on Klondike Road east of March Road. The cycling network consists of bike lanes on March Road with the exception of the two-lane segment which has paved shoulders. March Road will be considered a spine route, and both Klondike Road and Halton Terrace will be considered local cycling routes within the Study Area during the ultimate horizon. A gravel pathway is anticipated to connect the northeast side of the proposed development to Maxwell Bridge Road and the adjacent residential development to the southeast. Figure 3 illustrates the pedestrian facilities in the Study Area and Figure 4 illustrates the cycling facilities.

Figure 3: Study Area Pedestrian Facilities

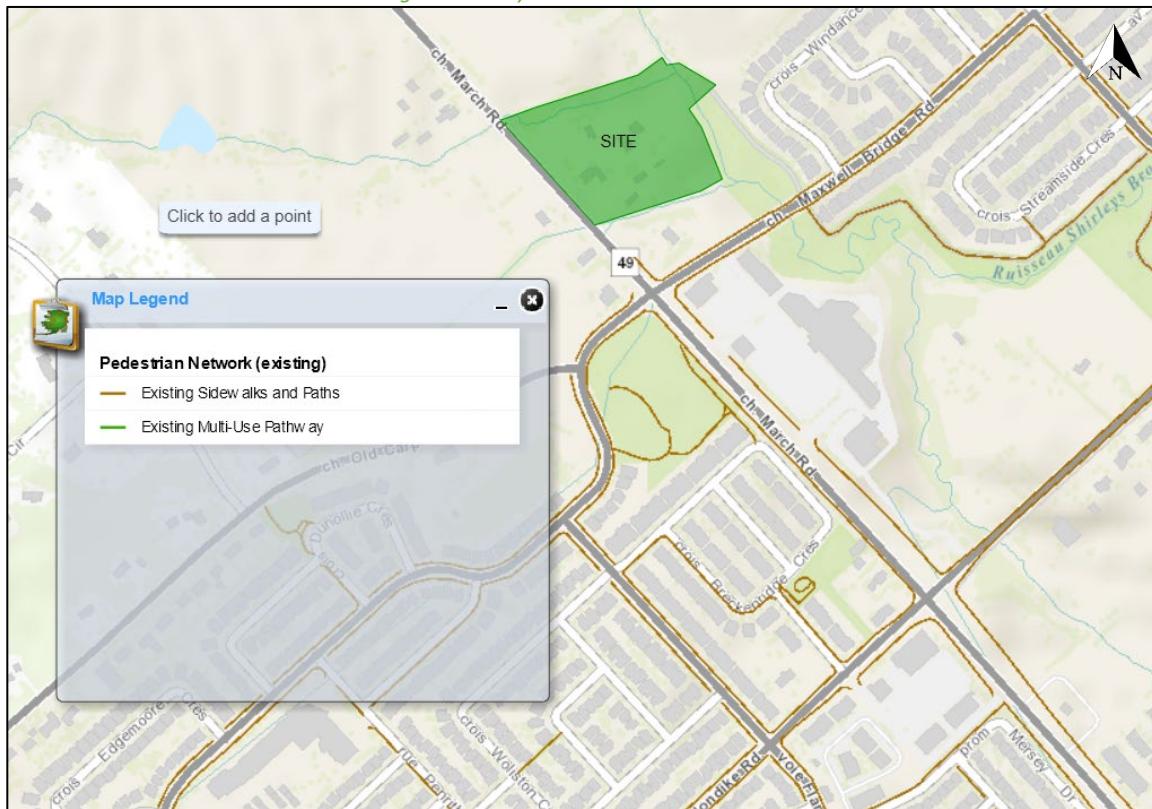

Source: <http://maps.ottawa.ca/geoOttawa/> Accessed: May 15, 2020

Figure 4: Study Area Cycling Facilities

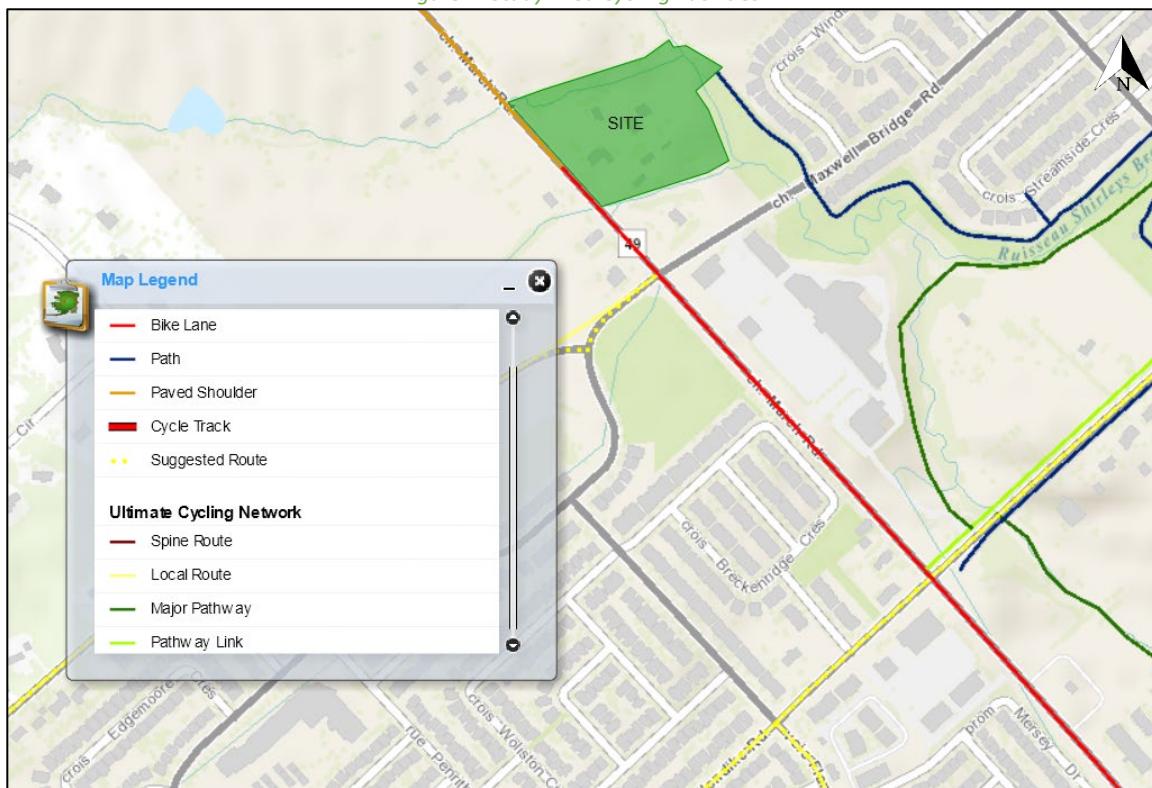

Source: <http://maps.ottawa.ca/geoOttawa/> Accessed: May 15, 2020


2.2.5 Existing Transit

Routes #63 and #165 are the only routes present within the Study Area. Route #63 has two stops on Maxwell Bridge Road, east of March Road and route #165 has two stops on Klondike Road to the east of March Road and two stops on Klondike Road to the west of March Road. The frequencies of these routes within the proximity of the proposed site currently are:

- Route #63— every 30 minutes on both weekdays and weekends.
- Route #165— while this route is shown on the OC Transpo Network Map, no information is currently available on it


Figure 5 illustrates the transit system map and Figure 6 illustrates the transit stops in the Study Area.

Figure 5: Existing Study Area Transit Service

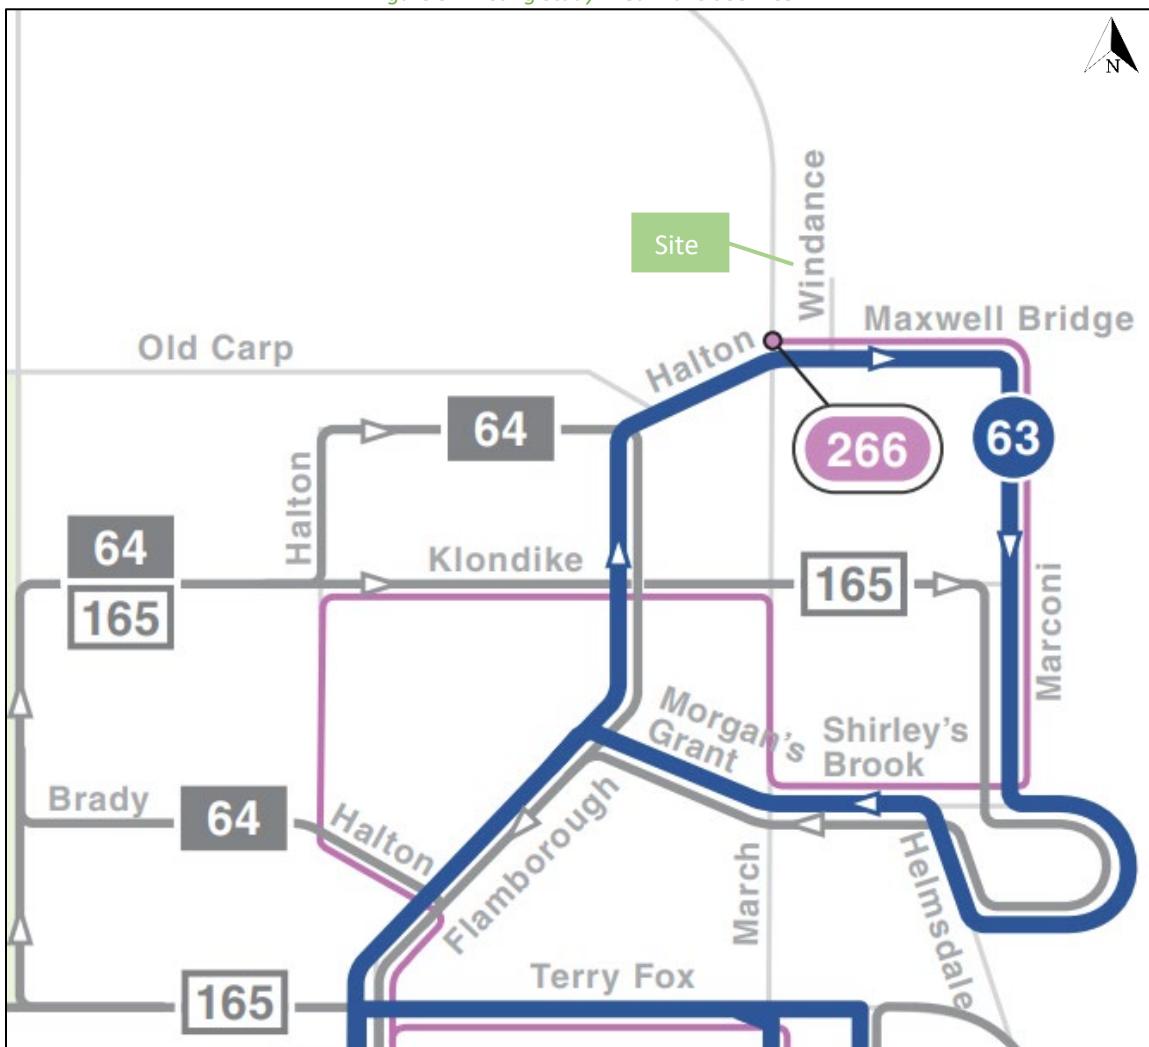

Source: <https://www.octranspo.com/en/> Accessed: May 15, 2020

Figure 6: Existing Study Area Transit Stops

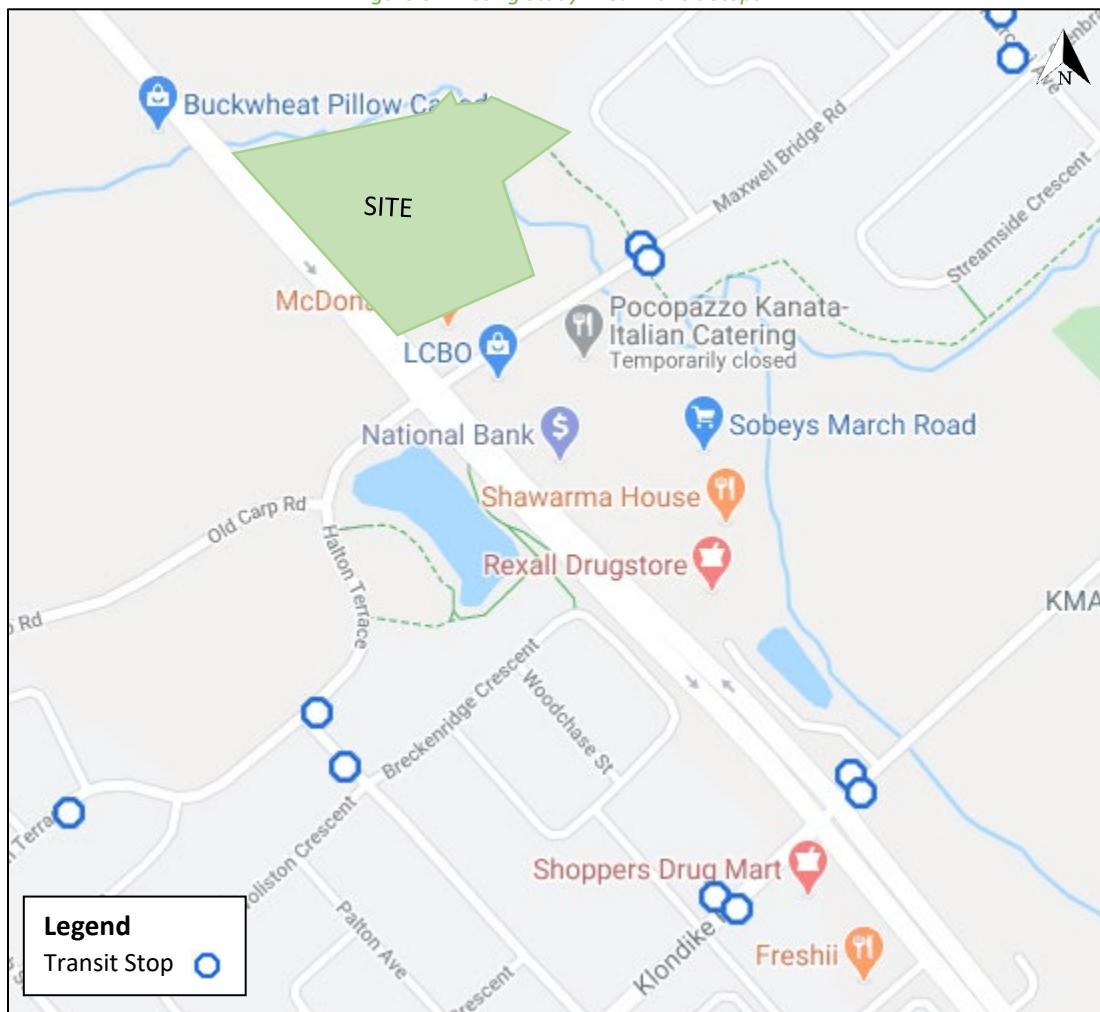

Source: <http://plan.octranspo.com/plan> Accessed: May 15, 2020

2.2.6 Existing Area Traffic Management Measures

Within the Study Area, traffic management measures are present on Maxwell Bridge Road approximately 200 metres east of March Road and on Halton Terrace beginning approximately 150 metres west of March Road. Both locations are designated as traffic calming zones using signage and pavement markings and is implemented via flexible in-road traffic calming signs

2.2.7 Existing Peak Hour Travel Demand


Existing turning movement counts were acquired for the existing Study Area intersection for both the AM and PM peak hours. No Saturday peak hour turning movement counts for the Study Area intersections are available and as a result of the current “lockdown” measures due to the COVID-19 pandemic, no counts can be collected. As such, PM peak period turning movement counts will also be used as Saturday peak hour volumes. This conservative estimation method has been approved by the City of Ottawa. Table 1 summarizes the count dates and data sources of the Study Area intersections.

Table 1: Intersection Count Date

Intersection	Count Date	Data Source
March Road at Halton Terrace / Maxwell Bridge Road	Wednesday, March 4, 2020	City of Ottawa
March Road at Klondike Road	Wednesday, March 4, 2020	City of Ottawa

Figure 7 illustrates the 2020 existing horizon traffic. As shown above, the turning movement count data has been collected in 2020 and as such, a background growth rate is not necessary in order to reflect the 2020 horizon. Detailed turning movement count data and signal timing information is included in Appendix B.

Figure 7: 2020 Existing Horizon Traffic Volumes and Traffic Controls

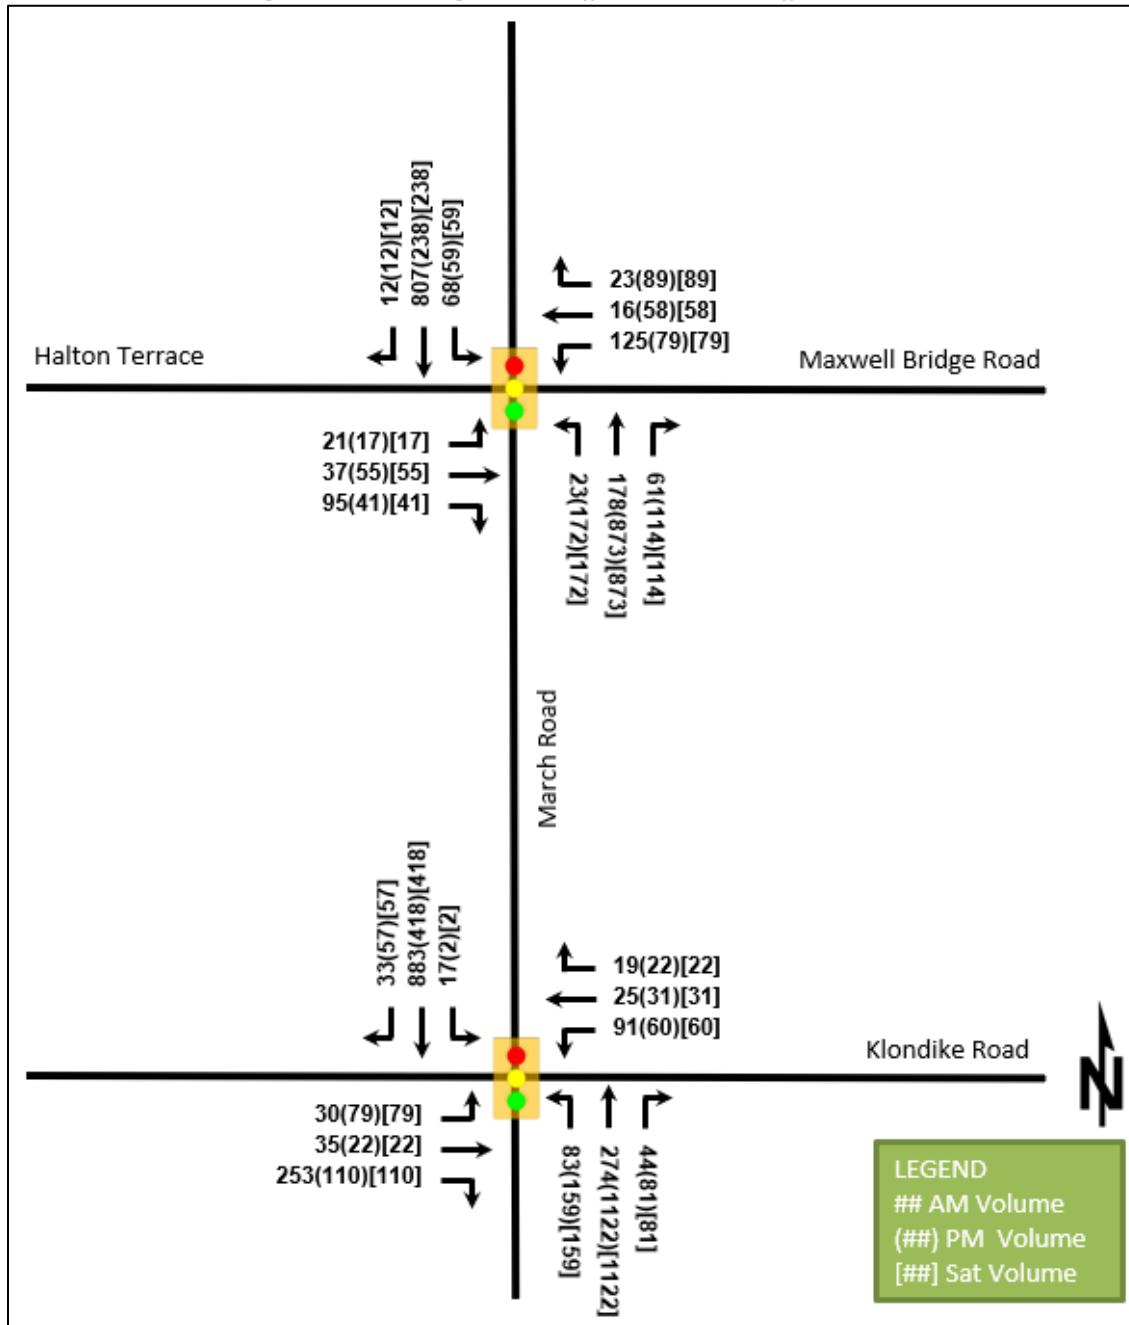

Additionally, the collected intersection counts also provided existing pedestrian and cyclist demands at the two Study Area intersections for both AM and PM peak periods. As discussed above, PM peak counts will also be used as Saturday peak hour counts. Figure 8 illustrates the existing pedestrian volumes and Figure 9 illustrates the existing cyclist volumes at the Study Area intersections

Figure 8: Existing Pedestrian Volumes

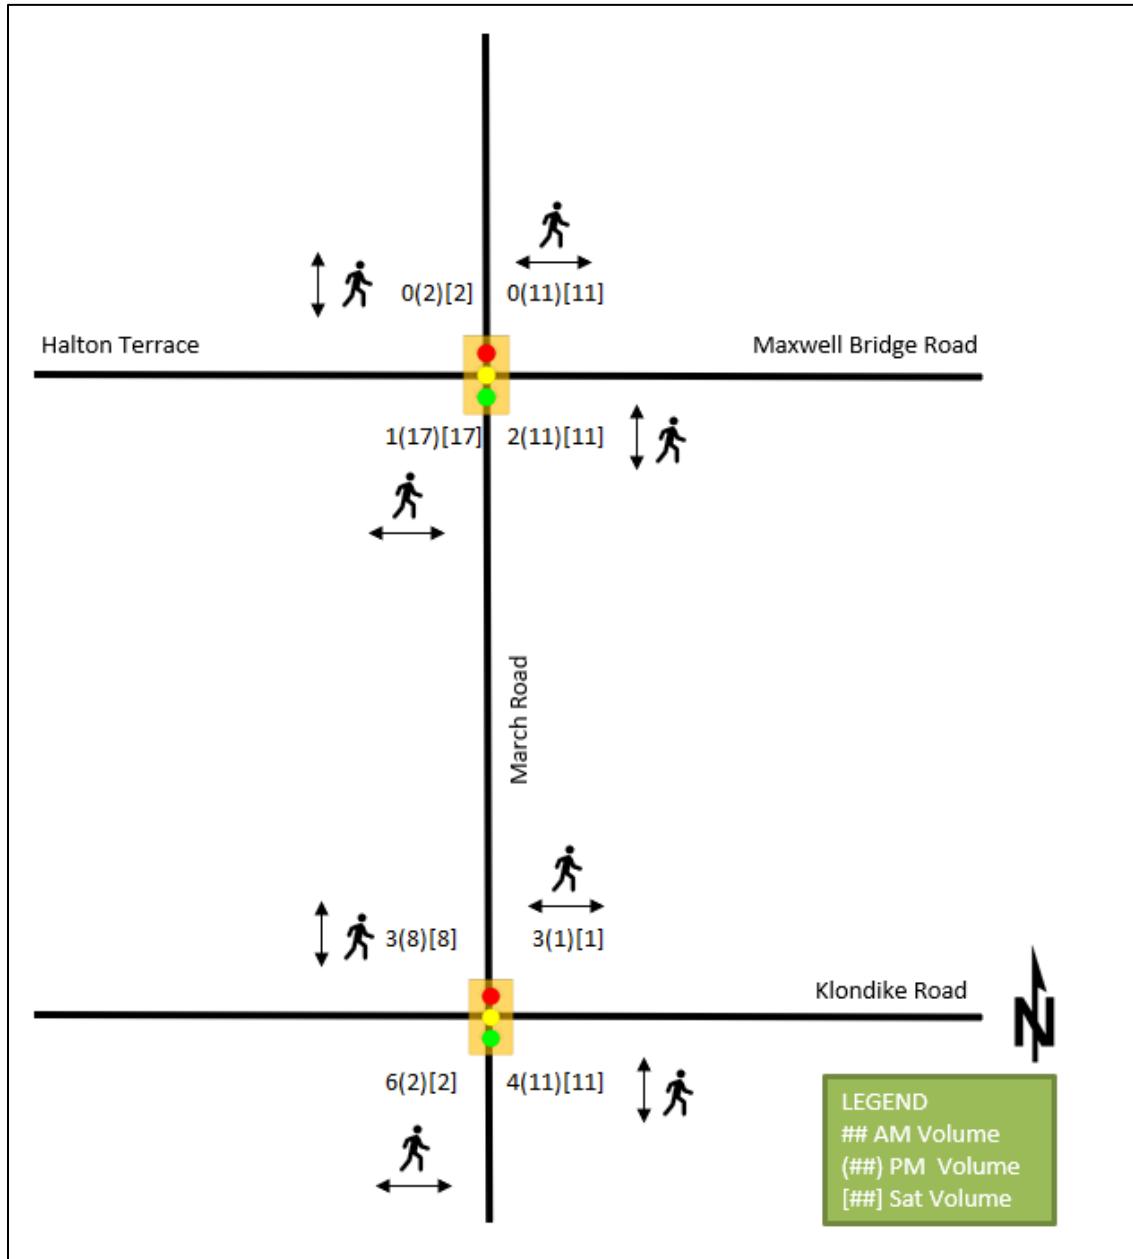


Figure 9: Existing Cycling Volumes



2.2.8 Collision Analysis

Collision data has been acquired from the City of Ottawa for five years (2014-2018) prior to the commencement of this TIA for the surrounding Study Area road network. Figure 10 shows the location of collisions within the Study Area, Table 2 illustrates the collisions at the intersections and road segments within the Study Area, and Table 3 summarizes the collision types and conditions of the 85 collisions recorded in the Study Area. Collision data is included in Appendix C.

Figure 10: Study Area Representation of Collision Locations

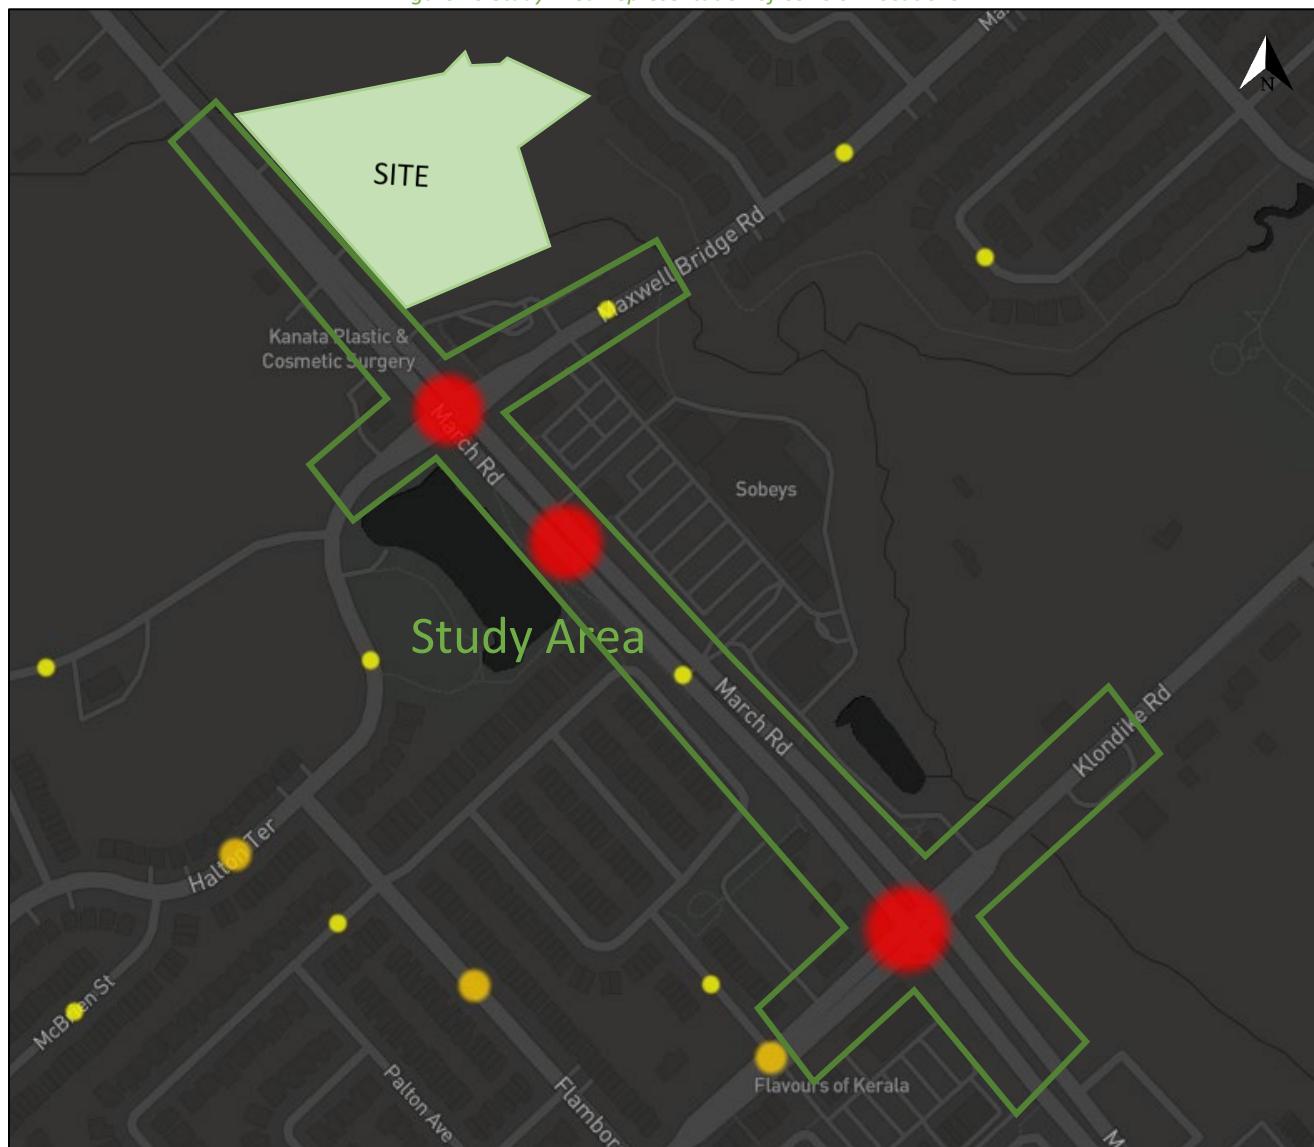


Table 2: Summary of Collision Locations

Intersection / Segment	Number	%
	85	100%
Halton Terrace / Maxwell Bridge Road @ March Road	12	14%
250 N of Klondike Road @ March Road	1	1%
Halton Terrace btwn continuation of Halton Terrace & Old Carp Road	2	2%
March Road btwn Halton Terrace / Maxwell Bridge Road & Klondike Road	24	28%
March Road btwn Halton Terrace / Maxwell Bridge Road & Maxwell Road	7	8%
Maxwell Bridge Road btwn March Road & Windance Crescent	1	1%
Klondike Road @ March Road	32	39%
March Road btwn Klondike Road & Morgan's Grant Way	6	7%

Table 3: Collision Summary

		Number	%
	Total Collisions	85	100%
Classification	Fatality	0	0%
	Non-Fatal Injury	19	22%
	Property Damage Only	66	78%
Initial Impact Type	Approaching	0	0%
	Angle	7	8%
	Rear end	26	31%
	Sideswipe	13	15%
	Turning Movement	10	12%
	SMV Unattended Vehicle	1	1%
	SMV Other	27	32%
	Other	1	1%
Road Surface Condition	Dry	28	55%
	Wet	8	19%
	Loose Snow	5	12%
	Slush	3	6%
	Packed Snow	1	1%
	Ice	2	7%
	Loose sand or gravel	0	0%
	Pedestrian Involved	1	1%
	Cyclists Involved	0	0%

Overall, no fatal collisions were documented in the Study Area and only one collision involving a pedestrian and no collisions involving a cyclist have been documented. Of the 85 collisions recorded in the Study Area, 22% resulted in a non-fatal injury and the remaining 78% resulted in property damage only. The impact types are distributed throughout the various categories with the largest number of collisions, at 32%, found in the SMV Other impact type category. Weather/road conditions are considered a contributing factor for 45% of the collisions in the Study Area.

2.3 Planned Conditions

2.3.1 Changes to the Area Transportation Network

The subject development is just outside the Kanata North CDP Urban Expansion Area, however March Road north of Maxwell Bridge Road / Halton Terrace is within the Kanata North CDP area. As such, this portion of March Road is subject to the planning policies outlined in the CDP. The CDP proposes that March Road remain an Arterial Road with a median Bus Rapid (BRT) facility, following the results of the Environmental Assessment (EA) completed for March Road. The widening of March Road, and the extension of a Bus Rapid Transit facility within the Study Area is considered in the City of Ottawa TMP Ultimate Network. Both interim and ultimate widening scenarios of March Road have been proposed in the Kanata North CDP and can be seen in Appendix D. The interim scenario is the widening of March Road to four lanes and the ultimate scenario considers the widening of March Road to accommodate the extension of the Median BRT system. As the timing of both of these improvements to March Road is unknown and neither transportation infrastructure upgrade is included in the City of Ottawa's 2031 Affordable Network, it has been assumed that they will occur beyond the proposed development's future analysis horizons. This assumption has been confirmed by the City of Ottawa as part of the comments provided on the Forecasting Report for the proposed development. These comments can be found in Appendix E.

The Ottawa Official Plan, Ottawa Transportation Master Plan, Ottawa Pedestrian Plan, and the Ottawa Cycling Plan have also been used to identify changes to the area transportation network. The resulting changes to the road, pedestrian, and cycling network in the Study Area due to these plans are outlined below:

- As part of the 2031 Affordable Road Network, Klondike Road between March Road and Sandhill Road will be urbanized from a rural to an urban road cross-section. The original timing of this improvement was between 2014 to 2019. As these changes do not appear to be implemented, the timing of this is currently unknown.
- As part of the 2031 Affordable Network, March Road between Carling Avenue and Maxwell Bridge Road will be considered a Transit Signal Priority corridor (Isolated Measures). As a result, transit signal priority and queue jump lanes will be implemented. The exact timing of this is not clear.
- As part of the 2031 Ultimate Cycling Network, within the Study Area March Road will be considered a spine route, and both Klondike Road to the west of March Road, and Halton Terrace will be considered local routes. The exact timing of these have not been made clear.


Additionally, it is assumed that as part of the proposed development, the existing pedestrian facilities and bike lanes which terminate north of Maxwell Bridge Road / Halton Terrace will be extended along the frontage of the proposed development along the east side of March Road upon full-build out of the development. It is expected that the existing pedestrian facilities and bike lanes which terminate north of Maxwell Bridge Road / Halton Terrace will be extended along the frontage of the proposed development along the west side of March Road in conjunction with the development of the southwestern quadrant of the Kanata North Community Design Plan. As discussed below, this is anticipated to occur in 2026.

2.3.2 Other Study Area Developments

A few development applications were available for the adjacent properties as listed on the City's Development Application Search tool:

- 1055 Klondike Road – A residential subdivision made up of 12 semi-detached dwellings, 46 townhouse units, 56 apartment units, and additional space designated for development. At this time a Transportation Impact Assessment (TIA) is not available. As this development is expected to have an impact on the Study Area, if the TIA is made available prior to completion of this study, the traffic impact of this development will be considered on the Study Area.
- 1156 / 1170 March Road – A gasoline service centre with eight fuelling pumps and a convenience store. The originally anticipated full-build out year was 2017. As this construction on this development does not appear to have begun yet, it will be assumed to be built-out before the future horizon year of 2022 to ensure it is considered. The anticipated primary trip generation from this site can be seen in Figure 11 and is an excerpt from the Mr. Gas Service Centre-1156 March Road Transportation Brief prepared by D.J. Halpenny & Associates Ltd.

Figure 11: 1156 March Road Site Generated Primary Volumes

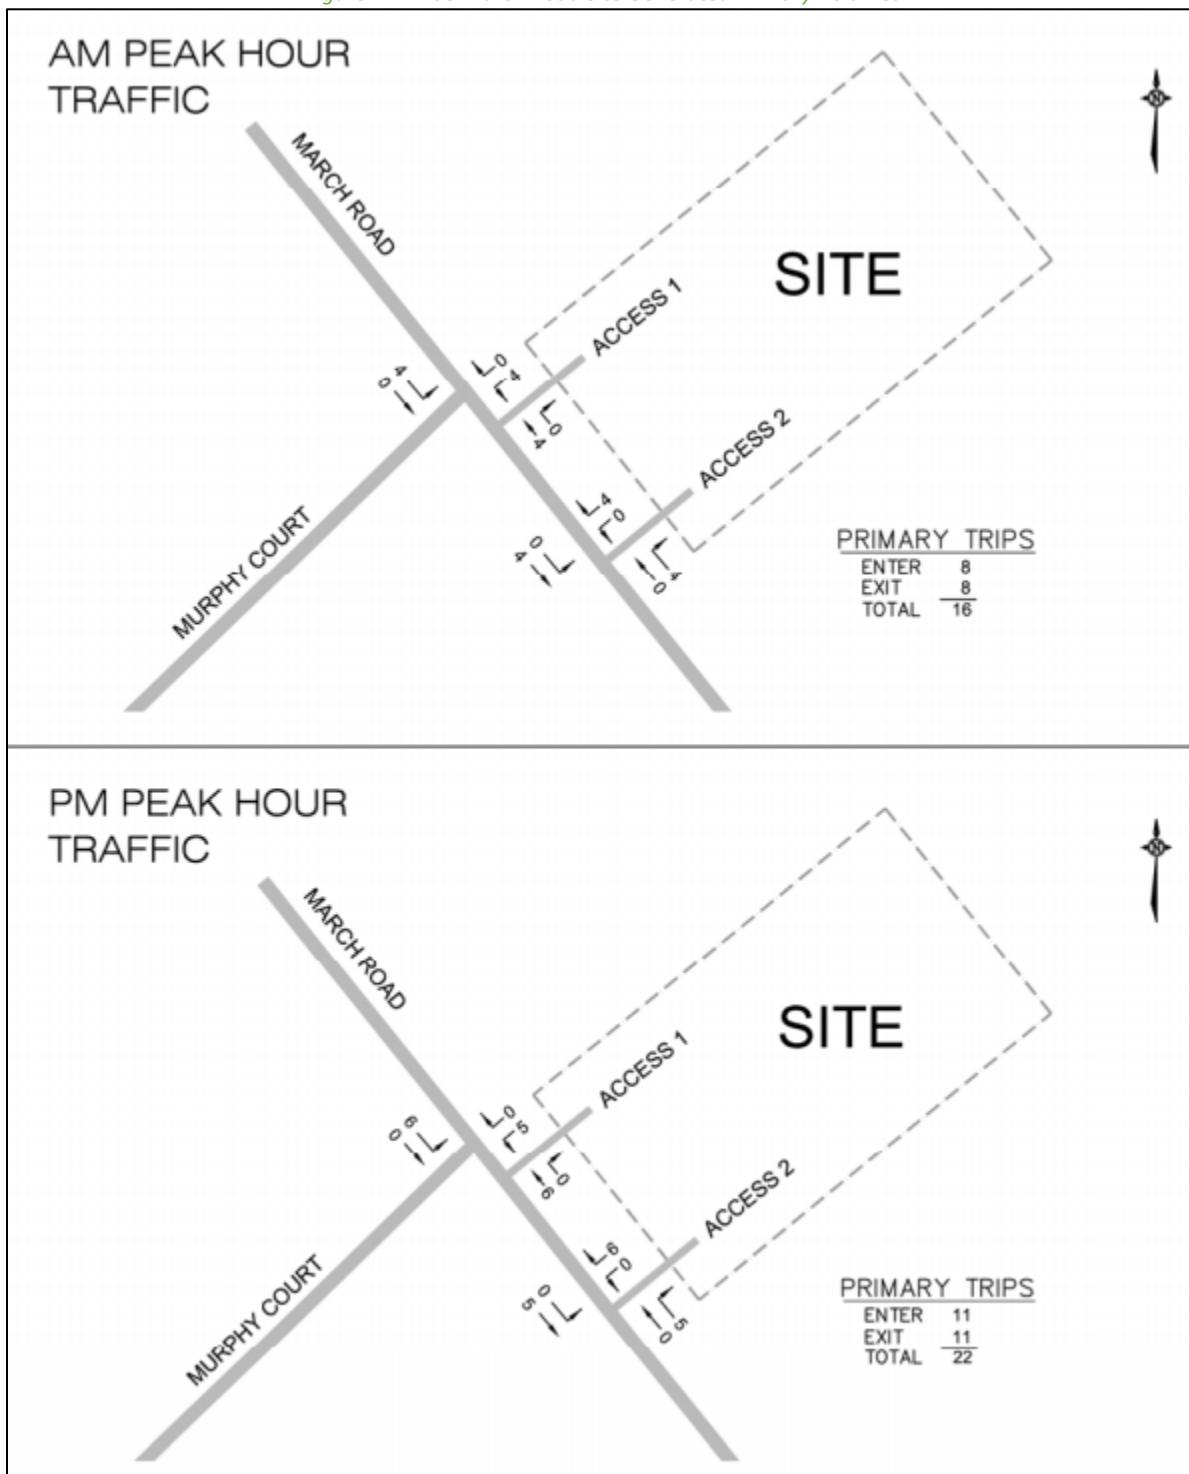


Source: 1156 March Road TIA Strategy Report (D.J. Halpenny & Associates Ltd., 2016)

- 788 March Road – A two-phase residential development proposing 95 residential units upon the completion of the first phase (2021) and an additional 101 residential units upon build-out of the second phase (2023). A total of approximately 270 vehicle parking spaces are proposed. The anticipated trip generation from this site for Phase 1 and Phase 2 can be seen in Figure 12 and Figure 13 respectively, and


are excerpts from the 788 March Road Draft Transportation Impact Assessment prepared by Parsons. A final version of the report has not been made available.

Figure 12: 788 March Road Site Generated Volumes-Phase 1

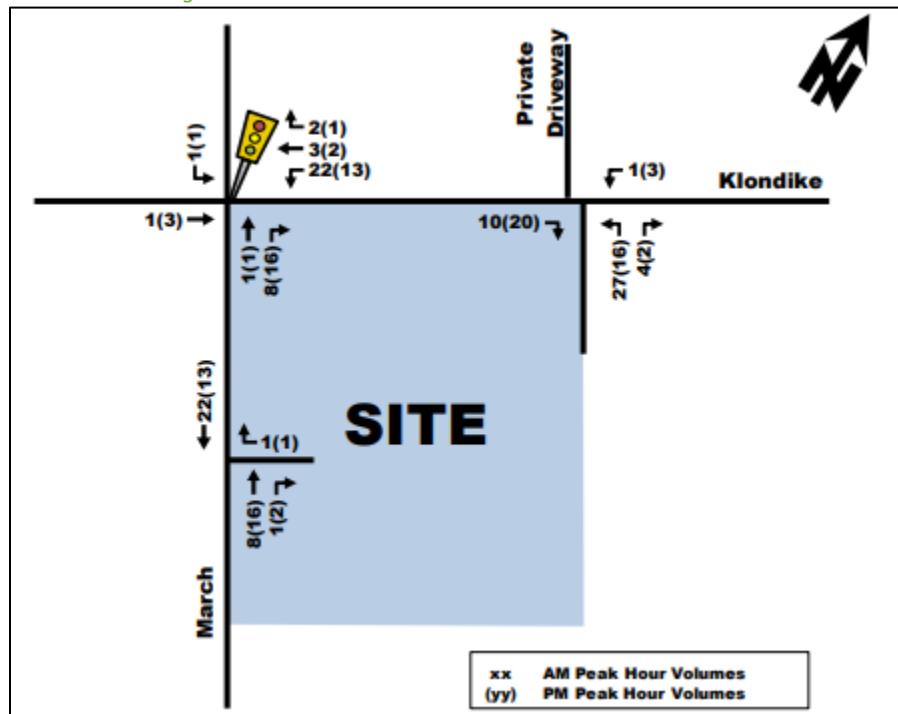

Source: 788 March Road TIA Strategy Report (Parsons, 2018)


Figure 13: 788 March Road Site Generated Volumes-Phase 1 & 2

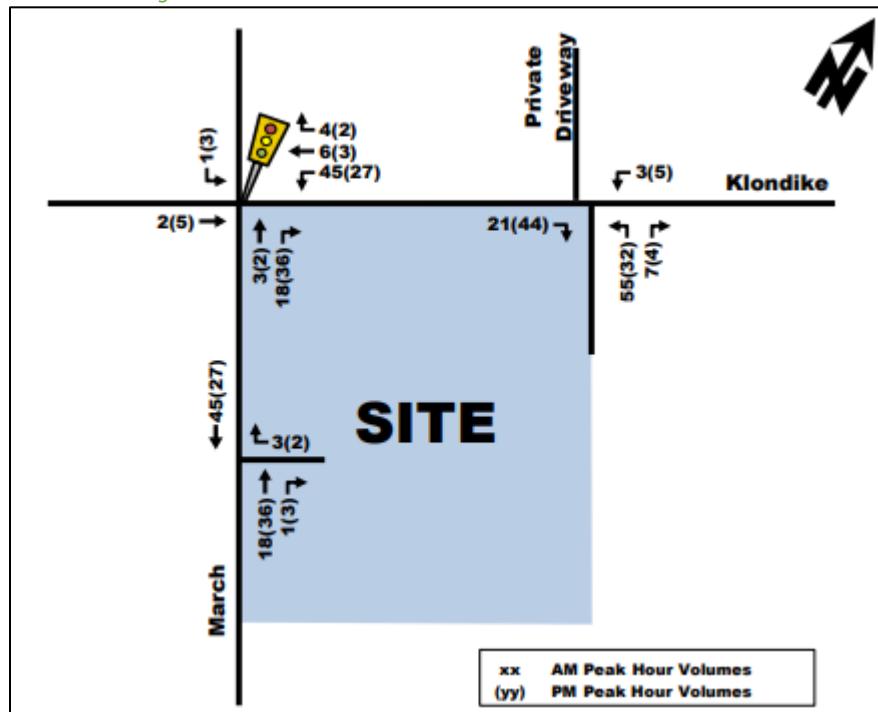

Source: 788 March Road TIA Strategy Report (Parsons, 2018)


The Kanata North Community Design Plan outlines the proposed community-wide land-use framework for the Kanata North Urban Expansion Area. Various proposed developments are considered as part of the design plan and have been broken into four quadrants (northeastern, southeastern, southwestern, and northwestern). The Kanata North Community Design Plan -TMP – prepared by Novatech identifies the site-generated traffic of all four quadrants on the surrounding area road network and assumes a full build-out year of 2026. Excerpts from the TMP can be seen in Figure 14 and Figure 15 depicting the 2026 Future Background Volumes and the 2026 Future Total Volumes, respectively.

Figure 14: Kanata North Community Design Plan - 2026 Future Background Volumes

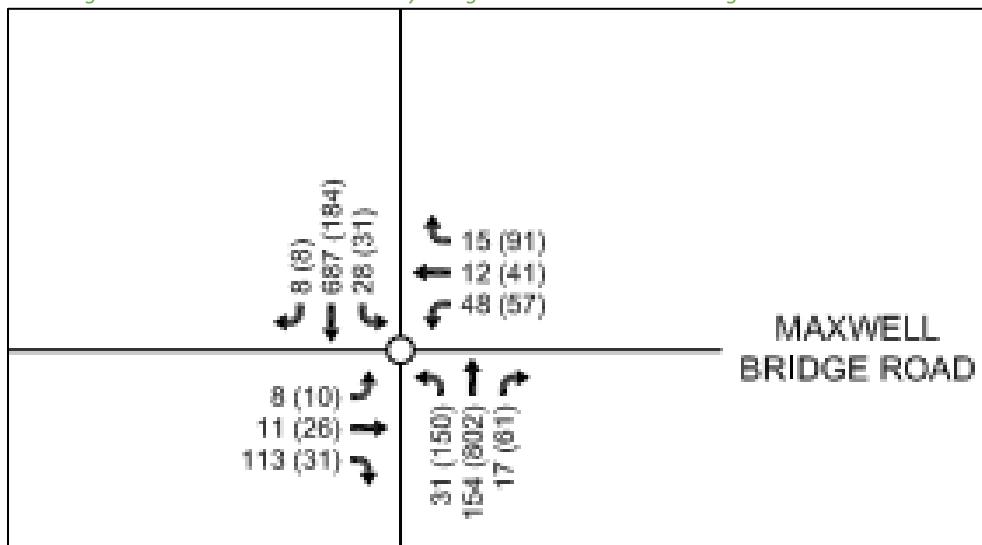

Source: Kanata North Community Design Plan - TMP (Novatech, 2016)

Figure 15: Kanata North Community Design Plan - 2026 Future Total Volumes

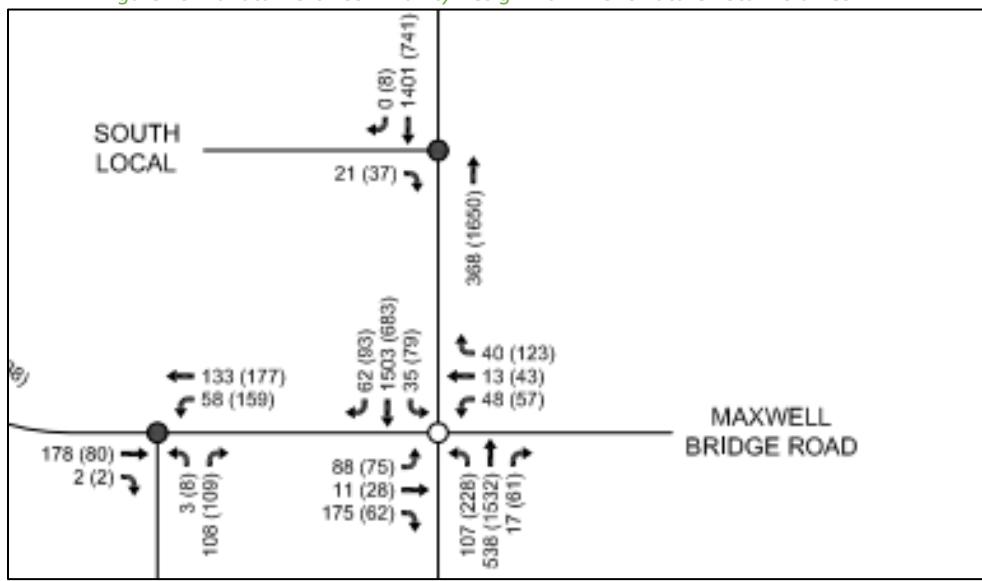

Source: Kanata North Community Design Plan - TMP (Novatech, 2016)


At this time, active development applications are available for all quadrants with the exception of the southwestern quadrant. As such, the contribution of the southwestern quadrant can only be considered based on the site generated volumes from the Kanata North Community Design Plan -TMP as shown in Figure 14 and Figure 15, and is therefore assumed to be built-out in 2026. This will produce a conservative analysis. Additionally, the

proponent has indicated that they intend to work with the land developers of the southwestern quadrant to ensure the South Local Road will form the west leg of the Site Access #1 intersection. Further details will be provided in Section 11.3.

The other development quadrants are explored in further detail below:

- 936 March Road - Considered the southeast portion of the Kanata North Urban Expansion Area Proposed to include approximately 800 residential units split between townhomes and detached units. The full build-out of this development is expected by 2023. The anticipated trip generation from this site can be seen in Figure 16 and is an excerpt from the 936 March Road Transportation Impact Study prepared by CGH Transportation.

Figure 16: 936 March Road Site Generated Traffic Volumes

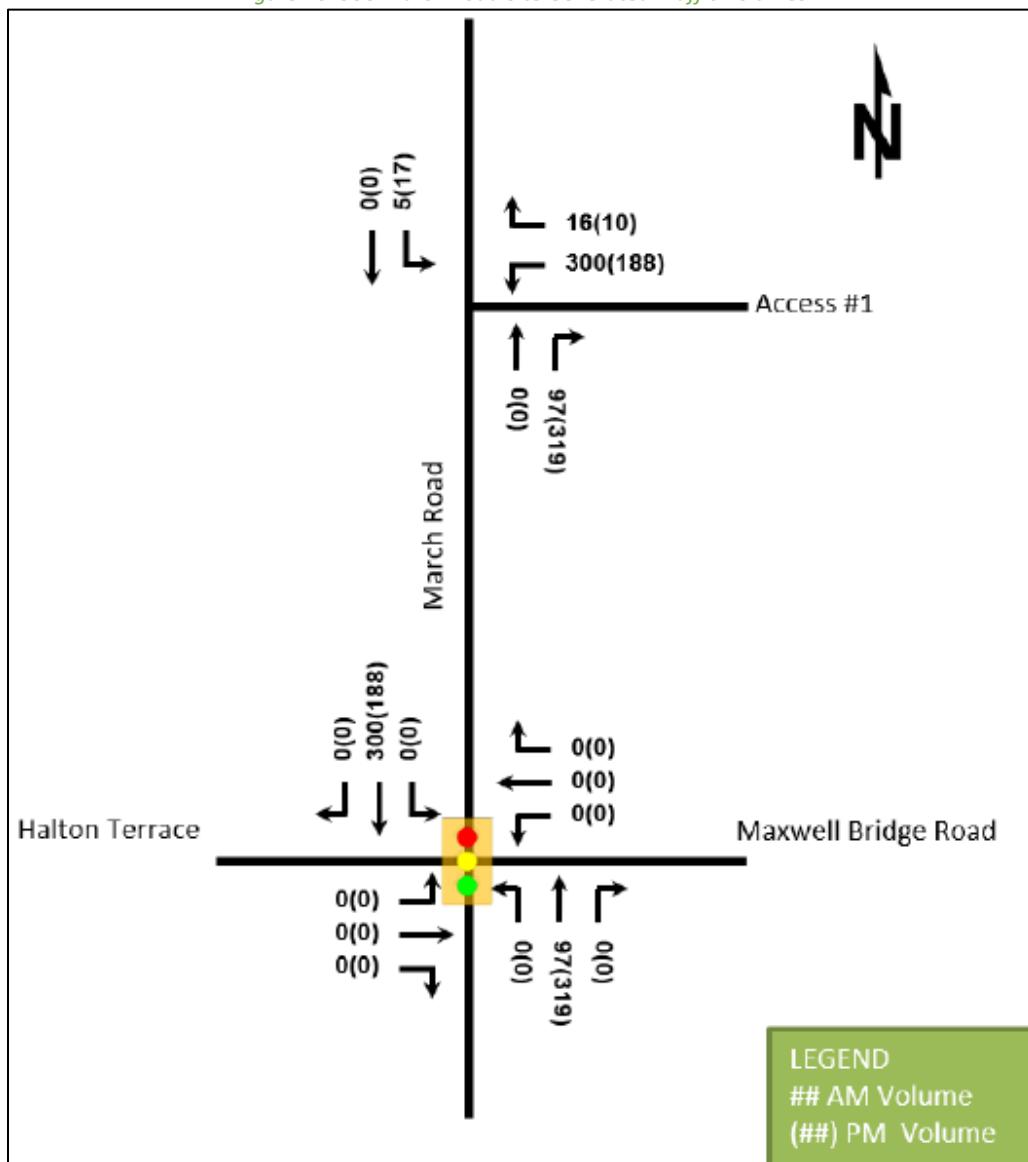


Source: 936 March Road (CGH Transportation, 2018)

- 1020 / 1070 March Road – Considered the northeast portion of the Kanata North Urban Expansion Area. A subdivision proposed to include 297 single family homes, 315 townhouses, 116 apartment units, and

elementary school and 80, 000 ft² of specialty retail. Full build-out of this development is expected by 2031. No phasing information is available. The anticipated trip generation from this site can be seen in Figure 17 and is an excerpt from 1020 and 1070 March Road Transportation Impact Assessment-Strategy Report prepared by Stantec.

Figure 17:1020 / 1070 March Road Site Generated Volumes

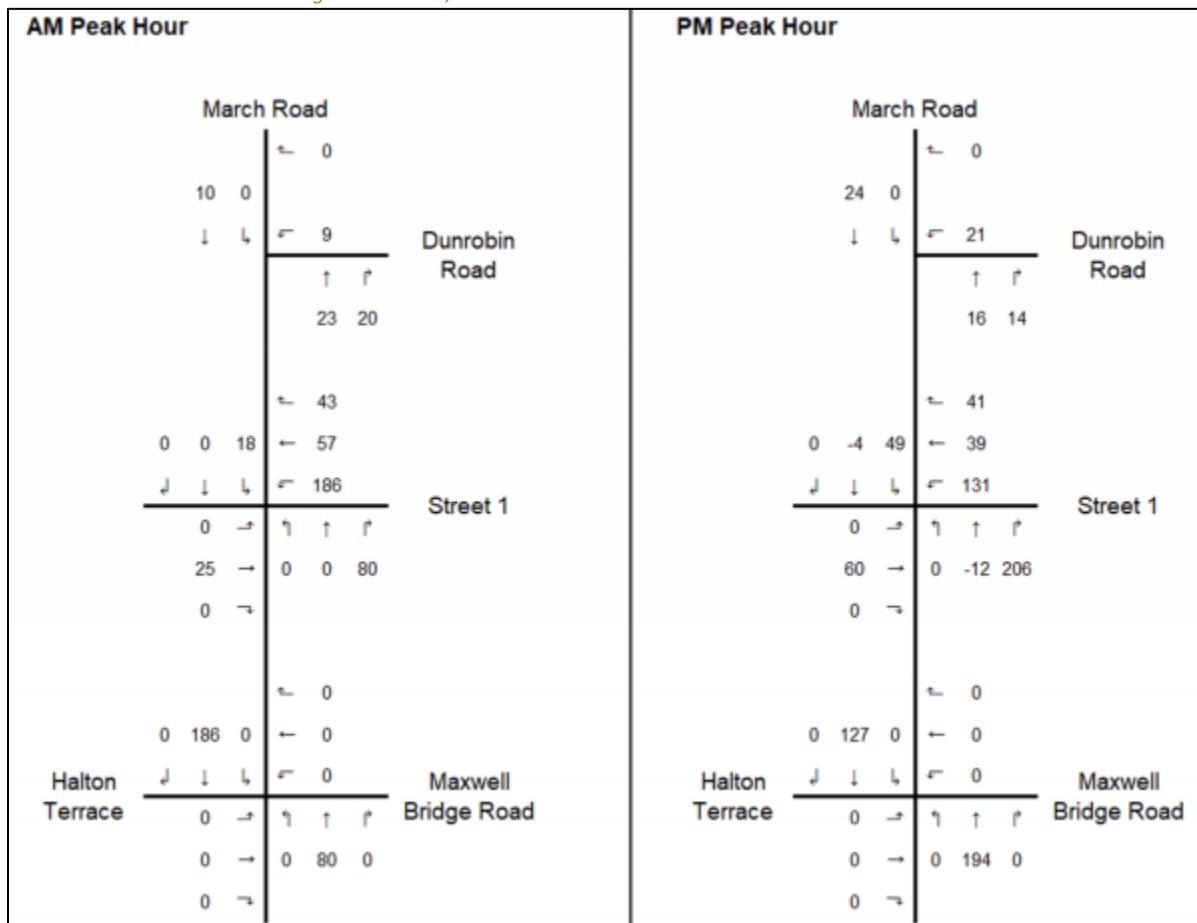

Source: 1020 and 1070 March Road TIA Strategy Report (Stantec, 2019)

- 1053 / 1075 / 1145 March Road – Considered the northwest portion of the Kanata North Urban Expansion Area. Proposed to include 295 single detached dwellings, 314 townhouse dwellings, 216 multi-unit dwellings. Full build-out of this development is expected by 2026. Site generated volumes diagrams are not available as part of the TIA, however the report indicates that the volumes presented in the Kanata North Community Design Plan – TMP prepared by Novatech can be used to determine a conservative estimate of the traffic generated by the proposed development at 1053 / 1075 / 1145 March Road. The 2026 future background volumes and the 2026 future total volumes seen in Figure 14 and Figure 15 will therefore be used to calculate the site generated traffic.

3 Study Area and Time Periods

3.1 Study Area

The Study Area will include the intersections of March Road at Halton Terrace / Maxwell Bridge Road and March Road at Klondike Road. March Road will be examined as a Boundary Road.

3.2 Time Periods

As the proposed development is composed entirely of commercial developments, the AM, PM, and Saturday peak hours will be examined.

3.3 Horizon Years

The anticipated build-out year is 2022. As a result, the full build-out plus five years horizon year is 2027.

4 Exemption Review

Table 4 summarizes the exemptions for this TIA.

Table 4: Exemption Review

Module	Element	Explanation	Exempt/Required
Design Review Component			
4.1 Development Design	4.1.2 Circulation and Access	Only required for site plans	Required
	4.2.3 New Street Networks	Only required for plans of subdivision	Exempt
4.2 Parking	4.2.1 Parking Supply	Only required for site plans	Required
	4.2.2 Spillover Parking	Only required for site plans where parking supply is 15% below unconstrained demand	Exempt
Network Impact Component			
4.5 Transportation Demand Management	All Elements	Not required for site plans expected to have fewer than 60 employees and/or students on location at any given time	Required
4.6 Neighbourhood Traffic Management	4.6.1 Adjacent Neighbourhoods	Only required when the development relies on local or collector streets for access and total volumes exceed ATM capacity thresholds	Exempt
4.8 Network Concept		Only required when proposed development generates more than 200 person-trips during the peak hour in excess of equivalent volume permitted by established zoning	Required

5 Development-Generated Travel Demand

5.1 Trip Generation and Mode Shares

This TIA has been prepared using the vehicle trip rates from the ITE Trip Generation Manual (10th Edition). To estimate person trip generation, a factor of 1.28 has been applied to the ITE rates. Table 5 summarizes the person trip rates for the proposed land uses.

Table 5: Trip Generation Person Trip Rates

Dwelling Type	Land Use Code	Peak Hour	Vehicle Trip Rate	Person Trip Rates
Hardware / Paint Store	816	AM	1.08	1.38
		PM	2.68	3.43
		Sat	2.25	2.88
Fast Casual Restaurant	930	AM	2.07	2.65
		PM	14.13	18.09
		Sat	34.02	43.55
Fast-Food Restaurant w Drive-Through	934	AM	40.19	51.44
		PM	32.67	41.82
		Sat	54.86	70.22
Coffee/Donut Shop w Drive-Through	937	AM	88.99	113.91
		PM	43.38	55.53
		Sat	87.70	112.26
Gasoline/Service Station w Convenience Market	945	AM	12.47	N/A
		PM	13.99	N/A
		Sat	19.35	N/A

Using the above Person Trip rates, the total person trip generation has been estimated. As the gasoline / service station with a convenience market is likely to generate only vehicle trips, the ITE vehicle trip rate will be used and all resulting trips will be allocated to the auto driver mode share in order to produce a conservative analysis. Table 6 below illustrates the total person trip generation by land use.

Table 6: Total Person Trip Generation

Land Use	Units / GFA	AM Peak Hour			PM Peak Hour			Sat Peak Hour		
		In	Out	Total	In	Out	Total	In	Out	Total
Hardware / Paint Store	20,256 sq.ft	15	13	28	32	37	69	32	26	58
Fast Casual Restaurant	3,601 sq.ft	7	3	10	36	29	65	86	71	157
Fast-Food Restaurant w Drive-Through	2,359 sq.ft	62	59	121	51	48	99	85	81	166
Coffee/Donut Shop w Drive-Through	2,058 sq.ft	119	115	234	57	57	114	115	116	231
Gasoline/Service Station w Convenience Market	10 pumping stations	64	61	125	71	69	140	96	97	193
Total Person Trips		267	251	518	247	240	487	414	391	805

Using the most recent National Capital Region Origin-Destination (OD Survey), the existing mode shares for the Kanata / Stittsville and Rural West TRANS districts have been summarized in Table 7. The proposed development is just within the Kanata / Stittsville district however, as requested by the City of Ottawa as part of the Forecasting Report review process, shown in Appendix E, the Rural West mode shares have been used instead to generate the site trips for the proposed development.

Table 7: Mode Share

Travel Mode	Kanata / Stittsville	Rural West
Auto Driver	65%	75%
Auto Passenger	15%	15%
Transit	10%	5%
Cycling	1%	1%
Walking	9%	4%
Total	100%	100%

Using the above mode shares and person trip rates, the person trips by mode have been forecasted during the peak hours. Where applicable, pass-by trips have been accounted for. These rates have been selected using ITE Trip Generation Manual 10th Edition Volume 1 Table E.32 for both the Fast-food Restaurant with a Drive-through and the Coffee / Donut Shop with a Drive-through land uses and Table E. 37 for the Gasoline / Service Station with Convenience Market land use. The average pass-by trip percentages for both the AM peak and PM peak periods were taken from these tables. For other land uses a pass-by rate has not been applied as they are unlikely to attract pass-by trips during the peak hours. The rates used for each land-use have been summarized in Table 8, as per the ITE Trip Generation Manual.

Table 8: Land Use Pass-by Rates

Land Use	Pass-by Rate	
	AM	PM
Fast-Food Restaurant w Drive-Through	49%	50%
Coffee/Donut Shop w Drive-Through	49%	50%
Gasoline/Service Station w Convenience Market	62%	56%

As no pass-by rates were available for the Coffee/Donut Shop with a Drive-through land use (LUC 937), the pass-by rates of a similar land use (Fast-food Restaurant with Drive-through (LUC 934)) have been used. This is considered conservative as it is suspected that the pass-by rates of a Coffee/Donut Shop with a Drive-through would be higher. Additionally, as no Saturday peak pass-by rates are available, the PM peak pass-by rates have been used. The pass-by reduction by land use can be seen in Appendix F and the total pass-by reduction can be seen in Table 9 below.

Given the relatively small size of the proposed development as well as the mix of different land uses, no notable degree of internal capture is expected, and as such, no internal capture rates have been considered. This will produce a conservative estimate of new peak hour vehicle trips.

Using the above mode shares and person trip rates, the person trips by mode have been projected. Table 9 summarizes the trip generation by mode.

Table 9: Trip Generation Mode

Travel Mode	Mode Share	AM Peak Hour			PM Peak Hour			Sat Peak Hour		
		In	Out	Total	In	Out	Total	In	Out	Total
Auto Driver	75%	217	203	420	202	199	401	335	317	652
Fast-Food Restaurant w Drive-Through Pass-by	-	-24	-22	-45	-19	-18	-37	-32	-31	-63
Coffee/Donut Shop w Drive-Through Pass-by	-	-44	-43	-87	-22	-22	-44	-43	-44	-87
Gasoline/Service Station w Convenience Market Pass-by	-	-40	-38	-78	-40	-39	-79	-54	-55	-109
Total Pass-by	-	-108	-103	-211	-81	-79	-160	-129	-130	-259
Net New	-	109	100	209	121	120	241	206	187	393
Auto Passenger	15%	30	28	58	27	26	53	48	44	92
Transit	5%	10	10	20	10	8	18	16	15	31
Cycling	1%	2	2	4	2	1	3	3	3	6
Walking	4%	8	8	16	6	6	12	12	12	24
Total	100%	267	251	518	247	240	487	414	391	805

As shown above, 209 AM, 241 PM and 393 Saturday net new peak hour two-way vehicle trips are projected as a result of the proposed development.

5.2 Trip Distribution

To understand the travel patterns of the subject development, the OD survey has been reviewed to determine the existing travel patterns in both the Kanata / Stittsville and Rural West TRANS districts. As requested by the City of Ottawa as part of the Forecasting Report review process, shown in Appendix E, the Rural West trip distribution pattern will be applied to the new vehicle trips. Table 10 below summarizes the various distributions of the two TRANS districts.

Table 10: OD Survey Existing Distribution

To/From	% of Trips	
	Kanata / Stittsville	Rural West
North	15%	15%
South	30%	20%
East	50%	50%
West	5%	15%
Total	100%	100%

5.3 Trip Assignment

Using the distribution outlined above, turning movement splits, and access to major transportation infrastructure, the pass-by trips and trips generated by the site have been assigned to the Study Area road network.

To assign the pass-by trips to the accesses, a ratio of southbound trips as a portion of all traffic on March Road, and northbound trips as a portion of all traffic on March Road was developed. It was determined that 80% of the total traffic is southbound and 20% is northbound in the 2022 AM peak period and 24% of the total traffic is southbound and 76% is northbound in both the 2022 PM and 2022 Saturday peak periods. It was also determined that 72% of the total traffic is southbound and 28% is northbound in the 2027 AM peak period and 35% of the total traffic is southbound and 65% is northbound in both the 2027 PM and 2027 Saturday peak periods. Using these percents the traffic volumes have been logically distributed to the access points.

Figure 18 and Figure 19 illustrate the forecasted site pass-by trip volumes for 2022 and 2027, respectively. Figure 20 illustrates the 2022 new site traffic assignment by percentage, Figure 21 illustrates the 2027 new site traffic assignment by percentage, Figure 22 illustrates the 2022 new site generated volumes, Figure 23 illustrates the 2027 new site generated volumes, and Figure 24 and Figure 25 illustrate the 2022 and 2027 net new site generated volumes, respectively.

Figure 18: Forecasted Site Pass-by Trip Volumes-2022

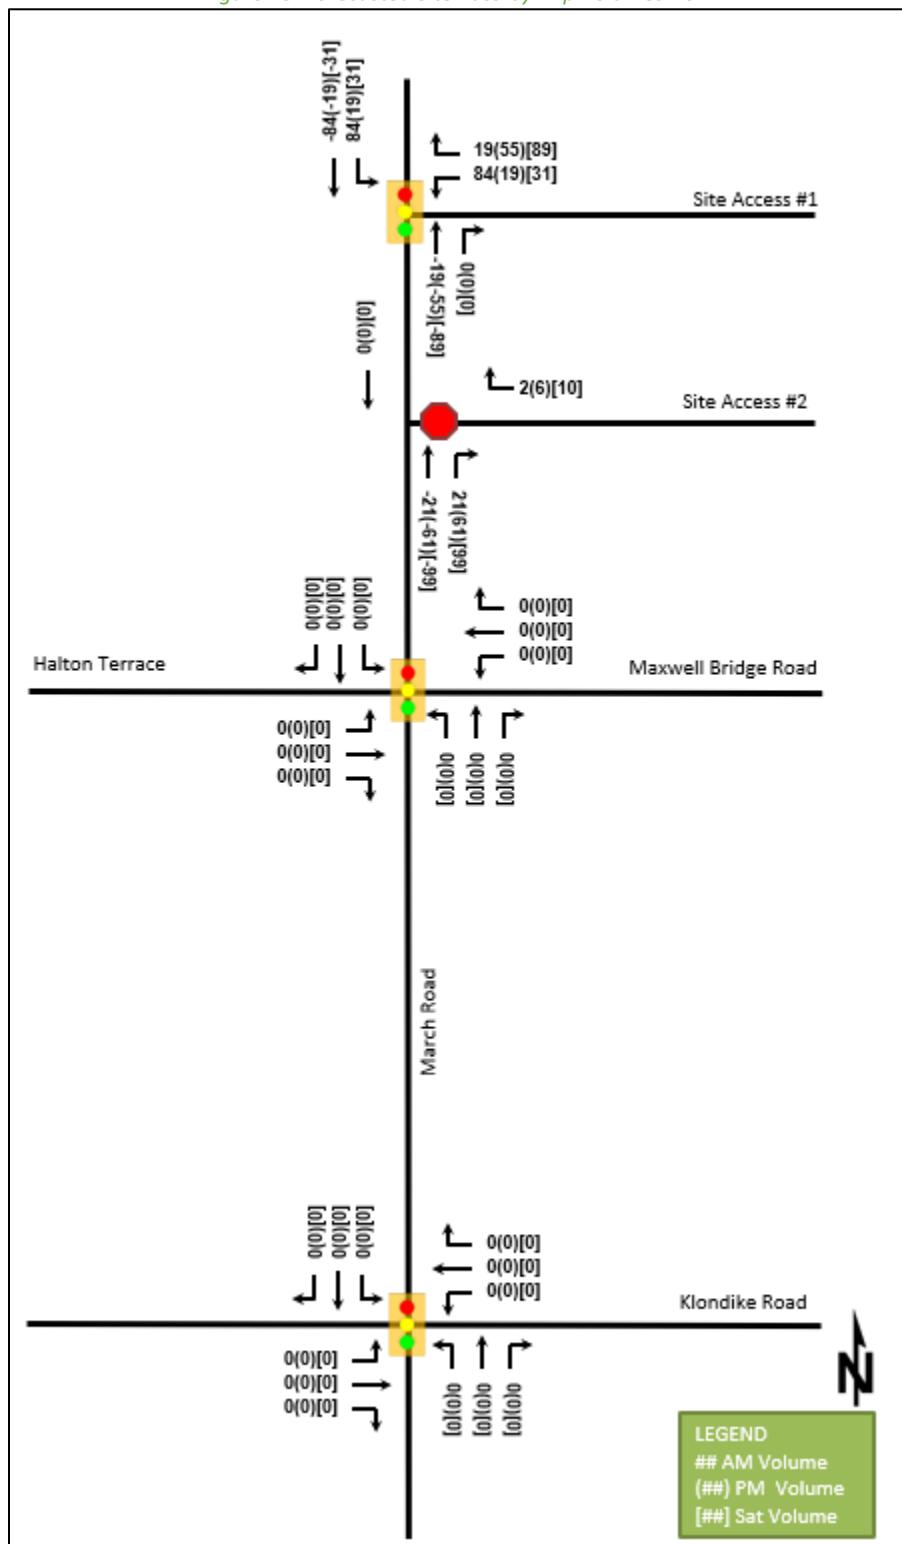


Figure 19: Forecasted Site Pass-by Trip Volumes-2027

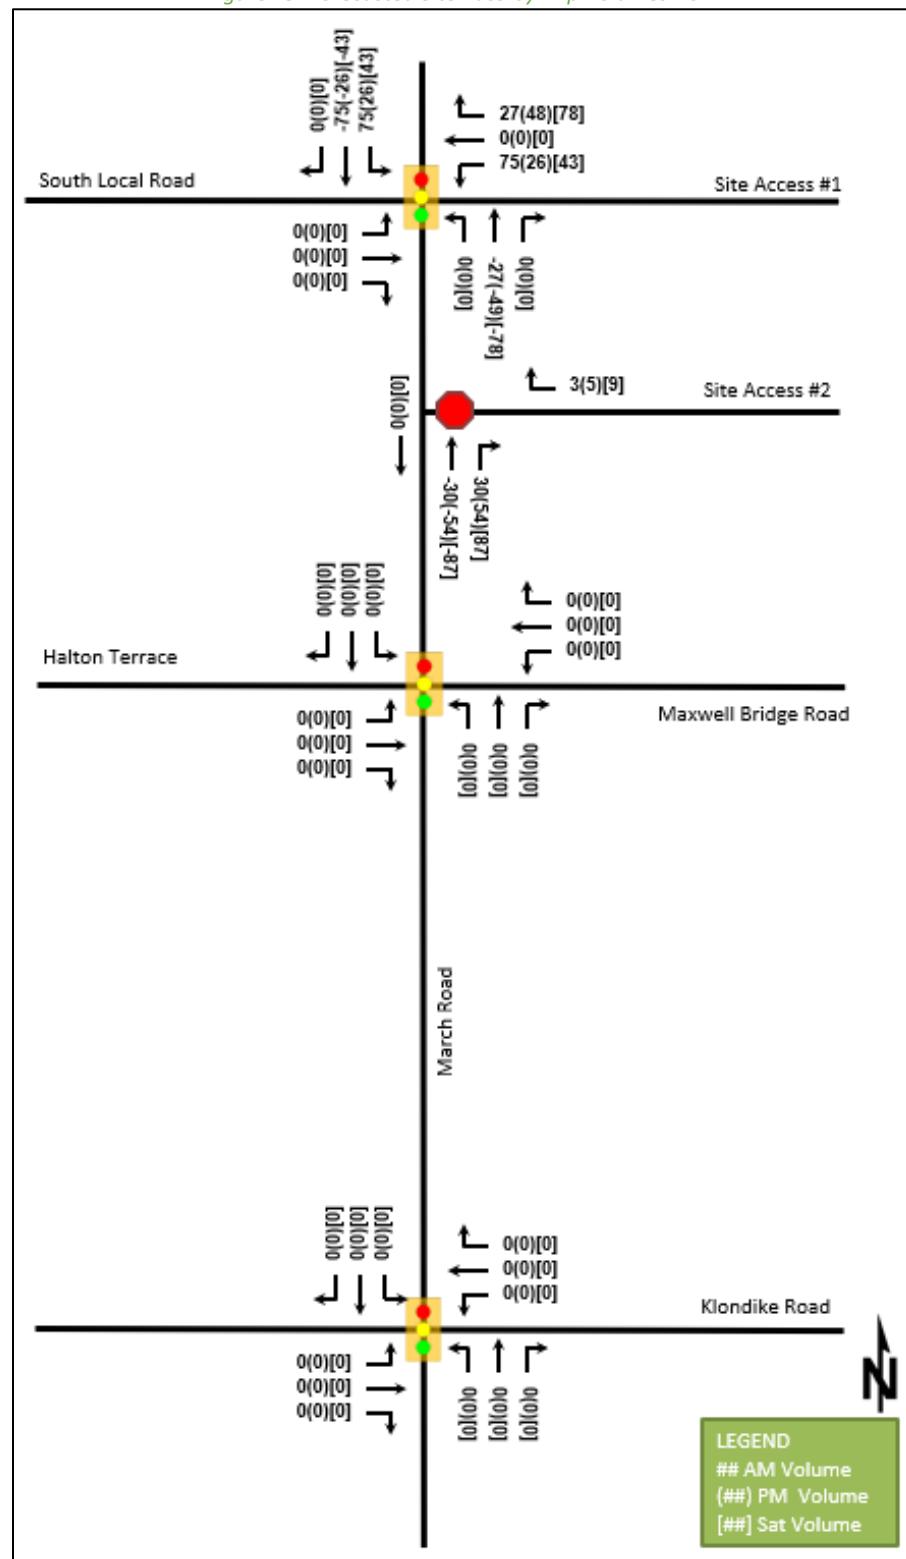


Figure 20: New Site Generation Assignment 2022 (%)

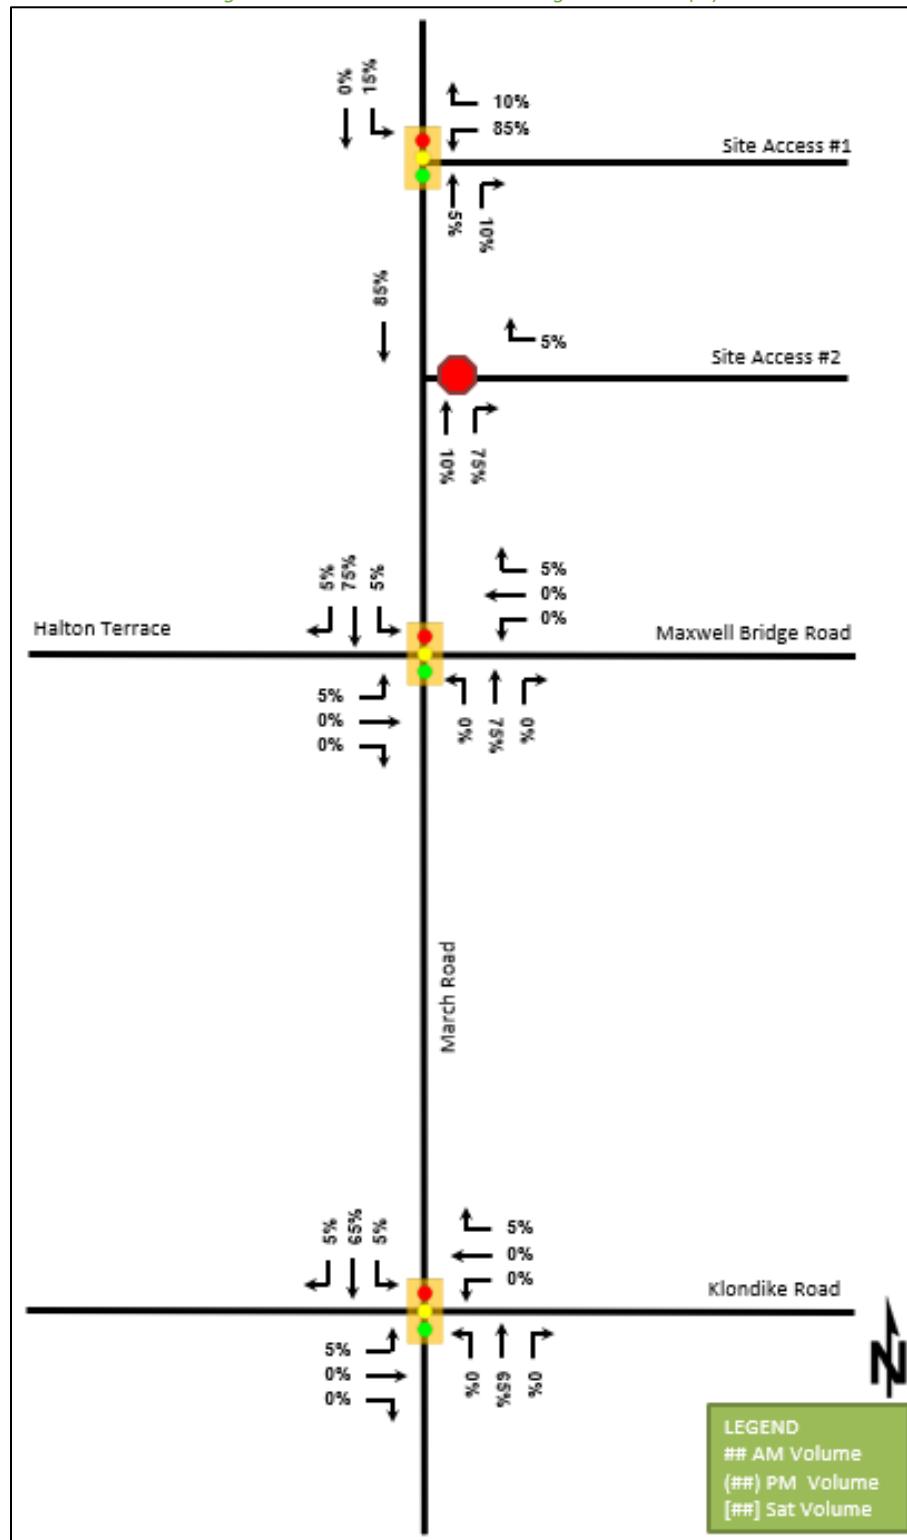


Figure 21: New Site Generation Assignment 2027 (%)

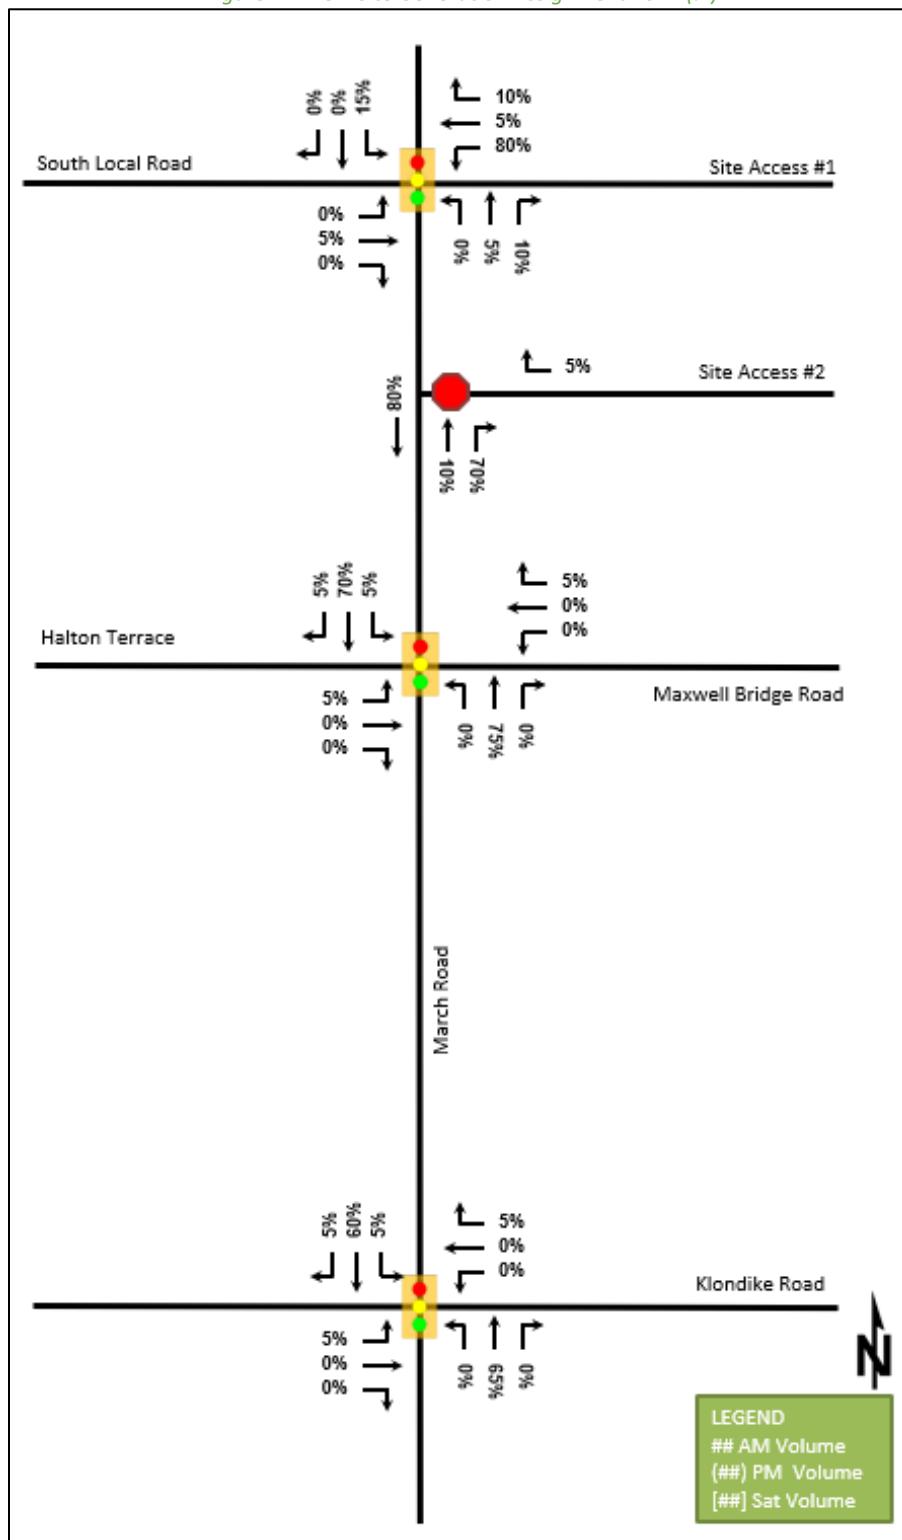


Figure 22: New Site Generation 2022 Auto Volumes

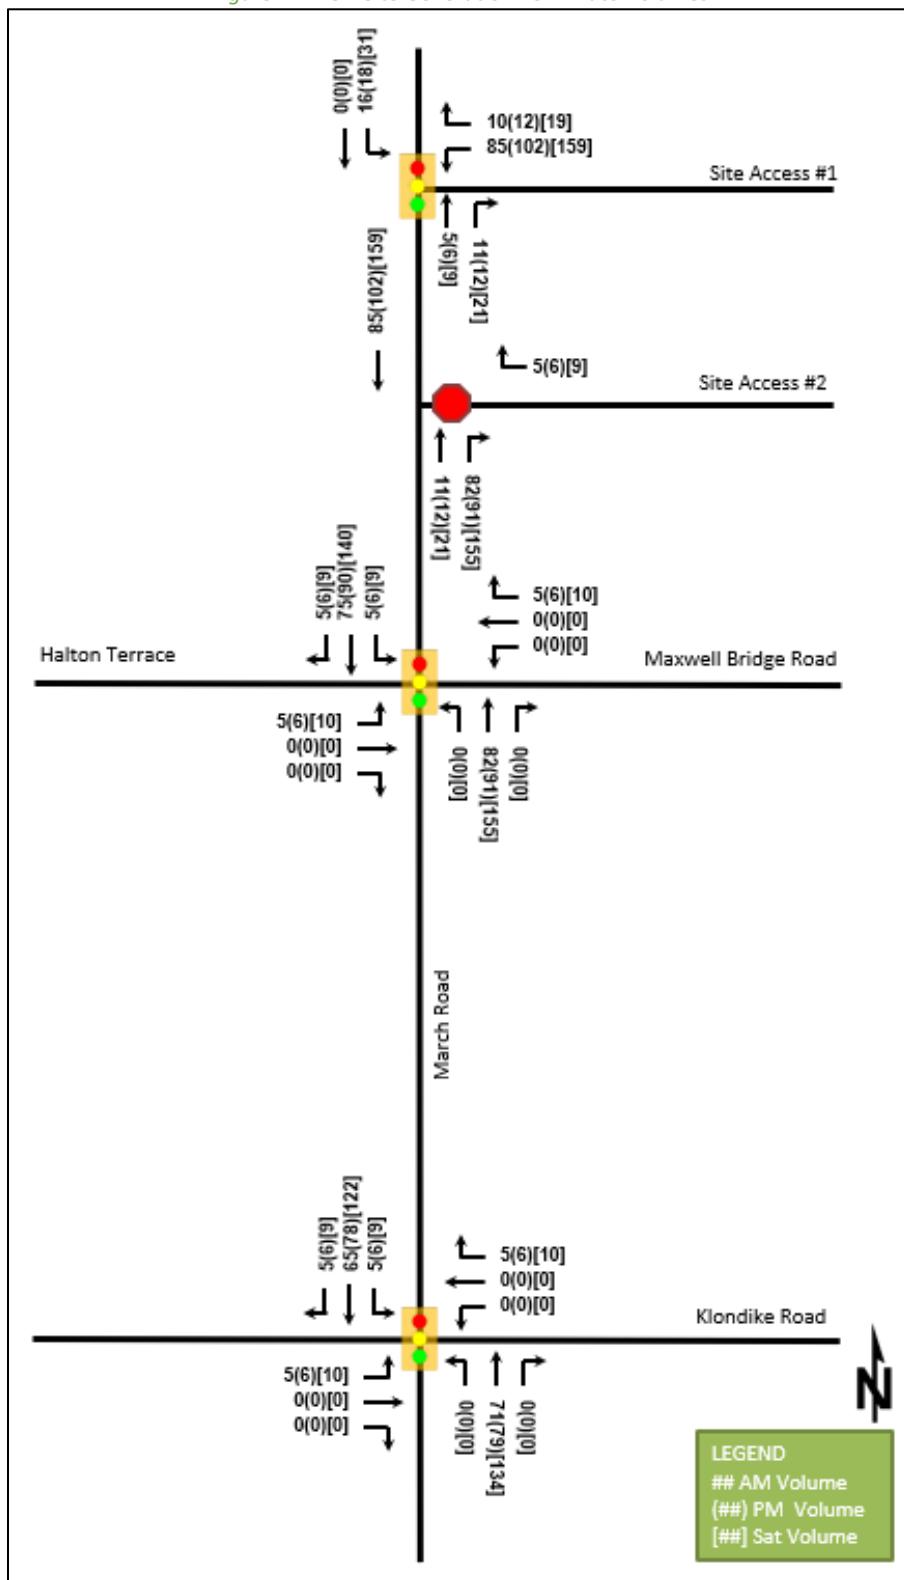


Figure 23: New Site Generation 2027 Auto Volumes

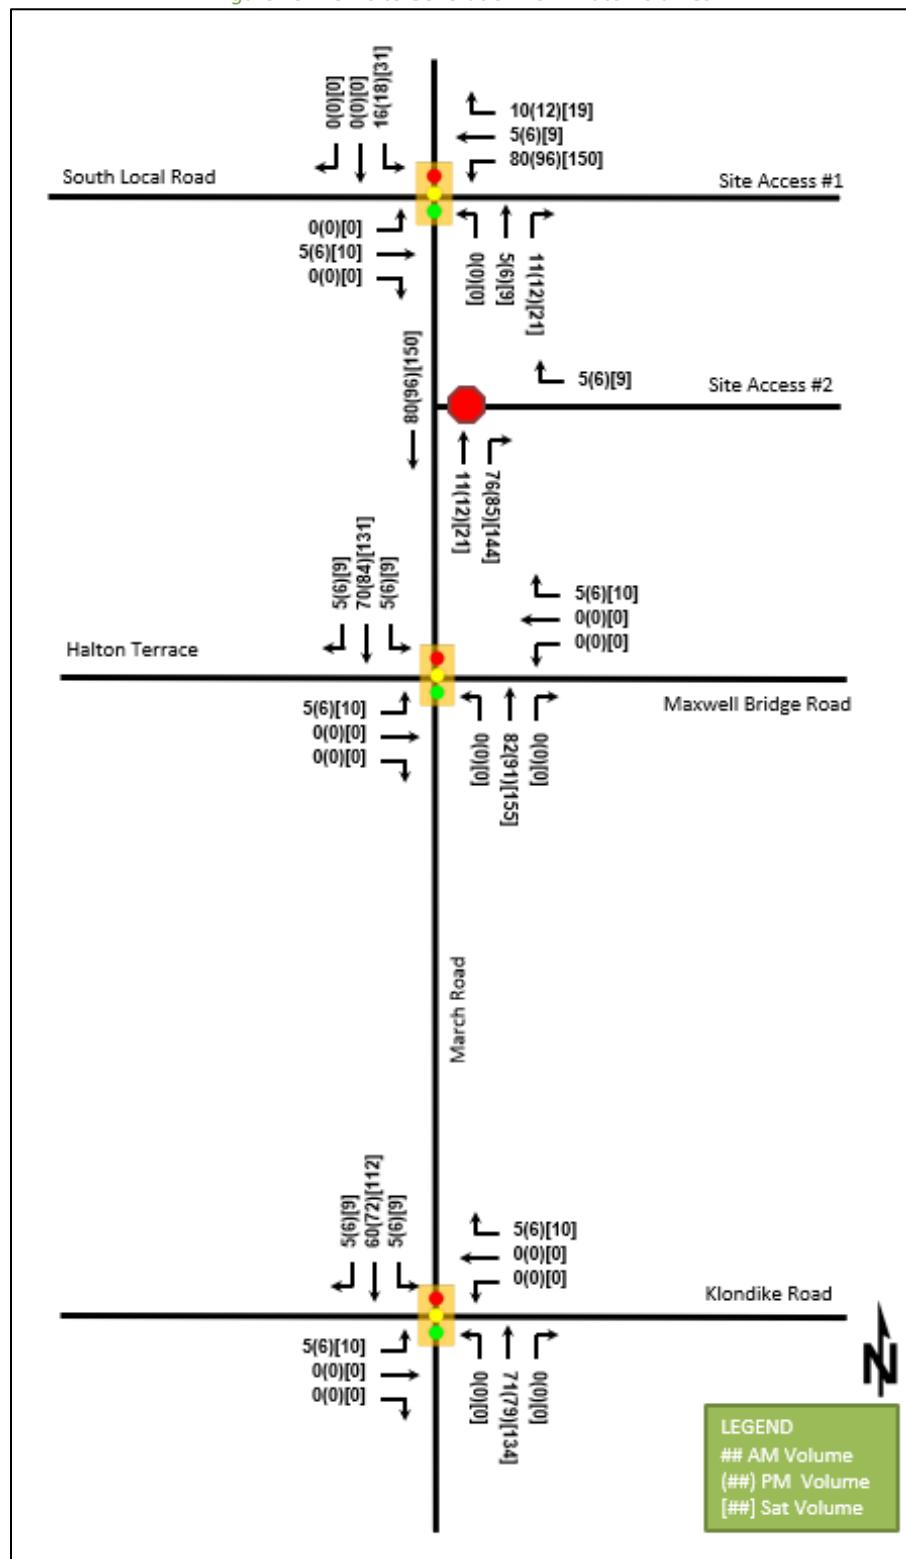


Figure 24: Net New Site Generation Auto Volumes 2022


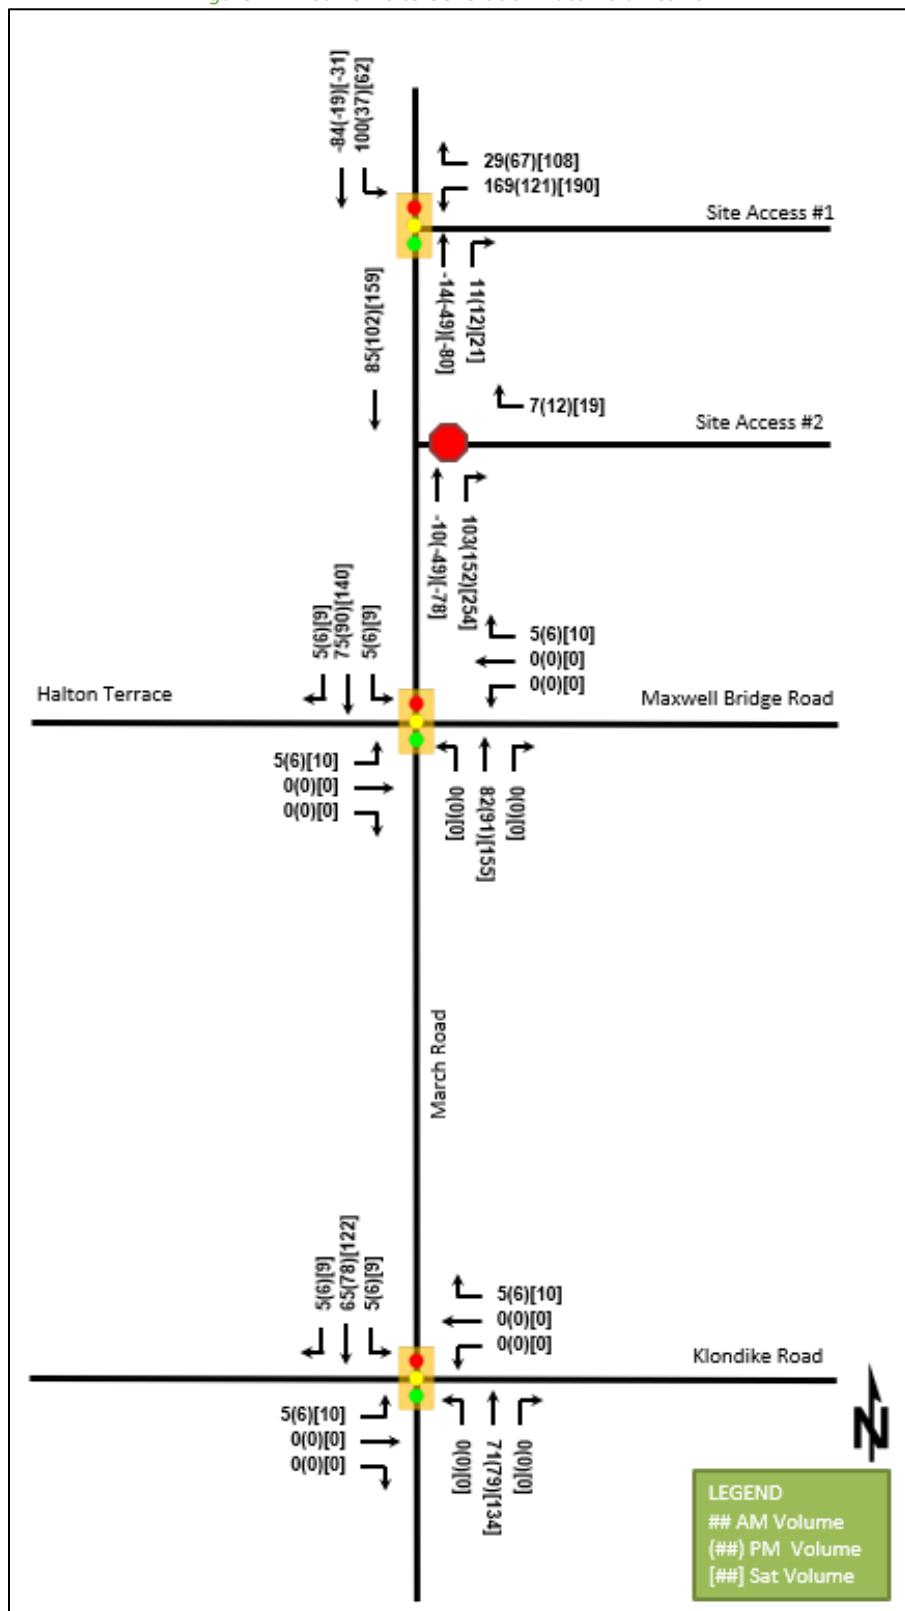


Figure 25: Net New Site Generation Auto Volumes 2027

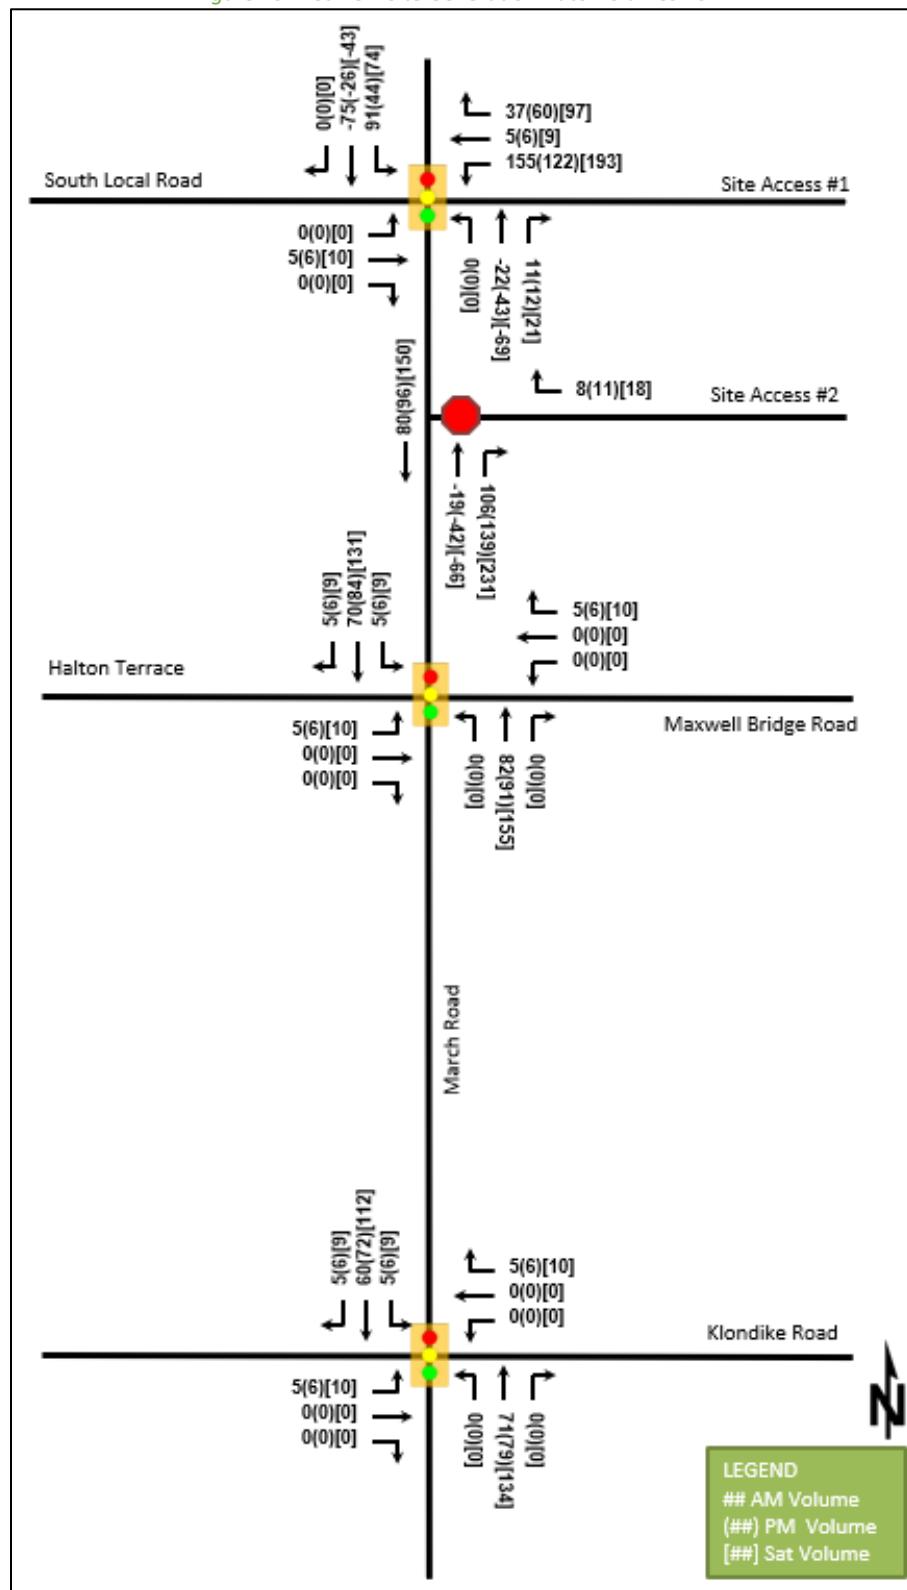

6 Background Network Travel Demands

6.1 Transportation Network Plans

The transportation network plans were discussed in Section 2.3.1. The Kanata North CDP has determined the required March Road interim and ultimate cross-sections. Both cross-sections, as shown in Appendix D, include two traffic lanes, cycling lanes, and sidewalks, both northbound and southbound. The ultimate cross-section also includes a centreline bus rapid transitway.

Additionally, Klondike Road between March Road and Sandhill Road will be urbanized and the implementation of a Transit Signal Priority corridor (isolated measures) on March Road between Carling Avenue and Maxwell Bridge Road are indicated by the City of Ottawa 2031 Affordable Road Network. This is assumed to occur beyond the proposed development's future analysis horizons.

The additional connectivity provided by the future bicycle spine route along March Road and the local routes along Klondike Road to the west of March Road and Halton Terrace will improve the active mode network but is not anticipated to significantly impact the modal shares used in the future trip generation.

6.2 Background Growth and Other Developments

An annual compound growth rate of 0.5% has been used to determine the background growth. The growth rate has been applied to the through volumes along March Road only. This growth rate is consistent with the Kanata North CDP TMP.

The background developments explicitly considered in the background conditions include the 1156/1170 March Road development, the 788 March Road development, the 936 March Road development, the 1053/1075/1145 March Road development, and the southwestern development in the Kanata North Community Design Plan. All of these developments are discussed in Section 2.3.2.

Figure 26 illustrates the 2022 background volumes and Figure 27 illustrates the 2027 background volumes

Figure 26: Background 2022 Volumes


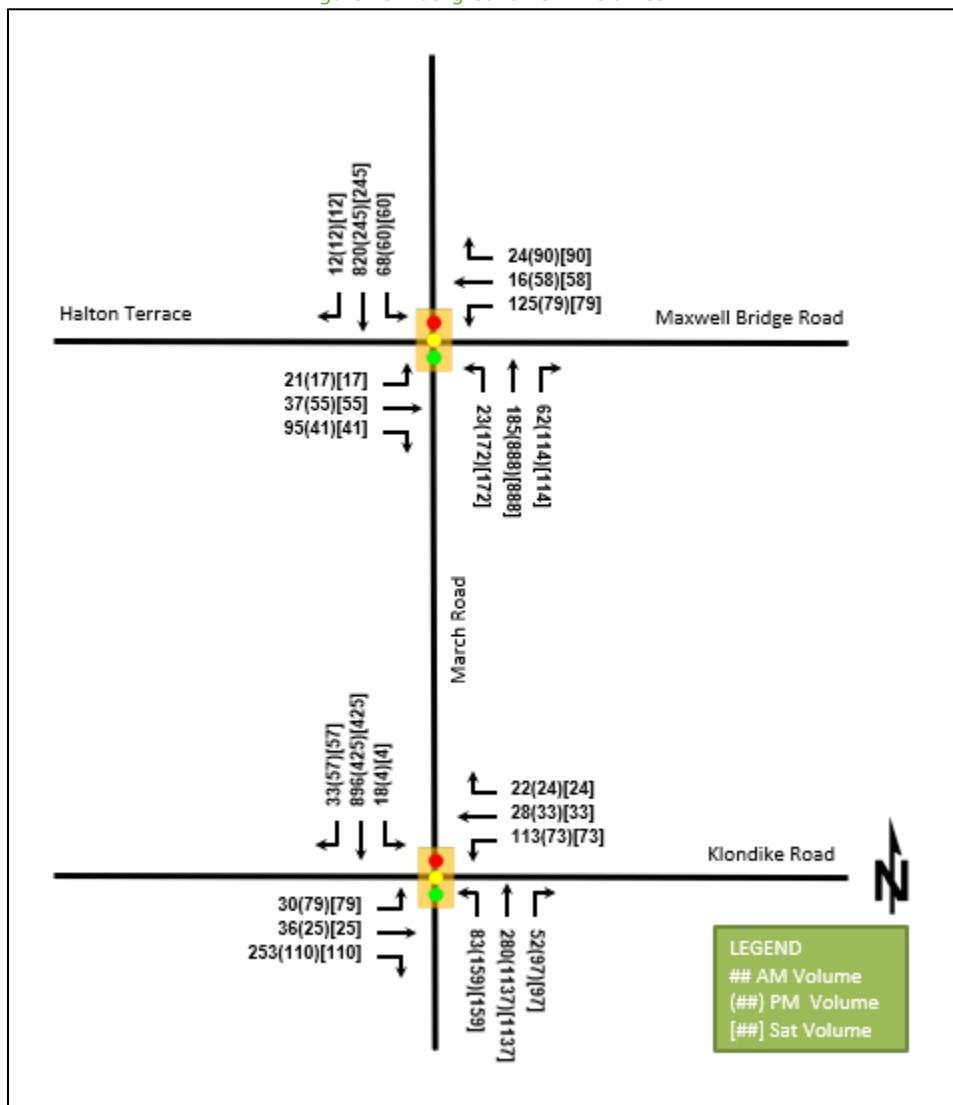


Figure 27: Background 2027 Volumes

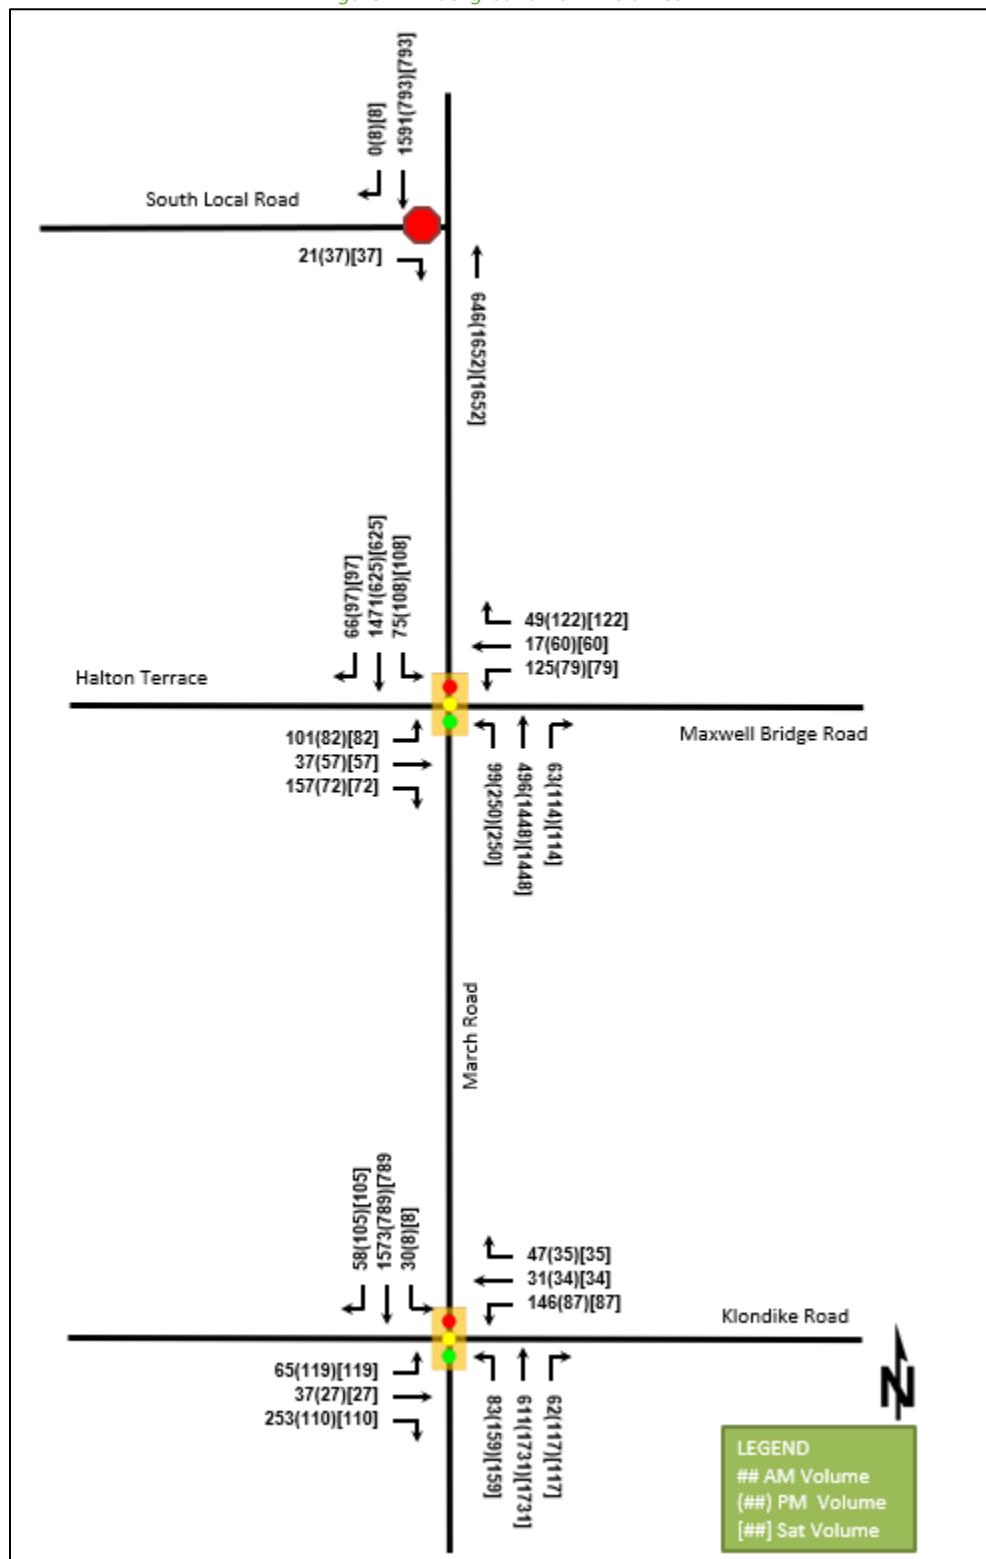

7 Demand Rationalization

As documented in Section 16.2.1, the existing conditions within the Study Area are not indicative of any capacity issues. Changes in traffic volumes between existing and future conditions will come from the applied 0.5% background growth rate, the 1156/1170 March Road development, the 788 March Road development, the 936 March Road development, the 1053/1075/1145 March Road development, the southwestern development in the Kanata North Community Design Plan, and the net new auto trips from the proposed development within this report. The trip generation of this development is consistent with expected modal shares as can be seen in Section 5.1.

As part of the Forecasting Report comments, shown in Appendix E, the City of Ottawa has requested that additional analysis to determine “how many vehicles must be diverted from the peak periods to maintain an acceptable level of service on March Road” be performed. As such, a two-part sensitivity analysis will be conducted as part of the Synchro analysis performed in Section 16.2.5. The first sensitivity analysis will identify the volume required to be diverted from over-capacity movements in order to maintain a V/C ratio <1.0. The second sensitivity analysis will identify the volume required to be diverted from over-capacity movements in order to ensure no queues back up to the signalized intersection of March Road and Halton Terrace / Maxwell Bridge Road (approximately 200 metres) to the south or the future signalized intersection to the north as described in the Kanata North Community Design Plan (approximately 380 metres).

The future total 2022 volumes are illustrated in Figure 28 and the future total 2027 volumes are illustrated in Figure 29.

Figure 28: Future Total 2022 Volumes


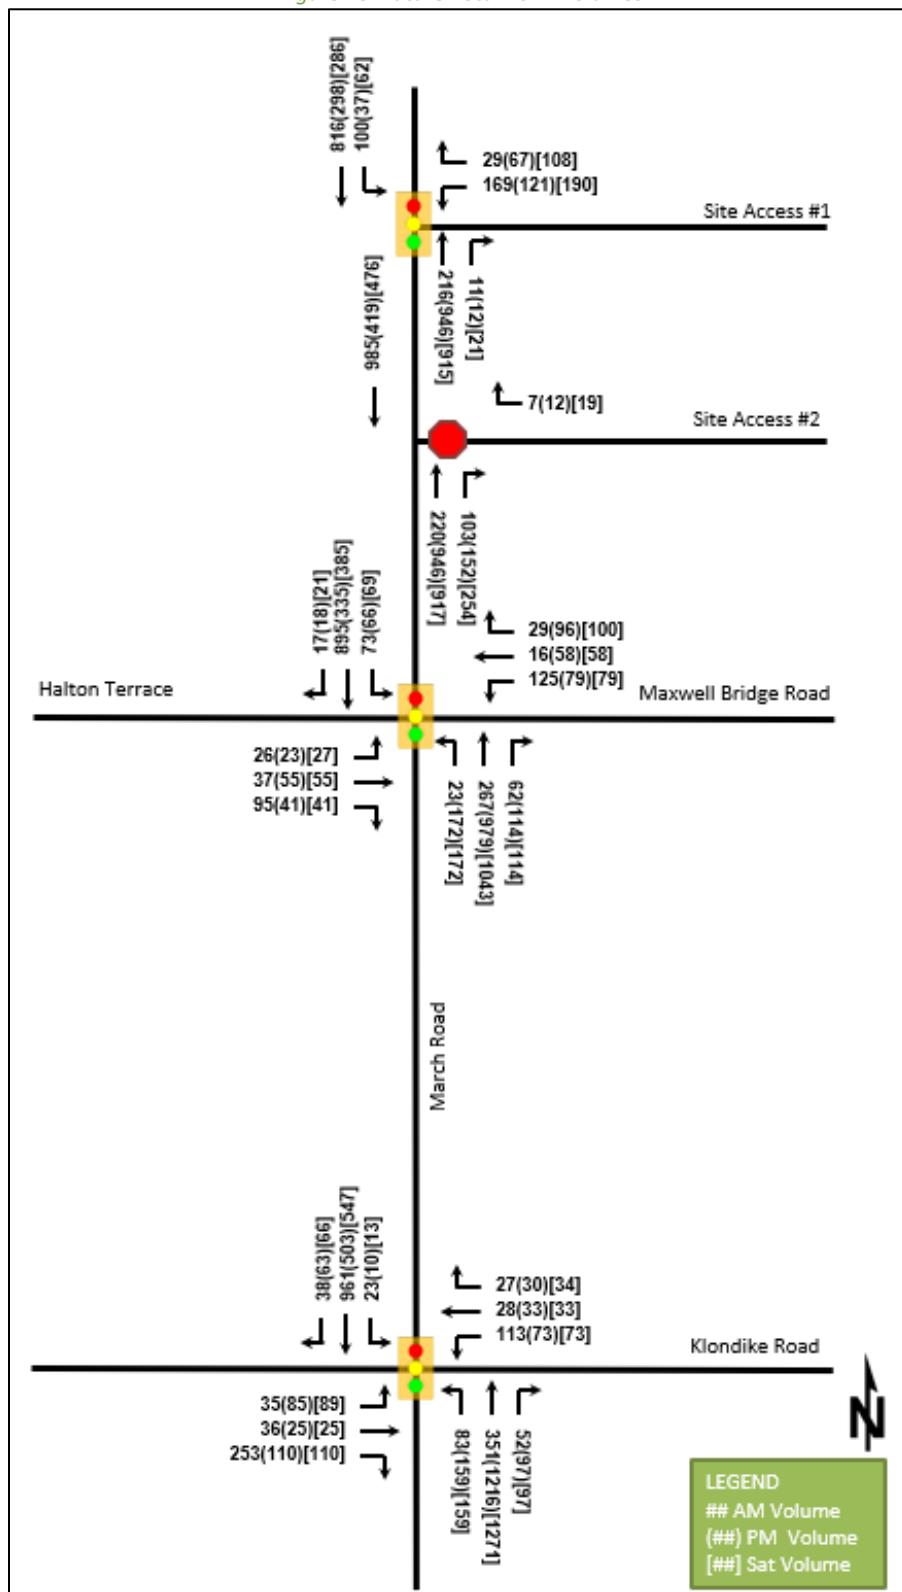


Figure 29: Future Total Traffic 2027 Volumes

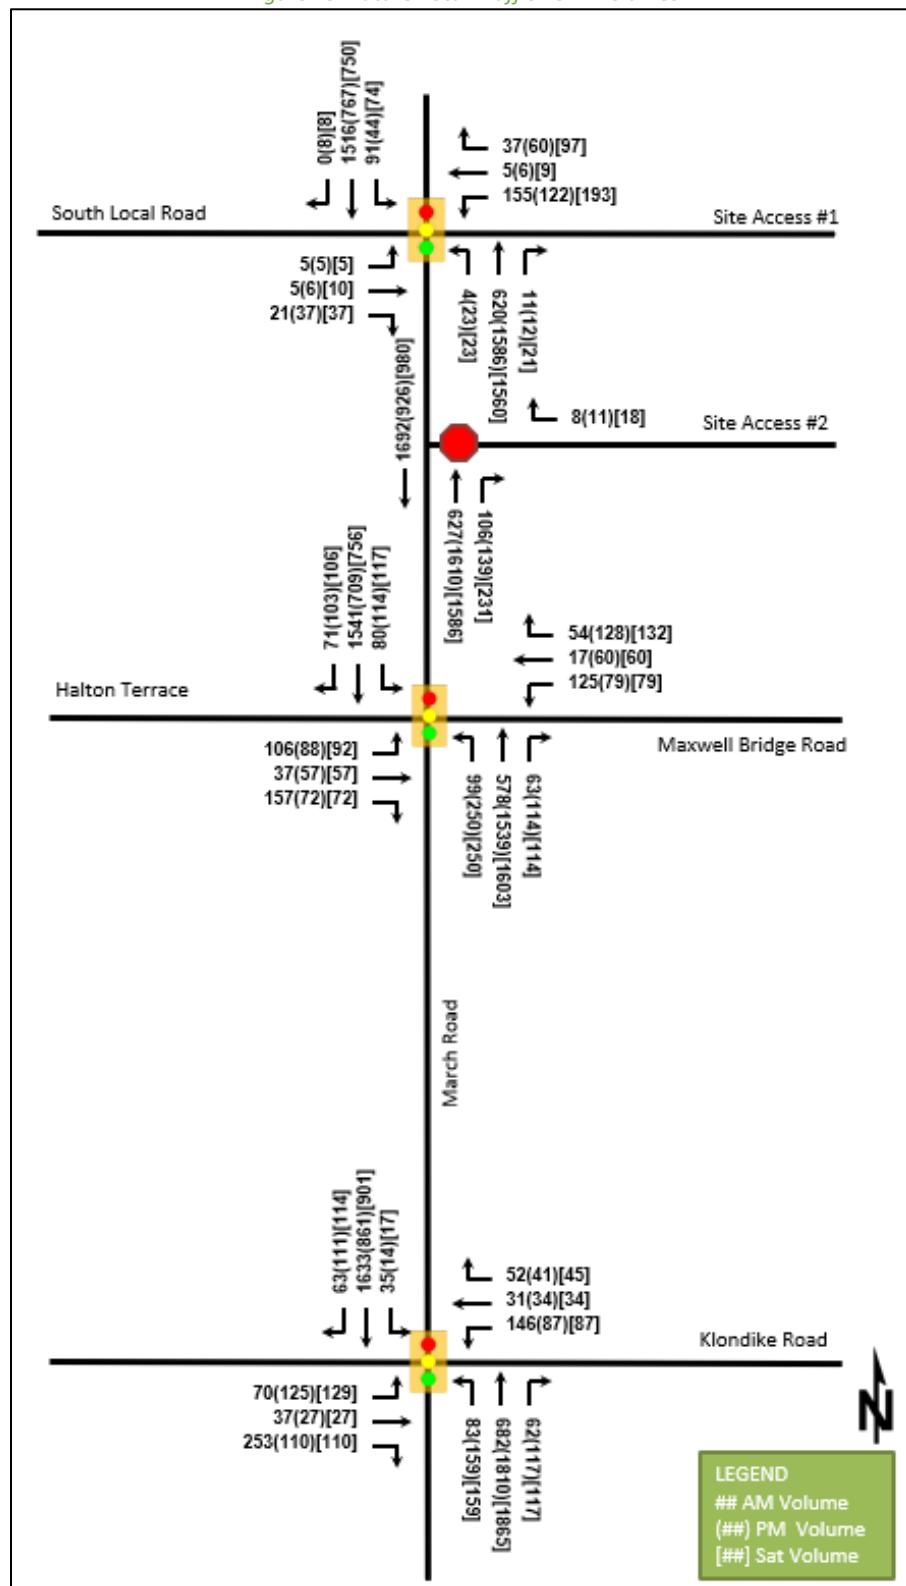

8 Development Design

8.1 Design for Sustainable Modes

The proposed retail development will provide outdoor vehicle and bicycle parking.

The proposed development fronts directly onto future pedestrian and bicycle facilities on March Road. These facilities will provide access to the surrounding Study Area as well as the existing transit stops surrounding the proposed development.

Additionally, the planned future Bus Rapid Transit facilities along March Road is anticipated improve transit access to and from the proposed development beyond the future study horizons.

Facilities that are supportive of sustainable modes in the City of Ottawa's TDM-supportive Development Design and Infrastructure Checklist, which are required for zoning and standard site design, are recommended. The following additional measures are also recommended:

- Locate building entrances in order to minimize walking distances to sidewalks and transit facilities.
- Locate building doors and entrances to ensure visibility of pedestrians from the building.
- Provide safe, direct, and attractive walking routes from the building entrances to nearby transit stops.
- Ensure that walking routes to transit stops are secure, visible, lighted, shaded and wind-protected wherever possible.
- Provide wayfinding signage for site access and egress.
- Provide lighting, landscaping, and benches along walking and cycling routes between building entrances and streets, sidewalks and trails.
- Provide a permanent bike repair station.

TDM Checklists for non-residential land uses can be found in Appendix G.

8.2 Circulation and Access

Both site accesses are expected to accommodate passenger vehicles accessing the proposed development. It is expected that loading trucks and garbage trucks will use both Site Access #1 and Site Access #2. Resulting turning templates have been completed and indicate adequate internal circulation within the site. These turning templates also show that further design considerations are required at the right-in right-out Site Access #2 intersection and will therefore be further reviewed as part of the RMA. Turning templates can be found in Appendix H.

8.3 New Street Networks

This TIA is exempt from this Module (see Table 4).

9 Parking

9.1 Parking Supply

The parking requirements and provisions for the proposed development are summarized in Table 11.

Table 11: Parking Provisions

Land Use	Parking Rate	Parking Required	Parking Provided
Gas Bar	0	0	155
Restaurant	10 / 100 m ² GFA	75	
Retail Store	3.4 / 100 m ² GFA	64	
Total Vehicle Parking		139	
Gas Bar (bicycle)	-	-	15-20
Restaurant (bicycle)	1 / 250 m ² GFA	3	
Retail Store (bicycle)	1 / 250 m ² GFA	8	
Total Bicycle Parking		11	

Based on the City of Ottawa Zoning By-laws, a total of 139 automobile parking spaces are required as a minimum and a minimum of 11 bicycle parking spaces are required. As can be seen in Table 11, automobile parking space requirements are met in excess of 16 parking spaces. As 15-20 bicycle parking spaces are anticipated depending on space availability, the bicycle parking requirements are met in excess of four to nine parking spaces.

9.2 Spillover Parking

This TIA is exempt from this Module (see Table 4).

10 Boundary Street Design

March Road is noted as a boundary road for the site in both the 2022 and 2027 future horizons. March Road is not considered a Complete Street and no plans currently exist to upgrade March Road within the proposed development's future analysis horizons. As discussed in Section 2.3.1., as part of the proposed development, the existing pedestrian facilities and bike lanes which terminate north of Maxwell Bridge Road / Halton Terrace will be extended along the frontage of the proposed development along the east side of March Road upon full-build out of the development. It is expected that the existing pedestrian facilities and bike lanes which terminate north of Maxwell Bridge Road / Halton Terrace will be extended along the frontage of the proposed development along the west side of March Road in conjunction with the development of the southwestern quadrant of the Kanata North Community Design Plan in time for the 2027 future horizon.

Additionally, future improvements on March Road north of Maxwell Bridge Road / Halton Terrace are expected in the form of an interim and ultimate scenario. The interim scenario is the widening of March Road to four lanes and the ultimate scenario considers the widening of March Road to accommodate the extension of the Median BRT system as discussed in Section 2.3.1. These improvements have been proposed as part of the City of Ottawa's TMP Ultimate Network and the Kanata North CDP. As the timing of both of these improvements to March Road is unknown and neither transportation infrastructure upgrade is included in the City of Ottawa's 2031 Affordable Network, it has been assumed that they will occur beyond the proposed development's future analysis horizons.

The Segment Multi-Modal Level of Service (MMLOS) is broken down into the Pedestrian Level of Service (PLOS), Bicycle Level of Service (BLOS), Transit Level of Service (TLOS) and Truck Level of Service (TkLOS) and are all

recorded in Table 12. As the existing, future background and future total scenarios are all different, they have been evaluated in their own MMLOS worksheets. The results however are the same across all horizons with the exception of the 2027 FT Bicycle Level of Service. March Road has been evaluated against the target for a developing community. The MMLOS Worksheets for each horizon can be found in Appendix I.

Table 12: Boundary Street MMLOS

Road Segment	Horizon	MMLOS							
		PLOS		BLOS		TLOS		TkLOS	
		Actual	Target	Actual	Target	Actual	Target	Actual	Target
March Road	Existing	F	C	F	C	D	D	C	D
	2022 FB								
	2022 FT								
	2027 FB								
	2027 FT			E					

March Road will not meet its pedestrian LOS target due to small boulevard widths and high vehicle operating speeds and will not meet its bicycle LOS target due to mixed traffic conditions on some segments of March Road and high operating speeds. Both the Transit LOS and Truck LOS targets have been met.

Future widening and transit improvements to March Road as mentioned above, are anticipated to increase connectivity and improve the segment MMLOS along March Road. As such, no further improvements to March Road, beyond the extension of pedestrian and bicycle facilities along the frontage of the site, are recommended as a result of the boundary street MMLOS analysis.

11 Access Intersection Design

11.1 Location and Design of Access

The site is proposed to have two accesses. Both accesses are located along March Road; the first (Site Access #1) is a full-movement access located approximately 215 metres north of Maxwell Bridge Road, measured from intersection centreline to intersection centreline. As per the Transportation Association of Canada's Geometric Design Guide for Canadian Roads (TAC), typical minimum intersection spacing along minor arterials is 200 metres. This segment of March Road can be considered a minor arterial road within the Study Area as it currently has a narrow cross-section, and south of the Study Area it provides access directly developments along March Road. Therefore, the distance between the intersection of March Road and Maxwell Bridge Road / Halton Terrace and Site Access #1 is acceptable. Additionally, this spacing is consistent with that of other signalized intersections along March Road such as the spacing between the intersection of March Road and Maxwell Bridge Road / Halton Terrace and the signalized access intersection to the south. As future infrastructure upgrades outside of the study horizons are implemented on March Road it will be upgraded to a major arterial road and at this time, signals at Access #1 to this site will be re-evaluated.

The second (Site Access #2) is an unsignalized right-in / right-out access located approximately 150 metres north of Maxwell Bridge Road, measured intersection centreline to intersection centreline.

11.2 Intersection Control

Using OTM Book 12 Justification 7, and the volume projections herein, the traffic control signal warrant for Access #1 at March Road has been examined in both the 2022 future total and 2027 future total horizons. It has been found that signals are not warranted using Justification 7. However, for a “new” intersection the warrant requires the volume threshold to reach 150% of the required volume. In this case the warrant was found to reach 133% of the threshold in the 2022 future total horizon and 149% of the threshold in the 2027 future horizon. As this is very close, this intersection will be further examined through the operational analysis to determine if traffic control signals would be appropriate based on the operational analysis.

The signalization warrants for Access #1 can be found in Appendix J.

Site Access #2 at March Road will be a right-in right-out access with stop-control on the minor approach.

11.3 Intersection Design

An RMA and functional design are anticipated for both site access intersections. For the purposes of this report however, the following assumptions surrounding the intersection design of both site accesses have been made:

Left-turn lane warrants for unsignalized intersections were examined at Site Access #1 for both 2022 and 2027 total future horizons using the MTO Geometric Design Standards for Ontario Highways, Section E. A southbound left-turn lane was found to be warranted for both future total horizons. The left-turn lane warrant nomographs can be found in Appendix K.

For the 2022 future total analysis horizon, the intersection of Site Access #1 and March Road has been assumed to be a three-legged intersection. The northbound approach will consist of a through and right-turn lane, the westbound approach will be made up of an auxiliary left-turn lane and a right-turn lane, and the southbound approach will consist of an auxiliary left-turn lane and a through lane. Additionally, pedestrian and cycling lanes are anticipated to be extended along the proposed development’s frontage on the east side of March Road.

For the 2027 future total analysis horizon, the intersection of Site Access #1 / South Local Road and March Road has been assumed to be a four-legged intersection. The South Local Road will form the west leg of the intersection and serves as an access to the southwestern development quadrant discussed in the Kanata North Community Design Plan. The South Local Road is anticipated to have both pedestrian and cycling facilities. The northbound approach will consist of a left-turn lane and a through lane, the westbound approach will be made up of an auxiliary left-turn lane and a shared through / right-turn lane, the southbound approach will consist of an auxiliary left-turn lane and a shared through / right-turn lane, and the eastbound approach will consist of a left-turn lane and a shared through / right-turn lane. Additionally, pedestrian and cycling lanes are anticipated to be extended along the proposed development’s frontage on the east side of March Road as well as on the west side of March Road in conjunction with the development of the southwestern quadrant of the Kanata North Community Design Plan.

The storage length of the westbound left-turn lane is based on the site plan and will be evaluated for adequacy based on the operational analysis of this intersection. The preliminary storage and taper lengths for the proposed southbound left-turn lane at Site Access #1 are summarized in Table 13 and further discussed below.

Table 13: 2022 and 2027 Site Access #1 at March Road SBL - Preliminary Design Criteria

Design Standard	Design Speed	Storage	Parallel Lane	Taper Ratio	Taper	Total Lane Length
TAC	90 km/h	15 m (min.)	95 m	27:1	95 m	205 m

Using Transportation Association of Canada's Geometric Design Guide for Canadian Roads (TAC) the storage, parallel lane, and taper lengths were determined for a 90 km/h design speed. For the purposes of determining the taper length it was assumed that this left-turn lane would be constructed as a left-turn on the left side of the centreline with a 3.5 metre turning lane width. The parallel lane length was calculated based on the following formula (TAC Formula 2.5.1):

$$d_b = 0.039 \frac{V^2}{a}$$

Where:

d_b = Braking Distance (m)

V = Design Speed (km/h)

a = Deceleration rate (m/s^2) = 3.4 m/s^2

No intersections or driveways are currently planned within the parallel lane or taper length of the left-turn lane that will be negatively impacted by its implementation.

Using Transportation Association of Canada's Geometric Design Guide for Canadian Roads (TAC) the runout lane is calculated to be 125 metres (30 metres + departure taper of 95 metres) with a design speed of 90 km/h. No intersections or driveways are located within 125 metres south of the Site Access #1 / South Local Road on March Road that will be negatively impacted by its implementation. Additionally, an RMA will be required at this intersection at which time the design of both the auxiliary and runout lane will be refined.

As such, the southbound left-turn lane at Site Access #1 should be 205 metres long with a storage lane of 15 metres, a parallel lane of 95 metres and a taper of 95 metres.

The proposed geometric intersection design at March Road and Site Access #2 remains the same for both the 2022 future total and the 2027 future total horizons. The TAC Geometric Standards suggest that a right turn lane is required where the right turn volume exceed 10% of the approach volume. At the subject intersection, the northbound right-turn volume exceeds 10% of the approach volume in the 2022 and 2027 horizon, and therefore a right turn lane has been considered for both future horizons. The right-turn storage and taper lengths have been considered for analysis only and will be further refined as part of the RMA. As such, the intersection configuration of Site Access #2 and March Road consists of two through and an auxiliary right-turn lane on the northbound approach, a channelized right-turn on the westbound approach and two through lanes on the southbound approach. Additionally, pedestrian and cycling lanes are anticipated to be extended along the proposed development's frontage on the east side of March Road in the 2022 future horizon and on the both sides of March Road in the 2027 future horizon.

As illustrated on the proposed site plan, the throat length of Site Access #1 is 15 metres and Site Access #2 is five metres however, due to how clear throat length is measured, the large radii curves for inbound trucks will allow for a greater effective throat length. Additionally, a northbound right turn lane is proposed. The combination of these two factors will allow inbound vehicles to be delayed entering the site without impeding the adjacent through traffic. According to Transportation Association of Canada's Geometric Design Guide for Canadian Roads (TAC), Table 8.9.3, the suggested minimum clear throat length for major driveways, for a development of this size, would require a throat length based on each land use and is summarized in the Table 14 below.

Table 14: Throat Length by Land Use

Land Use*	Development Size (s.m.)	Required Clear Throat Length (m)
Hardware/Paint Store	1882	15
Fast Food Restaurant	219	40

*Note: Not all land uses are represented in Table 8.9.3. Where an exact match was not available, a reasonable assumption of a comparable land use was used. (i.e. for the proposed hardware store Shopping Centre was used).

The throat length for the fast food restaurant is longer than the available throat length, however, TAC assumes that each land use is a stand alone facility. For the fast food restaurant, the throat length is primarily driven by the need for storage space for vehicles that are queued waiting to use the drive-through facilities. As shown on the site plan, the fast food restaurant has been designed such that the vehicles will have adequate space to queue within the site. Therefore, the hardware / paint store throat length will govern. As stated above Access #1 has 15 metres of clear throat length. While Access #2 does not have the required clear throat length, the combination of the large radius curves and the northbound right turn lane into the site will provide adequate space for inbound vehicles to queue without impacting the adjacent street traffic.

The accesses and throat lengths will be further refined as part of the RMA process.

12 Transportation Demand Management

Transportation Demand Management measures are implemented to encourage the use of non-auto modes of travel. This is aimed at reducing the reliance on single occupant auto trips in the City of Ottawa. The proposed development adheres to the City's TDM principles by facilitating connections to adjacent pedestrian, cycling, and transit facilities.

The following measures consistent with the TDM Checklists for non-residential land uses, included in Appendix G, could be implemented to ensure that the travel mode shares are achieved.

- Designate an internal coordinator, or contract with an external coordinator.
- Display local area maps with walking/cycling access routes and key destinations at major entrances.
- Display relevant transit schedules and route maps at entrances.
- Provide online links to OC Transpo and STO information.

In addition to these measures, providing more than the minimum bicycle parking required, will help in achieving the mode shares for the proposed development and is recommended.

13 Neighbourhood Traffic Management

This TIA is exempt from this Module (see Table 4).

14 Transit

In Section 5.1, the trip generation by mode was estimated, including the number of transit trips that will be generated by the proposed development. Table 15 summarizes the transit trip generation for both the 2022 and 2027 future horizons.

Table 15: Trip Generation by Transit Mode

Travel Mode	Mode Share	AM Peak Hour			PM Peak Hour			Sat Peak Hour		
		In	Out	Total	In	Out	Total	In	Out	Total
Transit	5%	10	10	20	10	8	18	16	15	31

Route #63 and #165 are expected to provide adequate transit capacity to support the increase in travel demand by the proposed development. It is recommended that OC Transpo provide additional transit capacity only as needed once the development is completed. It is expected that once the March Road BRT is constructed, that the transit trips generated by the proposed development would increase. This change in transit mode share has not been examined herein as the BRT is not included in the City of Ottawa TMP 2031 Affordable Network.

15 Review of Network Concept

March Road is expected to approach or exceed single lane capacity in the peak direction in the 2022 future background, 2022 future total, 2027 future background, and 2027 future total conditions. These volume projections are dependent on surrounding development growth being realized with the likely impact of these volumes being extended queues along March Road within the Study Area.

The planned future widening and BRT along March Road is expected to address the high volumes experienced and therefore at this time, no changes to the network concept are required to support the proposed development.

16 Intersection Design

16.1 Intersection Control

The intersection methods of control for March Road at Halton Terrace / Maxwell Bridge Road and March Road at Klondike Road will remain consistent with existing methods of control at both future horizons.

16.2 Intersection Design

To understand the intersection design, an MMLOS analysis of existing, 2022 future horizon, and 2027 future horizon demands is required. The existing and future segment MMLOS has been discussed in Section 10. The following sections will discuss the vehicle LOS at Study Area intersections. Synchro (Version 10) was used to model the Study Area intersections. This will be followed by a discussion of the intersection MMLOS for other modes.

As required by the City of Ottawa, the level of service at signalized intersections is based on the V / C ratio and the level of service at unsignalized intersections is based on the HCM criteria for average delay. The Heavy Vehicle percentage (HV %) has been calculated for each turning movement at the Study Area intersection. All Heavy Vehicle percentages calculated to be less than 2% were entered into the Synchro model as 2% in order to produce a conservative analysis. These calculations are shown in Appendix L. All parameters have been coded using the City of Ottawa's TIA Guidelines and default parameters.

16.2.1 Existing Conditions

The existing intersection volumes have been analyzed to establish a baseline condition and determine the impact of the subject development as well as the surrounding background developments on the Study Area road network. Table 16 summarizes the operational analysis of the 2020 existing conditions. Appendix M contains the 2020 Existing Conditions Synchro Sheets.

Table 16: 2020 Existing Intersection Operational Analysis

Intersection	Lane	AM Peak Hour				PM Peak Hour				Saturday Peak Hour			
		LOS	Delay	V/C	Q (95 th)	LOS	Delay	V/C	Q (95 th)	LOS	Delay	V/C	Q (95 th)
March Road at Halton Terrace / Maxwell Bridge Road Signalized	EBL	A	40	0.11	11	A	49	0.18	11	A	36	0.14	9
	EBT/R	A	18	0.44	25	A	40	0.48	32	A	28	0.42	25
	WBL	D	80	0.81	51	B	67	0.61	35	A	50	0.55	29
	WBT/R	A	22	0.16	13	B	40	0.64	41	A	26	0.56	30
	NBL	A	7	0.07	5	A	5	0.25	21	A	6	0.26	23
	NBT	A	11	0.10	19	A	11	0.43	82	A	6	0.41	51
	NBR	A	1	0.08	3	A	2	0.13	8	A	1	0.12	5
	SBL	A	6	0.10	12	A	6	0.17	8	A	7	0.19	10
	SBT	A	13	0.41	87	A	10	0.13	23	A	5	0.11	13
	SBR	A	0	0.01	0	A	0	0.01	0	A	0	0.01	<1
March Road at Klondike Road Signalized	Overall	B	18	-	-	B	16	-	-	B	11	-	-
	EBL	A	42	0.19	15	A	56	0.52	33	A	61	0.59	32
	EBT	A	41	0.13	17	A	42	0.08	12	A	42	0.12	12
	EBR	B	24	0.69	47	A	10	0.36	16	A	12	0.43	15
	WBL	B	74	0.66	42	A	73	0.56	31	A	52	0.44	26
	WBT/R	A	34	0.24	18	A	40	0.34	21	A	31	0.27	18
	NBL	A	63	0.42	20	A	63	0.57	34	A	53	0.53	29
	NBT/R	A	10	0.12	22	A	10	0.40	84	A	7	0.39	68
	SBL	A	65	0.24	13	A	60	0.03	3	A	50	0.02	3
	SBT/R	A	16	0.36	72	A	14	0.19	34	A	11	0.19	28
Notes:	Saturation flow rate of 1800 veh/h/lane												
	PHF = 0.90												

As can be seen above, the Study Area intersections operate satisfactorily during the peak period hours and with V/C < 0.9, low delays and all LOS C or better.

16.2.2 2022 Future Background

The 2022 future background intersection volumes and other development traffic has been analyzed to allow a comparison between the future volumes with and without the proposed development. Table 17 summarizes the operational analysis of 2022 future background conditions. Appendix N contains the 2022 Future Background Synchro sheets.

Table 17: 2022 Future Background Conditions Operational Analysis

Intersection	Lane	AM Peak Hour				PM Peak Hour				Saturday Peak Hour			
		LOS	Delay	V/C	Q (95 th)	LOS	Delay	V/C	Q (95 th)	LOS	Delay	V/C	Q (95 th)
March Road at Halton Terrace / Maxwell Bridge Road Signalized	EBL	A	42	0.11	11	A	49	0.16	10	A	36	0.12	8
	EBT/R	A	19	0.43	24	A	39	0.46	29	A	27	0.40	22
	WBL	D	76	0.76	46	A	66	0.58	32	A	49	0.51	26
	WBT/R	A	23	0.16	12	B	37	0.61	37	A	23	0.52	26
	NBL	A	6	0.06	6	A	5	0.22	18	A	6	0.23	20
	NBT	A	10	0.09	17	A	10	0.39	70	A	6	0.37	44
	NBR	A	1	0.07	2	A	2	0.11	7	A	1	0.11	5
	SBL	A	6	0.08	10	A	5	0.14	7	A	6	0.15	8
	SBT	A	11	0.37	73	A	10	0.12	20	A	4	0.10	11
	SBR	A	0	0.01	0	A	0	0.01	0	A	0	0.01	<1
March Road at Klondike Road Signalized	Overall	B	17	-	-	B	15	-	-	B	10	-	-
	EBL	A	40	0.16	13	A	52	0.44	30	A	61	0.56	30
	EBT	A	40	0.12	15	A	42	0.08	13	A	43	0.13	12
	EBR	A	16	0.59	35	A	10	0.32	15	A	13	0.42	15
	WBL	B	73	0.68	46	A	73	0.58	33	A	57	0.51	28
	WBT/R	A	33	0.23	17	A	38	0.32	20	A	31	0.29	18
	NBL	A	63	0.39	19	A	63	0.55	31	A	53	0.51	27
	NBT/R	A	10	0.11	21	A	10	0.37	77	A	6	0.35	60
	SBL	A	65	0.23	13	A	61	0.05	5	A	50	0.05	4
	SBT/R	A	16	0.33	66	A	14	0.18	31	A	10	0.17	24
Notes:	Saturation flow rate of 1800 veh/h/lane												
	PHF = 1.00												

With the addition of background growth and other development traffic to reflect the 2022 horizon, the existing intersections are anticipated to operate with similar operational characteristics to the existing conditions, with V/C < 0.9, low delays and all LOS C or better.

16.2.3 2027 Future Background

The 2027 future background intersection volumes and other development traffic has been analyzed to allow a comparison between the future volumes with and without the proposed development. The intersection of the South Local Road and March Road is considered as part of the 2027 future background horizon and has been analyzed as a right-in right-out unsignalized intersection as indicated in the Kanata North Community Design Plan. The South Local Road will form the west leg of the Site Access #1 / South Local Road and March Road intersection to be considered in the 2027 future total horizon. Table 18 summarizes the operational analysis of 2022 future background conditions. Appendix O contains the 2027 Future Background Synchro sheets.

Table 18: 2027 Future Background Conditions Operational Analysis

Intersection	Lane	AM Peak Hour				PM Peak Hour				Saturday Peak Hour			
		LOS	Delay	V/C	Q (95 th)	LOS	Delay	V/C	Q (95 th)	LOS	Delay	V/C	Q (95 th)
March Road at Halton Terrace / Maxwell Bridge Road Signalized	EBL	A	51	0.49	36	E	135	0.94	#42	A	48	0.53	27
	EBT/R	A	15	0.51	26	A	37	0.56	34	A	20	0.42	24
	WBL	E	109	0.93	#51	B	73	0.64	33	A	42	0.43	25
	WBT/R	A	17	0.23	14	B	38	0.68	43	B	44	0.67	46
	NBL	A	17	0.49	18	A	7	0.44	28	A	12	0.50	47
	NBT	A	12	0.26	46	B	18	0.69	170	B	10	0.63	107
	NBR	A	1	0.07	3	A	3	0.12	10	A	2	0.11	6
	SBL	A	7	0.13	12	A	10	0.41	12	B	30	0.62	#44
	SBT	C	23	0.75	#216	A	12	0.31	56	A	6	0.27	34
	SBR	A	1	0.08	3	A	3	0.10	8	A	3	0.09	7
	Overall	C	24	-	-	C	21	-	-	B	14	-	-
March Road at Klondike Road Signalized	EBL	A	40	0.29	23	A	55	0.57	42	B	61	0.66	41
	EBT	A	35	0.10	15	A	40	0.08	13	A	39	0.11	12
	EBR	A	20	0.56	43	A	9	0.29	14	A	11	0.36	14
	WBL	C	73	0.74	55	B	73	0.62	37	A	50	0.47	31
	WBT/R	A	24	0.29	20	A	33	0.34	21	A	25	0.27	18
	NBL	A	63	0.39	19	A	63	0.55	31	A	53	0.51	27
	NBT/R	A	16	0.25	49	A	14	0.58	145	A	10	0.55	122
	SBL	A	67	0.33	17	A	61	0.10	7	A	51	0.09	7
	SBT/R	B	24	0.63	146	A	17	0.34	62	A	13	0.33	53
	Overall	C	26	-	-	C	21	-	-	B	17	-	-
March Road at South Local Road Unsignalized	EBR	E	37	0.16	6	C	15	0.10	3	C	15	0.10	3
	NBT	-	-	-	-	-	-	-	-	-	-	-	-
	SBT/R	-	-	-	-	-	-	-	-	-	-	-	-
Notes:	Saturation flow rate of 1800 veh/h/lane												
	PHF = 1.00												
	# indicates the volume for the 95 th percentile cycle exceeds capacity												

With the addition of background growth and other development traffic to reflect the 2027 horizon, the existing intersections are anticipated to operate with similar operational characteristics to the existing conditions, with V/C < 0.9, low delays and all LOS C or better. Exceptions to this are the westbound left-turn and the eastbound left-turn at the intersection of March Road and Halton Terrace / Maxwell Bridge Road in the AM peak period and the PM peak period, respectively. All intersection movements, however, operate with a V/C < 1.0 and a LOS E or better.

At the intersection of March Road and Halton Terrace / Maxwell Bridge Road, the 95th percentile cycle exceeds capacity for the westbound left-turn and southbound through in the AM Peak period, the eastbound left-turn in the PM Peak period and the Southbound left-turn in the Saturday Peak period. Given the V/C < 1.0 for all four movements, it can be assumed that in practice the 95th percentile queue will rarely be exceeded.

16.2.4 2022 Future Total

The 2022 total future intersection volumes, including the site generated traffic and other development traffic, have been analyzed to understand the impact of the subject development in the Study Area intersections. Table 19 summarizes the operational analysis of the 2022 future total conditions. Appendix P contains the 2022 Future Total Synchro sheets.

Table 19: 2022 Future Total Conditions Operational Analysis

Intersection	Lane	AM Peak Hour				PM Peak Hour				Saturday Peak Hour			
		LOS	Delay	V/C	Q (95 th)	LOS	Delay	V/C	Q (95 th)	LOS	Delay	V/C	Q (95 th)
March Road at Halton Terrace / Maxwell Bridge Road Signalized	EBL	A	42	0.13	13	A	51	0.22	13	A	39	0.20	12
	EBT/R	A	19	0.43	24	A	39	0.46	29	A	27	0.40	22
	WBL	C	76	0.76	46	A	66	0.58	32	A	49	0.51	26
	WBT/R	A	22	0.18	13	B	37	0.62	38	A	30	0.59	33
	NBL	A	6	0.06	5	A	5	0.24	18	A	6	0.26	21
	NBT	A	10	0.14	23	A	10	0.43	80	A	6	0.43	54
	NBR	A	1	0.07	2	A	2	0.11	7	A	1	0.11	5
	SBL	A	6	0.10	10	A	5	0.17	8	A	7	0.21	11
	SBT	A	12	0.40	82	A	10	0.16	27	A	5	0.16	17
	SBR	A	<1	0.02	0	A	<1	0.02	0	A	1	0.02	1
	Overall	B	17	-	-	B	15	-	-	B	10	-	-
March Road at Klondike Road Signalized	EBL	A	41	0.19	15	A	51	0.44	32	A	61	0.59	33
	EBT	A	40	0.12	15	A	42	0.08	13	A	42	0.12	12
	EBR	A	18	0.60	37	A	10	0.30	15	A	12	0.40	15
	WBL	B	73	0.68	46	A	73	0.58	33	A	54	0.47	28
	WBT/R	A	31	0.25	18	A	36	0.35	21	A	27	0.31	18
	NBL	A	63	0.39	19	A	63	0.55	31	A	53	0.51	27
	NBT/R	A	12	0.14	26	A	11	0.41	86	A	7	0.40	73
	SBL	A	66	0.27	15	A	62	0.12	8	A	52	0.13	9
	SBT/R	A	16	0.36	72	A	15	0.21	37	A	11	0.22	32
	Overall	C	22	-	-	B	20	-	-	B	16	-	-
March Road at Site Access #1 Unsignalized	WBL	F	103	0.93	756	F	72	0.74	43	F	197	1.21	95
	WBR	A	10	0.04	1	C	19	0.21	6	C	21	0.33	11
	NBT	-	-	-	-	-	-	-	-	-	-	-	-
	NBR	-	-	-	-	-	-	-	-	-	-	-	-
	SBL	A	8	0.08	2	B	10	0.05	1	B	10	0.09	2
	SBTR	-	-	-	-	-	-	-	-	-	-	-	-
<i>Mitigation 1 – Signalization</i>													
March Road at Site Access #1 Signalized	WBL	B	46	0.65	45	A	31	0.41	30	B	47	0.68	50
	WBR	A	12	0.11	7	A	10	0.21	10	A	9	0.32	13
	NBT	A	5	0.17	21	C	12	0.75	137	C	14	0.74	151
	NBR	A	3	0.01	2	A	2	0.01	1	A	2	0.02	2
	SBL	A	5	0.13	11	A	6	0.15	5	A	8	0.23	10
	SBTR	B	10	0.65	118	A	5	0.23	24	A	5	0.23	27
	Overall	B	13	-	-	B	12	-	-	B	16	-	-
March Road at Site Access #2 Unsignalized	WBR	A	9	0.01	<1	B	12	0.02	<1	B	12	0.04	1
	NBT	-	-	-	-	-	-	-	-	-	-	-	-
	NBR	-	-	-	-	-	-	-	-	-	-	-	-
	SBT	-	-	-	-	-	-	-	-	-	-	-	-
Notes:	Saturation flow rate of 1800 veh/h/lane												
	PHF = 1.00												
	# indicates the volume for the 95 th percentile cycle exceeds capacity												

With the addition of site generated traffic, the existing intersections are anticipated to operate with similar operational characteristics as the 2022 future background conditions, and well within the City of Ottawa operational thresholds.

The intersection of Site Access #1 and March Road has been analyzed as a stop-controlled intersection. The westbound left-turn operates with a LOS of F in the AM, PM, and Saturday peak periods. As such, the signalization of Site Access #1 has been considered as a mitigation measure. The signal timing at this intersection was optimized

for the AM, PM, and Saturday peak periods based on the intersection configuration described in Section 11.3. An overall cycle length of 90 seconds was used for all Peak periods and the splits were optimized using the “Optimize Splits” Synchro function as well as by using manual optimization. New Yellow Times and All-Red Times were calculated using the methodology provided in OTM Book 12-Traffic Signals. The width of the intersecting roads have been assumed based on the existing lane widths at the intersection of March Road and Halton Terrace / Maxwell Bridge Road. As pedestrian facilities are proposed at Site Access #1 on the east side of March Road along the frontage of the proposed development, pedestrian phases were considered for the northbound and southbound through phases. Upon signalization, the intersection operates well, with V/C < 0.9, low delays and all LOS C or better. As such, signalization of Site Access #1 and March Road is recommended based on the operational analysis.

The intersection of Site Access #2 and March Road has been analyzed based on the intersection configuration described in Section 11.3 and operates well with no identified operational issues.

16.2.5 2027 Future Total

The 2027 future total intersection volumes, including the site generated traffic and other development traffic, have been analyzed to understand the impact of the subject development in the Study Area intersections. Table 20 summarizes the operational analysis of the 2027 future total conditions. Appendix Q contains the 2027 Future Total Synchro sheets.

Table 20:2027 Future Total Conditions Operational Analysis

Intersection	Lane	AM Peak Hour				PM Peak Hour				Saturday Peak Hour			
		LOS	Delay	V/C	Q (95 th)	LOS	Delay	V/C	Q (95 th)	LOS	Delay	V/C	Q (95 th)
March Road at Halton Terrace / Maxwell Bridge Road Signalized	EBL	A	53	0.51	37	E	119	0.91	#42	A	49	0.58	29
	EBT/R	A	15	0.51	26	A	34	0.52	33	A	19	0.40	23
	WBL	E	109	0.93	#51	A	64	0.58	32	A	40	0.40	24
	WBT/R	A	16	0.24	15	B	35	0.65	42	B	46	0.69	49
	NBL	A	21	0.52	21	A	9	0.48	30	A	17	0.59	59
	NBT	A	13	0.30	55	C	21	0.75	201	B	12	0.70	135
	NBR	A	1	0.07	3	A	4	0.12	10	A	2	0.11	6
	SBL	A	7	0.15	12	A	15	0.47	19	D	78	0.90	#35
	SBT	C	24	0.79	#235	A	14	0.36	69	A	7	0.33	44
	SBR	A	2	0.08	4	A	3	0.11	9	A	3	0.10	9
	Overall	C	24	-	-	C	22	-	-	B	17	-	-
March Road at Klondike Road Signalized	EBL	A	41	0.32	25	B	57	0.61	44	B	61	0.68	43
	EBT	A	35	0.10	15	A	40	0.08	13	A	38	0.10	12
	EBR	A	20	0.56	43	A	9	0.29	14	A	10	0.34	14
	WBL	C	73	0.74	55	B	73	0.62	37	A	47	0.44	30
	WBT/R	A	23	0.31	20	A	31	0.36	22	A	22	0.28	18
	NBL	A	63	0.39	19	A	63	0.55	31	A	53	0.51	27
	NBT/R	A	16	0.28	56	B	17	0.63	157	B	14	0.63	145
	SBL	A	68	0.37	19	A	63	0.16	10	A	52	0.17	10
	SBT/R	B	24	0.66	155	A	17	0.37	69	A	15	0.38	63
	Overall	C	26	-	-	C	22	-	-	B	19	-	-
March Road at Site Access #1 / South Local Road Unsignalized	EBL	F	252	0.26	8	F	736	0.63	9	F	2316	1.67	11
	EBT/R	F	62	0.30	10	E	46	0.33	10	F	88	0.55	18
	WBL	F	4094	9.12	153	F	4343	9.39	125	F	10007	21.44	196
	WBT/R	D	30	0.22	9	F	102	0.70	27	F	214	1.13	54
	NBL	B	13	0.01	<1	A	9	0.03	1	A	9	0.03	1
	NBT/R	-	-	-	-	-	-	-	-	-	-	-	-
	SBL	A	9	0.10	3	B	15	0.11	11	C	16	0.18	27
	SBT/R	-	-	-	-	-	-	-	-	-	-	-	-

Intersection	Lane	AM Peak Hour				PM Peak Hour				Saturday Peak Hour			
		LOS	Delay	V/C	Q (95 th)	LOS	Delay	V/C	Q (95 th)	LOS	Delay	V/C	Q (95 th)
<i>Mitigation 1 – Signalization</i>													
March Road at Site Access #1 / South Local Road Signalized	EBL	A	48	0.04	5	A	48	0.05	5	A	41	0.02	5
	EBT/R	A	25	0.16	10	A	22	0.26	12	A	18	0.15	12
	WBL	D	84	0.86	#68	B	59	0.65	#44	C	79	0.84	#79
	WBT/R	A	16	0.17	10	A	24	0.24	18	A	12	0.30	17
	NBL	A	11	0.06	2	A	5	0.06	4	A	10	0.06	6
	NBT/R	A	14	0.55	108	F	132	1.24	#529	F	192	1.36	#638
	SBL	A	5	0.19	9	C	75	0.72	#17	A	35	0.58	#24
	SBT/R	F	96	1.15	#487	A	10	0.60	107	A	11	0.60	127
	Overall	E	69	-	-	F	87	-	-	F	119	-	-
<i>Mitigation 2 – Two NBT and two SBT lanes</i>													
March Road at Site Access #1 / South Local Road Signalized	EBL	A	23	0.02	3	A	24	0.02	3	A	26	0.02	3
	EBT/R	A	13	0.08	6	A	11	0.14	8	A	12	0.13	9
	WBL	B	40	0.64	37	A	37	0.55	30	C	49	0.73	52
	WBT/R	A	11	0.13	8	A	22	0.24	15	A	24	0.32	24
	NBL	A	7	0.03	1	A	6	0.05	4	A	8	0.06	5
	NBT/R	A	6	0.29	32	B	10	0.66	108	C	14	0.72	142
	SBL	A	8	0.19	13	A	14	0.30	11	B	39	0.61	#35
	SBT/R	B	11	0.69	109	A	6	0.32	36	A	8	0.35	48
	Overall	B	12	-	-	A	10	-	-	B	16	-	-
<i>Sensitivity Analysis 1 – Volume Reduction to LOS E or Better</i>													
March Road at Site Access #1 / South Local Road Signalized	EBL	A	48	0.04	5	A	48	0.05	5	A	41	0.02	5
	EBT/R	A	25	0.16	10	A	22	0.26	12	A	18	0.15	12
	WBL	D	84	0.86	#68	B	59	0.65	#44	D	79	0.84	#79
	WBT/R	A	16	0.17	10	A	14	0.23	13	A	12	0.30	17
	NBL	A	11	0.06	2	A	5	0.06	4	A	10	0.06	6
	NBT/R	A	14	0.55	108	E	64	0.98	#370	E	81	0.97	#387
	SBL	A	5	0.19	9	B	62	0.67	#15	A	24	0.53	16
	SBT/R	E	38	0.99	#387	A	10	0.60	107	A	11	0.60	127
	Overall	C	33	-	-	D	43	-	-	D	51	-	-
<i>Sensitivity Analysis 2 – Volume Reduction to Acceptable Queue Length</i>													
March Road at Site Access #1 / South Local Road Signalized	EBL	A	48	0.04	5	A	48	0.05	5	A	41	0.02	5
	EBT/R	A	25	0.16	10	A	22	0.26	12	A	18	0.15	12
	WBL	D	84	0.86	#68	B	59	0.65	#45	C	79	0.84	#79
	WBT/R	A	16	0.17	10	A	14	0.23	13	A	12	0.30	17
	NBL	A	10	0.05	2	A	5	0.06	4	A	10	0.06	6
	NBT/R	A	14	0.55	108	C	19	0.78	194	B	22	0.71	193
	SBL	A	5	0.19	9	A	7	0.19	7	A	7	0.22	10
	SBT/R	E	30	0.95	#363	A	10	0.60	107	A	11	0.60	127
	Overall	C	28	-	-	B	17	-	-	C	22	-	-
March Road at Site Access #2 Unsignalized	WBR	B	10	0.01	<1	C	17	0.03	<1	C	17	0.05	1
	NBT	-	-	-	-	-	-	-	-	-	-	-	-
	NBR	-	-	-	-	-	-	-	-	-	-	-	-
	SBT	-	-	-	-	-	-	-	-	-	-	-	-
Notes:	Saturation flow rate of 1800 veh/h/lane												
	PHF = 1.00												
	# indicates the volume for the 95 th percentile cycle exceeds capacity												

With the addition of site generated traffic, the existing intersections are anticipated to operate with similar operational characteristics as the 2027 future background conditions, and well within the City of Ottawa operational thresholds.

The intersection of Site Access #1 / South Local Road and March Road has been analyzed as a stop-controlled intersection. Multiple movements in all three Peak periods operate with high delays, long queues and LOS F. As such, the signalization of Site Access #1 has been considered as a mitigation measure. The signal timing at this intersection was optimized for the AM, PM, and Saturday peak periods based on the intersection configuration described in Section 11.3. An overall cycle length of 130 seconds was used for all Peak periods and the splits were optimized using the “Optimize Splits” Synchro function as well as by using manual optimization. New Yellow Times and All-Red Times were calculated using the methodology provided in OTM Book 12-Traffic Signals. The width of the intersecting roads have been assumed based on the existing lane widths at the intersection of March Road and Halton Terrace / Maxwell Bridge Road. As pedestrian facilities are proposed at Site Access #1 on both sides of March Road along the frontage of the proposed development, as well as on the South Local Road, pedestrian phases were considered for all through phases. Additionally, in the AM peak period analysis the westbound and southbound left-turns have been coded as protective-permissive movements, in the PM Peak period analysis the westbound left-turn has been coded as a protective-permissive movement and in the Saturday Peak period analysis, the southbound left-turn has been coded as a protective-permissive movement. Upon signalization, the intersection operates well, with $V/C < 0.9$, low delays and all LOS D or better. The exceptions to this are the southbound through / right-turn movement in the AM Peak period, and the northbound through / right-turn movement in the PM and Saturday Peak periods which all operate with high delays, long queues, $V/C > 1.0$ and LOS F. As such, signalization of Site Access #1 / South Local Road and March Road is recommended based on the operational analysis.

Additionally, Table 20 indicates that westbound left-turn at Site Access #1 exceeds the 95th percentile cycle capacity. Queues are also shown to extend to a maximum of 79 metres. This indicates that a storage length of 80 metres at a minimum is required for this movement.

In order to determine the impact of the future road widening along March Road from a two-lane to a four-lane cross section, this scenario was analyzed as an additional mitigation measure at the signalized intersection of Site Access #1 / South Local Road and March Road. The signalization of this intersection follows the same methodology as described above. The exception to this being the 90 second cycle lengths in the AM Peak and PM Peak periods, 100 second cycle length in the Saturday Peak period and no protected-permissive left-turn phases. As a result of this mitigation measure, the intersection operates well, with $V/C < 0.9$, low delays and all LOS C or better. As mentioned in Section 15, the results of this mitigation measure indicate that the planned future widening of March Road, will provide additional capacity in order to accommodate the high projected future volumes along March Road.

As discussed in Section 7, as the result of a comment received from the City of Ottawa requesting analysis to determine “how many vehicles must be diverted from the peak periods to maintain an acceptable level of service on March Road”, a two-part sensitivity analysis has been undertaken. In both scenarios, the volumes at the signalized intersection of Site Access #1 / South Local Road and March Road have been evaluated. The signalization of this intersection follows the same methodology as described above. The first sensitivity analysis performed identified the volume required to be diverted from over-capacity movements in order to maintain a $V/C < 1.0$. The second sensitivity analysis performed identified the volume required to be diverted from over-capacity movements in order to ensure no queues backed up to the signalized intersection of March Road and Halton Terrace / Maxwell Bridge Road (approximately 200 metres) to the south or the future signalized intersection to the north as described in the Kanata North Community Design Plan (approximately 380 metres). Table 21 summarizes the results of the sensitivity analysis.

Table 21: Sensitivity Analysis Summary

Sensitivity Analysis	Peak Period (Movement)								
	AM (SBT)			PM (NBT)			Saturday (NBT)		
	Original	New	Reduction	Original	New	Reduction	Original	New	Reduction
V/C<1.0		1300	216		1250	335		1100	460
Acceptable Queues	1516	1250	266	1585	1000	585	1560	800	760

The intersection of Site Access #2 and March Road has been analyzed based on the intersection configuration described in Section 11.3 and operates well with no identified operational issues.

As shown through the above analysis, and through TIA's for developments further to the north, the widening of March Road from two to four lanes is the best option for accommodating the projected increases in vehicular demand.

16.2.6 Intersection MMLOS

Intersection MMLOS is only undertaken at signalized intersections. The three signalized intersections considered in this study are March Road at Halton Terrace / Maxwell Bridge Road, March Road at Klondike Road, and March Road at Site Access #1 / South Local Road. While the signalization of Site Access #1 has been considered a mitigation measure in the operational analysis above, Site Access #1 / Local South Road at March Road will be considered a signalized intersection in this section.

Table 22 summarizes the MMLOS analysis for these three signalized intersections in the Study Area for the existing and future horizons. As no changes to the intersections of March Road and Halton Terrace / Maxwell Bridge Road and March Road and Klondike Road are anticipated, all horizons have been analyzed in one row. The signalized intersection of Site Access #1 has been evaluated based on the intersection configurations outlined based on Section 11.3. It has been assumed that no pocket bike lanes will be present at the Site Access #1 intersection. The analysis is based on the developing community policy area. The MMLOS worksheets have been provided in Appendix I.

Table 22: Study Area Intersection MMLOS Analysis—All Horizons

Intersection	Horizon	Pedestrian LOS		Bicycle LOS		Transit LOS		Truck LOS		Auto LOS			
		PLOS	Target	BLOS	Target	TLOS	Target	TrLOS	Target	ALOS	Target		
March Road & Halton Terrace / Maxwell Bridge Road	Existing	F	C	F	B	F(F)[F]	E	D	D	B(D)[C]	D		
	2022 FB												
	2022 FT					F(F)[E]	C	F	F				
	2027 FB												
	2027 FT												
March Road & Klondike Road	Existing	F	C	F	B	F(F)[E]	D	C	D	B(B)[B]	D		
	2022 FB												
	2022 FT					F(D)[E]	F	F	F				
	2027 FB												
	2027 FT												
March Road & Site Access #1 / South Local Road	2022 FT	D	C	D	B	F(D)[E]	D	F	D	B(C)[B]	D		
	2027 FT	F		D		F(D)[F]		F		B(E)[E]			
Notes:	AM(PM)[Sat]												

The pedestrian and cycling LOS targets are not met at the network intersections due to crossing distances, permissive left and right-turns, and lack of cycling facilities in the Study Area. The bicycle LOS is not met as a result of mixed traffic conditions on some intersection legs as well as high operating speeds. The transit LOS generally fails to meet the targets at some intersections due to the intersection delays. Truck LOS is not met at most intersections due to the low number of receiving lanes. Auto LOS targets are generally met.

The future widening and transit improvements to March Road, are anticipated to increase connectivity and improve the segment MMLOS along March Road. As such, no further intersection improvements are recommended, beyond the extension of pedestrian and bicycle facilities along the frontage of the site, as a result of the intersection MMLOS analysis.

17 Conclusions

- A. The proposed development, located at 910 March Road, is a commercial development consisting of a 1,882 square metre hardware store, a 220 square metre restaurant with a drive-through, a 335 square metre restaurant, and a 249 square metre gas bar attached to a 192 square metre Tim Hortons with a drive-through. Approximately 155 vehicle parking spaces and 15-20 bicycle parking spaces will be provided.
- B. The site is proposed to have two accesses. Both accesses are located along March Road; the first (Site Access #1) is a full-movement access located approximately 215 metres north of Maxwell Bridge Road, measured from intersection centreline to intersection centreline. The second (Site Access #2) is a right-in / right-out access located approximately 150 metres north of Maxwell Bridge Road, measured intersection centreline to intersection centreline.
- C. Both site access intersections are subject to a future RMA and functional design.
- D. The existing Study Area is currently served by bus routes #63, and 165.
- E. The previous five years of collision history at the existing Study Area intersections has been reviewed. No patterns emerged that indicated that mitigation measures or further monitoring was required.
- F. Using the ITE Trip Generation Manual, the retail trip rates were identified. The Rural West mode shares were used to determine the trip generation by mode and pass-by trips were accounted for.
- G. It was found that the proposed development can be anticipated to generate 209 AM, 241 PM, and 393 Saturday net new peak hour two-way vehicle trips.
- H. Minimum vehicle parking space requirements are met with an excess of 16 spaces and bicycle parking space requirements are met with an excess of four to nine spaces.
- I. It was found that the road segments of March Road do not meet the majority of its MMLOS targets. As future changes to the road network are anticipated to improve the MMLOS of these segments, no resulting improvements to the boundary road is recommended.
- J. Both signalization warrants and left-turn lane warrants were evaluated at Site Access #1. Signalization was not warranted however a southbound left-turn lane was warranted for both future total horizons. Preliminary storage and taper lengths have been designed for the southbound left-turn lane for operational analysis purposes, however this design will be further refined in the RMA and functional design.
- K. A northbound right-turn at Site Access #2 was deemed to be warranted for both the 2022 and 2027 future total horizons. Appropriate storage and taper lengths were assumed for operational analysis purposes, however this design will be further refined in the RMA and functional design.
- L. The existing Study Area intersections operate satisfactorily during the peak hours in the existing conditions operational analysis.
- M. The existing Study Area intersections operate satisfactorily during the peak hours in the 2022 future background operational analysis.
- N. The existing Study Area intersections operate satisfactorily during the peak hours in the 2022 future total operational analysis with similar operational characteristics as the 2022 future background conditions. Site Access #2 is shown to operate well. The following recommendation is the result of this analysis:
 1. Signalization of Site Access #1
- O. The existing Study Area intersections generally operate satisfactorily during the peak hours in the 2027 future background operational analysis.
- P. The Study Area intersections generally operate satisfactorily during the peak hours in the 2027 future total operational analysis with similar operational characteristics as the 2027 future background

conditions. Site Access #2 is shown to operate well. The following recommendations are the result of this analysis:

1. Signalization of Site Access #1
 2. The design of the westbound left-turn lane of Site Access #1 be further considered in the RMA and functional design and at a minimum should have a storage length of 80 metres.
 3. The design of the northbound right-turn lane of Site Access #2 be further considered in the RMA and functional design.
- Q. Additional findings of the 2027 future total operational analysis demonstrate that the future road widening of March Road will significantly improve the operation of Site Access #1 and is the best option for accommodating the projected increases in vehicular demand.
- R. As per the request of the City of Ottawa, a sensitivity analysis was undertaken to determine “how many vehicles must be diverted from the peak periods to maintain an acceptable level of service on March Road”. In order to achieve $V/C < 1.0$ and acceptable queue lengths on March Road, a reduction of 266 vehicles to the southbound through movement, 585 vehicles to the northbound through movement and 760 vehicles to the northbound movement are required in the AM, PM, and Saturday Peak periods, respectively.
- S. The PLOS, BLOS, TLOS, and TkLOS were evaluated at all three signalized Study Area intersections. In most cases, the MMLOS targets were not met. No intersection alterations or mitigation measures are suggested as changes to these intersections as future improvements along March Road are expected to improve the intersection MMLOS at these locations.

The proposed development will function within the Study Area Road Network. It is recommended that, from a transportation perspective, the proposed development application process proceed.

Prepared By:



Robin Marinac, E.I.T.

437-242-5183

Robin.marinac@CGHTransportation.com

Reviewed By:



Mark Crockford, P. Eng.

905-251-4070

Mark.Crockford@CGHTransportation.com

Appendix A

TIA Screening Form and PM Certification Form



TIA Plan Reports

On 14 June 2017, the Council of the City of Ottawa adopted new Transportation Impact Assessment (TIA) Guidelines. In adopting the guidelines, Council established a requirement for those preparing and delivering transportation impact assessments and reports to sign a letter of certification.

Individuals submitting TIA reports will be responsible for all aspects of development-related transportation assessment and reporting, and undertaking such work, in accordance and compliance with the City of Ottawa's Official Plan, the Transportation Master Plan and the Transportation Impact Assessment (2017) Guidelines.

By submitting the attached TIA report (and any associated documents) and signing this document, the individual acknowledges that s/he meets the four criteria listed below.

CERTIFICATION

1. I have reviewed and have a sound understanding of the objectives, needs and requirements of the City of Ottawa's Official Plan, Transportation Master Plan and the Transportation Impact Assessment (2017) Guidelines;
2. I have a sound knowledge of industry standard practice with respect to the preparation of transportation impact assessment reports, including multi modal level of service review;
3. I have substantial experience (more than 5 years) in undertaking and delivering transportation impact studies (analysis, reporting and geometric design) with strong background knowledge in transportation planning, engineering or traffic operations; and
4. I am either a licensed¹ or registered² professional in good standing, whose field of expertise [check appropriate field(s)] is either transportation engineering or transportation planning .

^{1,2} License of registration body that oversees the profession is required to have a code of conduct and ethics guidelines that will ensure appropriate conduct and representation for transportation planning and/or transportation engineering works.

Dated at Newmarket this 22 day of April, 2020.
(City)

Name: Mark Crockford
(Please Print)

Professional Title: Professional Engineer

Signature of Individual certifier that s/he meets the above four criteria

Office Contact Information (Please Print)
Address: 628 Haines Road
City / Postal Code: Newmarket / L3Y 6V5
Telephone / Extension: (905) 251-4070
E-Mail Address: Mark.Crockford@CGHTransportation.com



City of Ottawa 2017 TIA Guidelines
Step 1 - Screening Form

Date: 29-Jun-20
Project Number: 2020-11
Project Reference: Wexford 910 March Road

1.1 Description of Proposed Development	
Municipal Address	910 March Road
Description of Location	CON 4 LOT 12
Land Use Classification	Development Reserve Zone [DR] and Rural Zone [RU]
Development Size	1,882 sq m hardware store, 220 sq m restaurant, 335 sq m restaurant, and a 249 sq m gas bar attached to a 192 sq m Tim Hortons
Accesses	Two: Both on March Road; one full-movement access (approximately 215 m north of Maxwell Bridge Rd) and one right-in / right-out approximately 150 m north of Maxwell Bridge Rd).
Phase of Development	Single Phase
Buildout Year	2022
TIA Requirement	Full TIA Required

1.2 Trip Generation Trigger	
Land Use Type	Gas station or convenience market
Development Size	248 G.F.A.
Trip Generation Trigger	Yes

1.3 Location Triggers	
Does the development propose a new driveway to a boundary street that is designated as part of the City's Transit Priority, Rapid Transit or Spine	Yes
Bicycle Networks?	
Is the development in a Design Priority Area (DPA) or Transit-oriented Development (TOD) zone?	No
Location Trigger	Yes

1.4. Safety Triggers	
Are posted speed limits on a boundary street 80 km/hr or greater?	Yes
Are there any horizontal/vertical curvatures on a boundary street limits sight lines at a proposed driveway?	No
Is the proposed driveway within the area of influence of an adjacent traffic signal or roundabout (i.e. within 300 m of intersection in rural conditions, or within 150 m of intersection in urban/ suburban conditions)?	Yes
Is the proposed driveway within auxiliary lanes of an intersection?	Yes
Does the proposed driveway make use of an existing median break that serves an existing site?	No
Is there a documented history of traffic operations or safety concerns on the boundary streets within 500 m of the development?	No
Does the development include a drive-thru facility?	Yes
Safety Trigger	Yes

Appendix B

Traffic Data

Transportation Services - Traffic Services

Turning Movement Count - Study Results

HALTON TERR/MAXWELL BRIDGE RD @ MARCH RD

Survey Date: Wednesday, March 04, 2020

WO No:


39372

Start Time: 07:00

Device:

Miovision

Full Study Diagram

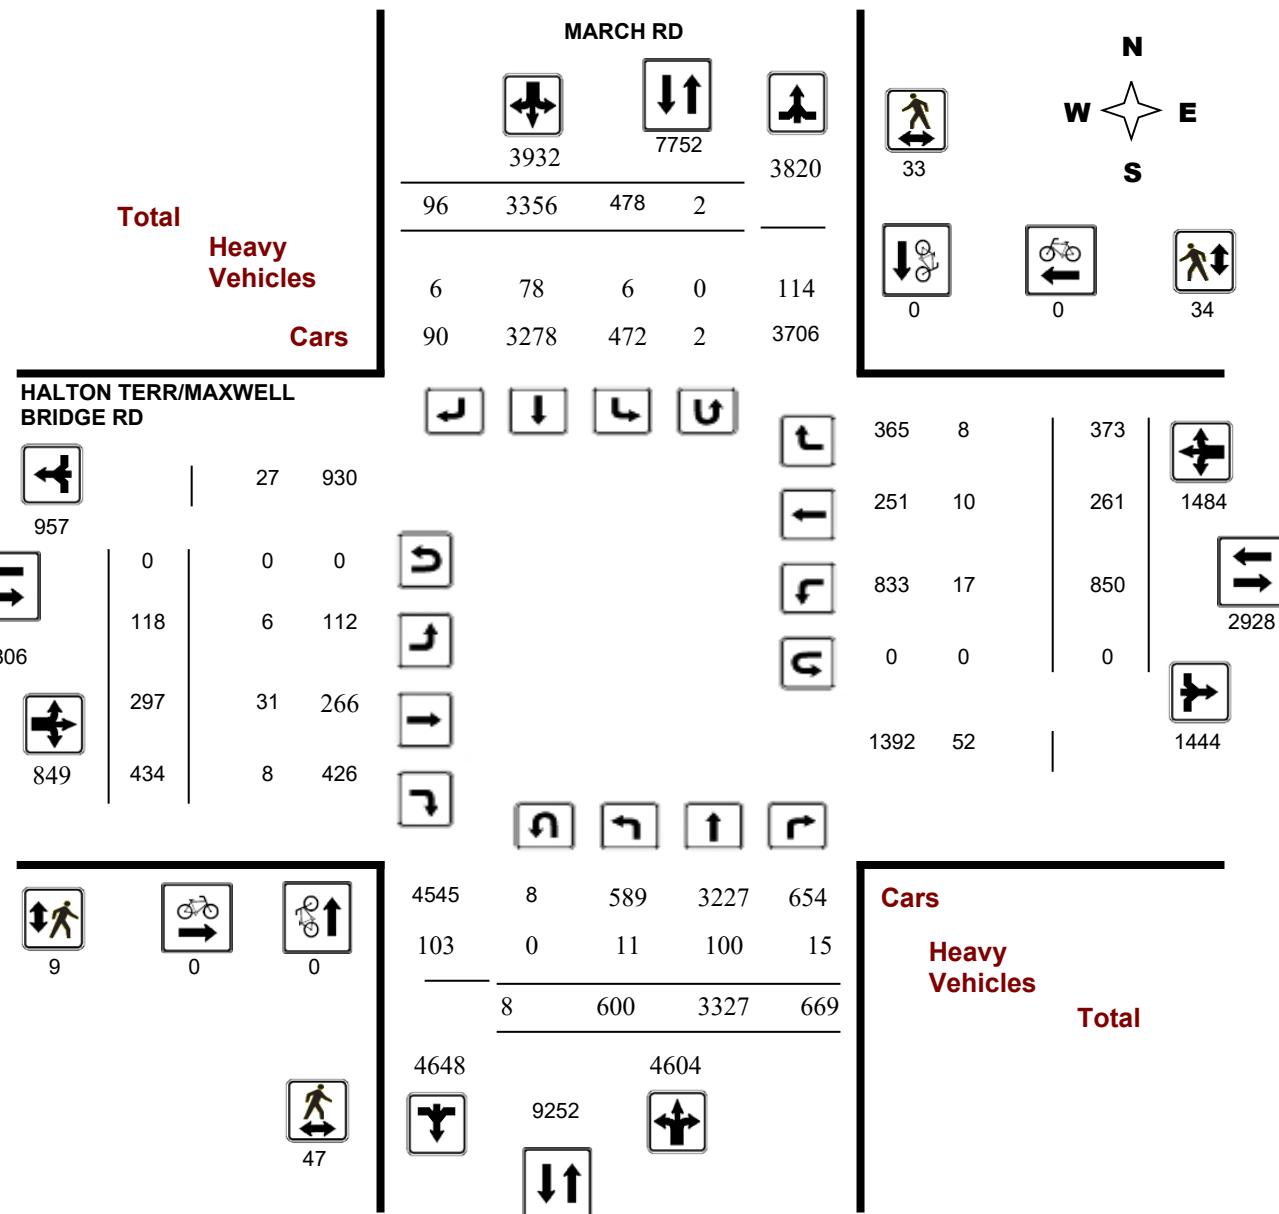

5472187 - WED JAN 22, 2020 - 8HRS - LORETTA

Transportation Services - Traffic Services

Turning Movement Count - Study Results

HALTON TERR/MAXWELL BRIDGE RD @ MARCH RD

Survey Date: Wednesday, March 04, 2020

WO No:

39372

Start Time: 07:00

Device:

Miovision

Full Study Peak Hour Diagram

MARCH RD

Total	Heavy Vehicles	Cars	
			310 1290 980
12	238	59	1
0	4	0	0
12	234	59	1
			5 975

HALTON TERR/MAXWELL BRIDGE RD

Total	Heavy Vehicles	Cars	
			242 240
242			
2	240		
0	0	0	
17	0	17	
5			
55	5	50	
113	2	39	
41			

Full Study
Peak Hour:
16:15 17:15

	Left Turn	Down	Left Turn	Up				
					89	0	89	
					56	2	58	226
					75	4	79	
					0	0	0	
					223	5		454
								228

Total	Heavy Vehicles	Cars	
			348 0 868 114
2	0	0	
0	0	5	0
			0 172 873 114
			358 1159
			17 1517

N
W  **E**
S

5472187 - WED JAN 22, 2020 - 8HRS - LORETTA



Transportation Services - Traffic Services

Turning Movement Count - Peak Hour Diagram


HALTON TERR/MAXWELL BRIDGE RD @ MARCH RD

Survey Date: Wednesday, March 04, 2020

Start Time: 07:00

WO No: 39372

Device: Miovision

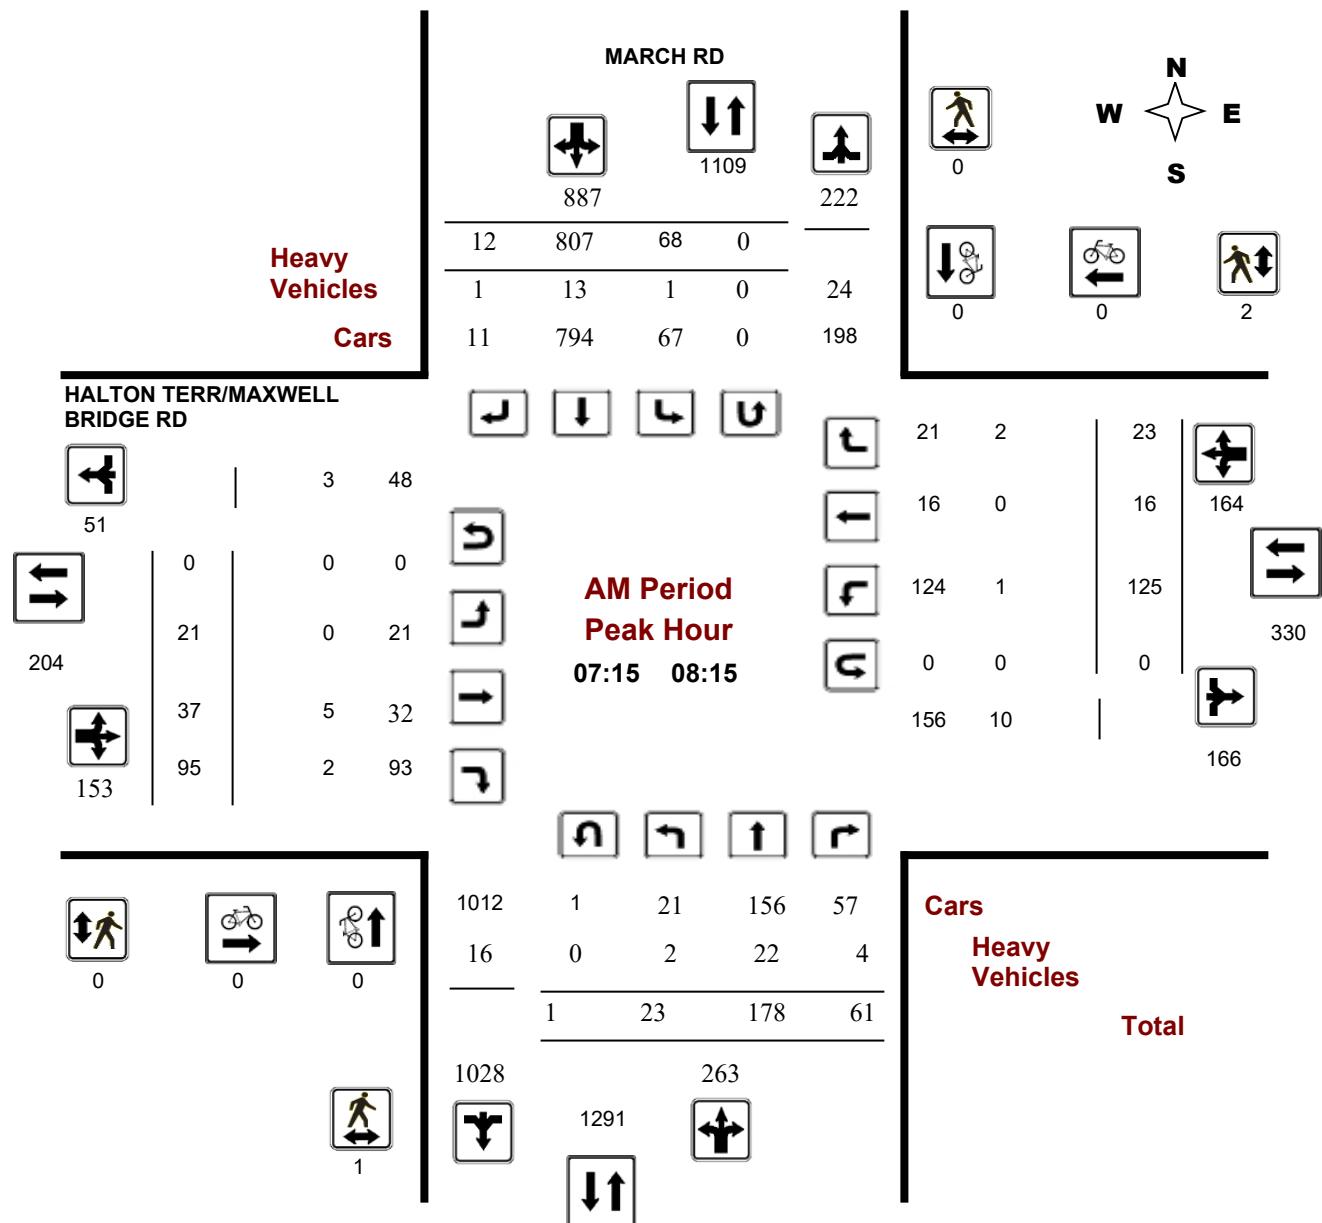

Comments 5472187 - WED JAN 22, 2020 - 8HRS - LORETTA



Transportation Services - Traffic Services

Turning Movement Count - Peak Hour Diagram


HALTON TERR/MAXWELL BRIDGE RD @ MARCH RD

Survey Date: Wednesday, March 04, 2020

Start Time: 07:00

WO No: 39372

Device: Miovision

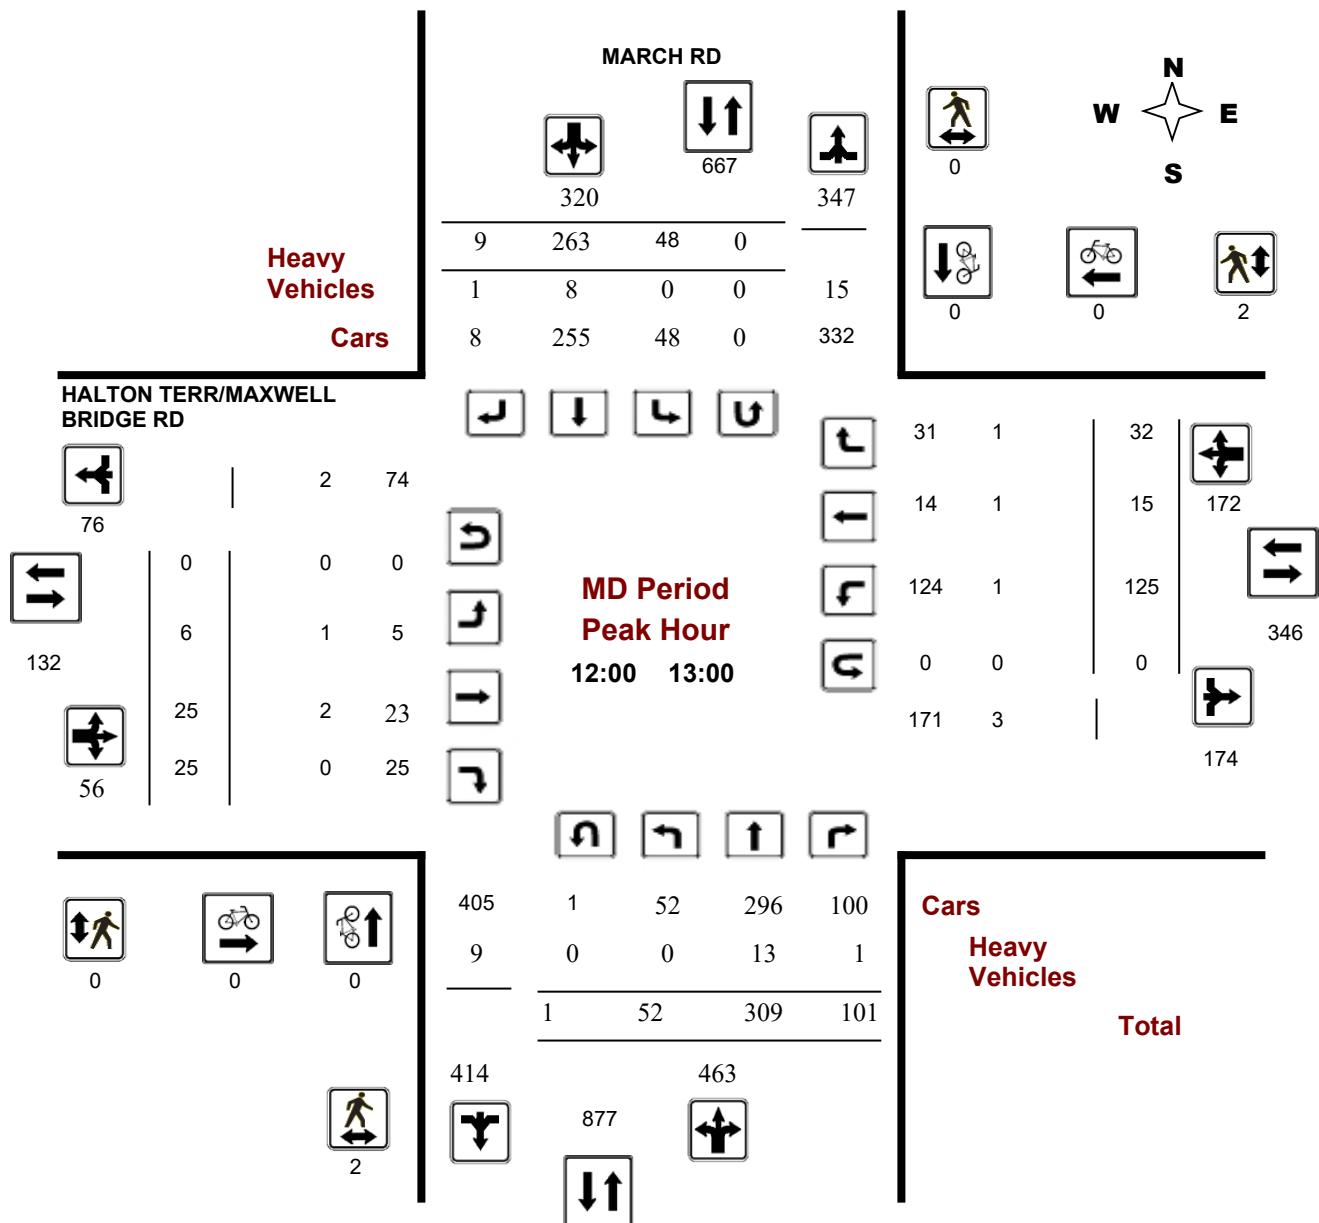



Transportation Services - Traffic Services

Turning Movement Count - Peak Hour Diagram


HALTON TERR/MAXWELL BRIDGE RD @ MARCH RD

Survey Date: Wednesday, March 04, 2020

Start Time: 07:00

WO No: 39372

Device: Miovision

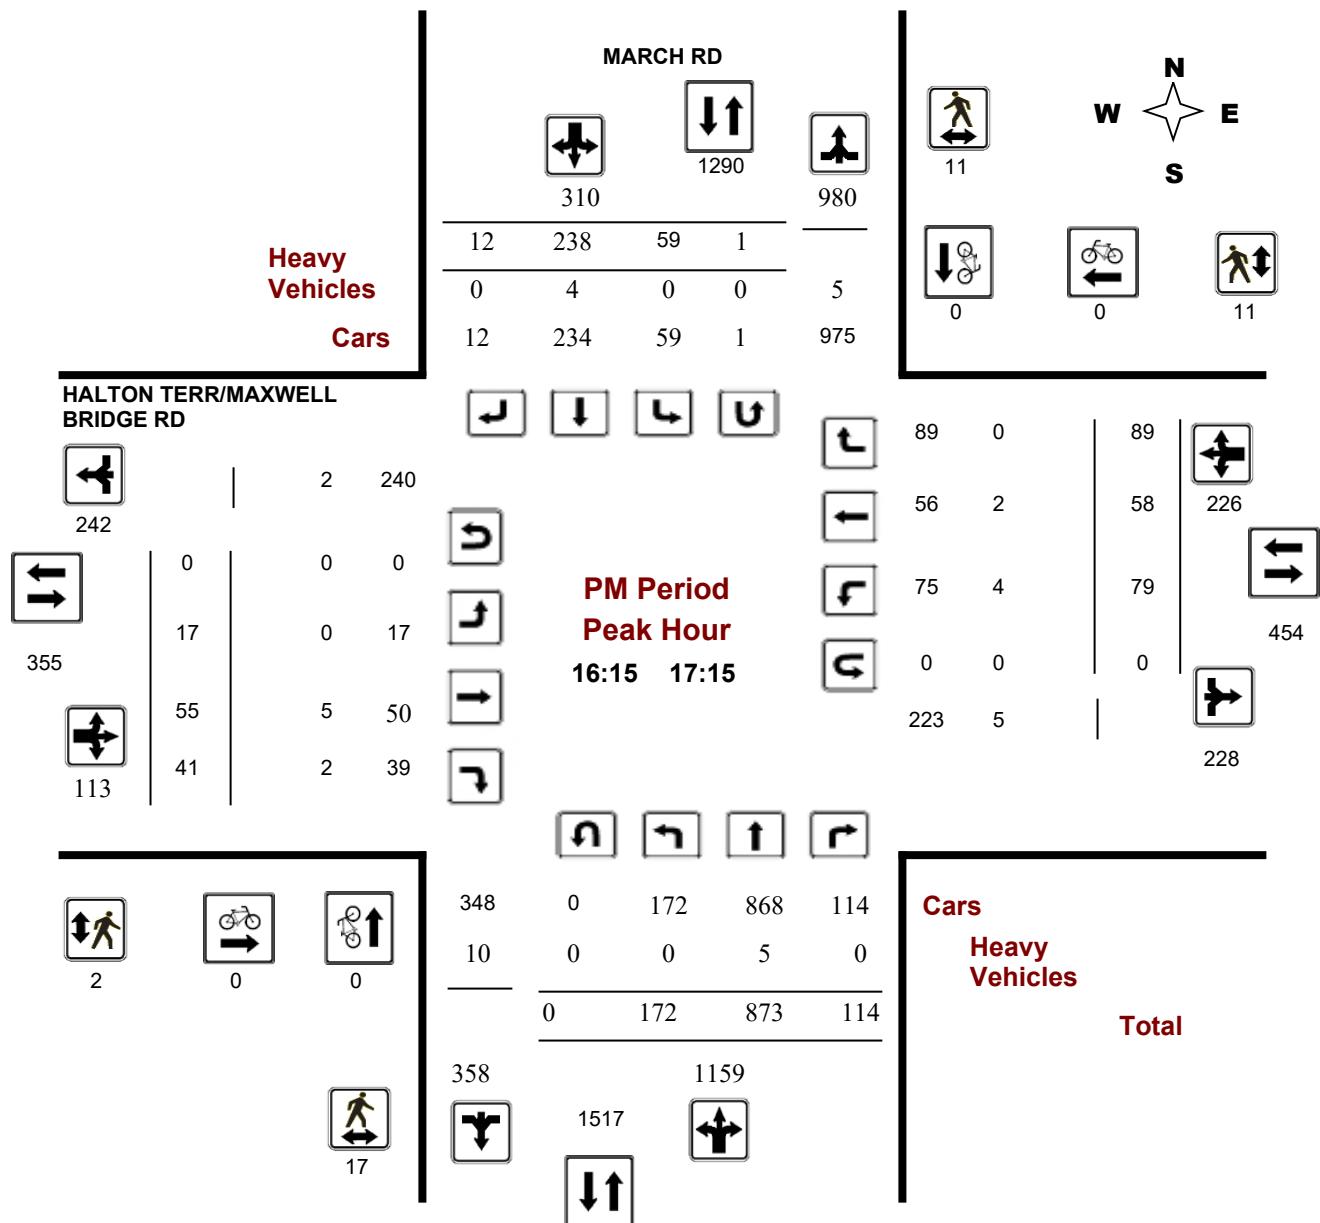



Transportation Services - Traffic Services

Turning Movement Count - Study Results

HALTON TERR/MAXWELL BRIDGE RD @ MARCH RD

Survey Date: Wednesday, March 04, 2020

WO No: 39372

Start Time: 07:00

Device: Miovision

Full Study Summary (8 HR Standard)

Survey Date: Wednesday, March 04, 2020

Total Observed U-Turns

AADT Factor

Northbound:	8	Southbound:	2	1.00
Eastbound:	0	Westbound:	0	

Period	MARCH RD						HALTON TERR/MAXWELL BRIDGE RD												
	Northbound			Southbound			SB TOT	STR TOT	Eastbound			Westbound			WB TOT	STR TOT	Grand Total		
Period	LT	ST	RT	NB TOT	LT	ST	RT		LT	ST	RT	EB TOT	LT	ST	RT				
07:00 08:00	21	180	50	251	56	785	10	851	1102	18	36	90	144	122	16	23	161	305	1407
08:00 09:00	35	152	76	263	78	758	10	846	1109	21	32	83	136	141	24	19	184	320	1429
09:00 10:00	28	208	62	298	69	517	13	599	897	21	42	87	150	120	28	29	177	327	1224
11:30 12:30	58	268	85	411	52	283	9	344	755	3	24	28	55	115	18	27	160	215	970
12:30 13:30	47	287	86	420	43	266	7	316	736	8	21	34	63	109	15	28	152	215	951
15:00 16:00	96	608	104	808	58	265	19	342	1150	18	41	36	95	59	50	73	182	277	1427
16:00 17:00	156	867	101	1124	63	246	11	320	1444	18	51	39	108	70	52	88	210	318	1762
17:00 18:00	159	757	105	1021	59	236	17	312	1333	11	50	37	98	114	58	86	258	356	1689
Sub Total	600	3327	669	4596	478	3356	96	3930	8526	118	297	434	849	850	261	373	1484	2333	10859
U Turns				8				2	10				0				0	0	10
Total	600	3327	669	4604	478	3356	96	3932	8536	118	297	434	849	850	261	373	1484	2333	10869
EQ 12Hr	834	4625	930	6400	664	4665	133	5465	11865	164	413	603	1180	1182	363	518	2063	3243	15108

Note: These values are calculated by multiplying the totals by the appropriate expansion factor.

1.39

Note: These volumes are calculated by multiplying the Equivalent 12 hr. totals by the AADT factor.

1

Note: These volumes are calculated by multiplying the Average Daily 12 hr. totals by 12 to 24 expansion factor.

1.31

Note: U-Turns provided for approach totals. Refer to 'U-Turn' Report for specific breakdown.



Transportation Services - Traffic Services

Turning Movement Count - Study Results

HALTON TERR/MAXWELL BRIDGE RD @ MARCH RD

Survey Date: Wednesday, March 04, 2020

WO No: 39372

Start Time: 07:00

Device: Miovision

Full Study 15 Minute Increments

MARCH RD

HALTON TERR/MAXWELL BRIDGE RD

Time Period	Northbound			Southbound			Eastbound			Westbound			Grand Total							
	LT	ST	RT	N TOT	LT	ST	RT	S TOT	STR TOT	LT	ST	RT	E TOT	LT	ST	RT	W TOT	STR TOT		
07:00	07:15	6	45	14	65	9	179	0	188	15	2	8	19	29	36	4	6	46	15	328
07:15	07:30	8	54	12	74	14	224	1	239	17	5	6	27	38	29	4	3	36	17	387
07:30	07:45	4	54	16	75	12	183	5	200	7	8	10	25	43	25	3	4	32	7	350
07:45	08:00	3	27	8	38	21	199	4	224	7	3	12	19	34	32	5	10	47	7	343
08:00	08:15	8	43	25	76	21	201	2	224	12	5	9	24	38	39	4	6	49	12	387
08:15	08:30	6	32	18	56	20	182	1	203	5	5	8	18	31	37	3	5	45	5	335
08:30	08:45	11	42	22	76	15	189	3	207	9	7	7	27	41	26	6	5	37	9	361
08:45	09:00	10	35	11	56	22	186	4	212	6	4	8	14	26	39	11	3	53	6	347
09:00	09:15	7	52	23	82	23	166	8	197	16	8	18	37	63	40	10	9	59	16	401
09:15	09:30	8	54	17	79	17	126	1	144	10	7	9	33	49	30	10	10	50	10	322
09:30	09:45	7	55	11	74	17	125	2	144	5	4	6	13	23	27	3	4	34	5	275
09:45	10:00	6	47	11	65	12	100	2	114	4	2	9	4	15	23	5	6	34	4	228
11:30	11:45	17	55	19	92	14	77	4	95	5	1	6	10	17	35	5	8	48	5	252
11:45	12:00	15	57	20	94	10	70	1	81	10	2	6	10	18	25	6	3	34	10	227
12:00	12:15	16	84	26	126	12	70	3	85	3	0	4	3	7	30	2	8	40	3	258
12:15	12:30	10	72	20	103	16	66	1	83	3	0	8	5	13	25	5	8	38	3	237
12:30	12:45	15	79	28	122	8	56	2	66	7	3	6	8	17	37	5	9	51	7	256
12:45	13:00	11	74	27	112	12	71	3	86	10	3	7	9	19	33	3	7	43	10	260
13:00	13:15	11	83	10	104	8	71	1	80	4	1	6	13	20	18	2	6	26	4	230
13:15	13:30	10	51	21	82	15	68	1	85	6	1	2	4	7	21	5	6	32	6	206
15:00	15:15	13	130	25	168	10	63	4	77	1	2	5	7	14	15	9	19	43	1	302
15:15	15:30	29	129	33	191	13	56	6	75	9	2	11	8	21	16	15	15	46	9	333
15:30	15:45	24	163	16	203	13	65	4	82	10	7	9	5	21	13	16	23	52	10	358
15:45	16:00	30	186	30	246	22	81	5	108	9	7	16	16	39	15	10	16	41	9	434
16:00	16:15	27	202	22	251	17	62	3	82	7	4	12	11	27	17	9	25	51	7	411
16:15	16:30	40	251	17	308	16	64	1	81	3	6	13	11	30	14	11	18	43	3	462
16:30	16:45	43	214	32	289	10	50	4	65	1	2	11	8	21	20	14	27	61	1	436
16:45	17:00	46	200	30	276	20	70	3	93	3	6	15	9	30	19	18	18	55	3	454
17:00	17:15	43	208	35	286	13	54	4	71	2	3	16	13	32	26	15	26	67	2	456
17:15	17:30	32	217	18	267	17	65	1	83	1	3	10	5	18	30	14	21	65	1	433
17:30	17:45	37	173	26	236	21	50	3	74	9	5	15	7	27	37	11	27	75	9	412
17:45	18:00	47	159	26	232	8	67	9	84	0	0	9	12	21	21	18	12	51	0	388
Total:		600	3327	669	4604	478	3356	96	3932	216	118	297	434	849	850	261	373	1484	216	10,869

Note: U-Turns are included in Totals.



Transportation Services - Traffic Services

Turning Movement Count - Study Results

HALTON TERR/MAXWELL BRIDGE RD @ MARCH RD

Survey Date: Wednesday, March 04, 2020

WO No: 39372

Start Time: 07:00

Device: Miovision

Full Study Cyclist Volume

MARCH RD

HALTON TERR/MAXWELL BRIDGE RD

Time Period	Northbound	Southbound	Street Total	Eastbound	Westbound	Street Total	Grand Total
07:00	07:15	0	0	0	0	0	0
07:15	07:30	0	0	0	0	0	0
07:30	07:45	0	0	0	0	0	0
07:45	08:00	0	0	0	0	0	0
08:00	08:15	0	0	0	0	0	0
08:15	08:30	0	0	0	0	0	0
08:30	08:45	0	0	0	0	0	0
08:45	09:00	0	0	0	0	0	0
09:00	09:15	0	0	0	0	0	0
09:15	09:30	0	0	0	0	0	0
09:30	09:45	0	0	0	0	0	0
09:45	10:00	0	0	0	0	0	0
11:30	11:45	0	0	0	0	0	0
11:45	12:00	0	0	0	0	0	0
12:00	12:15	0	0	0	0	0	0
12:15	12:30	0	0	0	0	0	0
12:30	12:45	0	0	0	0	0	0
12:45	13:00	0	0	0	0	0	0
13:00	13:15	0	0	0	0	0	0
13:15	13:30	0	0	0	0	0	0
15:00	15:15	0	0	0	0	0	0
15:15	15:30	0	0	0	0	0	0
15:30	15:45	0	0	0	0	0	0
15:45	16:00	0	0	0	0	0	0
16:00	16:15	0	0	0	0	0	0
16:15	16:30	0	0	0	0	0	0
16:30	16:45	0	0	0	0	0	0
16:45	17:00	0	0	0	0	0	0
17:00	17:15	0	0	0	0	0	0
17:15	17:30	0	0	0	0	0	0
17:30	17:45	0	0	0	0	0	0
17:45	18:00	0	0	0	0	0	0
Total		0	0	0	0	0	0



Transportation Services - Traffic Services

Turning Movement Count - Study Results

HALTON TERR/MAXWELL BRIDGE RD @ MARCH RD

Survey Date: Wednesday, March 04, 2020

WO No:

39372

Start Time: 07:00

Device:

Miovision

Full Study Pedestrian Volume

MARCH RD			HALTON TERR/MAXWELL BRIDGE RD				
Time Period	NB Approach (E or W Crossing)	SB Approach (E or W Crossing)	Total	EB Approach (N or S Crossing)	WB Approach (N or S Crossing)	Total	Grand Total
07:00 07:15	0	1	1	0	0	0	1
07:15 07:30	0	0	0	0	1	1	1
07:30 07:45	0	0	0	0	0	0	0
07:45 08:00	1	0	1	0	1	1	2
08:00 08:15	0	0	0	0	0	0	0
08:15 08:30	0	0	0	0	0	0	0
08:30 08:45	0	0	0	0	1	1	1
08:45 09:00	1	2	3	0	1	1	4
09:00 09:15	1	0	1	0	0	0	1
09:15 09:30	0	1	1	1	1	2	3
09:30 09:45	0	0	0	0	0	0	0
09:45 10:00	0	0	0	1	0	1	1
11:30 11:45	2	0	2	0	1	1	3
11:45 12:00	2	0	2	0	0	0	2
12:00 12:15	0	0	0	0	2	2	2
12:15 12:30	1	0	1	0	0	0	1
12:30 12:45	1	0	1	0	0	0	1
12:45 13:00	0	0	0	0	0	0	0
13:00 13:15	2	0	2	0	0	0	2
13:15 13:30	2	0	2	0	0	0	2
15:00 15:15	0	5	5	0	4	4	9
15:15 15:30	4	2	6	0	6	6	12
15:30 15:45	1	0	1	0	0	0	1
15:45 16:00	0	1	1	1	0	1	2
16:00 16:15	3	5	8	1	1	2	10
16:15 16:30	6	0	6	1	6	7	13
16:30 16:45	4	8	12	0	1	1	13
16:45 17:00	6	2	8	1	2	3	11
17:00 17:15	1	1	2	0	2	2	4
17:15 17:30	3	1	4	0	1	1	5
17:30 17:45	3	4	7	0	3	3	10
17:45 18:00	3	0	3	3	0	3	6
Total	47	33	80	9	34	43	123

5472187 - WED JAN 22, 2020 - 8HRS - LORETTA



Transportation Services - Traffic Services

Turning Movement Count - Study Results

HALTON TERR/MAXWELL BRIDGE RD @ MARCH RD

Survey Date: Wednesday, March 04, 2020

WO No: 39372

Start Time: 07:00

Device: Miovision

Full Study Heavy Vehicles

MARCH RD

HALTON TERR/MAXWELL BRIDGE RD

Time Period	Northbound			Southbound			Eastbound			Westbound			Grand Total							
	LT	ST	RT	N TOT	LT	ST	RT	S TOT	STR TOT	LT	ST	RT	E TOT	LT	ST	RT	W TOT	STR TOT		
07:00	07:15	1	5	3	9	0	6	0	6	15	0	2	0	2	0	0	0	2	17	
07:15	07:30	2	9	2	13	1	3	0	4	17	0	1	2	3	0	0	2	2	5	22
07:30	07:45	0	3	1	4	0	3	0	3	7	0	1	0	1	0	0	0	1	8	
07:45	08:00	0	2	0	2	0	4	1	5	7	0	1	0	1	1	0	0	1	9	
08:00	08:15	0	8	1	9	0	3	0	3	12	0	2	0	2	0	0	0	2	14	
08:15	08:30	0	2	0	2	1	2	0	3	5	0	1	0	1	0	0	0	1	6	
08:30	08:45	0	5	1	6	0	3	0	3	9	0	0	0	0	0	1	0	1	10	
08:45	09:00	0	2	0	2	1	3	0	4	6	0	1	0	1	1	1	0	2	3	9
09:00	09:15	2	6	0	8	0	7	1	8	16	1	2	2	5	0	1	1	2	7	23
09:15	09:30	1	6	1	8	0	2	0	2	10	1	2	2	5	0	0	1	1	6	16
09:30	09:45	0	2	0	2	0	3	0	3	5	0	0	0	0	0	0	0	0	0	5
09:45	10:00	0	2	0	2	0	2	0	2	4	0	2	0	2	0	0	0	2	6	
11:30	11:45	0	2	0	2	2	1	0	3	5	0	1	0	1	0	1	1	2	3	8
11:45	12:00	0	7	1	8	0	2	0	2	10	0	0	0	0	1	0	0	1	1	11
12:00	12:15	0	0	0	0	0	3	0	3	3	0	0	0	0	0	0	0	0	0	3
12:15	12:30	0	2	0	2	0	1	0	1	3	0	1	0	1	1	0	0	1	2	5
12:30	12:45	0	4	1	5	0	2	0	2	7	0	1	0	1	0	1	1	2	3	10
12:45	13:00	0	7	0	7	0	2	1	3	10	1	0	0	1	0	0	0	1	1	11
13:00	13:15	1	1	0	2	0	2	0	2	4	1	1	0	2	0	0	0	0	2	6
13:15	13:30	1	2	0	3	0	2	1	3	6	0	1	0	1	0	0	0	0	1	7
15:00	15:15	0	0	0	0	0	1	0	1	1	0	0	0	0	2	0	0	2	2	3
15:15	15:30	0	3	1	4	0	5	0	5	9	0	1	0	1	0	1	0	1	2	11
15:30	15:45	1	5	1	7	0	3	0	3	10	1	1	0	2	1	1	0	2	4	14
15:45	16:00	1	2	1	4	1	2	2	5	9	0	1	0	1	0	0	0	0	1	10
16:00	16:15	1	3	0	4	0	3	0	3	7	1	1	0	2	1	1	2	4	6	13
16:15	16:30	0	3	0	3	0	0	0	0	3	0	1	0	1	2	2	0	4	5	8
16:30	16:45	0	0	0	0	0	1	0	1	1	0	2	1	3	0	0	0	0	3	4
16:45	17:00	0	0	0	0	0	3	0	3	3	0	1	0	1	1	0	0	1	2	5
17:00	17:15	0	2	0	2	0	0	0	0	2	0	1	1	2	1	0	0	1	3	5
17:15	17:30	0	1	0	1	0	0	0	0	1	0	1	0	1	1	0	0	1	2	3
17:30	17:45	0	4	1	5	0	4	0	4	9	0	0	0	0	3	0	0	0	3	12
17:45	18:00	0	0	0	0	0	0	0	0	0	0	1	0	1	1	0	0	1	2	2
Total:	None	11	100	15	126	6	78	6	90	216	6	31	8	45	17	10	8	35	80	296



Transportation Services - Traffic Services

Turning Movement Count - Study Results

HALTON TERR/MAXWELL BRIDGE RD @ MARCH RD

Survey Date: Wednesday, March 04, 2020

WO No: 39372

Start Time: 07:00

Device: Miovision

Full Study 15 Minute U-Turn Total

MARCH RD HALTON TERR/MAXWELL BRIDGE

Time Period		Northbound U-Turn Total	Southbound U-Turn Total	Eastbound U-Turn Total	RD Westbound U-Turn Total	Total
07:00	07:15	0	0	0	0	0
07:15	07:30	0	0	0	0	0
07:30	07:45	1	0	0	0	1
07:45	08:00	0	0	0	0	0
08:00	08:15	0	0	0	0	0
08:15	08:30	0	0	0	0	0
08:30	08:45	1	0	0	0	1
08:45	09:00	0	0	0	0	0
09:00	09:15	0	0	0	0	0
09:15	09:30	0	0	0	0	0
09:30	09:45	1	0	0	0	1
09:45	10:00	1	0	0	0	1
11:30	11:45	1	0	0	0	1
11:45	12:00	2	0	0	0	2
12:00	12:15	0	0	0	0	0
12:15	12:30	1	0	0	0	1
12:30	12:45	0	0	0	0	0
12:45	13:00	0	0	0	0	0
13:00	13:15	0	0	0	0	0
13:15	13:30	0	1	0	0	1
15:00	15:15	0	0	0	0	0
15:15	15:30	0	0	0	0	0
15:30	15:45	0	0	0	0	0
15:45	16:00	0	0	0	0	0
16:00	16:15	0	0	0	0	0
16:15	16:30	0	0	0	0	0
16:30	16:45	0	1	0	0	1
16:45	17:00	0	0	0	0	0
17:00	17:15	0	0	0	0	0
17:15	17:30	0	0	0	0	0
17:30	17:45	0	0	0	0	0
17:45	18:00	0	0	0	0	0
Total		8	2	0	0	10

Transportation Services - Traffic Services

Turning Movement Count - Study Results

KLONDIKE RD @ MARCH RD


Survey Date: Wednesday, March 04, 2020

WO No: 39371

Start Time: 07:00

Device: Miovision

Full Study Diagram

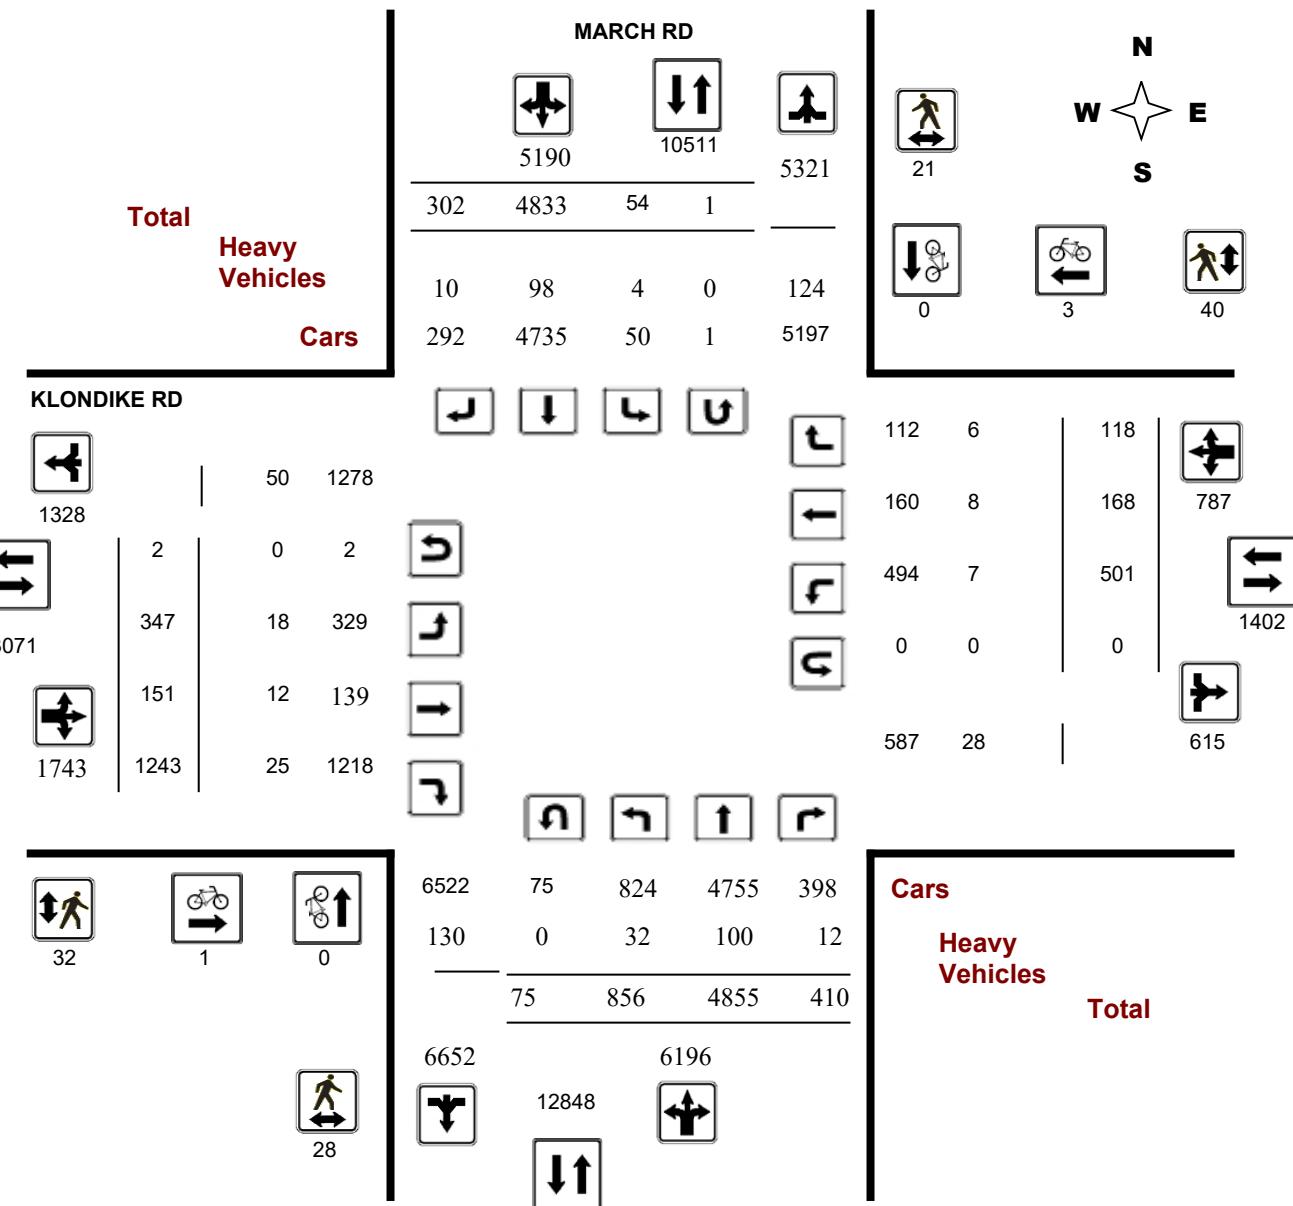

5472186 - WED JAN 22, 2020 - 8HRS - LORETTA



Transportation Services - Traffic Services

Turning Movement Count - Study Results

KLONDIKE RD @ MARCH RD


Survey Date: Wednesday, March 04, 2020

WO No: 39371

Start Time: 07:00

Device: Miovision

Full Study Peak Hour Diagram

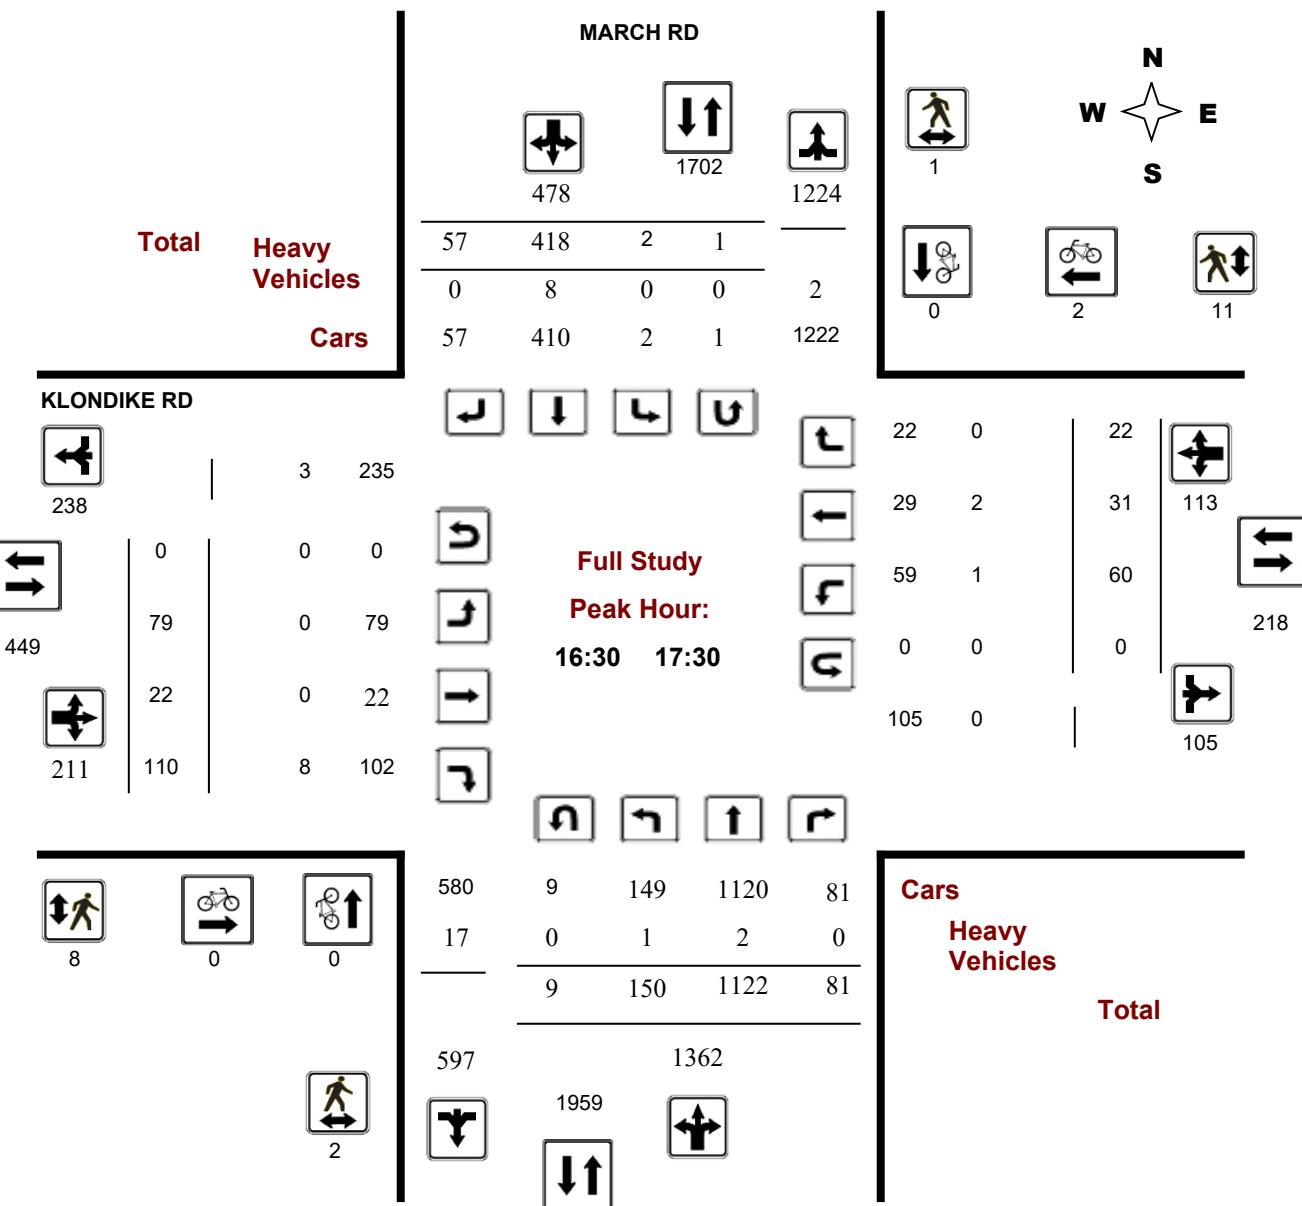

5472186 - WED JAN 22, 2020 - 8HRS - LORETTA



Transportation Services - Traffic Services

Turning Movement Count - Peak Hour Diagram


KLONDIKE RD @ MARCH RD

Survey Date: Wednesday, March 04, 2020

Start Time: 07:00

WO No: 39371

Device: Miovision

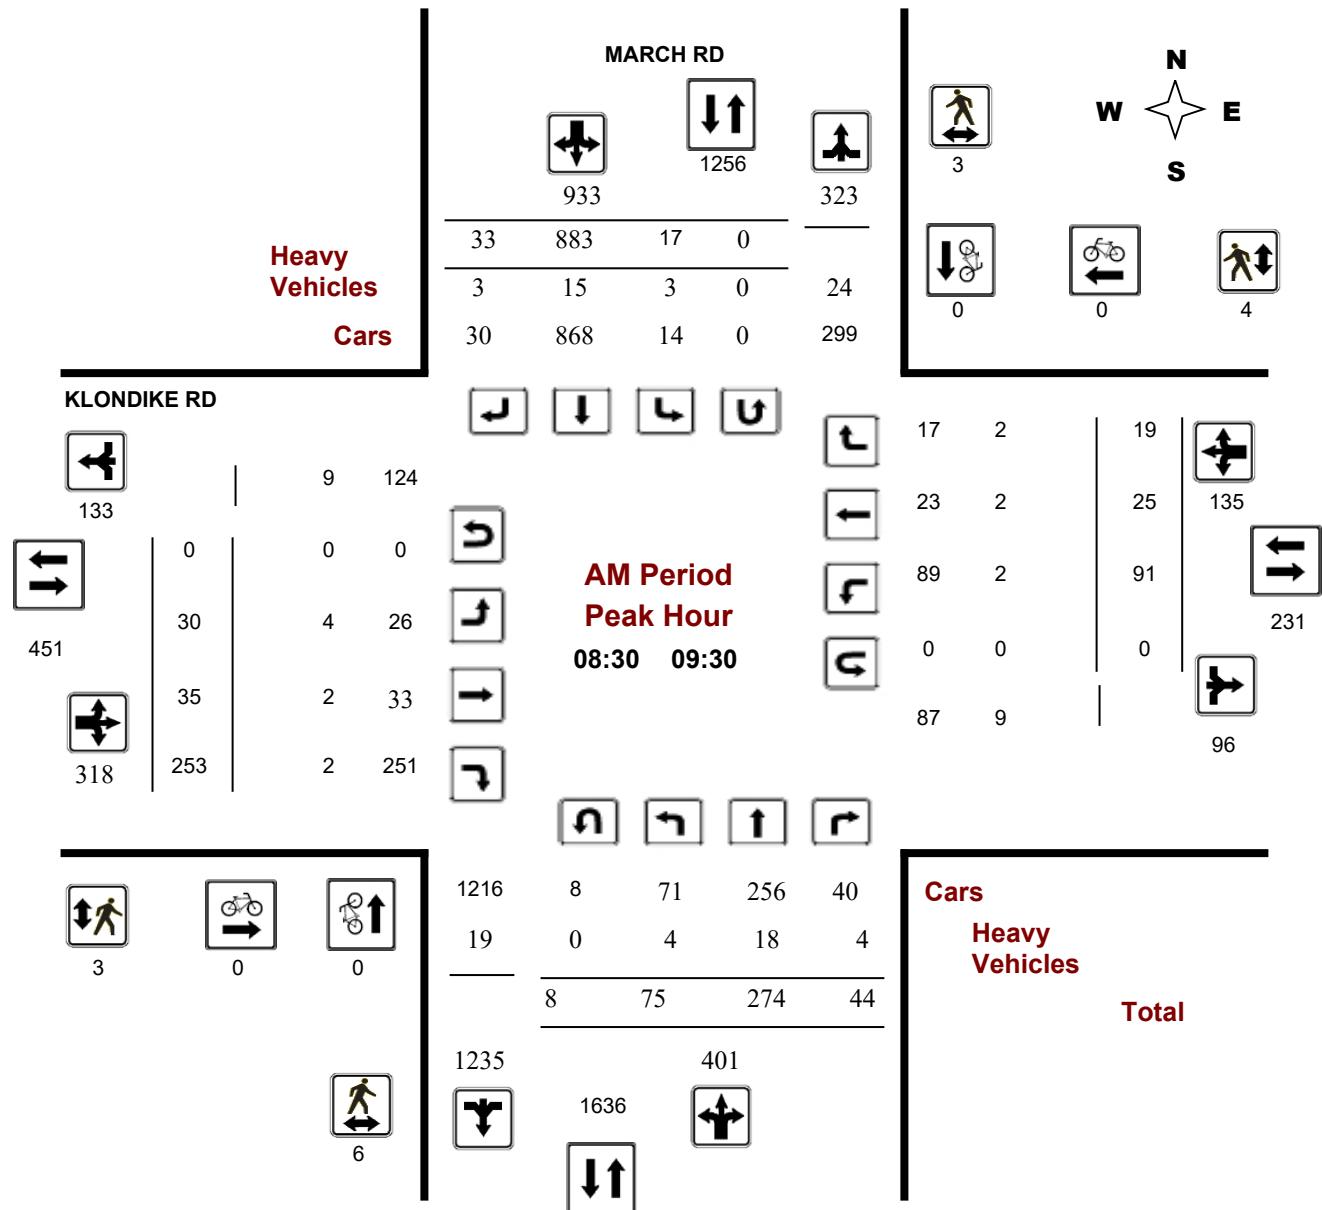



Transportation Services - Traffic Services

Turning Movement Count - Peak Hour Diagram


KLONDIKE RD @ MARCH RD

Survey Date: Wednesday, March 04, 2020

Start Time: 07:00

WO No: 39371

Device: Miovision

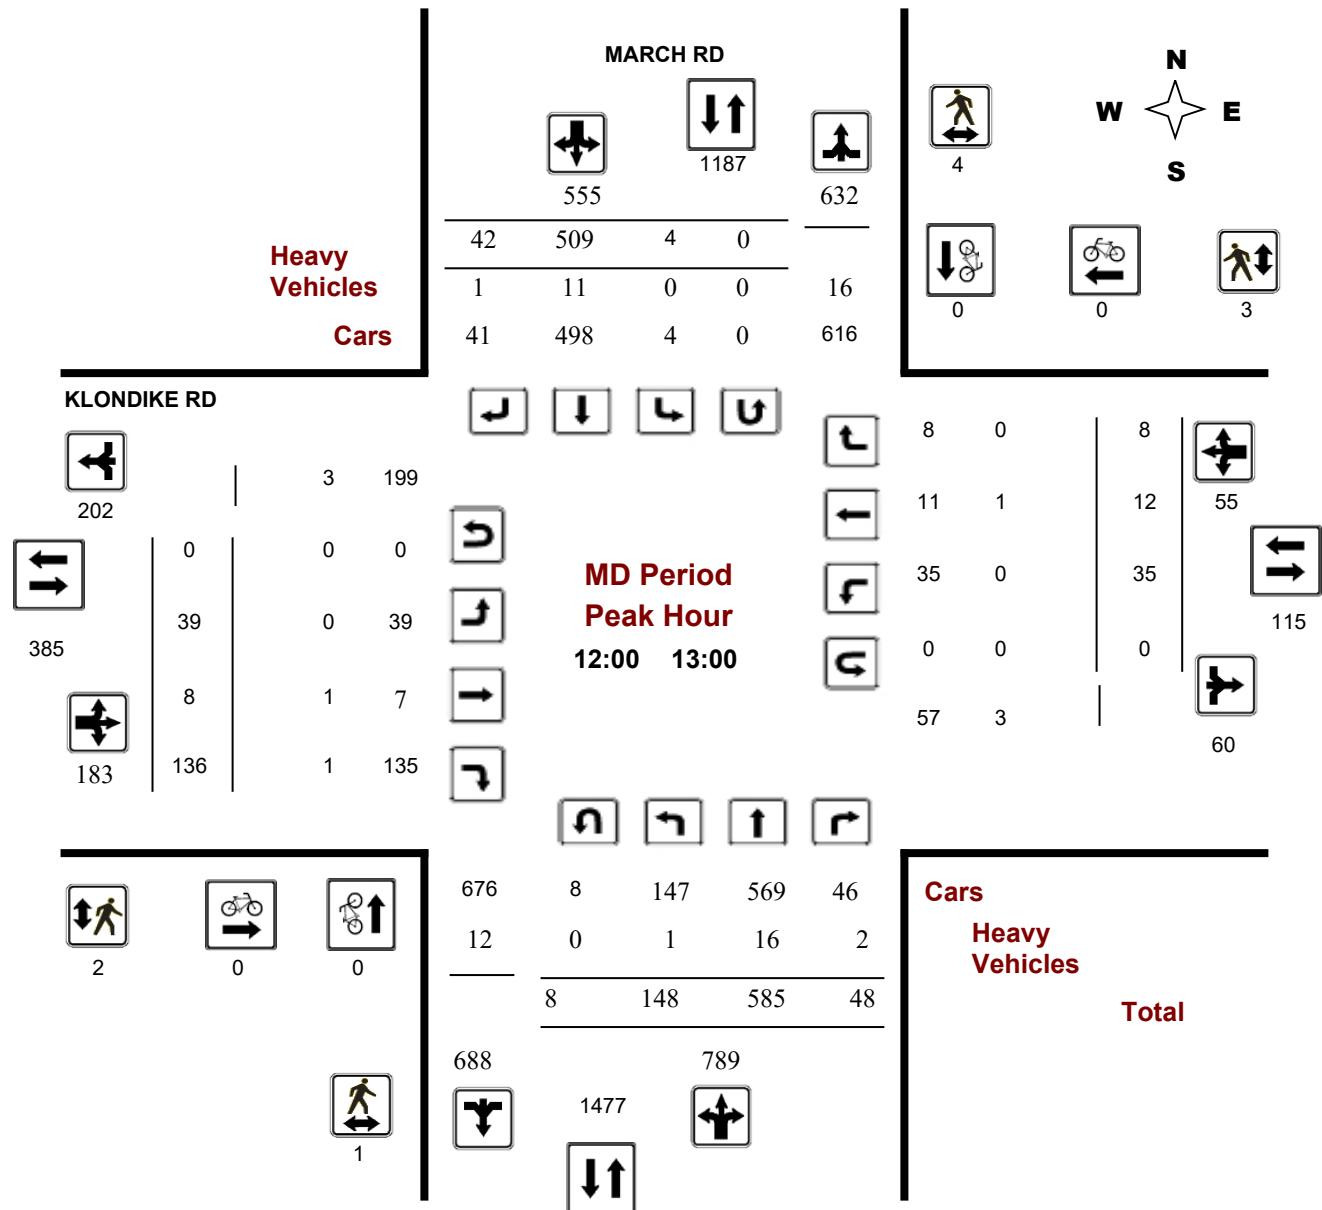



Transportation Services - Traffic Services

Turning Movement Count - Peak Hour Diagram


KLONDIKE RD @ MARCH RD

Survey Date: Wednesday, March 04, 2020

Start Time: 07:00

WO No: 39371

Device: Miovision

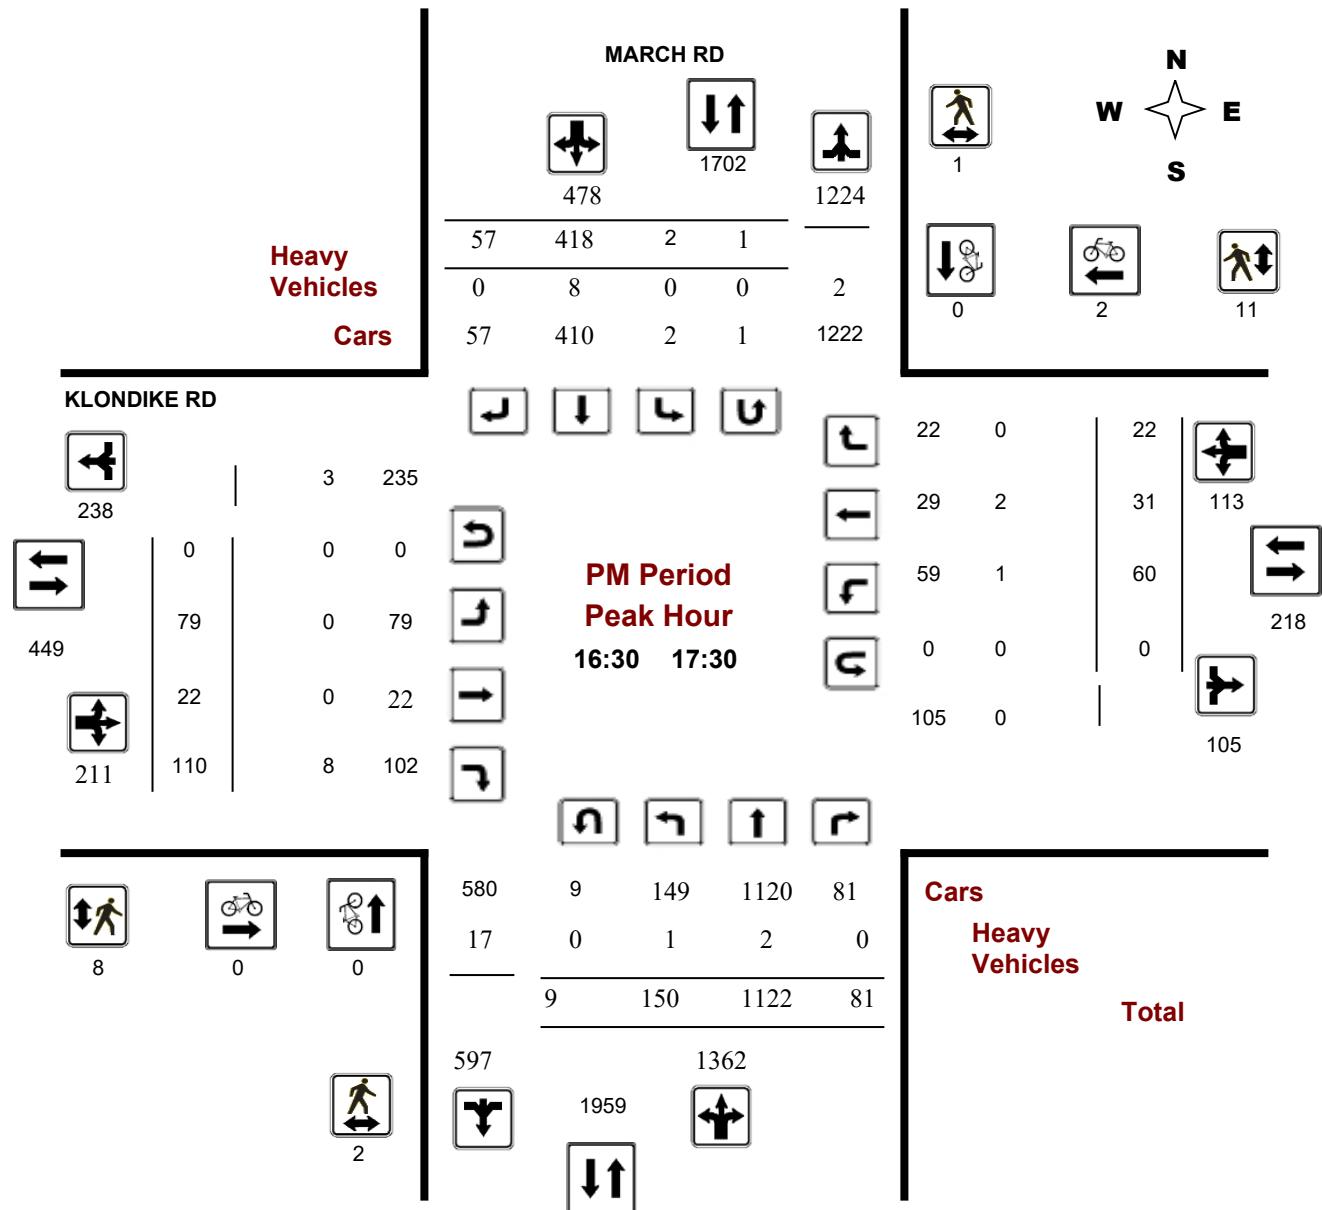

Comments 5472186 - WED JAN 22, 2020 - 8HRS - LORETTA



Transportation Services - Traffic Services

Turning Movement Count - Study Results

KLONDIKE RD @ MARCH RD

Survey Date: Wednesday, March 04, 2020

WO No:

39371

Start Time: 07:00

Device:

Miovision

Full Study Summary (8 HR Standard)

Survey Date: Wednesday, March 04, 2020

Total Observed U-Turns

AADT Factor

Northbound:	75	Southbound:	1	
Eastbound:	2	Westbound:	0	

1.00

MARCH RD

KLONDIKE RD

Period	Northbound			Southbound			SB TOT	STR TOT	Eastbound			Westbound			WB TOT	STR TOT	Grand Total		
	LT	ST	RT	LT	ST	RT			LT	ST	RT	EB TOT	LT	ST	RT				
07:00 08:00	42	268	31	341	6	966	16	988	1329	11	12	217	240	79	9	10	98	338	1667
08:00 09:00	65	232	38	335	8	954	31	993	1328	22	27	221	270	49	21	8	78	348	1676
09:00 10:00	70	320	40	430	13	720	27	760	1190	27	18	211	256	100	18	15	133	389	1579
11:30 12:30	129	567	42	738	3	485	40	528	1266	32	10	125	167	43	13	4	60	227	1493
12:30 13:30	134	473	42	649	1	492	42	535	1184	50	12	159	221	32	13	10	55	276	1460
15:00 16:00	126	804	58	988	11	391	34	436	1424	62	28	100	190	62	26	32	120	310	1734
16:00 17:00	152	1123	74	1349	5	383	55	443	1792	65	20	112	197	76	36	24	136	333	2125
17:00 18:00	138	1068	85	1291	7	442	57	506	1797	78	24	98	200	60	32	15	107	307	2104
Sub Total	856	4855	410	6121	54	4833	302	5189	11310	347	151	1243	1741	501	168	118	787	2528	13838
U Turns				75				1	76				2			0	2	78	
Total	856	4855	410	6196	54	4833	302	5190	11386	347	151	1243	1743	501	168	118	787	2530	13916

Note: These values are calculated by multiplying the totals by the appropriate expansion factor. **1.39**

AVG 12Hr 1190 6748 570 **8612** 75 6718 420 7214 **15827** 482 210 1728 **2423** 696 234 164 **1094** 3517 **19343**

Note: These volumes are calculated by multiplying the Equivalent 12 hr. totals by the AADT factor. **1**

AVG 24Hr 1469 8332 704 **10633** 93 8294 518 8907 **19540** 595 259 2133 **2991** 860 288 202 **1351** 4342 **23882**

Note: These volumes are calculated by multiplying the Average Daily 12 hr. totals by 12 to 24 expansion factor. **1.31**

Note: U-Turns provided for approach totals. Refer to 'U-Turn' Report for specific breakdown.



Transportation Services - Traffic Services

Turning Movement Count - Study Results

KLONDIKE RD @ MARCH RD

Survey Date: Wednesday, March 04, 2020

WO No: 39371

Start Time: 07:00

Device: Miovision

Full Study 15 Minute Increments

MARCH RD

KLONDIKE RD

Time Period	Northbound				Southbound				Eastbound				Westbound				Grand Total			
	LT	ST	RT	N TOT	LT	ST	RT	S TOT	STR TOT	LT	ST	RT	E TOT	LT	ST	RT	W TOT	STR TOT		
07:00	07:15	3	66	8	84	3	229	6	238	13	2	0	59	61	21	1	2	24	13	407
07:15	07:30	15	76	5	99	0	276	3	279	16	6	5	53	64	17	1	3	21	16	463
07:30	07:45	9	68	9	89	0	225	3	228	6	1	2	46	49	21	4	5	30	6	396
07:45	08:00	15	58	9	84	3	236	4	243	11	2	5	59	66	20	3	0	23	11	416
08:00	08:15	14	60	7	84	0	265	7	272	14	2	4	45	51	21	5	1	27	14	434
08:15	08:30	13	52	9	79	3	230	5	238	7	4	5	51	60	8	4	2	14	7	391
08:30	08:45	23	73	10	110	3	223	8	234	8	3	7	62	72	13	1	0	14	8	430
08:45	09:00	15	47	12	74	2	236	11	249	11	13	11	63	87	7	11	5	23	11	433
09:00	09:15	19	72	14	106	10	235	7	252	18	9	12	69	90	31	6	10	47	18	495
09:15	09:30	18	82	8	111	2	189	7	198	10	5	5	59	69	40	7	4	51	10	429
09:30	09:45	20	85	8	115	0	169	5	174	6	3	1	42	46	12	2	1	15	6	350
09:45	10:00	13	81	10	106	1	127	8	136	2	10	0	41	51	17	3	0	20	2	313
11:30	11:45	23	123	9	158	0	129	11	140	9	8	3	26	37	10	4	0	14	9	349
11:45	12:00	23	128	7	160	0	108	15	123	8	9	1	35	45	12	4	2	18	8	346
12:00	12:15	51	179	16	251	1	131	2	134	6	8	2	28	38	11	2	0	13	6	436
12:15	12:30	32	137	10	180	2	117	12	131	8	7	4	36	47	10	3	2	15	8	373
12:30	12:45	38	143	7	189	0	128	12	140	7	11	1	38	50	11	4	4	19	7	398
12:45	13:00	27	126	15	169	1	133	16	150	10	13	1	34	48	3	3	2	8	10	375
13:00	13:15	28	108	8	146	0	126	6	132	5	10	3	53	66	8	2	2	12	5	356
13:15	13:30	41	96	12	151	0	105	8	113	7	16	7	34	57	10	4	2	16	7	337
15:00	15:15	19	164	13	197	2	101	9	112	5	17	3	18	40	10	5	3	18	5	367
15:15	15:30	32	209	15	257	3	89	9	101	13	15	8	23	46	13	9	3	25	13	429
15:30	15:45	37	201	19	257	5	84	5	94	13	14	10	27	51	15	4	5	24	13	426
15:45	16:00	38	230	11	282	1	117	11	129	7	16	7	32	55	24	8	21	53	7	519
16:00	16:15	38	262	21	323	3	96	11	110	7	14	4	31	49	31	11	4	46	7	528
16:15	16:30	39	307	12	361	1	100	10	111	7	16	5	25	46	13	8	6	27	7	545
16:30	16:45	38	283	24	346	0	87	18	106	2	18	5	24	47	15	14	7	36	2	535
16:45	17:00	37	271	17	327	1	100	16	117	4	17	6	32	55	17	3	7	27	4	526
17:00	17:15	26	279	19	325	0	109	8	117	2	21	5	21	47	13	7	2	22	2	511
17:15	17:30	49	289	21	364	1	122	15	138	3	23	6	33	62	15	7	6	28	3	592
17:30	17:45	36	266	22	324	2	102	17	121	10	13	5	21	39	19	8	3	30	10	514
17:45	18:00	27	234	23	288	4	109	17	130	1	21	8	23	52	13	10	4	27	1	497
Total:		856	4855	410	6196	54	4833	302	5190	256	347	151	1243	1743	501	168	118	787	256	13,916

Note: U-Turns are included in Totals.



Transportation Services - Traffic Services

Turning Movement Count - Study Results

KLONDIKE RD @ MARCH RD

Survey Date: Wednesday, March 04, 2020

WO No:

39371

Start Time: 07:00

Device:

Miovision

Full Study Cyclist Volume

MARCH RD

KLONDIKE RD

Time Period	Northbound	Southbound	Street Total	Eastbound	Westbound	Street Total	Grand Total
07:00	07:15	0	0	0	0	0	0
07:15	07:30	0	0	0	0	0	0
07:30	07:45	0	0	0	0	0	0
07:45	08:00	0	0	0	0	0	0
08:00	08:15	0	0	0	0	0	0
08:15	08:30	0	0	0	0	0	0
08:30	08:45	0	0	0	0	0	0
08:45	09:00	0	0	0	0	0	0
09:00	09:15	0	0	0	0	0	0
09:15	09:30	0	0	0	0	0	0
09:30	09:45	0	0	0	0	0	0
09:45	10:00	0	0	0	0	0	0
11:30	11:45	0	0	0	0	0	0
11:45	12:00	0	0	0	0	0	0
12:00	12:15	0	0	0	0	0	0
12:15	12:30	0	0	0	0	0	0
12:30	12:45	0	0	0	0	0	0
12:45	13:00	0	0	0	0	0	0
13:00	13:15	0	0	0	0	0	0
13:15	13:30	0	0	0	0	0	0
15:00	15:15	0	0	0	0	0	0
15:15	15:30	0	0	0	1	1	1
15:30	15:45	0	0	0	0	0	0
15:45	16:00	0	0	1	0	1	1
16:00	16:15	0	0	0	0	0	0
16:15	16:30	0	0	0	0	0	0
16:30	16:45	0	0	0	1	1	1
16:45	17:00	0	0	0	0	0	0
17:00	17:15	0	0	0	0	0	0
17:15	17:30	0	0	0	1	1	1
17:30	17:45	0	0	0	0	0	0
17:45	18:00	0	0	0	0	0	0
Total		0	0	0	1	3	4



Transportation Services - Traffic Services

Turning Movement Count - Study Results

KLONDIKE RD @ MARCH RD

Survey Date: Wednesday, March 04, 2020

WO No:

39371

Start Time: 07:00

Device:

Miovision

Full Study Pedestrian Volume

MARCH RD

KLONDIKE RD

Time Period	NB Approach (E or W Crossing)	SB Approach (E or W Crossing)	Total	EB Approach (N or S Crossing)	WB Approach (N or S Crossing)	Total	Grand Total
07:00 07:15	1	0	1	0	1	1	2
07:15 07:30	1	0	1	0	2	2	3
07:30 07:45	0	0	0	0	0	0	0
07:45 08:00	0	0	0	0	0	0	0
08:00 08:15	3	0	3	0	0	0	3
08:15 08:30	1	0	1	0	0	0	1
08:30 08:45	0	0	0	1	0	1	1
08:45 09:00	3	0	3	1	2	3	6
09:00 09:15	1	2	3	1	0	1	4
09:15 09:30	2	1	3	0	2	2	5
09:30 09:45	0	2	2	1	0	1	3
09:45 10:00	0	0	0	1	0	1	1
11:30 11:45	0	1	1	0	0	0	1
11:45 12:00	1	2	3	3	0	3	6
12:00 12:15	0	0	0	0	1	1	1
12:15 12:30	1	1	2	0	1	1	3
12:30 12:45	0	1	1	1	1	2	3
12:45 13:00	0	2	2	1	0	1	3
13:00 13:15	1	0	1	1	3	4	5
13:15 13:30	0	0	0	0	0	0	0
15:00 15:15	2	1	3	2	4	6	9
15:15 15:30	2	3	5	2	1	3	8
15:30 15:45	1	1	2	1	2	3	5
15:45 16:00	2	0	2	0	1	1	3
16:00 16:15	2	2	4	1	1	2	6
16:15 16:30	0	1	1	0	1	1	2
16:30 16:45	0	0	0	1	2	3	3
16:45 17:00	1	1	2	2	1	3	5
17:00 17:15	1	0	1	2	5	7	8
17:15 17:30	0	0	0	3	3	6	6
17:30 17:45	1	0	1	3	6	9	10
17:45 18:00	1	0	1	4	0	4	5
Total	28	21	49	32	40	72	121

5472186 - WED JAN 22, 2020 - 8HRS - LORETTA



Transportation Services - Traffic Services

Turning Movement Count - Study Results

KLONDIKE RD @ MARCH RD

Survey Date: Wednesday, March 04, 2020

WO No:

39371

Start Time: 07:00

Device:

Miovision

Full Study Heavy Vehicles

MARCH RD

KLONDIKE RD

Time Period	Northbound			Southbound			Eastbound			Westbound			Grand Total					
	LT	ST	RT	N TOT	LT	ST	RT	S TOT	STR TOT	LT	ST	RT	E TOT	LT	ST	RT	W TOT	STR TOT
07:00	07:15	0	5	0	5	0	6	2	8	13	0	0	0	0	0	0	0	0
07:15	07:30	2	10	0	12	0	3	1	4	16	3	2	0	5	0	0	2	7
07:30	07:45	1	2	0	3	0	3	0	3	6	0	1	0	1	0	0	0	1
07:45	08:00	3	3	1	7	0	4	0	4	11	0	0	0	0	0	0	0	0
08:00	08:15	3	7	0	10	0	4	0	4	14	1	1	0	2	0	0	0	2
08:15	08:30	2	2	1	5	0	2	0	2	7	0	0	0	0	0	0	0	0
08:30	08:45	1	4	0	5	0	2	1	3	8	1	0	2	3	0	0	0	3
08:45	09:00	2	1	2	5	0	4	2	6	11	1	1	0	2	0	0	0	2
09:00	09:15	1	6	2	9	2	7	0	9	18	2	0	0	2	1	1	2	6
09:15	09:30	0	7	0	7	1	2	0	3	10	0	1	0	1	1	1	0	2
09:30	09:45	1	1	0	2	0	4	0	4	6	0	0	0	0	0	0	0	0
09:45	10:00	0	1	0	1	0	1	0	1	2	1	0	0	1	0	0	0	1
11:30	11:45	0	7	0	7	0	1	1	2	9	1	0	1	2	0	0	0	2
11:45	12:00	0	3	0	3	0	4	1	5	8	1	0	0	1	0	0	0	1
12:00	12:15	1	0	2	3	0	3	0	3	6	0	0	0	0	0	0	0	0
12:15	12:30	0	4	0	4	0	4	0	4	8	0	1	0	1	0	0	0	1
12:30	12:45	0	5	0	5	0	2	0	2	7	0	0	1	1	0	1	0	2
12:45	13:00	0	7	0	7	0	2	1	3	10	0	0	0	0	0	0	0	10
13:00	13:15	1	1	0	2	0	3	0	3	5	0	0	2	2	0	0	0	2
13:15	13:30	2	3	0	5	0	2	0	2	7	0	1	1	2	0	0	0	2
15:00	15:15	2	0	0	2	0	3	0	3	5	0	0	2	2	0	1	0	3
15:15	15:30	3	4	1	8	0	5	0	5	13	2	0	1	3	0	0	0	3
15:30	15:45	1	7	0	8	0	5	0	5	13	0	1	2	3	0	0	0	3
15:45	16:00	1	1	2	4	1	2	0	3	7	2	3	1	6	0	1	2	9
16:00	16:15	1	2	0	3	0	3	1	4	7	1	0	1	2	4	1	0	5
16:15	16:30	3	1	1	5	0	2	0	2	7	1	0	1	2	0	0	0	2
16:30	16:45	0	0	0	0	0	2	0	2	2	0	0	3	3	0	1	0	4
16:45	17:00	0	0	0	0	0	4	0	4	4	0	0	4	4	0	0	0	4
17:00	17:15	0	1	0	1	0	1	0	1	2	0	0	0	0	1	0	0	1
17:15	17:30	1	1	0	2	0	1	0	1	3	0	0	1	1	0	1	0	2
17:30	17:45	0	4	0	4	0	6	0	6	10	1	0	1	2	0	0	0	2
17:45	18:00	0	0	0	0	0	1	0	1	1	0	0	1	1	0	0	0	1
Total:	None	32	100	12	144	4	98	10	112	256	18	12	25	55	7	8	6	21
																		332



Transportation Services - Traffic Services

Turning Movement Count - Study Results

KLONDIKE RD @ MARCH RD

Survey Date: Wednesday, March 04, 2020

WO No: 39371

Start Time: 07:00

Device: Miovision

Full Study 15 Minute U-Turn Total

MARCH RD

KLONDIKE RD

Time Period		Northbound U-Turn Total	Southbound U-Turn Total	Eastbound U-Turn Total	Westbound U-Turn Total	Total
07:00	07:15	7	0	0	0	7
07:15	07:30	3	0	0	0	3
07:30	07:45	3	0	0	0	3
07:45	08:00	2	0	0	0	2
08:00	08:15	3	0	0	0	3
08:15	08:30	5	0	0	0	5
08:30	08:45	4	0	0	0	4
08:45	09:00	0	0	0	0	0
09:00	09:15	1	0	0	0	1
09:15	09:30	3	0	0	0	3
09:30	09:45	2	0	0	0	2
09:45	10:00	2	0	0	0	2
11:30	11:45	3	0	0	0	3
11:45	12:00	2	0	0	0	2
12:00	12:15	5	0	0	0	5
12:15	12:30	1	0	0	0	1
12:30	12:45	1	0	0	0	1
12:45	13:00	1	0	0	0	1
13:00	13:15	2	0	0	0	2
13:15	13:30	2	0	0	0	2
15:00	15:15	1	0	2	0	3
15:15	15:30	1	0	0	0	1
15:30	15:45	0	0	0	0	0
15:45	16:00	3	0	0	0	3
16:00	16:15	2	0	0	0	2
16:15	16:30	3	0	0	0	3
16:30	16:45	1	1	0	0	2
16:45	17:00	2	0	0	0	2
17:00	17:15	1	0	0	0	1
17:15	17:30	5	0	0	0	5
17:30	17:45	0	0	0	0	0
17:45	18:00	4	0	0	0	4
Total		75	1	2	0	78

Traffic Signal Timing

City of Ottawa, Transportation Services Department

Traffic Signal Operations Unit


Intersection:	Main: March	Side: Maxwell Bridge
Controller:	MS-3200	TSD: 5963
Author:	Sarah Saade	Date: 25-Jul-2018

Existing Timing Plans[†]


Plan	Ped Minimum Time								
	AM Peak 1	Off Peak 2	PM Peak 3	Night 4	AM Peak 11	PM Peak 13	Walk	DW	A+R
Cycle	110	95	120	95	120	120			
Offset	90	11	50	X	99	50			
NB Thru	56	56	66	56	52	55	7	21	4.6+2.0
SB Thru	56	56	66	56	52	55	7	21	4.6+2.0
EB Thru	39	39	39	39	48	45	7	25	3.3+3.3
WB Thru	39	39	39	39	48	45	7	25	3.3+3.3
NB Left	15	-	15	-	20	20	-	-	4.6+1.8
SB Left	15	-	15	-	20	20	-	-	4.6+1.8

Phasing Sequence[‡]

Plan: 1,3,11,13

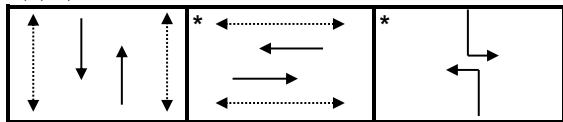

Plan: 2,4

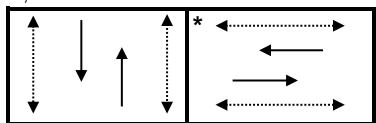

Schedule

Weekday		Weekend	
Time	Plan	Time	Plan
0:10	4	0:10	4
6:20	1	8:00	2
7:30	11	22:30	4
9:50	2		
15:00	3		
16:30	13		
18:30	3		
19:00	2		
23:00	4		

Notes

†: Time for each direction includes amber and all red intervals

‡: Start of first phase should be used as reference point for offset

Asterisk (*) Indicates actuated phase

(fp): Fully Protected Left Turn

↔ Pedestrian signal

Cost is \$56.50 (\$50 + HST)

Traffic Signal Timing

City of Ottawa, Transportation Services Department

Traffic Signal Operations Unit


Intersection:	Main: March	Side: Klondike
Controller:	MS-3200	TSD: 6742
Author:	Matthew Anderson	Date: 08-May-2020

Existing Timing Plans[†]


Plan	Ped Minimum Time							
	AM Peak	Off Peak	PM Peak	Night	PM Heavy	Walk	DW	A+R
Cycle	130	110	120	110	130			
Offset	64	16	8	X	20			
NB Thru	58	49	43	47	51	7	19	4.6+1.8
SB Thru	58	49	43	47	51	7	19	4.6+1.8
EB Left	12	-	12	-	12	-	-	3.3+3.3
EB Thru	57	45	57	46	57	7	30	3.3+3.8
WB Thru	45	45	45	46	45	7	30	3.3+3.8
NB Left (fp)	15	16	20	17	22	-	-	4.6+2.0
SB Left (fp)	15	16	20	17	22	-	-	4.6+2.0

Phasing Sequence[‡]

Plan: 1,2,4

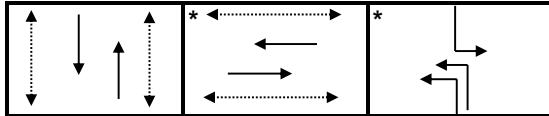

Plan: 3,13

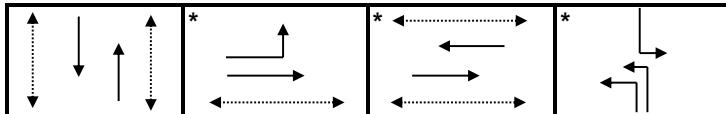

Schedule

Weekday		Weekend	
Time	Plan	Time	Plan
0:10	4	0:10	4
6:30	1	8:00	2
9:30	2	22:30	4
15:00	3		
16:30	13		
18:00	3		
18:30	2		
23:00	4		

Notes

†: Time for each direction includes amber and all red intervals

‡: Start of first phase should be used as reference point for offset

Asterisk (*) Indicates actuated phase

(fp): Fully Protected Left Turn

↔ Pedestrian signal

Cost is \$58.78 (\$52.02 + HST)

Appendix C

Collision Data

Accident Date	Accident Year	Accident Time	Location	Environment Condition	Light	Traffic Control	Classification Of Accident	Initial Impact Type	Road Surface Condition
2014-07-29	2014	19:40	HALTON TERR/MAXWELL BRIDGE RD @ MARCH RD	01 - Clear	01 - Daylight	01 - Traffic signal	03 - P.D. only	07 - SMV other	01 - Dry
2015-12-13	2015	17:23	HALTON TERR/MAXWELL BRIDGE RD @ MARCH RD	01 - Clear	07 - Dark	01 - Traffic signal	03 - P.D. only	04 - Sideswipe	01 - Dry
2016-09-30	2016	19:32	HALTON TERR/MAXWELL BRIDGE RD @ MARCH RD	01 - Clear	05 - Dusk	01 - Traffic signal	02 - Non-fatal injury	05 - Turning movement	01 - Dry
2016-11-24	2016	6:47	HALTON TERR/MAXWELL BRIDGE RD @ MARCH RD	03 - Snow	03 - Dawn	01 - Traffic signal	02 - Non-fatal injury	05 - Turning movement	06 - Ice
2016-02-28	2016	19:57	HALTON TERR/MAXWELL BRIDGE RD @ MARCH RD	04 - Freezing Rain	07 - Dark	01 - Traffic signal	03 - P.D. only	05 - Turning movement	06 - Ice
2016-12-23	2016	10:59	HALTON TERR/MAXWELL BRIDGE RD @ MARCH RD	01 - Clear	01 - Daylight	01 - Traffic signal	03 - P.D. only	05 - Turning movement	02 - Wet
2016-12-05	2016	8:23	HALTON TERR/MAXWELL BRIDGE RD @ MARCH RD	03 - Snow	01 - Daylight	01 - Traffic signal	03 - P.D. only	04 - Sideswipe	03 - Loose snow
2017-06-22	2017	10:59	HALTON TERR/MAXWELL BRIDGE RD @ MARCH RD	01 - Clear	01 - Daylight	01 - Traffic signal	03 - P.D. only	99 - Other	01 - Dry
2017-11-28	2017	22:03	HALTON TERR/MAXWELL BRIDGE RD @ MARCH RD	02 - Rain	07 - Dark	01 - Traffic signal	02 - Non-fatal injury	07 - SMV other	02 - Wet
2017-04-19	2017	14:14	HALTON TERR/MAXWELL BRIDGE RD @ MARCH RD	02 - Rain	01 - Daylight	01 - Traffic signal	02 - Non-fatal injury	02 - Angle	02 - Wet
2018-11-15	2018	17:20	HALTON TERR/MAXWELL BRIDGE RD @ MARCH RD (0011852)	01 - Clear	07 - Dark	01 - Traffic signal	03 - P.D. only	04 - Sideswipe	01 - Dry
2018-12-05	2018	18:26	HALTON TERR/MAXWELL BRIDGE RD @ MARCH RD (0011852)	03 - Snow	07 - Dark	01 - Traffic signal	03 - P.D. only	05 - Turning movement	03 - Loose snow

Accident Date	Accident Year	Accident Time	Location	Environment Condition	Light	Traffic Control	Classification Of Accident	Initial Impact Type	Road Surface Condition
2015-10-16	2015	18:19	250 N OF KLONDIKE RD @ MARCH RD	01 - Clear	05 - Dusk	01 - Traffic signal	03 - P.D. only	03 - Rear end	01 - Dry

Accident Date	Accident Year	Accident Time	Location	Environment Condition	Light	Traffic Control	Classification Of Accident	Initial Impact Type	Road Surface Condition
2016-01-18	2016	12:14	HALTON TER btwn Continuation of HALTON TER & OLD CARP RD	01 - Clear	01 - Daylight	10 - No control	03 - P.D. only	04 - Sideswipe	04 - Slush
2016-01-18	2016	13:16	HALTON TER btwn Continuation of HALTON TER & OLD CARP RD	01 - Clear	01 - Daylight	10 - No control	03 - P.D. only	03 - Rear end	04 - Slush

Accident Date	Accident Year	Accident Time	Location	Environment Condition	Light	Traffic Control	Classification Of Accident	Initial Impact Type	Road Surface Condition
2014-05-01	2014	20:55	MARCH RD btwn HALTON TERR/MAXWELL BRIDGE RD & KLONDIKE RD	01 - Clear	07 - Dark	10 - No control	03 - P.D. only	07 - SMV other	01 - Dry
2014-05-20	2014	1:30	MARCH RD btwn HALTON TERR/MAXWELL BRIDGE RD & KLONDIKE RD	01 - Clear	07 - Dark	10 - No control	03 - P.D. only	07 - SMV other	01 - Dry
2014-06-23	2014	0:02	MARCH RD btwn HALTON TERR/MAXWELL BRIDGE RD & KLONDIKE RD	01 - Clear	07 - Dark	10 - No control	03 - P.D. only	07 - SMV other	01 - Dry
2014-11-11	2014	17:44	MARCH RD btwn HALTON TERR/MAXWELL BRIDGE RD & KLONDIKE RD	01 - Clear	07 - Dark	10 - No control	03 - P.D. only	07 - SMV other	01 - Dry
2014-12-18	2014	21:15	MARCH RD btwn HALTON TERR/MAXWELL BRIDGE RD & KLONDIKE RD	01 - Clear	07 - Dark	10 - No control	03 - P.D. only	07 - SMV other	01 - Dry
2015-06-20	2015	3:14	MARCH RD btwn HALTON TERR/MAXWELL BRIDGE RD & KLONDIKE RD	01 - Clear	07 - Dark	10 - No control	02 - Non-fatal injury	07 - SMV other	01 - Dry
2015-01-20	2015	9:37	MARCH RD btwn HALTON TERR/MAXWELL BRIDGE RD & KLONDIKE RD	01 - Clear	01 - Daylight	10 - No control	02 - Non-fatal injury	03 - Rear end	01 - Dry
2015-09-04	2015	21:33	MARCH RD btwn HALTON TERR/MAXWELL BRIDGE RD & KLONDIKE RD	01 - Clear	07 - Dark	10 - No control	03 - P.D. only	07 - SMV other	01 - Dry
2015-06-17	2015	13:38	MARCH RD btwn HALTON TERR/MAXWELL BRIDGE RD & KLONDIKE RD	01 - Clear	01 - Daylight	10 - No control	03 - P.D. only	04 - Sideswipe	01 - Dry
2015-09-02	2015	9:15	MARCH RD btwn HALTON TERR/MAXWELL BRIDGE RD & KLONDIKE RD	01 - Clear	01 - Daylight	10 - No control	03 - P.D. only	03 - Rear end	01 - Dry
2016-10-19	2016	9:08	MARCH RD btwn HALTON TERR/MAXWELL BRIDGE RD & KLONDIKE RD	01 - Clear	01 - Daylight	10 - No control	03 - P.D. only	03 - Rear end	01 - Dry
2016-05-06	2016	6:56	MARCH RD btwn HALTON TERR/MAXWELL BRIDGE RD & KLONDIKE RD	01 - Clear	01 - Daylight	10 - No control	03 - P.D. only	07 - SMV other	01 - Dry
2016-04-22	2016	13:53	MARCH RD btwn HALTON TERR/MAXWELL BRIDGE RD & KLONDIKE RD	01 - Clear	01 - Daylight	10 - No control	03 - P.D. only	07 - SMV other	02 - Wet
2016-04-24	2016	11:02	MARCH RD btwn HALTON TERR/MAXWELL BRIDGE RD & KLONDIKE RD	01 - Clear	01 - Daylight	10 - No control	03 - P.D. only	05 - Turning movement	01 - Dry
2016-12-11	2016	21:53	MARCH RD btwn HALTON TERR/MAXWELL BRIDGE RD & KLONDIKE RD	03 - Snow	07 - Dark	10 - No control	03 - P.D. only	07 - SMV other	03 - Loose snow
2018-01-24	2018	15:03	MARCH RD btwn HALTON TERR/MAXWELL BRIDGE RD & KLONDIKE RD (3ZA3CG)	03 - Snow	01 - Daylight	10 - No control	03 - P.D. only	04 - Sideswipe	05 - Packed snow

Accident Date	Accident Year	Accident Time	Location	Environment Condition	Light	Traffic Control	Classification Of Accident	Initial Impact Type	Road Surface Condition
2017-06-06	2017	14:15	MARCH RD btwn HALTON TERR/MAXWELL BRIDGE RD & MAXWELL RD	01 - Clear	01 - Daylight	10 - No control	03 - P.D. only	04 - Sideswipe	02 - Wet
2017-11-27	2017	17:36	MARCH RD btwn HALTON TERR/MAXWELL BRIDGE RD & MAXWELL RD	01 - Clear	07 - Dark	10 - No control	02 - Non-fatal injury	07 - SMV other	02 - Wet
2017-02-08	2017	4:35	MARCH RD btwn HALTON TERR/MAXWELL BRIDGE RD & MAXWELL RD	04 - Freezing Rain	07 - Dark	10 - No control	03 - P.D. only	07 - SMV other	04 - Slush
2017-04-06	2017	21:59	MARCH RD btwn HALTON TERR/MAXWELL BRIDGE RD & MAXWELL RD	02 - Rain	07 - Dark	10 - No control	03 - P.D. only	03 - Rear end	02 - Wet
2017-02-21	2017	11:58	MARCH RD btwn HALTON TERR/MAXWELL BRIDGE RD & MAXWELL RD	01 - Clear	01 - Daylight	10 - No control	02 - Non-fatal injury	04 - Sideswipe	01 - Dry
2018-02-01	2018	17:05	MARCH RD btwn HALTON TERR/MAXWELL BRIDGE RD & MAXWELL RD (3ZA2GD)	03 - Snow	07 - Dark	10 - No control	03 - P.D. only	03 - Rear end	03 - Loose snow
2018-12-05	2018	16:50	MARCH RD btwn HALTON TERR/MAXWELL BRIDGE RD & MAXWELL RD (3ZA2GD)	03 - Snow	07 - Dark	10 - No control	03 - P.D. only	07 - SMV other	03 - Loose snow

Accident Date	Accident Year	Accident Time	Location	Environment Condition	Light	Traffic Control	Classification Of Accident	Initial Impact Type	Road Surface Condition
2014-09-22	2014	20:59	MARCH RD btwn OLD CARP RD & KLONDIKE RD	01 - Clear	07 - Dark	10 - No control	02 - Non-fatal injury	03 - Rear end	01 - Dry
2014-02-13	2014	22:55	MARCH RD btwn OLD CARP RD & KLONDIKE RD	01 - Clear	07 - Dark	10 - No control	03 - P.D. only	07 - SMV other	01 - Dry
2014-05-09	2014	12:22	MARCH RD btwn OLD CARP RD & KLONDIKE RD	01 - Clear	01 - Daylight	10 - No control	03 - P.D. only	07 - SMV other	01 - Dry
2014-08-20	2014	21:27	MARCH RD btwn OLD CARP RD & KLONDIKE RD	01 - Clear	07 - Dark	10 - No control	03 - P.D. only	07 - SMV other	01 - Dry
2015-03-07	2015	12:22	MARCH RD btwn OLD CARP RD & KLONDIKE RD	01 - Clear	01 - Daylight	10 - No control	02 - Non-fatal injury	03 - Rear end	01 - Dry
2015-11-12	2015	20:22	MARCH RD btwn OLD CARP RD & KLONDIKE RD	02 - Rain	07 - Dark	10 - No control	03 - P.D. only	07 - SMV other	02 - Wet
2015-01-16	2015	16:33	MARCH RD btwn OLD CARP RD & KLONDIKE RD	01 - Clear	01 - Daylight	10 - No control	03 - P.D. only	03 - Rear end	01 - Dry

2014-05-13	2014	9:44	MAXWELL BRIDGE RD btwn MARCH RD & WINDANCE CRES	01 - Clear	01 - Daylight	10 - No control	03 - P.D. only	06 - SMV unattended vehicle	01 - Dry
------------	------	------	---	------------	---------------	-----------------	----------------	-----------------------------	----------

Accident Date	Accident Year	Accident Time	Location	Environment Condition	Light	Traffic Control	Classification Of Accident	Initial Impact Type	Road Surface Condition
2014-01-06	2014	7:19	KLONDIKE RD @ MARCH RD	02 - Rain	03 - Dawn	01 - Traffic signal	02 - Non-fatal injury	03 - Rear end	02 - Wet
2014-02-25	2014	9:15	KLONDIKE RD @ MARCH RD	01 - Clear	01 - Daylight	01 - Traffic signal	03 - P.D. only	03 - Rear end	01 - Dry
2014-03-27	2014	13:27	KLONDIKE RD @ MARCH RD	01 - Clear	01 - Daylight	01 - Traffic signal	03 - P.D. only	02 - Angle	02 - Wet
2014-09-26	2014	13:45	KLONDIKE RD @ MARCH RD	02 - Rain	01 - Daylight	01 - Traffic signal	03 - P.D. only	03 - Rear end	02 - Wet
2014-12-31	2014	14:20	KLONDIKE RD @ MARCH RD	01 - Clear	01 - Daylight	01 - Traffic signal	03 - P.D. only	03 - Rear end	01 - Dry
2015-01-07	2015	10:00	KLONDIKE RD @ MARCH RD	01 - Clear	01 - Daylight	01 - Traffic signal	03 - P.D. only	07 - SMV other	06 - Ice
2015-07-05	2015	12:12	KLONDIKE RD @ MARCH RD	01 - Clear	01 - Daylight	01 - Traffic signal	03 - P.D. only	03 - Rear end	01 - Dry
2015-12-23	2015	16:18	KLONDIKE RD @ MARCH RD	02 - Rain	05 - Dusk	01 - Traffic signal	03 - P.D. only	05 - Turning movement	02 - Wet
2015-12-08	2015	6:46	KLONDIKE RD @ MARCH RD	01 - Clear	07 - Dark	01 - Traffic signal	03 - P.D. only	03 - Rear end	01 - Dry
2016-01-05	2016	10:48	KLONDIKE RD @ MARCH RD	01 - Clear	01 - Daylight	01 - Traffic signal	03 - P.D. only	02 - Angle	01 - Dry
2016-02-16	2016	9:08	KLONDIKE RD @ MARCH RD	03 - Snow	01 - Daylight	01 - Traffic signal	03 - P.D. only	07 - SMV other	03 - Loose snow
2016-09-10	2016	14:55	KLONDIKE RD @ MARCH RD	01 - Clear	01 - Daylight	01 - Traffic signal	03 - P.D. only	02 - Angle	01 - Dry
2016-12-13	2016	10:43	KLONDIKE RD @ MARCH RD	03 - Snow	01 - Daylight	01 - Traffic signal	03 - P.D. only	03 - Rear end	06 - Ice
2016-12-17	2016	10:39	KLONDIKE RD @ MARCH RD	03 - Snow	01 - Daylight	01 - Traffic signal	03 - P.D. only	04 - Sideswipe	03 - Loose snow
2017-07-28	2017	12:51	KLONDIKE RD @ MARCH RD	01 - Clear	01 - Daylight	01 - Traffic signal	02 - Non-fatal injury	02 - Angle	01 - Dry
2017-07-23	2017	13:00	KLONDIKE RD @ MARCH RD	01 - Clear	01 - Daylight	01 - Traffic signal	03 - P.D. only	05 - Turning movement	01 - Dry
2017-08-17	2017	6:14	KLONDIKE RD @ MARCH RD	01 - Clear	03 - Dawn	01 - Traffic signal	02 - Non-fatal injury	07 - SMV other	01 - Dry
2017-10-28	2017	11:01	KLONDIKE RD @ MARCH RD	01 - Clear	01 - Daylight	01 - Traffic signal	03 - P.D. only	02 - Angle	01 - Dry
2017-11-26	2017	6:56	KLONDIKE RD @ MARCH RD	01 - Clear	03 - Dawn	01 - Traffic signal	02 - Non-fatal injury	07 - SMV other	06 - Ice
2017-12-07	2017	13:37	KLONDIKE RD @ MARCH RD	03 - Snow	01 - Daylight	01 - Traffic signal	03 - P.D. only	04 - Sideswipe	03 - Loose snow
2017-01-03	2017	21:32	KLONDIKE RD @ MARCH RD	03 - Snow	07 - Dark	01 - Traffic signal	03 - P.D. only	03 - Rear end	03 - Loose snow
2017-02-13	2017	10:42	KLONDIKE RD @ MARCH RD	03 - Snow	01 - Daylight	01 - Traffic signal	03 - P.D. only	02 - Angle	04 - Slush
2017-12-18	2017	22:19	KLONDIKE RD @ MARCH RD	03 - Snow	07 - Dark	01 - Traffic signal	03 - P.D. only	03 - Rear end	03 - Loose snow
2018-02-02	2018	20:40	KLONDIKE RD @ MARCH RD (0003096)	01 - Clear	07 - Dark	01 - Traffic signal	02 - Non-fatal injury	03 - Rear end	02 - Wet
2018-03-04	2018	16:30	KLONDIKE RD @ MARCH RD (0003096)	01 - Clear	01 - Daylight	01 - Traffic signal	03 - P.D. only	03 - Rear end	01 - Dry
2018-04-17	2018	9:39	KLONDIKE RD @ MARCH RD (0003096)	02 - Rain	01 - Daylight	01 - Traffic signal	03 - P.D. only	03 - Rear end	02 - Wet
2018-05-04	2018	18:25	KLONDIKE RD @ MARCH RD (0003096)	06 - Strong wind	01 - Daylight	01 - Traffic signal	03 - P.D. only	03 - Rear end	01 - Dry
2018-07-18	2018	8:07	KLONDIKE RD @ MARCH RD (0003096)	01 - Clear	01 - Daylight	01 - Traffic signal	03 - P.D. only	03 - Rear end	01 - Dry
2018-07-20	2018	6:26	KLONDIKE RD @ MARCH RD (0003096)	01 - Clear	01 - Daylight	01 - Traffic signal	03 - P.D. only	07 - SMV other	01 - Dry
2018-08-23	2018	12:45	KLONDIKE RD @ MARCH RD (0003096)	01 - Clear	01 - Daylight	01 - Traffic signal	03 - P.D. only	05 - Turning movement	01 - Dry
2018-08-29	2018	13:00	KLONDIKE RD @ MARCH RD (0003096)	01 - Clear	01 - Daylight	01 - Traffic signal	02 - Non-fatal injury	05 - Turning movement	01 - Dry
2018-09-28	2018	10:57	KLONDIKE RD @ MARCH RD (0003096)	01 - Clear	01 - Daylight	01 - Traffic signal	03 - P.D. only	04 - Sideswipe	01 - Dry

Accident Date	Accident Year	Accident Time	Location	Environment Condition	Light	Traffic Control	Classification Of Accident	Initial Impact Type	Road Surface Condition
2014-01-04	2014	13:35	MARCH RD btwn KLONDIKE RD & MORGAN'S GRANT WAY	01 - Clear	01 - Daylight	10 - No control	03 - P.D. only	03 - Rear end	02 - Wet
2015-09-22	2015	8:44	MARCH RD btwn KLONDIKE RD & MORGAN'S GRANT WAY	01 - Clear	01 - Daylight	10 - No control	02 - Non-fatal injury	07 - SMV other	01 - Dry
2016-02-11	2016	7:32	MARCH RD btwn KLONDIKE RD & MORGAN'S GRANT WAY	03 - Snow	01 - Daylight	10 - No control	02 - Non-fatal injury	04 - Sideswipe	04 - Slush
2017-07-28	2017	9:20	MARCH RD btwn KLONDIKE RD & MORGAN'S GRANT WAY	01 - Clear	01 - Daylight	10 - No control	02 - Non-fatal injury	03 - Rear end	01 - Dry
2017-09-07	2017	19:47	MARCH RD btwn KLONDIKE RD & MORGAN'S GRANT WAY	02 - Rain	07 - Dark	10 - No control	03 - P.D. only	07 - SMV other	02 - Wet
2018-12-03	2018	9:24	MARCH RD btwn KLONDIKE RD & MORGAN'S GRANT WAY (_3ZA2EW)	03 - Snow	01 - Daylight	10 - No control	03 - P.D. only	07 - SMV other	06 - Ice

LOCATION & GEOID	TOTAL_CYCLIST_COLLISIONS	TOTAL_PEDESTRIAN_COLLISIONS
HALTON TERR/MAXWELL BRIDGE RD @ MARCH RD (0011852)	0	1
250 N OF KLONDIKE RD @ MARCH RD (0013528)	0	0
HALTON TER btwn Continuation of HALTON TER & OLD CARP RD (49PV3H)	0	0
MARCH RD btwn HALTON TERR/MAXWELL BRIDGE RD & KLONDIKE RD (3ZA3CG)	0	0
MARCH RD btwn HALTON TERR/MAXWELL BRIDGE RD & MAXWELL RD (3ZA2GD)	0	0
MAXWELL BRIDGE RD btwn MARCH RD & WINDANCE CRES (5J15LI)	0	0
KLONDIKE RD @ MARCH RD	0	1
MARCH RD btwn KLONDIKE RD & MORGAN'S GRANT WAY	0	0

Appendix D

March Road Widening Scenarios

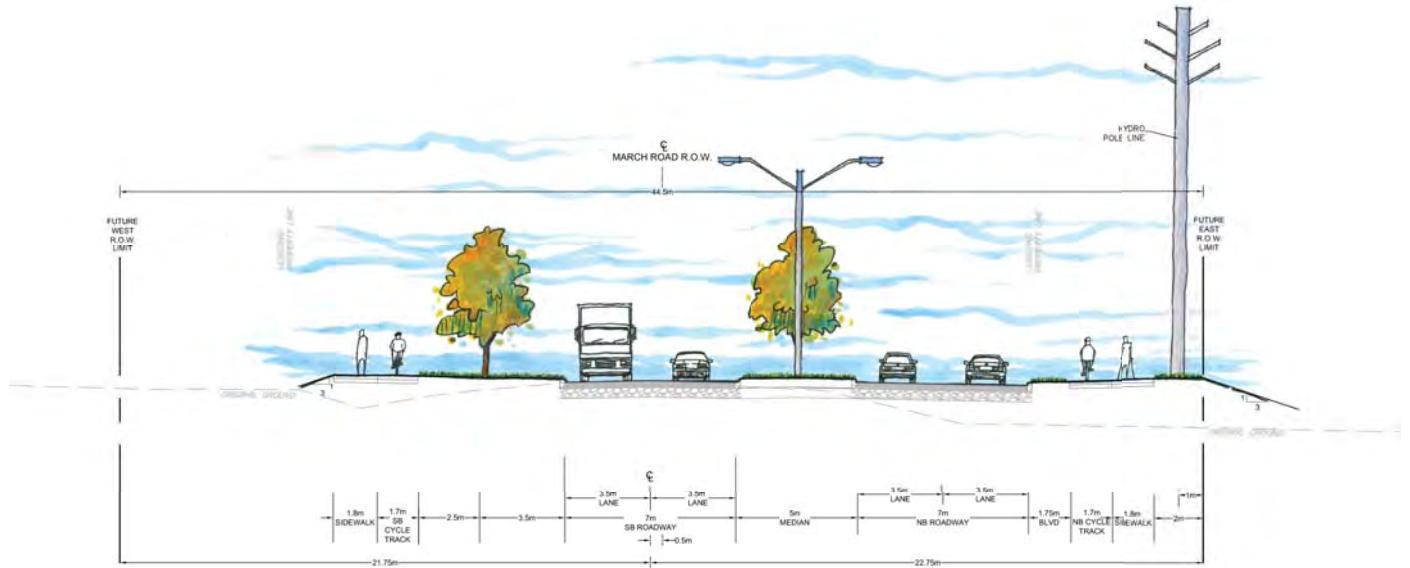


FIGURE 27 | Cross-Section for March Road - Interim

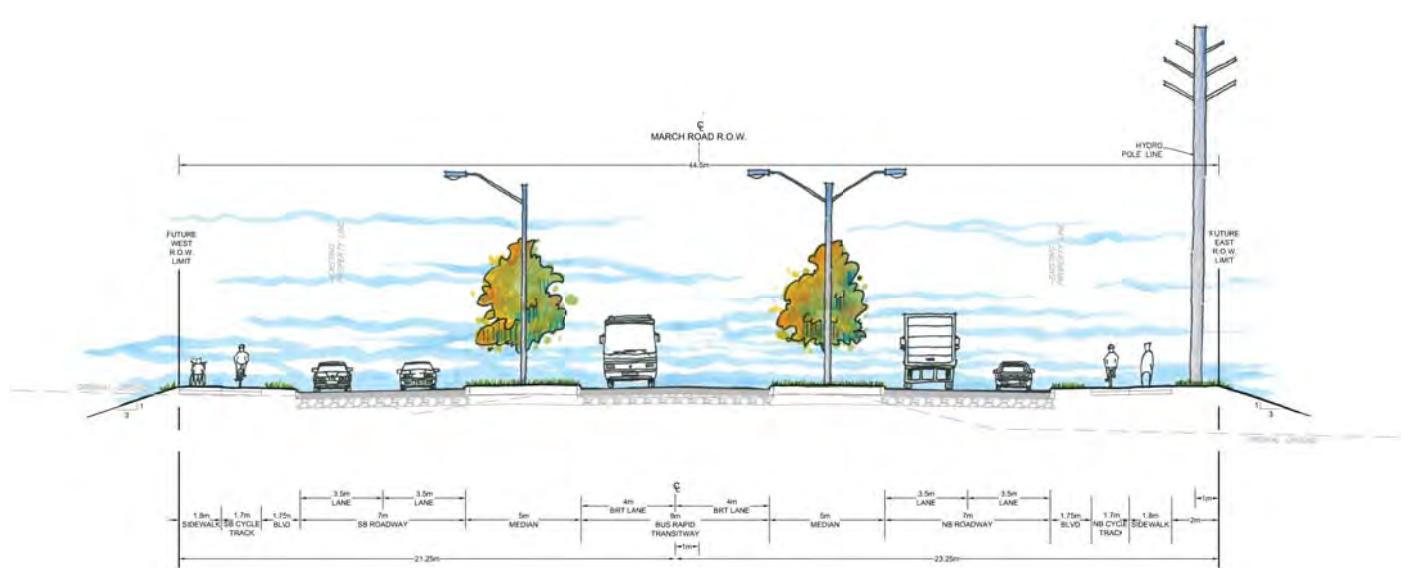


FIGURE 28 | Cross-Section for March Road - Ultimate

Appendix E

City of Ottawa Forecasting Report Comments

Robin Marinac

From: Gervais, Josiane <josiane.gervais@ottawa.ca>
Sent: June 17, 2020 12:12 PM
To: Mark Crockford
Cc: Robin Marinac
Subject: RE: 2020-11 910 March Road Step 3 - TPM Comments

Hello Mark,

Please find comments below regarding the Forecasting Report for 910 March Rd.

Transportation Engineering Services

1. Note that the development application for 936 March Road is subject to an RMA. The proposed works include one southbound left-turn lane, one northbound right-turn lane and paved shoulders on March Road. The RMA also accommodates for a future northbound left-turn lane.
2. Provide details as to the location of Access 1 relative to the proposed signalized intersection of March Road and Street A. Confirm that Access 1 is to be signalized, otherwise access onto March Road may need to be restricted.
3. A right in/right out access to March Rd, on the west side, is proposed approximately 225m north of Halton Terrace. Comment on the proposed accesses relative to the access across the street.
4. Consider adjusting the existing/future mode shares. The gas station/convenience market is unlikely to generate many transit trips and until the KNUEA is developed, this development is more likely to exhibit characteristics from the rural west TAZ.
5. Justify the difference between 2022 and 2027 trip projections. Additionally, if only 15% of trips are to from the north and 85% from the south (consistent with the KNUEA TMP), a maximum of 15% of trips can be pass-by trips. The remainder would be primary or diverted trips and should be explicitly accounted for on the study area's road network.
6. Since the timing of the widening of March Road is unknown, it should be assumed that March Road north of Maxwell Bridge/Halton Terrace has a two-lane cross-section. Indicate how many vehicles must be diverted from the peak periods to maintain an acceptable level of service on March Road.
7. Address comments prior to the submission of the strategy report.

Traffic Signal Operations

8. Page 11 of the report should refer to $v/c < 0.9$.

Development Review – Transportation

9. Include Figure 2: Concept Plan.
10. The site plan depicts a 4-way signalized intersection at Site Access #1, consider if site generated traffic would undertake the westbound through movement here. What is the west leg of the intersection connecting to?
11. An RMA is required for the traffic signal proposed at Access 1.

12. The right-in/right-out access at Access 2 must be supported by physical constraints, and RMA may be required.
13. As requested by TES, address comments prior to submission of Strategy Report.

Regards,

Josiane Gervais, P.Eng.

Project Manager, Infrastructure Approvals | GPRJ Approbation des demandes d'infrastructure
Development Review Branch | Dir Examen des projets d'aménagement
City of Ottawa | Ville d'Ottawa
Tel |Tél. : 613-580- 2424 ext. | poste 21765
web | Site Web : www.ottawa.ca

Appendix F

Pass-by Reduction by Land Use

Hardware/Paint Store											
Travel Mode	Mode Share	In	Out	Total	In	Out	Total	In	Out	Total	
Auto Driver	75%	11	10	21	24	28	52	24	20	44	
<i>Pass-by</i>	-	-	-	-	-	-	-	-	-	-	
<i>Net Auto Driver</i>	-	-	-	-	-	-	-	-	-	-	
Auto Passenger	15%	2	2	4	5	6	10	5	4	9	
Transit	5%	1	1	1	2	2	3	2	1	3	
Bicycle	1%	0	0	0	0	0	1	0	0	1	
Walk	4%	1	1	1	1	1	3	1	1	2	
Total	100%	15	14	27	32	37	69	32	26	59	

Fast Casual Restaurant										
Travel Mode	Mode Share	In	Out	Total	In	Out	Total	In	Out	Total
Auto Driver	75%	5	2	8	27	22	49	65	53	118
<i>Pass-by</i>	-	-	-	-	-	-	-	-	-	-
<i>Net Auto Driver</i>	-	-	-	-	-	-	-	-	-	-
Auto Passenger	15%	1	0	2	5	4	10	13	11	24
Transit	5%	0	0	1	2	1	3	4	4	8
Bicycle	1%	0	0	0	0	0	1	1	1	2
Walk	4%	0	0	0	1	1	3	3	3	6
Total	100%	6	2	11	35	28	66	86	72	158

Fast-Food Restaurant w Drive-Through										
Travel Mode	Mode Share	In	Out	Total	In	Out	Total	In	Out	Total
Auto Driver	75%	47	44	91	38	36	74	64	61	125
Pass-by	-	-24	-22	-46	-19	-18	-37	-32	-31	-63
Net Auto Driver	-	23	22	45	19	18	37	32	30	62
Auto Passenger	15%	9	9	18	8	7	15	13	12	25
Transit	5%	3	3	6	3	2	5	4	4	8
Bicycle	1%	1	1	1	1	0	1	1	1	2
Walk	4%	2	2	5	2	2	4	3	3	7
Total	100%	62	59	121	52	47	99	85	81	167

Coffee/Donut Shop w Drive-Through										
Travel Mode	Mode Share	In	Out	Total	In	Out	Total	In	Out	Total
Auto Driver	75%	89	86	176	43	43	86	86	87	173
Pass-by	-	-44	-43	-87	-22	-22	-44	-43	-44	-87
Net Auto Driver	-	45	43	89	21	21	42	43	43	86
Auto Passenger	15%	18	17	35	9	9	17	17	17	35
Transit	5%	6	6	12	3	3	6	6	6	12
Bicycle	1%	1	1	2	1	1	1	1	1	2
Walk	4%	5	5	9	2	2	5	5	5	9
Total	100%	119	115	234	58	58	115	115	116	231

Appendix G

TDM Checklists

TDM-Supportive Development Design and Infrastructure Checklist: *Non-Residential Developments (office, institutional, retail or industrial)*

Legend	
REQUIRED	The Official Plan or Zoning By-law provides related guidance that must be followed
BASIC	The measure is generally feasible and effective, and in most cases would benefit the development and its users
BETTER	The measure could maximize support for users of sustainable modes, and optimize development performance

TDM-supportive design & infrastructure measures: <i>Non-residential developments</i>		Check if completed & add descriptions, explanations or plan/drawing references
1. WALKING & CYCLING: ROUTES		
1.1 Building location & access points		
BASIC	1.1.1 Locate building close to the street, and do not locate parking areas between the street and building entrances	<input type="checkbox"/>
BASIC	1.1.2 Locate building entrances in order to minimize walking distances to sidewalks and transit stops/stations	<input checked="" type="checkbox"/>
BASIC	1.1.3 Locate building doors and windows to ensure visibility of pedestrians from the building, for their security and comfort	<input checked="" type="checkbox"/>
1.2 Facilities for walking & cycling		
REQUIRED	1.2.1 Provide convenient, direct access to stations or major stops along rapid transit routes within 600 metres; minimize walking distances from buildings to rapid transit; provide pedestrian-friendly, weather-protected (where possible) environment between rapid transit accesses and building entrances; ensure quality linkages from sidewalks through building entrances to integrated stops/stations (see <i>Official Plan policy 4.3.3</i>)	<input type="checkbox"/>
REQUIRED	1.2.2 Provide safe, direct and attractive pedestrian access from public sidewalks to building entrances through such measures as: reducing distances between public sidewalks and major building entrances; providing walkways from public streets to major building entrances; within a site, providing walkways along the front of adjoining buildings, between adjacent buildings, and connecting areas where people may congregate, such as courtyards and transit stops; and providing weather protection through canopies, colonnades, and other design elements wherever possible (see <i>Official Plan policy 4.3.12</i>)	<input checked="" type="checkbox"/>

TDM-supportive design & infrastructure measures: <i>Non-residential developments</i>		Check if completed & add descriptions, explanations or plan/drawing references
REQUIRED	1.2.3 Provide sidewalks of smooth, well-drained walking surfaces of contrasting materials or treatments to differentiate pedestrian areas from vehicle areas, and provide marked pedestrian crosswalks at intersection sidewalks (see <i>Official Plan policy 4.3.10</i>)	<input checked="" type="checkbox"/>
REQUIRED	1.2.4 Make sidewalks and open space areas easily accessible through features such as gradual grade transition, depressed curbs at street corners and convenient access to extra-wide parking spaces and ramps (see <i>Official Plan policy 4.3.10</i>)	<input checked="" type="checkbox"/>
REQUIRED	1.2.5 Include adequately spaced inter-block/street cycling and pedestrian connections to facilitate travel by active transportation. Provide links to the existing or planned network of public sidewalks, multi-use pathways and on-road cycle routes. Where public sidewalks and multi-use pathways intersect with roads, consider providing traffic control devices to give priority to cyclists and pedestrians (see <i>Official Plan policy 4.3.11</i>)	<input type="checkbox"/>
BASIC	1.2.6 Provide safe, direct and attractive walking routes from building entrances to nearby transit stops	<input checked="" type="checkbox"/>
BASIC	1.2.7 Ensure that walking routes to transit stops are secure, visible, lighted, shaded and wind-protected wherever possible	<input checked="" type="checkbox"/>
BASIC	1.2.8 Design roads used for access or circulation by cyclists using a target operating speed of no more than 30 km/h, or provide a separated cycling facility	<input type="checkbox"/>
1.3 Amenities for walking & cycling		
BASIC	1.3.1 Provide lighting, landscaping and benches along walking and cycling routes between building entrances and streets, sidewalks and trails	<input checked="" type="checkbox"/>
BASIC	1.3.2 Provide wayfinding signage for site access (where required, e.g. when multiple buildings or entrances exist) and egress (where warranted, such as when directions to reach transit stops/stations, trails or other common destinations are not obvious)	<input checked="" type="checkbox"/>

TDM-supportive design & infrastructure measures: <i>Non-residential developments</i>		Check if completed & add descriptions, explanations or plan/drawing references
2. WALKING & CYCLING: END-OF-TRIP FACILITIES		
2.1 Bicycle parking		
REQUIRED	2.1.1 Provide bicycle parking in highly visible and lighted areas, sheltered from the weather wherever possible (see <i>Official Plan policy 4.3.6</i>)	<input checked="" type="checkbox"/>
REQUIRED	2.1.2 Provide the number of bicycle parking spaces specified for various land uses in different parts of Ottawa; provide convenient access to main entrances or well-used areas (see <i>Zoning By-law Section 111</i>)	<input checked="" type="checkbox"/>
REQUIRED	2.1.3 Ensure that bicycle parking spaces and access aisles meet minimum dimensions; that no more than 50% of spaces are vertical spaces; and that parking racks are securely anchored (see <i>Zoning By-law Section 111</i>)	<input checked="" type="checkbox"/>
BASIC	2.1.4 Provide bicycle parking spaces equivalent to the expected number of commuter cyclists (assuming the cycling mode share target is met), plus the expected peak number of customer/visitor cyclists	<input type="checkbox"/>
BETTER	2.1.5 Provide bicycle parking spaces equivalent to the expected number of commuter and customer/visitor cyclists, plus an additional buffer (e.g. 25 percent extra) to encourage other cyclists and ensure adequate capacity in peak cycling season	<input type="checkbox"/>
2.2 Secure bicycle parking		
REQUIRED	2.2.1 Where more than 50 bicycle parking spaces are provided for a single office building, locate at least 25% of spaces within a building/structure, a secure area (e.g. supervised parking lot or enclosure) or bicycle lockers (see <i>Zoning By-law Section 111</i>)	<input type="checkbox"/>
BETTER	2.2.2 Provide secure bicycle parking spaces equivalent to the expected number of commuter cyclists (assuming the cycling mode share target is met)	<input type="checkbox"/>
2.3 Shower & change facilities		
BASIC	2.3.1 Provide shower and change facilities for the use of active commuters	<input type="checkbox"/>
BETTER	2.3.2 In addition to shower and change facilities, provide dedicated lockers, grooming stations, drying racks and laundry facilities for the use of active commuters	<input type="checkbox"/>
2.4 Bicycle repair station		
BETTER	2.4.1 Provide a permanent bike repair station, with commonly used tools and an air pump, adjacent to the main bicycle parking area (or secure bicycle parking area, if provided)	<input checked="" type="checkbox"/>

TDM-supportive design & infrastructure measures: <i>Non-residential developments</i>		Check if completed & add descriptions, explanations or plan/drawing references
3. TRANSIT		
3.1 Customer amenities		
BASIC	3.1.1 Provide shelters, lighting and benches at any on-site transit stops	<input type="checkbox"/>
BASIC	3.1.2 Where the site abuts an off-site transit stop and insufficient space exists for a transit shelter in the public right-of-way, protect land for a shelter and/or install a shelter	<input type="checkbox"/>
BETTER	3.1.3 Provide a secure and comfortable interior waiting area by integrating any on-site transit stops into the building	<input type="checkbox"/>
4. RIDESHARING		
4.1 Pick-up & drop-off facilities		
BASIC	4.1.1 Provide a designated area for carpool drivers (plus taxis and ride-hailing services) to drop off or pick up passengers without using fire lanes or other no-stopping zones	<input type="checkbox"/>
4.2 Carpool parking		
BASIC	4.2.1 Provide signed parking spaces for carpools in a priority location close to a major building entrance, sufficient in number to accommodate the mode share target for carpools	<input type="checkbox"/>
BETTER	4.2.2 At large developments, provide spaces for carpools in a separate, access-controlled parking area to simplify enforcement	<input type="checkbox"/>
5. CARSHARING & BIKE SHARING		
5.1 Carshare parking spaces		
BETTER	5.1.1 Provide carshare parking spaces in permitted non-residential zones, occupying either required or provided parking spaces (see <i>Zoning By-law Section 94</i>)	<input type="checkbox"/>
5.2 Bikeshare station location		
BETTER	5.2.1 Provide a designated bikeshare station area near a major building entrance, preferably lighted and sheltered with a direct walkway connection	<input type="checkbox"/>

TDM-supportive design & infrastructure measures: <i>Non-residential developments</i>		Check if completed & add descriptions, explanations or plan/drawing references
6. PARKING		
6.1 Number of parking spaces		
REQUIRED	6.1.1 Do not provide more parking than permitted by zoning, nor less than required by zoning, unless a variance is being applied for	<input checked="" type="checkbox"/>
BASIC	6.1.2 Provide parking for long-term and short-term users that is consistent with mode share targets, considering the potential for visitors to use off-site public parking	<input type="checkbox"/>
BASIC	6.1.3 Where a site features more than one use, provide shared parking and reduce the cumulative number of parking spaces accordingly (see <i>Zoning By-law Section 104</i>)	<input type="checkbox"/>
BETTER	6.1.4 Reduce the minimum number of parking spaces required by zoning by one space for each 13 square metres of gross floor area provided as shower rooms, change rooms, locker rooms and other facilities for cyclists in conjunction with bicycle parking (see <i>Zoning By-law Section 111</i>)	<input type="checkbox"/>
6.2 Separate long-term & short-term parking areas		
BETTER	6.2.1 Separate short-term and long-term parking areas using signage or physical barriers, to permit access controls and simplify enforcement (i.e. to discourage employees from parking in visitor spaces, and vice versa)	<input type="checkbox"/>
7. OTHER		
7.1 On-site amenities to minimize off-site trips		
BETTER	7.1.1 Provide on-site amenities to minimize mid-day or mid-commute errands	<input type="checkbox"/>

TDM Measures Checklist:
Non-Residential Developments (office, institutional, retail or industrial)

Legend	
BASIC	The measure is generally feasible and effective, and in most cases would benefit the development and its users
BETTER	The measure could maximize support for users of sustainable modes, and optimize development performance
★	The measure is one of the most dependably effective tools to encourage the use of sustainable modes

TDM measures: <i>Non-residential developments</i>		Check if proposed & add descriptions
1. TDM PROGRAM MANAGEMENT		
1.1 Program coordinator		
BASIC ★	1.1.1 Designate an internal coordinator, or contract with an external coordinator	<input checked="" type="checkbox"/>
1.2 Travel surveys		
BETTER	1.2.1 Conduct periodic surveys to identify travel-related behaviours, attitudes, challenges and solutions, and to track progress	<input type="checkbox"/>
2. WALKING AND CYCLING		
2.1 Information on walking/cycling routes & destinations		
BASIC	2.1.1 Display local area maps with walking/cycling access routes and key destinations at major entrances	<input checked="" type="checkbox"/>
2.2 Bicycle skills training		
<i>Commuter travel</i>		
BETTER ★	2.2.1 Offer on-site cycling courses for commuters, or subsidize off-site courses	<input type="checkbox"/>
2.3 Valet bike parking		
<i>Visitor travel</i>		
BETTER	2.3.1 Offer secure valet bike parking during public events when demand exceeds fixed supply (e.g. for festivals, concerts, games)	<input type="checkbox"/>


TDM measures: <i>Non-residential developments</i>		Check if proposed & add descriptions
3. TRANSIT		
3.1 Transit information		
BASIC	3.1.1 Display relevant transit schedules and route maps at entrances	<input checked="" type="checkbox"/>
BASIC	3.1.2 Provide online links to OC Transpo and STO information	<input checked="" type="checkbox"/>
BETTER	3.1.3 Provide real-time arrival information display at entrances	<input type="checkbox"/>
3.2 Transit fare incentives		
<i>Commuter travel</i>		
BETTER	3.2.1 Offer preloaded PRESTO cards to encourage commuters to use transit	<input type="checkbox"/>
BETTER ★	3.2.2 Subsidize or reimburse monthly transit pass purchases by employees	<input type="checkbox"/>
<i>Visitor travel</i>		
BETTER	3.2.3 Arrange inclusion of same-day transit fare in price of tickets (e.g. for festivals, concerts, games)	<input type="checkbox"/>
3.3 Enhanced public transit service		
<i>Commuter travel</i>		
BETTER	3.3.1 Contract with OC Transpo to provide enhanced transit services (e.g. for shift changes, weekends)	<input type="checkbox"/>
<i>Visitor travel</i>		
BETTER	3.3.2 Contract with OC Transpo to provide enhanced transit services (e.g. for festivals, concerts, games)	<input type="checkbox"/>
3.4 Private transit service		
<i>Commuter travel</i>		
BETTER	3.4.1 Provide shuttle service when OC Transpo cannot offer sufficient quality or capacity to serve demand (e.g. for shift changes, weekends)	<input type="checkbox"/>
<i>Visitor travel</i>		
BETTER	3.4.2 Provide shuttle service when OC Transpo cannot offer sufficient quality or capacity to serve demand (e.g. for festivals, concerts, games)	<input type="checkbox"/>


TDM measures: <i>Non-residential developments</i>			Check if proposed & add descriptions
4. RIDESHARING			
4.1 Ridematching service			
<i>Commuter travel</i>			
BASIC	★	4.1.1 Provide a dedicated ridematching portal at OttawaRideMatch.com	<input type="checkbox"/>
4.2 Carpool parking price incentives			
<i>Commuter travel</i>			
BETTER		4.2.1 Provide discounts on parking costs for registered carpools	<input type="checkbox"/>
4.3 Vanpool service			
<i>Commuter travel</i>			
BETTER		4.3.1 Provide a vanpooling service for long-distance commuters	<input type="checkbox"/>
5. CARSHARING & BIKE SHARING			
5.1 Bikeshare stations & memberships			
BETTER		5.1.1 Contract with provider to install on-site bikeshare station for use by commuters and visitors	<input type="checkbox"/>
<i>Commuter travel</i>			
BETTER		5.1.2 Provide employees with bikeshare memberships for local business travel	<input type="checkbox"/>
5.2 Carshare vehicles & memberships			
<i>Commuter travel</i>			
BETTER		5.2.1 Contract with provider to install on-site carshare vehicles and promote their use by tenants	<input type="checkbox"/>
BETTER		5.2.2 Provide employees with carshare memberships for local business travel	<input type="checkbox"/>
6. PARKING			
6.1 Priced parking			
<i>Commuter travel</i>			
BASIC	★	6.1.1 Charge for long-term parking (daily, weekly, monthly)	<input type="checkbox"/>
BASIC		6.1.2 Unbundle parking cost from lease rates at multi-tenant sites	<input type="checkbox"/>
<i>Visitor travel</i>			
BETTER		6.1.3 Charge for short-term parking (hourly)	<input type="checkbox"/>


TDM measures: <i>Non-residential developments</i>			Check if proposed & add descriptions
7. TDM MARKETING & COMMUNICATIONS			
7.1 Multimodal travel information			
<i>Commuter travel</i>			
BASIC	★	7.1.1 Provide a multimodal travel option information package to new/relocating employees and students	<input type="checkbox"/>
<i>Visitor travel</i>			
BETTER	★	7.1.2 Include multimodal travel option information in invitations or advertising that attract visitors or customers (e.g. for festivals, concerts, games)	<input type="checkbox"/>
7.2 Personalized trip planning			
<i>Commuter travel</i>			
BETTER	★	7.2.1 Offer personalized trip planning to new/relocating employees	<input type="checkbox"/>
7.3 Promotions			
<i>Commuter travel</i>			
BETTER		7.3.1 Deliver promotions and incentives to maintain awareness, build understanding, and encourage trial of sustainable modes	<input type="checkbox"/>
8. OTHER INCENTIVES & AMENITIES			
8.1 Emergency ride home			
<i>Commuter travel</i>			
BETTER	★	8.1.1 Provide emergency ride home service to non-driving commuters	<input type="checkbox"/>
8.2 Alternative work arrangements			
<i>Commuter travel</i>			
BASIC	★	8.2.1 Encourage flexible work hours	<input type="checkbox"/>
BETTER		8.2.2 Encourage compressed workweeks	<input type="checkbox"/>
BETTER	★	8.2.3 Encourage telework	<input type="checkbox"/>
8.3 Local business travel options			
<i>Commuter travel</i>			
BASIC	★	8.3.1 Provide local business travel options that minimize the need for employees to bring a personal car to work	<input type="checkbox"/>
8.4 Commuter incentives			
<i>Commuter travel</i>			
BETTER		8.4.1 Offer employees a taxable, mode-neutral commuting allowance	<input type="checkbox"/>
8.5 On-site amenities			
<i>Commuter travel</i>			
BETTER		8.5.1 Provide on-site amenities/services to minimize mid-day or mid-commute errands	<input type="checkbox"/>


Appendix H

Turning Templates

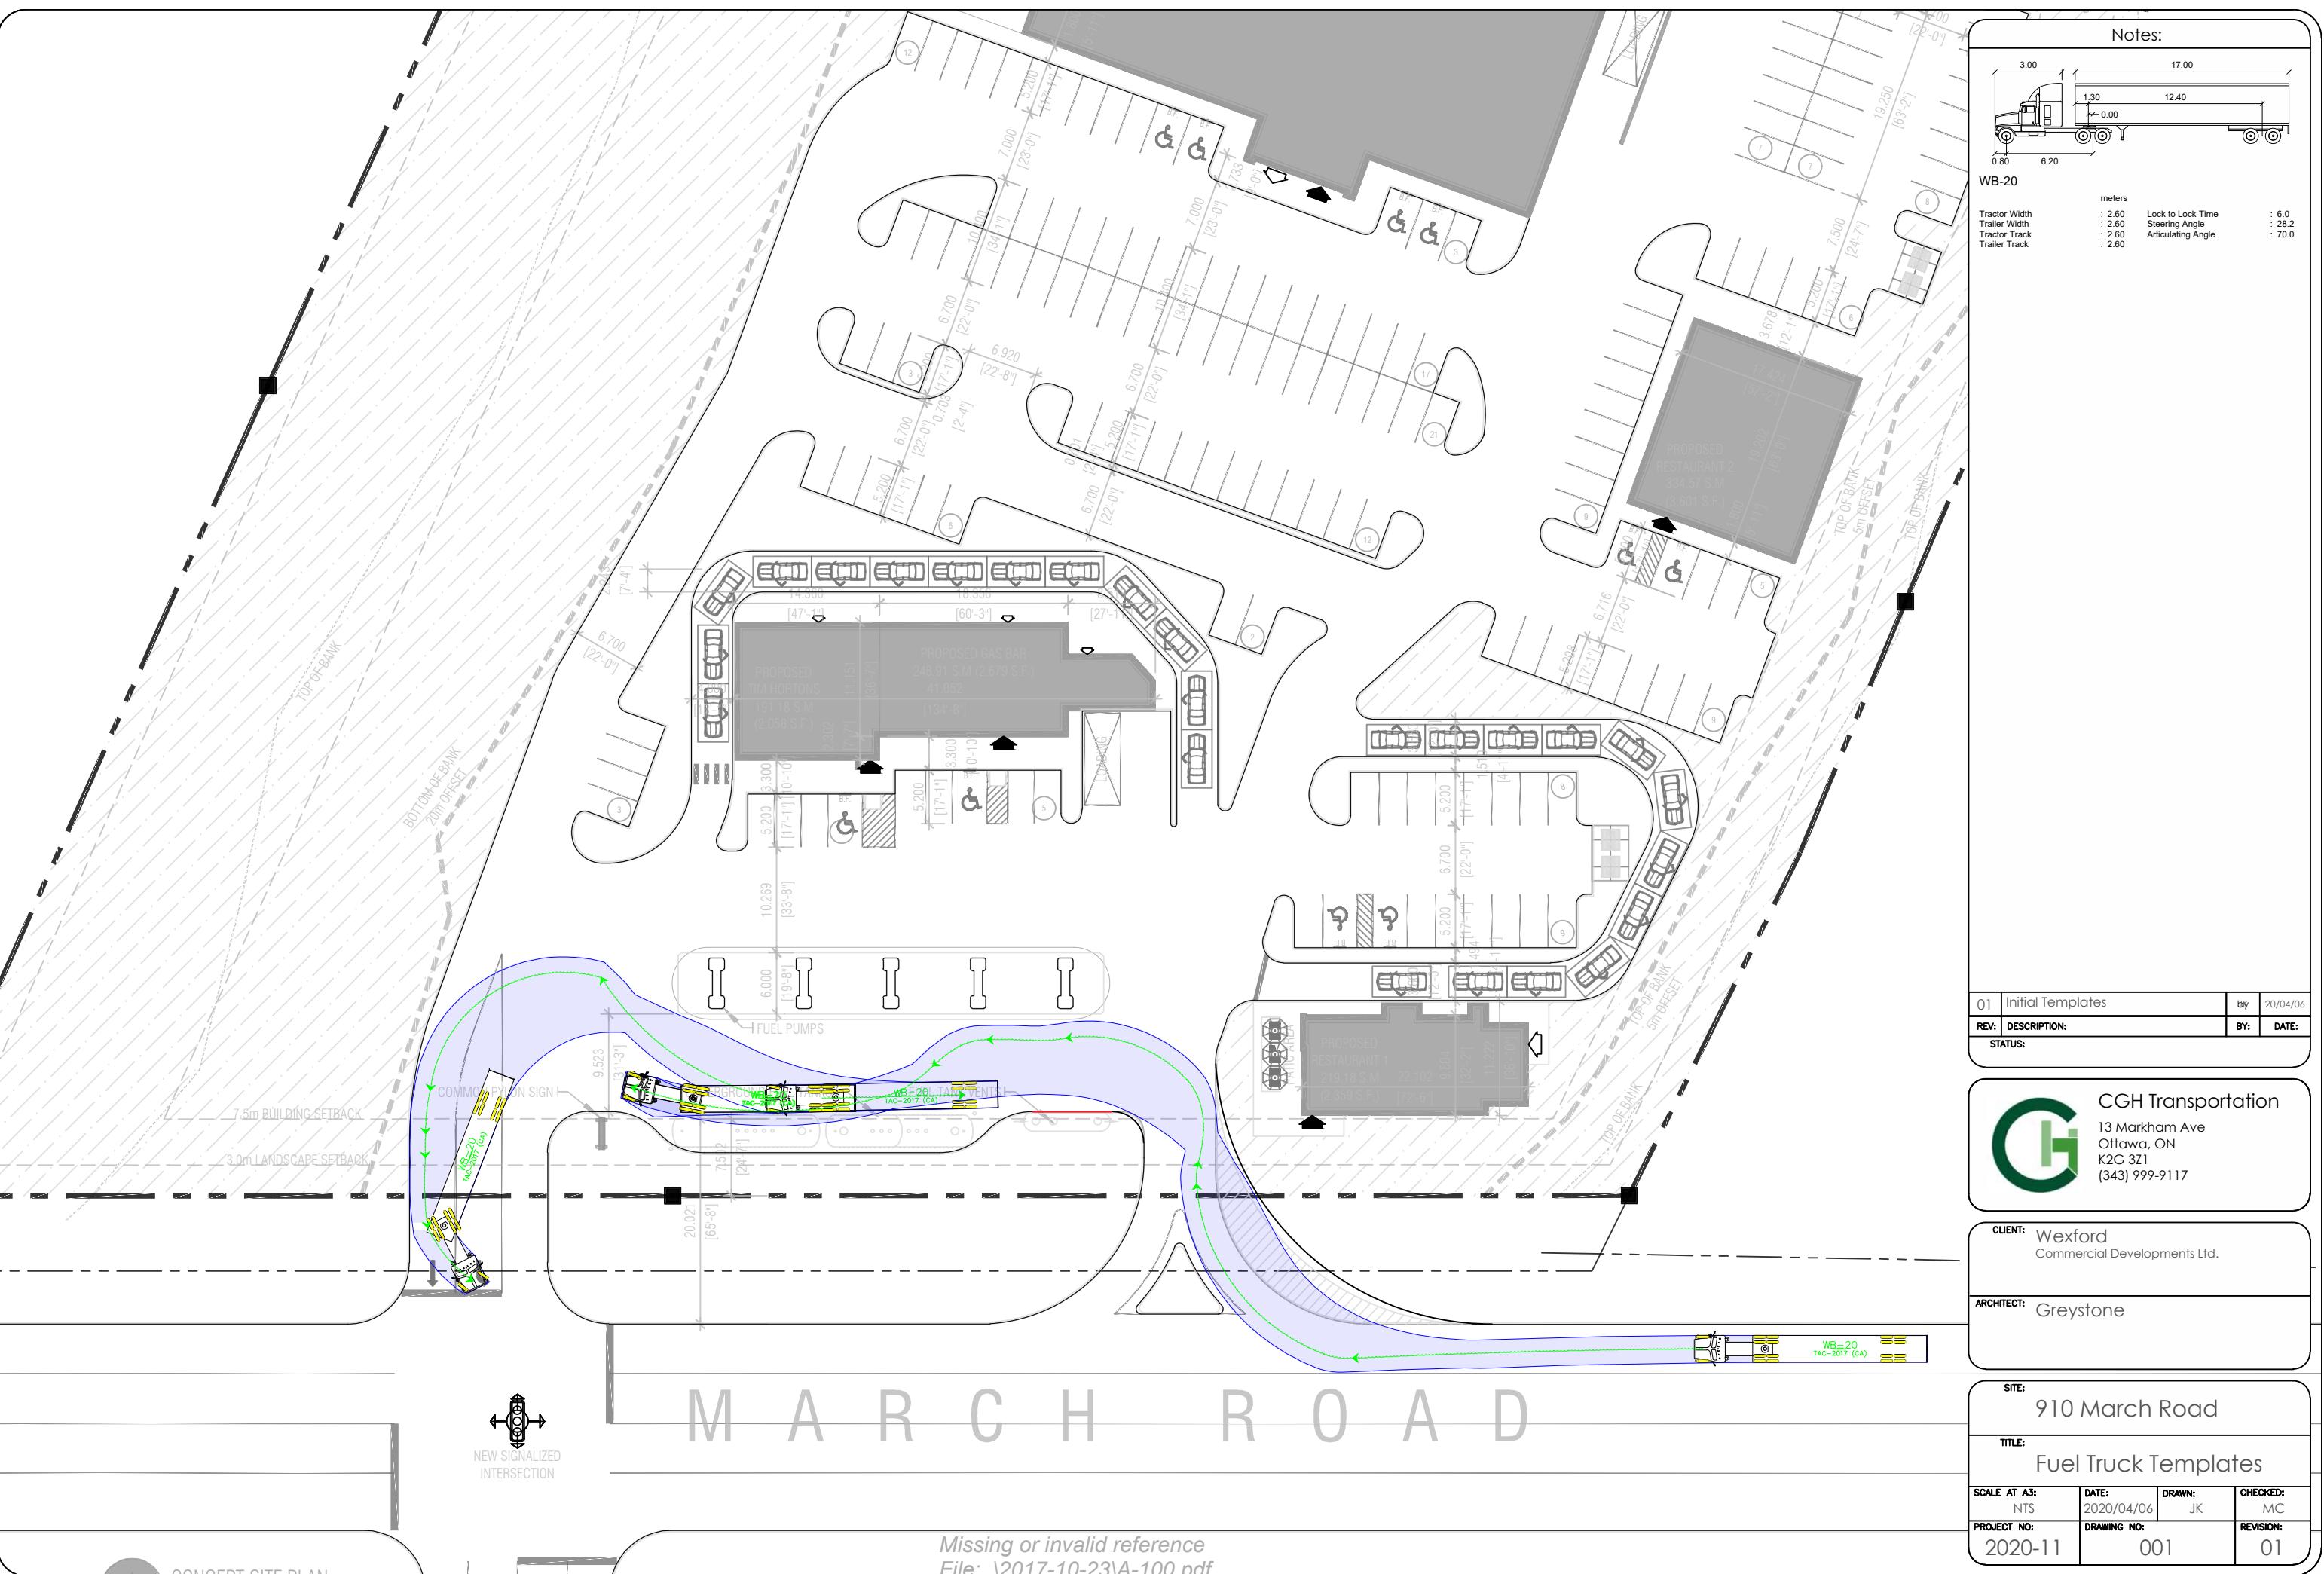

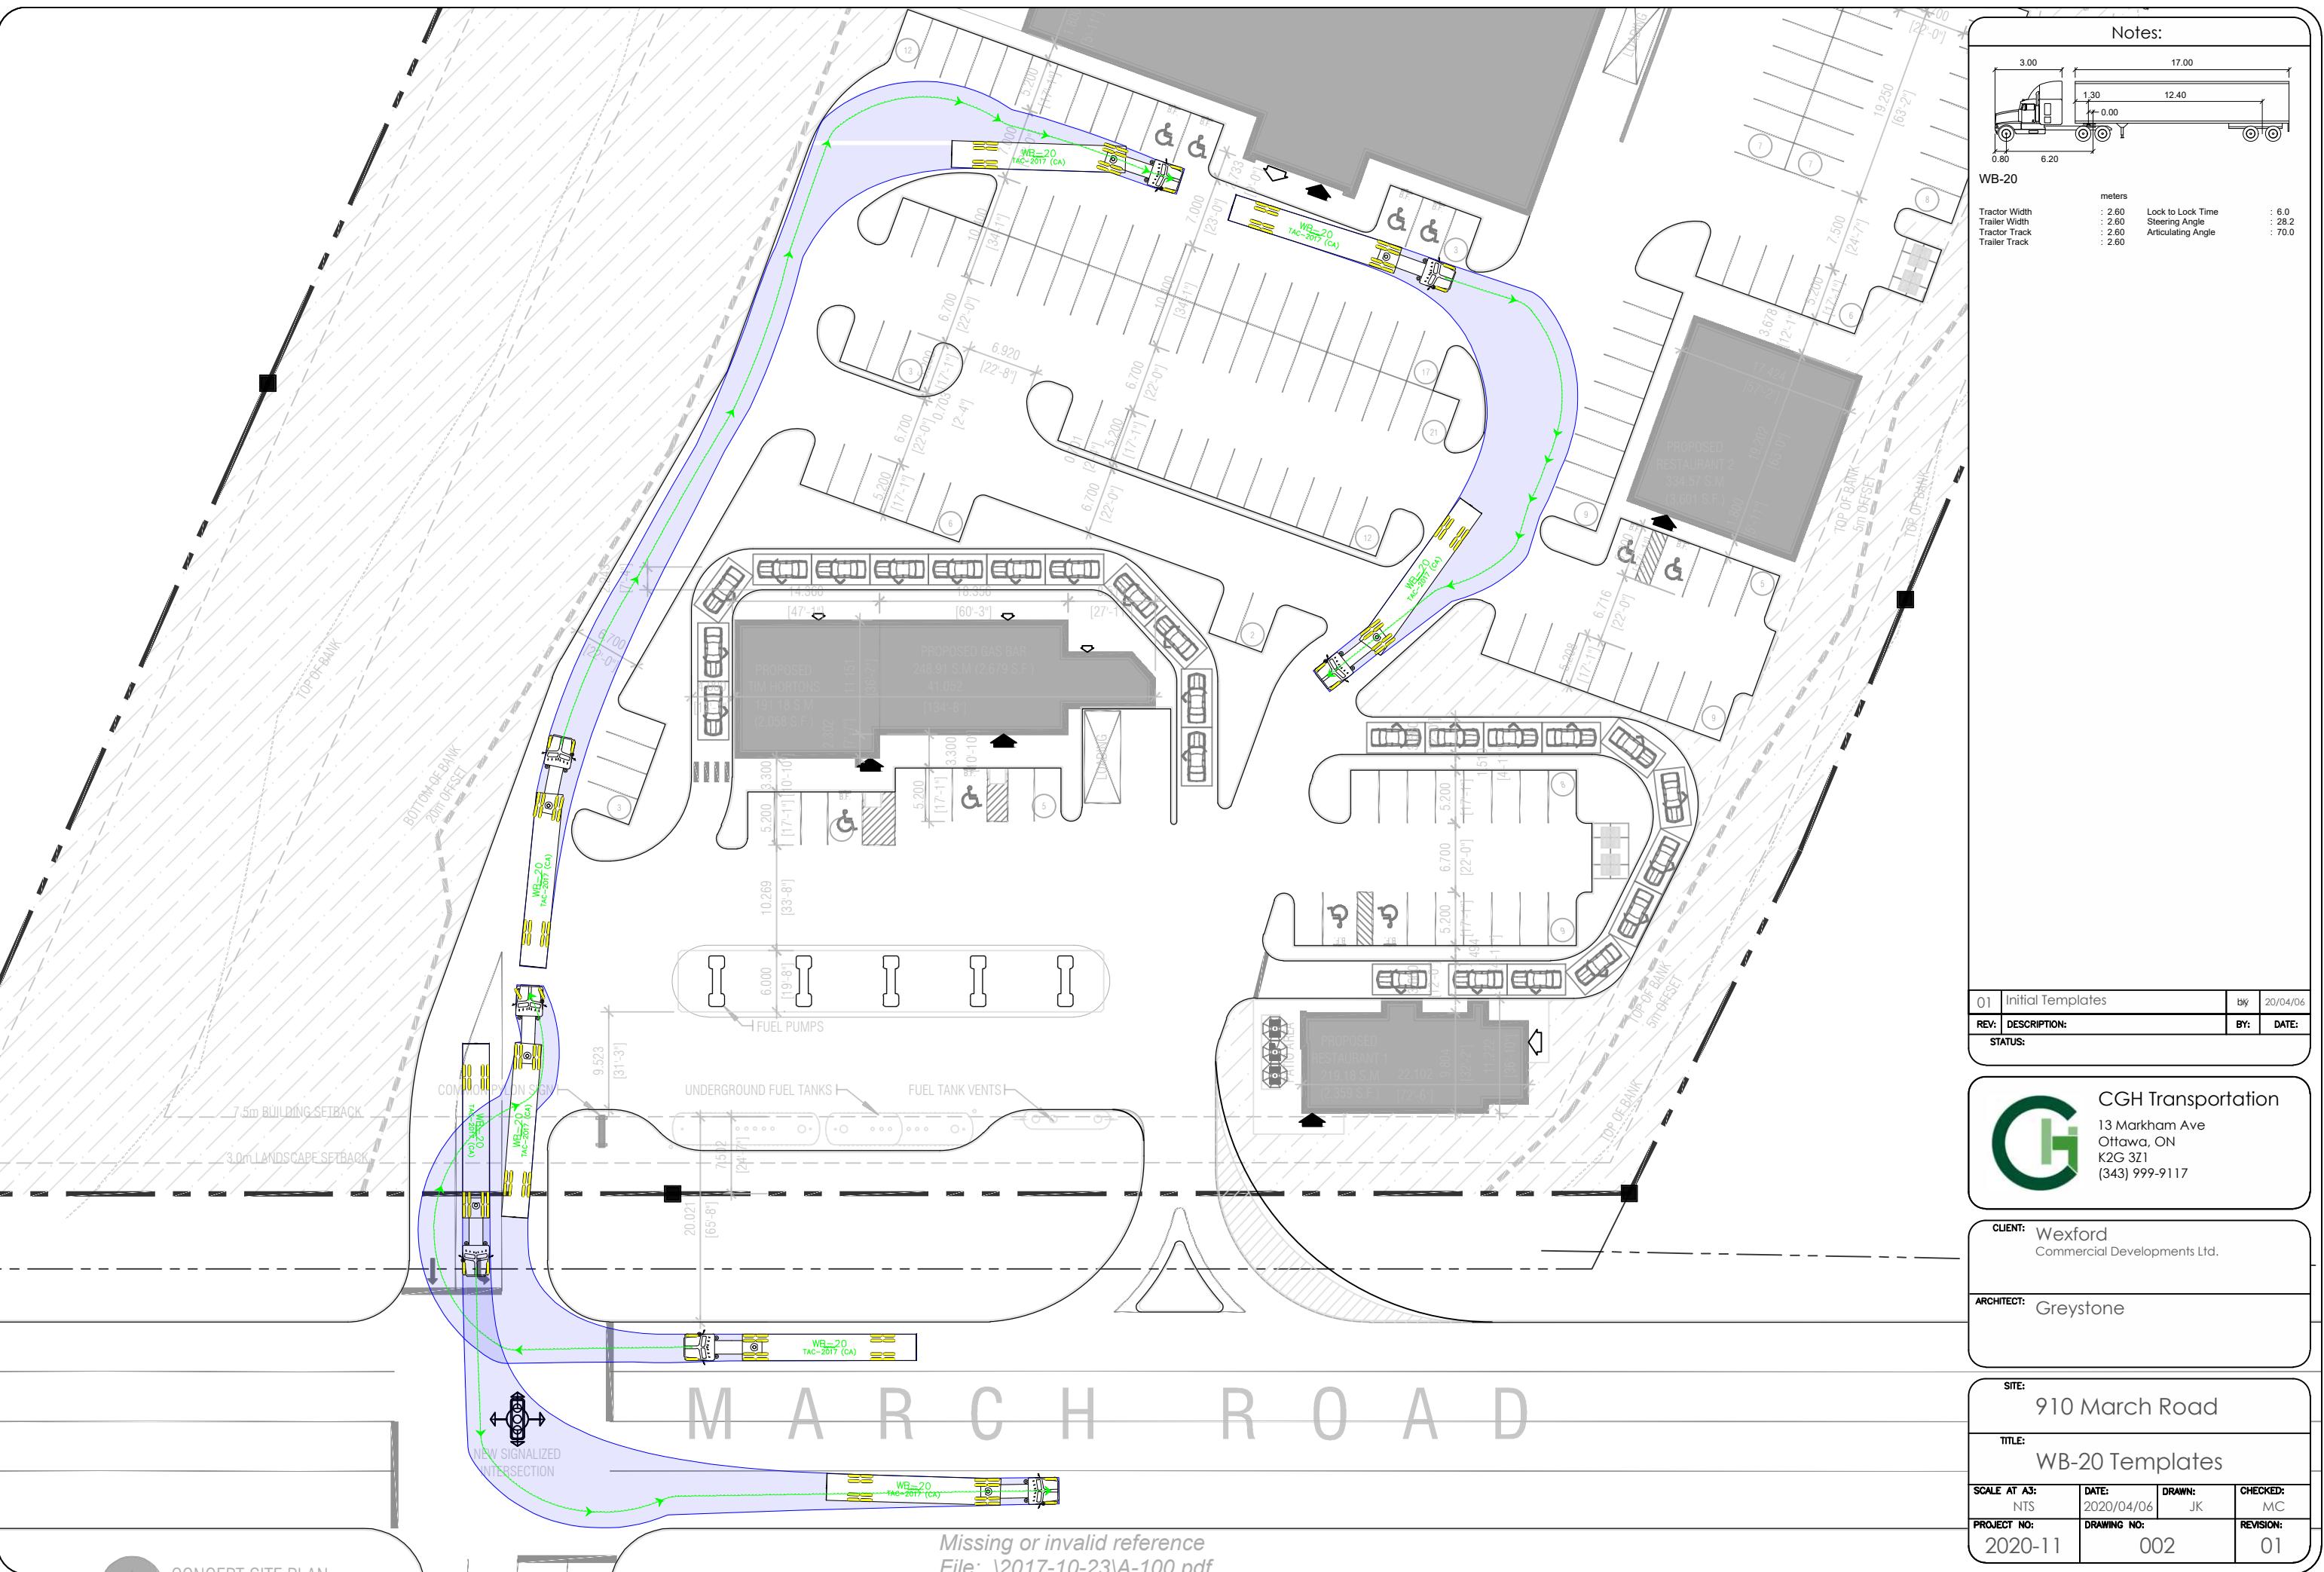

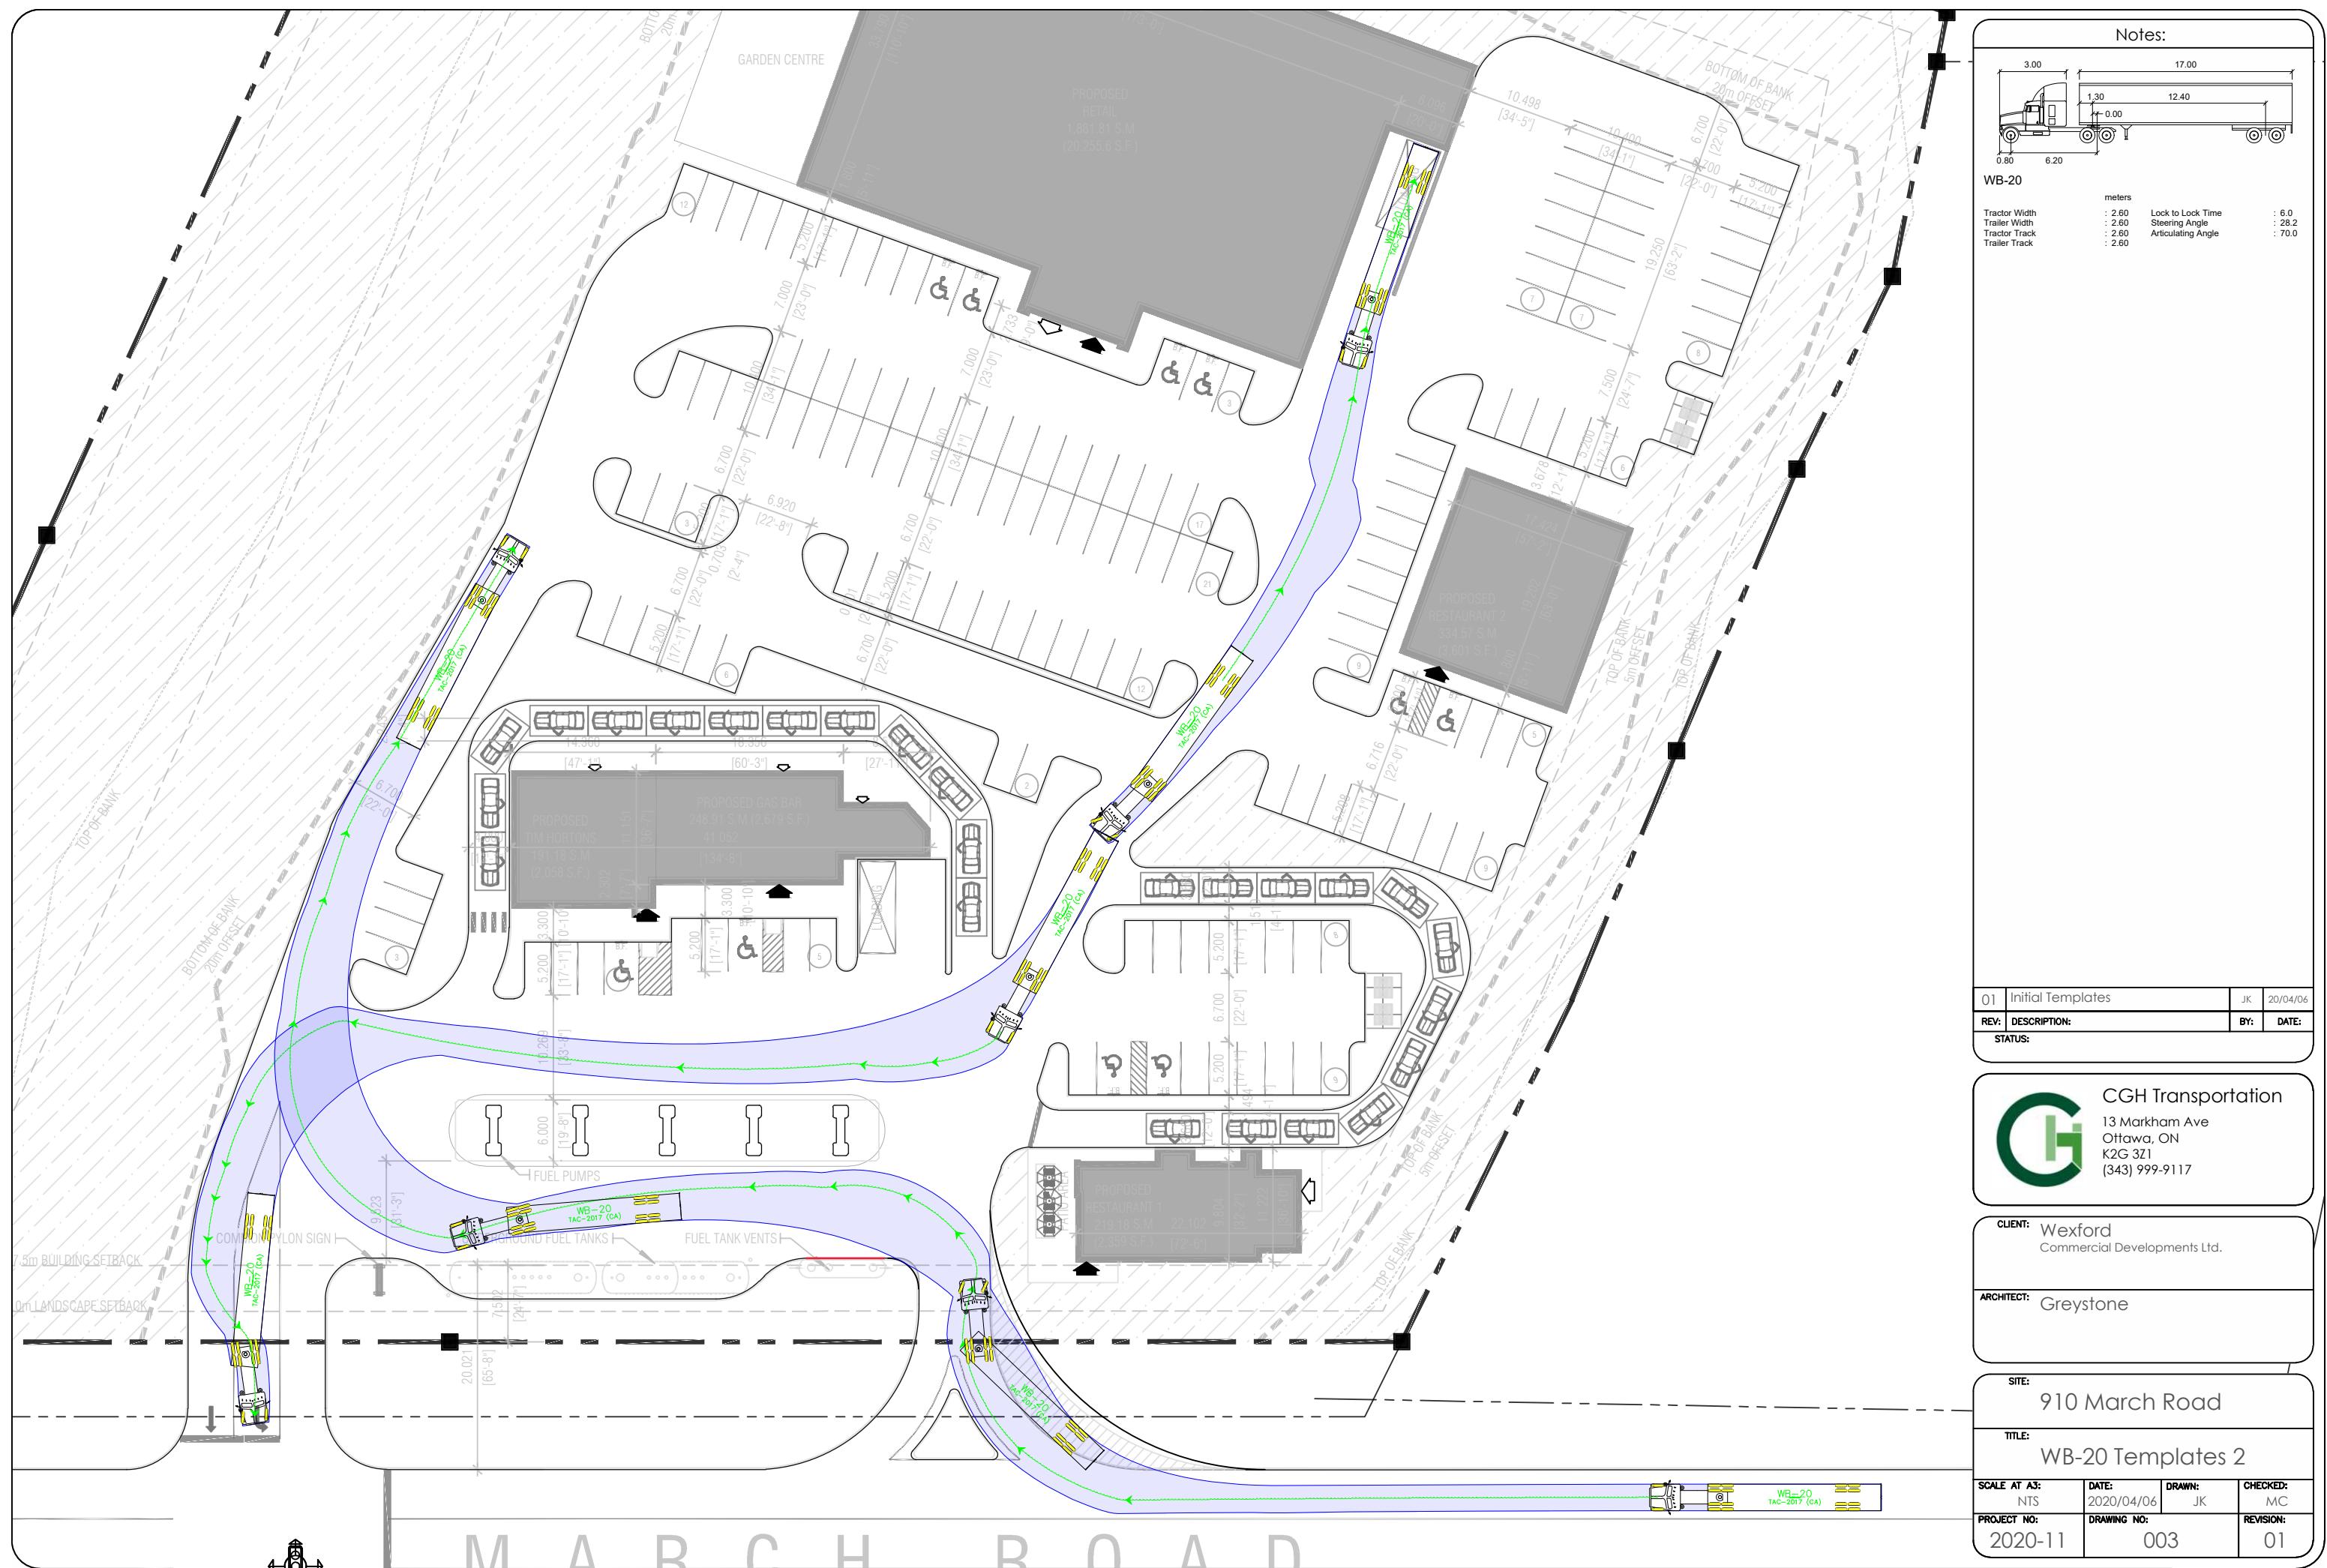

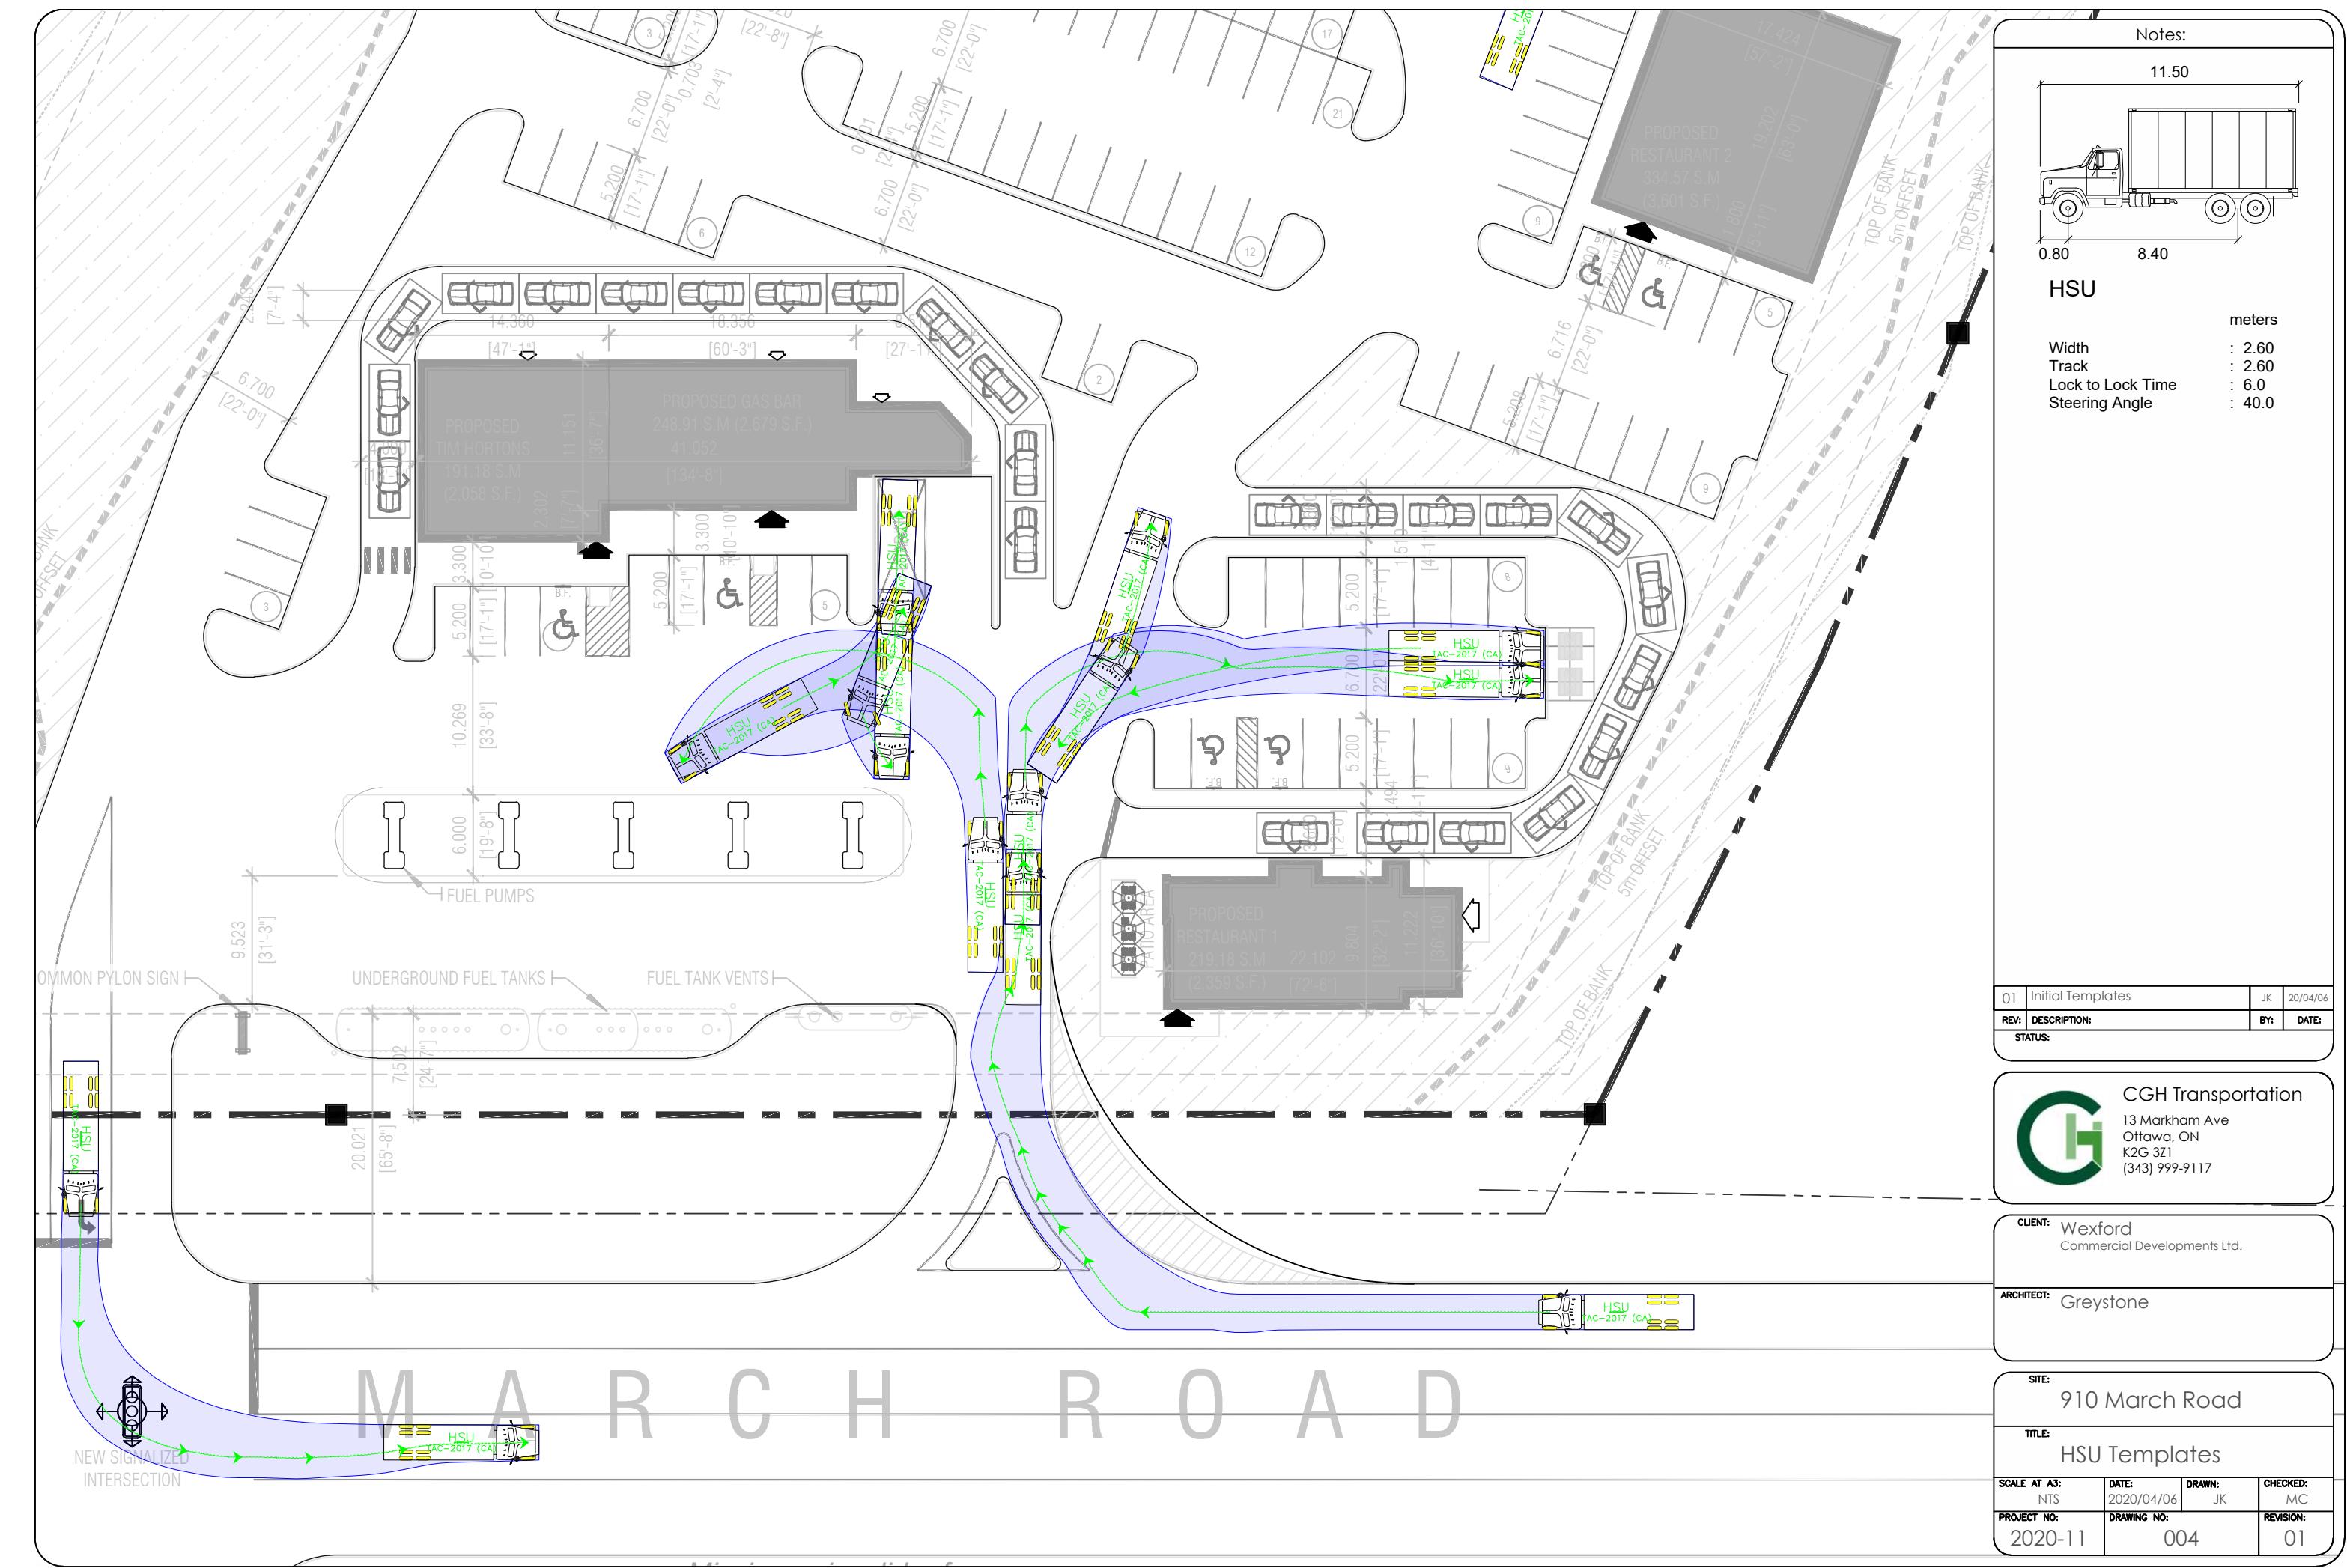

Appendix I

MMLOS Worksheets

Multi-Modal Level of Service - Intersections Form

Consultant	CGH Transportation	Project	2020-11
Scenario	2022 FT AM	Date	29-Jun-20
Comments			

INTERSECTIONS		March Road & Halton Terrace / Maxwell Bridge Road				March Road & Klondike Road				March Road & Site Access #1 / South Local Road			
Crossing Side		NORTH	SOUTH	EAST	WEST	NORTH	SOUTH	EAST	WEST	NORTH	SOUTH	EAST	WEST
Pedestrian	Lanes	9	9	6	6	10+	10+	7	7			4	
	Median	No Median - 2.4 m	No Median - 2.4 m	No Median - 2.4 m	No Median - 2.4 m	Median > 2.4 m	No Median - 2.4 m	No Median - 2.4 m	No Median - 2.4 m			No Median - 2.4 m	
	Conflicting Left Turns	Permissive	Permissive	Protected/Permissive	Protected/Permissive	Protected/Permissive	Permissive	Protected	Protected			Permissive	
	Conflicting Right Turns	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control			Permissive or yield control	
	Right Turns on Red (RToR) ?	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed			RTOR allowed	
	Ped Signal Leading Interval?	No	No	No	No	No	No	No	No			No	
	Right Turn Channel	No Channel	No Channel	No Channel	No Channel	No Channel	No Channel	No Channel	No Channel			No Channel	
	Corner Radius	15-25m	10-15m	10-15m	15-25m	10-15m	15-25m	10-15m	15-25m			5-10m	
	Crosswalk Type	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings			Std transverse markings	
	PETSI Score	-31	-29	20	18	-35	-47	12	14			54	
	Ped. Exposure to Traffic LoS	#N/A	#N/A	F	F	#N/A	#N/A	F	F	-	-	D	-
	Cycle Length												
	Effective Walk Time												
	Average Pedestrian Delay												
	Pedestrian Delay LoS	-	-	-	-	-	-	-	-	-	-	-	-
	Level of Service	#N/A	#N/A	F	F	#N/A	#N/A	F	F	-	-	D	-
		#N/A				#N/A				D			
Approach From		NORTH	SOUTH	EAST	WEST	NORTH	SOUTH	EAST	WEST	NORTH	SOUTH	EAST	WEST
Bicycle	Bicycle Lane Arrangement on Approach	Pocket Bike Lane	Pocket Bike Lane	Mixed Traffic	Mixed Traffic	Curb Bike Lane, Cycletrack or MUP	Curb Bike Lane, Cycletrack or MUP	Mixed Traffic	Mixed Traffic			Curb Bike Lane, Cycletrack or MUP	Mixed Traffic
	Right Turn Lane Configuration	Bike lane shifts to the left of right turn	Bike lane shifts to the left of right turn	> 50 m	> 50 m	Not Applicable	Not Applicable	> 50 m	≤ 50 m			Not Applicable	≤ 50 m
	Right Turning Speed	≤ 25 km/h	≤ 25 km/h	≤ 25 km/h	≤ 25 km/h	Not Applicable	Not Applicable	≤ 25 km/h	≤ 25 km/h			Not Applicable	≤ 25 km/h
	Cyclist relative to RT motorists	D	D	F	F	Not Applicable	Not Applicable	F	D	-	Not Applicable	D	-
	Separated or Mixed Traffic	Separated	Separated	Mixed Traffic	Mixed Traffic	Separated	Separated	Mixed Traffic	Mixed Traffic	-	Separated	Mixed Traffic	-
	Left Turn Approach	≥ 2 lanes crossed	≥ 2 lanes crossed	No lane crossed	No lane crossed	≥ 2 lanes crossed	≥ 2 lanes crossed	No lane crossed	No lane crossed	No lane crossed		No lane crossed	
	Operating Speed	≥ 60 km/h	≥ 60 km/h	> 40 to ≤ 50 km/h	> 40 to ≤ 50 km/h	≥ 60 km/h	≥ 60 km/h	> 40 to ≤ 50 km/h	> 40 to ≤ 50 km/h	≥ 60 km/h		≤ 40 km/h	
	Left Turning Cyclist	F	F	B	B	F	F	B	B	C	-	B	-
	Level of Service	F	F	F	F	F	F	F	D	-	-	D	-
		F				F				D			
Transit	Average Signal Delay	≤ 20 sec	≤ 10 sec	> 40 sec	≤ 30 sec	≤ 20 sec	≤ 20 sec	> 40 sec	≤ 30 sec	≤ 10 sec	≤ 10 sec	> 40 sec	
	Level of Service	C	B	F	D	C	C	F	D	B	B	F	-
		F				F				F			
Truck	Effective Corner Radius	> 15 m	10 - 15 m	> 15 m	10 - 15 m	> 15 m	10 - 15 m	10 - 15 m	> 15 m	< 10 m	< 10 m		
	Number of Receiving Lanes on Departure from Intersection	1	1	≥ 2	≥ 2	1	≥ 2	≥ 2	≥ 2	1	1	1	1
	Level of Service	C	E	A	B	C	B	B	A	-	F	F	-
		E				C				F			
Auto	Volume to Capacity Ratio	0.61 - 0.70				0.61 - 0.70				0.61 - 0.70			
	Level of Service	B				B				B			

Multi-Modal Level of Service - Intersections Form

Consultant Scenario Comments	CGH Transportation 2027 FT AM	Project Date 2020-11 29-Jun-20

INTERSECTIONS		March Road & Halton Terrace / Maxwell Bridge Road				March Road & Klondike Road				March Road & Site Access #1 / South Local Road			
Crossing Side		NORTH	SOUTH	EAST	WEST	NORTH	SOUTH	EAST	WEST	NORTH	SOUTH	EAST	WEST
Pedestrian	Lanes Median	9 No Median - 2.4 m	9 No Median - 2.4 m	6 No Median - 2.4 m	6 No Median - 2.4 m	10+ Median > 2.4 m	10+ No Median - 2.4 m	7 No Median - 2.4 m	7 No Median - 2.4 m	5 No Median - 2.4 m	6 No Median - 2.4 m	4 No Median - 2.4 m	5 No Median - 2.4 m
	Conflicting Left Turns	Permissive	Permissive	Protected/ Permissive	Protected/ Permissive	Protected/ Permissive	Permissive	Protected	Protected	Permissive	Protected/ Permissive	Protected/ Permissive	Permissive
	Conflicting Right Turns	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control
	Right Turns on Red (RToR) ?	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed
	Ped Signal Leading Interval?	No	No	No	No	No	No	No	No	No	No	No	No
	Right Turn Channel	No Channel	No Channel	No Channel	No Channel	No Channel	No Channel	No Channel	No Channel	No Channel	No Channel	No Channel	No Channel
	Corner Radius	15-25m	10-15m	10-15m	15-25m	10-15m	15-25m	10-15m	15-25m	5-10m	5-10m	5-10m	5-10m
	Crosswalk Type	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings
	PETSI Score	-31	-29	20	18	-35	-47	12	14	38	21	54	38
	Ped. Exposure to Traffic LoS	#N/A	#N/A	F	F	#N/A	#N/A	F	F	E	F	D	E
	Cycle Length												
	Effective Walk Time												
	Average Pedestrian Delay												
	Pedestrian Delay LoS	-	-	-	-	-	-	-	-	-	-	-	-
	Level of Service	#N/A	#N/A	F	F	#N/A	#N/A	F	F	E	F	D	E
	#N/A				#N/A				F				
Approach From		NORTH	SOUTH	EAST	WEST	NORTH	SOUTH	EAST	WEST	NORTH	SOUTH	EAST	WEST
Bicycle	Bicycle Lane Arrangement on Approach	Pocket Bike Lane	Pocket Bike Lane	Mixed Traffic	Mixed Traffic	Curb Bike Lane, Cycletrack or MUP	Curb Bike Lane, Cycletrack or MUP	Mixed Traffic	Mixed Traffic	Curb Bike Lane, Cycletrack or MUP	Curb Bike Lane, Cycletrack or MUP	Mixed Traffic	Curb Bike Lane, Cycletrack or MUP
	Right Turn Lane Configuration	Bike lane shifts to the left of right turn	Bike lane shifts to the left of right turn	> 50 m	> 50 m	Not Applicable	Not Applicable	> 50 m	≤ 50 m	Not Applicable	Not Applicable	≤ 50 m	≤ 50 m
	Right Turning Speed	≤ 25 km/h	≤ 25 km/h	≤ 25 km/h	≤ 25 km/h	Not Applicable	Not Applicable	≤ 25 km/h	≤ 25 km/h	Not Applicable	Not Applicable	≤ 25 km/h	≤ 25 km/h
	Cyclist relative to RT motorists	D	D	F	F	Not Applicable	Not Applicable	F	D	Not Applicable	Not Applicable	D	Not Applicable
	Separated or Mixed Traffic	Separated	Separated	Mixed Traffic	Mixed Traffic	Separated	Separated	Mixed Traffic	Mixed Traffic	Separated	Separated	Mixed Traffic	Separated
	Left Turn Approach	≥ 2 lanes crossed	≥ 2 lanes crossed	No lane crossed	No lane crossed	≥ 2 lanes crossed	≥ 2 lanes crossed	No lane crossed	No lane crossed	No lane crossed	No lane crossed	No lane crossed	No lane crossed
	Operating Speed	≥ 60 km/h	≥ 60 km/h	> 40 to ≤ 50 km/h	> 40 to ≤ 50 km/h	≥ 60 km/h	≥ 60 km/h	> 40 to ≤ 50 km/h	> 40 to ≤ 50 km/h	≥ 60 km/h	≥ 60 km/h	≤ 40 km/h	> 40 to ≤ 50 km/h
	Left Turning Cyclist	F	F	B	B	F	F	B	B	C	C	B	B
	Level of Service	F	F	F	F	F	F	F	D	C	C	D	B
	F				F				D				
Transit	Average Signal Delay	≤ 30 sec	≤ 20 sec	> 40 sec	≤ 30 sec	≤ 30 sec	≤ 30 sec	≤ 30 sec	> 40 sec	> 40 sec	≤ 20 sec	> 40 sec	≤ 30 sec
	Level of Service	D	C	F	D	D	D	D	F	F	C	F	D
	F				F				F				
Truck	Effective Corner Radius	> 15 m	10 - 15 m	> 15 m	10 - 15 m	> 15 m	10 - 15 m	10 - 15 m	> 15 m	< 10 m	< 10 m	< 10 m	< 10 m
	Number of Receiving Lanes on Departure from Intersection	1	1	≥ 2	≥ 2	1	≥ 2	≥ 2	≥ 2	1	1	1	≥ 2
	Level of Service	C	E	A	B	C	B	B	A	F	F	F	D
	E				C				F				
Auto	Volume to Capacity Ratio	0.61 - 0.70				0.61 - 0.70				0.61 - 0.70			
	Level of Service	B				B				B			

Multi-Modal Level of Service - Intersections Form

Consultant Scenario Comments	CGH Transportation 2022 FT PM	Project Date	2020-11 29-Jun-20

INTERSECTIONS		March Road & Halton Terrace / Maxwell Bridge Road				March Road & Klondike Road				March Road & Site Access #1 / South Local Road			
Crossing Side		NORTH	SOUTH	EAST	WEST	NORTH	SOUTH	EAST	WEST	NORTH	SOUTH	EAST	WEST
Pedestrian	Lanes	9	9	6	6	10+	10+	7	7			4	
	Median	No Median - 2.4 m	No Median - 2.4 m	No Median - 2.4 m	No Median - 2.4 m	Median > 2.4 m	No Median - 2.4 m	No Median - 2.4 m	No Median - 2.4 m			No Median - 2.4 m	
	Conflicting Left Turns	Permissive	Permissive	Protected/Permissive	Protected/Permissive	Protected/Permissive	Permissive	Protected	Protected			Permissive	
	Conflicting Right Turns	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control			Permissive or yield control	
	Right Turns on Red (RToR) ?	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed			RTOR allowed	
	Ped Signal Leading Interval?	No	No	No	No	No	No	No	No			No	
	Right Turn Channel	No Channel	No Channel	No Channel	No Channel	No Channel	No Channel	No Channel	No Channel			No Channel	
	Corner Radius	15-25m	10-15m	10-15m	15-25m	10-15m	15-25m	10-15m	15-25m			5-10m	
	Crosswalk Type	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings			Std transverse markings	
	PETSI Score	-31	-29	20	18	-35	-47	12	14			54	
	Ped. Exposure to Traffic LoS	#N/A	#N/A	F	F	#N/A	#N/A	F	F	-	-	D	-
	Cycle Length												
	Effective Walk Time												
	Average Pedestrian Delay												
	Pedestrian Delay LoS	-	-	-	-	-	-	-	-	-	-	-	-
	Level of Service	#N/A	#N/A	F	F	#N/A	#N/A	F	F	-	-	D	-
		#N/A				#N/A				D			
Approach From		NORTH	SOUTH	EAST	WEST	NORTH	SOUTH	EAST	WEST	NORTH	SOUTH	EAST	WEST
Bicycle	Bicycle Lane Arrangement on Approach	Pocket Bike Lane	Pocket Bike Lane	Mixed Traffic	Mixed Traffic	Curb Bike Lane, Cycletrack or MUP	Curb Bike Lane, Cycletrack or MUP	Mixed Traffic	Mixed Traffic			Curb Bike Lane, Cycletrack or MUP	Mixed Traffic
	Right Turn Lane Configuration	Bike lane shifts to the left of right turn	Bike lane shifts to the left of right turn	> 50 m	> 50 m	Not Applicable	Not Applicable	> 50 m	≤ 50 m			Not Applicable	≤ 50 m
	Right Turning Speed	≤ 25 km/h	≤ 25 km/h	≤ 25 km/h	≤ 25 km/h	Not Applicable	Not Applicable	≤ 25 km/h	≤ 25 km/h			Not Applicable	≤ 25 km/h
	Cyclist relative to RT motorists	D	D	F	F	Not Applicable	Not Applicable	F	D	-	Not Applicable	D	-
	Separated or Mixed Traffic	Separated	Separated	Mixed Traffic	Mixed Traffic	Separated	Separated	Mixed Traffic	Mixed Traffic	-	Separated	Mixed Traffic	-
	Left Turn Approach	≥ 2 lanes crossed	≥ 2 lanes crossed	No lane crossed	No lane crossed	≥ 2 lanes crossed	≥ 2 lanes crossed	No lane crossed	No lane crossed	No lane crossed		No lane crossed	
	Operating Speed	≥ 60 km/h	≥ 60 km/h	> 40 to ≤ 50 km/h	> 40 to ≤ 50 km/h	≥ 60 km/h	≥ 60 km/h	> 40 to ≤ 50 km/h	> 40 to ≤ 50 km/h	≥ 60 km/h		≤ 40 km/h	
	Left Turning Cyclist	F	F	B	B	F	F	B	B	C	-	B	-
	Level of Service	F	F	F	F	F	F	F	D	-	-	D	-
		F				F				D			
Transit	Average Signal Delay	≤ 10 sec	≤ 10 sec	> 40 sec	> 40 sec	≤ 20 sec	≤ 20 sec	> 40 sec	≤ 30 sec	≤ 20 sec	≤ 10 sec	≤ 30 sec	
	Level of Service	B	B	F	F	C	C	F	D	C	B	D	-
		F				F				D			
Truck	Effective Corner Radius	> 15 m	10 - 15 m	> 15 m	10 - 15 m	> 15 m	10 - 15 m	10 - 15 m	> 15 m		< 10 m	< 10 m	
	Number of Receiving Lanes on Departure from Intersection	1	1	≥ 2	≥ 2	1	≥ 2	≥ 2	≥ 2		1	1	
	Level of Service	C	E	A	B	C	B	B	A	-	F	F	-
		E				C				F			
Auto	Volume to Capacity Ratio	0.61 - 0.70				0.0 - 0.60				0.71 - 0.80			
	Level of Service	B				A				C			

Multi-Modal Level of Service - Intersections Form

Consultant	CGH Transportation	Project	2020-11
Scenario	2027 FT PM	Date	29-Jun-20
Comments			

INTERSECTIONS		March Road & Halton Terrace / Maxwell Bridge Road				March Road & Klondike Road				March Road & Site Access #1 / South Local Road			
Crossing Side		NORTH	SOUTH	EAST	WEST	NORTH	SOUTH	EAST	WEST	NORTH	SOUTH	EAST	WEST
Pedestrian	Lanes	9	9	6	6	10+	10+	7	7	5	6	4	5
	Median	No Median - 2.4 m	No Median - 2.4 m	No Median - 2.4 m	No Median - 2.4 m	Median > 2.4 m	No Median - 2.4 m	No Median - 2.4 m	No Median - 2.4 m	No Median - 2.4 m	No Median - 2.4 m	No Median - 2.4 m	No Median - 2.4 m
	Conflicting Left Turns	Permissive	Permissive	Protected/ Permissive	Protected/ Permissive	Protected/ Permissive	Permissive	Protected	Protected	Permissive	Protected/ Permissive	Permissive	Permissive
	Conflicting Right Turns	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control
	Right Turns on Red (RToR) ?	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed
	Ped Signal Leading Interval?	No	No	No	No	No	No	No	No	No	No	No	No
	Right Turn Channel	No Channel	No Channel	No Channel	No Channel	No Channel	No Channel	No Channel	No Channel	No Channel	No Channel	No Channel	No Channel
	Corner Radius	15-25m	10-15m	10-15m	15-25m	10-15m	15-25m	10-15m	15-25m	5-10m	5-10m	5-10m	5-10m
	Crosswalk Type	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings
	PETSI Score	-31	-29	20	18	-35	-47	12	14	38	21	54	38
	Ped. Exposure to Traffic LoS	#N/A	#N/A	F	F	#N/A	#N/A	F	F	E	F	D	E
Bicycle	Cycle Length												
	Effective Walk Time												
	Average Pedestrian Delay												
	Pedestrian Delay LoS	-	-	-	-	-	-	-	-	-	-	-	-
	Level of Service	#N/A	#N/A	F	F	#N/A	#N/A	F	F	E	F	D	E
		#N/A				#N/A				F			
	Approach From	NORTH	SOUTH	EAST	WEST	NORTH	SOUTH	EAST	WEST	NORTH	SOUTH	EAST	WEST
	Bicycle Lane Arrangement on Approach	Pocket Bike Lane	Pocket Bike Lane	Mixed Traffic	Mixed Traffic	Curb Bike Lane, Cycletrack or MUP	Curb Bike Lane, Cycletrack or MUP	Mixed Traffic	Mixed Traffic	Curb Bike Lane, Cycletrack or MUP	Curb Bike Lane, Cycletrack or MUP	Mixed Traffic	Curb Bike Lane, Cycletrack or MUP
	Right Turn Lane Configuration	Bike lane shifts to the left of right turn	Bike lane shifts to the left of right turn	> 50 m	> 50 m	Not Applicable	Not Applicable	> 50 m	≤ 50 m	Not Applicable	Not Applicable	≤ 50 m	
	Right Turning Speed	≤ 25 km/h	≤ 25 km/h	≤ 25 km/h	≤ 25 km/h	Not Applicable	Not Applicable	≤ 25 km/h	≤ 25 km/h	Not Applicable	Not Applicable	≤ 25 km/h	
	Cyclist relative to RT motorists	D	D	F	F	Not Applicable	Not Applicable	F	D	Not Applicable	Not Applicable	D	Not Applicable
	Separated or Mixed Traffic	Separated	Separated	Mixed Traffic	Mixed Traffic	Separated	Separated	Mixed Traffic	Mixed Traffic	Separated	Separated	Mixed Traffic	Separated
Transit	Left Turn Approach	≥ 2 lanes crossed	≥ 2 lanes crossed	No lane crossed	No lane crossed	≥ 2 lanes crossed	≥ 2 lanes crossed	No lane crossed	No lane crossed	No lane crossed	No lane crossed	No lane crossed	No lane crossed
	Operating Speed	≥ 60 km/h	≥ 60 km/h	> 40 to ≤ 50 km/h	> 40 to ≤ 50 km/h	≥ 60 km/h	≥ 60 km/h	> 40 to ≤ 50 km/h	> 40 to ≤ 50 km/h	≥ 60 km/h	≥ 60 km/h	≤ 40 km/h	> 40 to ≤ 50 km/h
	Left Turning Cyclist	F	F	B	B	F	F	B	B	C	C	B	B
	Level of Service	F	F	F	F	F	F	F	D	C	C	D	B
		F				F				D			
	Average Signal Delay	≤ 20 sec	≤ 20 sec	> 40 sec	> 40 sec	≤ 20 sec	≤ 20 sec	> 40 sec	≤ 40 sec	≤ 20 sec	> 40 sec	> 40 sec	≤ 30 sec
	Level of Service	C	C	F	F	C	C	F	E	C	F	F	D
		F				F				F			
Truck	Effective Corner Radius	> 15 m	10 - 15 m	> 15 m	10 - 15 m	> 15 m	10 - 15 m	10 - 15 m	> 15 m	< 10 m	< 10 m	< 10 m	< 10 m
	Number of Receiving Lanes on Departure from Intersection	1	1	≥ 2	≥ 2	1	≥ 2	≥ 2	≥ 2	1	1	1	≥ 2
	Level of Service	C	E	A	B	C	B	B	A	F	F	F	D
		E				C				F			
Auto	Volume to Capacity Ratio	0.81 - 0.90				0.61 - 0.70				0.91 - 1.00			
	Level of Service	D				B				E			

Multi-Modal Level of Service - Intersections Form

Consultant	CGH Transportation	Project	2020-11
Scenario	2022 FT Sat	Date	29-Jun-20
Comments			

INTERSECTIONS		March Road & Halton Terrace / Maxwell Bridge Road				March Road & Klondike Road				March Road & Site Access #1 / South Local Road			
Crossing Side		NORTH	SOUTH	EAST	WEST	NORTH	SOUTH	EAST	WEST	NORTH	SOUTH	EAST	WEST
Pedestrian	Lanes	9	9	6	6	10+	10+	7	7			4	
	Median	No Median - 2.4 m	No Median - 2.4 m	No Median - 2.4 m	No Median - 2.4 m	Median > 2.4 m	No Median - 2.4 m	No Median - 2.4 m	No Median - 2.4 m			No Median - 2.4 m	
	Conflicting Left Turns	Permissive	Permissive	Protected/Permissive	Protected/Permissive	Protected/Permissive	Permissive	Protected	Protected			Permissive	
	Conflicting Right Turns	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control			Permissive or yield control	
	Right Turns on Red (RToR) ?	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed			RTOR allowed	
	Ped Signal Leading Interval?	No	No	No	No	No	No	No	No			No	
	Right Turn Channel	No Channel	No Channel	No Channel	No Channel	No Channel	No Channel	No Channel	No Channel			No Channel	
	Corner Radius	15-25m	10-15m	10-15m	15-25m	10-15m	15-25m	10-15m	15-25m			5-10m	
	Crosswalk Type	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings			Std transverse markings	
	PETSI Score	-31	-29	20	18	-35	-47	12	14			54	
	Ped. Exposure to Traffic LoS	#N/A	#N/A	F	F	#N/A	#N/A	F	F	-	-	D	-
	Cycle Length												
	Effective Walk Time												
	Average Pedestrian Delay												
	Pedestrian Delay LoS	-	-	-	-	-	-	-	-	-	-	-	-
	Level of Service	#N/A	#N/A	F	F	#N/A	#N/A	F	F	-	-	D	-
Approach From		NORTH	SOUTH	EAST	WEST	NORTH	SOUTH	EAST	WEST	NORTH	SOUTH	EAST	WEST
Bicycle	Bicycle Lane Arrangement on Approach	Pocket Bike Lane	Pocket Bike Lane	Mixed Traffic	Mixed Traffic	Curb Bike Lane, Cycletrack or MUP	Curb Bike Lane, Cycletrack or MUP	Mixed Traffic	Mixed Traffic			Curb Bike Lane, Cycletrack or MUP	Mixed Traffic
	Right Turn Lane Configuration	Bike lane shifts to the left of right turn	Bike lane shifts to the left of right turn	> 50 m	> 50 m	Not Applicable	Not Applicable	> 50 m	≤ 50 m			Not Applicable	≤ 50 m
	Right Turning Speed	≤ 25 km/h	≤ 25 km/h	≤ 25 km/h	≤ 25 km/h	Not Applicable	Not Applicable	≤ 25 km/h	≤ 25 km/h			Not Applicable	≤ 25 km/h
	Cyclist relative to RT motorists	D	D	F	F	Not Applicable	Not Applicable	F	D	-	Not Applicable	D	-
	Separated or Mixed Traffic	Separated	Separated	Mixed Traffic	Mixed Traffic	Separated	Separated	Mixed Traffic	Mixed Traffic	-	Separated	Mixed Traffic	-
	Left Turn Approach	≥ 2 lanes crossed	≥ 2 lanes crossed	No lane crossed	No lane crossed	≥ 2 lanes crossed	≥ 2 lanes crossed	No lane crossed	No lane crossed	No lane crossed		No lane crossed	
	Operating Speed	≥ 60 km/h	≥ 60 km/h	> 40 to ≤ 50 km/h	> 40 to ≤ 50 km/h	≥ 60 km/h	≥ 60 km/h	> 40 to ≤ 50 km/h	> 40 to ≤ 50 km/h	≥ 60 km/h		≤ 40 km/h	
	Left Turning Cyclist	F	F	B	B	F	F	B	B	C	-	B	-
	Level of Service	F	F	F	F	F	F	F	D	-	-	D	-
		F				F				D			
Transit	Average Signal Delay	≤ 10 sec	≤ 10 sec	≤ 40 sec	≤ 30 sec	≤ 20 sec	≤ 20 sec	> 40 sec	≤ 40 sec	≤ 10 sec	≤ 20 sec	≤ 40 sec	
	Level of Service	B	B	E	D	C	C	F	E	B	C	E	-
		E				F				E			
Truck	Effective Corner Radius	> 15 m	10 - 15 m	> 15 m	10 - 15 m	> 15 m	10 - 15 m	10 - 15 m	> 15 m			< 10 m	< 10 m
	Number of Receiving Lanes on Departure from Intersection	1	1	≥ 2	≥ 2	1	≥ 2	≥ 2	≥ 2			1	1
	Level of Service	C	E	A	B	C	B	B	A	-	F	F	-
		E				C				F			
Auto	Volume to Capacity Ratio	0.0 - 0.60				0.0 - 0.60				0.61 - 0.70			
	Level of Service	A				A				B			

Multi-Modal Level of Service - Intersections Form

Consultant	CGH Transportation	Project	2020-11
Scenario	2027 FT Sat	Date	29-Jun-20
Comments			

INTERSECTIONS		March Road & Halton Terrace / Maxwell Bridge Road				March Road & Klondike Road				March Road & Site Access #1 / South Local Road			
Crossing Side		NORTH	SOUTH	EAST	WEST	NORTH	SOUTH	EAST	WEST	NORTH	SOUTH	EAST	WEST
Pedestrian	Lanes	9	9	6	6	10+	10+	7	7	5	6	4	5
	Median	No Median - 2.4 m	No Median - 2.4 m	No Median - 2.4 m	No Median - 2.4 m	Median > 2.4 m	No Median - 2.4 m	No Median - 2.4 m	No Median - 2.4 m	No Median - 2.4 m	No Median - 2.4 m	No Median - 2.4 m	No Median - 2.4 m
	Conflicting Left Turns	Permissive	Permissive	Protected/Permissive	Protected/Permissive	Protected/Permissive	Permissive	Protected	Protected	Permissive	Permissive	Protected/Permissive	Permissive
	Conflicting Right Turns	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control
	Right Turns on Red (RToR) ?	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed
	Ped Signal Leading Interval?	No	No	No	No	No	No	No	No	No	No	No	No
	Right Turn Channel	No Channel	No Channel	No Channel	No Channel	No Channel	No Channel	No Channel	No Channel	No Channel	No Channel	No Channel	No Channel
	Corner Radius	15-25m	10-15m	10-15m	15-25m	10-15m	15-25m	10-15m	15-25m	5-10m	5-10m	5-10m	5-10m
	Crosswalk Type	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings
	PETSI Score	-31	-29	20	18	-35	-47	12	14	38	21	54	38
	Ped. Exposure to Traffic LoS	#N/A	#N/A	F	F	#N/A	#N/A	F	F	E	F	D	E
	Cycle Length												
	Effective Walk Time												
	Average Pedestrian Delay												
	Pedestrian Delay LoS	-	-	-	-	-	-	-	-	-	-	-	-
	Level of Service	#N/A	#N/A	F	F	#N/A	#N/A	F	F	E	F	D	E
		#N/A				#N/A				F			
Approach From		NORTH	SOUTH	EAST	WEST	NORTH	SOUTH	EAST	WEST	NORTH	SOUTH	EAST	WEST
Bicycle	Bicycle Lane Arrangement on Approach	Pocket Bike Lane	Pocket Bike Lane	Mixed Traffic	Mixed Traffic	Curb Bike Lane, Cycletrack or MUP	Curb Bike Lane, Cycletrack or MUP	Mixed Traffic	Mixed Traffic	Curb Bike Lane, Cycletrack or MUP	Curb Bike Lane, Cycletrack or MUP	Mixed Traffic	Curb Bike Lane, Cycletrack or MUP
	Right Turn Lane Configuration	Bike lane shifts to the left of right turn	Bike lane shifts to the left of right turn	> 50 m	> 50 m	Not Applicable	Not Applicable	> 50 m	≤ 50 m	Not Applicable	Not Applicable	≤ 50 m	
	Right Turning Speed	≤ 25 km/h	≤ 25 km/h	≤ 25 km/h	≤ 25 km/h	Not Applicable	Not Applicable	≤ 25 km/h	≤ 25 km/h	Not Applicable	Not Applicable	≤ 25 km/h	
	Cyclist relative to RT motorists	D	D	F	F	Not Applicable	Not Applicable	F	D	Not Applicable	Not Applicable	D	Not Applicable
	Separated or Mixed Traffic	Separated	Separated	Mixed Traffic	Mixed Traffic	Separated	Separated	Mixed Traffic	Mixed Traffic	Separated	Separated	Mixed Traffic	Separated
	Left Turn Approach	≥ 2 lanes crossed	≥ 2 lanes crossed	No lane crossed	No lane crossed	≥ 2 lanes crossed	≥ 2 lanes crossed	No lane crossed	No lane crossed	No lane crossed	No lane crossed	No lane crossed	No lane crossed
	Operating Speed	≥ 60 km/h	≥ 60 km/h	> 40 to ≤ 50 km/h	> 40 to ≤ 50 km/h	≥ 60 km/h	≥ 60 km/h	> 40 to ≤ 50 km/h	> 40 to ≤ 50 km/h	≥ 60 km/h	≥ 60 km/h	≤ 40 km/h	> 40 to ≤ 50 km/h
	Left Turning Cyclist	F	F	B	B	F	F	B	B	C	C	B	B
	Level of Service	F	F	F	F	F	F	F	D	C	C	D	B
		F				F				D			
Transit	Average Signal Delay	≤ 20 sec	≤ 20 sec	> 40 sec	≤ 40 sec	≤ 20 sec	≤ 20 sec	≤ 40 sec	≤ 40 sec	≤ 20 sec	> 40 sec	> 40 sec	≤ 20 sec
	Level of Service	C	C	F	E	C	C	E	E	C	F	F	C
		F				E				F			
Truck	Effective Corner Radius	> 15 m	10 - 15 m	> 15 m	10 - 15 m	> 15 m	10 - 15 m	10 - 15 m	> 15 m	< 10 m	< 10 m	< 10 m	< 10 m
	Number of Receiving Lanes on Departure from Intersection	1	1	≥ 2	≥ 2	1	≥ 2	≥ 2	≥ 2	1	1	1	≥ 2
	Level of Service	C	E	A	B	C	B	B	A	F	F	F	D
		E				C				F			
Auto	Volume to Capacity Ratio	0.71 - 0.80				0.61 - 0.70				0.91 - 1.00			
	Level of Service	C				B				E			

Multi-Modal Level of Service - Segments Form

Consultant	CGH Transportation	Project Date	2020-11
Scenario	Existing and 2022 FB		June 22, 2020
Comments			

SEGMENTS		March Road	N of 125m N of Halton Terrace	S of 125m N of Halton Terrace	S of Klondike Rd
			1	2	3
Pedestrian	Sidewalk Width	F	no sidewalk n/a	≥ 2 m < 0.5	≥ 2 m < 0.5
	Boulevard Width		> 3000	> 3000	> 3000
	Avg Daily Curb Lane Traffic Volume		> 60 km/h no	> 60 km/h no	> 60 km/h no
	Operating Speed				
	On-Street Parking				
	Exposure to Traffic PLoS		F	F	F
	Effective Sidewalk Width				
	Pedestrian Volume				
	Crowding PLoS		-	-	-
	Level of Service		-	-	-
Bicycle	Type of Cycling Facility	F	Mixed Traffic	Curbside Bike Lane	Curbside Bike Lane
	Number of Travel Lanes		2-3 lanes total	≤ 1 each direction	≤ 1 each direction
	Operating Speed		≥ 60 km/h	> 70 km/h	> 70 km/h
	# of Lanes & Operating Speed LoS		F	E	E
	Bike Lane (+ Parking Lane) Width		≥ 1.8 m	≥ 1.8 m	≥ 1.8 m
	Bike Lane Width LoS		-	A	A
	Bike Lane Blockages		Rare	Rare	Rare
	Blockage LoS		-	A	A
	Median Refuge Width (no median = < 1.8 m)		< 1.8 m refuge	< 1.8 m refuge	< 1.8 m refuge
	No. of Lanes at Unsignalized Crossing		≤ 3 lanes	≤ 3 lanes	≤ 3 lanes
	Sidestreet Operating Speed		≤ 40 km/h	≤ 40 km/h	≤ 40 km/h
	Unsignalized Crossing - Lowest LoS		A	A	A
Transit	Level of Service	D	F	E	E
	Facility Type		Mixed Traffic	Mixed Traffic	Mixed Traffic
	Friction or Ratio Transit:Posted Speed		Vt/Vp ≥ 0.8	Vt/Vp ≥ 0.8	Vt/Vp ≥ 0.8
	Level of Service		D	D	D
Truck	Truck Lane Width	C	≤ 3.5 m	≤ 3.5 m	≤ 3.5 m
	Travel Lanes per Direction		1	> 1	> 1
	Level of Service		C	A	A
Auto	Level of Service	Not Applicable			

Multi-Modal Level of Service - Segments Form

Consultant	CGH Transportation	Project Date	2020-11
Scenario	2022 FT		June 22, 2020
Comments			

SEGMENTS		March Road	N of 125m N of Halton Terrace	S of 125m N of Halton Terrace	S of Klondike Rd
			1	2	3
Pedestrian	Sidewalk Width	F	≥ 2 m	≥ 2 m	≥ 2 m
	Boulevard Width		< 0.5	< 0.5	< 0.5
	Avg Daily Curb Lane Traffic Volume		> 3000	> 3000	> 3000
	Operating Speed		> 60 km/h	> 60 km/h	> 60 km/h
	On-Street Parking		no	no	no
	Exposure to Traffic PLoS		F	F	F
	Effective Sidewalk Width				
	Pedestrian Volume				
	Crowding PLoS		-	-	-
	Level of Service		-	-	-
Bicycle	Type of Cycling Facility	F	Mixed Traffic	Curbside Bike Lane	Curbside Bike Lane
	Number of Travel Lanes		2-3 lanes total	≤ 1 each direction	≤ 1 each direction
	Operating Speed		≥ 60 km/h	> 70 km/h	> 70 km/h
	# of Lanes & Operating Speed LoS		F	E	E
	Bike Lane (+ Parking Lane) Width		≥ 1.8 m	≥ 1.8 m	≥ 1.8 m
	Bike Lane Width LoS		-	A	A
	Bike Lane Blockages		Rare	Rare	Rare
	Blockage LoS		-	A	A
	Median Refuge Width (no median = < 1.8 m)		< 1.8 m refuge	< 1.8 m refuge	< 1.8 m refuge
	No. of Lanes at Unsignalized Crossing		≤ 3 lanes	≤ 3 lanes	≤ 3 lanes
	Sidestreet Operating Speed		≤ 40 km/h	≤ 40 km/h	≤ 40 km/h
	Unsignalized Crossing - Lowest LoS		A	A	A
Transit	Level of Service	D	F	E	E
	Facility Type		Mixed Traffic	Mixed Traffic	Mixed Traffic
	Friction or Ratio Transit:Posted Speed		Vt/Vp ≥ 0.8	Vt/Vp ≥ 0.8	Vt/Vp ≥ 0.8
	Level of Service		D	D	D
Truck	Truck Lane Width	C	≤ 3.5 m	≤ 3.5 m	≤ 3.5 m
	Travel Lanes per Direction		1	> 1	> 1
	Level of Service		C	A	A
Auto	Level of Service	Not Applicable			

Multi-Modal Level of Service - Segments Form

Consultant	CGH Transportation	Project Date	2020-11
Scenario	2027 FB		June 22, 2020
Comments			

SEGMENTS		March Road	N of 125m N of Halton Terrace	S of 125m N of Halton Terrace	S of Klondike Rd
			1	2	3
Pedestrian	Sidewalk Width	F	≥ 2 m	≥ 2 m	≥ 2 m
	Boulevard Width		< 0.5	< 0.5	< 0.5
	Avg Daily Curb Lane Traffic Volume		> 3000	> 3000	> 3000
	Operating Speed		> 60 km/h	> 60 km/h	> 60 km/h
	On-Street Parking		no	no	no
	Exposure to Traffic PLoS		F	F	F
	Effective Sidewalk Width				
	Pedestrian Volume				
	Crowding PLoS		-	-	-
	Level of Service		-	-	-
Bicycle	Type of Cycling Facility	F	Mixed Traffic	Curbside Bike Lane	Curbside Bike Lane
	Number of Travel Lanes		2-3 lanes total	≤ 1 each direction	≤ 1 each direction
	Operating Speed		≥ 60 km/h	> 70 km/h	> 70 km/h
	# of Lanes & Operating Speed LoS		F	E	E
	Bike Lane (+ Parking Lane) Width		≥ 1.8 m	≥ 1.8 m	≥ 1.8 m
	Bike Lane Width LoS		-	A	A
	Bike Lane Blockages		Rare	Rare	Rare
	Blockage LoS		-	A	A
	Median Refuge Width (no median = < 1.8 m)		< 1.8 m refuge	< 1.8 m refuge	< 1.8 m refuge
	No. of Lanes at Unsignalized Crossing		≤ 3 lanes	≤ 3 lanes	≤ 3 lanes
	Sidestreet Operating Speed		≤ 40 km/h	≤ 40 km/h	≤ 40 km/h
	Unsignalized Crossing - Lowest LoS		A	A	A
Transit	Level of Service	D	F	E	E
	Facility Type		Mixed Traffic	Mixed Traffic	Mixed Traffic
	Friction or Ratio Transit:Posted Speed		Vt/Vp ≥ 0.8	Vt/Vp ≥ 0.8	Vt/Vp ≥ 0.8
	Level of Service		D	D	D
Truck	Truck Lane Width	C	≤ 3.5 m	≤ 3.5 m	≤ 3.5 m
	Travel Lanes per Direction		1	> 1	> 1
	Level of Service		C	A	A
Auto	Level of Service	Not Applicable			

Multi-Modal Level of Service - Segments Form

Consultant	CGH Transportation	Project Date	2020-11
Scenario	2027 FT		June 22, 2020
Comments			

SEGMENTS		March Road	N of 125m N of Halton Terrace	S of 125m N of Halton Terrace	S of Klondike Rd
			1	2	3
Pedestrian	Sidewalk Width	F	≥ 2 m	≥ 2 m	≥ 2 m
	Boulevard Width		< 0.5	< 0.5	< 0.5
	Avg Daily Curb Lane Traffic Volume		> 3000	> 3000	> 3000
	Operating Speed		> 60 km/h	> 60 km/h	> 60 km/h
	On-Street Parking		no	no	no
	Exposure to Traffic PLoS		F	F	F
	Effective Sidewalk Width				
	Pedestrian Volume				
	Crowding PLoS		-	-	-
	Level of Service		-	-	-
Bicycle	Type of Cycling Facility	E	Curbside Bike Lane	Curbside Bike Lane	Curbside Bike Lane
	Number of Travel Lanes		≤ 1 each direction	≤ 1 each direction	≤ 1 each direction
	Operating Speed		> 70 km/h	> 70 km/h	> 70 km/h
	# of Lanes & Operating Speed LoS		E	E	E
	Bike Lane (+ Parking Lane) Width		≥ 1.8 m	≥ 1.8 m	≥ 1.8 m
	Bike Lane Width LoS		A	A	A
	Bike Lane Blockages		Rare	Rare	Rare
	Blockage LoS		A	A	A
	Median Refuge Width (no median = < 1.8 m)		< 1.8 m refuge	< 1.8 m refuge	< 1.8 m refuge
	No. of Lanes at Unsignalized Crossing		≤ 3 lanes	≤ 3 lanes	≤ 3 lanes
	Sidestreet Operating Speed		≤ 40 km/h	≤ 40 km/h	≤ 40 km/h
	Unsignalized Crossing - Lowest LoS		A	A	A
Transit	Level of Service	D	E	E	E
	Facility Type		Mixed Traffic	Mixed Traffic	Mixed Traffic
	Friction or Ratio Transit:Posted Speed		Vt/Vp ≥ 0.8	Vt/Vp ≥ 0.8	Vt/Vp ≥ 0.8
	Level of Service		D	D	D
Truck	Truck Lane Width	C	≤ 3.5 m	≤ 3.5 m	≤ 3.5 m
	Travel Lanes per Direction		1	> 1	> 1
	Level of Service		C	A	A
Auto	Level of Service	Not Applicable			

Appendix J

Signalization Warrants

Access #1 & March Road
2022 FT

Justification #7

Justification	Description	Minimum Requirement		Minimum Requirement		Compliance		Signal	
		1 Lane Highway		2 or More Lanes		Sectional			
		Free Flow	Restr. Flow	Free Flow	Restr. Flow	Numerical	%		
1. Minimum Vehicular Volume	A. Vehicle volume, all approaches (average hour)	480	720	600	900	716	149%	133%	
	B. Vehicle volume, along minor streets (average hour)	120	170	120	170	160	133%		
2. Delay to Cross Traffic	A. Vehicle volumes, major street (average hour)	480	720	600	900	609	127%	127%	
	B. Combined vehicle and pedestrian volume crossing artery from minor streets (average hour)	50	75	50	75	73	145%		

Notes

1. Refer to OTM Book 12, pg 88, Nov 2007
2. Lowest section percentage governs justification
3. Average hourly volumes estimated from peak hour volumes, AHV = PM/2 or (AM + PM) / 4
4. T-intersection factor corrected, applies only to 1B

Access #1 & March Road
2027 FT

Justification #7

Justification	Description	Minimum Requirement		Minimum Requirement		Compliance		Signal	
		1 Lane Highway		2 or More Lanes		Sectional			
		Free Flow	Restr. Flow	Free Flow	Restr. Flow	Numerical	%		
1. Minimum Vehicular Volume	A. Vehicle volume, all approaches (average hour)	480	720	600	900	1287	268%	97%	
	B. Vehicle volume, along minor streets (average hour)	120	170	120	170	116	97%		
2. Delay to Cross Traffic	A. Vehicle volumes, major street (average hour)	480	720	600	900	1171	244%	149%	
	B. Combined vehicle and pedestrian volume crossing artery from minor streets (average hour)	50	75	50	75	75	149%		


Notes

1. Refer to OTM Book 12, pg 88, Nov 2007
2. Lowest section percentage governs justification
3. Average hourly volumes estimated from peak hour volumes, AHV = PM/2 or (AM + PM) / 4
4. T-intersection factor corrected, applies only to 1B


Appendix K

Left-turn Lane Warrants

Design Speed 90 km/h	Southbound Left	Yes														
		EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	%Left Turn	Volume Advancing	Volume Opposing
Access #1 2022 FT	AM	0	0	0	169	0	29	0	216	11	100	816	0	10.9%	916	227
	PM	0	0	0	121	0	67	0	946	12	37	298	0	11.0%	335	958

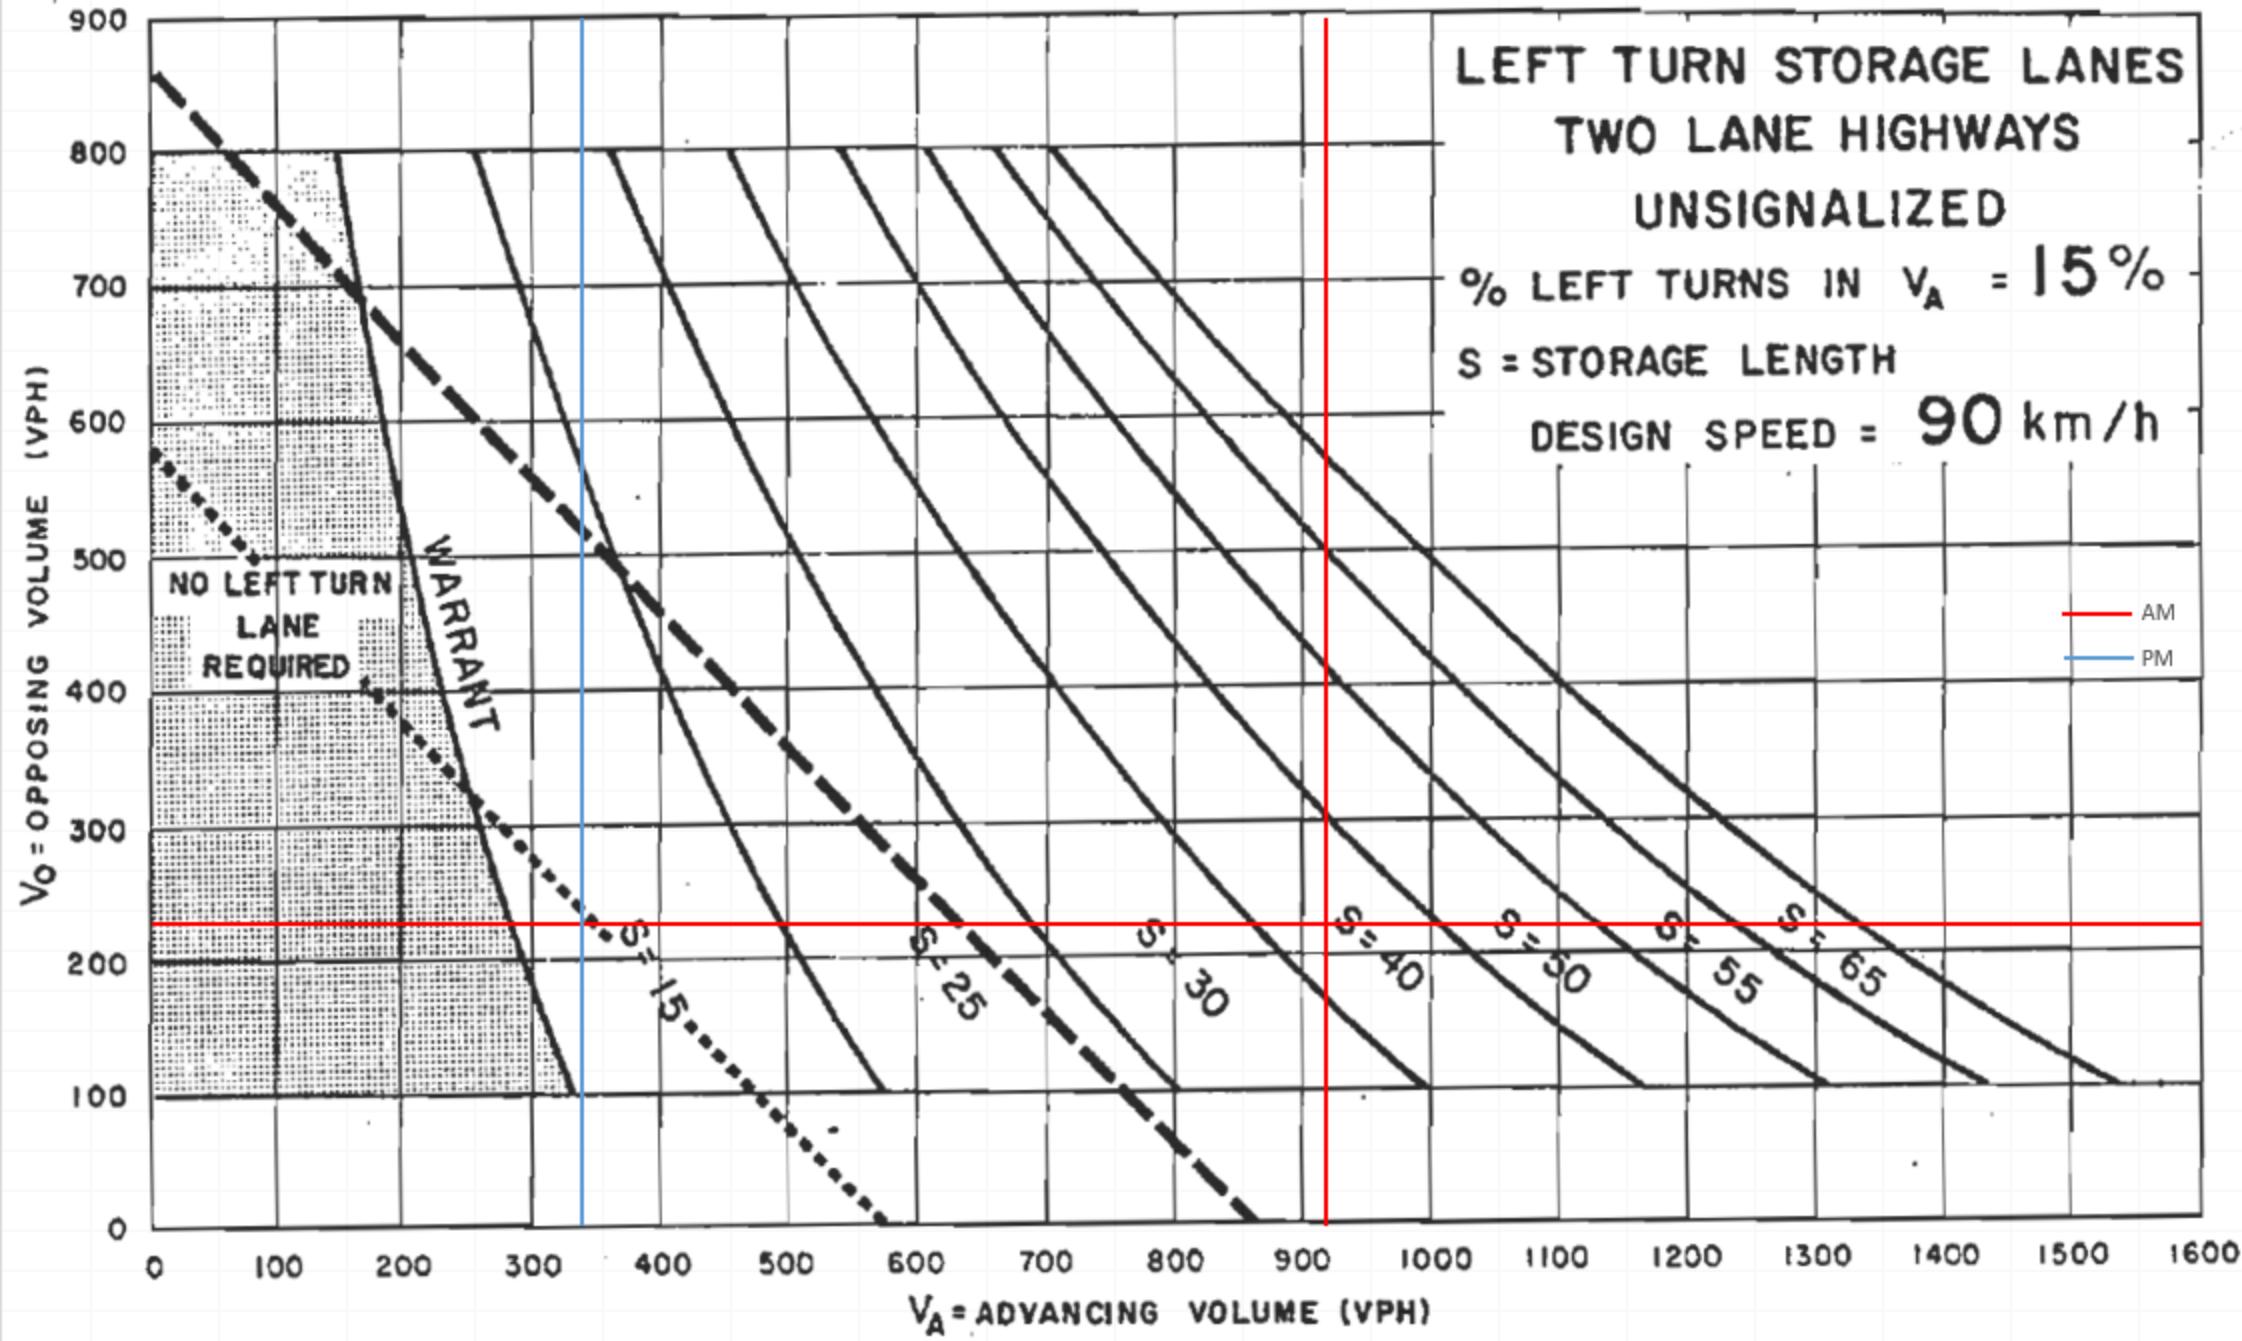

Design Speed 90 km/h		Southbound Left										Yes					
		EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	%Left Turn	Volume Advancing	Volume Opposing	
Access #1	2027 FT	AM	5	5	21	155	5	37	4	620	11	91	1516	0	5.7%	1607	635
		PM	5	6	37	122	9	97	23	1586	12	44	767	8	5.4%	819	1621

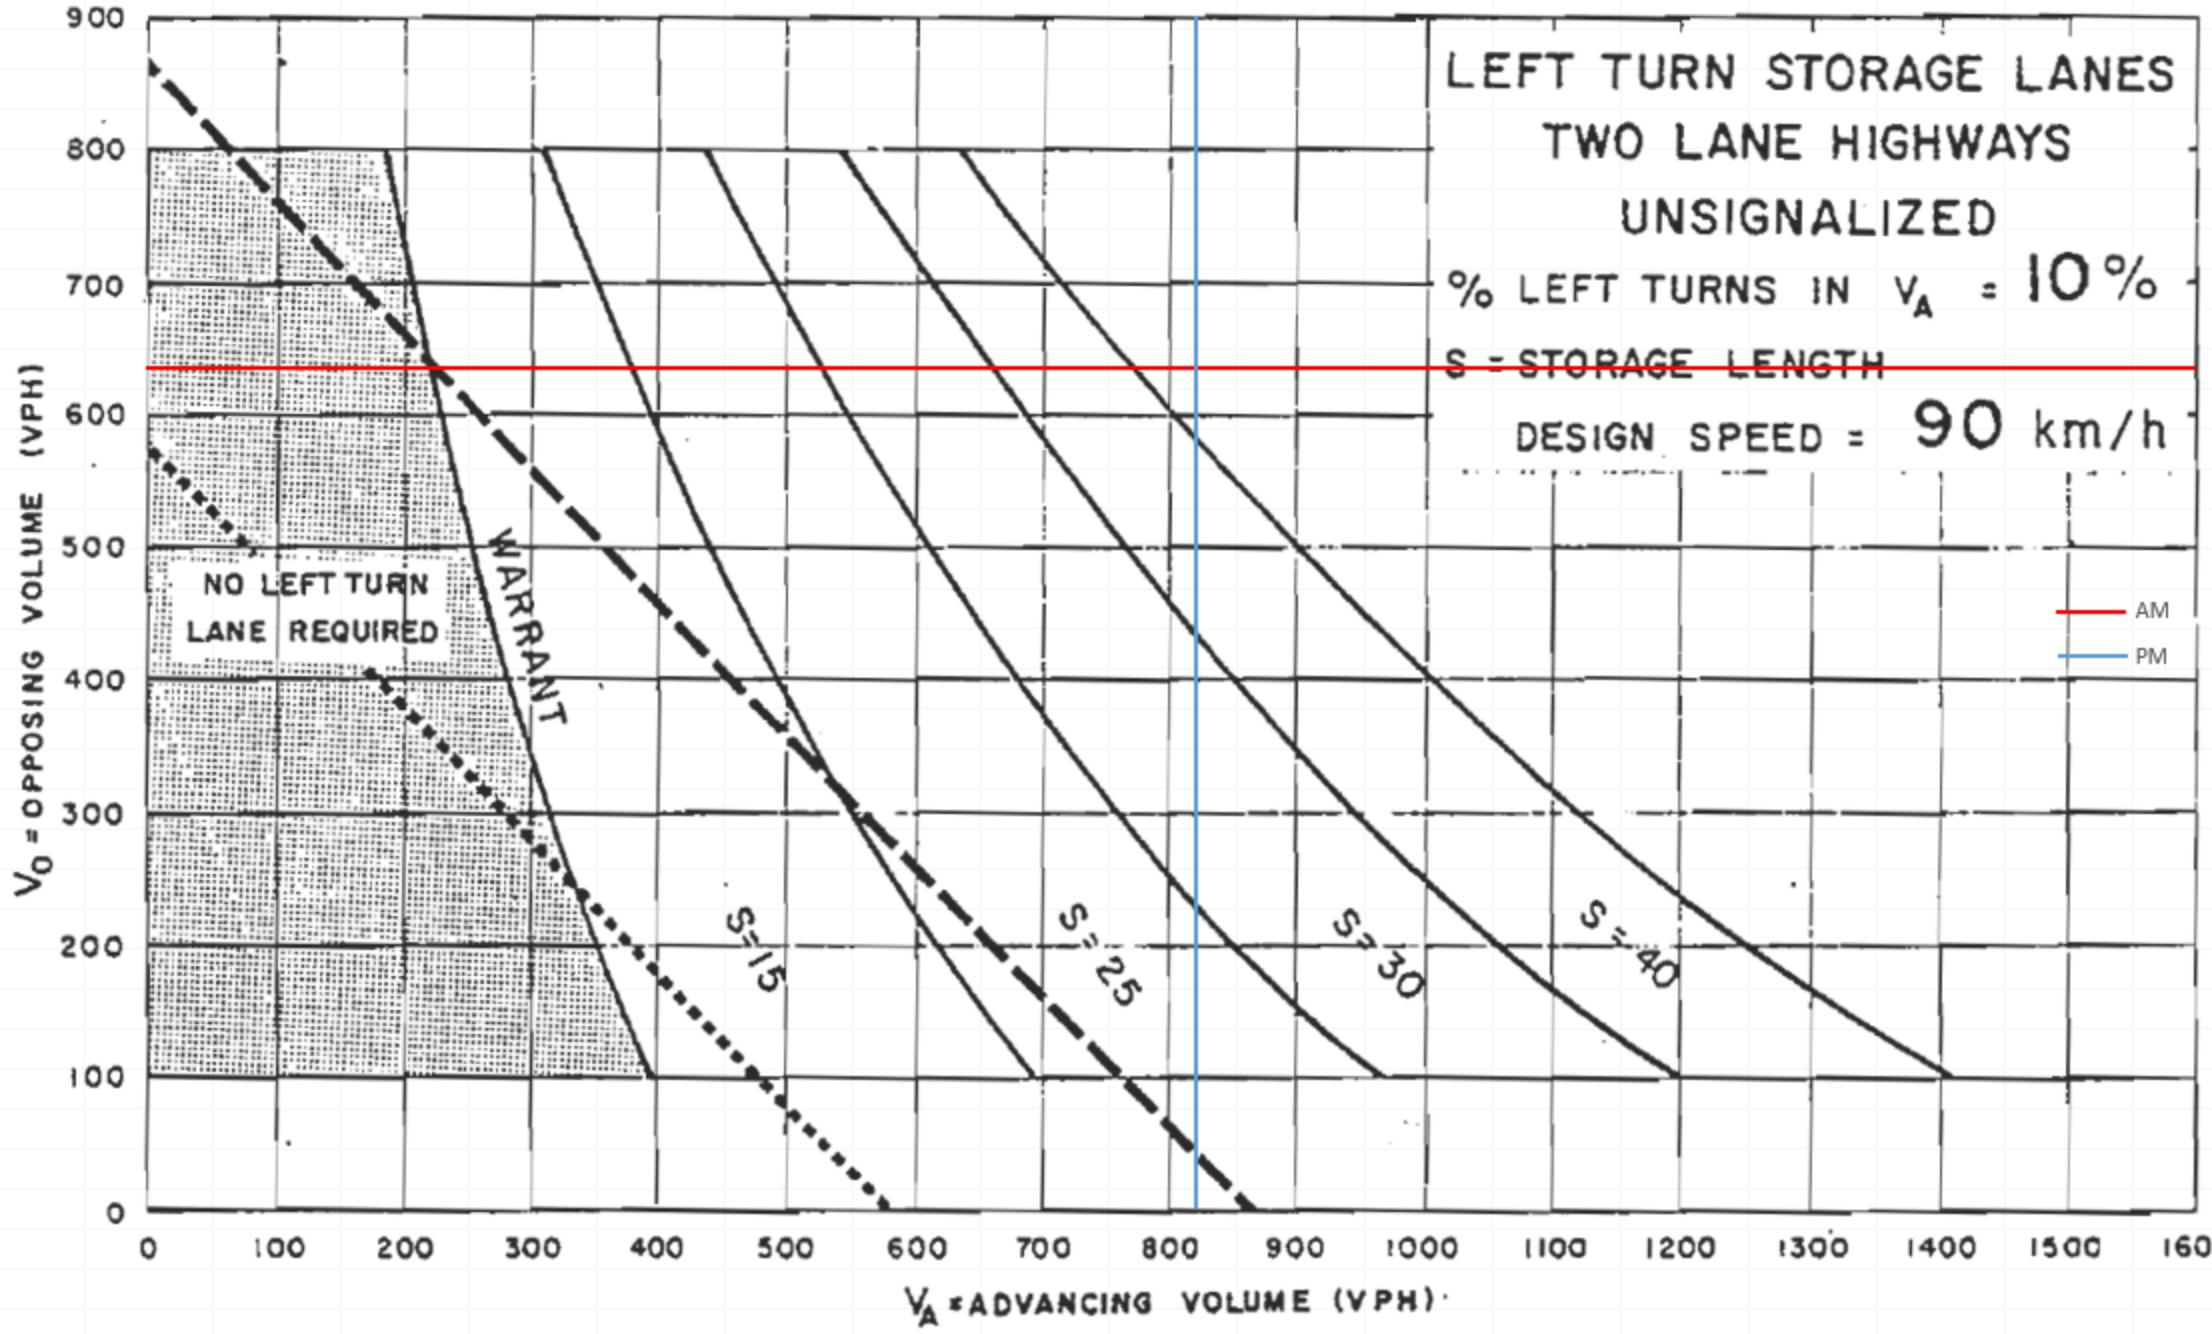

Appendix L

HV% Calculations

[1] March Road at Halton Terrace / Maxwell Bridge Road												
	AM											
	NBL	NBT	NBR	SBL	SBT	SBR	EBL	EBT	EBR	WBL	WBT	WBR
HV Volume	2	22	4	1	13	1	0	5	2	1	0	2
Total Volume	23	178	61	68	807	12	21	37	95	125	16	23
HV%	9%	12%	7%	1%	2%	8%	0%	14%	2%	1%	0%	9%
	PM											
	NBL	NBT	NBR	SBL	SBT	SBR	EBL	EBT	EBR	WBL	WBT	WBR
HV Volume	0	5	0	0	4	0	0	5	2	4	2	0
Total Volume	172	873	114	59	238	12	17	55	41	79	58	89
HV%	0%	1%	0%	0%	2%	0%	0%	9%	5%	5%	3%	0%

[2] March Road at Klondike Road												
	AM											
	NBL	NBT	NBR	SBL	SBT	SBR	EBL	EBT	EBR	WBL	WBT	WBR
HV Volume	4	18	4	3	15	3	4	2	2	2	2	2
Total Volume	83	274	44	17	883	33	30	35	253	91	25	19
HV%	5%	7%	9%	18%	2%	9%	13%	6%	1%	2%	8%	11%
	PM											
	NBL	NBT	NBR	SBL	SBT	SBR	EBL	EBT	EBR	WBL	WBT	WBR
HV Volume	1	2	0	0	8	0	0	0	0	1	2	0
Total Volume	159	1122	81	2	418	57	79	22	110	60	31	22
HV%	1%	0%	0%	0%	2%	0%	0%	0%	0%	2%	6%	0%

Appendix M

2020 Existing Conditions Synchro Sheets

Lanes, Volumes, Timings

2020 Existing-AM

1: March Road & Halton Terrace/Maxwell Bridge Road

910 March Road

	→	→	→	←	←	↑	↑	↓	↓	←	→	
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑		↑	↑		↑	↑↑	↑	↑	↑↑	↑
Traffic Volume (vph)	21	37	95	125	16	23	23	178	61	68	807	12
Future Volume (vph)	21	37	95	125	16	23	23	178	61	68	807	12
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	30.0		0.0	30.0		0.0	60.0		0.0	70.0		15.0
Storage Lanes	1		0	1		0	1		1	1		1
Taper Length (m)	60.0			60.0			70.0			100.0		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.95	1.00	1.00	0.95	1.00
Ped Bike Factor		0.99		1.00					0.98	1.00		
Fr _t		0.892			0.911				0.850		0.850	
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1658	1493	0	1658	1528	0	1551	3020	1414	1658	3316	1401
Flt Permitted	0.728			0.588			0.283			0.617		
Satd. Flow (perm)	1270	1493	0	1025	1528	0	462	3020	1380	1073	3316	1401
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		106			26				100			100
Link Speed (k/h)		40			40			80			80	
Link Distance (m)		143.7			356.2			324.9			267.2	
Travel Time (s)		12.9			32.1			14.6			12.0	
Confl. Peds. (#/hr)		1	1					2	2			
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Heavy Vehicles (%)	2%	14%	2%	2%	2%	9%	9%	12%	7%	2%	2%	8%
Adj. Flow (vph)	23	41	106	139	18	26	26	198	68	76	897	13
Shared Lane Traffic (%)												
Lane Group Flow (vph)	23	147	0	139	44	0	26	198	68	76	897	13
Enter Blocked Intersection	No											
Lane Alignment	Left	Left	Right									
Median Width(m)		3.5			3.5			3.5			3.5	
Link Offset(m)		0.0			0.0			0.0			0.0	
Crosswalk Width(m)		3.0			3.0			3.0			3.0	
Two way Left Turn Lane												
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25		15	25		15	25		15	25		15
Number of Detectors	1	2		1	2		1	2	1	1	2	1
Detector Template	Left	Thru		Left	Thru		Left	Thru	Right	Left	Thru	Right
Leading Detector (m)	2.0	10.0		2.0	10.0		2.0	10.0	2.0	2.0	10.0	2.0
Trailing Detector (m)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Position(m)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Size(m)	2.0	0.6		2.0	0.6		2.0	0.6	2.0	2.0	0.6	2.0
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(m)		9.4			9.4			9.4			9.4	
Detector 2 Size(m)		0.6			0.6			0.6			0.6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)	0.0			0.0			0.0			0.0		

Lanes, Volumes, Timings

2020 Existing-AM

1: March Road & Halton Terrace/Maxwell Bridge Road

910 March Road



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	Perm	NA		Perm	NA		pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases			4			8		5	2		1	6
Permitted Phases	4				8			2		2	6	6
Detector Phase	4	4		8	8			5	2	2	1	6
Switch Phase												
Minimum Initial (s)	10.0	10.0		10.0	10.0		5.0	10.0	10.0	5.0	10.0	10.0
Minimum Split (s)	38.6	38.6		38.6	38.6		12.4	34.6	34.6	11.4	34.6	34.6
Total Split (s)	48.0	48.0		48.0	48.0		20.0	52.0	52.0	20.0	52.0	52.0
Total Split (%)	40.0%	40.0%		40.0%	40.0%		16.7%	43.3%	43.3%	16.7%	43.3%	43.3%
Maximum Green (s)	41.4	41.4		41.4	41.4		12.6	45.4	45.4	13.6	45.4	45.4
Yellow Time (s)	3.3	3.3		3.3	3.3		4.6	4.6	4.6	4.6	4.6	4.6
All-Red Time (s)	3.3	3.3		3.3	3.3		2.8	2.0	2.0	1.8	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.6	6.6		6.6	6.6		7.4	6.6	6.6	6.4	6.6	6.6
Lead/Lag							Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?							Yes	Yes	Yes	Yes	Yes	Yes
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	None	None		None	None		None	C-Max	C-Max	None	C-Max	C-Max
Walk Time (s)	7.0	7.0		7.0	7.0			7.0	7.0		7.0	7.0
Flash Dont Walk (s)	25.0	25.0		25.0	25.0			21.0	21.0		21.0	21.0
Pedestrian Calls (#/hr)	0	0		0	0			0	0		0	0
Act Effct Green (s)	20.1	20.1		20.1	20.1		79.8	75.5	75.5	83.4	78.4	78.4
Actuated g/C Ratio	0.17	0.17		0.17	0.17		0.66	0.63	0.63	0.70	0.65	0.65
v/c Ratio	0.11	0.44		0.81	0.16		0.07	0.10	0.08	0.10	0.41	0.01
Control Delay	40.0	17.6		80.0	21.7		7.2	11.0	1.2	6.4	12.7	0.0
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	40.0	17.6		80.0	21.7		7.2	11.0	1.2	6.4	12.7	0.0
LOS	D	B		F	C		A	B	A	A	B	A
Approach Delay		20.6			66.0			8.4				12.1
Approach LOS		C			E			A				B
Queue Length 50th (m)	4.7	8.4		31.9	3.6		1.6	9.5	0.0	4.6	55.6	0.0
Queue Length 95th (m)	11.1	24.7		50.7	12.8		5.3	18.6	3.1	11.6	86.6	0.0
Internal Link Dist (m)		119.7			332.2			300.9				243.2
Turn Bay Length (m)	30.0			30.0			60.0			70.0		15.0
Base Capacity (vph)	438	584		353	544		440	1900	905	841	2165	949
Starvation Cap Reductn	0	0		0	0		0	0	0	0	0	0
Spillback Cap Reductn	0	0		0	0		0	0	0	0	0	0
Storage Cap Reductn	0	0		0	0		0	0	0	0	0	0
Reduced v/c Ratio	0.05	0.25		0.39	0.08		0.06	0.10	0.08	0.09	0.41	0.01

Intersection Summary

Area Type: Other

Cycle Length: 120

Actuated Cycle Length: 120

Offset: 99 (83%), Referenced to phase 2:NBT and 6:SBTL, Start of Green

Natural Cycle: 90

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.81

Intersection Signal Delay: 18.4

Intersection LOS: B


1: March Road & Halton Terrace/Maxwell Bridge Road

Intersection Capacity Utilization 67.6%

ICU Level of Service C

Analysis Period (min) 15

Splits and Phases: 1: March Road & Halton Terrace/Maxwell Bridge Road

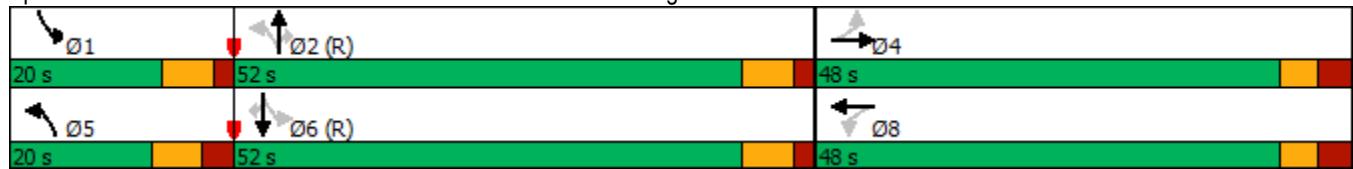

Lanes, Volumes, Timings
2: March Road & Klondike Road

2020 Existing-AM
910 March Road

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑	↑	↑	↑	↑	↑↑	↑↑↑	↑	↑	↑↑↑	↑
Traffic Volume (vph)	30	35	253	91	25	19	83	274	44	17	883	33
Future Volume (vph)	30	35	253	91	25	19	83	274	44	17	883	33
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	100.0			5.0	15.0		0.0	100.0		0.0	45.0	
Storage Lanes	1			1	1		0	2		0	1	
Taper Length (m)	0.0				30.0			100.0			85.0	
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	0.97	0.91	0.91	1.00	0.91	0.91
Ped Bike Factor	1.00			0.98	0.99	0.99		1.00	1.00		0.99	1.00
Fr _t				0.850		0.936			0.979			0.995
Flt Protected	0.950				0.950			0.950			0.950	
Satd. Flow (prot)	1496	1679	1483	1658	1515	0	3124	4416	0	1433	4726	0
Flt Permitted	0.510				0.732			0.950			0.950	
Satd. Flow (perm)	801	1679	1456	1270	1515	0	3119	4416	0	1424	4726	0
Right Turn on Red				Yes			Yes			Yes		Yes
Satd. Flow (RTOR)				186		21			28			5
Link Speed (k/h)				50		50			80			80
Link Distance (m)				117.7		346.6			261.8			142.1
Travel Time (s)				8.5		25.0			11.8			6.4
Confl. Peds. (#/hr)	3		6	6		3	3		4	4		3
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Heavy Vehicles (%)	13%	6%	2%	2%	8%	11%	5%	7%	9%	18%	2%	9%
Adj. Flow (vph)	33	39	281	101	28	21	92	304	49	19	981	37
Shared Lane Traffic (%)												
Lane Group Flow (vph)	33	39	281	101	49	0	92	353	0	19	1018	0
Enter Blocked Intersection	No											
Lane Alignment	Left	Left	Right									
Median Width(m)				3.5		3.5			7.0			7.0
Link Offset(m)				0.0		0.0			0.0			0.0
Crosswalk Width(m)				3.0		3.0			3.0			3.0
Two way Left Turn Lane												
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25		15	25		15	25		15	25		15
Number of Detectors	1	2	1	1	2		1	2		1	2	
Detector Template	Left	Thru	Right	Left	Thru		Left	Thru		Left	Thru	
Leading Detector (m)	2.0	10.0	2.0	2.0	10.0		2.0	10.0		2.0	10.0	
Trailing Detector (m)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Position(m)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Size(m)	2.0	0.6	2.0	2.0	0.6		2.0	0.6		2.0	0.6	
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(m)				9.4		9.4			9.4			9.4
Detector 2 Size(m)				0.6		0.6			0.6			0.6
Detector 2 Type				Cl+Ex		Cl+Ex			Cl+Ex			Cl+Ex
Detector 2 Channel												
Detector 2 Extend (s)	0.0				0.0			0.0			0.0	

Lanes, Volumes, Timings
2: March Road & Klondike Road

2020 Existing-AM
910 March Road

	↗	→	↘	↙	←	↖	↑	↗	↘	↓	↙	
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	pm+pt	NA	Perm	Perm	NA		Prot	NA		Prot	NA	
Protected Phases	7	4			8		5	2		1	6	
Permitted Phases	4		4	8								
Detector Phase	7	4	4	8	8		5	2		1	6	
Switch Phase												
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0		5.0	5.0		5.0	5.0	
Minimum Split (s)	11.6	44.1	44.1	44.1	44.1		11.6	32.4		11.6	32.4	
Total Split (s)	12.0	57.0	57.0	45.0	45.0		15.0	58.0		15.0	58.0	
Total Split (%)	9.2%	43.8%	43.8%	34.6%	34.6%		11.5%	44.6%		11.5%	44.6%	
Maximum Green (s)	5.4	49.9	49.9	37.9	37.9		8.4	51.6		8.4	51.6	
Yellow Time (s)	3.3	3.3	3.3	3.3	3.3		4.6	4.6		4.6	4.6	
All-Red Time (s)	3.3	3.8	3.8	3.8	3.8		2.0	1.8		2.0	1.8	
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Total Lost Time (s)	6.6	7.1	7.1	7.1	7.1		6.6	6.4		6.6	6.4	
Lead/Lag	Lead			Lag	Lag		Lead	Lag		Lead	Lag	
Lead-Lag Optimize?	Yes			Yes	Yes		Yes	Yes		Yes	Yes	
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None	None	None	None		None	C-Max		None	C-Max	
Walk Time (s)		7.0	7.0	7.0	7.0			7.0			7.0	
Flash Dont Walk (s)		30.0	30.0	30.0	30.0			19.0			19.0	
Pedestrian Calls (#/hr)	0	0	0	0	0			0			0	
Act Effct Green (s)	23.4	22.9	22.9	15.7	15.7		9.2	87.4		7.3	77.8	
Actuated g/C Ratio	0.18	0.18	0.18	0.12	0.12		0.07	0.67		0.06	0.60	
v/c Ratio	0.19	0.13	0.69	0.66	0.24		0.42	0.12		0.24	0.36	
Control Delay	42.0	41.1	24.4	73.6	34.4		63.2	9.7		64.9	15.5	
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Total Delay	42.0	41.1	24.4	73.6	34.4		63.2	9.7		64.9	15.5	
LOS	D	D	C	E	C		E	A		E	B	
Approach Delay		27.9			60.8			20.8			16.4	
Approach LOS		C			E			C			B	
Queue Length 50th (m)	6.8	8.1	21.0	25.1	6.5		11.8	9.5		4.8	50.9	
Queue Length 95th (m)	14.8	16.7	47.2	41.7	17.6		20.3	21.9		12.8	72.1	
Internal Link Dist (m)		93.7			322.6			237.8			118.1	
Turn Bay Length (m)	100.0		5.0	15.0			100.0			45.0		
Base Capacity (vph)	173	644	673	370	456		230	2976		95	2831	
Starvation Cap Reductn	0	0	0	0	0		0	0		0	0	
Spillback Cap Reductn	0	0	0	0	0		0	0		0	0	
Storage Cap Reductn	0	0	0	0	0		0	0		0	0	
Reduced v/c Ratio	0.19	0.06	0.42	0.27	0.11		0.40	0.12		0.20	0.36	
Intersection Summary												
Area Type:	Other											
Cycle Length:	130											
Actuated Cycle Length:	130											
Offset: 64 (49%), Referenced to phase 2:NBT and 6:SBT, Start of Green												
Natural Cycle: 100												
Control Type: Actuated-Coordinated												
Maximum v/c Ratio: 0.69												
Intersection Signal Delay: 22.8	Intersection LOS: C											

Intersection Capacity Utilization 63.8%
Analysis Period (min) 15

ICU Level of Service B

Splits and Phases: 2: March Road & Klondike Road



HCM 2010 Signalized Intersection Summary
2: March Road & Klondike Road

2020 Existing-AM
910 March Road

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	→	↓	←	↖	↙	↖	↑↑↑	↗	↖	↑↑↑	↗
Traffic Volume (veh/h)	30	35	253	91	25	19	83	274	44	17	883	33
Future Volume (veh/h)	30	35	253	91	25	19	83	274	44	17	883	33
Number	7	4	14	3	8	18	5	2	12	1	6	16
Initial Q (Q _b), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	0.99		1.00	0.99		0.99	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1593	1698	1765	1765	1647	1800	1714	1678	1800	1525	1760	1800
Adj Flow Rate, veh/h	33	39	0	101	28	21	92	304	49	19	981	37
Adj No. of Lanes	1	1	1	1	1	0	2	3	0	1	3	0
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Percent Heavy Veh, %	13	6	2	2	8	8	5	7	7	18	2	2
Cap, veh/h	218	352	311	230	113	85	136	2472	387	28	2828	107
Arrive On Green	0.03	0.21	0.00	0.13	0.13	0.13	0.04	0.62	0.62	0.02	0.60	0.60
Sat Flow, veh/h	1517	1698	1500	1345	869	652	3167	3994	625	1453	4753	179
Grp Volume(v), veh/h	33	39	0	101	0	49	92	230	123	19	661	357
Grp Sat Flow(s),veh/h/ln	1517	1698	1500	1345	0	1521	1584	1527	1565	1453	1602	1728
Q Serve(g_s), s	2.4	2.4	0.0	9.2	0.0	3.8	3.7	4.0	4.2	1.7	13.7	13.7
Cycle Q Clear(g_c), s	2.4	2.4	0.0	9.2	0.0	3.8	3.7	4.0	4.2	1.7	13.7	13.7
Prop In Lane	1.00		1.00	1.00		0.43	1.00		0.40	1.00		0.10
Lane Grp Cap(c), veh/h	218	352	311	230	0	198	136	1890	969	28	1906	1028
V/C Ratio(X)	0.15	0.11	0.00	0.44	0.00	0.25	0.68	0.12	0.13	0.68	0.35	0.35
Avail Cap(c_a), veh/h	240	652	576	447	0	443	205	1890	969	94	1906	1028
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(l)	1.00	1.00	0.00	1.00	0.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	45.7	41.8	0.0	53.2	0.0	50.9	61.3	10.2	10.2	63.4	13.4	13.4
Incr Delay (d2), s/veh	0.3	0.1	0.0	1.3	0.0	0.6	5.8	0.1	0.3	25.8	0.5	0.9
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%),veh/ln	1.0	1.2	0.0	3.5	0.0	1.6	1.7	1.7	1.9	0.9	6.2	6.8
LnGrp Delay(d),s/veh	46.0	41.9	0.0	54.5	0.0	51.5	67.1	10.3	10.5	89.2	13.9	14.4
LnGrp LOS	D	D		D		D	E	B	B	F	B	B
Approach Vol, veh/h		72			150			445			1037	
Approach Delay, s/veh		43.8			53.5			22.1			15.5	
Approach LOS		D			D			C			B	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	1	2		4	5	6	7	8				
Phs Duration (G+Y+Rc), s	9.1	86.9		34.1	12.2	83.8	10.1	24.0				
Change Period (Y+Rc), s	6.6	* 6.4		7.1	6.6	* 6.4	6.6	7.1				
Max Green Setting (Gmax), s	8.4	* 52		49.9	8.4	* 52	5.4	37.9				
Max Q Clear Time (g_c+l1), s	3.7	6.2		4.4	5.7	15.7	4.4	11.2				
Green Ext Time (p_c), s	0.0	2.9		0.2	0.1	9.5	0.0	0.7				
Intersection Summary												
HCM 2010 Ctrl Delay				21.7								
HCM 2010 LOS				C								
Notes												

Lanes, Volumes, Timings

2020 Existing-PM

1: March Road & Halton Terrace/Maxwell Bridge Road

910 March Road

	→	→	←	←	↑	↑	↓	↓	←	→	↑	↓	←
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	
Lane Configurations	1	1	1	1	1	1	1	1	1	1	1	1	1
Traffic Volume (vph)	17	55	41	79	58	89	172	873	114	59	238	12	
Future Volume (vph)	17	55	41	79	58	89	172	873	114	59	238	12	
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	
Storage Length (m)	30.0		0.0	30.0		0.0	60.0		0.0	70.0		15.0	
Storage Lanes	1		0	1		0	1		1	1		1	
Taper Length (m)	60.0			60.0			70.0			100.0			
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.95	1.00	1.00	0.95	1.00	
Ped Bike Factor	0.99	0.99		0.98	0.99		1.00		0.96	1.00		0.98	
Fr _t		0.936			0.909				0.850			0.850	
Flt Protected	0.950			0.950			0.950			0.950			
Satd. Flow (prot)	1658	1532	0	1610	1557	0	1658	3316	1483	1658	3316	1483	
Flt Permitted	0.487			0.687			0.553			0.278			
Satd. Flow (perm)	842	1532	0	1145	1557	0	962	3316	1419	483	3316	1447	
Right Turn on Red			Yes			Yes			Yes			Yes	
Satd. Flow (RTOR)		33			68				127			100	
Link Speed (k/h)		40			40			80			80		
Link Distance (m)		143.7			356.2			324.9			267.2		
Travel Time (s)		12.9			32.1			14.6			12.0		
Confl. Peds. (#/hr)	11		17	17		11	2		11	11		2	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	
Heavy Vehicles (%)	2%	9%	5%	5%	3%	2%	2%	2%	2%	2%	2%	2%	
Adj. Flow (vph)	19	61	46	88	64	99	191	970	127	66	264	13	
Shared Lane Traffic (%)													
Lane Group Flow (vph)	19	107	0	88	163	0	191	970	127	66	264	13	
Enter Blocked Intersection	No												
Lane Alignment	Left	Left	Right										
Median Width(m)		3.5			3.5			3.5			3.5		
Link Offset(m)		0.0			0.0			0.0			0.0		
Crosswalk Width(m)		3.0			3.0			3.0			3.0		
Two way Left Turn Lane													
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	
Turning Speed (k/h)	25		15	25		15	25		15	25		15	
Number of Detectors	1	2		1	2		1	2	1	1	2	1	
Detector Template	Left	Thru		Left	Thru		Left	Thru	Right	Left	Thru	Right	
Leading Detector (m)	2.0	10.0		2.0	10.0		2.0	10.0	2.0	2.0	10.0	2.0	
Trailing Detector (m)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	
Detector 1 Position(m)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	
Detector 1 Size(m)	2.0	0.6		2.0	0.6		2.0	0.6	2.0	2.0	0.6	2.0	
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	
Detector 1 Channel													
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	
Detector 2 Position(m)		9.4			9.4			9.4			9.4		
Detector 2 Size(m)		0.6			0.6			0.6			0.6		
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex		
Detector 2 Channel													
Detector 2 Extend (s)	0.0			0.0			0.0			0.0		0.0	

Lanes, Volumes, Timings

2020 Existing-PM

910 March Road

1: March Road & Halton Terrace/Maxwell Bridge Road



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	Perm	NA		Perm	NA		pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases			4			8			5	2		1
Permitted Phases	4					8			2		2	6
Detector Phase	4	4		8	8			5	2	2	1	6
Switch Phase												6
Minimum Initial (s)	10.0	10.0		10.0	10.0		5.0	10.0	10.0	5.0	10.0	10.0
Minimum Split (s)	38.6	38.6		38.6	38.6		12.4	34.6	34.6	11.4	34.6	34.6
Total Split (s)	45.0	45.0		45.0	45.0		20.0	55.0	55.0	20.0	55.0	55.0
Total Split (%)	37.5%	37.5%		37.5%	37.5%		16.7%	45.8%	45.8%	16.7%	45.8%	45.8%
Maximum Green (s)	38.4	38.4		38.4	38.4		12.6	48.4	48.4	13.6	48.4	48.4
Yellow Time (s)	3.3	3.3		3.3	3.3		4.6	4.6	4.6	4.6	4.6	4.6
All-Red Time (s)	3.3	3.3		3.3	3.3		2.8	2.0	2.0	1.8	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.6	6.6		6.6	6.6		7.4	6.6	6.6	6.4	6.6	6.6
Lead/Lag							Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?							Yes	Yes	Yes	Yes	Yes	Yes
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	None	None		None	None		None	C-Max	C-Max	None	C-Max	C-Max
Walk Time (s)	7.0	7.0		7.0	7.0			7.0	7.0		7.0	7.0
Flash Dont Walk (s)	25.0	25.0		25.0	25.0			21.0	21.0		21.0	21.0
Pedestrian Calls (#/hr)	0	0		0	0			0	0		0	0
Act Effct Green (s)	15.1	15.1		15.1	15.1		88.3	81.0	81.0	81.7	74.8	74.8
Actuated g/C Ratio	0.13	0.13		0.13	0.13		0.74	0.68	0.68	0.68	0.62	0.62
v/c Ratio	0.18	0.48		0.61	0.64		0.25	0.43	0.13	0.17	0.13	0.01
Control Delay	48.5	39.8		66.7	39.5		5.4	11.0	2.0	5.7	10.4	0.0
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	48.5	39.8		66.7	39.5		5.4	11.0	2.0	5.7	10.4	0.0
LOS	D	D		E	D		A	B	A	A	B	A
Approach Delay		41.1			49.1			9.3			9.1	
Approach LOS		D			D			A			A	
Queue Length 50th (m)	4.1	16.3		20.0	21.3		10.3	53.1	0.0	3.2	12.2	0.0
Queue Length 95th (m)	10.8	32.0		35.3	41.3		21.4	82.2	7.7	8.2	22.6	0.0
Internal Link Dist (m)		119.7			332.2			300.9			243.2	
Turn Bay Length (m)	30.0			30.0			60.0			70.0		15.0
Base Capacity (vph)	269	512		366	544		797	2236	998	489	2067	939
Starvation Cap Reductn	0	0		0	0		0	0	0	0	0	0
Spillback Cap Reductn	0	0		0	0		0	0	0	0	0	0
Storage Cap Reductn	0	0		0	0		0	0	0	0	0	0
Reduced v/c Ratio	0.07	0.21		0.24	0.30		0.24	0.43	0.13	0.13	0.13	0.01

Intersection Summary

Area Type: Other

Cycle Length: 120

Actuated Cycle Length: 120

Offset: 50 (42%), Referenced to phase 2:NBT and 6:SBTL, Start of Green

Natural Cycle: 90

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.64

Intersection Signal Delay: 16.2

Intersection LOS: B

Lanes, Volumes, Timings

2020 Existing-PM

910 March Road


1: March Road & Halton Terrace/Maxwell Bridge Road

Intersection Capacity Utilization 70.6%

ICU Level of Service C

Analysis Period (min) 15

Splits and Phases: 1: March Road & Halton Terrace/Maxwell Bridge Road

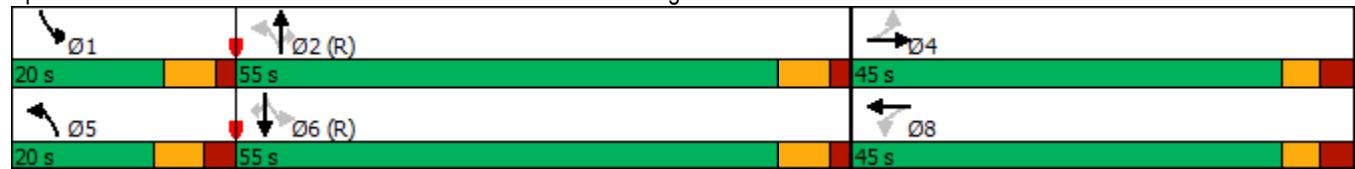

Lanes, Volumes, Timings
2: March Road & Klondike Road

2020 Existing-PM
910 March Road

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑	↑	↑	↑	↑	↑↑	↑↑↑		↑	↑↑↑	
Traffic Volume (vph)	79	22	110	60	31	22	159	1122	81	2	418	57
Future Volume (vph)	79	22	110	60	31	22	159	1122	81	2	418	57
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	100.0		5.0	15.0		0.0	100.0		0.0	45.0		0.0
Storage Lanes	1		1	1		0	2		0	1		0
Taper Length (m)	0.0			30.0			100.0			85.0		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	0.97	0.91	0.91	1.00	0.91	0.91
Ped Bike Factor	1.00		0.99	1.00	0.99		0.99	1.00		1.00	1.00	
Fr _t			0.850		0.938			0.990			0.982	
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1658	1745	1483	1658	1591	0	3216	4702	0	1658	4665	0
Flt Permitted	0.446			0.742			0.950			0.950		
Satd. Flow (perm)	778	1745	1462	1292	1591	0	3185	4702	0	1651	4665	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			122		24			9			20	
Link Speed (k/h)			50		50			80			80	
Link Distance (m)			117.7		346.6			261.8			142.1	
Travel Time (s)			8.5		25.0			11.8			6.4	
Confl. Peds. (#/hr)	1		2	2		1	8		11	11		8
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Heavy Vehicles (%)	2%	2%	2%	2%	6%	2%	2%	2%	2%	2%	2%	2%
Adj. Flow (vph)	88	24	122	67	34	24	177	1247	90	2	464	63
Shared Lane Traffic (%)												
Lane Group Flow (vph)	88	24	122	67	58	0	177	1337	0	2	527	0
Enter Blocked Intersection	No											
Lane Alignment	Left	Left	Right									
Median Width(m)			3.5		3.5			7.0			7.0	
Link Offset(m)			0.0		0.0			0.0			0.0	
Crosswalk Width(m)			3.0		3.0			3.0			3.0	
Two way Left Turn Lane												
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25		15	25		15	25		15	25		15
Number of Detectors	1	2	1	1	2		1	2		1	2	
Detector Template	Left	Thru	Right	Left	Thru		Left	Thru		Left	Thru	
Leading Detector (m)	2.0	10.0	2.0	2.0	10.0		2.0	10.0		2.0	10.0	
Trailing Detector (m)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Position(m)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Size(m)	2.0	0.6	2.0	2.0	0.6		2.0	0.6		2.0	0.6	
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(m)			9.4		9.4			9.4			9.4	
Detector 2 Size(m)			0.6		0.6			0.6			0.6	
Detector 2 Type			Cl+Ex		Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)	0.0			0.0			0.0			0.0		

Lanes, Volumes, Timings
2: March Road & Klondike Road

2020 Existing-PM
910 March Road

	→	→	→	←	←	↑	↑	↓	↓	←	→	
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	pm+pt	NA	Perm	Perm	NA		Prot	NA		Prot	NA	
Protected Phases	7	4			8		5	2		1	6	
Permitted Phases	4		4	8								
Detector Phase	7	4	4	8	8		5	2		1	6	
Switch Phase												
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0		5.0	5.0		5.0	5.0	
Minimum Split (s)	11.6	44.1	44.1	44.1	44.1		11.6	32.4		11.6	32.4	
Total Split (s)	12.0	57.0	57.0	45.0	45.0		22.0	51.0		22.0	51.0	
Total Split (%)	9.2%	43.8%	43.8%	34.6%	34.6%		16.9%	39.2%		16.9%	39.2%	
Maximum Green (s)	5.4	49.9	49.9	37.9	37.9		15.4	44.6		15.4	44.6	
Yellow Time (s)	3.3	3.3	3.3	3.3	3.3		4.6	4.6		4.6	4.6	
All-Red Time (s)	3.3	3.8	3.8	3.8	3.8		2.0	1.8		2.0	1.8	
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Total Lost Time (s)	6.6	7.1	7.1	7.1	7.1		6.6	6.4		6.6	6.4	
Lead/Lag	Lead			Lag	Lag		Lead	Lag		Lead	Lag	
Lead-Lag Optimize?	Yes			Yes	Yes		Yes	Yes		Yes	Yes	
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None	None	None	None		None	C-Max		None	C-Max	
Walk Time (s)		7.0	7.0	7.0	7.0			7.0			7.0	
Flash Dont Walk (s)		30.0	30.0	30.0	30.0			19.0			19.0	
Pedestrian Calls (#/hr)	0	0	0	0	0			0			0	
Act Effct Green (s)	22.0	21.5	21.5	12.1	12.1		12.5	92.4		5.8	75.9	
Actuated g/C Ratio	0.17	0.17	0.17	0.09	0.09		0.10	0.71		0.04	0.58	
v/c Ratio	0.52	0.08	0.36	0.56	0.34		0.57	0.40		0.03	0.19	
Control Delay	56.4	42.3	10.0	72.7	39.5		63.4	9.5		60.0	13.8	
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Total Delay	56.4	42.3	10.0	72.7	39.5		63.4	9.5		60.0	13.8	
LOS	E	D	B	E	D		E	A		E	B	
Approach Delay		30.8			57.3			15.8			14.0	
Approach LOS		C			E			B			B	
Queue Length 50th (m)	19.5	5.1	0.0	16.7	8.2		22.7	45.3		0.5	22.3	
Queue Length 95th (m)	33.1	12.2	15.5	30.8	20.9		33.6	83.9		3.3	33.9	
Internal Link Dist (m)		93.7			322.6			237.8			118.1	
Turn Bay Length (m)	100.0		5.0	15.0			100.0			45.0		
Base Capacity (vph)	169	669	636	376	480		383	3344		196	2733	
Starvation Cap Reductn	0	0	0	0	0		0	0		0	0	
Spillback Cap Reductn	0	0	0	0	0		0	0		0	0	
Storage Cap Reductn	0	0	0	0	0		0	0		0	0	
Reduced v/c Ratio	0.52	0.04	0.19	0.18	0.12		0.46	0.40		0.01	0.19	
Intersection Summary												
Area Type:	Other											
Cycle Length:	130											
Actuated Cycle Length:	130											
Offset: 20 (15%), Referenced to phase 2:NBT and 6:SBT, Start of Green												
Natural Cycle: 100												
Control Type: Actuated-Coordinated												
Maximum v/c Ratio: 0.57												
Intersection Signal Delay: 19.0	Intersection LOS: B											

Intersection Capacity Utilization 58.3%
Analysis Period (min) 15

ICU Level of Service B

Splits and Phases: 2: March Road & Klondike Road



HCM 2010 Signalized Intersection Summary
2: March Road & Klondike Road

2020 Existing-PM
910 March Road

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↖ ↗ ↘ ↙ ↖ ↗ ↘ ↙ ↖ ↗ ↘ ↙ ↖											
Traffic Volume (veh/h)	79	22	110	60	31	22	159	1122	81	2	418	57
Future Volume (veh/h)	79	22	110	60	31	22	159	1122	81	2	418	57
Number	7	4	14	3	8	18	5	2	12	1	6	16
Initial Q (Q _b), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00			1.00	0.99		0.99	1.00		0.99	1.00	0.99
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1765	1765	1765	1765	1725	1800	1765	1765	1800	1765	1765	1800
Adj Flow Rate, veh/h	88	24	0	67	34	24	177	1247	90	2	464	63
Adj No. of Lanes	1	1	1	1	1	0	2	3	0	1	3	0
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Percent Heavy Veh, %	2	2	2	2	6	6	2	2	2	2	2	2
Cap, veh/h	189	309	262	169	78	55	233	3061	221	5	2575	343
Arrive On Green	0.04	0.17	0.00	0.08	0.08	0.08	0.07	0.67	0.67	0.00	0.60	0.60
Sat Flow, veh/h	1681	1765	1500	1372	939	663	3261	4584	331	1681	4299	573
Grp Volume(v), veh/h	88	24	0	67	0	58	177	874	463	2	345	182
Grp Sat Flow(s),veh/h/ln	1681	1765	1500	1372	0	1602	1630	1606	1703	1681	1606	1660
Q Serve(g_s), s	5.4	1.5	0.0	6.1	0.0	4.5	6.9	16.1	16.1	0.2	6.3	6.4
Cycle Q Clear(g_c), s	5.4	1.5	0.0	6.1	0.0	4.5	6.9	16.1	16.1	0.2	6.3	6.4
Prop In Lane	1.00			1.00		0.41	1.00		0.19	1.00		0.35
Lane Grp Cap(c), veh/h	189	309	262	169	0	132	233	2145	1137	5	1924	994
V/C Ratio(X)	0.46	0.08	0.00	0.40	0.00	0.44	0.76	0.41	0.41	0.44	0.18	0.18
Avail Cap(c_a), veh/h	189	677	576	455	0	467	386	2145	1137	199	1924	994
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(l)	1.00	1.00	0.00	1.00	0.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	51.7	44.9	0.0	57.5	0.0	56.8	59.3	9.9	9.9	64.7	11.7	11.7
Incr Delay (d2), s/veh	1.8	0.1	0.0	1.5	0.0	2.3	5.0	0.6	1.1	56.3	0.2	0.4
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%),veh/ln	2.9	0.7	0.0	2.4	0.0	2.1	3.3	7.2	7.8	0.1	2.8	3.1
LnGrp Delay(d),s/veh	53.5	45.0	0.0	59.0	0.0	59.0	64.3	10.4	10.9	121.0	11.9	12.1
LnGrp LOS	D	D		E		E	E	B	B	F	B	B
Approach Vol, veh/h		112				125			1514		529	
Approach Delay, s/veh		51.7				59.0			16.9		12.4	
Approach LOS		D				E			B		B	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	1	2		4	5	6	7	8				
Phs Duration (G+Y+Rc), s	6.9	93.2		29.8	15.9	84.3	12.0	17.8				
Change Period (Y+Rc), s	6.6	* 6.4		7.1	6.6	* 6.4	6.6	7.1				
Max Green Setting (Gmax), s	15.4	* 45		49.9	15.4	* 45	5.4	37.9				
Max Q Clear Time (g_c+l1), s	2.2	18.1		3.5	8.9	8.4	7.4	8.1				
Green Ext Time (p_c), s	0.0	12.1		0.1	0.4	4.3	0.0	0.6				
Intersection Summary												
HCM 2010 Ctrl Delay				19.9								
HCM 2010 LOS				B								
Notes												

Lanes, Volumes, Timings

2020 Existing-Sat

1: March Road & Halton Terrace/Maxwell Bridge Road

910 March Road

	→	→	←	←	↑	↑	↓	↓	←	→	↑	↓	←
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	
Lane Configurations	↑	↑		↑	↑		↑	↑↑	↑	↑	↑↑	↑	
Traffic Volume (vph)	17	55	41	79	58	89	172	873	114	59	238	12	
Future Volume (vph)	17	55	41	79	58	89	172	873	114	59	238	12	
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	
Storage Length (m)	30.0		0.0	30.0		0.0	60.0		0.0	70.0		15.0	
Storage Lanes	1		0	1		0	1		1	1		1	
Taper Length (m)	60.0			60.0			70.0			100.0			
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.95	1.00	1.00	0.95	1.00	
Ped Bike Factor	0.99	0.99		0.99	0.99		1.00		0.96	1.00		0.98	
Fr _t		0.936			0.909				0.850			0.850	
Flt Protected	0.950			0.950			0.950			0.950			
Satd. Flow (prot)	1658	1535	0	1610	1559	0	1658	3316	1483	1658	3316	1483	
Flt Permitted	0.578			0.688			0.589			0.278			
Satd. Flow (perm)	1001	1535	0	1151	1559	0	1025	3316	1427	483	3316	1449	
Right Turn on Red			Yes			Yes			Yes			Yes	
Satd. Flow (RTOR)		43			86				127			41	
Link Speed (k/h)		40			40			80			80		
Link Distance (m)		143.7			356.2			324.9			267.2		
Travel Time (s)		12.9			32.1			14.6			12.0		
Confl. Peds. (#/hr)	11		17	17		11	2		11	11		2	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	
Heavy Vehicles (%)	2%	9%	5%	5%	3%	2%	2%	2%	2%	2%	2%	2%	
Adj. Flow (vph)	19	61	46	88	64	99	191	970	127	66	264	13	
Shared Lane Traffic (%)													
Lane Group Flow (vph)	19	107	0	88	163	0	191	970	127	66	264	13	
Enter Blocked Intersection	No												
Lane Alignment	Left	Left	Right										
Median Width(m)		3.5			3.5			3.5			3.5		
Link Offset(m)		0.0			0.0			0.0			0.0		
Crosswalk Width(m)		3.0			3.0			3.0			3.0		
Two way Left Turn Lane													
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	
Turning Speed (k/h)	25		15	25		15	25		15	25		15	
Number of Detectors	1	2		1	2		1	2	1	1	2	1	
Detector Template	Left	Thru		Left	Thru		Left	Thru	Right	Left	Thru	Right	
Leading Detector (m)	2.0	10.0		2.0	10.0		2.0	10.0	2.0	2.0	10.0	2.0	
Trailing Detector (m)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	
Detector 1 Position(m)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	
Detector 1 Size(m)	2.0	0.6		2.0	0.6		2.0	0.6	2.0	2.0	0.6	2.0	
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	
Detector 1 Channel													
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	
Detector 2 Position(m)		9.4			9.4			9.4			9.4		
Detector 2 Size(m)		0.6			0.6			0.6			0.6		
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex		
Detector 2 Channel													
Detector 2 Extend (s)	0.0			0.0			0.0			0.0		0.0	

Lanes, Volumes, Timings

2020 Existing-Sat

1: March Road & Halton Terrace/Maxwell Bridge Road

910 March Road



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	Perm	NA		Perm	NA		Perm	NA	Perm	Perm	NA	Perm
Protected Phases			4			8			2			6
Permitted Phases	4				8			2		2	6	6
Detector Phase	4	4		8	8		2	2	2	6	6	6
Switch Phase												
Minimum Initial (s)	10.0	10.0		10.0	10.0		10.0	10.0	10.0	10.0	10.0	10.0
Minimum Split (s)	38.6	38.6		38.6	38.6		34.6	34.6	34.6	34.6	34.6	34.6
Total Split (s)	39.0	39.0		39.0	39.0		56.0	56.0	56.0	56.0	56.0	56.0
Total Split (%)	41.1%	41.1%		41.1%	41.1%		58.9%	58.9%	58.9%	58.9%	58.9%	58.9%
Maximum Green (s)	32.4	32.4		32.4	32.4		49.4	49.4	49.4	49.4	49.4	49.4
Yellow Time (s)	3.3	3.3		3.3	3.3		4.6	4.6	4.6	4.6	4.6	4.6
All-Red Time (s)	3.3	3.3		3.3	3.3		2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.6	6.6		6.6	6.6		6.6	6.6	6.6	6.6	6.6	6.6
Lead/Lag												
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	None	None		None	None		C-Max	C-Max	C-Max	C-Max	C-Max	C-Max
Walk Time (s)	7.0	7.0		7.0	7.0		7.0	7.0	7.0	7.0	7.0	7.0
Flash Dont Walk (s)	25.0	25.0		25.0	25.0		21.0	21.0	21.0	21.0	21.0	21.0
Pedestrian Calls (#/hr)	0	0		0	0		0	0	0	0	0	0
Act Effct Green (s)	13.3	13.3		13.3	13.3		68.5	68.5	68.5	68.5	68.5	68.5
Actuated g/C Ratio	0.14	0.14		0.14	0.14		0.72	0.72	0.72	0.72	0.72	0.72
v/c Ratio	0.14	0.42		0.55	0.56		0.26	0.41	0.12	0.19	0.11	0.01
Control Delay	36.0	27.6		50.1	25.6		6.2	6.2	1.3	6.8	4.6	0.0
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	36.0	27.6		50.1	25.6		6.2	6.2	1.3	6.8	4.6	0.0
LOS	D	C		D	C		A	A	A	A	A	A
Approach Delay		28.9			34.2			5.7			4.8	
Approach LOS		C			C			A			A	
Queue Length 50th (m)	3.1	10.8		15.4	13.1		9.8	30.2	0.0	3.2	6.3	0.0
Queue Length 95th (m)	9.0	24.5		28.6	30.3		23.1	51.3	5.3	10.1	12.6	0.3
Internal Link Dist (m)		119.7			332.2			300.9			243.2	
Turn Bay Length (m)	30.0			30.0			60.0			70.0		15.0
Base Capacity (vph)	341	551		392	588		738	2390	1064	348	2390	1055
Starvation Cap Reductn	0	0		0	0		0	0	0	0	0	0
Spillback Cap Reductn	0	0		0	0		0	0	0	0	0	0
Storage Cap Reductn	0	0		0	0		0	0	0	0	0	0
Reduced v/c Ratio	0.06	0.19		0.22	0.28		0.26	0.41	0.12	0.19	0.11	0.01

Intersection Summary

Area Type: Other

Cycle Length: 95

Actuated Cycle Length: 95

Offset: 11 (12%), Referenced to phase 2:NBTL and 6:SBTL, Start of Green

Natural Cycle: 75

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.56

Intersection Signal Delay: 10.6

Intersection LOS: B


1: March Road & Halton Terrace/Maxwell Bridge Road

Intersection Capacity Utilization 70.3%

ICU Level of Service C

Analysis Period (min) 15

Splits and Phases: 1: March Road & Halton Terrace/Maxwell Bridge Road

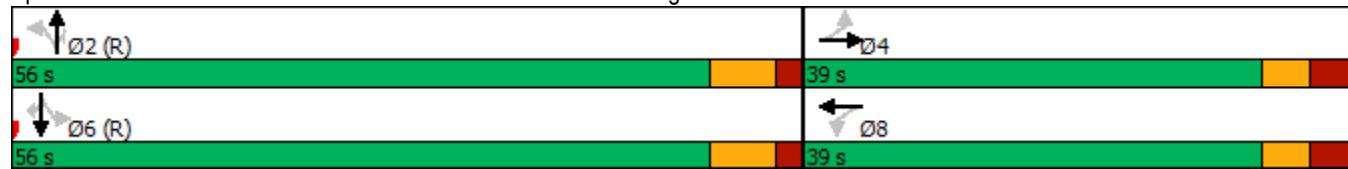

Lanes, Volumes, Timings
2: March Road & Klondike Road

2020 Existing-Sat
910 March Road

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑	↑	↑	↑	↑	↑↑	↑↑↑		↑	↑↑↑	
Traffic Volume (vph)	79	22	110	60	31	22	159	1122	81	2	418	57
Future Volume (vph)	79	22	110	60	31	22	159	1122	81	2	418	57
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	100.0		5.0	15.0		0.0	100.0		0.0	45.0		0.0
Storage Lanes	1		1	1		0	2		0	1		0
Taper Length (m)	0.0			30.0			100.0			85.0		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	0.97	0.91	0.91	1.00	0.91	0.91
Ped Bike Factor	1.00		0.99	1.00	0.99		0.99	1.00		1.00	1.00	
Fr _t			0.850		0.938			0.990			0.982	
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1658	1745	1483	1658	1592	0	3216	4703	0	1658	4666	0
Flt Permitted	0.719			0.742			0.950			0.950		
Satd. Flow (perm)	1254	1745	1463	1293	1592	0	3190	4703	0	1652	4666	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			122		24			12			26	
Link Speed (k/h)			50		50			80			80	
Link Distance (m)			117.7		346.6			261.8			142.1	
Travel Time (s)			8.5		25.0			11.8			6.4	
Confl. Peds. (#/hr)	1		2	2		1	8		11	11		8
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Heavy Vehicles (%)	2%	2%	2%	2%	6%	2%	2%	2%	2%	2%	2%	2%
Adj. Flow (vph)	88	24	122	67	34	24	177	1247	90	2	464	63
Shared Lane Traffic (%)												
Lane Group Flow (vph)	88	24	122	67	58	0	177	1337	0	2	527	0
Enter Blocked Intersection	No											
Lane Alignment	Left	Left	Right									
Median Width(m)			3.5		3.5			7.0			7.0	
Link Offset(m)			0.0		0.0			0.0			0.0	
Crosswalk Width(m)			3.0		3.0			3.0			3.0	
Two way Left Turn Lane												
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25		15	25		15	25		15	25		15
Number of Detectors	1	2	1	1	2		1	2		1	2	
Detector Template	Left	Thru	Right	Left	Thru		Left	Thru		Left	Thru	
Leading Detector (m)	2.0	10.0	2.0	2.0	10.0		2.0	10.0		2.0	10.0	
Trailing Detector (m)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Position(m)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Size(m)	2.0	0.6	2.0	2.0	0.6		2.0	0.6		2.0	0.6	
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(m)			9.4		9.4			9.4			9.4	
Detector 2 Size(m)			0.6		0.6			0.6			0.6	
Detector 2 Type			Cl+Ex		Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)	0.0			0.0			0.0			0.0		

Lanes, Volumes, Timings
2: March Road & Klondike Road

2020 Existing-Sat
910 March Road

	↗	→	↘	↙	←	↖	↑	↗	↘	↓	↙	
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	Perm	NA	Perm	Perm	NA		Prot	NA		Prot	NA	
Protected Phases		4			8		5	2		1	6	
Permitted Phases	4		4	8								
Detector Phase	4	4	4	8	8		5	2		1	6	
Switch Phase												
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0		5.0	5.0		5.0	5.0	
Minimum Split (s)	44.1	44.1	44.1	44.1	44.1		11.6	32.4		11.6	32.4	
Total Split (s)	45.0	45.0	45.0	45.0	45.0		16.0	49.0		16.0	49.0	
Total Split (%)	40.9%	40.9%	40.9%	40.9%	40.9%		14.5%	44.5%		14.5%	44.5%	
Maximum Green (s)	37.9	37.9	37.9	37.9	37.9		9.4	42.6		9.4	42.6	
Yellow Time (s)	3.3	3.3	3.3	3.3	3.3		4.6	4.6		4.6	4.6	
All-Red Time (s)	3.8	3.8	3.8	3.8	3.8		2.0	1.8		2.0	1.8	
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Total Lost Time (s)	7.1	7.1	7.1	7.1	7.1		6.6	6.4		6.6	6.4	
Lead/Lag							Lead	Lag		Lead	Lag	
Lead-Lag Optimize?							Yes	Yes		Yes	Yes	
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None	None	None	None		None	C-Max		None	C-Max	
Walk Time (s)	7.0	7.0	7.0	7.0	7.0			7.0			7.0	
Flash Dont Walk (s)	30.0	30.0	30.0	30.0	30.0			19.0			19.0	
Pedestrian Calls (#/hr)	0	0	0	0	0			0			0	
Act Effct Green (s)	13.1	13.1	13.1	13.1	13.1		11.3	80.8		5.7	65.4	
Actuated g/C Ratio	0.12	0.12	0.12	0.12	0.12		0.10	0.73		0.05	0.59	
v/c Ratio	0.59	0.12	0.43	0.44	0.27		0.53	0.39		0.02	0.19	
Control Delay	60.8	42.0	12.3	52.3	30.6		52.5	6.8		50.0	10.7	
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Total Delay	60.8	42.0	12.3	52.3	30.6		52.5	6.8		50.0	10.7	
LOS	E	D	B	D	C		D	A		D	B	
Approach Delay		33.6			42.2			12.2			10.9	
Approach LOS		C			D			B			B	
Queue Length 50th (m)	18.2	4.7	0.0	13.6	6.7		18.9	29.4		0.4	16.7	
Queue Length 95th (m)	32.4	11.7	15.3	25.9	17.7		28.9	67.6		2.9	27.6	
Internal Link Dist (m)		93.7			322.6			237.8			118.1	
Turn Bay Length (m)	100.0		5.0	15.0			100.0			45.0		
Base Capacity (vph)	432	601	584	445	564		339	3458		141	2786	
Starvation Cap Reductn	0	0	0	0	0		0	0		0	0	
Spillback Cap Reductn	0	0	0	0	0		0	0		0	0	
Storage Cap Reductn	0	0	0	0	0		0	0		0	0	
Reduced v/c Ratio	0.20	0.04	0.21	0.15	0.10		0.52	0.39		0.01	0.19	
Intersection Summary												
Area Type:	Other											
Cycle Length:	110											
Actuated Cycle Length:	110											
Offset: 16 (15%), Referenced to phase 2:NBT and 6:SBT, Start of Green												
Natural Cycle: 90												
Control Type: Actuated-Coordinated												
Maximum v/c Ratio: 0.59												
Intersection Signal Delay: 15.5	Intersection LOS: B											

Intersection Capacity Utilization 58.3%
Analysis Period (min) 15

ICU Level of Service B

Splits and Phases: 2: March Road & Klondike Road



HCM 2010 Signalized Intersection Summary
2: March Road & Klondike Road

2020 Existing-Sat
910 March Road

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↖ ↗ ↘ ↙ ↖ ↗ ↘ ↙ ↖ ↗ ↘ ↙ ↖											
Traffic Volume (veh/h)	79	22	110	60	31	22	159	1122	81	2	418	57
Future Volume (veh/h)	79	22	110	60	31	22	159	1122	81	2	418	57
Number	7	4	14	3	8	18	5	2	12	1	6	16
Initial Q (Q _b), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		0.99	1.00		0.99
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1765	1765	1765	1765	1725	1800	1765	1765	1800	1765	1765	1800
Adj Flow Rate, veh/h	88	24	0	67	34	24	177	1247	90	2	464	63
Adj No. of Lanes	1	1	1	1	1	0	2	3	0	1	3	0
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Percent Heavy Veh, %	2	2	2	2	6	6	2	2	2	2	2	2
Cap, veh/h	198	232	198	230	124	87	235	3130	226	5	2637	352
Arrive On Green	0.13	0.13	0.00	0.13	0.13	0.13	0.07	0.68	0.68	0.00	0.61	0.61
Sat Flow, veh/h	1335	1765	1500	1376	940	664	3261	4584	331	1681	4299	573
Grp Volume(v), veh/h	88	24	0	67	0	58	177	874	463	2	345	182
Grp Sat Flow(s),veh/h/ln	1335	1765	1500	1376	0	1604	1630	1606	1703	1681	1606	1660
Q Serve(g_s), s	7.0	1.3	0.0	5.0	0.0	3.6	5.9	13.0	13.0	0.1	5.1	5.3
Cycle Q Clear(g_c), s	10.6	1.3	0.0	6.3	0.0	3.6	5.9	13.0	13.0	0.1	5.1	5.3
Prop In Lane	1.00		1.00	1.00		0.41	1.00		0.19	1.00		0.35
Lane Grp Cap(c), veh/h	198	232	198	230	0	211	235	2193	1163	5	1970	1018
V/C Ratio(X)	0.45	0.10	0.00	0.29	0.00	0.27	0.75	0.40	0.40	0.44	0.17	0.18
Avail Cap(c_a), veh/h	482	608	517	523	0	553	279	2193	1163	144	1970	1018
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(l)	1.00	1.00	0.00	1.00	0.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	47.8	42.0	0.0	44.8	0.0	43.0	50.1	7.6	7.6	54.8	9.2	9.2
Incr Delay (d2), s/veh	1.6	0.2	0.0	0.7	0.0	0.7	9.2	0.5	1.0	55.6	0.2	0.4
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%),veh/ln	2.7	0.7	0.0	1.9	0.0	1.6	2.9	5.9	6.4	0.1	2.3	2.5
LnGrp Delay(d),s/veh	49.4	42.2	0.0	45.5	0.0	43.7	59.3	8.1	8.6	110.4	9.4	9.6
LnGrp LOS	D	D		D		D	E	A	A	F	A	A
Approach Vol, veh/h		112				125			1514		529	
Approach Delay, s/veh		47.8				44.7			14.3		9.9	
Approach LOS		D				D		B			A	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	1	2		4	5	6		8				
Phs Duration (G+Y+Rc), s	6.9	81.5		21.6	14.5	73.9		21.6				
Change Period (Y+Rc), s	6.6	* 6.4		7.1	6.6	* 6.4		7.1				
Max Green Setting (Gmax), s	9.4	* 43		37.9	9.4	* 43		37.9				
Max Q Clear Time (g_c+l1), s	2.1	15.0		12.6	7.9	7.3		8.3				
Green Ext Time (p_c), s	0.0	12.3		0.5	0.1	4.3		0.6				
Intersection Summary												
HCM 2010 Ctrl Delay			16.6									
HCM 2010 LOS			B									
Notes												

Appendix N

2022 Future Background Synchro Sheets

Lanes, Volumes, Timings

2022 FB-AM

910 March Road

1: March Road & Halton Terrace/Maxwell Bridge Road

	→	→	→	←	←	↑	↑	↓	↓	←	→	
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑		↑	↑		↑	↑↑	↑	↑	↑↑	↑
Traffic Volume (vph)	21	37	95	125	16	24	23	185	62	68	820	12
Future Volume (vph)	21	37	95	125	16	24	23	185	62	68	820	12
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	30.0		0.0	30.0		0.0	60.0		0.0	70.0		15.0
Storage Lanes	1		0	1		0	1		1	1		1
Taper Length (m)	60.0			60.0			70.0			100.0		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.95	1.00	1.00	0.95	1.00
Ped Bike Factor		0.99			1.00				0.98	1.00		
Fr _t		0.892				0.910			0.850			0.850
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1658	1493	0	1658	1525	0	1551	3020	1414	1658	3316	1401
Flt Permitted	0.731			0.619			0.316			0.627		
Satd. Flow (perm)	1276	1493	0	1079	1525	0	516	3020	1380	1091	3316	1401
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		95			24				100			100
Link Speed (k/h)		40			40			80			80	
Link Distance (m)		143.7			356.2			324.9			267.2	
Travel Time (s)		12.9			32.1			14.6			12.0	
Confl. Peds. (#/hr)		1	1					2	2			
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Heavy Vehicles (%)	2%	14%	2%	2%	2%	9%	9%	12%	7%	2%	2%	8%
Adj. Flow (vph)	21	37	95	125	16	24	23	185	62	68	820	12
Shared Lane Traffic (%)												
Lane Group Flow (vph)	21	132	0	125	40	0	23	185	62	68	820	12
Enter Blocked Intersection	No											
Lane Alignment	Left	Left	Right									
Median Width(m)		3.5			3.5			3.5			3.5	
Link Offset(m)		0.0			0.0			0.0			0.0	
Crosswalk Width(m)		3.0			3.0			3.0			3.0	
Two way Left Turn Lane												
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25		15	25		15	25		15	25		15
Number of Detectors	1	2		1	2		1	2	1	1	2	1
Detector Template	Left	Thru		Left	Thru		Left	Thru	Right	Left	Thru	Right
Leading Detector (m)	2.0	10.0		2.0	10.0		2.0	10.0	2.0	2.0	10.0	2.0
Trailing Detector (m)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Position(m)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Size(m)	2.0	0.6		2.0	0.6		2.0	0.6	2.0	2.0	0.6	2.0
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(m)		9.4			9.4			9.4			9.4	
Detector 2 Size(m)		0.6			0.6			0.6			0.6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)	0.0			0.0			0.0			0.0		

Lanes, Volumes, Timings

1: March Road & Halton Terrace/Maxwell Bridge Road

2022 FB-AM

910 March Road



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	Perm	NA		Perm	NA		pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases				4		8		5	2		1	6
Permitted Phases	4				8			2		2	6	6
Detector Phase	4	4		8	8		5	2	2	1	6	6
Switch Phase												
Minimum Initial (s)	10.0	10.0		10.0	10.0		5.0	10.0	10.0	5.0	10.0	10.0
Minimum Split (s)	38.6	38.6		38.6	38.6		12.4	34.6	34.6	11.4	34.6	34.6
Total Split (s)	48.0	48.0		48.0	48.0		20.0	52.0	52.0	20.0	52.0	52.0
Total Split (%)	40.0%	40.0%		40.0%	40.0%		16.7%	43.3%	43.3%	16.7%	43.3%	43.3%
Maximum Green (s)	41.4	41.4		41.4	41.4		12.6	45.4	45.4	13.6	45.4	45.4
Yellow Time (s)	3.3	3.3		3.3	3.3		4.6	4.6	4.6	4.6	4.6	4.6
All-Red Time (s)	3.3	3.3		3.3	3.3		2.8	2.0	2.0	1.8	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.6	6.6		6.6	6.6		7.4	6.6	6.6	6.4	6.6	6.6
Lead/Lag							Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?							Yes	Yes	Yes	Yes	Yes	Yes
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	None	None		None	None		None	C-Max	C-Max	None	C-Max	C-Max
Walk Time (s)	7.0	7.0		7.0	7.0			7.0	7.0		7.0	7.0
Flash Dont Walk (s)	25.0	25.0		25.0	25.0			21.0	21.0		21.0	21.0
Pedestrian Calls (#/hr)	0	0		0	0			0	0		0	0
Act Effct Green (s)	18.3	18.3		18.3	18.3		81.7	77.6	77.6	85.1	80.3	80.3
Actuated g/C Ratio	0.15	0.15		0.15	0.15		0.68	0.65	0.65	0.71	0.67	0.67
v/c Ratio	0.11	0.43		0.76	0.16		0.06	0.09	0.07	0.08	0.37	0.01
Control Delay	41.8	18.7		75.8	22.8		6.4	10.0	0.8	5.7	11.2	0.0
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	41.8	18.7		75.8	22.8		6.4	10.0	0.8	5.7	11.2	0.0
LOS	D	B		E	C		A	B	A	A	B	A
Approach Delay		21.9			62.9			7.6			10.7	
Approach LOS		C			E			A			B	
Queue Length 50th (m)	4.3	7.7		28.6	3.3		1.3	8.4	0.0	3.8	47.0	0.0
Queue Length 95th (m)	10.8	23.8		46.2	12.2		4.5	16.5	2.1	9.8	73.3	0.0
Internal Link Dist (m)		119.7			332.2			300.9			243.2	
Turn Bay Length (m)	30.0			30.0			60.0			70.0		15.0
Base Capacity (vph)	440	577		372	541		482	1952	927	869	2217	970
Starvation Cap Reductn	0	0		0	0		0	0	0	0	0	0
Spillback Cap Reductn	0	0		0	0		0	0	0	0	0	0
Storage Cap Reductn	0	0		0	0		0	0	0	0	0	0
Reduced v/c Ratio	0.05	0.23		0.34	0.07		0.05	0.09	0.07	0.08	0.37	0.01

Intersection Summary

Area Type: Other

Cycle Length: 120

Actuated Cycle Length: 120

Offset: 99 (83%), Referenced to phase 2:NBT and 6:SBTL, Start of Green

Natural Cycle: 90

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.76

Intersection Signal Delay: 17.0


Intersection LOS: B

1: March Road & Halton Terrace/Maxwell Bridge Road

Intersection Capacity Utilization 68.0%

ICU Level of Service C

Analysis Period (min) 15

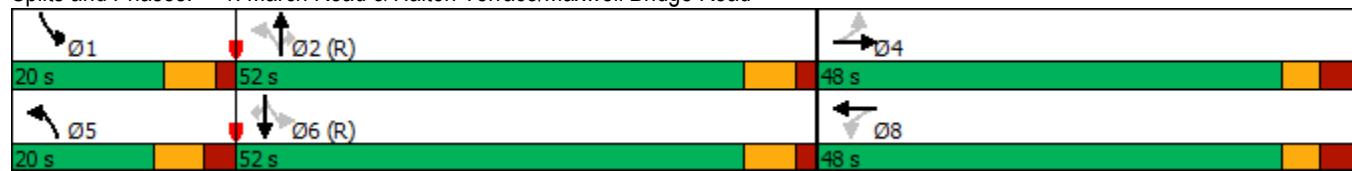Splits and Phases: 1: March Road & Halton Terrace/Maxwell Bridge Road

Lanes, Volumes, Timings
2: March Road & Klondike Road

2022 FB-AM
910 March Road

	↑	→	↓	↗	↖	↙	↖	↗	↑	↗	↓	↖
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑	↑	↑	↑	↑	↑↑	↑↑↑	↑	↑	↑↑↑	↑
Traffic Volume (vph)	30	36	253	113	28	22	83	280	52	18	896	33
Future Volume (vph)	30	36	253	113	28	22	83	280	52	18	896	33
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	100.0			5.0	15.0		0.0	100.0		0.0	45.0	
Storage Lanes	1			1	1		0	2		0	1	
Taper Length (m)	0.0				30.0			100.0			85.0	
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	0.97	0.91	0.91	1.00	0.91	0.91
Ped Bike Factor	1.00			0.98	0.99	0.99		1.00	1.00		0.99	1.00
Fr _t				0.850		0.934			0.977			0.995
Flt Protected	0.950				0.950			0.950			0.950	
Satd. Flow (prot)	1496	1679	1483	1658	1511	0	3124	4403	0	1433	4726	0
Flt Permitted	0.521				0.734			0.950			0.950	
Satd. Flow (perm)	818	1679	1456	1273	1511	0	3118	4403	0	1424	4726	0
Right Turn on Red			Yes				Yes			Yes		Yes
Satd. Flow (RTOR)			197			22			34			5
Link Speed (k/h)			50			50			80			80
Link Distance (m)			117.7			346.6			261.8			142.1
Travel Time (s)			8.5			25.0			11.8			6.4
Confl. Peds. (#/hr)	3		6	6		3	3		4	4		3
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Heavy Vehicles (%)	13%	6%	2%	2%	8%	11%	5%	7%	9%	18%	2%	9%
Adj. Flow (vph)	30	36	253	113	28	22	83	280	52	18	896	33
Shared Lane Traffic (%)												
Lane Group Flow (vph)	30	36	253	113	50	0	83	332	0	18	929	0
Enter Blocked Intersection	No											
Lane Alignment	Left	Left	Right									
Median Width(m)			3.5			3.5			7.0			7.0
Link Offset(m)			0.0			0.0			0.0			0.0
Crosswalk Width(m)			3.0			3.0			3.0			3.0
Two way Left Turn Lane												
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25		15	25		15	25		15	25		15
Number of Detectors	1	2	1	1	2		1	2		1	2	
Detector Template	Left	Thru	Right	Left	Thru		Left	Thru		Left	Thru	
Leading Detector (m)	2.0	10.0	2.0	2.0	10.0		2.0	10.0		2.0	10.0	
Trailing Detector (m)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Position(m)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Size(m)	2.0	0.6	2.0	2.0	0.6		2.0	0.6		2.0	0.6	
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(m)			9.4			9.4			9.4			9.4
Detector 2 Size(m)			0.6			0.6			0.6			0.6
Detector 2 Type			Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex
Detector 2 Channel												
Detector 2 Extend (s)	0.0			0.0			0.0			0.0		

Lanes, Volumes, Timings
2: March Road & Klondike Road

2022 FB-AM
910 March Road

	↗	→	↘	↙	←	↖	↑	↗	↘	↓	↙	
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	pm+pt	NA	Perm	Perm	NA		Prot	NA		Prot	NA	
Protected Phases	7	4			8		5	2		1	6	
Permitted Phases	4		4	8								
Detector Phase	7	4	4	8	8		5	2		1	6	
Switch Phase												
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0		5.0	5.0		5.0	5.0	
Minimum Split (s)	11.6	44.1	44.1	44.1	44.1		11.6	32.4		11.6	32.4	
Total Split (s)	12.0	57.0	57.0	45.0	45.0		15.0	58.0		15.0	58.0	
Total Split (%)	9.2%	43.8%	43.8%	34.6%	34.6%		11.5%	44.6%		11.5%	44.6%	
Maximum Green (s)	5.4	49.9	49.9	37.9	37.9		8.4	51.6		8.4	51.6	
Yellow Time (s)	3.3	3.3	3.3	3.3	3.3		4.6	4.6		4.6	4.6	
All-Red Time (s)	3.3	3.8	3.8	3.8	3.8		2.0	1.8		2.0	1.8	
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Total Lost Time (s)	6.6	7.1	7.1	7.1	7.1		6.6	6.4		6.6	6.4	
Lead/Lag	Lead			Lag	Lag		Lead	Lag		Lead	Lag	
Lead-Lag Optimize?	Yes			Yes	Yes		Yes	Yes		Yes	Yes	
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None	None	None	None		None	C-Max		None	C-Max	
Walk Time (s)		7.0	7.0	7.0	7.0			7.0			7.0	
Flash Dont Walk (s)		30.0	30.0	30.0	30.0			19.0			19.0	
Pedestrian Calls (#/hr)	0	0	0	0	0			0			0	
Act Effct Green (s)	24.6	24.1	24.1	16.9	16.9		8.8	86.2		7.2	77.0	
Actuated g/C Ratio	0.19	0.19	0.19	0.13	0.13		0.07	0.66		0.06	0.59	
v/c Ratio	0.16	0.12	0.59	0.68	0.23		0.39	0.11		0.23	0.33	
Control Delay	40.2	39.6	16.3	73.4	32.8		63.0	10.0		64.7	15.6	
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Total Delay	40.2	39.6	16.3	73.4	32.8		63.0	10.0		64.7	15.6	
LOS	D	D	B	E	C		E	A		E	B	
Approach Delay		21.2			60.9			20.6			16.5	
Approach LOS		C			E			C			B	
Queue Length 50th (m)	6.1	7.4	11.7	28.0	6.5		10.6	9.0		4.5	46.0	
Queue Length 95th (m)	13.3	15.4	34.6	45.6	17.3		18.8	20.8		12.5	66.0	
Internal Link Dist (m)		93.7			322.6			237.8			118.1	
Turn Bay Length (m)	100.0		5.0	15.0			100.0			45.0		
Base Capacity (vph)	183	644	680	371	456		224	2930		95	2799	
Starvation Cap Reductn	0	0	0	0	0		0	0		0	0	
Spillback Cap Reductn	0	0	0	0	0		0	0		0	0	
Storage Cap Reductn	0	0	0	0	0		0	0		0	0	
Reduced v/c Ratio	0.16	0.06	0.37	0.30	0.11		0.37	0.11		0.19	0.33	
Intersection Summary												
Area Type:	Other											
Cycle Length:	130											
Actuated Cycle Length:	130											
Offset: 64 (49%), Referenced to phase 2:NBT and 6:SBT, Start of Green												
Natural Cycle: 100												
Control Type: Actuated-Coordinated												
Maximum v/c Ratio: 0.68												
Intersection Signal Delay: 22.2	Intersection LOS: C											

Intersection Capacity Utilization 65.1%
Analysis Period (min) 15

ICU Level of Service C

Splits and Phases: 2: March Road & Klondike Road



HCM 2010 Signalized Intersection Summary
2: March Road & Klondike Road

2022 FB-AM
910 March Road

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	→	↓	←	↖	↙	↖	↑↑↑	↗	↖	↑↑↑	↗
Traffic Volume (veh/h)	30	36	253	113	28	22	83	280	52	18	896	33
Future Volume (veh/h)	30	36	253	113	28	22	83	280	52	18	896	33
Number	7	4	14	3	8	18	5	2	12	1	6	16
Initial Q (Q _b), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	0.99		1.00	0.99		0.99	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1593	1698	1765	1765	1647	1800	1714	1677	1800	1525	1760	1800
Adj Flow Rate, veh/h	30	36	0	113	28	22	83	280	52	18	896	33
Adj No. of Lanes	1	1	1	1	1	0	2	3	0	1	3	0
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Percent Heavy Veh, %	13	6	2	2	8	8	5	7	7	18	2	2
Cap, veh/h	224	362	320	240	116	91	126	2397	430	27	2820	104
Arrive On Green	0.03	0.21	0.00	0.14	0.14	0.14	0.04	0.61	0.61	0.02	0.59	0.59
Sat Flow, veh/h	1517	1698	1500	1349	850	668	3167	3904	700	1453	4758	175
Grp Volume(v), veh/h	30	36	0	113	0	50	83	217	115	18	603	326
Grp Sat Flow(s),veh/h/ln	1517	1698	1500	1349	0	1518	1584	1526	1551	1453	1602	1729
Q Serve(g_s), s	2.2	2.2	0.0	10.3	0.0	3.8	3.4	3.8	4.0	1.6	12.3	12.3
Cycle Q Clear(g_c), s	2.2	2.2	0.0	10.3	0.0	3.8	3.4	3.8	4.0	1.6	12.3	12.3
Prop In Lane	1.00		1.00	1.00		0.44	1.00		0.45	1.00		0.10
Lane Grp Cap(c), veh/h	224	362	320	240	0	208	126	1874	952	27	1899	1025
V/C Ratio(X)	0.13	0.10	0.00	0.47	0.00	0.24	0.66	0.12	0.12	0.67	0.32	0.32
Avail Cap(c_a), veh/h	248	652	576	449	0	443	205	1874	952	94	1899	1025
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(l)	1.00	1.00	0.00	1.00	0.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	45.0	41.1	0.0	52.9	0.0	50.1	61.6	10.4	10.5	63.4	13.3	13.3
Incr Delay (d2), s/veh	0.3	0.1	0.0	1.4	0.0	0.6	5.8	0.1	0.3	25.6	0.4	0.8
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%),veh/ln	0.9	1.1	0.0	3.9	0.0	1.6	1.6	1.6	1.8	0.8	5.6	6.1
LnGrp Delay(d),s/veh	45.2	41.2	0.0	54.3	0.0	50.7	67.4	10.6	10.7	89.0	13.7	14.1
LnGrp LOS	D	D		D		D	E	B	B	F	B	B
Approach Vol, veh/h		66			163			415			947	
Approach Delay, s/veh		43.1			53.2			22.0			15.3	
Approach LOS		D			D			C			B	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	1	2		4	5	6	7	8				
Phs Duration (G+Y+Rc), s	9.0	86.2		34.8	11.8	83.5	9.9	24.9				
Change Period (Y+Rc), s	6.6	* 6.4		7.1	6.6	* 6.4	6.6	7.1				
Max Green Setting (Gmax), s	8.4	* 52		49.9	8.4	* 52	5.4	37.9				
Max Q Clear Time (g_c+l1), s	3.6	6.0		4.2	5.4	14.3	4.2	12.3				
Green Ext Time (p_c), s	0.0	2.7		0.2	0.1	8.5	0.0	0.8				
Intersection Summary												
HCM 2010 Ctrl Delay			22.1									
HCM 2010 LOS			C									
Notes												

Lanes, Volumes, Timings

2022 FB-PM

910 March Road

1: March Road & Halton Terrace/Maxwell Bridge Road

	→	→	←	←	↑	↑	↓	↓	←	→	↑	↓	←
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	
Lane Configurations	↑	↑		↑	↑		↑	↑↑	↑	↑	↑↑	↑	
Traffic Volume (vph)	17	55	41	79	58	90	172	888	114	60	245	12	
Future Volume (vph)	17	55	41	79	58	90	172	888	114	60	245	12	
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	
Storage Length (m)	30.0		0.0	30.0		0.0	60.0		0.0	70.0		15.0	
Storage Lanes	1		0	1		0	1		1	1		1	
Taper Length (m)	60.0			60.0			70.0			100.0			
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.95	1.00	1.00	0.95	1.00	
Ped Bike Factor	0.99	0.99		0.98	0.99		1.00		0.96	1.00		0.98	
Fr _t		0.936			0.909				0.850			0.850	
Flt Protected	0.950			0.950			0.950			0.950			
Satd. Flow (prot)	1658	1532	0	1610	1557	0	1658	3316	1483	1658	3316	1483	
Flt Permitted	0.528			0.695			0.567			0.309			
Satd. Flow (perm)	912	1532	0	1158	1557	0	986	3316	1419	537	3316	1447	
Right Turn on Red			Yes			Yes			Yes			Yes	
Satd. Flow (RTOR)		33			68				114			100	
Link Speed (k/h)		40			40			80			80		
Link Distance (m)		143.7			356.2			324.9			267.2		
Travel Time (s)		12.9			32.1			14.6			12.0		
Confl. Peds. (#/hr)	11		17	17		11	2		11	11		2	
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	
Heavy Vehicles (%)	2%	9%	5%	5%	3%	2%	2%	2%	2%	2%	2%	2%	
Adj. Flow (vph)	17	55	41	79	58	90	172	888	114	60	245	12	
Shared Lane Traffic (%)													
Lane Group Flow (vph)	17	96	0	79	148	0	172	888	114	60	245	12	
Enter Blocked Intersection	No												
Lane Alignment	Left	Left	Right										
Median Width(m)		3.5			3.5			3.5			3.5		
Link Offset(m)		0.0			0.0			0.0			0.0		
Crosswalk Width(m)		3.0			3.0			3.0			3.0		
Two way Left Turn Lane													
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	
Turning Speed (k/h)	25		15	25		15	25		15	25		15	
Number of Detectors	1	2		1	2		1	2	1	1	2	1	
Detector Template	Left	Thru		Left	Thru		Left	Thru	Right	Left	Thru	Right	
Leading Detector (m)	2.0	10.0		2.0	10.0		2.0	10.0	2.0	2.0	10.0	2.0	
Trailing Detector (m)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	
Detector 1 Position(m)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	
Detector 1 Size(m)	2.0	0.6		2.0	0.6		2.0	0.6	2.0	2.0	0.6	2.0	
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	
Detector 1 Channel													
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	
Detector 2 Position(m)		9.4			9.4			9.4			9.4		
Detector 2 Size(m)		0.6			0.6			0.6			0.6		
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex		
Detector 2 Channel													
Detector 2 Extend (s)	0.0			0.0			0.0			0.0		0.0	

Lanes, Volumes, Timings

1: March Road & Halton Terrace/Maxwell Bridge Road

2022 FB-PM

910 March Road



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	Perm	NA		Perm	NA		pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases			4			8		5	2		1	6
Permitted Phases	4				8			2		2	6	6
Detector Phase	4	4		8	8		5	2	2	1	6	6
Switch Phase												
Minimum Initial (s)	10.0	10.0		10.0	10.0		5.0	10.0	10.0	5.0	10.0	10.0
Minimum Split (s)	38.6	38.6		38.6	38.6		12.4	34.6	34.6	11.4	34.6	34.6
Total Split (s)	45.0	45.0		45.0	45.0		20.0	55.0	55.0	20.0	55.0	55.0
Total Split (%)	37.5%	37.5%		37.5%	37.5%		16.7%	45.8%	45.8%	16.7%	45.8%	45.8%
Maximum Green (s)	38.4	38.4		38.4	38.4		12.6	48.4	48.4	13.6	48.4	48.4
Yellow Time (s)	3.3	3.3		3.3	3.3		4.6	4.6	4.6	4.6	4.6	4.6
All-Red Time (s)	3.3	3.3		3.3	3.3		2.8	2.0	2.0	1.8	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.6	6.6		6.6	6.6		7.4	6.6	6.6	6.4	6.6	6.6
Lead/Lag							Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?							Yes	Yes	Yes	Yes	Yes	Yes
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	None	None		None	None		None	C-Max	C-Max	None	C-Max	C-Max
Walk Time (s)	7.0	7.0		7.0	7.0			7.0	7.0		7.0	7.0
Flash Dont Walk (s)	25.0	25.0		25.0	25.0			21.0	21.0		21.0	21.0
Pedestrian Calls (#/hr)	0	0		0	0			0	0		0	0
Act Effct Green (s)	14.2	14.2		14.2	14.2		88.8	82.1	82.1	83.1	76.3	76.3
Actuated g/C Ratio	0.12	0.12		0.12	0.12		0.74	0.68	0.68	0.69	0.64	0.64
v/c Ratio	0.16	0.46		0.58	0.61		0.22	0.39	0.11	0.14	0.12	0.01
Control Delay	48.8	38.8		66.1	37.3		4.9	9.9	2.0	5.0	9.6	0.0
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	48.8	38.8		66.1	37.3		4.9	9.9	2.0	5.0	9.6	0.0
LOS	D	D		E	D		A	A	A	A	A	A
Approach Delay		40.3			47.3			8.4			8.4	
Approach LOS		D			D			A			A	
Queue Length 50th (m)	3.7	13.9		18.0	17.9		8.7	45.2	0.0	2.7	10.8	0.0
Queue Length 95th (m)	10.3	29.1		32.4	37.2		18.4	70.1	7.0	7.2	20.0	0.0
Internal Link Dist (m)		119.7			332.2			300.9			243.2	
Turn Bay Length (m)	30.0			30.0			60.0			70.0		15.0
Base Capacity (vph)	291	512		370	544		820	2267	1006	530	2109	956
Starvation Cap Reductn	0	0		0	0		0	0	0	0	0	0
Spillback Cap Reductn	0	0		0	0		0	0	0	0	0	0
Storage Cap Reductn	0	0		0	0		0	0	0	0	0	0
Reduced v/c Ratio	0.06	0.19		0.21	0.27		0.21	0.39	0.11	0.11	0.12	0.01

Intersection Summary

Area Type: Other

Cycle Length: 120

Actuated Cycle Length: 120

Offset: 50 (42%), Referenced to phase 2:NBT and 6:SBTL, Start of Green

Natural Cycle: 90

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.61

Intersection Signal Delay: 15.2

Intersection LOS: B

Lanes, Volumes, Timings

1: March Road & Halton Terrace/Maxwell Bridge Road

2022 FB-PM


910 March Road

Intersection Capacity Utilization 70.6%

ICU Level of Service C

Analysis Period (min) 15

Splits and Phases: 1: March Road & Halton Terrace/Maxwell Bridge Road

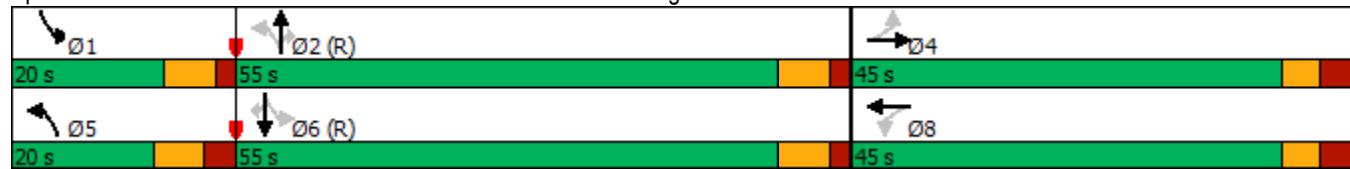

Lanes, Volumes, Timings
2: March Road & Klondike Road

2022 FB-PM
910 March Road

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑	↑	↑	↑	↑	↑↑	↑↑↑	↑	↑	↑↑↑	↑
Traffic Volume (vph)	79	25	110	73	33	24	159	1137	97	4	425	57
Future Volume (vph)	79	25	110	73	33	24	159	1137	97	4	425	57
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	100.0		5.0	15.0		0.0	100.0		0.0	45.0		0.0
Storage Lanes	1		1	1		0	2		0	1		0
Taper Length (m)	0.0			30.0			100.0			85.0		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	0.97	0.91	0.91	1.00	0.91	0.91
Ped Bike Factor	1.00		0.99	1.00	0.99		0.99	1.00		1.00	1.00	
Fr _t			0.850		0.937			0.988			0.982	
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1658	1745	1483	1658	1590	0	3216	4690	0	1658	4665	0
Flt Permitted	0.474			0.741			0.950			0.950		
Satd. Flow (perm)	826	1745	1462	1290	1590	0	3183	4690	0	1650	4665	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			110		24			12			20	
Link Speed (k/h)			50		50			80			80	
Link Distance (m)			117.7		346.6			261.8			142.1	
Travel Time (s)			8.5		25.0			11.8			6.4	
Confl. Peds. (#/hr)	1		2	2		1	8		11	11		8
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Heavy Vehicles (%)	2%	2%	2%	2%	6%	2%	2%	2%	2%	2%	2%	2%
Adj. Flow (vph)	79	25	110	73	33	24	159	1137	97	4	425	57
Shared Lane Traffic (%)												
Lane Group Flow (vph)	79	25	110	73	57	0	159	1234	0	4	482	0
Enter Blocked Intersection	No											
Lane Alignment	Left	Left	Right									
Median Width(m)			3.5		3.5			7.0			7.0	
Link Offset(m)			0.0		0.0			0.0			0.0	
Crosswalk Width(m)			3.0		3.0			3.0			3.0	
Two way Left Turn Lane												
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25		15	25		15	25		15	25		15
Number of Detectors	1	2	1	1	2		1	2		1	2	
Detector Template	Left	Thru	Right	Left	Thru		Left	Thru		Left	Thru	
Leading Detector (m)	2.0	10.0	2.0	2.0	10.0		2.0	10.0		2.0	10.0	
Trailing Detector (m)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Position(m)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Size(m)	2.0	0.6	2.0	2.0	0.6		2.0	0.6		2.0	0.6	
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(m)			9.4		9.4			9.4			9.4	
Detector 2 Size(m)			0.6		0.6			0.6			0.6	
Detector 2 Type			Cl+Ex		Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)	0.0			0.0			0.0			0.0		

Lanes, Volumes, Timings
2: March Road & Klondike Road

2022 FB-PM
910 March Road

	↗	→	↘	↙	←	↖	↑	↗	↘	↓	↙	
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	pm+pt	NA	Perm	Perm	NA		Prot	NA		Prot	NA	
Protected Phases	7	4			8		5	2		1	6	
Permitted Phases	4		4	8								
Detector Phase	7	4	4	8	8		5	2		1	6	
Switch Phase												
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0		5.0	5.0		5.0	5.0	
Minimum Split (s)	11.6	44.1	44.1	44.1	44.1		11.6	32.4		11.6	32.4	
Total Split (s)	12.0	57.0	57.0	45.0	45.0		22.0	51.0		22.0	51.0	
Total Split (%)	9.2%	43.8%	43.8%	34.6%	34.6%		16.9%	39.2%		16.9%	39.2%	
Maximum Green (s)	5.4	49.9	49.9	37.9	37.9		15.4	44.6		15.4	44.6	
Yellow Time (s)	3.3	3.3	3.3	3.3	3.3		4.6	4.6		4.6	4.6	
All-Red Time (s)	3.3	3.8	3.8	3.8	3.8		2.0	1.8		2.0	1.8	
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Total Lost Time (s)	6.6	7.1	7.1	7.1	7.1		6.6	6.4		6.6	6.4	
Lead/Lag	Lead			Lag	Lag		Lead	Lag		Lead	Lag	
Lead-Lag Optimize?	Yes			Yes	Yes		Yes	Yes		Yes	Yes	
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None	None	None	None		None	C-Max		None	C-Max	
Walk Time (s)		7.0	7.0	7.0	7.0			7.0			7.0	
Flash Dont Walk (s)		30.0	30.0	30.0	30.0			19.0			19.0	
Pedestrian Calls (#/hr)	0	0	0	0	0			0			0	
Act Effct Green (s)	22.8	22.3	22.3	12.7	12.7		11.7	91.5		6.0	75.8	
Actuated g/C Ratio	0.18	0.17	0.17	0.10	0.10		0.09	0.70		0.05	0.58	
v/c Ratio	0.44	0.08	0.32	0.58	0.32		0.55	0.37		0.05	0.18	
Control Delay	51.6	41.7	9.8	72.9	38.2		63.4	9.6		60.5	13.7	
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Total Delay	51.6	41.7	9.8	72.9	38.2		63.4	9.6		60.5	13.7	
LOS	D	D	A	E	D		E	A		E	B	
Approach Delay		29.0			57.7			15.7			14.0	
Approach LOS		C			E			B			B	
Queue Length 50th (m)	17.3	5.3	0.0	18.2	7.9		20.4	41.3		1.0	20.0	
Queue Length 95th (m)	30.0	12.5	14.7	32.7	20.3		30.8	77.4		4.8	30.9	
Internal Link Dist (m)		93.7			322.6			237.8			118.1	
Turn Bay Length (m)	100.0		5.0	15.0			100.0			45.0		
Base Capacity (vph)	179	669	628	376	480		380	3303		196	2729	
Starvation Cap Reductn	0	0	0	0	0		0	0		0	0	
Spillback Cap Reductn	0	0	0	0	0		0	0		0	0	
Storage Cap Reductn	0	0	0	0	0		0	0		0	0	
Reduced v/c Ratio	0.44	0.04	0.18	0.19	0.12		0.42	0.37		0.02	0.18	
Intersection Summary												
Area Type:	Other											
Cycle Length:	130											
Actuated Cycle Length:	130											
Offset: 20 (15%), Referenced to phase 2:NBT and 6:SBT, Start of Green												
Natural Cycle: 100												
Control Type: Actuated-Coordinated												
Maximum v/c Ratio: 0.58												
Intersection Signal Delay: 19.1	Intersection LOS: B											

Intersection Capacity Utilization 59.0%
Analysis Period (min) 15

ICU Level of Service B

Splits and Phases: 2: March Road & Klondike Road



HCM 2010 Signalized Intersection Summary
2: March Road & Klondike Road

2022 FB-PM
910 March Road

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↖ ↗ ↘ ↙ ↖ ↗ ↘ ↙ ↖ ↗ ↘ ↙ ↖											
Traffic Volume (veh/h)	79	25	110	73	33	24	159	1137	97	4	425	57
Future Volume (veh/h)	79	25	110	73	33	24	159	1137	97	4	425	57
Number	7	4	14	3	8	18	5	2	12	1	6	16
Initial Q (Q _b), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00			1.00	0.99		0.99	1.00		0.99	1.00	0.99
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1765	1765	1765	1765	1726	1800	1765	1765	1800	1765	1765	1800
Adj Flow Rate, veh/h	79	25	0	73	33	24	159	1137	97	4	425	57
Adj No. of Lanes	1	1	1	1	1	0	2	3	0	1	3	0
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Percent Heavy Veh, %	2	2	2	2	6	6	2	2	2	2	2	2
Cap, veh/h	196	316	268	174	80	58	214	2988	255	9	2587	340
Arrive On Green	0.04	0.18	0.00	0.09	0.09	0.09	0.07	0.66	0.66	0.01	0.60	0.60
Sat Flow, veh/h	1681	1765	1500	1371	927	674	3261	4519	385	1681	4307	566
Grp Volume(v), veh/h	79	25	0	73	0	57	159	808	426	4	315	167
Grp Sat Flow(s),veh/h/ln	1681	1765	1500	1371	0	1601	1630	1606	1693	1681	1606	1661
Q Serve(g_s), s	5.4	1.5	0.0	6.7	0.0	4.4	6.2	14.8	14.8	0.3	5.6	5.8
Cycle Q Clear(g_c), s	5.4	1.5	0.0	6.7	0.0	4.4	6.2	14.8	14.8	0.3	5.6	5.8
Prop In Lane	1.00			1.00		0.42	1.00		0.23	1.00		0.34
Lane Grp Cap(c), veh/h	196	316	268	174	0	139	214	2124	1119	9	1929	998
V/C Ratio(X)	0.40	0.08	0.00	0.42	0.00	0.41	0.74	0.38	0.38	0.46	0.16	0.17
Avail Cap(c_a), veh/h	196	677	576	455	0	467	386	2124	1119	199	1929	998
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(l)	1.00	1.00	0.00	1.00	0.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	50.3	44.4	0.0	57.3	0.0	56.2	59.6	10.0	10.0	64.5	11.5	11.5
Incr Delay (d2), s/veh	1.3	0.1	0.0	1.6	0.0	1.9	5.0	0.5	1.0	33.5	0.2	0.4
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%),veh/ln	2.6	0.8	0.0	2.6	0.0	2.0	3.0	6.7	7.2	0.2	2.5	2.7
LnGrp Delay(d),s/veh	51.6	44.5	0.0	58.9	0.0	58.2	64.6	10.5	11.0	98.0	11.7	11.9
LnGrp LOS	D	D		E		E	E	B	B	F	B	B
Approach Vol, veh/h	104				130				1393			486
Approach Delay, s/veh	49.9				58.6				16.8			12.5
Approach LOS	D			E				B			B	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	1	2		4	5	6	7	8				
Phs Duration (G+Y+Rc), s	7.3	92.4		30.4	15.1	84.5	12.0	18.4				
Change Period (Y+Rc), s	6.6	* 6.4		7.1	6.6	* 6.4	6.6	7.1				
Max Green Setting (Gmax), s	15.4	* 45		49.9	15.4	* 45	5.4	37.9				
Max Q Clear Time (g_c+l1), s	2.3	16.8		3.5	8.2	7.8	7.4	8.7				
Green Ext Time (p_c), s	0.0	11.2		0.1	0.3	3.9	0.0	0.7				
Intersection Summary												
HCM 2010 Ctrl Delay				20.0								
HCM 2010 LOS				C								
Notes												

Lanes, Volumes, Timings

2022 FB Sat

910 March Road

1: March Road & Halton Terrace/Maxwell Bridge Road

	→	→	→	←	←	↑	↑	↓	↓	←	→	
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑		↑	↑		↑	↑↑	↑	↑	↑↑	↑
Traffic Volume (vph)	17	55	41	79	58	90	172	888	114	60	245	12
Future Volume (vph)	17	55	41	79	58	90	172	888	114	60	245	12
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	30.0		0.0	30.0		0.0	60.0		0.0	70.0		15.0
Storage Lanes	1		0	1		0	1		1	1		1
Taper Length (m)	60.0			60.0			70.0			100.0		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.95	1.00	1.00	0.95	1.00
Ped Bike Factor	0.99	0.99		0.99	0.99		1.00		0.96	1.00		0.98
Fr _t		0.936			0.909				0.850			0.850
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1658	1535	0	1610	1559	0	1658	3316	1483	1658	3316	1483
Flt Permitted	0.622			0.695			0.600			0.309		
Satd. Flow (perm)	1077	1535	0	1163	1559	0	1045	3316	1427	537	3316	1449
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		41			89				114			41
Link Speed (k/h)		40			40			80			80	
Link Distance (m)		143.7			356.2			324.9			267.2	
Travel Time (s)		12.9			32.1			14.6			12.0	
Confl. Peds. (#/hr)	11		17	17		11	2		11	11		2
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Heavy Vehicles (%)	2%	9%	5%	5%	3%	2%	2%	2%	2%	2%	2%	2%
Adj. Flow (vph)	17	55	41	79	58	90	172	888	114	60	245	12
Shared Lane Traffic (%)												
Lane Group Flow (vph)	17	96	0	79	148	0	172	888	114	60	245	12
Enter Blocked Intersection	No											
Lane Alignment	Left	Left	Right									
Median Width(m)		3.5			3.5			3.5			3.5	
Link Offset(m)		0.0			0.0			0.0			0.0	
Crosswalk Width(m)		3.0			3.0			3.0			3.0	
Two way Left Turn Lane												
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25		15	25		15	25		15	25		15
Number of Detectors	1	2		1	2		1	2	1	1	2	1
Detector Template	Left	Thru		Left	Thru		Left	Thru	Right	Left	Thru	Right
Leading Detector (m)	2.0	10.0		2.0	10.0		2.0	10.0	2.0	2.0	10.0	2.0
Trailing Detector (m)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Position(m)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Size(m)	2.0	0.6		2.0	0.6		2.0	0.6	2.0	2.0	0.6	2.0
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(m)		9.4			9.4			9.4			9.4	
Detector 2 Size(m)		0.6			0.6			0.6			0.6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)	0.0			0.0			0.0			0.0		

Lanes, Volumes, Timings

1: March Road & Halton Terrace/Maxwell Bridge Road

2022 FB Sat

910 March Road



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	Perm	NA		Perm	NA		Perm	NA	Perm	Perm	NA	Perm
Protected Phases			4			8			2			6
Permitted Phases	4				8			2		2	6	6
Detector Phase	4	4		8	8			2	2	2	6	6
Switch Phase												
Minimum Initial (s)	10.0	10.0		10.0	10.0		10.0	10.0	10.0	10.0	10.0	10.0
Minimum Split (s)	38.6	38.6		38.6	38.6		34.6	34.6	34.6	34.6	34.6	34.6
Total Split (s)	39.0	39.0		39.0	39.0		56.0	56.0	56.0	56.0	56.0	56.0
Total Split (%)	41.1%	41.1%		41.1%	41.1%		58.9%	58.9%	58.9%	58.9%	58.9%	58.9%
Maximum Green (s)	32.4	32.4		32.4	32.4		49.4	49.4	49.4	49.4	49.4	49.4
Yellow Time (s)	3.3	3.3		3.3	3.3		4.6	4.6	4.6	4.6	4.6	4.6
All-Red Time (s)	3.3	3.3		3.3	3.3		2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.6	6.6		6.6	6.6		6.6	6.6	6.6	6.6	6.6	6.6
Lead/Lag												
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	None	None		None	None		C-Max	C-Max	C-Max	C-Max	C-Max	C-Max
Walk Time (s)	7.0	7.0		7.0	7.0		7.0	7.0	7.0	7.0	7.0	7.0
Flash Dont Walk (s)	25.0	25.0		25.0	25.0		21.0	21.0	21.0	21.0	21.0	21.0
Pedestrian Calls (#/hr)	0	0		0	0		0	0	0	0	0	0
Act Effct Green (s)	12.7	12.7		12.7	12.7		69.1	69.1	69.1	69.1	69.1	69.1
Actuated g/C Ratio	0.13	0.13		0.13	0.13		0.73	0.73	0.73	0.73	0.73	0.73
v/c Ratio	0.12	0.40		0.51	0.52		0.23	0.37	0.11	0.15	0.10	0.01
Control Delay	36.3	27.2		49.1	22.9		5.6	5.7	1.2	5.8	4.3	0.0
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	36.3	27.2		49.1	22.9		5.6	5.7	1.2	5.8	4.3	0.0
LOS	D	C		D	C		A	A	A	A	A	A
Approach Delay	28.5			32.0			5.2			4.4		
Approach LOS	C			C			A			A		
Queue Length 50th (m)	2.8	9.3		13.8	10.0		8.3	25.6	0.0	2.7	5.5	0.0
Queue Length 95th (m)	8.4	22.4		26.4	26.4		19.6	43.6	4.8	8.4	11.2	0.1
Internal Link Dist (m)	119.7			332.2			300.9			243.2		
Turn Bay Length (m)	30.0			30.0			60.0			70.0		15.0
Base Capacity (vph)	367	550		396	590		759	2411	1068	390	2411	1064
Starvation Cap Reductn	0	0		0	0		0	0	0	0	0	0
Spillback Cap Reductn	0	0		0	0		0	0	0	0	0	0
Storage Cap Reductn	0	0		0	0		0	0	0	0	0	0
Reduced v/c Ratio	0.05	0.17		0.20	0.25		0.23	0.37	0.11	0.15	0.10	0.01

Intersection Summary

Area Type: Other

Cycle Length: 95

Actuated Cycle Length: 95

Offset: 11 (12%), Referenced to phase 2:NBTL and 6:SBTL, Start of Green

Natural Cycle: 75

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.52

Intersection Signal Delay: 9.9


Intersection LOS: A

Intersection Capacity Utilization 70.7%

ICU Level of Service C

Analysis Period (min) 15

Splits and Phases: 1: March Road & Halton Terrace/Maxwell Bridge Road

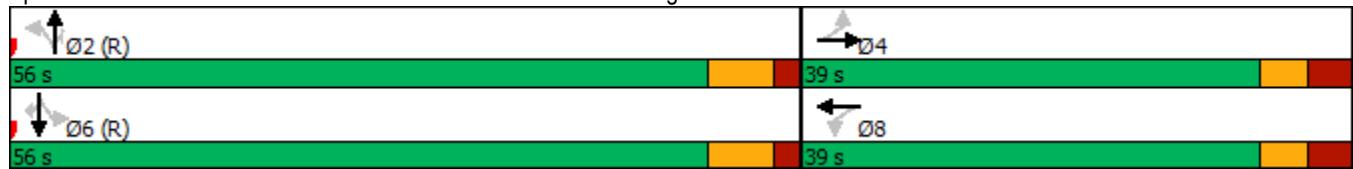

Lanes, Volumes, Timings
2: March Road & Klondike Road

2022 FB Sat
910 March Road

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑	↑	↑	↑	↑	↑↑	↑↑↑	↑	↑	↑↑↑	↑
Traffic Volume (vph)	79	25	110	73	33	24	159	1137	97	4	425	57
Future Volume (vph)	79	25	110	73	33	24	159	1137	97	4	425	57
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	100.0			5.0	15.0		0.0	100.0		0.0	45.0	
Storage Lanes	1			1	1		0	2		0	1	
Taper Length (m)	0.0				30.0			100.0			85.0	
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	0.97	0.91	0.91	1.00	0.91	0.91
Ped Bike Factor	1.00			0.99	1.00	0.99		0.99	1.00		1.00	1.00
Fr _t				0.850		0.937			0.988			0.982
Flt Protected	0.950				0.950			0.950			0.950	
Satd. Flow (prot)	1658	1745	1483	1658	1590	0	3216	4691	0	1658	4666	0
Flt Permitted	0.720				0.741			0.950			0.950	
Satd. Flow (perm)	1255	1745	1463	1291	1590	0	3188	4691	0	1651	4666	0
Right Turn on Red				Yes			Yes			Yes		Yes
Satd. Flow (RTOR)				110		24			15			25
Link Speed (k/h)				50		50			80			80
Link Distance (m)				117.7		346.6			261.8			142.1
Travel Time (s)				8.5		25.0			11.8			6.4
Confl. Peds. (#/hr)	1		2	2			1	8		11	11	8
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Heavy Vehicles (%)	2%	2%	2%	2%	6%	2%	2%	2%	2%	2%	2%	2%
Adj. Flow (vph)	79	25	110	73	33	24	159	1137	97	4	425	57
Shared Lane Traffic (%)												
Lane Group Flow (vph)	79	25	110	73	57	0	159	1234	0	4	482	0
Enter Blocked Intersection	No											
Lane Alignment	Left	Left	Right									
Median Width(m)				3.5		3.5			7.0			7.0
Link Offset(m)				0.0		0.0			0.0			0.0
Crosswalk Width(m)				3.0		3.0			3.0			3.0
Two way Left Turn Lane												
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25		15	25		15	25		15	25		15
Number of Detectors	1	2	1	1	2		1	2		1	2	
Detector Template	Left	Thru	Right	Left	Thru		Left	Thru		Left	Thru	
Leading Detector (m)	2.0	10.0	2.0	2.0	10.0		2.0	10.0		2.0	10.0	
Trailing Detector (m)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Position(m)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Size(m)	2.0	0.6	2.0	2.0	0.6		2.0	0.6		2.0	0.6	
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(m)				9.4		9.4			9.4			9.4
Detector 2 Size(m)				0.6		0.6			0.6			0.6
Detector 2 Type				Cl+Ex		Cl+Ex			Cl+Ex			Cl+Ex
Detector 2 Channel												
Detector 2 Extend (s)	0.0				0.0			0.0			0.0	

Lanes, Volumes, Timings
2: March Road & Klondike Road

2022 FB Sat
910 March Road



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	Perm	NA	Perm	Perm	NA		Prot	NA		Prot	NA	
Protected Phases		4			8		5	2		1	6	
Permitted Phases	4		4	8								
Detector Phase	4	4	4	8	8		5	2		1	6	
Switch Phase												
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0		5.0	5.0		5.0	5.0	
Minimum Split (s)	44.1	44.1	44.1	44.1	44.1		11.6	32.4		11.6	32.4	
Total Split (s)	45.0	45.0	45.0	45.0	45.0		16.0	49.0		16.0	49.0	
Total Split (%)	40.9%	40.9%	40.9%	40.9%	40.9%		14.5%	44.5%		14.5%	44.5%	
Maximum Green (s)	37.9	37.9	37.9	37.9	37.9		9.4	42.6		9.4	42.6	
Yellow Time (s)	3.3	3.3	3.3	3.3	3.3		4.6	4.6		4.6	4.6	
All-Red Time (s)	3.8	3.8	3.8	3.8	3.8		2.0	1.8		2.0	1.8	
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Total Lost Time (s)	7.1	7.1	7.1	7.1	7.1		6.6	6.4		6.6	6.4	
Lead/Lag							Lead	Lag		Lead	Lag	
Lead-Lag Optimize?							Yes	Yes		Yes	Yes	
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None	None	None	None		None	C-Max		None	C-Max	
Walk Time (s)	7.0	7.0	7.0	7.0	7.0			7.0			7.0	
Flash Dont Walk (s)	30.0	30.0	30.0	30.0	30.0			19.0			19.0	
Pedestrian Calls (#/hr)	0	0	0	0	0			0			0	
Act Effct Green (s)	12.3	12.3	12.3	12.3	12.3		10.7	81.5		5.9	66.8	
Actuated g/C Ratio	0.11	0.11	0.11	0.11	0.11		0.10	0.74		0.05	0.61	
v/c Ratio	0.56	0.13	0.42	0.51	0.29		0.51	0.35		0.05	0.17	
Control Delay	60.6	43.0	13.0	56.9	31.3		52.5	6.3		50.2	9.9	
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Total Delay	60.6	43.0	13.0	56.9	31.3		52.5	6.3		50.2	9.9	
LOS	E	D	B	E	C		D	A		D	A	
Approach Delay		34.1			45.7			11.6			10.3	
Approach LOS		C			D			B			B	
Queue Length 50th (m)	16.3	4.9	0.0	15.0	6.5		17.0	25.2		0.8	14.5	
Queue Length 95th (m)	30.2	12.3	14.9	28.0	17.5		26.5	59.7		4.4	24.2	
Internal Link Dist (m)		93.7			322.6			237.8			118.1	
Turn Bay Length (m)	100.0		5.0	15.0			100.0			45.0		
Base Capacity (vph)	432	601	576	444	563		323	3480		141	2845	
Starvation Cap Reductn	0	0	0	0	0		0	0		0	0	
Spillback Cap Reductn	0	0	0	0	0		0	0		0	0	
Storage Cap Reductn	0	0	0	0	0		0	0		0	0	
Reduced v/c Ratio	0.18	0.04	0.19	0.16	0.10		0.49	0.35		0.03	0.17	

Intersection Summary

Area Type: Other

Cycle Length: 110

Actuated Cycle Length: 110

Offset: 16 (15%), Referenced to phase 2:NBT and 6:SBT, Start of Green

Natural Cycle: 90

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.56

Intersection Signal Delay: 15.5

Intersection LOS: B

Intersection Capacity Utilization 59.0%
Analysis Period (min) 15

ICU Level of Service B

Splits and Phases: 2: March Road & Klondike Road



HCM 2010 Signalized Intersection Summary
2: March Road & Klondike Road

2022 FB Sat
910 March Road

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↖ ↗ ↘ ↙ ↖ ↗ ↘ ↙ ↖ ↗ ↘ ↙ ↖											
Traffic Volume (veh/h)	79	25	110	73	33	24	159	1137	97	4	425	57
Future Volume (veh/h)	79	25	110	73	33	24	159	1137	97	4	425	57
Number	7	4	14	3	8	18	5	2	12	1	6	16
Initial Q (Q _b), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00			1.00	1.00		1.00	1.00		0.99	1.00	0.99
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1765	1765	1765	1765	1726	1800	1765	1765	1800	1765	1765	1800
Adj Flow Rate, veh/h	79	25	0	73	33	24	159	1137	97	4	425	57
Adj No. of Lanes	1	1	1	1	1	0	2	3	0	1	3	0
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Percent Heavy Veh, %	2	2	2	2	6	6	2	2	2	2	2	2
Cap, veh/h	189	221	187	220	116	84	217	3105	265	9	2695	354
Arrive On Green	0.12	0.12	0.00	0.12	0.12	0.12	0.07	0.69	0.69	0.01	0.63	0.63
Sat Flow, veh/h	1336	1765	1500	1374	928	675	3261	4520	385	1681	4307	566
Grp Volume(v), veh/h	79	25	0	73	0	57	159	808	426	4	315	167
Grp Sat Flow(s),veh/h/ln	1336	1765	1500	1374	0	1603	1630	1606	1693	1681	1606	1661
Q Serve(g_s), s	6.3	1.4	0.0	5.5	0.0	3.5	5.3	11.6	11.6	0.3	4.5	4.6
Cycle Q Clear(g_c), s	9.8	1.4	0.0	6.9	0.0	3.5	5.3	11.6	11.6	0.3	4.5	4.6
Prop In Lane	1.00			1.00		0.42	1.00		0.23	1.00		0.34
Lane Grp Cap(c), veh/h	189	221	187	220	0	200	217	2207	1163	9	2009	1039
V/C Ratio(X)	0.42	0.11	0.00	0.33	0.00	0.28	0.73	0.37	0.37	0.46	0.16	0.16
Avail Cap(c_a), veh/h	483	608	517	522	0	552	279	2207	1163	144	2009	1039
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(l)	1.00	1.00	0.00	1.00	0.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	48.1	42.7	0.0	45.8	0.0	43.7	50.4	7.2	7.2	54.6	8.5	8.6
Incr Delay (d2), s/veh	1.5	0.2	0.0	0.9	0.0	0.8	7.0	0.5	0.9	32.6	0.2	0.3
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%),veh/ln	2.4	0.7	0.0	2.1	0.0	1.6	2.6	5.2	5.6	0.2	2.0	2.2
LnGrp Delay(d),s/veh	49.6	42.9	0.0	46.6	0.0	44.4	57.4	7.7	8.1	87.2	8.7	8.9
LnGrp LOS	D	D		D		D	E	A	A	F	A	A
Approach Vol, veh/h	104				130				1393			486
Approach Delay, s/veh	48.0				45.7				13.5			9.4
Approach LOS	D			D			B			A		
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	1	2		4	5	6		8				
Phs Duration (G+Y+Rc), s	7.2	82.0		20.8	13.9	75.2		20.8				
Change Period (Y+Rc), s	6.6	* 6.4		7.1	6.6	* 6.4		7.1				
Max Green Setting (Gmax), s	9.4	* 43		37.9	9.4	* 43		37.9				
Max Q Clear Time (g_c+l1), s	2.3	13.6		11.8	7.3	6.6		8.9				
Green Ext Time (p_c), s	0.0	11.4		0.4	0.1	3.9		0.7				
Intersection Summary												
HCM 2010 Ctrl Delay				16.2								
HCM 2010 LOS				B								
Notes												

Appendix O

2027 Future Background Synchro Sheets

Lanes, Volumes, Timings

2027 FB-AM

910 March Road

1: March Road & Halton Terrace/Maxwell Bridge Road

	→	→	→	←	←	↑	↑	↓	↓	←	→	
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑		↑	↑		↑	↑↑	↑	↑	↑↑	↑
Traffic Volume (vph)	101	37	157	125	17	49	99	496	63	75	1471	66
Future Volume (vph)	101	37	157	125	17	49	99	496	63	75	1471	66
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	30.0		0.0	30.0		0.0	60.0		0.0	70.0		15.0
Storage Lanes	1		0	1		0	1		1	1		1
Taper Length (m)	60.0			60.0			70.0			100.0		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.95	1.00	1.00	0.95	1.00
Ped Bike Factor		0.99			1.00				0.98	1.00		
Fr _t		0.879				0.889			0.850			0.850
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1658	1484	0	1658	1476	0	1551	3020	1414	1658	3316	1401
Flt Permitted	0.714			0.463			0.097			0.470		
Satd. Flow (perm)	1246	1484	0	807	1476	0	158	3020	1380	819	3316	1401
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		157			49				100			100
Link Speed (k/h)		40			40			80			80	
Link Distance (m)		143.7			356.2			324.9			209.0	
Travel Time (s)		12.9			32.1			14.6			9.4	
Confl. Peds. (#/hr)		1	1					2	2			
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Heavy Vehicles (%)	2%	14%	2%	2%	2%	9%	9%	12%	7%	2%	2%	8%
Adj. Flow (vph)	101	37	157	125	17	49	99	496	63	75	1471	66
Shared Lane Traffic (%)												
Lane Group Flow (vph)	101	194	0	125	66	0	99	496	63	75	1471	66
Enter Blocked Intersection	No											
Lane Alignment	Left	Left	Right									
Median Width(m)		3.5			3.5			3.5			3.5	
Link Offset(m)		0.0			0.0			0.0			0.0	
Crosswalk Width(m)		3.0			3.0			3.0			3.0	
Two way Left Turn Lane												
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25		15	25		15	25		15	25		15
Number of Detectors	1	2		1	2		1	2	1	1	2	1
Detector Template	Left	Thru		Left	Thru		Left	Thru	Right	Left	Thru	Right
Leading Detector (m)	2.0	10.0		2.0	10.0		2.0	10.0	2.0	2.0	10.0	2.0
Trailing Detector (m)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Position(m)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Size(m)	2.0	0.6		2.0	0.6		2.0	0.6	2.0	2.0	0.6	2.0
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(m)		9.4			9.4			9.4			9.4	
Detector 2 Size(m)		0.6			0.6			0.6			0.6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	

Lanes, Volumes, Timings

1: March Road & Halton Terrace/Maxwell Bridge Road

2027 FB-AM

910 March Road



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	Perm	NA		Perm	NA		pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases		4			8		5	2		1	6	
Permitted Phases	4				8		2		2	6		6
Detector Phase	4	4		8	8		5	2	2	1	6	6
Switch Phase												
Minimum Initial (s)	10.0	10.0		10.0	10.0		5.0	10.0	10.0	5.0	10.0	10.0
Minimum Split (s)	38.6	38.6		38.6	38.6		12.4	34.6	34.6	11.4	34.6	34.6
Total Split (s)	48.0	48.0		48.0	48.0		20.0	52.0	52.0	20.0	52.0	52.0
Total Split (%)	40.0%	40.0%		40.0%	40.0%		16.7%	43.3%	43.3%	16.7%	43.3%	43.3%
Maximum Green (s)	41.4	41.4		41.4	41.4		12.6	45.4	45.4	13.6	45.4	45.4
Yellow Time (s)	3.3	3.3		3.3	3.3		4.6	4.6	4.6	4.6	4.6	4.6
All-Red Time (s)	3.3	3.3		3.3	3.3		2.8	2.0	2.0	1.8	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.6	6.6		6.6	6.6		7.4	6.6	6.6	6.4	6.6	6.6
Lead/Lag							Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?							Yes	Yes	Yes	Yes	Yes	Yes
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	None	None		None	None		None	C-Max	C-Max	None	C-Max	C-Max
Walk Time (s)	7.0	7.0		7.0	7.0			7.0	7.0		7.0	7.0
Flash Dont Walk (s)	25.0	25.0		25.0	25.0			21.0	21.0		21.0	21.0
Pedestrian Calls (#/hr)	0	0		0	0			0	0		0	0
Act Effct Green (s)	20.1	20.1		20.1	20.1		81.9	75.5	75.5	78.4	71.0	71.0
Actuated g/C Ratio	0.17	0.17		0.17	0.17		0.68	0.63	0.63	0.65	0.59	0.59
v/c Ratio	0.49	0.51		0.93	0.23		0.49	0.26	0.07	0.13	0.75	0.08
Control Delay	51.3	15.1		109.0	16.9		16.6	12.2	1.0	6.9	23.0	1.3
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	51.3	15.1		109.0	16.9		16.6	12.2	1.0	6.9	23.0	1.3
LOS	D	B		F	B			B	B	A	A	C
Approach Delay		27.5			77.1			11.8				21.4
Approach LOS		C			E			B				C
Queue Length 50th (m)	21.8	7.5		29.3	3.4		6.3	26.8	0.0	4.5	124.7	0.0
Queue Length 95th (m)	35.9	26.4		#51.0	14.3		18.1	45.8	2.5	11.6	#216.0	3.0
Internal Link Dist (m)		119.7			332.2			300.9				185.0
Turn Bay Length (m)	30.0			30.0			60.0			70.0		15.0
Base Capacity (vph)	429	614		278	541		258	1900	905	673	1960	869
Starvation Cap Reductn	0	0		0	0		0	0	0	0	0	0
Spillback Cap Reductn	0	0		0	0		0	0	0	0	0	0
Storage Cap Reductn	0	0		0	0		0	0	0	0	0	0
Reduced v/c Ratio	0.24	0.32		0.45	0.12		0.38	0.26	0.07	0.11	0.75	0.08

Intersection Summary

Area Type: Other

Cycle Length: 120

Actuated Cycle Length: 120

Offset: 99 (83%), Referenced to phase 2:NBT and 6:SBTL, Start of Green

Natural Cycle: 100

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.93

Intersection Signal Delay: 23.6

Intersection LOS: C

Lanes, Volumes, Timings

1: March Road & Halton Terrace/Maxwell Bridge Road

2027 FB-AM

910 March Road

Intersection Capacity Utilization 92.5%

ICU Level of Service F

Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 1: March Road & Halton Terrace/Maxwell Bridge Road



Lanes, Volumes, Timings
2: March Road & Klondike Road

2027 FB-AM
910 March Road

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑	↑	↑	↑	↑	↑↑	↑↑↑	↑	↑	↑↑↑	↑
Traffic Volume (vph)	65	37	253	146	31	47	83	611	62	30	1573	58
Future Volume (vph)	65	37	253	146	31	47	83	611	62	30	1573	58
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	100.0		5.0	15.0		0.0	100.0		0.0	45.0		0.0
Storage Lanes	1		1	1		0	2		0	1		0
Taper Length (m)	0.0			30.0			100.0			85.0		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	0.97	0.91	0.91	1.00	0.91	0.91
Ped Bike Factor	1.00		0.98	0.99	0.99		1.00	1.00		1.00	1.00	
Fr _t			0.850		0.910			0.986			0.995	
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1496	1679	1483	1658	1462	0	3124	4458	0	1433	4726	0
Flt Permitted	0.533			0.733			0.950			0.950		
Satd. Flow (perm)	837	1679	1456	1271	1462	0	3122	4458	0	1427	4726	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			156		47			15			5	
Link Speed (k/h)			50		50			80			80	
Link Distance (m)			117.7		346.6			261.8			142.1	
Travel Time (s)			8.5		25.0			11.8			6.4	
Confl. Peds. (#/hr)	3		6	6		3	3		4	4		3
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Heavy Vehicles (%)	13%	6%	2%	2%	8%	11%	5%	7%	9%	18%	2%	9%
Adj. Flow (vph)	65	37	253	146	31	47	83	611	62	30	1573	58
Shared Lane Traffic (%)												
Lane Group Flow (vph)	65	37	253	146	78	0	83	673	0	30	1631	0
Enter Blocked Intersection	No											
Lane Alignment	Left	Left	Right									
Median Width(m)			3.5		3.5			7.0			7.0	
Link Offset(m)			0.0		0.0			0.0			0.0	
Crosswalk Width(m)			3.0		3.0			3.0			3.0	
Two way Left Turn Lane												
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25		15	25		15	25		15	25		15
Number of Detectors	1	2	1	1	2		1	2		1	2	
Detector Template	Left	Thru	Right	Left	Thru		Left	Thru		Left	Thru	
Leading Detector (m)	2.0	10.0	2.0	2.0	10.0		2.0	10.0		2.0	10.0	
Trailing Detector (m)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Position(m)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Size(m)	2.0	0.6	2.0	2.0	0.6		2.0	0.6		2.0	0.6	
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(m)			9.4		9.4			9.4			9.4	
Detector 2 Size(m)			0.6		0.6			0.6			0.6	
Detector 2 Type			Cl+Ex			Cl+Ex			Cl+Ex		Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)	0.0			0.0			0.0			0.0		

Lanes, Volumes, Timings
2: March Road & Klondike Road

2027 FB-AM
910 March Road

	↗	→	↘	↙	←	↖	↑	↗	↘	↓	↙	
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	pm+pt	NA	Perm	Perm	NA		Prot	NA		Prot	NA	
Protected Phases	7	4			8		5	2		1	6	
Permitted Phases	4		4	8								
Detector Phase	7	4	4	8	8		5	2		1	6	
Switch Phase												
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0		5.0	5.0		5.0	5.0	
Minimum Split (s)	11.6	44.1	44.1	44.1	44.1		11.6	32.4		11.6	32.4	
Total Split (s)	12.0	57.0	57.0	45.0	45.0		15.0	58.0		15.0	58.0	
Total Split (%)	9.2%	43.8%	43.8%	34.6%	34.6%		11.5%	44.6%		11.5%	44.6%	
Maximum Green (s)	5.4	49.9	49.9	37.9	37.9		8.4	51.6		8.4	51.6	
Yellow Time (s)	3.3	3.3	3.3	3.3	3.3		4.6	4.6		4.6	4.6	
All-Red Time (s)	3.3	3.8	3.8	3.8	3.8		2.0	1.8		2.0	1.8	
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Total Lost Time (s)	6.6	7.1	7.1	7.1	7.1		6.6	6.4		6.6	6.4	
Lead/Lag	Lead			Lag	Lag		Lead	Lag		Lead	Lag	
Lead-Lag Optimize?	Yes			Yes	Yes		Yes	Yes		Yes	Yes	
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None	None	None	None		None	C-Max		None	C-Max	
Walk Time (s)		7.0	7.0	7.0	7.0			7.0			7.0	
Flash Dont Walk (s)		30.0	30.0	30.0	30.0			19.0			19.0	
Pedestrian Calls (#/hr)	0	0	0	0	0			0			0	
Act Effct Green (s)	30.4	29.9	29.9	20.3	20.3		8.8	76.9		8.2	71.2	
Actuated g/C Ratio	0.23	0.23	0.23	0.16	0.16		0.07	0.59		0.06	0.55	
v/c Ratio	0.29	0.10	0.56	0.74	0.29		0.39	0.25		0.33	0.63	
Control Delay	39.8	35.4	19.7	72.8	23.6		63.0	15.6		67.2	23.6	
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Total Delay	39.8	35.4	19.7	72.8	23.6		63.0	15.6		67.2	23.6	
LOS	D	D	B	E	C		E	B		E	C	
Approach Delay		25.0			55.6			20.8			24.4	
Approach LOS		C			E			C			C	
Queue Length 50th (m)	13.1	7.3	20.4	36.1	6.9		10.6	32.6		7.5	106.0	
Queue Length 95th (m)	23.2	15.0	42.9	55.3	19.8		18.8	49.4		17.2	145.9	
Internal Link Dist (m)		93.7			322.6			237.8			118.1	
Turn Bay Length (m)	100.0		5.0	15.0			100.0			45.0		
Base Capacity (vph)	223	644	655	370	459		224	2641		101	2590	
Starvation Cap Reductn	0	0	0	0	0		0	0		0	0	
Spillback Cap Reductn	0	0	0	0	0		0	0		0	0	
Storage Cap Reductn	0	0	0	0	0		0	0		0	0	
Reduced v/c Ratio	0.29	0.06	0.39	0.39	0.17		0.37	0.25		0.30	0.63	
Intersection Summary												
Area Type:	Other											
Cycle Length:	130											
Actuated Cycle Length:	130											
Offset: 64 (49%), Referenced to phase 2:NBT and 6:SBT, Start of Green												
Natural Cycle: 110												
Control Type: Actuated-Coordinated												
Maximum v/c Ratio: 0.74												
Intersection Signal Delay: 25.9	Intersection LOS: C											

Intersection Capacity Utilization 78.8%
Analysis Period (min) 15

ICU Level of Service D

Splits and Phases: 2: March Road & Klondike Road



HCM 2010 Signalized Intersection Summary
2: March Road & Klondike Road

2027 FB-AM
910 March Road

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	→	↓	←	↖	↙	↖	↗	↙	↖	↑↑↑	↖
Traffic Volume (veh/h)	65	37	253	146	31	47	83	611	62	30	1573	58
Future Volume (veh/h)	65	37	253	146	31	47	83	611	62	30	1573	58
Number	7	4	14	3	8	18	5	2	12	1	6	16
Initial Q (Q _b), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	0.99		1.00	0.99		0.99	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1593	1698	1765	1765	1639	1800	1714	1679	1800	1525	1760	1800
Adj Flow Rate, veh/h	65	37	0	146	31	47	83	611	62	30	1573	58
Adj No. of Lanes	1	1	1	1	1	0	2	3	0	1	3	0
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Percent Heavy Veh, %	13	6	2	2	8	8	5	7	7	18	2	2
Cap, veh/h	248	424	375	268	92	140	126	2413	243	37	2645	97
Arrive On Green	0.04	0.25	0.00	0.16	0.16	0.16	0.04	0.57	0.57	0.03	0.56	0.56
Sat Flow, veh/h	1517	1698	1500	1351	585	886	3167	4233	425	1453	4758	175
Grp Volume(v), veh/h	65	37	0	146	0	78	83	439	234	30	1059	572
Grp Sat Flow(s),veh/h/ln	1517	1698	1500	1351	0	1471	1584	1528	1603	1453	1602	1729
Q Serve(g_s), s	4.6	2.2	0.0	13.3	0.0	6.1	3.4	9.4	9.5	2.7	28.5	28.5
Cycle Q Clear(g_c), s	4.6	2.2	0.0	13.3	0.0	6.1	3.4	9.4	9.5	2.7	28.5	28.5
Prop In Lane	1.00		1.00	1.00		0.60	1.00		0.27	1.00		0.10
Lane Grp Cap(c), veh/h	248	424	375	268	0	232	126	1742	914	37	1781	961
V/C Ratio(X)	0.26	0.09	0.00	0.54	0.00	0.34	0.66	0.25	0.26	0.81	0.59	0.59
Avail Cap(c_a), veh/h	248	652	576	449	0	429	205	1742	914	94	1781	961
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(l)	1.00	1.00	0.00	1.00	0.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	42.2	37.4	0.0	51.7	0.0	48.7	61.6	14.0	14.1	63.0	19.2	19.2
Incr Delay (d2), s/veh	0.6	0.1	0.0	1.7	0.0	0.8	5.8	0.3	0.7	32.7	1.5	2.7
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%),veh/ln	2.0	1.0	0.0	5.1	0.0	2.5	1.6	4.1	4.4	1.4	12.9	14.2
LnGrp Delay(d),s/veh	42.7	37.5	0.0	53.4	0.0	49.6	67.4	14.4	14.7	95.7	20.6	21.9
LnGrp LOS	D	D		D		D	E	B	B	F	C	C
Approach Vol, veh/h	102			224			756			1661		
Approach Delay, s/veh	40.8			52.1			20.3			22.4		
Approach LOS	D			D			C			C		
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	1	2		4	5	6	7	8				
Phs Duration (G+Y+Rc), s	9.9	80.5		39.6	11.8	78.7	12.0	27.6				
Change Period (Y+Rc), s	6.6	* 6.4		7.1	6.6	* 6.4	6.6	7.1				
Max Green Setting (Gmax), s	8.4	* 52		49.9	8.4	* 52	5.4	37.9				
Max Q Clear Time (g_c+l1), s	4.7	11.5		4.2	5.4	30.5	6.6	15.3				
Green Ext Time (p_c), s	0.0	5.9		0.2	0.1	13.2	0.0	1.1				
Intersection Summary												
HCM 2010 Ctrl Delay				24.9								
HCM 2010 LOS				C								
Notes												

Lanes, Volumes, Timings
3: March Road & South Local Road

2027 FB-AM
910 March Road



Lane Group	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations				↑↑	↓	
Traffic Volume (vph)	0	21	0	646	1591	0
Future Volume (vph)	0	21	0	646	1591	0
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800
Lane Util. Factor	1.00	1.00	1.00	0.95	1.00	1.00
Fr _t				0.865		
Flt Protected						
Satd. Flow (prot)	0	1510	0	3316	1745	0
Flt Permitted						
Satd. Flow (perm)	0	1510	0	3316	1745	0
Link Speed (k/h)	50			80	80	
Link Distance (m)	96.7			209.0	77.4	
Travel Time (s)	7.0			9.4	3.5	
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00
Adj. Flow (vph)	0	21	0	646	1591	0
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	21	0	646	1591	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Left	Left	Right
Median Width(m)	0.0			3.5	3.5	
Link Offset(m)	0.0			0.0	0.0	
Crosswalk Width(m)	3.0			3.0	3.0	
Two way Left Turn Lane						
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25	15	25			15
Sign Control	Stop			Free	Free	

Intersection Summary

Area Type: Other

Control Type: Unsignalized

Intersection Capacity Utilization 98.4%

ICU Level of Service F

Analysis Period (min) 15

Intersection						
Int Delay, s/veh	0.3					
Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations		↑		↑↑	↑	
Traffic Vol, veh/h	0	21	0	646	1591	0
Future Vol, veh/h	0	21	0	646	1591	0
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	-	0	-	-	-	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	100	100	100	100	100	100
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	0	21	0	646	1591	0
Major/Minor	Minor2	Major1		Major2		
Conflicting Flow All	-	1591	-	0	-	0
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Critical Hdwy	-	6.23	-	-	-	-
Critical Hdwy Stg 1	-	-	-	-	-	-
Critical Hdwy Stg 2	-	-	-	-	-	-
Follow-up Hdwy	-	3.319	-	-	-	-
Pot Cap-1 Maneuver	0	132	0	-	-	-
Stage 1	0	-	0	-	-	-
Stage 2	0	-	0	-	-	-
Platoon blocked, %				-	-	-
Mov Cap-1 Maneuver	-	132	-	-	-	-
Mov Cap-2 Maneuver	-	-	-	-	-	-
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Approach	EB	NB		SB		
HCM Control Delay, s	37.4	0		0		
HCM LOS	E					
Minor Lane/Major Mvmt	NBT	EBLn1	SBT	SBR		
Capacity (veh/h)	-	132	-	-		
HCM Lane V/C Ratio	-	0.159	-	-		
HCM Control Delay (s)	-	37.4	-	-		
HCM Lane LOS	-	E	-	-		
HCM 95th %tile Q(veh)	-	0.5	-	-		

Lanes, Volumes, Timings

1: March Road & Halton Terrace/Maxwell Bridge Road

2027 FB-PM

910 March Road

	→	→	→	←	←	↑	↑	↓	↓	←	→	
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑		↑	↑		↑	↑↑	↑	↑	↑↑	↑
Traffic Volume (vph)	82	57	72	79	60	122	250	1448	114	108	625	97
Future Volume (vph)	82	57	72	79	60	122	250	1448	114	108	625	97
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	30.0		0.0	30.0		0.0	60.0		0.0	70.0		15.0
Storage Lanes	1		0	1		0	1		1	1		1
Taper Length (m)	60.0			60.0			70.0			100.0		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.95	1.00	1.00	0.95	1.00
Ped Bike Factor	0.99	0.98		0.98	0.98		1.00		0.96			0.98
Fr _t		0.916			0.899				0.850			0.850
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1658	1501	0	1610	1538	0	1658	3316	1483	1658	3316	1483
Flt Permitted	0.413			0.604			0.380			0.126		
Satd. Flow (perm)	714	1501	0	1008	1538	0	661	3316	1419	220	3316	1447
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		56			90				100			100
Link Speed (k/h)		40			40			80			80	
Link Distance (m)		143.7			356.2			324.9			209.0	
Travel Time (s)		12.9			32.1			14.6			9.4	
Confl. Peds. (#/hr)	11		17	17		11	2		11	11		2
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Heavy Vehicles (%)	2%	9%	5%	5%	3%	2%	2%	2%	2%	2%	2%	2%
Adj. Flow (vph)	82	57	72	79	60	122	250	1448	114	108	625	97
Shared Lane Traffic (%)												
Lane Group Flow (vph)	82	129	0	79	182	0	250	1448	114	108	625	97
Enter Blocked Intersection	No											
Lane Alignment	Left	Left	Right									
Median Width(m)		3.5			3.5			3.5			3.5	
Link Offset(m)		0.0			0.0			0.0			0.0	
Crosswalk Width(m)		3.0			3.0			3.0			3.0	
Two way Left Turn Lane												
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25		15	25		15	25		15	25		15
Number of Detectors	1	2		1	2		1	2	1	1	2	1
Detector Template	Left	Thru		Left	Thru		Left	Thru	Right	Left	Thru	Right
Leading Detector (m)	2.0	10.0		2.0	10.0		2.0	10.0	2.0	2.0	10.0	2.0
Trailing Detector (m)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Position(m)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Size(m)	2.0	0.6		2.0	0.6		2.0	0.6	2.0	2.0	0.6	2.0
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(m)		9.4			9.4			9.4			9.4	
Detector 2 Size(m)		0.6			0.6			0.6			0.6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)	0.0			0.0			0.0			0.0		0.0

Lanes, Volumes, Timings

1: March Road & Halton Terrace/Maxwell Bridge Road

2027 FB-PM

910 March Road



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	Perm	NA		Perm	NA		pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases			4			8			5	2		1
Permitted Phases	4					8			2		2	6
Detector Phase	4	4		8	8			5	2	2	1	6
Switch Phase												6
Minimum Initial (s)	10.0	10.0		10.0	10.0		5.0	10.0	10.0	5.0	10.0	10.0
Minimum Split (s)	38.6	38.6		38.6	38.6		12.4	34.6	34.6	11.4	34.6	34.6
Total Split (s)	45.0	45.0		45.0	45.0		20.0	55.0	55.0	20.0	55.0	55.0
Total Split (%)	37.5%	37.5%		37.5%	37.5%		16.7%	45.8%	45.8%	16.7%	45.8%	45.8%
Maximum Green (s)	38.4	38.4		38.4	38.4		12.6	48.4	48.4	13.6	48.4	48.4
Yellow Time (s)	3.3	3.3		3.3	3.3		4.6	4.6	4.6	4.6	4.6	4.6
All-Red Time (s)	3.3	3.3		3.3	3.3		2.8	2.0	2.0	1.8	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.6	6.6		6.6	6.6		7.4	6.6	6.6	6.4	6.6	6.6
Lead/Lag							Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?							Yes	Yes	Yes	Yes	Yes	Yes
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	None	None		None	None		None	C-Max	C-Max	None	C-Max	C-Max
Walk Time (s)	7.0	7.0		7.0	7.0			7.0	7.0		7.0	7.0
Flash Dont Walk (s)	25.0	25.0		25.0	25.0			21.0	21.0		21.0	21.0
Pedestrian Calls (#/hr)	0	0		0	0			0	0		0	0
Act Effct Green (s)	14.7	14.7		14.7	14.7		86.5	76.5	76.5	83.4	73.9	73.9
Actuated g/C Ratio	0.12	0.12		0.12	0.12		0.72	0.64	0.64	0.70	0.62	0.62
v/c Ratio	0.94	0.56		0.64	0.68		0.44	0.69	0.12	0.41	0.31	0.10
Control Delay	134.9	36.7		72.6	38.0		7.2	17.6	3.3	9.7	12.4	2.7
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	134.9	36.7		72.6	38.0		7.2	17.6	3.3	9.7	12.4	2.7
LOS	F	D		E	D		A	B	A	A	B	A
Approach Delay		74.9			48.5			15.2				10.9
Approach LOS		E			D			B				B
Queue Length 50th (m)	19.5	16.2		18.1	20.7		13.8	104.3	1.1	5.2	33.4	0.0
Queue Length 95th (m)	#41.9	33.8		32.7	42.6		27.5	169.5	9.7	12.1	56.1	7.5
Internal Link Dist (m)		119.7			332.2			300.9				185.0
Turn Bay Length (m)	30.0			30.0			60.0			70.0		15.0
Base Capacity (vph)	228	518		322	553		597	2112	940	324	2041	929
Starvation Cap Reductn	0	0		0	0		0	0	0	0	0	0
Spillback Cap Reductn	0	0		0	0		0	0	0	0	0	0
Storage Cap Reductn	0	0		0	0		0	0	0	0	0	0
Reduced v/c Ratio	0.36	0.25		0.25	0.33		0.42	0.69	0.12	0.33	0.31	0.10

Intersection Summary

Area Type: Other

Cycle Length: 120

Actuated Cycle Length: 120

Offset: 50 (42%), Referenced to phase 2:NBT and 6:SBTL, Start of Green

Natural Cycle: 100

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.94

Intersection Signal Delay: 20.9

Intersection LOS: C

1: March Road & Halton Terrace/Maxwell Bridge Road

Intersection Capacity Utilization 95.2%

ICU Level of Service F

Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 1: March Road & Halton Terrace/Maxwell Bridge Road



Lanes, Volumes, Timings
2: March Road & Klondike Road

2027 FB-PM
910 March Road

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑	↑	↑	↑	↑	↑↑	↑↑↑	↑↑	↑	↑↑↑	↑↑
Traffic Volume (vph)	119	27	110	87	34	35	159	1731	117	8	789	105
Future Volume (vph)	119	27	110	87	34	35	159	1731	117	8	789	105
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	100.0		5.0	15.0		0.0	100.0		0.0	45.0		0.0
Storage Lanes	1		1	1		0	2		0	1		0
Taper Length (m)	0.0			30.0			100.0			85.0		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	0.97	0.91	0.91	1.00	0.91	0.91
Ped Bike Factor	1.00		0.99	1.00	0.99		0.99	1.00		1.00	1.00	
Fr _t			0.850		0.924			0.991			0.982	
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1658	1745	1483	1658	1571	0	3216	4707	0	1658	4665	0
Flt Permitted	0.486			0.740			0.950			0.950		
Satd. Flow (perm)	847	1745	1462	1289	1571	0	3183	4707	0	1654	4665	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			110		35			9			20	
Link Speed (k/h)			50		50			80			80	
Link Distance (m)			117.7		346.6			261.8			142.1	
Travel Time (s)			8.5		25.0			11.8			6.4	
Confl. Peds. (#/hr)	1		2	2		1	8		11	11		8
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Heavy Vehicles (%)	2%	2%	2%	2%	6%	2%	2%	2%	2%	2%	2%	2%
Adj. Flow (vph)	119	27	110	87	34	35	159	1731	117	8	789	105
Shared Lane Traffic (%)												
Lane Group Flow (vph)	119	27	110	87	69	0	159	1848	0	8	894	0
Enter Blocked Intersection	No											
Lane Alignment	Left	Left	Right									
Median Width(m)			3.5		3.5			7.0			7.0	
Link Offset(m)			0.0		0.0			0.0			0.0	
Crosswalk Width(m)			3.0		3.0			3.0			3.0	
Two way Left Turn Lane												
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25		15	25		15	25		15	25		15
Number of Detectors	1	2	1	1	2		1	2		1	2	
Detector Template	Left	Thru	Right	Left	Thru		Left	Thru		Left	Thru	
Leading Detector (m)	2.0	10.0	2.0	2.0	10.0		2.0	10.0		2.0	10.0	
Trailing Detector (m)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Position(m)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Size(m)	2.0	0.6	2.0	2.0	0.6		2.0	0.6		2.0	0.6	
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(m)			9.4		9.4			9.4			9.4	
Detector 2 Size(m)			0.6		0.6			0.6			0.6	
Detector 2 Type			Cl+Ex			Cl+Ex			Cl+Ex		Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)	0.0			0.0			0.0			0.0		

Lanes, Volumes, Timings
2: March Road & Klondike Road

2027 FB-PM
910 March Road

	↗	→	↘	↙	←	↖	↑	↗	↘	↓	↙	
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	pm+pt	NA	Perm	Perm	NA		Prot	NA		Prot	NA	
Protected Phases	7	4			8		5	2		1	6	
Permitted Phases	4		4	8								
Detector Phase	7	4	4	8	8		5	2		1	6	
Switch Phase												
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0		5.0	5.0		5.0	5.0	
Minimum Split (s)	11.6	44.1	44.1	44.1	44.1		11.6	32.4		11.6	32.4	
Total Split (s)	12.0	57.0	57.0	45.0	45.0		22.0	51.0		22.0	51.0	
Total Split (%)	9.2%	43.8%	43.8%	34.6%	34.6%		16.9%	39.2%		16.9%	39.2%	
Maximum Green (s)	5.4	49.9	49.9	37.9	37.9		15.4	44.6		15.4	44.6	
Yellow Time (s)	3.3	3.3	3.3	3.3	3.3		4.6	4.6		4.6	4.6	
All-Red Time (s)	3.3	3.8	3.8	3.8	3.8		2.0	1.8		2.0	1.8	
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Total Lost Time (s)	6.6	7.1	7.1	7.1	7.1		6.6	6.4		6.6	6.4	
Lead/Lag	Lead			Lag	Lag		Lead	Lag		Lead	Lag	
Lead-Lag Optimize?	Yes			Yes	Yes		Yes	Yes		Yes	Yes	
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None	None	None	None		None	C-Max		None	C-Max	
Walk Time (s)		7.0	7.0	7.0	7.0			7.0			7.0	
Flash Dont Walk (s)		30.0	30.0	30.0	30.0			19.0			19.0	
Pedestrian Calls (#/hr)	0	0	0	0	0			0			0	
Act Effct Green (s)	26.7	26.2	26.2	14.2	14.2		11.7	87.5		6.3	72.0	
Actuated g/C Ratio	0.21	0.20	0.20	0.11	0.11		0.09	0.67		0.05	0.55	
v/c Ratio	0.57	0.08	0.29	0.62	0.34		0.55	0.58		0.10	0.34	
Control Delay	55.4	40.3	9.0	73.2	32.7		63.4	13.7		61.4	16.9	
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Total Delay	55.4	40.3	9.0	73.2	32.7		63.4	13.7		61.4	16.9	
LOS	E	D	A	E	C		E	B		E	B	
Approach Delay		33.9			55.3			17.7			17.3	
Approach LOS		C			E			B			B	
Queue Length 50th (m)	26.3	5.7	0.0	21.6	8.1		20.4	78.8		2.0	43.3	
Queue Length 95th (m)	41.7	13.1	14.4	37.4	21.4		30.8	144.5		7.3	62.4	
Internal Link Dist (m)		93.7			322.6			237.8			118.1	
Turn Bay Length (m)	100.0		5.0	15.0			100.0			45.0		
Base Capacity (vph)	207	669	628	375	482		380	3171		196	2592	
Starvation Cap Reductn	0	0	0	0	0		0	0		0	0	
Spillback Cap Reductn	0	0	0	0	0		0	0		0	0	
Storage Cap Reductn	0	0	0	0	0		0	0		0	0	
Reduced v/c Ratio	0.57	0.04	0.18	0.23	0.14		0.42	0.58		0.04	0.34	
Intersection Summary												
Area Type:	Other											
Cycle Length:	130											
Actuated Cycle Length:	130											
Offset: 20 (15%), Referenced to phase 2:NBT and 6:SBT, Start of Green												
Natural Cycle:	120											
Control Type: Actuated-Coordinated												
Maximum v/c Ratio: 0.62												
Intersection Signal Delay: 20.6	Intersection LOS: C											

Intersection Capacity Utilization 73.8%
Analysis Period (min) 15

ICU Level of Service D

Splits and Phases: 2: March Road & Klondike Road



HCM 2010 Signalized Intersection Summary
2: March Road & Klondike Road

2027 FB-PM
910 March Road

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↖ ↗ ↘ ↙ ↖ ↗ ↘ ↙ ↖ ↗ ↘ ↙ ↖											
Traffic Volume (veh/h)	119	27	110	87	34	35	159	1731	117	8	789	105
Future Volume (veh/h)	119	27	110	87	34	35	159	1731	117	8	789	105
Number	7	4	14	3	8	18	5	2	12	1	6	16
Initial Q (Q _b), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00			1.00	0.99		0.99	1.00		0.99	1.00	0.99
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1765	1765	1765	1765	1731	1800	1765	1765	1800	1765	1765	1800
Adj Flow Rate, veh/h	119	27	0	87	34	35	159	1731	117	8	789	105
Adj No. of Lanes	1	1	1	1	1	0	2	3	0	1	3	0
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Percent Heavy Veh, %	2	2	2	2	6	6	2	2	2	2	2	2
Cap, veh/h	199	334	284	188	76	78	214	2978	201	16	2540	336
Arrive On Green	0.04	0.19	0.00	0.10	0.10	0.10	0.07	0.65	0.65	0.01	0.59	0.59
Sat Flow, veh/h	1681	1765	1500	1370	780	803	3261	4608	311	1681	4303	569
Grp Volume(v), veh/h	119	27	0	87	0	69	159	1206	642	8	588	306
Grp Sat Flow(s),veh/h/ln	1681	1765	1500	1370	0	1584	1630	1606	1707	1681	1606	1661
Q Serve(g_s), s	5.4	1.6	0.0	8.0	0.0	5.3	6.2	27.6	27.7	0.6	11.9	12.1
Cycle Q Clear(g_c), s	5.4	1.6	0.0	8.0	0.0	5.3	6.2	27.6	27.7	0.6	11.9	12.1
Prop In Lane	1.00			1.00		0.51	1.00		0.18	1.00		0.34
Lane Grp Cap(c), veh/h	199	334	284	188	0	154	214	2076	1103	16	1896	980
V/C Ratio(X)	0.60	0.08	0.00	0.46	0.00	0.45	0.74	0.58	0.58	0.49	0.31	0.31
Avail Cap(c_a), veh/h	199	677	576	455	0	462	386	2076	1103	199	1896	980
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	1.00	0.00	1.00	0.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	52.9	43.4	0.0	56.6	0.0	55.4	59.6	13.0	13.0	64.1	13.4	13.4
Incr Delay (d2), s/veh	4.8	0.1	0.0	1.8	0.0	2.0	5.0	1.2	2.2	21.3	0.4	0.8
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%),veh/ln	4.0	0.8	0.0	3.1	0.0	2.4	3.0	12.6	13.7	0.4	5.4	5.8
LnGrp Delay(d),s/veh	57.7	43.5	0.0	58.3	0.0	57.4	64.6	14.2	15.3	85.4	13.8	14.2
LnGrp LOS	E	D		E		E	E	B	B	F	B	B
Approach Vol, veh/h		146			156			2007			902	
Approach Delay, s/veh		55.0			57.9			18.6			14.6	
Approach LOS		E			E			B			B	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	1	2		4	5	6	7	8				
Phs Duration (G+Y+Rc), s	7.9	90.4		31.7	15.1	83.1	12.0	19.7				
Change Period (Y+Rc), s	6.6	* 6.4		7.1	6.6	* 6.4	6.6	7.1				
Max Green Setting (Gmax), s	15.4	* 45		49.9	15.4	* 45	5.4	37.9				
Max Q Clear Time (g_c+l1), s	2.6	29.7		3.6	8.2	14.1	7.4	10.0				
Green Ext Time (p_c), s	0.0	11.3		0.1	0.3	7.8	0.0	0.8				
Intersection Summary												
HCM 2010 Ctrl Delay				21.0								
HCM 2010 LOS				C								
Notes												

Lanes, Volumes, Timings
3: March Road & South Local Road

2027 FB-PM
910 March Road



Lane Group	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations				↑↑	↓	
Traffic Volume (vph)	0	37	0	1652	793	8
Future Volume (vph)	0	37	0	1652	793	8
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800
Lane Util. Factor	1.00	1.00	1.00	0.95	1.00	1.00
Fr _t		0.865			0.999	
Flt Protected						
Satd. Flow (prot)	0	1510	0	3316	1743	0
Flt Permitted						
Satd. Flow (perm)	0	1510	0	3316	1743	0
Link Speed (k/h)	50			80	80	
Link Distance (m)	109.6			209.0	71.2	
Travel Time (s)	7.9			9.4	3.2	
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00
Adj. Flow (vph)	0	37	0	1652	793	8
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	37	0	1652	801	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Left	Left	Right
Median Width(m)	0.0			3.5	3.5	
Link Offset(m)	0.0			0.0	0.0	
Crosswalk Width(m)	3.0			3.0	3.0	
Two way Left Turn Lane						
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25	15	25			15
Sign Control	Stop			Free	Free	

Intersection Summary

Area Type: Other

Control Type: Unsignalized

Intersection Capacity Utilization 54.6%

ICU Level of Service A

Analysis Period (min) 15

Intersection						
Int Delay, s/veh	0.2					
Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations		↗		↑↑	↗	
Traffic Vol, veh/h	0	37	0	1652	793	8
Future Vol, veh/h	0	37	0	1652	793	8
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	-	0	-	-	-	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	100	100	100	100	100	100
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	0	37	0	1652	793	8
Major/Minor	Minor2	Major1		Major2		
Conflicting Flow All	-	797	-	0	-	0
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Critical Hdwy	-	6.23	-	-	-	-
Critical Hdwy Stg 1	-	-	-	-	-	-
Critical Hdwy Stg 2	-	-	-	-	-	-
Follow-up Hdwy	-	3.319	-	-	-	-
Pot Cap-1 Maneuver	0	386	0	-	-	-
Stage 1	0	-	0	-	-	-
Stage 2	0	-	0	-	-	-
Platoon blocked, %				-	-	-
Mov Cap-1 Maneuver	-	386	-	-	-	-
Mov Cap-2 Maneuver	-	-	-	-	-	-
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Approach	EB	NB		SB		
HCM Control Delay, s	15.3	0		0		
HCM LOS	C					
Minor Lane/Major Mvmt	NBT	EBLn1	SBT	SBR		
Capacity (veh/h)	-	386	-	-		
HCM Lane V/C Ratio	-	0.096	-	-		
HCM Control Delay (s)	-	15.3	-	-		
HCM Lane LOS	-	C	-	-		
HCM 95th %tile Q(veh)	-	0.3	-	-		

Lanes, Volumes, Timings

2027 FB Sat

910 March Road

1: March Road & Halton Terrace/Maxwell Bridge Road

	→	→	→	←	←	↑	↑	↓	↓	←	→	
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑		↑	↑		↑	↑↑	↑	↑	↑↑	↑
Traffic Volume (vph)	82	57	72	79	60	122	250	1448	114	108	625	97
Future Volume (vph)	82	57	72	79	60	122	250	1448	114	108	625	97
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	30.0		0.0	30.0		0.0	60.0		0.0	70.0		15.0
Storage Lanes	1		0	1		0	1		1	1		1
Taper Length (m)	60.0			60.0			70.0			100.0		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.95	1.00	1.00	0.95	1.00
Ped Bike Factor	0.99	0.99		0.99	0.99		1.00		0.96	1.00		0.98
Fr _t		0.916			0.899				0.850			0.850
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1658	1504	0	1610	1541	0	1658	3316	1483	1658	3316	1483
Flt Permitted	0.547			0.674			0.415			0.143		
Satd. Flow (perm)	947	1504	0	1128	1541	0	723	3316	1427	249	3316	1449
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		72			23				114			69
Link Speed (k/h)		40			40			80			80	
Link Distance (m)		143.7			356.2			324.9			209.0	
Travel Time (s)		12.9			32.1			14.6			9.4	
Confl. Peds. (#/hr)	11		17	17		11	2		11	11		2
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Heavy Vehicles (%)	2%	9%	5%	5%	3%	2%	2%	2%	2%	2%	2%	2%
Adj. Flow (vph)	82	57	72	79	60	122	250	1448	114	108	625	97
Shared Lane Traffic (%)												
Lane Group Flow (vph)	82	129	0	79	182	0	250	1448	114	108	625	97
Enter Blocked Intersection	No											
Lane Alignment	Left	Left	Right									
Median Width(m)		3.5			3.5			3.5			3.5	
Link Offset(m)		0.0			0.0			0.0			0.0	
Crosswalk Width(m)		3.0			3.0			3.0			3.0	
Two way Left Turn Lane												
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25		15	25		15	25		15	25		15
Number of Detectors	1	2		1	2		1	2	1	1	2	1
Detector Template	Left	Thru		Left	Thru		Left	Thru	Right	Left	Thru	Right
Leading Detector (m)	2.0	10.0		2.0	10.0		2.0	10.0	2.0	2.0	10.0	2.0
Trailing Detector (m)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Position(m)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Size(m)	2.0	0.6		2.0	0.6		2.0	0.6	2.0	2.0	0.6	2.0
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(m)		9.4			9.4			9.4			9.4	
Detector 2 Size(m)		0.6			0.6			0.6			0.6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)	0.0			0.0			0.0			0.0		0.0

Lanes, Volumes, Timings

1: March Road & Halton Terrace/Maxwell Bridge Road

2027 FB Sat

910 March Road



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	Perm	NA		Perm	NA		Perm	NA	Perm	Perm	NA	Perm
Protected Phases			4			8			2			6
Permitted Phases	4				8			2		2	6	6
Detector Phase	4	4		8	8		2	2	2	6	6	6
Switch Phase												
Minimum Initial (s)	10.0	10.0		10.0	10.0		10.0	10.0	10.0	10.0	10.0	10.0
Minimum Split (s)	38.6	38.6		38.6	38.6		34.6	34.6	34.6	34.6	34.6	34.6
Total Split (s)	39.0	39.0		39.0	39.0		56.0	56.0	56.0	56.0	56.0	56.0
Total Split (%)	41.1%	41.1%		41.1%	41.1%		58.9%	58.9%	58.9%	58.9%	58.9%	58.9%
Maximum Green (s)	32.4	32.4		32.4	32.4		49.4	49.4	49.4	49.4	49.4	49.4
Yellow Time (s)	3.3	3.3		3.3	3.3		4.6	4.6	4.6	4.6	4.6	4.6
All-Red Time (s)	3.3	3.3		3.3	3.3		2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.6	6.6		6.6	6.6		6.6	6.6	6.6	6.6	6.6	6.6
Lead/Lag												
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	None	None		None	None		C-Max	C-Max	C-Max	C-Max	C-Max	C-Max
Walk Time (s)	7.0	7.0		7.0	7.0		7.0	7.0	7.0	7.0	7.0	7.0
Flash Dont Walk (s)	25.0	25.0		25.0	25.0		21.0	21.0	21.0	21.0	21.0	21.0
Pedestrian Calls (#/hr)	0	0		0	0		0	0	0	0	0	0
Act Effct Green (s)	15.6	15.6		15.6	15.6		66.2	66.2	66.2	66.2	66.2	66.2
Actuated g/C Ratio	0.16	0.16		0.16	0.16		0.70	0.70	0.70	0.70	0.70	0.70
v/c Ratio	0.53	0.42		0.43	0.67		0.50	0.63	0.11	0.62	0.27	0.09
Control Delay	47.6	20.4		41.5	44.0		12.1	10.0	1.6	30.1	6.3	2.6
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	47.6	20.4		41.5	44.0		12.1	10.0	1.6	30.1	6.3	2.6
LOS	D	C		D	D		B	B	A	C	A	A
Approach Delay		30.9			43.2			9.8			9.0	
Approach LOS		C			D			A			A	
Queue Length 50th (m)	14.0	9.2		13.2	27.7		18.2	64.2	0.0	9.1	19.2	1.4
Queue Length 95th (m)	26.6	23.5		24.9	45.5		46.6	106.7	5.7	#43.7	33.6	7.2
Internal Link Dist (m)		119.7			332.2			300.9			185.0	
Turn Bay Length (m)	30.0			30.0			60.0			70.0		15.0
Base Capacity (vph)	322	560		384	540		503	2310	1029	173	2310	1030
Starvation Cap Reductn	0	0		0	0		0	0	0	0	0	0
Spillback Cap Reductn	0	0		0	0		0	0	0	0	0	0
Storage Cap Reductn	0	0		0	0		0	0	0	0	0	0
Reduced v/c Ratio	0.25	0.23		0.21	0.34		0.50	0.63	0.11	0.62	0.27	0.09

Intersection Summary

Area Type: Other

Cycle Length: 95

Actuated Cycle Length: 95

Offset: 11 (12%), Referenced to phase 2:NBT and 6:SBTL, Start of Green

Natural Cycle: 100

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.67

Intersection Signal Delay: 13.8

Intersection LOS: B

Lanes, Volumes, Timings

1: March Road & Halton Terrace/Maxwell Bridge Road

2027 FB Sat

910 March Road

Intersection Capacity Utilization 97.4%


ICU Level of Service F

Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 1: March Road & Halton Terrace/Maxwell Bridge Road

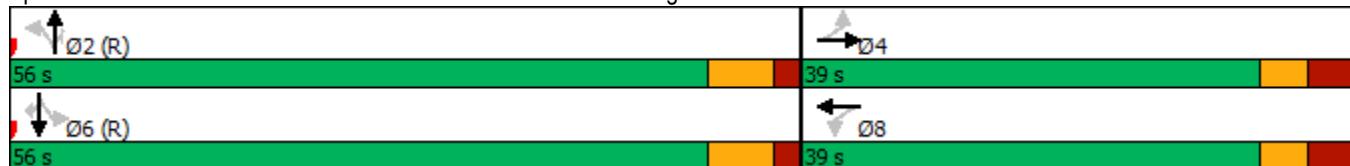

Lanes, Volumes, Timings
2: March Road & Klondike Road

2027 FB Sat
910 March Road

	↑	→	↓	↗	↖	↙	↖	↗	↑	↗	↓	↖
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑	↑	↑	↑	↑	↑↑	↑↑↑	↑	↑	↑↑↑	↑
Traffic Volume (vph)	119	27	110	87	34	35	159	1731	117	8	789	105
Future Volume (vph)	119	27	110	87	34	35	159	1731	117	8	789	105
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	100.0			5.0	15.0		0.0	100.0		0.0	45.0	
Storage Lanes	1			1	1		0	2		0	1	
Taper Length (m)	0.0				30.0			100.0			85.0	
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	0.97	0.91	0.91	1.00	0.91	0.91
Ped Bike Factor	1.00			0.99	1.00	0.99		1.00	1.00		1.00	1.00
Fr _t				0.850		0.924			0.991			0.982
Flt Protected	0.950				0.950			0.950			0.950	
Satd. Flow (prot)	1658	1745	1483	1658	1572	0	3216	4708	0	1658	4666	0
Flt Permitted	0.712				0.740			0.950			0.950	
Satd. Flow (perm)	1242	1745	1463	1289	1572	0	3200	4708	0	1655	4666	0
Right Turn on Red			Yes				Yes			Yes		Yes
Satd. Flow (RTOR)			110			35			11			25
Link Speed (k/h)			50			50			80			80
Link Distance (m)			117.7			346.6			261.8			142.1
Travel Time (s)			8.5			25.0			11.8			6.4
Confl. Peds. (#/hr)	1		2	2			1	8		11	11	8
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Heavy Vehicles (%)	2%	2%	2%	2%	6%	2%	2%	2%	2%	2%	2%	2%
Adj. Flow (vph)	119	27	110	87	34	35	159	1731	117	8	789	105
Shared Lane Traffic (%)												
Lane Group Flow (vph)	119	27	110	87	69	0	159	1848	0	8	894	0
Enter Blocked Intersection	No											
Lane Alignment	Left	Left	Right									
Median Width(m)	3.5				3.5			7.0			7.0	
Link Offset(m)	0.0				0.0			0.0			0.0	
Crosswalk Width(m)	3.0				3.0			3.0			3.0	
Two way Left Turn Lane												
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25		15	25		15	25		15	25		15
Number of Detectors	1	2	1	1	2		1	2		1	2	
Detector Template	Left	Thru	Right	Left	Thru		Left	Thru		Left	Thru	
Leading Detector (m)	2.0	10.0	2.0	2.0	10.0		2.0	10.0		2.0	10.0	
Trailing Detector (m)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Position(m)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Size(m)	2.0	0.6	2.0	2.0	0.6		2.0	0.6		2.0	0.6	
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(m)			9.4			9.4			9.4			9.4
Detector 2 Size(m)			0.6			0.6			0.6			0.6
Detector 2 Type			Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex
Detector 2 Channel												
Detector 2 Extend (s)	0.0			0.0			0.0			0.0		

Lanes, Volumes, Timings
2: March Road & Klondike Road

2027 FB Sat
910 March Road



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	Perm	NA	Perm	Perm	NA		Prot	NA		Prot	NA	
Protected Phases		4			8		5	2		1	6	
Permitted Phases	4		4	8								
Detector Phase	4	4	4	8	8		5	2		1	6	
Switch Phase												
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0		5.0	5.0		5.0	5.0	
Minimum Split (s)	44.1	44.1	44.1	44.1	44.1		11.6	32.4		11.6	32.4	
Total Split (s)	45.0	45.0	45.0	45.0	45.0		16.0	49.0		16.0	49.0	
Total Split (%)	40.9%	40.9%	40.9%	40.9%	40.9%		14.5%	44.5%		14.5%	44.5%	
Maximum Green (s)	37.9	37.9	37.9	37.9	37.9		9.4	42.6		9.4	42.6	
Yellow Time (s)	3.3	3.3	3.3	3.3	3.3		4.6	4.6		4.6	4.6	
All-Red Time (s)	3.8	3.8	3.8	3.8	3.8		2.0	1.8		2.0	1.8	
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Total Lost Time (s)	7.1	7.1	7.1	7.1	7.1		6.6	6.4		6.6	6.4	
Lead/Lag							Lead	Lag		Lead	Lag	
Lead-Lag Optimize?							Yes	Yes		Yes	Yes	
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None	None	None	None		None	C-Max		None	C-Max	
Walk Time (s)	7.0	7.0	7.0	7.0	7.0			7.0			7.0	
Flash Dont Walk (s)	30.0	30.0	30.0	30.0	30.0			19.0			19.0	
Pedestrian Calls (#/hr)	0	0	0	0	0			0			0	
Act Effct Green (s)	16.0	16.0	16.0	16.0	16.0		10.7	77.7		6.2	63.2	
Actuated g/C Ratio	0.15	0.15	0.15	0.15	0.15		0.10	0.71		0.06	0.57	
v/c Ratio	0.66	0.11	0.36	0.47	0.27		0.51	0.55		0.09	0.33	
Control Delay	60.8	38.9	10.5	49.7	24.5		52.5	10.2		50.9	13.4	
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Total Delay	60.8	38.9	10.5	49.7	24.5		52.5	10.2		50.9	13.4	
LOS	E	D	B	D	C		D	B		D	B	
Approach Delay		36.9			38.5			13.5			13.7	
Approach LOS		D			D			B			B	
Queue Length 50th (m)	24.5	5.1	0.0	17.4	6.5		17.0	54.8		1.7	33.7	
Queue Length 95th (m)	40.7	12.1	14.1	30.7	17.7		26.5	122.1		6.7	52.6	
Internal Link Dist (m)		93.7			322.6			237.8			118.1	
Turn Bay Length (m)	100.0		5.0	15.0			100.0			45.0		
Base Capacity (vph)	427	601	576	444	564		323	3330		141	2690	
Starvation Cap Reductn	0	0	0	0	0		0	0		0	0	
Spillback Cap Reductn	0	0	0	0	0		0	0		0	0	
Storage Cap Reductn	0	0	0	0	0		0	0		0	0	
Reduced v/c Ratio	0.28	0.04	0.19	0.20	0.12		0.49	0.55		0.06	0.33	

Intersection Summary

Area Type: Other

Cycle Length: 110

Actuated Cycle Length: 110

Offset: 16 (15%), Referenced to phase 2:NBT and 6:SBT, Start of Green

Natural Cycle: 100

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.66

Intersection Signal Delay: 16.6

Intersection LOS: B

Intersection Capacity Utilization 73.8%
Analysis Period (min) 15

ICU Level of Service D

Splits and Phases: 2: March Road & Klondike Road



HCM 2010 Signalized Intersection Summary
2: March Road & Klondike Road

2027 FB Sat
910 March Road

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↖ ↗ ↘ ↙ ↖ ↗ ↘ ↙ ↖ ↗ ↘ ↙ ↖											
Traffic Volume (veh/h)	119	27	110	87	34	35	159	1731	117	8	789	105
Future Volume (veh/h)	119	27	110	87	34	35	159	1731	117	8	789	105
Number	7	4	14	3	8	18	5	2	12	1	6	16
Initial Q (Q _b), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		0.99	1.00		0.99
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1765	1765	1765	1765	1731	1800	1765	1765	1800	1765	1765	1800
Adj Flow Rate, veh/h	119	27	0	87	34	35	159	1731	117	8	789	105
Adj No. of Lanes	1	1	1	1	1	0	2	3	0	1	3	0
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Percent Heavy Veh, %	2	2	2	2	6	6	2	2	2	2	2	2
Cap, veh/h	227	283	240	267	125	129	217	2982	201	17	2541	336
Arrive On Green	0.16	0.16	0.00	0.16	0.16	0.16	0.07	0.65	0.65	0.01	0.59	0.59
Sat Flow, veh/h	1322	1765	1500	1373	781	804	3261	4608	311	1681	4303	569
Grp Volume(v), veh/h	119	27	0	87	0	69	159	1206	642	8	588	306
Grp Sat Flow(s),veh/h/ln	1322	1765	1500	1373	0	1586	1630	1606	1707	1681	1606	1661
Q Serve(g_s), s	9.6	1.4	0.0	6.3	0.0	4.2	5.3	23.3	23.4	0.5	10.1	10.2
Cycle Q Clear(g_c), s	13.8	1.4	0.0	7.8	0.0	4.2	5.3	23.3	23.4	0.5	10.1	10.2
Prop In Lane	1.00		1.00	1.00		0.51	1.00		0.18	1.00		0.34
Lane Grp Cap(c), veh/h	227	283	240	267	0	254	217	2079	1105	17	1897	981
V/C Ratio(X)	0.52	0.10	0.00	0.33	0.00	0.27	0.73	0.58	0.58	0.48	0.31	0.31
Avail Cap(c_a), veh/h	471	608	517	521	0	546	279	2079	1105	144	1897	981
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(l)	1.00	1.00	0.00	1.00	0.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	46.6	39.4	0.0	42.7	0.0	40.6	50.4	11.0	11.0	54.2	11.3	11.3
Incr Delay (d2), s/veh	1.9	0.1	0.0	0.7	0.0	0.6	7.0	1.2	2.2	20.2	0.4	0.8
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%),veh/ln	3.6	0.7	0.0	2.5	0.0	1.9	2.6	10.6	11.6	0.3	4.5	4.9
LnGrp Delay(d),s/veh	48.5	39.5	0.0	43.4	0.0	41.1	57.4	12.1	13.2	74.4	11.7	12.1
LnGrp LOS	D	D		D		D	E	B	B	E	B	B
Approach Vol, veh/h		146			156			2007			902	
Approach Delay, s/veh		46.8			42.4			16.1			12.4	
Approach LOS		D			D			B			B	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	1	2		4	5	6		8				
Phs Duration (G+Y+Rc), s	7.7	77.6		24.7	13.9	71.4		24.7				
Change Period (Y+Rc), s	6.6	* 6.4		7.1	6.6	* 6.4		7.1				
Max Green Setting (Gmax), s	9.4	* 43		37.9	9.4	* 43		37.9				
Max Q Clear Time (g_c+l1), s	2.5	25.4		15.8	7.3	12.2		9.8				
Green Ext Time (p_c), s	0.0	12.7		0.6	0.1	7.8		0.8				
Intersection Summary												
HCM 2010 Ctrl Delay			17.7									
HCM 2010 LOS			B									
Notes												

Lanes, Volumes, Timings
3: March Road & South Local Road

2027 FB Sat
910 March Road



Lane Group	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations				↑↑	↓	
Traffic Volume (vph)	0	37	0	1652	793	8
Future Volume (vph)	0	37	0	1652	793	8
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800
Lane Util. Factor	1.00	1.00	1.00	0.95	1.00	1.00
Fr _t		0.865			0.999	
Flt Protected						
Satd. Flow (prot)	0	1510	0	3316	1743	0
Flt Permitted						
Satd. Flow (perm)	0	1510	0	3316	1743	0
Link Speed (k/h)	50			80	80	
Link Distance (m)	145.1			209.0	73.9	
Travel Time (s)	10.4			9.4	3.3	
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00
Adj. Flow (vph)	0	37	0	1652	793	8
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	37	0	1652	801	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Left	Left	Right
Median Width(m)	0.0			3.5	3.5	
Link Offset(m)	0.0			0.0	0.0	
Crosswalk Width(m)	3.0			3.0	3.0	
Two way Left Turn Lane						
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25	15	25			15
Sign Control	Stop			Free	Free	

Intersection Summary

Area Type: Other

Control Type: Unsignalized

Intersection Capacity Utilization 54.6%

ICU Level of Service A

Analysis Period (min) 15

Intersection

Int Delay, s/veh 0.2

Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Vol, veh/h	0	37	0	1652	793	8
Future Vol, veh/h	0	37	0	1652	793	8
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	-	0	-	-	-	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	100	100	100	100	100	100
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	0	37	0	1652	793	8

Major/Minor Minor2 Major1 Major2

Conflicting Flow All	-	797	-	0	-	0
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Critical Hdwy	-	6.23	-	-	-	-
Critical Hdwy Stg 1	-	-	-	-	-	-
Critical Hdwy Stg 2	-	-	-	-	-	-
Follow-up Hdwy	-	3.319	-	-	-	-
Pot Cap-1 Maneuver	0	386	0	-	-	-
Stage 1	0	-	0	-	-	-
Stage 2	0	-	0	-	-	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	-	386	-	-	-	-
Mov Cap-2 Maneuver	-	-	-	-	-	-
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-

Approach EB NB SB

HCM Control Delay, s	15.3	0	0
HCM LOS	C		

Minor Lane/Major Mvmt	NBT	EBLn1	SBT	SBR
Capacity (veh/h)	-	386	-	-
HCM Lane V/C Ratio	-	0.096	-	-
HCM Control Delay (s)	-	15.3	-	-
HCM Lane LOS	-	C	-	-
HCM 95th %tile Q(veh)	-	0.3	-	-

Appendix P

2022 Future Total Synchro Sheets

Lanes, Volumes, Timings

2022 FT-AM

910 March Road

1: March Road & Halton Terrace/Maxwell Bridge Road

	→	→	→	←	←	↑	↑	↓	↓	←	→	
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑		↑	↑		↑	↑↑	↑	↑	↑↑	↑
Traffic Volume (vph)	26	37	95	125	16	29	23	267	62	73	895	17
Future Volume (vph)	26	37	95	125	16	29	23	267	62	73	895	17
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	30.0		0.0	30.0		0.0	60.0		0.0	70.0		15.0
Storage Lanes	1		0	1		0	1		1	1		1
Taper Length (m)	60.0			60.0			70.0			100.0		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.95	1.00	1.00	0.95	1.00
Ped Bike Factor		0.99			1.00				0.98	1.00		
Fr _t		0.892				0.903			0.850			0.850
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1658	1493	0	1658	1509	0	1551	3020	1414	1658	3316	1401
Flt Permitted	0.728			0.619			0.287			0.579		
Satd. Flow (perm)	1270	1493	0	1079	1509	0	469	3020	1380	1007	3316	1401
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		95			29				100			100
Link Speed (k/h)		40			40			80			80	
Link Distance (m)		143.7			356.2			324.9			142.9	
Travel Time (s)		12.9			32.1			14.6			6.4	
Confl. Peds. (#/hr)		1	1						2	2		
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Heavy Vehicles (%)	2%	14%	2%	2%	2%	9%	9%	12%	7%	2%	2%	8%
Adj. Flow (vph)	26	37	95	125	16	29	23	267	62	73	895	17
Shared Lane Traffic (%)												
Lane Group Flow (vph)	26	132	0	125	45	0	23	267	62	73	895	17
Enter Blocked Intersection	No											
Lane Alignment	Left	Left	Right									
Median Width(m)		3.5			3.5			3.5			3.5	
Link Offset(m)		0.0			0.0			0.0			0.0	
Crosswalk Width(m)		3.0			3.0			3.0			3.0	
Two way Left Turn Lane												
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25		15	25		15	25		15	25		15
Number of Detectors	1	2		1	2		1	2	1	1	2	1
Detector Template	Left	Thru		Left	Thru		Left	Thru	Right	Left	Thru	Right
Leading Detector (m)	2.0	10.0		2.0	10.0		2.0	10.0	2.0	2.0	10.0	2.0
Trailing Detector (m)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Position(m)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Size(m)	2.0	0.6		2.0	0.6		2.0	0.6	2.0	2.0	0.6	2.0
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(m)		9.4			9.4			9.4			9.4	
Detector 2 Size(m)		0.6			0.6			0.6			0.6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)	0.0			0.0			0.0			0.0		

Lanes, Volumes, Timings

2022 FT-AM

910 March Road

1: March Road & Halton Terrace/Maxwell Bridge Road



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	Perm	NA		Perm	NA		pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases				4		8		5	2		1	6
Permitted Phases	4				8			2		2	6	6
Detector Phase	4	4		8	8		5	2	2	1	6	6
Switch Phase												
Minimum Initial (s)	10.0	10.0		10.0	10.0		5.0	10.0	10.0	5.0	10.0	10.0
Minimum Split (s)	38.6	38.6		38.6	38.6		12.4	34.6	34.6	11.4	34.6	34.6
Total Split (s)	48.0	48.0		48.0	48.0		20.0	52.0	52.0	20.0	52.0	52.0
Total Split (%)	40.0%	40.0%		40.0%	40.0%		16.7%	43.3%	43.3%	16.7%	43.3%	43.3%
Maximum Green (s)	41.4	41.4		41.4	41.4		12.6	45.4	45.4	13.6	45.4	45.4
Yellow Time (s)	3.3	3.3		3.3	3.3		4.6	4.6	4.6	4.6	4.6	4.6
All-Red Time (s)	3.3	3.3		3.3	3.3		2.8	2.0	2.0	1.8	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.6	6.6		6.6	6.6		7.4	6.6	6.6	6.4	6.6	6.6
Lead/Lag							Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?							Yes	Yes	Yes	Yes	Yes	Yes
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	None	None		None	None		None	C-Max	C-Max	None	C-Max	C-Max
Walk Time (s)	7.0	7.0		7.0	7.0			7.0	7.0		7.0	7.0
Flash Dont Walk (s)	25.0	25.0		25.0	25.0			21.0	21.0		21.0	21.0
Pedestrian Calls (#/hr)	0	0		0	0			0	0		0	0
Act Effct Green (s)	18.3	18.3		18.3	18.3		81.6	77.5	77.5	85.1	80.3	80.3
Actuated g/C Ratio	0.15	0.15		0.15	0.15		0.68	0.65	0.65	0.71	0.67	0.67
v/c Ratio	0.13	0.43		0.76	0.18		0.06	0.14	0.07	0.10	0.40	0.02
Control Delay	42.4	18.7		75.8	21.5		6.4	10.2	0.8	5.8	11.6	0.1
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	42.4	18.7		75.8	21.5		6.4	10.2	0.8	5.8	11.6	0.1
LOS	D	B		E	C		A	B	A	A	B	A
Approach Delay		22.6			61.4			8.3			11.0	
Approach LOS		C			E			A			B	
Queue Length 50th (m)	5.4	7.7		28.6	3.3		1.3	12.6	0.0	4.1	52.8	0.0
Queue Length 95th (m)	12.7	23.8		46.2	12.7		4.5	23.2	2.1	10.4	82.1	0.0
Internal Link Dist (m)		119.7			332.2			300.9			118.9	
Turn Bay Length (m)	30.0			30.0			60.0			70.0		15.0
Base Capacity (vph)	438	577		372	539		452	1949	926	816	2217	970
Starvation Cap Reductn	0	0		0	0		0	0	0	0	0	0
Spillback Cap Reductn	0	0		0	0		0	0	0	0	0	0
Storage Cap Reductn	0	0		0	0		0	0	0	0	0	0
Reduced v/c Ratio	0.06	0.23		0.34	0.08		0.05	0.14	0.07	0.09	0.40	0.02

Intersection Summary

Area Type: Other

Cycle Length: 120

Actuated Cycle Length: 120

Offset: 99 (83%), Referenced to phase 2:NBT and 6:SBTL, Start of Green

Natural Cycle: 90

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.76

Intersection Signal Delay: 16.7

Intersection LOS: B


1: March Road & Halton Terrace/Maxwell Bridge Road

Intersection Capacity Utilization 70.2%

ICU Level of Service C

Analysis Period (min) 15

Splits and Phases: 1: March Road & Halton Terrace/Maxwell Bridge Road

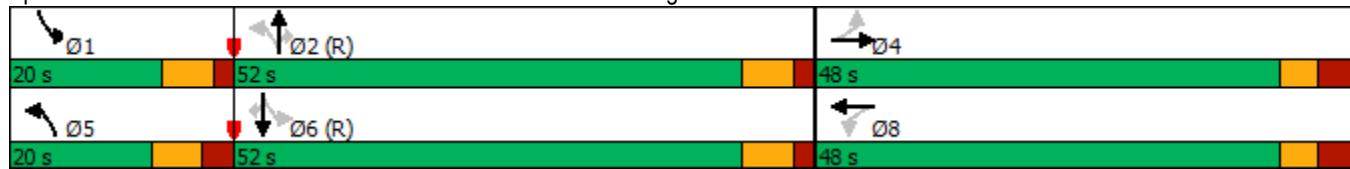

Lanes, Volumes, Timings
2: March Road & Klondike Road

2022 FT-AM
910 March Road

	↑	→	↓	↗	↖	↙	↖	↗	↑	↗	↓	↖
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑	↑	↑	↑	↑	↑↑	↑↑↑	↑	↑	↑↑↑	↑
Traffic Volume (vph)	35	36	253	113	28	27	83	351	52	23	961	38
Future Volume (vph)	35	36	253	113	28	27	83	351	52	23	961	38
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	100.0			5.0	15.0		0.0	100.0		0.0	45.0	
Storage Lanes	1			1	1		0	2		0	1	
Taper Length (m)	0.0				30.0			100.0			85.0	
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	0.97	0.91	0.91	1.00	0.91	0.91
Ped Bike Factor	1.00			0.98	0.99	0.99		1.00	1.00		0.99	1.00
Fr _t				0.850		0.926			0.981			0.994
Flt Protected	0.950				0.950			0.950			0.950	
Satd. Flow (prot)	1496	1679	1483	1658	1494	0	3124	4427	0	1433	4720	0
Flt Permitted	0.519				0.734			0.950			0.950	
Satd. Flow (perm)	815	1679	1456	1273	1494	0	3118	4427	0	1425	4720	0
Right Turn on Red			Yes				Yes			Yes		Yes
Satd. Flow (RTOR)			188			27			25			5
Link Speed (k/h)			50			50			80			80
Link Distance (m)			117.7			346.6			261.8			142.1
Travel Time (s)			8.5			25.0			11.8			6.4
Confl. Peds. (#/hr)	3		6	6		3	3		4	4		3
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Heavy Vehicles (%)	13%	6%	2%	2%	8%	11%	5%	7%	9%	18%	2%	9%
Adj. Flow (vph)	35	36	253	113	28	27	83	351	52	23	961	38
Shared Lane Traffic (%)												
Lane Group Flow (vph)	35	36	253	113	55	0	83	403	0	23	999	0
Enter Blocked Intersection	No											
Lane Alignment	Left	Left	Right									
Median Width(m)			3.5			3.5			7.0			7.0
Link Offset(m)			0.0			0.0			0.0			0.0
Crosswalk Width(m)			3.0			3.0			3.0			3.0
Two way Left Turn Lane												
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25		15	25		15	25		15	25		15
Number of Detectors	1	2	1	1	2		1	2		1	2	
Detector Template	Left	Thru	Right	Left	Thru		Left	Thru		Left	Thru	
Leading Detector (m)	2.0	10.0	2.0	2.0	10.0		2.0	10.0		2.0	10.0	
Trailing Detector (m)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Position(m)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Size(m)	2.0	0.6	2.0	2.0	0.6		2.0	0.6		2.0	0.6	
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(m)			9.4			9.4			9.4			9.4
Detector 2 Size(m)			0.6			0.6			0.6			0.6
Detector 2 Type			Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex
Detector 2 Channel												
Detector 2 Extend (s)	0.0			0.0			0.0			0.0		

Lanes, Volumes, Timings
2: March Road & Klondike Road

2022 FT-AM
910 March Road

	↗	→	↘	↙	←	↖	↑	↗	↘	↓	↙	
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	pm+pt	NA	Perm	Perm	NA		Prot	NA		Prot	NA	
Protected Phases	7	4			8		5	2		1	6	
Permitted Phases	4		4	8								
Detector Phase	7	4	4	8	8		5	2		1	6	
Switch Phase												
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0		5.0	5.0		5.0	5.0	
Minimum Split (s)	11.6	44.1	44.1	44.1	44.1		11.6	32.4		11.6	32.4	
Total Split (s)	12.0	57.0	57.0	45.0	45.0		15.0	58.0		15.0	58.0	
Total Split (%)	9.2%	43.8%	43.8%	34.6%	34.6%		11.5%	44.6%		11.5%	44.6%	
Maximum Green (s)	5.4	49.9	49.9	37.9	37.9		8.4	51.6		8.4	51.6	
Yellow Time (s)	3.3	3.3	3.3	3.3	3.3		4.6	4.6		4.6	4.6	
All-Red Time (s)	3.3	3.8	3.8	3.8	3.8		2.0	1.8		2.0	1.8	
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Total Lost Time (s)	6.6	7.1	7.1	7.1	7.1		6.6	6.4		6.6	6.4	
Lead/Lag	Lead			Lag	Lag		Lead	Lag		Lead	Lag	
Lead-Lag Optimize?	Yes			Yes	Yes		Yes	Yes		Yes	Yes	
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None	None	None	None		None	C-Max		None	C-Max	
Walk Time (s)		7.0	7.0	7.0	7.0			7.0			7.0	
Flash Dont Walk (s)		30.0	30.0	30.0	30.0			19.0			19.0	
Pedestrian Calls (#/hr)	0	0	0	0	0			0			0	
Act Effct Green (s)	24.6	24.1	24.1	16.9	16.9		8.8	83.1		7.6	77.0	
Actuated g/C Ratio	0.19	0.19	0.19	0.13	0.13		0.07	0.64		0.06	0.59	
v/c Ratio	0.19	0.12	0.60	0.68	0.25		0.39	0.14		0.27	0.36	
Control Delay	41.0	39.6	17.9	73.4	30.7		63.0	11.7		65.9	15.9	
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Total Delay	41.0	39.6	17.9	73.4	30.7		63.0	11.7		65.9	15.9	
LOS	D	D	B	E	C		E	B		E	B	
Approach Delay		22.8			59.4			20.4			17.0	
Approach LOS		C			E			C			B	
Queue Length 50th (m)	7.2	7.4	13.7	28.0	6.5		10.6	16.1		5.8	50.4	
Queue Length 95th (m)	14.9	15.4	36.9	45.6	17.8		18.8	26.1		14.8	71.9	
Internal Link Dist (m)		93.7			322.6			237.8			118.1	
Turn Bay Length (m)	100.0		5.0	15.0			100.0			45.0		
Base Capacity (vph)	182	644	674	371	454		224	2839		97	2796	
Starvation Cap Reductn	0	0	0	0	0		0	0		0	0	
Spillback Cap Reductn	0	0	0	0	0		0	0		0	0	
Storage Cap Reductn	0	0	0	0	0		0	0		0	0	
Reduced v/c Ratio	0.19	0.06	0.38	0.30	0.12		0.37	0.14		0.24	0.36	
Intersection Summary												
Area Type:	Other											
Cycle Length:	130											
Actuated Cycle Length:	130											
Offset: 64 (49%), Referenced to phase 2:NBT and 6:SBT, Start of Green												
Natural Cycle: 100												
Control Type: Actuated-Coordinated												
Maximum v/c Ratio: 0.68												
Intersection Signal Delay: 22.3	Intersection LOS: C											

Intersection Capacity Utilization 65.1%
Analysis Period (min) 15

ICU Level of Service C

Splits and Phases: 2: March Road & Klondike Road



HCM 2010 Signalized Intersection Summary
2: March Road & Klondike Road

2022 FT-AM
910 March Road

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↖ ↗ ↘ ↙ ↖ ↗ ↘ ↙ ↖ ↗ ↘ ↙ ↖											
Traffic Volume (veh/h)	35	36	253	113	28	27	83	351	52	23	961	38
Future Volume (veh/h)	35	36	253	113	28	27	83	351	52	23	961	38
Number	7	4	14	3	8	18	5	2	12	1	6	16
Initial Q (Q _b), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	0.99			1.00	0.99		0.99	1.00		1.00	1.00	1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1593	1698	1765	1765	1644	1800	1714	1678	1800	1525	1760	1800
Adj Flow Rate, veh/h	35	36	0	113	28	27	83	351	52	23	961	38
Adj No. of Lanes	1	1	1	1	1	0	2	3	0	1	3	0
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Percent Heavy Veh, %	13	6	2	2	8	8	5	7	7	18	2	2
Cap, veh/h	222	366	323	240	105	101	126	2459	355	32	2800	111
Arrive On Green	0.03	0.22	0.00	0.14	0.14	0.14	0.04	0.61	0.61	0.02	0.59	0.59
Sat Flow, veh/h	1517	1698	1500	1350	765	738	3167	4043	584	1453	4743	187
Grp Volume(v), veh/h	35	36	0	113	0	55	83	263	140	23	649	350
Grp Sat Flow(s),veh/h/ln	1517	1698	1500	1350	0	1503	1584	1527	1573	1453	1602	1727
Q Serve(g_s), s	2.5	2.2	0.0	10.3	0.0	4.3	3.4	4.8	5.0	2.0	13.5	13.6
Cycle Q Clear(g_c), s	2.5	2.2	0.0	10.3	0.0	4.3	3.4	4.8	5.0	2.0	13.5	13.6
Prop In Lane	1.00			1.00		0.49	1.00		0.37	1.00		0.11
Lane Grp Cap(c), veh/h	222	366	323	240	0	206	126	1858	957	32	1891	1019
V/C Ratio(X)	0.16	0.10	0.00	0.47	0.00	0.27	0.66	0.14	0.15	0.73	0.34	0.34
Avail Cap(c_a), veh/h	244	652	576	449	0	438	205	1858	957	94	1891	1019
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(l)	1.00	1.00	0.00	1.00	0.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	44.9	40.9	0.0	52.8	0.0	50.2	61.6	10.9	10.9	63.2	13.7	13.7
Incr Delay (d2), s/veh	0.3	0.1	0.0	1.4	0.0	0.7	5.8	0.2	0.3	27.2	0.5	0.9
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%),veh/ln	1.1	1.1	0.0	3.9	0.0	1.8	1.6	2.1	2.2	1.1	6.1	6.7
LnGrp Delay(d),s/veh	45.2	41.0	0.0	54.3	0.0	50.9	67.4	11.1	11.3	90.4	14.2	14.6
LnGrp LOS	D	D		D		D	E	B	B	F	B	B
Approach Vol, veh/h		71			168			486			1022	
Approach Delay, s/veh		43.1			53.2			20.7			16.0	
Approach LOS		D			D			C			B	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	1	2		4	5	6	7	8				
Phs Duration (G+Y+Rc), s	9.4	85.5		35.1	11.8	83.1	10.2	24.9				
Change Period (Y+Rc), s	6.6	* 6.4		7.1	6.6	* 6.4	6.6	7.1				
Max Green Setting (Gmax), s	8.4	* 52		49.9	8.4	* 52	5.4	37.9				
Max Q Clear Time (g_c+l1), s	4.0	7.0		4.2	5.4	15.6	4.5	12.3				
Green Ext Time (p_c), s	0.0	3.3		0.2	0.1	9.2	0.0	0.8				
Intersection Summary												
HCM 2010 Ctrl Delay				22.0								
HCM 2010 LOS				C								
Notes												

Lanes, Volumes, Timings
3: March Road & Site Access #1

2022 FT-AM
910 March Road



Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↑ ↗	↑ ↗	↑	↑ ↗	↗	↑
Traffic Volume (vph)	169	29	216	11	100	816
Future Volume (vph)	169	29	216	11	100	816
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800
Storage Length (m)	20.0	0.0		0.0	110.0	
Storage Lanes	1	1		1	1	
Taper Length (m)	15.0				95.0	
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.850		0.850		
Flt Protected	0.950				0.950	
Satd. Flow (prot)	1658	1483	1745	1483	1658	1745
Flt Permitted	0.950				0.950	
Satd. Flow (perm)	1658	1483	1745	1483	1658	1745
Link Speed (k/h)	30		80		80	
Link Distance (m)	104.3		66.1		114.5	
Travel Time (s)	12.5		3.0		5.2	
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00
Adj. Flow (vph)	169	29	216	11	100	816
Shared Lane Traffic (%)						
Lane Group Flow (vph)	169	29	216	11	100	816
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Right	Left	Left
Median Width(m)	3.5		3.5		3.5	
Link Offset(m)	0.0		0.0		0.0	
Crosswalk Width(m)	3.0		3.0		3.0	
Two way Left Turn Lane						
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25	15		15	25	
Sign Control	Stop		Free		Free	
Intersection Summary						
Area Type:	Other					
Control Type:	Unsignalized					
Intersection Capacity Utilization	61.9%				ICU Level of Service B	
Analysis Period (min)	15					

Intersection						
Int Delay, s/veh	13.8					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↑	↑	↑	↑	↑	↑
Traffic Vol, veh/h	169	29	216	11	100	816
Future Vol, veh/h	169	29	216	11	100	816
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	200	0	-	0	1100	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	100	100	100	100	100	100
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	169	29	216	11	100	816
Major/Minor	Minor1	Major1		Major2		
Conflicting Flow All	1232	216	0	0	227	0
Stage 1	216	-	-	-	-	-
Stage 2	1016	-	-	-	-	-
Critical Hdwy	6.42	6.22	-	-	4.12	-
Critical Hdwy Stg 1	5.42	-	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-	-
Follow-up Hdwy	3.518	3.318	-	-	2.218	-
Pot Cap-1 Maneuver	196	824	-	-	1341	-
Stage 1	820	-	-	-	-	-
Stage 2	350	-	-	-	-	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	181	824	-	-	1341	-
Mov Cap-2 Maneuver	181	-	-	-	-	-
Stage 1	820	-	-	-	-	-
Stage 2	324	-	-	-	-	-
Approach	WB	NB		SB		
HCM Control Delay, s	89	0		0.9		
HCM LOS	F					
Minor Lane/Major Mvmt	NBT	NBR	WBLn1	WBLn2	SBL	SBT
Capacity (veh/h)	-	-	181	824	1341	-
HCM Lane V/C Ratio	-	-	0.934	0.035	0.075	-
HCM Control Delay (s)	-	-	102.6	9.5	7.9	-
HCM Lane LOS	-	-	F	A	A	-
HCM 95th %tile Q(veh)	-	-	7.2	0.1	0.2	-

Lanes, Volumes, Timings
4: March Road & Site Access #2

2022 FT-AM
910 March Road



Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations		↑	↑↑	↑		↑↑
Traffic Volume (vph)	0	7	220	103	0	985
Future Volume (vph)	0	7	220	103	0	985
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800
Storage Length (m)	0.0	0.0		20.0	0.0	
Storage Lanes	0	1		1	0	
Taper Length (m)	15.0				15.0	
Lane Util. Factor	1.00	1.00	0.95	1.00	1.00	0.95
Frt		0.865		0.850		
Flt Protected						
Satd. Flow (prot)	0	1510	3316	1483	0	3316
Flt Permitted						
Satd. Flow (perm)	0	1510	3316	1483	0	3316
Link Speed (k/h)	30		80			80
Link Distance (m)	96.8		142.9			66.1
Travel Time (s)	11.6		6.4			3.0
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00
Adj. Flow (vph)	0	7	220	103	0	985
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	7	220	103	0	985
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Right	Left	Left
Median Width(m)	0.0		3.5			3.5
Link Offset(m)	0.0		0.0			0.0
Crosswalk Width(m)	3.0		3.0			3.0
Two way Left Turn Lane						
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25	15		15	25	
Sign Control	Stop		Free		Free	
Intersection Summary						
Area Type:	Other					
Control Type:	Unsignalized					
Intersection Capacity Utilization	32.1%			ICU Level of Service A		
Analysis Period (min)	15					

Intersection						
Int Delay, s/veh	0					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations			↑	↑↑	↑	↑↑
Traffic Vol, veh/h	0	7	220	103	0	985
Future Vol, veh/h	0	7	220	103	0	985
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	Stop	-	None	-	None
Storage Length	-	0	-	200	-	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	100	100	100	100	100	100
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	0	7	220	103	0	985
Major/Minor	Minor1	Major1		Major2		
Conflicting Flow All	-	110	0	0	-	-
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Critical Hdwy	-	6.94	-	-	-	-
Critical Hdwy Stg 1	-	-	-	-	-	-
Critical Hdwy Stg 2	-	-	-	-	-	-
Follow-up Hdwy	-	3.32	-	-	-	-
Pot Cap-1 Maneuver	0	922	-	-	0	-
Stage 1	0	-	-	-	0	-
Stage 2	0	-	-	-	0	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	-	922	-	-	-	-
Mov Cap-2 Maneuver	-	-	-	-	-	-
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Approach	WB	NB		SB		
HCM Control Delay, s	8.9	0		0		
HCM LOS	A					
Minor Lane/Major Mvmt	NBT	NBR	WBLn1	SBT		
Capacity (veh/h)	-	-	922	-		
HCM Lane V/C Ratio	-	-	0.008	-		
HCM Control Delay (s)	-	-	8.9	-		
HCM Lane LOS	-	-	A	-		
HCM 95th %tile Q(veh)	-	-	0	-		

Lanes, Volumes, Timings

2022 FT-PM

910 March Road

1: March Road & Halton Terrace/Maxwell Bridge Road

	→	→	→	←	←	↑	↑	↓	↓	←	→	
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑		↑	↑		↑	↑↑	↑	↑	↑↑	↑
Traffic Volume (vph)	23	55	41	79	58	96	172	979	114	66	335	18
Future Volume (vph)	23	55	41	79	58	96	172	979	114	66	335	18
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	30.0		0.0	30.0		0.0	60.0		0.0	70.0		15.0
Storage Lanes	1		0	1		0	1		1	1		1
Taper Length (m)	60.0			60.0			70.0			100.0		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.95	1.00	1.00	0.95	1.00
Ped Bike Factor	0.99	0.99		0.98	0.98		1.00		0.96	1.00		0.98
Fr _t		0.936			0.906				0.850			0.850
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1658	1532	0	1610	1552	0	1658	3316	1483	1658	3316	1483
Flt Permitted	0.506			0.695			0.521			0.274		
Satd. Flow (perm)	874	1532	0	1158	1552	0	907	3316	1419	476	3316	1447
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		33			73				114			100
Link Speed (k/h)		40			40			80			80	
Link Distance (m)		143.7			356.2			324.9			142.9	
Travel Time (s)		12.9			32.1			14.6			6.4	
Confl. Peds. (#/hr)	11		17	17		11	2		11	11		2
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Heavy Vehicles (%)	2%	9%	5%	5%	3%	2%	2%	2%	2%	2%	2%	2%
Adj. Flow (vph)	23	55	41	79	58	96	172	979	114	66	335	18
Shared Lane Traffic (%)												
Lane Group Flow (vph)	23	96	0	79	154	0	172	979	114	66	335	18
Enter Blocked Intersection	No											
Lane Alignment	Left	Left	Right									
Median Width(m)		3.5			3.5			3.5			3.5	
Link Offset(m)		0.0			0.0			0.0			0.0	
Crosswalk Width(m)		3.0			3.0			3.0			3.0	
Two way Left Turn Lane												
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25		15	25		15	25		15	25		15
Number of Detectors	1	2		1	2		1	2	1	1	2	1
Detector Template	Left	Thru		Left	Thru		Left	Thru	Right	Left	Thru	Right
Leading Detector (m)	2.0	10.0		2.0	10.0		2.0	10.0	2.0	2.0	10.0	2.0
Trailing Detector (m)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Position(m)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Size(m)	2.0	0.6		2.0	0.6		2.0	0.6	2.0	2.0	0.6	2.0
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(m)		9.4			9.4			9.4			9.4	
Detector 2 Size(m)		0.6			0.6			0.6			0.6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)	0.0			0.0			0.0			0.0		

Lanes, Volumes, Timings

2022 FT-PM

910 March Road

1: March Road & Halton Terrace/Maxwell Bridge Road



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	Perm	NA		Perm	NA		pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases			4			8			5	2		1
Permitted Phases	4					8			2		2	6
Detector Phase	4	4		8	8			5	2	2	1	6
Switch Phase												6
Minimum Initial (s)	10.0	10.0		10.0	10.0		5.0	10.0	10.0	5.0	10.0	10.0
Minimum Split (s)	38.6	38.6		38.6	38.6		12.4	34.6	34.6	11.4	34.6	34.6
Total Split (s)	45.0	45.0		45.0	45.0		20.0	55.0	55.0	20.0	55.0	55.0
Total Split (%)	37.5%	37.5%		37.5%	37.5%		16.7%	45.8%	45.8%	16.7%	45.8%	45.8%
Maximum Green (s)	38.4	38.4		38.4	38.4		12.6	48.4	48.4	13.6	48.4	48.4
Yellow Time (s)	3.3	3.3		3.3	3.3		4.6	4.6	4.6	4.6	4.6	4.6
All-Red Time (s)	3.3	3.3		3.3	3.3		2.8	2.0	2.0	1.8	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.6	6.6		6.6	6.6		7.4	6.6	6.6	6.4	6.6	6.6
Lead/Lag							Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?							Yes	Yes	Yes	Yes	Yes	Yes
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	None	None		None	None		None	C-Max	C-Max	None	C-Max	C-Max
Walk Time (s)	7.0	7.0		7.0	7.0			7.0	7.0		7.0	7.0
Flash Dont Walk (s)	25.0	25.0		25.0	25.0			21.0	21.0		21.0	21.0
Pedestrian Calls (#/hr)	0	0		0	0			0	0		0	0
Act Effct Green (s)	14.2	14.2		14.2	14.2		88.7	81.9	81.9	83.2	76.3	76.3
Actuated g/C Ratio	0.12	0.12		0.12	0.12		0.74	0.68	0.68	0.69	0.64	0.64
v/c Ratio	0.22	0.46		0.58	0.62		0.24	0.43	0.11	0.17	0.16	0.02
Control Delay	51.3	38.8		66.1	37.2		5.0	10.4	2.0	5.3	9.9	0.1
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	51.3	38.8		66.1	37.2		5.0	10.4	2.0	5.3	9.9	0.1
LOS	D	D		E	D		A	B	A	A	A	A
Approach Delay		41.2			47.0			8.9			8.7	
Approach LOS		D			D			A			A	
Queue Length 50th (m)	5.0	13.9		18.0	18.1		8.7	52.1	0.0	3.0	15.2	0.0
Queue Length 95th (m)	12.6	29.1		32.4	37.8		18.4	80.1	7.0	7.7	27.0	0.0
Internal Link Dist (m)		119.7			332.2			300.9			118.9	
Turn Bay Length (m)	30.0			30.0			60.0			70.0		15.0
Base Capacity (vph)	279	512		370	546		768	2264	1005	491	2109	956
Starvation Cap Reductn	0	0		0	0		0	0	0	0	0	0
Spillback Cap Reductn	0	0		0	0		0	0	0	0	0	0
Storage Cap Reductn	0	0		0	0		0	0	0	0	0	0
Reduced v/c Ratio	0.08	0.19		0.21	0.28		0.22	0.43	0.11	0.13	0.16	0.02

Intersection Summary

Area Type: Other

Cycle Length: 120

Actuated Cycle Length: 120

Offset: 50 (42%), Referenced to phase 2:NBT and 6:SBTL, Start of Green

Natural Cycle: 90

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.62

Intersection Signal Delay: 15.1

Intersection LOS: B

Lanes, Volumes, Timings

1: March Road & Halton Terrace/Maxwell Bridge Road

2022 FT-PM


910 March Road

Intersection Capacity Utilization 73.5%

ICU Level of Service D

Analysis Period (min) 15

Splits and Phases: 1: March Road & Halton Terrace/Maxwell Bridge Road

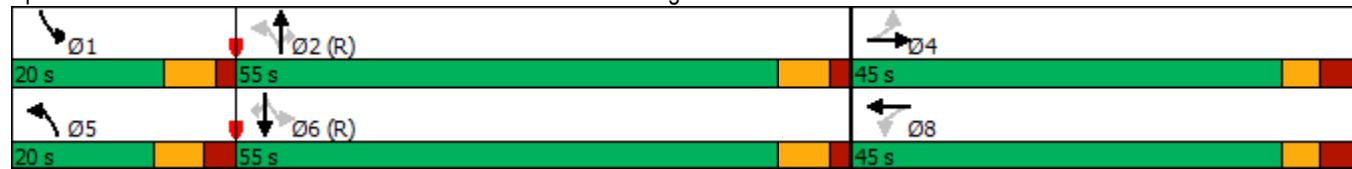

Lanes, Volumes, Timings
2: March Road & Klondike Road

2022 FT-PM
910 March Road

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑	↑	↑	↑	↑	↑↑	↑↑↑	↑	↑	↑↑↑	↑
Traffic Volume (vph)	85	25	110	73	33	30	159	1216	97	10	503	63
Future Volume (vph)	85	25	110	73	33	30	159	1216	97	10	503	63
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	100.0		5.0	15.0		0.0	100.0		0.0	45.0		0.0
Storage Lanes	1		1	1		0	2		0	1		0
Taper Length (m)	0.0			30.0			100.0			85.0		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	0.97	0.91	0.91	1.00	0.91	0.91
Ped Bike Factor	1.00		0.99	1.00	0.99		0.99	1.00		1.00	1.00	
Fr _t			0.850		0.929			0.989			0.983	
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1658	1745	1483	1658	1579	0	3216	4695	0	1658	4671	0
Flt Permitted	0.471			0.741			0.950			0.950		
Satd. Flow (perm)	821	1745	1462	1290	1579	0	3186	4695	0	1650	4671	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			110		30			11			18	
Link Speed (k/h)			50		50			80			80	
Link Distance (m)			117.7		346.6			261.8			142.1	
Travel Time (s)			8.5		25.0			11.8			6.4	
Confl. Peds. (#/hr)	1		2	2		1	8		11	11		8
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Heavy Vehicles (%)	2%	2%	2%	2%	6%	2%	2%	2%	2%	2%	2%	2%
Adj. Flow (vph)	85	25	110	73	33	30	159	1216	97	10	503	63
Shared Lane Traffic (%)												
Lane Group Flow (vph)	85	25	110	73	63	0	159	1313	0	10	566	0
Enter Blocked Intersection	No											
Lane Alignment	Left	Left	Right									
Median Width(m)			3.5		3.5			7.0			7.0	
Link Offset(m)			0.0		0.0			0.0			0.0	
Crosswalk Width(m)			3.0		3.0			3.0			3.0	
Two way Left Turn Lane												
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25		15	25		15	25		15	25		15
Number of Detectors	1	2	1	1	2		1	2		1	2	
Detector Template	Left	Thru	Right	Left	Thru		Left	Thru		Left	Thru	
Leading Detector (m)	2.0	10.0	2.0	2.0	10.0		2.0	10.0		2.0	10.0	
Trailing Detector (m)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Position(m)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Size(m)	2.0	0.6	2.0	2.0	0.6		2.0	0.6		2.0	0.6	
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(m)			9.4		9.4			9.4			9.4	
Detector 2 Size(m)			0.6		0.6			0.6			0.6	
Detector 2 Type			Cl+Ex		Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)	0.0			0.0		0.0		0.0			0.0	

Lanes, Volumes, Timings
2: March Road & Klondike Road

2022 FT-PM
910 March Road

	↗	→	↘	↙	←	↖	↑	↗	↘	↓	↙	
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	pm+pt	NA	Perm	Perm	NA		Prot	NA		Prot	NA	
Protected Phases	7	4			8		5	2		1	6	
Permitted Phases	4		4	8								
Detector Phase	7	4	4	8	8		5	2		1	6	
Switch Phase												
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0		5.0	5.0		5.0	5.0	
Minimum Split (s)	11.6	44.1	44.1	44.1	44.1		11.6	32.4		11.6	32.4	
Total Split (s)	12.0	57.0	57.0	45.0	45.0		22.0	51.0		22.0	51.0	
Total Split (%)	9.2%	43.8%	43.8%	34.6%	34.6%		16.9%	39.2%		16.9%	39.2%	
Maximum Green (s)	5.4	49.9	49.9	37.9	37.9		15.4	44.6		15.4	44.6	
Yellow Time (s)	3.3	3.3	3.3	3.3	3.3		4.6	4.6		4.6	4.6	
All-Red Time (s)	3.3	3.8	3.8	3.8	3.8		2.0	1.8		2.0	1.8	
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Total Lost Time (s)	6.6	7.1	7.1	7.1	7.1		6.6	6.4		6.6	6.4	
Lead/Lag	Lead			Lag	Lag		Lead	Lag		Lead	Lag	
Lead-Lag Optimize?	Yes			Yes	Yes		Yes	Yes		Yes	Yes	
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None	None	None	None		None	C-Max		None	C-Max	
Walk Time (s)		7.0	7.0	7.0	7.0			7.0			7.0	
Flash Dont Walk (s)		30.0	30.0	30.0	30.0			19.0			19.0	
Pedestrian Calls (#/hr)	0	0	0	0	0			0			0	
Act Effct Green (s)	25.2	24.7	24.7	12.7	12.7		11.7	88.9		6.4	73.4	
Actuated g/C Ratio	0.19	0.19	0.19	0.10	0.10		0.09	0.68		0.05	0.56	
v/c Ratio	0.44	0.08	0.30	0.58	0.35		0.55	0.41		0.12	0.21	
Control Delay	50.8	41.6	9.5	72.9	35.9		63.4	10.5		61.9	14.6	
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Total Delay	50.8	41.6	9.5	72.9	35.9		63.4	10.5		61.9	14.6	
LOS	D	D	A	E	D		E	B		E	B	
Approach Delay		29.1			55.8			16.3			15.4	
Approach LOS		C			E			B			B	
Queue Length 50th (m)	18.7	5.3	0.0	18.2	7.9		20.4	45.0		2.5	24.2	
Queue Length 95th (m)	32.1	12.5	14.7	32.7	21.0		30.8	85.7		8.3	36.7	
Internal Link Dist (m)		93.7			322.6			237.8			118.1	
Turn Bay Length (m)	100.0		5.0	15.0			100.0			45.0		
Base Capacity (vph)	194	669	628	376	481		380	3213		196	2645	
Starvation Cap Reductn	0	0	0	0	0		0	0		0	0	
Spillback Cap Reductn	0	0	0	0	0		0	0		0	0	
Storage Cap Reductn	0	0	0	0	0		0	0		0	0	
Reduced v/c Ratio	0.44	0.04	0.18	0.19	0.13		0.42	0.41		0.05	0.21	
Intersection Summary												
Area Type:	Other											
Cycle Length:	130											
Actuated Cycle Length:	130											
Offset: 20 (15%), Referenced to phase 2:NBT and 6:SBT, Start of Green												
Natural Cycle: 100												
Control Type: Actuated-Coordinated												
Maximum v/c Ratio: 0.58												
Intersection Signal Delay: 19.5	Intersection LOS: B											

Intersection Capacity Utilization 61.0%
Analysis Period (min) 15

ICU Level of Service B

Splits and Phases: 2: March Road & Klondike Road



HCM 2010 Signalized Intersection Summary
2: March Road & Klondike Road

2022 FT-PM
910 March Road

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↖ ↗ ↘ ↙ ↖ ↗ ↘ ↙ ↖ ↗ ↘ ↙ ↖											
Traffic Volume (veh/h)	85	25	110	73	33	30	159	1216	97	10	503	63
Future Volume (veh/h)	85	25	110	73	33	30	159	1216	97	10	503	63
Number	7	4	14	3	8	18	5	2	12	1	6	16
Initial Q (Q _b), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00			1.00	0.99		0.99	1.00		0.99	1.00	0.99
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1765	1765	1765	1765	1729	1800	1765	1765	1800	1765	1765	1800
Adj Flow Rate, veh/h	85	25	0	73	33	30	159	1216	97	10	503	63
Adj No. of Lanes	1	1	1	1	1	0	2	3	0	1	3	0
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Percent Heavy Veh, %	2	2	2	2	6	6	2	2	2	2	2	2
Cap, veh/h	191	317	269	175	72	66	214	2975	237	20	2607	321
Arrive On Green	0.04	0.18	0.00	0.09	0.09	0.09	0.07	0.65	0.65	0.01	0.60	0.60
Sat Flow, veh/h	1681	1765	1500	1371	833	757	3261	4546	363	1681	4343	536
Grp Volume(v), veh/h	85	25	0	73	0	63	159	859	454	10	370	196
Grp Sat Flow(s),veh/h/ln	1681	1765	1500	1371	0	1589	1630	1606	1697	1681	1606	1667
Q Serve(g_s), s	5.4	1.5	0.0	6.7	0.0	4.9	6.2	16.4	16.4	0.8	6.8	6.9
Cycle Q Clear(g_c), s	5.4	1.5	0.0	6.7	0.0	4.9	6.2	16.4	16.4	0.8	6.8	6.9
Prop In Lane	1.00			1.00		0.48	1.00		0.21	1.00		0.32
Lane Grp Cap(c), veh/h	191	317	269	175	0	138	214	2102	1111	20	1928	1000
V/C Ratio(X)	0.45	0.08	0.00	0.42	0.00	0.46	0.74	0.41	0.41	0.51	0.19	0.20
Avail Cap(c_a), veh/h	191	677	576	455	0	463	386	2102	1111	199	1928	1000
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(l)	1.00	1.00	0.00	1.00	0.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	50.9	44.4	0.0	57.2	0.0	56.4	59.6	10.6	10.6	63.9	11.7	11.8
Incr Delay (d2), s/veh	1.6	0.1	0.0	1.6	0.0	2.3	5.0	0.6	1.1	19.0	0.2	0.4
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%),veh/ln	2.8	0.8	0.0	2.6	0.0	2.2	3.0	7.4	8.0	0.5	3.0	3.3
LnGrp Delay(d),s/veh	52.6	44.5	0.0	58.8	0.0	58.7	64.6	11.2	11.7	82.9	12.0	12.2
LnGrp LOS	D	D		E		E	E	B	B	F	B	B
Approach Vol, veh/h		110				136			1472		576	
Approach Delay, s/veh		50.7				58.8			17.1		13.3	
Approach LOS		D				E			B		B	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	1	2		4	5	6	7	8				
Phs Duration (G+Y+Rc), s	8.1	91.5		30.4	15.1	84.4	12.0	18.4				
Change Period (Y+Rc), s	6.6	* 6.4		7.1	6.6	* 6.4	6.6	7.1				
Max Green Setting (Gmax), s	15.4	* 45		49.9	15.4	* 45	5.4	37.9				
Max Q Clear Time (g_c+l1), s	2.8	18.4		3.5	8.2	8.9	7.4	8.7				
Green Ext Time (p_c), s	0.0	11.8		0.1	0.3	4.6	0.0	0.7				
Intersection Summary												
HCM 2010 Ctrl Delay				20.2								
HCM 2010 LOS				C								
Notes												

Lanes, Volumes, Timings
3: March Road & Site Access #1

2022 FT-PM
910 March Road



Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↑ ↗	↗ ↑	↑	↖	↗	↑
Traffic Volume (vph)	121	67	946	12	37	298
Future Volume (vph)	121	67	946	12	37	298
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800
Storage Length (m)	20.0	0.0		0.0	110.0	
Storage Lanes	1	1		1	1	
Taper Length (m)	15.0				95.0	
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.850		0.850		
Flt Protected	0.950				0.950	
Satd. Flow (prot)	1658	1483	1745	1483	1658	1745
Flt Permitted	0.950				0.950	
Satd. Flow (perm)	1658	1483	1745	1483	1658	1745
Link Speed (k/h)	30		80		80	
Link Distance (m)	103.7		66.1		184.8	
Travel Time (s)	12.4		3.0		8.3	
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00
Adj. Flow (vph)	121	67	946	12	37	298
Shared Lane Traffic (%)						
Lane Group Flow (vph)	121	67	946	12	37	298
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Right	Left	Left
Median Width(m)	3.5		3.5		3.5	
Link Offset(m)	0.0		0.0		0.0	
Crosswalk Width(m)	3.0		3.0		3.0	
Two way Left Turn Lane						
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25	15		15	25	
Sign Control	Stop		Free		Free	
Intersection Summary						
Area Type:	Other					
Control Type:	Unsignalized					
Intersection Capacity Utilization	66.3%				ICU Level of Service C	
Analysis Period (min)	15					

Intersection

Int Delay, s/veh 7

Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↖	↗	↑	↖	↖	↑
Traffic Vol, veh/h	121	67	946	12	37	298
Future Vol, veh/h	121	67	946	12	37	298
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	200	0	-	0	1100	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	100	100	100	100	100	100
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	121	67	946	12	37	298

Major/Minor	Minor1	Major1	Major2		
Conflicting Flow All	1318	946	0	0	958
Stage 1	946	-	-	-	-
Stage 2	372	-	-	-	-
Critical Hdwy	6.42	6.22	-	-	4.12
Critical Hdwy Stg 1	5.42	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-
Follow-up Hdwy	3.518	3.318	-	-	2.218
Pot Cap-1 Maneuver	173	317	-	-	718
Stage 1	377	-	-	-	-
Stage 2	697	-	-	-	-
Platoon blocked, %	-	-	-	-	-
Mov Cap-1 Maneuver	164	317	-	-	718
Mov Cap-2 Maneuver	164	-	-	-	-
Stage 1	377	-	-	-	-
Stage 2	661	-	-	-	-

Approach WB NB SB

HCM Control Delay, s 53.1 0 1.1

HCM LOS F

Minor Lane/Major Mvmt	NBT	NBR	WBLn1	WBLn2	SBL	SBT
Capacity (veh/h)	-	-	164	317	718	-
HCM Lane V/C Ratio	-	-	0.738	0.211	0.052	-
HCM Control Delay (s)	-	-	71.7	19.4	10.3	-
HCM Lane LOS	-	-	F	C	B	-
HCM 95th %tile Q(veh)	-	-	4.6	0.8	0.2	-

Lanes, Volumes, Timings
4: March Road & Site Access #2

2022 FT-PM
910 March Road



Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations		↑	↑↑	↑		↑↑
Traffic Volume (vph)	0	12	946	152	0	419
Future Volume (vph)	0	12	946	152	0	419
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800
Storage Length (m)	0.0	0.0		20.0	0.0	
Storage Lanes	0	1		1	0	
Taper Length (m)	15.0				15.0	
Lane Util. Factor	1.00	1.00	0.95	1.00	1.00	0.95
Frt		0.865		0.850		
Flt Protected						
Satd. Flow (prot)	0	1510	3316	1483	0	3316
Flt Permitted						
Satd. Flow (perm)	0	1510	3316	1483	0	3316
Link Speed (k/h)	30		80			80
Link Distance (m)	106.8		142.9			66.1
Travel Time (s)	12.8		6.4			3.0
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00
Adj. Flow (vph)	0	12	946	152	0	419
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	12	946	152	0	419
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Right	Left	Left
Median Width(m)	0.0		3.5			3.5
Link Offset(m)	0.0		0.0			0.0
Crosswalk Width(m)	3.0		3.0			3.0
Two way Left Turn Lane						
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25	15		15	25	
Sign Control	Stop		Free			Free
Intersection Summary						
Area Type:	Other					
Control Type:	Unsignalized					
Intersection Capacity Utilization	37.6%				ICU Level of Service A	
Analysis Period (min)	15					

Intersection						
Int Delay, s/veh	0.1					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations			↑	↑↑	↑	↑↑
Traffic Vol, veh/h	0	12	946	152	0	419
Future Vol, veh/h	0	12	946	152	0	419
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	Stop	-	None	-	None
Storage Length	-	0	-	200	-	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	100	100	100	100	100	100
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	0	12	946	152	0	419
Major/Minor	Minor1	Major1		Major2		
Conflicting Flow All	-	473	0	0	-	-
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Critical Hdwy	-	6.94	-	-	-	-
Critical Hdwy Stg 1	-	-	-	-	-	-
Critical Hdwy Stg 2	-	-	-	-	-	-
Follow-up Hdwy	-	3.32	-	-	-	-
Pot Cap-1 Maneuver	0	538	-	-	0	-
Stage 1	0	-	-	-	0	-
Stage 2	0	-	-	-	0	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	-	538	-	-	-	-
Mov Cap-2 Maneuver	-	-	-	-	-	-
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Approach	WB	NB		SB		
HCM Control Delay, s	11.8	0		0		
HCM LOS	B					
Minor Lane/Major Mvmt	NBT	NBR	WBLn1	SBT		
Capacity (veh/h)	-	-	538	-		
HCM Lane V/C Ratio	-	-	0.022	-		
HCM Control Delay (s)	-	-	11.8	-		
HCM Lane LOS	-	-	B	-		
HCM 95th %tile Q(veh)	-	-	0.1	-		

Lanes, Volumes, Timings

2022 FT Sat

910 March Road

1: March Road & Halton Terrace/Maxwell Bridge Road

	→	→	←	←	↑	↑	↓	↓	←	→	↑	↓	←
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	
Lane Configurations	↑	↑		↑	↑		↑	↑↑	↑	↑	↑↑	↑	
Traffic Volume (vph)	27	55	41	79	58	100	172	1043	114	69	385	21	
Future Volume (vph)	27	55	41	79	58	100	172	1043	114	69	385	21	
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	
Storage Length (m)	30.0		0.0	30.0		0.0	60.0		0.0	70.0		15.0	
Storage Lanes	1		0	1		0	1		1	1		1	
Taper Length (m)	60.0			60.0			70.0			100.0			
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.95	1.00	1.00	0.95	1.00	
Ped Bike Factor	0.99	0.99		0.99	0.99		1.00		0.96	1.00		0.98	
Fr _t		0.936			0.905				0.850			0.850	
Flt Protected	0.950			0.950			0.950			0.950			
Satd. Flow (prot)	1658	1535	0	1610	1552	0	1658	3316	1483	1658	3316	1483	
Flt Permitted	0.589			0.695			0.524			0.256			
Satd. Flow (perm)	1020	1535	0	1163	1552	0	913	3316	1427	445	3316	1449	
Right Turn on Red			Yes			Yes			Yes			Yes	
Satd. Flow (RTOR)		41			71				114			41	
Link Speed (k/h)		40			40			80			80		
Link Distance (m)		143.7			356.2			324.9			142.9		
Travel Time (s)		12.9			32.1			14.6			6.4		
Confl. Peds. (#/hr)	11		17	17		11	2		11	11		2	
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	
Heavy Vehicles (%)	2%	9%	5%	5%	3%	2%	2%	2%	2%	2%	2%	2%	
Adj. Flow (vph)	27	55	41	79	58	100	172	1043	114	69	385	21	
Shared Lane Traffic (%)													
Lane Group Flow (vph)	27	96	0	79	158	0	172	1043	114	69	385	21	
Enter Blocked Intersection	No												
Lane Alignment	Left	Left	Right										
Median Width(m)		3.5			3.5			3.5			3.5		
Link Offset(m)		0.0			0.0			0.0			0.0		
Crosswalk Width(m)		3.0			3.0			3.0			3.0		
Two way Left Turn Lane													
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	
Turning Speed (k/h)	25		15	25		15	25		15	25		15	
Number of Detectors	1	2		1	2		1	2	1	1	2	1	
Detector Template	Left	Thru		Left	Thru		Left	Thru	Right	Left	Thru	Right	
Leading Detector (m)	2.0	10.0		2.0	10.0		2.0	10.0	2.0	2.0	10.0	2.0	
Trailing Detector (m)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	
Detector 1 Position(m)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	
Detector 1 Size(m)	2.0	0.6		2.0	0.6		2.0	0.6	2.0	2.0	0.6	2.0	
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	
Detector 1 Channel													
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	
Detector 2 Position(m)		9.4			9.4			9.4			9.4		
Detector 2 Size(m)		0.6			0.6			0.6			0.6		
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex		
Detector 2 Channel													
Detector 2 Extend (s)	0.0			0.0			0.0			0.0		0.0	

Lanes, Volumes, Timings

1: March Road & Halton Terrace/Maxwell Bridge Road

2022 FT Sat

910 March Road



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	Perm	NA		Perm	NA		Perm	NA	Perm	Perm	NA	Perm
Protected Phases			4			8			2			6
Permitted Phases	4				8			2		2	6	6
Detector Phase	4	4		8	8		2	2	2	6	6	6
Switch Phase												
Minimum Initial (s)	10.0	10.0		10.0	10.0		10.0	10.0	10.0	10.0	10.0	10.0
Minimum Split (s)	38.6	38.6		38.6	38.6		34.6	34.6	34.6	34.6	34.6	34.6
Total Split (s)	39.0	39.0		39.0	39.0		56.0	56.0	56.0	56.0	56.0	56.0
Total Split (%)	41.1%	41.1%		41.1%	41.1%		58.9%	58.9%	58.9%	58.9%	58.9%	58.9%
Maximum Green (s)	32.4	32.4		32.4	32.4		49.4	49.4	49.4	49.4	49.4	49.4
Yellow Time (s)	3.3	3.3		3.3	3.3		4.6	4.6	4.6	4.6	4.6	4.6
All-Red Time (s)	3.3	3.3		3.3	3.3		2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.6	6.6		6.6	6.6		6.6	6.6	6.6	6.6	6.6	6.6
Lead/Lag												
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	None	None		None	None		C-Max	C-Max	C-Max	C-Max	C-Max	C-Max
Walk Time (s)	7.0	7.0		7.0	7.0		7.0	7.0	7.0	7.0	7.0	7.0
Flash Dont Walk (s)	25.0	25.0		25.0	25.0		21.0	21.0	21.0	21.0	21.0	21.0
Pedestrian Calls (#/hr)	0	0		0	0		0	0	0	0	0	0
Act Effct Green (s)	12.7	12.7		12.7	12.7		69.1	69.1	69.1	69.1	69.1	69.1
Actuated g/C Ratio	0.13	0.13		0.13	0.13		0.73	0.73	0.73	0.73	0.73	0.73
v/c Ratio	0.20	0.40		0.51	0.59		0.26	0.43	0.11	0.21	0.16	0.02
Control Delay	38.6	27.2		49.1	30.2		6.1	6.2	1.2	6.9	4.5	0.7
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	38.6	27.2		49.1	30.2		6.1	6.2	1.2	6.9	4.5	0.7
LOS	D	C		D	C		A	A	A	A	A	A
Approach Delay		29.7			36.5			5.7			4.7	
Approach LOS		C			D			A			A	
Queue Length 50th (m)	4.5	9.3		13.8	15.0		8.5	32.1	0.0	3.3	9.2	0.0
Queue Length 95th (m)	11.7	22.4		26.4	32.5		20.6	54.2	4.8	10.5	17.2	1.0
Internal Link Dist (m)		119.7			332.2			300.9			118.9	
Turn Bay Length (m)	30.0			30.0			60.0			70.0		15.0
Base Capacity (vph)	347	550		396	576		663	2411	1068	323	2411	1064
Starvation Cap Reductn	0	0		0	0		0	0	0	0	0	0
Spillback Cap Reductn	0	0		0	0		0	0	0	0	0	0
Storage Cap Reductn	0	0		0	0		0	0	0	0	0	0
Reduced v/c Ratio	0.08	0.17		0.20	0.27		0.26	0.43	0.11	0.21	0.16	0.02

Intersection Summary

Area Type: Other

Cycle Length: 95

Actuated Cycle Length: 95

Offset: 11 (12%), Referenced to phase 2:NBT and 6:SBTL, Start of Green

Natural Cycle: 75

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.59

Intersection Signal Delay: 10.2

Intersection LOS: B

Lanes, Volumes, Timings

1: March Road & Halton Terrace/Maxwell Bridge Road

2022 FT Sat


910 March Road

Intersection Capacity Utilization 80.2%

ICU Level of Service D

Analysis Period (min) 15

Splits and Phases: 1: March Road & Halton Terrace/Maxwell Bridge Road

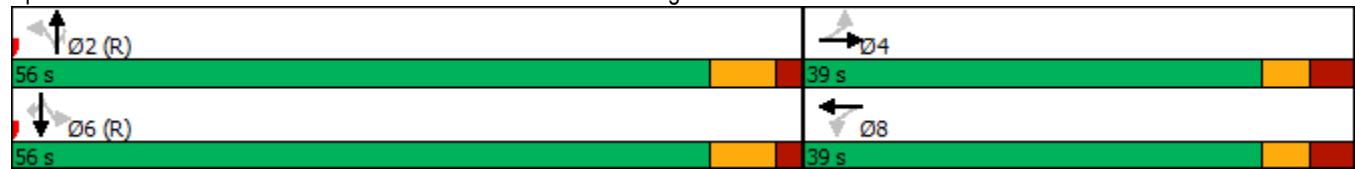

Lanes, Volumes, Timings
2: March Road & Klondike Road

2022 FT Sat
910 March Road

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑	↑	↑	↑	↑	↑↑	↑↑↑	↑	↑	↑↑↑	↑
Traffic Volume (vph)	89	25	110	73	33	34	159	1271	97	13	547	66
Future Volume (vph)	89	25	110	73	33	34	159	1271	97	13	547	66
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	100.0		5.0	15.0		0.0	100.0		0.0	45.0		0.0
Storage Lanes	1		1	1		0	2		0	1		0
Taper Length (m)	0.0			30.0			100.0			85.0		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	0.97	0.91	0.91	1.00	0.91	0.91
Ped Bike Factor	1.00		0.99	1.00	0.99		0.99	1.00		1.00	1.00	
Fr _t			0.850		0.924			0.989			0.984	
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1658	1745	1483	1658	1572	0	3216	4697	0	1658	4677	0
Flt Permitted	0.713			0.741			0.950			0.950		
Satd. Flow (perm)	1243	1745	1463	1291	1572	0	3192	4697	0	1652	4677	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			110		34			13			22	
Link Speed (k/h)			50		50			80			80	
Link Distance (m)			117.7		346.6			261.8			142.1	
Travel Time (s)			8.5		25.0			11.8			6.4	
Confl. Peds. (#/hr)	1		2	2		1	8		11	11		8
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Heavy Vehicles (%)	2%	2%	2%	2%	6%	2%	2%	2%	2%	2%	2%	2%
Adj. Flow (vph)	89	25	110	73	33	34	159	1271	97	13	547	66
Shared Lane Traffic (%)												
Lane Group Flow (vph)	89	25	110	73	67	0	159	1368	0	13	613	0
Enter Blocked Intersection	No											
Lane Alignment	Left	Left	Right									
Median Width(m)			3.5		3.5			7.0			7.0	
Link Offset(m)			0.0		0.0			0.0			0.0	
Crosswalk Width(m)			3.0		3.0			3.0			3.0	
Two way Left Turn Lane												
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25		15	25		15	25		15	25		15
Number of Detectors	1	2	1	1	2		1	2		1	2	
Detector Template	Left	Thru	Right	Left	Thru		Left	Thru		Left	Thru	
Leading Detector (m)	2.0	10.0	2.0	2.0	10.0		2.0	10.0		2.0	10.0	
Trailing Detector (m)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Position(m)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Size(m)	2.0	0.6	2.0	2.0	0.6		2.0	0.6		2.0	0.6	
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(m)			9.4		9.4			9.4			9.4	
Detector 2 Size(m)			0.6		0.6			0.6			0.6	
Detector 2 Type			Cl+Ex			Cl+Ex			Cl+Ex		Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)	0.0			0.0			0.0			0.0		

Lanes, Volumes, Timings
2: March Road & Klondike Road

2022 FT Sat
910 March Road



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	Perm	NA	Perm	Perm	NA		Prot	NA		Prot	NA	
Protected Phases		4			8		5	2		1	6	
Permitted Phases	4		4	8								
Detector Phase	4	4	4	8	8		5	2		1	6	
Switch Phase												
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0		5.0	5.0		5.0	5.0	
Minimum Split (s)	44.1	44.1	44.1	44.1	44.1		11.6	32.4		11.6	32.4	
Total Split (s)	45.0	45.0	45.0	45.0	45.0		16.0	49.0		16.0	49.0	
Total Split (%)	40.9%	40.9%	40.9%	40.9%	40.9%		14.5%	44.5%		14.5%	44.5%	
Maximum Green (s)	37.9	37.9	37.9	37.9	37.9		9.4	42.6		9.4	42.6	
Yellow Time (s)	3.3	3.3	3.3	3.3	3.3		4.6	4.6		4.6	4.6	
All-Red Time (s)	3.8	3.8	3.8	3.8	3.8		2.0	1.8		2.0	1.8	
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Total Lost Time (s)	7.1	7.1	7.1	7.1	7.1		6.6	6.4		6.6	6.4	
Lead/Lag							Lead	Lag		Lead	Lag	
Lead-Lag Optimize?							Yes	Yes		Yes	Yes	
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None	None	None	None		None	C-Max		None	C-Max	
Walk Time (s)	7.0	7.0	7.0	7.0	7.0			7.0			7.0	
Flash Dont Walk (s)	30.0	30.0	30.0	30.0	30.0			19.0			19.0	
Pedestrian Calls (#/hr)	0	0	0	0	0			0			0	
Act Effct Green (s)	13.3	13.3	13.3	13.3	13.3		10.7	80.3		6.5	65.9	
Actuated g/C Ratio	0.12	0.12	0.12	0.12	0.12		0.10	0.73		0.06	0.60	
v/c Ratio	0.59	0.12	0.40	0.47	0.31		0.51	0.40		0.13	0.22	
Control Delay	60.9	41.9	12.3	53.7	27.2		52.5	7.3		51.6	10.9	
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Total Delay	60.9	41.9	12.3	53.7	27.2		52.5	7.3		51.6	10.9	
LOS	E	D	B	D	C		D	A		D	B	
Approach Delay		34.9			41.0			12.0			11.7	
Approach LOS		C			D			B			B	
Queue Length 50th (m)	18.4	4.9	0.0	14.8	6.5		17.0	30.5		2.7	19.8	
Queue Length 95th (m)	32.8	12.1	14.7	27.6	18.3		26.5	73.1		8.7	32.1	
Internal Link Dist (m)		93.7			322.6			237.8			118.1	
Turn Bay Length (m)	100.0		5.0	15.0			100.0			45.0		
Base Capacity (vph)	428	601	576	444	563		323	3433		141	2810	
Starvation Cap Reductn	0	0	0	0	0		0	0		0	0	
Spillback Cap Reductn	0	0	0	0	0		0	0		0	0	
Storage Cap Reductn	0	0	0	0	0		0	0		0	0	
Reduced v/c Ratio	0.21	0.04	0.19	0.16	0.12		0.49	0.40		0.09	0.22	

Intersection Summary

Area Type: Other

Cycle Length: 110

Actuated Cycle Length: 110

Offset: 16 (15%), Referenced to phase 2:NBT and 6:SBT, Start of Green

Natural Cycle: 90

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.59

Intersection Signal Delay: 15.6

Intersection LOS: B

Intersection Capacity Utilization 62.3%
Analysis Period (min) 15

ICU Level of Service B

Splits and Phases: 2: March Road & Klondike Road



HCM 2010 Signalized Intersection Summary
2: March Road & Klondike Road

2022 FT Sat
910 March Road

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↖ ↗ ↘ ↙ ↖ ↗ ↘ ↙ ↖ ↗ ↘ ↙ ↖											
Traffic Volume (veh/h)	89	25	110	73	33	34	159	1271	97	13	547	66
Future Volume (veh/h)	89	25	110	73	33	34	159	1271	97	13	547	66
Number	7	4	14	3	8	18	5	2	12	1	6	16
Initial Q (Q _b), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00			1.00	1.00		1.00	1.00		0.99	1.00	0.99
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1765	1765	1765	1765	1731	1800	1765	1765	1800	1765	1765	1800
Adj Flow Rate, veh/h	89	25	0	73	33	34	159	1271	97	13	547	66
Adj No. of Lanes	1	1	1	1	1	0	2	3	0	1	3	0
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Percent Heavy Veh, %	2	2	2	2	6	6	2	2	2	2	2	2
Cap, veh/h	198	244	207	238	108	111	217	3031	231	25	2672	318
Arrive On Green	0.14	0.14	0.00	0.14	0.14	0.14	0.07	0.66	0.66	0.01	0.61	0.61
Sat Flow, veh/h	1324	1765	1500	1375	781	804	3261	4563	348	1681	4362	519
Grp Volume(v), veh/h	89	25	0	73	0	67	159	895	473	13	401	212
Grp Sat Flow(s),veh/h/ln	1324	1765	1500	1375	0	1585	1630	1606	1700	1681	1606	1670
Q Serve(g_s), s	7.1	1.4	0.0	5.4	0.0	4.2	5.3	14.3	14.3	0.8	6.1	6.2
Cycle Q Clear(g_c), s	11.3	1.4	0.0	6.8	0.0	4.2	5.3	14.3	14.3	0.8	6.1	6.2
Prop In Lane	1.00			1.00		0.51	1.00		0.20	1.00		0.31
Lane Grp Cap(c), veh/h	198	244	207	238	0	219	217	2133	1129	25	1967	1023
V/C Ratio(X)	0.45	0.10	0.00	0.31	0.00	0.31	0.73	0.42	0.42	0.52	0.20	0.21
Avail Cap(c_a), veh/h	471	608	517	522	0	546	279	2133	1129	144	1967	1023
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	1.00	0.00	1.00	0.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	47.8	41.4	0.0	44.4	0.0	42.7	50.4	8.6	8.6	53.8	9.4	9.5
Incr Delay (d2), s/veh	1.6	0.2	0.0	0.7	0.0	0.8	7.0	0.6	1.1	15.6	0.2	0.5
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%),veh/ln	2.7	0.7	0.0	2.1	0.0	1.9	2.6	6.4	6.9	0.5	2.7	3.0
LnGrp Delay(d),s/veh	49.3	41.6	0.0	45.1	0.0	43.4	57.4	9.2	9.7	69.4	9.7	9.9
LnGrp LOS	D	D		D		D	E	A	A	E	A	A
Approach Vol, veh/h		114				140			1527		626	
Approach Delay, s/veh		47.7				44.3			14.4		11.0	
Approach LOS		D				D		B		B		
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	1	2		4	5	6		8				
Phs Duration (G+Y+Rc), s	8.2	79.5		22.3	13.9	73.8		22.3				
Change Period (Y+Rc), s	6.6	* 6.4		7.1	6.6	* 6.4		7.1				
Max Green Setting (Gmax), s	9.4	* 43		37.9	9.4	* 43		37.9				
Max Q Clear Time (g_c+l1), s	2.8	16.3		13.3	7.3	8.2		8.8				
Green Ext Time (p_c), s	0.0	12.4		0.5	0.1	5.1		0.7				
Intersection Summary												
HCM 2010 Ctrl Delay			16.8									
HCM 2010 LOS			B									
Notes												

Lanes, Volumes, Timings
3: March Road & Site Access #1

2022 FT Sat
910 March Road



Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↑	↑	↑	↑	↑	↑
Traffic Volume (vph)	190	108	915	21	62	286
Future Volume (vph)	190	108	915	21	62	286
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800
Storage Length (m)	0.0	0.0	0.0	110.0		
Storage Lanes	1	1	1	1		
Taper Length (m)	15.0			95.0		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.850		0.850		
Flt Protected	0.950			0.950		
Satd. Flow (prot)	1658	1483	1745	1483	1658	1745
Flt Permitted	0.950			0.950		
Satd. Flow (perm)	1658	1483	1745	1483	1658	1745
Link Speed (k/h)	30		80		80	
Link Distance (m)	120.5		66.1		61.1	
Travel Time (s)	14.5		3.0		2.7	
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00
Adj. Flow (vph)	190	108	915	21	62	286
Shared Lane Traffic (%)						
Lane Group Flow (vph)	190	108	915	21	62	286
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Right	Left	Left
Median Width(m)	3.5		3.5		3.5	
Link Offset(m)	0.0		0.0		0.0	
Crosswalk Width(m)	3.0		3.0		3.0	
Two way Left Turn Lane						
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25	15		15	25	
Sign Control	Stop		Free		Free	
Intersection Summary						
Area Type:	Other					
Control Type:	Unsignalized					
Intersection Capacity Utilization	72.2%			ICU Level of Service C		
Analysis Period (min)	15					

Intersection

Int Delay, s/veh 25.4

Movement	WBL	WBR	NBT	NBR	SBL	SBT
----------	-----	-----	-----	-----	-----	-----

Lane Configurations	↖ ↗ ↘ ↗ ↘ ↗					
Traffic Vol, veh/h	190	108	915	21	62	286
Future Vol, veh/h	190	108	915	21	62	286
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	0	-	0	1100	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	100	100	100	100	100	100
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	190	108	915	21	62	286

Major/Minor	Minor1	Major1	Major2
-------------	--------	--------	--------

Conflicting Flow All	1325	915	0	0	936	0
Stage 1	915	-	-	-	-	-
Stage 2	410	-	-	-	-	-
Critical Hdwy	6.42	6.22	-	-	4.12	-
Critical Hdwy Stg 1	5.42	-	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-	-
Follow-up Hdwy	3.518	3.318	-	-	2.218	-
Pot Cap-1 Maneuver	~ 172	331	-	-	732	-
Stage 1	390	-	-	-	-	-
Stage 2	670	-	-	-	-	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	~ 157	331	-	-	732	-
Mov Cap-2 Maneuver	~ 157	-	-	-	-	-
Stage 1	390	-	-	-	-	-
Stage 2	613	-	-	-	-	-

Approach	WB	NB	SB
----------	----	----	----

HCM Control Delay, s	133	0	1.8
HCM LOS	F		

Minor Lane/Major Mvmt	NBT	NBR	WBLn1	WBLn2	SBL	SBT
-----------------------	-----	-----	-------	-------	-----	-----

Capacity (veh/h)	-	-	157	331	732	-
HCM Lane V/C Ratio	-	-	1.21	0.326	0.085	-
HCM Control Delay (s)	-	-	196.6	21.1	10.4	-
HCM Lane LOS	-	-	F	C	B	-
HCM 95th %tile Q(veh)	-	-	10.8	1.4	0.3	-

Notes

~: Volume exceeds capacity \$: Delay exceeds 300s +: Computation Not Defined *: All major volume in platoon

Lanes, Volumes, Timings
4: March Road & Site Access #2

2022 FT Sat
910 March Road



Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations		↑	↑↑	↑		↑↑
Traffic Volume (vph)	0	19	917	254	0	476
Future Volume (vph)	0	19	917	254	0	476
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800
Storage Length (m)	0.0	0.0		20.0	0.0	
Storage Lanes	0	1		1	0	
Taper Length (m)	15.0				15.0	
Lane Util. Factor	1.00	1.00	0.95	1.00	1.00	0.95
Frt		0.865		0.850		
Flt Protected						
Satd. Flow (prot)	0	1510	3316	1483	0	3316
Flt Permitted						
Satd. Flow (perm)	0	1510	3316	1483	0	3316
Link Speed (k/h)	50		80			80
Link Distance (m)	78.7		142.9			66.1
Travel Time (s)	5.7		6.4			3.0
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00
Adj. Flow (vph)	0	19	917	254	0	476
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	19	917	254	0	476
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Right	Left	Left
Median Width(m)	0.0		3.5			3.5
Link Offset(m)	0.0		0.0			0.0
Crosswalk Width(m)	3.0		3.0			3.0
Two way Left Turn Lane						
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25	15		15	25	
Sign Control	Stop		Free			Free
Intersection Summary						
Area Type:	Other					
Control Type:	Unsignalized					
Intersection Capacity Utilization	36.8%				ICU Level of Service A	
Analysis Period (min)	15					

Intersection

Int Delay, s/veh 0.1

Movement	WBL	WBR	NBT	NBR	SBL	SBT
----------	-----	-----	-----	-----	-----	-----

Lane Configurations						
Traffic Vol, veh/h	0	19	917	254	0	476
Future Vol, veh/h	0	19	917	254	0	476
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	Stop	-	None	-	None
Storage Length	-	0	-	200	-	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	100	100	100	100	100	100
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	0	19	917	254	0	476

Major/Minor	Minor1	Major1	Major2
-------------	--------	--------	--------

Conflicting Flow All	-	459	0	0	-	-
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Critical Hdwy	-	6.94	-	-	-	-
Critical Hdwy Stg 1	-	-	-	-	-	-
Critical Hdwy Stg 2	-	-	-	-	-	-
Follow-up Hdwy	-	3.32	-	-	-	-
Pot Cap-1 Maneuver	0	549	-	-	0	-
Stage 1	0	-	-	-	0	-
Stage 2	0	-	-	-	0	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	-	549	-	-	-	-
Mov Cap-2 Maneuver	-	-	-	-	-	-
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-

Approach	WB	NB	SB
----------	----	----	----

HCM Control Delay, s	11.8	0	0
HCM LOS	B		


Minor Lane/Major Mvmt	NBT	NBRWBLn1	SBT
-----------------------	-----	----------	-----

Capacity (veh/h)	-	-	549	-
HCM Lane V/C Ratio	-	-	0.035	-
HCM Control Delay (s)	-	-	11.8	-
HCM Lane LOS	-	-	B	-
HCM 95th %tile Q(veh)	-	-	0.1	-

Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations						
Traffic Volume (vph)	169	29	216	11	100	816
Future Volume (vph)	169	29	216	11	100	816
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800
Storage Length (m)	20.0	0.0		0.0	110.0	
Storage Lanes	1	1		1	1	
Taper Length (m)	15.0				95.0	
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.850		0.850		
Flt Protected	0.950				0.950	
Satd. Flow (prot)	1658	1483	1745	1483	1658	1745
Flt Permitted	0.950				0.623	
Satd. Flow (perm)	1658	1483	1745	1483	1087	1745
Right Turn on Red		Yes		Yes		
Satd. Flow (RTOR)		29		11		
Link Speed (k/h)	30		80			80
Link Distance (m)	104.3		66.1			114.5
Travel Time (s)	12.5		3.0			5.2
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00
Adj. Flow (vph)	169	29	216	11	100	816
Shared Lane Traffic (%)						
Lane Group Flow (vph)	169	29	216	11	100	816
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Right	Left	Left
Median Width(m)	3.5		3.5			3.5
Link Offset(m)	0.0		0.0			0.0
Crosswalk Width(m)	3.0		3.0			3.0
Two way Left Turn Lane						
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25	15		15	25	
Number of Detectors	1	1	2	1	1	2
Detector Template	Left	Right	Thru	Right	Left	Thru
Leading Detector (m)	2.0	2.0	10.0	2.0	2.0	10.0
Trailing Detector (m)	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Position(m)	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Size(m)	2.0	2.0	0.6	2.0	2.0	0.6
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel						
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(m)			9.4		9.4	
Detector 2 Size(m)			0.6		0.6	
Detector 2 Type			Cl+Ex		Cl+Ex	
Detector 2 Channel						
Detector 2 Extend (s)			0.0		0.0	
Turn Type	Prot	Perm	NA	Perm	Perm	NA
Protected Phases	8		2		6	
Permitted Phases		8		2	6	

Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Detector Phase	8	8	2	2	6	6
Switch Phase						
Minimum Initial (s)	5.0	5.0	10.0	10.0	10.0	10.0
Minimum Split (s)	23.8	23.8	25.6	25.6	25.6	25.6
Total Split (s)	24.0	24.0	66.0	66.0	66.0	66.0
Total Split (%)	26.7%	26.7%	73.3%	73.3%	73.3%	73.3%
Maximum Green (s)	19.1	19.1	60.4	60.4	60.4	60.4
Yellow Time (s)	3.0	3.0	4.6	4.6	4.6	4.6
All-Red Time (s)	1.9	1.9	1.0	1.0	1.0	1.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	4.9	4.9	5.6	5.6	5.6	5.6
Lead/Lag						
Lead-Lag Optimize?						
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	None	None	Max	Max	Max	Max
Walk Time (s)			7.0	7.0	7.0	7.0
Flash Dont Walk (s)			13.0	13.0	13.0	13.0
Pedestrian Calls (#/hr)			0	0	0	0
Act Effect Green (s)	14.1	14.1	64.6	64.6	64.6	64.6
Actuated g/C Ratio	0.16	0.16	0.72	0.72	0.72	0.72
v/c Ratio	0.65	0.11	0.17	0.01	0.13	0.65
Control Delay	46.0	12.1	4.8	2.5	4.9	10.2
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	46.0	12.1	4.8	2.5	4.9	10.2
LOS	D	B	A	A	A	B
Approach Delay	41.0		4.7			9.6
Approach LOS	D		A			A
Queue Length 50th (m)	25.9	0.0	9.6	0.0	4.3	59.4
Queue Length 95th (m)	45.0	6.8	20.5	1.5	11.1	117.5
Internal Link Dist (m)	80.3		42.1			90.5
Turn Bay Length (m)	20.0				110.0	
Base Capacity (vph)	355	340	1263	1076	786	1263
Starvation Cap Reductn	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.48	0.09	0.17	0.01	0.13	0.65
Intersection Summary						
Area Type:	Other					
Cycle Length: 90						
Actuated Cycle Length: 89.2						
Natural Cycle: 65						
Control Type: Actuated-Uncoordinated						
Maximum v/c Ratio: 0.65						
Intersection Signal Delay: 13.4					Intersection LOS: B	
Intersection Capacity Utilization 64.0%					ICU Level of Service B	
Analysis Period (min) 15						

Splits and Phases: 3: March Road & Site Access #1

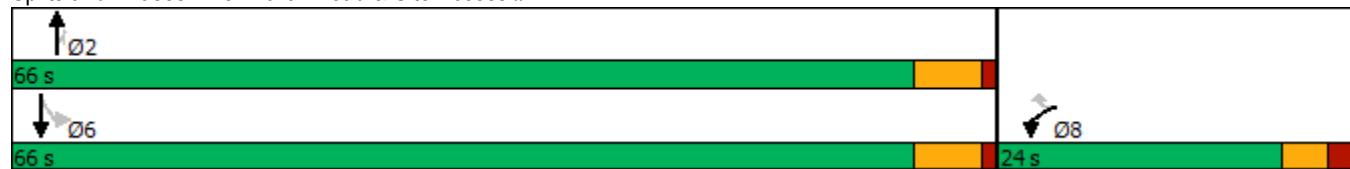


Lanes, Volumes, Timings
3: March Road & Site Access #1

2022 FT-PM Mitigation 1
910 March Road

Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations						
Traffic Volume (vph)	121	67	946	12	37	298
Future Volume (vph)	121	67	946	12	37	298
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800
Storage Length (m)	20.0	0.0		0.0	110.0	
Storage Lanes	1	1		1	1	
Taper Length (m)	15.0				95.0	
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.850		0.850		
Flt Protected	0.950				0.950	
Satd. Flow (prot)	1658	1483	1745	1483	1658	1745
Flt Permitted	0.950				0.200	
Satd. Flow (perm)	1658	1483	1745	1483	349	1745
Right Turn on Red		Yes		Yes		
Satd. Flow (RTOR)		67		12		
Link Speed (k/h)	30		80		80	
Link Distance (m)	103.7		66.1		184.8	
Travel Time (s)	12.4		3.0		8.3	
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00
Adj. Flow (vph)	121	67	946	12	37	298
Shared Lane Traffic (%)						
Lane Group Flow (vph)	121	67	946	12	37	298
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Right	Left	Left
Median Width(m)	3.5		3.5		3.5	
Link Offset(m)	0.0		0.0		0.0	
Crosswalk Width(m)	3.0		3.0		3.0	
Two way Left Turn Lane						
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25	15		15	25	
Number of Detectors	1	1	2	1	1	2
Detector Template	Left	Right	Thru	Right	Left	Thru
Leading Detector (m)	2.0	2.0	10.0	2.0	2.0	10.0
Trailing Detector (m)	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Position(m)	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Size(m)	2.0	2.0	0.6	2.0	2.0	0.6
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel						
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(m)			9.4		9.4	
Detector 2 Size(m)			0.6		0.6	
Detector 2 Type			Cl+Ex		Cl+Ex	
Detector 2 Channel						
Detector 2 Extend (s)			0.0		0.0	
Turn Type	Prot	Perm	NA	Perm	Perm	NA
Protected Phases	8		2		6	
Permitted Phases		8		2	6	

Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Detector Phase	8	8	2	2	6	6
Switch Phase						
Minimum Initial (s)	5.0	5.0	10.0	10.0	10.0	10.0
Minimum Split (s)	22.9	22.9	25.6	25.6	25.6	25.6
Total Split (s)	23.0	23.0	67.0	67.0	67.0	67.0
Total Split (%)	25.6%	25.6%	74.4%	74.4%	74.4%	74.4%
Maximum Green (s)	18.1	18.1	61.4	61.4	61.4	61.4
Yellow Time (s)	3.0	3.0	4.6	4.6	4.6	4.6
All-Red Time (s)	1.9	1.9	1.0	1.0	1.0	1.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	4.9	4.9	5.6	5.6	5.6	5.6
Lead/Lag						
Lead-Lag Optimize?						
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	None	None	Min	Min	Min	Min
Walk Time (s)			7.0	7.0	7.0	7.0
Flash Dont Walk (s)			13.0	13.0	13.0	13.0
Pedestrian Calls (#/hr)			0	0	0	0
Act Effect Green (s)	10.7	10.7	43.3	43.3	43.3	43.3
Actuated g/C Ratio	0.18	0.18	0.73	0.73	0.73	0.73
v/c Ratio	0.41	0.21	0.75	0.01	0.15	0.23
Control Delay	30.9	10.0	12.4	2.2	6.0	4.9
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	30.9	10.0	12.4	2.2	6.0	4.9
LOS	C	A	B	A	A	A
Approach Delay	23.4		12.3			5.0
Approach LOS	C		B			A
Queue Length 50th (m)	11.0	0.0	63.0	0.0	1.3	11.0
Queue Length 95th (m)	34.0	10.4	144.8	1.4	5.4	25.1
Internal Link Dist (m)	79.7		42.1			160.8
Turn Bay Length (m)	20.0				110.0	
Base Capacity (vph)	564	549	1595	1357	319	1595
Starvation Cap Reductn	0	0	24	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.21	0.12	0.60	0.01	0.12	0.19
Intersection Summary						
Area Type:	Other					
Cycle Length: 90						
Actuated Cycle Length: 59.5						
Natural Cycle: 75						
Control Type: Actuated-Uncoordinated						
Maximum v/c Ratio: 0.75						
Intersection Signal Delay: 12.1				Intersection LOS: B		
Intersection Capacity Utilization 68.4%				ICU Level of Service C		
Analysis Period (min) 15						

Splits and Phases: 3: March Road & Site Access #1

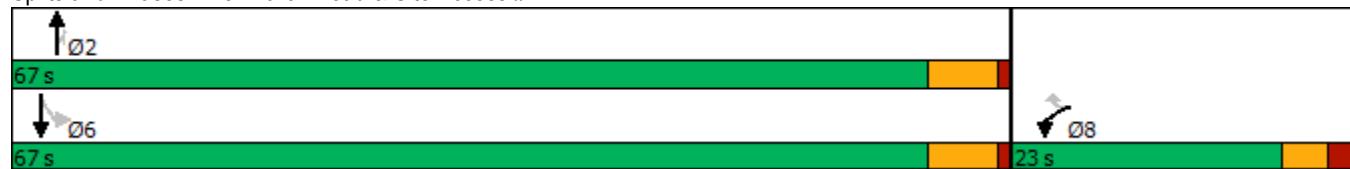

Lanes, Volumes, Timings
3: March Road & Site Access #1


2022 FT Sat Mitigation 1
910 March Road

Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations						
Traffic Volume (vph)	190	108	915	21	62	286
Future Volume (vph)	190	108	915	21	62	286
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800
Storage Length (m)	0.0	0.0		0.0	110.0	
Storage Lanes	1	1		1	1	
Taper Length (m)	15.0				95.0	
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.850		0.850		
Flt Protected	0.950				0.950	
Satd. Flow (prot)	1658	1483	1745	1483	1658	1745
Flt Permitted	0.950				0.219	
Satd. Flow (perm)	1658	1483	1745	1483	382	1745
Right Turn on Red		Yes		Yes		
Satd. Flow (RTOR)		108		21		
Link Speed (k/h)	30		80		80	
Link Distance (m)	120.5		66.1		61.1	
Travel Time (s)	14.5		3.0		2.7	
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00
Adj. Flow (vph)	190	108	915	21	62	286
Shared Lane Traffic (%)						
Lane Group Flow (vph)	190	108	915	21	62	286
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Right	Left	Left
Median Width(m)	3.5		3.5		3.5	
Link Offset(m)	0.0		0.0		0.0	
Crosswalk Width(m)	3.0		3.0		3.0	
Two way Left Turn Lane						
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25	15		15	25	
Number of Detectors	1	1	2	1	1	2
Detector Template	Left	Right	Thru	Right	Left	Thru
Leading Detector (m)	2.0	2.0	10.0	2.0	2.0	10.0
Trailing Detector (m)	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Position(m)	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Size(m)	2.0	2.0	0.6	2.0	2.0	0.6
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel						
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(m)			9.4		9.4	
Detector 2 Size(m)			0.6		0.6	
Detector 2 Type			Cl+Ex		Cl+Ex	
Detector 2 Channel						
Detector 2 Extend (s)			0.0		0.0	
Turn Type	Prot	Perm	NA	Perm	Perm	NA
Protected Phases	8		2		6	
Permitted Phases		8		2	6	



Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Detector Phase	8	8	2	2	6	6
Switch Phase						
Minimum Initial (s)	5.0	5.0	10.0	10.0	10.0	10.0
Minimum Split (s)	23.8	23.8	25.6	25.6	25.6	25.6
Total Split (s)	24.0	24.0	66.0	66.0	66.0	66.0
Total Split (%)	26.7%	26.7%	73.3%	73.3%	73.3%	73.3%
Maximum Green (s)	19.1	19.1	60.4	60.4	60.4	60.4
Yellow Time (s)	3.0	3.0	4.6	4.6	4.6	4.6
All-Red Time (s)	1.9	1.9	1.0	1.0	1.0	1.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	4.9	4.9	5.6	5.6	5.6	5.6
Lead/Lag						
Lead-Lag Optimize?						
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	None	None	Max	Max	Max	Max
Walk Time (s)			7.0	7.0	7.0	7.0
Flash Dont Walk (s)			13.0	13.0	13.0	13.0
Pedestrian Calls (#/hr)			0	0	0	0
Act Effect Green (s)	14.8	14.8	62.8	62.8	62.8	62.8
Actuated g/C Ratio	0.17	0.17	0.71	0.71	0.71	0.71
v/c Ratio	0.68	0.32	0.74	0.02	0.23	0.23
Control Delay	46.8	9.0	13.1	2.1	7.8	5.4
Queue Delay	0.0	0.0	0.6	0.0	0.0	0.0
Total Delay	46.8	9.0	13.7	2.1	7.8	5.4
LOS	D	A	B	A	A	A
Approach Delay	33.1		13.4			5.8
Approach LOS	C		B			A
Queue Length 50th (m)	29.4	0.0	79.5	0.0	3.1	14.1
Queue Length 95th (m)	50.2	12.5	151.1	2.1	9.8	27.2
Internal Link Dist (m)	96.5		42.1			37.1
Turn Bay Length (m)					110.0	
Base Capacity (vph)	359	406	1243	1063	272	1243
Starvation Cap Reductn	0	0	93	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.53	0.27	0.80	0.02	0.23	0.23
Intersection Summary						
Area Type:	Other					
Cycle Length: 90						
Actuated Cycle Length: 88.1						
Natural Cycle: 75						
Control Type: Actuated-Uncoordinated						
Maximum v/c Ratio: 0.74						
Intersection Signal Delay: 15.5				Intersection LOS: B		
Intersection Capacity Utilization 74.2%				ICU Level of Service D		
Analysis Period (min) 15						

Splits and Phases: 3: March Road & Site Access #1

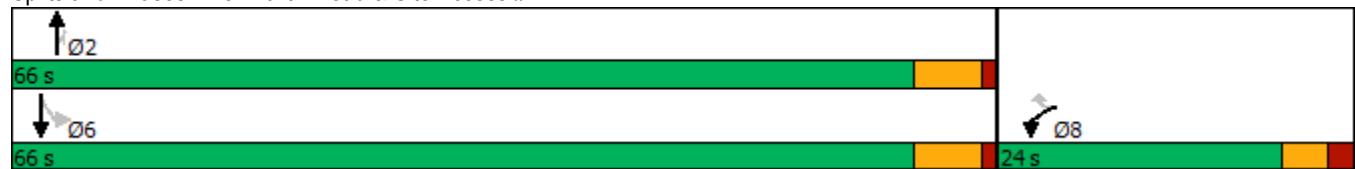

Appendix Q

2027 Future Total Synchro Sheets

Lanes, Volumes, Timings

2027 FT-AM

910 March Road



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑	↑	↑	↑	↑	↑	↑↑	↑	↑	↑↑	↑
Traffic Volume (vph)	106	37	157	125	17	54	99	578	63	80	1541	71
Future Volume (vph)	106	37	157	125	17	54	99	578	63	80	1541	71
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	30.0		0.0	30.0		0.0	60.0		0.0	70.0		15.0
Storage Lanes	1		0	1		0	1		1	1		1
Taper Length (m)	60.0			60.0			70.0			100.0		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.95	1.00	1.00	0.95	1.00
Ped Bike Factor		0.99			1.00				0.98	1.00		
Fr _t		0.879				0.886			0.850			0.850
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1658	1484	0	1658	1469	0	1551	3020	1414	1658	3316	1401
Flt Permitted	0.711			0.463			0.084			0.434		
Satd. Flow (perm)	1241	1484	0	807	1469	0	137	3020	1380	756	3316	1401
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		157			54				100			100
Link Speed (k/h)		40			40			80			80	
Link Distance (m)		143.7			356.2			324.9			142.9	
Travel Time (s)		12.9			32.1			14.6			6.4	
Confl. Peds. (#/hr)		1	1						2	2		
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Heavy Vehicles (%)	2%	14%	2%	2%	2%	9%	9%	12%	7%	2%	2%	8%
Adj. Flow (vph)	106	37	157	125	17	54	99	578	63	80	1541	71
Shared Lane Traffic (%)												
Lane Group Flow (vph)	106	194	0	125	71	0	99	578	63	80	1541	71
Enter Blocked Intersection	No											
Lane Alignment	Left	Left	Right									
Median Width(m)		3.5			3.5			3.5			3.5	
Link Offset(m)		0.0			0.0			0.0			0.0	
Crosswalk Width(m)		3.0			3.0			3.0			3.0	
Two way Left Turn Lane												
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25		15	25		15	25		15	25		15
Number of Detectors	1	2		1	2		1	2	1	1	2	1
Detector Template	Left	Thru		Left	Thru		Left	Thru	Right	Left	Thru	Right
Leading Detector (m)	2.0	10.0		2.0	10.0		2.0	10.0	2.0	2.0	10.0	2.0
Trailing Detector (m)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Position(m)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Size(m)	2.0	0.6		2.0	0.6		2.0	0.6	2.0	2.0	0.6	2.0
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(m)		9.4			9.4			9.4			9.4	
Detector 2 Size(m)		0.6			0.6			0.6			0.6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)	0.0			0.0			0.0			0.0		

Lanes, Volumes, Timings

1: March Road & Halton Terrace/Maxwell Bridge Road

2027 FT-AM

910 March Road



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	Perm	NA		Perm	NA		pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases			4			8		5	2		1	6
Permitted Phases	4				8			2		2	6	6
Detector Phase	4	4		8	8			5	2	2	1	6
Switch Phase												
Minimum Initial (s)	10.0	10.0		10.0	10.0		5.0	10.0	10.0	5.0	10.0	10.0
Minimum Split (s)	38.6	38.6		38.6	38.6		12.4	34.6	34.6	11.4	34.6	34.6
Total Split (s)	48.0	48.0		48.0	48.0		20.0	52.0	52.0	20.0	52.0	52.0
Total Split (%)	40.0%	40.0%		40.0%	40.0%		16.7%	43.3%	43.3%	16.7%	43.3%	43.3%
Maximum Green (s)	41.4	41.4		41.4	41.4		12.6	45.4	45.4	13.6	45.4	45.4
Yellow Time (s)	3.3	3.3		3.3	3.3		4.6	4.6	4.6	4.6	4.6	4.6
All-Red Time (s)	3.3	3.3		3.3	3.3		2.8	2.0	2.0	1.8	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.6	6.6		6.6	6.6		7.4	6.6	6.6	6.4	6.6	6.6
Lead/Lag							Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?							Yes	Yes	Yes	Yes	Yes	Yes
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	None	None		None	None		None	C-Max	C-Max	None	C-Max	C-Max
Walk Time (s)	7.0	7.0		7.0	7.0			7.0	7.0		7.0	7.0
Flash Dont Walk (s)	25.0	25.0		25.0	25.0			21.0	21.0		21.0	21.0
Pedestrian Calls (#/hr)	0	0		0	0			0	0		0	0
Act Effct Green (s)	20.1	20.1		20.1	20.1		81.8	75.4	75.4	78.5	70.9	70.9
Actuated g/C Ratio	0.17	0.17		0.17	0.17		0.68	0.63	0.63	0.65	0.59	0.59
v/c Ratio	0.51	0.51		0.93	0.24		0.52	0.30	0.07	0.15	0.79	0.08
Control Delay	52.5	15.1		109.0	16.3		20.5	12.7	1.0	7.0	24.3	1.6
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	52.5	15.1		109.0	16.3		20.5	12.7	1.0	7.0	24.3	1.6
LOS	D	B		F	B		C	B	A	A	C	A
Approach Delay		28.3			75.4			12.7			22.6	
Approach LOS		C			E			B			C	
Queue Length 50th (m)	23.0	7.5		29.3	3.4		6.3	32.4	0.0	4.8	136.2	0.0
Queue Length 95th (m)	37.4	26.4		#51.0	14.7		21.3	54.7	2.5	12.2	#234.7	3.9
Internal Link Dist (m)		119.7			332.2			300.9			118.9	
Turn Bay Length (m)	30.0			30.0			60.0			70.0		15.0
Base Capacity (vph)	428	614		278	542		245	1897	904	635	1960	869
Starvation Cap Reductn	0	0		0	0		0	0	0	0	0	0
Spillback Cap Reductn	0	0		0	0		0	0	0	0	0	0
Storage Cap Reductn	0	0		0	0		0	0	0	0	0	0
Reduced v/c Ratio	0.25	0.32		0.45	0.13		0.40	0.30	0.07	0.13	0.79	0.08

Intersection Summary

Area Type: Other

Cycle Length: 120

Actuated Cycle Length: 120

Offset: 99 (83%), Referenced to phase 2:NBT and 6:SBTL, Start of Green

Natural Cycle: 100

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.93

Intersection Signal Delay: 24.2

Intersection LOS: C

Lanes, Volumes, Timings

2027 FT-AM

910 March Road

1: March Road & Halton Terrace/Maxwell Bridge Road

Intersection Capacity Utilization 94.6%


ICU Level of Service F

Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 1: March Road & Halton Terrace/Maxwell Bridge Road

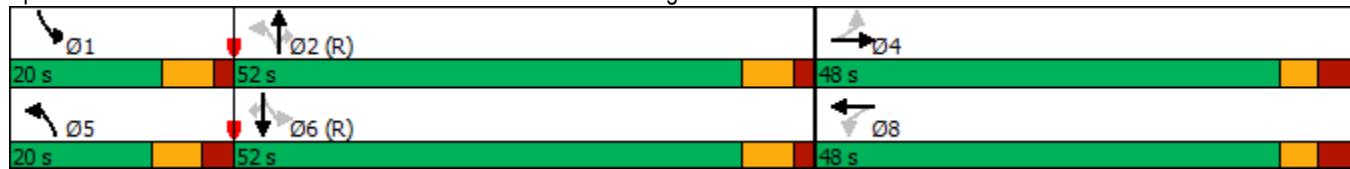

Lanes, Volumes, Timings
2: March Road & Klondike Road

2027 FT-AM
910 March Road

	↑	→	↓	↗	↖	↙	↖	↗	↑	↗	↓	↖
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑	↑	↑	↑	↑	↑↑	↑↑↑	↑	↑	↑↑↑	↑
Traffic Volume (vph)	70	37	253	146	31	52	83	682	62	35	1633	63
Future Volume (vph)	70	37	253	146	31	52	83	682	62	35	1633	63
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	100.0			5.0	15.0		0.0	100.0		0.0	45.0	
Storage Lanes	1			1	1		0	2		0	1	
Taper Length (m)	0.0				30.0			100.0			85.0	
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	0.97	0.91	0.91	1.00	0.91	0.91
Ped Bike Factor	1.00			0.98	0.99	0.99		1.00	1.00		1.00	1.00
Fr _t				0.850		0.906			0.987			0.994
Flt Protected	0.950				0.950			0.950			0.950	
Satd. Flow (prot)	1496	1679	1483	1658	1454	0	3124	4464	0	1433	4721	0
Flt Permitted	0.531				0.733			0.950			0.950	
Satd. Flow (perm)	834	1679	1456	1271	1454	0	3122	4464	0	1428	4721	0
Right Turn on Red			Yes				Yes			Yes		Yes
Satd. Flow (RTOR)			156			52			13			5
Link Speed (k/h)			50			50			80			80
Link Distance (m)			117.7			346.6			261.8			142.1
Travel Time (s)			8.5			25.0			11.8			6.4
Confl. Peds. (#/hr)	3		6	6		3	3		4	4		3
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Heavy Vehicles (%)	13%	6%	2%	2%	8%	11%	5%	7%	9%	18%	2%	9%
Adj. Flow (vph)	70	37	253	146	31	52	83	682	62	35	1633	63
Shared Lane Traffic (%)												
Lane Group Flow (vph)	70	37	253	146	83	0	83	744	0	35	1696	0
Enter Blocked Intersection	No											
Lane Alignment	Left	Left	Right									
Median Width(m)	3.5				3.5			7.0			7.0	
Link Offset(m)	0.0				0.0			0.0			0.0	
Crosswalk Width(m)	3.0				3.0			3.0			3.0	
Two way Left Turn Lane												
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25		15	25		15	25		15	25		15
Number of Detectors	1	2	1	1	2		1	2		1	2	
Detector Template	Left	Thru	Right	Left	Thru		Left	Thru		Left	Thru	
Leading Detector (m)	2.0	10.0	2.0	2.0	10.0		2.0	10.0		2.0	10.0	
Trailing Detector (m)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Position(m)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Size(m)	2.0	0.6	2.0	2.0	0.6		2.0	0.6		2.0	0.6	
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(m)			9.4			9.4			9.4			9.4
Detector 2 Size(m)			0.6			0.6			0.6			0.6
Detector 2 Type			Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex
Detector 2 Channel												
Detector 2 Extend (s)	0.0			0.0			0.0			0.0		

Lanes, Volumes, Timings
2: March Road & Klondike Road

2027 FT-AM
910 March Road

	↗	→	↘	↙	←	↖	↑	↗	↘	↓	↙	
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	pm+pt	NA	Perm	Perm	NA		Prot	NA		Prot	NA	
Protected Phases	7	4			8		5	2		1	6	
Permitted Phases	4		4	8								
Detector Phase	7	4	4	8	8		5	2		1	6	
Switch Phase												
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0		5.0	5.0		5.0	5.0	
Minimum Split (s)	11.6	44.1	44.1	44.1	44.1		11.6	32.4		11.6	32.4	
Total Split (s)	12.0	57.0	57.0	45.0	45.0		15.0	58.0		15.0	58.0	
Total Split (%)	9.2%	43.8%	43.8%	34.6%	34.6%		11.5%	44.6%		11.5%	44.6%	
Maximum Green (s)	5.4	49.9	49.9	37.9	37.9		8.4	51.6		8.4	51.6	
Yellow Time (s)	3.3	3.3	3.3	3.3	3.3		4.6	4.6		4.6	4.6	
All-Red Time (s)	3.3	3.8	3.8	3.8	3.8		2.0	1.8		2.0	1.8	
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Total Lost Time (s)	6.6	7.1	7.1	7.1	7.1		6.6	6.4		6.6	6.4	
Lead/Lag	Lead			Lag	Lag		Lead	Lag		Lead	Lag	
Lead-Lag Optimize?	Yes			Yes	Yes		Yes	Yes		Yes	Yes	
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None	None	None	None		None	C-Max		None	C-Max	
Walk Time (s)		7.0	7.0	7.0	7.0			7.0			7.0	
Flash Dont Walk (s)		30.0	30.0	30.0	30.0			19.0			19.0	
Pedestrian Calls (#/hr)	0	0	0	0	0			0			0	
Act Effct Green (s)	30.4	29.9	29.9	20.3	20.3		8.8	76.5		8.7	71.2	
Actuated g/C Ratio	0.23	0.23	0.23	0.16	0.16		0.07	0.59		0.07	0.55	
v/c Ratio	0.32	0.10	0.56	0.74	0.31		0.39	0.28		0.37	0.66	
Control Delay	40.5	35.4	19.7	72.8	22.6		63.0	16.2		67.9	24.3	
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Total Delay	40.5	35.4	19.7	72.8	22.6		63.0	16.2		67.9	24.3	
LOS	D	D	B	E	C		E	B		E	C	
Approach Delay		25.4			54.6			20.9			25.1	
Approach LOS		C			D			C			C	
Queue Length 50th (m)	14.2	7.3	20.4	36.1	6.9		10.6	37.2		8.7	112.7	
Queue Length 95th (m)	24.5	15.0	42.9	55.3	20.3		18.8	55.8		19.2	154.7	
Internal Link Dist (m)		93.7			322.6			237.8			118.1	
Turn Bay Length (m)	100.0		5.0	15.0			100.0			45.0		
Base Capacity (vph)	222	644	655	370	460		224	2632		104	2587	
Starvation Cap Reductn	0	0	0	0	0		0	0		0	0	
Spillback Cap Reductn	0	0	0	0	0		0	0		0	0	
Storage Cap Reductn	0	0	0	0	0		0	0		0	0	
Reduced v/c Ratio	0.32	0.06	0.39	0.39	0.18		0.37	0.28		0.34	0.66	
Intersection Summary												
Area Type:	Other											
Cycle Length:	130											
Actuated Cycle Length:	130											
Offset: 64 (49%), Referenced to phase 2:NBT and 6:SBT, Start of Green												
Natural Cycle: 110												
Control Type: Actuated-Coordinated												
Maximum v/c Ratio: 0.74												
Intersection Signal Delay: 26.2	Intersection LOS: C											

Intersection Capacity Utilization 80.2%
Analysis Period (min) 15

ICU Level of Service D

Splits and Phases: 2: March Road & Klondike Road



HCM 2010 Signalized Intersection Summary
2: March Road & Klondike Road

2027 FT-AM
910 March Road

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	→	↓	←	↖	↙	↖	↑↑↑	↗	↖	↑↑↑	↗
Traffic Volume (veh/h)	70	37	253	146	31	52	83	682	62	35	1633	63
Future Volume (veh/h)	70	37	253	146	31	52	83	682	62	35	1633	63
Number	7	4	14	3	8	18	5	2	12	1	6	16
Initial Q (Q _b), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	0.99			1.00	0.99		0.99	1.00		1.00	1.00	1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1593	1698	1765	1765	1638	1800	1714	1680	1800	1525	1760	1800
Adj Flow Rate, veh/h	70	37	0	146	31	52	83	682	62	35	1633	63
Adj No. of Lanes	1	1	1	1	1	0	2	3	0	1	3	0
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Percent Heavy Veh, %	13	6	2	2	8	8	5	7	7	18	2	2
Cap, veh/h	244	425	375	268	86	145	126	2427	219	41	2638	102
Arrive On Green	0.04	0.25	0.00	0.16	0.16	0.16	0.04	0.57	0.57	0.03	0.56	0.56
Sat Flow, veh/h	1517	1698	1500	1351	547	917	3167	4280	386	1453	4748	183
Grp Volume(v), veh/h	70	37	0	146	0	83	83	486	258	35	1102	594
Grp Sat Flow(s),veh/h/ln	1517	1698	1500	1351	0	1464	1584	1528	1610	1453	1602	1727
Q Serve(g_s), s	4.9	2.2	0.0	13.3	0.0	6.6	3.4	10.6	10.8	3.1	30.3	30.3
Cycle Q Clear(g_c), s	4.9	2.2	0.0	13.3	0.0	6.6	3.4	10.6	10.8	3.1	30.3	30.3
Prop In Lane	1.00			1.00		0.63	1.00		0.24	1.00		0.11
Lane Grp Cap(c), veh/h	244	425	375	268	0	231	126	1733	913	41	1780	960
V/C Ratio(X)	0.29	0.09	0.00	0.54	0.00	0.36	0.66	0.28	0.28	0.85	0.62	0.62
Avail Cap(c_a), veh/h	244	652	576	449	0	427	205	1733	913	94	1780	960
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(l)	1.00	1.00	0.00	1.00	0.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	42.3	37.4	0.0	51.7	0.0	48.9	61.6	14.5	14.5	62.9	19.6	19.6
Incr Delay (d2), s/veh	0.6	0.1	0.0	1.7	0.0	0.9	5.8	0.4	0.8	35.2	1.6	3.0
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%),veh/ln	2.1	1.0	0.0	5.1	0.0	2.7	1.6	4.5	4.9	1.7	13.7	15.2
LnGrp Delay(d),s/veh	43.0	37.5	0.0	53.4	0.0	49.8	67.4	14.9	15.3	98.1	21.2	22.6
LnGrp LOS	D	D		D		D	E	B	B	F	C	C
Approach Vol, veh/h		107			229			827			1731	
Approach Delay, s/veh		41.1			52.1			20.3			23.2	
Approach LOS		D			D			C			C	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	1	2		4	5	6	7	8				
Phs Duration (G+Y+Rc), s	10.3	80.1		39.6	11.8	78.6	12.0	27.6				
Change Period (Y+Rc), s	6.6	* 6.4		7.1	6.6	* 6.4	6.6	7.1				
Max Green Setting (Gmax), s	8.4	* 52		49.9	8.4	* 52	5.4	37.9				
Max Q Clear Time (g_c+l1), s	5.1	12.8		4.2	5.4	32.3	6.9	15.3				
Green Ext Time (p_c), s	0.0	6.6		0.2	0.1	12.9	0.0	1.2				
Intersection Summary												
HCM 2010 Ctrl Delay				25.3								
HCM 2010 LOS				C								
Notes												

Lanes, Volumes, Timings

2027 FT-AM

910 March Road

3: March Road & South Local Road/Site Access #1



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑		↑	↑		↑	↑		↑	↑	
Traffic Volume (vph)	5	5	21	155	5	37	4	620	11	91	1516	0
Future Volume (vph)	5	5	21	155	5	37	4	620	11	91	1516	0
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	0.0		0.0	20.0		0.0	0.0		0.0	110.0		0.0
Storage Lanes	1		0	1		0	1		0	1		0
Taper Length (m)	15.0			15.0			15.0			95.0		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.879			0.868			0.997				
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1658	1534	0	1658	1515	0	1658	1740	0	1658	1745	0
Flt Permitted	0.950			0.950			0.950			0.950		
Satd. Flow (perm)	1658	1534	0	1658	1515	0	1658	1740	0	1658	1745	0
Link Speed (k/h)		50			30			80			80	
Link Distance (m)		86.4			104.3			66.1			51.2	
Travel Time (s)		6.2			12.5			3.0			2.3	
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj. Flow (vph)	5	5	21	155	5	37	4	620	11	91	1516	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	5	26	0	155	42	0	4	631	0	91	1516	0
Enter Blocked Intersection	No	No	No									
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(m)		3.5			3.5			3.5			3.5	
Link Offset(m)		0.0			0.0			0.0			0.0	
Crosswalk Width(m)		3.0			3.0			3.0			3.0	
Two way Left Turn Lane												
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25		15	25		15	25		15	25		15
Sign Control		Stop			Stop			Free			Free	

Intersection Summary

Area Type: Other

Control Type: Unsignalized

Intersection Capacity Utilization 106.6%

ICU Level of Service G

Analysis Period (min) 15

Intersection

Int Delay, s/veh 258.9

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↖ ↗	↖ ↗	21	155	5	37	4	620	11	91	1516	0
Traffic Vol, veh/h	5	5	21	155	5	37	4	620	11	91	1516	0
Future Vol, veh/h	5	5	21	155	5	37	4	620	11	91	1516	0
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None									
Storage Length	0	-	-	200	-	-	0	-	-	1100	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	100	100	100	100	100	100	100	100	100	100	100	100
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	5	5	21	155	5	37	4	620	11	91	1516	0

Major/Minor	Minor2	Minor1			Major1			Major2				
Conflicting Flow All	2353	2337	1516	2345	2332	626	1516	0	0	631	0	0
Stage 1	1698	1698	-	634	634	-	-	-	-	-	-	-
Stage 2	655	639	-	1711	1698	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	25	37	147	~ 25	37	484	441	-	-	951	-	-
Stage 1	117	148	-	467	473	-	-	-	-	-	-	-
Stage 2	455	470	-	~ 115	148	-	-	-	-	-	-	-
Platoon blocked, %								-	-	-	-	-
Mov Cap-1 Maneuver	19	33	147	~ 17	33	484	441	-	-	951	-	-
Mov Cap-2 Maneuver	19	33	-	~ 17	33	-	-	-	-	-	-	-
Stage 1	116	134	-	463	469	-	-	-	-	-	-	-
Stage 2	412	466	-	~ 86	134	-	-	-	-	-	-	-

Approach	EB	WB			NB			SB		
HCM Control Delay, s	92.8	\$ 3227.5			0.1			0.5		
HCM LOS	F	F								
Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1	EBLn2	WBLn1	WBLn2	SBL	SBT	SBR
Capacity (veh/h)	441	-	-	19	88	17	184	951	-	-
HCM Lane V/C Ratio	0.009	-	-	0.263	0.295	9.118	0.228	0.096	-	-
HCM Control Delay (s)	13.2	-	-	252.1	62.409	3.8	30.3	9.2	-	-
HCM Lane LOS	B	-	-	F	F	F	D	A	-	-
HCM 95th %tile Q(veh)	0	-	-	0.8	1.1	20.1	0.8	0.3	-	-

Notes

~: Volume exceeds capacity \$: Delay exceeds 300s +: Computation Not Defined *: All major volume in platoon

Lanes, Volumes, Timings
4: March Road & Site Access #2

2027 FT-AM
910 March Road



Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations		↑	↑↑	↑		↑↑
Traffic Volume (vph)	0	8	627	106	0	1692
Future Volume (vph)	0	8	627	106	0	1692
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800
Storage Length (m)	0.0	0.0		20.0	0.0	
Storage Lanes	0	1		1	0	
Taper Length (m)	15.0				15.0	
Lane Util. Factor	1.00	1.00	0.95	1.00	1.00	0.95
Frt		0.865		0.850		
Flt Protected						
Satd. Flow (prot)	0	1510	3316	1483	0	3316
Flt Permitted						
Satd. Flow (perm)	0	1510	3316	1483	0	3316
Link Speed (k/h)	30		80			80
Link Distance (m)	96.8		142.9			66.1
Travel Time (s)	11.6		6.4			3.0
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00
Adj. Flow (vph)	0	8	627	106	0	1692
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	8	627	106	0	1692
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Right	Left	Left
Median Width(m)	0.0		3.5			3.5
Link Offset(m)	0.0		0.0			0.0
Crosswalk Width(m)	3.0		3.0			3.0
Two way Left Turn Lane						
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25	15		15	25	
Sign Control	Stop		Free		Free	
Intersection Summary						
Area Type:	Other					
Control Type:	Unsignalized					
Intersection Capacity Utilization	52.7%				ICU Level of Service A	
Analysis Period (min)	15					

Intersection

Int Delay, s/veh 0

Movement	WBL	WBR	NBT	NBR	SBL	SBT
----------	-----	-----	-----	-----	-----	-----

Lane Configurations						
Traffic Vol, veh/h	0	8	627	106	0	1692
Future Vol, veh/h	0	8	627	106	0	1692
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	Stop	-	None	-	None
Storage Length	-	0	-	200	-	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	100	100	100	100	100	100
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	0	8	627	106	0	1692

Major/Minor	Minor1	Major1	Major2
-------------	--------	--------	--------

Conflicting Flow All	-	314	0	0	-	-
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Critical Hdwy	-	6.94	-	-	-	-
Critical Hdwy Stg 1	-	-	-	-	-	-
Critical Hdwy Stg 2	-	-	-	-	-	-
Follow-up Hdwy	-	3.32	-	-	-	-
Pot Cap-1 Maneuver	0	682	-	-	0	-
Stage 1	0	-	-	-	0	-
Stage 2	0	-	-	-	0	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	-	682	-	-	-	-
Mov Cap-2 Maneuver	-	-	-	-	-	-
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-

Approach	WB	NB	SB
----------	----	----	----

HCM Control Delay, s	10.3	0	0
HCM LOS	B		

Minor Lane/Major Mvmt	NBT	NBR	WBLn1	SBT
-----------------------	-----	-----	-------	-----

Capacity (veh/h)	-	-	682	-
HCM Lane V/C Ratio	-	-	0.012	-
HCM Control Delay (s)	-	-	10.3	-
HCM Lane LOS	-	-	B	-
HCM 95th %tile Q(veh)	-	-	0	-

Lanes, Volumes, Timings

2027 FT-PM

910 March Road

1: March Road & Halton Terrace/Maxwell Bridge Road

	→	→	→	←	←	↑	↑	↓	↓	←	→	
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑		↑	↑		↑	↑↑	↑	↑	↑↑	↑
Traffic Volume (vph)	88	57	72	79	60	128	250	1539	114	114	709	103
Future Volume (vph)	88	57	72	79	60	128	250	1539	114	114	709	103
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	30.0		0.0	30.0		0.0	60.0		0.0	70.0		15.0
Storage Lanes	1		0	1		0	1		1	1		1
Taper Length (m)	60.0			60.0			70.0			100.0		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.95	1.00	1.00	0.95	1.00
Ped Bike Factor	0.99	0.98		0.98	0.98		1.00		0.96			0.98
Fr _t		0.916			0.898				0.850			0.850
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1658	1501	0	1610	1537	0	1658	3316	1483	1658	3316	1483
Flt Permitted	0.420			0.615			0.339			0.102		
Satd. Flow (perm)	726	1501	0	1026	1537	0	591	3316	1419	178	3316	1447
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		56			94				100			100
Link Speed (k/h)		40			40			80			80	
Link Distance (m)		143.7			356.2			324.9			142.9	
Travel Time (s)		12.9			32.1			14.6			6.4	
Confl. Peds. (#/hr)	11		17	17		11	2		11	11		2
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Heavy Vehicles (%)	2%	9%	5%	5%	3%	2%	2%	2%	2%	2%	2%	2%
Adj. Flow (vph)	88	57	72	79	60	128	250	1539	114	114	709	103
Shared Lane Traffic (%)												
Lane Group Flow (vph)	88	129	0	79	188	0	250	1539	114	114	709	103
Enter Blocked Intersection	No											
Lane Alignment	Left	Left	Right									
Median Width(m)		3.5			3.5			3.5			3.5	
Link Offset(m)		0.0			0.0			0.0			0.0	
Crosswalk Width(m)		3.0			3.0			3.0			3.0	
Two way Left Turn Lane												
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25		15	25		15	25		15	25		15
Number of Detectors	1	2		1	2		1	2	1	1	2	1
Detector Template	Left	Thru		Left	Thru		Left	Thru	Right	Left	Thru	Right
Leading Detector (m)	2.0	10.0		2.0	10.0		2.0	10.0	2.0	2.0	10.0	2.0
Trailing Detector (m)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Position(m)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Size(m)	2.0	0.6		2.0	0.6		2.0	0.6	2.0	2.0	0.6	2.0
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(m)		9.4			9.4			9.4			9.4	
Detector 2 Size(m)		0.6			0.6			0.6			0.6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)	0.0			0.0			0.0			0.0		0.0

Lanes, Volumes, Timings

2027 FT-PM

910 March Road

1: March Road & Halton Terrace/Maxwell Bridge Road



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	Perm	NA		Perm	NA		pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases			4			8			5	2		1
Permitted Phases	4					8			2		2	6
Detector Phase	4	4		8	8			5	2	2	1	6
Switch Phase												6
Minimum Initial (s)	10.0	10.0		10.0	10.0		5.0	10.0	10.0	5.0	10.0	10.0
Minimum Split (s)	38.6	38.6		38.6	38.6		12.4	34.6	34.6	11.4	34.6	34.6
Total Split (s)	45.0	45.0		45.0	45.0		20.0	55.0	55.0	20.0	55.0	55.0
Total Split (%)	37.5%	37.5%		37.5%	37.5%		16.7%	45.8%	45.8%	16.7%	45.8%	45.8%
Maximum Green (s)	38.4	38.4		38.4	38.4		12.6	48.4	48.4	13.6	48.4	48.4
Yellow Time (s)	3.3	3.3		3.3	3.3		4.6	4.6	4.6	4.6	4.6	4.6
All-Red Time (s)	3.3	3.3		3.3	3.3		2.8	2.0	2.0	1.8	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.6	6.6		6.6	6.6		7.4	6.6	6.6	6.4	6.6	6.6
Lead/Lag							Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?							Yes	Yes	Yes	Yes	Yes	Yes
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	None	None		None	None		None	C-Max	C-Max	None	C-Max	C-Max
Walk Time (s)	7.0	7.0		7.0	7.0			7.0	7.0		7.0	7.0
Flash Dont Walk (s)	25.0	25.0		25.0	25.0			21.0	21.0		21.0	21.0
Pedestrian Calls (#/hr)	0	0		0	0			0	0		0	0
Act Effct Green (s)	16.1	16.1		16.1	16.1		85.0	74.6	74.6	81.9	72.1	72.1
Actuated g/C Ratio	0.13	0.13		0.13	0.13		0.71	0.62	0.62	0.68	0.60	0.60
v/c Ratio	0.91	0.52		0.58	0.65		0.48	0.75	0.12	0.47	0.36	0.11
Control Delay	119.2	33.7		63.8	34.5		8.6	20.7	3.6	15.1	14.0	3.3
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	119.2	33.7		63.8	34.5		8.6	20.7	3.6	15.1	14.0	3.3
LOS	F	C		E	C		A	C	A	B	B	A
Approach Delay		68.4			43.1			18.1				13.0
Approach LOS		E			D			B				B
Queue Length 50th (m)	20.8	15.9		17.8	20.9		14.8	123.3	1.2	5.9	41.1	0.3
Queue Length 95th (m)	#41.5	32.9		31.7	42.3		29.9	201.2	10.4	19.3	69.2	9.0
Internal Link Dist (m)		119.7			332.2			300.9				118.9
Turn Bay Length (m)	30.0			30.0			60.0			70.0		15.0
Base Capacity (vph)	232	518		328	555		546	2060	919	297	1991	909
Starvation Cap Reductn	0	0		0	0		0	0	0	0	0	0
Spillback Cap Reductn	0	0		0	0		0	0	0	0	0	0
Storage Cap Reductn	0	0		0	0		0	0	0	0	0	0
Reduced v/c Ratio	0.38	0.25		0.24	0.34		0.46	0.75	0.12	0.38	0.36	0.11

Intersection Summary

Area Type: Other

Cycle Length: 120

Actuated Cycle Length: 120

Offset: 50 (42%), Referenced to phase 2:NBT and 6:SBTL, Start of Green

Natural Cycle: 100

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.91

Intersection Signal Delay: 22.0

Intersection LOS: C

Lanes, Volumes, Timings

2027 FT-PM

910 March Road

1: March Road & Halton Terrace/Maxwell Bridge Road

Intersection Capacity Utilization 98.5%


ICU Level of Service F

Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 1: March Road & Halton Terrace/Maxwell Bridge Road

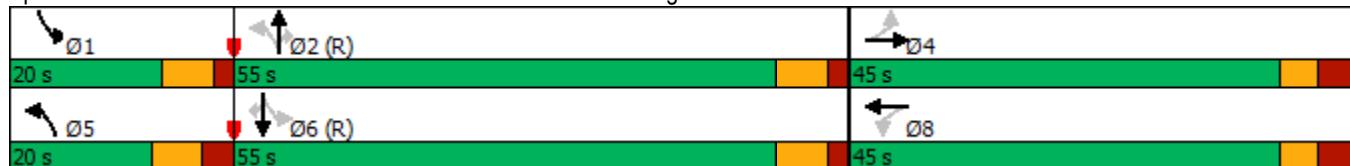

Lanes, Volumes, Timings
2: March Road & Klondike Road

2027 FT-PM
910 March Road

	↑	→	↓	↗	↖	↙	↖	↗	↑	↗	↓	↖
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑	↑	↑	↑	↑	↑↑	↑↑↑	↑	↑	↑↑↑	↑
Traffic Volume (vph)	125	27	110	87	34	41	159	1810	117	14	861	111
Future Volume (vph)	125	27	110	87	34	41	159	1810	117	14	861	111
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	100.0			5.0	15.0		0.0	100.0		0.0	45.0	
Storage Lanes	1			1	1		0	2		0	1	
Taper Length (m)	0.0				30.0			100.0			85.0	
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	0.97	0.91	0.91	1.00	0.91	0.91
Ped Bike Factor	1.00			0.99	1.00	0.99		0.99	1.00		1.00	1.00
Fr _t				0.850		0.918			0.991			0.983
Flt Protected	0.950				0.950			0.950			0.950	
Satd. Flow (prot)	1658	1745	1483	1658	1563	0	3216	4708	0	1658	4670	0
Flt Permitted	0.483				0.740			0.950			0.950	
Satd. Flow (perm)	842	1745	1462	1289	1563	0	3200	4708	0	1655	4670	0
Right Turn on Red			Yes				Yes			Yes		Yes
Satd. Flow (RTOR)			110			41			8			19
Link Speed (k/h)			50			50			80			80
Link Distance (m)			117.7			346.6			261.8			142.1
Travel Time (s)			8.5			25.0			11.8			6.4
Confl. Peds. (#/hr)	1		2	2			1	8		11	11	8
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Heavy Vehicles (%)	2%	2%	2%	2%	6%	2%	2%	2%	2%	2%	2%	2%
Adj. Flow (vph)	125	27	110	87	34	41	159	1810	117	14	861	111
Shared Lane Traffic (%)												
Lane Group Flow (vph)	125	27	110	87	75	0	159	1927	0	14	972	0
Enter Blocked Intersection	No											
Lane Alignment	Left	Left	Right									
Median Width(m)	3.5				3.5			7.0			7.0	
Link Offset(m)	0.0				0.0			0.0			0.0	
Crosswalk Width(m)	3.0				3.0			3.0			3.0	
Two way Left Turn Lane												
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25		15	25		15	25		15	25		15
Number of Detectors	1	2	1	1	2		1	2		1	2	
Detector Template	Left	Thru	Right	Left	Thru		Left	Thru		Left	Thru	
Leading Detector (m)	2.0	10.0	2.0	2.0	10.0		2.0	10.0		2.0	10.0	
Trailing Detector (m)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Position(m)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Size(m)	2.0	0.6	2.0	2.0	0.6		2.0	0.6		2.0	0.6	
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(m)			9.4			9.4			9.4			9.4
Detector 2 Size(m)			0.6			0.6			0.6			0.6
Detector 2 Type			Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex
Detector 2 Channel												
Detector 2 Extend (s)	0.0			0.0			0.0			0.0		

Lanes, Volumes, Timings
2: March Road & Klondike Road

2027 FT-PM
910 March Road

	→	→	→	←	←	↑	↑	↓	↓	←	→	
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	pm+pt	NA	Perm	Perm	NA		Prot	NA		Prot	NA	
Protected Phases	7	4			8		5	2		1	6	
Permitted Phases	4		4	8								
Detector Phase	7	4	4	8	8		5	2		1	6	
Switch Phase												
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0		5.0	5.0		5.0	5.0	
Minimum Split (s)	11.6	44.1	44.1	44.1	44.1		11.6	32.4		11.6	32.4	
Total Split (s)	12.0	57.0	57.0	45.0	45.0		22.0	51.0		22.0	51.0	
Total Split (%)	9.2%	43.8%	43.8%	34.6%	34.6%		16.9%	39.2%		16.9%	39.2%	
Maximum Green (s)	5.4	49.9	49.9	37.9	37.9		15.4	44.6		15.4	44.6	
Yellow Time (s)	3.3	3.3	3.3	3.3	3.3		4.6	4.6		4.6	4.6	
All-Red Time (s)	3.3	3.8	3.8	3.8	3.8		2.0	1.8		2.0	1.8	
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Total Lost Time (s)	6.6	7.1	7.1	7.1	7.1		6.6	6.4		6.6	6.4	
Lead/Lag	Lead			Lag	Lag		Lead	Lag		Lead	Lag	
Lead-Lag Optimize?	Yes			Yes	Yes		Yes	Yes		Yes	Yes	
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None	None	None	None		None	C-Max		None	C-Max	
Walk Time (s)		7.0	7.0	7.0	7.0			7.0			7.0	
Flash Dont Walk (s)		30.0	30.0	30.0	30.0			19.0			19.0	
Pedestrian Calls (#/hr)	0	0	0	0	0			0			0	
Act Effct Green (s)	26.7	26.2	26.2	14.2	14.2		11.7	84.6		6.7	72.0	
Actuated g/C Ratio	0.21	0.20	0.20	0.11	0.11		0.09	0.65		0.05	0.55	
v/c Ratio	0.61	0.08	0.29	0.62	0.36		0.55	0.63		0.16	0.37	
Control Delay	57.2	40.3	9.0	73.2	31.1		63.4	16.5		62.7	17.4	
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Total Delay	57.2	40.3	9.0	73.2	31.1		63.4	16.5		62.7	17.4	
LOS	E	D	A	E	C		E	B		E	B	
Approach Delay		35.2			53.7			20.1			18.0	
Approach LOS		D			D			C			B	
Queue Length 50th (m)	27.8	5.7	0.0	21.6	8.1		20.4	84.6		3.5	48.3	
Queue Length 95th (m)	43.7	13.1	14.4	37.4	21.9		30.8	157.3		10.3	68.8	
Internal Link Dist (m)		93.7			322.6			237.8			118.1	
Turn Bay Length (m)	100.0		5.0	15.0			100.0			45.0		
Base Capacity (vph)	206	669	628	375	484		380	3065		196	2594	
Starvation Cap Reductn	0	0	0	0	0		0	0		0	0	
Spillback Cap Reductn	0	0	0	0	0		0	0		0	0	
Storage Cap Reductn	0	0	0	0	0		0	0		0	0	
Reduced v/c Ratio	0.61	0.04	0.18	0.23	0.15		0.42	0.63		0.07	0.37	
Intersection Summary												
Area Type:	Other											
Cycle Length:	130											
Actuated Cycle Length:	130											
Offset: 20 (15%), Referenced to phase 2:NBT and 6:SBT, Start of Green												
Natural Cycle:	120											
Control Type: Actuated-Coordinated												
Maximum v/c Ratio: 0.63												
Intersection Signal Delay: 22.2	Intersection LOS: C											

Intersection Capacity Utilization 75.7%
Analysis Period (min) 15

ICU Level of Service D

Splits and Phases: 2: March Road & Klondike Road



HCM 2010 Signalized Intersection Summary
2: March Road & Klondike Road

2027 FT-PM
910 March Road

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↖ ↗ ↘ ↙ ↖ ↗ ↘ ↙ ↖ ↗ ↘ ↙ ↖											
Traffic Volume (veh/h)	125	27	110	87	34	41	159	1810	117	14	861	111
Future Volume (veh/h)	125	27	110	87	34	41	159	1810	117	14	861	111
Number	7	4	14	3	8	18	5	2	12	1	6	16
Initial Q (Q _b), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00			1.00	0.99		0.99	1.00		0.99	1.00	0.99
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1765	1765	1765	1765	1734	1800	1765	1765	1800	1765	1765	1800
Adj Flow Rate, veh/h	125	27	0	87	34	41	159	1810	117	14	861	111
Adj No. of Lanes	1	1	1	1	1	0	2	3	0	1	3	0
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Percent Heavy Veh, %	2	2	2	2	6	6	2	2	2	2	2	2
Cap, veh/h	194	335	285	189	70	84	214	2960	191	26	2549	327
Arrive On Green	0.04	0.19	0.00	0.10	0.10	0.10	0.07	0.64	0.64	0.02	0.59	0.59
Sat Flow, veh/h	1681	1765	1500	1370	714	861	3261	4623	298	1681	4321	554
Grp Volume(v), veh/h	125	27	0	87	0	75	159	1256	671	14	639	333
Grp Sat Flow(s),veh/h/ln	1681	1765	1500	1370	0	1576	1630	1606	1709	1681	1606	1663
Q Serve(g_s), s	5.4	1.6	0.0	8.0	0.0	5.9	6.2	30.0	30.2	1.1	13.2	13.3
Cycle Q Clear(g_c), s	5.4	1.6	0.0	8.0	0.0	5.9	6.2	30.0	30.2	1.1	13.2	13.3
Prop In Lane	1.00			1.00		0.55	1.00		0.17	1.00		0.33
Lane Grp Cap(c), veh/h	194	335	285	189	0	154	214	2057	1094	26	1895	981
V/C Ratio(X)	0.64	0.08	0.00	0.46	0.00	0.49	0.74	0.61	0.61	0.55	0.34	0.34
Avail Cap(c_a), veh/h	194	677	576	455	0	459	386	2057	1094	199	1895	981
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	1.00	0.00	1.00	0.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	53.5	43.3	0.0	56.5	0.0	55.6	59.6	13.8	13.8	63.6	13.6	13.7
Incr Delay (d2), s/veh	7.1	0.1	0.0	1.7	0.0	2.4	5.0	1.4	2.6	16.8	0.5	0.9
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%),veh/ln	4.3	0.8	0.0	3.1	0.0	2.7	3.0	13.7	14.9	0.6	6.0	6.4
LnGrp Delay(d),s/veh	60.6	43.4	0.0	58.3	0.0	58.0	64.6	15.2	16.4	80.4	14.1	14.6
LnGrp LOS	E	D		E		E	E	B	B	F	B	B
Approach Vol, veh/h		152				162			2086			986
Approach Delay, s/veh		57.6				58.1			19.3			15.2
Approach LOS		E				E			B			B
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	1	2		4	5	6	7	8				
Phs Duration (G+Y+Rc), s	8.6	89.6		31.8	15.1	83.1	12.0	19.8				
Change Period (Y+Rc), s	6.6	* 6.4		7.1	6.6	* 6.4	6.6	7.1				
Max Green Setting (Gmax), s	15.4	* 45		49.9	15.4	* 45	5.4	37.9				
Max Q Clear Time (g_c+l1), s	3.1	32.2		3.6	8.2	15.3	7.4	10.0				
Green Ext Time (p_c), s	0.0	10.0		0.1	0.3	8.5	0.0	0.9				
Intersection Summary												
HCM 2010 Ctrl Delay				21.7								
HCM 2010 LOS				C								
Notes												

Lanes, Volumes, Timings

2027 FT-PM

910 March Road

3: March Road & South Local Road/Site Access #1



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↓		↑	↓		↑	↓		↑	↓	
Traffic Volume (vph)	5	6	37	122	6	60	23	1586	12	44	767	8
Future Volume (vph)	5	6	37	122	6	60	23	1586	12	44	767	8
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	0.0		0.0	20.0		0.0	0.0		0.0	110.0		0.0
Storage Lanes	1		0	1		0	1		0	1		0
Taper Length (m)	15.0			15.0			15.0			95.0		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.871			0.864			0.999			0.998	
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1658	1520	0	1658	1508	0	1658	1743	0	1658	1742	0
Flt Permitted	0.950			0.950			0.950			0.950		
Satd. Flow (perm)	1658	1520	0	1658	1508	0	1658	1743	0	1658	1742	0
Link Speed (k/h)		50			30			80			80	
Link Distance (m)		91.5			103.7			66.1			81.0	
Travel Time (s)		6.6			12.4			3.0			3.6	
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj. Flow (vph)	5	6	37	122	6	60	23	1586	12	44	767	8
Shared Lane Traffic (%)												
Lane Group Flow (vph)	5	43	0	122	66	0	23	1598	0	44	775	0
Enter Blocked Intersection	No											
Lane Alignment	Left	Left	Right									
Median Width(m)		3.5			3.5			3.5			3.5	
Link Offset(m)		0.0			0.0			0.0			0.0	
Crosswalk Width(m)		3.0			3.0			3.0			3.0	
Two way Left Turn Lane												
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25		15	25		15	25		15	25		15
Sign Control		Stop			Stop			Free			Free	

Intersection Summary

Area Type: Other

Control Type: Unsignalized

Intersection Capacity Utilization 109.3%

ICU Level of Service H

Analysis Period (min) 15

Intersection

Int Delay, s/veh 203

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↖	↘		↖	↘		↖	↘		↖	↘	
Traffic Vol, veh/h	5	6	37	122	6	60	23	1586	12	44	767	8
Future Vol, veh/h	5	6	37	122	6	60	23	1586	12	44	767	8
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None									
Storage Length	0	-	-	200	-	-	0	-	-	1100	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	100	100	100	100	100	100	100	100	100	100	100	100
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	5	6	37	122	6	60	23	1586	12	44	767	8

Major/Minor	Minor2	Minor1			Major1			Major2			
Conflicting Flow All	2530	2503	771	2519	2501	1592	775	0	0	1598	0
Stage 1	859	859	-	1638	1638	-	-	-	-	-	-
Stage 2	1671	1644	-	881	863	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-
Pot Cap-1 Maneuver	19	29	400	~ 19	29	132	841	-	-	410	-
Stage 1	351	373	-	127	158	-	-	-	-	-	-
Stage 2	121	157	-	341	372	-	-	-	-	-	-
Platoon blocked, %							-	-	-	-	-
Mov Cap-1 Maneuver	8	25	400	~ 13	25	132	841	-	-	410	-
Mov Cap-2 Maneuver	8	25	-	~ 13	25	-	-	-	-	-	-
Stage 1	342	333	-	124	154	-	-	-	-	-	-
Stage 2	62	153	-	271	332	-	-	-	-	-	-

Approach	EB	WB			NB			SB		
HCM Control Delay, s	118.2	\$ 2854.5			0.1			0.8		
HCM LOS	F	F								
Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1	EBLn2	WBLn1	WBLn2	SBL	SBT	SBR
Capacity (veh/h)	841	-	-	8	129	13	95	410	-	-
HCM Lane V/C Ratio	0.027	-	-	0.625	0.333	9.385	0.695	0.107	-	-
HCM Control Delay (s)	9.4	-	-	\$ 736.3	46.3	\$ 4343	102.9	14.8	-	-
HCM Lane LOS	A	-	-	F	E	F	F	B	-	-
HCM 95th %tile Q(veh)	0.1	-	-	1.2	1.3	16.4	3.5	0.4	-	-

Notes

~: Volume exceeds capacity \$: Delay exceeds 300s +: Computation Not Defined *: All major volume in platoon

Lanes, Volumes, Timings
4: March Road & Site Access #2

2027 FT-PM
910 March Road



Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations		↑	↑↑	↑		↑↑
Traffic Volume (vph)	0	11	1610	139	0	926
Future Volume (vph)	0	11	1610	139	0	926
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800
Storage Length (m)	0.0	0.0		20.0	0.0	
Storage Lanes	0	1		1	0	
Taper Length (m)	15.0				15.0	
Lane Util. Factor	1.00	1.00	0.95	1.00	1.00	0.95
Frt		0.865		0.850		
Flt Protected						
Satd. Flow (prot)	0	1510	3316	1483	0	3316
Flt Permitted						
Satd. Flow (perm)	0	1510	3316	1483	0	3316
Link Speed (k/h)	30		80			80
Link Distance (m)	106.8		142.9			66.1
Travel Time (s)	12.8		6.4			3.0
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00
Adj. Flow (vph)	0	11	1610	139	0	926
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	11	1610	139	0	926
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Right	Left	Left
Median Width(m)	0.0		3.5			3.5
Link Offset(m)	0.0		0.0			0.0
Crosswalk Width(m)	3.0		3.0			3.0
Two way Left Turn Lane						
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25	15		15	25	
Sign Control	Stop		Free			Free
Intersection Summary						
Area Type:	Other					
Control Type:	Unsignalized					
Intersection Capacity Utilization	57.0%				ICU Level of Service B	
Analysis Period (min)	15					

Intersection						
Int Delay, s/veh	0.1					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations			↗	↑↑	↗	↑↑
Traffic Vol, veh/h	0	11	1610	139	0	926
Future Vol, veh/h	0	11	1610	139	0	926
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	Stop	-	None	-	None
Storage Length	-	0	-	200	-	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	100	100	100	100	100	100
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	0	11	1610	139	0	926
Major/Minor	Minor1	Major1		Major2		
Conflicting Flow All	-	805	0	0	-	-
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Critical Hdwy	-	6.94	-	-	-	-
Critical Hdwy Stg 1	-	-	-	-	-	-
Critical Hdwy Stg 2	-	-	-	-	-	-
Follow-up Hdwy	-	3.32	-	-	-	-
Pot Cap-1 Maneuver	0	325	-	-	0	-
Stage 1	0	-	-	-	0	-
Stage 2	0	-	-	-	0	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	-	325	-	-	-	-
Mov Cap-2 Maneuver	-	-	-	-	-	-
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Approach	WB	NB	SB			
HCM Control Delay, s	16.5	0	0			
HCM LOS	C					
Minor Lane/Major Mvmt	NBT	NBR	WBLn1	SBT		
Capacity (veh/h)	-	-	325	-		
HCM Lane V/C Ratio	-	-	0.034	-		
HCM Control Delay (s)	-	-	16.5	-		
HCM Lane LOS	-	-	C	-		
HCM 95th %tile Q(veh)	-	-	0.1	-		

Lanes, Volumes, Timings

2027 FT Sat

910 March Road

1: March Road & Halton Terrace/Maxwell Bridge Road

	→	→	→	←	←	↑	↑	↓	↓	←	→	
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑		↑	↑		↑	↑↑	↑	↑	↑↑	↑
Traffic Volume (vph)	92	57	72	79	60	132	250	1603	114	117	756	106
Future Volume (vph)	92	57	72	79	60	132	250	1603	114	117	756	106
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	30.0		0.0	30.0		0.0	60.0		0.0	70.0		15.0
Storage Lanes	1		0	1		0	1		1	1		1
Taper Length (m)	60.0			60.0			70.0			100.0		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.95	1.00	1.00	0.95	1.00
Ped Bike Factor	0.99	0.99		0.99	0.99		1.00		0.96			0.98
Fr _t		0.916			0.897				0.850			0.850
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1658	1504	0	1610	1537	0	1658	3316	1483	1658	3316	1483
Flt Permitted	0.530			0.674			0.355			0.109		
Satd. Flow (perm)	918	1504	0	1128	1537	0	619	3316	1427	190	3316	1449
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		72			15				114			63
Link Speed (k/h)		40			40			80			80	
Link Distance (m)		143.7			356.2			324.9			142.9	
Travel Time (s)		12.9			32.1			14.6			6.4	
Confl. Peds. (#/hr)	11		17	17		11	2		11	11		2
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Heavy Vehicles (%)	2%	9%	5%	5%	3%	2%	2%	2%	2%	2%	2%	2%
Adj. Flow (vph)	92	57	72	79	60	132	250	1603	114	117	756	106
Shared Lane Traffic (%)												
Lane Group Flow (vph)	92	129	0	79	192	0	250	1603	114	117	756	106
Enter Blocked Intersection	No											
Lane Alignment	Left	Left	Right									
Median Width(m)		3.5			3.5			3.5			3.5	
Link Offset(m)		0.0			0.0			0.0			0.0	
Crosswalk Width(m)		3.0			3.0			3.0			3.0	
Two way Left Turn Lane												
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25		15	25		15	25		15	25		15
Number of Detectors	1	2		1	2		1	2	1	1	2	1
Detector Template	Left	Thru		Left	Thru		Left	Thru	Right	Left	Thru	Right
Leading Detector (m)	2.0	10.0		2.0	10.0		2.0	10.0	2.0	2.0	10.0	2.0
Trailing Detector (m)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Position(m)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Size(m)	2.0	0.6		2.0	0.6		2.0	0.6	2.0	2.0	0.6	2.0
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(m)		9.4			9.4			9.4			9.4	
Detector 2 Size(m)		0.6			0.6			0.6			0.6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)	0.0			0.0			0.0			0.0		

Lanes, Volumes, Timings

1: March Road & Halton Terrace/Maxwell Bridge Road

2027 FT Sat

910 March Road



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	Perm	NA		Perm	NA		Perm	NA	Perm	Perm	NA	Perm
Protected Phases			4			8			2			6
Permitted Phases	4				8			2		2	6	6
Detector Phase	4	4		8	8		2	2	2	6	6	6
Switch Phase												
Minimum Initial (s)	10.0	10.0		10.0	10.0		10.0	10.0	10.0	10.0	10.0	10.0
Minimum Split (s)	38.6	38.6		38.6	38.6		34.6	34.6	34.6	34.6	34.6	34.6
Total Split (s)	39.0	39.0		39.0	39.0		56.0	56.0	56.0	56.0	56.0	56.0
Total Split (%)	41.1%	41.1%		41.1%	41.1%		58.9%	58.9%	58.9%	58.9%	58.9%	58.9%
Maximum Green (s)	32.4	32.4		32.4	32.4		49.4	49.4	49.4	49.4	49.4	49.4
Yellow Time (s)	3.3	3.3		3.3	3.3		4.6	4.6	4.6	4.6	4.6	4.6
All-Red Time (s)	3.3	3.3		3.3	3.3		2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.6	6.6		6.6	6.6		6.6	6.6	6.6	6.6	6.6	6.6
Lead/Lag												
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	None	None		None	None		C-Max	C-Max	C-Max	C-Max	C-Max	C-Max
Walk Time (s)	7.0	7.0		7.0	7.0		7.0	7.0	7.0	7.0	7.0	7.0
Flash Dont Walk (s)	25.0	25.0		25.0	25.0		21.0	21.0	21.0	21.0	21.0	21.0
Pedestrian Calls (#/hr)	0	0		0	0		0	0	0	0	0	0
Act Effct Green (s)	16.5	16.5		16.5	16.5		65.3	65.3	65.3	65.3	65.3	65.3
Actuated g/C Ratio	0.17	0.17		0.17	0.17		0.69	0.69	0.69	0.69	0.69	0.69
v/c Ratio	0.58	0.40		0.40	0.69		0.59	0.70	0.11	0.90	0.33	0.10
Control Delay	49.3	19.4		39.5	45.9		16.6	12.1	1.7	77.5	7.1	3.3
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	49.3	19.4		39.5	45.9		16.6	12.1	1.7	77.5	7.1	3.3
LOS	D	B		D	D		B	B	A	E	A	A
Approach Delay		31.8			44.0			12.1				15.1
Approach LOS		C			D			B				B
Queue Length 50th (m)	15.7	9.1		13.0	30.8		20.9	81.4	0.0	15.2	25.7	2.2
Queue Length 95th (m)	28.9	23.0		24.4	48.7		58.9	134.8	5.9	#34.8	43.8	8.9
Internal Link Dist (m)		119.7			332.2			300.9				118.9
Turn Bay Length (m)	30.0			30.0			60.0			70.0		15.0
Base Capacity (vph)	313	560		384	534		425	2278	1016	130	2278	1015
Starvation Cap Reductn	0	0		0	0		0	0	0	0	0	0
Spillback Cap Reductn	0	0		0	0		0	0	0	0	0	0
Storage Cap Reductn	0	0		0	0		0	0	0	0	0	0
Reduced v/c Ratio	0.29	0.23		0.21	0.36		0.59	0.70	0.11	0.90	0.33	0.10

Intersection Summary

Area Type: Other

Cycle Length: 95

Actuated Cycle Length: 95

Offset: 11 (12%), Referenced to phase 2:NBTL and 6:SBTL, Start of Green

Natural Cycle: 130

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.90

Intersection Signal Delay: 16.7

Intersection LOS: B

Lanes, Volumes, Timings

1: March Road & Halton Terrace/Maxwell Bridge Road

2027 FT Sat

910 March Road

Intersection Capacity Utilization 102.4%


ICU Level of Service G

Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 1: March Road & Halton Terrace/Maxwell Bridge Road

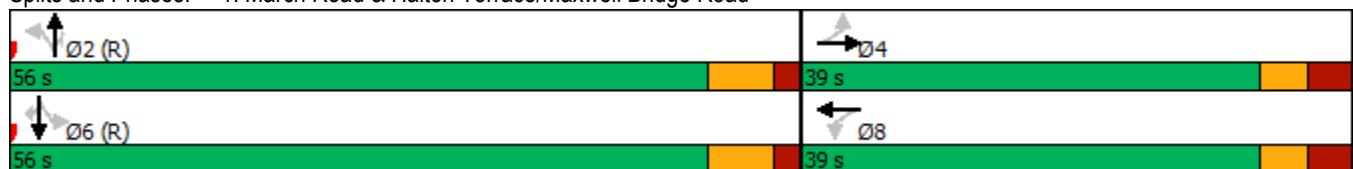

Lanes, Volumes, Timings
2: March Road & Klondike Road

2027 FT Sat
910 March Road

	↑	→	↓	↗	↖	↙	↖	↗	↑	↗	↓	↖
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑	↑	↑	↑	↑	↑↑	↑↑↑	↑	↑	↑↑↑	↑
Traffic Volume (vph)	129	27	110	87	34	45	159	1865	117	17	901	114
Future Volume (vph)	129	27	110	87	34	45	159	1865	117	17	901	114
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	100.0			5.0	15.0		0.0	100.0		0.0	45.0	
Storage Lanes	1			1	1		0	2		0	1	
Taper Length (m)	0.0				30.0			100.0			85.0	
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	0.97	0.91	0.91	1.00	0.91	0.91
Ped Bike Factor	1.00			0.99	1.00	0.99		1.00	1.00		1.00	1.00
Fr _t				0.850		0.915			0.991			0.983
Flt Protected	0.950				0.950			0.950			0.950	
Satd. Flow (prot)	1658	1745	1483	1658	1559	0	3216	4709	0	1658	4672	0
Flt Permitted	0.706				0.740			0.950			0.950	
Satd. Flow (perm)	1231	1745	1463	1289	1559	0	3203	4709	0	1655	4672	0
Right Turn on Red			Yes				Yes			Yes		Yes
Satd. Flow (RTOR)			110			45			10			24
Link Speed (k/h)			50			50			80			80
Link Distance (m)			117.7			346.6			261.8			142.1
Travel Time (s)			8.5			25.0			11.8			6.4
Confl. Peds. (#/hr)	1		2	2			1	8		11	11	8
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Heavy Vehicles (%)	2%	2%	2%	2%	6%	2%	2%	2%	2%	2%	2%	2%
Adj. Flow (vph)	129	27	110	87	34	45	159	1865	117	17	901	114
Shared Lane Traffic (%)												
Lane Group Flow (vph)	129	27	110	87	79	0	159	1982	0	17	1015	0
Enter Blocked Intersection	No											
Lane Alignment	Left	Left	Right									
Median Width(m)	3.5				3.5			7.0			7.0	
Link Offset(m)	0.0				0.0			0.0			0.0	
Crosswalk Width(m)	3.0				3.0			3.0			3.0	
Two way Left Turn Lane												
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25		15	25		15	25		15	25		15
Number of Detectors	1	2	1	1	2		1	2		1	2	
Detector Template	Left	Thru	Right	Left	Thru		Left	Thru		Left	Thru	
Leading Detector (m)	2.0	10.0	2.0	2.0	10.0		2.0	10.0		2.0	10.0	
Trailing Detector (m)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Position(m)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Size(m)	2.0	0.6	2.0	2.0	0.6		2.0	0.6		2.0	0.6	
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(m)			9.4			9.4			9.4			9.4
Detector 2 Size(m)			0.6			0.6			0.6			0.6
Detector 2 Type			Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex
Detector 2 Channel												
Detector 2 Extend (s)	0.0			0.0			0.0			0.0		

Lanes, Volumes, Timings
2: March Road & Klondike Road

2027 FT Sat
910 March Road



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	Perm	NA	Perm	Perm	NA		Prot	NA		Prot	NA	
Protected Phases		4			8		5	2		1	6	
Permitted Phases	4		4	8								
Detector Phase	4	4	4	8	8		5	2		1	6	
Switch Phase												
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0		5.0	5.0		5.0	5.0	
Minimum Split (s)	44.1	44.1	44.1	44.1	44.1		11.6	32.4		11.6	32.4	
Total Split (s)	45.0	45.0	45.0	45.0	45.0		16.0	49.0		16.0	49.0	
Total Split (%)	40.9%	40.9%	40.9%	40.9%	40.9%		14.5%	44.5%		14.5%	44.5%	
Maximum Green (s)	37.9	37.9	37.9	37.9	37.9		9.4	42.6		9.4	42.6	
Yellow Time (s)	3.3	3.3	3.3	3.3	3.3		4.6	4.6		4.6	4.6	
All-Red Time (s)	3.8	3.8	3.8	3.8	3.8		2.0	1.8		2.0	1.8	
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Total Lost Time (s)	7.1	7.1	7.1	7.1	7.1		6.6	6.4		6.6	6.4	
Lead/Lag							Lead	Lag		Lead	Lag	
Lead-Lag Optimize?							Yes	Yes		Yes	Yes	
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None	None	None	None		None	C-Max		None	C-Max	
Walk Time (s)	7.0	7.0	7.0	7.0	7.0			7.0			7.0	
Flash Dont Walk (s)	30.0	30.0	30.0	30.0	30.0			19.0			19.0	
Pedestrian Calls (#/hr)	0	0	0	0	0			0			0	
Act Effct Green (s)	17.0	17.0	17.0	17.0	17.0		10.7	73.7		6.7	62.2	
Actuated g/C Ratio	0.15	0.15	0.15	0.15	0.15		0.10	0.67		0.06	0.57	
v/c Ratio	0.68	0.10	0.34	0.44	0.28		0.51	0.63		0.17	0.38	
Control Delay	60.7	37.7	10.0	47.4	21.6		52.5	13.8		52.2	14.5	
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	
Total Delay	60.7	37.7	10.0	47.4	21.6		52.5	13.8		52.2	14.5	
LOS	E	D	A	D	C		D	B		D	B	
Approach Delay		37.4			35.1			16.7			15.2	
Approach LOS		D			D			B			B	
Queue Length 50th (m)	26.5	5.0	0.0	17.1	6.4		17.0	64.5		3.5	40.8	
Queue Length 95th (m)	43.0	11.9	13.8	30.3	18.3		26.5	144.7		10.4	62.8	
Internal Link Dist (m)		93.7			322.6			237.8			118.1	
Turn Bay Length (m)	100.0		5.0	15.0			100.0				45.0	
Base Capacity (vph)	424	601	576	444	566		323	3158		141	2650	
Starvation Cap Reductn	0	0	0	0	0		0	0		0	0	
Spillback Cap Reductn	0	0	0	0	0		0	0		0	0	
Storage Cap Reductn	0	0	0	0	0		0	0		0	0	
Reduced v/c Ratio	0.30	0.04	0.19	0.20	0.14		0.49	0.63		0.12	0.38	

Intersection Summary

Area Type: Other

Cycle Length: 110

Actuated Cycle Length: 110

Offset: 16 (15%), Referenced to phase 2:NBT and 6:SBT, Start of Green

Natural Cycle: 100

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.68

Intersection Signal Delay: 18.6

Intersection LOS: B

Intersection Capacity Utilization 77.0%
Analysis Period (min) 15

ICU Level of Service D

Splits and Phases: 2: March Road & Klondike Road



HCM 2010 Signalized Intersection Summary
2: March Road & Klondike Road

2027 FT Sat
910 March Road

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↖ ↗ ↘ ↙ ↖ ↗ ↘ ↙ ↖ ↗ ↘ ↙ ↖											
Traffic Volume (veh/h)	129	27	110	87	34	45	159	1865	117	17	901	114
Future Volume (veh/h)	129	27	110	87	34	45	159	1865	117	17	901	114
Number	7	4	14	3	8	18	5	2	12	1	6	16
Initial Q (Q _b), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		0.99	1.00		0.99
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1765	1765	1765	1765	1735	1800	1765	1765	1800	1765	1765	1800
Adj Flow Rate, veh/h	129	27	0	87	34	45	159	1865	117	17	901	114
Adj No. of Lanes	1	1	1	1	1	0	2	3	0	1	3	0
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Percent Heavy Veh, %	2	2	2	2	6	6	2	2	2	2	2	2
Cap, veh/h	235	306	260	286	117	155	217	2898	181	31	2500	315
Arrive On Green	0.17	0.17	0.00	0.17	0.17	0.17	0.07	0.63	0.63	0.02	0.58	0.58
Sat Flow, veh/h	1311	1765	1500	1373	677	896	3261	4632	290	1681	4331	546
Grp Volume(v), veh/h	129	27	0	87	0	79	159	1291	691	17	667	348
Grp Sat Flow(s),veh/h/ln	1311	1765	1500	1373	0	1574	1630	1606	1711	1681	1606	1665
Q Serve(g_s), s	10.5	1.4	0.0	6.2	0.0	4.8	5.3	27.7	27.9	1.1	12.2	12.3
Cycle Q Clear(g_c), s	15.3	1.4	0.0	7.7	0.0	4.8	5.3	27.7	27.9	1.1	12.2	12.3
Prop In Lane	1.00		1.00	1.00		0.57	1.00		0.17	1.00		0.33
Lane Grp Cap(c), veh/h	235	306	260	286	0	273	217	2009	1070	31	1854	961
V/C Ratio(X)	0.55	0.09	0.00	0.30	0.00	0.29	0.73	0.64	0.65	0.55	0.36	0.36
Avail Cap(c_a), veh/h	460	608	517	521	0	542	279	2009	1070	144	1854	961
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	1.00	0.00	1.00	0.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	46.2	38.2	0.0	41.4	0.0	39.6	50.4	12.9	12.9	53.5	12.4	12.4
Incr Delay (d2), s/veh	2.0	0.1	0.0	0.6	0.0	0.6	7.0	1.6	3.0	14.3	0.5	1.1
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%),veh/ln	3.9	0.7	0.0	2.4	0.0	2.1	2.6	12.6	13.9	0.6	5.5	5.9
LnGrp Delay(d),s/veh	48.2	38.3	0.0	42.0	0.0	40.2	57.4	14.5	15.9	67.8	12.9	13.5
LnGrp LOS	D	D		D		D	E	B	B	E	B	B
Approach Vol, veh/h		156			166			2141			1032	
Approach Delay, s/veh		46.5			41.1			18.1			14.0	
Approach LOS		D			D			B			B	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	1	2		4	5	6		8				
Phs Duration (G+Y+Rc), s	8.6	75.2		26.2	13.9	69.9		26.2				
Change Period (Y+Rc), s	6.6	* 6.4		7.1	6.6	* 6.4		7.1				
Max Green Setting (Gmax), s	9.4	* 43		37.9	9.4	* 43		37.9				
Max Q Clear Time (g_c+l1), s	3.1	29.9		17.3	7.3	14.3		9.7				
Green Ext Time (p_c), s	0.0	10.4		0.7	0.1	8.9		0.9				
Intersection Summary												
HCM 2010 Ctrl Delay			19.3									
HCM 2010 LOS			B									
Notes												

Lanes, Volumes, Timings

3: March Road & South Local Road/Site Access #1

2027 FT Sat

910 March Road

	↙	→	↘	↖	←	↗	↖	↑	↗	↘	↓	↖
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑		↑	↑		↑	↑		↑	↑	
Traffic Volume (vph)	5	10	37	193	9	97	23	1560	21	74	750	8
Future Volume (vph)	5	10	37	193	9	97	23	1560	21	74	750	8
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	0.0		0.0	0.0		0.0	0.0		0.0	110.0		0.0
Storage Lanes	1		0	1		0	1		0	1		0
Taper Length (m)	15.0			15.0			15.0			95.0		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.882			0.863			0.998			0.998	
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1658	1539	0	1658	1506	0	1658	1742	0	1658	1742	0
Flt Permitted	0.950			0.950			0.950			0.950		
Satd. Flow (perm)	1658	1539	0	1658	1506	0	1658	1742	0	1658	1742	0
Link Speed (k/h)		50			30			80			80	
Link Distance (m)		75.3			120.5			66.1			61.1	
Travel Time (s)		5.4			14.5			3.0			2.7	
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj. Flow (vph)	5	10	37	193	9	97	23	1560	21	74	750	8
Shared Lane Traffic (%)												
Lane Group Flow (vph)	5	47	0	193	106	0	23	1581	0	74	758	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(m)		3.5			3.5			3.5			3.5	
Link Offset(m)		0.0			0.0			0.0			0.0	
Crosswalk Width(m)		3.0			3.0			3.0			3.0	
Two way Left Turn Lane												
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25		15	25		15	25		15	25		15
Sign Control		Stop			Stop			Free			Free	
Intersection Summary												
Area Type:	Other											
Control Type:	Unsignalized											
Intersection Capacity Utilization	112.6%							ICU Level of Service H				
Analysis Period (min)	15											

Intersection

Int Delay, s/veh 707.3

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗
Traffic Vol, veh/h	5	10	37	193	9	97	23	1560	21	74	750	8
Future Vol, veh/h	5	10	37	193	9	97	23	1560	21	74	750	8
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None									
Storage Length	0	-	-	0	-	-	0	-	-	1100	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	100	100	100	100	100	100	100	100	100	100	100	100
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	5	10	37	193	9	97	23	1560	21	74	750	8

Major/Minor	Minor2	Minor1			Major1			Major2				
Conflicting Flow All	2572	2529	754	2543	2523	1571	758	0	0	1581	0	0
Stage 1	902	902	-	1617	1617	-	-	-	-	-	-	-
Stage 2	1670	1627	-	926	906	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	17	28	409	~ 18	28	136	853	-	-	416	-	-
Stage 1	332	356	-	~ 130	162	-	-	-	-	-	-	-
Stage 2	121	160	-	322	355	-	-	-	-	-	-	-
Platoon blocked, %							-	-	-	-	-	-
Mov Cap-1 Maneuver	~ 3	22	409	~ 9	22	136	853	-	-	416	-	-
Mov Cap-2 Maneuver	~ 3	22	-	~ 9	22	-	-	-	-	-	-	-
Stage 1	323	293	-	~ 126	158	-	-	-	-	-	-	-
Stage 2	32	156	-	233	292	-	-	-	-	-	-	-

Approach	EB	WB	NB	SB
HCM Control Delay, \$	302.8	\$ 6535.4	0.1	1.4
HCM LOS	F	F		
<hr/>				
Minor Lane/Major Mvmt	NBL	NBT	NBR	EBln1 EBln2 WBln1 WBln2 SBL SBT SBR
Capacity (veh/h)	853	-	-	3 86 9 94 416 - -
HCM Lane V/C Ratio	0.027	-	-	1.667 0.547 21.444 1.128 0.178 - -
HCM Control Delay (s)	9.3	-	\$ 2315.5	88.6 10007 214.4 15.5 - -
HCM Lane LOS	A	-	-	F F F C - -
HCM 95th %tile Q(veh)	0.1	-	-	1.5 2.4 25.8 7.1 0.6 - -

Notes

~: Volume exceeds capacity \$: Delay exceeds 300s +: Computation Not Defined *: All major volume in platoon

Lanes, Volumes, Timings
4: March Road & Site Access #2

2027 FT Sat
910 March Road



Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations		↑	↑↑	↑		↑↑
Traffic Volume (vph)	0	18	1586	231	0	980
Future Volume (vph)	0	18	1586	231	0	980
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800
Storage Length (m)	0.0	0.0		20.0	0.0	
Storage Lanes	0	1		1	0	
Taper Length (m)	15.0				15.0	
Lane Util. Factor	1.00	1.00	0.95	1.00	1.00	0.95
Frt		0.865		0.850		
Flt Protected						
Satd. Flow (prot)	0	1510	3316	1483	0	3316
Flt Permitted						
Satd. Flow (perm)	0	1510	3316	1483	0	3316
Link Speed (k/h)	50		80			80
Link Distance (m)	78.7		142.9			66.1
Travel Time (s)	5.7		6.4			3.0
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00
Adj. Flow (vph)	0	18	1586	231	0	980
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	18	1586	231	0	980
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Right	Left	Left
Median Width(m)	0.0		3.5			3.5
Link Offset(m)	0.0		0.0			0.0
Crosswalk Width(m)	3.0		3.0			3.0
Two way Left Turn Lane						
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25	15		15	25	
Sign Control	Stop		Free			Free
Intersection Summary						
Area Type:	Other					
Control Type:	Unsignalized					
Intersection Capacity Utilization	56.3%				ICU Level of Service B	
Analysis Period (min)	15					

Intersection

Int Delay, s/veh 0.1

Movement	WBL	WBR	NBT	NBR	SBL	SBT
----------	-----	-----	-----	-----	-----	-----

Lane Configurations						
Traffic Vol, veh/h	0	18	1586	231	0	980
Future Vol, veh/h	0	18	1586	231	0	980
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	Stop	-	None	-	None
Storage Length	-	0	-	200	-	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	100	100	100	100	100	100
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	0	18	1586	231	0	980

Major/Minor	Minor1	Major1	Major2
-------------	--------	--------	--------

Conflicting Flow All	-	793	0	0	-	-
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Critical Hdwy	-	6.94	-	-	-	-
Critical Hdwy Stg 1	-	-	-	-	-	-
Critical Hdwy Stg 2	-	-	-	-	-	-
Follow-up Hdwy	-	3.32	-	-	-	-
Pot Cap-1 Maneuver	0	331	-	-	0	-
Stage 1	0	-	-	-	0	-
Stage 2	0	-	-	-	0	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	-	331	-	-	-	-
Mov Cap-2 Maneuver	-	-	-	-	-	-
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-

Approach	WB	NB	SB
----------	----	----	----

HCM Control Delay, s	16.5	0	0
HCM LOS	C		

Minor Lane/Major Mvmt	NBT	NBR	WBLn1	SBT
-----------------------	-----	-----	-------	-----

Capacity (veh/h)	-	-	331	-
HCM Lane V/C Ratio	-	-	0.054	-
HCM Control Delay (s)	-	-	16.5	-
HCM Lane LOS	-	-	C	-
HCM 95th %tile Q(veh)	-	-	0.2	-

Lanes, Volumes, Timings

2027 FT-AM Mitigation 1

3: March Road & South Local Road/Site Access #1

910 March Road

	↑	→	↓	↶	←	↷	↖	↗	↙	↘	↖	↗
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑		↑	↑		↑	↑		↑	↑	
Traffic Volume (vph)	5	5	21	155	5	37	4	620	11	91	1516	0
Future Volume (vph)	5	5	21	155	5	37	4	620	11	91	1516	0
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	0.0		0.0	20.0		0.0	0.0		0.0	110.0		0.0
Storage Lanes	1		0	1		0	1		0	1		0
Taper Length (m)	15.0			15.0			15.0			95.0		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.879			0.868			0.997				
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1658	1534	0	1658	1515	0	1658	1740	0	1658	1745	0
Flt Permitted	0.730			0.420			0.056			0.310		
Satd. Flow (perm)	1274	1534	0	733	1515	0	98	1740	0	541	1745	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		21			37			1				
Link Speed (k/h)		50			30			80			80	
Link Distance (m)		86.4			104.3			66.1			51.2	
Travel Time (s)		6.2			12.5			3.0			2.3	
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj. Flow (vph)	5	5	21	155	5	37	4	620	11	91	1516	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	5	26	0	155	42	0	4	631	0	91	1516	0
Enter Blocked Intersection	No											
Lane Alignment	Left	Left	Right									
Median Width(m)		3.5			3.5			3.5			3.5	
Link Offset(m)		0.0			0.0			0.0			0.0	
Crosswalk Width(m)		3.0			3.0			3.0			3.0	
Two way Left Turn Lane												
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25		15	25		15	25		15	25		15
Number of Detectors	1	2		1	2		1	2		1	2	
Detector Template	Left	Thru										
Leading Detector (m)	2.0	10.0		2.0	10.0		2.0	10.0		2.0	10.0	
Trailing Detector (m)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Position(m)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Size(m)	2.0	0.6		2.0	0.6		2.0	0.6		2.0	0.6	
Detector 1 Type	Cl+Ex	Cl+Ex										
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(m)		9.4			9.4			9.4			9.4	
Detector 2 Size(m)		0.6			0.6			0.6			0.6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	Perm	NA	pm+pt	NA		Perm	NA		pm+pt	NA		
Protected Phases		4		3	8			2		1	6	
Permitted Phases		4			8			2		6		

Lanes, Volumes, Timings

3: March Road & South Local Road/Site Access #1

2027 FT-AM Mitigation 1

910 March Road



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector Phase	4	4		3	8		2	2		1	6	
Switch Phase												
Minimum Initial (s)	10.0	10.0		5.0	10.0		10.0	10.0		5.0	10.0	
Minimum Split (s)	32.7	32.7		9.5	32.7		29.6	29.6		9.5	29.6	
Total Split (s)	33.0	33.0		10.0	43.0		76.0	76.0		11.0	87.0	
Total Split (%)	25.4%	25.4%		7.7%	33.1%		58.5%	58.5%		8.5%	66.9%	
Maximum Green (s)	27.3	27.3		5.5	37.3		70.4	70.4		6.5	81.4	
Yellow Time (s)	3.3	3.3		3.5	3.3		4.6	4.6		3.5	4.6	
All-Red Time (s)	2.4	2.4		1.0	2.4		1.0	1.0		1.0	1.0	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Total Lost Time (s)	5.7	5.7		4.5	5.7		5.6	5.6		4.5	5.6	
Lead/Lag	Lag	Lag		Lead			Lag	Lag		Lead		
Lead-Lag Optimize?	Yes	Yes		Yes			Yes	Yes		Yes		
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None		None	None		Max	Max		None	Max	
Walk Time (s)	7.0	7.0		7.0			7.0	7.0			7.0	
Flash Dont Walk (s)	20.0	20.0		20.0			17.0	17.0			17.0	
Pedestrian Calls (#/hr)	0	0		0			0	0			0	
Act Effect Green (s)	10.0	10.0		17.1	15.9		71.9	71.9		83.8	82.7	
Actuated g/C Ratio	0.09	0.09		0.16	0.14		0.65	0.65		0.76	0.75	
v/c Ratio	0.04	0.16		0.86	0.17		0.06	0.55		0.19	1.15	
Control Delay	48.0	25.1		83.7	16.3		11.2	13.4		4.8	96.1	
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.5		0.0	0.0	
Total Delay	48.0	25.1		83.7	16.3		11.2	14.0		4.8	96.1	
LOS	D	C		F	B		B	B		A	F	
Approach Delay		28.8			69.3			13.9			90.9	
Approach LOS		C			E			B			F	
Queue Length 50th (m)	1.0	1.0		30.9	0.9		0.3	75.8		4.9	~406.8	
Queue Length 95th (m)	4.8	9.5		#67.6	10.4		2.1	108.0		9.2	#486.6	
Internal Link Dist (m)		62.4			80.3			42.1			27.2	
Turn Bay Length (m)				20.0							110.0	
Base Capacity (vph)	316	397		180	539		64	1138		478	1313	
Starvation Cap Reductn	0	0		0	0		0	192		0	0	
Spillback Cap Reductn	0	0		0	0		0	0		0	0	
Storage Cap Reductn	0	0		0	0		0	0		0	0	
Reduced v/c Ratio	0.02	0.07		0.86	0.08		0.06	0.67		0.19	1.15	

Intersection Summary

Area Type: Other

Cycle Length: 130

Actuated Cycle Length: 109.9

Natural Cycle: 145

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 1.15

Intersection Signal Delay: 68.6 Intersection LOS: E

Intersection Capacity Utilization 109.4% ICU Level of Service H

Analysis Period (min) 15

~ Volume exceeds capacity, queue is theoretically infinite.


Queue shown is maximum after two cycles.

3: March Road & South Local Road/Site Access #1

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 3: March Road & South Local Road/Site Access #1

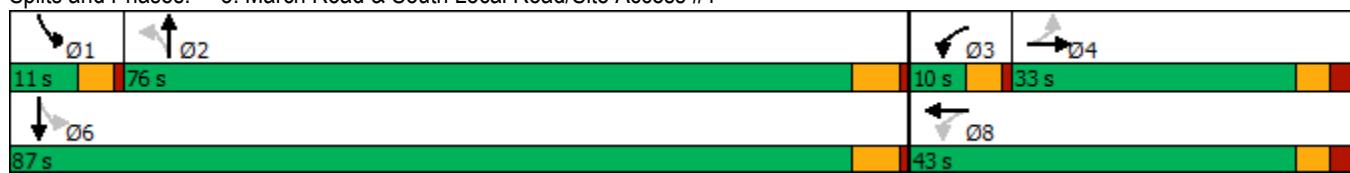

Lanes, Volumes, Timings

2027 FT-PM Mitigation 1

3: March Road & South Local Road/Site Access #1

910 March Road

	→	→	→	←	←	↑	↑	↓	↓	←	→	
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	1	1	1	1	1	1	1	1	1	1	1	1
Traffic Volume (vph)	5	6	37	122	6	60	23	1586	12	44	767	8
Future Volume (vph)	5	6	37	122	6	60	23	1586	12	44	767	8
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	0.0	0.0	20.0		0.0	0.0			0.0	110.0		0.0
Storage Lanes	1		0	1		0	1		0	1		0
Taper Length (m)	15.0			15.0			15.0			95.0		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.871			0.864			0.999			0.998	
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1658	1520	0	1658	1508	0	1658	1743	0	1658	1742	0
Flt Permitted	0.714			0.469			0.295			0.047		
Satd. Flow (perm)	1246	1520	0	818	1508	0	515	1743	0	82	1742	0
Right Turn on Red		Yes			Yes		Yes		Yes		Yes	
Satd. Flow (RTOR)		37			36			1			1	
Link Speed (k/h)		50			30			80			80	
Link Distance (m)		91.5			103.7			66.1			81.0	
Travel Time (s)		6.6			12.4			3.0			3.6	
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj. Flow (vph)	5	6	37	122	6	60	23	1586	12	44	767	8
Shared Lane Traffic (%)												
Lane Group Flow (vph)	5	43	0	122	66	0	23	1598	0	44	775	0
Enter Blocked Intersection	No											
Lane Alignment	Left	Left	Right									
Median Width(m)		3.5			3.5			3.5			3.5	
Link Offset(m)		0.0			0.0			0.0			0.0	
Crosswalk Width(m)		3.0			3.0			3.0			3.0	
Two way Left Turn Lane												
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25		15	25		15	25		15	25		15
Number of Detectors	1	2		1	2		1	2		1	2	
Detector Template	Left	Thru										
Leading Detector (m)	2.0	10.0		2.0	10.0		2.0	10.0		2.0	10.0	
Trailing Detector (m)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Position(m)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Size(m)	2.0	0.6		2.0	0.6		2.0	0.6		2.0	0.6	
Detector 1 Type	Cl+Ex	Cl+Ex										
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(m)		9.4			9.4			9.4			9.4	
Detector 2 Size(m)		0.6			0.6			0.6			0.6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	Perm	NA	pm+pt	NA		Perm	NA		Perm	NA		
Protected Phases		4		3	8			2			6	
Permitted Phases		4		8			2			6		

Lanes, Volumes, Timings

3: March Road & South Local Road/Site Access #1

2027 FT-PM Mitigation 1

910 March Road



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector Phase	4	4		3	8		2	2		6	6	
Switch Phase												
Minimum Initial (s)	10.0	10.0		5.0	10.0		10.0	10.0		10.0	10.0	
Minimum Split (s)	32.7	32.7		9.5	32.7		29.6	29.6		29.6	29.6	
Total Split (s)	33.0	33.0		10.0	43.0		87.0	87.0		87.0	87.0	
Total Split (%)	25.4%	25.4%		7.7%	33.1%		66.9%	66.9%		66.9%	66.9%	
Maximum Green (s)	27.3	27.3		5.5	37.3		81.4	81.4		81.4	81.4	
Yellow Time (s)	3.3	3.3		3.5	3.3		4.6	4.6		4.6	4.6	
All-Red Time (s)	2.4	2.4		1.0	2.4		1.0	1.0		1.0	1.0	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Total Lost Time (s)	5.7	5.7		4.5	5.7		5.6	5.6		5.6	5.6	
Lead/Lag	Lag	Lag		Lead								
Lead-Lag Optimize?	Yes	Yes		Yes								
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None		None	None		Max	Max		Max	Max	
Walk Time (s)	7.0	7.0		7.0			7.0	7.0		7.0	7.0	
Flash Dont Walk (s)	20.0	20.0		20.0			17.0	17.0		17.0	17.0	
Pedestrian Calls (#/hr)	0	0		0			0	0		0	0	
Act Effect Green (s)	10.0	10.0		19.3	18.1		84.3	84.3		84.3	84.3	
Actuated g/C Ratio	0.09	0.09		0.17	0.16		0.74	0.74		0.74	0.74	
v/c Ratio	0.05	0.26		0.65	0.24		0.06	1.24		0.72	0.60	
Control Delay	48.2	22.3		59.1	23.7		5.0	132.2		75.4	9.7	
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.1		0.0	0.0	
Total Delay	48.2	22.3		59.1	23.7		5.0	132.2		75.4	9.7	
LOS	D	C		E	C		A	F		E	A	
Approach Delay		25.0			46.7			130.4			13.2	
Approach LOS		C			D			F			B	
Queue Length 50th (m)	1.0	1.2		23.8	5.6		1.3	~447.4		5.1	74.5	
Queue Length 95th (m)	4.8	12.1		#43.8	17.9		3.7	#529.2		#16.9	106.8	
Internal Link Dist (m)		67.5			79.7			42.1			57.0	
Turn Bay Length (m)				20.0							110.0	
Base Capacity (vph)	299	393		187	519		381	1293		61	1292	
Starvation Cap Reductn	0	0		0	0		0	27		0	0	
Spillback Cap Reductn	0	0		0	0		0	0		0	0	
Storage Cap Reductn	0	0		0	0		0	0		0	0	
Reduced v/c Ratio	0.02	0.11		0.65	0.13		0.06	1.26		0.72	0.60	

Intersection Summary

Area Type: Other

Cycle Length: 130

Actuated Cycle Length: 113.7

Natural Cycle: 150

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 1.24

Intersection Signal Delay: 86.8 Intersection LOS: F

Intersection Capacity Utilization 112.1% ICU Level of Service H

Analysis Period (min) 15

~ Volume exceeds capacity, queue is theoretically infinite.


Queue shown is maximum after two cycles.

3: March Road & South Local Road/Site Access #1

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 3: March Road & South Local Road/Site Access #1

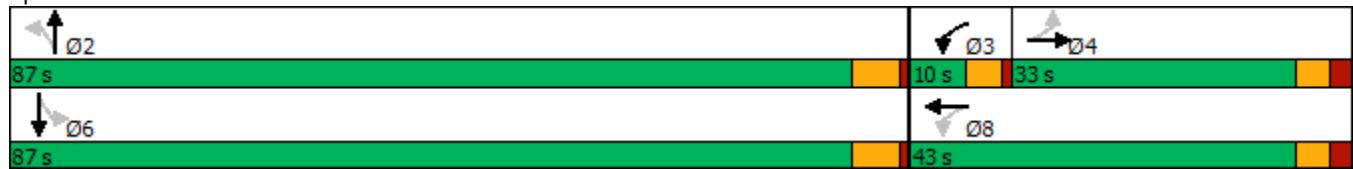

Lanes, Volumes, Timings

2027 FT Sat Mitigation 1

3: March Road & South Local Road/Site Access #1

910 March Road

	→	→	→	←	←	↑	↑	↓	↓	←	→	
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	1	1	1	1	1	1	1	1	1	1	1	1
Traffic Volume (vph)	5	10	37	193	9	97	23	1560	21	74	750	8
Future Volume (vph)	5	10	37	193	9	97	23	1560	21	74	750	8
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	0.0	0.0	0.0			0.0	0.0		0.0	110.0		0.0
Storage Lanes	1		0	1		0	1		0	1		0
Taper Length (m)	15.0			15.0			15.0			95.0		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.882			0.863			0.998			0.998	
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1658	1539	0	1658	1506	0	1658	1742	0	1658	1742	0
Flt Permitted	0.664			0.726			0.330			0.045		
Satd. Flow (perm)	1159	1539	0	1267	1506	0	576	1742	0	79	1742	0
Right Turn on Red		Yes				Yes			Yes			Yes
Satd. Flow (RTOR)		37			97			1			1	
Link Speed (k/h)		50			30			80			80	
Link Distance (m)		75.3			120.5			66.1			61.1	
Travel Time (s)		5.4			14.5			3.0			2.7	
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj. Flow (vph)	5	10	37	193	9	97	23	1560	21	74	750	8
Shared Lane Traffic (%)												
Lane Group Flow (vph)	5	47	0	193	106	0	23	1581	0	74	758	0
Enter Blocked Intersection	No											
Lane Alignment	Left	Left	Right									
Median Width(m)		3.5			3.5			3.5			3.5	
Link Offset(m)		0.0			0.0			0.0			0.0	
Crosswalk Width(m)		3.0			3.0			3.0			3.0	
Two way Left Turn Lane												
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25		15	25		15	25		15	25		15
Number of Detectors	1	2		1	2		1	2		1	2	
Detector Template	Left	Thru										
Leading Detector (m)	2.0	10.0		2.0	10.0		2.0	10.0		2.0	10.0	
Trailing Detector (m)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Position(m)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Size(m)	2.0	0.6		2.0	0.6		2.0	0.6		2.0	0.6	
Detector 1 Type	Cl+Ex	Cl+Ex										
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(m)		9.4			9.4			9.4			9.4	
Detector 2 Size(m)		0.6			0.6			0.6			0.6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	Perm	NA		Perm	NA		Perm	NA		pm+pt	NA	
Protected Phases		4			8			2		1	6	
Permitted Phases		4			8			2		6		

Lanes, Volumes, Timings

3: March Road & South Local Road/Site Access #1

2027 FT Sat Mitigation 1

910 March Road




Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR																				
Detector Phase	4	4		8	8		2	2		1	6																					
Switch Phase																																
Minimum Initial (s)	10.0	10.0		10.0	10.0		10.0	10.0		5.0	10.0																					
Minimum Split (s)	32.7	32.7		32.7	32.7		29.6	29.6		9.5	29.6																					
Total Split (s)	33.0	33.0		33.0	33.0		87.0	87.0		10.0	97.0																					
Total Split (%)	25.4%	25.4%		25.4%	25.4%		66.9%	66.9%		7.7%	74.6%																					
Maximum Green (s)	27.3	27.3		27.3	27.3		81.4	81.4		5.5	91.4																					
Yellow Time (s)	3.3	3.3		3.3	3.3		4.6	4.6		3.5	4.6																					
All-Red Time (s)	2.4	2.4		2.4	2.4		1.0	1.0		1.0	1.0																					
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0																					
Total Lost Time (s)	5.7	5.7		5.7	5.7		5.6	5.6		4.5	5.6																					
Lead/Lag							Lag	Lag		Lead																						
Lead-Lag Optimize?							Yes	Yes		Yes																						
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0	3.0																					
Recall Mode	None	None		None	None		Max	Max		None	Max																					
Walk Time (s)	7.0	7.0		7.0	7.0		7.0	7.0			7.0																					
Flash Dont Walk (s)	20.0	20.0		20.0	20.0		17.0	17.0			17.0																					
Pedestrian Calls (#/hr)	0	0		0	0		0	0			0																					
Act Effect Green (s)	23.0	23.0		23.0	23.0		84.0	84.0		93.0	91.9																					
Actuated g/C Ratio	0.18	0.18		0.18	0.18		0.67	0.67		0.74	0.73																					
v/c Ratio	0.02	0.15		0.84	0.30		0.06	1.36		0.58	0.60																					
Control Delay	41.4	18.0		79.0	12.2		9.8	192.0		34.5	11.3																					
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.1		0.0	0.0																					
Total Delay	41.4	18.0		79.0	12.2		9.8	192.1		34.5	11.3																					
LOS	D	B		E	B		A	F		C	B																					
Approach Delay				55.3				189.5			13.4																					
Approach LOS		C		E				F			B																					
Queue Length 50th (m)	1.0	2.1		46.5	1.9		2.0	~539.7		4.8	85.8																					
Queue Length 95th (m)	4.6	12.3		#79.3	17.0		5.9	#637.2		#23.6	126.9																					
Internal Link Dist (m)		51.3			96.5			42.1			37.1																					
Turn Bay Length (m)											110.0																					
Base Capacity (vph)	250	362		274	401		383	1160		127	1269																					
Starvation Cap Reductn	0	0		0	0		0	26		0	0																					
Spillback Cap Reductn	0	0		0	0		0	0		0	0																					
Storage Cap Reductn	0	0		0	0		0	0		0	0																					
Reduced v/c Ratio	0.02	0.13		0.70	0.26		0.06	1.39		0.58	0.60																					
Intersection Summary																																
Area Type:	Other																															
Cycle Length: 130																																
Actuated Cycle Length: 126.2																																
Natural Cycle: 150																																
Control Type: Actuated-Uncoordinated																																
Maximum v/c Ratio: 1.36																																
Intersection Signal Delay: 119.3	Intersection LOS: F																															
Intersection Capacity Utilization 115.4%	ICU Level of Service H																															
Analysis Period (min) 15																																
~ Volume exceeds capacity, queue is theoretically infinite.																																
Queue shown is maximum after two cycles.																																

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 3: March Road & South Local Road/Site Access #1

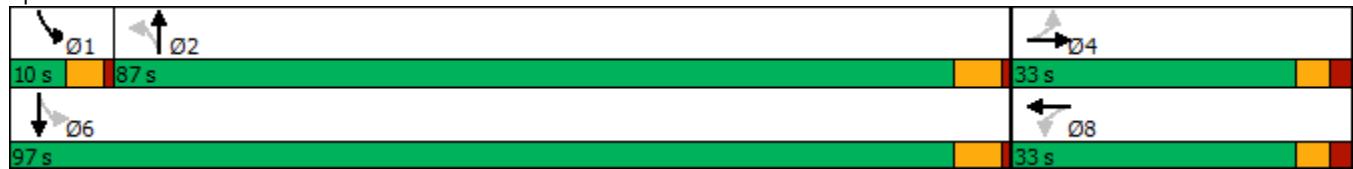

Lanes, Volumes, Timings

2027 FT-AM Mitigation 2

3: March Road & South Local Road/Site Access #1

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑		↑	↑		↑	↑↓		↑	↑↓	
Traffic Volume (vph)	5	5	21	155	5	37	4	620	11	91	1516	0
Future Volume (vph)	5	5	21	155	5	37	4	620	11	91	1516	0
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	0.0		0.0	20.0		0.0	30.0		0.0	110.0		0.0
Storage Lanes	1		0	1		0	1		0	1		0
Taper Length (m)	15.0			15.0			15.0			95.0		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.95	0.95	1.00	0.95	0.95
Frt		0.879			0.868			0.997				
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1658	1534	0	1658	1515	0	1658	3306	0	1658	3316	0
Flt Permitted	0.730			0.740			0.120			0.410		
Satd. Flow (perm)	1274	1534	0	1291	1515	0	209	3306	0	715	3316	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		21			37			3				
Link Speed (k/h)		50			30			80			80	
Link Distance (m)		86.4			104.3			66.1			225.6	
Travel Time (s)		6.2			12.5			3.0			10.2	
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj. Flow (vph)	5	5	21	155	5	37	4	620	11	91	1516	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	5	26	0	155	42	0	4	631	0	91	1516	0
Enter Blocked Intersection	No											
Lane Alignment	Left	Left	Right									
Median Width(m)		3.5			3.5			3.5			3.5	
Link Offset(m)		0.0			0.0			0.0			0.0	
Crosswalk Width(m)		3.0			3.0			3.0			3.0	
Two way Left Turn Lane												
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25		15	25		15	25		15	25		15
Number of Detectors	1	2		1	2		1	2		1	2	
Detector Template	Left	Thru										
Leading Detector (m)	2.0	10.0		2.0	10.0		2.0	10.0		2.0	10.0	
Trailing Detector (m)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Position(m)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Size(m)	2.0	0.6		2.0	0.6		2.0	0.6		2.0	0.6	
Detector 1 Type	Cl+Ex	Cl+Ex										
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(m)		9.4			9.4			9.4			9.4	
Detector 2 Size(m)		0.6			0.6			0.6			0.6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	Perm	NA										
Protected Phases		4			8			2			6	
Permitted Phases	4			8			2			6		

Lanes, Volumes, Timings

3: March Road & South Local Road/Site Access #1


2027 FT-AM Mitigation 2

910 March Road



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector Phase	4	4		8	8		2	2		6	6	
Switch Phase												
Minimum Initial (s)	10.0	10.0		10.0	10.0		10.0	10.0		10.0	10.0	
Minimum Split (s)	37.0	37.0		37.0	37.0		29.6	29.6		29.6	29.6	
Total Split (s)	37.0	37.0		37.0	37.0		53.0	53.0		53.0	53.0	
Total Split (%)	41.1%	41.1%		41.1%	41.1%		58.9%	58.9%		58.9%	58.9%	
Maximum Green (s)	31.0	31.0		31.0	31.0		47.4	47.4		47.4	47.4	
Yellow Time (s)	3.3	3.3		3.3	3.3		4.6	4.6		4.6	4.6	
All-Red Time (s)	2.7	2.7		2.7	2.7		1.0	1.0		1.0	1.0	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Total Lost Time (s)	6.0	6.0		6.0	6.0		5.6	5.6		5.6	5.6	
Lead/Lag												
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None		None	None		Max	Max		Max	Max	
Walk Time (s)	7.0	7.0		7.0	7.0		7.0	7.0		7.0	7.0	
Flash Dont Walk (s)	24.0	24.0		24.0	24.0		17.0	17.0		17.0	17.0	
Pedestrian Calls (#/hr)	0	0		0	0		0	0		0	0	
Act Effect Green (s)	14.6	14.6		14.6	14.6		51.1	51.1		51.1	51.1	
Actuated g/C Ratio	0.19	0.19		0.19	0.19		0.66	0.66		0.66	0.66	
v/c Ratio	0.02	0.08		0.64	0.13		0.03	0.29		0.19	0.69	
Control Delay	23.0	12.5		40.0	10.6		6.8	6.4		7.5	11.2	
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Total Delay	23.0	12.5		40.0	10.6		6.8	6.4		7.5	11.2	
LOS	C	B		D	B		A	A		A	B	
Approach Delay				14.2		33.8			6.4			10.9
Approach LOS				B		C			A			B
Queue Length 50th (m)	0.6	0.6		19.7	0.6		0.2	16.7		4.3	60.4	
Queue Length 95th (m)	3.1	6.2		37.2	7.7		1.4	31.6		13.0	108.6	
Internal Link Dist (m)				62.4		80.3			42.1			201.6
Turn Bay Length (m)					20.0			30.0				110.0
Base Capacity (vph)	512	629		518	630		138	2185		472	2190	
Starvation Cap Reductn	0	0		0	0		0	0		0	0	
Spillback Cap Reductn	0	0		0	0		0	0		0	0	
Storage Cap Reductn	0	0		0	0		0	0		0	0	
Reduced v/c Ratio	0.01	0.04		0.30	0.07		0.03	0.29		0.19	0.69	
Intersection Summary												
Area Type:	Other											
Cycle Length: 90												
Actuated Cycle Length: 77.3												
Natural Cycle: 80												
Control Type: Actuated-Uncoordinated												
Maximum v/c Ratio: 0.69												
Intersection Signal Delay: 11.7					Intersection LOS: B							
Intersection Capacity Utilization 82.6%					ICU Level of Service E							
Analysis Period (min) 15												

Splits and Phases: 3: March Road & South Local Road/Site Access #1

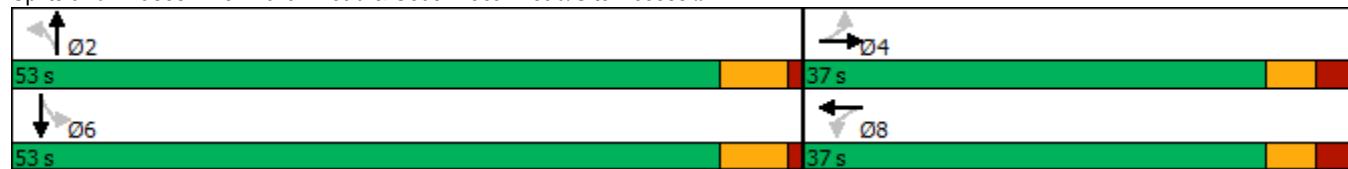

Lanes, Volumes, Timings

2027 FT-PM Mitigation 2

3: March Road & South Local Road/Site Access #1

	→	→	→	←	←	↑	↑	↓	↓	←	→	
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	1	1	1	1	1	1	1	1	1	1	1	1
Traffic Volume (vph)	5	6	37	122	6	60	23	1586	12	44	767	8
Future Volume (vph)	5	6	37	122	6	60	23	1586	12	44	767	8
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	0.0	0.0	20.0		0.0	30.0		0.0	110.0		0.0	
Storage Lanes	1		0	1		0	1		0	1		0
Taper Length (m)	15.0			15.0			15.0			95.0		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.95	0.95	1.00	0.95	0.95
Frt		0.871			0.864			0.999			0.998	
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1658	1520	0	1658	1508	0	1658	3312	0	1658	3309	0
Flt Permitted	0.714			0.729			0.352			0.115		
Satd. Flow (perm)	1246	1520	0	1272	1508	0	614	3312	0	201	3309	0
Right Turn on Red		Yes			Yes			Yes			Yes	
Satd. Flow (RTOR)		37			18			1			2	
Link Speed (k/h)		50			30			80			80	
Link Distance (m)		91.5			103.7			66.1			81.0	
Travel Time (s)		6.6			12.4			3.0			3.6	
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj. Flow (vph)	5	6	37	122	6	60	23	1586	12	44	767	8
Shared Lane Traffic (%)												
Lane Group Flow (vph)	5	43	0	122	66	0	23	1598	0	44	775	0
Enter Blocked Intersection	No											
Lane Alignment	Left	Left	Right									
Median Width(m)		3.5			3.5			3.5			3.5	
Link Offset(m)		0.0			0.0			0.0			0.0	
Crosswalk Width(m)		3.0			3.0			3.0			3.0	
Two way Left Turn Lane												
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25		15	25		15	25		15	25		15
Number of Detectors	1	2		1	2		1	2		1	2	
Detector Template	Left	Thru										
Leading Detector (m)	2.0	10.0		2.0	10.0		2.0	10.0		2.0	10.0	
Trailing Detector (m)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Position(m)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Size(m)	2.0	0.6		2.0	0.6		2.0	0.6		2.0	0.6	
Detector 1 Type	Cl+Ex	Cl+Ex										
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(m)		9.4			9.4			9.4			9.4	
Detector 2 Size(m)		0.6			0.6			0.6			0.6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	Perm	NA										
Protected Phases		4			8			2			6	
Permitted Phases		4			8			2			6	

Lanes, Volumes, Timings

3: March Road & South Local Road/Site Access #1


2027 FT-PM Mitigation 2

910 March Road



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector Phase	4	4		8	8		2	2		6	6	
Switch Phase												
Minimum Initial (s)	10.0	10.0		10.0	10.0		10.0	10.0		10.0	10.0	
Minimum Split (s)	37.0	37.0		37.0	37.0		29.6	29.6		29.6	29.6	
Total Split (s)	37.0	37.0		37.0	37.0		53.0	53.0		53.0	53.0	
Total Split (%)	41.1%	41.1%		41.1%	41.1%		58.9%	58.9%		58.9%	58.9%	
Maximum Green (s)	31.0	31.0		31.0	31.0		47.4	47.4		47.4	47.4	
Yellow Time (s)	3.3	3.3		3.3	3.3		4.6	4.6		4.6	4.6	
All-Red Time (s)	2.7	2.7		2.7	2.7		1.0	1.0		1.0	1.0	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Total Lost Time (s)	6.0	6.0		6.0	6.0		5.6	5.6		5.6	5.6	
Lead/Lag												
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None		None	None		Max	Max		Max	Max	
Walk Time (s)	7.0	7.0		7.0	7.0		7.0	7.0		7.0	7.0	
Flash Dont Walk (s)	24.0	24.0		24.0	24.0		17.0	17.0		17.0	17.0	
Pedestrian Calls (#/hr)	0	0		0	0		0	0		0	0	
Act Effect Green (s)	12.7	12.7		12.7	12.7		52.5	52.5		52.5	52.5	
Actuated g/C Ratio	0.18	0.18		0.18	0.18		0.73	0.73		0.73	0.73	
v/c Ratio	0.02	0.14		0.55	0.24		0.05	0.66		0.30	0.32	
Control Delay	23.8	11.4		36.7	21.6		5.6	9.5		13.5	5.6	
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Total Delay	23.8	11.4		36.7	21.6		5.6	9.5		13.5	5.6	
LOS	C	B		D	C		A	A		B	A	
Approach Delay		12.7			31.4			9.4			6.0	
Approach LOS		B			C			A			A	
Queue Length 50th (m)	0.6	0.7		15.1	5.6		0.9	60.4		2.1	19.7	
Queue Length 95th (m)	3.1	8.0		29.9	15.0		3.9	108.2		11.3	36.1	
Internal Link Dist (m)		67.5			79.7			42.1			57.0	
Turn Bay Length (m)				20.0			30.0			110.0		
Base Capacity (vph)	535	673		546	657		446	2407		146	2405	
Starvation Cap Reductn	0	0		0	0		0	0		0	0	
Spillback Cap Reductn	0	0		0	0		0	0		0	0	
Storage Cap Reductn	0	0		0	0		0	0		0	0	
Reduced v/c Ratio	0.01	0.06		0.22	0.10		0.05	0.66		0.30	0.32	
Intersection Summary												
Area Type:	Other											
Cycle Length: 90												
Actuated Cycle Length: 72.3												
Natural Cycle: 90												
Control Type: Actuated-Uncoordinated												
Maximum v/c Ratio: 0.66												
Intersection Signal Delay: 10.0							Intersection LOS: A					
Intersection Capacity Utilization 70.1%							ICU Level of Service C					
Analysis Period (min) 15												

Splits and Phases: 3: March Road & South Local Road/Site Access #1

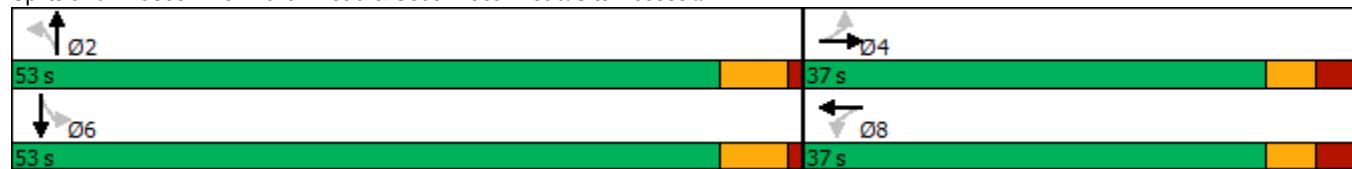

Lanes, Volumes, Timings

2027 FT Sat Mitigation 2

3: March Road & South Local Road/Site Access #1

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑		↑	↑		↑	↑↑		↑	↑↑	
Traffic Volume (vph)	5	10	37	193	9	97	23	1560	21	74	750	8
Future Volume (vph)	5	10	37	193	9	97	23	1560	21	74	750	8
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	0.0		0.0	0.0		0.0	30.0		0.0	110.0		0.0
Storage Lanes	1		0	1		0	1		0	1		0
Taper Length (m)	15.0			15.0			15.0			95.0		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.95	0.95	1.00	0.95	0.95
Frt		0.882			0.863			0.998			0.998	
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1658	1539	0	1658	1506	0	1658	3309	0	1658	3309	0
Flt Permitted	0.689			0.726			0.345			0.105		
Satd. Flow (perm)	1202	1539	0	1267	1506	0	602	3309	0	183	3309	0
Right Turn on Red		Yes			Yes			Yes			Yes	
Satd. Flow (RTOR)		37			27			2			2	
Link Speed (k/h)		50			30			80			80	
Link Distance (m)		75.3			120.5			66.1			61.1	
Travel Time (s)		5.4			14.5			3.0			2.7	
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj. Flow (vph)	5	10	37	193	9	97	23	1560	21	74	750	8
Shared Lane Traffic (%)												
Lane Group Flow (vph)	5	47	0	193	106	0	23	1581	0	74	758	0
Enter Blocked Intersection	No											
Lane Alignment	Left	Left	Right									
Median Width(m)		3.5			3.5			3.5			3.5	
Link Offset(m)		0.0			0.0			0.0			0.0	
Crosswalk Width(m)		3.0			3.0			3.0			3.0	
Two way Left Turn Lane												
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25		15	25		15	25		15	25		15
Number of Detectors	1	2		1	2		1	2		1	2	
Detector Template	Left	Thru										
Leading Detector (m)	2.0	10.0		2.0	10.0		2.0	10.0		2.0	10.0	
Trailing Detector (m)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Position(m)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Size(m)	2.0	0.6		2.0	0.6		2.0	0.6		2.0	0.6	
Detector 1 Type	Cl+Ex	Cl+Ex										
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(m)		9.4			9.4			9.4			9.4	
Detector 2 Size(m)		0.6			0.6			0.6			0.6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	Perm	NA										
Protected Phases		4			8			2			6	
Permitted Phases		4			8			2			6	

Lanes, Volumes, Timings

3: March Road & South Local Road/Site Access #1


2027 FT Sat Mitigation 2

910 March Road



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector Phase	4	4		8	8		2	2		6	6	
Switch Phase												
Minimum Initial (s)	10.0	10.0		10.0	10.0		10.0	10.0		10.0	10.0	
Minimum Split (s)	37.0	37.0		37.0	37.0		29.6	29.6		29.6	29.6	
Total Split (s)	37.0	37.0		37.0	37.0		63.0	63.0		63.0	63.0	
Total Split (%)	37.0%	37.0%		37.0%	37.0%		63.0%	63.0%		63.0%	63.0%	
Maximum Green (s)	31.0	31.0		31.0	31.0		57.4	57.4		57.4	57.4	
Yellow Time (s)	3.3	3.3		3.3	3.3		4.6	4.6		4.6	4.6	
All-Red Time (s)	2.7	2.7		2.7	2.7		1.0	1.0		1.0	1.0	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Total Lost Time (s)	6.0	6.0		6.0	6.0		5.6	5.6		5.6	5.6	
Lead/Lag												
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None		None	None		Max	Max		Max	Max	
Walk Time (s)	7.0	7.0		7.0	7.0		7.0	7.0		7.0	7.0	
Flash Dont Walk (s)	24.0	24.0		24.0	24.0		17.0	17.0		17.0	17.0	
Pedestrian Calls (#/hr)	0	0		0	0		0	0		0	0	
Act Effect Green (s)	18.7	18.7		18.7	18.7		59.2	59.2		59.2	59.2	
Actuated g/C Ratio	0.21	0.21		0.21	0.21		0.66	0.66		0.66	0.66	
v/c Ratio	0.02	0.13		0.73	0.32		0.06	0.72		0.61	0.35	
Control Delay	26.0	12.4		48.9	23.7		7.6	13.4		38.6	7.9	
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.1		0.0	0.0	
Total Delay	26.0	12.4		48.9	23.7		7.6	13.5		38.6	7.9	
LOS	C	B		D	C		A	B		D	A	
Approach Delay		13.7			40.0			13.5			10.7	
Approach LOS		B			D			B			B	
Queue Length 50th (m)	0.7	1.3		30.3	11.1		1.2	80.4		6.3	26.1	
Queue Length 95th (m)	3.3	9.3		52.3	24.1		5.0	142.3	#35.1	47.7		
Internal Link Dist (m)		51.3			96.5			42.1			37.1	
Turn Bay Length (m)						30.0			110.0			
Base Capacity (vph)	416	558		439	540		398	2190		121	2190	
Starvation Cap Reductn	0	0		0	0		0	94		0	0	
Spillback Cap Reductn	0	0		0	0		0	0		0	0	
Storage Cap Reductn	0	0		0	0		0	0		0	0	
Reduced v/c Ratio	0.01	0.08		0.44	0.20		0.06	0.75		0.61	0.35	
Intersection Summary												
Area Type:	Other											
Cycle Length: 100												
Actuated Cycle Length: 89.5												
Natural Cycle: 100												
Control Type: Actuated-Uncoordinated												
Maximum v/c Ratio: 0.73												
Intersection Signal Delay: 15.5						Intersection LOS: B						
Intersection Capacity Utilization 86.8%							ICU Level of Service E					
Analysis Period (min) 15												
# 95th percentile volume exceeds capacity, queue may be longer.												
Queue shown is maximum after two cycles.												

Splits and Phases: 3: March Road & South Local Road/Site Access #1

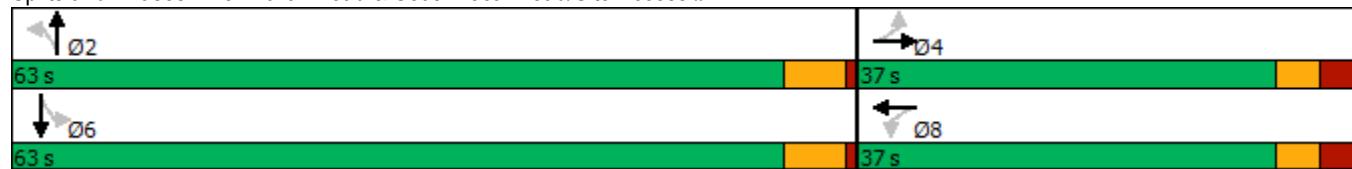

Lanes, Volumes, Timings

2027 FT-AM Sensitivity 1

3: March Road & South Local Road/Site Access #1

910 March Road

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑		↑	↑		↑	↑		↑	↑	
Traffic Volume (vph)	5	5	21	155	5	37	4	620	11	91	1300	0
Future Volume (vph)	5	5	21	155	5	37	4	620	11	91	1300	0
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	0.0		0.0	20.0		0.0	0.0		0.0	110.0		0.0
Storage Lanes	1		0	1		0	1		0	1		0
Taper Length (m)	15.0			15.0			15.0			95.0		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.879			0.868			0.997				
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1658	1534	0	1658	1515	0	1658	1740	0	1658	1745	0
Flt Permitted	0.730			0.420			0.056			0.310		
Satd. Flow (perm)	1274	1534	0	733	1515	0	98	1740	0	541	1745	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		21			37			1				
Link Speed (k/h)		50			30			80			80	
Link Distance (m)		86.4			104.3			66.1			51.2	
Travel Time (s)		6.2			12.5			3.0			2.3	
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj. Flow (vph)	5	5	21	155	5	37	4	620	11	91	1300	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	5	26	0	155	42	0	4	631	0	91	1300	0
Enter Blocked Intersection	No											
Lane Alignment	Left	Left	Right									
Median Width(m)		3.5			3.5			3.5			3.5	
Link Offset(m)		0.0			0.0			0.0			0.0	
Crosswalk Width(m)		3.0			3.0			3.0			3.0	
Two way Left Turn Lane												
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25		15	25		15	25		15	25		15
Number of Detectors	1	2		1	2		1	2		1	2	
Detector Template	Left	Thru										
Leading Detector (m)	2.0	10.0		2.0	10.0		2.0	10.0		2.0	10.0	
Trailing Detector (m)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Position(m)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Size(m)	2.0	0.6		2.0	0.6		2.0	0.6		2.0	0.6	
Detector 1 Type	Cl+Ex	Cl+Ex										
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(m)		9.4			9.4			9.4			9.4	
Detector 2 Size(m)		0.6			0.6			0.6			0.6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	Perm	NA	pm+pt	NA		Perm	NA		pm+pt	NA		
Protected Phases		4		3	8			2		1	6	
Permitted Phases		4		8			2			6		

Lanes, Volumes, Timings

3: March Road & South Local Road/Site Access #1

2027 FT-AM Sensitivity 1

910 March Road



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector Phase	4	4		3	8		2	2		1	6	
Switch Phase												
Minimum Initial (s)	10.0	10.0		5.0	10.0		10.0	10.0		5.0	10.0	
Minimum Split (s)	32.7	32.7		9.5	32.7		29.6	29.6		9.5	29.6	
Total Split (s)	33.0	33.0		10.0	43.0		76.0	76.0		11.0	87.0	
Total Split (%)	25.4%	25.4%		7.7%	33.1%		58.5%	58.5%		8.5%	66.9%	
Maximum Green (s)	27.3	27.3		5.5	37.3		70.4	70.4		6.5	81.4	
Yellow Time (s)	3.3	3.3		3.5	3.3		4.6	4.6		3.5	4.6	
All-Red Time (s)	2.4	2.4		1.0	2.4		1.0	1.0		1.0	1.0	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Total Lost Time (s)	5.7	5.7		4.5	5.7		5.6	5.6		4.5	5.6	
Lead/Lag	Lag	Lag		Lead			Lag	Lag		Lead		
Lead-Lag Optimize?	Yes	Yes		Yes			Yes	Yes		Yes		
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None		None	None		Max	Max		None	Max	
Walk Time (s)	7.0	7.0		7.0			7.0	7.0			7.0	
Flash Dont Walk (s)	20.0	20.0		20.0			17.0	17.0			17.0	
Pedestrian Calls (#/hr)	0	0		0			0	0			0	
Act Effect Green (s)	10.0	10.0		17.1	15.9		71.9	71.9		83.8	82.7	
Actuated g/C Ratio	0.09	0.09		0.16	0.14		0.65	0.65		0.76	0.75	
v/c Ratio	0.04	0.16		0.86	0.17		0.06	0.55		0.19	0.99	
Control Delay	48.0	25.1		83.7	16.3		11.2	13.4		4.8	38.3	
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.5		0.0	0.0	
Total Delay	48.0	25.1		83.7	16.3		11.2	14.0		4.8	38.3	
LOS	D	C		F	B		B	B		A	D	
Approach Delay		28.8			69.3			13.9			36.1	
Approach LOS		C			E			B			D	
Queue Length 50th (m)	1.0	1.0		30.9	0.9		0.3	75.8		4.9	~307.6	
Queue Length 95th (m)	4.8	9.5		#67.6	10.4		2.1	108.0		9.2	#386.5	
Internal Link Dist (m)		62.4			80.3			42.1			27.2	
Turn Bay Length (m)				20.0							110.0	
Base Capacity (vph)	316	397		180	539		64	1138		478	1313	
Starvation Cap Reductn	0	0		0	0		0	192		0	0	
Spillback Cap Reductn	0	0		0	0		0	0		0	0	
Storage Cap Reductn	0	0		0	0		0	0		0	0	
Reduced v/c Ratio	0.02	0.07		0.86	0.08		0.06	0.67		0.19	0.99	

Intersection Summary

Area Type: Other

Cycle Length: 130

Actuated Cycle Length: 109.9

Natural Cycle: 145

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.99

Intersection Signal Delay: 32.6 Intersection LOS: C

Intersection Capacity Utilization 105.0% ICU Level of Service G

Analysis Period (min) 15

~ Volume exceeds capacity, queue is theoretically infinite.


Queue shown is maximum after two cycles.

3: March Road & South Local Road/Site Access #1

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 3: March Road & South Local Road/Site Access #1

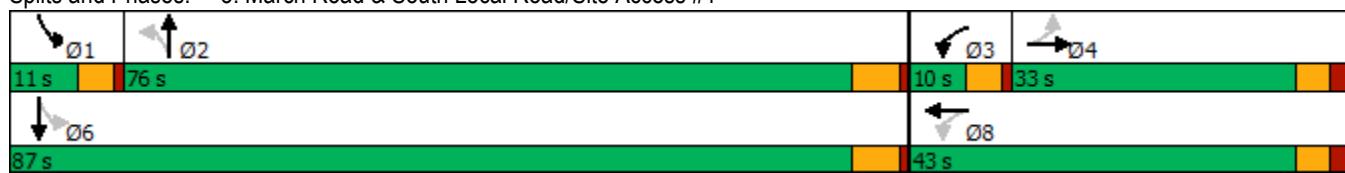

Lanes, Volumes, Timings

2027 FT-PM Sensitivity 1

3: March Road & South Local Road/Site Access #1

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	1	1	1	1	1	1	1	1	1	1	1	1
Traffic Volume (vph)	5	6	37	122	6	60	23	1250	12	44	767	8
Future Volume (vph)	5	6	37	122	6	60	23	1250	12	44	767	8
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	0.0	0.0	20.0		0.0	0.0			0.0	110.0		0.0
Storage Lanes	1		0	1		0	1		0	1		0
Taper Length (m)	15.0			15.0			15.0			95.0		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.871			0.864			0.999			0.998	
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1658	1520	0	1658	1508	0	1658	1743	0	1658	1742	0
Flt Permitted	0.714			0.469			0.295			0.051		
Satd. Flow (perm)	1246	1520	0	818	1508	0	515	1743	0	89	1742	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		37			60			1			1	
Link Speed (k/h)		50			30			80			80	
Link Distance (m)		91.5			103.7			66.1			81.0	
Travel Time (s)		6.6			12.4			3.0			3.6	
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj. Flow (vph)	5	6	37	122	6	60	23	1250	12	44	767	8
Shared Lane Traffic (%)												
Lane Group Flow (vph)	5	43	0	122	66	0	23	1262	0	44	775	0
Enter Blocked Intersection	No											
Lane Alignment	Left	Left	Right									
Median Width(m)		3.5			3.5			3.5			3.5	
Link Offset(m)		0.0			0.0			0.0			0.0	
Crosswalk Width(m)		3.0			3.0			3.0			3.0	
Two way Left Turn Lane												
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25		15	25		15	25		15	25		15
Number of Detectors	1	2		1	2		1	2		1	2	
Detector Template	Left	Thru										
Leading Detector (m)	2.0	10.0		2.0	10.0		2.0	10.0		2.0	10.0	
Trailing Detector (m)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Position(m)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Size(m)	2.0	0.6		2.0	0.6		2.0	0.6		2.0	0.6	
Detector 1 Type	Cl+Ex	Cl+Ex										
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(m)		9.4			9.4			9.4			9.4	
Detector 2 Size(m)		0.6			0.6			0.6			0.6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	Perm	NA	pm+pt	NA		Perm	NA		Perm	NA		
Protected Phases		4		3	8			2			6	
Permitted Phases		4		8			2			6		

Lanes, Volumes, Timings

3: March Road & South Local Road/Site Access #1

2027 FT-PM Sensitivity 1

910 March Road



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector Phase	4	4		3	8		2	2		6	6	
Switch Phase												
Minimum Initial (s)	10.0	10.0		5.0	10.0		10.0	10.0		10.0	10.0	
Minimum Split (s)	32.7	32.7		9.5	32.7		29.6	29.6		29.6	29.6	
Total Split (s)	33.0	33.0		10.0	43.0		87.0	87.0		87.0	87.0	
Total Split (%)	25.4%	25.4%		7.7%	33.1%		66.9%	66.9%		66.9%	66.9%	
Maximum Green (s)	27.3	27.3		5.5	37.3		81.4	81.4		81.4	81.4	
Yellow Time (s)	3.3	3.3		3.5	3.3		4.6	4.6		4.6	4.6	
All-Red Time (s)	2.4	2.4		1.0	2.4		1.0	1.0		1.0	1.0	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Total Lost Time (s)	5.7	5.7		4.5	5.7		5.6	5.6		5.6	5.6	
Lead/Lag	Lag	Lag		Lead								
Lead-Lag Optimize?	Yes	Yes		Yes								
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None		None	None		Max	Max		Max	Max	
Walk Time (s)	7.0	7.0		7.0			7.0	7.0		7.0	7.0	
Flash Dont Walk (s)	20.0	20.0		20.0			17.0	17.0		17.0	17.0	
Pedestrian Calls (#/hr)	0	0		0			0	0		0	0	
Act Effect Green (s)	10.0	10.0		19.3	18.1		84.3	84.3		84.3	84.3	
Actuated g/C Ratio	0.09	0.09		0.17	0.16		0.74	0.74		0.74	0.74	
v/c Ratio	0.05	0.26		0.65	0.23		0.06	0.98		0.67	0.60	
Control Delay	48.2	22.3		59.1	13.9		5.0	35.9		61.9	9.7	
Queue Delay	0.0	0.0		0.0	0.0		0.0	27.6		0.0	0.0	
Total Delay	48.2	22.3		59.1	13.9		5.0	63.6		61.9	9.7	
LOS	D	C		E	B		A	E		E	A	
Approach Delay		25.0			43.2			62.5			12.5	
Approach LOS		C			D			E			B	
Queue Length 50th (m)	1.0	1.2		23.8	1.1		1.3	~247.2		4.7	74.5	
Queue Length 95th (m)	4.8	12.1		#43.8	13.0		3.7	#370.3		#14.6	106.8	
Internal Link Dist (m)		67.5			79.7			42.1			57.0	
Turn Bay Length (m)				20.0						110.0		
Base Capacity (vph)	299	393		187	535		381	1293		66	1292	
Starvation Cap Reductn	0	0		0	0		0	112		0	0	
Spillback Cap Reductn	0	0		0	0		0	0		0	0	
Storage Cap Reductn	0	0		0	0		0	0		0	0	
Reduced v/c Ratio	0.02	0.11		0.65	0.12		0.06	1.07		0.67	0.60	

Intersection Summary

Area Type: Other

Cycle Length: 130

Actuated Cycle Length: 113.7

Natural Cycle: 150

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.98

Intersection Signal Delay: 42.7

Intersection LOS: D

Intersection Capacity Utilization 93.4%

ICU Level of Service F

Analysis Period (min) 15


~ Volume exceeds capacity, queue is theoretically infinite.

Queue shown is maximum after two cycles.

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 3: March Road & South Local Road/Site Access #1

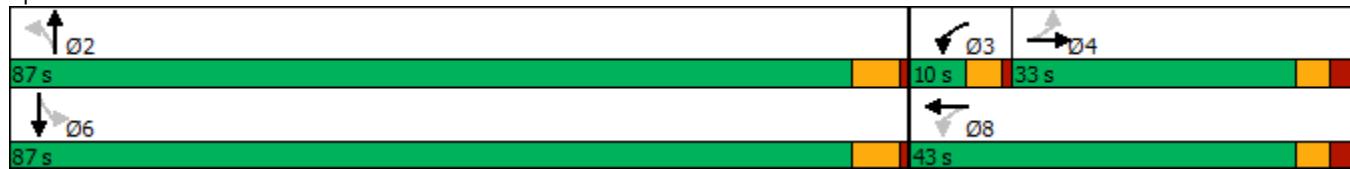

Lanes, Volumes, Timings

2027 FT Sat Sensitivity 1

3: March Road & South Local Road/Site Access #1

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↓		↑	↓		↑	↓		↑	↓	
Traffic Volume (vph)	5	10	37	193	9	97	23	1100	21	74	750	8
Future Volume (vph)	5	10	37	193	9	97	23	1100	21	74	750	8
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	0.0		0.0		0.0		0.0		0.0	110.0		0.0
Storage Lanes	1		0	1		0	1		0	1		0
Taper Length (m)	15.0			15.0			15.0			95.0		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.882			0.863			0.997			0.998	
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1658	1539	0	1658	1506	0	1658	1740	0	1658	1742	0
Flt Permitted	0.664			0.726			0.330			0.056		
Satd. Flow (perm)	1159	1539	0	1267	1506	0	576	1740	0	98	1742	0
Right Turn on Red		Yes			Yes			Yes			Yes	
Satd. Flow (RTOR)		37			97			1			1	
Link Speed (k/h)		50			30			80			80	
Link Distance (m)		75.3			120.5			66.1			61.1	
Travel Time (s)		5.4			14.5			3.0			2.7	
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj. Flow (vph)	5	10	37	193	9	97	23	1100	21	74	750	8
Shared Lane Traffic (%)												
Lane Group Flow (vph)	5	47	0	193	106	0	23	1121	0	74	758	0
Enter Blocked Intersection	No											
Lane Alignment	Left	Left	Right									
Median Width(m)		3.5			3.5			3.5			3.5	
Link Offset(m)		0.0			0.0			0.0			0.0	
Crosswalk Width(m)		3.0			3.0			3.0			3.0	
Two way Left Turn Lane												
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25		15	25		15	25		15	25		15
Number of Detectors	1	2		1	2		1	2		1	2	
Detector Template	Left	Thru										
Leading Detector (m)	2.0	10.0		2.0	10.0		2.0	10.0		2.0	10.0	
Trailing Detector (m)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Position(m)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Size(m)	2.0	0.6		2.0	0.6		2.0	0.6		2.0	0.6	
Detector 1 Type	Cl+Ex	Cl+Ex										
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(m)		9.4			9.4			9.4			9.4	
Detector 2 Size(m)		0.6			0.6			0.6			0.6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	Perm	NA		Perm	NA		Perm	NA		pm+pt	NA	
Protected Phases		4			8			2			1	6
Permitted Phases		4			8			2			6	

Lanes, Volumes, Timings

3: March Road & South Local Road/Site Access #1

2027 FT Sat Sensitivity 1

910 March Road




Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR								
Detector Phase	4	4		8	8		2	2		1	6									
Switch Phase																				
Minimum Initial (s)	10.0	10.0		10.0	10.0		10.0	10.0		5.0	10.0									
Minimum Split (s)	32.7	32.7		32.7	32.7		29.6	29.6		9.5	30.0									
Total Split (s)	33.0	33.0		33.0	33.0		87.0	87.0		10.0	97.0									
Total Split (%)	25.4%	25.4%		25.4%	25.4%		66.9%	66.9%		7.7%	74.6%									
Maximum Green (s)	27.3	27.3		27.3	27.3		81.4	81.4		5.5	91.4									
Yellow Time (s)	3.3	3.3		3.3	3.3		4.6	4.6		3.5	4.6									
All-Red Time (s)	2.4	2.4		2.4	2.4		1.0	1.0		1.0	1.0									
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0									
Total Lost Time (s)	5.7	5.7		5.7	5.7		5.6	5.6		4.5	5.6									
Lead/Lag							Lag	Lag		Lead										
Lead-Lag Optimize?							Yes	Yes		Yes										
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0	3.0									
Recall Mode	None	None		None	None		Max	Max		None	Max									
Walk Time (s)	7.0	7.0		7.0	7.0		7.0	7.0			7.0									
Flash Dont Walk (s)	20.0	20.0		20.0	20.0		17.0	17.0			17.0									
Pedestrian Calls (#/hr)	0	0		0	0		0	0			0									
Act Effect Green (s)	23.0	23.0		23.0	23.0		84.0	84.0		93.0	91.9									
Actuated g/C Ratio	0.18	0.18		0.18	0.18		0.67	0.67		0.74	0.73									
v/c Ratio	0.02	0.15		0.84	0.30		0.06	0.97		0.53	0.60									
Control Delay	41.4	18.0		79.0	12.2		9.8	42.1		24.2	11.3									
Queue Delay	0.0	0.0		0.0	0.0		0.0	39.3		0.0	0.0									
Total Delay	41.4	18.0		79.0	12.2		9.8	81.4		24.2	11.3									
LOS	D	B		E	B		A	F		C	B									
Approach Delay				55.3				79.9			12.5									
Approach LOS		C		E				E			B									
Queue Length 50th (m)	1.0	2.1		46.5	1.9		2.0	~276.9		4.8	85.8									
Queue Length 95th (m)	4.6	12.3		#79.3	17.0		5.9	#387.3		16.6	126.9									
Internal Link Dist (m)		51.3			96.5			42.1			37.1									
Turn Bay Length (m)										110.0										
Base Capacity (vph)	250	362		274	401		383	1158		140	1269									
Starvation Cap Reductn	0	0		0	0		0	134		0	0									
Spillback Cap Reductn	0	0		0	0		0	0		0	0									
Storage Cap Reductn	0	0		0	0		0	0		0	0									
Reduced v/c Ratio	0.02	0.13		0.70	0.26		0.06	1.09		0.53	0.60									
Intersection Summary																				
Area Type:	Other																			
Cycle Length: 130																				
Actuated Cycle Length: 126.2																				
Natural Cycle: 130																				
Control Type: Actuated-Uncoordinated																				
Maximum v/c Ratio: 0.97																				
Intersection Signal Delay: 51.3	Intersection LOS: D																			
Intersection Capacity Utilization 92.3%	ICU Level of Service F																			
Analysis Period (min) 15																				
~ Volume exceeds capacity, queue is theoretically infinite.																				
Queue shown is maximum after two cycles.																				

3: March Road & South Local Road/Site Access #1

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 3: March Road & South Local Road/Site Access #1

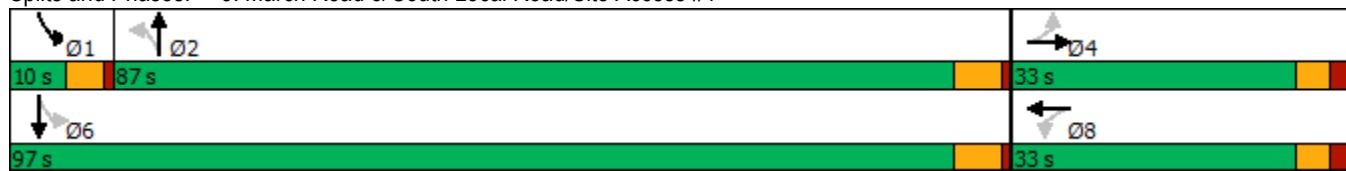

Lanes, Volumes, Timings

2027 FT-AM Sensitivity 2

3: March Road & South Local Road/Site Access #1

910 March Road

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↓		↑	↓		↑	↓		↑	↓	
Traffic Volume (vph)	5	5	21	155	5	37	4	620	11	91	1250	0
Future Volume (vph)	5	5	21	155	5	37	4	620	11	91	1250	0
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	0.0		0.0	20.0		0.0	0.0		0.0	110.0		0.0
Storage Lanes	1		0	1		0	1		0	1		0
Taper Length (m)	15.0			15.0			15.0			95.0		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.879			0.868			0.997				
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1658	1534	0	1658	1515	0	1658	1740	0	1658	1745	0
Flt Permitted	0.730			0.420			0.070			0.310		
Satd. Flow (perm)	1274	1534	0	733	1515	0	122	1740	0	541	1745	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		21			37			1				
Link Speed (k/h)		50			30			80			80	
Link Distance (m)		86.4			104.3			66.1			51.2	
Travel Time (s)		6.2			12.5			3.0			2.3	
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj. Flow (vph)	5	5	21	155	5	37	4	620	11	91	1250	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	5	26	0	155	42	0	4	631	0	91	1250	0
Enter Blocked Intersection	No											
Lane Alignment	Left	Left	Right									
Median Width(m)		3.5			3.5			3.5			3.5	
Link Offset(m)		0.0			0.0			0.0			0.0	
Crosswalk Width(m)		3.0			3.0			3.0			3.0	
Two way Left Turn Lane												
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25		15	25		15	25		15	25		15
Number of Detectors	1	2		1	2		1	2		1	2	
Detector Template	Left	Thru										
Leading Detector (m)	2.0	10.0		2.0	10.0		2.0	10.0		2.0	10.0	
Trailing Detector (m)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Position(m)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Size(m)	2.0	0.6		2.0	0.6		2.0	0.6		2.0	0.6	
Detector 1 Type	Cl+Ex	Cl+Ex										
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(m)		9.4			9.4			9.4			9.4	
Detector 2 Size(m)		0.6			0.6			0.6			0.6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	Perm	NA	pm+pt	NA		Perm	NA		pm+pt	NA		
Protected Phases		4		3	8			2		1	6	
Permitted Phases		4		8			2			6		

Lanes, Volumes, Timings

3: March Road & South Local Road/Site Access #1

2027 FT-AM Sensitivity 2

910 March Road



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector Phase	4	4		3	8		2	2		1	6	
Switch Phase												
Minimum Initial (s)	10.0	10.0		5.0	10.0		10.0	10.0		5.0	10.0	
Minimum Split (s)	32.7	32.7		9.5	32.7		29.6	29.6		9.5	29.6	
Total Split (s)	33.0	33.0		10.0	43.0		76.0	76.0		11.0	87.0	
Total Split (%)	25.4%	25.4%		7.7%	33.1%		58.5%	58.5%		8.5%	66.9%	
Maximum Green (s)	27.3	27.3		5.5	37.3		70.4	70.4		6.5	81.4	
Yellow Time (s)	3.3	3.3		3.5	3.3		4.6	4.6		3.5	4.6	
All-Red Time (s)	2.4	2.4		1.0	2.4		1.0	1.0		1.0	1.0	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Total Lost Time (s)	5.7	5.7		4.5	5.7		5.6	5.6		4.5	5.6	
Lead/Lag	Lag	Lag		Lead			Lag	Lag		Lead		
Lead-Lag Optimize?	Yes	Yes		Yes			Yes	Yes		Yes		
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None		None	None		Max	Max		None	Max	
Walk Time (s)	7.0	7.0		7.0			7.0	7.0			7.0	
Flash Dont Walk (s)	20.0	20.0		20.0			17.0	17.0			17.0	
Pedestrian Calls (#/hr)	0	0		0			0	0			0	
Act Effect Green (s)	10.0	10.0		17.1	15.9		71.9	71.9		83.8	82.7	
Actuated g/C Ratio	0.09	0.09		0.16	0.14		0.65	0.65		0.76	0.75	
v/c Ratio	0.04	0.16		0.86	0.17		0.05	0.55		0.19	0.95	
Control Delay	48.0	25.1		83.7	16.3		10.2	13.4		4.8	30.3	
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.5		0.0	0.0	
Total Delay	48.0	25.1		83.7	16.3		10.2	14.0		4.8	30.3	
LOS	D	C		F	B		B	B		A	C	
Approach Delay		28.8			69.3			13.9			28.6	
Approach LOS		C			E			B			C	
Queue Length 50th (m)	1.0	1.0		30.9	0.9		0.3	75.8		4.9	235.8	
Queue Length 95th (m)	4.8	9.5		#67.6	10.4		1.9	108.0		9.2	#363.1	
Internal Link Dist (m)		62.4			80.3			42.1			27.2	
Turn Bay Length (m)				20.0							110.0	
Base Capacity (vph)	316	397		180	539		79	1138		478	1313	
Starvation Cap Reductn	0	0		0	0		0	192		0	0	
Spillback Cap Reductn	0	0		0	0		0	0		0	0	
Storage Cap Reductn	0	0		0	0		0	0		0	0	
Reduced v/c Ratio	0.02	0.07		0.86	0.08		0.05	0.67		0.19	0.95	

Intersection Summary

Area Type: Other

Cycle Length: 130

Actuated Cycle Length: 109.9

Natural Cycle: 145

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.95

Intersection Signal Delay: 28.0 Intersection LOS: C


Intersection Capacity Utilization 105.0% ICU Level of Service G

Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 3: March Road & South Local Road/Site Access #1

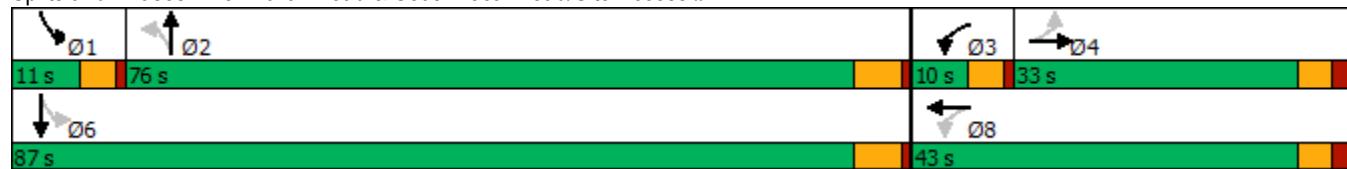

Lanes, Volumes, Timings

2027 FT-PM Sensitivity 2

3: March Road & South Local Road/Site Access #1

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	1	1	1	1	1	1	1	1	1	1	1	1
Traffic Volume (vph)	5	6	37	122	6	60	23	1000	12	44	767	8
Future Volume (vph)	5	6	37	122	6	60	23	1000	12	44	767	8
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	0.0	0.0	20.0		0.0	0.0			0.0	110.0		0.0
Storage Lanes	1		0	1		0	1		0	1		0
Taper Length (m)	15.0			15.0			15.0			95.0		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.871			0.864			0.998			0.998	
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1658	1520	0	1658	1508	0	1658	1742	0	1658	1742	0
Flt Permitted	0.714			0.469			0.295			0.179		
Satd. Flow (perm)	1246	1520	0	818	1508	0	515	1742	0	312	1742	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		37			60			1			1	
Link Speed (k/h)		50			30			80			80	
Link Distance (m)		91.5			103.7			66.1			81.0	
Travel Time (s)		6.6			12.4			3.0			3.6	
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj. Flow (vph)	5	6	37	122	6	60	23	1000	12	44	767	8
Shared Lane Traffic (%)												
Lane Group Flow (vph)	5	43	0	122	66	0	23	1012	0	44	775	0
Enter Blocked Intersection	No											
Lane Alignment	Left	Left	Right									
Median Width(m)		3.5			3.5			3.5			3.5	
Link Offset(m)		0.0			0.0			0.0			0.0	
Crosswalk Width(m)		3.0			3.0			3.0			3.0	
Two way Left Turn Lane												
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25		15	25		15	25		15	25		15
Number of Detectors	1	2		1	2		1	2		1	2	
Detector Template	Left	Thru										
Leading Detector (m)	2.0	10.0		2.0	10.0		2.0	10.0		2.0	10.0	
Trailing Detector (m)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Position(m)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Size(m)	2.0	0.6		2.0	0.6		2.0	0.6		2.0	0.6	
Detector 1 Type	Cl+Ex	Cl+Ex										
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(m)		9.4			9.4			9.4			9.4	
Detector 2 Size(m)		0.6			0.6			0.6			0.6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	Perm	NA	pm+pt	NA		Perm	NA		Perm	NA		
Protected Phases		4		3	8			2			6	
Permitted Phases		4		8			2			6		


Lanes, Volumes, Timings

2027 FT-PM Sensitivity 2

3: March Road & South Local Road/Site Access #1

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR								
Detector Phase	4	4		3	8		2	2		6	6									
Switch Phase																				
Minimum Initial (s)	10.0	10.0		5.0	10.0		10.0	10.0		10.0	10.0									
Minimum Split (s)	32.7	32.7		9.5	32.7		29.6	29.6		29.6	29.6									
Total Split (s)	33.0	33.0		10.0	43.0		87.0	87.0		87.0	87.0									
Total Split (%)	25.4%	25.4%		7.7%	33.1%		66.9%	66.9%		66.9%	66.9%									
Maximum Green (s)	27.3	27.3		5.5	37.3		81.4	81.4		81.4	81.4									
Yellow Time (s)	3.3	3.3		3.5	3.3		4.6	4.6		4.6	4.6									
All-Red Time (s)	2.4	2.4		1.0	2.4		1.0	1.0		1.0	1.0									
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0									
Total Lost Time (s)	5.7	5.7		4.5	5.7		5.6	5.6		5.6	5.6									
Lead/Lag	Lag	Lag		Lead																
Lead-Lag Optimize?	Yes	Yes		Yes																
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0	3.0									
Recall Mode	None	None		None	None		Max	Max		Max	Max									
Walk Time (s)	7.0	7.0		7.0			7.0	7.0		7.0	7.0									
Flash Dont Walk (s)	20.0	20.0		20.0			17.0	17.0		17.0	17.0									
Pedestrian Calls (#/hr)	0	0		0			0	0		0	0									
Act Effect Green (s)	10.0	10.0		19.3	18.1		84.3	84.3		84.3	84.3									
Actuated g/C Ratio	0.09	0.09		0.17	0.16		0.74	0.74		0.74	0.74									
v/c Ratio	0.05	0.26		0.65	0.23		0.06	0.78		0.19	0.60									
Control Delay	48.2	22.3		59.1	13.9		5.0	15.4		7.4	9.7									
Queue Delay	0.0	0.0		0.0	0.0		0.0	3.1		0.0	0.0									
Total Delay	48.2	22.3		59.1	13.9		5.0	18.5		7.4	9.7									
LOS	D	C		E	B		A	B		A	A									
Approach Delay		25.0			43.2			18.2			9.6									
Approach LOS		C			D			B			A									
Queue Length 50th (m)	1.0	1.2		23.8	1.1		1.3	128.9		2.7	74.5									
Queue Length 95th (m)	4.8	12.1		#43.8	13.0		3.7	194.1		7.3	106.8									
Internal Link Dist (m)		67.5			79.7			42.1			57.0									
Turn Bay Length (m)				20.0						110.0										
Base Capacity (vph)	299	393		187	535		381	1292		231	1292									
Starvation Cap Reductn	0	0		0	0		0	184		0	0									
Spillback Cap Reductn	0	0		0	0		0	0		0	0									
Storage Cap Reductn	0	0		0	0		0	0		0	0									
Reduced v/c Ratio	0.02	0.11		0.65	0.12		0.06	0.91		0.19	0.60									
Intersection Summary																				
Area Type:	Other																			
Cycle Length: 130																				
Actuated Cycle Length: 113.7																				
Natural Cycle: 110																				
Control Type: Actuated-Uncoordinated																				
Maximum v/c Ratio: 0.78																				
Intersection Signal Delay: 17.2	Intersection LOS: B																			
Intersection Capacity Utilization 79.5%	ICU Level of Service D																			
Analysis Period (min) 15																				
# 95th percentile volume exceeds capacity, queue may be longer.																				
Queue shown is maximum after two cycles.																				

Splits and Phases: 3: March Road & South Local Road/Site Access #1

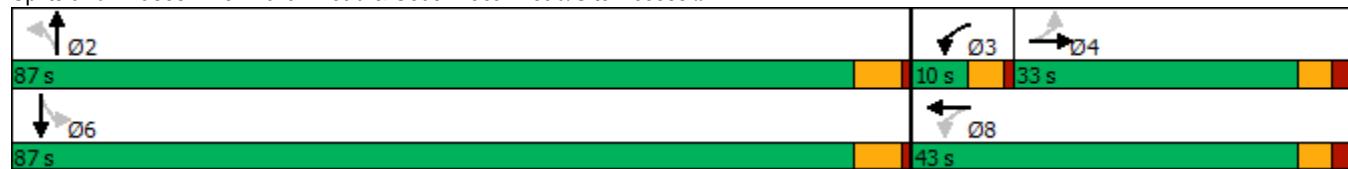

Lanes, Volumes, Timings

2027 FT Sat Sensitivity 2

3: March Road & South Local Road/Site Access #1

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↓		↑	↓		↑	↓		↑	↓	
Traffic Volume (vph)	5	10	37	193	9	97	23	800	21	74	750	8
Future Volume (vph)	5	10	37	193	9	97	23	800	21	74	750	8
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Length (m)	0.0		0.0		0.0		0.0		0.0	110.0		0.0
Storage Lanes	1		0	1		0	1		0	1		0
Taper Length (m)	15.0			15.0			15.0			95.0		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.882			0.863			0.996			0.998	
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1658	1539	0	1658	1506	0	1658	1738	0	1658	1742	0
Flt Permitted	0.664			0.726			0.330			0.215		
Satd. Flow (perm)	1159	1539	0	1267	1506	0	576	1738	0	375	1742	0
Right Turn on Red		Yes			Yes			Yes			Yes	
Satd. Flow (RTOR)		37			97			2			1	
Link Speed (k/h)		50			30			80			80	
Link Distance (m)		75.3			120.5			66.1			61.1	
Travel Time (s)		5.4			14.5			3.0			2.7	
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj. Flow (vph)	5	10	37	193	9	97	23	800	21	74	750	8
Shared Lane Traffic (%)												
Lane Group Flow (vph)	5	47	0	193	106	0	23	821	0	74	758	0
Enter Blocked Intersection	No											
Lane Alignment	Left	Left	Right									
Median Width(m)		3.5			3.5			3.5			3.5	
Link Offset(m)		0.0			0.0			0.0			0.0	
Crosswalk Width(m)		3.0			3.0			3.0			3.0	
Two way Left Turn Lane												
Headway Factor	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09
Turning Speed (k/h)	25		15	25		15	25		15	25		15
Number of Detectors	1	2		1	2		1	2		1	2	
Detector Template	Left	Thru										
Leading Detector (m)	2.0	10.0		2.0	10.0		2.0	10.0		2.0	10.0	
Trailing Detector (m)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Position(m)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Size(m)	2.0	0.6		2.0	0.6		2.0	0.6		2.0	0.6	
Detector 1 Type	Cl+Ex	Cl+Ex										
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(m)		9.4			9.4			9.4			9.4	
Detector 2 Size(m)		0.6			0.6			0.6			0.6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	Perm	NA		Perm	NA		Perm	NA		pm+pt	NA	
Protected Phases		4			8			2			1	6
Permitted Phases		4			8			2			6	

Lanes, Volumes, Timings

2027 FT Sat Sensitivity 2

3: March Road & South Local Road/Site Access #1

910 March Road



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR								
Detector Phase	4	4		8	8		2	2		1	6									
Switch Phase																				
Minimum Initial (s)	10.0	10.0		10.0	10.0		10.0	10.0		5.0	10.0									
Minimum Split (s)	32.7	32.7		32.7	32.7		29.6	29.6		9.5	29.6									
Total Split (s)	33.0	33.0		33.0	33.0		87.0	87.0		10.0	97.0									
Total Split (%)	25.4%	25.4%		25.4%	25.4%		66.9%	66.9%		7.7%	74.6%									
Maximum Green (s)	27.3	27.3		27.3	27.3		81.4	81.4		5.5	91.4									
Yellow Time (s)	3.3	3.3		3.3	3.3		4.6	4.6		3.5	4.6									
All-Red Time (s)	2.4	2.4		2.4	2.4		1.0	1.0		1.0	1.0									
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0									
Total Lost Time (s)	5.7	5.7		5.7	5.7		5.6	5.6		4.5	5.6									
Lead/Lag							Lag	Lag		Lead										
Lead-Lag Optimize?							Yes	Yes		Yes										
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0	3.0									
Recall Mode	None	None		None	None		Max	Max		None	Max									
Walk Time (s)	7.0	7.0		7.0	7.0		7.0	7.0			7.0									
Flash Dont Walk (s)	20.0	20.0		20.0	20.0		17.0	17.0			17.0									
Pedestrian Calls (#/hr)	0	0		0	0		0	0			0									
Act Effect Green (s)	23.0	23.0		23.0	23.0		84.0	84.0		93.0	91.9									
Actuated g/C Ratio	0.18	0.18		0.18	0.18		0.67	0.67		0.74	0.73									
v/c Ratio	0.02	0.15		0.84	0.30		0.06	0.71		0.22	0.60									
Control Delay	41.4	18.0		79.0	12.2		9.8	19.3		6.9	11.3									
Queue Delay	0.0	0.0		0.0	0.0		0.0	2.4		0.0	0.0									
Total Delay	41.4	18.0		79.0	12.2		9.8	21.6		6.9	11.3									
LOS	D	B		E	B		A	C		A	B									
Approach Delay				55.3				21.3			10.9									
Approach LOS		C		E				C			B									
Queue Length 50th (m)	1.0	2.1		46.5	1.9		2.0	132.1		4.8	85.8									
Queue Length 95th (m)	4.6	12.3		#79.3	17.0		5.9	193.4		9.6	126.9									
Internal Link Dist (m)		51.3			96.5			42.1			37.1									
Turn Bay Length (m)										110.0										
Base Capacity (vph)	250	362		274	401		383	1158		332	1269									
Starvation Cap Reductn	0	0		0	0		0	210		0	0									
Spillback Cap Reductn	0	0		0	0		0	0		0	0									
Storage Cap Reductn	0	0		0	0		0	0		0	0									
Reduced v/c Ratio	0.02	0.13		0.70	0.26		0.06	0.87		0.22	0.60									
Intersection Summary																				
Area Type:	Other																			
Cycle Length: 130																				
Actuated Cycle Length: 126.2																				
Natural Cycle: 90																				
Control Type: Actuated-Uncoordinated																				
Maximum v/c Ratio: 0.84																				
Intersection Signal Delay: 22.0	Intersection LOS: C																			
Intersection Capacity Utilization 82.5%	ICU Level of Service E																			
Analysis Period (min) 15																				
# 95th percentile volume exceeds capacity, queue may be longer.																				
Queue shown is maximum after two cycles.																				

Splits and Phases: 3: March Road & South Local Road/Site Access #1

