

SOURCE REFERENCE:
 PLAN OF SUBDIVISION OF PART OF LOT "H" CONCESSION "D" (RIDEAU FRONT), PREPARED BY ANNIS, O-SULLIVAN, VOLLEBEK LTD. ON DECEMBER 15, 2017. (PLAN 4M-1596)
TOPOGRAPHIC INFORMATION:
 HORIZONTAL DATUM: NAD 83 (ORIGINAL), MTM - ZONE 9
 VERTICAL DATUM: CGVD2878
 1. DRAFT PLAN OF SUBDIVISION OF PART OF LOT "H" CONCESSION "D" (RIDEAU FRONT), PREPARED BY ANNIS, O-SULLIVAN, VOLLEBEK LTD. (2015)
 2. NOVATECH TOPOGRAPHIC SURVEY, APRIL 2024


LEGEND

	PROPOSED ELEVATION		EXISTING SANITARY MAINTENANCE HOLE
	EXISTING GROUND ELEVATION		EXISTING STORM MAINTENANCE HOLE
	PROPOSED ELEVATION (SUBDIVISION)		EXISTING CATCHBASIN
	EXISTING CONTOUR AND ELEVATION		EXISTING VALVE & VALVE BOX LOCATION
	TERRACE TO EXISTING (3.1 MAX)		EXISTING HYDRANT
	PROPOSED GRADING TIE-IN LIMITS		EXISTING DEPRESSED CURB
	PROPOSED SANITARY MAINTENANCE HOLE		EXISTING STREET LIGHT
	PROPOSED STORM MAINTENANCE HOLE		LEAN CONCRETE REQUIRED UNDER FOOTING TO 3.5m BELOW FINISHED GRADE (FOOTING WITHIN 4.5m OF PROPOSED TREE)
	PROPOSED CATCHBASIN		SITE BOUNDARY
	PROPOSED STAND POST LOCATION		
	DEPRESSED CURB		

PAVEMENT STRUCTURE:


DESCHÂTELETS AVENUE	CAR COURT AREAS
40mm ASPHALT SP12.5 (LEVEL B)	50mm ASPHALT SP12.5 (LEVEL B)
50mm ASPHALT SP19.0 (LEVEL B)	150mm GRANULAR "A"
50mm ASPHALT SP19.0 (LEVEL B)	300mm GRANULAR "B"
150mm GRANULAR "A"	500mm TOTAL DEPTH
450mm GRANULAR "B"	
740mm TOTAL DEPTH	

- GRADING AND PAVEMENT NOTES:**
- ALL TOPSOIL, ORGANIC OR DELETERIOUS MATERIAL MUST BE ENTIRELY REMOVED FROM BENEATH THE PROPOSED HARD SURFACE (i.e. PAVEMENT, CURB, SIDEWALK, ETC.) AREAS AS DIRECTED BY THE SITE ENGINEER OR GEOTECHNICAL ENGINEER.
 - EXPOSED SUBGRADES IN PROPOSED PAVED AREAS SHOULD BE HEAVILY PROOF ROLLED WITH A LARGE (10 TON) VIBRATORY STEEL DRUM ROLLER UNDER DRY CONDITIONS AND INSPECTED BY THE GEOTECHNICAL ENGINEER PRIOR TO THE PLACEMENT OF GRANULARS.
 - ANY SOFT AREAS EVIDENT FROM THE PROOF ROLLING SHOULD BE SUB-EXCAVATED AND REPLACED WITH SUITABLE MATERIAL THAT IS FROST COMPATIBLE WITH THE EXISTING SOILS AS RECOMMENDED BY THE GEOTECHNICAL ENGINEER.
 - THE GRANULAR BASE SHOULD BE PLACED IN MAXIMUM 300mm LIFTS AND COMPACTED TO AT LEAST 98% OF THE STANDARD PROCTOR MAXIMUM DRY DENSITY VALUE. ANY ADDITIONAL GRANULAR FILL USED BELOW THE PROPOSED PAVEMENT SHOULD BE PLACED IN MAXIMUM 300mm LIFTS AND COMPACTED TO AT LEAST 95% OF THE STANDARD PROCTOR MAXIMUM DRY DENSITY VALUE.
 - SUBGRADE TO BE INSPECTED BY THE GEOTECHNICAL ENGINEER AT THE TIME OF CONSTRUCTION TO REVIEW IF A WOVEN GEOTEXTILE IS REQUIRED BELOW THE GRANULAR MATERIALS; AND TO CONFIRM THE DEPTH AND COMPACTION OF GRANULAR 'B' PRIOR TO PLACEMENT OF WEAR COURSE ASPHALT, THE CONTRACTOR SHALL ADJUST ALL STRUCTURES TO FINAL GRADE PER CITY OF OTTAWA STANDARDS.
 - MINIMUM OF 2% GRADE FOR ALL GRASSED AREAS UNLESS OTHERWISE NOTED.
 - MAXIMUM TERRACING GRADE TO BE 3:1 UNLESS OTHERWISE NOTED.
 - ALL GRADES BY CURBS ARE EDGE OF PAVEMENT GRADES UNLESS OTHERWISE INDICATED.
 - ALL CURBS SHALL BE BARRIER CURB UNLESS OTHERWISE NOTED AND CONSTRUCTED PER CITY OF OTTAWA STANDARD (SC1.1).
 - ALL SIDEWALKS ARE TO HAVE 2% CROSSFALL UNLESS OTHERWISE NOTED. CROSSFALL IS TO BE DIRECTED AWAY FROM BUILDINGS AND PROPERTY LINES UNLESS OTHERWISE NOTED. WHERE PATHWAY TO HAVE 1% CROSSFALL, LONGITUDINAL FALL IS TO BE 2% MINIMUM.
 - REFER TO LANDSCAPE PLAN FOR PLANTING AND OTHER LANDSCAPE FEATURE DETAILS.
 - DESCHÂTELETS AVENUE IS A COLLECTOR ROADWAY. ALL ASPHALT USED FOR ROAD CUT REINSTATEMENTS SHALL BE LEVEL B (PG 68-34) PER R10 AND THE APPROVED SUBDIVISION PLANS.
 - ASPHALT TO BE PLACED IN LIFT THICKNESSES NOT EXCEEDING 60mm OR AS OTHERWISE RECOMMENDED BY THE GEOTECHNICAL ENGINEER.
 - REFER TO GEOTECHNICAL INVESTIGATION - PROPOSED RESIDENTIAL DEVELOPMENT - 295 & 355 DESCHÂTELETS AVENUE, PREPARED BY PATERSON GROUP, DATED FEBRUARY 1, 2024 FOR ADDITIONAL INFORMATION.
 - RIGHT OF WAY CURBS AND SIDEWALK TO BE CONSTRUCTED AS PER SC1.1 AND SC1.4 OR SC2. ENTRANCES TO BE CONSTRUCTED AS PER SC7.1

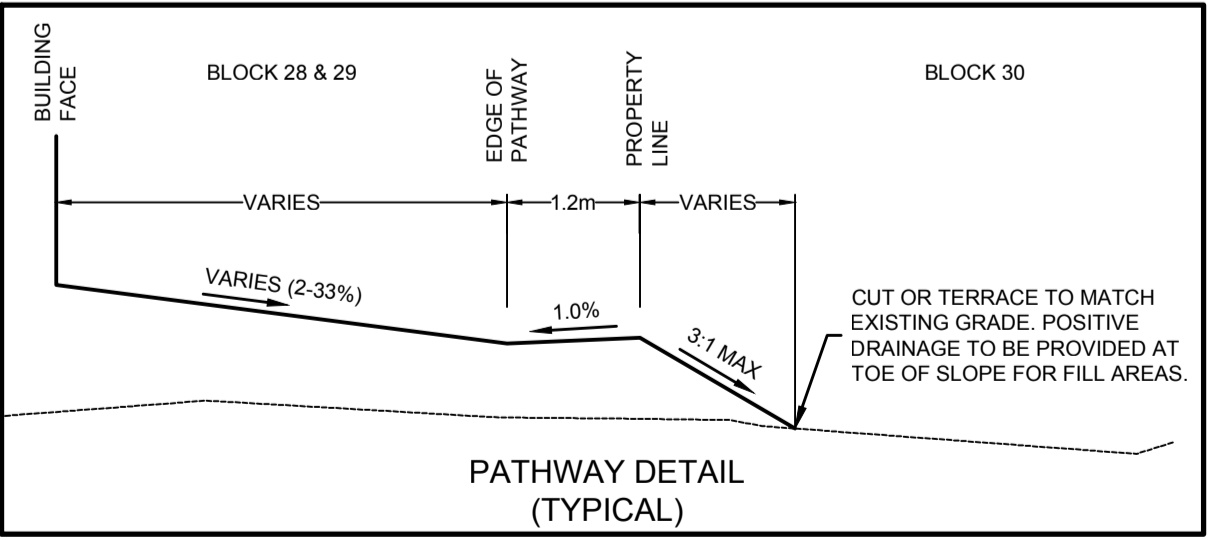

NOTE:
 THE POSITION OF ALL POLE LINES, CONDUITS, WATERMANS, SEWERS AND OTHER UNDERGROUND AND OVERGROUND UTILITIES AND STRUCTURES IS NOT NECESSARILY SHOWN ON THE CONTRACT DRAWINGS, AND WHERE SHOWN, THE ACCURACY OF THE POSITION OF SUCH UTILITIES AND STRUCTURES IS NOT GUARANTEED. BEFORE STARTING WORK, DETERMINE THE EXACT LOCATION OF ALL SUCH UTILITIES AND STRUCTURES AND ASSUME ALL LIABILITY FOR DAMAGE TO THEM.

No.	REVISION	DATE	BY
5.	REVISED PER CITY COMMENTS	DEC 20/24	TJM
4.	REVISED PER CITY COMMENTS	NOV 29/24	TJM
3.	RE-ISSUED FOR SITE PLAN APPROVAL	OCT 17/24	TJM
2.	ISSUED FOR SITE PLAN APPROVAL	AUG 14/24	TJM
1.	ISSUED FOR DISCUSSION	APR 26/24	TJM

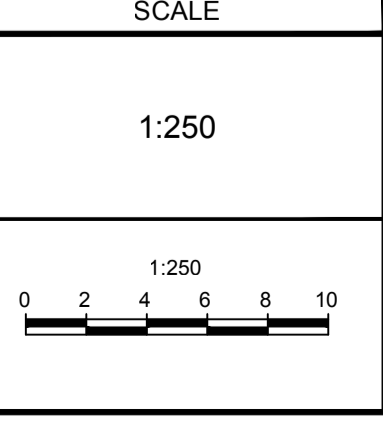

DESIGN	SAM
CHECKED	TJM
DRAWN	SAM
CHECKED	TJM
APPROVED	TJM



NOVATECH
 Engineers, Planners & Landscape Architects
 Suite 200, 240 Michael Cowpland Drive
 Ottawa, Ontario, Canada K2M 1P6
 Telephone: (613) 254-9643
 Facsimile: (613) 254-5867
 Website: www.novatech-eng.com

LOCATION	CITY OF OTTAWA GREYSTONE VILLAGE
DRAWING NAME	BLOCK 28 GRADING PLAN
PROJECT No.	114025-00
REV	REV # 5
DRAWING No.	114025-FI-GR2

M:\2024\114025\CAD\Drawings\114025-FI-GR2.dwg, FT-GR.dwg, Dec 20, 2024 - 6:09pm, Chanana

D07-12-24-0130