


| PROPOSED PLANT LIST | | | | | | |
|--|------|----------------|-------------|-----------|-----------|----------------|
| KEY | QTY. | BOTANICAL NAME | COMMON NAME | SIZE | CONDITION | NATIVE SPECIES |
| TREES | | | | | | |
| SM | 1 | Acer saccharum | Sugar Maple | 50mm cal. | B&B | YES |
| NOTE: TREE IS PROPOSED ON PRIVATE PROPERTY | | | | | | |



KEY PLAN: NTS

| | | | |
|--|--|---|--|
| GENERAL NOTES: 1. IT IS THE RESPONSIBILITY OF THE APPROPRIATE CONTRACTOR OR OFFICIAL TO REPORT ANY ERRORS, OMISSIONS OR DISCREPANCIES ON THIS PLAN WITH ACTUAL SITE CONDITIONS TO THE LANDSCAPE ARCHITECT BEFORE PROCEEDING WITH CONSTRUCTION. 2. THE CONTRACTOR IS TO NOTIFY ALL UTILITY COMPANIES AND AUTHORITIES PRIOR TO ANY EXCAVATION AND ASCERTAIN LOCATIONS OF UNDERGROUND SERVICES. 3. THE CONTRACTOR IS TO REINSTATE ALL AREAS AND ITEMS DAMAGED AS A RESULT OF CONSTRUCTION ACTIVITY. 4. THE CONTRACTOR IS TO COMPLY WITH ALL PERTINENT CODES AND BY-LAWS. 5. THE CONTRACTOR IS TO MAINTAIN A POSITIVE SURFACE RUN-OFF THROUGHOUT THE ENTIRE CONSTRUCTION PERIOD. 6. THE LANDSCAPE ARCHITECT IS NOT RESPONSIBLE FOR SUBSURFACE CONDITIONS. 7. THE CONTRACTOR IS TO STAKE THE PROPOSED LOCATION OF ALL PLANT MATERIAL IN CONJUNCTION WITH THE LANDSCAPE ARCHITECT PRIOR TO EXCAVATION. 8. MINIMUM DISTANCES FOR SELECTED DECIDUOUS TREES ARE AS FOLLOWS: 8.1. BUILDING FOUNDATIONS - 7.5M 8.2. SIDEWALKS - 1.5M 8.3. PUBLIC STREETS - 2.5M 8.4. UNDERGROUND INFRASTRUCTURE - 2.0M 9. ALL TREES WITHIN 1M OF UNDERGROUND UTILITY TRENCHES ARE TO BE EXCAVATED BY HAND. 10. REMOVE ALL PROTECTIVE WRAPPING FROM TREE TRUNKS AFTER INSTALLATION. 11. STAKING OF TREES SHALL ONLY BE PERFORMED IF NECESSARY. 12. ENSURE THAT MULCH IS PULLED BACK A MINIMUM DISTANCE OF 75MM FROM BASE OF TREE TRUNK. | | 40 YEAR CANOPY CALCULATION: -456m2 site area -1 Large deciduous tree proposed (154m2 ea.) =154m2 canopy cover =33.8% canopy cover *Large deciduous tree calculated at 14m spread | |
|--|--|---|--|

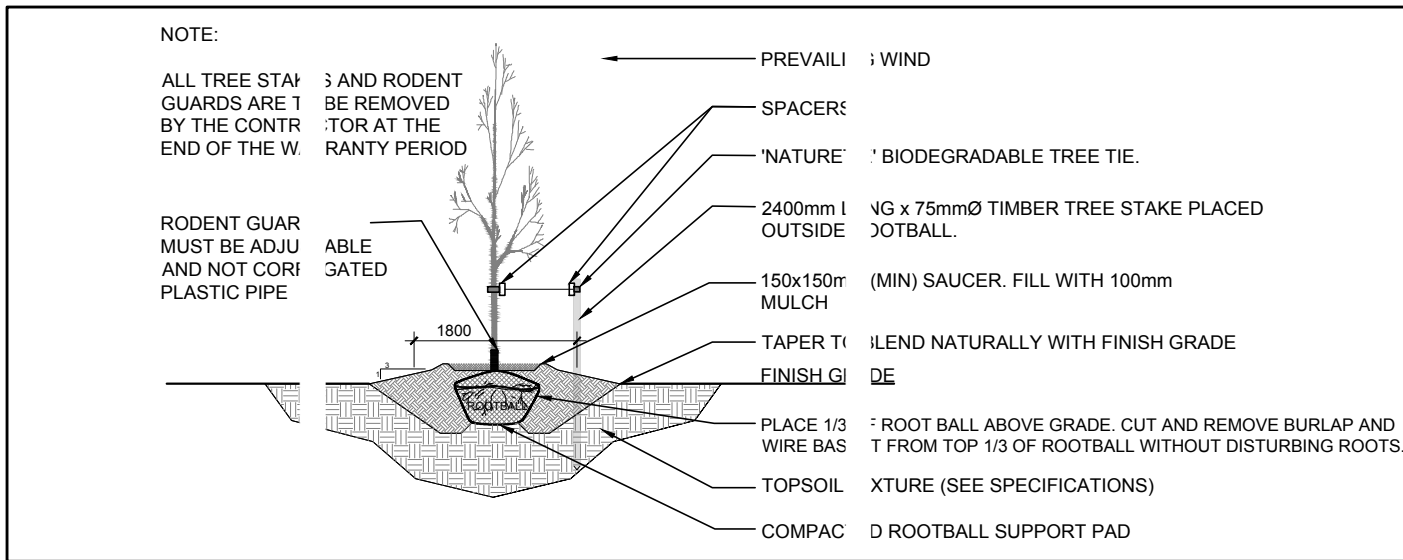

CLIENT

Majid Ahangaran

CONSULTANTS

ARCHITECT:

RA | REDLINE ARCHITECTURE

REDLINE ARCHITECTURE INC.

Tel: 613-612-2232
info@redlinearchitecture.ca
www.redlinearchitecture.ca

CIVIL ENGINEERS:

EXP SERVICES INC.

2650 Queensview Drive, Ottawa ON K2B 8H6
Tel : (613) 688-1899

SURVEYORS:

ANNIS, O'SULLIVAN, VOLLEBEKK LTD.

14 Concourse Gate, Suite 500
Nepean, Ont. K2E 7S6
Phone: (613) 727-0850 / Fax: (613) 727-1079
Email: Nepean@aoi.com

LEGEND

PROPOSED DECIDUOUS TREE
REQUIRED SOIL VOLUME (30m3 FOR LARGE TREE AT A 1.5m DEPTH)

PROPOSED RIVERSTONE

PROPOSED SOD

PROPOSED SIDEWALK

EXISTING PRIVATE RIGHT OF WAY

CAR PARKING AREA

EXISTING SHRUB TO REMAIN

PROPOSED ROAD CUT AREA (REFER TO CIVIL DRAWING FOR DETAILS)

| | | | | |
|-----|------------------------------|------------|----|-------|
| 4 | REVISED PER CITY COMMENTS | 05/20/2025 | ML | JL |
| 3 | REVISED PER NEW SITE PLAN | 05/01/2025 | ML | JL |
| 2 | REVISED PER CITY COMMENTS | 01/22/2025 | ML | JL |
| 1 | ISSUED FOR SITE PLAN CONTROL | 11/19/2024 | ML | JL |
| No. | Issue | Date | ML | DR CK |

JAMES B. LENNOX & ASSOCIATES INC. LANDSCAPE ARCHITECTS

3332 CARLING AVE. OTTAWA, ONTARIO K2H 5A8
Tel. (613) 722-5168 Fax. (866) 343-3942

PROJECT

PROPOSED 4-STORY LOW RISE APARTMENT BUILDING

116-118 CARRUTHERS AVENUE, OTTAWA ON

DRAWING

LANDSCAPE PLAN

STAMP

SCALE

AS SHOWN

START DATE

JULY 2024

PROJECT NO.

24MIS2444

PROJECT NORTH

DRAWING NO.

L.1

PLOT SIZE ARCH-D