

# FUNCTIONAL SERVICING AND STORMWATER MANAGEMENT REPORT

### SITE PLAN SUBMISSION - OCTOBER 2025



4497 O'Keefe Court, Ottawa, Ontario Proposed Office and Warehouse Development KWA PROJECT: 21684 Application #D07-12-25-0085 Plan #19335

### **Report Prepared for:**

O'Keefe Court Properties c/o The Properties Group Mgmt Ltd. 26 Metcalfe Street Ottawa, ON K20 1R3



#### **Report Prepared by:**

**KWA Site Development Consulting Inc.** 2453 Auckland Drive Burlington, Ontario L7L 7A9

This report reflects best engineering judgment based on the material available at the time of its preparation. KWA Site Development Consulting Inc. accepts no responsibility for any damages to a third party that may arise as a result of decisions made or actions taken based on this report.



# **Table of Contents**

1.0	Introd	luction	1
	1.1	Project Background	2
	1.2	Proposed development	2
	1.3	Site access	2
	1.4	Utilities	2
2.0	Storm	water Management	4
	2.1	Existing Drainage Conditions	4
	2.2	Stormwater Management Design Criteria	4
	2.3	Proposed Stormwater Management Design Strategy	5
	2.4	Stormwater Quantity Control	6
	2.5	Stormwater Water Quality	7
	2.6	Water Balance	8
	2.7	Proposed Stormwater Outfall	9
	2.8	Stormwater Emergency Overland Flow Route	9
	2.9	Construction Erosion and Sediment Control	9
3.0	Sanita	ary Servicing	13
	3.1	Existing Sanitary Servicing	13
	3.2	Proposed Sanitary Servicing	13
4.0	Water	r Servicing	14
	4.1	Existing Water Servicing	14
	4.2	Proposed Water Servicing	
	4.3	Fire Hydrant Coverage	
5.0	Concli	usion	
		Pacammendations	17



#### **Tables**

- Table 1 Pre-development Runoff Peak Flows
- Table 2 Stage-Storage-Discharge for Storage Chamber
- Table 3 Comparison of Pre-development and Post-development Peak Flows

# **Figures**

- Figure 1-1 Location Plan
- Figure 1-2 Proposed Development Plan
- Figure 2-1 Proposed Drainage Plan
- Figure 2-2 Drainage Route to Ultimate Outfall

### **Appendices**

- Appendix A Stormwater Management Calculations
- Appendix B Sanitary Calculations
- Appendix C Water Demand Calculations
- Appendix D Off-Site Works Exhibits
- Appendix E Supporting Documentation
- Appendix F Drawings



#### 1.0 Introduction

KWA Site Development Consulting Inc. (KWA) has been retained by The Properties Group to prepare a detailed Functional Servicing and Stormwater Management Report along with a corresponding grading and servicing design in support of the Site Plan Application (SPA) for the proposed development. The subject property is located at the northwest corner of O'Keefe Court at municipal address 4497 O'Keefe Court in the City of Ottawa (formerly the Municipality of Nepean). Refer to **Figure 1.1** below.

#### This report will:

- Provide background information regarding the subject property;
- Summarize the existing site conditions;
- Provide information regarding the proposed development conditions;
- Outline the proposed grading for the development; and
- Outline the existing and proposed municipal servicing.

The recommended servicing has been developed in accordance with the applicable design criteria and requirements of the City of Ottawa (the City).



Figure 1-1: Location Plan



#### 1.1 PROJECT BACKGROUND

The total property is approximately 6.88ha in area at municipal address 4497 O'Keefe Court in the City of Ottawa. The existing site was previously a quarry which has not been active for many years and is now vacant greenfield.

The subject site is bound by O'Keefe Court to the south, Lytle Park to the East, Highway 416 to the west and Vacant greenfield to the north.

The existing topography of the site slopes from north-west to south-east, towards the existing ditches along O'Keefe Court. Existing elevations are 113.0-114.50 in the north-west corner sloping down to the south-east corner with elevations of 102.50-103.00. Site elevation differences of approximately 10-12 m across the length of the site.

#### 1.2 PROPOSED DEVELOPMENT


The proposed development of the site includes three (3) industrial warehouse buildings, with a total anticipated floor area of 23,858m<sup>2</sup> (256,800ft<sup>2</sup>). The buildings will be surrounded by driveways, parking, and loading docks located on the east side of the buildings, with entrances facing the highway on the west side. Refer to Figure 1-1 for the proposed development plan.

#### 1.3 SITE ACCESS

The site's main vehicular access will be two proposed entrances from O'Keefe Court.

#### 1.4 UTILITIES

As the proposed development is located within a well-developed area of Ottawa, all utilities including telephone, cable, electricity and gas are readily available to service the subject property. Water and sanitary servicing will be further elaborated in the subsequent respective sections in this report.

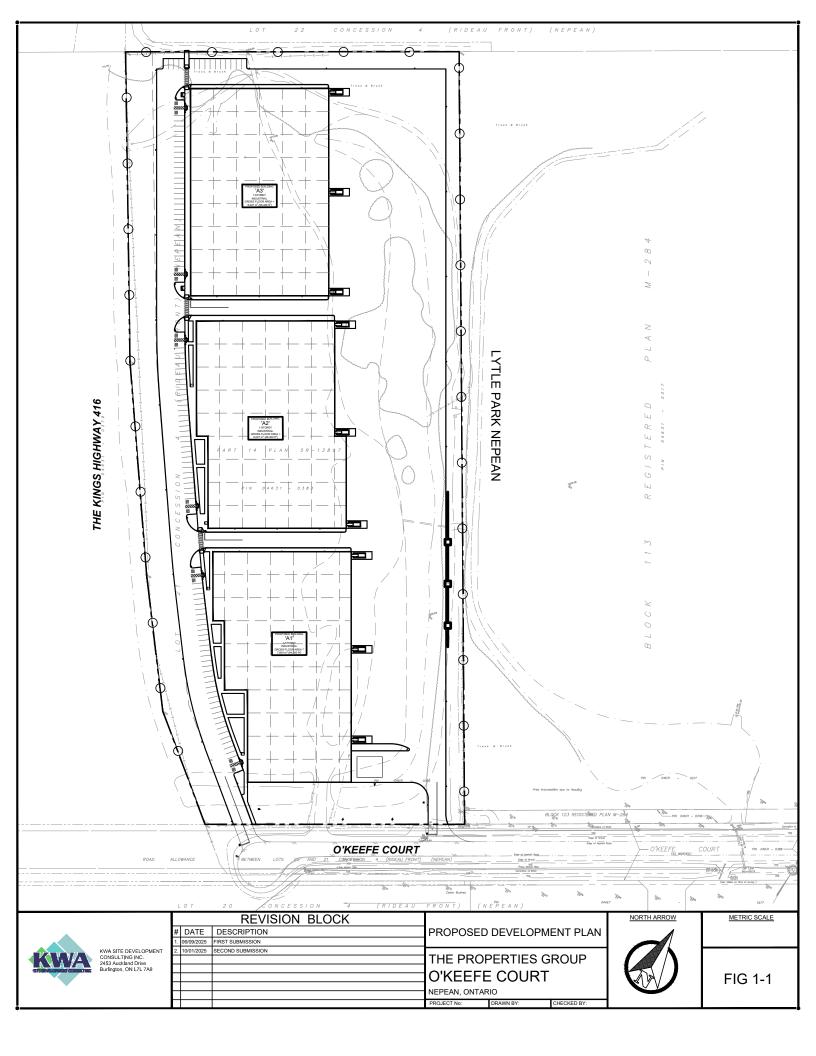



#### 2.0 STORMWATER MANAGEMENT

#### 2.1 Existing Drainage Conditions

The existing topography of the site slopes from north-west to south-east, towards the existing ditches along O'Keefe Court. Existing elevations are 113.0-114.50 in the north-west corner sloping down to the south-east corner with elevations of 102.50-103.00. Site elevation differences of approximately 10-12 m across the length of the site.

Most of the existing drainage from the site drains towards the east-middle of the site where drainage is conveyed by a 750mm culvert through a landscaped berm along the eastern property limit. This drainage is then conveyed towards a ditch within the neighbouring Lytle Park, where the drainage enters a water feature located on the south side of the Lytle Park property. Flows after this water feature are then conveyed along a swale on the north side of O'Keefe Court, which then crosses to the south side of O'Keefe Court through a culvert. Drainage then continues to flow south-east through conveyance swales and culverts down to Jock River, which finally flows east into the Rideau River flowing north to Ottawa River.

Although existing drainage of the subject site is tributary to the north swale of O'Keefe Court (via Lytle Park), discussions with City staff have determined that the swale along the south side of O'Keefe Court will serve as the most functionally acceptable outfall for the site (i.e. bypassing Lytle Park and the north swale), provided there is sufficient flow capacity. Therefore, the site will be designed based on the allowable outlet determined by City staff instead of existing conditions. Further discussion and analysis can be found in Section 2.7.

The pre-development rates are determined using the Modified Rational Method. The inputs are:

- Drainage area = 6.88ha
- Time of Concentration = 40 minutes (calculated using the Airport Method)
- Runoff Coefficient = 0.30
- Intensity based on the City of Ottawa IDF curves.

Table 1: Pre-development Runoff Peak Flows

Storm Event	Intensity (mm/hr)	Peak Flows (L/s)
2-yr	32.9	189
5-yr	44.2	254
10-yr	51.6	296
25-yr	61.0	350
50-yr	68.0	390
100-yr	75.1	431

Refer to **Figure F2-1** for the proposed drainage plan and **Figure F2-2** for the extent of external drainage route southeast of the site down to Jock River.

#### 2.2 STORMWATER MANAGEMENT DESIGN CRITERIA

The proposed stormwater management design is based on the MOE 2008 Stormwater Management Planning & Design (SWMPD), the City of Ottawa Sewer Guidelines (October 2012), and the City of Ottawa Stormwater Management Design Guidelines (2012).

- **Quantity Control:** Stormwater runoff is to be controlled from pre-development to post-development peak runoff rates for storms up to and including the 100-year event using on-site detention.
  - Ministry of Transportation (MTO): It is understood that rooftop controls are typically not permitted for sites within MTO jurisdiction. The drainage outlets for these building rooftops drain easterly away from the Highway 416 corridor and towards the Jock River, therefore the site



- Quality Control: Stormwater quality control measures will be provided to achieve at a minimum, Enhanced level of protection (i.e. 80% TSS removal) as described in the MOE SWMPD manual for TSS removal. Thermal mitigation through on-site Best Management Practices (BMP's) is also required.
- Water Balance: Based on the Jock River Reach 1 Subwatershed Study (June 2007), future development within this subwatershed should have an objective to maximize infiltration wherever possible using best management practices (BMP). Retention of the first 5mm of all rainfall events will be provided through on-site infiltration as a best efforts approach. Retention of the first 5mm of rainfall is equivalent to a 50% annual runoff reduction.
- Construction Erosion and Sediment Control: All applicants must include an Erosion and Sediment Control
  plan demonstrating that fish habitat and water quality are not affected by sediment from the property during
  or following site construction.
- **Ponding and Overflows:** Allowable flow depth shall not exceed 300mm in parking lot/private roadway areas. Excess runoff greater than the 100-year storm event must overflow to City ROW (O'Keefe Court).
- Stormwater Outlet: Stormwater drainage systems shall discharge to municipal storm sewer system where
  feasible. In cases where this is not possible, stormwater drainage systems may discharge to natural
  watercourses.

#### 2.3 Proposed Stormwater Management Design Strategy

The proposed stormwater management system will include the capture and conveyance of the entire proposed development (6.88ha). The primary stormwater management will be achieved by utilization of rooftop storage using control drains. Since the rooftop of the buildings cover a significant portion of the site area, this will provide considerable and effective stormwater management for the site. Surface drainage will be captured by a series of catchbasins spread out across the site. The storm sewers will be sized to capture and convey 5-year storm flows and directed to a series of stormwater management facilities in the southeast corner of the site before outfall.

It is understood that the subject site falls within the jurisdiction of the Ministry of Transportation (MTO), where rooftop controls are typically not permitted. In this case, however, the building rooftops are controlled and ultimately discharge to the roadside ditches on O'Keefe Court, with drainage continuing through the O'Keefe drain, and ultimately to the Jock River, which lies outside MTO jurisdiction. Therefore, given that rooftop drainage is directed away from MTO drainage features, it is assumed that rooftop controls would not be subject to MTO regulation. For a depiction of the ultimate drainage outfall in both existing and proposed conditions, please refer to **Figure 2-2**.

Catchbasin inlets are designed with a 50% blockage factor to capture the 5-year flows, with storm events above the 5-year and up to the 100-year draining overland and being picked up by subsequent catchbasins. In order to ensure overland drainage up to the 100-year storm event does not spill out from the site, the final catchbasin inlet for both the west and east drive aisles have been designed to receive all overland drainage above the 5-year and up to the 100-year storm events for upstream catchments, with only the emergency overland flow route spilling out to O'Keefe Court (i.e. during rainfall events above the 100-year or clogged inlet scenarios). Inlet capacity calculations can be found in **Appendix A**.

The stormwater management facilities include a Cultec storage chamber and dry pond. An orifice and weir is designed at the outlet of the control maintenance hole at the south-east corner prior to release to a culvert that will cross O'Keefe Court and discharge to the south swale. A 170mm orifice plate has been proposed with a 1.50m rectangular weir to match post-development flows to pre-development for all storm events from the 2-year to 100-year storms.

Water balance volumes for infiltration will be achieved with proposed underground infiltration galleries located at building storm outfalls. The infiltration chambers will be sized to provide the water balance infiltration volumes for the building rooftops and drainage captured from the west side of the site. The chambers will be located such that the base of the infiltration gallery is at least 1.0m above existing groundwater and bedrock elevations. Total suspended solids treatment will be achieved primarily using a treatment inlet row (i.e. a Separator Row) located in the first row of the chambers with final treatment by an OGS located at the south-east corner of the property prior to site discharge out to the O'Keefe Court drainage swale.



#### 2.4 STORMWATER QUANTITY CONTROL

The quantity control criteria is to control the post-development peak runoff rates to the pre-development peak runoff rates (as found in Section 2.1) for every storm event up to the 100-year event.

In the post-development condition, the drainage areas and directions will be as follows:

- **Controlled Rooftops:** runoff from **2.39ha** of rooftops is proposed to be controlled to a rate of 42L/s/roof ha by controlled roof drains. Runoff coefficient of 0.90 (used for the purpose of Quality Control sizing).
- **Controlled Landscaped and Pavement areas:** Runoff from **4.00ha** of the landscaped areas, loading docks, and parking lots is collected by catch basins and conveyed to the on-site storm sewers that are sized to accommodate the 5-year design flows. Runoff coefficient of 0.90.
- Uncontrolled Pavement areas: Runoff from 0.49ha of paved and landscape areas (composite runoff coefficient of 0.43) will discharge uncontrolled towards O'Keefe Court
- Total net developable area is **6.88ha**.

For the 100-year storm event, runoff coefficients are increased by a factor of 1.25 for all drainage areas.

Building rooftops (2.39ha) are proposed to be controlled at a rate of 42L/s/ha. Based on the modified rational method, the maximum rooftop storage volume required during the 100-year storm event is **1149.4m³** across the three building rooftops. Assuming 50% of the rooftops are available for ponding storage and a maximum depth of ponding on rooftops of 0.15m (6"), the total available rooftop storage is estimated to be **1,793m³**, therefore it is expected that the rooftops will have capacity to provide the rooftop storage required. Further details will be reviewed and refined with the mechanical and structural engineers of the building at a later stage.

A dry pond and underground chamber by Cultec (Recharger 280HD) is proposed to achieve the storage requirements for the remaining controlled site areas (4.00ha), accounting for inflows coming from the upstream controlled rooftops. To optimize attenuation of post-development flows to pre-development levels storm events up to the 100-year storm event, a 170mm orifice plate and 1.5m rectangular weir has been proposed in the control manhole located immediately downstream of the dry pond. Using the modified rational method, a maximum storage volume required during the 100-year storm event was calculated to **1,729m**<sup>3</sup>.

The dry pond has been sized to maximize the available landscape area at the south end of the site, while maintaining sufficient freeboard and horizontal clearances from the adjacent building and drive aisles, providing a total pond volume of **644m**<sup>3</sup>. The remaining storage deficit will be provided by a Cultec Recharger 280HD that is connected upstream of the dry pond by a transfer pipe and has been sized to provide up to **1,091m**<sup>3</sup> of storage volume, providing a total storage of **1,735m**<sup>3</sup>. Table 2 below summarizes the stage-storage-discharge relationship of the quantity control measures.

The uncontrolled area of 0.49 ha will discharge uncontrolled in all storm events. Refer to Table 3 below for the total release rates for the site, including the controlled and uncontrolled drainage.



Table 2: Stage-Storage-Discharge

Storm Event	Elevation (m)	Required/Provided Storage (m³)	Post-development Release Rate (L/s)	Target Controlled Release Rate (L/s)
2-yr	104.42	1,190	69	145
5-yr	104.63	1,512	93	193
10-yr	104.66	1,556	120	225
25-yr	104.69	1,594	148	266
50-yr	104.71	1,624	173	296
100-yr	104.80	1,729	324	328

- The required/provided storage corresponds to the available storage in both the pond and chamber at the various elevations for each storm event
- The target controlled release rate is the total allowable release rate less the post-development uncontrolled release rate
- Post-development release rate is based on the acting head on the orifice/weir

Table 3: Comparison of Pre-development and Post-development Peak Flows

Storm	Pre-development	Post-de	velopment Releas	e Rates (L/s)	Net	
Event	Release Rates (L/s)	Controlled Flows	Uncontrolled Flows	Total	Reduction	
2-yr	189	69	45	114	40%	
5-yr	254	93	60	153	40%	
10-yr	296	120	71	191	35%	
25-yr	350	148	84	232	34%	
50-yr	390	173	94	267	32%	
100-yr	431	324	104	428	1%	

As shown in Table 3, the proposed quantity controls will have a net reduction in site flows for all storm events in post-development conditions as compared to pre-development conditions, thus achieving the required stormwater quantity criteria.

#### 2.5 STORMWATER WATER QUALITY

#### 2.5.1 TOTAL SUSPENDED SOLIDS

The quality control objective is to provide an enhanced protection level, which corresponds to the removal of minimum 80% TSS.

Runoff on the site will follow a treatment train approach, where rooftop flows (which is generally considered clean), will enter initial treatment through the Separator Rows of the Cultec infiltration systems. Overflows from the infiltration system will be conveyed to secondary treatment from the Oil Grit Separator (OGS), which also treats asphalted surface runoff which are captured by catchbasins on the site. The final treatment occurs at the final Separator Row of the Cultec underground storage chamber, before it is released into the downstream dry pond.

Both the Separator Row and Oil Grit Separator hold Environmental Technology Verification (ETV) and has been sized to achieve 80% TSS removal (granting a 50% TSS removal credit). The OGS unit sized and specified is a Stormceptor EFO12. Using the New Jersey Department of Environmental Protection (NJDEP) formula for TSS Removal rates for BMP's in series, the total TSS removal rate for the site was calculated to **84%**, which meets the minimum 80% TSS removal requirement for the site.

Refer to Appendix A for Cultec and OGS design calculations for quality control and the ETV verification statement.



#### 2.5.2 THERMAL MITIGATION

The primary form of thermal reduction on the subject site will be achieved through capturing and conveying stormwater flows to at least one of the four underground detention chambers. Drainage from the west and from rooftops are all directed to an underground infiltration gallery, before merging with runoff from the east side of the site where then flows enter a final underground detention chamber and dry detention pond.

The performance of thermal reduction of stormwater in underground stormwater detention chambers was tested by the department of Civil Engineering at the University of Toronto in collaboration with the TRCA. The results of the analysis determined a maximum temperature reduction of 5 degrees Celsius from inlet to outlet, and outlet temperatures remained within the thermal regime for Coldwater fish habitat throughout the evaluation period (which lasted 6 months). The nominal outlet temperature ranged from 10C in the spring to a high of 13C by the end of the summer. This finding was published in the journal Water, 21 January 2016, an excerpt of the journal article is included in **Appendix A**. Based on these results and the existing high thermal capacity of the subsurface soils, it is expected that the underground chamber would provide a similar order of magnitude thermal benefit to the stormwater for the site.

#### 2.6 WATER BALANCE

The Jock River Reach 1 Subwatershed Study (June 2007) identifies maximizing infiltration through the application of best management practices as a key objective for future developments within the subwatershed. The subcatchment is underlain predominantly by silty clay soils, which provide limited opportunity for groundwater recharge. With the introduction of additional impervious surfaces through development, the potential for infiltration is further reduced, resulting in an estimated infiltration and evapotranspiration deficit of approximately 58 mm/year.

To address water balance requirements for the subject site, a best-efforts approach using a 5 mm rainfall depth has been applied. This value is commonly adopted and represents approximately 50% of annual rainfall, as referenced in the City of Toronto Wet Weather Flow Management Guidelines (November 2016). Based on an average annual precipitation of 944 mm/year within the subwatershed (per Environment Canada Climate Normals), retention and infiltration of the 5 mm event corresponds to approximately 472 mm/year.

Retention and infiltration will be achieved using Cultec chambers installed downstream of the storm stub at each building. The chambers will be constructed as open-bottom systems, with the stone base set a minimum of 1.0 m above the highest observed groundwater elevation identified in the hydrogeological investigation. The chambers are designed to infiltrate all rooftop runoff with an overflow to the downstream storm sewer system, should the chambers be full before the next rainfall event. Although roof water is generally considered clean, each chamber will include a Separator Row to provide pretreatment and remove suspended solids prior to distribution within the infiltration system.

The total 5mm rainfall volume requirement for the subject site is calculated as 344m³ (6.88ha x 5mm). Based on review of the hydrogeological investigation in relation to the site plan and servicing plan, the following limitations were determined:

- Infiltration is most suitable north of the site, and directly adjacent to building storm outfalls
- Infiltration near the outfall of the site is not feasible due to high groundwater and poor soil infiltration rates
- Connecting storm sewers from the east side of the buildings into the infiltration galleries will be logistically
  challenging, as the sewers will be sloped against the slope of the surface.

Based on the above limitations, a best-efforts approach for infiltration has been assumed for the subject site, of which only the drainage areas on the west of the site and rooftops will be captured and retained. The total drainage area captured is 3.59ha (2.39ha of rooftop, 1.20ha of impervious), and amounts to a water balance volume of **179.5m**<sup>3</sup>. Three infiltration chambers serving each building rooftop have been sized with a total retention volume of **179.5m**<sup>3</sup>. The infiltration provided on a site level can be summarized as follows:

• **Drainage area subject to infiltration:** 3.59 ha



Through the use of Cultec chambers, infiltration is provided for the 5mm rainfall volume across the
drainage area, which is equivalent to 472 mm/year. This drainage area is approximately 52% of the
total site area, which results in infiltration of approximately 245 mm/year.

#### • **Drainage area not subject to infiltration:** 3.29 ha

No infiltration measures are proposed in this drainage area due to the site constraints specified above. As per Table 6.3.9 of the Jock River Reach 1 Subwatershed Study, the site is within the 'O'Keefe' catchment and subject to 112 mm/year of infiltration. This drainage area is approximately 48% of the total site area, which results in infiltration of approximately 54 mm/year.

In total, infiltration of approximately **299 mm** is provided on the site annually. As per Table 3.7.3 of the Jock River Reach 1 Subwatershed Study, the existing infiltration within the 'O'Keefe' catchment is 181 mm/year. Therefore, with the infiltration measures proposed, the infiltration deficit of 58 mm/year will be met.

A 48-hour drawdown time was selected based on recommendations from the Sustainable Technologies Evaluation Program (STEP) for the 50<sup>th</sup> percentile interevent time (i.e. 50% probability of the next rainfall event happening in 48 hours) for the Ottawa Region. Drawdown calculations were completed and confirms that retained water can infiltrate within a 48-hour drawdown period. For supporting calculations on infiltration, drawdown, and Cultec sizing, please refer to **Appendix A**. Excerpts of the selection of drawdown time per STEP recommendations can be found in **Appendix E**.

#### 2.7 STORMWATER EMERGENCY OVERLAND FLOW ROUTE

The site has been graded such that drainage up to the 100-year storm event will be contained within the site. All catchbasin inlets have been sized to ensure capture of the 5-year storm event. For storm events above the 5-year and up to the 100-year, flows will drain overland where the final catchbasin has been sized to capture the 100-year (less the 5-year) storm event. The designed grading pattern ensures a maximum 0.30m ponding for each inlet catchment while ensuring a distinctive overland flow route towards the emergency outfall at 0'Keefe Court during extreme storm events (beyond the 100-year event), where then drainage will be conveyed through the ditches on 0'Keefe Court.

The City of Ottawa stormwater management criteria requires that the overland flow route be designed for the 100-year post development flow from the site + 20% as a safety factor.

The post development uncontrolled 100-yr flow generated from the subject site is 1294L/s, therefore the design flow with 20% addition is **1553L/s**. Further analysis of this flow in relation to the capacity of the O'Keefe swales is discussed in the following section. Refer to **Appendix A** for swale design calculations.

#### 2.8 Proposed Stormwater Outfall

It has been determined that the existing swale along the south side of O'Keefe Court will serve as the most functionally acceptable outfall, provided there is sufficient flow capacity. This swale flows easterly along the southern shoulder of O'Keefe Court, where then the drainage continues southerly through conveyance swales and culverts down to the Jock River, which finally flows east into the Rideau River. The drainage route is similar to that in existing conditions, and is represented in **Figure 2-2**.

An analysis of the existing swale was completed to determine flow capacity relative to the anticipated contributing flows. The site outlet will consist of a culvert under O'Keefe Court to direct site flows to the south swale along O'Keefe Court.

Based on the characteristics of the south swale, an analysis was completed using the Manning's equation to estimate a minimum flow capacity of **2275L/s**. This calculation was based on the following characteristics observed from available data on the south swale:

- A top width of approximately **7.0m** (i.e. measured between Top of Slope's from the topographic survey)
- An assumed freeboard of **0.30m**, resulting in a flow depth of **0.87m** for a triangular shaped swale



- A minimum observed slope of **0.30%** between the O'Keefe cul-de-sac bulb to approximately 383m east (where the swale diverts southwards)
- Existing side slopes of **3:1**
- Manning's 'n' coefficient of **0.03**

Based on topographical survey of the existing swale, there appears to be few locations of filled material and reverse slope conditions. It is therefore recommended that remedial improvements to the swale be completed, including regrading the swale to a more consistent slope of 1.0% to provide sufficient flow conveyance. Under these conditions, it is anticipated the minimum flow capacity of the swale would be **4153L/s**.

Based on review of the topographic survey, LIDAR information, existing record drawings (specifically the Storm Drainage Area Plan, drawing 500 for the 416 Lands by IBI Group), and Google imagery, the south swale is assumed to capture drainage from the subject site, Lytle Park, and the O'Keefe ROW (total contributing drainage area of 17.9ha). Based on these contributing drainage areas, the estimated 100-year contributing flow to the O'Keefe south swale is approximately 1356L/s in post-development conditions, which makes up approximately 33% of the full flow capacity of the reinstated south swale.

As per Section 2.8, the overland flow route shall be designed such that the 100-year post development flow (with a 20% surcharge) can safely be conveyed from the site. This flow was estimated to be 1553L/s for the subject site, and totals **2477L/s** when accounting for 100-year flows from the remaining contributing drainage areas to the south swale. During emergency overland flow conditions, the south swale is estimated to operate at **60%** of the full flow capacity of the south swale. Therefore, the south swale is sufficiently sized to convey flows in post-development conditions.

The proposed sewer infrastructure is shown on the Servicing Plans and Grading Plans. For detailed calculations on swale capacity and contributing flows, refer to **Appendix A**. For the cross-sections and profiles of the existing south swale, as well as the drainage area plan for this swale, please refer to the figures in **Appendix D**. Grading plans of the proposed swale design can be found in drawing **GSW-1** in **Appendix F**.


#### 2.9 CONSTRUCTION EROSION AND SEDIMENT CONTROL


Best practices are implemented to control erosion and sedimentation during construction and prior to build-out of stormwater quantity and quality control measures. All measures will be designed in accordance with the Sustainable Technologies Evaluation Program (STEP) "Erosion and Sediment Control Guideline for Urban Construction" dated 2019, and City of Ottawa design criteria. In general, the ESC approach can be outlined as:

- Silt fence to be installed around the site perimeter.
- A construction access (mud mat) is to be provided at the entrance off O'Keefe Court
- Cut-off swales and sediment traps provided on site and prior to discharging to the O'Keefe swales
- Catch basins and catch basin manholes on adjacent streets to have underside of the grate covered with Terrafix 240R non-woven geotextile.

These ESC measures should be regularly inspected and maintained to ensure they are operating as designed.

Refer to **Appendix F** for the **Erosion and Sediment Control Plan**.

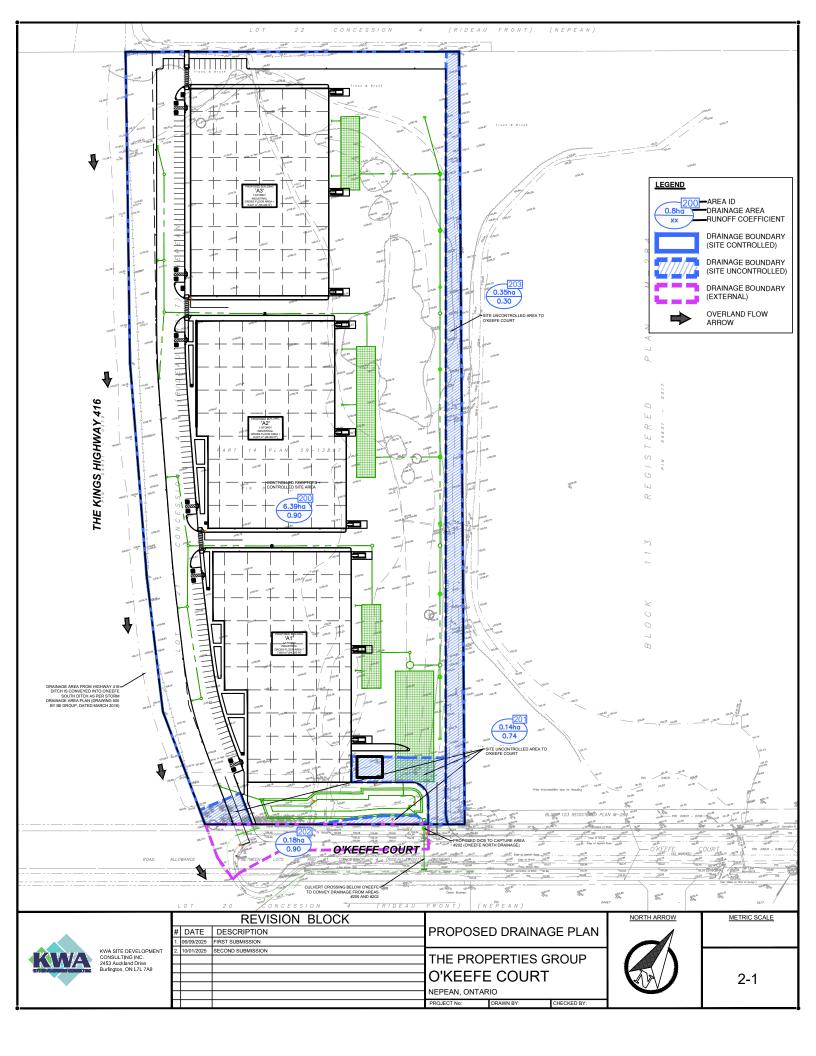

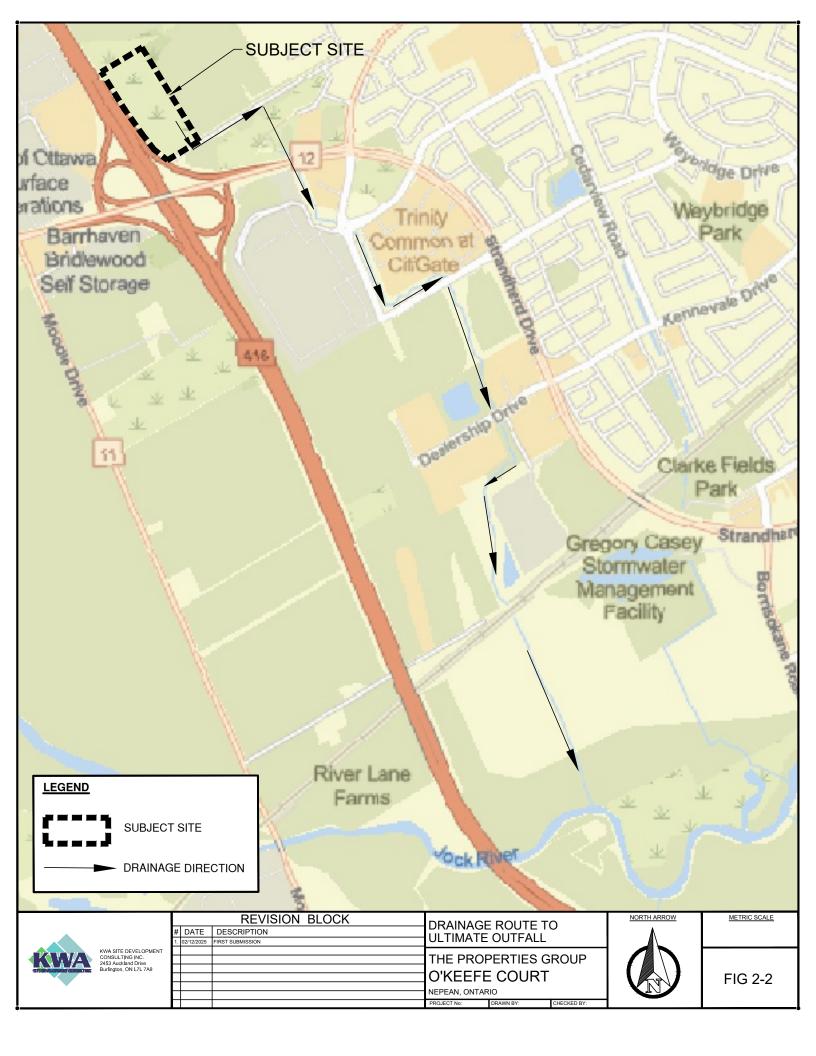



#### 3.0 SANITARY SERVICING

#### 3.1 Existing Sanitary Servicing

A development application for the 416 Lands to the south of the subject development indicates there are sanitary sewers proposed and partially constructed as part of this development (City File No. D07-16-13-0013, City Plan No. 17492).

The advancement of the 416 Lands development and availability of the remaining sanitary sewers to be constructed as part of this development is currently not known, and therefore it is assumed that there are no available sanitary sewers in the vicinity of the subject site.

Record drawings for the General Plan of Services for the 416 Lands development can be found in the supporting documentation in **Appendix E**.

#### 3.2 Proposed Sanitary Servicing

Design flows for the proposed development has been calculated using the Ottawa Sewer Design Guidelines (Second Edition – Technical Bulletin ISTB-2018-1 Update March 21, 2018). The internal sanitary sewer drainage system for the subject site is designed to accommodate peak sanitary sewage flows as per the City of Ottawa's design criteria.

The total peak sanitary flow for the proposed development (including the infiltration allowance) has been calculated as **3.24L/s**. Refer to **Appendix B** for details of the calculations.

As there are no gravity sanitary sewer infrastructure available for the site, the proposed design involves an on-site septic system to treat and manage sanitary sewage and is to be completed by others in separate reports and design documents.

Sanitary site servicing for industrial warehouse buildings will consist of a 150 mm diameter connection at a 1.0% slope. These sewers will then be conveyed and discharged to the proposed on-site sanitary sewage treatment facility located at the south-east corner of the property.

The proposed and existing servicing is shown on the **Servicing Drawings**.



#### 4.0 WATER SERVICING

#### 4.1 EXISTING WATER SERVICING

The existing site servicing details obtained from the City of Ottawa engineering plan and profiles and a topographical survey completed of the area, indicate that there is watermain infrastructure in the vicinity of the site. The following watermain infrastructure is adjacent to the subject site;

- A 610mm diameter watermain located along the south side of O'Keefe Court, which extends west from Fallowfield Road to the end of the cul-de-sac in front of the subject site
- A 300mm diameter watermain which was recently constructed extending down Lusk Street to the end of storm water management pond
- A 300mm diameter watermain located in Foxtail Avenue, approximately 750m east of the subject site.

#### 4.2 Proposed Water Servicing

The proposed water servicing design and calculations are based on the Ottawa Design Guidelines – Water Distribution (July 2010) with all relevant Technical Bulletins issued for the guideline. This includes Technical Bulletin ISTB-2021-03 and ISTB-2010-02. Based on the available record drawings indicated above there is the obvious primary connection made to the existing 610mm watermain located within O'Keefe Court. Through preliminary consultation the city requires that a secondary watermain connection be provided under such conditions in which the existing 610mm watermain were to require shut down for maintenance an alternative water supply be provided to the site. There are two primary considerations for this configuration, which are explained further below.

#### 4.2.1 EXTERNAL WATERMAIN OPTIONS

Previous reports and analyses had contemplated a connection through the future anticipated proposed development to the south. But as discussed previously, there is some uncertainty in the advancement of this development, and should it not proceed, alternative options should be considered such that the site can proceed and be serviced independently of this site.

- 1. The first option would be to provide a new 300mm waterline along O'Keefe Court, and then connect south to the existing 300mm watermain located in the newly installed and extended watermain in Lusk Street. This watermain would need to remain outside of the private properties so would need to be proposed through the public drainage right-of-way that currently serves for the drainage swale and culvert for the drainage outlet of O'Keefe Court. This watermain would be installed at the very edge of Block 15 such that it does not impact any function or access of the block drainage conveyance infrastructure.
- 2. The second option would be to extend the watermain further down O'Keefe Court all the way to the 300mm watermain at Lusk Street and O'Keefe Court. This would be the secondary option but would require longer lengths of pipe to be installed and an increased disturbance for the O'Keefe Court right-of-way, but it is possible should the first option not be considered acceptable to the City.

Through discussions with the City, the preferred option is Option 2, and will be the subject of the hydraulic network analysis in the following sections. For the off-site watermain servicing options, please refer to **Figure WAT-E** in **Appendix D**.

#### 4.2.2 FLOW DEMANDS

Domestic water demand was calculated based on the Ottawa Design Guidelines for Water Distribution and Technical Bulletin ISTB-2010-02. An industrial flow rate of 35,000 L/ha/day was used to determine the average water demand for the proposed development. The average day water demand was calculated to be **0.97 L/s**. A maximum day factor of 1.50 (applied to the average day demand) and a peak hour factor of 1.80 (applied to the maximum day demand) were used in determining maximum day and peak hour demands The maximum day and peak hour demands were calculated to be **1.45L/s** and **2.61L/s**, respectively. Calculations are provided in **Appendix C**.

Fire flow calculations we completed based on the Fire Underwriters Survey Water Supply for Public Fire Protection, 2020. Under proposed conditions the development is anticipated to have a fire flow demand of **167L/s** for the worst-



case scenario building A3, at the north end of the property, the largest building and furthest distance for the watermain connection. The anticipated maximum day + fire flow demand thus be 168.5L/s.

#### 4.2.3 Hydraulic Network Analysis

#### **Model Setup**

A hydraulic network analysis was completed for Option 2 to evaluate the serviceability of the proposed development with the planned watermain extension on O'Keefe Court.

A hydrant flow test, carried out by Hydrant Testing Ontario (HTO) on September 18, 2025, was used to calibrate the model boundary conditions. The residual hydrant selected was the first hydrant on Lusk Street, south of O'Keefe Court, closest to the future watermain extension. The test recorded a static pressure of 70.5 psi and a maximum flow of 243 L/s, with an observed pressure variation of 11%.

The hydraulic model was prepared in Bentley WaterCAD (EPANET engine) providing nodes at key locations. Boundary conditions were represented using a reservoir and pump configuration to replicate the flow and pressure response observed in the hydrant test. Ground elevations were assigned using LiDAR survey data.

The hydrant flow test and a schematic of the model setup for Option 2 can be found in **Appendix C**.

#### **Modelling Results**

Two flow demand scenarios were analyzed in the model:

- 1. Peak Hour
- 2. Maximum Day + Fire

A table summarizing the model inputs for the different scenarios can be found in **Appendix C**.

The proposed watermain on O'Keefe Court was sized to 300mm up to and including the combined fire and domestic water service for the subject development.

Based on the modelling results, all pipe velocities were observed to be within allowable limits (i.e. 2.0m/s for peak hour demands, and 3.0m/s for fire flow demands). In all demand scenarios, all nodes were observed to maintain a residual pressure of above 140kPa (20.3psi) and 275kPa (40psi) during maximum day+fire and peak hour scenarios, respectively. Therefore, it is expected that the proposed watermain through O'Keefe Court will adequately service the subject development.

The water demand calculations, modelling results, and model schematics are shown in **Appendix C** and the proposed and existing watermain infrastructure are shown on the Servicing Drawings. For the preliminary design of watermain Option 2, please refer to the plan & profile drawings for this watermain extension found in **PP1-PP5** in **Appendix F**.

#### 4.3 FIRE HYDRANT COVERAGE

There are four (4) proposed fire hydrants to provide sufficient fire protection coverage, three of which are proposed private within the subject site, and one of which is a future hydrant as part of ongoing off-site works on O'Keefe Court. The coverage radius is shown and indicated by a dashed circle on the servicing plan to show sufficient coverage is provided for fire protection.



#### 5.0 CONCLUSION

The proposed development consists of three industrial buildings across a 6.88ha site area. The proposed development can be serviced utilizing the existing and proposed infrastructure outlined in the Servicing Drawings. Our conclusions and recommendations for servicing of the proposed development is summarized as follows:

#### **Stormwater Management Servicing:**

- The proposed development will match post-development flows to pre-development levels for all storm events between the 2-year and 100-year storm events. Quantity controls will be achieved by the use of rooftop controls, Cultec chambers and an on-site dry pond
- Stormwater quality will be achieved by a treatment train approach, primarily through ETV certified technologies including a Separator Row and Oil Grit Separator
- Water balance will be met by infiltrating the initial 5mm rainfall depth of roof runoff and the west drainage area, which achieves approximately 52.2% of the total 5mm volume requirement for the site. This infiltration design provides 299mm/year of infiltration for the site, which surpasses the 58mm/year infiltration deficit noted in the Jock River Reach 1 Subwatershed study.
- Sediment and erosion control measures to be taken during construction have been presented in this report.

#### **Sanitary Servicing:**

- The anticipated peak sanitary peak flow for the proposed development is 3.24L/s.
- There are no existing or future planned sanitary sewer infrastructure on O'Keefe Court, therefore the subject site proposes an on-site septic system to manage sanitary sewage. This design is to be completed by others.

#### **Water Servicing:**

- The calculated maximum day and peak hour demands were calculated as 1.45L/s and 2.61L/s, respectively.
- The calculated fire flow demand for the proposed development is 167L/s, based on the furthest and largest building (Building A3)
- The proposed development will be serviced by a proposed 300mm watermain primary connection made to the existing 610mm watermain on O'Keefe Court. A secondary connection for the site will be made to a future 300mm local watermain extension on O'Keefe Court.
- Additional confirmation of the fire and domestic branch sizing and fire flow requirements should be provided by the Mechanical Consultant at the Building Permit stage of approval.



#### 5.1 RECOMMENDATIONS:

The following recommendations are presented:

• The contractor shall locate and verify all dimensions, levels, inverts, and datums onsite and report any discrepancies or omissions to the engineer prior to construction.

In summary, the site can be adequately serviced in respect to water supply, sanitary drainage, stormwater drainage, and stormwater management. The stormwater quantity and quality controls can be implemented in accordance to The City of Ottawa Sewer Guidelines (October 2012), and The City of Ottawa Stormwater Management Design Guidelines (2012).

Accordingly, we hereby recommend the adoption of this report as it relates to the provision of servicing works, and for the purposes of site plan application, and building permit application approvals. We trust that this Functional Servicing and Stormwater Management Report is sufficient for your purposes. If you have any questions or comments, please do not hesitate to contact the undersigned.

Yours very truly,

**KWA Site Development Consulting Inc.** 

Ted Fair, P.Eng.

ted.fair@kwasitedev.com



# **APPENDIX A**

STORMWATER CALCULATIONS



#### 21684 O'Keefe Court

Prepared By: LP Reviewed By: TF Date: 10/2/2025

#### **Pre-development Site Statistics**

	Drainage Area #1	Area (ha)	Runoff Coefficient	AxC
1)	Landscape	6.88	0.30	2.06
	Total	6.88		2.06

Composite Runoff Coefficient = 0.30

#### <u>Time of Concentration - Airport Formula (Runoff Coefficient less than 0.40)</u>

Catchment Area =	6.88	ha
Max. Catchment Elevation =	114.5	
Min. Catchment Elevation =	102.5	
Catchment Length =	440	
Catchment Slope =	2.7	%
Runoff C =	0.30	
Time of Concentration =	39.29	min

#### <u>Time of Concentration - Bransby William Formula (Runoff Coefficient more than 0.40)</u>

Catchment Area =	6.88	ha
Max. Catchment Elevation =	110.5	
Mni. Catchment Elevation =	102.5	
Catchment Length =	380	
Catchment Slope =	2.1	%
Time of Concentration =	15.39	min

#### **Pre-development Flow Rates**

From calculations above, pre-development Time of Concentration = 40 min

Storm Event	Intensity (mm/hr)	Flow Rate (L/s)
2 year	32.9	188.6
5 year	44.2	253.5
10 year	51.6	296.2
25 year	61.0	349.8
50 year	68.0	389.9
100 year	75.1	431.2

# **Uncontrolled Flow and Allowable Release Rate Calculation**

Uncontrolled area (ha) = 0.49
Runoff Coefficient = 0.43
Time of Concentration (min) = 10

Storm Front	Intensity	Uncontrolled	Pre-Development Flow	Target Release Rate for
Storm Event	(mm/hr)	Flow Rate (L/s)	Rate (L/s)	Orifice (L/s)
2 year	76.8	44.5	188.6	144.0
5 year	104.2	60.4	253.5	193.1
10 year	122.1	70.8	296.2	225.4
25 year	144.7	83.9	349.8	265.9
50 year	161.5	93.6	389.9	296.3
100 year	178.6	103.5	431.2	327.6



		MODIF	IED RATIO	NAL METH	IOD		
		Site (Vault)				Controlled Rooftop	)
2-Year		Controlled	Area 4.00	Runoff C 0.90	Area 2.39	Runoff C 0.90	Unit Rate (L/s/ha 42
		Uncontrolled	0.49 4.49	0.43			
		Orifice Control Flow (L/s) =	69.47				
Storm Duration	Rainfall Intensity	Inflow	Controlled Flow	Storage Required	Storm Runoff	Roof Flow	Storage Required
t <sub>d</sub> (min)	i (mm/h)	$Q_{\text{in +}} Q_{\text{in,roof}} (L/s)$	Q <sub>out,con</sub> (L/s)	V (m <sup>3</sup> )	Q <sub>in,roof</sub> (L/s)	Q <sub>out,roof</sub> (L/s)	V (m <sup>3</sup> )
10	76.8	869.0	69.47	479.75	459.28	100.38	215.34
15	61.8	718.5	69.47	584.17	369.36	100.38	242.08
20	52.0	621.1	69.47	661.97	311.14	100.38	252.91
25	45.2	552.4	69.47	724.41	270.09	100.38	254.56
30	40.0	501.1	69.47	777.00	239.45	100.38	250.33
40	32.9	429.3	69.47	863.56	196.52	100.38	230.74
60	24.6	346.2	69.47	996.06	146.85	100.38	167.29
70	21.9	319.7	69.47	1050.89	131.03	100.38	128.74
80	19.8	298.8	69.47	1100.96	118.58	100.38	87.35
90	18.1	282.0	69.47	1147.42	108.49	100.38	43.80
100	16.7	267.7	69.47	1189.60	100.14	100.14	0.00
120	14.6	232.8	69.47	1176.08	87.08	87.08	0.00
140	12.9	206.7	69.47	1152.41	77.30	77.30	0.00
160	11.7	186.3	69.47	1121.33	69.67	69.67	0.00
180	10.6	169.9	69.47	1084.60	63.54	63.54	0.00
200	9.8	156.4	69.47	1043.40	58.50	58.50	0.00
240	8.5	135.5	69.47	950.76	50.68	50.68	0.00
280	7.5	119.9	69.47	847.90	44.86	44.86	0.00
320	6.7	107.9	69.47	737.49	40.35	40.35	0.00
360	6.1	98.2	69.47	621.27	36.74	36.74	0.00
N (0	. 0 \*	М	ax Storage (m <sup>3</sup> ) =	1189.60	Max	Roof Storage (m <sup>3</sup> )	= 254.56
V = (Q	in - Qout,con) * td		ol Outflow $(L/s) =$	69.47			
			ease Rate (L/s) =	144.03			
5-Year		Site (Vault)	Area	Runoff C	Area	Runoff C	Unit Rate (L/s/ha
5-rear		Controlled	4.00	0.90	2.39	0.90	42
		Uncontrolled	0.49	0.43	2.37	0.50	72
			4.49				
		Orifice Control Flow $(L/s) =$	93.24				
Storm Duration	Rainfall Intensity	Storm Runoff	Controlled Flow	Storage Required	Storm Runoff	Roof Flow	Storage Required
t <sub>d</sub> (min)	i (mm/h)	Q <sub>in</sub> (L/s)	Q <sub>out,con</sub> (L/s)	V (m <sup>3</sup> )	Q <sub>in</sub> (L/s)	Q <sub>out,con</sub> (L/s)	V (m <sup>3</sup> )
10	104.2	1143.1	93.24	629.94	623.05	100.38	313.60
15	83.6	936.6	93.24	759.04	499.65	100.38	359.35
20	70.3	803.5	93.24	852.25	420.09	100.38	383.65
25	60.9	709.8	93.24	924.88	364.14	100.38	395.65
30	53.9	640.1	93.24	984.32	322.48	100.38	399.77
40	44.2	542.6	93.24	1078.41	264.21	100.38	393.20
60	32.9	430.1	93.24	1212.61	196.99	100.38	347.81
70	29.4	394.3	93.24	1264.59	175.64	100.38	316.08
80	26.6	366.2	93.24	1310.26	158.84	100.38	280.59
90	24.3	343.5	93.24	1351.16	145.24	100.38	242.24
100	22.4	324.6	93.24	1388.33	133.99	100.38	201.66
120	19.5	295.2	93.24	1454.17	116.41	100.38	115.43
140	17.3	273.2	93.24	1511.65	103.26	100.38	24.20
160	15.6	248.7	93.24	1492.35	93.02	93.02	0.00
180	14.2	226.7	93.24	1441.42	84.79	84.79	0.00
	13.0	208.6	93.24	1384.61	78.03	78.03	0.00
200							
240	11.3	180.6	93.24	1257.56	67.54	67.54	0.00
240 280	11.3 10.0	180.6 159.7	93.24	1117.09	59.74	59.74	0.00
240	11.3	180.6					

8.2 V = (Qin - Qout,con) \* td 130.7

360

Max Storage (m³) = 1511.65 Total Outflow (L/s) = 93.24 Target Release Rate (L/s) = 193.10

808.75

93.24

Max Roof Storage (m<sup>3</sup>) =

48.88

0.00

399.77

48.88



				NAL METH			
		Site (Vault)		- ma I		Controlled Rooftop	** ** ** ** ** ** ** ** ** ** ** ** **
10-Year		Controlled	Area 4.00	Runoff C 0.90	Area 2.39	Runoff C 0.90	Unit Rate (L/s/ha 42
		Uncontrolled	0.49	0.43	2.39	0.90	42
		oncontrolled	4.49	0.15			
		Orifice Control Flow (L/s) =	119.91				
Storm Duration	Rainfall Intensity	Storm Runoff	Controlled Flow	Storage Required	Storm Runoff	Roof Flow	Storage Require
t <sub>d</sub> (min)	i (mm/h)	Q <sub>in</sub> (L/s)	Q <sub>out,con</sub> (L/s)	V (m <sup>3</sup> )	Q <sub>in</sub> (L/s)	Q <sub>out,con</sub> (L/s)	V (m <sup>3</sup> )
10	122.1	1322.8	119.91	721.72	730.38	100.38	378.00
15	97.9	1079.7	119.91	863.79	585.13	100.38	436.28
20	82.2	923.1	119.91	963.88	491.60	100.38	469.46
25	71.2	813.2	119.91	1039.91	425.90	100.38	488.28
30	63.0	731.3	119.91	1100.57	377.00	100.38	497.92
40	51.6	617.0	119.91	1192.99	308.68	100.38	499.91
60	38.5	485.2	119.91	1315.04	229.93	100.38	466.39
70	34.3	443.4	119.91	1358.50	204.93	100.38	439.12
80	31.0	410.5	119.91	1394.63	185.27	100.38	407.49
90	28.3	383.8	119.91	1425.23	169.37	100.38	372.55
100	26.1	361.8	119.91	1451.50	156.22	100.38	335.01
120	22.7	327.4	119.91	1494.20	135.67	100.38	254.08
140	20.1	301.7	119.91	1527.21	120.30	100.38	167.35
160	18.1	281.7	119.91	1553.16	108.34	100.38	76.40
180	16.5	264.0	119.91	1555.96	98.74	98.74	0.00
200	15.2	242.9	119.91	1475.56	90.84	90.84	0.00
240	13.1	210.1	119.91	1299.22	78.60	78.60	0.00
280	11.6	185.8	119.91	1107.39	69.50	69.50	0.00
320	10.4	167.0	119.91	904.13	62.46	62.46	0.00
360	9.5	152.0	119.91	692.08	56.83	56.83	0.00
			ax Storage (m <sup>3</sup> ) =	1555.96	Max	Roof Storage (m <sup>3</sup> ) =	499.91
V = (Qi	n - Qout,con) * td	Tota	ol Outflow $(L/s) =$	119.91			
		Target Rel	ease Rate (L/s) =	225.36			
		Site (Vault)				Controlled Rooftop	
25-Year			Area	Runoff C	Area	Runoff C	Unit Rate (L/s/h
		Controlled	4.00	0.90	2.39	0.90	42
		Uncontrolled	0.49	0.43			
		0.15 0 . 171 (7.1)	4.49				
Circum D	Data Call Lancach	Orifice Control Flow (L/s) =	147.64	Cr D	C1	D CPL	Ct D
Storm Duration	Rainfall Intensity	Storm Runoff	Controlled Flow	Storage Required	Storm Runoff	Roof Flow	Storage Require
t <sub>d</sub> (min)	i (mm/h)			37 ( 5)			17 ( 3)
		Q <sub>in</sub> (L/s)	Q <sub>out,con</sub> (L/s)	V (m <sup>3</sup> )	Q <sub>in</sub> (L/s)	Q <sub>out,con</sub> (L/s)	V (m <sup>3</sup> )
10	144.7	1548.5	147.64	840.50	865.23	100.38	458.91
15	144.7 115.8	1548.5 1259.6	147.64 147.64	840.50 1000.77	865.23 692.64	100.38 100.38	458.91 533.03
15 20	144.7 115.8 97.3	1548.5 1259.6 1073.7	147.64 147.64 147.64	840.50 1000.77 1111.29	865.23 692.64 581.56	100.38 100.38 100.38	458.91 533.03 577.42
15 20 25	144.7 115.8 97.3 84.2	1548.5 1259.6 1073.7 943.2	147.64 147.64 147.64 147.64	840.50 1000.77 1111.29 1193.35	865.23 692.64 581.56 503.59	100.38 100.38 100.38 100.38	458.91 533.03 577.42 604.81
15 20 25 30	144.7 115.8 97.3 84.2 74.5	1548.5 1259.6 1073.7 943.2 846.1	147.64 147.64 147.64 147.64 147.64	840.50 1000.77 1111.29 1193.35 1257.25	865.23 692.64 581.56 503.59 445.57	100.38 100.38 100.38 100.38 100.38	458.91 533.03 577.42 604.81 621.34
15 20 25 30 40	144.7 115.8 97.3 84.2 74.5 61.0	1548.5 1259.6 1073.7 943.2 846.1 710.5	147.64 147.64 147.64 147.64 147.64	840.50 1000.77 1111.29 1193.35 1257.25 1350.93	865.23 692.64 581.56 503.59 445.57 364.56	100.38 100.38 100.38 100.38 100.38 100.38	458.91 533.03 577.42 604.81 621.34 634.03
15 20 25 30 40 60	144.7 115.8 97.3 84.2 74.5 61.0 45.4	1548.5 1259.6 1073.7 943.2 846.1 710.5 554.4	147.64 147.64 147.64 147.64 147.64 147.64	840.50 1000.77 1111.29 1193.35 1257.25 1350.93 1464.31	865.23 692.64 581.56 503.59 445.57 364.56 271.27	100.38 100.38 100.38 100.38 100.38 100.38 100.38	458.91 533.03 577.42 604.81 621.34 634.03 615.21
15 20 25 30 40 60 70	144.7 115.8 97.3 84.2 74.5 61.0 45.4 40.4	1548.5 1259.6 1073.7 943.2 846.1 710.5 554.4 504.9	147.64 147.64 147.64 147.64 147.64 147.64 147.64	840.50 1000.77 1111.29 1193.35 1257.25 1350.93 1464.31 1500.35	865.23 692.64 581.56 503.59 445.57 364.56 271.27 241.68	100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38	458.91 533.03 577.42 604.81 621.34 634.03 615.21 593.45
15 20 25 30 40 60 70 80	144.7 115.8 97.3 84.2 74.5 61.0 45.4 40.4 36.5	1548.5 1259.6 1073.7 943.2 846.1 710.5 554.4 504.9 465.9	147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64	840.50 1000.77 1111.29 1193.35 1257.25 1350.93 1464.31 1500.35 1527.78	865.23 692.64 581.56 503.59 445.57 364.56 271.27 241.68 218.41	100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38	458.91 533.03 577.42 604.81 621.34 634.03 615.21 593.45 566.56
15 20 25 30 40 60 70 80 90	144.7 115.8 97.3 84.2 74.5 61.0 45.4 40.4 36.5 33.4	1548.5 1259.6 1073.7 943.2 846.1 710.5 554.4 504.9 465.9	147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64	840.50 1000.77 1111.29 1193.35 1257.25 1350.93 1464.31 1500.35 1527.78 1548.73	865.23 692.64 581.56 503.59 445.57 364.56 271.27 241.68 218.41 199.60	100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38	458.91 533.03 577.42 604.81 621.34 634.03 615.21 593.45 566.56 535.79
15 20 25 30 40 60 70 80 90	144.7 115.8 97.3 84.2 74.5 61.0 45.4 40.4 36.5 33.4 30.8	1548.5 1259.6 1073.7 943.2 846.1 710.5 554.4 504.9 465.9 434.4 408.4	147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64	840.50 1000.77 1111.29 1193.35 1257.25 1350.93 1464.31 1500.35 1527.78 1548.73 1564.60	865.23 692.64 581.56 503.59 445.57 364.56 271.27 241.68 218.41 199.60 184.04	100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38	458.91 533.03 577.42 604.81 621.34 634.03 615.21 593.45 566.56 535.79 501.98
15 20 25 30 40 60 70 80 90 100 120	144.7 115.8 97.3 84.2 74.5 61.0 45.4 40.4 36.5 33.4 30.8 26.7	1548.5 1259.6 1073.7 943.2 846.1 710.5 554.4 504.9 465.9 434.4 408.4 367.8	147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64	840.50 1000.77 1111.29 1193.35 1257.25 1350.93 1464.31 1500.35 1527.78 1548.73 1564.60 1584.83	865.23 692.64 581.56 503.59 445.57 364.56 271.27 241.68 218.41 199.60 184.04 159.75	100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38	458.91 533.03 577.42 604.81 621.34 634.03 615.21 593.45 566.56 535.79 501.98 427.50
15 20 25 30 40 60 70 80 90 100 120 140	144.7 115.8 97.3 84.2 74.5 61.0 45.4 40.4 36.5 33.4 30.8 26.7 23.7	1548.5 1259.6 1073.7 943.2 846.1 710.5 554.4 504.9 465.9 434.4 408.4 367.8 337.4	147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64	840.50 1000.77 1111.29 1193.35 1257.25 1350.93 1464.31 1500.35 1527.78 1548.73 1564.60 1584.83 1593.72	865.23 692.64 581.56 503.59 445.57 364.56 271.27 241.68 218.41 199.60 184.04 159.75 141.60	100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38	458.91 533.03 577.42 604.81 621.34 634.03 615.21 593.45 566.56 535.79 501.98 427.50 346.23
15 20 25 30 40 60 70 80 90 100 120 140 160	144.7 115.8 97.3 84.2 74.5 61.0 45.4 40.4 36.5 33.4 30.8 26.7 23.7 21.3	1548.5 1259.6 1073.7 943.2 846.1 710.5 554.4 504.9 465.9 434.4 408.4 367.8 337.4 313.7	147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64	840.50 1000.77 1111.29 1193.35 1257.25 1350.93 1464.31 1500.35 1527.78 1548.73 1564.60 1584.83 1593.72 1594.36	865.23 692.64 581.56 503.59 445.57 364.56 271.27 241.68 218.41 199.60 184.04 159.75 141.60 127.47	100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38	458.91 533.03 577.42 604.81 621.34 634.03 615.21 593.45 566.56 535.79 501.98 427.50 346.23 260.04
15 20 25 30 40 60 70 80 90 100 120 140 160 180	144.7 115.8 97.3 84.2 74.5 61.0 45.4 40.4 36.5 33.4 30.8 26.7 23.7 21.3 19.4	1548.5 1259.6 1073.7 943.2 846.1 710.5 554.4 504.9 465.9 434.4 408.4 367.8 337.4 313.7 294.7	147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64	840.50 1000.77 1111.29 1193.35 1257.25 1350.93 1464.31 1500.35 1527.78 1548.73 1564.60 1584.83 1593.72 1594.36 1588.70	865.23 692.64 581.56 503.59 445.57 364.56 271.27 241.68 218.41 199.60 184.04 159.75 141.60 127.47	100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38	458.91 533.03 577.42 604.81 621.34 634.03 615.21 593.45 566.56 535.79 501.98 427.50 344.23 260.04 170.09
15 20 25 30 40 60 70 80 90 100 120 140 160 180 200	144.7 115.8 97.3 84.2 74.5 61.0 45.4 40.4 36.5 33.4 30.8 26.7 23.7 21.3 19.4 17.9	1548.5 1259.6 1073.7 943.2 846.1 710.5 554.4 504.9 465.9 434.4 408.4 367.8 337.4 313.7 294.7 279.1	147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64	840.50 1000.77 1111.29 1193.35 1257.25 1350.93 1464.31 1500.35 1527.78 1548.73 1564.60 1584.83 1593.72 1594.36 1588.70 1578.10	865.23 692.64 581.56 503.59 445.57 364.56 271.27 241.68 218.41 199.60 184.04 159.75 141.60 127.47 116.13	100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38	458.91 533.03 577.42 604.81 621.34 634.03 615.21 593.45 566.56 535.79 501.98 427.50 346.23 260.04 170.09 77.18
15 20 25 30 40 60 70 80 90 100 120 140 160 180 200 240	144.7 115.8 97.3 84.2 74.5 61.0 45.4 40.4 36.5 33.4 30.8 26.7 23.7 21.3 19.4 17.9 15.4	1548.5 1259.6 1073.7 943.2 846.1 710.5 554.4 504.9 465.9 434.4 408.4 367.8 337.4 313.7 294.7 279.1 246.9	147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64	840.50 1000.77 1111.29 1193.35 1257.25 1350.93 1464.31 1500.35 1527.78 1548.73 1564.60 1584.83 1593.72 1594.36 1588.70 1578.10	865.23 692.64 581.56 503.59 445.57 364.56 271.27 241.68 218.41 199.60 184.04 159.75 141.60 127.47 116.13 106.81 92.36	100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38	458.91 533.03 577.42 604.81 621.34 634.03 615.21 593.45 566.56 535.79 501.98 427.50 346.23 260.04 170.09 77.18
15 20 25 30 40 60 70 80 90 100 120 140 160 180 200 240 280	144.7 115.8 97.3 84.2 74.5 61.0 45.4 40.4 36.5 33.4 30.8 26.7 23.7 21.3 19.4 17.9 15.4 13.7	1548.5 1259.6 1073.7 943.2 846.1 710.5 554.4 504.9 465.9 434.4 408.4 367.8 337.4 313.7 294.7 279.1 246.9 218.3	147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64	840.50 1000.77 1111.29 1193.35 1257.25 1350.93 1464.31 1500.35 1527.78 1548.73 1564.60 1584.83 1593.72 1594.36 1588.70 1578.10 1430.11 1186.90	865.23 692.64 581.56 503.59 445.57 364.56 271.27 241.68 218.41 199.60 184.04 159.75 141.60 127.47 116.13 106.81 92.36 81.64	100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38	458.91 533.03 577.42 604.81 621.34 634.03 615.21 593.45 566.56 535.79 501.98 427.50 346.23 260.04 170.09 77.18 0.00
15 20 25 30 40 60 70 80 90 100 120 140 160 180 200 240 280 320	144.7 115.8 97.3 84.2 74.5 61.0 45.4 40.4 36.5 33.4 30.8 26.7 23.7 21.3 19.4 17.9 15.4 13.7 12.3	1548.5 1259.6 1073.7 943.2 846.1 710.5 554.4 504.9 465.9 434.4 408.4 367.8 337.4 313.7 294.7 279.1 246.9 218.3 196.1	147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64	840.50 1000.77 1111.29 1193.35 1257.25 1350.93 1464.31 1500.35 1527.78 1548.73 1564.60 1584.83 1593.72 1594.36 1588.70 1578.10 1430.11 1186.90 930.40	865.23 692.64 581.56 503.59 445.57 364.56 271.27 241.68 218.41 199.60 184.04 159.75 141.60 127.47 116.13 106.81 92.36 81.64 73.34	100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38	458.91 533.03 577.42 604.81 621.34 634.03 615.21 593.45 566.56 535.79 501.98 427.50 346.23 260.04 170.09 77.18 0.00 0.00
15 20 25 30 40 60 70 80 90 100 120 140 160 180 200 240 280	144.7 115.8 97.3 84.2 74.5 61.0 45.4 40.4 36.5 33.4 30.8 26.7 23.7 21.3 19.4 17.9 15.4 13.7	1548.5 1259.6 1073.7 943.2 846.1 710.5 554.4 504.9 465.9 434.4 408.4 367.8 337.4 313.7 294.7 279.1 246.9 218.3 196.1 178.4	147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64	840.50 1000.77 1111.29 1193.35 1257.25 1350.93 1464.31 1500.35 1527.78 1548.73 1564.60 1584.83 1593.72 1594.36 1588.70 1578.10 1430.11 1186.90 930.40 663.67	865.23 692.64 581.56 503.59 445.57 364.56 271.27 241.68 218.41 199.60 184.04 159.75 141.60 127.47 116.13 106.81 92.36 81.64 73.34 66.71	100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38	458.91 533.03 577.42 604.81 621.34 634.03 615.21 593.45 566.56 535.79 501.98 427.50 346.23 260.04 170.09 77.18 0.00 0.00 0.00
15 20 25 30 40 60 70 80 90 100 120 140 160 180 200 240 280 320 360	144.7 115.8 97.3 84.2 74.5 61.0 45.4 40.4 36.5 33.4 30.8 26.7 23.7 21.3 19.4 17.9 15.4 13.7 12.3	1548.5 1259.6 1073.7 943.2 846.1 710.5 554.4 504.9 465.9 434.4 408.4 367.8 337.4 313.7 294.7 279.1 246.9 218.3 196.1 178.4	147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64 147.64	840.50 1000.77 1111.29 1193.35 1257.25 1350.93 1464.31 1500.35 1527.78 1548.73 1564.60 1584.83 1593.72 1594.36 1588.70 1578.10 1430.11 1186.90 930.40	865.23 692.64 581.56 503.59 445.57 364.56 271.27 241.68 218.41 199.60 184.04 159.75 141.60 127.47 116.13 106.81 92.36 81.64 73.34 66.71	100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38 100.38	458.91 533.03 577.42 604.81 621.34 634.03 615.21 593.45 566.56 535.79 501.98 427.50 346.23 260.04 170.09 77.18 0.00 0.00



		MODIF	IED RATIO	NAL METH	OD		
		Site (Vault)				Controlled Rooftop	
50-Year		Controlled Uncontrolled	Area 4.00 0.49 4.49	Runoff C 0.90 0.43	Area 2.39	Runoff C 0.90	Unit Rate (L/s/ha) 42
Storm Duration	Rainfall Intensity	Orifice Control Flow (L/s) = Storm Runoff	172.73 Controlled Flow	Storage Required	Storm Runoff	Roof Flow	Storage Required
t <sub>d</sub> (min)	i (mm/h)	Q <sub>in</sub> (L/s)	Q <sub>out,con</sub> (L/s)	V (m <sup>3</sup> )	Q <sub>in</sub> (L/s)	Q <sub>out,con</sub> (L/s)	V (m <sup>3</sup> )
10	161.5	1716.4	172.73	926.19	965.56	100.38	519.11
15	129.2	1393.6	172.73	1098.78	772.70	100.38	605.09
20	108.5	1186.0	172.73	1215.87	648.63	100.38	657.90
25	93.9	1040.2	172.73	1301.23	561.55	100.38	691.76
30	83.1	931.8	172.73	1366.34	496.78	100.38	713.52
40	68.0	780.5	172.73	1458.55	406.35	100.38	734.32
60	50.5	606.2	172.73	1560.62	302.25	100.38	726.73
70	45.0	551.0	172.73	1588.67	269.24	100.38	709.20
80	40.7	507.6	172.73	1607.16	243.29	100.38	685.96
90	37.2	472.4	172.73	1618.44	222.31	100.38	658.41
100	34.3	443.4	172.73	1624.07	204.96	100.38	627.48
120	29.7	398.1	172.73	1622.55	177.88	100.38	557.99
140	26.4	364.2	172.73	1608.43	157.64	100.38	480.98
160	23.7	337.9	172.73	1585.15	141.89	100.38	398.49
180	21.6	316.7	172.73	1554.89	129.25	100.38	311.83
200	19.9	299.3	172.73	1519.13	118.87	100.38	221.88
240	17.2	272.4	172.73	1435.02	102.77	100.38	34.47
280	15.2	242.8	172.73	1177.95	90.83	90.83	0.00
320	13.6	218.1	172.73	871.67	81.59	81.59	0.00
360	12.4	198.4	172.73	554.06	74.20	74.20	0.00
	- Qout,con) * td	M Tota	ax Storage (m <sup>3</sup> ) = al Outflow (L/s) =	1624.07 172.73		Roof Storage (m <sup>3</sup> ) =	734.32
			ease Rate (L/s) =	296.28			
100 11		Site (Vault)		D 65.0		Controlled Rooftop	W :: D : G / G :
100-Year		Controlled	Area 4.00	Runoff C 1.13	Area	Runoff C 1.13	Unit Rate (L/s/ha)
		Uncontrolled		0.53	2.39	1.13	42
		Uncontrolled	0.49	0.55			
			4.49				
		Orifice Control Flow (L/s) =	4.49 324.22				
Storm Duration	Rainfall Intensity	Orifice Control Flow (L/s) = Storm Runoff		Storage Required	Storm Runoff	Roof Flow	Storage Required
	•	Storm Runoff	324.22 Controlled Flow				Storage Required V (m <sup>3</sup> )
t <sub>d</sub> (min)	i (mm/h)	Storm Runoff Q <sub>in</sub> (L/s)	324.22 Controlled Flow Q <sub>out,con</sub> (L/s)	Storage Required V (m³)	Q <sub>in</sub> (L/s)	Q <sub>out,con</sub> (L/s)	V (m <sup>3</sup> )
<b>t</b> <sub>d</sub> (min)	i (mm/h) 178.6	Storm Runoff Q <sub>in</sub> (L/s) 2344.1	324.22 Controlled Flow Q <sub>out,con</sub> (L/s) 324.22	Storage Required V (m³) 1211.92	Q <sub>in</sub> (L/s) 1340.61	Q <sub>out,con</sub> (L/s) 100.38	V (m <sup>3</sup> ) 744.14
t <sub>d</sub> (min) 10 15	i (mm/h) 178.6 142.9	Storm Runoff Q <sub>in</sub> (L/s) 2344.1 1895.9	324.22 Controlled Flow Q <sub>out,con</sub> (L/s) 324.22 324.22	Storage Required V (m³) 1211.92 1414.54	Q <sub>in</sub> (L/s) 1340.61 1072.84	Q <sub>out,con</sub> (L/s) 100.38 100.38	V (m³) 744.14 875.22
t <sub>d</sub> (min)  10  15  20	i (mm/h) 178.6 142.9 120.0	Storm Runoff Q <sub>in</sub> (L/s) 2344.1 1895.9 1607.6	324.22 Controlled Flow Q <sub>out,con</sub> (L/s) 324.22 324.22 324.22	Storage Required V (m³) 1211.92 1414.54 1540.09	Q <sub>in</sub> (L/s) 1340.61 1072.84 900.58	Q <sub>out,con</sub> (L/s) 100.38 100.38 100.38	V (m³) 744.14 875.22 960.24
t <sub>d</sub> (min)  10  15  20  25	i (mm/h)  178.6  142.9  120.0  103.8	Storm Runoff Q <sub>in</sub> (L/s) 2344.1 1895.9 1607.6 1405.3	324.22 Controlled Flow Q <sub>out.con</sub> (L/s) 324.22 324.22 324.22 324.22	Storage Required V (m³) 1211.92 1414.54 1540.09 1621.59	Q <sub>in</sub> (L/s) 1340.61 1072.84 900.58 779.68	Q <sub>out,con</sub> (L/s) 100.38 100.38 100.38 100.38	V (m³)  744.14  875.22  960.24  1018.95
t <sub>d</sub> (min)  10  15  20  25  30	i (mm/h)  178.6  142.9  120.0  103.8  91.9	Storm Runoff Q <sub>in</sub> (L/s) 2344.1 1895.9 1607.6 1405.3 1254.8	324.22 Controlled Flow Q <sub>out,con</sub> (L/s) 324.22 324.22 324.22 324.22 324.22 324.22	Storage Required V (m³) 1211.92 1414.54 1540.09 1621.59 1674.97	Q <sub>in</sub> (L/s) 1340.61 1072.84 900.58 779.68 689.74	Q <sub>out,con</sub> (L/s) 100.38 100.38 100.38 100.38 100.38	V (m <sup>3</sup> )  744.14  875.22  960.24  1018.95  1060.85
t <sub>d</sub> (min)  10  15  20  25  30  40	i (mm/h)  178.6  142.9  120.0  103.8  91.9  75.1	Storm Runoff Q <sub>in</sub> (L/s) 2344.1 1895.9 1607.6 1405.3 1254.8 1044.6	324.22 Controlled Flow Q <sub>out,con</sub> (L/s) 324.22 324.22 324.22 324.22 324.22 324.22 324.22	Storage Required V (m³) 1211.92 1414.54 1540.09 1621.59 1674.97 1728.97	Q <sub>tn</sub> (L/s) 1340.61 1072.84 900.58 779.68 689.74 564.19	Q <sub>outcon</sub> (L/s) 100.38 100.38 100.38 100.38 100.38 100.38	V (m <sup>3</sup> )  744.14  875.22  960.24  1018.95  1060.85  1113.14
t <sub>d</sub> (min)  10  15  20  25  30  40  60	i (mm/h)  178.6  142.9  120.0  103.8  91.9  75.1  55.9	Storm Runoff Q <sub>in</sub> (L/s) 2344.1 1895.9 1607.6 1405.3 1254.8 1044.6 802.7	324.22 Controlled Flow Q <sub>out.con</sub> (L/s) 324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22	Storage Required V (m³) 1211.92 1414.54 1540.09 1621.59 1674.97 1728.97 1722.63	Q <sub>in</sub> (L/s) 1340.61 1072.84 900.58 779.68 689.74 564.19 419.65	Q <sub>out.con</sub> (L/s)  100.38  100.38  100.38  100.38  100.38  100.38  100.38	V (m <sup>3</sup> )  744.14  875.22  960.24  1018.95  1060.85  1113.14  1149.39
t <sub>d</sub> (min)  10  15  20  25  30  40  60  70	i (mm/h)  178.6  142.9  120.0  103.8  91.9  75.1  55.9  49.8	Storm Runoff Q <sub>in</sub> (L/s) 2344.1 1895.9 1607.6 1405.3 1254.8 1044.6 802.7 726.0	324.22 Controlled Flow Q <sub>out.con</sub> (L/s) 324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22	Storage Required V (m³) 1211.92 1414.54 1540.09 1621.59 1674.97 1728.97 1722.63 1687.54	Q <sub>in</sub> (L/s) 1340.61 1072.84 900.58 779.68 689.74 564.19 419.65 373.82	Q <sub>out.con</sub> (L/s)  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38	V (m <sup>3</sup> )  744.14  875.22  960.24  1018.95  1060.85  1113.14  1149.39  1148.44
t <sub>d</sub> (min)  10  15  20  25  30  40  60  70  80	i (mm/h)  178.6  142.9  120.0  103.8  91.9  75.1  55.9  49.8  45.0	Storm Runoff Q <sub>in</sub> (L/s) 2344.1 1895.9 1607.6 1405.3 1254.8 1044.6 802.7 726.0 665.7	324.22 Controlled Flow Q <sub>out.con</sub> (L/s) 324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22	Storage Required V (m³) 1211.92 1414.54 1540.09 1621.59 1674.97 1728.97 1722.63 1687.54 1639.18	Q <sub>in</sub> (L/s) 1340.61 1072.84 900.58 779.68 689.74 564.19 419.65 373.82 337.79	Q <sub>out.con</sub> (L/s)  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38	V (m <sup>3</sup> )  744.14  875.22  960.24  1018.95  1060.85  1113.14  1149.39  1148.44  1139.57
t <sub>d</sub> (min)  10  15  20  25  30  40  60  70  80  90	i (mm/h)  178.6  142.9  120.0  103.8  91.9  75.1  55.9  49.8  45.0  41.1	Storm Runoff Q <sub>in</sub> (L/s) 2344.1 1895.9 1607.6 1405.3 1254.8 1044.6 802.7 726.0 665.7 617.0	324.22 Controlled Flow Q <sub>out,con</sub> (L/s) 324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22	Storage Required V (m³) 1211.92 1414.54 1540.09 1621.59 1674.97 1728.97 1722.63 1687.54 1639.18 1580.81	Q <sub>in</sub> (L/s) 1340.61 1072.84 900.58 779.68 689.74 564.19 419.65 373.82 337.79 308.66	Q <sub>out.con</sub> (L/s)  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38	V (m <sup>3</sup> )  744.14  875.22  960.24  1018.95  1060.85  1113.14  1149.39  1148.44  1139.57  1124.70
t <sub>d</sub> (min)  10  15  20  25  30  40  60  70  80  90  100	i (mm/h)  178.6  142.9  120.0  103.8  91.9  75.1  55.9  49.8  45.0  41.1  37.9	Storm Runoff Q <sub>in</sub> (L/s)  2344.1 1895.9 1607.6 1405.3 1254.8 1044.6 802.7 726.0 665.7 617.0 576.7	324.22 Controlled Flow Qout,con (L/s) 324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22	Storage Required V (m³)  1211.92 1414.54 1540.09 1621.59 1674.97 1728.97 1722.63 1687.54 1639.18 1580.81 1514.60	Q <sub>in</sub> (L/s) 1340.61 1072.84 900.58 779.68 689.74 564.19 419.65 373.82 337.79 308.66 284.57	Q <sub>out.con</sub> (L/s)  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38	V (m <sup>3</sup> )  744.14  875.22  960.24  1018.95  1060.85  1113.14  1149.39  1148.44  1139.57  1124.70  1105.16
t <sub>d</sub> (min)  10  15  20  25  30  40  60  70  80  90  100  120	i (mm/h)  178.6  142.9  120.0  103.8  91.9  75.1  55.9  49.8  45.0  41.1  37.9  32.9	Storm Runoff Q <sub>in</sub> (L/s)  2344.1 1895.9 1607.6 1405.3 1254.8 1044.6 802.7 726.0 665.7 617.0 576.7 513.7	324.22 Controlled Flow Q <sub>out,con</sub> (L/s) 324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22	Storage Required V (m³)  1211.92 1414.54 1540.09 1621.59 1674.97 1728.97 1722.63 1687.54 1639.18 1580.81 1514.60 1364.42	Q <sub>in</sub> (L/s) 1340.61 1072.84 900.58 779.68 689.74 564.19 419.65 373.82 337.79 308.66 284.57 246.97	Q <sub>out.con</sub> (L/s)  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38	V (m <sup>3</sup> )  744.14  875.22  960.24  1018.95  1060.85  1113.14  1149.39  1148.44  1139.57  1124.70  1105.16  1055.47
t <sub>d</sub> (min)  10  15  20  25  30  40  60  70  80  90  100  120  140	i (mm/h)  178.6  142.9  120.0  103.8  91.9  75.1  55.9  49.8  45.0  41.1  37.9  32.9  29.2	Storm Runoff Q <sub>in</sub> (L/s)  2344.1 1895.9 1607.6 1405.3 1254.8 1044.6 802.7 726.0 665.7 617.0 576.7 513.7 466.7	324.22 Controlled Flow Qout.con (L/s)  324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22	Storage Required V (m³)  1211.92 1414.54 1540.09 1621.59 1674.97 1728.97 1722.63 1687.54 1639.18 1580.81 1514.60 1364.42 1196.76	Q <sub>in</sub> (L/s) 1340.61 1072.84 900.58 779.68 689.74 564.19 419.65 373.82 337.79 308.66 284.57 246.97 218.87	Q <sub>out.con</sub> (L/s)  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38	V (m <sup>3</sup> )  744.14  875.22  960.24  1018.95  1060.85  1113.14  1149.39  1148.44  1139.57  1124.70  1105.16  1055.47  995.33
t <sub>d</sub> (min)  10  15  20  25  30  40  60  70  80  90  100  120  140  160	i (mm/h)  178.6  142.9  120.0  103.8  91.9  75.1  55.9  49.8  45.0  41.1  37.9  32.9  29.2  26.2	Storm Runoff Q <sub>in</sub> (L/s)  2344.1 1895.9 1607.6 1405.3 1254.8 1044.6 802.7 726.0 665.7 617.0 576.7 513.7 466.7 430.1	324.22 Controlled Flow Qout.con (L/s)  324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22 324.22	Storage Required V (m³)  1211.92 1414.54 1540.09 1621.59 1674.97 1728.97 1722.63 1687.54 1639.18 1580.81 1514.60 1364.42 1196.76 1016.37	Q <sub>in</sub> (L/s) 1340.61 1072.84 900.58 779.68 689.74 564.19 419.65 373.82 337.79 308.66 284.57 246.97 218.87 197.00	Q <sub>out.con</sub> (L/s)  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38	V (m <sup>3</sup> )  744.14  875.22  960.24  1018.95  1060.85  1113.14  1149.39  1148.44  1139.57  1124.70  1105.16  1055.47  995.33  927.59
t <sub>d</sub> (min)  10  15  20  25  30  40  60  70  80  90  100  120  140  160  180	i (mm/h)  178.6  142.9  120.0  103.8  91.9  75.1  55.9  49.8  45.0  41.1  37.9  32.9  29.2  26.2  23.9	Storm Runoff Q <sub>in</sub> (L/s) 2344.1 1895.9 1607.6 1405.3 1254.8 1044.6 802.7 726.0 665.7 617.0 576.7 513.7 466.7 430.1 400.7	324.22 Controlled Flow Qout,con (L/s) 324.22	Storage Required V (m³)  1211.92 1414.54 1540.09 1621.59 1674.97 1728.63 1687.54 1639.18 1580.81 1514.60 1364.42 1196.76 1016.37 826.29	Q <sub>in</sub> (L/s) 1340.61 1072.84 900.58 779.68 689.74 564.19 419.65 373.82 337.79 308.66 284.57 246.97 218.87 197.00 179.46	Q <sub>out.con</sub> (L/s)  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38	V (m <sup>3</sup> )  744.14  875.22  960.24  1018.95  1060.85  1113.14  1149.39  1148.44  1139.57  1124.70  1105.16  1055.47  995.33  927.59  854.05
t <sub>d</sub> (min)  10  15  20  25  30  40  60  70  80  90  100  120  140  160  180  200	i (mm/h)  178.6  142.9  120.0  103.8  91.9  75.1  55.9  49.8  45.0  41.1  37.9  32.9  29.2  26.2  23.9  22.0	Storm Runoff Q <sub>in</sub> (L/s)  2344.1 1895.9 1607.6 1405.3 1254.8 1044.6 802.7 726.0 665.7 617.0 576.7 513.7 466.7 430.1 400.7 376.6	324.22 Controlled Flow Qout,con (L/s) 324.22	Storage Required V (m³) 1211.92 1414.54 1540.09 1621.59 1674.97 1728.97 1722.63 1687.54 1639.18 1580.81 1514.60 1364.42 1196.76 1016.37 826.29 628.58	Q <sub>in</sub> (L/s) 1340.61 1072.84 900.58 779.68 689.74 564.19 419.65 373.82 337.79 308.66 284.57 246.97 218.87 197.00 179.46 165.04	Q <sub>out.con</sub> (L/s)  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38	V (m <sup>3</sup> )  744.14  875.22  960.24  1018.95  1060.85  1113.14  1149.39  1148.44  1139.57  1124.70  1105.16  1055.47  995.33  927.59  854.05  775.96
t <sub>d</sub> (min)  10  15  20  25  30  40  60  70  80  90  100  120  140  160  180  200  240	i (mm/h)  178.6  142.9  120.0  103.8  91.9  75.1  55.9  49.8  45.0  41.1  37.9  32.9  29.2  26.2  23.9  22.0  19.0	Storm Runoff Q <sub>in</sub> (L/s)  2344.1 1895.9 1607.6 1405.3 1254.8 1044.6 802.7 726.0 665.7 617.0 576.7 513.7 466.7 430.1 400.7 376.6 339.2	324.22 Controlled Flow Qout,con (L/s) 324.22	Storage Required V (m³)  1211.92 1414.54 1540.09 1621.59 1674.97 1728.97 1722.63 1687.54 1639.18 1580.81 1514.60 1364.42 1196.76 1016.37 826.29 628.58 215.67	Q <sub>in</sub> (L/s) 1340.61 1072.84 900.58 779.68 689.74 564.19 419.65 373.82 337.79 308.66 284.57 246.97 218.87 197.00 179.46 165.04 142.69	Q <sub>out.con</sub> (L/s)  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38	V (m <sup>3</sup> )  744.14  875.22  960.24  1018.95  1060.85  1113.14  1149.39  1148.44  1139.57  1124.70  1105.16  1055.47  995.33  927.59  854.05  775.96  609.32
t <sub>d</sub> (min)  10  15  20  25  30  40  60  70  80  90  100  120  140  160  180  200	i (mm/h)  178.6  142.9  120.0  103.8  91.9  75.1  55.9  49.8  45.0  41.1  37.9  32.9  29.2  26.2  23.9  22.0	Storm Runoff Q <sub>in</sub> (L/s)  2344.1 1895.9 1607.6 1405.3 1254.8 1044.6 802.7 726.0 665.7 617.0 576.7 513.7 466.7 430.1 400.7 376.6	324.22 Controlled Flow Qout,con (L/s) 324.22	Storage Required V (m³) 1211.92 1414.54 1540.09 1621.59 1674.97 1728.97 1722.63 1687.54 1639.18 1580.81 1514.60 1364.42 1196.76 1016.37 826.29 628.58	Q <sub>in</sub> (L/s) 1340.61 1072.84 900.58 779.68 689.74 564.19 419.65 373.82 337.79 308.66 284.57 246.97 218.87 197.00 179.46 165.04	Q <sub>out.con</sub> (L/s)  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38  100.38	V (m <sup>3</sup> )  744.14  875.22  960.24  1018.95  1060.85  1113.14  1149.39  1148.44  1139.57  1124.70  1105.16  1055.47  995.33  927.59  854.05  775.96

360

13.7

V = (Qin - Qout,con) \* td

272.8

324.22

Max Storage (m<sup>3</sup>) =

Total Outflow (L/s) = Target Release Rate (L/s) = 0.00

1728.97

324.22 327.63 103.02

100.38

Max Roof Storage (m<sup>3</sup>) =

57.04

1149.39



### **ORIFICE SIZING**

Orifice Equation:  $Q = C \times A \times \sqrt{2 \ gh}$ 

Weir Equation:  $Q = (C)(L)(H)^{\frac{3}{2}}$ 

Orifice Details

	Orifice 1		Weir
Orifice Location =	Chamber Outlet	Orifice Location =	Chamber Outlet
Orifice Type =	Plate		
Discharge Coefficient =	0.63	Discharge Coefficient =	1.81
Orifice Diameter =	170	Weir Width =	1.50
Orifice Area =	0.02		
Orifice Invert =	103.13	Weir Invert =	104.60

Storm Event	Volume Required	Headwater Elevation	Total Head	Orifice Release Rate, a	 Orifice Release Rate, b	Target Release Rate	Difference [Target - Flow] (L/s)	Proportion [Flow/ Target] (%)
	(m <sup>3</sup> )	(m)	(m)	(L/s)	(L/s)			
2-Year	1190	104.42	1.20	69	69	145	75.53	48%
5-Year	1512	104.63	1.42	93	93	193	99.86	48%
10-Year	1556	104.66	1.45	120	120	225	105.45	53%
25-Year	1594	104.69	1.47	148	148	266	118.27	56%
50-Year	1624	104.71	1.49	173	173	296	123.54	58%
100-Year	1729	104.80	1.58	324	324	328	3.41	99%



# STAGE STORAGE DISCHARGE

0	rifice 1	Weir				
Q = (C)	$(A)\sqrt{2g\Delta h}$	Q = (C	$(A)\sqrt{2ga}$	Δh		
Invert	103.13	Invert	104.6			
Size (mm)	170	Width	1.50			
Area (m2)	0.0227					
Type	Plate					
Cd	0.63	Cd	1.81			

Elevation	Total	Pond	Cultec	Stage		Orifice 1	Weir	TOTAL
(m)	Storage (cu.m)			(m)		Discharge	Discharge	DISCHARGE
104.82	1735.41	644.05	1091.36	1.02		80.24	280.16	360.40
104.78	1735.41	644.05	1091.36	0.98		79.15	201.32	280.47
104.75	1713.57	640.00	1073.57	0.95		78.50	159.47	237.97
104.73	1655.04	599.25	1055.79	0.93		77.85	121.00	198.85
104.70	1478.00	440.00	1038.00	0.90		77.19	86.24	163.44
104.67	1576.03	555.81	1020.22	0.88		76.53	55.65	132.18
104.65	1532.82	530.39	1002.43	0.85		75.86	29.90	105.76
104.62	1498.35	513.71	984.64	0.83		75.19	10.16	85.35
104.60	1455.95	489.09	966.86	0.80		74.51	0.00	74.51
104.57	1422.01	472.94	949.07	0.77		73.82	0.00	73.82
104.55	1380.40	449.11	931.29	0.75		73.13	0.00	73.13
104.52	1346.99	433.49	913.50	0.72		72.43	0.00	72.43
104.50	1306.17	410.46	895.71	0.70		71.72	0.00	71.72
104.47	1280.81	402.88	877.93	0.67		71.01	0.00	71.01
104.46	1249.51	380.48	869.03	0.66		70.65	0.00	70.65
104.43	1215.85	365.81	850.04	0.64		69.92	0.00	69.92
104.41	1173.29	344.18	829.11	0.61		69.19	0.00	69.19
104.38	1134.67	330.03	804.64	0.58		68.45	0.00	68.45
104.36	1087.09	309.19	777.90	0.56		67.70	0.00	67.70
104.33	1045.04	295.55	749.49	0.53		66.94	0.00	66.94
104.31	995.22	275.48	719.74	0.51		66.18	0.00	66.18
104.28	951.28	262.36	688.92	0.48		65.40	0.00	65.40
104.26	900.22	243.06	657.16	0.46		64.62	0.00	64.62
104.23	855.06	230.45	624.61	0.43		63.83	0.00	63.83
104.21	803.22	211.91	591.31	0.41		63.02	0.00	63.02
104.18	751.26	193.84	557.42	0.38		62.21	0.00	62.21
104.15	705.03	182.04	522.99	0.36		61.38	0.00	61.38
104.13	652.34	164.71	487.63	0.33		60.55	0.00	60.55
104.10	605.41	153.42	451.99	0.30		59.70	0.00	59.70
104.08	552.94	136.85	416.09	0.28		58.84	0.00	58.84
104.05	505.97	126.05	379.92	0.25		57.97	0.00	57.97
104.03	453.69	110.23	343.46	0.23		57.08	0.00	57.08
104.00	406.40	99.93	306.47	0.20		56.18	0.00	56.18
103.98	354.01	84.86	269.15	0.18		55.27	0.00	55.27
103.95	306.73	75.05	231.68	0.15		54.34	0.00	54.34
103.93	254.19	60.71	193.48	0.13		53.39	0.00	53.39
103.90	202.03	46.81	155.22	0.10		52.43	0.00	52.43
103.87	154.60	37.79	116.81	0.08		51.45	0.00	51.45
103.85	102.90	24.62	78.28	0.05		50.45	0.00	50.45
103.82	55.70	16.09	39.61	0.03		49.43	0.00	49.43
103.80	3.65	3.65	0.00	0.00	1	48.39	0.00	48.39



#### **CULTEC Stormwater Design Calculator**

<b>Date:</b> October 02, 2025								
Project Information:								

# Calculations Performed By:

#### **RECHARGER 280HD**

Recharger 280HD Chamber Specifications						
Height	673	mm				
Width	1194	mm				
Length	2.44	meters				
Installed Length	2.13	meters				
Bare Chamber Volume	1.20	cu. meters				
Installed Chamber Volume	2.19	cu. meters				



Breakdown of Storage Provided by Recharger 280HD Stormwater System							
Stone Porosity	40.0	%					
Within Chambers	677.19	cu. meters					
Within Stone	573.95	cu. meters					
Total Storage Provided	1,251.1	cu. meters					
Total Storage Required	1227.96	.96 cu. meters					

#### **Materials List**

Recharger 280HD									
Total Number of Chambers Required	pieces								
Separator Row Chambers	40	pieces							
Starter Chambers		pieces							
Intermediate Chambers	532	pieces							
End Chambers	14	pieces							
HVLV FC-24 Feed Connectors	26	pieces							
CULTEC No. 410 Non-Woven Geotextile	4698	sq. meters							
CULTEC AFAB-HPF Woven Geotextile	131	meters							
Stone	1435	cu. meters							

ator Row Qty Included in Total


Based on 2 Internal Manifolds

#### **Bed Detail**



Bed Layout Information								
Number of Rows Wide	14	pieces						
Number of Chambers Long	40	pieces						
Chamber Row Width	19.69	meters						
Chamber Row Length	85.65	meters						
Bed Width	20.29	meters						
Bed Length	86.26	meters						
Bed Area Required	1750.58	sq. meters						
Length of Separator Row	85.65	meters						

#### Bed detail for reference only. Not project specific. Not to scale.

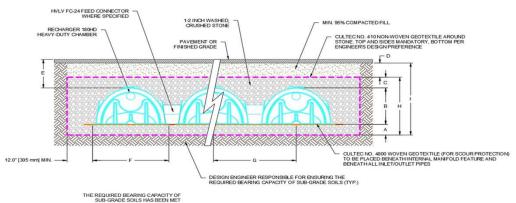

Conceptual graphic only. Not job specific.

	Cross Section Table Reference									
Α	Depth of Stone Base	229	mm							
В	Chamber Height	673	mm							
С	Depth of Stone Above Units	305	mm							
D	Depth of 95% Compacted Fill	254	mm							
E	Max. Depth Allowed Above the Chamber	3.66	meters							
F	Chamber Width	1194	mm							
G	Center to Center Spacing	1.42	meters							
н	Effective Depth	1.21	meters							
I	Bed Depth	1.46	meters							



#### **CULTEC Stage-Storage Calculations**

Date: October 2, 2025





Chamber Model -Number of Rows-Total Number of Chambers -Stone Void -Stone Base -Stone Above Units -Area -Base of Stone Elevation -Recharger 280HD

14 u
560 u
40 9
229 n
305 n
1750.58 n
103.57 units units % mm mm mm

Recharger 280HD Incremental Storage Volumes														
Height of	Height of System		r Volume	HVLV Feed C		Stone 1	Volume	Cumulative Volu	Total Cumulati Volun	Stage /	Area	Eleva	ition	
In 47.5 46.5 48.5 49.5 49.5 49.5 49.5 49.5 49.5 49.5 49	System	0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0	10.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0			628.1 628.1	17.8   17.8			***  ***  ***  ***  ***  ***  ***  ***  ***  ***  ***  ***  **  ***  ***  ***  ***  ***  ***  ***  ***  ***  ***  ***  ***  **  ***  ***  ***  ***  ***  ***  ***  ***  ***  ***  ***  ***  **  ***  ***  ***  ***  ***  ***  ***  ***  ***  ***  ***  ***  **  ***  ***  ***  ***  ***  ***  ***  ***  ***  ***  ***  ***  **  ***  ***  ***  ***  ***  ***  ***  ***  ***  ***  ***  ***  **  ***  ***  ***  ***  ***  ***  ***  ***  ***  ***  ***  ***  **  ***  ***  ***  ***  ***  ***  ***  ***  ***  ***  ***  ***  **  ***  ***  **	m² 700.21 71.55 823.88 963.35 1052.81 1118.60 1171.22 1213.33 1250.17 1281.74 1310.69 1334.37 1355.42 1310.69 1344.97 1445.09 1456.36 1474.87 1487.69 1506.54 1511.83 1517.12 1700.21 700.21 700.21 700.21 700.21 700.21 700.21 700.21 700.21 700.21 700.21 700.21 700.21 700.21	t 107.53 107.45 107.75 107.53 107.45 107.73 107.45 107.73 107.45 107.20 107.11 107.03 106.95 106.86 106.78 106.67 106.61 106.53 106.49 106.44 106.15 106.07 105.99 105.90	m 104.78 104.75 104.73 104.75 104.73 104.70 104.65 104.62 104.60 104.55 104.52 104.50 104.45 104.45 104.45 104.45 104.45 104.45 104.45 104.36 104.36 104.36 104.37 104.18 104.18 104.28 104.29 104.29 103.85 103.95	Top of Stone Elevation  Top of Chamber Elevation  Bottom of Chamber Elevation

#### **Quality Control Calculations**

	Device	TSS Removal Efficiency	NJDEP Calculation for TSS removal rates for BMP in Series:
BMP1	Separator Row-1	50%	R = A + B - [(AxB)/100]
BMP2	OGS	50%	A = TSS Removal rate from First (Upstream BMP)
BMP3	Separator Row-2	50%	B = TSS Removal rate from Second (Downstream BMP)

Land Type	Area (m²)	Starting TSS Removal (A)	TSS Removal (B <sub>1</sub> )	TSS Removal (B <sub>2</sub> )	TSS Removal (B <sub>3</sub> )	Notes
Roof	23,900	90%	95%	98%	99%	Roof is treated by all three BMPs
Landscape	1,400	90%	90%	95%	98%	Landscape does not get treated by BMP1
Impervious	43,500	0%	0%	50%	75%	Impervious does not get treated by BMP1
TOTAL	68,800	33%	35%	67%	84%	





# Imbrium® Systems ESTIMATED NET ANNUAL SEDIMENT (TSS) LOAD REDUCTION

02/16/2025

Cit - Name -	Vacta Court		
Years of Rainfall Data:	20		
Climate Station Id:	6105978		
Nearest Rainfall Station:	OTTAWA CDA RCS		
City:	Ottawa		
Province:	Ontario		

Site Name: O'Keefe Court

Drainage Area (ha): 6.88
Runoff Coefficient 'c': 0.90

Particle Size Distribution: Fine

Target TSS Removal (%): 80.0

90.00
199.85
No
No
200
7583
6165

Project Name:	O'Keefe Court
Project Number:	21684
Designer Name:	Luan Phan
Designer Company:	KWA
Designer Email:	luan.phan@kwasitedev.com
Designer Phone:	437-453-3130
EOR Name:	
EOR Company:	
EOR Email:	
EOR Phone:	

# Net Annual Sediment (TSS) Load Reduction Sizing Summary

Stormceptor Model	TSS Removal Provided (%)			
EF4	43			
EF5	52			
EF6	59			
EF8	69			
EF10	76			
EF12	81			

Recommended Stormceptor EF Model: EF12

Estimated Net Annual Sediment (TSS) Load Reduction (%): 81

Water Quality Runoff Volume Capture (%):

> 90





#### THIRD-PARTY TESTING AND VERIFICATION

► Stormceptor® EF and Stormceptor® EFO are the latest evolutions in the Stormceptor® oil-grit separator (OGS) technology series, and are designed to remove a wide variety of pollutants from stormwater and snowmelt runoff. These technologies have been third-party tested in accordance with the Canadian ETV Procedure for Laboratory Testing of Oil-Grit Separators and performance has been third-party verified in accordance with the ISO 14034 Environmental Technology Verification (ETV) protocol.

#### **PERFORMANCE**

▶ Stormceptor® EF and EFO remove stormwater pollutants through gravity separation and floatation, and feature a patent-pending design that generates positive removal of total suspended solids (TSS) throughout each storm event, including high-intensity storms. Captured pollutants include sediment, free oils, and sediment-bound pollutants such as nutrients, heavy metals, and petroleum hydrocarbons. Stormceptor is sized to remove a high level of TSS from the frequent rainfall events that contribute the vast majority of annual runoff volume and pollutant load. The technology incorporates an internal bypass to convey excessive stormwater flows from high-intensity storms through the device without resuspension and washout (scour) of previously captured pollutants. Proper routine maintenance ensures high pollutant removal performance and protection of downstream waterways.

#### PARTICLE SIZE DISTRIBUTION (PSD)

► The Canadian ETV PSD shown in the table below was used, or in part, for this sizing. This is the identical PSD that is referenced in the Canadian ETV *Procedure for Laboratory Testing of Oil-Grit Separators* for both sediment removal testing and scour testing. The Canadian ETV PSD contains a wide range of particle sizes in the sand and silt fractions, and is considered reasonably representative of the particle size fractions found in typical urban stormwater runoff.

Particle	Percent Less	Particle Size	Percent		
Size (µm)	Than	Fraction (µm)			
1000	100	500-1000	5		
500	95	250-500	5		
250	90	150-250	15		
150	75	100-150	15		
100	60	75-100	10		
75	50	50-75	5		
50	45	20-50	10		
20	35	8-20	15		
8	20	5-8	10		
5	10	2-5	5		
2	5	<2	5		






Rainfall Intensity (mm / hr)	Percent Rainfall Volume (%)	Cumulative Rainfall Volume (%)	Flow Rate (L/s)	Flow Rate (L/min)	Surface Loading Rate (L/min/m²)	Removal Efficiency (%)	Incremental Removal (%)	Cumulative Removal (%)
0.50	8.6	8.6	8.61	516.0	516.0 49.0		8.6	8.6
1.00	20.3	29.0	17.21	1033.0	98.0	97	19.8	28.4
2.00	16.2	45.2	34.43	2066.0	197.0	84	13.7	42.1
3.00	12.0	57.2	51.64	3098.0	295.0	79	9.5	51.5
4.00	8.4	65.6	68.86	4131.0	393.0	74	6.3	57.8
5.00	5.9	71.6	86.07	5164.0	492.0	72	4.3	62.1
6.00	4.6	76.2	103.28	6197.0	590.0	71	3.3	65.4
7.00	3.1	79.3	120.50	7230.0	689.0	70	2.1	67.6
8.00	2.7	82.0	137.71	8263.0	787.0	69	1.9	69.5
9.00	3.3	85.3	154.92	9295.0	885.0	69	2.3	71.7
10.00	2.3	87.6	172.14	10328.0	984.0	68	1.6	73.3
11.00	1.6	89.2	189.35	11361.0	1082.0	69	1.1	74.4
12.00	1.3	90.5	206.57	12394.0	1180.0	71	0.9	75.3
13.00	1.7	92.2	223.78	13427.0	1279.0	73	1.3	76.6
14.00	1.2	93.5	240.99	14460.0	1377.0	75	0.9	77.5
15.00	1.2	94.6	258.21	15492.0	1475.0	72	0.8	78.3
16.00	0.7	95.3	275.42	16525.0	1574.0	67	0.5	78.8
17.00	0.7	96.1	292.63	17558.0	1672.0	63	0.5	79.3
18.00	0.4	96.5	309.85	18591.0	1771.0	60	0.2	79.5
19.00	0.4	96.9	327.06	19624.0	1869.0	57	0.2	79.7
20.00	0.2	97.1	344.28	20657.0	1967.0	54	0.1	79.8
21.00	0.5	97.5	361.49	21689.0	2066.0	51	0.2	80.1
22.00	0.2	97.8	378.70	22722.0	2164.0	49	0.1	80.2
23.00	1.0	98.8	395.92	23755.0	2262.0	47	0.5	80.7
24.00	0.3	99.1	413.13	24788.0	2361.0	45	0.1	80.8
25.00	0.0	99.1	430.34	25821.0	2459.0	43	0.0	80.8
30.00	0.9	100.0	516.41	30985.0	2951.0	36	0.3	81.1
35.00	0.0	100.0	602.48	36149.0	3443.0	31	0.0	81.1
40.00	0.0	100.0	688.55	41313.0	3935.0	27	0.0	81.1
45.00	0.0	100.0	774.62	46477.0	4426.0	24	0.0	81.1
			Es	timated Ne	t Annual Sedim	ent (TSS) Loa	d Reduction =	81 %

Climate Station ID: 6105978 Years of Rainfall Data: 20








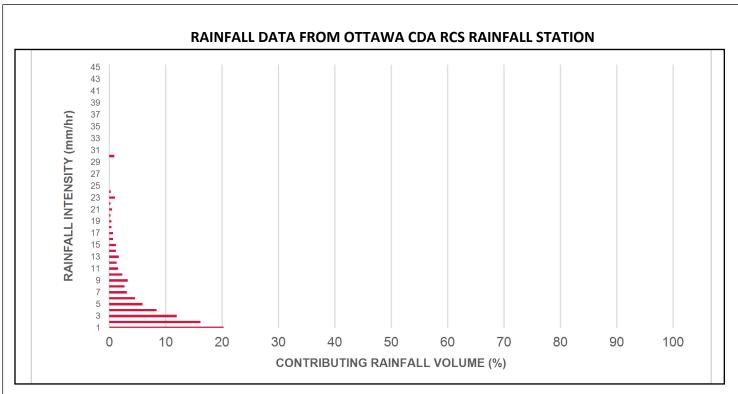

# INCREMENTAL AND CUMULATIVE TSS REMOVAL FOR THE RECOMMENDED STORMCEPTOR® MODEL

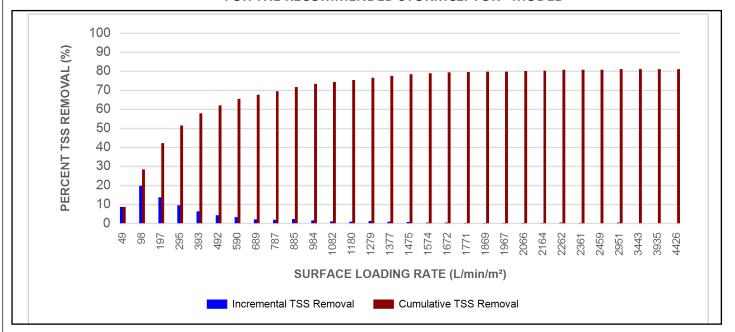





#### **Maximum Pipe Diameter / Peak Conveyance**

Stormceptor EF / EFO	Model Diameter		Min Angle Inlet / Outlet Pipes	Max Inlet Pipe Diameter		Max Outlet Pipe Diameter		Peak Conveyance Flow Rate	
	(m)	(ft)		(mm)	(in)	(mm)	(in)	(L/s)	(cfs)
EF4 / EFO4	1.2	4	90	609	24	609	24	425	15
EF5 / EFO5	1.5	5	90	762	30	762	30	710	25
EF6 / EFO6	1.8	6	90	914	36	914	36	990	35
EF8 / EFO8	2.4	8	90	1219	48	1219	48	1700	60
EF10 / EFO10	3.0	10	90	1828	72	1828	72	2830	100
EF12 / EFO12	3.6	12	90	1828	72	1828	72	2830	100

#### SCOUR PREVENTION AND ONLINE CONFIGURATION


► Stormceptor® EF and EFO feature an internal bypass and superior scour prevention technology that have been demonstrated in third-party testing according to the scour testing provisions of the Canadian ETV Procedure for Laboratory Testing of Oil-Grit Separators, and the exceptional scour test performance has been third-party verified in accordance with the ISO 14034 ETV protocol. As a result, Stormceptor EF and EFO are approved for online installation, eliminating the need for costly additional bypass structures, piping, and installation expense.

#### **DESIGN FLEXIBILITY**

▶ Stormceptor® EF and EFO offers design flexibility in one simplified platform, accepting stormwater flow from a single inlet pipe or multiple inlet pipes, and/or surface runoff through an inlet grate. The device can also serve as a junction structure, accommodate a 90-degree inlet-to-outlet bend angle, and can be modified to ensure performance in submerged conditions.

#### **OIL CAPTURE AND RETENTION**


► While Stormceptor® EF will capture and retain oil from dry weather spills and low intensity runoff, **Stormceptor® EFO** has demonstrated superior oil capture and greater than 99% oil retention in third-party testing according to the light liquid reentrainment testing provisions of the Canadian ETV **Procedure for Laboratory Testing of Oil-Grit Separators**. Stormceptor EFO is recommended for sites where oil capture and retention is a requirement.







# Stormceptor EF Sizing Report



#### **INLET-TO-OUTLET DROP**

Elevation differential between inlet and outlet pipe inverts is dictated by the angle at which the inlet pipe(s) enters the unit.

0° - 45°: The inlet pipe is 1-inch (25mm) higher than the outlet pipe. 45° - 90°: The inlet pipe is 2-inches (50mm) higher than the outlet pipe.

#### **HEAD LOSS**

The head loss through Stormceptor EF is similar to that of a 60-degree bend structure. The applicable K value for calculating minor losses through the unit is 1.1. For submerged conditions the applicable K value is 3.0.

#### **Pollutant Capacity**

Stormceptor EF / EFO	Model Diameter		Depth (Outlet Pipe Invert to Sump Floor)		Oil Volume		Oil Volume  Recommended Sediment Maintenance Depth *		Maxii Sediment	-	Maxin Sediment	-
	(m)	(ft)	(m)	(ft)	(L)	(Gal)	(mm)	(in)	(L)	(ft³)	(kg)	(lb)
EF4 / EFO4	1.2	4	1.52	5.0	265	70	203	8	1190	42	1904	5250
EF5 / EFO5	1.5	5	1.62	5.3	420	111	305	10	2124	75	2612	5758
EF6 / EFO6	1.8	6	1.93	6.3	610	160	305	12	3470	123	5552	15375
EF8 / EFO8	2.4	8	2.59	8.5	1070	280	610	24	8780	310	14048	38750
EF10 / EFO10	3.0	10	3.25	10.7	1670	440	610	24	17790	628	28464	78500
EF12 / EFO12	3.6	12	3.89	12.8	2475	655	610	24	31220	1103	49952	137875

<sup>\*</sup>Increased sump depth may be added to increase sediment storage capacity

\*\* Average density of wet packed sediment in sump = 1.6 kg/L (100 lb/ft³)

Feature	Benefit	Feature Appeals To	
Patent-pending enhanced flow treatment and scour prevention technology	Superior, verified third-party performance	Regulator, Specifying & Design Engineer	
Third-party verified light liquid capture and retention for EFO version	Proven performance for fuel/oil hotspot locations	Regulator, Specifying & Design Engineer, Site Owner	
Functions as bend, junction or inlet structure	Design flexibility	Specifying & Design Engineer	
Minimal drop between inlet and outlet	Site installation ease	Contractor	
Large diameter outlet riser for inspection and maintenance	Easy maintenance access from grade	Maintenance Contractor & Site Owner	

#### STANDARD STORMCEPTOR EF/EFO DRAWINGS

For standard details, please visit http://www.imbriumsystems.com/stormwater-treatment-solutions/stormceptor-ef

#### STANDARD STORMCEPTOR EF/EFO SPECIFICATION

For specifications, please visit http://www.imbriumsystems.com/stormwater-treatment-solutions/stormceptor-ef







# Stormceptor® EF Sizing Report

# STANDARD PERFORMANCE SPECIFICATION FOR "OIL GRIT SEPARATOR" (OGS) STORMWATER QUALITY TREAMENT DEVICE

#### PART 1 - GENERAL

#### 1.1 WORK INCLUDED

This section specifies requirements for selecting, sizing, and designing an underground Oil Grit Separator (OGS) device for stormwater quality treatment, with third-party testing results and a Statement of Verification in accordance with ISO 14034 Environmental Management – Environmental Technology Verification (ETV).

#### 1.2 REFERENCE STANDARDS & PROCEDURES

ISO 14034:2016 Environmental management – Environmental technology verification (ETV)

Canadian Environmental Technology Verification (ETV) Program's **Procedure for Laboratory Testing of Oil-Grit Separators**.

#### 1.3 SUBMITTALS

- 1.3.1 All submittals, including sizing reports & shop drawings, shall be submitted upon request with each order to the contractor then forwarded to the Engineer of Record for review and acceptance. Shop drawings shall detail all OGS components, elevations, and sequence of construction.
- 1.3.2 Alternative devices shall have features identical to or greater than the specified device, including: treatment chamber diameter, treatment chamber wet volume, sediment storage volume, and oil storage volume.
- 1.3.3 Unless directed otherwise by the Engineer of Record, OGS stormwater quality treatment product substitutions or alternatives submitted within ten days prior to project bid shall not be accepted. All alternatives or substitutions submitted shall be signed and sealed by a local registered Professional Engineer, based on the exact same criteria detailed in Section 3, in entirety, subject to review and approval by the Engineer of Record.

#### **PART 2 - PRODUCTS**

#### 2.1 OGS POLLUTANT STORAGE

The OGS device shall include a sump for sediment storage, and a protected volume for the capture and storage of petroleum hydrocarbons and buoyant gross pollutants. The <u>minimum</u> sediment & petroleum hydrocarbon storage capacity shall be as follows:

2.1.1 4 ft (1219 mm) Diameter OGS Units: 1.19 m³ sediment / 265 L oil 5 ft (1524 mm) Diameter OGS Units: 1.95 m³ sediment / 420L oil 6 ft (1829 mm) Diameter OGS Units: 3.48 m³ sediment / 609 L oil 8 ft (2438 mm) Diameter OGS Units: 8.78 m³ sediment / 1,071 L oil 10 ft (3048 mm) Diameter OGS Units: 17.78 m³ sediment / 1,673 L oil 12 ft (3657 mm) Diameter OGS Units: 31.23 m³ sediment / 2,476 L oil

#### PART 3 - PERFORMANCE & DESIGN







# Stormceptor® EF Sizing Report

#### 3.1 GENERAL

The OGS stormwater quality treatment device shall be verified in accordance with ISO 14034:2016 Environmental management – Environmental technology verification (ETV). The OGS stormwater quality treatment device shall remove oil, sediment and gross pollutants from stormwater runoff during frequent wet weather events, and retain these pollutants during less frequent high flow wet weather events below the insert within the OGS for later removal during maintenance. The Manufacturer shall have at least ten (10) years of local experience, history and success in engineering design, manufacturing and production and supply of OGS stormwater quality treatment device systems, acceptable to the Engineer of Record.

#### 3.2 SIZING METHODOLOGY

The OGS device shall be engineered, designed and sized to provide stormwater quality treatment based on treating a minimum of 90 percent of the average annual runoff volume and a minimum removal of an annual average 60% of the sediment (TSS) load based on the Particle Size Distribution (PSD) specified in the sizing report for the specified device. Sizing of the OGS shall be determined by use of a minimum ten (10) years of local historical rainfall data provided by Environment Canada. Sizing shall also be determined by use of the sediment removal performance data derived from the ISO 14034 ETV third-party verified laboratory testing data from testing conducted in accordance with the Canadian ETV protocol Procedure for Laboratory Testing of Oil-Grit Separators, as follows:

- 3.2.1 Sediment removal efficiency for a given surface loading rate and its associated flow rate shall be based on sediment removal efficiency demonstrated at the seven (7) tested surface loading rates specified in the protocol, ranging 40 L/min/m² to 1400 L/min/m², and as stated in the ISO 14034 ETV Verification Statement for the OGS device.
- 3.2.2 Sediment removal efficiency for surface loading rates between 40 L/min/m<sup>2</sup> and 1400 L/min/m<sup>2</sup> shall be based on linear interpolation of data between consecutive tested surface loading rates.
- 3.2.3 Sediment removal efficiency for surface loading rates less than the lowest tested surface loading rate of 40 L/min/m² shall be assumed to be identical to the sediment removal efficiency at 40 L/min/m². No extrapolation shall be allowed that results in a sediment removal efficiency that is greater than that demonstrated at 40 L/min/m².
- 3.2.4 Sediment removal efficiency for surface loading rates greater than the highest tested surface loading rate of 1400 L/min/m² shall assume zero sediment removal for the portion of flow that exceeds 1400 L/min/m², and shall be calculated using a simple proportioning formula, with 1400 L/min/m² in the numerator and the higher surface loading rate in the denominator, and multiplying the resulting fraction times the sediment removal efficiency at 1400 L/min/m².

The OGS device shall also have sufficient annual sediment storage capacity as specified and calculated in Section 2.1.

#### 3.3 CANADIAN ETV or ISO 14034 ETV VERIFICATION OF SCOUR TESTING

The OGS device shall have Canadian ETV or ISO 14034 ETV Verification of third-party scour testing conducted in accordance with the Canadian ETV Program's **Procedure for Laboratory Testing of Oil-Grit Separators**.

3.3.1 To be acceptable for on-line installation, the OGS device must demonstrate an average scour test effluent concentration less than 10 mg/L at each surface loading rate tested, up to and including 2600 L/min/m<sup>2</sup>.







# Stormceptor EF Sizing Report





Article

# Performance of an Underground Stormwater Detention Chamber and Comparison with Stormwater Management Ponds

Jennifer Drake 1,\*, Dean Young 2 and Nicholas McIntosh 1

- Department of Civil Engineering, University of Toronto, 35 St George St., Toronto, ON M5S 1A4, Canada; nicholas.mcintosh@mail.utoronto.ca
- Toronto and Region Conservation Authority, 9520 Pine Valley Drive, Vaughan, ON L4L 1A6, Canada; dyoung@trca.on.ca
- \* Correspondence: jenn.drake@utoronto.ca; Tel.: +1-416-978-8248

Academic Editors: Kelly T. Morgan and Monica Ozores-Hampton

Received: 21 January 2016; Accepted: 11 May 2016; Published: 20 May 2016

**Abstract:** The transportation of pollutants from impervious surfaces during runoff events to receiving water bodies is a serious environmental problem. Summer runoff is also heated by impervious surfaces, causing thermal enrichment in receiving water body systems and degradation of coldwater aquatic ecosystems. End-of-pipe stormwater management facilities that are open to the environment can result in further elevated temperatures due to exposure to solar radiation. Receiving water systems that provide coldwater habitat require cool water temperatures to sustain healthy conditions for cold water flora and fauna (e.g., trout, dace). Underground Stormwater Detention Chambers (USDC) are a technology for the detention and treatment of stormwater runoff that can potentially solve the thermal issues associated with sun-exposed detention facilities while still providing an equivalent level of treatment services for stormwater pollutants. A field study of an USDC located in Southern Ontario was undertaken to characterize its treatment performance and effect on water temperature. The results were: the USDC was found to provide similar levels of stormwater treatment as wet detention ponds. On average, outlet maximum temperatures were 5 °C cooler than inlet maximum temperatures, and outlet water temperatures remained within the thermal regime for coldwater fish habitat throughout the evaluation period. There was little to no stratification of temperature, nor dissolved solids, but stratification of dissolved oxygen was observed mid-winter and into the spring.

**Keywords:** stormwater detention; end-of-pipe; underground detention chambers; ponds; water quality; temperature

#### 1. Introduction

Stormwater management is a key issue in the design of urban infrastructure. Sustained increases in urbanization have resulted in large-scale replacement of pervious land by impervious surfaces, which reduces infiltration rates and available surface storage [1]. Due to these changes, a larger proportion of urban precipitation becomes runoff. Runoff from urban areas causes non-point source pollution by transporting pollutants-which are deposited on impervious surfaces through human activities and atmospheric deposition-to receiving water bodies [2,3].

Stormwater management (SWM) ponds have been the most widely employed management practice in urban drainage for over 40 years [4]. SWM ponds have been widely documented to improve stormwater quality reducing concentrations of suspended sediments [5], metals [5], nutrients [5,6] and bacteria [7]. Ponds are often assumed to provide high removal efficiency for total suspended solids



# **Mannings Equation - Trapezoidal Channel**

Project Name: O'Keefe Court
Project Number: 21684
Location: Nepean, Ontario
Date: 2/19/2025

Prepared By: LP

#### **EXISTING SWALE**

Parameter	Value		Units	]
Flow depth	0.87		m	]
Freeboard	0.3			assumed
Side slope Ratio	3	:1	H:V	existing side slopes approx. 3:1
Bed width	0		m	assume triangular - per cross sections
Top width	7		m	existing top width is >7m
Area	2.253		m <sup>2</sup>	
Wetted Perimeter	5.481		m	
Slope	0.3		%	MINIMUM SLOPE ALONG SOUTH SWALE
Mannings 'n'	0.03			BETWEEN CUL-DE-SAC AND POINT OF
Channel Capacity	2.275		m³/s	DIRECTIONAL SWITCH
Channel Capacity	2275		L/s	FLOW CAPACITY OF DITCH AT WORST
Channel Capacity	1.009		m/s	CASE SCENARIO

#### **REINSTATED SWALE**

Parameter	Value		Units	
Flow depth	0.87		m	
Freeboard	0.3			assumed
Side slope Ratio	3	:1	H:V	existing side slopes approx. 3:1
Bed width	0		m	assume triangular - per cross sections
Top width	7		m	existing top width is >7m
Area	2.253		m <sup>2</sup>	
Wetted Perimeter	5.481		m	
Slope	1		%	APPROXIMATE SLOPE FROM AVERAGIN
Mannings 'n'	0.03			OUT SLOPE BETWEEN CUL-DE-SAC AND
Channel Capacity	4.153		m³/s	POINT OF DIRECTIONAL SWITCH
Channel Capacity	4153		L/s	
Channel Capacity	1.843		m/s	

# **Total Site - Uncontrolled Flow**

Uncontrolled area (ha) =	6.88
Runoff Coefficient =	0.9
Time of Concentration (min) =	40

Storm Event	Intensity (mm/hr)	Uncontro lled Flow Rate (L/s)
2 year	32.9	565.7
5 year	44.2	760.6
10 year	51.6	888.6
25 year	61.0	1049.4
50 year	68.0	1169.7
100 year	75.1	1293.5

100-year Flow + 20% Surcharge = 1552.2

#### Calculation of Contributing Flow to O'Keefe South Swale (Up to Block 15 Inlet)

Rainfall Intensity				nsity (mm/hr)	Rational	Flow (L/s)		
*Drainage ID	Description	Area (ha)	**ToC (min)	Runoff C	2 year	100 year	2 year	100 year
200	Subject Site - Controlled Flow	6.74	Flow is predetermined - Refer to SWM Calcs			166.5	379.8	
201	Subject Site - Uncontrolled Flow	0.14	Flow	Flow is predetermined - Refer to SWM Calcs				51.4
202a	O'Keefe ROW - North	0.57	15	0.90	61.8	142.9	88.1	203.8
202b	O'Keefe ROW - South	0.66	20	0.90	52.0	120.0	85.9	198.1
203	Lytle Park	9.8	50	0.30	28.0	64.0	229.2	522.7

17.91

#### IDF curve equations (Intensity in mm/hr)

| 100 year Intensity | 1735.688 / (Time in min + 6.014) | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.820 | 0.82

 Ditch Capacity =
 4153
 L/s

 Total Tribitary Flow (2-year) =
 591.8
 L/s

 Total Tributary Flow (100-year) =
 1355.8
 L/s

 \*\*\*\*Site Overland Flow Conditions =
 2476.8
 L/s

#### **Operating Capacities**

2-year 14% 100-year 33% Overland Flow 60%

\*Refer to Figure PDP-A in Appendix E

1355.8

Total Flow (L/s)

591.8

<sup>\*\*</sup>time of concentration calculated using Airport Formula (RC<0.4) and Bransby William Formula (RC>0.4)

<sup>\*\*\*</sup>site overland flow conditions based on uncontrolled flow of total site (with 20% surcharge) + 100-year flows from areas 202a, 202b, 203

### **Culvert Sizing**

Pipe Size =	600	mm
Pipe Grade % =	2	
Full Wetted Area =	0.28	m2
Full Wetted Perimeter =	1.88	m
Mannings Coefficient	0.024	
Full Flow Velocity =	1.66	m/s
Full Flow Capacity =	470.4	L/s

Area #202	<b>Area (m²)</b> 1828	Runoff C 0.75	<b>ToC (min)</b>	) O'Keefe no	rth ROW di	rainage
Pre-De	velopment Flo	w (L/s)				
	2 year	5 year	10 year	25 year	50 year	100 year
Area 202	29.27	39.71	46.55	55.15	61.54	68.06
Site (Area 200)	151.00	166.41	202.35	266.16	317.97	378.29
% of FFC	38%	44%	53%	68%	81%	95%

Project:	<u>O'Keefe Court</u>
Project #:	21684
Designed By:	L.P.
Checked By:	T.F
Date:	2-0ct-2025
Site Total - Infiltration Rate & Drawdown Time	
Infiltration Storage Required	
Rainfall Retention Depth =	
Site Area =	= <b>6.88</b> ha
Total Water Balance Volume Required =	344.00 m <sup>3</sup>
Combined Rooftop Area =	<b>2.39</b> ha
West Drainage Area =	= 1.20 ha
Total Target Water Balance Volume =	<b>179.50</b> m <sup>3</sup>
Total Water Balance Volume Provided =	= 179.50 m <sup>3</sup>
% of total volume requirement =	52.2%

Project: O'Keefe Court Project #: 21684 Designed By: Checked By: T.G T.F Date: 2-Oct-2025

#### Infiltration Gallery - 1 (Cultec 100HD Stormwater System) - Infiltration Rate & Drawdown Time

25.8 mm/hr as per Hydrogeological Investigation (Gemtech) dated 09/04/24

<u>Infiltration Rate</u> Infiltration Rate = Safety Correction Factor = 2.5 Total Target Water Balance Volume Pr 10.32 mm/hr

Infiltration Storage Required

**5.00** mm **0.80** ha Rainfall Retention Depth = Building A3 Area = Total Target Water Balance Volume  $\textbf{40.00}\ m^3$ 

<u>Cultec 100HD Stormwater System Dimensions</u> Footprint Volume **384.97** m2 **40.00** m3

	Vol of Infiltration (m <sup>3</sup> )	Infiltration Rate (m/hr)	Area of Infiltration (m <sup>2</sup> )	Infiltration Vol. Rate (m <sup>3</sup> /hr)	Drawdown Time (hrs)*			
Infiltration	40.00	0.0103	384.97	4.0	10.1			
Total	40.00							
*Max allowable drawdown time = 48 hours (2 days)								
**effective depth of water from Cultec stage-storage sheet multiplied by 0.40 (water volume/bulk volume ratio)								

Project: O'Keefe Court Project #: 21684 Designed By: Checked By: T.G T.F Date: 2-Oct-2025

#### Infiltration Gallery - 2 (Cultec 100HD Stormwater System) - Infiltration Rate & Drawdown Time

Infiltration Rate

4.3 mm/hr 2.5 Infiltration Rate = as per Hydrogeological Investigation (Gemtech) dated 09/04/24

Safety Correction Factor =

Total Target Water Balance Volume Pr 1.72 mm/hr

Infiltration Storage Required

Rainfall Retention Depth =
Building A2 + West Parking Lot Area **5.00** mm

**1.40** ha Total Target Water Balance Volume **70.00** m<sup>3</sup>

Cultec 100HD Stormwater System Dimensions

Footprint **960.62** m2 Volume **70.00** m3

	Vol of Infiltration (m <sup>3</sup> )	Infiltration Rate (m/hr)	Area of Infiltration (m <sup>2</sup> )	Infiltration Vol. Rate (m <sup>3</sup> /hr)	Drawdown Time (hrs)*				
Infiltration	70.00	0.0017	960.62	1.7	42.4				
Total	70.00								
	*Max allowable drawdown time = 48 hours (2 days)								

<sup>\*\*</sup>effective depth of water from Cultec stage-storage sheet multiplied by 0.40 (water volume/bulk volume ratio)

 Project:
 O'Keefe Court

 Project #:
 21684

 Designed By:
 T.G

 Checked By:
 T.F

 Date:
 2-Oct-2025

#### Infiltration Gallery - 3 (Cultec 100HD Stormwater System) - Infiltration Rate & Drawdown Time

Infiltration Rate

Infiltration Rate = 13.2 mm/hr as per Hydrogeological Investigation (Gemtech) dated 09/04/24

Safety Correction Factor = 2.5

Total Target Water Balance Volume Pr 5.28 mm/hr

Infiltration Storage Required

Rainfall Retention Depth = 5.00 mm
Building A1 + West Parking Lot Area

=  $1.39 \, \mathrm{ha}$ Total Target Water Balance Volume  $69.50 \, \mathrm{m}^3$ 

Cultec 100HD Stormwater System Dimensions

Footprint 444.54 m2 Volume 69.50 m3

	Vol of Infiltration (m <sup>3</sup> )	Infiltration Rate (m/hr)	Area of Infiltration (m <sup>2</sup> )	Infiltration Vol. Rate (m <sup>3</sup> /hr)	Drawdown Time (hrs)*				
Infiltration	69.50	0.0053	444.54	2.3	29.6				
Total	69.50								
	*Max allowable drawdown time = 48 hours (2 days)								

<sup>\*\*</sup>effective depth of water from Cultec stage-storage sheet multiplied by 0.40 (water volume/bulk volume ratio)



#### **CULTEC Stormwater Design Calculator**

Date:	October 02, 2025						
Project Information:							
Building A1 - Chamber							

# Calculations Performed By:

#### **CONTACTOR 100HD**

Contactor 100HD Chamber Specifications								
Height	318	mm						
Width	914	mm						
Length	2.44	meters						
Installed Length	2.29	meters						
Bare Chamber Volume	0.40	cu. meters						
Installed Chamber Volume	0.97	cu. meters						



Breakdown of Storage Provided by Contactor 100HD Stormwater System							
Stone Porosity	40.0	%					
Within Chambers	68.55	cu. meters					
Within Stone	105.82	cu. meters					
Total Storage Provided	174.4	cu. meters					
Total Storage Required	170.00	cu. meters					


#### **Materials List**


Contactor			
Total Number of Chambers Required	171	pieces	
Separator Row Chambers	19	pieces	Separator Row Qty Included in Total
Starter Chambers	9	pieces	
End Chambers	162	pieces	
HVLV SFCx2 Feed Connectors	16	pieces	Based on 2 Internal Manifolds
CULTEC No. 410 Non-Woven Geotextile	1213	sq. meters	
CULTEC AFAB-HPF Woven Geotextile	66	meters	
Stone	265	cu. meters	

#### **Bed Detail**



Bed detail for reference only. Not project specific. Not to scale.



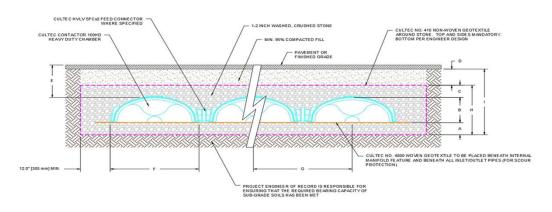

Conceptual graphic only. Not job specific.

	Cross Section Table Reference						
Α	Depth of Stone Base	280	mm				
В	Chamber Height	318	mm				
С	Depth of Stone Above Units	152	mm				
D	Depth of 95% Compacted Fill	203	mm				
E	Max. Depth Allowed Above the Chamber	3.66	meters				
F	Chamber Width	914	mm				
G	Center to Center Spacing	1.07	meters				
н	Effective Depth	0.75	meters				
I	Bed Depth	0.95	meters				

CULTEC, Inc. P.O. Box 280 Brookfield, CT 06804 USA



#### **CULTEC Stage-Storage Calculations**

Date: October 2, 2025

Building A1 - Chamber



Chamber Model -Number of Rows-Total Number of Chambers -Stone Void -Stone Base -Stone Above Units -Area -Base of Stone Elevation -Contactor 100HD 9 171 40 280 152 444.54 104.90 units units % mm mm mm

Contactor 100HD Incremental Storage Volumes																				
Height of System		Chambe	Chamber Volume  HVLV Feed Connector Volume							Area	Eleva	ition								
7447 749 677 679 679 679 679 688 888 888 888 888 888 888 888 888 88	7749 7749 7749 673 6699 673 6688 6622 5597 5584 483 483 330 331 336 331 178 222 23 178 225 0	10.0 0.0 0.0 0.0 0.0 0.0 0.0 0.1 130.9 141.6 178.9 204.6 223.9 236.8 247.1 261.3 261.3 287.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0	0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0	m <sup>2</sup> 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.	Volum  1:3  0.0  0.0  0.0  0.0  0.0  0.0  0.0  0	dume		m3 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.	m3 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.	\$\$\frac{\mathbb{r}^2}{159.5}\$ \$159.5\$	M3 4.5 4.5 4.5 2.3 4.2 2.0 1.8 4.5 4.5 4.5 4.5 4.5 4.5 4.5 4.5 4.5 4.5	Cumulativ volu  159.500	m <sup>2</sup> 4.5 4.5 4.5 4.5 4.5 4.5 4.5 4.5 6.0 6.9 7.6 8.0 8.3 8.5 7.9 9.0 9.4 4.5 4.5 4.5 4.5 4.5 4.5 4.5 4.5 4.5 4	Total Cumulati	174,41 169,90 165,38 156,38 156,33 147,32 148,06 140,01 119,55 111,55 11	nt 1914.00 1914.00 1914.00 1914.00 1914.00 1914.00 1914.00 1914.00 1914.00 357.93 2136.39 2534.85 2933.30 3320.20 33387.44 3526.90 3620.98 3695.77 3797.97 3798.12 3798.28 3984.90 1914.00 1914.00 1914.00 1914.00 1914.00 1914.00 1914.00 0.00	m² 177.81 177.81 177.81 177.81 177.81 177.81 177.81 235.49 272.50 297.47 314.69 327.65 336.39 343.34 352.85 352.85 352.86 370.20 177.81 177.81 177.81 177.81 177.81 0.00	t 107.36 107.28 107.19 107.11 107.03 106.94 106.86 106.82 106.73 106.65 106.57 106.57 106.58 106.48 106.48 106.32 106.15 106.57 106.57 105.57 105.57 105.57 105.48 105.90 105.32 105.73 105.65 105.49 105.73 105.65 105.49 105.73 105.65 105.49 105.73 105.65 105.49 105.73 105.65 105.49 105.73 105.65 105.49 105.73 105.65 105.49 105.73 105.65 105.49 105.73 105.65 105.49 105.73 105.65 105.49 105.73 105.65 105.49 105.73 105.65 105.49 105.73 105.65	105.65 105.62 105.60 105.57 105.55 105.52 105.50 105.48 105.48 105.43 105.41 105.33 105.41 105.28 105.20 10	Top of Stone Elevation  Top of Chamber Elevation  Bottom of Chamber Elevation



#### **CULTEC Stormwater Design Calculator**

Date: October 02, 2025							
Project Information:							
Building A2 - Chamber							

# Calculations Performed By:

#### **CONTACTOR 100HD**

Contactor 100HD Chamber Specifications								
Height	318	mm						
Width	914	mm						
Length	2.44	meters						
Installed Length	2.29	meters						
Bare Chamber Volume	0.40	cu. meters						
Installed Chamber Volume	0.92	cu. meters						



Breakdown of Storage Provided by Contactor 100HD Stormwater System							
Stone Porosity	40.0	%					
Within Chambers	150.95	cu. meters					
Within Stone	208.02	cu. meters					
Total Storage Provided	359.0	cu. meters					
Total Storage Required	350.00	cu. meters					


#### **Materials List**


Contactor			
Total Number of Chambers Required	377	pieces	
Separator Row Chambers	29	pieces	Separator Row Qty Included in Total
Starter Chambers	13	pieces	
End Chambers	364	pieces	
HVLV SFCx2 Feed Connectors	24	pieces	Based on 2 Internal Manifolds
CULTEC No. 410 Non-Woven Geotextile	2544	sq. meters	
CULTEC AFAB-HPF Woven Geotextile	98	meters	
Stone	520	cu. meters	

#### **Bed Detail**



Bed detail for reference only. Not project specific. Not to scale



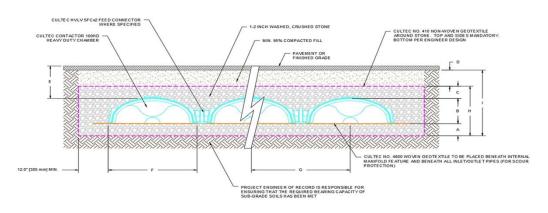

Conceptual graphic only. Not job specific.

	Cross Section Table Reference		
Α	Depth of Stone Base	230	mm
В	Chamber Height	318	mm
С	Depth of Stone Above Units	152	mm
D	Depth of 95% Compacted Fill	203	mm
E	Max. Depth Allowed Above the Chamber	3.66	meters
F	Chamber Width	914	mm
G	Center to Center Spacing	1.07	meters
н	Effective Depth	0.70	meters
I	Bed Depth	0.90	meters

CULTEC, Inc. P.O. Box 280 Brookfield, CT 06804 USA



#### **CULTEC Stage-Storage Calculations**

Date: October 2, 2025

Building A2 - Chamber



Chamber Model -Number of Rows-Total Number of Chambers -Stone Void -Stone Base -Stone Above Units -Area -Base of Stone Elevation -Contactor 100HD 13 377 40 230 152 960.62 104.80 units units % mm mm mm

or 100HD Incremental Storage Volumes											
Stone Volume Cumulative Storage Volume Volume Total Cumulative Storage Stage / Area Elevation	e T	ve Storag ume	Cumulative Volu	olume	Stone V	nector	HVLV Feed Con Volume	Volume	Chamber	f System	Height o
Stone Volume	e T	we Storage was a series of the	Cumulativ. Volu  1344.667 344.667 344.667 344.667 344.667 344.667 344.667 345.67 345.67 345.67 345.67 345.67 345.67 345.67 345.67 345.67 346.67 346.67 346.67 346.67 346.67 346.67 346.67 346.67 346.67 346.67 346.67 346.67	9.8 9.8 9.8 9.8 9.8 9.8 9.8 9.8 9.8 4.9 9.7 6.6 2.3 2.2 3.2 2.6 9.8 9.8 9.8 9.8 9.8 9.8 9.8 9.8 9.8 9.8	Stone V  344.7 344.7 344.7 344.7 344.7 344.7 344.7 344.7 344.7 344.7 344.7 344.7 344.7 344.7 344.7 344.7 344.7	m3 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.	Volume  tt3  0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0	m <sup>2</sup> 0.0 0.0 0.0 0.0 0.0 0.0 0.0 1.9 5.4 8.8 11.2.8 14.0 14.8 16.3 16.3 16.3 16.3 16.3 10.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.	re <sup>2</sup> 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 189.9 311.7 313.7 313.7 3575.3 632.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0	mm 699 673 648 648 622 5546 533 508 483 457 432 406 381 356 330 279 224 203 178 229 127 70	in 27.5 26.5 26.5 26.5 24.5 24.5 24.5 24.5 24.5 22.5 24.5 22.5 24.5 22.5 21.0 19.0 19.0 19.0 19.0 19.0 19.0 19.0 1



#### **CULTEC Stormwater Design Calculator**

Date: October 02, 2025										
Project Information:										
Building A3 - Chamber										

# Calculations Performed By:

#### **CONTACTOR 100HD**

Contactor 100HD Chamber Specifications									
Height	318	mm							
Width	914	mm							
Length	2.44	meters							
Installed Length	2.29	meters							
Bare Chamber Volume	0.40	cu. meters							
Installed Chamber Volume	0.85	cu. meters							



Breakdown of Storage Provided by Contactor 100HD Stormwater System										
Stone Porosity	40.0	%								
Within Chambers	58.48	cu. meters								
Within Stone	72.43	cu. meters								
Total Storage Provided	130.9	cu. meters								
Total Storage Required 120.00 cu. meters										


#### **Materials List**


Contactor			
Total Number of Chambers Required	144	pieces	
Separator Row Chambers	4	pieces	Separator Row Qty Included in Total
Starter Chambers	36	pieces	
End Chambers	108	pieces	
HVLV SFCx2 Feed Connectors	70	pieces	Based on 2 Internal Manifolds
CULTEC No. 410 Non-Woven Geotextile	1038	sq. meters	
CULTEC AFAB-HPF Woven Geotextile	88	meters	
Stone	181	cu. meters	

#### **Bed Detail**



Bed detail for reference only. Not project specific. Not to scale



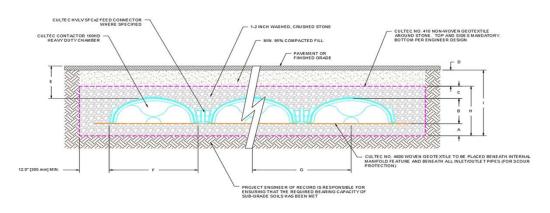

Conceptual graphic only. Not job specific.

	Cross Section Table Reference		
Α	Depth of Stone Base	152	mm
В	Chamber Height	318	mm
С	Depth of Stone Above Units	152	mm
D	Depth of 95% Compacted Fill	203	mm
E	Max. Depth Allowed Above the Chamber	3.66	meters
F	Chamber Width	914	mm
G	Center to Center Spacing	1.07	meters
н	Effective Depth	0.62	meters
I	Bed Depth	0.83	meters

CULTEC, Inc. P.O. Box 280 Brookfield, CT 06804 USA



#### **CULTEC Stage-Storage Calculations**

Date: October 2, 2025

Building A3 - Chamber



Chamber Model -Number of Rows-Total Number of Chambers -Stone Void -Stone Base -Stone Above Units -Area -Base of Stone Elevation -Contactor 100HD 36 144 40 152 152 384.97 106.20 units units % mm mm mm

					Cont	actor 10	OHD Inc	cremental	Storage	Volumes					
Height o	of System	Chambe	r Volume	HVLV Feed Connector Volume		Stone 1	Volume	Cumulative Volu		Total Cumulatin	Stage /	Area	Eleva	tion	
Height c in 24.5 24.5 22.5 22.5 22.5 20.5 18.5 17.0 15.0 11.0 13.0 11.0 10.0 9.0 8.0 7.0 10.0 10.0 10.0 10.0 10.0 10.0 10.	mm 622 597 576 521 495 470 437 432 406 381 356 330 305 279 254 229 203 178 152 107 6 51	Chambe  10.0 0.0 0.0 0.0 0.0 0.0 0.0 0.1 26.4 73.6 120.8 152.6 191.1 202.0 210.8 222.9 222.9 222.9 222.9 222.9 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0	r Volume  m <sup>3</sup> 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.7 2.1 4.3 4.9 5.4 6.3 6.3 6.3 6.3 6.9 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0		onnector			Cumulativ	e Storage	Total Cumulation	Stage /  1657.50 1657.50 1657.50 1657.50 1657.50 1657.50 1657.50 1657.50 1657.50 1657.50 1657.50 1657.50 1657.50 1657.50 1657.50 1657.50 1657.50 1657.50 1657.50	Area  n² 153.98 153.98 153.98 153.98 153.98 153.98 153.98 170.61 171.61 203.19 234.77 256.07 270.79 281.99 289.92 296.06 304.25 304.31 304.37 319.59 153.98 153.98 153.98 153.98 153.98 153.98	Rt 108.24 108.16 108.16 108.16 108.16 108.16 107.99 107.91 107.83 107.74 107.70 107.62 107.53 107.45 107.37 107.28 107.30 106.87 106.87 106.87 106.28 106.20	m 106.82 106.80 106.77 106.75 106.75 106.67 106.66 106.63 106.61 106.58 106.53 106.53 106.63	Top of Stone Elevation  Top of Chamber Elevation  Bottom of Chamber Elevation  Bottom of Stone Elevation



Project Name: O'KEEFE COURT Project #: 21684

Date: 3/4/2025

Prepared by: TG Checked by: TF,LP LOCATION: OTTAWA STORM SEWER DESIGN SHEET STORM EVENT (yr) 5 a = 998.071 b = 6.053 c = 0.814  $i = a[(T+b)/60]^{-c}$ , where i (mm/h); T (min) Q = A(i)C/3600 + C. FLOW x (42), where A ( $m^2$ ); i (mm/h)  $AC = AREA \times RUNOFF COEFFICIENT$ 

C. FLOW = CONTROLLED FLOW

	UPSTREAM STRUCTURE	DOWNSTREAM STRUCTURE	AREA (m²) C=0.90 AC	(m <sup>2</sup> ) CUM	MULATIVE To	C. FLC @421	OW CUMU ./s/ha (m²) FLOW	LATIVE C. i (m <sup>2</sup> )	mm/h) Q (	L/s) PIPI (mn	E SIZE n) GR	ADE (%) CAF	PACITY VELOC	ITY (m/s) LENG	TH (m) % CAP.	ACITY
	0 STUB - BLDG A3-1	INFIL GALLERY 1	0	0	0	10.00	4000	4000	104.19	16.8	250	1.00	59.5	1.2	5.0	
	1 STUB - BLDG A3-2	INFIL GALLERY 1	0	0	0	10.00	4000	4000	104.19	16.8	250	1.00	59.5	1.2	5.1	
	2 INFIL GALLERY 1	STM CBMH8	0	0	0	10.07		8000	103.83	33.6	250	1.00	59.5	1.2	42.5	
	3 STM CB10	STM CBMH8	4900	4410	4410	10.00		0	104.19	127.6	525	0.30	235.6	1.1	31.0	
	4 STM CBMH8	STM CBMH7	1700	1530	5940	10.65		8000	100.86	200.0	600	0.30	336.3	1.2	30.1	
	5 STM CBMH7	STM CBMH6	1800	1620	7560	11.08		8000	98.83	241.2	600	0.30	336.3	1.2	29.9	
	6 STM CBMH6	STM MH12	1600	1440	9000	11.50		8000	96.91	275.9	600	0.30	336.3	1.2	13.9	
	7 STM CB8	STM MH16	2500	2250	2250	10.00		0	104.19	65.1	375	0.70	146.7	1.3	14.9	
	8 STM MH16	STM MH15	2300	0	2250	10.19		0	103.21	64.5	375	0.70	146.7	1.3	45.6	
	9 STM CB7	STM MH15	1600	1440	1440	10.19		0	103.21	41.7	250	1.10	62.4	1.3	3.4	
	10 STM MH15	STM MH14	0	0	3690	10.76		0	100.35	102.9	375	0.70	146.7	1.3	27.4	
	11 STM CB6	STM MH14	2100	1890	1890	10.00		0	104.19	54.7	300	0.80	86.5	1.2	35.2	
	12 STM MH14	STM CBMH12	0	0	5580	11.10		0	98.71	153.0	450	0.70	238.5	1.5	53.4	•
	13 STM CBMH12	STM MH12	1000	900	6480	11.70		0	96.02	172.8	525	0.46	291.7	1.3	92.7	
	14 STM MH12	STM CBMH9	0	0	15480	12.84		8000	91.25	426.0	750	0.30	609.8	1.4	29.6	
	15 STM CBMH9	STM CBMH5	3400	3060	18540	13.20		8000	89.87	496.4	750	0.30	609.8	1.4	46.4	
	16 STUB - BLDG A2-1	INFIL GALLERY 2	0	0	0	10.00	4500	4500	104.19	18.9	250	1.00	59.5	1.2	7.7	
	17 STUB - BLDG A2-2	INFIL GALLERY 2	0	0	0	10.00	3600	3600	104.19	15.1	250	1.00	59.5	1.2	7.7	
	18 INFIL GALLERY 2	STM MH20	0	0	0	10.00	3000	8100	103.63	34.0	250	1.00	59.5	1.2	10.9	
	19 STM MH20	STM CBMH5	0	0	0	10.26		8100	103.03	34.0	250	0.96	58.3	1.2	35.6	
	20 STM CBMH5	STM CBMH4	2700	2430	20970	13.76		16100	87.79	579.0	825	0.30	786.2	1.5	35.2	
	21 STM CBMH4	STM CBMH3	1300	1170	22140	14.16		16100	86.38	598.8	825	0.30	786.2	1.5	11.7	
	0.0001.005		1000		4 400	40.00					270		0.1.1			
	22 STM CB5	STM MH10	1800	1620	1620	10.00		0	104.19	46.9	250	2.00	84.1	1.7	6.2	
	23 STM MH10	STM MH6	0	0	1620	10.06		0	103.88	46.7	250	2.00	84.1	1.7	37.1	
		STM MH9	800	720	720	10.00		0	104.19	20.8	250	0.40	37.6	0.8	15.9	
	25 STM MH9	STM MH8	0	0	720	10.35		0	102.40	20.5	250	0.40	37.6	0.8	31.9	
	26 STM CB3	STM MH8	2100	1890	1890	10.00		0	104.19	54.7	300	1.00	96.7	1.4	5.5	
	27 STM MH8	STM MH7	0	0	2610	11.04		0	99.00	71.8	375	0.40	110.9	1.0	49.1	
	27.5 STM CB4	STM MH7	1900 0	1710	1710	10.00		0	104.19	49.5	300	1.00	96.7	1.4	5.1	
	28 STM MH7	STM MH6	0	0	4320	11.85		0	95.32	114.4	450	0.40	180.3	1.1	32.4	
	29 STM MH6 30 STM CBMH11	STM CBMH11 STM CBMH3	700	630	5940 6570	12.33 13.01		0	93.31 90.59	154.0 165.3	525	0.30	235.6 235.6	1.1	44.3 89.0	
	31 STM CBMH11	STM CBMH10	700	630	28710	14.37		16100	90.59 85.64	750.6	525 900	0.30	991.6	1.1 1.6	25.6	
	32 STM CBMH10	STM CDM1110 STM MH19	3100	2790	31500	14.65		16100	84.72	808.9	900	0.30	991.6	1.6	37.6	
			2000	1800	1800	10.00		0	104.19	52.1	375	0.30	96.0	0.9	32.7	
	34 STM CBMH2	STM MH19	0	0	1800	10.63		0	100.99	50.5	375	0.30	96.0	0.9	6.3	
	35 STM MH19	OGS EF12	1200	1080	34380	15.05		16100	83.40	864.1	900	0.30	991.6	1.6	15.9	
	36 STUB - BLDG A1-1	INFIL GALLERY 3	0	0	0	10.00	4400	4400	104.19	18.5	250	1.03	60.4	1.2	3.3	
	37 STUB - BLDG A1-2	INFIL GALLERY 3	0	0	0	10.00	3400	3400	104.19	14.3	250	1.00	59.5	1.2	3.3	
	38 INFIL GALLERY 3	STM MH2	0	0	0	10.05		7800	103.96	32.8	250	0.83	54.2	1.1	18.7	
· · · · · · · · · · · · · · · · · · ·	39 STM MH2	OGS EF12	0	0	0	10.33		7800	102.50	32.8	250	1.98	83.7	1.7	6.7	<del></del> -
	40 OGS EF12	CULTEC	0	0	34380	15.22		23900	82.86	891.7	900	1.00	1810.3	2.8	3.2	
	41 CULTEC	HW1 (OPSD 804.030)	0	0	34380	15.24		23900	82.80	891.1	900	0.55	1342.6	2.1	7.5	



# **Inlet Capcity Analysis**

Project Name:

O'Keefe Court

Project Number:

21684

Location:

Date:

Nepean, Ottawa 3/4/2025

	Rainfall Data											
Location:	Nepean, Ottawa											
Event	5 year	100 year										
a	998.071	1735.688										
b	6.053	6.014										
С	0.814	0.820										

Drain ID	Structure Name	Overland Outlet	Drain Catchment Area (m²)	Runoff Coefficient	Tc (min)	Intensity (mm/hr)	Flow (m³/s)	Drain Type	Depth of Ponding (m)	Inlet Capacity (m³/s)	Inlet Capacity with 50% Blockage (m³/s)	OK with 50% Blockage?
1	STM CB8	West	2500	0.90	10.00	104.2	0.065	Single CB	0.30	0.220	0.110	OK
2	STM CB10	East	4900	0.90	10.00	104.2	0.128	Twin CB	0.30	0.405	0.203	OK
3	STM CBMH8	East	1700	0.90	10.00	104.2	0.044	Single CB	0.20	0.155	0.078	OK
4	STM CBMH7	East	1800	0.90	10.00	104.2	0.047	Single CB	0.20	0.155	0.078	OK
5	STM CB7	West	1600	0.90	10.00	104.2	0.042	Single CB	0.20	0.155	0.078	OK
6	STM CBMH9	East	3400	0.90	10.00	104.2	0.089	Single CB	0.30	0.220	0.110	OK
7	STM CBMH5	East	2700	0.90	10.00	104.2	0.070	Single CB	0.25	0.180	0.090	OK
8	STM CBMH4	East	1300	0.90	10.00	104.2	0.034	Single CB	0.15	0.120	0.060	OK
9	STM CBMH10	East	3100	0.90	10.00	104.2	0.081	Single CB	0.25	0.180	0.090	OK
10	STM CBMH2	East	2000	0.90	10.00	104.2	0.052	Single CB	0.20	0.155	0.078	OK
11	STM HONEYCOMB CB2	East - Final Catchment*	1200	0.90	10.00	178.6	0.504	Twin Honeycomb CB	0.20	1.202	0.601	OK
12	STM CBMH11	East	700	0.90	10.00	104.2	0.018	Single CB	0.10	0.060	0.030	OK
13	STM HONEYCOMB CB1	West - Final Catchment*	800	0.90	10.00	178.6	0.259	Honeycomb CB	0.25	0.672	0.336	OK
14	STM CB3	West	2100	0.90	10.00	104.2	0.055	Single CB	0.30	0.220	0.110	OK
15	STM CB4	West	1900	0.90	10.00	104.2	0.050	Single CB	0.30	0.220	0.110	OK
16	STM CB5	West	1800	0.90	10.00	104.2	0.047	Single CB	0.30	0.220	0.110	OK
17	STM CB6	West	2100	0.90	10.00	104.2	0.055	Single CB	0.30	0.220	0.110	OK
18	STM CBMH6	East	1600	0.90	10.00	104.2	0.042	Single CB	0.30	0.220	0.110	OK
19	STM CBMH12	East	1000	0.90	10.00	104.2	0.026	Single CB	0.12	0.085	0.043	OK

	Overland Flow Route Design (East Outlet)													
Return Period	ToC (min)	i (mm/hr)	Runoff Coefficient	Area (m2)	Flow (m3/s)									
5-year 10		104.19	0.0	24200	0.631									
100-year	10	178.56	0.9	24200	1.081									
-			Flow	Difference (m3/s) =	0.450									

Prepared By: T.G

Checked By: T.F

<sup>&</sup>lt;- Flow added to 100-yr Flow of Drain #11

Overland Flow Route Design (West Outlet)						
Return Period	ToC (min)	i (mm/hr)	Runoff Coefficient	Area (m2)	Flow (m3/s)	
5-year	10	104.19	0.9	12000	0.313	
100-year	10	178.56	0.9	12000	0.536	
-			Flor	w Difference (m3/s) =	0.223	

<sup>&</sup>lt;- Flow added to 100-yr Flow of Drain #13

<sup>\*</sup>Flow calculated for the final catchments in each overland outlet is based on the 100-year storm flow for that catchment plus the flow difference (100-year minus 5-year) for all upstream catchments

4497 O'Keefe Court, Ottawa, Ontario SITE PLAN SUBMISSION – OCTOBER 2025 KWA PROJECT: 21684



# **APPENDIX B**

**SANITARY CALCULATIONS** 

KWA

Standards

Project Name: 4497 O'Keefe Court, Ottawa

= Ottawa

Project # : 21684

Sanitary Servicing Analysis

Prepared by: TF Checked by: TF

Date: February 20, 2025

Formulas

Peaking Factor (Harmon)

(Harmon) =  $1+14/[4+(P/1000)^{1/2}]$ 

Peak Flow

= p(q)M(unit conversion) + infiltration

Existing Sanitary Design Flow

Land Type	Area	# of Units	Density	Population (p)	Average Flow (q)	Peaking Factor (M)	Peak Flow (Q)
	(m <sup>2</sup> )	/Floor Area					(L/s)
Infiltration Allowance	68836				0.33 L/ha/d		2.27
Total	68836						2.27

Proposed Sanitary Design Flow

roposca cantary Design rion							
Land Type	Area	Floor Area (Ha)	Density	Population (p)	Average Flow (q)	Peaking Factor (M)	Peak Flow (Q)
	(m <sup>2</sup> )						(L/s)
Infiltration Allowance	68836				0.33 L/ha/d		2.27
BUILDING A1	7804	0.7804			35000 L/day/ha of floor	1.00	0.32
BUILDING A2	8027	0.8027			35000 L/day/ha of floor	1.00	0.33
BUILDING A3	8027	0.8027			35000 L/day/ha of floor	1.00	0.33
Total	68836	_					3.24

Summary

Existing Sanitary Design Flow =	2.27 L/s
Proposed Sanitary Design Flow =	3.24 L/s
Increased Flow =	0.97 L/s

Service Connection	Diameter (m)	Slope (%)	Velocity (m/s)	Full Flow Capacity (L/s)	Spare Capacity (L/s)	Usage Increased (%)	Total Usage (%)
Residential	150	1.0	0.86	15.23	11.99	-	21.3%
San. Main	250	0.5	0.86	42.05	38.81	2.3%	7.7%

#### Notes

- 1. The proposed development would be an increase of 0.97 L/s of peak sanitary flow to the downstream sanitary sewer system.
- 2. This increase is equal to 2.3% of the total pipe capacity of the 250mm municipal sanitary sewer.
- 3. This flow is equal to 21.3% of the total pipe capacity of a 150mm diameter service connection.

4497 O'Keefe Court, Ottawa, Ontario SITE PLAN SUBMISSION – OCTOBER 2025 KWA PROJECT: 21684



# **APPENDIX C**

WATER CALCULATIONS



### 4497 O'Keefe Court, Ottawa Project Number 21684

Required Fire Flow - BLDG A3

Prepared by: **LP** Checked by: **TF** 

Date: September 22, 2025

as per Fire Underwriters Survey Water Supply for Public Fire Protection, 2020

#### 1. Initial Required Fire Flow (Step A, B, C)

Construction Type = Type II Noncombustible Construction

Construction Coefficient, C = 0.8

Total Effective Area, A\* = 8027 m<sup>2</sup> largest/furthest building

Required Fire Flow, RFF = 15768.46 LPM

RFF, rounded = 16000 LPM

#### 2. Occupancy and Contents Adjustment Factor (Step D)

Contents = Combustible contents

Adjustment Factor = 0%

RFF = 16000 LPM

#### 3. Automatic Sprinkler Protection (Step E)

, , ,			
Sprinkler Design	Designed	Building Coverage	Credit
Automatic sprinkler protection designed and	Yes	100%	30%
installed in accordance with NFPA 13 Water supply is standard for both the system and	Yes	100%	10%
Fire Department hose lines Fully supervised system	Yes	100%	10%
. ,	Total Sprin	kler Credit =	50%

Reduction = 8000 LPM

#### 4. Exposure Adjustment Charge (Step F)

Direction	Distance	Charge
North	Greater than 30	0%
South	10.1m to 20m	15%
East	Greater than 30	0%
West	Greater than 30	0%

Total Charge = 15%

Charge = 2400 LPM

#### 5. Final Required Fire Flow (Step G)

RFF = 16000 LPM

Reduction = 8000 LPM

Charge = 2400 LPM

RFF = 10400 LPM

Final RFF, rounded = 10000 LPM 2642 GPM 167 L/s



### 4497 O'Keefe Court, Ottawa Project Number 21684

oject Number 21684Checked by: TFDomestic DemandDate: September 22, 2025

Prepared by: LP

as per CITY OF OTTAWA DESIGN GUIDELINES

TOTAL BUILDING AREA = 2.39 ha

FLOW = 35000 L/ha/day


Average Daily Demand = 83503 L/day

0.97 L/s

	<u>-</u>	Average Day	Maximum Day	Peak Hour*	_
Pea	king Factor	n/a	1.50	1.80	
	Demand	0.97	1.45	2.61	L/s
		15.32	22.98	41.36	GPM

<sup>\*</sup>Peak Hour Factor applies to the maximum day demand as per Technical Bulletin ISTB 2010-02

# Model Setup – Node & Pipe ID's

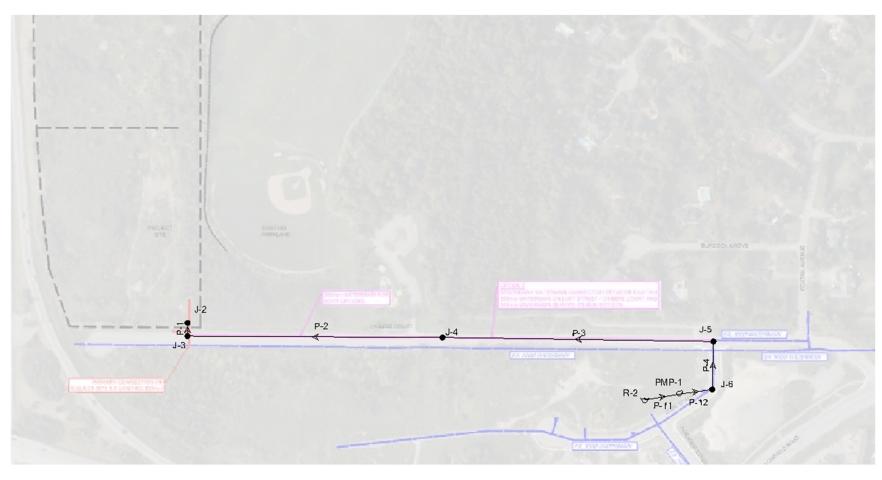



REPORT N°. 2692

September 18, 2025

To: Ted Fair, P. Eng.

KWA Site Development Consulting Inc.

ted.fair@kwasitedev.com


2453 Auckland Dr,

Burlington, ON L7L 7A9

RE: Hydrant Flow Test - 4497 O'Keefe Court, Ottawa

Please find the Report for the following works

**Scope:** Conducted Hydrant Flow Test as per NFPA291 Recommended Practices for Water Flow Testing and Marking of Hydrants.

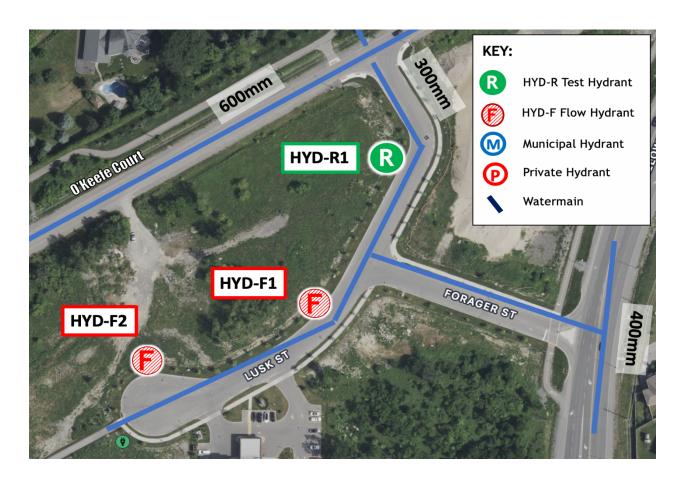



# **HYDRANT FLOW TEST**

**OTTAWA** 

TEST 1

DATE: September 18, 2025 TIME: 11:00 AM

R -TEST HYDRANT LUSK ST/O'KEEFE CRT - 300mr HYDRANT No. HYD-R1

HYDRANT MODEL: AVK COLOUR: BLUE

STATIC PRESSURE psi (hr-20^0.54): 70.5 VARIANCE: 6%

Q - FLOW HYDRANT 125 LUSK ST/FORAGER ST HYDRANT No. HYD-F1

HYDRANT MODEL: AVK COLOUR: BLUE

No.	Residual Pressure	Orifice Dia	Coefficient	Nozzle PSI	Q = Flow (USGPM)
Outlets	(hf-R^0.54)	Dia. (in.) $(d^2)$		$(\sqrt{psi})$	$Q = 29.83 (c) (d2) (\sqrt{psi})$
1	68.5	2.5	0.9	52	1210
2	66	2.5	0.9	46	1138
1			$Q_F$ = Total Flo	ow (USGPM)	2276

 $Q_{\it R}$  = flow predicted @ 20 psi


 $Q_R = Q_F * (H_r - 20^{0.54}) / (H_f - R^{0.54})$ 

8399 530

USGPM L/s

NFPA Rating:

**CLASS AA - BLUE** 

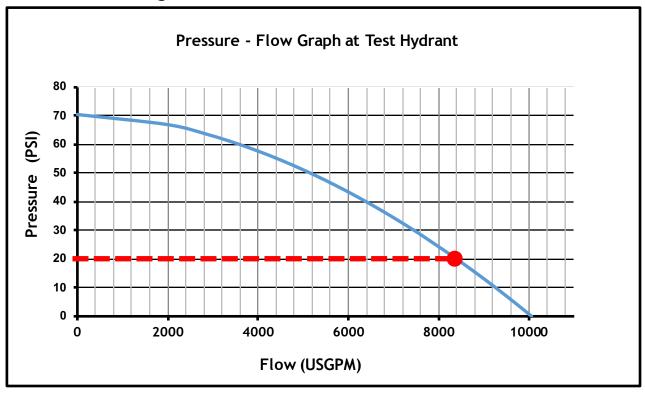



# **HYDRANT FLOW TEST**

**OTTAWA** 

TEST 2

DATE: September 18, 2025 TIME: 11:00 AM

R -TEST HYDRANT LUSK ST/O'KEEFE CRT - 300mr HYDRANT No. HYD-R1

HYDRANT MODEL: AVK COLOUR: BLUE

STATIC PRESSURE psi (hr-20^0.54): 70.5 VARIANCE: 11%

Q - FLOW HYDRANT 125 LUSK STREET HYDRANT No. HYD-F1/2

HYDRANT MODEL: AVK COLOUR: BLUE

No.	Residual Pressure	Orifice Dia	Coefficient	Nozzle PSI	Q = Flow (USGPM)
Outlets	(hf-R^0.54)	Dia. (in.) (d <sup>2</sup> )		$(\sqrt{psi})$	$Q = 29.83 (c) (d2) (\sqrt{psi})$
3	65.5	2.5	0.9	40	1061
4	63	2.5	0.9	33	964
	-		$Q_F$ = Total Flo	ow (USGPM)	3856


 $Q_R$  = flow predicted @ 20 psi


 $Q_R = Q_F * (H_r - 20^{0.54}) / (H_f - R^{0.54})$ 

10798 USGPM 681 L/s

NFPA Rating:

**CLASS AA - BLUE** 

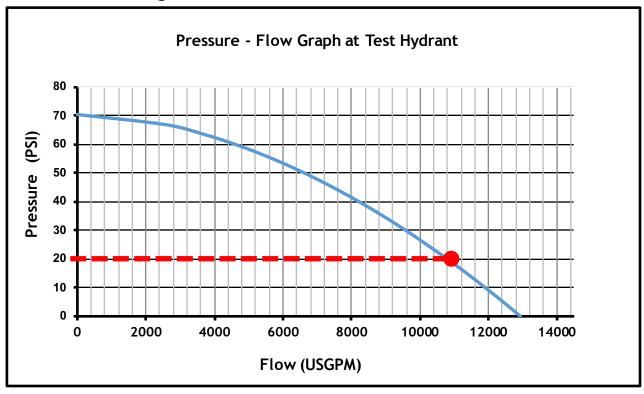

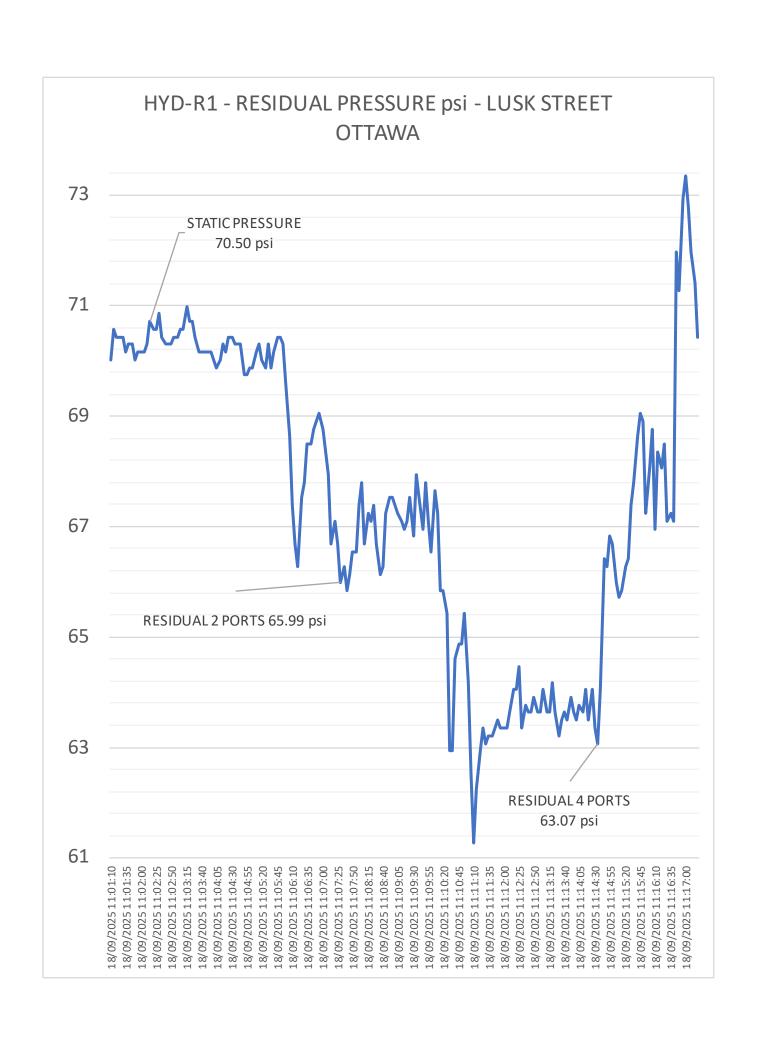

#### **Test Conclusion**

The system at the time of testing produced a theorectical projected flow rate of:

LOCATION	Total USGPM	USGPM at 20 psi	lps at 20 psi	Test #
LUSK STREET	3856	10798	681	2

Hydrants are classified in accordance with their rated capacities as per NFPA291.

COLOUR	CLASS	Available Flow @ 20psi
BLUE	AA	1500 GPM or more
GREEN	Α	1000 - 1499 GPM
ORANGE	В	500 - 999 GPM
RED	С	Below 500 GPM

We strongly feel that all attempts have been made to ensure that the required data as stipulated was captured, stored and presented in an accurate, efficient and timely manner for the required period.

We look forward to working with you in the future.

Please feel free to contact the undersigned should you require any further information.

**Best Regards** 

Rob Gamache E.P Manager of Operations Hydrant Testing Ontario

Info@HTOntario.ca

#### Ottawa, Ontario



	<u>Peak Hour</u>															
	Node Table							Pipe Table								
Node ID N	Node Description	Elevation	Demand	Head	HGL	Pressure		Link ID F	From Nodo	To Node	Length	Diameter	Roughness	Flow	Velocity	Headloss
Noue ID	Noue Description	m	L/s	m	m	psi			ri oili Noue	10 Noue	m	mm		L/s	m/s	(m)
J-2	Subject site	103.56	2.61	46.92	150.48	66.7		P-1	J-2	J-3	10	300	120	2.61	0.04	0.0001
J-3		103.4	0.00	47.07	150.47	66.9		P-2	J-3	J-4	260	300	120	2.61	0.04	0.0023
J-4	O'Keefe & easement	101.07	0.00	49.41	150.48	70.3		P-3	J-4	J-5	300	300	120	2.61	0.04	0.0026
J-5	Lusk & O'Keefe	102.62	0.00	47.86	150.48	68.1		P-4	J-5	J-6	60	300	120	2.61	0.04	0.0005
J-6	Residual hydrant	101.39	0.00	49.09	150.48	69.8								MAX	0.04	
				MIN	150.47	66.7	Ì						'			•
				MAX	150.48	70.3										

<sup>\*</sup>Elevations are approximate, based on LiDAR information




Node Table									
Node ID	Node Description	Elevation	tion Demand Head		HGL	Pressure			
Noue ID	Node Description	m	L/s	m	m	psi			
J-2	Subject site	103.56	168.45	32.08	135.64	45.6			
J-3		103.4	0.00	32.43	135.83	46.1			
J-4	O'Keefe & easement	101.07	0.00	39.86	140.93	56.7			
J-5	Lusk & O'Keefe	102.62	0.00	44.18	146.8	62.8			
J-6	Residual hydrant	101.39	0.00	46.59	147.98	66.2			
				MIN	135.64	45.6			
				MAX	147.98	66.2			

	Maximur	n Day + Fi	re								
I		Pipe Table									
		Link ID	From Node	To Node	Length	Diameter	Roughness	Flow	Velocity	Headloss	
	LIIKID		110m Noue	10 Noue	m	mm		L/s	m/s	(m)	
		P-1	J-2	J-3	10	300	120	168.45	2.38	0.1958	
		P-2	J-3	J-4	260	300	120	168.45	2.38	5.0902	
		P-3	J-4	J-5	300	300	120	168.45	2.38	5.8733	
		P-4	J-5	J-6	60	300	120	168.45	2.38	1.1747	
1			•		•			MAX	2.38		

<sup>\*</sup>Elevations are approximate, based on LiDAR information


# Modeling Results (Average Day)

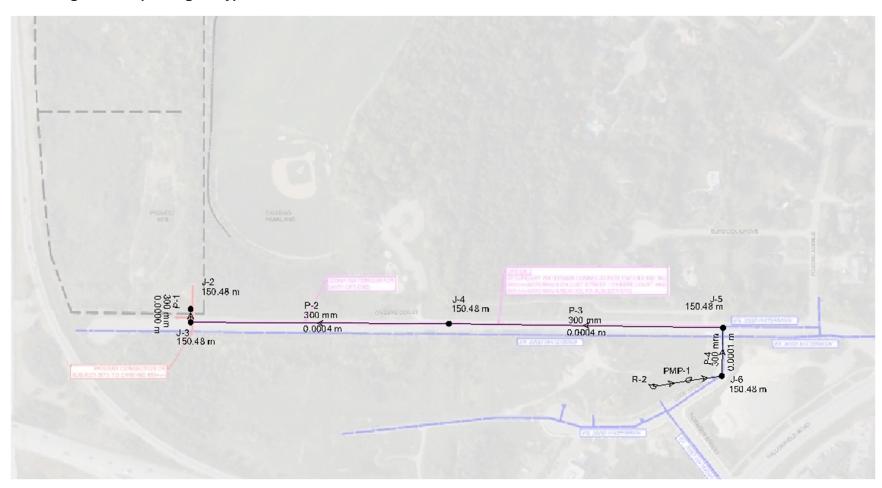

# <u>Legend</u>

Nodes	<u>Pipes</u>
Junction ID	Pipe ID
HGL	Pipe Size
	Headloss


# Modeling Results (Peak Hour)

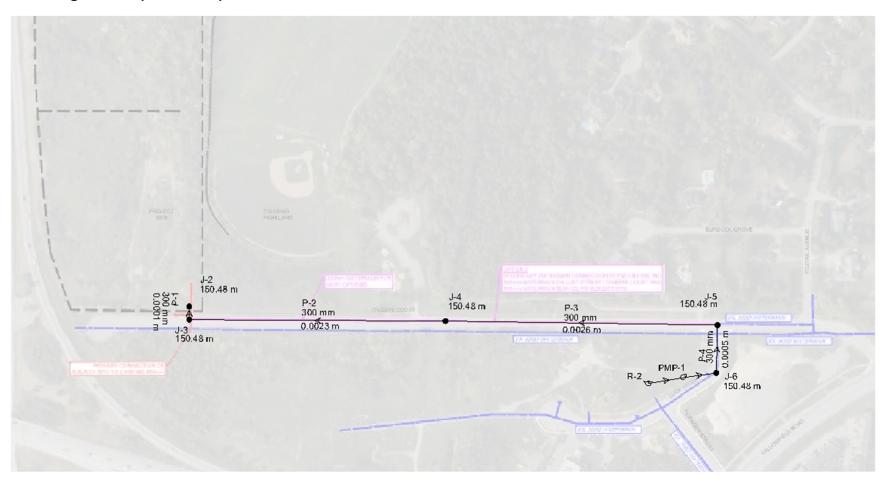

# <u>Legend</u>

Nodes	<u>Pipes</u>
Junction ID	Pipe ID
HGL	Pipe Size
	Headloss

### Modeling Results (Max Day + Fire)

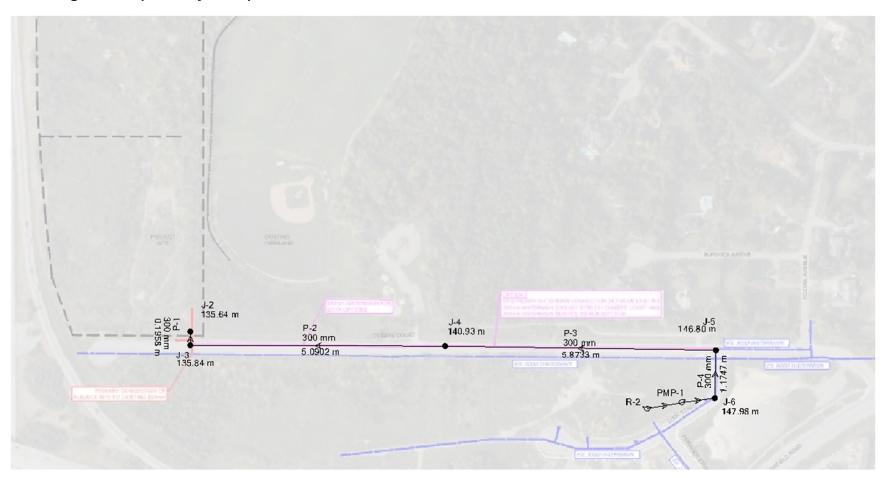

### <u>Legend</u>


<u>Nodes</u>	<u>Pipes</u>
Junction ID	Pipe ID
HGL	Pipe Size
	Headloss

4497 O'Keefe Court, Ottawa, Ontario SITE PLAN SUBMISSION – OCTOBER 2025 KWA PROJECT: 21684



### **APPENDIX D**

**OFFSITE WORKS EXHIBITS** 

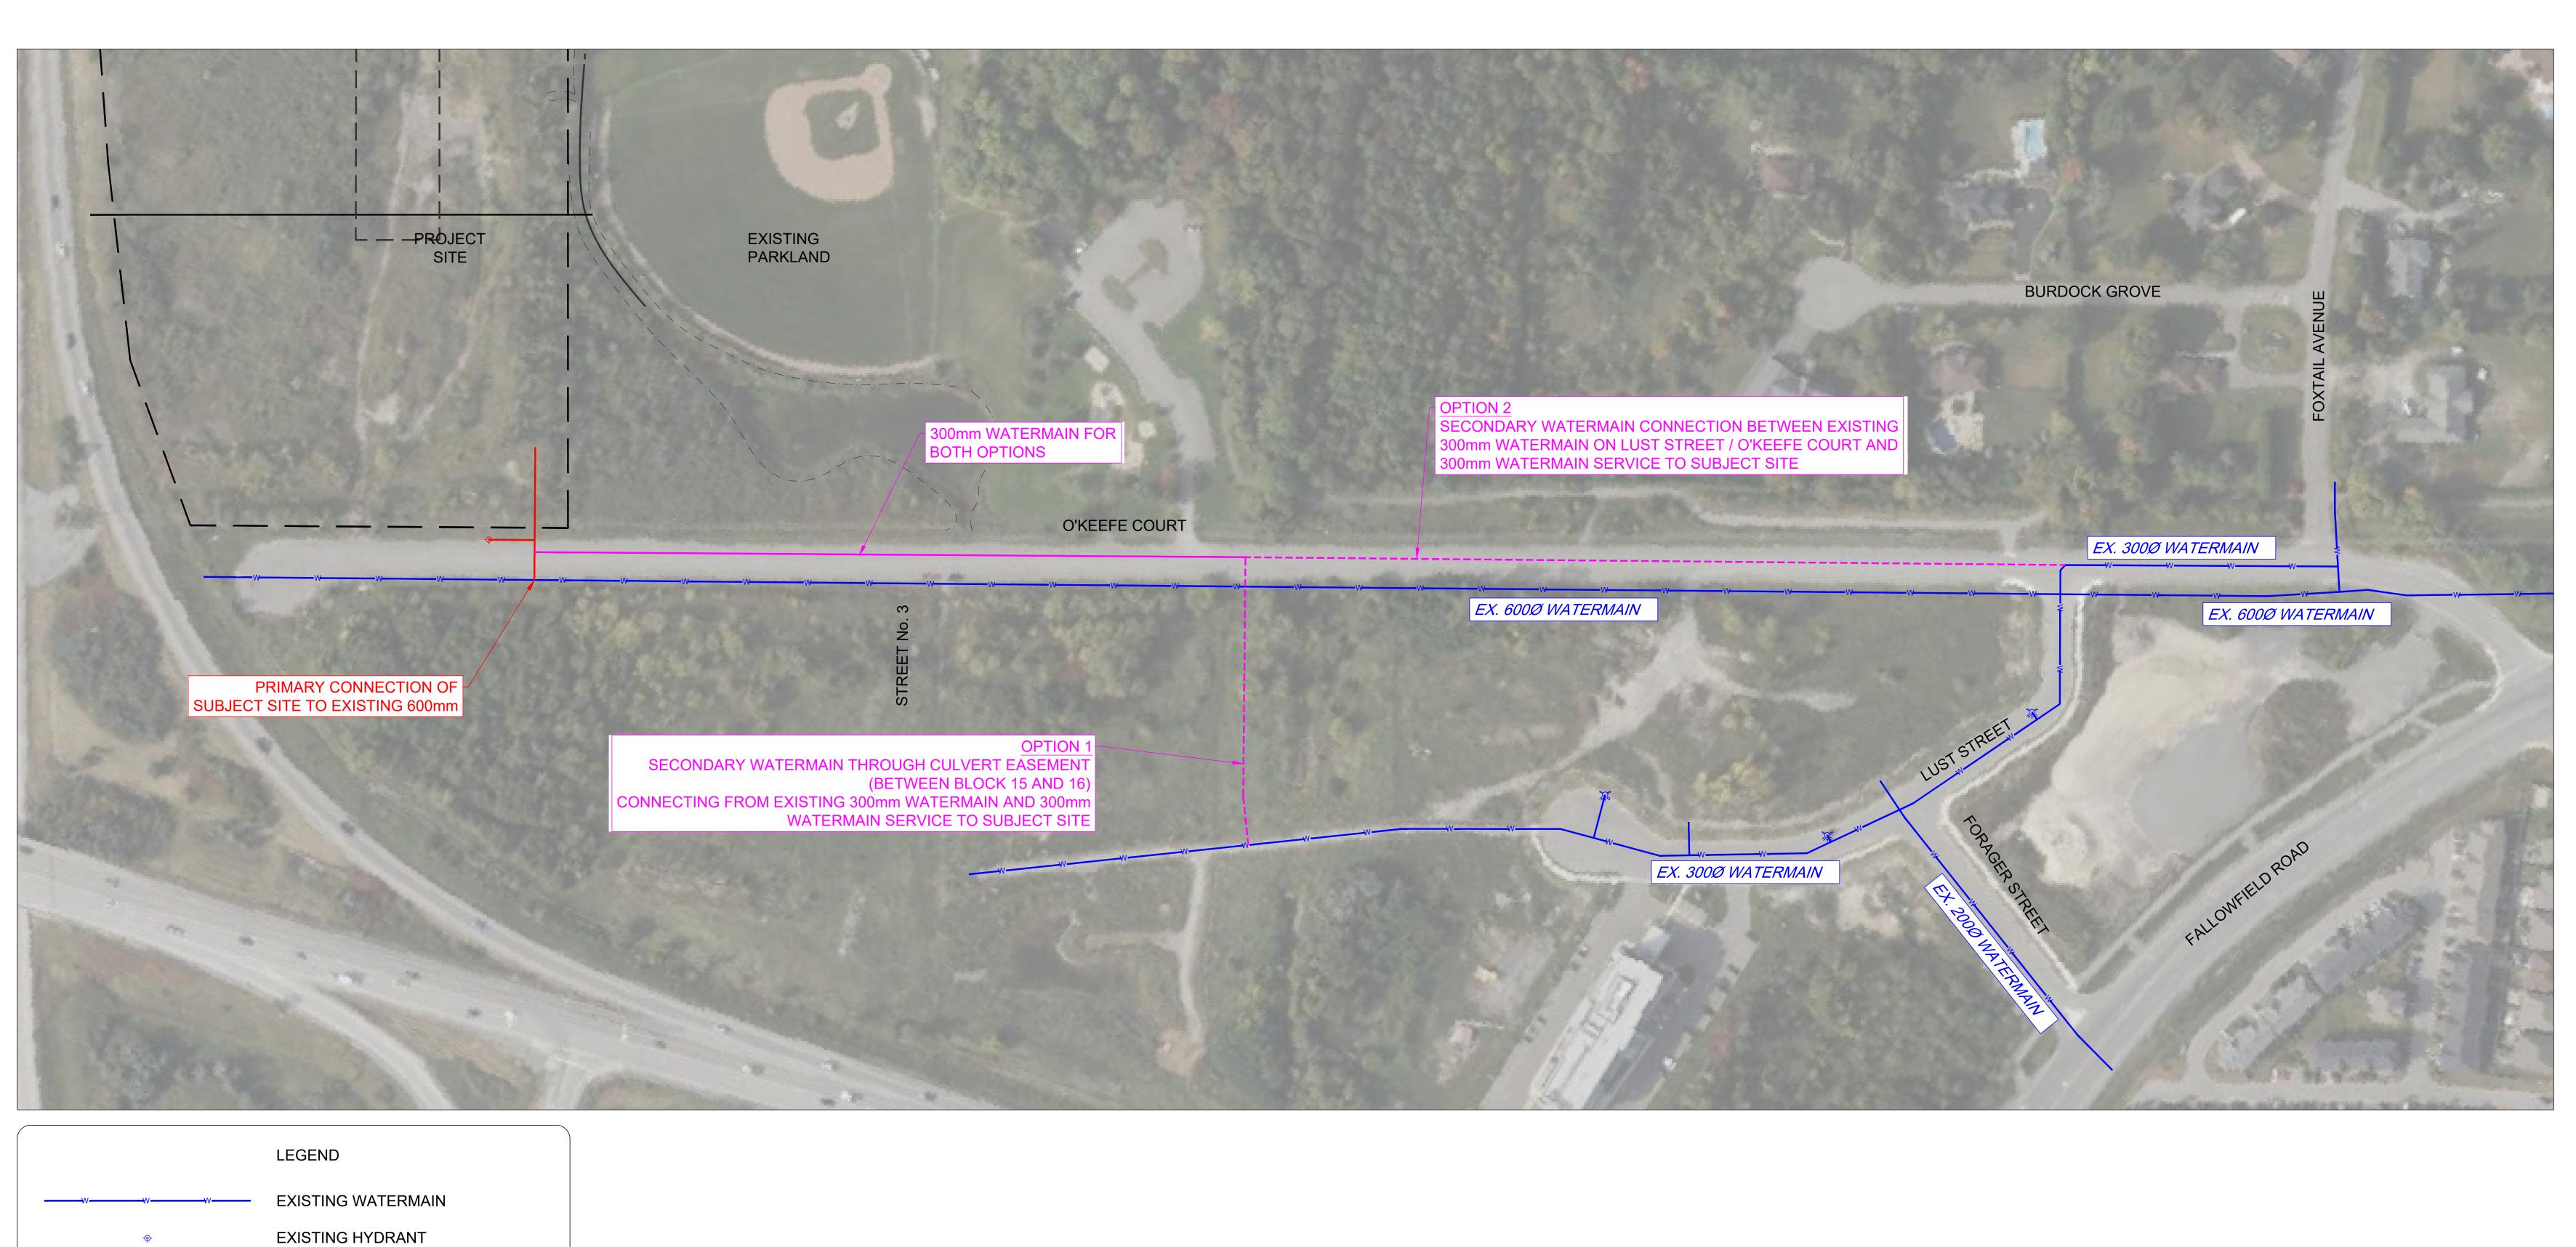

PROPOSED WATERMAIN (KWA)

FUTURE WATERMAIN (BY OTHERS)

FUTURE HYDRANT (BY OTHERS)


PROPOSED HYDRANT (KWA)

REVISION BLOCK DATE DESCRIPTION

NORTH ARROW


METRIC SCALE N.T.S

WAT-E

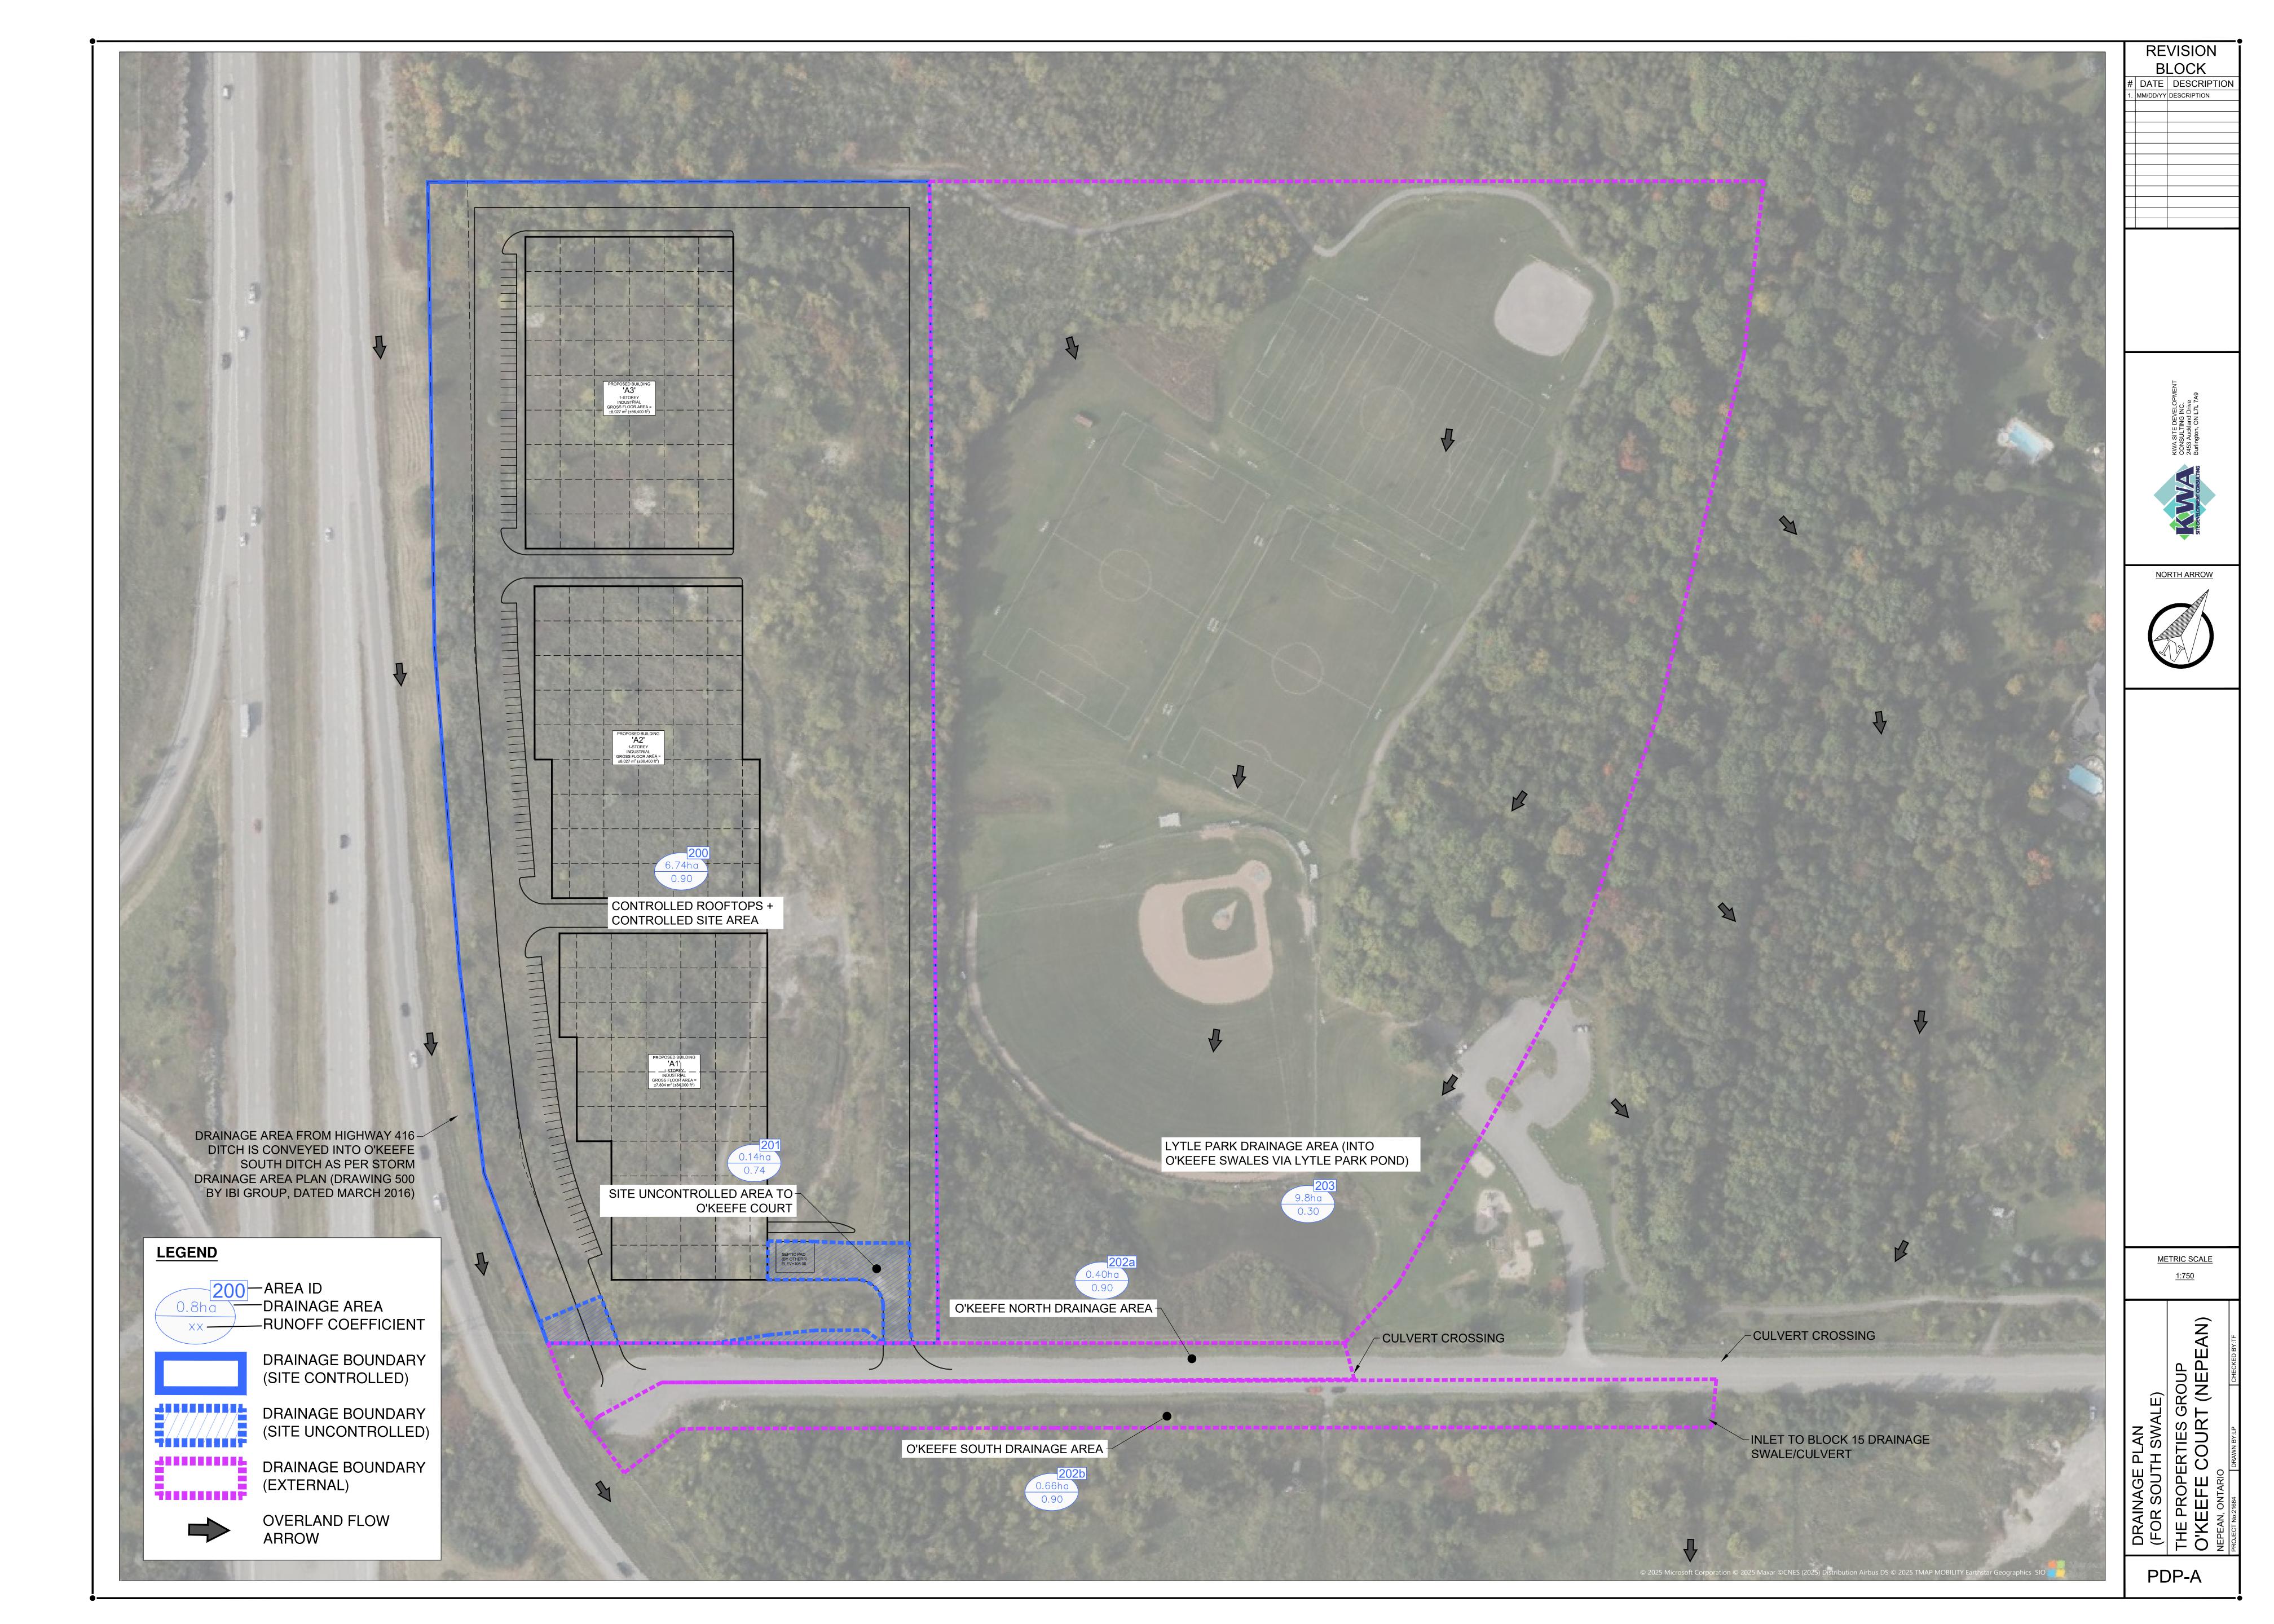






O'KEEFE COURT MODEL VIEW SCALE = 1:500

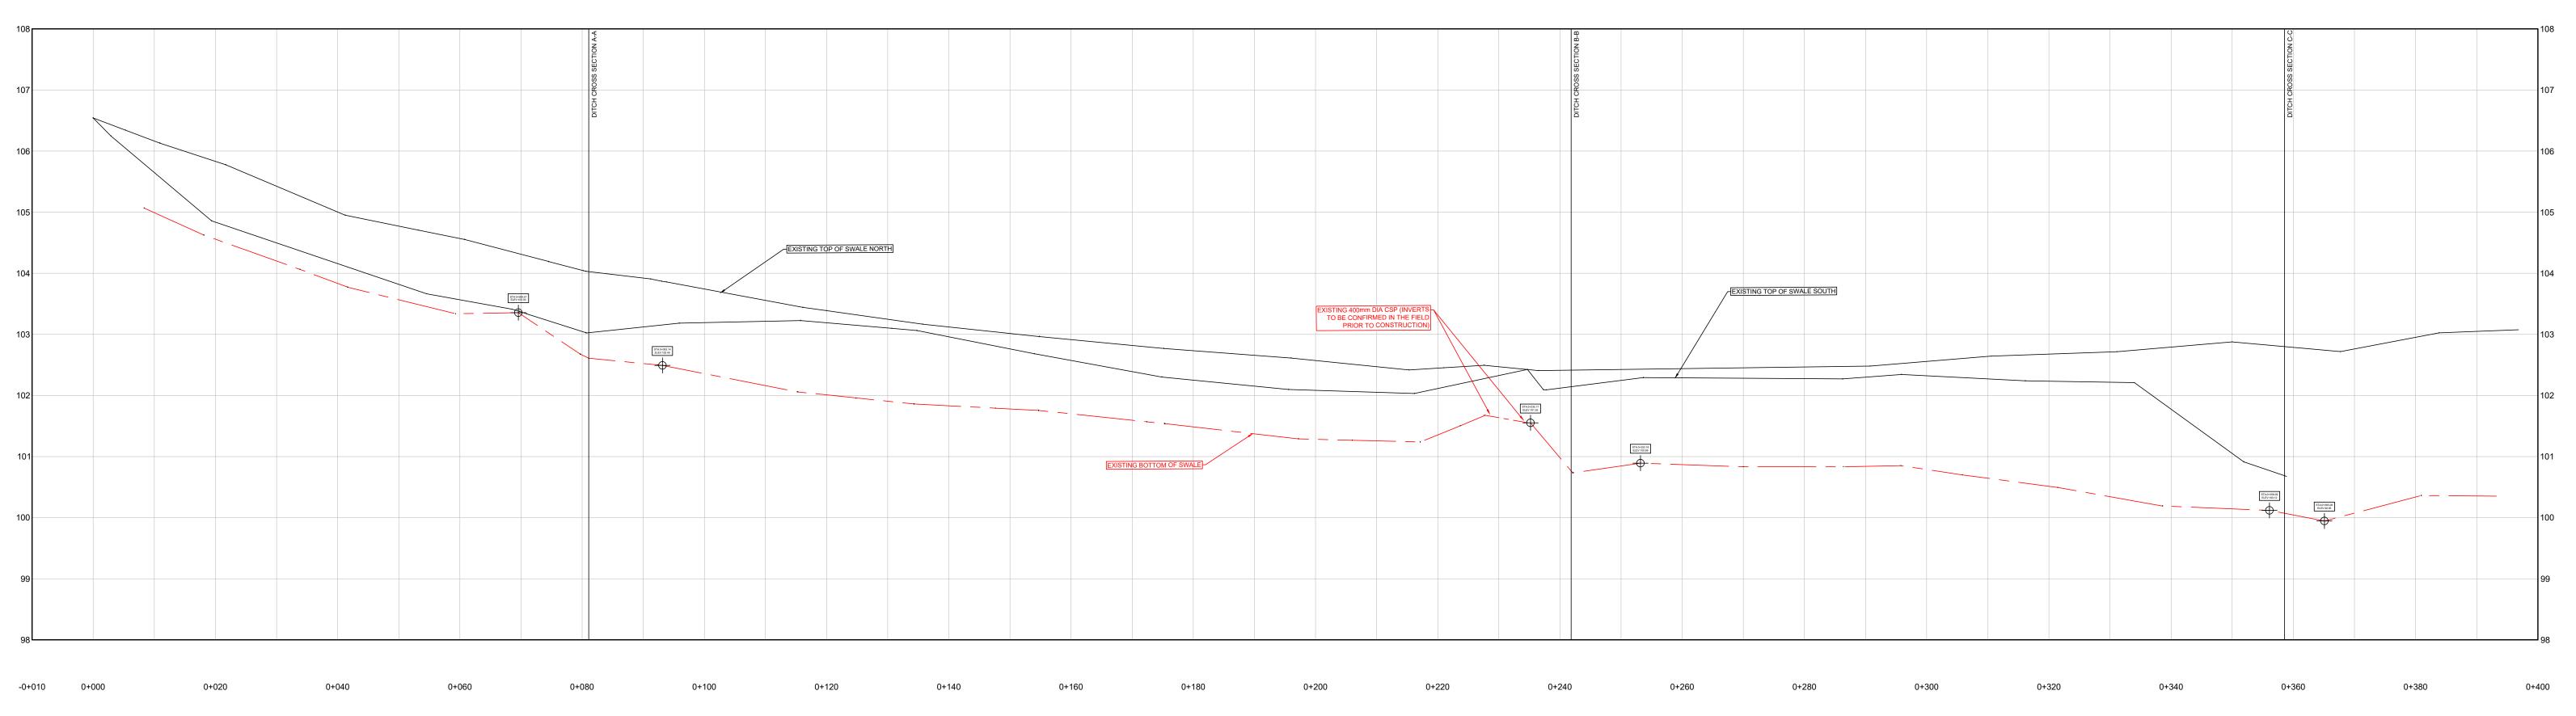

EXISTING DITCH AND TOP OF SLOPE PROFILE HORIZONTAL SCALE = 1:500 VERTICAL SCALE = 1:50

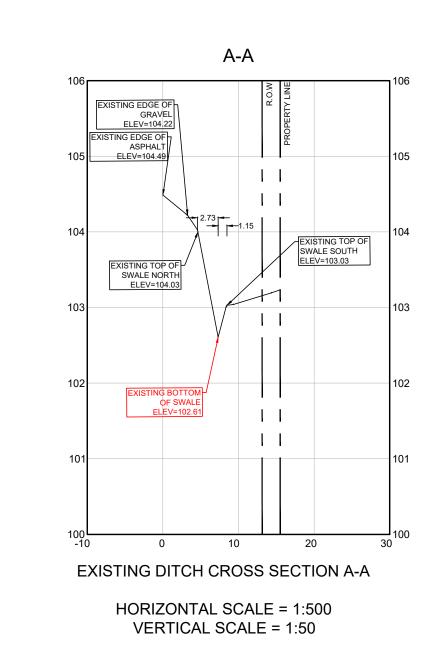

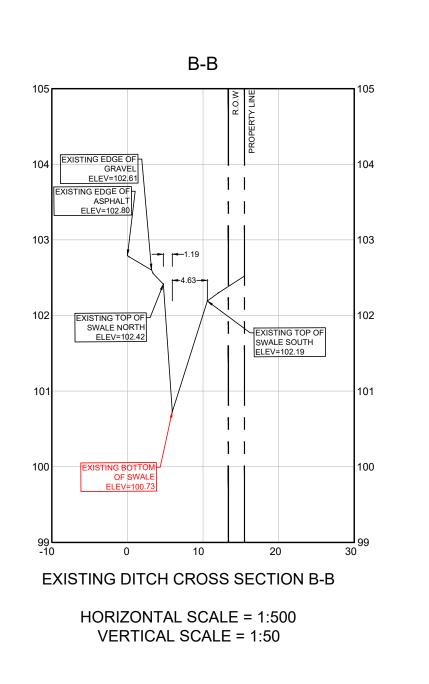

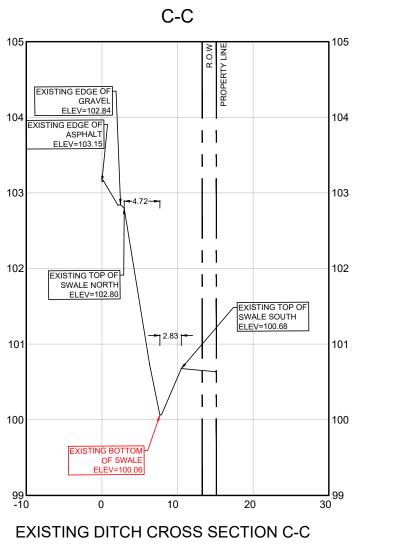

HORIZONTAL SCALE = 1:500 VERTICAL SCALE = 1:50

REVISION **BLOCK** DATE DESCRIPTION I. MM/DD/YY DESCRIPTION



NORTH ARROW

METRIC SCALE AS NOTED

AN) EXISTING DITCH
CROSS SECTION
THE PROPERTIES GROUP
O'KEEFE COURT (NEPEAN, ONTARIO

X-SEC

4497 O'Keefe Court, Ottawa, Ontario SITE PLAN SUBMISSION – OCTOBER 2025 KWA PROJECT: 21684




## **APPENDIX E**

SUPPORTING DOCUMENTATION

#### Rainstorm frequency across Southern Ontario



#### Chance of next storm within ..... hours

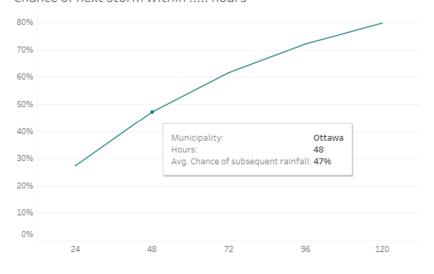

#### Source:

https://wiki.sustainabletechnologies.ca/wiki/Drainage\_time https://public.tableau.com/app/profile/jenny.hill/viz/StormIntereventTimesOntario/Dashboard1

# JOCK RIVER REACH ONE SUBWATERSHED STUDY FINAL REPORT

Existing Conditions Summary June 2007

project-specific basis and are not considered in the Conceptual Fisheries Compensation Plan completed for the Barrhaven South community.

#### 3.7 WATER BALANCE

Cursory water balance calculations were conducted for a portion of Reach 1 as part of the master drainage planning for the South Nepean growth area. The study identified the following water budget conditions for existing and estimated proposed future conditions, summarized in **Table 3.7.1**:

Table 3.7.1 South Nepean Master Drainage Plan Water Balance Results (CG&S, 1997)

Component	Existing	Urbanized to 40% Imperviousness	
	Rainfall: 663 mm		
Precipitation	Snowfall (as liquid water): 217 mm	880 mm	
	Total: 880 mm		
Evapotranspiration	550 mm – 600 mm	370 mm – 410 mm	
Water Yield (Surface runoff plus contribution to groundwater)	300 mm – 350 mm	470 mm – 510 mm	
Surface Runoff	100 mm – 150 mm	350 mm – 400 mm	
Net Contribution to Water Table	200 mm	70 mm – 160 mm	

As part of this Subwatershed study, a more detailed water budget analysis was prepared. Hydrogeotechnical input on the water holding capacities of the existing soils was used in conjunction with Meteorological Service of Canada (Environment Canada) modeling data and Ministry of the Environment (MOE) surplus water (i.e. infiltration factor) data to generate water budget results.

Marine clay is the predominant soil in the study area. The South Nepean Master Servicing Study (1998) included correspondence from Jaques Whitford Limited (JWL) estimating the permeability for each of the identified soil units and assessing their suitability for stormwater management infiltration practices (based on MOE SWM guidelines). The permeability estimates are summarized in **Table 3.7.2** (refer to **Figure 3.4.1** for soil units). Based on the suggested permeability, it is shown that only a minor fraction (14%) of the proposed Barrhaven South Community will be suitable for infiltration practices due to the limited areas with sandy soil.

#### JOCK RIVER REACH ONE SUBWATERSHED STUDY FINAL REPORT

Existing Conditions Summary June 2007

Table 3.7.2 Permeability Estimate and Infiltration Suitability for Surficial Materials (from Jacques Whitford, 1994 & 1995)

Soil Unit	Soil Description	Permeability (m/s)	Suitable for Infiltration?
1	Glacial Till (silty sand/dense sand)	1 x 10 <sup>-5</sup> – 1 x 10 <sup>-4</sup>	No
2	Fluvioglacial Deposits (stratified sand and gravel)	1 x 10 <sup>-1</sup> – 1 x 10 <sup>-4</sup>	Yes
3	Champlain Sea Silty Clay (silty 'Leda' clay)	1 x 10 <sup>-5</sup> – 1 x 10 <sup>-8</sup>	No
4	Beach Deposits (coarse sand containing gravel/cobbles)	1 x 10 <sup>-1</sup> – 1 x 10 <sup>-4</sup>	Yes
5	Marine Sand (uniform, fine-grained sand)	1 x 10 <sup>-3</sup> – 1 x 10 <sup>-6</sup>	Yes
8	Abandoned River Channel Deposits (silt to silty clay & sand)	1 x 10 <sup>-7</sup> – 1 x 10 <sup>-4</sup>	Marginal
10	Organic Deposits (peat, poorly-drained)	<< 1 x 10 <sup>-7</sup>	No

#### 3.7.1 Methodology

Environment Canada uses the Thornthwaite & Mather methodology and Ottawa International Airport mean long-term (1939-2004) monthly precipitation data to generate annual potential and actual evapotranspiration and surplus water estimates. This information is based on type of soil (holding capacity), precipitation input (rain and snow), variations in soil storage throughout the year, and solar input (latitude). MOE infiltration factors are then used to determine the fraction of water surplus that is infiltration and runoff, based on soil type, cover, and topography. In addition, an assumption for urban impervious surfaces is applied to reallocate the infiltration and evapotranspiration components from these surfaces directly to runoff (conservative simplification).

Due to the variations in soil distribution and land cover, and in the interest of understanding the water contribution to the existing tributaries of the Jock River, the water balance was subdivided into several subcatchments corresponding with the hydrologic modeling areas (See **Drawing PRE-1**).

#### 3.7.2 Results

Results of the annual water budget analysis are presented in **Table 3.7.3**. Detailed calculations are provided in **Appendix F**.

# JOCK RIVER REACH ONE SUBWATERSHED STUDY FINAL REPORT

Existing Conditions Summary June 2007

**Table 3.7.3 Existing Condition Annual Water Balance Results** 

Catchment	Area	Total Evapotranspiration		Total Infiltration		Total Runoff	
Catchinent	(ha)	(m³/yr)	(mm/yr)	(m³/yr)	(mm/yr )	(m³/yr)	(mm/yr)
OKEEFE	531	2,896,695	546	958,980	181	1,156,965	218
FOSTER	335	1,232,320	368	394,156	118	1,535,924	458
FRASER	90	532,945	592	167,299	186	149,356	166
KEN_BU	281	1,044,908	372	334,921	119	1,272,812	453
W_CLAR	65	382,166	588	134,858	207	96,576	149
E_CLAR	85	496,745	584	170,592	201	135,063	159
TODD	201	1,180,605	587	368,817	183	348,018	173
CORRIG	75	420,836	561	145,674	194	141,491	189
MILLS	139	765,280	551	239,367	172	307,514	221
JOCKVA	226	1,337,355	592	417,945	185	378,140	167
S_1	349	2,009,745	576	724,166	207	560,649	161
S_2	112	634,255	566	201,658	180	221,367	198
DESIRE	24	106,464	444	33,653	140	86,443	360
Total	2,513	13,040,318	519	4,292,084	171	6,390,318	254

The overall results indicate general concurrence with the previous master drainage plan water budget assessment, with differences attributed to the degree of development considered 'existing' as shown in **Drawing PRE-1**. Evapotranspiration (519 mm) accounts for a significant fraction of total rainfall (944 mm). Of the 425 mm of available rainfall, 171 mm infiltrates and 254 mm is converted into surface runoff.

Subcatchments with development exhibit reduced evapotranspiration and infiltration rates, with a corresponding increase in runoff. The O'Keefe drain in the northwest corner of Reach 1 exhibits reduced infiltration from the drains south of the river due to the prevalence of silty clay over the majority of the subcatchment and the presence of urban development north of Fallowfield Road. Areas that show presence of sand and woodlots such as the east and west Clarke drains, Mills, S\_1 and SW\_1, have higher infiltration rates and consequently lower runoff. The Heart's Desire community, although estate-type development, has limited vegetative cover and therefore produces very low evapotranspiration and infiltration rates.

Overall, the majority of the Reach is within tight-natured soils thereby limiting the recharge potential. A component not directly reflected is the presence of tile drainage in the northern agricultural portion of the reach, which reduces the potential for infiltration/recharge as water is diverted to the many municipal and non-municipal drains.

# JOCK RIVER REACH ONE SUBWATERSHED STUDY FINAL REPORT

Development of Preferred Management Strategy June 2007

classified as poor. The observation that the water quality in the upstream reaches of the Jock River is consistent with the water quality of this reach implies that a holistic approach to water quality improvement should be taken at a watershed level. However, the proposed developments in Reach 1 have an opportunity to improve water quality by providing enhanced level treatment to urban runoff. Hence all the proposed developments should make sufficient efforts in improving water quality of the Jock River and the SWM facilities must be designed to meet water quality criteria established in this study.

The combination of urbanization and stormwater treatment will reduce net loading of phosphorus to the Jock River.

Stormwater management facilities in Reach 1 are required to provide Enhanced Level treatment of urban runoff corresponding to 80% TSS removal (*MOE, March 2003*).

An integrated watershed based approach is required to improve the water quality of the Jock River.

#### 6.3.5 Water Balance

The increase in surface imperviousness due to urbanization of lands has two major impacts in water balance – decreased infiltration and evaporation and increased runoff volume and peak flows. In the areas of critical hydrogeological function, reduction in infiltration becomes a serious concern as it has the potential to deplete the groundwater levels over a longer period. Therefore it is important to identify net changes in infiltration due to development. A subwatershed scale post development water balance analysis was completed to assess the potential change in infiltration using the MOE method as described in **Section 3.7**. Impervious areas were considered to have no infiltration capacity. The summary of the post development water balance for the subwatershed is presented in **Table 6.3.9**. The results show that as a result of urbanization of the subwatershed, there will be a net reduction in infiltration by approximately 58mm if no infiltration BMPs are implemented. The details are included in **Appendix F**.

**Table 6.3.9 Post Development Annual Water Balance** 

Catchment	Area	Total Evapotranspiration		Total Infiltration		Total Runoff	
	(ha)	(m³/yr)	(mm/yr)	(m³/yr)	(mm/yr)	(m³/yr)	(mm/yr)
OKEEFE	448	1,422,280	317	500,764	112	2,306,076	515
FOSTER	373	931,560	250	294,462	79	2,295,098	615
FRASER	90	376,148	418	120,007	133	353,445	393
KEN_BU	281	701,165	250	221,635	79	1,729,840	616

#### JOCK RIVER REACH ONE SUBWATERSHED STUDY FINAL REPORT

Development of Preferred Management Strategy June 2007

		Total Evapotranspiration		Total Infiltration		Total Runoff	
W_CLAR	243	761,221	313	361,456	149	1,171,243	482
TODD	195	608,305	312	200,405	103	1,032,090	529
CORRIG	149	451,200	303	149,668	100	805,692	541
MILLS	139	476,015	342	150,948	109	685,197	493
JOCKVA	252	698,670	277	220,847	88	1,459,364	579
S_1	245	1,358,525	555	429,424	175	524,851	214
S_2	102	574,155	563	182,812	179	205,913	202
DESIRE	24	99,810	416	31,550	131	95,201	397
Total	2,541	8,459,054	333	2,863,977	113	12,664,009	498

The majority of surficial soils of the subwatershed have very low permeability, with only about 14% of the surface soils within the CDP area being suitable for infiltration measures. Low existing permeability and the reduction in pervious surface area due to development are expected to further reduce the total infiltration within the subwatershed.

To maximize infiltration, non-structural infiltration BMPs should be implemented throughout the subwatershed.

In the areas where suitable soils for infiltration are present, structural BMPs should be implemented to maintain the existing rate of recharge.

Any future development of the quarry area should ensure that the existing rate of recharge, at a minimum, is maintained.

Hydrogeological investigations suggest that the groundwater derived from the deeper bedrock formations is likely recharged in the upstream areas near the Village of Richmond. Some recharge of overburden groundwater is expected from the existing gravel quarry area as the area has higher infiltration rate, however expected recharge of deeper formation is likely minimal due to underlying impermeable soils. The existing quarry area lies to the south-east corner of the subwatershed. Although currently outside the urban area, it may have potential for future development should the land use designation change. Even though this area in not likely to recharge the deeper ground water, higher infiltration in the area contributes to the baseflow through interflow. Therefore any future developments should ensure that at least the existing rate of recharge is maintained. Further analysis will be required to quantify the amount of existing recharge from this area.

For the rest of the subwatershed, structural Best Management Practices (BMPs) such as soakaway pits or infiltration trenches may not be effective, due to low permeability of thick layer

4497 O'Keefe Court, Ottawa, Ontario SITE PLAN SUBMISSION – OCTOBER 2025 KWA PROJECT: 21684



## **APPENDIX F**

DRAWINGS