



1. ANY DISTURBED AREA DURING CONSTRUCTION TO BE RESTORED TO ORIGINAL CONDITION OR BETTER TO THE SATISFACTION OF THE AUTHORITIES HAVING JURISDICTION
2. COVERINGS TO VERTICES TO CLOSE LOCATIONS AND INVERT ELEVATIONS EX. UNDERGROUND SERVICES AND EX. UTILITIES PRIOR TO STARTING CONSTRUCTION
3. ALL EXISTING TREES, SHRUBS ETC. WITHIN LOTS, BLOCKS AND ROADS TO BE REPAIRED, UNLESS OTHERWISE NOTED
4. PERMISSION REQUIRED FOR WORK ON ADJACENT LANDS
5. FORTY PERMANENT STUBS, 2.4m MIN. COVER TO BE PROVIDED
6. ANY DISTURBED MATERIAL EXPOSED BEING REPLACED TO SUBGRADE LEVEL WITHIN A BUILDING FOOTPRINT TO BE SUB-EXCAVATED AND BACKFILLED AND RECOMPACTED TO 95% MIN. DENSITY AS PER GEO-CHEMICAL ENGINEERS RECOMMENDATION
7. ALL CATCHBASIN DATA, REFER TO DWG. No. 2 FOR DETAILS
8. ALL DWELLINGS TO BE PROVIDED WITH PRESSURE REDUCING VALVES UNLESS OTHERWISE NOTED.
9. WATERMAIN INSULATION TO BE PROVIDED TO CITY STD. W25
10. WATERMANS OVER SEWERS TO BE PER CITY STD. W25
11. WATERMANS UNDER SEWERS TO BE PER CITY STD. W25

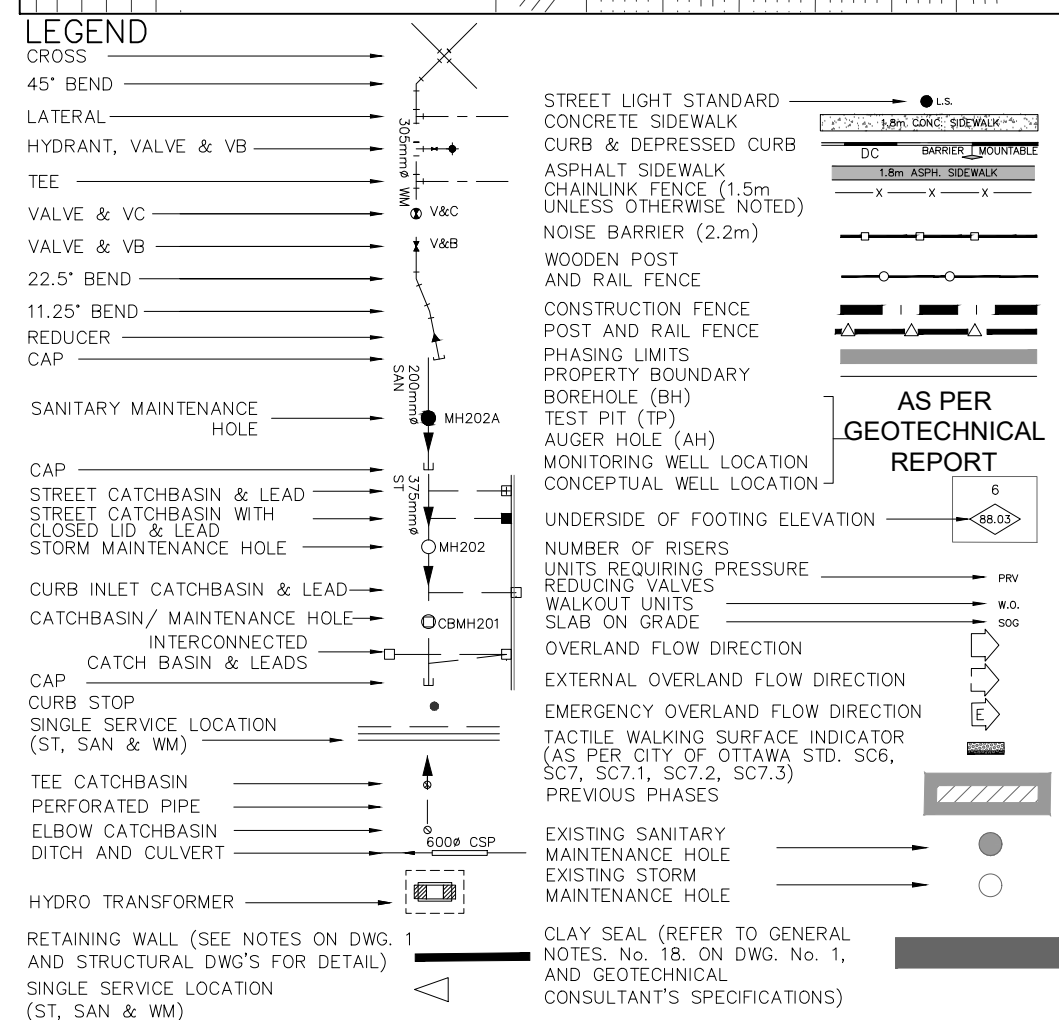

2	S.L.M	2025-10-24	2nd SUBMISSION
1	S.L.M	2025-06-20	1st SUBMISSION
No.	RY	DATE	DESCRIPTION

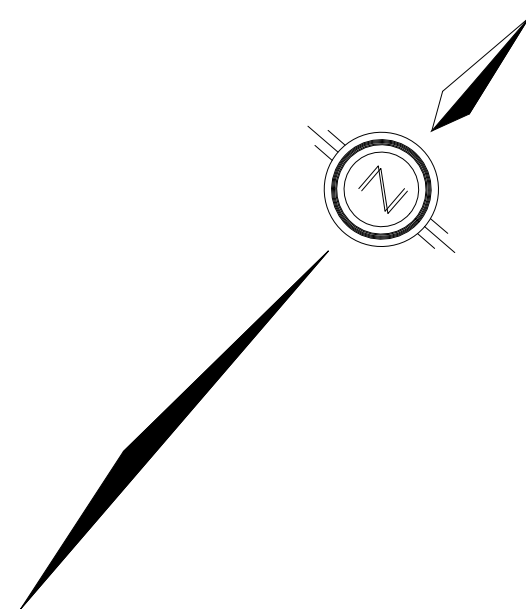