


Legend

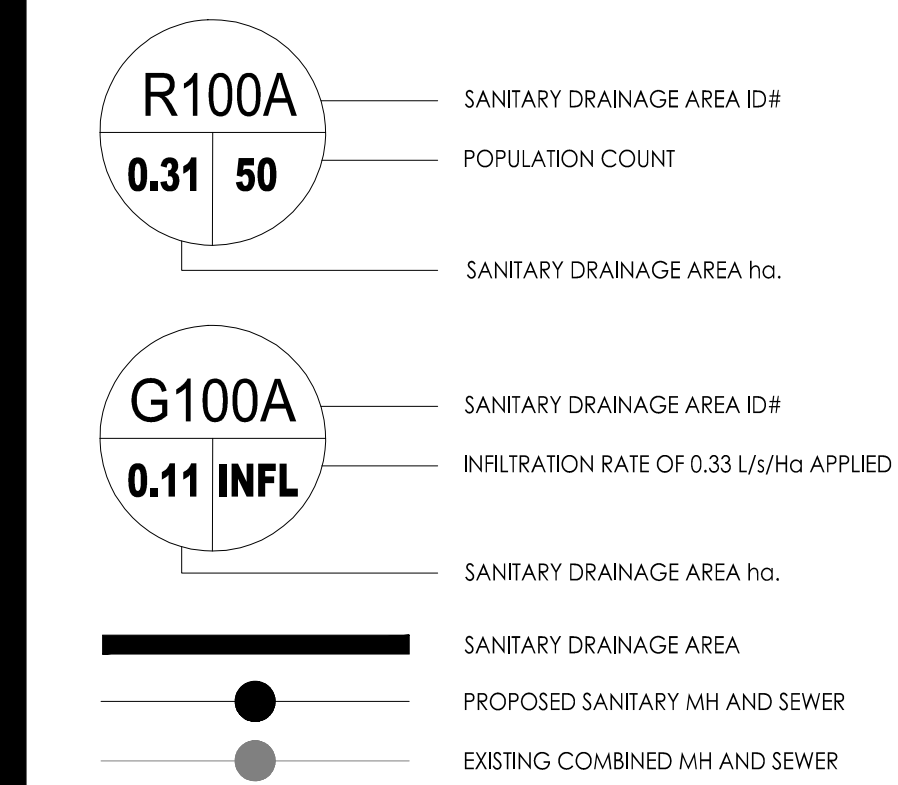

Notes

SANITARY STATS	
POPULATION COUNT	
TOWER A	
144 - 1 BEDROOM APTS @ 1.4PPU = 202 PEOPLE	
94 - 2 BEDROOM + DEN APTS @ 3.1PPU = 298 PEOPLE	
TOTAL POPULATION TOWER A = 500 PEOPLE	
BUILDING B	
132 - 1 BEDROOM APTS @ 1.4PPU = 188 PEOPLE	
88 - 2 BEDROOM + DEN APTS @ 3.1PPU = 273 PEOPLE	
TOTAL POPULATION TOWER B = 458 PEOPLE	
PODIUM	
4 - BACHELOR APTS @ 1.4PPU = 4 PEOPLE	
20 - 1 BEDROOM APTS @ 1.4PPU = 28 PEOPLE	
28 - 1 BEDROOM + DEN APTS @ 2.1PPU = 59 PEOPLE	
36 - 2 BEDROOM APTS @ 2.1PPU = 80 PEOPLE	
18 - 2 BEDROOM + DEN APTS @ 3.1PPU = 56 PEOPLE	
20 - 3 BEDROOM APTS @ 3.1PPU = 62 PEOPLE	
TOTAL POPULATION PODIUM = 291 PEOPLE	
TOTAL POPULATION = 1249	
TOTAL COMMERCIAL SPACE = 734.0m² (0.075ha) @ 28,000 L/ha/day	

Revision	By	Appd.	YY.MM.DD
3	MJS	PM	26.04.14
2	MJS	PM	25.04.22
1	MJS	PM	24.09.04
0	MJS	PM	23.06.01

Permit-Seal

Client/Project
BRIGIL HOMES

1299 RICHMOND ROAD
MIXED USE TOWER DEVELOPMENT
OTTAWA, ON, CANADA

Title
SANITARY DRAINAGE PLAN

Project No. 160401697	Scale 1:250	Sheet SA-1	Revision 3
--------------------------	----------------	---------------	---------------