



**Kollaard Associates**

Engineers

210 Prescott Street, Unit 1

P.O. Box 189

Kemptville, Ontario K0G 1J0

Civil • Geotechnical •  
Structural • Environmental •  
Hydrogeology

(613) 860-0923

FAX: (613) 258-0475

---

STORMWATER MANAGEMENT REPORT  
PROPOSED INDUSTRIAL WAREHOUSE DEVELOPMENT  
2726 MOODIE DRIVE  
CITY OF OTTAWA, ONTARIO

Prepared For:

1000198532 Ontario Inc.  
1172 Walkley Road  
Ottawa, Ontario  
K1V 1P7

PROJECT #: 221099

DISTRIBUTION

City of Ottawa

1000198532 Ontario Inc.

Kollaard Associates

Rev 0 – Issued in support of Site Plan Control Application

Rev 1 – Response to City of Ottawa Formal Review Comments

Rev 2 – Response to 2<sup>nd</sup> Review

October 24, 2025

February 27, 2026

June 09, 2026



**Professional Engineers**  
Ontario

Authorized by the Association of Professional Engineers  
Of Ontario to offer professional engineering services



|                                                             |    |
|-------------------------------------------------------------|----|
| 1. INTRODUCTION.....                                        | 1  |
| 1.1. Background .....                                       | 1  |
| 1.2. Subwatershed Study .....                               | 2  |
| 1.3. Summary.....                                           | 3  |
| 1.4. Governing Authorities.....                             | 4  |
| 1.5. Guidelines and Manuals.....                            | 4  |
| 2. STORMWATER MANAGEMENT DESIGN .....                       | 6  |
| 2.1. Design Criteria.....                                   | 6  |
| 2.1.1. Quantity Control Criteria.....                       | 6  |
| 2.1.2. Quality Control Criteria .....                       | 6  |
| 2.1.3. Jock River Subwatershed Report.....                  | 6  |
| 2.2. Best Management Practices.....                         | 6  |
| 3. Subsurface Conditions .....                              | 7  |
| 3.1. Soil Conditions .....                                  | 7  |
| 3.2. Permeability of Native Soils .....                     | 7  |
| 4. PROPOSED HYDROLOGIC MODEL .....                          | 8  |
| 4.1. Design Storm Intensity.....                            | 8  |
| 4.2. Methodology.....                                       | 8  |
| 4.3. OTTHYMO Storm Analysis Variables .....                 | 9  |
| 4.3.1. Runoff Curve Numbers.....                            | 10 |
| 4.3.2. Initial Abstraction and Potential Storage .....      | 11 |
| 4.3.3. Time of Concentration and Time to Peak.....          | 11 |
| 4.3.3.1. Travel time for sheet flow .....                   | 12 |
| 4.3.3.2. Travel time for shallow concentrated flow .....    | 13 |
| 4.3.3.3. Travel time for open channel flow .....            | 13 |
| 4.4. Manning Coefficients – Post Development.....           | 13 |
| 4.5. Catchment Areas.....                                   | 13 |
| 4.5.1. Delineation of Onsite Catchment Areas .....          | 14 |
| 5. RECEIVING WATER BODY – JOCK RIVER .....                  | 14 |
| 6. PRE-DEVELOPMENT STORMWATER ANALYSIS.....                 | 15 |
| 6.1. On Site Pre-Development Catchments .....               | 15 |
| 6.1.1. Onsite Conditions.....                               | 15 |
| 6.1.2. Onsite Delineation Catchments and Curve Numbers..... | 15 |
| 6.2. Pre-Development Runoff .....                           | 16 |
| 7. POST-DEVELOPMENT MODEL .....                             | 18 |
| 7.1. Post-Development Catchment Areas .....                 | 18 |
| 7.1.1. Onsite Post-Development Catchment Areas.....         | 18 |
| 7.1.1.1. Post-development Conditions .....                  | 18 |
| 7.1.1.2. Delineation of NASHYD Catchments .....             | 19 |
| 7.1.1.3. Delineation of STANDHYD Catchments.....            | 20 |



|          |                                                                           |    |
|----------|---------------------------------------------------------------------------|----|
| 7.1.1.4. | Comparison of Pre- to Post- Development Onsite Conditions .....           | 21 |
| 7.2.     | Stormwater Conveyance - Controlled Areas .....                            | 21 |
| 7.2.1.   | Sheet Flow to Storm Swale .....                                           | 21 |
| 7.2.2.   | Roof Drainage .....                                                       | 21 |
| 7.2.3.   | Storm Chambers .....                                                      | 22 |
| 7.2.4.   | Capacity of Storm Chambers.....                                           | 22 |
| 7.3.     | Stormwater Conveyance – Low Impact Development Areas .....                | 23 |
| 7.3.1.   | Rain Garden along West Property Line Adjacent to Fallowfield (C-L-A)..... | 23 |
| 7.3.2.   | Enhanced Swale along North Property Line (C-L-B) .....                    | 23 |
| 7.3.3.   | Enhanced Swale along West and South Property Lines (C-L-C).....           | 24 |
| 7.3.4.   | Linear Subdrained Rain Garden along South Property Line (C-L-D).....      | 24 |
| 7.4.     | Stormwater Conveyance - Uncontrolled Areas .....                          | 25 |
| 7.4.1.   | Uncontrolled Catchment along North and East of Site (C-U-A).....          | 25 |
| 7.4.2.   | Uncontrolled Catchment along West and South of Site (C-U-B) .....         | 25 |
| 8.       | Post-Development Quantity Control – Flow Rate .....                       | 25 |
| 8.1.     | Low Impact Development Areas .....                                        | 26 |
| 8.1.1.   | Catchment Area C-L-A .....                                                | 26 |
| 8.1.2.   | Catchment Area C-L-B .....                                                | 27 |
| 8.1.3.   | Catchment Area C-L-C .....                                                | 28 |
| 8.1.4.   | Catchment Area C-L-D.....                                                 | 29 |
| 8.2.     | Roof Drainage .....                                                       | 30 |
| 8.3.     | Stormwater Storage Swale and Storm Chambers .....                         | 32 |
| 8.3.1.   | Storm Chambers .....                                                      | 32 |
| 8.3.2.   | Stormwater Storage Swale.....                                             | 33 |
| 8.3.3.   | Outlet Control and Allowable Release Rate .....                           | 34 |
| 8.3.3.1. | Release from C-P-A .....                                                  | 34 |
| 8.3.3.2. | Release from C-P-B.....                                                   | 35 |
| 8.4.     | Mitigated or Controlled Post Development Runoff .....                     | 36 |
| 8.5.     | Storage Requirements .....                                                | 37 |
| 8.6.     | Quantity Control – Additional Criteria .....                              | 38 |
| 9.       | Quality Control.....                                                      | 39 |
| 9.1.     | Source Control .....                                                      | 39 |
| 9.2.     | Conveyance Control.....                                                   | 40 |
| 9.2.1.   | Conveyance to the Stormwater Storage Swale.....                           | 40 |
| 9.2.1.1. | Storm Sewer.....                                                          | 40 |
| 9.2.1.2. | Storage Chambers.....                                                     | 40 |
| 9.3.     | End-of-pipe Control.....                                                  | 40 |
| 9.3.1.   | Hydrodynamic Oil Grit Separator .....                                     | 41 |
| 9.3.2.   | Effluent Polishing – Vegetated Stormwater Storage Swale.....              | 41 |
| 9.4.     | Quality Control Summary.....                                              | 42 |
| 10.      | Operation and Maintenance.....                                            | 42 |



|                                                      |    |
|------------------------------------------------------|----|
| 10.1. Enhanced Grassed Swales .....                  | 42 |
| 10.2. Rain Gardens and Stormwater Storage Swale..... | 42 |
| 10.3. Storm sewers and Outlet Pipe .....             | 43 |
| 10.4. Catch basins and Maintenance Holes .....       | 43 |
| 10.5. Storm Chambers .....                           | 44 |
| 10.6. Hydrodynamic Oil Grit Separator .....          | 44 |
| 11. EROSION AND SEDIMENT CONTROL .....               | 45 |
| 12. STORMWATER MANAGEMENT CONCLUSIONS.....           | 46 |

#### *LIST OF FIGURES AND TABLES*

|                                                                                                                 |    |
|-----------------------------------------------------------------------------------------------------------------|----|
| Figure 1-1: Image of Watershed Divide at Site .....                                                             | 3  |
| Table 4-1: Design Storms Considered .....                                                                       | 8  |
| Table 6-1: Pre-Development Runoff Curve Numbers .....                                                           | 16 |
| Table 6-2: Pre-Development Peak Runoff from Entire Site .....                                                   | 17 |
| Table 6-3: Pre-Development Peak Runoff Contributing to Monahan Drain Subwatershed .....                         | 17 |
| Table 7-1: Post-Development Catchment Areas .....                                                               | 20 |
| Table 7-2: Comparison of Pre- to Post-Development Catchments .....                                              | 21 |
| Table 8-1: Rain Garden - Catchment Area C-L-A.....                                                              | 27 |
| Table 8-2: Enhanced Swale – C-L-B.....                                                                          | 28 |
| Table 8-3: Enhanced Swale – C-L-C.....                                                                          | 29 |
| Table 8-4: Linear Subdrained Rain Gardens - Catchment Area C-L-D.....                                           | 30 |
| Table 8-5: Roof Storage and Release Rates – Release to C-P-A.....                                               | 31 |
| Table 8-6: Roof Storage and Release Rates – Release to C-P-B.....                                               | 31 |
| Table 8-7: Mitigated Post-Development Runoff Rates and Runoff Volumes .....                                     | 36 |
| Table 8-8: Storage Requirements .....                                                                           | 37 |
| Table 8-9: Comparison of Post-Development flows to Pre-Development flows to the Monahan Drain Subwatershed..... | 39 |





### *LIST OF APPENDICES*

Appendix A : Storm Analysis Model Schematic and Parameters  
Appendix B : Time of Concentration and Time to Peak Calculation  
Appendix C : Pre-Development Otthymo Model Results  
Appendix D : Product Information  
Appendix E : Roof Drainage  
Appendix F : Stormwater Management Storage Swale  
Appendix G : OTTHYMO Models for Low Impact Design Components  
Appendix H : Post-Development OTTHYMO Model Results  
Appendix I : Guelph Permeameter Test Results  
Appendix J : Civil Drawings

### *LIST OF DRAWINGS*

|                   |                                   |
|-------------------|-----------------------------------|
| 221099-CP         | COVER PAGE                        |
| 221099-PRE        | PRE-DEVELOPMENT DRAWING           |
| 221099-NOTES      | NOTES                             |
| 221099-GR1,2,3,4  | PROPOSED GRADING PLANS 1-4        |
| 221099-SVC1,2,3,4 | PROPOSED SERVICING PLANS 1-4      |
| 221099-POST       | POST DEVELOPMENT DRAWING          |
| 221099-ESC        | EROSION AND SEDIMENT CONTROL PLAN |
| 221099-DET1,2     | DETAILS SHEETS 1-2                |



## 1. INTRODUCTION

### 1.1. Background

Mr. TJ Sohal of 1000198532 Ontario Inc. retained Kollaard Associates Inc. to complete a Site Grading and Drainage Plan along with a Stormwater Management Report in support of the Site Plan Control Application for the proposed industrial development at 2726 Moodie Drive in the City of Ottawa, Ontario. Additionally, Kollaard Associates Inc. was retained to complete a *Servicing Feasibility Report* with the same objective which will be submitted concurrently, and which will be referenced throughout this document.

The proposed development will occupy a mostly vacant parcel of land along the west side of Moodie Drive at Fallowfield Road. The development will be accessed by a right turn only small vehicle access from Fallowfield Road and by means of a main entrance from Moodie Drive. For the purposes of this design, Moodie Drive is considered to be oriented along a north south axis.

The development site is approximately 6.607 hectares (16.3 acres) and resembles a rectangularly shaped parcel with the northwest corner missing. The development site extends about 390 metres west of Moodie Drive with approximately 240 metres of frontage along the south side Fallowfield Road. The remaining about 150 metres extends behind existing residential development along the south side of Fallowfield Road. The site has approximately 170 metres of frontage along Moodie Drive.

A proposed road widening along Fallowfield Road will shift the property line between the site and Fallowfield Road south 5.1 metres at the west end of the site, about 7.1 metres at the center of the north side of the site and about 4.3 metres at the east end of the site. This road widening will reduce the site area by about 0.1 hectare. The future property line has been indicated on the drawings. The only impervious area within the road widening is a result of the proposed entrance from Fallowfield Road. The stormwater management design has been completed using the current site area as the grading for the proposed development will affect the area within the future road widening. The reduction in site area by changing site area to offsite area will not change the stormwater management model.

The proposed development will consist of 5 Industrial Warehouse Buildings together with associated parking, roadway and truck turning areas. The proposed warehouses will be oriented parallel to Fallowfield Road with 3 buildings adjacent to Moodie Drive and 2 buildings behind the existing residential lots along Fallowfield Road. Buildings A and B and buildings D

and E will be placed back to back to shield the adjacent properties from the loading bays and by extension the vast majority of the truck traffic.

This report is intended to present the results of a stormwater management design in support of the application for site plan control approval. The report will summarize the stormwater management (SWM) design requirements and proposed works that will address stormwater flows arising from the site under post-development conditions on a level sufficient to ensure that stormwater management facility is adequately designed to meet the criteria for the site.

The report is to be read in conjunction with the stormwater management system design presented in the Kollaard Civil Drawings.

Topographic information of the site was obtained using GPS survey equipment. All elevations used in this report are geodetic and were referenced to the vertical datum of CGVD28:78.

## 1.2. Subwatershed Study

The proposed development site is part of the Jock River Watershed. The east side of the site outlets to the Jock River via the roadside ditches along Fallowfield Road and Moodie Drive while the west portion of the site outlets to the Jock River by means of the Monahan Drain. The flow divide between the catchment areas is illustrated in the pre-development drawing with area Pre-W outletting to the Monahan Drain catchment.

The wide blue line in Figure 1-1 below (when printed in colour) indicates the watershed boundaries. It is noted that the Jock River is south of the site and that Leamy Creek outlets to the Jock River on the south side of the river. The Barrhaven catchment (label not shown) begins east of Moodie Drive. The greenhouses shown in the air photo on the site were removed from the site prior to 2021.



Figure 1-1: Image of Watershed Divide at Site

A subwatershed study report for the Jock River Watershed was issued by Rideau Valley Conservation Authority dated 2016. This report provides an assessment of the Jock River watershed as well as proposed actions which could be completed to preserve and improve the condition of the Jock River. In general, the forest cover across the Jock River Watershed ranges from about 42 percent in the upper rural reaches to 7 percent in the lower urban reaches. There is no significant wetland cover in the Monahan Drain or Leamy Creek Catchments. The quality of the water in the Jock River ranges from Good to Poor depending on specific location and adjacent land uses.

### 1.3. Summary

The proposed stormwater management design directs stormwater runoff to both the Monahan Drain catchment and the Leamy Creek catchment. The flows directed to the Monahan Drain catchment will either be uncontrolled or be controlled and treated using low impact design techniques only. The flows directed to the Leamy Creek catchment will be either uncontrolled or controlled and treated by means of a stormwater storage facility which incorporates both vegetative and sand filtration.

The proposed stormwater management plan for the development will make use of best management practices and low impact design techniques where possible in combination with a treatment train approach to meet the requirements for stormwater management on the site. Stormwater from the roof and paved areas of the site, with the exception of the entranceways, will be directed to the stormwater storage facility. The stormwater water storage facility will

consist of a combination of underground storage provided in modular storm chambers and an enhanced swale / rain garden. The underground storage will be provided in NDS SC-34E and NDS SC-18 stormchambers as illustrated on the proposed grading and servicing plans. The enhanced swale / rain garden will consist of a flat bottomed low sloped swale complete with an enhanced topsoil layer on the bottom. The low impact design techniques employed in the remaining areas will consist of enhanced grassed swales and infiltration facilities.

The enhanced stormwater management swale and the low impact development techniques used will provide stormwater storage and promote sedimentation and infiltration in order to achieve the quantity and quality control parameters established by the City of Ottawa and the Ministry of Environment Conservation and Parks.

#### 1.4. Governing Authorities

This Stormwater Management Report has been prepared to present the design information to satisfy conditions set by the following authorities:

City of Ottawa (City)

Rideau Valley Conservation Authority (RVCA)

Ministry of Environment, Conservation and Parks (MECP) formerly Ministry of Environment (MOE)

#### 1.5. Guidelines and Manuals

The following guidelines and manuals were utilized in the creation of the stormwater management design and the preparation of this report. Reference names used within this report are listed after the name of the publication in square parentheses and italicized.

**Ottawa Sewer Design Guildelines [OSDG]**

City of Ottawa, October 2012 as amended.

**Stormwater Management Planning and Design Manual [MOE Manual]**

Ministry of the Environment, March 2003

**Visual OTTHYMO V6.0: User's Manual**

Civica Infrastructure Inc., November 201

**CITY OF OTTAWA, Low Impact Development Technical Guidance Report [City LID Guide]**

City of Ottawa, February 2021

**Low Impact Development Stormwater Management Guidance Manual [MECP LID Guide]**

Ministry of Environment Conservation and Parks, (Draft - January 2022)



**Low Impact Development Stormwater Management Planning and Design Guide Version 1.0**  
**[CVC LID Guide]**

Credit Valley Conservation & Toronto and Region Conservation 2010

**MTO Drainage Management Manual**

Ontario Ministry of Transportation

**Part 650 Hydrology National Engineering Handbook – Chapter 15 Time of Concentration**  
**[USDA Chapter 15]**

United States Department of Agriculture

**Urban Hydrology for Small Watersheds Technical Release 55 [USDA TR55]**

United States Department of Agriculture

**Storm Water Management Model Reference Manual Volume I – Hydrology (Revised) [US EPA RM]**

United States Environmental Protection Agency

**Jock River Subwatershed Report**

Rideau Valley Conservation Authority, 2016



## 2. STORMWATER MANAGEMENT DESIGN

The subject lands are within the City of Ottawa and the Rideau Valley Conservation Authority jurisdiction. Stormwater management criteria were established based on the nature and location of the development and on the nature of the receiving watercourse for the stormwater discharge from the site.

### 2.1. Design Criteria

#### 2.1.1. Quantity Control Criteria

- The post-development peak runoff rate occurring during a 100 year design storm event is to be controlled to the runoff rate of the 2 year pre-development design storm of the same duration;
- Onsite stormwater storage and flow shall be controlled as to not affect lands adjacent the development site.
- Runoff from impervious surfaces must not be directed onto neighbouring properties.
- Stormwater discharge must outlet to a legal and sufficient outlet.

#### 2.1.2. Quality Control Criteria

- The design shall include enhanced quality treatment to 80% long-term suspended solids removal as recommended by the MOE Manual.

#### 2.1.3. Jock River Subwatershed Report

- There are no directly specified criteria provided in the Jock River Subwatershed report.
- The report however does recommend:
  - the implementation of best practiced for stormwater management including low impact development measures;
  - Reduce property runoff by allowing surface water to infiltrate as much as possible;
  - Use advanced wastewater treatment systems.
    - Note: The wastewater system will be discussed within the *Servicing Feasibility Report*.

### 2.2. Best Management Practices

As indicated in the MOE Manual, the recommended strategy for stormwater management is to provide an integrated treatment train approach to stormwater management. Each element of



the treatment train within the development when combined forms the stormwater management facility for the development.

In general, best management practices for stormwater management are divided into three categories: source control, conveyance control and end-of-pipe control. As indicated in the Ministry of Transportation Drainage Management Manual, the priority in applying these BMPs should follow the sequence presented with end of pipe measures applied as the last resort.

The proposed BMPs utilized in the proposed development will include reduced lot grading in uncontrolled areas, reducing directly connected impervious areas where possible, vegetative buffer strips and protecting any surface areas disturbed during construction as soon as possible. The proposed BMPs will also include reduced swale slopes and increased swale cross sections where possible to reduce flow rates and promote filtration and the removal of sediments.

### 3. Subsurface Conditions

#### 3.1. Soil Conditions

Detailed description with respect to the subsurface conditions can be found in the Geotechnical Report prepared for the proposed development. The subsurface conditions were found to consist of 0.1 to 0.7 m of topsoil overlying clayey silty sand glacial till. Comparison of the results of the particle size analysis with the grain size distribution charts provided in the Ontario Building Code Supplementary Standards SB-6 indicates that the Glacial Till could be classified as SM – silty sand / sand silt mixture in accordance with the Unified Soils Classification System.

#### 3.2. Permeability of Native Soils

Permeability testing was completed on the native glacial till materials within the areas of the proposed rain garden and bioswales along the west sides of the development. The test results are included in Appendix I. The test results indicate that the permeability  $k$  for the native soils at the site range from  $2.0 \times 10^{-7}$  cm/s to  $2.2 \times 10^{-7}$  cm/s. The following table obtained from Appendix C of the CVC LID guide indicates the relationship between the Coefficient of Permeability, Percolation Time, and Infiltration Rate:

**Table C1: Approximate relationships between hydraulic conductivity, percolation time and infiltration rate**

| Hydraulic Conductivity, $K_{fs}$<br>(centimetres/second) | Percolation Time, $T$<br>(minutes/centimetre) | Infiltration Rate, $1/T$<br>(millimetres/hour) |
|----------------------------------------------------------|-----------------------------------------------|------------------------------------------------|
| 0.1                                                      | 2                                             | 300                                            |
| 0.01                                                     | 4                                             | 150                                            |
| 0.001                                                    | 8                                             | 75                                             |
| 0.0001                                                   | 12                                            | 50                                             |
| 0.00001                                                  | 20                                            | 30                                             |
| 0.000001                                                 | 50                                            | 12                                             |

Source: Ontario Ministry of Municipal Affairs and Housing (OMMAH), 1997. Supplementary Guidelines to the Ontario Building Code 1997. SG-6 Percolation Time and Soil Descriptions. Toronto, Ontario.



From the above, the native soils at the site would have an estimated infiltration rate of 12 mm/hr and a percolation time T of 50 minutes.

#### 4. PROPOSED HYDROLOGIC MODEL

##### 4.1. Design Storm Intensity

Intensity-Duration-Frequency curves derived from Meteorological Services of Canada rainfall data for the MacDonald-Cartier Airport in Ottawa were used to determine the expected rainfall intensity for a given duration and storm frequency.

The IDF formulae obtained from the OSDG are as follows:

$$\begin{aligned}
 100 \text{ year Intensity} &= 1735.688 / (\text{Time in min} + 6.014)^{0.820} \\
 5 \text{ year Intensity} &= 998.071 / (\text{Time in min} + 6.053)^{0.814} \\
 2 \text{ year Intensity} &= 732.951 / (\text{Time in min} + 6.199)^{0.810}
 \end{aligned}$$

The data obtained from the IDF curves for the site was used to generate Chicago Storms with select durations and return periods up to and including the 100 year storm event. The 25 mm 4 hour Chicago storm is considered by the MECP to be the design storm for quality control purposes and was also included in the analysis. Table 4-1 summarizes the selected design storms included for analysis.

Table 4-1: Design Storms Considered

| Quantity Control Storm Events     |                           |
|-----------------------------------|---------------------------|
| Simulation 01.                    | Chicago 2 yr 3 hr         |
| Simulation 02.                    | Chicago 2 yr 6 hr         |
| Simulation 03.                    | Chicago 5 yr 3 hr         |
| Simulation 04.                    | Chicago 5 yr 6 hr         |
| Simulation 05.                    | Chicago 100 yr 3 hr       |
| Simulation 06.                    | Chicago 100 yr 6 hr       |
| Extreme Event – Historical Storms |                           |
| Simulation 08                     | August 4, 1988 Historical |
| Simulation 09                     | July 1, 1979 Historical   |
| Quality Control Storm Event       |                           |
| Simulation 07                     | 25mm 4 hr Chicago         |

##### 4.2. Methodology

The hydrologic modeling software, Visual OTTHYMO (V6.2) was used to assess pre- and post-development stormwater conditions at the site.

The pre-development were calculated using the NASHYD watershed command. The post-development conditions were also calculated using the NASHYD watershed command for the sub-catchment areas having an impervious ratio of less than 20 percent. The post-development conditions for the catchment areas having an impervious ratio of more than 20 percent were calculated using the STANDHYD watershed command.

The NASHYD hydrograph method uses the Nash instantaneous unit hydrograph which is made of a cascade of 'N' linear reservoirs and is used to model rural areas.

The STANDHYD hydrograph method is used to simulate runoff flows from urban watersheds having an impervious ratio of greater than 20%. The program uses two parallel standard instantaneous unit hydrographs modeled at the same time to combine the effective rainfall intensity over the pervious and impervious surfaces.

Both the pre and post-development conditions were modeled for quantity control purposes utilizing the Chicago storm distributions listed for Simulations 1 to 7 in Table 4-1 above.

The post-development conditions were also modeled using the 25 mm 4 hour Chicago storm for quality control purposes.

#### 4.3. OTTHYMO Storm Analysis Variables

As previously indicated, the stormwater runoff was calculated using both the NASHYD watershed command and the STANDHYD watershed command.

The NASHYD command uses the Nash instantaneous unit hydrograph which is made of a cascade of 'N' linear reservoirs and is used to model rural areas.

The NASHYD command uses the following inputs:

DT – Simulation time step increment (min) – must be shorter than TP

Area – Watershed or catchment area (hectares)

DWF – A constant Dry Weather Flow or Baseflow (m<sup>3</sup>/s) assumed to be 0 (doesn't change from pre to post development)

CN – SCS Modified Curve Number

IA – Initial Abstraction (mm)

N – Number of Linear reservoir used for derivation of the Nash Unit Hydrograph

TP – Unit hydrograph time to peak (hr)

The STANDHYD command uses the following inputs:



DT – Simulation time step increment (min) – must be shorter than TP

Area – Watershed or catchment area (hectares)

DWF – A constant Dry Weather Flow or Baseflow (m<sup>3</sup>/s) assumed to be 0 (doesn't change from pre to post development)

XIMP – Directly connected imperviousness (ratio of area which is impervious and directly connected to the storm sewer or discharge point)

TIMP – Total impervious area (ratio of total impervious area to total catchment area)

LOSS – Loss method (Modified SCS Curve number)

SLPP – Pervious area ground slope

LGP – Length of flow over pervious area

MNP – manning's roughness coefficient for sheet flow over pervious area

SCP – Pervious area storage coefficient (set to allow program to calculate)

DPSI – Available impervious area depression storage

SLPI – Impervious area ground slope

LGI – Flow length of impervious area

MNI – Manning's Roughness coefficient for impervious area (channel flow)

SCI – Impervious area storage coefficient (set to allow program to calculate)

The Storm Analysis Model Variables for each catchment used in the storm water management model are summarized in Appendix A of this report.

#### 4.3.1. Runoff Curve Numbers

The NasHyd hydrograph method which uses the SCS loss method for pervious areas was used to model both the pre- and post development conditions of the proposed warehouse development. Runoff Curve Numbers (CN) are utilized in the SCS hydrology method. The Curve Number is a function of soil type, ground cover, and antecedent moisture conditions. The Hydrologic soil type was chosen to be Group C for the predevelopment conditions at the site in keeping with the Geotechnical Report prepared for the proposed development. The subsurface conditions were found to consist of 0.1 to 0.7 m of topsoil overlying clayey silty sand glacial till. The proposed site grading will result in significant quantity of fill material being placed in the catchment areas controlled by low impact development techniques. The fill material in these areas is specified to be riprap over sandy loam material. These materials will have a significantly higher permeability. As such a soil classification of Group B was used for these areas in post development conditions. A calculation of the CN values for both the pre- and post-development conditions is presented in Appendix A.

The CN values used for each catchment area consist of a weighted average value based on the conditions and cover of the ground surface in the catchment area. For the purposes of analysis presented in this report, the surface cover was considered to be: Open Space and Pasture in good condition 74 (61 for post development); Woods/brush in fair condition (the woods/brush along the west side of the site is re-growth since 2008) 76 (N/A for post development); Unmaintained and overgrown Woods/brush in fair condition 70 (N/A for post development); Gravel 89 (85 for post development); and Impervious 98 (98 for post development). The CN values were taken from OSDG Table 5.9 and from USDA TR55.

#### 4.3.2. Initial Abstraction and Potential Storage

The initial abstraction includes all losses before runoff begins, and includes water retained in surface depressions, water taken up by vegetation, evaporation, and infiltration. This value is related to characteristics of the soil and the soil cover. Initial abstraction is a function of the potential storage and is generally assumed to be equal to  $0.2S$  where  $S$  is the potential storage.

It is considered that for lower CN values, the relationship  $IA = 0.2S$  tends to overestimate the initial abstraction resulting in underestimated peak runoff. As such suggested guidelines are as follows:

$$CN \leq 70 \quad IA = 0.075S$$

$$CN > 70 \leq 80 \quad IA = 0.10S$$

$$CN > 80 \leq 90 \quad IA = 0.15S$$

$$CN > 90 \quad IA = 0.2S$$

The potential storage  $S$  is related to the runoff coefficient as follows:

$$S = (25400/CN) - 254$$

The initial abstraction  $IA$  and potential storage  $S$  values for both the pre- and post-development conditions are also presented in Appendix A.

#### 4.3.3. Time of Concentration and Time to Peak

The time to peak is generally considered to be 2/3rds of the time of concentration of a catchment area. The calculation for the time of concentration of each catchment during pre-development conditions is summarized in Appendix B. The time of concentration of each catchment was determined using the Velocity method. The velocity method assumes that the time of concentration is the sum of travel times for segments along the hydraulically most distant flow path. The segments used in the velocity method may be of three types: sheet flow

$T_s$ , shallow concentrated (overland) flow  $T_{sc}$ , and open channel flow  $T_c$ . The open channel flow has been modelled using the route Channel Command in OTTHYMO. The time to peak for the catchments analyzed during post-development conditions using the NASHYD command was taken as 10 minutes in keeping with the OSDG for minimum time of concentration.

#### 4.3.3.1. *Travel time for sheet flow*

Sheet flow is defined as flow over plane surfaces. Sheet flow usually occurs at the upper end of each individual catchment and typically occurs for no more than 30 metres before transitioning to shallow concentrated flow. The Manning's roughness coefficients used for sheet flow only apply for flow depth of less than 3 cm and vary from those used in shallow concentrated flow and open channel flow.

The travel time for sheet flow is calculated using the simplified Manning's Kinematic solution as follows:

$$T_s = \frac{0.091(nl)^{0.8}}{(P_2)^{0.5}S^{0.4}}$$

Where  $T_s$  = travel time, h

$n$  = Manning's roughness coefficient sheet flow

$l$  = sheet flow length,

$P_2$  = 2-year 24-hour rainfall, = 48 mm

$S$  = Slope of land surface m/m

The Manning's roughness coefficient for sheet flow includes the effects of roughness as well as the effects of raindrop impact, drag over the surface, obstacles such as litter and rocks and transportation of sediment.

The Manning's  $n$  for sheet flow ranges from 0.8 for Woods (with dense underbrush and no clearing of deadfall and other detritus) to 0.018 for bare hard packed earth. The Manning's  $n$  for grass ranges from 0.15 (short grass prairie or lawn grass with bare patches), 0.24 (dense prairie grasses (long stems grasses)) to 0.41 (Bermuda grass or dense lush lawn grass).

The ground surface conditions at about the location where the flow divide between subwatersheds crosses the site consists of dense un-mown vegetation (dense prairie grasses). Since the sheet flow occurs at the upper end of the catchment area, the sheet flow during pre-development conditions on site will occur through this portion of the site. As such a Manning's roughness coefficient of 0.24 corresponding to dense prairie grass cover was used for pre-development conditions for the site.



#### 4.3.3.2. *Travel time for shallow concentrated flow*

Shallow concentrated flow follows sheet flow and is expected to occur at depths of greater than 3 cm and less than 15 cm. The Manning's roughness coefficients for shallow concentrated or overland flow was obtained from Table 3-5 of the US EPA RM. The flow velocity used to calculate the time of travel for shallow concentrated flow was determined using Table 15-3 and Figure 15-4 of Chapter 15 of the USDA handbook (Included in Appendix B of this Report). Since the ground surface cover descriptions provided on Table 15-3 are agricultural in nature, they do not readily relate to the expected ground surface cover to be encountered in the proposed development. As such, the corresponding Manning's n value provided in Table 15-3 was used to relate the ground surface cover description used in Figure 15-4. From US EPA RM Table 3-5, when considering shallow concentrated flow or overland flow, a Manning's n of 0.075 is used for parks and lawns, 0.09 for dense grass and 0.12 for shrubs and bushes. A Manning's n of 0.202 is used for forest with heavy ground litter and hay meadows.

As previously discussed, it is expected that the majority of the shallow concentrated flow during pre-development conditions will occur through un-mown vegetation or pasture which corresponds to a Manning's n of 0.073. The flow velocity short grass pasture was obtained from Figure 15-4 using the slopes calculated for each catchment to obtain the flow velocity for shallow concentrated flow during pre-development conditions.

#### 4.3.3.3. *Travel time for open channel flow*

Open Channel flow was not considered in either pre- or post- development conditions

### 4.4. Manning Coefficients – Post Development

The Manning Roughness (n) Coefficients for overland flow selected for impervious site areas (MNI) was assumed to be 0.013 based on the CoFO Guidelines: Appendix 6-C Manning Coefficient values for street and gutter flow assuming weathered asphalt.

The Manning's roughness coefficient for pervious surfaces (MNP) was selected to be 0.25 based on sheet flow through good quality grass in the previous areas.

### 4.5. Catchment Areas

The catchment areas contributing runoff to the stormwater management works consist of onsite catchment areas. Due to the slope of the lands adjacent the site, there is no significant runoff contribution from adjacent properties onto or across the site. The catchment areas used

in the design for the proposed development are presented in the attached drawings 221099-PRE and 221099-POST.

#### 4.5.1. Delineation of Onsite Catchment Areas

The onsite catchment areas for pre-development conditions were delineated based on the topography obtained for the site area. In general the area of the site directing runoff to the Monahan Drain sub-catchment of the Jock River was considered as one catchment. The area of the site directing runoff to the Leamy Creek sub-catchment of the Jock River was divided between the area directing runoff to the ditch along Fallowfield Road and the area directing runoff to the ditch along Moodie Drive.

The catchment areas used in the analysis during post-development conditions for the design of the stormwater management facility are presented in the attached drawing 221099-POST – Post-Development Drainage Plan. These catchment areas have been delineated based on the proposed grading of the development and the proposed building layout.

## 5. RECEIVING WATER BODY – JOCK RIVER

As previously stated, the proposed development is within the Jock River watershed. A subwatershed report was generated for the Jock River in 2016. This report provides an assessment of the Jock River watershed as well as proposed actions which could be completed to preserve and improve the condition of the Jock River. The proposed development is within the lower urban reaches of the Jock River and has no significant forest cover and no wetland cover. The quality of the water in the Jock River ranges from good to Poor depending on specific location and adjacent land uses. In order to mitigate the effects of development and urbanization on the watershed, the Jock River report recommends that best practices for stormwater management including low impact development measures be incorporated within proposed development. In addition, tree planting to the greatest extent possible is encouraged.

Additional recommended actions such as maintaining setbacks to watercourses and wetlands as well as preservation of forests are not applicable to the site as these features are not present on the site.

## **6. PRE-DEVELOPMENT STORMWATER ANALYSIS**

### **6.1. On Site Pre-Development Catchments**

#### **6.1.1. Onsite Conditions**

As previously indicated, the property is generally rectangular in shape with an area missing from the northwest corner of the rectangle. Historical imagery available on the geoOttawa website indicates that the site was historically occupied by a tree nursery with greenhouses and a single family dwelling. These images show that the site was last used as nursery more than 15 years ago and that the greenhouses were demolished between 2019 and 2021. The existing dwelling was also removed from the site prior to 2025. The ground surface across the site has a general downward slope from about the center of the site to the west of about 2.5 percent and from the centre to the east of about 1.3 percent and to the north of about 2.1 percent. Current site drainage takes the form of sheet and shallow concentrated flow following the general slope of the site.

The vegetative communities on the east portion of the site and on the east half of the west portion of the site consist of over grown weeds and grasses. There is new growth forest along the western property line, with over grown brush between the forest and the over grown weeds and grasses.

#### **6.1.2. Onsite Delineation Catchments and Curve Numbers**

As previously indicated, the general flow direction during pre-development conditions is from the center to the west and east. The flow in the eastern catchment is further divided between the areas that direct runoff to Fallowfield Road and to Moodie Drive. As such, the onsite pre-development catchment areas were divided into 3 catchments. Based on the ground surface cover the Runoff Curve Numbers for the onsite pre-development conditions are as shown in Table 6-1 below:



Table 6-1: Pre-Development Runoff Curve Numbers

| Catchment                  | Surface                                       | Area (Ha) | CN | Weighted Avg. CN |
|----------------------------|-----------------------------------------------|-----------|----|------------------|
| Monahan Drain Subwatershed |                                               |           |    |                  |
| PRE-W<br>(2.072 ha)        | Woods Fair condition                          | 0.779     | 76 | 72.3             |
|                            | Brush, weeds and grass fair condition         | 1.273     | 70 |                  |
| Leamy Creek Subwatershed   |                                               |           |    |                  |
| PRE-E<br>(3.703 ha)        | Brush, weeds and grass                        | 3.414     | 70 | 71.0             |
|                            | Weeds and Grass/ open space in good condition | 0.130     | 74 |                  |
|                            | Gravel                                        | 0.011     | 89 |                  |
|                            | Impervious                                    | 0.148     | 98 |                  |
| PRE-N<br>(0.832 ha)        | Brush, weeds and grass                        | 0.684     | 70 | 71.0             |
|                            | Weeds and Grass/ open space in good condition | 0.131     | 74 |                  |
|                            | Impervious                                    | 0.0170    | 98 |                  |

## 6.2. Pre-Development Runoff

As previously indicated, the runoff criteria from a quantity control perspective were given as: post-development peak runoff rate for the 100 year design storm is to be equal to or less than pre-development peak runoff rate for the 2 year design storm of the same duration and stormwater discharge must be directed to a legal and sufficient outlet.

The pre-development peak runoff rate and runoff volume was calculated using the OTTHYMO model. The pre-development peak runoff rates for each design storm event were assessed for the entire site in order to assess the allowable post development runoff rates from the site. The pre-development runoff rate to the Monahan Drain subcatchment area was also assessed independent of the remainder of the site to determine the impact of the development to the adjacent property as runoff from the site directed to the Monahan Drain subcatchment flows across adjacent private property. Table 6-2 summarizes the pre-development peak runoff rate and runoff volumes calculated using the OTTHYMO model for the entire site. Appendix C contains pre-development OTTHYMO summary output data as well as the detailed output data for the last link in the model. The detailed output data for the last link provides a summary of the predevelopment outflow from the proposed.



Table 6-2: Pre-Development Peak Runoff from Entire Site

| Design Storm Event |                           | Pre-Development<br>Runoff Rate | Runoff Volume (1) |
|--------------------|---------------------------|--------------------------------|-------------------|
|                    |                           | (m <sup>3</sup> /s)            | (mm)              |
| Simulation 01.     | Chicago 2 yr 3 hr         | 0.052                          | 3.81              |
| Simulation 02.     | Chicago 2 yr 6 hr         | 0.063                          | 5.55              |
| Simulation 03.     | Chicago 5 yr 3 hr         | 0.116                          | 7.8               |
| Simulation 04.     | Chicago 5 yr 6 hr         | 0.136                          | 10.74             |
| Simulation 05.     | Chicago 100 yr 3 hr       | 0.382                          | 23.17             |
| Simulation 06.     | Chicago 100 yr 6 hr       | 0.434                          | 29.93             |
| Simulation 07      | 25mm 4 hour Chicago       | 0.016                          | 1.89              |
| Simulation 08      | August 4, 1988 Historical | 0.522                          | 28.79             |
| Simulation 09      | July 1, 1979 Historical   | 0.573                          | 31.04             |

Table 6-3 summarizes the pre-development peak runoff rate and runoff volumes calculated using the OTTHYMO model for the portion of the site directing runoff west towards the Monahan Drain subwatershed:

Table 6-3: Pre-Development Peak Runoff Contributing to Monahan Drain Subwatershed

| Design Storm Event |                           | Pre-Development<br>Runoff Rate | Runoff<br>Volume (1) | Runoff<br>Volume (2) |
|--------------------|---------------------------|--------------------------------|----------------------|----------------------|
|                    |                           | (m <sup>3</sup> /s)            | (mm)                 | (m <sup>3</sup> )    |
| Simulation 01.     | Chicago 2 yr 3 hr         | 0.018                          | 4.11                 | 85                   |
| Simulation 02.     | Chicago 2 yr 6 hr         | 0.022                          | 5.92                 | 123                  |
| Simulation 03.     | Chicago 5 yr 3 hr         | 0.039                          | 8.27                 | 171                  |
| Simulation 04.     | Chicago 5 yr 6 hr         | 0.046                          | 11.32                | 235                  |
| Simulation 05.     | Chicago 100 yr 3 hr       | 0.126                          | 24.1                 | 499                  |
| Simulation 06.     | Chicago 100 yr 6 hr       | 0.142                          | 31.02                | 643                  |
| Simulation 07      | 25mm 4 hour Chicago       | 0.006                          | 2.08                 | 43                   |
| Simulation 08      | August 4, 1988 Historical | 0.169                          | 29.85                | 618                  |
| Simulation 09      | July 1, 1979 Historical   | 0.186                          | 32.15                | 666                  |

(1) Runoff volume is calculated by OTTHYMO in terms of mm of depth.

(2) Runoff volume in cubic metres is calculated by multiplying the runoff volume depth by the area of the catchment area.



## 7. POST-DEVELOPMENT MODEL

### 7.1. Post-Development Catchment Areas

#### 7.1.1. Onsite Post-Development Catchment Areas

##### 7.1.1.1. *Post-development Conditions*

As previously indicated, the proposed development will consist of 5 Industrial Warehouse Buildings together with associated parking, roadway and truck turning areas. The proposed warehouses will be rectangular in shape and oriented in an east-west manner. Buildings A, B and C will be located on the East side of the development. Buildings D and E will be located on the west side of the development. Footprint areas of the buildings will range from approximately 3,689 square metres to 4,912 square metres. The majority of the units within the buildings will contain principal entrances with potential for office space as well as loading bays at-grade. End units offer additional building frontage but do not provide loading bay access.

Truck access is provided by the private approach from Moodie Drive in the southeast corner of the site. Loading bays are arranged between Buildings A and B, along the South side of Building C, and between Buildings D and E. Passenger vehicle parking is provided along the North side of Buildings A and D, between Buildings B and C and along the South side of Building E. Additional parking is provided along the ends of each building.

Storm runoff is directed by means of an onsite sewer system consisting of a series of roof drains, catch basins, manhole structures, subterranean storm chambers, and storm sewer pipes. Site grading is proposed such that storm runoff is directed away from each building to be intercepted by catch basins and directed toward the on-site stormwater management facility for temporary detention, filtration and release. Release of the storm runoff on the roof of each building will be controlled by roof drains, allowing for a temporary storage of the accumulated runoff atop each building.

The post-development catchment areas were delineated based on the proposed site grading. There are six areas around the perimeter of the proposed development that do not direct runoff to the proposed stormwater management facility along the east side of the site. Runoff from these six areas is either uncontrolled or is controlled by low impact design techniques only. These six areas include minimal impervious surface area and as such have been modeled using the NASHYD watershed command.

The remaining portion of the site contains the proposed buildings with associated parking the roadways and the truck turning and access areas. These post-development catchments were modeled using the STANDHYD due to the high percentage of impervious surface area in each catchment.

#### *7.1.1.2. Delineation of NASHYD Catchments*

As previously indicated, the six perimeter catchment areas consisting largely of pervious areas were accessed using the NASHYD watershed command. These catchments were delineated based on their discharge locations and method of stormwater control.

These catchments are further delineated into two subcategories; uncontrolled and controlled by Low Impact Development (LID) techniques.

These six catchments area as follows:

- C-L-A – The pervious area between Building A and the west property line. This area discharges to the roadside ditch along Fallowfield Road which will direct the runoff towards the Leamy Creek subwatershed. This area will be controlled by means of an enhanced grass swale.
- C-L-B – The pervious area between Building D and the north property line. This area discharges to an existing swale at the southwest corner of the site towards the Monahan Drain subwatershed along existing flow paths. This area will be controlled by means of an enhanced grass swale.
- C-L-C – The pervious area between the proposed development and the west property line as well as the south property line for about 140 m. This area discharges to an existing swale at the southwest corner of the site towards the Monahan Drain subwatershed along existing flow paths. This area will be controlled by means of an enhanced grass swale.
- C-L-D – The pervious area between the proposed development and the south property line. This area discharges to the roadside ditch along Moodie Drive. This area will be controlled by means of an enhanced grass swale. This swale is subdrained toward Moodie.
- C-U-A – The pervious area around the north, and east property lines. This area is graded toward the roadside ditches along Fallowfield and Moodie.
- C-U-B – The pervious area around the north, west and south property lines. This area is graded to the adjoining properties, discharging to an existing swale at the southwest corner of the site towards the Monahan Drain subwatershed along existing flow paths.

### 7.1.1.3. Delineation of STANDHYD Catchments

The remainder of the site consists of the impervious roof, roadway, access/turning areas and parking areas, the pervious landscaped areas adjacent the buildings not included in the previously listed catchments and the pervious area surrounding the proposed stormwater management facility. These catchment areas were modeled using the STANDHYD watershed command and are delineated into seven catchments on drawing 221099-Post. These delineations were made based on flow control and consist of the five rooftop storage areas and two catchment areas consisting of the remainder of the impervious area. These two areas were determined based on flow controls allowing placement of storm chambers to attenuate post-development runoff. Each of the roof areas use the prefix C-R and are assigned sequentially from northeast to southwest. Similarly the additional areas which mostly consist of parking areas use the prefix C-P. C-P-A consists of the east side of the development and release from C-P-A is directed offsite at a controlled rate by way of an orifice plate. C-P-B consists of the controlled area on the west side of the development. Release from C-P-B is to C-P-A and is controlled by an orifice plate.

The catchment areas used in the post-development analysis have the following properties. More details are provided in Appendix A.

Table 7-1: Post-Development Catchment Areas

| Catchment    | Total Area (ha) | Weighted Average CN | Approx. Equivalent Runoff Coef C | Initial Abstraction (mm) | Percent Impervious (%) | Average Slope Impervious (%) | Average Slope Pervious (%) |
|--------------|-----------------|---------------------|----------------------------------|--------------------------|------------------------|------------------------------|----------------------------|
| <b>C-L-A</b> | 0.094           | 61.0                | 0.25                             | 13.0                     | 0                      | N/A                          | N/A                        |
| <b>C-L-B</b> | 0.127           | 61.0                | 0.25                             | 13.0                     | 0                      | N/A                          | N/A                        |
| <b>C-L-C</b> | 0.224           | 61.0                | 0.25                             | 13.0                     | 0                      | N/A                          | N/A                        |
| <b>C-L-D</b> | 0.248           | 62.7                | 0.27                             | 12.1                     | 0                      | N/A                          | N/A                        |
| <b>C-U-A</b> | 0.131           | 61.6                | 0.26                             | 12.7                     | 2                      | N/A                          | N/A                        |
| <b>C-U-B</b> | 0.207           | 61.0                | 0.25                             | 13.0                     | 0                      | N/A                          | N/A                        |
| <b>C-R-A</b> | 0.415           | N/A                 | 0.90                             | N/A                      | 99                     | 1.0                          | 1.0                        |
| <b>C-R-B</b> | 0.491           | N/A                 | 0.90                             | N/A                      | 99                     | 1.0                          | 1.0                        |
| <b>C-R-C</b> | 0.409           | N/A                 | 0.90                             | N/A                      | 99                     | 1.0                          | 1.0                        |
| <b>C-R-D</b> | 0.369           | N/A                 | 0.90                             | N/A                      | 99                     | 1.0                          | 1.0                        |
| <b>C-R-E</b> | 0.369           | N/A                 | 0.90                             | N/A                      | 99                     | 1.0                          | 1.0                        |
| <b>C-P-A</b> | 2.214           | N/A                 | 0.74                             | N/A                      | 74                     | 3.0                          | 1.5                        |
| <b>C-P-B</b> | 1.306           | N/A                 | 0.88                             | N/A                      | 96                     | 3.0                          | 1.5                        |



#### 7.1.1.4. Comparison of Pre- to Post- Development Onsite Conditions

As previously indicated, the pre-development onsite catchments were divided based on the existing topography and receiving subwatershed. The above post-development catchments were combined into two post-development areas based on the receiving subwatersheds in order to directly compare the pre- and post- development catchments to illustrate the affect of the proposed development on the catchments. This comparison is provided in Table 7-2.

Table 7-2: Comparison of Pre- to Post-Development Catchments

| Catchment                                      | Total Area (ha) | Percent Impervious Area % | Weighted Average Curve Number CN | Approximate Equivalent Runoff Coefficient C |
|------------------------------------------------|-----------------|---------------------------|----------------------------------|---------------------------------------------|
| Area Discharging to Monahan Drain Subwatershed |                 |                           |                                  |                                             |
| Pre                                            | 2.072           | 0                         | 72.3                             | 0.3                                         |
| Post                                           | 0.347           | 0                         | 61.0                             | 0.25                                        |
| Area Discharging to Leamy Creek Subwatershed   |                 |                           |                                  |                                             |
| Pre                                            | 4.535           | 3.4                       | 71.0                             | 0.3                                         |
| Post                                           | 6.260           | 78.0                      | 91.3                             | 0.77                                        |

## 7.2. Stormwater Conveyance - Controlled Areas

### 7.2.1. Sheet Flow to Storm Swale

The runoff originating on the sidewalk, landscaped area, and parking / roadway east of Buildings A, B, and C will be conveyed by sheet flow to the curb along the east edge of the roadway. The finished grade elevation along the curb will be varied with longitudinal slopes of plus or minus 1 percent to form local high and low spots along the curb. A 0.5 m wide curb cut will be inserted at each low spot to outlet the runoff into the storm swale.

### 7.2.2. Roof Drainage

The runoff originating on the roof of each building will be discharged by means of a series of WATTS Accutrol Roof Drains (Product information is included in Appendix D) to storm leads which in turn will outlet to storm sewers conveying the runoff.

The storm leads conveying the roof runoff will be designed by the mechanical engineer. The roof will be fitted with scuppers along both the front and back of the building to ensure that the maximum ponding depth of 0.15 metres is not exceeded.

Roof areas are delineated into individual catchments representing their respective areas. Buildings A, B, and C (catchments C-R-A, C-R-B, C-R-C) are directed to the stormwater management facility within catchment C-P-A.

Buildings D and E (catchments C-R-D and C-R-E) are directed to the stormwater management facility within catchment C-P-B.

Roof drain leaders either connect to the storm sewers via lateral connections or directly to the storm chamber. Final connections are to be determined in conjunction with final architectural drawings of each building.

#### 7.2.3. Storm Chambers

NDS SC-34 and NDS SC-18 storm chambers or similar product (Product information is included in Appendix D) will be placed along the internal roadways within the development as shown on the servicing plan drawing 221099-SER to convey the runoff collected from the trench drains and roof discharge to the proposed stormwater storage swale along the east side of the site. The NDS SC-34 storm chambers have a bottom width of 1.52 m, and a height of 0.86 m. The NDS SC-18 storm chambers have a bottom width of 0.97 m, and a height of 0.46 m. The chambers will be placed level.

The storm chambers will outlet to the storm swale by means of 375 mm diameter storm sewers. The storm chambers are intended to provide additional stormwater storage at the same elevation as the storm swale. It is intended that the outlet restriction from the storm swale will result in backup of stormwater within the chambers. There will be no impervious liner below the chambers. This means that there will be some infiltration into the underlying soils below the chambers. Since the subsurface soils are expected to consist of glacial till of low permeability, the infiltration rate from the chambers to the soils was not considered to be of significant magnitude to include in the stormwater management calculations.

#### 7.2.4. Capacity of Storm Chambers

The capacity of the storm chambers to attenuate the flow demand determined for all design storm events was determined by iteration using OTTHYMO.

The stage-storage discharge worksheets presented in Appendix F indicates that the proposed storm chambers will be able to attenuate the flow demands during all design storm events.



### 7.3. Stormwater Conveyance – Low Impact Development Areas

#### 7.3.1. Rain Garden along West Property Line Adjacent to Fallowfield (C-L-A)

Catchment area C-L-A consists of the area west of the private approach off of Fallowfield. Runoff originating on this catchment will be directed to the rain garden which will be constructed along the length of the catchment. The rain garden is intended to collect the runoff and allow it to infiltrate into the underlying soils.

Discharge will be provided by infiltration to a subdrain within the east slope of the rain garden which will outlet to the roadside ditch along Fallowfield. There is not anticipated to be any significant flow within the rain garden as all of the runoff entering the bio swale is intended to infiltrate.

#### 7.3.2. Enhanced Swale along North Property Line (C-L-B)

Catchment area C-L-B consists of the area between the parking surface and C-U-A along the north property line adjacent to the neighbouring residential lots. Runoff originating on this catchment will be directed to an enhanced swale sloped from east to west at a grade of about 1%. To allow for extended detention of runoff, check dams with a height of 0.3 m will be provided at increments of 30 m. The base of the enhanced swale will be underlaid with an amended topsoil layer of about 0.15 m which is well suited for extended periods of wet soil conditions immediately following major storm events. Additionally, deeply rooted plantings adapted to both wet and dry conditions will be recommended.

The interior side wall of the enhanced swale will be provided by the back slope of the parking surface adjacent to catchment area C-L-B. The exterior side wall of the enhanced swale will be formed by imported soils consisting of sandy loam and/or sand. These imported soils will provide ample permeability to allow for infiltration through the earthen berm.

The enhanced swale has been constructed in imported fill material with the bottom above the existing ground surface. Stormwater from the enhanced swale will infiltrate into the imported material which has sufficient storage capacity to accommodate the volume of the infiltration above the existing ground surface. As such, this LID is not relying on the ability of the native soils to receive the runoff during or immediately following a storm event. Any seasonally high ground water in the native soils will not impede the function of the LID.





### 7.3.3. Enhanced Swale along West and South Property Lines (C-L-C)

Catchment area C-L-C consists of the area between the parking surface and C-U-A along the west property line and about the westernmost 140 m of the site along the south property line adjacent to the neighbouring agricultural lots. Runoff originating on this catchment will be directed to an L-shaped enhanced swale which slopes from north to south and from east to west and combining at the southwest corner of the site. Each section of the combined enhanced swale slopes at a grade of about 1%. To allow for extended detention of runoff, check dams with a height of 0.3 m will be provided at increments of 30 m. The base of the enhanced swale will be underlaid with an amended topsoil layer of about 0.15 m which is well suited for extended periods of wet soil conditions immediately following major storm events. Additionally, deeply rooted plantings adapted to both wet and dry conditions will be recommended.

The interior side wall of the enhanced swale will be provided by the back slope of the parking surface adjacent to catchment area C-L-B. The exterior side wall of the enhanced swale will be formed by imported soils consisting of sandy loam and/or sand. These imported soils will provide ample permeability to allow for infiltration through the earthen berm similarly to the enhanced swale previously discussed in section 7.3.2.

### 7.3.4. Linear Subdrained Rain Garden along South Property Line (C-L-D)

Catchment area C-L-D consists of the area between the parking surface and the south property line adjacent to the neighbouring agricultural and residential lots. Runoff originating on this catchment will be directed to a linear subdrained rain garden which slopes at a grade of about 0.3%. To allow for extended detention of runoff, spreaders with a height of 0.3 m will be provided at increments of 25 m. The base of the enhanced swale will be underlaid with an amended topsoil layer of about 0.3 m which is well suited for extended periods of wet soil conditions immediately following major storm events. Additionally, deeply rooted plantings adapted to both wet and dry conditions will be recommended.

Given that the proposed elevation for the linear subdrained rain garden provides little cover over the existing soils, infiltration is considered to be negligible into the underlying soils. As such, this area is subdrained to allow runoff to be conveyed to the roadside ditch along Moodie.



#### 7.4. Stormwater Conveyance - Uncontrolled Areas

##### 7.4.1. Uncontrolled Catchment along North and East of Site (C-U-A)

Runoff from catchment area C-U-A will be directed without restriction, channelization or control to the roadside ditch along the south side of Fallowfield Road and west side of Moodie Drive. The runoff from this catchment will originate on the landscaped surfaces along the perimeter of the development.

##### 7.4.2. Uncontrolled Catchment along West and South of Site (C-U-B)

Catchment area C-U-B consists of a strip along the west and south sides of the proposed development which ranges in width from about 3 m at the east end of the site to 12 m in the southwest corner of the site. This catchment also wraps along the north property line in the northwest corner of the site. The majority of this catchment consists of the backslope of earthen berms created to ensure attenuation of stormwater within the LID controlled catchments C-L-B, C-L-C, and C-L-D.

The backslope ranges from about a 2:1 slope near the northwest corner to a 6:1 slope near the southwest corner of the site. To stabilize the backslope riprap protection will be provided along the length of the entire catchment area.

### 8. Post-Development Quantity Control – Flow Rate

As previously indicated, the post-development peak runoff rate occurring during a 100 year design storm event is to be controlled to the runoff rate of the 2 year pre-development design storm of the same duration.

Due to the increased impervious area and decreased time of concentration resulting from the proposed development, the post-development unrestricted runoff rates from the site will be much greater than the pre-development runoff rates.

In order to meet the stormwater management criteria for the site with respect to runoff rate, temporary flow detention will be provided by means of directing the runoff from the controlled areas of the development (by the conveyance means indicated above) to the stormwater storage chambers and storage swale. The discharge rate from the stormwater storage areas will be restricted by means of an outlet control structures

In addition, low impact design techniques were incorporated into four of the six uncontrolled catchments to reduce the runoff from these uncontrolled areas.



## 8.1. Low Impact Development Areas

### 8.1.1. Catchment Area C-L-A

It is noted that area of the rain garden comprises the vast majority of the catchment area, and therefore the resultant storage requirement is far surpassed by the available storage. The rain garden will function as a large level area of green space within the development, suitable for various plantings. These plantings also provide a buffer between the development and the residential lots to the west.

As described in section 7.3.1, catchment area C-L-A consists of the vegetated area within the area between the private approach on Fallowfield and the west property line. A rain garden is provided to allow for attenuation of all runoff originating in this catchment area. The rain garden is rectangular in shape with rounded ends and having a width of about 4.5m and length of about 118m along the depth. The rain garden will have a 0.3 m thickness of amended topsoil followed by native soils. An infiltration rate of 0.075 m/hr was used for the amended topsoil and an infiltration rate of 0.0051 m/hr was used for the native underlying soils.

A subdrain will be installed within the side slope of the rain garden to provide an outlet to the on-site SWM network. The base of the rain garden and the subdrain will be at a grade of 0.3%. For the OTTHYMO simulations of the selected storm events, the subdrain was omitted as the rain garden is designed to have enough volume for all major storm events. The subdrain is only provided as a redundancy measure given the relatively low infiltration rate of the underlying soils. The subdrain allows a flow path to the municipal drain watershed directly without affecting the neighbouring properties.

The demand on the rain garden along the west side of building A for the various storm events is summarized in Table 8-1.

Table 8-1: Rain Garden - Catchment Area C-L-A

| Design Storm Event  | Peak Runoff Rate (m <sup>3</sup> /s) |       | Surface Storage Volume (m <sup>3</sup> ) |           |
|---------------------|--------------------------------------|-------|------------------------------------------|-----------|
|                     | In                                   | Out   | Required                                 | Available |
| Chicago 2 yr 3 hr   | <0.001                               | 0.000 | 0                                        | 253.6     |
| Chicago 2 yr 6 hr   | 0.001                                | 0.000 | 0                                        | 253.6     |
| Chicago 5 yr 3 hr   | 0.001                                | 0.000 | 0                                        | 253.6     |
| Chicago 5 yr 6 hr   | 0.001                                | 0.000 | 0                                        | 253.6     |
| Chicago 100 yr 3 hr | 0.005                                | 0.000 | 0                                        | 253.6     |
| Chicago 100 yr 6 hr | 0.006                                | 0.000 | 0                                        | 253.6     |
| 25mm 4 hour Chicago | <0.001                               | 0.000 | 0                                        | 253.6     |
| August 4, 1988 H    | 0.008                                | 0.000 | 0.85                                     | 253.6     |
| July 1, 1979 H      | 0.008                                | 0.000 | 1.14                                     | 253.6     |

#### 8.1.2. Catchment Area C-L-B

A physical description of catchment area C-L-B is provided in section 7.3.2. Runoff originating on this catchment will be directed by means of an enhanced grassed swale which will be constructed along the length of the catchment. The swale is intended to collect the runoff and allow it to infiltrate into the underlying soils. Overflow of the enhanced swale will consist of sheet flow to the neighbouring properties. The design of the enhanced swale restricts any peak overflow to significantly less than the pre-development flow to the adjacent properties. The enhanced swale has been designed with a maximum storage depth of about 0.5m with a check dam or overflow height of 0.30 m. The swale will have a bottom width of 0.3 metres and 3 horizontal to 1 vertical side slopes. The swale has a longitudinal slope of about 1 percent. The enhanced swale will be constructed with 0.3 m of amended topsoil below the bottom of the swale. The enhanced swale should be planted with vegetation that can withstand periods of flooding. The OTTHYMO Model Information and detailed output for the enhanced swale is included in Appendix G.

The demand on the enhanced swale within catchment area C-L-B for the various storm events is summarized in Table 8-2.

Table 8-2: Enhanced Swale – C-L-B

| Design Storm Event  | Peak Runoff Rate<br>(m <sup>3</sup> /s) |          |
|---------------------|-----------------------------------------|----------|
|                     | In                                      | Overflow |
| Chicago 2 yr 3 hr   | 0.001                                   | 0.000    |
| Chicago 2 yr 6 hr   | 0.001                                   | 0.000    |
| Chicago 5 yr 3 hr   | 0.002                                   | 0.000    |
| Chicago 5 yr 6 hr   | 0.002                                   | 0.000    |
| Chicago 100 yr 3 hr | 0.007                                   | 0.006    |
| Chicago 100 yr 6 hr | 0.008                                   | 0.006    |
| 25mm 4 hour Chicago | <0.001                                  | 0.000    |
| August 4, 1988 H    | 0.010                                   | 0.009    |
| July 1, 1979 H      | 0.010                                   | 0.009    |

#### 8.1.3. Catchment Area C-L-C

A physical description of catchment area C-L-C is provided in section 7.3.3. Runoff originating on this catchment will be directed by means of an enhanced grassed swale which will be constructed along the length of the catchment with a low point in the southwest corner of the site. The swale is intended to collect the runoff and allow it to infiltrate into the underlying soils. Overflow of the enhanced swale will consist of sheet flow to the neighbouring properties. The design of the enhanced swale restricts any peak overflow to significantly less than the pre-development flow to the adjacent properties. The enhanced swale has been designed with a maximum storage depth of about 0.5m with a check dam or overflow height of 0.30 m. The swale will have a bottom width of 0.3 metres and 3 horizontal to 1 vertical side slopes. The swale has a longitudinal slope of about 1 percent. The enhanced swale will be constructed with 0.3 m of amended topsoil below the bottom of the swale. The enhanced swale should be planted with vegetation that can withstand periods of flooding. The OTTHYMO Model Information and detailed output for the enhanced swale is included in Appendix G.

The demand on the enhanced swale within catchment area C-L-C for the various storm events is summarized in Table 8-3.

Table 8-3: Enhanced Swale – C-L-C

| Design Storm Event  | Peak Runoff Rate<br>(m <sup>3</sup> /s) |          |
|---------------------|-----------------------------------------|----------|
|                     | In                                      | Overflow |
| Chicago 2 yr 3 hr   | 0.001                                   | 0.000    |
| Chicago 2 yr 6 hr   | 0.001                                   | 0.000    |
| Chicago 5 yr 3 hr   | 0.003                                   | 0.000    |
| Chicago 5 yr 6 hr   | 0.004                                   | <0.001   |
| Chicago 100 yr 3 hr | 0.012                                   | 0.011    |
| Chicago 100 yr 6 hr | 0.014                                   | 0.013    |
| 25mm 4 hour Chicago | <0.001                                  | 0.000    |
| August 4, 1988 H    | 0.018                                   | 0.017    |
| July 1, 1979 H      | 0.018                                   | 0.017    |

#### 8.1.4. Catchment Area C-L-D

A physical description of catchment area C-L-D is provided in section 7.3.4. Runoff originating on this catchment will be directed by means of a linear series of subdrained rain gardens which will be constructed along the length of the catchment with a low point in the southeast corner of the site. The swale is intended to collect the runoff and allow it to infiltrate into the underlying soils. Given the low permeability of the underlying soils, additional drainage of this catchment has been provided by way of a 100 mm diameter perforated subdrain. Overflow of the enhanced swale will consist of sheet flow to the neighbouring properties. The design of the enhanced swale restricts any peak overflow to significantly less than the pre-development flow to the adjacent properties. The rain garden has been designed with a surface water storage depth of about 0.25m with a check dam or overflow height of 0.25 m. The series of rain gardens will have a bottom width of between 1 and 10 metres. The subdrain and the base of the rain gardens have a longitudinal slope of about 0.3 percent. The rain gardens will be constructed with 0.3 m of amended topsoil below the bottom of the swale. The enhanced swale should be planted with vegetation that can withstand periods of flooding. The OTTHYMO Model Information and detailed output for the enhanced swale is included in Appendix G.

The demand on the enhanced swale within catchment area C-L-D for the various storm events is summarized in Table 8-4.

Table 8-4: Linear Subdrained Rain Gardens - Catchment Area C-L-D

| Design Storm Event  | Peak Runoff Rate<br>(m <sup>3</sup> /s) |        | Surface<br>Storage Volume (m <sup>3</sup> ) |           |
|---------------------|-----------------------------------------|--------|---------------------------------------------|-----------|
|                     | In                                      | Out    | Required                                    | Available |
| Chicago 2 yr 3 hr   | 0.001                                   | <0.001 | 4                                           | 132       |
| Chicago 2 yr 6 hr   | 0.002                                   | <0.001 | 6                                           | 132       |
| Chicago 5 yr 3 hr   | 0.004                                   | <0.001 | 11                                          | 132       |
| Chicago 5 yr 6 hr   | 0.004                                   | <0.001 | 15                                          | 132       |
| Chicago 100 yr 3 hr | 0.014                                   | <0.001 | 40                                          | 132       |
| Chicago 100 yr 6 hr | 0.017                                   | <0.001 | 52                                          | 132       |
| 25mm 4 hour Chicago | <0.001                                  | <0.001 | 1                                           | 132       |
| August 4, 1988 H    | 0.021                                   | <0.001 | 49                                          | 132       |
| July 1, 1979 H      | 0.021                                   | <0.001 | 55                                          | 132       |

## 8.2. Roof Drainage

As previously indicated, the roofs of each building will be designed to provide stormwater storage. At the time of this report, detailed architectural drawings are not available. Each roof area was separated into ponding areas with each individual ponding area having a length of 30 metres and width of 15 metres. The slope of the ponding area along the length is shown as 1% and along the width is shown as 2%. This results in a difference of 0.15 metres between the outlet and the edge of the ponding area.

Each ponding area on each roof will be fitted with a WATT Accutrol Roof Drain with a single slot. The resulting stage storage design curve for each roof has been included in Appendix E. A Route Reservoir block was added to the OTTHYMO hydrologic model following each roof catchment. Each of the reservoir blocks was based on the respected stage storage curve for the building. The discharge from each reservoir block was added to the ground surface based catchments in the OTTHYMO hydrologic model. The OTTHYMO Model Information and detailed output for each roof is included in Appendix E.

The storage demand and release rate from each roof which drains directly to catchment area C-P-A for the various storm events is summarized in Table 8-5 below.



Table 8-5: Roof Storage and Release Rates – Release to C-P-A

| Building:          | Building A                           |       |          | Building B         |       |          | Building C         |       |          |
|--------------------|--------------------------------------|-------|----------|--------------------|-------|----------|--------------------|-------|----------|
| Total Drains:      | 10                                   |       |          | 11                 |       |          | 8                  |       |          |
| Available Storage: | 225 m <sup>3</sup>                   |       |          | 250 m <sup>3</sup> |       |          | 171 m <sup>3</sup> |       |          |
| Design Storm Event | Peak Runoff Rate (m <sup>3</sup> /s) |       |          |                    |       |          |                    |       |          |
|                    | In                                   | Out   | Overflow | In                 | Out   | Overflow | In                 | Out   | Overflow |
| Chi. 2 yr 3 hr     | 0.088                                | 0.003 | 0.000    | 0.104              | 0.003 | 0.000    | 0.086              | 0.003 | 0.000    |
| Chi. 2 yr 6 hr     | 0.088                                | 0.003 | 0.000    | 0.104              | 0.003 | 0.000    | 0.086              | 0.003 | 0.000    |
| Chi. 5 yr 3 hr     | 0.119                                | 0.003 | 0.000    | 0.141              | 0.003 | 0.000    | 0.118              | 0.003 | 0.000    |
| Chi. 5 yr 6 hr     | 0.119                                | 0.003 | 0.000    | 0.141              | 0.003 | 0.000    | 0.118              | 0.003 | 0.000    |
| Chi. 100 yr 3 hr   | 0.205                                | 0.003 | 0.018    | 0.243              | 0.003 | 0.034    | 0.202              | 0.003 | 0.088    |
| Chi. 100 yr 6 hr   | 0.205                                | 0.003 | 0.018    | 0.243              | 0.003 | 0.047    | 0.202              | 0.003 | 0.062    |
| 25mm 4 hr Chi.     | 0.057                                | 0.003 | 0.000    | 0.067              | 0.003 | 0.000    | 0.056              | 0.003 | 0.000    |
| Aug 4, 1988 H      | 0.176                                | 0.003 | 0.189    | 0.208              | 0.003 | 0.205    | 0.174              | 0.003 | 0.171    |
| Jul 1, 1979 H      | 0.123                                | 0.003 | 0.090    | 0.145              | 0.003 | 0.096    | 0.121              | 0.003 | 0.118    |

The storage demand and release rate from each roof which drains directly to catchment area C-P-B for the various storm events is summarized in Table 8-6 below.

Table 8-6: Roof Storage and Release Rates – Release to C-P-B

| Building:          | Building D                           |       |          | Building E         |       |          |
|--------------------|--------------------------------------|-------|----------|--------------------|-------|----------|
| Total Drains:      | 8                                    |       |          | 8                  |       |          |
| Available Storage: | 171 m <sup>3</sup>                   |       |          | 171 m <sup>3</sup> |       |          |
| Design Storm Event | Peak Runoff Rate (m <sup>3</sup> /s) |       |          |                    |       |          |
|                    | In                                   | Out   | Overflow | In                 | Out   | Overflow |
| Chi. 2 yr 3 hr     | 0.078                                | 0.003 | 0.000    | 0.078              | 0.003 | 0.000    |
| Chi. 2 yr 6 hr     | 0.078                                | 0.003 | 0.000    | 0.078              | 0.003 | 0.000    |
| Chi. 5 yr 3 hr     | 0.106                                | 0.003 | 0.000    | 0.106              | 0.003 | 0.000    |
| Chi. 5 yr 6 hr     | 0.106                                | 0.003 | 0.000    | 0.106              | 0.003 | 0.000    |
| Chi. 100 yr 3 hr   | 0.182                                | 0.003 | 0.026    | 0.182              | 0.003 | 0.026    |
| Chi. 100 yr 6 hr   | 0.182                                | 0.003 | 0.053    | 0.182              | 0.003 | 0.053    |
| 25mm 4 hr Chi.     | 0.051                                | 0.003 | 0.000    | 0.051              | 0.003 | 0.000    |
| Aug 4, 1988 H      | 0.157                                | 0.003 | 0.155    | 0.157              | 0.003 | 0.155    |
| Jul 1, 1979 H      | 0.109                                | 0.003 | 0.111    | 0.109              | 0.003 | 0.111    |



### 8.3. Stormwater Storage Swale and Storm Chambers

#### 8.3.1. Storm Chambers

As previously indicated, NDS SC-34 and NDS SC-18 storm chambers will be installed below the internal circulation roadways within the proposed development as shown on drawing 221099-SER. The storm chambers will discharge into the storage swale by means of an onsite storm sewer network. There will be no outlet restriction on the storm chambers. Details on the onsite storm sewer network are found in the previously referenced servicing drawings as well as the *Servicing Feasibility Report* which has been submitted concurrently with this report.

From section 4.4.2 of the CVC LID Guide which discusses best management practices for low impact development, the depth of the stone layer below the storage chambers is dependent on the native soil infiltration rate, porosity (void space ratio) of the gravel storage layer media (i.e., aggregate material used in the stone reservoir) and the targeted time period to achieve complete drainage between storm events. The maximum allowable depth of stone below the chambers is given as:

$$d_{r \max} = i * t_s / V_r$$

where:  $d_{r \max}$  = Maximum stone depth (mm)  
 $i$  = Infiltration rate for native soils (mm/hr) = 3.6 mm/hr  
 $V_r$  = Void space ratio for aggregate used = 0.4  
 $t_s$  = Time to drain (design for 48 hour time to drain is recommended)  
 $d_{r \max} = 432 \text{ mm}$

The initial design was completed using an estimated infiltration rate corresponding to 3.6 mm/hr. As discussed in Section 3.2 above, permeability test results indicate that the actual infiltration rate is 12 mm/hr. The design calculation for infiltration was not revised in order to provide a conservative calculation and add a factor of safety to the design.

The storm chambers have been designed as follows:

- The chambers will be installed flat.
- The NDS SC-18 tanks are to be constructed on a minimum 150mm of clear crushed stone below the modules.
- The NDS SC-34 tanks are to be constructed on a minimum 228mm of clear crushed stone below the modules.

- The clear stone will be installed with a constant bottom elevation below each set of chambers. Clear stone is also to be used to backfill the tanks to a minimum of 150mm of cover over the tanks.
- The clear crushed stone shall be comprised of  $\frac{3}{4}$ "-2" washed angular crushed stone conforming to AASHTO #3 or #4.
- The clear stone has an assumed void ratio of 0.4, which is the industry standard
- The storm chambers shall be installed per NDS Design Worx installation guidelines and specifications.
- Discharge from the storm chambers will be controlled by the outlet controls from the storm water storage swale and within CB-64 during design storm events.

### 8.3.2. Stormwater Storage Swale

The stormwater storage swale has been designed as follows:

- The bottom of the storage swale has an average length of about 133 m and a width of about 11.6 m. The bottom slopes downward from an elevation of 115.80 m at the south end of the swale to 115.70 m at the north end of the swale.
- The storm sewers will discharge into the storage swale at the southwest and northwest corners.
- The outlet from the swale will be at the northeast corner of the swale.
- A 0.6 m high wall consisting of a row of precast concrete blocks having nominal dimensions of 0.6 m x 0.6 m x 1.2 m will be extended out from the north end of the swale midway between the stormwater inlet at the northwest corner and the stormwater outlet. The wall will have length of 9.6 m and will prevent direct flow from the northwest inlet to the outlet of the swale during storm events of less than or equal to a 2 year storm event.
- The storage swale has been constructed with a maximum depth before overflow of 1.0 metres and side slopes of about 3 horizontal to 1 vertical.
- Discharge from the swale will be controlled by an outlet structure at the north east corner of the site. Details of the outlet structure are provided in section 8.3.3.1 of this report.
- Overflow from the storage swale will be over the east side of the swale and will be directed to the roadside ditch along the west side of Moodie Drive.
- The topsoil should be removed from below the footprint of the proposed storage swale and stockpiled.
- The bottom of the storage swale should be further excavated as required to a subgrade level 0.45 m below the bottom of the swale.
- The subgrade surface should be scarified or ripped using the teeth of an excavator following removal of the topsoil.



- The storage swale bottom soil structure should consist of a layer of 150 mm thickness of 20mm clear stone placed on the subgrade materials topped with a 300 mm thickness of amended existing site topsoil.
- The existing site topsoil can be stripped and stock piled prior to amending. The site topsoil should be amended by mixing 1 part amendment material with 3 parts by volume of site topsoil. The amendment material shall consist of organic matter primarily leaf, yard and bark waste compost of 20 – 30% by dry weight as determined by loss-on-ignition. No uncomposted manure should be used.
- The swale shall be seeded with deep rooted grasses and planted with vegetation that can tolerate both wet and dry soil conditions.
- Discharge from the swale below an elevation of 115.80 metres is by infiltration only.

The physical characteristics of the stormwater storage swale and outlet control will result in the storage - discharge relationship as indicated in the calculation sheets provided in Appendix F.

### 8.3.3. Outlet Control and Allowable Release Rate

#### 8.3.3.1. Release from C-P-A

The flow rate from the storage swale will be restricted such that the maximum runoff rate from the proposed development during post-development conditions for a 100 year design storm will be less than or equal to the pre-development flow rate from the proposed development area during a 2 year design storm of the same duration. The release rate from the stormwater storage swale will be controlled by means of an outlet control structure. The maximum release rate from the storage swale that will allow conformance to this criterion corresponds to the allowable release rate from the controlled catchment areas of the development.

The outlet control structure will consist of a 375 mm diameter double wall HDPE (R320) outlet culvert complete with a concrete headwall placed at the northeast corner of the storage swale. The culvert will have an inlet invert of 115.70 m. The culvert will be fitted with a cap across the inlet of the culvert through which one orifice will be cut. The orifice will have an invert of 115.80 m and a diameter of 120 mm. A grate will be fitted over the inlet of the outlet pipe to protect the orifice from debris.

The discharge rates through the orifices were calculated using the equation (Vatankhah, A. R., (February 2018) Discussion of “Flow through Partially Submerged Orifice” by James C.Y. GUo and Ryan P. Stitt Journal of Irrigation and Drainage Engineering):



$$Q = \frac{0.72\sqrt{2gD^5}}{[(C_w\eta^{1.98})^{-2.14} + (C_d\eta^{0.52})^{-2.14}]^{0.4673}}$$

This is a calculation that unifies flow through a partially full orifice as weir flow with flow through a fully submerged orifice as orifice flow.

Where      Q = flow (cubic meters per second)  
               C<sub>d</sub> = Coefficient of Discharge for a sharp orifice = 0.60  
               C<sub>w</sub> = Coefficient of Discharge for a sharp crested weir = 0.62  
               D = Orifice diameter (m)  
               η = y/D  
               Y = water-head relative to orifice invert (m)  
               g = acceleration from gravity (9.81 m/s<sup>2</sup>)

The size and elevation of the orifice was determined by iteration. In a relatively large storm water storage facility, it is generally assumed that the hydraulic gradient is a function of the water surface elevation only. Since the discharge rate Q is a function of the depth of water or head relative to the orifice invert, the discharge rate will be directly related to the water surface elevation relative to the orifice invert. The volume of the storage swale is also directly related to the depth of water or water surface elevation. Since the discharge rate and storage swale volume are both related, a Discharge vs Storage curve can be developed. A discharge storage curve was developed in excel and was then programmed into the Route Reservoir block within the OTTHYMO hydrologic model. This process was repeated by varying the orifice size and/or invert elevation until the model produced post-development peak flow rates that met the stormwater management criteria.

The stormwater storage swale and outlet structure are modeled in the OTTHYMO program using a Route Reservoir Hydrograph command. The detailed worksheet has been included in Appendix F. Discharge from the Outlet control structure is directed to the roadside ditch along the west side of Moodie Drive.

#### 8.3.3.2. Release from C-P-B

As previously discussed, the controlled areas of the site were split into two distinct areas, each with a control structure to mitigate post-development runoff. This delineation of catchments allows for chamber groups D, E and F to be placed with base elevations higher than those of chamber groups A, B and C without sacrificing significant storage volumes. The release from C-P-B will be controlled by an orifice plate within CB-64 and set at an

invert of 116.09 m and having a diameter of 150 mm. These values and the associated release was determined by iteration using the methods described in section 8.3.3.1 above.

#### 8.4. Mitigated or Controlled Post Development Runoff

The mitigated post-development runoff rate from the proposed development is calculated using the OTTHYMO model after the insertion of the Route Reservoir Hydrograph command to control the runoff rate from the controlled areas of the site. The runoff rates for each design storm event simulation are summarized in Table 8-7. This table also provides a comparison to the pre-development runoff rates.

Table 8-7: Mitigated Post-Development Runoff Rates and Runoff Volumes

| Design Storm Event                |                     | Post-Development<br>Runoff Rate<br>(m <sup>3</sup> /s) | Pre-Development<br>Runoff Rate<br>(m <sup>3</sup> /s) | Post < Pre |
|-----------------------------------|---------------------|--------------------------------------------------------|-------------------------------------------------------|------------|
| Quantity Storm Events             |                     |                                                        |                                                       |            |
| Sim 1                             | Chicago 2 yr 3 hr   | 0.016                                                  | 0.052                                                 | Yes        |
| Sim 2                             | Chicago 2 yr 6 hr   | 0.018                                                  | 0.063                                                 | Yes        |
| Sim 3                             | Chicago 5 yr 3 hr   | 0.019                                                  | 0.116                                                 | Yes        |
| Sim 4                             | Chicago 5 yr 6 hr   | 0.020                                                  | 0.136                                                 | Yes        |
| Sim 5                             | Chicago 100 yr 3 hr | 0.051                                                  | 0.382                                                 | Yes        |
| Sim 6                             | Chicago 100 yr 6 hr | 0.057                                                  | 0.434                                                 | Yes        |
| Extreme Event – Historical Storms |                     |                                                        |                                                       |            |
| Sim 8                             | August 4, 1988 H    | 0.077                                                  | 0.522                                                 | Yes        |
| Sim 9                             | July 1, 1979 H      | 0.076                                                  | 0.573                                                 | Yes        |
| Quality Storm Event               |                     |                                                        |                                                       |            |
| Sim 7                             | 25mm 4 hour Chicago | 0.014                                                  | 0.016                                                 | Yes        |

A review of the above table indicates that the proposed stormwater storage swale and outlet control configuration effectively mitigates the post-development runoff rate to less than that occurring during pre-development conditions for all of the quantity storm events as well as the historical storm events. In addition, the runoff rate from the post-development 100 year 3 hour Chicago design storm is less than the runoff rate from the pre-development 2 year 3 hour Chicago design storm. The runoff rate from post-development 100 year 6 hour Chicago design storm is less than the runoff rate from the pre-development 2 year 6 hour Chicago design storm.

The stormwater discharge from the stormwater management facility is directed to the roadside ditch along Moodie Drive. This ditch is part of the City of Ottawa stormwater

management infrastructure and is the legal outlet for the runoff from the site. Since the discharge rate has been limited such that the post-development 100 year release rates are less than the 2 year pre-development release rates, the proposed development will result in significant decrease in the demand on the capacity of the roadside ditch. As such, the reduced demand ensures sufficient capacity for the post-development conditions.

Appendix H contains post-development OTTHYMO summary output data. Also included in Appendix H is the detailed output data for the last link in the model. The detailed output data for the last link provides a summary of the post-development outflow from the proposed development.

### 8.5. Storage Requirements

The OTTHYMO model Route Reservoir Report is provided in Appendix F. The storage requirements for the various storm events, obtained from the from the route reservoir block which models the stormwater storage swale, are shown in the following Table 8-8.

Table 8-8: Storage Requirements

| Design Storm Event |                     | Max.<br>Storage | Max.<br>Ponding<br>Elev. | Storage<br>Drawdown<br>Time | Peak<br>Discharge<br>Rate |
|--------------------|---------------------|-----------------|--------------------------|-----------------------------|---------------------------|
|                    |                     | m <sup>3</sup>  | m                        | hrs                         | m <sup>3</sup> /s         |
| Sim. 1             | Chicago 2 yr 3 hr   | 992             | 116.14                   | 22                          | 0.016                     |
| Sim. 2             | Chicago 2 yr 6 hr   | 1158            | 116.19                   | 29                          | 0.018                     |
| Sim. 3             | Chicago 5 yr 3 hr   | 1291            | 116.24                   | 31                          | 0.019                     |
| Sim. 4             | Chicago 5 yr 6 hr   | 1504            | 116.31                   | 34                          | 0.021                     |
| Sim. 5             | Chicago 100 yr 3 hr | 2366            | 116.60                   | 45                          | 0.026                     |
| Sim. 6             | Chicago 100 yr 6 hr | 2742            | 116.72                   | 48                          | 0.029                     |

The invert of the orifice in the outlet pipe from the storage swale has been set at an elevation of 115.80 meters resulting in a storage volume of 72 cubic metres below the outlet.

The maximum storage requirement of 2742 cubic metres occurs during the 100 yr 6 hr Chicago storm event. The minimum modeled storage requirement is 817 cubic meters during a 25 mm 4 hr Chicago storm. Since the maximum storage requirement is less than the maximum available storage volume there is sufficient storage volume available within the proposed storage swale and storm chambers.

## 8.6. Quantity Control – Additional Criteria

The stormwater management criteria from a quantity control perspective also included the following criteria: Onsite stormwater storage and flow shall be controlled as to not affect lands adjacent the development site; Runoff from impervious surfaces must not be directed onto neighbouring properties; and Stormwater Discharge must outlet to a legal and sufficient outlet.

As previously indicated, the pre-development onsite catchments were divided based on the existing topography and receiving subwatershed. As discussed in section 6.2, the pre-development flow was divided between catchment areas directing runoff to the Monahan Drain Subwatershed and the Leamy Creek Subwatershed. Runoff directed to the Monahan Drain Subwatershed flows from the site to adjacent private property.

The runoff rates, for all the post-development catchments contributing runoff towards the Monahan Drain Catchment were also calculated independent from the post-development rates for the entire site. The flow from these catchments consisting of C-L-B, C-U-B and C-L-C is the stormwater runoff which potentially flows to neighbouring properties. In order to meet the additional criteria, the catchments cannot contain any impervious area and cannot discharge any concentrated flow. In addition, the post-development flow from these catchments must be less than the pre-development flow in terms of both rate and volume.

As discussed in section 8.1 above, catchments C-L-B, C-U-B and C-L-C do not contain any impervious area and there is no concentrated discharge point from any of these three catchments. Table 7-2 above compared the pre- and post- development catchments contributing runoff to the respective subwatersheds based on catchment area and runoff coefficient. From this table, it can be seen that the runoff coefficient during post-development conditions will be the same or less than the pre-development conditions and that the total contributing area to the Monahan Drain Catchment is much less during post-development conditions. The post-development flows from these contributing catchment areas are summarized in Table 8-8 and are compared to the predevelopment flows.

Table 8-9: Comparison of Post-Development flows to Pre-Development flows to the Monahan Drain Subwatershed

| Design Storm Event        | Pre-Development Runoff |                   | Post-Development Runoff |                   |
|---------------------------|------------------------|-------------------|-------------------------|-------------------|
|                           | Rate                   | Volume            | Rate                    | Volume            |
|                           | (m <sup>3</sup> /s)    | (m <sup>3</sup> ) | (m <sup>3</sup> /s)     | (m <sup>3</sup> ) |
| Chicago 2 yr 3 hr         | 0.018                  | 85                | 0.001                   | 5                 |
| Chicago 2 yr 6 hr         | 0.022                  | 123               | 0.002                   | 7                 |
| Chicago 5 yr 3 hr         | 0.039                  | 171               | 0.003                   | 11                |
| Chicago 5 yr 6 hr         | 0.046                  | 235               | 0.004                   | 15                |
| Chicago 100 yr 3 hr       | 0.126                  | 499               | 0.026                   | 64                |
| Chicago 100 yr 6 hr       | 0.142                  | 643               | 0.030                   | 83                |
| 25mm 4 hour Chicago       | 0.006                  | 43                | <0.001                  | 2                 |
| August 4, 1988 Historical | 0.169                  | 618               | 0.044                   | 81                |
| July 1, 1979 Historical   | 0.186                  | 666               | 0.044                   | 99                |

A review of the above table indicates that the post-development runoff will be less than the pre-development runoff in term of both rate and volume for all storm events. As such, the proposed development will have no negative impact on the neighbouring properties from a stormwater management perspective and the proposed development will satisfy the stormwater management criteria.

## 9. Quality Control

As previously stated, an enhanced level of treatment is required for the runoff from the site. An enhanced level of treatment corresponds to 80 percent total suspended solids removal. The recommended strategy in the MOE Manual for stormwater management quality control is to provide an integrated treatment train approach. In general, best management practices for stormwater management quality control are divided into three categories: source control or lot level control, conveyance control and end-of-pipe control. A treatment train approach consists of a combination of these practices..

### 9.1. Source Control

The primary source of total suspended solids and associated runoff pollution under post-development conditions is considered to be the areas of a site subject to vehicle traffic. At the proposed development, this consists of the parking areas, roadways and truck access areas. The vegetated landscaped surfaces and building roofs are typically not considered to be significant



sources of suspended solids following the completion of the development and establishment of the vegetation in landscaped areas.

The application of de-icing chemicals including salts and sand can be reduced with a best management plan for the application of these products. BMPs with respect to de-icing chemicals include such measures as timing of application, targeted application, and clearing of snow cover before application. The use of coarser particles and clean sand for de-icing facilitates rapid sedimentation of the suspended solids originating from the de-icing.

## 9.2. Conveyance Control

### 9.2.1. Conveyance to the Stormwater Storage Swale

#### 9.2.1.1. Storm Sewer

The proposed parking areas, roadways, and truck access areas are within the controlled area of the site. In general, runoff generated from these areas will be collected by catchbasins. There will be settlement of coarse suspended solids within the catch basin sumps. There will be little additional benefit in terms of conveyance control from the storm sewers.

#### 9.2.1.2. Storage Chambers

The underground storage chambers are open bottomed and set on clear stone. The full flow velocity in the storm chambers is 0.4 m/s. This low velocity will result in some settlement of suspended solids within the clear stone. Guidance with respect to the design of the Chambers is provided in the CVC LID Guide section 4.4. It is recommended that these chambers should be used for runoff from low traffic roads or parking areas and not for pollution hot spots (areas such as vehicle fuelling, servicing or demolitions areas or storage or handling of hazardous materials). This site consists of a parking and truck access area and is not a pollution hot spot, it is appropriate to use the chambers at this location. Pretreatment for the chambers will take the form of sedimentation in the sumps of the catch basins and within sediment traps at each inlet into the chambers.

## 9.3. End-of-pipe Control

Final Treatment and effluent polishing for the runoff from the impervious areas of the site will be provided by Stormceptor OSR hydrodynamic separators followed by settlement and additional vegetative filtration within the stormwater storage swale.

### 9.3.1. Hydrodynamic Oil Grit Separator

Treatment consisting of sediment and hydrocarbon removal for the runoff upstream of the storage swale will be provided by 4 Imbrium Stormceptor OSR hydrodynamic separators. The Stormceptor units will be installed in storm maintenance holes between the storage chambers and the swale. These Stormceptor units result in a treatment level of greater than 80% predicted net annual total suspended solids removal efficiency when considering the New Jersey particle size distribution. However the treatment level decreases to about 60% when the Environmental Technology Verification particle size distribution is used. The Stormceptor units are to be installed in accordance with the manufacturer's specifications and guidelines. The Stormceptor product information is included in Appendix D. The Stormceptor units will remove a significant portion of the silt and sand sized particles from the runoff prior to it entering the stormwater storage swale significantly reducing maintenance requirements in the storage swale.

### 9.3.2. Effluent Polishing – Vegetated Stormwater Storage Swale

A Research paper completed by University of Guelph School of Engineering (Authors Dr. Ramesh P Rudra Ph.D., Dr. Hugh R Whiteley Ph.D., Dr. William T Dickinson Ph.D.) *Sediment Removal Efficiency of Vegetative Filter Strips* indicates that vegetative filters can partially remove sediments and pollutants attached to sediment particles in runoff. Field experiments on vegetative filter strips showed average sediment removal varying from 50 to 98% as flow path length increases from 2.5 to 10 metres. The research indicates that almost all particles larger than 40 microns in diameter are captured within the first five meters of a filter strip provided the flow velocity is limited to less than 0.5 m/s during the quality control storm event. About 50% of the sediments are removed within the first 2.5 metres of travel over the vegetative filter flow path. An additional 25% to 45% of sediments are removed within the next 2.5 m of the flow path depending on the flow rate and velocity. The removal efficiency of the vegetative filtration does not significantly increase with a flow path length beyond 10 m. This research is in keeping with the discussion in section 4.6 of the CVC LID Guide.

Stormwater Runoff will enter the stormwater storage swale from storm sewers following the initial treatment by the Stormceptor units as shown on drawing 221099-SER. Additionally some runoff will be directed to the swale through the curb cuts along the east side of parking surface. For these small areas it is considered that the effluent polishing itself will be sufficient to treat this runoff and maintain 80% TSS removal for the entire site.



The length of flow path from the southwest corner of the swale to the outlet of the swale at the northeast corner is approximately 130 metres. The 0.6 m high concrete block wall will force a minimum length of flow path of 20 metres for runoff entering the northwest corner of the pond. The stormwater storage swale has been designed to promote a dense growth of semi-emergent vegetation. This vegetation will provide effective vegetative filtration and removal of sediments.

#### 9.4. Quality Control Summary

Quality control for the site is accomplished through an integrated treatment train approach. It is understood that a Stormceptor unit installed directly downstream of impervious areas such as the parking surface on this site is not capable of achieving 80% TSS removal. By combining the Stormceptor with both source control and end-of-pipe control practices (effluent polishing within the vegetated stormwater storage swale) it is expected that the site as a whole will achieve 80% TSS removal. Additionally, by capturing coarse sediment within sediment traps and catchbasin sumps, the maintenance requirements for the Stormceptor units will be significantly reduced. The Stormceptor units will in turn reduce the need for filtration within the stormwater storage swale and by extension reduce the need for maintenance within the storage swale.

### 10. Operation and Maintenance

The owner or designated Property Management Company is responsible for inspections and maintenance of the stormwater management facility. Records of inspections and maintenance should be kept for each visit.

#### 10.1. Enhanced Grassed Swales

The grassed swales for the development will require occasional maintenance. Periodic grass trimming along the drainage swales and ditches represents the bulk of the maintenance required.

Should excavation be required during maintenance, re-vegetation of disturbed areas should be completed after maintenance operations have been completed.

#### 10.2. Rain Gardens and Stormwater Storage Swale

The stormwater management swale should be inspected on a bi-weekly basis and after any rain fall event after construction until vegetation is well established. Once the vegetation is well established and during the first year of operation, the stormwater management swale should



be visually inspected on a bi-monthly basis and following significant storm event. For inspection purposes, a rain fall event of more than 25 mm in 4 hours would be considered to be a significant event.

Cut the vegetation within the stormwater storage swale to a height of 20 cm twice during the first growing season and once early in the second growing season. Hand remove pockets of aggressive weeds during the establishment period. The specified native seed mixes are intended to grow without maintenance following their establishment in order to provide wildlife habitat.

If patches of weeds occur following the establishment of the seed mixture, the patch could be mechanically removed by excavator. The topsoil removed should be replaced with an amended topsoil mix and the area should be reseeded.

Removal of accumulated sediment from the stormwater management swale should be conducted when the accumulation of the sediment begins to significantly affect the quality of the vegetation growth within the storage swale and/or the drainage patterns along the bottom. If the drawdown time becomes significantly extended, the topsoil layer should be tilled or cultivated to reduce the compaction. Additional amending material can also be added at that time. Following tilling or cultivation, the bottom should be reseeded with the specified seed mixtures.

### 10.3. Storm sewers and Outlet Pipe

The control device for the site is a 375mm diameter outlet pipe. The outlet pipe should be inspected on a semi-annual basis and following major storm events. Any blockages, trash or debris should be removed. If the stored water does not recede in a normal manner the outlet pipe and MH-STM – (63) should be inspected and cleaned.

### 10.4. Catch basins and Maintenance Holes

The catch basins and maintenance holes should be cleaned with a hydrovac excavation truck following completion of construction, paving of the asphaltic concrete surface and establishment of adequate grass cover on the landscaped areas.

Following the initial cleaning the catch basins and maintenance holes should be inspected on a semi-annual basis and following major storm events. Any blockages, trash or debris should be removed. Once the sediment accumulation in the catch basins and manhole has reached a level



equal to 0.15 metres below the outlet invert of the structure, the sediment should be removed by hydro excavation.

#### 10.5. Storm Chambers

The Storm Chambers can be inspected and maintained through the observation ports. A camera with a light and/or a long measuring stick can be used to measure the accumulation of sediment within the chambers. The Storm Chambers should be serviced once sediment build-up exceeds 3 inches from the bottom.

The Storm Chambers should be cleaned with a Hydrovac excavation truck following completion of construction, paving of the asphaltic concrete surface and establishment of adequate grass cover on the landscaped areas. When the sediment level accumulates to a level at which maintenance is required, the sediment can be removed using a Hydrovac excavation truck.

New installations should be inspected quarterly and after each large storm event to see how it performs. It is recommended that a logbook be maintained showing the depth of water in the Storm Chambers at each observation point. This will help determine the rate at which the Storm Chamber system dewateres after runoff producing storm events.

Once the performance characteristics of the Storm Chamber have been verified, the monitoring schedule can be reduced, unless the performance data suggests that a more frequent schedule is required.

#### 10.6. Hydrodynamic Oil Grit Separator

The Imbrium Stormceptor OSR hydrodynamic separator is to be maintained in accordance with manufactures recommendations and guidelines as provided in the owner's manual. In addition the followings maintenance practice should be followed:

- Inspect every 6 months for the first year to determine the oil and sediment accumulation rate. In subsequent years, inspections are based on first-year observations or local requirements
- Inspect immediately after an oil, fuel or chemical spill. A licensed waste management company should remove oil and sediment and dispose responsibly.
- Sediment removal to be completed with a vacuum truck.



## **11. EROSION AND SEDIMENT CONTROL**

The owner (and/or contractor) agrees to prepare and implement an erosion and sediment control plan at least equal to the stated minimum requirements and to the satisfaction of the City of Ottawa, appropriate to the site conditions, prior to undertaking any site alterations (filling, grading, removal of vegetation, etc.) and during all phases of site preparation and construction in accordance with the current best management practices for erosion and sediment control. It is considered to be the owners and/or contractors responsibility to ensure that the erosion control measures are implemented and maintained.

In order to limit the amount of sediment carried in stormwater runoff from the site during construction, it is recommended to install a silt fence along the inside of the front property line of the site, as shown in Kollaard Associates Inc. Drawing #221099-ESC Erosion & Sediment Control Plan. The silt fence may be polypropylene, nylon, and polyester or ethylene yarn.

Additionally, it is recommended that erosion and sediment control measures are implemented to protect the stormchambers between installation and final paving of the parking surface. Specifics relating to this will need to be determined in conjunction with the engineer based on the schedule of construction activities. Measures such as additional silt fencing within the construction zone or coir logs or straw bales are examples of potential options.

If a standard filter fabric is used, it must be backed by a wire fence supported on posts not over 2.0 m apart. Extra strength filter fabric may be used without a wire fence backing if posts are not over 1.0 m apart. Fabric joints should be lapped at least 150 mm (6") and stapled. The bottom edge of the filter fabric should be anchored in a 300 mm (1 ft) deep trench, to prevent flow under the fence. Sections of fence should be cleaned, if blocked with sediment and replaced if torn.

Filter socks should be installed across the proposed catch basin, maintenance hole and inspection port lids immediately after installation. The filter socks should only be removed once the asphaltic concrete is installed and the site is cleaned.

The exposed landscaped areas of the site should be finished as soon as possible. The proposed asphaltic concrete surfaced areas should be surfaced as soon as possible.

The silt fences should only be removed once the site is stabilized and vegetation is established. These measures will reduce the amount of sediment carried from the site during storm events that may occur during construction.

## 12. STORMWATER MANAGEMENT CONCLUSIONS

Stormwater Management for the proposed development will be achieved by restricting the post-development runoff rate for each design storm (up to and including a 100 year design storm event) to a runoff rate of less than a 2 year pre-development design storm of the same duration.

The proposed stormwater storage area (consisting of underground storm chambers and a stormwater storage swale) contains an outlet control structure that has been designed to ensure that the stormwater leaving the storage area is controlled, as to not affect the land adjacent to the site.

The stormwater runoff in the controlled areas will be treated using a treatment train approach consisting of sedimentation, effluent polishing with a hydrodynamic oil grit separator, and vegetative filtration.

Low impact development techniques such as enhanced swales, and bioswales/ rain gardens were used in four of the six uncontrolled areas to reduce the amount of runoff.

Erosion measures will be placed prior to construction and during development and will remain in place until construction is complete. Disturbed areas will be topsoiled and seeded as soon as reasonably possible.

We trust that this report provides sufficient information for your present purposes. If you have any questions concerning this report or if we can be of any further assistance to you on this project, please do not hesitate to contact our office.

Sincerely,  
Kollaard Associates Inc.



Steven deWit, P.Eng.




## **Appendix A: Storm Analysis Model Schematic and Parameters**

PRE-DEVELOPMENT OTTHYMO MODEL SCHEMATIC AND SUMMARY TABLE

POST-DEVELOPMENT OTTHYMO MODEL SCHEMATIC AND SUMMARY TABLE


MODEL VARIABLES FOR EACH CATCHMENT



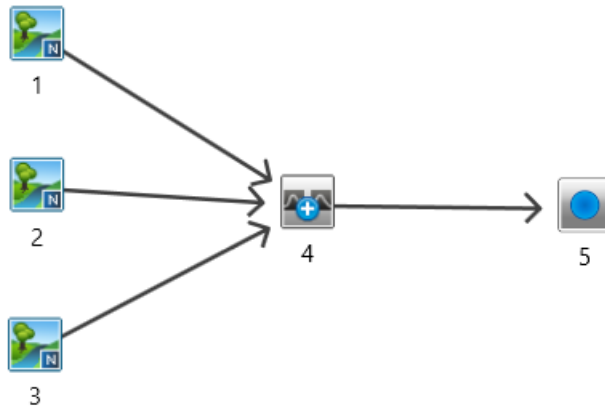

Pre-Development OTTHYMO model Schematic Summary Table

| Hydrograph No. | Model Type | Item Represented    | Comment                                                                                          |
|----------------|------------|---------------------|--------------------------------------------------------------------------------------------------|
| 1              | NASHYD     | Sub-Catchment PRE-W | Catchment represents portion of site direction runoff to the adjacent property west of the site. |
| 2              | NASHYD     | Sub-Catchment PRE-E | Catchment represents portion of the site directing runoff to Moodie Drive                        |
| 3              | NASHYD     | Sub-Catchment PRE-N | Catchment represents portion of the site directing runoff to Fallowfield Road                    |
| 4              | ADDHYD     | Add Hydrograph      | Used to add hydrographs in the routing                                                           |
| 5              | Node       | Ends the Model      | Ends the Model                                                                                   |

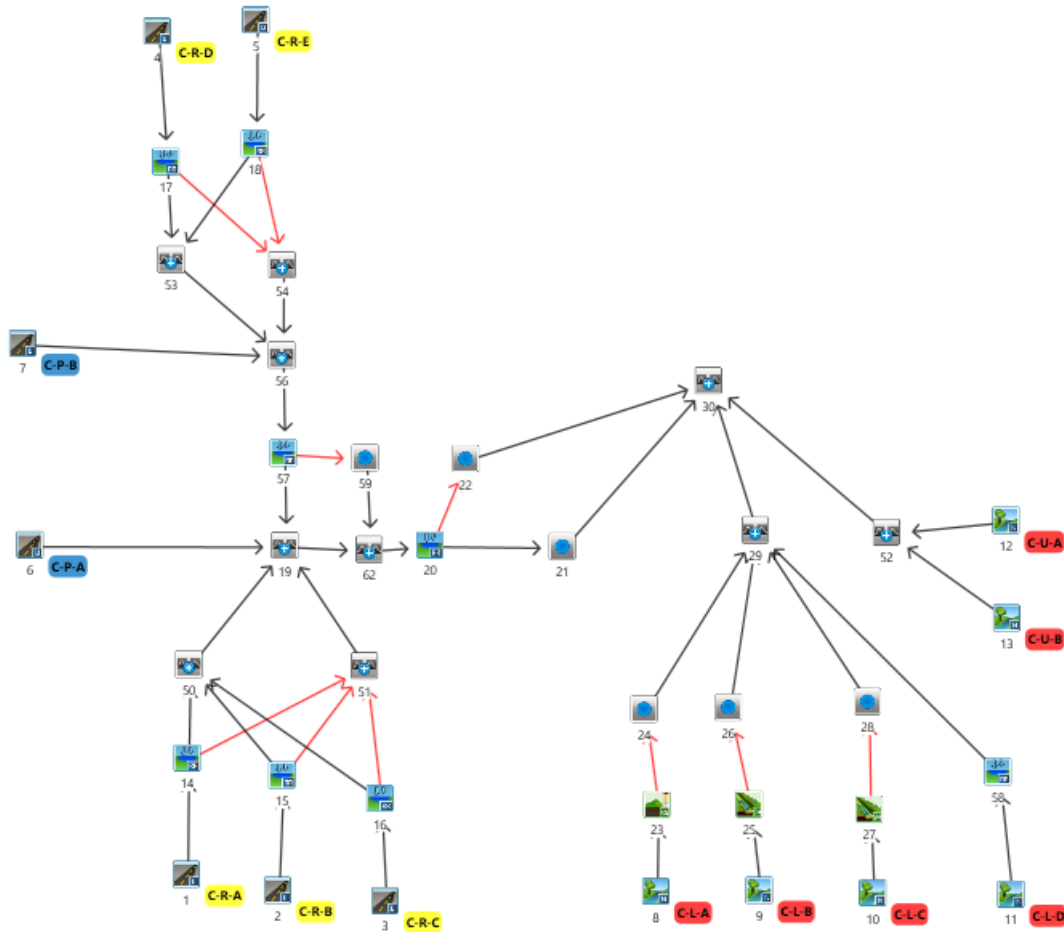

Post-Development OTTHYMO model Schematic Summary Table

| Hydrograph No. | Model Type | Item Represented    | Comment                                                                                                          |
|----------------|------------|---------------------|------------------------------------------------------------------------------------------------------------------|
| 8              | NASHYD     | Sub-Catchment C-L-A | Catchment represents area controlled by LID techniques (rain garden) west of Building A.                         |
| 9              | NASHYD     | Sub-Catchment C-L-B | Catchment represents area controlled by LID techniques (enhanced swale) in the northwest corner of the site.     |
| 10             | NASHYD     | Sub-Catchment C-L-C | Catchment represents area controlled by LID techniques (enhanced swale) in the southwest corner of the site.     |
| 11             | NASHYD     | Sub-Catchment C-L-D | Catchment represents area controlled by LID techniques (linear rain garden) in the southeast corner of the site. |
| 12             | NASHYD     | Sub-Catchment C-U-A | Catchment represents uncontrolled area in the northeast corner of the site.                                      |



|            |                 |                                                                                     |                                                                                                                 |
|------------|-----------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|
| 13         | NASHYD          | Sub-Catchment C-U-A                                                                 | Catchment represents uncontrolled area on the west side of the site.                                            |
| 23         | LID – RG        | Rain Garden                                                                         | Modeling tool in OTTHYMO to model a Rain Garden.                                                                |
| 25, 27     | LID – SW        | Enhanced Swale                                                                      | Modeling tool in OTTHYMO to model an enhanced swale                                                             |
| 58         | Route Reservoir | Linear Rain Garden Storage-Release                                                  | Provides a model of the stormwater storage and release from the linear rain garden.                             |
| 24, 26, 28 | JUNCTION        | Junction                                                                            | A modeling tool in OTTHYMO used to connect a LID object to the next item in the model.                          |
| 29         | ADDHYD          | Add Hydrograph                                                                      | Used to add the hydrographs representing the uncontrolled areas in the routing                                  |
| 1          | STANDHYD        | Sub-Catchment C-R-A                                                                 | Roof of Building A - Controlled                                                                                 |
| 2          | STANDHYD        | Sub-Catchment C-R-B                                                                 | Roof of Building B - Controlled                                                                                 |
| 3          | STANDHYD        | Sub-Catchment C-R-C                                                                 | Roof of Building C - Controlled                                                                                 |
| 4          | STANDHYD        | Sub-Catchment C-R-D                                                                 | Roof of Building D - Controlled                                                                                 |
| 5          | STANDHYD        | Sub-Catchment C-R-E                                                                 | Roof of Building E - Controlled                                                                                 |
| 14         | Route Reservoir | Roof Storage Building A                                                             | Provides a model of the stormwater storage and release from the roof.                                           |
| 15         | Route Reservoir | Roof Storage Building B                                                             | Provides a model of the stormwater storage and release from the roof.                                           |
| 16         | Route Reservoir | Roof Storage Building C                                                             | Provides a model of the stormwater storage and release from the roof.                                           |
| 17         | Route Reservoir | Roof Storage Building D                                                             | Provides a model of the stormwater storage and release from the roof.                                           |
| 18         | Route Reservoir | Roof Storage Building E                                                             | Provides a model of the stormwater storage and release from the roof.                                           |
| 50, 53     | ADDHYD          | Add Hydrograph                                                                      | Used to add the hydrographs representing the discharge from the roofs.                                          |
| 51, 54     | ADDHYD          | Add Hydrograph                                                                      | Used to add the over flow from the roofs if present.                                                            |
| 6, 7       | STANDHYD        | Represent the controlled area Sub-Catchments indicated by the name of the component | The location of the catchments areas are shown on drawing 221099-POST.                                          |
| 19, 56, 62 | ADDHYD          | Add Hydrograph                                                                      | Used to add the hydrographs together.                                                                           |
| 20, 57     | Route Reservoir | Storage Swale and Chambers                                                          | Provides a model of the stormwater storage and release from the storage swale and underground storage chambers. |
| 22, 59     | JUNCTION        | Junction                                                                            | An outlet for overflow from the swales and chambers if it occurred.                                             |



June 9, 2026

File No. 221099

|    |          |                |                                                                                                                                                              |
|----|----------|----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 21 | JUNCTION | Junction       | A modeling tool in OTTHYMO used to connect the route reservoir to the next component in the model.                                                           |
| 30 | ADDHYD   | Add Hydrograph | Used to add the hydrograph representing the discharge from the storage swale to the hydrograph representing the combined runoff from the uncontrolled areas. |

June 9, 2026

File No. 221099

2726 Moodie Drive, Ottawa

### Catchment Areas and Model Parameters

Refer to Drawing # 221099-PRE and Drawing # 221099-POST for an illustration of the specified catchment areas.

| NASHYD CATCHMENT AREAS                            |       |                                 |                                  |                                     |                            |                             |                          |                           |                              |
|---------------------------------------------------|-------|---------------------------------|----------------------------------|-------------------------------------|----------------------------|-----------------------------|--------------------------|---------------------------|------------------------------|
|                                                   |       | TOTAL<br>AREA<br>m <sup>2</sup> | 2-2c<br>[WOODS &<br>GRASS](FAIR) | 2-2c [BRUSH<br>WEED<br>GRASS](FAIR) | 2-2a [OPEN<br>SPACE](GOOD) | 2-2a<br>[IMP](ROOFS<br>ETC) | 2-2a<br>[STREET](GRAVEL) | WEIGHTED<br>AVERAGE<br>CN | POTENTIAL<br>STORAGE<br>[mm] |
| PRE-DEVELOPMENT<br>HYDROLOGIC SOIL<br>GROUP<br>C  |       |                                 | CN= 76                           | CN= 70                              | CN= 74                     | CN= 98                      | CN= 89                   |                           |                              |
|                                                   | PRE-W | 20720                           | 7990                             | 12730                               | 0                          | 0                           | 0                        | 72.3                      | 97.3                         |
|                                                   | PRE-E | 37030                           | 0                                | 34140                               | 1300                       | 110                         | 1480                     | 71.0                      | 103.7                        |
|                                                   | PRE-N | 8320                            | 0                                | 6840                                | 1310                       | 0                           | 170                      | 71.0                      | 103.7                        |
| POST-DEVELOPMENT<br>HYDROLOGIC SOIL<br>GROUP<br>B |       |                                 | CN= 65                           | CN= 56                              | CN= 61                     | CN= 98                      | CN= 85                   |                           |                              |
|                                                   | C-L-A | 937                             | 0                                | 0                                   | 937                        | 0                           | 0                        | 61.0                      | 162.4                        |
|                                                   | C-L-B | 1274                            | 0                                | 0                                   | 1274                       | 0                           | 0                        | 61.0                      | 162.4                        |
|                                                   | C-L-C | 2236                            | 0                                | 0                                   | 2236                       | 0                           | 0                        | 61.0                      | 162.4                        |
|                                                   | C-L-D | 2480                            | 0                                | 0                                   | 2308                       | 0                           | 172                      | 62.7                      | 151.1                        |
|                                                   | C-U-A | 1310                            | 0                                | 0                                   | 1287                       | 23                          | 0                        | 61.6                      | 158.3                        |
|                                                   | C-U-B | 2070                            | 0                                | 0                                   | 2070                       | 0                           | 0                        | 61                        | 162.4                        |

| OTTHYMO NASHYD PARAMETERS |       |                               |            |            |        |             |              |                            |      |            |   |            |                |                 |
|---------------------------|-------|-------------------------------|------------|------------|--------|-------------|--------------|----------------------------|------|------------|---|------------|----------------|-----------------|
| NHYD                      | NAME  | COMMENTS 1                    | COMMENTS 2 | COMMENTS 3 | OUTLET | DT<br>[min] | AREA<br>[ha] | DWF<br>[m <sup>3</sup> /s] | CN   | IA<br>[mm] | N | TP<br>[hr] | STORM<br>INDEX | RAIN<br>[mm/hr] |
| 1                         | PRE-W | PRE                           | A          |            | 4      | 5           | 2.072        | 0                          | 72.3 | 9.7        | 3 | 0.32       | 1              | 0               |
| 2                         | PRE-E | PRE                           | B          |            | 4      | 5           | 3.703        | 0                          | 71.0 | 10.4       | 3 | 0.33       | 1              | 0               |
| 3                         | PRE-N | PRE                           | C          |            | 4      | 5           | 0.832        | 0                          | 71.0 | 10.4       | 3 | 0.28       | 1              | 0               |
| 8                         | C-L-A | POST - LOW IMPACT DEVELOPMENT | A          |            | 23     | 5           | 0.094        | 0                          | 61.0 | 13.0       | 3 | 0.17       | 1              | 0               |
| 9                         | C-L-B | POST - LOW IMPACT DEVELOPMENT | B          |            | 25     | 5           | 0.127        | 0                          | 61.0 | 13.0       | 3 | 0.17       | 1              | 0               |
| 10                        | C-L-C | POST - LOW IMPACT DEVELOPMENT | C          |            | 27     | 5           | 0.224        | 0                          | 61.0 | 13.0       | 3 | 0.17       | 1              | 0               |
| 11                        | C-L-D | POST - LOW IMPACT DEVELOPMENT | D          |            | 58     | 5           | 0.248        | 0                          | 62.7 | 12.1       | 3 | 0.17       | 1              | 0               |
| 12                        | C-U-A | POST - UNCONTROLLED           | A          |            | 52     | 5           | 0.131        | 0                          | 61.6 | 12.7       | 3 | 0.17       | 1              | 0               |
| 13                        | C-U-B | POST - UNCONTROLLED           | B          |            | 52     | 5           | 0.207        | 0                          | 61.0 | 13.0       | 3 | 0.17       | 1              | 0               |

June 9, 2026

File No. 221099

2726 Moodie Drive, Ottawa

## STANDHYD CATCHMENT AREAS

| NHYD | NAME  | TOTAL AREA | DIRECT IMPERVIOUS m <sup>2</sup> | INDIRECT IMPERVIOUS m <sup>2</sup> | PERVIOUS m <sup>2</sup> | COMMENT                   |
|------|-------|------------|----------------------------------|------------------------------------|-------------------------|---------------------------|
| 1    | C-R-A | 4146       | 4146                             | 0                                  | 0                       | BLDG - A ROOF             |
| 2    | C-R-B | 4912       | 4912                             | 0                                  | 0                       | BLDG - B ROOF             |
| 3    | C-R-C | 4094       | 4094                             | 0                                  | 0                       | BLDG - C ROOF             |
| 4    | C-R-D | 3689       | 3689                             | 0                                  | 0                       | BLDG - D ROOF             |
| 5    | C-R-E | 3689       | 3689                             | 0                                  | 0                       | BLDG - E ROOF             |
| 6    | C-P-A | 22144      | 16497                            | 0                                  | 5647                    | EAST HALF OF PARKING AREA |
| 7    | C-P-B | 13058      | 13058                            | 0                                  | 0                       | WEST HALF OF PARKING AREA |

## OTTHYMO STANDHYD PARAMETERS

| NHYD | NAME  | OUTLET | DT [min] | AREA [ha] | TIMP | XIMP | DWF [m <sup>3</sup> /s] | LOSS              | SLPP [%] | LGP [m] | MNP  | SCP [hr] | DPSI [mm] | SLPI [%] | LGI Type | LGI [m] | MNI   | SCI [hr] | STORM INDEX | RAIN [mm/hr] |
|------|-------|--------|----------|-----------|------|------|-------------------------|-------------------|----------|---------|------|----------|-----------|----------|----------|---------|-------|----------|-------------|--------------|
| 1    | C-R-A | 14     | 5        | 0.415     | 0.99 | 0.99 | 0                       | Horton's Equation | 1.00     | 15.0    | 0.25 | 0        | 0         | 1.00     | Auto     | Auto    | 0.013 | 0        | 1           | 0            |
| 2    | C-R-B | 15     | 5        | 0.491     | 0.99 | 0.99 | 0                       | Horton's Equation | 1.00     | 15.0    | 0.25 | 0        | 0         | 1.00     | Auto     | Auto    | 0.013 | 0        | 1           | 0            |
| 3    | C-R-C | 16     | 5        | 0.409     | 0.99 | 0.99 | 0                       | Horton's Equation | 1.00     | 15.0    | 0.25 | 0        | 0         | 1.00     | Auto     | Auto    | 0.013 | 0        | 1           | 0            |
| 4    | C-R-D | 17     | 5        | 0.369     | 0.99 | 0.99 | 0                       | Horton's Equation | 1.00     | 15.0    | 0.25 | 0        | 0         | 1.00     | Auto     | Auto    | 0.013 | 0        | 1           | 0            |
| 5    | C-R-E | 18     | 5        | 0.369     | 0.99 | 0.99 | 0                       | Horton's Equation | 1.00     | 15.0    | 0.25 | 0        | 0         | 1.00     | Auto     | Auto    | 0.013 | 0        | 1           | 0            |
| 6    | C-P-A | 19     | 5        | 2.214     | 0.74 | 0.74 | 0                       | Horton's Equation | 2.00     | 25.0    | 0.25 | 0        | 1.57      | 1.50     | Auto     | Auto    | 0.013 | 0        | 1           | 0            |
| 7    | C-P-B | 56     | 5        | 1.306     | 0.99 | 0.99 | 0                       | Horton's Equation | 2.00     | 25.0    | 0.25 | 0        | 1.57      | 1.50     | Auto     | Auto    | 0.013 | 0        | 1           | 0            |



## **Appendix B: Time of Concentration and Time to Peak Calculation**

### CALCULATION TABLES


### USDA CHAPTER 15 – FIGURE 15-4 AND TABLE 15-3

|              | <b>SHEET FLOW</b>                         |            |                             |                                   |                |                                |
|--------------|-------------------------------------------|------------|-----------------------------|-----------------------------------|----------------|--------------------------------|
|              | Sheet Flow Surface<br>Part 630 Table-15-1 | Mannings n | Length<br>Sheet Flow<br>(m) | 2 yr 24<br>Hr<br>Rainfall<br>(mm) | Slope<br>(m/m) | Time of Sheet<br>Flow<br>(hrs) |
| <b>PRE-W</b> | DENSE GRASSES                             | 0.24       | 30                          | 51.8                              | 0.01           | <b>0.39</b>                    |
| <b>PRE-E</b> | DENSE GRASSES                             | 0.24       | 30                          | 51.8                              | 0.014          | <b>0.34</b>                    |
| <b>PRE-N</b> | DENSE GRASSES                             | 0.24       | 30                          | 51.8                              | 0.01           | <b>0.39</b>                    |

|              | <b>SHALLOW CONCENTRATED FLOW</b>       |                |                 |                         |               |               |                   |                                              |
|--------------|----------------------------------------|----------------|-----------------|-------------------------|---------------|---------------|-------------------|----------------------------------------------|
|              | Flow Length to<br>Major Channel<br>(m) | Slope<br>(m/m) | sqrt<br>(slope) | Flow type<br>Table 15-4 | Depth<br>(ft) | Mannings<br>n | Velocity<br>(m/s) | Time of Shallow<br>Concentrated Flow<br>(hr) |
| <b>PRE-W</b> | 107.95                                 | 0.025          | 0.158           | Short-grass pasture     | 0.2           | 0.073         | 0.34              | <b>0.09</b>                                  |
| <b>PRE-E</b> | 130.75                                 | 0.013          | 0.114           | Short-grass pasture     | 0.2           | 0.073         | 0.24              | <b>0.15</b>                                  |
| <b>PRE-N</b> | 38.77                                  | 0.021          | 0.145           | Short-grass pasture     | 0.2           | 0.073         | 0.31              | <b>0.04</b>                                  |

|              | <b>TOC SUMMARY</b> |               |
|--------------|--------------------|---------------|
|              | TOC<br>[hrs]       | TOC<br>[mins] |
| <b>PRE-W</b> | <b>0.48</b>        | <b>28.65</b>  |
| <b>PRE-E</b> | <b>0.49</b>        | <b>29.36</b>  |
| <b>PRE-N</b> | <b>0.42</b>        | <b>25.39</b>  |

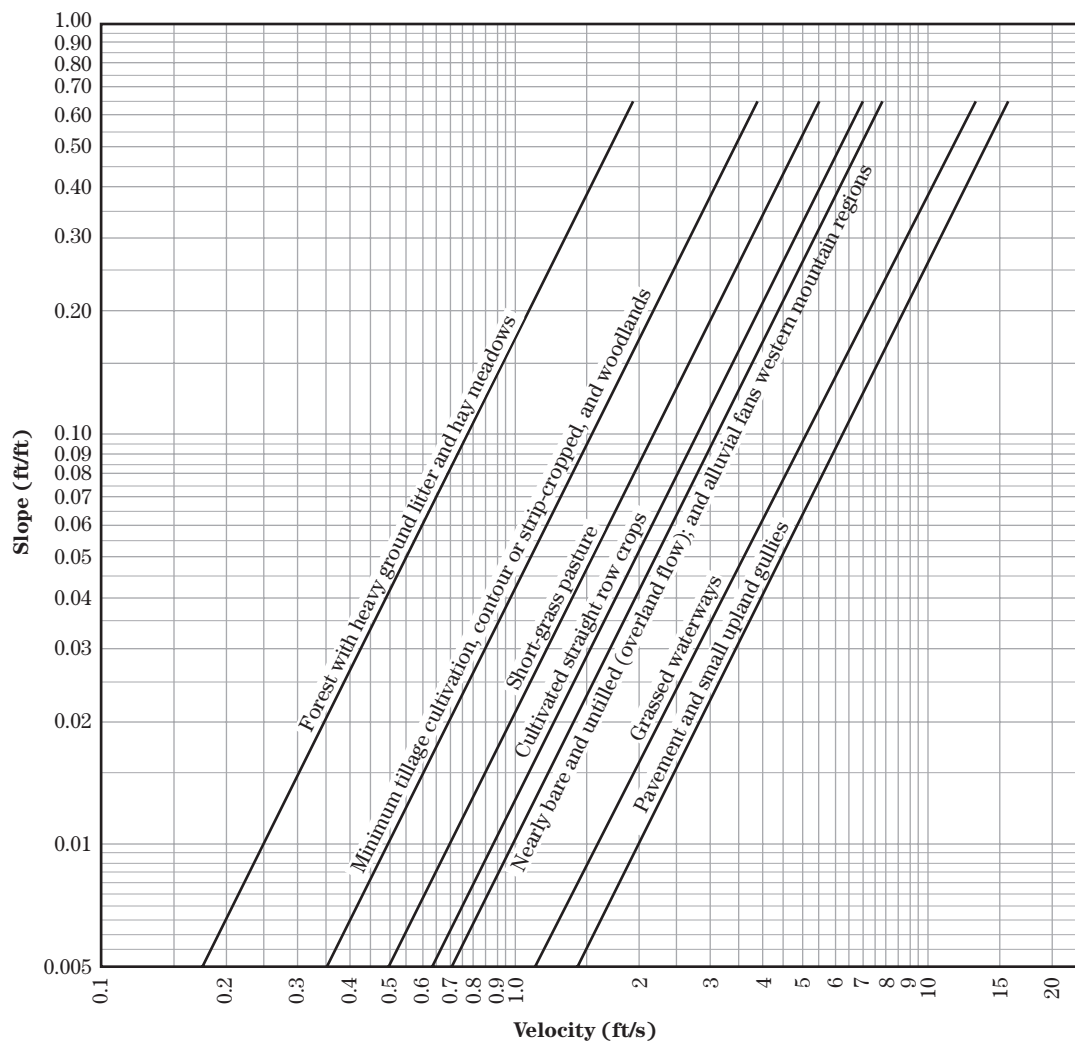

**Figure 15–4** Velocity versus slope for shallow concentrated flow**Table 15–3** Equations and assumptions developed from figure 15–4

| Flow type                                                                               | Depth (ft) | Manning's $n$ | Velocity equation (ft/s) |
|-----------------------------------------------------------------------------------------|------------|---------------|--------------------------|
| Pavement and small upland gullies                                                       | 0.2        | 0.025         | $V = 20.328(s)^{0.5}$    |
| Grassed waterways                                                                       | 0.4        | 0.050         | $V = 16.135(s)^{0.5}$    |
| Nearly bare and untilled (overland flow); and alluvial fans in western mountain regions | 0.2        | 0.051         | $V = 9.965(s)^{0.5}$     |
| Cultivated straight row crops                                                           | 0.2        | 0.058         | $V = 8.762(s)^{0.5}$     |
| Short-grass pasture                                                                     | 0.2        | 0.073         | $V = 6.962(s)^{0.5}$     |
| Minimum tillage cultivation, contour or strip-cropped, and woodlands                    | 0.2        | 0.101         | $V = 5.032(s)^{0.5}$     |
| Forest with heavy ground litter and hay meadows                                         | 0.2        | 0.202         | $V = 2.516(s)^{0.5}$     |



## **Appendix C: Pre-Development Otthymo Model Results**

SUMMARY OUTPUT FROM PRE-DEVELOPMENT MODEL

DETAILED OUTPUT FROM LAST LINK IN PRE-DEVELOPMENT MODEL



\*\*\*\*\*  
\*\* SIMULATION:1. CHICAGO [2 YR] [3 HR] \*\*  
\*\*\*\*\*

```
-----
| ADD HYD ( 0004) |
| 1 + 2 = 3 |
-----
```

|                   | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------|--------------|----------------|----------------|--------------|
| ID1= 1 ( 0001):   | 2.07         | 0.018          | 1.50           | 4.11         |
| + ID2= 2 ( 0002): | 3.70         | 0.028          | 1.50           | 3.68         |
| =====             |              |                |                |              |
| ID = 3 ( 0004):   | 5.78         | 0.046          | 1.50           | 3.83         |

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```
-----
| ADD HYD ( 0004) |
| 3 + 2 = 1 |
-----
```

|                   | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------|--------------|----------------|----------------|--------------|
| ID1= 3 ( 0004):   | 5.78         | 0.046          | 1.50           | 3.83         |
| + ID2= 2 ( 0003): | 0.83         | 0.007          | 1.42           | 3.68         |
| =====             |              |                |                |              |
| ID = 1 ( 0004):   | 6.61         | 0.052          | 1.50           | 3.81         |

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

\*\*\*\*\*  
\*\* SIMULATION:2. CHICAGO [2 YR] [6 HR] \*\*  
\*\*\*\*\*

```
-----
| ADD HYD ( 0004) |
| 1 + 2 = 3 |
-----
```

|                   | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------|--------------|----------------|----------------|--------------|
| ID1= 1 ( 0001):   | 2.07         | 0.022          | 2.42           | 5.92         |
| + ID2= 2 ( 0002): | 3.70         | 0.033          | 2.42           | 5.38         |
| =====             |              |                |                |              |
| ID = 3 ( 0004):   | 5.78         | 0.055          | 2.42           | 5.57         |

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```
-----
| ADD HYD ( 0004) |
| 3 + 2 = 1 |
-----
```

|                   | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------|--------------|----------------|----------------|--------------|
| ID1= 3 ( 0004):   | 5.78         | 0.055          | 2.42           | 5.57         |
| + ID2= 2 ( 0003): | 0.83         | 0.008          | 2.42           | 5.37         |
| =====             |              |                |                |              |
| ID = 1 ( 0004):   | 6.61         | 0.063          | 2.42           | 5.55         |

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.



```
*****
** SIMULATION : 9. 25mm4hrChicago **
*****

W/E COMMAND          HYD ID   DT      AREA   ' Qpeak Tpeak   R.V. R.C.
Qbase                                     min     ha   '   cms   hrs     mm       cms

      START @   0.00 hrs
      -----
      READ STORM                      10.0
      [ Ptot= 25.00 mm ]
      fname : C:\Users\hymo\AppData\Local\Temp\139b0b06-77be-4897-ae11-
9440be1396d7\e9c0c91c-67a5-4dfb-b889-37391f
      remark: 25mm4hrChicago
*
** CALIB NASHYD          0001  1  5.0    2.07    0.01  2.17    2.08 0.08    0.000
   [CN=72.3              ]
   [ N = 3.0:Tp 0.32]
*
      READ STORM                      10.0
      [ Ptot= 25.00 mm ]
      fname : C:\Users\hymo\AppData\Local\Temp\139b0b06-77be-4897-ae11-
9440be1396d7\e9c0c91c-67a5-4dfb-b889-37391f
      remark: 25mm4hrChicago
*
** CALIB NASHYD          0002  1  5.0    3.70    0.01  2.25    1.80 0.07    0.000
   [CN=71.0              ]
   [ N = 3.0:Tp 0.33]
*
      READ STORM                      10.0
      [ Ptot= 25.00 mm ]
      fname : C:\Users\hymo\AppData\Local\Temp\139b0b06-77be-4897-ae11-
9440be1396d7\e9c0c91c-67a5-4dfb-b889-37391f
      remark: 25mm4hrChicago
*
** CALIB NASHYD          0003  1  5.0    0.83    0.00  2.08    1.80 0.07    0.000
   [CN=71.0              ]
   [ N = 3.0:Tp 0.28]
*
      ADD [ 0001+ 0002] 0004  3  5.0    5.78    0.01  2.17    1.90 n/a    0.000
*
      ADD [ 0004+ 0003] 0004  1  5.0    6.61    0.02  2.17    1.89 n/a    0.000
*****
=
```



\*\*\*\*\*  
\*\* SIMULATION:3. CHICAGO [5 YR] [3 HR] \*\*  
\*\*\*\*\*

```
-----  
| ADD HYD ( 0004) |  
| 1 + 2 = 3 |  
-----  
          AREA      QPEAK      TPEAK      R.V.  
          (ha)      (cms)      (hrs)      (mm)  
ID1= 1 ( 0001):    2.07    0.039    1.42    8.27  
+ ID2= 2 ( 0002):    3.70    0.062    1.42    7.59  
=====
```

```
ID = 3 ( 0004):    5.78    0.101    1.42    7.83
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```
-----  
| ADD HYD ( 0004) |  
| 3 + 2 = 1 |  
-----  
          AREA      QPEAK      TPEAK      R.V.  
          (ha)      (cms)      (hrs)      (mm)  
ID1= 3 ( 0004):    5.78    0.101    1.42    7.83  
+ ID2= 2 ( 0003):    0.83    0.015    1.33    7.59  
=====
```

```
ID = 1 ( 0004):    6.61    0.116    1.42    7.80
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

\*\*\*\*\*  
\*\* SIMULATION:4. CHICAGO [5 YR] [6 HR] \*\*  
\*\*\*\*\*

```
-----  
| ADD HYD ( 0004) |  
| 1 + 2 = 3 |  
-----  
          AREA      QPEAK      TPEAK      R.V.  
          (ha)      (cms)      (hrs)      (mm)  
ID1= 1 ( 0001):    2.07    0.046    2.42    11.32  
+ ID2= 2 ( 0002):    3.70    0.073    2.42    10.48  
=====
```

```
ID = 3 ( 0004):    5.78    0.118    2.42    10.78
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```
-----  
| ADD HYD ( 0004) |  
| 3 + 2 = 1 |  
-----  
          AREA      QPEAK      TPEAK      R.V.  
          (ha)      (cms)      (hrs)      (mm)  
ID1= 3 ( 0004):    5.78    0.118    2.42    10.78  
+ ID2= 2 ( 0003):    0.83    0.018    2.33    10.48  
=====
```

```
ID = 1 ( 0004):    6.61    0.136    2.42    10.74
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.



\*\*\*\*\*  
\*\* SIMULATION:5. CHICAGO [100 YR] [3 HR] \*\*  
\*\*\*\*\*

```
-----
| ADD HYD ( 0004) |
| 1 + 2 = 3 |
-----
```

|                   | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------|--------------|----------------|----------------|--------------|
| ID1= 1 ( 0001):   | 2.07         | 0.126          | 1.33           | 24.10        |
| + ID2= 2 ( 0002): | 3.70         | 0.205          | 1.33           | 22.74        |
| =====             |              |                |                |              |
| ID = 3 ( 0004):   | 5.78         | 0.331          | 1.33           | 23.23        |

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```
-----
| ADD HYD ( 0004) |
| 3 + 2 = 1 |
-----
```

|                   | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------|--------------|----------------|----------------|--------------|
| ID1= 3 ( 0004):   | 5.78         | 0.331          | 1.33           | 23.23        |
| + ID2= 2 ( 0003): | 0.83         | 0.051          | 1.33           | 22.73        |
| =====             |              |                |                |              |
| ID = 1 ( 0004):   | 6.61         | 0.382          | 1.33           | 23.17        |

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

\*\*\*\*\*  
\*\* SIMULATION:6. CHICAGO [100 YR] [6 HR] \*\*  
\*\*\*\*\*

```
-----
| ADD HYD ( 0004) |
| 1 + 2 = 3 |
-----
```

|                   | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------|--------------|----------------|----------------|--------------|
| ID1= 1 ( 0001):   | 2.07         | 0.142          | 2.33           | 31.02        |
| + ID2= 2 ( 0002): | 3.70         | 0.234          | 2.33           | 29.44        |
| =====             |              |                |                |              |
| ID = 3 ( 0004):   | 5.78         | 0.376          | 2.33           | 30.01        |

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```
-----
| ADD HYD ( 0004) |
| 3 + 2 = 1 |
-----
```

|                   | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------|--------------|----------------|----------------|--------------|
| ID1= 3 ( 0004):   | 5.78         | 0.376          | 2.33           | 30.01        |
| + ID2= 2 ( 0003): | 0.83         | 0.058          | 2.25           | 29.43        |
| =====             |              |                |                |              |
| ID = 1 ( 0004):   | 6.61         | 0.434          | 2.33           | 29.93        |

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.



\*\*\*\*\*  
\*\* SIMULATION:7. Historical Aug 4 1988 \*\*  
\*\*\*\*\*

```
-----
| ADD HYD ( 0004) |
| 1 + 2 = 3 |
-----
          AREA      QPEAK      TPEAK      R.V.
          (ha)      (cms)      (hrs)      (mm)
      ID1= 1 ( 0001):    2.07    0.169    2.17    29.85
+ ID2= 2 ( 0002):    3.70    0.283    2.17    28.30
=====
      ID = 3 ( 0004):    5.78    0.452    2.17    28.86
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```
-----
| ADD HYD ( 0004) |
| 3 + 2 = 1 |
-----
          AREA      QPEAK      TPEAK      R.V.
          (ha)      (cms)      (hrs)      (mm)
      ID1= 3 ( 0004):    5.78    0.452    2.17    28.86
+ ID2= 2 ( 0003):    0.83    0.069    2.17    28.29
=====
      ID = 1 ( 0004):    6.61    0.522    2.17    28.79
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

\*\*\*\*\*  
\*\* SIMULATION:8. Historical July 1 1979 \*\*  
\*\*\*\*\*

```
-----
| ADD HYD ( 0004) |
| 1 + 2 = 3 |
-----
          AREA      QPEAK      TPEAK      R.V.
          (ha)      (cms)      (hrs)      (mm)
      ID1= 1 ( 0001):    2.07    0.186    1.83    32.15
+ ID2= 2 ( 0002):    3.70    0.312    1.83    30.53
=====
      ID = 3 ( 0004):    5.78    0.498    1.83    31.11
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```
-----
| ADD HYD ( 0004) |
| 3 + 2 = 1 |
-----
          AREA      QPEAK      TPEAK      R.V.
          (ha)      (cms)      (hrs)      (mm)
      ID1= 3 ( 0004):    5.78    0.498    1.83    31.11
+ ID2= 2 ( 0003):    0.83    0.076    1.75    30.52
=====
      ID = 1 ( 0004):    6.61    0.573    1.83    31.04
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.



\*\*\*\*\*  
\*\* SIMULATION:9. 25mm4hrChicago \*\*  
\*\*\*\*\*

```
-----  
| ADD HYD ( 0004) |  
| 1 + 2 = 3 |  
-----  
          AREA      QPEAK      TPEAK      R.V.  
          (ha)      (cms)      (hrs)      (mm)  
          ID1= 1 ( 0001):      2.07      0.006      2.17      2.08  
+ ID2= 2 ( 0002):      3.70      0.008      2.25      1.80  
=====
```

```
ID = 3 ( 0004):      5.78      0.014      2.17      1.90
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```
-----  
| ADD HYD ( 0004) |  
| 3 + 2 = 1 |  
-----  
          AREA      QPEAK      TPEAK      R.V.  
          (ha)      (cms)      (hrs)      (mm)  
          ID1= 3 ( 0004):      5.78      0.014      2.17      1.90  
+ ID2= 2 ( 0003):      0.83      0.002      2.08      1.80  
=====
```

```
ID = 1 ( 0004):      6.61      0.016      2.17      1.89
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.





```
V   V   I   SSSSS U   U   A   L           (v 6.2.2015)
V   V   I   SS    U   U   A A   L
  V   V   I   SS    U   U   AAAAA L
  V   V   I   SS    U   U   A   A L
   VV     I   SSSSS UUUUU A   A   LLLLL

  OOO   TTTTT TTTTT H   H   Y   Y   M   M   OOO   TM
O   O   T       T   H   H   Y   Y   MM MM O   O
O   O   T       T   H   H       Y   M   M   O   O
  OOO     T       T   H   H       Y   M   M   OOO
```

## \*\*\*\*\* S U M M A R Y O U T P U T \*\*\*\*\*

```
*****
** SIMULATION : 1. CHICAGO [2 YR] [3 HR] **
*****
```

| W/E COMMAND        | HYD ID | DT    | AREA | ' Qpeak | Tpeak | R.V. | R.C.       |
|--------------------|--------|-------|------|---------|-------|------|------------|
| Qbase              |        | min   | ha   | ' cms   | hrs   | mm   | cms        |
| START @ 0.00 hrs   |        |       |      |         |       |      |            |
| -----              |        |       |      |         |       |      |            |
| CHIC STORM         |        | 10.0  |      |         |       |      |            |
| [ Ptot= 31.86 mm ] |        |       |      |         |       |      |            |
| *                  |        |       |      |         |       |      |            |
| ** CALIB NASHYD    | 0001   | 1 5.0 | 2.07 | 0.02    | 1.50  | 4.11 | 0.13 0.000 |
| [CN=72.3           |        |       |      |         |       |      |            |
| [ N = 3.0:Tp 0.32] |        |       |      |         |       |      |            |
| *                  |        |       |      |         |       |      |            |
| CHIC STORM         |        | 10.0  |      |         |       |      |            |
| [ Ptot= 31.86 mm ] |        |       |      |         |       |      |            |
| *                  |        |       |      |         |       |      |            |
| ** CALIB NASHYD    | 0002   | 1 5.0 | 3.70 | 0.03    | 1.50  | 3.68 | 0.12 0.000 |
| [CN=71.0           |        |       |      |         |       |      |            |
| [ N = 3.0:Tp 0.33] |        |       |      |         |       |      |            |
| *                  |        |       |      |         |       |      |            |
| CHIC STORM         |        | 10.0  |      |         |       |      |            |
| [ Ptot= 31.86 mm ] |        |       |      |         |       |      |            |
| *                  |        |       |      |         |       |      |            |
| ** CALIB NASHYD    | 0003   | 1 5.0 | 0.83 | 0.01    | 1.42  | 3.68 | 0.12 0.000 |
| [CN=71.0           |        |       |      |         |       |      |            |
| [ N = 3.0:Tp 0.28] |        |       |      |         |       |      |            |
| *                  |        |       |      |         |       |      |            |
| ADD [ 0001+ 0002]  | 0004   | 3 5.0 | 5.78 | 0.05    | 1.50  | 3.83 | n/a 0.000  |
| *                  |        |       |      |         |       |      |            |
| ADD [ 0004+ 0003]  | 0004   | 1 5.0 | 6.61 | 0.05    | 1.50  | 3.81 | n/a 0.000  |
| *                  |        |       |      |         |       |      |            |



```
*****
** SIMULATION : 2. CHICAGO [2 YR] [6 HR] **
*****

W/E COMMAND          HYD ID   DT      AREA   ' Qpeak Tpeak   R.V. R.C.
Qbase                                     min    ha    '   cms   hrs      mm          cms

      START @  0.00 hrs
      -----
      CHIC STORM              10.0
      [ Ptot= 36.86 mm ]
*
** CALIB NASHYD              0001  1  5.0      2.07      0.02  2.42      5.92 0.16      0.000
   [CN=72.3                  ]
   [ N = 3.0:Tp 0.32]
*
      CHIC STORM              10.0
      [ Ptot= 36.86 mm ]
*
** CALIB NASHYD              0002  1  5.0      3.70      0.03  2.42      5.38 0.15      0.000
   [CN=71.0                  ]
   [ N = 3.0:Tp 0.33]
*
      CHIC STORM              10.0
      [ Ptot= 36.86 mm ]
*
** CALIB NASHYD              0003  1  5.0      0.83      0.01  2.42      5.37 0.15      0.000
   [CN=71.0                  ]
   [ N = 3.0:Tp 0.28]
*
      ADD [ 0001+ 0002] 0004  3  5.0      5.78      0.05  2.42      5.57 n/a      0.000
*
      ADD [ 0004+ 0003] 0004  1  5.0      6.61      0.06  2.42      5.55 n/a      0.000
*
=====
```



```
*****
** SIMULATION : 3. CHICAGO [5 YR] [3 HR] **
*****

W/E COMMAND          HYD ID   DT      AREA   ' Qpeak Tpeak   R.V. R.C.
Qbase                                     min     ha   '   cms   hrs     mm         cms

      START @  0.00 hrs
      -----
      CHIC STORM              10.0
      [ Ptot= 42.51 mm ]
*
** CALIB NASHYD              0001  1   5.0      2.07      0.04   1.42      8.27 0.19      0.000
   [CN=72.3                  ]
   [ N = 3.0:Tp 0.32]
*
      CHIC STORM              10.0
      [ Ptot= 42.51 mm ]
*
** CALIB NASHYD              0002  1   5.0      3.70      0.06   1.42      7.59 0.18      0.000
   [CN=71.0                  ]
   [ N = 3.0:Tp 0.33]
*
      CHIC STORM              10.0
      [ Ptot= 42.51 mm ]
*
** CALIB NASHYD              0003  1   5.0      0.83      0.02   1.33      7.59 0.18      0.000
   [CN=71.0                  ]
   [ N = 3.0:Tp 0.28]
*
      ADD [ 0001+ 0002] 0004  3   5.0      5.78      0.10   1.42      7.83 n/a      0.000
*
      ADD [ 0004+ 0003] 0004  1   5.0      6.61      0.12   1.42      7.80 n/a      0.000
*
=====
```



```
*****
** SIMULATION : 4. CHICAGO [5 YR] [6 HR] **
*****

W/E COMMAND          HYD ID   DT      AREA   ' Qpeak Tpeak   R.V. R.C.
Qbase                                     min    ha    '   cms   hrs      mm          cms

      START @  0.00 hrs
      -----
      CHIC STORM              10.0
      [ Ptot= 49.04 mm ]
*
** CALIB NASHYD              0001  1  5.0    2.07    0.05  2.42  11.32  0.23   0.000
   [CN=72.3                  ]
   [ N = 3.0:Tp 0.32]
*
      CHIC STORM              10.0
      [ Ptot= 49.04 mm ]
*
** CALIB NASHYD              0002  1  5.0    3.70    0.07  2.42  10.48  0.21   0.000
   [CN=71.0                  ]
   [ N = 3.0:Tp 0.33]
*
      CHIC STORM              10.0
      [ Ptot= 49.04 mm ]
*
** CALIB NASHYD              0003  1  5.0    0.83    0.02  2.33  10.48  0.21   0.000
   [CN=71.0                  ]
   [ N = 3.0:Tp 0.28]
*
      ADD [ 0001+ 0002] 0004  3  5.0    5.78    0.12  2.42  10.78  n/a    0.000
*
      ADD [ 0004+ 0003] 0004  1  5.0    6.61    0.14  2.42  10.74  n/a    0.000
*=====
```



```
*****
** SIMULATION : 5. CHICAGO [100 YR] [3 HR] **
*****

W/E COMMAND          HYD ID   DT      AREA   ' Qpeak Tpeak   R.V. R.C.
Qbase                                     min    ha    '   cms   hrs     mm      cms

      START @  0.00 hrs
      -----
      CHIC STORM              10.0
      [ Ptot= 71.66 mm ]
*
** CALIB NASHYD              0001  1   5.0      2.07      0.13   1.33   24.10  0.34   0.000
   [CN=72.3                  ]
   [ N = 3.0:Tp 0.32]
*
      CHIC STORM              10.0
      [ Ptot= 71.66 mm ]
*
** CALIB NASHYD              0002  1   5.0      3.70      0.21   1.33   22.74  0.32   0.000
   [CN=71.0                  ]
   [ N = 3.0:Tp 0.33]
*
      CHIC STORM              10.0
      [ Ptot= 71.66 mm ]
*
** CALIB NASHYD              0003  1   5.0      0.83      0.05   1.33   22.73  0.32   0.000
   [CN=71.0                  ]
   [ N = 3.0:Tp 0.28]
*
      ADD [ 0001+ 0002] 0004  3   5.0      5.78      0.33   1.33   23.23  n/a   0.000
*
      ADD [ 0004+ 0003] 0004  1   5.0      6.61      0.38   1.33   23.17  n/a   0.000
*
=====
```



```
*****
** SIMULATION : 6. CHICAGO [100 YR] [6 HR] **
*****

W/E COMMAND          HYD ID   DT      AREA   ' Qpeak Tpeak   R.V. R.C.
Qbase                                     min    ha    '  cms   hrs      mm          cms

      START @  0.00 hrs
      -----
      CHIC STORM              10.0
      [ Ptot= 82.32 mm ]
*
** CALIB NASHYD              0001  1  5.0      2.07      0.14  2.33  31.02  0.38   0.000
   [CN=72.3                  ]
   [ N = 3.0:Tp 0.32]
*
      CHIC STORM              10.0
      [ Ptot= 82.32 mm ]
*
** CALIB NASHYD              0002  1  5.0      3.70      0.23  2.33  29.44  0.36   0.000
   [CN=71.0                  ]
   [ N = 3.0:Tp 0.33]
*
      CHIC STORM              10.0
      [ Ptot= 82.32 mm ]
*
** CALIB NASHYD              0003  1  5.0      0.83      0.06  2.25  29.43  0.36   0.000
   [CN=71.0                  ]
   [ N = 3.0:Tp 0.28]
*
      ADD [ 0001+ 0002] 0004  3  5.0      5.78      0.38  2.33  30.01  n/a   0.000
*
      ADD [ 0004+ 0003] 0004  1  5.0      6.61      0.43  2.33  29.93  n/a   0.000
*
=====
```



```
*****
** SIMULATION : 7. Historical Aug 4 1988 **
*****

W/E COMMAND          HYD ID   DT      AREA   ' Qpeak Tpeak   R.V. R.C.
Qbase                                     min     ha   '   cms   hrs     mm         cms

      START @   0.00 hrs
      -----
      READ STORM                      5.0
      [ Ptot= 80.57 mm ]
      fname : C:\Users\hymo\AppData\Local\Temp\139b0b06-77be-4897-ae11-
9440be1396d7\09eafe89-7e1a-4df3-a422-195407
      remark: Historical Aug 4 1988
*
** CALIB NASHYD          0001  1  5.0    2.07    0.17  2.17  29.85 0.37   0.000
   [CN=72.3              ]
   [ N = 3.0:Tp 0.32]
*
      READ STORM                      5.0
      [ Ptot= 80.57 mm ]
      fname : C:\Users\hymo\AppData\Local\Temp\139b0b06-77be-4897-ae11-
9440be1396d7\09eafe89-7e1a-4df3-a422-195407
      remark: Historical Aug 4 1988
*
** CALIB NASHYD          0002  1  5.0    3.70    0.28  2.17  28.30 0.35   0.000
   [CN=71.0              ]
   [ N = 3.0:Tp 0.33]
*
      READ STORM                      5.0
      [ Ptot= 80.57 mm ]
      fname : C:\Users\hymo\AppData\Local\Temp\139b0b06-77be-4897-ae11-
9440be1396d7\09eafe89-7e1a-4df3-a422-195407
      remark: Historical Aug 4 1988
*
** CALIB NASHYD          0003  1  5.0    0.83    0.07  2.17  28.29 0.35   0.000
   [CN=71.0              ]
   [ N = 3.0:Tp 0.28]
*
      ADD [ 0001+ 0002] 0004  3  5.0    5.78    0.45  2.17  28.86 n/a   0.000
*
      ADD [ 0004+ 0003] 0004  1  5.0    6.61    0.52  2.17  28.79 n/a   0.000
*
=====
```



```
*****
** SIMULATION : 7. Historical Aug 4 1988 **
*****

W/E COMMAND          HYD ID   DT      AREA   ' Qpeak Tpeak   R.V. R.C.
Qbase                                     min    ha    '   cms   hrs    mm      cms

      START @   0.00 hrs
      -----
      READ STORM                      5.0
      [ Ptot= 80.57 mm ]
      fname : C:\Users\hymo\AppData\Local\Temp\139b0b06-77be-4897-ae11-
9440be1396d7\09eafe89-7e1a-4df3-a422-195407
      remark: Historical Aug 4 1988
*
** CALIB NASHYD          0001  1  5.0    2.07    0.17  2.17  29.85 0.37   0.000
   [CN=72.3              ]
   [ N = 3.0:Tp 0.32]
*
      READ STORM                      5.0
      [ Ptot= 80.57 mm ]
      fname : C:\Users\hymo\AppData\Local\Temp\139b0b06-77be-4897-ae11-
9440be1396d7\09eafe89-7e1a-4df3-a422-195407
      remark: Historical Aug 4 1988
*
** CALIB NASHYD          0002  1  5.0    3.70    0.28  2.17  28.30 0.35   0.000
   [CN=71.0              ]
   [ N = 3.0:Tp 0.33]
*
      READ STORM                      5.0
      [ Ptot= 80.57 mm ]
      fname : C:\Users\hymo\AppData\Local\Temp\139b0b06-77be-4897-ae11-
9440be1396d7\09eafe89-7e1a-4df3-a422-195407
      remark: Historical Aug 4 1988
*
** CALIB NASHYD          0003  1  5.0    0.83    0.07  2.17  28.29 0.35   0.000
   [CN=71.0              ]
   [ N = 3.0:Tp 0.28]
*
      ADD [ 0001+ 0002]  0004  3  5.0    5.78    0.45  2.17  28.86 n/a   0.000
*
      ADD [ 0004+ 0003]  0004  1  5.0    6.61    0.52  2.17  28.79 n/a   0.000
*****
=
```





## **Appendix D: Product Information**

WATT ACCUTROL ROOF DRAINS

NDS SC-34 STORM CHAMBERS

STORMCEPTOR HYDRODYNAMIC OIL GRIT SEPARATOR

NEWTERRA CLEAR3 MBR.ST-105 PRODUCT BROCHURE



## Adjustable Accutrol Weir

Tag: \_\_\_\_\_

## Adjustable Flow Control for Roof Drains

### ADJUSTABLE ACCUTROL (for Large Sump Roof Drains only)



For more flexibility in controlling flow with heads deeper than 2", Watts Drainage offers the Adjustable Accutrol. The Adjustable Accutrol Weir is designed with a single parabolic opening that can be covered to restrict flow above 2" of head to less than 5 gpm per inch, up to 6" of head. To adjust the flow rate for depths over 2" of head, set the slot in the adjustable upper cone according to the flow rate required. Refer to Table 1 below.

Note: Flow rates are directly proportional to the amount of weir opening that is exposed.

#### EXAMPLE:

For example, if the adjustable upper cone is set to cover 1/2 of the weir opening, flow rates above 2" of head will be restricted to 2-1/2 gpm per inch of head.

Therefore, at 3" of head, the flow rate through the Accutrol Weir that has 1/2 the slot exposed will be:  
[ 5 gpm (per inch of head) x 2 inches of head ] + 2-1/2 gpm (for the third inch of head) = 12-1/2 gpm.

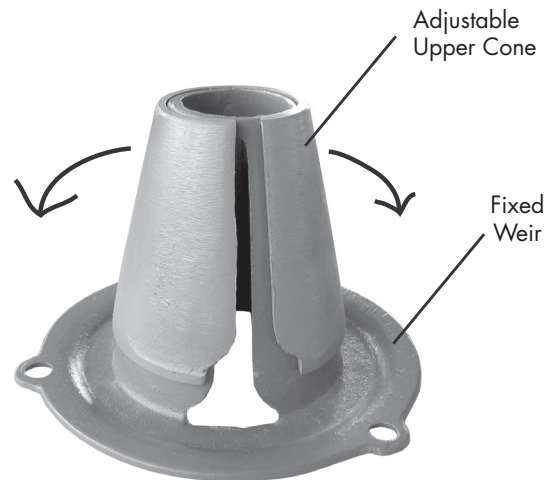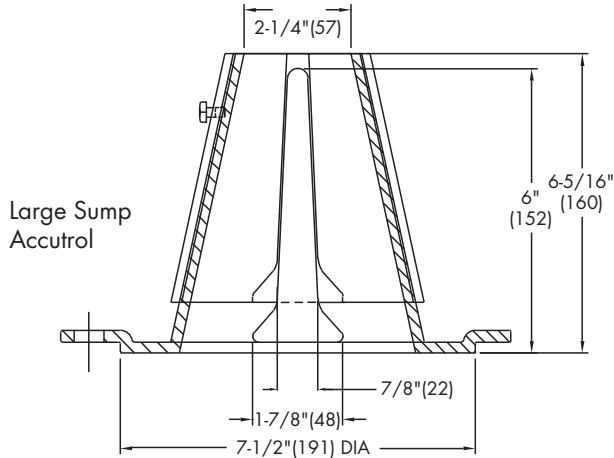

1/2 Weir Opening Exposed Shown Above

TABLE 1. Adjustable Accutrol Flow Rate Settings

| Weir Opening Exposed | 1"                             | 2" | 3"    | 4"   | 5"    | 6" |
|----------------------|--------------------------------|----|-------|------|-------|----|
|                      | Flow Rate (gallons per minute) |    |       |      |       |    |
| Fully Exposed        | 5                              | 10 | 15    | 20   | 25    | 30 |
| 3/4                  | 5                              | 10 | 13.75 | 17.5 | 21.25 | 25 |
| 1/2                  | 5                              | 10 | 12.5  | 15   | 17.5  | 20 |
| 1/4                  | 5                              | 10 | 11.25 | 12.5 | 13.75 | 15 |
| Closed               | 5                              | 5  | 5     | 5    | 5     | 5  |

Job Name \_\_\_\_\_

Contractor \_\_\_\_\_

Job Location \_\_\_\_\_

Contractor's P.O. No. \_\_\_\_\_

Engineer \_\_\_\_\_

Representative \_\_\_\_\_

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.


USA: Tel: (800) 338-2581 • Fax: (828) 248-3929 • Watts.com

Canada: Tel: (905) 332-4090 • Fax: (905) 332-7068 • Watts.ca

Latin America: Tel: (52) 81-1001-8600 • Fax: (52) 81-8000-7091 • Watts.com



A Watts Water Technologies Company

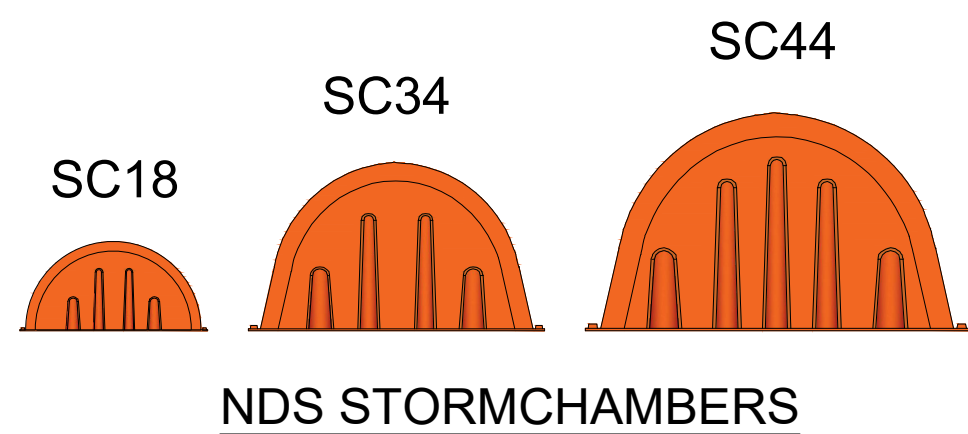

PROJECT NAME  
PROJECT LOCATION



NDS STORMCHAMBER SYSTEM SPECIFICATIONS

- 1. CHAMBERS SHALL BE NDS STORMCHAMBER .
- 2. CHAMBERS SHALL BE ARCH SHAPED AND SHALL BE MANUFACTURED FROM HIGH MOLECULAR WEIGHT HIGH DENSITY POLYETHYLENE.
- 3. CHAMBERS MEET OR EXCEED ASTM F2922 AND ASTM F2787. MEET AASHTO HS-20, HS-25 AND HL-93 LIVE LOADING PER AASHTO LRFD SECTION 12.
- 4. MANUFACTURED NOMINAL DIMENSIONS OF START, MIDDLE AND END CHAMBERS
  - SC18 3.17 FT WIDE X 18 INCHES TALL.
  - SC34 5 FT WIDE X 34 INCHES TALL.
  - SC44 6.35 FT WIDE X 44 INCHES TALL.
- 5. MINIMUM COVER FOR SC18 AND SC34 IS 18 INCHES, MINIMUM COVER FOR SC44 IS 22 INCHES .
- 6. SEDIMENTRAP MANUFACTURED WITH HIGH MOLECULAR WEIGHT, HIGH DENSITY POLYETHYLENE.
- 7. NON-WOVEN POLYPROPYLENE FILTER FABRIC TMG-4OZNWG BY TMPG OR APPROVED EQUAL
- 8. WOVEN POLYPROPYLENE FILTER FABRIC 300HTM BY WINFAB OR APPROVED EQUAL.
- 9. THE PERFORMANCE OF NDS STORMCHAMBER™ IS DIRECTLY CORRELATED TO THE LOAD BEARING CAPACITY, PLASTICITY, AND PERMEABILITY OF NATIVE SOIL; FROST-HEAVE POTENTIAL; VOLUME AND LOAD-RATING OF PROJECT TRAFFIC; INSTALLATION METHODS USED; AS WELL AS THE TYPE, GRADATION, AND THICKNESS OF THE SURROUNDING AND OVERLAY ROCK.


REQUIREMENTS FOR CONSTRUCTION EQUIPMENT

- 1. NDS RECOMMENDS 3 BACKFILL METHODS, STONESHOOTER LOCATED OFF THE CHAMBER BED, BACKFILL AS ROWS ARE BUILT USING AN EXCAVATOR ON THE FOUNDATION STONE OR SUBGRADE AND BACKFILL FROM OUTSIDE THE EXCAVATION USING A LONG BOOM HOE OR EXCAVATOR. CONVEYORS OR EXCAVATORS SHOULD BE LOCATED SUCH THAT THEIR LOADS DO NOT INFLUENCE THE CHAMBERS SHOULD BE USED TO PLACE BACKFILL STONE.
- 2. NO CONSTRUCTION EQUIPMENT ALLOWED ON TOP OF THE CHAMBER SYSTEM UNTIL MINIMUM STONE COVER REQUIREMENTS HAVE BEEN MET, 6-INCH FOR SC-18 AND SC-34 AND 12-INCH FOR SC-44, ONLY THEN SHOULD A SKID STEER OR SMALL DOZER (D4) BE ALLOWED ON TOP.
- 3. NO WHEEL LOADS SHOULD BE APPLIED OVER THE SYSTEM. ONCE THE MINIMUM STONE HAS BEEN PLACED OVER THE CROWN OF THE CHAMBERS, ONLY SMALL WALK BEHIND VIBRATORY COMPACTION EQUIPMENT CAN BE USED UNTIL A 12 INCHES OF COVER IS ACHIEVED. LIGHTWEIGHT TRACKED DOZERS WITH A MAXIMUM GROUND PRESSURE OF 1100 PSF ARE PERMITTED OVER THE STRUCTURE.
- 4. DOZERS MUST SPREAD STONE WORKING IN A DIRECTION PARALLEL WITH THE CHAMBER ROWS; NOT WORKING ACROSS THE CHAMBER ROWS. ANY CHAMBERS DAMAGED BY USING THE "DUMP AND PUSH" METHOD ARE NOT COVERED UNDER THE STORMCHAMBER STANDARD WARRANTY.
- 5. ONCE 18"(457mm) OF COMPACTED MATERIAL IS OVER THE CHAMBERS, HIGHWAY VEHICLES OF HS-20 AND HS-25 CAN BE OPERATED OVER THE STRUCTURES.
- 6. A FRONT END LOADER CAN BE OPERATED OVER THE STRUCTURES AS LONG AS THE MAXIMUM WHEEL LOAD DOES NOT EXCEED 16000 POUNDS. COMPACTING EQUIPMENT CAN BE OPERATED OVER THE STRUCTURES AS LONG AS THE DYNAMIC FORCE FROM THE DRUM DOES NOT EXCEED 20000 POUNDS AND THE GROSS VEHICLE WEIGHT DOES NOT EXCEED 12000 POUNDS.

BACKFILL, HANDLING AND INSTALLATION REQUIREMENTS

- 1. THIS DOCUMENT IS NOT A SUBSTITUTE FOR THE INSTALLATION GUIDE.
- 2. STORMCHAMBERS SHALL BE INSTALLED IN ACCORDANCE WITH THE NDS STORMCHAMBER INSTALLATION GUIDE.
- 3. STORMCHAMBERS SHALL NOT BE INSTALLED UNTIL THE MANUFACTURER'S REPRESENTATIVE HAS COMPLETED A PRE-CONSTRUCTION MEETING WITH THE INSTALLERS. **CONTACT NDS SPECIALIST 571-521-9538 OR LOCAL REPRESENTATIVE.**
- 4. IN HOT WEATHER CONDITIONS, IF POSSIBLE, STORE ALL CHAMBERS AND BACKFILL STONE IN A SHADED AREA UNTIL THEY ARE READY TO BE INSTALLED. OUR RECOMMENDATION IS THAT THE SYSTEM BE LAID OUT AND ALL PIPES CONNECTED THE DAY PRIOR TO BACKFILLING WITH STONE. **WHEN TEMPERATURES ARE ABOVE 85°F, BACKFILLING SHOULD BE RESTRICTED TO COOLER MORNING PERIODS ONLY.**
- 5. 3/4" TO 2" CLEAN, CRUSHED, WASHED, ANGULAR STONE AASHTO M43 DESIGNATION OF #3 OR #4 OR CRUSHED CONCRETE OF THE SAME SIZE. SEE ACCEPTABLE FILL MATERIAL TABLE ON PAGE 3.
- 6. FOOTING OF CHAMBERS SHOULD BE CONNECTED WITH A DRYWALL SCREW WHEN OVERLAPPING AND INSTALLING.
- 7. MINIMUM SPACING BETWEEN THE CHAMBER ROWS SC18 & SC34 = 6 INCHES, SC44 = 9 INCHES.
- 8. INLET, OUTLET, AND INSPECTION PIPES MUST BE INSERTED A MINIMUM OF 12 INCHES (300 mm) INTO CHAMBER.
- 9. STONE MUST BE PLACED ON THE TOP CENTER OF THE CHAMBER TO ANCHOR THE CHAMBERS IN PLACE AND PRESERVE ROW SPACING.
- 10. PLACE THE BACKFILL MATERIAL IN 6-8 INCH LOOSE LIFTS AND COMPACT. USE MECHANICAL HAND TAMPERS OR APPROVED COMPACTING EQUIPMENT TO COMPACT ALL BACKFILL AND EMBANKMENT IMMEDIATELY ADJACENT TO EACH SIDE OF THE INSTALLATION AND OVER TOP OF THE INSTALLATION TO THE MINIMUM DEPTH SPECIFIED.
- 11. PLACE BACKFILL SO THERE IS NO MORE THAN A TWO LIFT DIFFERENTIAL BETWEEN ANY OF THE CHAMBERS AT ANYTIME DURING THE BACKFILLING PROCESS (12 INCHES) .
- 12. PERIMETER STONE MUST BE BROUGHT UP EVENLY WITH CHAMBER ROWS. PERIMETER MUST BE FULLY BACKFILLED WITH STONE EXTENDED HORIZONTALLY TO THE EXCAVATION WALL.

BACKFILL METHODS

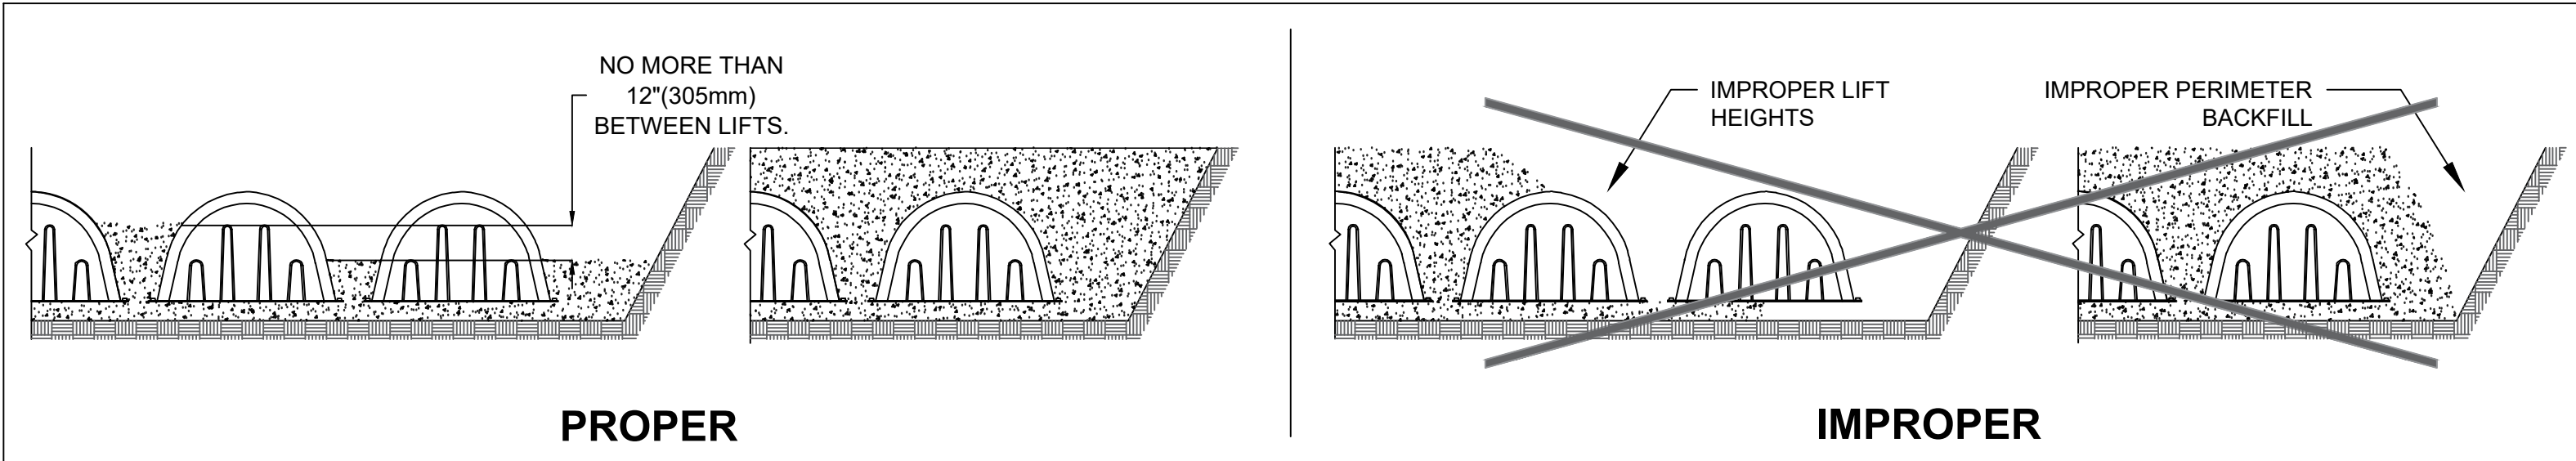

PROJECT NAME :  
PROJECT LOCATION :


DRAWN BY: ARH



NDS STORMCHAMBER SYSTEM DETAILS  
NDS SPECIALIST: 571-521-9538




| CHAMBER PART                                                                                              | WIDTH (IN)(MM) | HEIGHT (IN)(MM) | WEIGHT (LBS) | ACTUAL LENGTH (IN)(MM) | INSTALLED LENGTH (IN)(MM) | CHAMBER VOLUME (CF)(CM) | INSTALLED STORAGE VOLUME(CF)(CM) |
|-----------------------------------------------------------------------------------------------------------|----------------|-----------------|--------------|------------------------|---------------------------|-------------------------|----------------------------------|
| START                                                                                                     | 60"(1524)      | 34"(864)        | 100          | 103"(2616)             | 97"(2464)                 | 77.2(2.18)              | 122.9(3.48)                      |
| MIDDLE                                                                                                    | 60"(1524)      | 34"(864)        | 100          | 101"(2565)             | 91"(2311)                 | 72.4(2.05)              | 107.4(3.04)                      |
| END                                                                                                       | 60"(1524)      | 34"(864)        | 100          | 103"(2616)             | 97"(2464)                 | 77.2(2.18)              | 122.9(3.48)                      |
| CLOSED                                                                                                    | 60"(1524)      | 34"(864)        | 100          | 103"(2616)             | 103"(2616)                | 82.0(2.32)              | 162.8(4.60)                      |
| 6"(152mm) ABOVE AND BELOW CHAMBER, 6"(152mm) CHAMBER SPACING, 12"(305mm) PERIMETER STONE AND 40% POROSITY |                |                 |              |                        |                           |                         |                                  |

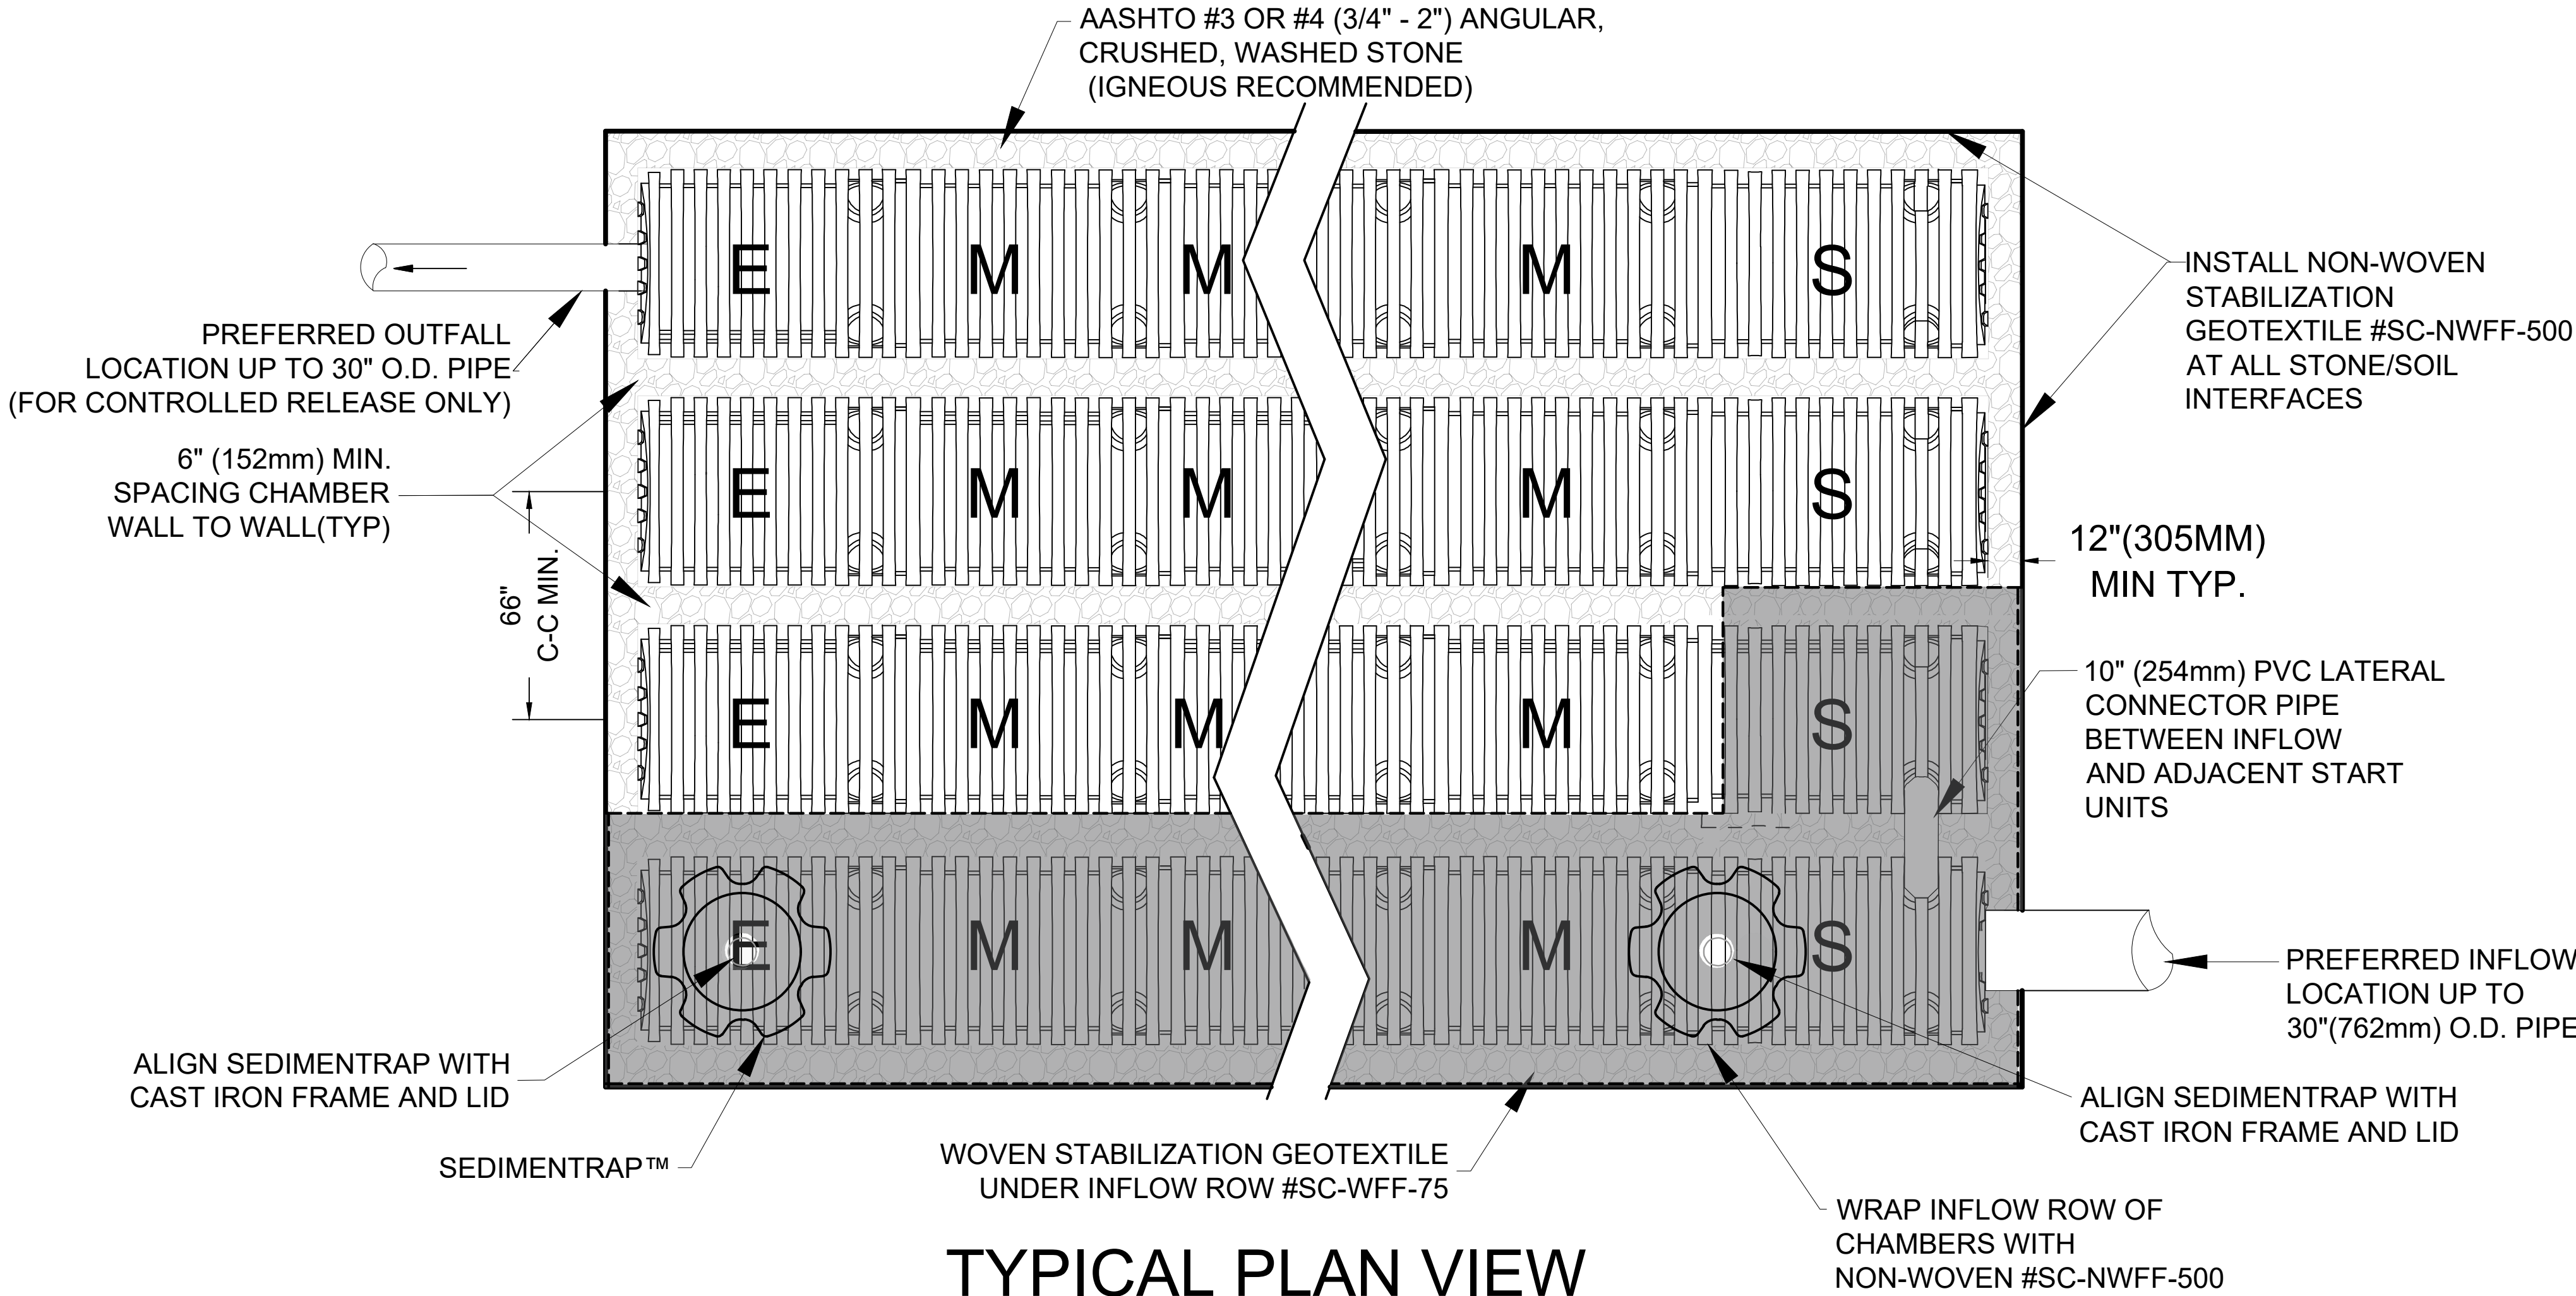


SC-3475 DIMENSIONS

(DIMENSIONS MAY VARY SLIGHTLY)  
WEIGHT: 100 LBS EA.

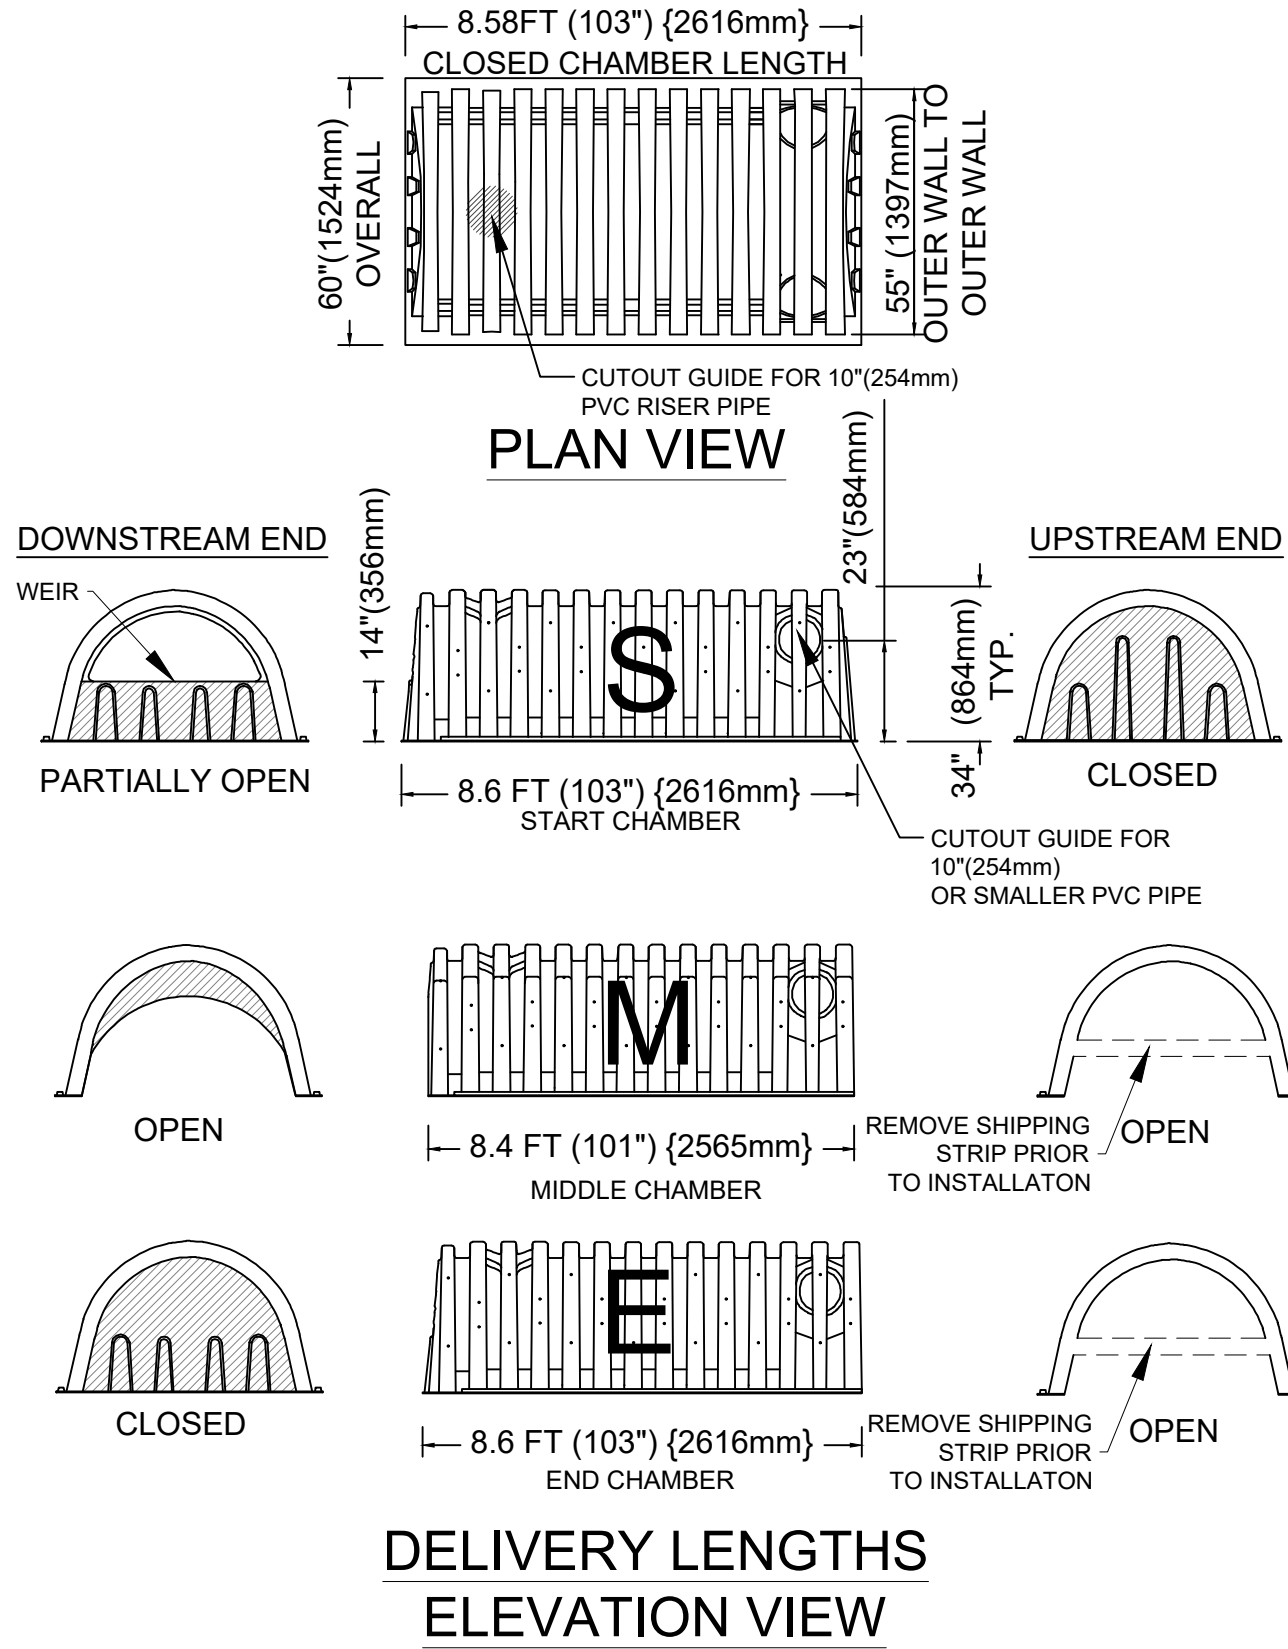

DELIVERY LENGTHS  
ELEVATION VIEW

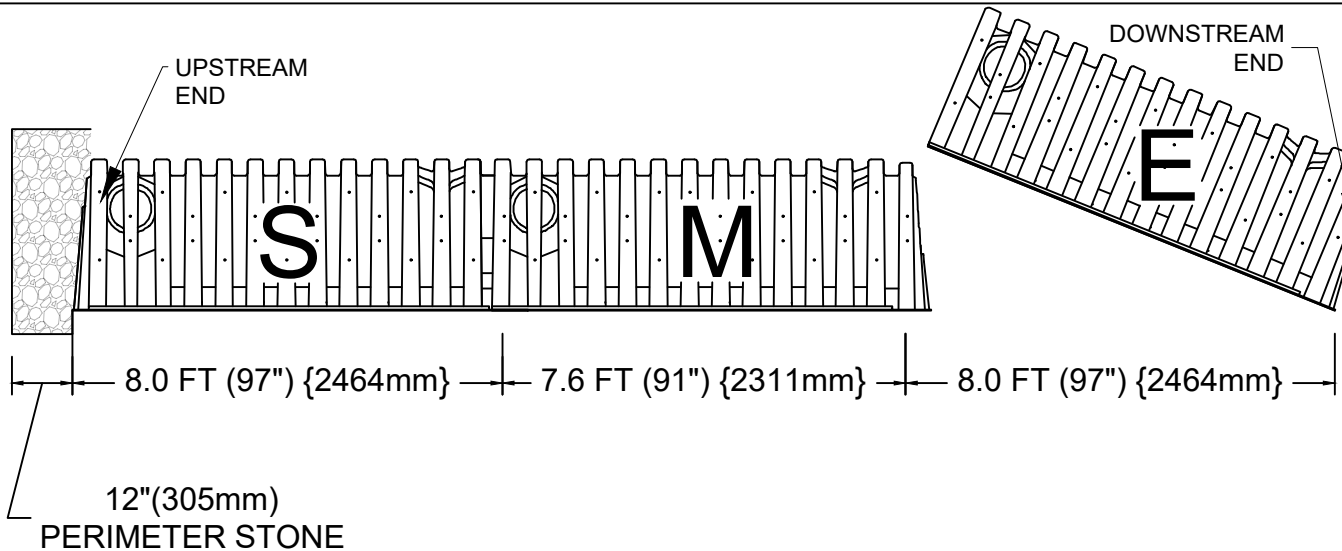


- NOTES:
1. START CHAMBERS (CLOSED AT THE SIDE PORTAL END) ARE PLACED AT THE INFLOW END OF THE ROWS.
  2. BEGIN PLACEMENTS WITH START CHAMBERS AND END ROWS WITH END CHAMBERS.
  3. PLACE FIRST RIB OF THE NEXT CHAMBER IN THE ROW OVER THE LAST RIB OF THE PREVIOUS CHAMBER WITH SCREWS.

INSTALLED LENGTHS  
ELEVATION VIEW

MATERIAL LIST

| DESCRIPTION                              | STOCK CODE  | QTY | UNITS |
|------------------------------------------|-------------|-----|-------|
| <b>CHAMBERS AND ACCESSORIES:</b>         |             |     |       |
| START CHAMBER                            | SC-3475-S-O |     | EACH  |
| MIDDLE CHAMBER                           | SC-3475-M-O |     | EACH  |
| END CHAMBER                              | SC-3475-E-O |     | EACH  |
| CLOSED CHAMBER                           | SC-3475-C-O |     | EACH  |
| SEDIMENTRAP™                             | SC-ST       |     | EACH  |
| NON-WOVEN GEOTEXTILE                     | SC-NWFF-500 |     | ROLLS |
| WOVEN STABILIZATION GEOTEXTILE           | SC-WFF-75   |     | ROLLS |
| 30"Ø X 20"H HDPE PIPE FOR SEDIMENTRAP™   | SC-3020P    |     | EACH  |
| 10" CAST IRON FRAME AND LID              | SC-FL-10    |     | EACH  |
| <b>MATERIALS BY OTHERS:</b>              |             |     |       |
| 10"(254mm) DIAMETER RISER / LATERAL PIPE | OTHERS      |     | EACH  |
| IN-PLACE EXCAVATION (NO BULKING FACTOR)  | OTHERS      |     | CU YD |
| STONE BACKFILL                           | OTHERS      |     | CU YD |
| 1/4" X 1-1/2" NUT AND BOLT               | OTHERS      |     | EACH  |
| 3" SCREWS                                | OTHERS      |     | EACH  |
| IMPERVIOUS LINER                         | OTHERS      |     | CU YD |

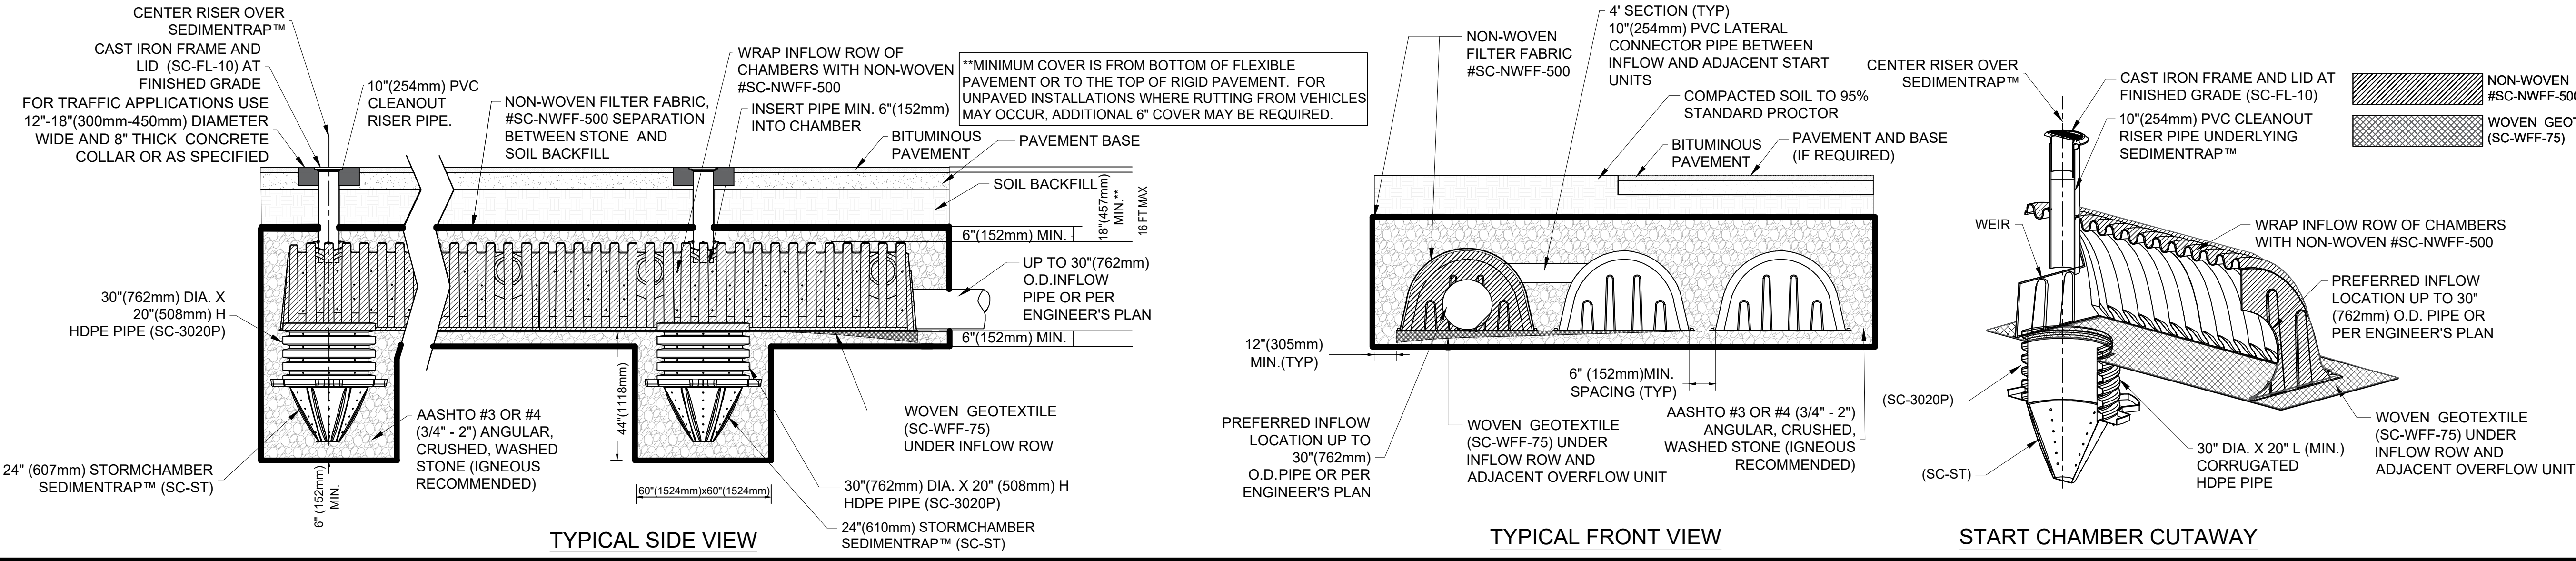

PROJECT #

|               |  |
|---------------|--|
|               |  |
| DRAWN BY: ARH |  |



SC-3475 STORMCHAMBER  
LAYOUT

MEETS OR EXCEEDS ASTM F2922 AND ASTM F2787.  
MEETS AASHTO HS-20, HS-25 AND HL-93 LIVE LOADING PER AASHTO LRFD SECTION 12

|                             |
|-----------------------------|
| DRAWING# 3475-DT            |
| REV. E      DATE 11-10-2022 |



ENTER SYSTEM PARAMETERS

Measurement Type

Imperial

Input Storage Volume

2,350

ft³

Select the Chamber Model

SC-34E

Select Design Constraint

Width

Design Constraint Dimension

25

ft

Stone Above Chambers (min. 6 inches; max. 192 inches)

6

in

Stone Below Chambers (min. 6 inches)

6

in

Total Cover Over Chambers (min. 18 inches; max. 192 inches)

18

in

Stone Void (Industry Standard is 40%)

40

%

Desired Number of Layers

1

Space Between each Layer (min. 12 Inches)

12

in

Number of Rows Desired

4

Maximum Number of Rows Based on Constraint Dimension

4

Space Between Each Row (min. 6 inches)

6

in

Number of SedimentTraps Desired

2

Minimum Suggested Number of SedimentTraps (per inflow row)

2

Do you need impervious liner to restrict infiltration?

no

Number of Inflow Rows

1

Perimeter stone border size 12 Inches

Trench depths beyond the range suggested may be achievable.  
For assistance please contact us at (888) 825-4716.

SC - 18

SC - 34

SC - 44

SYSTEM RESULTS

12 in

6 in

6 in

Additional Cover Above System

Stone Layer Above

SC-34E Chamber Height

Stone Layer Below

3.83 ft

4.83 ft

23.50 ft

40.92 ft

System Depth

Trench Depth

Minimum Trench Width

Minimum Trench Length

Total Chamber Storage Volume

1,494.40

Cubic Feet

Total Stone Storage Volume

876.60

Cubic Feet

Installed System Storage Volume

2,371.00

Cubic Feet

Minimum Internal Storage of a Chamber

72.80

Cubic Feet

Minimum Installed Storage with stone

107.63

Cubic Feet

Total Number of Chambers Required

20

Total #

18 Inches

6 Inches

24 Inches

47 Inches

Minimum Trench Length

40.92

ft

Minimum Trench Width

23.50

ft

System Depth

3.83

ft

Trench Depth

4.83

ft

Minimum Bed Size Required

962

Square Feet

OTHER SYSTEM COMPONENTS

Minimum Amount of Stone Required

Volume of Excavation (not including fill)

Non-woven Filter Fabric Required

Stabilization Fabric

Impervious Liner

88

137

414

1

-

Cubic Yards

Cubic Yards

Square Yards

Pieces

Square Yards

3/4" - 2" crushed, washed, ANGULAR stone.

4' SECTION (TYP) 10"(254mm) PVC LATERAL CONNECTOR PIPE BETWEEN INFLOW AND ADJACENT START UNITS

PAVEMENT AND BASE (IF REQUIRED)

COMPACTED SOIL TO 95% STANDARD PROCTOR

AASHTO #3 OR #4 (3/4" - 2") ANGULAR, CRUSHED, WASHED STONE (IGNEOUS RECOMMENDED)

MIN. SPACING 6"(152mm) FOR SC34 ,SC18 & MIN. SPACING 9"(305mm) FOR SC44

WOVEN GEOTEXTILE (SC-WFF-75) UNDER INFLOW ROW AND ADJACENT OVERFLOW UNIT

NON-WOVEN FILTER FABRIC #SC-NWFF-500 OR APPROVED EQUAL

SIDE PORTAL INFLOW LOCATION UP TO 10"(254mm) PIPE OR PER ENGINEER'S PLAN

12"(305mm) MIN. (TYP.)

PREFERRED INFLOW LOCATION UP TO 30"(762mm) PIPE OR PER ENGINEER'S PLAN

| ACCEPTABLE FILL MATERIALS: NDS STORMCHAMBER SYSTEMS |                                                                                                                                                                                            |                                                                                                                             |                                                                                                             |
|-----------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|
| MATERIAL LOCATION                                   | DESCRIPTION                                                                                                                                                                                | AASHTO MATERIAL CLASSIFICATION                                                                                              | COMPACTION/DENSITY REQUIREMENT                                                                              |
| 4                                                   | FILL MATERIAL FOR LAYER '4' STARTS FROM THE TOP OF THE '3' LAYER TO THE BOTTOM OF FLEXIBLE PAVEMENT OR UNPAVED FINISHED GRADE ABOVE. NOTE THAT PAVEMENT SUBBASE MAY BE PART OF THIS LAYER. | ANY SOIL/ROCK MATERIALS, NATIVE SOILS OR PER ENGINEER'S PLANS. CHECK PLANS FOR PAVEMENT SUBGRADE REQUIREMENTS.              | PREPARE PER ENGINEER'S PLANS. PAVED INSTALLATIONS MAY HAVE STRINGENT MATERIAL AND PREPARATION REQUIREMENTS. |
| 3                                                   | FILL MATERIAL FOR LAYER '3' STARTS FROM THE TOP OF THE EMBEDMENT STONE ('2' LAYER) TO 18" [457mm] ABOVE THE TOP OF THE CHAMBER. NOTE THAT PAVEMENT SUBBASE MAY BE A PART OF THIS LAYER.    | GRANULAR WELL-GRADED SOIL/AGGREGATE MIXTURES, 35% FINES. MOST PAVEMENT SUBBASE MATERIALS CAN BE USED IN LIEU OF THIS LAYER. | AASHTO M145 A-1, A-2-4, A-3 OR AASHTO M43 #3: 357, 4, 467, 5, 56, 57, 6, 67, 68, 7, 78, 8, 89, 9, 10        |
| 2                                                   | EMBEDMENT STONE SURROUNDING THE CHAMBERS FROM THE FOUNTAIN STONE ('1' LAYER) TO THE '3' LAYER ABOVE.                                                                                       | CLEAN, CRUSHED, ANGULAR STONE, NOMINAL SIZE DISTRIBUTION ¾ -2 INCH [19-51mm]                                                | AASHTO M43 - #3, 4                                                                                          |
| 1                                                   | FOUNDATION STONE BELOW CHAMBERS FROM THE SUBGRADE UP TO THE FOOT (BOTTOM) OF CHAMBER.                                                                                                      | CLEAN, CRUSHED, ANGULAR STONE, NOMINAL SIZE DISTRIBUTION ¾ -2 INCH [19-51mm]                                                | AASHTO M43 - #3, 4                                                                                          |

**INSPECTION AND MAINTENANCE OF STORMCHAMBER SEDIMENTRAP ROW**

STORMCHAMBER™ WITH SEDIMENTRAP™ ROW IS DESIGNED FOR EASE OF INSPECTION AND REDUCED LONG-TERM MAINTENANCE COST MONITORING T.S.S. BUILDUP IN A SEDIMENTRAP™ CAN BE DONE WITHOUT THE NEED FOR A THIRD PARTY AS THE TRAP SITS DIRECTLY BELOW THE OBSERVATION PORT. A CAMERA WITH LIGHT AND/OR LONG MEASURING STICK CAN SUCCESSFULLY INSPECT AND DETERMINE WHEN MAINTENANCE IS NEEDED. AS NEEDED, SEDIMENT REMOVAL WITH A VACUUM TRUCK REQUIRES LITTLE OR NO WATER JETTING AS WITH OTHER COMPETING SYSTEMS.

**INSPECTION AND MAINTENANCE SCHEDULE**

THE QUANTITY AND LOCATION OF INSPECTION PORTS VARY BY SITE. PLEASE REFER TO THE SITE PLAN AND LAYOUT TO CONFIRM INSPECTION PORT LOCATIONS. NEW INSTALLATIONS SHOULD BE INSPECTED QUARTERLY AND AFTER EACH LARGE STORM EVENT TO SEE HOW IT PERFORMS. IT IS RECOMMENDED THAT A LOGBOOK BE MAINTAINED SHOWING THE DEPTH OF WATER IN THE STORMCHAMBER AT EACH OBSERVATION IN ORDER TO DETERMINE THE RATE AT WHICH THE STORMCHAMBER SYSTEM DEWATERS AFTER RUNOFF PRODUCING STORM EVENTS. ONCE THE PERFORMANCE CHARACTERISTICS OF THE STORMCHAMBER HAVE BEEN VERIFIED, THE MONITORING SCHEDULE CAN BE REDUCED TO AN ANNUAL BASIS, UNLESS THE PERFORMANCE DATA SUGGESTS THAT A MORE FREQUENT SCHEDULE IS REQUIRED. **SEDIMENT SHOULD BE SERVICED WHEN DEPOSITS APPROACH WITHIN 6 INCHES FROM THE TOP OF THE SEDIMENTRAP OR CHAMBER BOTTOM.**

**1: MAINTENANCE WITH SEDIMENTRAP - VACUUM TRUCK METHOD**

REMOVE LID FROM INSPECTION PORTS. MEASURE THE DEPTH OF SEDIMENT BUILD-UP IN THE SEDIMENTRAPS. IF SEDIMENT BUILD-UP IN THE SEDIMENTRAP IS WITHIN 6 INCHES FROM THE TOP OF THE SEDIMENTRAP OR CHAMBER BOTTOM THEN PROCEED TO MAINTENANCE STEPS BELOW. IF SEDIMENT BUILD-UP IS LESS THAN 6 INCHES, LOG THE RESULTS AND PLACE THE LIDS BACK ON.

- INSERT VACUUM TUBE THROUGH 10 INCH CLEAN OUT RISER.
- VACUUM TUBE WILL NEED TO REACH THE BOTTOM DEPTH OF SEDIMENTRAP (TYP. 7-10 FEET BELOW FINISHED GRADE).
- REMOVE SEDIMENT USING VACUUM TRUCK/EQUIPMENT UNTIL NO FURTHER SEDIMENT IS BEING REMOVED.
- INSPECT SEDIMENT BUILD-UP AGAIN TO ENSURE PROPER CLEANOUT.

**2: MAINTENANCE WITHOUT SEDIMENTRAP - WATER JET METHOD**

REMOVE LID FROM INSPECTION PORTS. MEASURE THE DEPTH OF SEDIMENT BUILD-UP ON THE UNDERLYING WOVEN FABRIC UNDER THE CHAMBERS. IF SEDIMENT BUILD-UP ON THE BOTTOM IS GREATER THAN 3 INCHES THEN PROCEED TO MAINTENANCE STEPS BELOW. IF SEDIMENT BUILD-UP IS LESS THAN 3 INCHES, LOG THE RESULTS AND PLACE THE LIDS BACK ON.

- REMOVE SEDIMENT FROM SEDIMENT ROW USING A HIGH PRESSURE WATER JET SYSTEM.
- PREFERRED EQUIPMENT REQUIRED SHOULD HAVE A FIXED FLOOR CLEANING NOZZLE (REAR FACING) WITH A SPREAD OF AROUND 45 INCHES.
- APPLY AS MANY PASSES IN THE ROW UNTIL THE BACKFLUSH WATER IS CLEAN.
- VACUUM AREAS UNDER INSPECTION PORTS AND OUT OF ANY MANHOLES.

MAINTENANCE WITH SEDIMENTRAPs USING VACUUM TRUCK

MAINTENANCE WITHOUT SEDIMENTRAPs USING WATER JET

PROJECT NAME :  
PROJECT LOCATION :


DRAWN BY: ARH

NDS STORMCHAMBER SYSTEM DETAILS  
NDS SPECIALIST: 571-521-9538



# STORMCEPTOR® OSR

The Stormceptor OSR is optimized to remove oil and sediment from stormwater runoff. Recommended applications include pretreatment and redevelopment/retrofit projects to meet your water quality objectives.

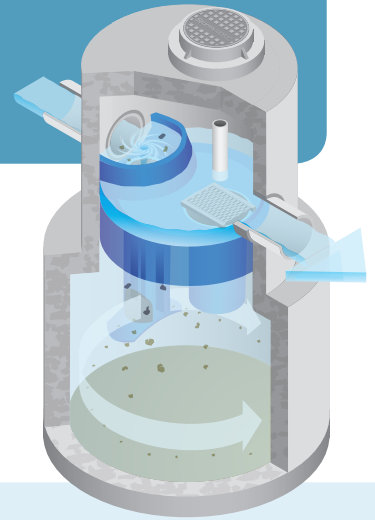

## Product Overview

- Patented design is optimized for fine sand-sized particle removal and increased hydraulic capacity
- Typically designed for removal of 50 micron particles and greater
- Easily and flexibly sized to meet your site's needs
- Hydrocarbon spill protection in wet and dry weather conditions

## Proven performance

- Independent third-party tested
- Independent verification by New Jersey Corporation for Advanced Technology (NJCAT)

## Flexible and versatile

- Easy installation – small footprint saves time and money with limited site disruption
- Minimal drop between inlet and outlet; 1-inch (25mm) or 3-inch (75mm)
- Can be used as a bend structure
- Low head loss from inlet to outlet makes it compatible with existing infrastructure
- Ideal for new developments, redevelopment and retrofit applications

## Essential part of a stormwater treatment train

- Seamless support with pretreatment of existing BMPs (wet/dry ponds, filtration and infiltration devices)
- Improves water quality, extends BMP maintenance life and minimizes costs


## Maintenance made easy

- Maintenance is convenient and trouble-free, with virtually no site disruption
- Easy unit entrance from surface access cover – no confined space entry needed



With over 40,000 units operating worldwide, Stormceptor performs and protects every day, in every storm.

# Oil & Sediment Removal

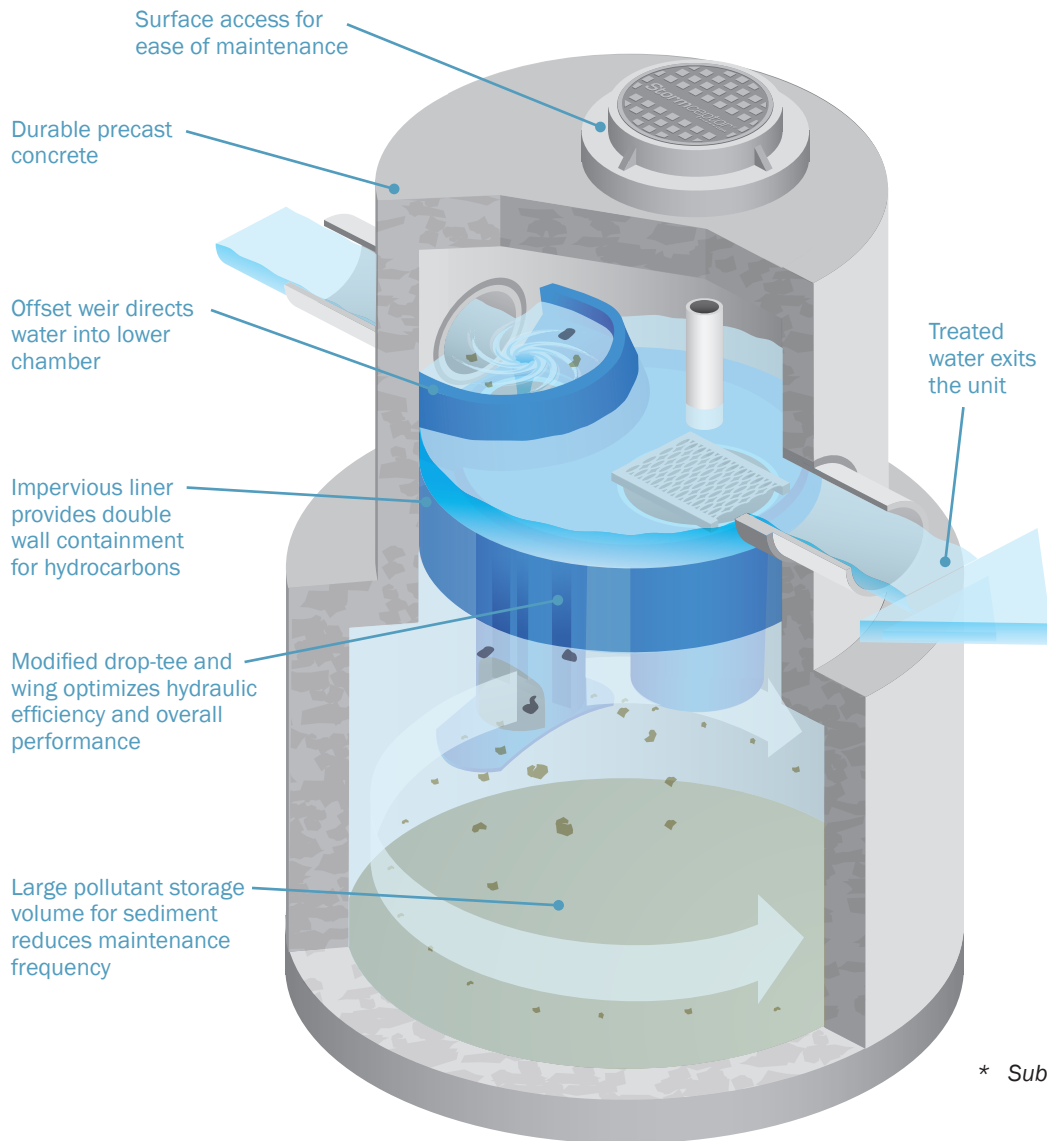


| Stormceptor OSR Models |      |       |
|------------------------|------|-------|
| Model                  | US   | CAD   |
| Inlet OSR              | 065  | 300   |
| In-line OSR            | 140  | 750   |
|                        | 250  | 2000  |
|                        | 390  | 4000  |
|                        | 560  | 6000  |
| Series OSR             | 780  | 9000  |
|                        | 1125 | 14000 |

\* Submerged conditions can be accommodated  
\*\* Fiberglass units are available




## Easy to install

Small footprint saves time and money with limited disruption to your site.



## Seamless

Minimal drop between inlet and outlet pipes makes Stormceptor ideal for retrofits and new development projects.



## Flexible

Inlet OSR can connect multiple inlet pipes.  
Can be used as a bend structure.



# CLEAR<sup>3</sup>

## MBR.ST-105

### Pre-Engineered MBR Sewage Treatment System

The Clear<sup>3</sup> MBR.ST-105 is a pre-engineered stand-alone decentralized modular treatment plant capable of treating sewage and waste water from residential, recreational, institutional and commercial developments up to **27,700 gallons per day**. The rugged, self-contained system is housed in a single modular building enclosure, built to meet local **weather conditions from extreme heat to extreme cold**. The Clear<sup>3</sup> MBR.ST-105 is built on Newterra's years of membrane bioreactor experience and utilizes world class proven ZeeWeed® membranes for exceptional permeate quality that meets the **most stringent regulatory requirements** for reuse applications or discharge to sensitive receptors.

#### Clear<sup>3</sup> Design Advantages

- Pre-fabricated modular facilities
- Rapid deployment
- Compact footprint
- Scalable
- Operator-friendly
- High-quality effluent
- No odor
- More discharge options
- Sound attenuation
- Reuse-ready effluent

#### Influent & Effluent Limits

Designed for a range of wastewater strengths and the ability to meet the most stringent discharge and reuse requirements.

| Flow Parameter                               | Influent From...  | Effluent Limits  |
|----------------------------------------------|-------------------|------------------|
| Biological Oxygen Demand (BOD <sub>5</sub> ) | 200 to 400 mg/L   | 5 mg/L           |
| Total Suspended Solids (TSS)                 | 150 to 350 mg/L   | 5 mg/L           |
| Total Kjeldhal Nitrogen (TKN)                | 35 to 70 mg/L     | –                |
| Total Ammonia Nitrogen (TAN)                 | 25 to 50 mg/L     | 1 mg/L           |
| Total Nitrogen (TN)                          | –                 | 5 mg/L *         |
| Total Phosphorous (TP)                       | 5 to 10 mg/L      | 0.1 mg/L *       |
| Fat, Oil, and Grease (FOG)                   | Less than 30 mg/L | –                |
| Fecal Coliform                               | –                 | 2.2 MPN/100 mL** |
| Water Temperature                            | 10 to 25°C        | –                |
| Turbidity                                    | –                 | 0.5 mg/L         |

\*With nutrient reduction option(s) selected

\*\*With disinfection option(s) selected

#### Efficient Modular Design

- 40' long x 8' wide x 9.5' high
- Fully functional building including, but not limited to insulation, heating, ventilation, lighting, operator work space, and eyewash station
- Optional exterior finishings (color, siding, and/or roofing)



#### Design Flow Parameters

With robust biology and a broad turn-down capability the Clear<sup>3</sup> MBR.ST-105 is designed around the following flow conditions.

| Flow Parameter             | Up To...       |
|----------------------------|----------------|
| Average Daily Flow (ADF)   | 27,700 gal/day |
| Maximum Monthly Flow (MMF) | 33,200 gal/day |
| Maximum Daily Flow (MDF)   | 55,400 gal/day |

“Newterra is leading the way with decentralized wastewater solutions that help reduce project costs with a sustainable treatment approach”



800.420.4056  
newterra.com

Newterra, Ltd. | 800.420.4056 | newterra.com

ZeeWeed® is a Trademark of SUEZ; may be registered in one or more countries.  
The Newterra® logo is a trademarks or registered trademark of Newterra, Ltd. or its affiliates in the U.S. and other countries. Copyright © 2021. Newterra, Ltd. Specifications are subject to change without notice. 08-21



#### Base Unit Features

- Pre-treatment
- Flow equalization
- Aerobic biological treatment
- Membrane filtration with industry leading ZeeWeed® 500S membranes
- Sludge storage and thickening
- Advanced telemetry for remote control, monitoring & diagnostics
- Equipment or treatment train redundancy
- Low power, sludge production, and chemical consumption
- Pre-engineered for fast delivery
- Quality controlled factory assembled and tested
- MET/MET certified

#### Adders & Options

- Customized process design, tankage and equipment sizing
- Biological nutrient reduction, MLE process for denitrification
- Biological nutrient reduction, 4-stage bardenpho process for denitrification
- Coagulant dosing for phosphorous reduction
- UV disinfection
- Chlorine disinfection
- Critical spare parts package
- Turbidity monitoring
- Increased chemical storage
- Building exterior finish (selection of colors, siding, roofing)
- Annual newtN™ service agreement

#### Flexible Tankage

The Clear<sup>3</sup> MBR.ST-105 is designed for use with a variety of in-ground tank configurations. This flexibility allows the benefits of a pre-engineered product, while using the best available tank configuration based on project specific site conditions and availability of labour and materials.



| Basin                    | Required Volume |
|--------------------------|-----------------|
| Trash Trap               | 16,700 gal      |
| Equalization             | 12,000 gal      |
| Aerobic                  | 16,800 gal      |
| Sludge Holding (30 days) | 16,300 gal      |

#### Fiberglass

- 10' diameter FRP tanks provided by Newterra
- All in-tank components are factory installed prior to delivery
- Minimal mechanical and electrical site-work

#### Pre-Cast Concrete

- Pre-cast concrete tanks provided by Newterra or supplied locally
- Some mechanical and electrical site work
- All in-tank components are shipped loose for installation at site

#### Poured Concrete

- Poured in place concrete tanks supplied locally
- Smallest footprint of the tankage options
- More civil engineering and on-site civil, mechanical, and electrical work required
- All in-tank components are shipped loose for installation at site



#### newtN™ Advanced Remote Monitoring & Control

- Advanced cloud-based data acquisition and control
- Bank level security
- A real-time link to the treatment system familiar HMI screen
- Email/text out upon alarm and a daily system status report
- Operating data is collected and available for download from the customer portal or locally at the HMI
- The customer portal also includes other useful information at your fingertips including manuals, troubleshooting guides, parts lists, etc.



## **Appendix E: Roof Drainage**

BUILDING A ROOF RESERVOIR REPORT

BUILDING B ROOF RESERVOIR REPORT

BUILDING C ROOF RESERVOIR REPORT

BUILDING D ROOF RESERVOIR REPORT

BUILDING E ROOF RESERVOIR REPORT



\*\*\*\*\*  
\*\* SIMULATION:1. CHICAGO [2 YR] [3 HR] \*\*  
\*\*\*\*\*

-----  
| RESERVOIR( 0014) | OVERFLOW IS ON  
| IN= 2---> OUT= 1 |  
| DT= 5.0 min |  
-----

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0000             | 0.0032           | 0.0036             |
| 0.0010           | 0.0000             | 0.0032           | 0.0051             |
| 0.0021           | 0.0001             | 0.0032           | 0.0069             |
| 0.0032           | 0.0002             | 0.0032           | 0.0092             |
| 0.0032           | 0.0005             | 0.0032           | 0.0120             |
| 0.0032           | 0.0009             | 0.0032           | 0.0151             |
| 0.0032           | 0.0015             | 0.0032           | 0.0187             |
| 0.0032           | 0.0024             | 0.0032           | 0.0225             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0001)  | 0.415        | 0.088          | 1.00           | 30.67        |
| OUTFLOW: ID= 1 ( 0014)  | 0.415        | 0.003          | 0.58           | 30.68        |
| OVERFLOW: ID= 3 ( 0003) | 0.000        | 0.000          | 0.00           | 0.00         |

TOTAL NUMBER OF SIMULATION OVERFLOW = 0  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.00  
PERCENTAGE OF TIME OVERFLOWING (%) = 0.00

PEAK FLOW REDUCTION [Qout/Qin](%)= 3.59  
TIME SHIFT OF PEAK FLOW (min)=-25.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0098

-----  
\*\* SIMULATION:2. CHICAGO [2 YR] [6 HR] \*\*  
-----

-----  
| RESERVOIR( 0014) | OVERFLOW IS ON  
| IN= 2---> OUT= 1 |  
| DT= 5.0 min |  
-----

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0000             | 0.0032           | 0.0036             |
| 0.0010           | 0.0000             | 0.0032           | 0.0051             |
| 0.0021           | 0.0001             | 0.0032           | 0.0069             |
| 0.0032           | 0.0002             | 0.0032           | 0.0092             |
| 0.0032           | 0.0005             | 0.0032           | 0.0120             |
| 0.0032           | 0.0009             | 0.0032           | 0.0151             |
| 0.0032           | 0.0015             | 0.0032           | 0.0187             |
| 0.0032           | 0.0024             | 0.0032           | 0.0225             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0001)  | 0.415        | 0.088          | 2.00           | 35.66        |
| OUTFLOW: ID= 1 ( 0014)  | 0.415        | 0.003          | 1.42           | 35.67        |
| OVERFLOW: ID= 3 ( 0003) | 0.000        | 0.000          | 0.00           | 0.00         |

TOTAL NUMBER OF SIMULATION OVERFLOW = 0  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.00  
PERCENTAGE OF TIME OVERFLOWING (%) = 0.00

PEAK FLOW REDUCTION [Qout/Qin](%)= 3.59  
TIME SHIFT OF PEAK FLOW (min)=-35.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0099



\*\*\*\*\*  
\*\* SIMULATION:3. CHICAGO [5 YR] [3 HR] \*\*  
\*\*\*\*\*

-----  
| RESERVOIR( 0014) | OVERFLOW IS ON  
| IN= 2--> OUT= 1 |  
| DT= 5.0 min |  
-----

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0000             | 0.0032           | 0.0036             |
| 0.0010           | 0.0000             | 0.0032           | 0.0051             |
| 0.0021           | 0.0001             | 0.0032           | 0.0069             |
| 0.0032           | 0.0002             | 0.0032           | 0.0092             |
| 0.0032           | 0.0005             | 0.0032           | 0.0120             |
| 0.0032           | 0.0009             | 0.0032           | 0.0151             |
| 0.0032           | 0.0015             | 0.0032           | 0.0187             |
| 0.0032           | 0.0024             | 0.0032           | 0.0225             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0001)  | 0.415        | 0.119          | 1.00           | 41.29        |
| OUTFLOW: ID= 1 ( 0014)  | 0.415        | 0.003          | 0.50           | 41.30        |
| OVERFLOW: ID= 3 ( 0003) | 0.000        | 0.000          | 0.00           | 0.00         |

TOTAL NUMBER OF SIMULATION OVERFLOW = 0  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.00  
PERCENTAGE OF TIME OVERFLOWING (%) = 0.00

PEAK FLOW REDUCTION [Qout/Qin](%)= 2.64  
TIME SHIFT OF PEAK FLOW (min)=-30.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0141

-----  
\*\* SIMULATION:4. CHICAGO [5 YR] [6 HR] \*\*  
\*\*\*\*\*

-----  
| RESERVOIR( 0014) | OVERFLOW IS ON  
| IN= 2--> OUT= 1 |  
| DT= 5.0 min |  
-----

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0000             | 0.0032           | 0.0036             |
| 0.0010           | 0.0000             | 0.0032           | 0.0051             |
| 0.0021           | 0.0001             | 0.0032           | 0.0069             |
| 0.0032           | 0.0002             | 0.0032           | 0.0092             |
| 0.0032           | 0.0005             | 0.0032           | 0.0120             |
| 0.0032           | 0.0009             | 0.0032           | 0.0151             |
| 0.0032           | 0.0015             | 0.0032           | 0.0187             |
| 0.0032           | 0.0024             | 0.0032           | 0.0225             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0001)  | 0.415        | 0.119          | 2.00           | 47.80        |
| OUTFLOW: ID= 1 ( 0014)  | 0.415        | 0.003          | 1.17           | 47.80        |
| OVERFLOW: ID= 3 ( 0003) | 0.000        | 0.000          | 0.00           | 0.00         |

TOTAL NUMBER OF SIMULATION OVERFLOW = 0  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.00  
PERCENTAGE OF TIME OVERFLOWING (%) = 0.00

PEAK FLOW REDUCTION [Qout/Qin](%)= 2.64  
TIME SHIFT OF PEAK FLOW (min)=-50.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0143



\*\*\*\*\*  
\*\* SIMULATION:5. CHICAGO [100 YR] [3 HR] \*\*  
\*\*\*\*\*

-----  
| RESERVOIR( 0014) |  
| IN= 2---> OUT= 1 |  
| DT= 5.0 min |  
-----

OVERFLOW IS ON

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0000             | 0.0032           | 0.0036             |
| 0.0010           | 0.0000             | 0.0032           | 0.0051             |
| 0.0021           | 0.0001             | 0.0032           | 0.0069             |
| 0.0032           | 0.0002             | 0.0032           | 0.0092             |
| 0.0032           | 0.0005             | 0.0032           | 0.0120             |
| 0.0032           | 0.0009             | 0.0032           | 0.0151             |
| 0.0032           | 0.0015             | 0.0032           | 0.0187             |
| 0.0032           | 0.0024             | 0.0032           | 0.0225             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0001)  | 0.415        | 0.205          | 1.00           | 70.39        |
| OUTFLOW: ID= 1 ( 0014)  | 0.362        | 0.003          | 0.33           | 71.75        |
| OVERFLOW: ID= 3 ( 0003) | 0.053        | 0.018          | 1.50           | 71.75        |

TOTAL NUMBER OF SIMULATION OVERFLOW = 19  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 1.58  
PERCENTAGE OF TIME OVERFLOWING (%) = 6.76

PEAK FLOW REDUCTION [Qout/Qin](%)= 1.54  
TIME SHIFT OF PEAK FLOW (min)=-40.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0222

-----  
\*\* SIMULATION:6. CHICAGO [100 YR] [6 HR] \*\*  
\*\*\*\*\*

-----  
| RESERVOIR( 0014) |  
| IN= 2---> OUT= 1 |  
| DT= 5.0 min |  
-----

OVERFLOW IS ON

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0000             | 0.0032           | 0.0036             |
| 0.0010           | 0.0000             | 0.0032           | 0.0051             |
| 0.0021           | 0.0001             | 0.0032           | 0.0069             |
| 0.0032           | 0.0002             | 0.0032           | 0.0092             |
| 0.0032           | 0.0005             | 0.0032           | 0.0120             |
| 0.0032           | 0.0009             | 0.0032           | 0.0151             |
| 0.0032           | 0.0015             | 0.0032           | 0.0187             |
| 0.0032           | 0.0024             | 0.0032           | 0.0225             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0001)  | 0.415        | 0.205          | 2.00           | 81.02        |
| OUTFLOW: ID= 1 ( 0014)  | 0.355        | 0.003          | 0.75           | 81.04        |
| OVERFLOW: ID= 3 ( 0003) | 0.060        | 0.018          | 2.42           | 81.04        |

TOTAL NUMBER OF SIMULATION OVERFLOW = 33  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 2.75  
PERCENTAGE OF TIME OVERFLOWING (%) = 10.54

PEAK FLOW REDUCTION [Qout/Qin](%)= 1.54  
TIME SHIFT OF PEAK FLOW (min)=-75.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0225



\*\*\*\*\*  
\*\* SIMULATION:7. Historical Aug 4 1988 \*\*  
\*\*\*\*\*

-----  
| RESERVOIR( 0014)| OVERFLOW IS ON  
| IN= 2---> OUT= 1 |  
| DT= 5.0 min |  
-----

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0000             | 0.0032           | 0.0036             |
| 0.0010           | 0.0000             | 0.0032           | 0.0051             |
| 0.0021           | 0.0001             | 0.0032           | 0.0069             |
| 0.0032           | 0.0002             | 0.0032           | 0.0092             |
| 0.0032           | 0.0005             | 0.0032           | 0.0120             |
| 0.0032           | 0.0009             | 0.0032           | 0.0151             |
| 0.0032           | 0.0015             | 0.0032           | 0.0187             |
| 0.0032           | 0.0024             | 0.0032           | 0.0225             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0001)  | 0.415        | 0.176          | 2.00           | 79.27        |
| OUTFLOW: ID= 1 ( 0014)  | 0.314        | 0.003          | 0.50           | 87.70        |
| OVERFLOW: ID= 3 ( 0003) | 0.101        | 0.189          | 2.00           | 87.70        |

TOTAL NUMBER OF SIMULATION OVERFLOW = 4  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.33  
PERCENTAGE OF TIME OVERFLOWING (%) = 1.33

PEAK FLOW REDUCTION [Qout/Qin](%)= 1.79  
TIME SHIFT OF PEAK FLOW (min)=-90.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0225

-----  
\*\* SIMULATION:8. Historical July 1 1979 \*\*  
\*\*\*\*\*

-----  
| RESERVOIR( 0014)| OVERFLOW IS ON  
| IN= 2---> OUT= 1 |  
| DT= 5.0 min |  
-----

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0000             | 0.0032           | 0.0036             |
| 0.0010           | 0.0000             | 0.0032           | 0.0051             |
| 0.0021           | 0.0001             | 0.0032           | 0.0069             |
| 0.0032           | 0.0002             | 0.0032           | 0.0092             |
| 0.0032           | 0.0005             | 0.0032           | 0.0120             |
| 0.0032           | 0.0009             | 0.0032           | 0.0151             |
| 0.0032           | 0.0015             | 0.0032           | 0.0187             |
| 0.0032           | 0.0024             | 0.0032           | 0.0225             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0001)  | 0.415        | 0.123          | 1.50           | 82.69        |
| OUTFLOW: ID= 1 ( 0014)  | 0.303        | 0.003          | 0.42           | 84.51        |
| OVERFLOW: ID= 3 ( 0003) | 0.112        | 0.090          | 1.58           | 84.51        |

TOTAL NUMBER OF SIMULATION OVERFLOW = 16  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 1.33  
PERCENTAGE OF TIME OVERFLOWING (%) = 5.78

PEAK FLOW REDUCTION [Qout/Qin](%)= 2.57  
TIME SHIFT OF PEAK FLOW (min)=-65.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0225



\*\*\*\*\*  
\*\* SIMULATION:9. 25mm4hrChicago \*\*  
\*\*\*\*\*

```
-----
| RESERVOIR( 0014)|      OVERFLOW IS ON
| IN= 2--> OUT= 1 |
| DT=  5.0 min   |
|-----|
```

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0000             | 0.0032           | 0.0036             |
| 0.0010           | 0.0000             | 0.0032           | 0.0051             |
| 0.0021           | 0.0001             | 0.0032           | 0.0069             |
| 0.0032           | 0.0002             | 0.0032           | 0.0092             |
| 0.0032           | 0.0005             | 0.0032           | 0.0120             |
| 0.0032           | 0.0009             | 0.0032           | 0.0151             |
| 0.0032           | 0.0015             | 0.0032           | 0.0187             |
| 0.0032           | 0.0024             | 0.0032           | 0.0225             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0001)  | 0.415        | 0.057          | 1.50           | 23.83        |
| OUTFLOW: ID= 1 ( 0014)  | 0.415        | 0.003          | 1.00           | 23.84        |
| OVERFLOW: ID= 3 ( 0003) | 0.000        | 0.000          | 0.00           | 0.00         |

TOTAL NUMBER OF SIMULATION OVERFLOW = 0  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.00  
PERCENTAGE OF TIME OVERFLOWING (%) = 0.00

PEAK FLOW REDUCTION [Qout/Qin](%)= 5.53  
TIME SHIFT OF PEAK FLOW (min)=-30.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0061

-----





\*\*\*\*\*  
\*\* SIMULATION:1. CHICAGO [2 YR] [3 HR] \*\*  
\*\*\*\*\*

-----  
| RESERVOIR( 0015) | OVERFLOW IS ON  
| IN= 2---> OUT= 1 |  
| DT= 5.0 min |  
-----

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0000             | 0.0035           | 0.0039             |
| 0.0012           | 0.0000             | 0.0035           | 0.0056             |
| 0.0023           | 0.0001             | 0.0035           | 0.0076             |
| 0.0035           | 0.0002             | 0.0035           | 0.0101             |
| 0.0035           | 0.0005             | 0.0035           | 0.0131             |
| 0.0035           | 0.0010             | 0.0035           | 0.0166             |
| 0.0035           | 0.0017             | 0.0035           | 0.0206             |
| 0.0035           | 0.0026             | 0.0035           | 0.0250             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0002)  | 0.491        | 0.104          | 1.00           | 30.67        |
| OUTFLOW: ID= 1 ( 0015)  | 0.491        | 0.003          | 0.58           | 30.67        |
| OVERFLOW: ID= 3 ( 0003) | 0.000        | 0.000          | 0.00           | 0.00         |

TOTAL NUMBER OF SIMULATION OVERFLOW = 0  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.00  
PERCENTAGE OF TIME OVERFLOWING (%) = 0.00

PEAK FLOW REDUCTION [Qout/Qin](%)= 3.35  
TIME SHIFT OF PEAK FLOW (min)=-25.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0118

-----  
\*\* SIMULATION:2. CHICAGO [2 YR] [6 HR] \*\*  
-----

-----  
| RESERVOIR( 0015) | OVERFLOW IS ON  
| IN= 2---> OUT= 1 |  
| DT= 5.0 min |  
-----

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0000             | 0.0035           | 0.0039             |
| 0.0012           | 0.0000             | 0.0035           | 0.0056             |
| 0.0023           | 0.0001             | 0.0035           | 0.0076             |
| 0.0035           | 0.0002             | 0.0035           | 0.0101             |
| 0.0035           | 0.0005             | 0.0035           | 0.0131             |
| 0.0035           | 0.0010             | 0.0035           | 0.0166             |
| 0.0035           | 0.0017             | 0.0035           | 0.0206             |
| 0.0035           | 0.0026             | 0.0035           | 0.0250             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0002)  | 0.491        | 0.104          | 2.00           | 35.66        |
| OUTFLOW: ID= 1 ( 0015)  | 0.491        | 0.003          | 1.33           | 35.66        |
| OVERFLOW: ID= 3 ( 0003) | 0.000        | 0.000          | 0.00           | 0.00         |

TOTAL NUMBER OF SIMULATION OVERFLOW = 0  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.00  
PERCENTAGE OF TIME OVERFLOWING (%) = 0.00

PEAK FLOW REDUCTION [Qout/Qin](%)= 3.35  
TIME SHIFT OF PEAK FLOW (min)=-40.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0120



\*\*\*\*\*  
\*\* SIMULATION:3. CHICAGO [5 YR] [3 HR] \*\*  
\*\*\*\*\*

-----  
| RESERVOIR( 0015) | OVERFLOW IS ON  
| IN= 2---> OUT= 1 |  
| DT= 5.0 min |  
-----

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0000             | 0.0035           | 0.0039             |
| 0.0012           | 0.0000             | 0.0035           | 0.0056             |
| 0.0023           | 0.0001             | 0.0035           | 0.0076             |
| 0.0035           | 0.0002             | 0.0035           | 0.0101             |
| 0.0035           | 0.0005             | 0.0035           | 0.0131             |
| 0.0035           | 0.0010             | 0.0035           | 0.0166             |
| 0.0035           | 0.0017             | 0.0035           | 0.0206             |
| 0.0035           | 0.0026             | 0.0035           | 0.0250             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0002)  | 0.491        | 0.141          | 1.00           | 41.29        |
| OUTFLOW: ID= 1 ( 0015)  | 0.491        | 0.003          | 0.50           | 41.30        |
| OVERFLOW: ID= 3 ( 0003) | 0.000        | 0.000          | 0.00           | 0.00         |

TOTAL NUMBER OF SIMULATION OVERFLOW = 0  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.00  
PERCENTAGE OF TIME OVERFLOWING (%) = 0.00

PEAK FLOW REDUCTION [Qout/Qin](%)= 2.46  
TIME SHIFT OF PEAK FLOW (min)=-30.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0169

-----  
\*\* SIMULATION:4. CHICAGO [5 YR] [6 HR] \*\*  
\*\*\*\*\*

-----  
| RESERVOIR( 0015) | OVERFLOW IS ON  
| IN= 2---> OUT= 1 |  
| DT= 5.0 min |  
-----

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0000             | 0.0035           | 0.0039             |
| 0.0012           | 0.0000             | 0.0035           | 0.0056             |
| 0.0023           | 0.0001             | 0.0035           | 0.0076             |
| 0.0035           | 0.0002             | 0.0035           | 0.0101             |
| 0.0035           | 0.0005             | 0.0035           | 0.0131             |
| 0.0035           | 0.0010             | 0.0035           | 0.0166             |
| 0.0035           | 0.0017             | 0.0035           | 0.0206             |
| 0.0035           | 0.0026             | 0.0035           | 0.0250             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0002)  | 0.491        | 0.141          | 2.00           | 47.80        |
| OUTFLOW: ID= 1 ( 0015)  | 0.491        | 0.003          | 1.08           | 47.81        |
| OVERFLOW: ID= 3 ( 0003) | 0.000        | 0.000          | 0.00           | 0.00         |

TOTAL NUMBER OF SIMULATION OVERFLOW = 0  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.00  
PERCENTAGE OF TIME OVERFLOWING (%) = 0.00

PEAK FLOW REDUCTION [Qout/Qin](%)= 2.46  
TIME SHIFT OF PEAK FLOW (min)=-55.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0172



\*\*\*\*\*  
\*\* SIMULATION:5. CHICAGO [100 YR] [3 HR] \*\*  
\*\*\*\*\*

-----  
| RESERVOIR( 0015) | OVERFLOW IS ON  
| IN= 2---> OUT= 1 |  
| DT= 5.0 min |  
-----

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0000             | 0.0035           | 0.0039             |
| 0.0012           | 0.0000             | 0.0035           | 0.0056             |
| 0.0023           | 0.0001             | 0.0035           | 0.0076             |
| 0.0035           | 0.0002             | 0.0035           | 0.0101             |
| 0.0035           | 0.0005             | 0.0035           | 0.0131             |
| 0.0035           | 0.0010             | 0.0035           | 0.0166             |
| 0.0035           | 0.0017             | 0.0035           | 0.0206             |
| 0.0035           | 0.0026             | 0.0035           | 0.0250             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0002)  | 0.491        | 0.243          | 1.00           | 70.39        |
| OUTFLOW: ID= 1 ( 0015)  | 0.403        | 0.003          | 0.33           | 71.10        |
| OVERFLOW: ID= 3 ( 0003) | 0.088        | 0.034          | 1.33           | 71.10        |

TOTAL NUMBER OF SIMULATION OVERFLOW = 21  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 1.75  
PERCENTAGE OF TIME OVERFLOWING (%) = 7.47

PEAK FLOW REDUCTION [Qout/Qin](%)= 1.43  
TIME SHIFT OF PEAK FLOW (min)=-40.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0247

-----  
\*\* SIMULATION:6. CHICAGO [100 YR] [6 HR] \*\*  
\*\*\*\*\*

-----  
| RESERVOIR( 0015) | OVERFLOW IS ON  
| IN= 2---> OUT= 1 |  
| DT= 5.0 min |  
-----

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0000             | 0.0035           | 0.0039             |
| 0.0012           | 0.0000             | 0.0035           | 0.0056             |
| 0.0023           | 0.0001             | 0.0035           | 0.0076             |
| 0.0035           | 0.0002             | 0.0035           | 0.0101             |
| 0.0035           | 0.0005             | 0.0035           | 0.0131             |
| 0.0035           | 0.0010             | 0.0035           | 0.0166             |
| 0.0035           | 0.0017             | 0.0035           | 0.0206             |
| 0.0035           | 0.0026             | 0.0035           | 0.0250             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0002)  | 0.491        | 0.243          | 2.00           | 81.03        |
| OUTFLOW: ID= 1 ( 0015)  | 0.387        | 0.003          | 0.67           | 82.45        |
| OVERFLOW: ID= 3 ( 0003) | 0.104        | 0.047          | 2.25           | 82.45        |

TOTAL NUMBER OF SIMULATION OVERFLOW = 40  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 3.33  
PERCENTAGE OF TIME OVERFLOWING (%) = 12.70

PEAK FLOW REDUCTION [Qout/Qin](%)= 1.43  
TIME SHIFT OF PEAK FLOW (min)=-80.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0250



\*\*\*\*\*  
\*\* SIMULATION:7. Historical Aug 4 1988 \*\*  
\*\*\*\*\*

-----  
| RESERVOIR( 0015) | OVERFLOW IS ON  
| IN= 2---> OUT= 1 |  
| DT= 5.0 min |  
-----

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0000             | 0.0035           | 0.0039             |
| 0.0012           | 0.0000             | 0.0035           | 0.0056             |
| 0.0023           | 0.0001             | 0.0035           | 0.0076             |
| 0.0035           | 0.0002             | 0.0035           | 0.0101             |
| 0.0035           | 0.0005             | 0.0035           | 0.0131             |
| 0.0035           | 0.0010             | 0.0035           | 0.0166             |
| 0.0035           | 0.0017             | 0.0035           | 0.0206             |
| 0.0035           | 0.0026             | 0.0035           | 0.0250             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0002)  | 0.491        | 0.208          | 2.00           | 79.27        |
| OUTFLOW: ID= 1 ( 0015)  | 0.368        | 0.003          | 0.50           | 84.03        |
| OVERFLOW: ID= 3 ( 0003) | 0.123        | 0.205          | 2.00           | 84.03        |

TOTAL NUMBER OF SIMULATION OVERFLOW = 5  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.42  
PERCENTAGE OF TIME OVERFLOWING (%) = 1.64

PEAK FLOW REDUCTION [Qout/Qin](%)= 1.67  
TIME SHIFT OF PEAK FLOW (min)=-90.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0250

-----  
\*\* SIMULATION:8. Historical July 1 1979 \*\*  
\*\*\*\*\*

-----  
| RESERVOIR( 0015) | OVERFLOW IS ON  
| IN= 2---> OUT= 1 |  
| DT= 5.0 min |  
-----

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0000             | 0.0035           | 0.0039             |
| 0.0012           | 0.0000             | 0.0035           | 0.0056             |
| 0.0023           | 0.0001             | 0.0035           | 0.0076             |
| 0.0035           | 0.0002             | 0.0035           | 0.0101             |
| 0.0035           | 0.0005             | 0.0035           | 0.0131             |
| 0.0035           | 0.0010             | 0.0035           | 0.0166             |
| 0.0035           | 0.0017             | 0.0035           | 0.0206             |
| 0.0035           | 0.0026             | 0.0035           | 0.0250             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0002)  | 0.491        | 0.145          | 1.50           | 82.69        |
| OUTFLOW: ID= 1 ( 0015)  | 0.345        | 0.003          | 0.42           | 83.04        |
| OVERFLOW: ID= 3 ( 0003) | 0.146        | 0.096          | 1.58           | 83.04        |

TOTAL NUMBER OF SIMULATION OVERFLOW = 18  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 1.50  
PERCENTAGE OF TIME OVERFLOWING (%) = 6.41

PEAK FLOW REDUCTION [Qout/Qin](%)= 2.39  
TIME SHIFT OF PEAK FLOW (min)=-65.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0250



\*\*\*\*\*  
\*\* SIMULATION:9. 25mm4hrChicago \*\*  
\*\*\*\*\*

-----  
| RESERVOIR( 0015) | OVERFLOW IS ON  
| IN= 2--> OUT= 1 |  
| DT= 5.0 min |  
-----

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0000             | 0.0035           | 0.0039             |
| 0.0012           | 0.0000             | 0.0035           | 0.0056             |
| 0.0023           | 0.0001             | 0.0035           | 0.0076             |
| 0.0035           | 0.0002             | 0.0035           | 0.0101             |
| 0.0035           | 0.0005             | 0.0035           | 0.0131             |
| 0.0035           | 0.0010             | 0.0035           | 0.0166             |
| 0.0035           | 0.0017             | 0.0035           | 0.0206             |
| 0.0035           | 0.0026             | 0.0035           | 0.0250             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0002)  | 0.491        | 0.067          | 1.50           | 23.83        |
| OUTFLOW: ID= 1 ( 0015)  | 0.491        | 0.003          | 0.92           | 23.83        |
| OVERFLOW: ID= 3 ( 0003) | 0.000        | 0.000          | 0.00           | 0.00         |

TOTAL NUMBER OF SIMULATION OVERFLOW = 0  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.00  
PERCENTAGE OF TIME OVERFLOWING (%) = 0.00

PEAK FLOW REDUCTION [Qout/Qin](%)= 5.17  
TIME SHIFT OF PEAK FLOW (min)=-35.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0075

-----



\*\*\*\*\*  
\*\* SIMULATION:1. CHICAGO [2 YR] [3 HR] \*\*  
\*\*\*\*\*

-----  
| RESERVOIR( 0016) |  
| IN= 2--> OUT= 1 |  
| DT= 5.0 min |  
-----

OVERFLOW IS ON

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0000             | 0.0025           | 0.0028             |
| 0.0008           | 0.0000             | 0.0025           | 0.0039             |
| 0.0017           | 0.0000             | 0.0025           | 0.0053             |
| 0.0025           | 0.0002             | 0.0025           | 0.0070             |
| 0.0025           | 0.0004             | 0.0025           | 0.0090             |
| 0.0025           | 0.0007             | 0.0025           | 0.0113             |
| 0.0025           | 0.0012             | 0.0025           | 0.0140             |
| 0.0025           | 0.0019             | 0.0025           | 0.0171             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0003)  | 0.409        | 0.086          | 1.00           | 30.67        |
| OUTFLOW: ID= 1 ( 0016)  | 0.409        | 0.003          | 0.58           | 30.68        |
| OVERFLOW: ID= 3 ( 0003) | 0.000        | 0.000          | 0.00           | 0.00         |

TOTAL NUMBER OF SIMULATION OVERFLOW = 0  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.00  
PERCENTAGE OF TIME OVERFLOWING (%) = 0.00

PEAK FLOW REDUCTION [Qout/Qin](%)= 2.92  
TIME SHIFT OF PEAK FLOW (min)=-25.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0101

-----  
\*\*\*\*\*  
\*\* SIMULATION:2. CHICAGO [2 YR] [6 HR] \*\*  
\*\*\*\*\*

-----  
| RESERVOIR( 0016) |  
| IN= 2--> OUT= 1 |  
| DT= 5.0 min |  
-----

OVERFLOW IS ON

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0000             | 0.0025           | 0.0028             |
| 0.0008           | 0.0000             | 0.0025           | 0.0039             |
| 0.0017           | 0.0000             | 0.0025           | 0.0053             |
| 0.0025           | 0.0002             | 0.0025           | 0.0070             |
| 0.0025           | 0.0004             | 0.0025           | 0.0090             |
| 0.0025           | 0.0007             | 0.0025           | 0.0113             |
| 0.0025           | 0.0012             | 0.0025           | 0.0140             |
| 0.0025           | 0.0019             | 0.0025           | 0.0171             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0003)  | 0.409        | 0.086          | 2.00           | 35.66        |
| OUTFLOW: ID= 1 ( 0016)  | 0.409        | 0.003          | 1.25           | 35.66        |
| OVERFLOW: ID= 3 ( 0003) | 0.000        | 0.000          | 0.00           | 0.00         |

TOTAL NUMBER OF SIMULATION OVERFLOW = 0  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.00  
PERCENTAGE OF TIME OVERFLOWING (%) = 0.00

PEAK FLOW REDUCTION [Qout/Qin](%)= 2.92  
TIME SHIFT OF PEAK FLOW (min)=-45.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0103



\*\*\*\*\*  
\*\* SIMULATION:3. CHICAGO [5 YR] [3 HR] \*\*  
\*\*\*\*\*

-----  
| RESERVOIR( 0016) |  
| IN= 2--> OUT= 1 |  
| DT= 5.0 min |  
-----

OVERFLOW IS ON

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0000             | 0.0025           | 0.0028             |
| 0.0008           | 0.0000             | 0.0025           | 0.0039             |
| 0.0017           | 0.0000             | 0.0025           | 0.0053             |
| 0.0025           | 0.0002             | 0.0025           | 0.0070             |
| 0.0025           | 0.0004             | 0.0025           | 0.0090             |
| 0.0025           | 0.0007             | 0.0025           | 0.0113             |
| 0.0025           | 0.0012             | 0.0025           | 0.0140             |
| 0.0025           | 0.0019             | 0.0025           | 0.0171             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0003)  | 0.409        | 0.118          | 1.00           | 41.29        |
| OUTFLOW: ID= 1 ( 0016)  | 0.409        | 0.003          | 0.42           | 41.30        |
| OVERFLOW: ID= 3 ( 0003) | 0.000        | 0.000          | 0.00           | 0.00         |

TOTAL NUMBER OF SIMULATION OVERFLOW = 0  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.00  
PERCENTAGE OF TIME OVERFLOWING (%) = 0.00

PEAK FLOW REDUCTION [Qout/Qin](%)= 2.14  
TIME SHIFT OF PEAK FLOW (min)=-35.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0144

-----  
\*\*\*\*\*  
\*\* SIMULATION:4. CHICAGO [5 YR] [6 HR] \*\*  
\*\*\*\*\*

-----  
| RESERVOIR( 0016) |  
| IN= 2--> OUT= 1 |  
| DT= 5.0 min |  
-----

OVERFLOW IS ON

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0000             | 0.0025           | 0.0028             |
| 0.0008           | 0.0000             | 0.0025           | 0.0039             |
| 0.0017           | 0.0000             | 0.0025           | 0.0053             |
| 0.0025           | 0.0002             | 0.0025           | 0.0070             |
| 0.0025           | 0.0004             | 0.0025           | 0.0090             |
| 0.0025           | 0.0007             | 0.0025           | 0.0113             |
| 0.0025           | 0.0012             | 0.0025           | 0.0140             |
| 0.0025           | 0.0019             | 0.0025           | 0.0171             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0003)  | 0.409        | 0.118          | 2.00           | 47.79        |
| OUTFLOW: ID= 1 ( 0016)  | 0.409        | 0.003          | 1.00           | 47.79        |
| OVERFLOW: ID= 3 ( 0003) | 0.000        | 0.000          | 0.00           | 0.00         |

TOTAL NUMBER OF SIMULATION OVERFLOW = 0  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.00  
PERCENTAGE OF TIME OVERFLOWING (%) = 0.00

PEAK FLOW REDUCTION [Qout/Qin](%)= 2.14  
TIME SHIFT OF PEAK FLOW (min)=-60.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0148





\*\*\*\*\*  
\*\* SIMULATION:5. CHICAGO [100 YR] [3 HR] \*\*  
\*\*\*\*\*

```
-----
| RESERVOIR( 0016)| OVERFLOW IS ON
| IN= 2--> OUT= 1 |
| DT= 5.0 min      |
-----
```

|  | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|--|------------------|--------------------|------------------|--------------------|
|  | 0.0000           | 0.0000             | 0.0025           | 0.0028             |
|  | 0.0008           | 0.0000             | 0.0025           | 0.0039             |
|  | 0.0017           | 0.0000             | 0.0025           | 0.0053             |
|  | 0.0025           | 0.0002             | 0.0025           | 0.0070             |
|  | 0.0025           | 0.0004             | 0.0025           | 0.0090             |
|  | 0.0025           | 0.0007             | 0.0025           | 0.0113             |
|  | 0.0025           | 0.0012             | 0.0025           | 0.0140             |
|  | 0.0025           | 0.0019             | 0.0025           | 0.0171             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0003)  | 0.409        | 0.202          | 1.00           | 70.39        |
| OUTFLOW: ID= 1 ( 0016)  | 0.266        | 0.003          | 0.33           | 74.95        |
| OVERFLOW: ID= 3 ( 0003) | 0.143        | 0.088          | 1.08           | 74.95        |

TOTAL NUMBER OF SIMULATION OVERFLOW = 24  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 2.00  
PERCENTAGE OF TIME OVERFLOWING (%) = 8.92

PEAK FLOW REDUCTION [Qout/Qin](%)= 1.25  
TIME SHIFT OF PEAK FLOW (min)=-40.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0171

\*\*\*\*\*  
\*\* SIMULATION:6. CHICAGO [100 YR] [6 HR] \*\*  
\*\*\*\*\*

```
-----
| RESERVOIR( 0016)| OVERFLOW IS ON
| IN= 2--> OUT= 1 |
| DT= 5.0 min      |
-----
```

|  | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|--|------------------|--------------------|------------------|--------------------|
|  | 0.0000           | 0.0000             | 0.0025           | 0.0028             |
|  | 0.0008           | 0.0000             | 0.0025           | 0.0039             |
|  | 0.0017           | 0.0000             | 0.0025           | 0.0053             |
|  | 0.0025           | 0.0002             | 0.0025           | 0.0070             |
|  | 0.0025           | 0.0004             | 0.0025           | 0.0090             |
|  | 0.0025           | 0.0007             | 0.0025           | 0.0113             |
|  | 0.0025           | 0.0012             | 0.0025           | 0.0140             |
|  | 0.0025           | 0.0019             | 0.0025           | 0.0171             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0003)  | 0.409        | 0.202          | 2.00           | 81.02        |
| OUTFLOW: ID= 1 ( 0016)  | 0.274        | 0.003          | 0.67           | 81.00        |
| OVERFLOW: ID= 3 ( 0003) | 0.135        | 0.062          | 2.08           | 81.00        |

TOTAL NUMBER OF SIMULATION OVERFLOW = 44  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 3.67  
PERCENTAGE OF TIME OVERFLOWING (%) = 14.57

PEAK FLOW REDUCTION [Qout/Qin](%)= 1.25  
TIME SHIFT OF PEAK FLOW (min)=-80.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0171



\*\*\*\*\*  
\*\* SIMULATION:7. Historical Aug 4 1988 \*\*  
\*\*\*\*\*

```
-----
| RESERVOIR( 0016)| OVERFLOW IS ON
| IN= 2--> OUT= 1 |
| DT= 5.0 min      |
-----
```

|  | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|--|------------------|--------------------|------------------|--------------------|
|  | 0.0000           | 0.0000             | 0.0025           | 0.0028             |
|  | 0.0008           | 0.0000             | 0.0025           | 0.0039             |
|  | 0.0017           | 0.0000             | 0.0025           | 0.0053             |
|  | 0.0025           | 0.0002             | 0.0025           | 0.0070             |
|  | 0.0025           | 0.0004             | 0.0025           | 0.0090             |
|  | 0.0025           | 0.0007             | 0.0025           | 0.0113             |
|  | 0.0025           | 0.0012             | 0.0025           | 0.0140             |
|  | 0.0025           | 0.0019             | 0.0025           | 0.0171             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0003)  | 0.409        | 0.174          | 2.00           | 79.27        |
| OUTFLOW: ID= 1 ( 0016)  | 0.253        | 0.003          | 0.50           | 85.85        |
| OVERFLOW: ID= 3 ( 0003) | 0.156        | 0.171          | 2.00           | 85.85        |

TOTAL NUMBER OF SIMULATION OVERFLOW = 6  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.50  
PERCENTAGE OF TIME OVERFLOWING (%) = 2.03

PEAK FLOW REDUCTION [Qout/Qin](%)= 1.45  
TIME SHIFT OF PEAK FLOW (min)=-90.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0171

\*\*\*\*\*  
\*\* SIMULATION:8. Historical July 1 1979 \*\*  
\*\*\*\*\*

```
-----
| RESERVOIR( 0016)| OVERFLOW IS ON
| IN= 2--> OUT= 1 |
| DT= 5.0 min      |
-----
```

|  | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|--|------------------|--------------------|------------------|--------------------|
|  | 0.0000           | 0.0000             | 0.0025           | 0.0028             |
|  | 0.0008           | 0.0000             | 0.0025           | 0.0039             |
|  | 0.0017           | 0.0000             | 0.0025           | 0.0053             |
|  | 0.0025           | 0.0002             | 0.0025           | 0.0070             |
|  | 0.0025           | 0.0004             | 0.0025           | 0.0090             |
|  | 0.0025           | 0.0007             | 0.0025           | 0.0113             |
|  | 0.0025           | 0.0012             | 0.0025           | 0.0140             |
|  | 0.0025           | 0.0019             | 0.0025           | 0.0171             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0003)  | 0.409        | 0.121          | 1.50           | 82.69        |
| OUTFLOW: ID= 1 ( 0016)  | 0.238        | 0.003          | 0.42           | 83.20        |
| OVERFLOW: ID= 3 ( 0003) | 0.171        | 0.118          | 1.50           | 83.20        |

TOTAL NUMBER OF SIMULATION OVERFLOW = 19  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 1.58  
PERCENTAGE OF TIME OVERFLOWING (%) = 7.06

PEAK FLOW REDUCTION [Qout/Qin](%)= 2.09  
TIME SHIFT OF PEAK FLOW (min)=-65.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0171



\*\*\*\*\*  
\*\* SIMULATION:9. 25mm4hrChicago \*\*  
\*\*\*\*\*

```
-----
| RESERVOIR( 0016)| OVERFLOW IS ON
| IN= 2--> OUT= 1 |
| DT= 5.0 min      |
-----
```

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0000             | 0.0025           | 0.0028             |
| 0.0008           | 0.0000             | 0.0025           | 0.0039             |
| 0.0017           | 0.0000             | 0.0025           | 0.0053             |
| 0.0025           | 0.0002             | 0.0025           | 0.0070             |
| 0.0025           | 0.0004             | 0.0025           | 0.0090             |
| 0.0025           | 0.0007             | 0.0025           | 0.0113             |
| 0.0025           | 0.0012             | 0.0025           | 0.0140             |
| 0.0025           | 0.0019             | 0.0025           | 0.0171             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0003)  | 0.409        | 0.056          | 1.50           | 23.83        |
| OUTFLOW: ID= 1 ( 0016)  | 0.409        | 0.003          | 0.83           | 23.84        |
| OVERFLOW: ID= 3 ( 0003) | 0.000        | 0.000          | 0.00           | 0.00         |

TOTAL NUMBER OF SIMULATION OVERFLOW = 0  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.00  
PERCENTAGE OF TIME OVERFLOWING (%) = 0.00

PEAK FLOW REDUCTION [Qout/Qin](%)= 4.49  
TIME SHIFT OF PEAK FLOW (min)=-40.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0066

-----



\*\*\*\*\*  
\*\* SIMULATION:1. CHICAGO [2 YR] [3 HR] \*\*  
\*\*\*\*\*

-----  
| RESERVOIR( 0017) |  
| IN= 2--> OUT= 1 |  
| DT= 5.0 min |  
-----

OVERFLOW IS ON

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0000             | 0.0025           | 0.0028             |
| 0.0008           | 0.0000             | 0.0025           | 0.0039             |
| 0.0017           | 0.0000             | 0.0025           | 0.0053             |
| 0.0025           | 0.0002             | 0.0025           | 0.0070             |
| 0.0025           | 0.0004             | 0.0025           | 0.0091             |
| 0.0025           | 0.0007             | 0.0025           | 0.0114             |
| 0.0025           | 0.0012             | 0.0025           | 0.0141             |
| 0.0025           | 0.0019             | 0.0025           | 0.0171             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0004)  | 0.369        | 0.078          | 1.00           | 30.67        |
| OUTFLOW: ID= 1 ( 0017)  | 0.369        | 0.003          | 0.58           | 30.67        |
| OVERFLOW: ID= 3 ( 0003) | 0.000        | 0.000          | 0.00           | 0.00         |

TOTAL NUMBER OF SIMULATION OVERFLOW = 0  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.00  
PERCENTAGE OF TIME OVERFLOWING (%) = 0.00

PEAK FLOW REDUCTION [Qout/Qin](%)= 3.23  
TIME SHIFT OF PEAK FLOW (min)=-25.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0089

-----  
\*\*\*\*\*  
\*\* SIMULATION:2. CHICAGO [2 YR] [6 HR] \*\*  
\*\*\*\*\*

-----  
| RESERVOIR( 0017) |  
| IN= 2--> OUT= 1 |  
| DT= 5.0 min |  
-----

OVERFLOW IS ON

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0000             | 0.0025           | 0.0028             |
| 0.0008           | 0.0000             | 0.0025           | 0.0039             |
| 0.0017           | 0.0000             | 0.0025           | 0.0053             |
| 0.0025           | 0.0002             | 0.0025           | 0.0070             |
| 0.0025           | 0.0004             | 0.0025           | 0.0091             |
| 0.0025           | 0.0007             | 0.0025           | 0.0114             |
| 0.0025           | 0.0012             | 0.0025           | 0.0141             |
| 0.0025           | 0.0019             | 0.0025           | 0.0171             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0004)  | 0.369        | 0.078          | 2.00           | 35.65        |
| OUTFLOW: ID= 1 ( 0017)  | 0.369        | 0.003          | 1.33           | 35.66        |
| OVERFLOW: ID= 3 ( 0003) | 0.000        | 0.000          | 0.00           | 0.00         |

TOTAL NUMBER OF SIMULATION OVERFLOW = 0  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.00  
PERCENTAGE OF TIME OVERFLOWING (%) = 0.00

PEAK FLOW REDUCTION [Qout/Qin](%)= 3.23  
TIME SHIFT OF PEAK FLOW (min)=-40.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0091



\*\*\*\*\*  
\*\* SIMULATION:3. CHICAGO [5 YR] [3 HR] \*\*  
\*\*\*\*\*

-----  
| RESERVOIR( 0017) |  
| IN= 2--> OUT= 1 |  
| DT= 5.0 min |  
-----

OVERFLOW IS ON

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0000             | 0.0025           | 0.0028             |
| 0.0008           | 0.0000             | 0.0025           | 0.0039             |
| 0.0017           | 0.0000             | 0.0025           | 0.0053             |
| 0.0025           | 0.0002             | 0.0025           | 0.0070             |
| 0.0025           | 0.0004             | 0.0025           | 0.0091             |
| 0.0025           | 0.0007             | 0.0025           | 0.0114             |
| 0.0025           | 0.0012             | 0.0025           | 0.0141             |
| 0.0025           | 0.0019             | 0.0025           | 0.0171             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0004)  | 0.369        | 0.106          | 1.00           | 41.29        |
| OUTFLOW: ID= 1 ( 0017)  | 0.369        | 0.003          | 0.50           | 41.30        |
| OVERFLOW: ID= 3 ( 0003) | 0.000        | 0.000          | 0.00           | 0.00         |

TOTAL NUMBER OF SIMULATION OVERFLOW = 0  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.00  
PERCENTAGE OF TIME OVERFLOWING (%) = 0.00

PEAK FLOW REDUCTION [Qout/Qin](%)= 2.38  
TIME SHIFT OF PEAK FLOW (min)=-30.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0128

-----  
\*\*\*\*\*  
\*\* SIMULATION:4. CHICAGO [5 YR] [6 HR] \*\*  
\*\*\*\*\*

-----  
| RESERVOIR( 0017) |  
| IN= 2--> OUT= 1 |  
| DT= 5.0 min |  
-----

OVERFLOW IS ON

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0000             | 0.0025           | 0.0028             |
| 0.0008           | 0.0000             | 0.0025           | 0.0039             |
| 0.0017           | 0.0000             | 0.0025           | 0.0053             |
| 0.0025           | 0.0002             | 0.0025           | 0.0070             |
| 0.0025           | 0.0004             | 0.0025           | 0.0091             |
| 0.0025           | 0.0007             | 0.0025           | 0.0114             |
| 0.0025           | 0.0012             | 0.0025           | 0.0141             |
| 0.0025           | 0.0019             | 0.0025           | 0.0171             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0004)  | 0.369        | 0.106          | 2.00           | 47.80        |
| OUTFLOW: ID= 1 ( 0017)  | 0.369        | 0.003          | 1.08           | 47.80        |
| OVERFLOW: ID= 3 ( 0003) | 0.000        | 0.000          | 0.00           | 0.00         |

TOTAL NUMBER OF SIMULATION OVERFLOW = 0  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.00  
PERCENTAGE OF TIME OVERFLOWING (%) = 0.00

PEAK FLOW REDUCTION [Qout/Qin](%)= 2.38  
TIME SHIFT OF PEAK FLOW (min)=-55.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0131



\*\*\*\*\*  
\*\* SIMULATION:5. CHICAGO [100 YR] [3 HR] \*\*  
\*\*\*\*\*

```
-----
| RESERVOIR( 0017)| OVERFLOW IS ON
| IN= 2--> OUT= 1 |
| DT= 5.0 min      |
-----
```

|  | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|--|------------------|--------------------|------------------|--------------------|
|  | 0.0000           | 0.0000             | 0.0025           | 0.0028             |
|  | 0.0008           | 0.0000             | 0.0025           | 0.0039             |
|  | 0.0017           | 0.0000             | 0.0025           | 0.0053             |
|  | 0.0025           | 0.0002             | 0.0025           | 0.0070             |
|  | 0.0025           | 0.0004             | 0.0025           | 0.0091             |
|  | 0.0025           | 0.0007             | 0.0025           | 0.0114             |
|  | 0.0025           | 0.0012             | 0.0025           | 0.0141             |
|  | 0.0025           | 0.0019             | 0.0025           | 0.0171             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0004)  | 0.369        | 0.182          | 1.00           | 70.39        |
| OUTFLOW: ID= 1 ( 0017)  | 0.280        | 0.003          | 0.33           | 70.70        |
| OVERFLOW: ID= 3 ( 0003) | 0.089        | 0.026          | 1.25           | 70.70        |

TOTAL NUMBER OF SIMULATION OVERFLOW = 22  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 1.83  
PERCENTAGE OF TIME OVERFLOWING (%) = 8.21

PEAK FLOW REDUCTION [Qout/Qin](%)= 1.38  
TIME SHIFT OF PEAK FLOW (min)=-40.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0171

-----  
\*\*\*\*\*  
\*\* SIMULATION:6. CHICAGO [100 YR] [6 HR] \*\*  
\*\*\*\*\*

```
-----
| RESERVOIR( 0017)| OVERFLOW IS ON
| IN= 2--> OUT= 1 |
| DT= 5.0 min      |
-----
```

|  | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|--|------------------|--------------------|------------------|--------------------|
|  | 0.0000           | 0.0000             | 0.0025           | 0.0028             |
|  | 0.0008           | 0.0000             | 0.0025           | 0.0039             |
|  | 0.0017           | 0.0000             | 0.0025           | 0.0053             |
|  | 0.0025           | 0.0002             | 0.0025           | 0.0070             |
|  | 0.0025           | 0.0004             | 0.0025           | 0.0091             |
|  | 0.0025           | 0.0007             | 0.0025           | 0.0114             |
|  | 0.0025           | 0.0012             | 0.0025           | 0.0141             |
|  | 0.0025           | 0.0019             | 0.0025           | 0.0171             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0004)  | 0.369        | 0.182          | 2.00           | 81.02        |
| OUTFLOW: ID= 1 ( 0017)  | 0.273        | 0.003          | 0.67           | 81.37        |
| OVERFLOW: ID= 3 ( 0003) | 0.096        | 0.053          | 2.17           | 81.37        |

TOTAL NUMBER OF SIMULATION OVERFLOW = 44  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 3.67  
PERCENTAGE OF TIME OVERFLOWING (%) = 14.57

PEAK FLOW REDUCTION [Qout/Qin](%)= 1.38  
TIME SHIFT OF PEAK FLOW (min)=-80.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0170

-----



\*\*\*\*\*  
\*\* SIMULATION:7. Historical Aug 4 1988 \*\*  
\*\*\*\*\*

```
-----
| RESERVOIR( 0017)| OVERFLOW IS ON
| IN= 2--> OUT= 1 |
| DT= 5.0 min      |
-----
```

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0000             | 0.0025           | 0.0028             |
| 0.0008           | 0.0000             | 0.0025           | 0.0039             |
| 0.0017           | 0.0000             | 0.0025           | 0.0053             |
| 0.0025           | 0.0002             | 0.0025           | 0.0070             |
| 0.0025           | 0.0004             | 0.0025           | 0.0091             |
| 0.0025           | 0.0007             | 0.0025           | 0.0114             |
| 0.0025           | 0.0012             | 0.0025           | 0.0141             |
| 0.0025           | 0.0019             | 0.0025           | 0.0171             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0004)  | 0.369        | 0.157          | 2.00           | 79.27        |
| OUTFLOW: ID= 1 ( 0017)  | 0.255        | 0.003          | 0.50           | 83.69        |
| OVERFLOW: ID= 3 ( 0003) | 0.114        | 0.155          | 2.00           | 83.69        |

TOTAL NUMBER OF SIMULATION OVERFLOW = 6  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.50  
PERCENTAGE OF TIME OVERFLOWING (%) = 2.06

PEAK FLOW REDUCTION [Qout/Qin](%)= 1.60  
TIME SHIFT OF PEAK FLOW (min)=-90.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0171

\*\*\*\*\*  
\*\* SIMULATION:8. Historical July 1 1979 \*\*  
\*\*\*\*\*

```
-----
| RESERVOIR( 0017)| OVERFLOW IS ON
| IN= 2--> OUT= 1 |
| DT= 5.0 min      |
-----
```

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0000             | 0.0025           | 0.0028             |
| 0.0008           | 0.0000             | 0.0025           | 0.0039             |
| 0.0017           | 0.0000             | 0.0025           | 0.0053             |
| 0.0025           | 0.0002             | 0.0025           | 0.0070             |
| 0.0025           | 0.0004             | 0.0025           | 0.0091             |
| 0.0025           | 0.0007             | 0.0025           | 0.0114             |
| 0.0025           | 0.0012             | 0.0025           | 0.0141             |
| 0.0025           | 0.0019             | 0.0025           | 0.0171             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0004)  | 0.369        | 0.109          | 1.50           | 82.69        |
| OUTFLOW: ID= 1 ( 0017)  | 0.232        | 0.003          | 0.42           | 85.17        |
| OVERFLOW: ID= 3 ( 0003) | 0.137        | 0.111          | 1.50           | 85.17        |

TOTAL NUMBER OF SIMULATION OVERFLOW = 19  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 1.58  
PERCENTAGE OF TIME OVERFLOWING (%) = 7.09

PEAK FLOW REDUCTION [Qout/Qin](%)= 2.31  
TIME SHIFT OF PEAK FLOW (min)=-65.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0171





\*\*\*\*\*  
\*\* SIMULATION:9. 25mm4hrChicago \*\*  
\*\*\*\*\*

```
-----
| RESERVOIR( 0017)| OVERFLOW IS ON
| IN= 2--> OUT= 1 |
| DT= 5.0 min      |
-----
```

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0000             | 0.0025           | 0.0028             |
| 0.0008           | 0.0000             | 0.0025           | 0.0039             |
| 0.0017           | 0.0000             | 0.0025           | 0.0053             |
| 0.0025           | 0.0002             | 0.0025           | 0.0070             |
| 0.0025           | 0.0004             | 0.0025           | 0.0091             |
| 0.0025           | 0.0007             | 0.0025           | 0.0114             |
| 0.0025           | 0.0012             | 0.0025           | 0.0141             |
| 0.0025           | 0.0019             | 0.0025           | 0.0171             |

|                        | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0004) | 0.369        | 0.051          | 1.50           | 23.83        |
| OUTFLOW: ID= 1 ( 0017) | 0.369        | 0.003          | 0.92           | 23.84        |
| OVERFLOW:ID= 3 ( 0003) | 0.000        | 0.000          | 0.00           | 0.00         |

TOTAL NUMBER OF SIMULATION OVERFLOW = 0  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.00  
PERCENTAGE OF TIME OVERFLOWING (%) = 0.00

PEAK FLOW REDUCTION [Qout/Qin](%)= 4.97  
TIME SHIFT OF PEAK FLOW (min)=-35.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0057

-----



\*\*\*\*\*  
\*\* SIMULATION:1. CHICAGO [2 YR] [3 HR] \*\*  
\*\*\*\*\*

```
-----
| RESERVOIR( 0018)| OVERFLOW IS ON
| IN= 2--> OUT= 1 |
| DT= 5.0 min      |
-----
```

|  | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|--|------------------|--------------------|------------------|--------------------|
|  | 0.0000           | 0.0000             | 0.0025           | 0.0028             |
|  | 0.0008           | 0.0000             | 0.0025           | 0.0039             |
|  | 0.0017           | 0.0000             | 0.0025           | 0.0053             |
|  | 0.0025           | 0.0002             | 0.0025           | 0.0070             |
|  | 0.0025           | 0.0004             | 0.0025           | 0.0091             |
|  | 0.0025           | 0.0007             | 0.0025           | 0.0114             |
|  | 0.0025           | 0.0012             | 0.0025           | 0.0141             |
|  | 0.0025           | 0.0019             | 0.0025           | 0.0171             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0005)  | 0.369        | 0.078          | 1.00           | 30.67        |
| OUTFLOW: ID= 1 ( 0018)  | 0.369        | 0.003          | 0.58           | 30.67        |
| OVERFLOW: ID= 3 ( 0003) | 0.000        | 0.000          | 0.00           | 0.00         |

TOTAL NUMBER OF SIMULATION OVERFLOW = 0  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.00  
PERCENTAGE OF TIME OVERFLOWING (%) = 0.00

PEAK FLOW REDUCTION [Qout/Qin](%)= 3.23  
TIME SHIFT OF PEAK FLOW (min)=-25.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0089

\*\*\*\*\*  
\*\* SIMULATION:2. CHICAGO [2 YR] [6 HR] \*\*  
\*\*\*\*\*

```
-----
| RESERVOIR( 0018)| OVERFLOW IS ON
| IN= 2--> OUT= 1 |
| DT= 5.0 min      |
-----
```

|  | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|--|------------------|--------------------|------------------|--------------------|
|  | 0.0000           | 0.0000             | 0.0025           | 0.0028             |
|  | 0.0008           | 0.0000             | 0.0025           | 0.0039             |
|  | 0.0017           | 0.0000             | 0.0025           | 0.0053             |
|  | 0.0025           | 0.0002             | 0.0025           | 0.0070             |
|  | 0.0025           | 0.0004             | 0.0025           | 0.0091             |
|  | 0.0025           | 0.0007             | 0.0025           | 0.0114             |
|  | 0.0025           | 0.0012             | 0.0025           | 0.0141             |
|  | 0.0025           | 0.0019             | 0.0025           | 0.0171             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0005)  | 0.369        | 0.078          | 2.00           | 35.65        |
| OUTFLOW: ID= 1 ( 0018)  | 0.369        | 0.003          | 1.33           | 35.66        |
| OVERFLOW: ID= 3 ( 0003) | 0.000        | 0.000          | 0.00           | 0.00         |

TOTAL NUMBER OF SIMULATION OVERFLOW = 0  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.00  
PERCENTAGE OF TIME OVERFLOWING (%) = 0.00

PEAK FLOW REDUCTION [Qout/Qin](%)= 3.23  
TIME SHIFT OF PEAK FLOW (min)=-40.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0091



\*\*\*\*\*  
\*\* SIMULATION:3. CHICAGO [5 YR] [3 HR] \*\*  
\*\*\*\*\*

-----  
| RESERVOIR( 0018) |  
| IN= 2--> OUT= 1 |  
| DT= 5.0 min |  
-----

OVERFLOW IS ON

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0000             | 0.0025           | 0.0028             |
| 0.0008           | 0.0000             | 0.0025           | 0.0039             |
| 0.0017           | 0.0000             | 0.0025           | 0.0053             |
| 0.0025           | 0.0002             | 0.0025           | 0.0070             |
| 0.0025           | 0.0004             | 0.0025           | 0.0091             |
| 0.0025           | 0.0007             | 0.0025           | 0.0114             |
| 0.0025           | 0.0012             | 0.0025           | 0.0141             |
| 0.0025           | 0.0019             | 0.0025           | 0.0171             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0005)  | 0.369        | 0.106          | 1.00           | 41.29        |
| OUTFLOW: ID= 1 ( 0018)  | 0.369        | 0.003          | 0.50           | 41.30        |
| OVERFLOW: ID= 3 ( 0003) | 0.000        | 0.000          | 0.00           | 0.00         |

TOTAL NUMBER OF SIMULATION OVERFLOW = 0  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.00  
PERCENTAGE OF TIME OVERFLOWING (%) = 0.00

PEAK FLOW REDUCTION [Qout/Qin](%)= 2.38  
TIME SHIFT OF PEAK FLOW (min)=-30.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0128

-----  
\*\*\*\*\*  
\*\* SIMULATION:4. CHICAGO [5 YR] [6 HR] \*\*  
\*\*\*\*\*

-----  
| RESERVOIR( 0018) |  
| IN= 2--> OUT= 1 |  
| DT= 5.0 min |  
-----

OVERFLOW IS ON

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0000             | 0.0025           | 0.0028             |
| 0.0008           | 0.0000             | 0.0025           | 0.0039             |
| 0.0017           | 0.0000             | 0.0025           | 0.0053             |
| 0.0025           | 0.0002             | 0.0025           | 0.0070             |
| 0.0025           | 0.0004             | 0.0025           | 0.0091             |
| 0.0025           | 0.0007             | 0.0025           | 0.0114             |
| 0.0025           | 0.0012             | 0.0025           | 0.0141             |
| 0.0025           | 0.0019             | 0.0025           | 0.0171             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0005)  | 0.369        | 0.106          | 2.00           | 47.80        |
| OUTFLOW: ID= 1 ( 0018)  | 0.369        | 0.003          | 1.08           | 47.80        |
| OVERFLOW: ID= 3 ( 0003) | 0.000        | 0.000          | 0.00           | 0.00         |

TOTAL NUMBER OF SIMULATION OVERFLOW = 0  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.00  
PERCENTAGE OF TIME OVERFLOWING (%) = 0.00

PEAK FLOW REDUCTION [Qout/Qin](%)= 2.38  
TIME SHIFT OF PEAK FLOW (min)=-55.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0131



\*\*\*\*\*  
\*\* SIMULATION:5. CHICAGO [100 YR] [3 HR] \*\*  
\*\*\*\*\*

-----  
| RESERVOIR( 0018)| OVERFLOW IS ON  
| IN= 2--> OUT= 1 |  
| DT= 5.0 min |  
-----

|  | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|--|------------------|--------------------|------------------|--------------------|
|  | 0.0000           | 0.0000             | 0.0025           | 0.0028             |
|  | 0.0008           | 0.0000             | 0.0025           | 0.0039             |
|  | 0.0017           | 0.0000             | 0.0025           | 0.0053             |
|  | 0.0025           | 0.0002             | 0.0025           | 0.0070             |
|  | 0.0025           | 0.0004             | 0.0025           | 0.0091             |
|  | 0.0025           | 0.0007             | 0.0025           | 0.0114             |
|  | 0.0025           | 0.0012             | 0.0025           | 0.0141             |
|  | 0.0025           | 0.0019             | 0.0025           | 0.0171             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0005)  | 0.369        | 0.182          | 1.00           | 70.39        |
| OUTFLOW: ID= 1 ( 0018)  | 0.280        | 0.003          | 0.33           | 70.70        |
| OVERFLOW: ID= 3 ( 0003) | 0.089        | 0.026          | 1.25           | 70.70        |

TOTAL NUMBER OF SIMULATION OVERFLOW = 22  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 1.83  
PERCENTAGE OF TIME OVERFLOWING (%) = 8.21

PEAK FLOW REDUCTION [Qout/Qin](%)= 1.38  
TIME SHIFT OF PEAK FLOW (min)=-40.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0171

-----  
\*\*\*\*\*  
\*\* SIMULATION:6. CHICAGO [100 YR] [6 HR] \*\*  
\*\*\*\*\*

-----  
| RESERVOIR( 0018)| OVERFLOW IS ON  
| IN= 2--> OUT= 1 |  
| DT= 5.0 min |  
-----

|  | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|--|------------------|--------------------|------------------|--------------------|
|  | 0.0000           | 0.0000             | 0.0025           | 0.0028             |
|  | 0.0008           | 0.0000             | 0.0025           | 0.0039             |
|  | 0.0017           | 0.0000             | 0.0025           | 0.0053             |
|  | 0.0025           | 0.0002             | 0.0025           | 0.0070             |
|  | 0.0025           | 0.0004             | 0.0025           | 0.0091             |
|  | 0.0025           | 0.0007             | 0.0025           | 0.0114             |
|  | 0.0025           | 0.0012             | 0.0025           | 0.0141             |
|  | 0.0025           | 0.0019             | 0.0025           | 0.0171             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0005)  | 0.369        | 0.182          | 2.00           | 81.02        |
| OUTFLOW: ID= 1 ( 0018)  | 0.273        | 0.003          | 0.67           | 81.37        |
| OVERFLOW: ID= 3 ( 0003) | 0.096        | 0.053          | 2.17           | 81.37        |

TOTAL NUMBER OF SIMULATION OVERFLOW = 44  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 3.67  
PERCENTAGE OF TIME OVERFLOWING (%) = 14.57

PEAK FLOW REDUCTION [Qout/Qin](%)= 1.38  
TIME SHIFT OF PEAK FLOW (min)=-80.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0170



\*\*\*\*\*  
\*\* SIMULATION:7. Historical Aug 4 1988 \*\*  
\*\*\*\*\*

```
-----
| RESERVOIR( 0018)| OVERFLOW IS ON
| IN= 2--> OUT= 1 |
| DT= 5.0 min      |
-----
```

|  | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|--|------------------|--------------------|------------------|--------------------|
|  | 0.0000           | 0.0000             | 0.0025           | 0.0028             |
|  | 0.0008           | 0.0000             | 0.0025           | 0.0039             |
|  | 0.0017           | 0.0000             | 0.0025           | 0.0053             |
|  | 0.0025           | 0.0002             | 0.0025           | 0.0070             |
|  | 0.0025           | 0.0004             | 0.0025           | 0.0091             |
|  | 0.0025           | 0.0007             | 0.0025           | 0.0114             |
|  | 0.0025           | 0.0012             | 0.0025           | 0.0141             |
|  | 0.0025           | 0.0019             | 0.0025           | 0.0171             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0005)  | 0.369        | 0.157          | 2.00           | 79.27        |
| OUTFLOW: ID= 1 ( 0018)  | 0.255        | 0.003          | 0.50           | 83.69        |
| OVERFLOW: ID= 3 ( 0003) | 0.114        | 0.155          | 2.00           | 83.69        |

TOTAL NUMBER OF SIMULATION OVERFLOW = 6  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.50  
PERCENTAGE OF TIME OVERFLOWING (%) = 2.06

PEAK FLOW REDUCTION [Qout/Qin](%)= 1.60  
TIME SHIFT OF PEAK FLOW (min)=-90.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0171

\*\*\*\*\*  
\*\* SIMULATION:8. Historical July 1 1979 \*\*  
\*\*\*\*\*

```
-----
| RESERVOIR( 0018)| OVERFLOW IS ON
| IN= 2--> OUT= 1 |
| DT= 5.0 min      |
-----
```

|  | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|--|------------------|--------------------|------------------|--------------------|
|  | 0.0000           | 0.0000             | 0.0025           | 0.0028             |
|  | 0.0008           | 0.0000             | 0.0025           | 0.0039             |
|  | 0.0017           | 0.0000             | 0.0025           | 0.0053             |
|  | 0.0025           | 0.0002             | 0.0025           | 0.0070             |
|  | 0.0025           | 0.0004             | 0.0025           | 0.0091             |
|  | 0.0025           | 0.0007             | 0.0025           | 0.0114             |
|  | 0.0025           | 0.0012             | 0.0025           | 0.0141             |
|  | 0.0025           | 0.0019             | 0.0025           | 0.0171             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0005)  | 0.369        | 0.109          | 1.50           | 82.69        |
| OUTFLOW: ID= 1 ( 0018)  | 0.232        | 0.003          | 0.42           | 85.17        |
| OVERFLOW: ID= 3 ( 0003) | 0.137        | 0.111          | 1.50           | 85.17        |

TOTAL NUMBER OF SIMULATION OVERFLOW = 19  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 1.58  
PERCENTAGE OF TIME OVERFLOWING (%) = 7.09

PEAK FLOW REDUCTION [Qout/Qin](%)= 2.31  
TIME SHIFT OF PEAK FLOW (min)=-65.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0171



\*\*\*\*\*  
\*\* SIMULATION:9. 25mm4hrChicago \*\*  
\*\*\*\*\*

```
-----
| RESERVOIR( 0018)| OVERFLOW IS ON
| IN= 2--> OUT= 1 |
| DT= 5.0 min      |
-----
```

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0000             | 0.0025           | 0.0028             |
| 0.0008           | 0.0000             | 0.0025           | 0.0039             |
| 0.0017           | 0.0000             | 0.0025           | 0.0053             |
| 0.0025           | 0.0002             | 0.0025           | 0.0070             |
| 0.0025           | 0.0004             | 0.0025           | 0.0091             |
| 0.0025           | 0.0007             | 0.0025           | 0.0114             |
| 0.0025           | 0.0012             | 0.0025           | 0.0141             |
| 0.0025           | 0.0019             | 0.0025           | 0.0171             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0005)  | 0.369        | 0.051          | 1.50           | 23.83        |
| OUTFLOW: ID= 1 ( 0018)  | 0.369        | 0.003          | 0.92           | 23.84        |
| OVERFLOW: ID= 3 ( 0003) | 0.000        | 0.000          | 0.00           | 0.00         |

TOTAL NUMBER OF SIMULATION OVERFLOW = 0  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.00  
PERCENTAGE OF TIME OVERFLOWING (%) = 0.00

PEAK FLOW REDUCTION [Qout/Qin](%)= 4.97  
TIME SHIFT OF PEAK FLOW (min)=-35.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0057

-----



## **Appendix F: Stormwater Management Storage Swale**

STAGE STORAGE WORKSHEET

OTTHYMO MODEL ROUTE RESERVOIR REPORT



| APPENDIX F - DOWNSTREAM RESERVOIR<br>Stage Storage Discharge Worksheet<br>Client: 1000198532 Ontario Inc.<br>Job No.: 221099<br>Location: 2725 Moodie Drive, Ottawa, ON<br>Date: June 9, 2026<br><br><div>Total Chambers: 273</div> |         |                           |                                                            |                                                             |                                                            |                                |                      | Orifice 1 Information            |                            |                           |                            |                                  |                         |        |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|---------------------------|------------------------------------------------------------|-------------------------------------------------------------|------------------------------------------------------------|--------------------------------|----------------------|----------------------------------|----------------------------|---------------------------|----------------------------|----------------------------------|-------------------------|--------|
|                                                                                                                                                                                                                                     |         |                           |                                                            |                                                             |                                                            |                                |                      | Dia (m):                         |                            |                           |                            |                                  |                         | 0.120  |
|                                                                                                                                                                                                                                     |         |                           |                                                            |                                                             |                                                            |                                |                      | Area (m2.):                      |                            |                           |                            |                                  |                         | 0.0113 |
|                                                                                                                                                                                                                                     |         |                           |                                                            |                                                             |                                                            |                                |                      | Orifice Coeff, C <sub>d</sub> :  |                            |                           |                            |                                  |                         | 0.60   |
|                                                                                                                                                                                                                                     |         |                           |                                                            |                                                             |                                                            |                                |                      | Orifice Coeff , C <sub>w</sub> : |                            |                           |                            |                                  |                         | 0.62   |
|                                                                                                                                                                                                                                     |         |                           |                                                            |                                                             |                                                            |                                |                      | Orifice Top (m):                 |                            |                           |                            |                                  |                         | 115.92 |
|                                                                                                                                                                                                                                     |         |                           |                                                            |                                                             |                                                            |                                |                      | Orifice Cen (m):                 |                            |                           |                            |                                  |                         | 115.86 |
|                                                                                                                                                                                                                                     |         |                           |                                                            |                                                             |                                                            |                                |                      | Orifice Inv (m):                 |                            |                           |                            |                                  |                         | 115.80 |
| Stage,<br>WSE Elev<br>(m)                                                                                                                                                                                                           | Comment | Layer<br>Thickness<br>[m] | Storage<br>Chamber<br>Group A<br>(42 Chambers)<br>[ha. M.] | Storage<br>Chamber<br>Group B<br>(171 Chambers)<br>[ha. M.] | Storage<br>Chamber<br>Group C<br>(60 Chambers)<br>[ha. M.] | Cumulative<br>pond<br>[ha. M.] | Orifice 1 Flow       |                                  |                            | Total Outflow<br>(m³/sec) | Quantity Storage<br>(Ha.m) | Incremental<br>Drawdown<br>(hrs) | Total Drawdown<br>(hrs) |        |
|                                                                                                                                                                                                                                     |         |                           |                                                            |                                                             |                                                            |                                | Flow<br>Depth<br>(m) | n                                | Orifice 1 Flow<br>(m³/sec) |                           |                            |                                  |                         |        |
|                                                                                                                                                                                                                                     |         |                           |                                                            |                                                             |                                                            |                                |                      |                                  |                            |                           |                            |                                  |                         |        |
| 116.75                                                                                                                                                                                                                              |         | 0.05                      | 0.0124                                                     | 0.0527                                                      | 0.0194                                                     | 0.1989                         | 0.950                | 7.92                             | 0.028                      | 0.02797                   | 0.28338                    | 1.5                              | 49.4                    |        |
| 116.70                                                                                                                                                                                                                              |         | 0.05                      | 0.0118                                                     | 0.0512                                                      | 0.0187                                                     | 0.1868                         | 0.900                | 7.50                             | 0.027                      | 0.02719                   | 0.26842                    | 1.5                              | 47.9                    |        |
| 116.65                                                                                                                                                                                                                              |         | 0.05                      | 0.0111                                                     | 0.0494                                                      | 0.0179                                                     | 0.1748                         | 0.850                | 7.08                             | 0.026                      | 0.02639                   | 0.25329                    | 1.6                              | 46.4                    |        |
| 116.60                                                                                                                                                                                                                              |         | 0.05                      | 0.0105                                                     | 0.0474                                                      | 0.0170                                                     | 0.1632                         | 0.800                | 6.67                             | 0.026                      | 0.02556                   | 0.23801                    | 1.7                              | 44.7                    |        |
| 116.55                                                                                                                                                                                                                              |         | 0.05                      | 0.0098                                                     | 0.0451                                                      | 0.0161                                                     | 0.1517                         | 0.750                | 6.25                             | 0.025                      | 0.02471                   | 0.22267                    | 1.7                              | 43.1                    |        |
| 116.50                                                                                                                                                                                                                              |         | 0.05                      | 0.0091                                                     | 0.0427                                                      | 0.0151                                                     | 0.1405                         | 0.700                | 5.83                             | 0.024                      | 0.02383                   | 0.20735                    | 1.8                              | 41.4                    |        |
| 116.45                                                                                                                                                                                                                              |         | 0.05                      | 0.0083                                                     | 0.0401                                                      | 0.0141                                                     | 0.1295                         | 0.650                | 5.42                             | 0.023                      | 0.02292                   | 0.19209                    | 1.8                              | 39.6                    |        |
| 116.40                                                                                                                                                                                                                              |         | 0.05                      | 0.0076                                                     | 0.0375                                                      | 0.0131                                                     | 0.1187                         | 0.600                | 5.00                             | 0.022                      | 0.02198                   | 0.17693                    | 1.9                              | 37.7                    |        |
| 116.35                                                                                                                                                                                                                              |         | 0.05                      | 0.0068                                                     | 0.0348                                                      | 0.0121                                                     | 0.1082                         | 0.550                | 4.58                             | 0.021                      | 0.02098                   | 0.16187                    | 2.0                              | 35.8                    |        |
| 116.30                                                                                                                                                                                                                              |         | 0.05                      | 0.0060                                                     | 0.0320                                                      | 0.0110                                                     | 0.0979                         | 0.500                | 4.17                             | 0.020                      | 0.01994                   | 0.14695                    | 2.1                              | 33.9                    |        |
| 116.25                                                                                                                                                                                                                              |         | 0.05                      | 0.0053                                                     | 0.0292                                                      | 0.0099                                                     | 0.0878                         | 0.450                | 3.75                             | 0.019                      | 0.01884                   | 0.13217                    | 2.2                              | 31.8                    |        |
| 116.20                                                                                                                                                                                                                              |         | 0.05                      | 0.0045                                                     | 0.0263                                                      | 0.0088                                                     | 0.0780                         | 0.400                | 3.33                             | 0.018                      | 0.01767                   | 0.11755                    | 2.3                              | 29.6                    |        |
| 116.15                                                                                                                                                                                                                              |         | 0.05                      | 0.0037                                                     | 0.0234                                                      | 0.0077                                                     | 0.0683                         | 0.350                | 2.92                             | 0.016                      | 0.01640                   | 0.10309                    | 2.4                              | 27.4                    |        |
| 116.10                                                                                                                                                                                                                              |         | 0.05                      | 0.0029                                                     | 0.0204                                                      | 0.0066                                                     | 0.0589                         | 0.300                | 2.50                             | 0.015                      | 0.01500                   | 0.08879                    | 2.6                              | 25.0                    |        |
| 116.05                                                                                                                                                                                                                              |         | 0.05                      | 0.0021                                                     | 0.0174                                                      | 0.0055                                                     | 0.0497                         | 0.250                | 2.08                             | 0.013                      | 0.01340                   | 0.07468                    | 2.9                              | 22.3                    |        |
| 116.00                                                                                                                                                                                                                              |         | 0.05                      | 0.0012                                                     | 0.0144                                                      | 0.0043                                                     | 0.0408                         | 0.200                | 1.67                             | 0.011                      | 0.01148                   | 0.06072                    | 3.2                              | 19.4                    |        |
| 115.95                                                                                                                                                                                                                              |         | 0.05                      | 0.0008                                                     | 0.0113                                                      | 0.0032                                                     | 0.0320                         | 0.150                | 1.25                             | 0.009                      | 0.00897                   | 0.04736                    | 4.1                              | 16.2                    |        |
| 115.90                                                                                                                                                                                                                              |         | 0.05                      | 0.0004                                                     | 0.0082                                                      | 0.0020                                                     | 0.0235                         | 0.100                | 0.83                             | 0.006                      | 0.00551                   | 0.03418                    | 6.3                              | 12.1                    |        |
| 115.85                                                                                                                                                                                                                              |         | 0.05                      | 0.0000                                                     | 0.0051                                                      | 0.0013                                                     | 0.0152                         | 0.050                | 0.42                             | 0.002                      | 0.00169                   | 0.02163                    | 5.8                              | 5.8                     |        |
| 115.80                                                                                                                                                                                                                              |         | 0.05                      | 0.0000                                                     | 0.0033                                                      | 0.0007                                                     | 0.0072                         |                      |                                  |                            | 0.00000                   | 0.01114                    | 0.0                              | 0.0                     |        |
| 115.75                                                                                                                                                                                                                              |         | 0.05                      | 0.0000                                                     | 0.0018                                                      | 0.0000                                                     | 0.0013                         |                      |                                  |                            | 0.00000                   | 0.00310                    |                                  | 0.0                     |        |
| 115.70                                                                                                                                                                                                                              |         | 0.05                      | 0.0000                                                     | 0.0000                                                      | 0.0000                                                     | 0.0000                         |                      |                                  |                            | 0.00000                   | 0.00000                    |                                  | 0.0                     |        |
| 115.65                                                                                                                                                                                                                              |         | 0.00                      | 0.0000                                                     | 0.0000                                                      | 0.0000                                                     | 0.0000                         |                      |                                  |                            | 0.00000                   | 0.00000                    |                                  | 0.0                     |        |



Post-development Otthymo Analysis Detailed Output  
Downstream Chambers and Storage Swale  
2726 Moodie Drive, Ottawa  
June 9, 2026

Project # 221099

1 of 5

\*\*\*\*\*  
\*\* SIMULATION:1. CHICAGO [2 YR] [3 HR] \*\*  
\*\*\*\*\*

-----  
| RESERVOIR( 0020) |  
| IN= 2---> OUT= 1 |  
| DT= 5.0 min |  
-----

OVERFLOW IS ON

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0111             | 0.0199           | 0.1470             |
| 0.0017           | 0.0216             | 0.0210           | 0.1619             |
| 0.0055           | 0.0342             | 0.0220           | 0.1769             |
| 0.0090           | 0.0474             | 0.0229           | 0.1921             |
| 0.0115           | 0.0607             | 0.0238           | 0.2074             |
| 0.0134           | 0.0747             | 0.0247           | 0.2227             |
| 0.0150           | 0.0888             | 0.0256           | 0.2380             |
| 0.0164           | 0.1031             | 0.0264           | 0.2533             |
| 0.0177           | 0.1176             | 0.0272           | 0.2684             |
| 0.0188           | 0.1322             | 0.0280           | 0.2834             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0062)  | 5.573        | 0.406          | 1.00           | 28.51        |
| OUTFLOW: ID= 1 ( 0020)  | 5.573        | 0.016          | 6.00           | 26.23        |
| OVERFLOW: ID= 3 ( 0003) | 0.000        | 0.000          | 0.00           | 0.00         |

TOTAL NUMBER OF SIMULATION OVERFLOW = 0  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.00  
PERCENTAGE OF TIME OVERFLOWING (%) = 0.00

PEAK FLOW REDUCTION [Qout/Qin](%)= 3.95  
TIME SHIFT OF PEAK FLOW (min)=300.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0992

-----  
\*\* SIMULATION:2. CHICAGO [2 YR] [6 HR] \*\*  
-----

-----  
| RESERVOIR( 0020) |  
| IN= 2---> OUT= 1 |  
| DT= 5.0 min |  
-----

OVERFLOW IS ON

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0111             | 0.0199           | 0.1470             |
| 0.0017           | 0.0216             | 0.0210           | 0.1619             |
| 0.0055           | 0.0342             | 0.0220           | 0.1769             |
| 0.0090           | 0.0474             | 0.0229           | 0.1921             |
| 0.0115           | 0.0607             | 0.0238           | 0.2074             |
| 0.0134           | 0.0747             | 0.0247           | 0.2227             |
| 0.0150           | 0.0888             | 0.0256           | 0.2380             |
| 0.0164           | 0.1031             | 0.0264           | 0.2533             |
| 0.0177           | 0.1176             | 0.0272           | 0.2684             |
| 0.0188           | 0.1322             | 0.0280           | 0.2834             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0062)  | 5.573        | 0.410          | 2.00           | 33.33        |
| OUTFLOW: ID= 1 ( 0020)  | 5.573        | 0.018          | 7.33           | 31.05        |
| OVERFLOW: ID= 3 ( 0003) | 0.000        | 0.000          | 0.00           | 0.00         |

TOTAL NUMBER OF SIMULATION OVERFLOW = 0  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.00  
PERCENTAGE OF TIME OVERFLOWING (%) = 0.00

PEAK FLOW REDUCTION [Qout/Qin](%)= 4.27  
TIME SHIFT OF PEAK FLOW (min)=320.00  
MAXIMUM STORAGE USED (ha.m.)= 0.1158



Post-development Otthymo Analysis Detailed Output  
Downstream Chambers and Storage Swale  
2726 Moodie Drive, Ottawa  
June 9, 2026

Project # 221099

2 of 5

\*\*\*\*\*  
\*\* SIMULATION:3. CHICAGO [5 YR] [3 HR] \*\*  
\*\*\*\*\*

-----  
| RESERVOIR( 0020) |  
| IN= 2---> OUT= 1 |  
| DT= 5.0 min |  
-----

OVERFLOW IS ON

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0111             | 0.0199           | 0.1470             |
| 0.0017           | 0.0216             | 0.0210           | 0.1619             |
| 0.0055           | 0.0342             | 0.0220           | 0.1769             |
| 0.0090           | 0.0474             | 0.0229           | 0.1921             |
| 0.0115           | 0.0607             | 0.0238           | 0.2074             |
| 0.0134           | 0.0747             | 0.0247           | 0.2227             |
| 0.0150           | 0.0888             | 0.0256           | 0.2380             |
| 0.0164           | 0.1031             | 0.0264           | 0.2533             |
| 0.0177           | 0.1176             | 0.0272           | 0.2684             |
| 0.0188           | 0.1322             | 0.0280           | 0.2834             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0062)  | 5.573        | 0.555          | 1.00           | 38.81        |
| OUTFLOW: ID= 1 ( 0020)  | 5.573        | 0.019          | 6.75           | 36.53        |
| OVERFLOW: ID= 3 ( 0003) | 0.000        | 0.000          | 0.00           | 0.00         |

TOTAL NUMBER OF SIMULATION OVERFLOW = 0  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.00  
PERCENTAGE OF TIME OVERFLOWING (%) = 0.00

PEAK FLOW REDUCTION [Qout/Qin](%)= 3.35  
TIME SHIFT OF PEAK FLOW (min)=345.00  
MAXIMUM STORAGE USED (ha.m.)= 0.1291

-----  
\*\* SIMULATION:4. CHICAGO [5 YR] [6 HR] \*\*  
\*\*\*\*\*

-----  
| RESERVOIR( 0020) |  
| IN= 2---> OUT= 1 |  
| DT= 5.0 min |  
-----

OVERFLOW IS ON

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0111             | 0.0199           | 0.1470             |
| 0.0017           | 0.0216             | 0.0210           | 0.1619             |
| 0.0055           | 0.0342             | 0.0220           | 0.1769             |
| 0.0090           | 0.0474             | 0.0229           | 0.1921             |
| 0.0115           | 0.0607             | 0.0238           | 0.2074             |
| 0.0134           | 0.0747             | 0.0247           | 0.2227             |
| 0.0150           | 0.0888             | 0.0256           | 0.2380             |
| 0.0164           | 0.1031             | 0.0264           | 0.2533             |
| 0.0177           | 0.1176             | 0.0272           | 0.2684             |
| 0.0188           | 0.1322             | 0.0280           | 0.2834             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0062)  | 5.573        | 0.561          | 2.00           | 45.15        |
| OUTFLOW: ID= 1 ( 0020)  | 5.573        | 0.020          | 8.33           | 42.87        |
| OVERFLOW: ID= 3 ( 0003) | 0.000        | 0.000          | 0.00           | 0.00         |

TOTAL NUMBER OF SIMULATION OVERFLOW = 0  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.00  
PERCENTAGE OF TIME OVERFLOWING (%) = 0.00

PEAK FLOW REDUCTION [Qout/Qin](%)= 3.60  
TIME SHIFT OF PEAK FLOW (min)=380.00  
MAXIMUM STORAGE USED (ha.m.)= 0.1504



Post-development Otthymo Analysis Detailed Output  
Downstream Chambers and Storage Swale  
2726 Moodie Drive, Ottawa  
June 9, 2026

Project # 221099

3 of 5

\*\*\*\*\*  
\*\* SIMULATION:5. CHICAGO [100 YR] [3 HR] \*\*  
\*\*\*\*\*

-----  
| RESERVOIR( 0020) |  
| IN= 2---> OUT= 1 |  
| DT= 5.0 min |  
-----

OVERFLOW IS ON

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0111             | 0.0199           | 0.1470             |
| 0.0017           | 0.0216             | 0.0210           | 0.1619             |
| 0.0055           | 0.0342             | 0.0220           | 0.1769             |
| 0.0090           | 0.0474             | 0.0229           | 0.1921             |
| 0.0115           | 0.0607             | 0.0238           | 0.2074             |
| 0.0134           | 0.0747             | 0.0247           | 0.2227             |
| 0.0150           | 0.0888             | 0.0256           | 0.2380             |
| 0.0164           | 0.1031             | 0.0264           | 0.2533             |
| 0.0177           | 0.1176             | 0.0272           | 0.2684             |
| 0.0188           | 0.1322             | 0.0280           | 0.2834             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0062)  | 5.573        | 1.015          | 1.00           | 67.85        |
| OUTFLOW: ID= 1 ( 0020)  | 5.573        | 0.025          | 9.67           | 65.57        |
| OVERFLOW: ID= 3 ( 0003) | 0.000        | 0.000          | 0.00           | 0.00         |

TOTAL NUMBER OF SIMULATION OVERFLOW = 0  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.00  
PERCENTAGE OF TIME OVERFLOWING (%) = 0.00

PEAK FLOW REDUCTION [Qout/Qin](%)= 2.51  
TIME SHIFT OF PEAK FLOW (min)=520.00  
MAXIMUM STORAGE USED (ha.m.)= 0.2366

-----  
\*\*\*\*\*  
\*\* SIMULATION:6. CHICAGO [100 YR] [6 HR] \*\*  
\*\*\*\*\*

-----  
| RESERVOIR( 0020) |  
| IN= 2---> OUT= 1 |  
| DT= 5.0 min |  
-----

OVERFLOW IS ON

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0111             | 0.0199           | 0.1470             |
| 0.0017           | 0.0216             | 0.0210           | 0.1619             |
| 0.0055           | 0.0342             | 0.0220           | 0.1769             |
| 0.0090           | 0.0474             | 0.0229           | 0.1921             |
| 0.0115           | 0.0607             | 0.0238           | 0.2074             |
| 0.0134           | 0.0747             | 0.0247           | 0.2227             |
| 0.0150           | 0.0888             | 0.0256           | 0.2380             |
| 0.0164           | 0.1031             | 0.0264           | 0.2533             |
| 0.0177           | 0.1176             | 0.0272           | 0.2684             |
| 0.0188           | 0.1322             | 0.0280           | 0.2834             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0062)  | 5.573        | 1.025          | 2.00           | 77.97        |
| OUTFLOW: ID= 1 ( 0020)  | 5.573        | 0.027          | 11.25          | 75.69        |
| OVERFLOW: ID= 3 ( 0003) | 0.000        | 0.000          | 0.00           | 0.00         |

TOTAL NUMBER OF SIMULATION OVERFLOW = 0  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.00  
PERCENTAGE OF TIME OVERFLOWING (%) = 0.00

PEAK FLOW REDUCTION [Qout/Qin](%)= 2.68  
TIME SHIFT OF PEAK FLOW (min)=555.00  
MAXIMUM STORAGE USED (ha.m.)= 0.2742



Post-development Otthymo Analysis Detailed Output  
Downstream Chambers and Storage Swale  
2726 Moodie Drive, Ottawa  
June 9, 2026

Project # 221099

4 of 5

\*\*\*\*\*  
\*\* SIMULATION:7. Historical Aug 4 1988 \*\*  
\*\*\*\*\*

```
-----
| RESERVOIR( 0020) | OVERFLOW IS ON
| IN= 2---> OUT= 1 |
| DT= 5.0 min      |
-----
```

|  | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|--|------------------|--------------------|------------------|--------------------|
|  | 0.0000           | 0.0111             | 0.0199           | 0.1470             |
|  | 0.0017           | 0.0216             | 0.0210           | 0.1619             |
|  | 0.0055           | 0.0342             | 0.0220           | 0.1769             |
|  | 0.0090           | 0.0474             | 0.0229           | 0.1921             |
|  | 0.0115           | 0.0607             | 0.0238           | 0.2074             |
|  | 0.0134           | 0.0747             | 0.0247           | 0.2227             |
|  | 0.0150           | 0.0888             | 0.0256           | 0.2380             |
|  | 0.0164           | 0.1031             | 0.0264           | 0.2533             |
|  | 0.0177           | 0.1176             | 0.0272           | 0.2684             |
|  | 0.0188           | 0.1322             | 0.0280           | 0.2834             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0062)  | 5.573        | 1.600          | 2.00           | 78.44        |
| OUTFLOW: ID= 1 ( 0020)  | 5.573        | 0.028          | 10.50          | 76.16        |
| OVERFLOW: ID= 3 ( 0003) | 0.000        | 0.000          | 0.00           | 0.00         |

TOTAL NUMBER OF SIMULATION OVERFLOW = 0  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.00  
PERCENTAGE OF TIME OVERFLOWING (%) = 0.00

PEAK FLOW REDUCTION [Qout/Qin](%)= 1.73  
TIME SHIFT OF PEAK FLOW (min)=510.00  
MAXIMUM STORAGE USED (ha.m.)= 0.2782

-----  
\*\*\*\*\*  
\*\* SIMULATION:8. Historical July 1 1979 \*\*  
\*\*\*\*\*

```
-----
| RESERVOIR( 0020) | OVERFLOW IS ON
| IN= 2---> OUT= 1 |
| DT= 5.0 min      |
-----
```

|  | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|--|------------------|--------------------|------------------|--------------------|
|  | 0.0000           | 0.0111             | 0.0199           | 0.1470             |
|  | 0.0017           | 0.0216             | 0.0210           | 0.1619             |
|  | 0.0055           | 0.0342             | 0.0220           | 0.1769             |
|  | 0.0090           | 0.0474             | 0.0229           | 0.1921             |
|  | 0.0115           | 0.0607             | 0.0238           | 0.2074             |
|  | 0.0134           | 0.0747             | 0.0247           | 0.2227             |
|  | 0.0150           | 0.0888             | 0.0256           | 0.2380             |
|  | 0.0164           | 0.1031             | 0.0264           | 0.2533             |
|  | 0.0177           | 0.1176             | 0.0272           | 0.2684             |
|  | 0.0188           | 0.1322             | 0.0280           | 0.2834             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0062)  | 5.573        | 1.105          | 1.67           | 80.23        |
| OUTFLOW: ID= 1 ( 0020)  | 5.427        | 0.028          | 5.83           | 77.48        |
| OVERFLOW: ID= 3 ( 0003) | 0.146        | 0.017          | 5.83           | 77.48        |

TOTAL NUMBER OF SIMULATION OVERFLOW = 32  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 2.67  
PERCENTAGE OF TIME OVERFLOWING (%) = 2.67

PEAK FLOW REDUCTION [Qout/Qin](%)= 2.53  
TIME SHIFT OF PEAK FLOW (min)=250.00  
MAXIMUM STORAGE USED (ha.m.)= 0.2834



\*\*\*\*\*  
\*\* SIMULATION:9. 25mm4hrChicago \*\*  
\*\*\*\*\*

```
-----
| RESERVOIR( 0020) | OVERFLOW IS ON
| IN= 2--> OUT= 1 |
| DT= 5.0 min      |
-----
```

|  | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|--|------------------|--------------------|------------------|--------------------|
|  | 0.0000           | 0.0111             | 0.0199           | 0.1470             |
|  | 0.0017           | 0.0216             | 0.0210           | 0.1619             |
|  | 0.0055           | 0.0342             | 0.0220           | 0.1769             |
|  | 0.0090           | 0.0474             | 0.0229           | 0.1921             |
|  | 0.0115           | 0.0607             | 0.0238           | 0.2074             |
|  | 0.0134           | 0.0747             | 0.0247           | 0.2227             |
|  | 0.0150           | 0.0888             | 0.0256           | 0.2380             |
|  | 0.0164           | 0.1031             | 0.0264           | 0.2533             |
|  | 0.0177           | 0.1176             | 0.0272           | 0.2684             |
|  | 0.0188           | 0.1322             | 0.0280           | 0.2834             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0062)  | 5.573        | 0.268          | 1.50           | 21.94        |
| OUTFLOW: ID= 1 ( 0020)  | 5.573        | 0.014          | 6.25           | 19.66        |
| OVERFLOW: ID= 3 ( 0003) | 0.000        | 0.000          | 0.00           | 0.00         |

TOTAL NUMBER OF SIMULATION OVERFLOW = 0  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.00  
PERCENTAGE OF TIME OVERFLOWING (%) = 0.00

PEAK FLOW REDUCTION [Qout/Qin](%)= 5.30  
TIME SHIFT OF PEAK FLOW (min)=285.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0817

-----

| APPENDIX F - UPSTREAM RESERVOIR<br>Stage Storage Discharge Worksheet<br>Client:<br>Job No.: 221099<br>Location: 2726 Moodie Drive<br>Date: June 9, 2026<br><br><div>Total Chambers: 290</div> |         |                           |                                                            |                                                             |                                                            |                                                           |                                                           | Orifice 1 Information            |        |                            |                           |                            |                                  |                            |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|---------------------------|------------------------------------------------------------|-------------------------------------------------------------|------------------------------------------------------------|-----------------------------------------------------------|-----------------------------------------------------------|----------------------------------|--------|----------------------------|---------------------------|----------------------------|----------------------------------|----------------------------|
|                                                                                                                                                                                               |         |                           |                                                            |                                                             |                                                            |                                                           |                                                           | Dia (m):                         | 0.150  |                            |                           |                            |                                  |                            |
|                                                                                                                                                                                               |         |                           |                                                            |                                                             |                                                            |                                                           |                                                           | Area (m2.):                      | 0.0177 |                            |                           |                            |                                  |                            |
|                                                                                                                                                                                               |         |                           |                                                            |                                                             |                                                            |                                                           |                                                           | Orifice Coeff, C <sub>d</sub> :  | 0.60   |                            |                           |                            |                                  |                            |
|                                                                                                                                                                                               |         |                           |                                                            |                                                             |                                                            |                                                           |                                                           | Orifice Coeff , C <sub>w</sub> : | 0.62   |                            |                           |                            |                                  |                            |
|                                                                                                                                                                                               |         |                           |                                                            |                                                             |                                                            |                                                           |                                                           | Orifice Top (m):                 | 116.25 |                            |                           |                            |                                  |                            |
|                                                                                                                                                                                               |         |                           |                                                            |                                                             |                                                            |                                                           |                                                           | Orifice Cen (m):                 | 116.18 |                            |                           |                            |                                  |                            |
|                                                                                                                                                                                               |         |                           |                                                            |                                                             |                                                            |                                                           |                                                           | Orifice Inv (m):                 | 116.10 |                            |                           |                            |                                  |                            |
| Stage,<br>WSE Elev<br>(m)                                                                                                                                                                     | Comment | Layer<br>Thickness<br>[m] | Storage<br>Chamber<br>Group D<br>(44 Chambers)<br>[ha. M.] | Storage<br>Chamber<br>Group E<br>(196 Chambers)<br>[ha. M.] | Storage<br>Chamber<br>Group F<br>(33 Chambers)<br>[ha. M.] | Storage<br>Chamber<br>Group G<br>(8 Chambers)<br>[ha. M.] | Storage<br>Chamber<br>Group H<br>(9 Chambers)<br>[ha. M.] | Orifice 1 Flow                   |        |                            | Total Outflow<br>(m³/sec) | Quantity Storage<br>(Ha.m) | Incremental<br>Drawdown<br>(hrs) | Total<br>Drawdown<br>(hrs) |
|                                                                                                                                                                                               |         |                           |                                                            |                                                             |                                                            |                                                           |                                                           | Flow<br>Depth<br>(m)             | n      | Orifice 1 Flow<br>(m³/sec) |                           |                            |                                  |                            |
|                                                                                                                                                                                               |         |                           |                                                            |                                                             |                                                            |                                                           |                                                           |                                  |        |                            |                           |                            |                                  |                            |
| 117.50                                                                                                                                                                                        |         | 0.10                      | 0.0065                                                     | 0.0632                                                      | 0.0048                                                     | 0.0029                                                    | 0.0032                                                    | 1.400                            | 9.33   | 0.053                      | 0.05324                   | 0.08059                    | 0.2                              | 6.2                        |
| 117.40                                                                                                                                                                                        |         | 0.10                      | 0.0065                                                     | 0.0598                                                      | 0.0048                                                     | 0.0029                                                    | 0.0032                                                    | 1.300                            | 8.67   | 0.051                      | 0.05122                   | 0.07724                    | 0.2                              | 6.0                        |
| 117.30                                                                                                                                                                                        |         | 0.10                      | 0.0065                                                     | 0.0561                                                      | 0.0048                                                     | 0.0029                                                    | 0.0032                                                    | 1.200                            | 8.00   | 0.049                      | 0.04912                   | 0.07350                    | 0.3                              | 5.8                        |
| 117.20                                                                                                                                                                                        |         | 0.10                      | 0.0065                                                     | 0.0512                                                      | 0.0045                                                     | 0.0028                                                    | 0.0030                                                    | 1.100                            | 7.33   | 0.047                      | 0.04694                   | 0.06801                    | 0.4                              | 5.5                        |
| 117.10                                                                                                                                                                                        |         | 0.10                      | 0.0065                                                     | 0.0456                                                      | 0.0040                                                     | 0.0027                                                    | 0.0028                                                    | 1.000                            | 6.67   | 0.045                      | 0.04466                   | 0.06153                    | 0.4                              | 5.1                        |
| 117.00                                                                                                                                                                                        |         | 0.10                      | 0.0065                                                     | 0.0395                                                      | 0.0034                                                     | 0.0025                                                    | 0.0026                                                    | 0.900                            | 6.00   | 0.042                      | 0.04226                   | 0.05441                    | 0.5                              | 4.7                        |
| 116.90                                                                                                                                                                                        |         | 0.10                      | 0.0062                                                     | 0.0331                                                      | 0.0026                                                     | 0.0023                                                    | 0.0023                                                    | 0.800                            | 5.33   | 0.040                      | 0.03972                   | 0.04652                    | 0.6                              | 4.2                        |
| 116.80                                                                                                                                                                                        |         | 0.10                      | 0.0056                                                     | 0.0265                                                      | 0.0018                                                     | 0.0020                                                    | 0.0020                                                    | 0.700                            | 4.67   | 0.037                      | 0.03701                   | 0.03790                    | 0.7                              | 3.6                        |
| 116.70                                                                                                                                                                                        |         | 0.10                      | 0.0049                                                     | 0.0197                                                      | 0.0010                                                     | 0.0017                                                    | 0.0016                                                    | 0.600                            | 4.00   | 0.034                      | 0.03409                   | 0.02896                    | 0.7                              | 2.9                        |
| 116.60                                                                                                                                                                                        |         | 0.10                      | 0.0039                                                     | 0.0128                                                      | 0.0004                                                     | 0.0014                                                    | 0.0013                                                    | 0.500                            | 3.33   | 0.031                      | 0.03087                   | 0.01988                    | 0.8                              | 2.1                        |
| 116.50                                                                                                                                                                                        |         | 0.10                      | 0.0029                                                     | 0.0058                                                      | 0.0000                                                     | 0.0011                                                    | 0.0010                                                    | 0.400                            | 2.67   | 0.027                      | 0.02722                   | 0.01074                    | 0.6                              | 1.3                        |
| 116.40                                                                                                                                                                                        |         | 0.10                      | 0.0018                                                     | 0.0020                                                      | 0.0000                                                     | 0.0008                                                    | 0.0006                                                    | 0.300                            | 2.00   | 0.023                      | 0.02280                   | 0.00525                    | 0.4                              | 0.8                        |
| 116.30                                                                                                                                                                                        |         | 0.10                      | 0.0008                                                     | 0.0000                                                      | 0.0000                                                     | 0.0005                                                    | 0.0003                                                    | 0.200                            | 1.33   | 0.017                      | 0.01666                   | 0.00157                    | 0.2                              | 0.3                        |
| 116.20                                                                                                                                                                                        |         | 0.10                      | 0.0000                                                     | 0.0000                                                      | 0.0000                                                     | 0.0002                                                    | 0.0001                                                    | 0.100                            | 0.67   | 0.007                      | 0.00682                   | 0.00032                    | 0.1                              | 0.1                        |
| 116.10                                                                                                                                                                                        |         | 0.00                      | 0.0000                                                     | 0.0000                                                      | 0.0000                                                     | 0.0001                                                    | 0.0000                                                    | 0.000                            | 0.00   | 0.000                      | 0.00000                   | 0.00006                    | 0.0                              | 0.0                        |



\*\*\*\*\*  
\*\* SIMULATION:1. CHICAGO [2 YR] [3 HR] \*\*  
\*\*\*\*\*

```
-----
| RESERVOIR( 0057) | OVERFLOW IS ON
| IN= 2--> OUT= 1 |
| DT= 5.0 min      |
-----
```

|  | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|--|------------------|--------------------|------------------|--------------------|
|  | 0.0000           | 0.0001             | 0.0397           | 0.0465             |
|  | 0.0068           | 0.0003             | 0.0423           | 0.0544             |
|  | 0.0167           | 0.0016             | 0.0447           | 0.0615             |
|  | 0.0228           | 0.0053             | 0.0469           | 0.0680             |
|  | 0.0272           | 0.0107             | 0.0491           | 0.0735             |
|  | 0.0309           | 0.0199             | 0.0512           | 0.0772             |
|  | 0.0341           | 0.0290             | 0.0532           | 0.0806             |
|  | 0.0370           | 0.0379             | 0.0000           | 0.0000             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0056)  | 2.044        | 0.279          | 1.00           | 30.31        |
| OUTFLOW: ID= 1 ( 0057)  | 2.044        | 0.033          | 1.50           | 30.28        |
| OVERFLOW: ID= 3 ( 0003) | 0.000        | 0.000          | 0.00           | 0.00         |

TOTAL NUMBER OF SIMULATION OVERFLOW = 0  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.00  
PERCENTAGE OF TIME OVERFLOWING (%) = 0.00

PEAK FLOW REDUCTION [Qout/Qin](%)= 11.69  
TIME SHIFT OF PEAK FLOW (min)= 30.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0247

\*\*\*\*\*  
\*\* SIMULATION:2. CHICAGO [2 YR] [6 HR] \*\*  
\*\*\*\*\*

```
-----
| RESERVOIR( 0057) | OVERFLOW IS ON
| IN= 2--> OUT= 1 |
| DT= 5.0 min      |
-----
```

|  | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|--|------------------|--------------------|------------------|--------------------|
|  | 0.0000           | 0.0001             | 0.0397           | 0.0465             |
|  | 0.0068           | 0.0003             | 0.0423           | 0.0544             |
|  | 0.0167           | 0.0016             | 0.0447           | 0.0615             |
|  | 0.0228           | 0.0053             | 0.0469           | 0.0680             |
|  | 0.0272           | 0.0107             | 0.0491           | 0.0735             |
|  | 0.0309           | 0.0199             | 0.0512           | 0.0772             |
|  | 0.0341           | 0.0290             | 0.0532           | 0.0806             |
|  | 0.0370           | 0.0379             | 0.0000           | 0.0000             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0056)  | 2.044        | 0.279          | 2.00           | 35.30        |
| OUTFLOW: ID= 1 ( 0057)  | 2.044        | 0.033          | 2.50           | 35.27        |
| OVERFLOW: ID= 3 ( 0003) | 0.000        | 0.000          | 0.00           | 0.00         |

TOTAL NUMBER OF SIMULATION OVERFLOW = 0  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.00  
PERCENTAGE OF TIME OVERFLOWING (%) = 0.00

PEAK FLOW REDUCTION [Qout/Qin](%)= 11.77  
TIME SHIFT OF PEAK FLOW (min)= 30.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0254





\*\*\*\*\*  
\*\* SIMULATION:3. CHICAGO [5 YR] [3 HR] \*\*  
\*\*\*\*\*

```
-----
| RESERVOIR( 0057) | OVERFLOW IS ON
| IN= 2---> OUT= 1 |
| DT= 5.0 min      |
-----
```

|  | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|--|------------------|--------------------|------------------|--------------------|
|  | 0.0000           | 0.0001             | 0.0397           | 0.0465             |
|  | 0.0068           | 0.0003             | 0.0423           | 0.0544             |
|  | 0.0167           | 0.0016             | 0.0447           | 0.0615             |
|  | 0.0228           | 0.0053             | 0.0469           | 0.0680             |
|  | 0.0272           | 0.0107             | 0.0491           | 0.0735             |
|  | 0.0309           | 0.0199             | 0.0512           | 0.0772             |
|  | 0.0341           | 0.0290             | 0.0532           | 0.0806             |
|  | 0.0370           | 0.0379             | 0.0000           | 0.0000             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0056)  | 2.044        | 0.378          | 1.00           | 40.93        |
| OUTFLOW: ID= 1 ( 0057)  | 2.044        | 0.036          | 1.58           | 40.90        |
| OVERFLOW: ID= 3 ( 0003) | 0.000        | 0.000          | 0.00           | 0.00         |

TOTAL NUMBER OF SIMULATION OVERFLOW = 0  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.00  
PERCENTAGE OF TIME OVERFLOWING (%) = 0.00

PEAK FLOW REDUCTION [Qout/Qin](%)= 9.54  
TIME SHIFT OF PEAK FLOW (min)= 35.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0351

\*\*\*\*\*  
\*\* SIMULATION:4. CHICAGO [5 YR] [6 HR] \*\*  
\*\*\*\*\*

```
-----
| RESERVOIR( 0057) | OVERFLOW IS ON
| IN= 2---> OUT= 1 |
| DT= 5.0 min      |
-----
```

|  | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|--|------------------|--------------------|------------------|--------------------|
|  | 0.0000           | 0.0001             | 0.0397           | 0.0465             |
|  | 0.0068           | 0.0003             | 0.0423           | 0.0544             |
|  | 0.0167           | 0.0016             | 0.0447           | 0.0615             |
|  | 0.0228           | 0.0053             | 0.0469           | 0.0680             |
|  | 0.0272           | 0.0107             | 0.0491           | 0.0735             |
|  | 0.0309           | 0.0199             | 0.0512           | 0.0772             |
|  | 0.0341           | 0.0290             | 0.0532           | 0.0806             |
|  | 0.0370           | 0.0379             | 0.0000           | 0.0000             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0056)  | 2.044        | 0.379          | 2.00           | 47.44        |
| OUTFLOW: ID= 1 ( 0057)  | 2.044        | 0.036          | 2.58           | 47.41        |
| OVERFLOW: ID= 3 ( 0003) | 0.000        | 0.000          | 0.00           | 0.00         |

TOTAL NUMBER OF SIMULATION OVERFLOW = 0  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.00  
PERCENTAGE OF TIME OVERFLOWING (%) = 0.00

PEAK FLOW REDUCTION [Qout/Qin](%)= 9.61  
TIME SHIFT OF PEAK FLOW (min)= 35.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0359



\*\*\*\*\*  
\*\* SIMULATION:5. CHICAGO [100 YR] [3 HR] \*\*  
\*\*\*\*\*

```
-----
| RESERVOIR( 0057) | OVERFLOW IS ON
| IN= 2---> OUT= 1 |
| DT= 5.0 min      |
-----
```

|  | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|--|------------------|--------------------|------------------|--------------------|
|  | 0.0000           | 0.0001             | 0.0397           | 0.0465             |
|  | 0.0068           | 0.0003             | 0.0423           | 0.0544             |
|  | 0.0167           | 0.0016             | 0.0447           | 0.0615             |
|  | 0.0228           | 0.0053             | 0.0469           | 0.0680             |
|  | 0.0272           | 0.0107             | 0.0491           | 0.0735             |
|  | 0.0309           | 0.0199             | 0.0512           | 0.0772             |
|  | 0.0341           | 0.0290             | 0.0532           | 0.0806             |
|  | 0.0370           | 0.0379             | 0.0000           | 0.0000             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0056)  | 2.044        | 0.649          | 1.00           | 70.14        |
| OUTFLOW: ID= 1 ( 0057)  | 2.044        | 0.049          | 2.08           | 70.11        |
| OVERFLOW: ID= 3 ( 0003) | 0.000        | 0.000          | 0.00           | 0.00         |

TOTAL NUMBER OF SIMULATION OVERFLOW = 0  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.00  
PERCENTAGE OF TIME OVERFLOWING (%) = 0.00

PEAK FLOW REDUCTION [Qout/Qin](%)= 7.55  
TIME SHIFT OF PEAK FLOW (min)= 65.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0732

\*\*\*\*\*  
\*\* SIMULATION:6. CHICAGO [100 YR] [6 HR] \*\*  
\*\*\*\*\*

```
-----
| RESERVOIR( 0057) | OVERFLOW IS ON
| IN= 2---> OUT= 1 |
| DT= 5.0 min      |
-----
```

|  | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|--|------------------|--------------------|------------------|--------------------|
|  | 0.0000           | 0.0001             | 0.0397           | 0.0465             |
|  | 0.0068           | 0.0003             | 0.0423           | 0.0544             |
|  | 0.0167           | 0.0016             | 0.0447           | 0.0615             |
|  | 0.0228           | 0.0053             | 0.0469           | 0.0680             |
|  | 0.0272           | 0.0107             | 0.0491           | 0.0735             |
|  | 0.0309           | 0.0199             | 0.0512           | 0.0772             |
|  | 0.0341           | 0.0290             | 0.0532           | 0.0806             |
|  | 0.0370           | 0.0379             | 0.0000           | 0.0000             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0056)  | 2.044        | 0.649          | 2.00           | 80.79        |
| OUTFLOW: ID= 1 ( 0057)  | 2.044        | 0.051          | 3.00           | 80.76        |
| OVERFLOW: ID= 3 ( 0003) | 0.000        | 0.000          | 0.00           | 0.00         |

TOTAL NUMBER OF SIMULATION OVERFLOW = 0  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.00  
PERCENTAGE OF TIME OVERFLOWING (%) = 0.00

PEAK FLOW REDUCTION [Qout/Qin](%)= 7.80  
TIME SHIFT OF PEAK FLOW (min)= 60.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0762



\*\*\*\*\*  
\*\* SIMULATION:7. Historical Aug 4 1988 \*\*  
\*\*\*\*\*

```
-----  
| RESERVOIR( 0057) | OVERFLOW IS ON  
| IN= 2---> OUT= 1 |  
| DT= 5.0 min |  
-----  
OUTFLOW STORAGE | OUTFLOW STORAGE  
(cms) (ha.m.) | (cms) (ha.m.)  
0.0000 0.0001 | 0.0397 0.0465  
0.0068 0.0003 | 0.0423 0.0544  
0.0167 0.0016 | 0.0447 0.0615  
0.0228 0.0053 | 0.0469 0.0680  
0.0272 0.0107 | 0.0491 0.0735  
0.0309 0.0199 | 0.0512 0.0772  
0.0341 0.0290 | 0.0532 0.0806  
0.0370 0.0379 | 0.0000 0.0000
```

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0056)  | 2.044        | 0.860          | 2.00           | 80.51        |
| OUTFLOW: ID= 1 ( 0057)  | 1.966        | 0.053          | 2.08           | 81.17        |
| OVERFLOW: ID= 3 ( 0003) | 0.078        | 0.192          | 2.00           | 81.17        |

TOTAL NUMBER OF SIMULATION OVERFLOW = 1  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.08  
PERCENTAGE OF TIME OVERFLOWING (%) = 0.34

PEAK FLOW REDUCTION [Qout/Qin](%)= 6.19  
TIME SHIFT OF PEAK FLOW (min)= 5.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0806

\*\*\*\*\*  
\*\* SIMULATION:8. Historical July 1 1979 \*\*  
\*\*\*\*\*

```
-----  
| RESERVOIR( 0057) | OVERFLOW IS ON  
| IN= 2---> OUT= 1 |  
| DT= 5.0 min |  
-----  
OUTFLOW STORAGE | OUTFLOW STORAGE  
(cms) (ha.m.) | (cms) (ha.m.)  
0.0000 0.0001 | 0.0397 0.0465  
0.0068 0.0003 | 0.0423 0.0544  
0.0167 0.0016 | 0.0447 0.0615  
0.0228 0.0053 | 0.0469 0.0680  
0.0272 0.0107 | 0.0491 0.0735  
0.0309 0.0199 | 0.0512 0.0772  
0.0341 0.0290 | 0.0532 0.0806  
0.0370 0.0379 | 0.0000 0.0000
```

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0056)  | 2.044        | 0.612          | 1.50           | 83.23        |
| OUTFLOW: ID= 1 ( 0057)  | 1.736        | 0.053          | 1.67           | 83.88        |
| OVERFLOW: ID= 3 ( 0003) | 0.308        | 0.363          | 1.67           | 83.88        |

TOTAL NUMBER OF SIMULATION OVERFLOW = 5  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.42  
PERCENTAGE OF TIME OVERFLOWING (%) = 1.85

PEAK FLOW REDUCTION [Qout/Qin](%)= 8.70  
TIME SHIFT OF PEAK FLOW (min)= 10.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0806



\*\*\*\*\*  
\*\* SIMULATION:9. 25mm4hrChicago \*\*  
\*\*\*\*\*

```
-----
| RESERVOIR( 0057) | OVERFLOW IS ON
| IN= 2---> OUT= 1 |
| DT= 5.0 min      |
-----
```

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0001             | 0.0397           | 0.0465             |
| 0.0068           | 0.0003             | 0.0423           | 0.0544             |
| 0.0167           | 0.0016             | 0.0447           | 0.0615             |
| 0.0228           | 0.0053             | 0.0469           | 0.0680             |
| 0.0272           | 0.0107             | 0.0491           | 0.0735             |
| 0.0309           | 0.0199             | 0.0512           | 0.0772             |
| 0.0341           | 0.0290             | 0.0532           | 0.0806             |
| 0.0370           | 0.0379             | 0.0000           | 0.0000             |

|                         | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|-------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0056)  | 2.044        | 0.182          | 1.50           | 23.48        |
| OUTFLOW: ID= 1 ( 0057)  | 2.044        | 0.029          | 1.92           | 23.44        |
| OVERFLOW: ID= 3 ( 0003) | 0.000        | 0.000          | 0.00           | 0.00         |

TOTAL NUMBER OF SIMULATION OVERFLOW = 0  
CUMULATIVE TIME OF OVERFLOW (HOURS) = 0.00  
PERCENTAGE OF TIME OVERFLOWING (%) = 0.00

PEAK FLOW REDUCTION [Qout/Qin](%)= 15.87  
TIME SHIFT OF PEAK FLOW (min)= 25.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0148

-----



## **Appendix G: OTTHYMO Models for Low Impact Design Components**

RAIN GARDEN

ENHANCED SWALES

LINEAR SUBDRAINED RAIN GARDENS



\*\*\*\*\*  
\*\* SIMULATION:1. CHICAGO [2 YR] [3 HR] \*\*  
\*\*\*\*\*

-----  
|Raingarden( 0023)| SURFACE PONDING LAYER:  
|IN= 2--> OUT= 3 |  
|DT= 5.0 MIN |  
-----

|           |                      |           |          |
|-----------|----------------------|-----------|----------|
|           | Max. Ponding Storage | (cu.m.)=  | 121.60   |
| DISCHARGE | DEPTH                | DISCHARGE | DEPTH    |
|           | (m)                  | (m2)      | (m) (m2) |
| 356.0     | 0.00                 | 0.0       | 0.25     |
| 372.3     | 0.05                 | 150.3     | 0.30     |
| 388.6     | 0.10                 | 299.6     | 0.35     |
| 405.1     | 0.15                 | 323.6     | 0.40     |
| 0.0       | 0.20                 | 339.8     | 0.00     |

## ENGINEERED SOIL LAYER:

|        |                         |                 |                    |      |
|--------|-------------------------|-----------------|--------------------|------|
| 1.00   | Length                  | (m)= 60.00      | Height             | (m)= |
| 0.46   | Width                   | (m)= 4.75       | Porosity           | =    |
| 0.0750 | Soil moisture           | = 0.30          | Infiltration(m/hr) | =    |
|        | Engineered Soil Storage | (cu.m.)= 131.96 |                    |      |

## TOTAL AVAILABLE STORAGE:

TOTAL STORAGE=Surface Ponding + Storage  
Layer(cu.m.)= 253.55

## NATIVE SOIL LAYER:

Infiltration(m/hr) = 0.0120

|                |      |       |       |      |
|----------------|------|-------|-------|------|
|                | AREA | QPEAK | TPEAK | R.V. |
|                | (ha) | (cms) | (hrs) | (mm) |
| INFLOW:ID= 2   | 0.09 | 0.000 | 1.33  | 1.95 |
| OVERFLOW:ID= 3 | 0.00 | 0.000 | 0.00  | 0.00 |

|                                              |        |
|----------------------------------------------|--------|
| Volume Reduction Rate[(RVin-RVout)/RVin](%)= | 100.00 |
| Time to reach Max storage (Hr)=              | 0.08   |
| Volume of water for drawdown in LID (cu.m.)= | 29.45  |
| Volume of maximum water storage (cu.m.)=     | 39.30  |
| Maximum surface ponding volume (cu.m.)=      | 0.00   |
| Surface ponding drawdown time (Hr)=          | 4.08   |
| Calculated Drawdown Time (Hr)=               | 8.58   |



\*\*\*\*\*  
\*\* SIMULATION:2. CHICAGO [2 YR] [6 HR] \*\*  
\*\*\*\*\*

-----  
|Raingarden( 0023)| SURFACE PONDING LAYER:  
|IN= 2--> OUT= 3 |  
|DT= 5.0 MIN |  
-----

|           |                      |           |          |
|-----------|----------------------|-----------|----------|
|           | Max. Ponding Storage | (cu.m.)=  | 121.60   |
| DISCHARGE | DEPTH                | DISCHARGE | DEPTH    |
|           | (m)                  | (m2)      | (m) (m2) |
| 356.0     | 0.00                 | 0.0       | 0.25     |
| 372.3     | 0.05                 | 150.3     | 0.30     |
| 388.6     | 0.10                 | 299.6     | 0.35     |
| 405.1     | 0.15                 | 323.6     | 0.40     |
| 0.0       | 0.20                 | 339.8     | 0.00     |

## ENGINEERED SOIL LAYER:

|        |                         |                 |                    |      |
|--------|-------------------------|-----------------|--------------------|------|
| 1.00   | Length                  | (m)= 60.00      | Height             | (m)= |
| 0.46   | Width                   | (m)= 4.75       | Porosity           | =    |
| 0.0750 | Soil moisture           | = 0.30          | Infiltration(m/hr) | =    |
|        | Engineered Soil Storage | (cu.m.)= 131.96 |                    |      |

## TOTAL AVAILABLE STORAGE:

TOTAL STORAGE=Surface Ponding + Storage  
Layer(cu.m.)= 253.55

## NATIVE SOIL LAYER:

Infiltration(m/hr) = 0.0120

|                |      |       |       |      |
|----------------|------|-------|-------|------|
|                | AREA | QPEAK | TPEAK | R.V. |
|                | (ha) | (cms) | (hrs) | (mm) |
| INFLOW:ID= 2   | 0.09 | 0.001 | 2.25  | 3.04 |
| OVERFLOW:ID= 3 | 0.00 | 0.000 | 0.00  | 0.00 |

|                                              |        |
|----------------------------------------------|--------|
| Volume Reduction Rate[(RVin-RVout)/RVin](%)= | 100.00 |
| Time to reach Max storage (Hr)=              | 0.08   |
| Volume of water for drawdown in LID (cu.m.)= | 20.50  |
| Volume of maximum water storage (cu.m.)=     | 39.30  |
| Maximum surface ponding volume (cu.m.)=      | 0.00   |
| Surface ponding drawdown time (Hr)=          | 3.17   |
| Calculated Drawdown Time (Hr)=               | 5.92   |



\*\*\*\*\*  
\*\* SIMULATION:3. CHICAGO [5 YR] [3 HR] \*\*  
\*\*\*\*\*

-----  
|Raingarden( 0023)| SURFACE PONDING LAYER:  
|IN= 2--> OUT= 3 |  
|DT= 5.0 MIN |  
-----

|           |                      |           |          |
|-----------|----------------------|-----------|----------|
|           | Max. Ponding Storage | (cu.m.)=  | 121.60   |
| DISCHARGE | DEPTH                | DISCHARGE | DEPTH    |
|           | (m)                  | (m2)      | (m) (m2) |
| 356.0     | 0.00                 | 0.0       | 0.25     |
| 372.3     | 0.05                 | 150.3     | 0.30     |
| 388.6     | 0.10                 | 299.6     | 0.35     |
| 405.1     | 0.15                 | 323.6     | 0.40     |
| 0.0       | 0.20                 | 339.8     | 0.00     |

## ENGINEERED SOIL LAYER:

|        |                         |                 |                    |      |
|--------|-------------------------|-----------------|--------------------|------|
| 1.00   | Length                  | (m)= 60.00      | Height             | (m)= |
| 0.46   | Width                   | (m)= 4.75       | Porosity           | =    |
| 0.0750 | Soil moisture           | = 0.30          | Infiltration(m/hr) | =    |
|        | Engineered Soil Storage | (cu.m.)= 131.96 |                    |      |

## TOTAL AVAILABLE STORAGE:

TOTAL STORAGE=Surface Ponding + Storage  
Layer(cu.m.)= 253.55

## NATIVE SOIL LAYER:

Infiltration(m/hr) = 0.0120

|                |      |       |       |      |
|----------------|------|-------|-------|------|
|                | AREA | QPEAK | TPEAK | R.V. |
|                | (ha) | (cms) | (hrs) | (mm) |
| INFLOW:ID= 2   | 0.09 | 0.001 | 1.25  | 4.52 |
| OVERFLOW:ID= 3 | 0.00 | 0.000 | 0.00  | 0.00 |

|                                              |        |
|----------------------------------------------|--------|
| Volume Reduction Rate[(RVin-RVout)/RVin](%)= | 100.00 |
| Time to reach Max storage (Hr)=              | 0.08   |
| Volume of water for drawdown in LID (cu.m.)= | 31.58  |
| Volume of maximum water storage (cu.m.)=     | 39.30  |
| Maximum surface ponding volume (cu.m.)=      | 0.00   |
| Surface ponding drawdown time (Hr)=          | 4.08   |
| Calculated Drawdown Time (Hr)=               | 9.17   |



Project # 221099

4 of 9

```
*****
** SIMULATION:4. CHICAGO [5 YR] [6 HR] **
*****
```

```
|Raingarden( 0023)| SURFACE PONDING LAYER:
|IN= 2--> OUT= 3 |
|DT= 5.0 MIN      |
```

----- Max. Ponding Storage (cu.m.)= 121.60

| DISCHARGE | DEPTH | DISCHARGE | DEPTH |
|-----------|-------|-----------|-------|
|           | (m)   | (m2)      | (m)   |
|           | 0.00  | 0.0       | 0.25  |
| 356.0     | 0.05  | 150.3     | 0.30  |
| 372.3     | 0.10  | 299.6     | 0.35  |
| 388.6     | 0.15  | 323.6     | 0.40  |
| 405.1     | 0.20  | 339.8     | 0.00  |
| 0.0       |       |           |       |

ENGINEERED SOIL LAYER:

|        |                         |          |        |                    |      |
|--------|-------------------------|----------|--------|--------------------|------|
| 1.00   | Length                  | (m)=     | 60.00  | Height             | (m)= |
| 0.46   | Width                   | (m)=     | 4.75   | Porosity           | =    |
| 0.0750 | Soil moisture           | =        | 0.30   | Infiltration(m/hr) | =    |
|        | Engineered Soil Storage | (cu.m.)= | 131.96 |                    |      |

TOTAL AVAILABLE STORAGE:

Layer (cu.m.) = 253.55

NATIVE SOIL LAYER:

$$\text{Infiltration(m/hr)} = 0.0120$$

|                 | AREA | QPEAK | TPEAK | R.V. |
|-----------------|------|-------|-------|------|
|                 | (ha) | (cms) | (hrs) | (mm) |
| INFLOW: ID= 2   | 0.09 | 0.001 | 2.17  | 6.52 |
| OVERFLOW: ID= 3 | 0.00 | 0.000 | 0.00  | 0.00 |

|                                              |        |
|----------------------------------------------|--------|
| Volume Reduction Rate[(RVin-RVout)/RVin](%)= | 100.00 |
| Time to reach Max storage (Hr)=              | 0.08   |
| Volume of water for drawdown in LID (cu.m.)= | 23.48  |
| Volume of maximum water storage (cu.m.)=     | 39.30  |
| Maximum surface ponding volume (cu.m.)=      | 0.00   |
| Surface ponding drawdown time (Hr)=          | 0.00   |
| Calculated Drawdown Time (Hr)=               | 6.83   |



\*\*\*\*\*  
\*\* SIMULATION:5. CHICAGO [100 YR] [3 HR] \*\*  
\*\*\*\*\*

-----  
|Raingarden( 0023)| SURFACE PONDING LAYER:  
|IN= 2--> OUT= 3 |  
|DT= 5.0 MIN |  
-----

|           |                      |           |          |
|-----------|----------------------|-----------|----------|
|           | Max. Ponding Storage | (cu.m.)=  | 121.60   |
| DISCHARGE | DEPTH                | DISCHARGE | DEPTH    |
|           | (m)                  | (m2)      | (m) (m2) |
| 356.0     | 0.00                 | 0.0       | 0.25     |
| 372.3     | 0.05                 | 150.3     | 0.30     |
| 388.6     | 0.10                 | 299.6     | 0.35     |
| 405.1     | 0.15                 | 323.6     | 0.40     |
| 0.0       | 0.20                 | 339.8     | 0.00     |

## ENGINEERED SOIL LAYER:

|        |                         |                 |                    |      |
|--------|-------------------------|-----------------|--------------------|------|
| 1.00   | Length                  | (m)= 60.00      | Height             | (m)= |
| 0.46   | Width                   | (m)= 4.75       | Porosity           | =    |
| 0.0750 | Soil moisture           | = 0.30          | Infiltration(m/hr) | =    |
|        | Engineered Soil Storage | (cu.m.)= 131.96 |                    |      |

## TOTAL AVAILABLE STORAGE:

TOTAL STORAGE=Surface Ponding + Storage  
Layer(cu.m.)= 253.55

## NATIVE SOIL LAYER:

Infiltration(m/hr) = 0.0120

|                |      |       |       |       |
|----------------|------|-------|-------|-------|
|                | AREA | QPEAK | TPEAK | R.V.  |
|                | (ha) | (cms) | (hrs) | (mm)  |
| INFLOW:ID= 2   | 0.09 | 0.005 | 1.17  | 15.51 |
| OVERFLOW:ID= 3 | 0.00 | 0.000 | 0.00  | 0.00  |

|                                              |        |
|----------------------------------------------|--------|
| Volume Reduction Rate[(RVin-RVout)/RVin](%)= | 100.00 |
| Time to reach Max storage (Hr)=              | 2.25   |
| Volume of water for drawdown in LID (cu.m.)= | 41.62  |
| Volume of maximum water storage (cu.m.)=     | 44.10  |
| Maximum surface ponding volume (cu.m.)=      | 0.00   |
| Surface ponding drawdown time (Hr)=          | 2.42   |
| Calculated Drawdown Time (Hr)=               | 12.17  |



\*\*\*\*\*  
\*\* SIMULATION:6. CHICAGO [100 YR] [6 HR] \*\*  
\*\*\*\*\*

-----  
|Raingarden( 0023)| SURFACE PONDING LAYER:  
|IN= 2--> OUT= 3 |  
|DT= 5.0 MIN |  
-----

|           |                      |           |          |
|-----------|----------------------|-----------|----------|
|           | Max. Ponding Storage | (cu.m.)=  | 121.60   |
| DISCHARGE | DEPTH                | DISCHARGE | DEPTH    |
|           | (m)                  | (m2)      | (m) (m2) |
| 356.0     | 0.00                 | 0.0       | 0.25     |
| 372.3     | 0.05                 | 150.3     | 0.30     |
| 388.6     | 0.10                 | 299.6     | 0.35     |
| 405.1     | 0.15                 | 323.6     | 0.40     |
| 0.0       | 0.20                 | 339.8     | 0.00     |

## ENGINEERED SOIL LAYER:

|        |                         |                 |                    |      |
|--------|-------------------------|-----------------|--------------------|------|
| 1.00   | Length                  | (m)= 60.00      | Height             | (m)= |
| 0.46   | Width                   | (m)= 4.75       | Porosity           | =    |
| 0.0750 | Soil moisture           | = 0.30          | Infiltration(m/hr) | =    |
|        | Engineered Soil Storage | (cu.m.)= 131.96 |                    |      |

## TOTAL AVAILABLE STORAGE:

TOTAL STORAGE=Surface Ponding + Storage  
Layer(cu.m.)= 253.55

## NATIVE SOIL LAYER:

Infiltration(m/hr) = 0.0120

|                |      |       |       |       |
|----------------|------|-------|-------|-------|
|                | AREA | QPEAK | TPEAK | R.V.  |
|                | (ha) | (cms) | (hrs) | (mm)  |
| INFLOW:ID= 2   | 0.09 | 0.006 | 2.17  | 20.66 |
| OVERFLOW:ID= 3 | 0.00 | 0.000 | 0.00  | 0.00  |

|                                              |        |
|----------------------------------------------|--------|
| Volume Reduction Rate[(RVin-RVout)/RVin](%)= | 100.00 |
| Time to reach Max storage (Hr)=              | 3.25   |
| Volume of water for drawdown in LID (cu.m.)= | 36.49  |
| Volume of maximum water storage (cu.m.)=     | 42.26  |
| Maximum surface ponding volume (cu.m.)=      | 0.00   |
| Surface ponding drawdown time (Hr)=          | 0.00   |
| Calculated Drawdown Time (Hr)=               | 10.67  |



\*\*\*\*\*  
\*\* SIMULATION:7. Historical Aug 4 1988 \*\*  
\*\*\*\*\*

-----  
|Raingarden( 0023)| SURFACE PONDING LAYER:  
|IN= 2--> OUT= 3 |  
|DT= 5.0 MIN |  
-----

|           |                      |           |          |
|-----------|----------------------|-----------|----------|
|           | Max. Ponding Storage | (cu.m.)=  | 121.60   |
| DISCHARGE | DEPTH                | DISCHARGE | DEPTH    |
|           | (m)                  | (m2)      | (m) (m2) |
| 356.0     | 0.00                 | 0.0       | 0.25     |
| 372.3     | 0.05                 | 150.3     | 0.30     |
| 388.6     | 0.10                 | 299.6     | 0.35     |
| 405.1     | 0.15                 | 323.6     | 0.40     |
| 0.0       | 0.20                 | 339.8     | 0.00     |

## ENGINEERED SOIL LAYER:

|        |                         |                 |                    |      |
|--------|-------------------------|-----------------|--------------------|------|
| 1.00   | Length                  | (m)= 60.00      | Height             | (m)= |
| 0.46   | Width                   | (m)= 4.75       | Porosity           | =    |
| 0.0750 | Soil moisture           | = 0.30          | Infiltration(m/hr) | =    |
|        | Engineered Soil Storage | (cu.m.)= 131.96 |                    |      |

## TOTAL AVAILABLE STORAGE:

TOTAL STORAGE=Surface Ponding + Storage  
Layer(cu.m.)= 253.55

## NATIVE SOIL LAYER:

Infiltration(m/hr) = 0.0120

|                |      |       |       |       |
|----------------|------|-------|-------|-------|
|                | AREA | QPEAK | TPEAK | R.V.  |
|                | (ha) | (cms) | (hrs) | (mm)  |
| INFLOW:ID= 2   | 0.09 | 0.008 | 2.08  | 19.78 |
| OVERFLOW:ID= 3 | 0.00 | 0.000 | 0.00  | 0.00  |

|                                              |        |
|----------------------------------------------|--------|
| Volume Reduction Rate[(RVin-RVout)/RVin](%)= | 100.00 |
| Time to reach Max storage (Hr)=              | 2.42   |
| Volume of water for drawdown in LID (cu.m.)= | 36.96  |
| Volume of maximum water storage (cu.m.)=     | 44.85  |
| Maximum surface ponding volume (cu.m.)=      | 0.85   |
| Surface ponding drawdown time (Hr)=          | 0.00   |
| Calculated Drawdown Time (Hr)=               | 10.75  |



\*\*\*\*\*  
\*\* SIMULATION:8. Historical July 1 1979 \*\*  
\*\*\*\*\*

-----  
|Raingarden( 0023)| SURFACE PONDING LAYER:  
|IN= 2--> OUT= 3 |  
|DT= 5.0 MIN |  
-----

|           |                      |           |          |
|-----------|----------------------|-----------|----------|
|           | Max. Ponding Storage | (cu.m.)=  | 121.60   |
| DISCHARGE | DEPTH                | DISCHARGE | DEPTH    |
|           | (m)                  | (m2)      | (m) (m2) |
| 356.0     | 0.00                 | 0.0       | 0.25     |
| 372.3     | 0.05                 | 150.3     | 0.30     |
| 388.6     | 0.10                 | 299.6     | 0.35     |
| 405.1     | 0.15                 | 323.6     | 0.40     |
| 0.0       | 0.20                 | 339.8     | 0.00     |

## ENGINEERED SOIL LAYER:

|        |                         |                 |                    |      |
|--------|-------------------------|-----------------|--------------------|------|
| 1.00   | Length                  | (m)= 60.00      | Height             | (m)= |
| 0.46   | Width                   | (m)= 4.75       | Porosity           | =    |
| 0.0750 | Soil moisture           | = 0.30          | Infiltration(m/hr) | =    |
|        | Engineered Soil Storage | (cu.m.)= 131.96 |                    |      |

## TOTAL AVAILABLE STORAGE:

TOTAL STORAGE=Surface Ponding + Storage  
Layer(cu.m.)= 253.55

## NATIVE SOIL LAYER:

Infiltration(m/hr) = 0.0120

|                |      |       |       |       |
|----------------|------|-------|-------|-------|
|                | AREA | QPEAK | TPEAK | R.V.  |
|                | (ha) | (cms) | (hrs) | (mm)  |
| INFLOW:ID= 2   | 0.09 | 0.008 | 1.67  | 21.51 |
| OVERFLOW:ID= 3 | 0.00 | 0.000 | 0.00  | 0.00  |

|                                              |        |
|----------------------------------------------|--------|
| Volume Reduction Rate[(RVin-RVout)/RVin](%)= | 100.00 |
| Time to reach Max storage (Hr)=              | 2.33   |
| Volume of water for drawdown in LID (cu.m.)= | 46.79  |
| Volume of maximum water storage (cu.m.)=     | 49.64  |
| Maximum surface ponding volume (cu.m.)=      | 1.14   |
| Surface ponding drawdown time (Hr)=          | 1.42   |
| Calculated Drawdown Time (Hr)=               | 13.67  |



Project # 221099

9 of 9

```
*****
** SIMULATION:9. 25mm4hrChicago **
*****
```

```
|Raingarden( 0023)| SURFACE PONDING LAYER:
|IN= 2--> OUT= 3 |
|DT= 5.0 MIN      |
```

Max. Ponding Storage (cu.m.)= 121.60

| DISCHARGE | DEPTH | DISCHARGE | DEPTH    |
|-----------|-------|-----------|----------|
|           | (m)   | (m2)      | (m) (m2) |
|           | 0.00  | 0.0       | 0.25     |
| 356.0     | 0.05  | 150.3     | 0.30     |
| 372.3     | 0.10  | 299.6     | 0.35     |
| 388.6     | 0.15  | 323.6     | 0.40     |
| 405.1     | 0.20  | 339.8     | 0.00     |
| 0.0       |       |           |          |

ENGINEERED SOIL LAYER:

|        |                         |          |        |                    |      |
|--------|-------------------------|----------|--------|--------------------|------|
| 1.00   | Length                  | (m)=     | 60.00  | Height             | (m)= |
| 0.46   | Width                   | (m)=     | 4.75   | Porosity           | =    |
| 0.0750 | Soil moisture           | =        | 0.30   | Infiltration(m/hr) | =    |
|        | Engineered Soil Storage | (cu.m.)= | 131.96 |                    |      |

TOTAL AVAILABLE STORAGE:

Layer (cu.m.) = 253.55

NATIVE SOIL LAYER:

$$\text{Infiltration(m/hr)} = 0.0120$$

|                 | AREA | QPEAK | TPEAK | R.V. |
|-----------------|------|-------|-------|------|
|                 | (ha) | (cms) | (hrs) | (mm) |
| INFLOW: ID= 2   | 0.09 | 0.000 | 2.17  | 0.81 |
| OVERFLOW: ID= 3 | 0.00 | 0.000 | 0.00  | 0.00 |

|                                              |        |
|----------------------------------------------|--------|
| Volume Reduction Rate[(RVin-RVout)/RVin](%)= | 100.00 |
| Time to reach Max storage (Hr)=              | 0.08   |
| Volume of water for drawdown in LID (cu.m.)= | 25.25  |
| Volume of maximum water storage (cu.m.)=     | 39.30  |
| Maximum surface ponding volume (cu.m.)=      | 0.00   |
| Surface ponding drawdown time (Hr)=          | 2.00   |
| Calculated Drawdown Time (Hr)=               | 7.33   |



\*\*\*\*\*  
\*\* SIMULATION:1. CHICAGO [2 YR] [3 HR] \*\*  
\*\*\*\*\*

-----  
| SWALE( 0025) | SURFACE PONDING LAYER:  
| IN= 2--> OUT= 3 | Length (m)= 75.00 Height (m)=  
0.30  
| DT= 5.0 MIN | Left Slope = 3.00 Right Slope =  
2.00  
----- Bottom Width (m)= 0.30 Surface slope(%) =  
1.00

NATIVE SOIL LAYER:  
Infiltration (m/hr) = 0.0500

|                | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|----------------|--------------|----------------|----------------|--------------|
| INFLOW:ID= 2   | 0.13         | 0.001          | 1.33           | 1.95         |
| OUTFLOW:ID= 1  | 0.00         | 0.000          | 0.00           | 0.00         |
| OVERFLOW:ID= 3 | 0.00         | 0.000          | 0.00           | 0.00         |

|                                              |        |
|----------------------------------------------|--------|
| Volume Reduction Rate[(RVin-RVout)/RVin](%)= | 100.00 |
| Maximum ponding/storage volume (cu.m.)=      | 0.90   |
| Time to reach Max storage (Hr)=              | 2.08   |
| Volume of water for drawdown in LID (cu.m.)= | 0.49   |
| Calculated Drawdown Time (Hr)=               | 1.92   |

\*\*\*\*\*  
\*\* SIMULATION:2. CHICAGO [2 YR] [6 HR] \*\*  
\*\*\*\*\*

-----  
| SWALE( 0025) | SURFACE PONDING LAYER:  
| IN= 2--> OUT= 3 | Length (m)= 75.00 Height (m)=  
0.30  
| DT= 5.0 MIN | Left Slope = 3.00 Right Slope =  
2.00  
----- Bottom Width (m)= 0.30 Surface slope(%) =  
1.00

NATIVE SOIL LAYER:  
Infiltration (m/hr) = 0.0500

|                | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|----------------|--------------|----------------|----------------|--------------|
| INFLOW:ID= 2   | 0.13         | 0.001          | 2.25           | 3.04         |
| OUTFLOW:ID= 1  | 0.00         | 0.000          | 0.00           | 0.00         |
| OVERFLOW:ID= 3 | 0.00         | 0.000          | 0.00           | 0.00         |

|                                              |        |
|----------------------------------------------|--------|
| Volume Reduction Rate[(RVin-RVout)/RVin](%)= | 100.00 |
| Maximum ponding/storage volume (cu.m.)=      | 1.13   |
| Time to reach Max storage (Hr)=              | 3.00   |
| Volume of water for drawdown in LID (cu.m.)= | 0.27   |
| Calculated Drawdown Time (Hr)=               | 1.50   |



\*\*\*\*\*  
\*\* SIMULATION:3. CHICAGO [5 YR] [3 HR] \*\*  
\*\*\*\*\*

-----  
| SWALE( 0025) | SURFACE PONDING LAYER:  
| IN= 2--> OUT= 3 | Length (m)= 75.00 Height (m)=  
0.30  
| DT= 5.0 MIN | Left Slope = 3.00 Right Slope =  
2.00  
----- Bottom Width (m)= 0.30 Surface slope(%) =  
1.00

NATIVE SOIL LAYER:  
Infiltration (m/hr) = 0.0500

|                | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|----------------|--------------|----------------|----------------|--------------|
| INFLOW:ID= 2   | 0.13         | 0.002          | 1.25           | 4.52         |
| OUTFLOW:ID= 1  | 0.00         | 0.000          | 0.00           | 0.00         |
| OVERFLOW:ID= 3 | 0.00         | 0.000          | 0.00           | 0.00         |

|                                              |        |
|----------------------------------------------|--------|
| Volume Reduction Rate[(RVin-RVout)/RVin](%)= | 100.00 |
| Maximum ponding/storage volume (cu.m.)=      | 2.57   |
| Time to reach Max storage (Hr)=              | 2.08   |
| Volume of water for drawdown in LID (cu.m.)= | 1.52   |
| Calculated Drawdown Time (Hr)=               | 3.08   |

\*\*\*\*\*  
\*\* SIMULATION:4. CHICAGO [5 YR] [6 HR] \*\*  
\*\*\*\*\*

-----  
| SWALE( 0025) | SURFACE PONDING LAYER:  
| IN= 2--> OUT= 3 | Length (m)= 75.00 Height (m)=  
0.30  
| DT= 5.0 MIN | Left Slope = 3.00 Right Slope =  
2.00  
----- Bottom Width (m)= 0.30 Surface slope(%) =  
1.00

NATIVE SOIL LAYER:  
Infiltration (m/hr) = 0.0500

|                | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|----------------|--------------|----------------|----------------|--------------|
| INFLOW:ID= 2   | 0.13         | 0.002          | 2.17           | 6.52         |
| OUTFLOW:ID= 1  | 0.00         | 0.000          | 0.00           | 0.00         |
| OVERFLOW:ID= 3 | 0.00         | 0.000          | 0.00           | 0.00         |

|                                              |        |
|----------------------------------------------|--------|
| Volume Reduction Rate[(RVin-RVout)/RVin](%)= | 100.00 |
| Maximum ponding/storage volume (cu.m.)=      | 3.07   |
| Time to reach Max storage (Hr)=              | 3.00   |
| Volume of water for drawdown in LID (cu.m.)= | 0.91   |
| Calculated Drawdown Time (Hr)=               | 2.50   |





\*\*\*\*\*  
\*\* SIMULATION:5. CHICAGO [100 YR] [3 HR] \*\*  
\*\*\*\*\*

-----  
| SWALE( 0025) | SURFACE PONDING LAYER:  
| IN= 2--> OUT= 3 | Length (m)= 75.00 Height (m)=  
0.30  
| DT= 5.0 MIN | Left Slope = 3.00 Right Slope =  
2.00  
----- Bottom Width (m)= 0.30 Surface slope(%) =  
1.00

NATIVE SOIL LAYER:  
Infiltration (m/hr) = 0.0500

|                | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|----------------|--------------|----------------|----------------|--------------|
| INFLOW:ID= 2   | 0.13         | 0.007          | 1.17           | 15.51        |
| OUTFLOW:ID= 1  | 0.00         | 0.000          | 0.00           | 0.00         |
| OVERFLOW:ID= 3 | 0.13         | 0.006          | 1.25           | 7.07         |

Volume Reduction Rate[(RVin-RVout)/RVin](%)= 54.38  
Maximum ponding/storage volume (cu.m.)= 4.73  
Time to reach Max storage (Hr)= 1.17  
Volume of water for drawdown in LID (cu.m.)= 3.53  
Calculated Drawdown Time (Hr)= 4.17

\*\*\*\*\*  
\*\* SIMULATION:6. CHICAGO [100 YR] [6 HR] \*\*  
\*\*\*\*\*

-----  
| SWALE( 0025) | SURFACE PONDING LAYER:  
| IN= 2--> OUT= 3 | Length (m)= 75.00 Height (m)=  
0.30  
| DT= 5.0 MIN | Left Slope = 3.00 Right Slope =  
2.00  
----- Bottom Width (m)= 0.30 Surface slope(%) =  
1.00

NATIVE SOIL LAYER:  
Infiltration (m/hr) = 0.0500

|                | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|----------------|--------------|----------------|----------------|--------------|
| INFLOW:ID= 2   | 0.13         | 0.008          | 2.17           | 20.66        |
| OUTFLOW:ID= 1  | 0.00         | 0.000          | 0.00           | 0.00         |
| OVERFLOW:ID= 3 | 0.13         | 0.006          | 2.25           | 8.83         |

Volume Reduction Rate[(RVin-RVout)/RVin](%)= 57.26  
Maximum ponding/storage volume (cu.m.)= 4.73  
Time to reach Max storage (Hr)= 2.17  
Volume of water for drawdown in LID (cu.m.)= 2.73  
Calculated Drawdown Time (Hr)= 3.83



\*\*\*\*\*  
\*\* SIMULATION:7. Historical Aug 4 1988 \*\*  
\*\*\*\*\*

-----  
| SWALE( 0025) | SURFACE PONDING LAYER:  
| IN= 2--> OUT= 3 | Length (m)= 75.00 Height (m)=  
0.30  
| DT= 5.0 MIN | Left Slope = 3.00 Right Slope =  
2.00  
----- Bottom Width (m)= 0.30 Surface slope(%) =  
1.00

NATIVE SOIL LAYER:  
Infiltration (m/hr) = 0.0500

|                | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|----------------|--------------|----------------|----------------|--------------|
| INFLOW:ID= 2   | 0.13         | 0.010          | 2.08           | 19.78        |
| OUTFLOW:ID= 1  | 0.00         | 0.000          | 0.00           | 0.00         |
| OVERFLOW:ID= 3 | 0.13         | 0.009          | 2.08           | 9.54         |

Volume Reduction Rate[(RVin-RVout)/RVin](%)= 51.76  
Maximum ponding/storage volume (cu.m.)= 4.73  
Time to reach Max storage (Hr)= 1.92  
Volume of water for drawdown in LID (cu.m.)= 2.12  
Calculated Drawdown Time (Hr)= 3.50

\*\*\*\*\*  
\*\* SIMULATION:8. Historical July 1 1979 \*\*  
\*\*\*\*\*

-----  
| SWALE( 0025) | SURFACE PONDING LAYER:  
| IN= 2--> OUT= 3 | Length (m)= 75.00 Height (m)=  
0.30  
| DT= 5.0 MIN | Left Slope = 3.00 Right Slope =  
2.00  
----- Bottom Width (m)= 0.30 Surface slope(%) =  
1.00

NATIVE SOIL LAYER:  
Infiltration (m/hr) = 0.0500

|                | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|----------------|--------------|----------------|----------------|--------------|
| INFLOW:ID= 2   | 0.13         | 0.010          | 1.67           | 21.51        |
| OUTFLOW:ID= 1  | 0.00         | 0.000          | 0.00           | 0.00         |
| OVERFLOW:ID= 3 | 0.13         | 0.009          | 1.67           | 13.71        |

Volume Reduction Rate[(RVin-RVout)/RVin](%)= 36.28  
Maximum ponding/storage volume (cu.m.)= 4.73  
Time to reach Max storage (Hr)= 1.50  
Volume of water for drawdown in LID (cu.m.)= 3.40  
Calculated Drawdown Time (Hr)= 4.17



\*\*\*\*\*  
\*\* SIMULATION:9. 25mm4hrChicago \*\*  
\*\*\*\*\*

-----  
| SWALE( 0025) | SURFACE PONDING LAYER:  
| IN= 2--> OUT= 3 | Length (m)= 75.00 Height (m)=  
0.30  
| DT= 5.0 MIN | Left Slope = 3.00 Right Slope =  
2.00  
----- Bottom Width (m)= 0.30 Surface slope(%) =  
1.00

NATIVE SOIL LAYER:  
Infiltration (m/hr) = 0.0500

|                | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|----------------|--------------|----------------|----------------|--------------|
| INFLOW:ID= 2   | 0.13         | 0.000          | 2.17           | 0.82         |
| OUTFLOW:ID= 1  | 0.00         | 0.000          | 0.00           | 0.00         |
| OVERFLOW:ID= 3 | 0.00         | 0.000          | 0.00           | 0.00         |

|                                              |        |
|----------------------------------------------|--------|
| Volume Reduction Rate[(RVin-RVout)/RVin](%)= | 100.00 |
| Maximum ponding/storage volume (cu.m.)=      | 0.22   |
| Time to reach Max storage (Hr)=              | 3.50   |
| Volume of water for drawdown in LID (cu.m.)= | 0.14   |
| Calculated Drawdown Time (Hr)=               | 1.08   |



\*\*\*\*\*  
\*\* SIMULATION:1. CHICAGO [2 YR] [3 HR] \*\*  
\*\*\*\*\*

-----  
| SWALE( 0027) | SURFACE PONDING LAYER:  
| IN= 2--> OUT= 3 | Length (m)= 250.00 Height (m)=  
0.30  
| DT= 5.0 MIN | Left Slope = 3.00 Right Slope =  
3.00  
----- Bottom Width (m)= 0.30 Surface slope(%) =  
1.00

NATIVE SOIL LAYER:  
Infiltration (m/hr) = 0.0500

|                | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|----------------|--------------|----------------|----------------|--------------|
| INFLOW:ID= 2   | 0.22         | 0.001          | 1.33           | 1.95         |
| OUTFLOW:ID= 1  | 0.00         | 0.000          | 0.00           | 0.00         |
| OVERFLOW:ID= 3 | 0.00         | 0.000          | 0.00           | 0.00         |

|                                              |        |
|----------------------------------------------|--------|
| Volume Reduction Rate[(RVin-RVout)/RVin](%)= | 100.00 |
| Maximum ponding/storage volume (cu.m.)=      | 1.73   |
| Time to reach Max storage (Hr)=              | 2.17   |
| Volume of water for drawdown in LID (cu.m.)= | 0.99   |
| Calculated Drawdown Time (Hr)=               | 2.42   |

\*\*\*\*\*  
\*\* SIMULATION:2. CHICAGO [2 YR] [6 HR] \*\*  
\*\*\*\*\*

-----  
| SWALE( 0027) | SURFACE PONDING LAYER:  
| IN= 2--> OUT= 3 | Length (m)= 250.00 Height (m)=  
0.30  
| DT= 5.0 MIN | Left Slope = 3.00 Right Slope =  
3.00  
----- Bottom Width (m)= 0.30 Surface slope(%) =  
1.00

NATIVE SOIL LAYER:  
Infiltration (m/hr) = 0.0500

|                | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|----------------|--------------|----------------|----------------|--------------|
| INFLOW:ID= 2   | 0.22         | 0.001          | 2.25           | 3.04         |
| OUTFLOW:ID= 1  | 0.00         | 0.000          | 0.00           | 0.00         |
| OVERFLOW:ID= 3 | 0.00         | 0.000          | 0.00           | 0.00         |

|                                              |        |
|----------------------------------------------|--------|
| Volume Reduction Rate[(RVin-RVout)/RVin](%)= | 100.00 |
| Maximum ponding/storage volume (cu.m.)=      | 2.15   |
| Time to reach Max storage (Hr)=              | 3.08   |
| Volume of water for drawdown in LID (cu.m.)= | 0.62   |
| Calculated Drawdown Time (Hr)=               | 2.00   |



\*\*\*\*\*  
\*\* SIMULATION:3. CHICAGO [5 YR] [3 HR] \*\*  
\*\*\*\*\*

-----  
| SWALE( 0027) | SURFACE PONDING LAYER:  
| IN= 2--> OUT= 3 | Length (m)= 250.00 Height (m)=  
0.30  
| DT= 5.0 MIN | Left Slope = 3.00 Right Slope =  
3.00  
----- Bottom Width (m)= 0.30 Surface slope(%) =  
1.00

NATIVE SOIL LAYER:  
Infiltration (m/hr) = 0.0500

|                | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|----------------|--------------|----------------|----------------|--------------|
| INFLOW:ID= 2   | 0.22         | 0.003          | 1.25           | 4.52         |
| OUTFLOW:ID= 1  | 0.00         | 0.000          | 0.00           | 0.00         |
| OVERFLOW:ID= 3 | 0.00         | 0.000          | 0.00           | 0.00         |

|                                              |        |
|----------------------------------------------|--------|
| Volume Reduction Rate[(RVin-RVout)/RVin](%)= | 100.00 |
| Maximum ponding/storage volume (cu.m.)=      | 4.82   |
| Time to reach Max storage (Hr)=              | 2.17   |
| Volume of water for drawdown in LID (cu.m.)= | 3.02   |
| Calculated Drawdown Time (Hr)=               | 3.75   |

\*\*\*\*\*  
\*\* SIMULATION:4. CHICAGO [5 YR] [6 HR] \*\*  
\*\*\*\*\*

-----  
| SWALE( 0027) | SURFACE PONDING LAYER:  
| IN= 2--> OUT= 3 | Length (m)= 250.00 Height (m)=  
0.30  
| DT= 5.0 MIN | Left Slope = 3.00 Right Slope =  
3.00  
----- Bottom Width (m)= 0.30 Surface slope(%) =  
1.00

NATIVE SOIL LAYER:  
Infiltration (m/hr) = 0.0500

|                | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|----------------|--------------|----------------|----------------|--------------|
| INFLOW:ID= 2   | 0.22         | 0.004          | 2.17           | 6.52         |
| OUTFLOW:ID= 1  | 0.00         | 0.000          | 0.00           | 0.00         |
| OVERFLOW:ID= 3 | 0.22         | 0.000          | 2.83           | 0.20         |

|                                              |       |
|----------------------------------------------|-------|
| Volume Reduction Rate[(RVin-RVout)/RVin](%)= | 96.90 |
| Maximum ponding/storage volume (cu.m.)=      | 5.40  |
| Time to reach Max storage (Hr)=              | 2.75  |
| Volume of water for drawdown in LID (cu.m.)= | 1.96  |
| Calculated Drawdown Time (Hr)=               | 3.17  |



\*\*\*\*\*  
\*\* SIMULATION:5. CHICAGO [100 YR] [3 HR] \*\*  
\*\*\*\*\*

-----  
| SWALE( 0027) | SURFACE PONDING LAYER:  
| IN= 2--> OUT= 3 | Length (m)= 250.00 Height (m)=  
0.30  
| DT= 5.0 MIN | Left Slope = 3.00 Right Slope =  
3.00  
----- Bottom Width (m)= 0.30 Surface slope(%) =  
1.00

NATIVE SOIL LAYER:  
Infiltration (m/hr) = 0.0500

|                | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|----------------|--------------|----------------|----------------|--------------|
| INFLOW:ID= 2   | 0.22         | 0.012          | 1.17           | 15.51        |
| OUTFLOW:ID= 1  | 0.00         | 0.000          | 0.00           | 0.00         |
| OVERFLOW:ID= 3 | 0.22         | 0.011          | 1.17           | 9.84         |

Volume Reduction Rate[(RVin-RVout)/RVin](%)= 36.58  
Maximum ponding/storage volume (cu.m.)= 5.40  
Time to reach Max storage (Hr)= 1.08  
Volume of water for drawdown in LID (cu.m.)= 3.96  
Calculated Drawdown Time (Hr)= 4.08

\*\*\*\*\*  
\*\* SIMULATION:6. CHICAGO [100 YR] [6 HR] \*\*  
\*\*\*\*\*

-----  
| SWALE( 0027) | SURFACE PONDING LAYER:  
| IN= 2--> OUT= 3 | Length (m)= 250.00 Height (m)=  
0.30  
| DT= 5.0 MIN | Left Slope = 3.00 Right Slope =  
3.00  
----- Bottom Width (m)= 0.30 Surface slope(%) =  
1.00

NATIVE SOIL LAYER:  
Infiltration (m/hr) = 0.0500

|                | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|----------------|--------------|----------------|----------------|--------------|
| INFLOW:ID= 2   | 0.22         | 0.014          | 2.17           | 20.66        |
| OUTFLOW:ID= 1  | 0.00         | 0.000          | 0.00           | 0.00         |
| OVERFLOW:ID= 3 | 0.22         | 0.013          | 2.17           | 12.27        |

Volume Reduction Rate[(RVin-RVout)/RVin](%)= 40.61  
Maximum ponding/storage volume (cu.m.)= 5.40  
Time to reach Max storage (Hr)= 2.08  
Volume of water for drawdown in LID (cu.m.)= 3.95  
Calculated Drawdown Time (Hr)= 4.08



\*\*\*\*\*  
\*\* SIMULATION:7. Historical Aug 4 1988 \*\*  
\*\*\*\*\*

-----  
| SWALE( 0027) | SURFACE PONDING LAYER:  
| IN= 2--> OUT= 3 | Length (m)= 250.00 Height (m)=  
0.30  
| DT= 5.0 MIN | Left Slope = 3.00 Right Slope =  
3.00  
----- Bottom Width (m)= 0.30 Surface slope(%) =  
1.00

NATIVE SOIL LAYER:  
Infiltration (m/hr) = 0.0500

|                | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|----------------|--------------|----------------|----------------|--------------|
| INFLOW:ID= 2   | 0.22         | 0.018          | 2.08           | 19.78        |
| OUTFLOW:ID= 1  | 0.00         | 0.000          | 0.00           | 0.00         |
| OVERFLOW:ID= 3 | 0.22         | 0.017          | 2.08           | 12.17        |

Volume Reduction Rate[(RVin-RVout)/RVin](%)= 38.47  
Maximum ponding/storage volume (cu.m.)= 5.40  
Time to reach Max storage (Hr)= 1.75  
Volume of water for drawdown in LID (cu.m.)= 3.25  
Calculated Drawdown Time (Hr)= 3.83

\*\*\*\*\*  
\*\* SIMULATION:8. Historical July 1 1979 \*\*  
\*\*\*\*\*

-----  
| SWALE( 0027) | SURFACE PONDING LAYER:  
| IN= 2--> OUT= 3 | Length (m)= 250.00 Height (m)=  
0.30  
| DT= 5.0 MIN | Left Slope = 3.00 Right Slope =  
3.00  
----- Bottom Width (m)= 0.30 Surface slope(%) =  
1.00

NATIVE SOIL LAYER:  
Infiltration (m/hr) = 0.0500

|                | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|----------------|--------------|----------------|----------------|--------------|
| INFLOW:ID= 2   | 0.22         | 0.018          | 1.67           | 21.51        |
| OUTFLOW:ID= 1  | 0.00         | 0.000          | 0.00           | 0.00         |
| OVERFLOW:ID= 3 | 0.22         | 0.017          | 1.67           | 16.17        |

Volume Reduction Rate[(RVin-RVout)/RVin](%)= 24.82  
Maximum ponding/storage volume (cu.m.)= 5.40  
Time to reach Max storage (Hr)= 1.42  
Volume of water for drawdown in LID (cu.m.)= 3.90  
Calculated Drawdown Time (Hr)= 4.08



\*\*\*\*\*  
\*\* SIMULATION:9. 25mm4hrChicago \*\*  
\*\*\*\*\*

-----  
| SWALE( 0027) | SURFACE PONDING LAYER:  
| IN= 2--> OUT= 3 | Length (m)= 250.00 Height (m)=  
0.30  
| DT= 5.0 MIN | Left Slope = 3.00 Right Slope =  
3.00  
----- Bottom Width (m)= 0.30 Surface slope(%) =  
1.00

NATIVE SOIL LAYER:  
Infiltration (m/hr) = 0.0500

|                | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|----------------|--------------|----------------|----------------|--------------|
| INFLOW:ID= 2   | 0.22         | 0.000          | 2.17           | 0.82         |
| OUTFLOW:ID= 1  | 0.00         | 0.000          | 0.00           | 0.00         |
| OVERFLOW:ID= 3 | 0.00         | 0.000          | 0.00           | 0.00         |

|                                              |        |
|----------------------------------------------|--------|
| Volume Reduction Rate[(RVin-RVout)/RVin](%)= | 100.00 |
| Maximum ponding/storage volume (cu.m.)=      | 0.46   |
| Time to reach Max storage (Hr)=              | 3.83   |
| Volume of water for drawdown in LID (cu.m.)= | 0.28   |
| Calculated Drawdown Time (Hr)=               | 1.42   |





Post-development Otthymo Analysis Detailed Output  
Linear Sub-Drained Rain Garden – C-L-D  
2726 Moodie Drive, Ottawa  
February 27, 2026

Project # 221099

1 of 5

\*\*\*\*\*  
\*\* SIMULATION:1. CHICAGO [2 YR] [3 HR] \*\*  
\*\*\*\*\*

-----  
| RESERVOIR( 0058) |  
| IN= 2---> OUT= 1 |  
| DT= 5.0 min |  
-----

OVERFLOW IS OFF

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0000             | 0.0002           | 0.0058             |
| 0.0001           | 0.0001             | 0.0003           | 0.0068             |
| 0.0002           | 0.0004             | 0.0003           | 0.0078             |
| 0.0002           | 0.0011             | 0.0030           | 0.0089             |
| 0.0002           | 0.0019             | 0.0079           | 0.0099             |
| 0.0002           | 0.0029             | 0.0143           | 0.0110             |
| 0.0002           | 0.0038             | 0.0218           | 0.0121             |
| 0.0002           | 0.0048             | 0.0304           | 0.0132             |

|                        | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0011) | 0.248        | 0.001          | 1.25           | 2.28         |
| OUTFLOW: ID= 1 ( 0058) | 0.248        | 0.000          | 3.25           | 0.53         |

PEAK FLOW REDUCTION [Qout/Qin](%)= 10.49  
TIME SHIFT OF PEAK FLOW (min)=120.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0004

-----  
\*\*\*\*\*  
\*\* SIMULATION:2. CHICAGO [2 YR] [6 HR] \*\*  
\*\*\*\*\*

-----  
| RESERVOIR( 0058) |  
| IN= 2---> OUT= 1 |  
| DT= 5.0 min |  
-----

OVERFLOW IS OFF

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0000             | 0.0002           | 0.0058             |
| 0.0001           | 0.0001             | 0.0003           | 0.0068             |
| 0.0002           | 0.0004             | 0.0003           | 0.0078             |
| 0.0002           | 0.0011             | 0.0030           | 0.0089             |
| 0.0002           | 0.0019             | 0.0079           | 0.0099             |
| 0.0002           | 0.0029             | 0.0143           | 0.0110             |
| 0.0002           | 0.0038             | 0.0218           | 0.0121             |
| 0.0002           | 0.0048             | 0.0304           | 0.0132             |

|                        | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0011) | 0.248        | 0.002          | 2.25           | 3.47         |
| OUTFLOW: ID= 1 ( 0058) | 0.248        | 0.000          | 6.17           | 0.99         |

PEAK FLOW REDUCTION [Qout/Qin](%)= 8.44  
TIME SHIFT OF PEAK FLOW (min)=235.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0006



Post-development Otthymo Analysis Detailed Output  
Linear Sub-Drained Rain Garden – C-L-D  
2726 Moodie Drive, Ottawa  
February 27, 2026

Project # 221099

2 of 5

\*\*\*\*\*  
\*\* SIMULATION:3. CHICAGO [5 YR] [3 HR] \*\*  
\*\*\*\*\*

-----  
| RESERVOIR( 0058) |  
| IN= 2---> OUT= 1 |  
| DT= 5.0 min |  
-----

OVERFLOW IS OFF

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0000             | 0.0002           | 0.0058             |
| 0.0001           | 0.0001             | 0.0003           | 0.0068             |
| 0.0002           | 0.0004             | 0.0003           | 0.0078             |
| 0.0002           | 0.0011             | 0.0030           | 0.0089             |
| 0.0002           | 0.0019             | 0.0079           | 0.0099             |
| 0.0002           | 0.0029             | 0.0143           | 0.0110             |
| 0.0002           | 0.0038             | 0.0218           | 0.0121             |
| 0.0002           | 0.0048             | 0.0304           | 0.0132             |

|                        | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0011) | 0.248        | 0.004          | 1.25           | 5.08         |
| OUTFLOW: ID= 1 ( 0058) | 0.248        | 0.000          | 3.33           | 0.61         |

PEAK FLOW REDUCTION [Qout/Qin](%)= 4.39  
TIME SHIFT OF PEAK FLOW (min)=125.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0011

-----  
\*\*\*\*\*  
\*\* SIMULATION:4. CHICAGO [5 YR] [6 HR] \*\*  
\*\*\*\*\*

-----  
| RESERVOIR( 0058) |  
| IN= 2---> OUT= 1 |  
| DT= 5.0 min |  
-----

OVERFLOW IS OFF

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0000             | 0.0002           | 0.0058             |
| 0.0001           | 0.0001             | 0.0003           | 0.0068             |
| 0.0002           | 0.0004             | 0.0003           | 0.0078             |
| 0.0002           | 0.0011             | 0.0030           | 0.0089             |
| 0.0002           | 0.0019             | 0.0079           | 0.0099             |
| 0.0002           | 0.0029             | 0.0143           | 0.0110             |
| 0.0002           | 0.0038             | 0.0218           | 0.0121             |
| 0.0002           | 0.0048             | 0.0304           | 0.0132             |

|                        | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0011) | 0.248        | 0.004          | 2.17           | 7.23         |
| OUTFLOW: ID= 1 ( 0058) | 0.248        | 0.000          | 6.25           | 1.10         |

PEAK FLOW REDUCTION [Qout/Qin](%)= 3.81  
TIME SHIFT OF PEAK FLOW (min)=245.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0015



Post-development Otthymo Analysis Detailed Output  
Linear Sub-Drained Rain Garden – C-L-D  
2726 Moodie Drive, Ottawa  
February 27, 2026

Project # 221099

3 of 5

February 27, 2026

\*\*\*\*\*  
\*\* SIMULATION:5. CHICAGO [100 YR] [3 HR] \*\*  
\*\*\*\*\*

-----  
| RESERVOIR( 0058) |  
| IN= 2---> OUT= 1 |  
| DT= 5.0 min |  
-----

OVERFLOW IS OFF

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0000             | 0.0002           | 0.0058             |
| 0.0001           | 0.0001             | 0.0003           | 0.0068             |
| 0.0002           | 0.0004             | 0.0003           | 0.0078             |
| 0.0002           | 0.0011             | 0.0030           | 0.0089             |
| 0.0002           | 0.0019             | 0.0079           | 0.0099             |
| 0.0002           | 0.0029             | 0.0143           | 0.0110             |
| 0.0002           | 0.0038             | 0.0218           | 0.0121             |
| 0.0002           | 0.0048             | 0.0304           | 0.0132             |

|                        | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0011) | 0.248        | 0.014          | 1.17           | 16.78        |
| OUTFLOW: ID= 1 ( 0058) | 0.248        | 0.000          | 3.42           | 0.82         |

PEAK FLOW REDUCTION [Qout/Qin](%)= 1.48  
TIME SHIFT OF PEAK FLOW (min)=135.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0040

-----  
\*\* SIMULATION:6. CHICAGO [100 YR] [6 HR] \*\*  
\*\*\*\*\*

-----  
| RESERVOIR( 0058) |  
| IN= 2---> OUT= 1 |  
| DT= 5.0 min |  
-----

OVERFLOW IS OFF

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0000             | 0.0002           | 0.0058             |
| 0.0001           | 0.0001             | 0.0003           | 0.0068             |
| 0.0002           | 0.0004             | 0.0003           | 0.0078             |
| 0.0002           | 0.0011             | 0.0030           | 0.0089             |
| 0.0002           | 0.0019             | 0.0079           | 0.0099             |
| 0.0002           | 0.0029             | 0.0143           | 0.0110             |
| 0.0002           | 0.0038             | 0.0218           | 0.0121             |
| 0.0002           | 0.0048             | 0.0304           | 0.0132             |

|                        | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0011) | 0.248        | 0.017          | 2.17           | 22.20        |
| OUTFLOW: ID= 1 ( 0058) | 0.248        | 0.000          | 6.33           | 1.53         |

PEAK FLOW REDUCTION [Qout/Qin](%)= 1.41  
TIME SHIFT OF PEAK FLOW (min)=250.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0052



Post-development Otthymo Analysis Detailed Output  
Linear Sub-Drained Rain Garden – C-L-D  
2726 Moodie Drive, Ottawa  
February 27, 2026

Project # 221099

4 of 5

\*\*\*\*\*  
\*\* SIMULATION:7. Historical Aug 4 1988 \*\*  
\*\*\*\*\*

-----  
| RESERVOIR( 0058) |  
| IN= 2---> OUT= 1 |  
| DT= 5.0 min |  
-----

OVERFLOW IS OFF

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0000             | 0.0002           | 0.0058             |
| 0.0001           | 0.0001             | 0.0003           | 0.0068             |
| 0.0002           | 0.0004             | 0.0003           | 0.0078             |
| 0.0002           | 0.0011             | 0.0030           | 0.0089             |
| 0.0002           | 0.0019             | 0.0079           | 0.0099             |
| 0.0002           | 0.0029             | 0.0143           | 0.0110             |
| 0.0002           | 0.0038             | 0.0218           | 0.0121             |
| 0.0002           | 0.0048             | 0.0304           | 0.0132             |

|                        | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0011) | 0.248        | 0.021          | 2.08           | 21.27        |
| OUTFLOW: ID= 1 ( 0058) | 0.248        | 0.000          | 5.92           | 1.57         |

PEAK FLOW REDUCTION [Qout/Qin](%)= 1.09  
TIME SHIFT OF PEAK FLOW (min)=230.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0049

-----  
\*\*\*\*\*  
\*\* SIMULATION:8. Historical July 1 1979 \*\*  
\*\*\*\*\*

-----  
| RESERVOIR( 0058) |  
| IN= 2---> OUT= 1 |  
| DT= 5.0 min |  
-----

OVERFLOW IS OFF

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0000             | 0.0002           | 0.0058             |
| 0.0001           | 0.0001             | 0.0003           | 0.0068             |
| 0.0002           | 0.0004             | 0.0003           | 0.0078             |
| 0.0002           | 0.0011             | 0.0030           | 0.0089             |
| 0.0002           | 0.0019             | 0.0079           | 0.0099             |
| 0.0002           | 0.0029             | 0.0143           | 0.0110             |
| 0.0002           | 0.0038             | 0.0218           | 0.0121             |
| 0.0002           | 0.0048             | 0.0304           | 0.0132             |

|                        | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0011) | 0.248        | 0.021          | 1.67           | 23.09        |
| OUTFLOW: ID= 1 ( 0058) | 0.248        | 0.000          | 3.33           | 0.85         |

PEAK FLOW REDUCTION [Qout/Qin](%)= 1.12  
TIME SHIFT OF PEAK FLOW (min)=100.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0055



Project # 221099

5 of 5

\*\*\*\*\*  
\*\* SIMULATION:9. 25mm4hrChicago \*\*  
\*\*\*\*\*

-----  
| RESERVOIR( 0058) |  
| IN= 2---> OUT= 1 |  
| DT= 5.0 min |  
-----

OVERFLOW IS OFF

| OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) | OUTFLOW<br>(cms) | STORAGE<br>(ha.m.) |
|------------------|--------------------|------------------|--------------------|
| 0.0000           | 0.0000             | 0.0002           | 0.0058             |
| 0.0001           | 0.0001             | 0.0003           | 0.0068             |
| 0.0002           | 0.0004             | 0.0003           | 0.0078             |
| 0.0002           | 0.0011             | 0.0030           | 0.0089             |
| 0.0002           | 0.0019             | 0.0079           | 0.0099             |
| 0.0002           | 0.0029             | 0.0143           | 0.0110             |
| 0.0002           | 0.0038             | 0.0218           | 0.0121             |
| 0.0002           | 0.0048             | 0.0304           | 0.0132             |

|                        | AREA<br>(ha) | QPEAK<br>(cms) | TPEAK<br>(hrs) | R.V.<br>(mm) |
|------------------------|--------------|----------------|----------------|--------------|
| INFLOW : ID= 2 ( 0011) | 0.248        | 0.000          | 2.00           | 1.01         |
| OUTFLOW: ID= 1 ( 0058) | 0.248        | 0.000          | 4.17           | 0.47         |

PEAK FLOW REDUCTION [Qout/Qin](%)= 40.42  
TIME SHIFT OF PEAK FLOW (min)=130.00  
MAXIMUM STORAGE USED (ha.m.)= 0.0001

-----



Kemptville, Ontario K0G 1J0

Structural • Environmental •

## OUTLET CONTROL DESIGN SHEET - LINEAR SUBDRAINED RAIN GARDEN

**Date:** February 27, 2026

## Spreader Overflow

Spreader depth = 0.3 m

Discharge from site includes only the portion of the flow exiting the storm pond by means of the outlet structure and being directed to the adjacent roadside ditch.



## **Appendix H: Post-Development OTTHYMO Model Results**

SUMMARY OUTPUT FROM POST-DEVELOPMENT MODEL

DETAILED OUTPUT FROM LAST LINK IN POST-DEVELOPMENT MODEL



\*\*\*\*\*  
\*\* SIMULATION:1. CHICAGO [2 YR] [3 HR] \*\*  
\*\*\*\*\*

```
-----
| ADD HYD ( 0030)|
| 1 + 2 = 3 |
-----
          AREA      QPEAK      TPEAK      R.V.
          (ha)      (cms)      (hrs)      (mm)
*** W A R N I N G :  HYDROGRAPH 0022 <ID= 2> IS DRY.
*** W A R N I N G :  HYDROGRAPH 0003 = HYDROGRAPH 0001
      ID1= 1 ( 0021):    5.57    0.016    6.00    26.23
+ ID2= 2 ( 0022):    0.00    0.000    0.00    0.00
=====
      ID = 3 ( 0030):    5.57    0.016    6.00    26.23
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```
-----
| ADD HYD ( 0030)|
| 3 + 2 = 1 |
-----
          AREA      QPEAK      TPEAK      R.V.
          (ha)      (cms)      (hrs)      (mm)
      ID1= 3 ( 0030):    5.57    0.016    6.00    26.23
+ ID2= 2 ( 0029):    0.25    0.000    3.25    0.53
=====
      ID = 1 ( 0030):    5.82    0.016    6.00    25.14
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```
-----
| ADD HYD ( 0030)|
| 1 + 2 = 3 |
-----
          AREA      QPEAK      TPEAK      R.V.
          (ha)      (cms)      (hrs)      (mm)
      ID1= 1 ( 0030):    5.82    0.016    6.00    25.14
+ ID2= 2 ( 0052):    0.34    0.002    1.25    2.24
=====
      ID = 3 ( 0030):    6.16    0.016    6.00    23.88
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.





\*\*\*\*\*  
\*\* SIMULATION:2. CHICAGO [2 YR] [6 HR] \*\*  
\*\*\*\*\*

```
-----  
| ADD HYD ( 0030) |  
| 1 + 2 = 3 |  
-----  
          AREA      QPEAK      TPEAK      R.V.  
          (ha)      (cms)      (hrs)      (mm)  
*** W A R N I N G :  HYDROGRAPH 0022 <ID= 2> IS DRY.  
*** W A R N I N G :  HYDROGRAPH 0003 = HYDROGRAPH 0001  
      ID1= 1 ( 0021):    5.57    0.018    7.33    31.05  
      + ID2= 2 ( 0022):    0.00    0.000    0.00    0.00  
      =====  
      ID = 3 ( 0030):    5.57    0.018    7.33    31.05
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```
-----  
| ADD HYD ( 0030) |  
| 3 + 2 = 1 |  
-----  
          AREA      QPEAK      TPEAK      R.V.  
          (ha)      (cms)      (hrs)      (mm)  
      ID1= 3 ( 0030):    5.57    0.018    7.33    31.05  
      + ID2= 2 ( 0029):    0.25    0.000    6.17    0.99  
      =====  
      ID = 1 ( 0030):    5.82    0.018    6.58    29.77
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```
-----  
| ADD HYD ( 0030) |  
| 1 + 2 = 3 |  
-----  
          AREA      QPEAK      TPEAK      R.V.  
          (ha)      (cms)      (hrs)      (mm)  
      ID1= 1 ( 0030):    5.82    0.018    6.58    29.77  
      + ID2= 2 ( 0052):    0.34    0.002    2.25    3.40  
      =====  
      ID = 3 ( 0030):    6.16    0.018    6.00    28.32
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.



\*\*\*\*\*  
\*\* SIMULATION:3. CHICAGO [5 YR] [3 HR] \*\*  
\*\*\*\*\*

```
-----  
| ADD HYD ( 0030) |  
| 1 + 2 = 3 |  
-----  
          AREA      QPEAK      TPEAK      R.V.  
          (ha)      (cms)      (hrs)      (mm)  
*** W A R N I N G :  HYDROGRAPH 0022 <ID= 2> IS DRY.  
*** W A R N I N G :  HYDROGRAPH 0003 = HYDROGRAPH 0001  
      ID1= 1 ( 0021):    5.57    0.019    6.75    36.53  
      + ID2= 2 ( 0022):    0.00    0.000    0.00    0.00  
      =====  
      ID = 3 ( 0030):    5.57    0.019    6.75    36.53
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```
-----  
| ADD HYD ( 0030) |  
| 3 + 2 = 1 |  
-----  
          AREA      QPEAK      TPEAK      R.V.  
          (ha)      (cms)      (hrs)      (mm)  
      ID1= 3 ( 0030):    5.57    0.019    6.75    36.53  
      + ID2= 2 ( 0029):    0.25    0.000    3.33    0.61  
      =====  
      ID = 1 ( 0030):    5.82    0.019    6.75    35.00
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```
-----  
| ADD HYD ( 0030) |  
| 1 + 2 = 3 |  
-----  
          AREA      QPEAK      TPEAK      R.V.  
          (ha)      (cms)      (hrs)      (mm)  
      ID1= 1 ( 0030):    5.82    0.019    6.75    35.00  
      + ID2= 2 ( 0052):    0.34    0.005    1.17    4.94  
      =====  
      ID = 3 ( 0030):    6.16    0.019    6.75    33.35
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.



\*\*\*\*\*  
\*\* SIMULATION:4. CHICAGO [5 YR] [6 HR] \*\*  
\*\*\*\*\*

```
-----
| ADD HYD ( 0030) |
| 1 + 2 = 3 |
-----
          AREA      QPEAK      TPEAK      R.V.
          (ha)      (cms)      (hrs)      (mm)
*** W A R N I N G :  HYDROGRAPH 0022 <ID= 2> IS DRY.
*** W A R N I N G :  HYDROGRAPH 0003 = HYDROGRAPH 0001
      ID1= 1 ( 0021):    5.57    0.020      8.33    42.87
      + ID2= 2 ( 0022):    0.00    0.000      0.00     0.00
      =====
      ID = 3 ( 0030):    5.57    0.020      8.33    42.87
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```
-----
| ADD HYD ( 0030) |
| 3 + 2 = 1 |
-----
          AREA      QPEAK      TPEAK      R.V.
          (ha)      (cms)      (hrs)      (mm)
      ID1= 3 ( 0030):    5.57    0.020      8.33    42.87
      + ID2= 2 ( 0029):    0.47    0.001      2.83     0.67
      =====
      ID = 1 ( 0030):    6.05    0.020      8.33    39.57
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```
-----
| ADD HYD ( 0030) |
| 1 + 2 = 3 |
-----
          AREA      QPEAK      TPEAK      R.V.
          (ha)      (cms)      (hrs)      (mm)
      ID1= 1 ( 0030):    6.05    0.020      8.33    39.57
      + ID2= 2 ( 0052):    0.34    0.006      2.17     7.02
      =====
      ID = 3 ( 0030):    6.38    0.020      8.33    37.85
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.



\*\*\*\*\*  
\*\* SIMULATION:5. CHICAGO [100 YR] [3 HR] \*\*  
\*\*\*\*\*

```
-----
| ADD HYD ( 0030) |
| 1 + 2 = 3 |
-----
          AREA      QPEAK      TPEAK      R.V.
          (ha)      (cms)      (hrs)      (mm)
*** W A R N I N G :  HYDROGRAPH 0022 <ID= 2> IS DRY.
*** W A R N I N G :  HYDROGRAPH 0003 = HYDROGRAPH 0001
    ID1= 1 ( 0021):    5.57    0.025    9.67    65.57
    + ID2= 2 ( 0022):    0.00    0.000    0.00    0.00
    =====
    ID = 3 ( 0030):    5.57    0.025    9.67    65.57
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```
-----
| ADD HYD ( 0030) |
| 3 + 2 = 1 |
-----
          AREA      QPEAK      TPEAK      R.V.
          (ha)      (cms)      (hrs)      (mm)
    ID1= 3 ( 0030):    5.57    0.025    9.67    65.57
    + ID2= 2 ( 0029):    0.60    0.016    1.25    5.52
    =====
    ID = 1 ( 0030):    6.17    0.033    1.25    59.74
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```
-----
| ADD HYD ( 0030) |
| 1 + 2 = 3 |
-----
          AREA      QPEAK      TPEAK      R.V.
          (ha)      (cms)      (hrs)      (mm)
    ID1= 1 ( 0030):    6.17    0.033    1.25    59.74
    + ID2= 2 ( 0052):    0.34    0.019    1.17    16.24
    =====
    ID = 3 ( 0030):    6.51    0.051    1.25    57.48
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.



\*\*\*\*\*  
\*\* SIMULATION:6. CHICAGO [100 YR] [6 HR] \*\*  
\*\*\*\*\*

```
-----
| ADD HYD ( 0030) |
| 1 + 2 = 3 |
-----
          AREA      QPEAK      TPEAK      R.V.
          (ha)      (cms)      (hrs)      (mm)
*** W A R N I N G :  HYDROGRAPH 0022 <ID= 2> IS DRY.
*** W A R N I N G :  HYDROGRAPH 0003 = HYDROGRAPH 0001
    ID1= 1 ( 0021):    5.57    0.027    11.25    75.69
    + ID2= 2 ( 0022):    0.00    0.000     0.00     0.00
    =====
    ID = 3 ( 0030):    5.57    0.027    11.25    75.69
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```
-----
| ADD HYD ( 0030) |
| 3 + 2 = 1 |
-----
          AREA      QPEAK      TPEAK      R.V.
          (ha)      (cms)      (hrs)      (mm)
    ID1= 3 ( 0030):    5.57    0.027    11.25    75.69
    + ID2= 2 ( 0029):    0.60    0.018     2.25     7.10
    =====
    ID = 1 ( 0030):    6.17    0.037     2.25    69.03
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```
-----
| ADD HYD ( 0030) |
| 1 + 2 = 3 |
-----
          AREA      QPEAK      TPEAK      R.V.
          (ha)      (cms)      (hrs)      (mm)
    ID1= 1 ( 0030):    6.17    0.037     2.25    69.03
    + ID2= 2 ( 0052):    0.34    0.022     2.17    21.48
    =====
    ID = 3 ( 0030):    6.51    0.057     2.17    66.56
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.



\*\*\*\*\*  
\*\* SIMULATION:7. Historical Aug 4 1988 \*\*  
\*\*\*\*\*

```
-----  
| ADD HYD ( 0030) |  
| 1 + 2 = 3 |  
-----  
          AREA      QPEAK      TPEAK      R.V.  
          (ha)      (cms)      (hrs)      (mm)  
*** W A R N I N G :  HYDROGRAPH 0022 <ID= 2> IS DRY.  
*** W A R N I N G :  HYDROGRAPH 0003 = HYDROGRAPH 0001  
      ID1= 1 ( 0021):    5.57    0.028    10.50    76.16  
      + ID2= 2 ( 0022):    0.00    0.000     0.00     0.00  
      =====  
      ID = 3 ( 0030):    5.57    0.028    10.50    76.16
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```
-----  
| ADD HYD ( 0030) |  
| 3 + 2 = 1 |  
-----  
          AREA      QPEAK      TPEAK      R.V.  
          (ha)      (cms)      (hrs)      (mm)  
      ID1= 3 ( 0030):    5.57    0.028    10.50    76.16  
      + ID2= 2 ( 0029):    0.60    0.027     2.08     7.22  
      =====  
      ID = 1 ( 0030):    6.17    0.049     2.08    69.47
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```
-----  
| ADD HYD ( 0030) |  
| 1 + 2 = 3 |  
-----  
          AREA      QPEAK      TPEAK      R.V.  
          (ha)      (cms)      (hrs)      (mm)  
      ID1= 1 ( 0030):    6.17    0.049     2.08    69.47  
      + ID2= 2 ( 0052):    0.34    0.028     2.08    20.59  
      =====  
      ID = 3 ( 0030):    6.51    0.077     2.08    66.93
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.



\*\*\*\*\*  
\*\* SIMULATION:8. Historical July 1 1979 \*\*  
\*\*\*\*\*

```
-----
| ADD HYD ( 0030)|
| 1 + 2 = 3 |
-----
          AREA      QPEAK      TPEAK      R.V.
          (ha)      (cms)      (hrs)      (mm)
ID1= 1 ( 0021):    5.43    0.028    5.83    77.48
+ ID2= 2 ( 0022):    0.15    0.017    5.83    77.48
=====
ID = 3 ( 0030):    5.57    0.045    5.83    77.48
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```
-----
| ADD HYD ( 0030)|
| 3 + 2 = 1 |
-----
          AREA      QPEAK      TPEAK      R.V.
          (ha)      (cms)      (hrs)      (mm)
ID1= 3 ( 0030):    5.57    0.045    5.83    77.48
+ ID2= 2 ( 0029):    0.60    0.027    1.67    9.31
=====
ID = 1 ( 0030):    6.17    0.048    1.67    70.86
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```
-----
| ADD HYD ( 0030)|
| 1 + 2 = 3 |
-----
          AREA      QPEAK      TPEAK      R.V.
          (ha)      (cms)      (hrs)      (mm)
ID1= 1 ( 0030):    6.17    0.048    1.67    70.86
+ ID2= 2 ( 0052):    0.34    0.028    1.67    22.35
=====
ID = 3 ( 0030):    6.51    0.076    1.67    68.35
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.



\*\*\*\*\*  
\*\* SIMULATION:9. 25mm4hrChicago \*\*  
\*\*\*\*\*

```
-----
| ADD HYD ( 0030) |
| 1 + 2 = 3 |
-----
          AREA      QPEAK      TPEAK      R.V.
          (ha)      (cms)      (hrs)      (mm)
*** W A R N I N G :  HYDROGRAPH 0022 <ID= 2> IS DRY.
*** W A R N I N G :  HYDROGRAPH 0003 = HYDROGRAPH 0001
      ID1= 1 ( 0021):    5.57    0.014    6.25    19.66
      + ID2= 2 ( 0022):    0.00    0.000    0.00    0.00
      =====
      ID = 3 ( 0030):    5.57    0.014    6.25    19.66
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```
-----
| ADD HYD ( 0030) |
| 3 + 2 = 1 |
-----
          AREA      QPEAK      TPEAK      R.V.
          (ha)      (cms)      (hrs)      (mm)
      ID1= 3 ( 0030):    5.57    0.014    6.25    19.66
      + ID2= 2 ( 0029):    0.25    0.000    4.17    0.47
      =====
      ID = 1 ( 0030):    5.82    0.014    6.25    18.85
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```
-----
| ADD HYD ( 0030) |
| 1 + 2 = 3 |
-----
          AREA      QPEAK      TPEAK      R.V.
          (ha)      (cms)      (hrs)      (mm)
      ID1= 1 ( 0030):    5.82    0.014    6.25    18.85
      + ID2= 2 ( 0052):    0.34    0.000    2.00    1.01
      =====
      ID = 3 ( 0030):    6.16    0.014    6.25    17.87
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.





=====

```
V  V  I  SSSSS  U  U  A  L          (v 6.2.2015)
V  V  I  SS    U  U  A  A  L
V  V  I  SS    U  U  AAAAA  L
V  V  I  SS    U  U  A  A  L
VV   I  SSSSS  UUUUU  A  A  LLLLL
```

```
000  TTTT  TTTT  H  H  Y  Y  M  M  000  TM
0  0  T  T  H  H  Y  Y  MM  MM  0  0
0  0  T  T  H  H  Y  Y  M  M  0  0
000  T  T  H  H  Y  M  M  000
```

Developed and Distributed by Smart City Water Inc

Copyright 2007 - 2022 Smart City Water Inc

All rights reserved.

## \*\*\*\*\* S U M M A R Y O U T P U T \*\*\*\*\*

```
Input  filename: C:\Program Files (x86)\Visual OTTHYMO 6.2\V02\voin.dat
Output filename: C:\Users\hymo\AppData\Local\Civica\XH5\c182f2f7-27a5-48b7-a29b-
2f5977d7e46f\aa95a288-da3f-4000-8fee-2f84e4feab15\scenari
Summary filename: C:\Users\hymo\AppData\Local\Civica\XH5\c182f2f7-27a5-48b7-a29b-
2f5977d7e46f\aa95a288-da3f-4000-8fee-2f84e4feab15\scenari
```

DATE: 06-03-2026

TIME: 11:11:34

USER:

COMMENTS: \_\_\_\_\_

```
*****
** SIMULATION : 1. CHICAGO [2 YR] [3 HR] **
*****
```

| W/E COMMAND                                           | HYD ID | DT<br>min | AREA<br>ha | '<br>Qpeak<br>cms | Tpeak<br>hrs | R.V.<br>mm | R.C. | Qbase<br>cms |
|-------------------------------------------------------|--------|-----------|------------|-------------------|--------------|------------|------|--------------|
| START @ 0.00 hrs                                      |        |           |            |                   |              |            |      |              |
| -----                                                 |        |           |            |                   |              |            |      |              |
| CHIC STORM<br>[ Ptot= 31.86 mm ]                      | 10.0   |           |            |                   |              |            |      |              |
| * ** CALIB NASHYD<br>[CN=61.0 ]<br>[ N = 3.0:Tp 0.17] | 0008   | 1 5.0     | 0.09       | 0.00              | 1.33         | 1.95       | 0.06 | 0.000        |
| * ** Rain Garden<br>OVERFLOW                          | 0023   | 3 5.0     | 0.00       | 0.00              | 0.00         | 0.00       | n/a  | 0.000        |
| CHIC STORM<br>[ Ptot= 31.86 mm ]                      | 10.0   |           |            |                   |              |            |      |              |
| * ** CALIB NASHYD<br>[CN=61.0 ]<br>[ N = 3.0:Tp 0.17] | 0009   | 1 5.0     | 0.13       | 0.00              | 1.33         | 1.95       | 0.06 | 0.000        |
| * ** Swale<br>OVERFLOW :                              | 0025   | 3 5.0     | 0.00       | 0.00              | 0.00         | 0.00       | n/a  | 0.000        |
| UNDERDRAIN:                                           | 0025   | 4 5.0     | 0.00       | 0.00              | 0.00         | 0.00       | n/a  | 0.000        |
| CHIC STORM<br>[ Ptot= 31.86 mm ]                      | 10.0   |           |            |                   |              |            |      |              |
| * ** CALIB NASHYD<br>[CN=61.0 ]                       | 0010   | 1 5.0     | 0.22       | 0.00              | 1.33         | 1.95       | 0.06 | 0.000        |



```
[ N = 3.0:Tp 0.17]
*
** Swale
OVERFLOW :      0027 3 5.0    0.00    0.00 0.00    0.00 n/a    0.000
UNDERDRAIN:      0027 4 5.0    0.00    0.00 0.00    0.00 n/a    0.000
*
CHIC STORM      10.0
[ Ptot= 31.86 mm ]
*
** CALIB NASHYD      0011 1 5.0    0.25    0.00 1.25    2.28 0.07    0.000
[CN=62.7        ]
[ N = 3.0:Tp 0.17]
*
** Reservoir
OUTFLOW:      0058 1 5.0    0.25    0.00 3.25    0.53 n/a    0.000
*
ADD [ 0024+ 0026] 0029 3 0.0    0.00    0.00 0.00    0.00 n/a    0.000
*
ADD [ 0029+ 0028] 0029 1 0.0    0.00    0.00 0.00    0.00 n/a    0.000
*
ADD [ 0029+ 0058] 0029 3 5.0    0.25    0.00 3.25    0.53 n/a    0.000
*
CHIC STORM      10.0
[ Ptot= 31.86 mm ]
*
** CALIB NASHYD      0012 1 5.0    0.13    0.00 1.25    2.18 0.07    0.000
[CN=61.6        ]
[ N = 3.0:Tp 0.17]
*
CHIC STORM      10.0
[ Ptot= 31.86 mm ]
*
** CALIB NASHYD      0013 1 5.0    0.21    0.00 1.25    2.28 0.07    0.000
[CN=61.0        ]
[ N = 3.0:Tp 0.17]
*
ADD [ 0012+ 0013] 0052 3 5.0    0.34    0.00 1.25    2.24 n/a    0.000
*
CHIC STORM      10.0
[ Ptot= 31.86 mm ]
*
* CALIB STANDHYD      0001 1 5.0    0.42    0.09 1.00    30.67 0.96    0.000
[I%=99.0:S%= 1.00]
*
** Reservoir
OUTFLOW:      0014 1 5.0    0.42    0.00 0.58    30.68 n/a    0.000
*
CHIC STORM      10.0
[ Ptot= 31.86 mm ]
*
* CALIB STANDHYD      0002 1 5.0    0.49    0.10 1.00    30.67 0.96    0.000
[I%=99.0:S%= 1.00]
*
** Reservoir
OUTFLOW:      0015 1 5.0    0.49    0.00 0.58    30.67 n/a    0.000
*
CHIC STORM      10.0
[ Ptot= 31.86 mm ]
*
* CALIB STANDHYD      0003 1 5.0    0.41    0.09 1.00    30.67 0.96    0.000
[I%=99.0:S%= 1.00]
*
** Reservoir
OUTFLOW:      0016 1 5.0    0.41    0.00 0.58    30.68 n/a    0.000
*
ADD [ 0014+ 0015] 0050 3 5.0    0.91    0.01 0.58    30.67 n/a    0.000
*
ADD [ 0050+ 0016] 0050 1 5.0    1.32    0.01 0.58    30.67 n/a    0.000
*
ADD [ 0014+ 0015] 0051 3 0.0    0.00    0.00 0.00    30.67 n/a    0.000
*
ADD [ 0051+ 0016] 0051 1 0.0    0.00    0.00 0.00    0.00 n/a    0.000
```



```
*      CHIC STORM                10.0
*      [ Ptot= 31.86 mm ]
*
* * CALIB STANDHYD              0004  1  5.0    0.37    0.08  1.00  30.67 0.96  0.000
*      [ I%=99.0:S%= 1.00 ]
*
* * Reservoir
*      OUTFLOW:                  0017  1  5.0    0.37    0.00  0.58  30.67 n/a  0.000
*
*      CHIC STORM                10.0
*      [ Ptot= 31.86 mm ]
*
* * CALIB STANDHYD              0005  1  5.0    0.37    0.08  1.00  30.67 0.96  0.000
*      [ I%=99.0:S%= 1.00 ]
*
* * Reservoir
*      OUTFLOW:                  0018  1  5.0    0.37    0.00  0.58  30.67 n/a  0.000
*
*      ADD [ 0017+ 0018] 0054  3  0.0    0.00    0.00  0.00  0.00 n/a  0.000
*
*      ADD [ 0017+ 0018] 0053  3  5.0    0.74    0.01  0.58  30.67 n/a  0.000
*
*      CHIC STORM                10.0
*      [ Ptot= 31.86 mm ]
*
* * CALIB STANDHYD              0007  1  5.0    1.31    0.27  1.00  30.11 0.95  0.000
*      [ I%=99.0:S%= 2.00 ]
*
*      ADD [ 0053+ 0054] 0056  3  5.0    0.74    0.01  0.58  30.67 n/a  0.000
*
*      ADD [ 0056+ 0007] 0056  1  5.0    2.04    0.28  1.00  30.31 n/a  0.000
*
* * Reservoir
*      OUTFLOW:                  0057  1  5.0    2.04    0.03  1.50  30.28 n/a  0.000
*
*      CHIC STORM                10.0
*      [ Ptot= 31.86 mm ]
*
* * CALIB STANDHYD              0006  1  5.0    2.21    0.37  1.00  25.60 0.80  0.000
*      [ I%=74.0:S%= 2.00 ]
*
*      ADD [ 0050+ 0051] 0019  3  5.0    1.32    0.01  0.58  30.67 n/a  0.000
*
*      ADD [ 0019+ 0057] 0019  1  5.0    3.36    0.04  1.50  30.44 n/a  0.000
*
*      ADD [ 0019+ 0006] 0019  3  5.0    5.57    0.41  1.00  28.51 n/a  0.000
*
*      ADD [ 0019+ 0059] 0062  3  5.0    5.57    0.41  1.00  28.51 n/a  0.000
*
* * Reservoir
*      OUTFLOW:                  0020  1  5.0    5.57    0.02  6.00  26.23 n/a  0.000
*
*      ADD [ 0021+ 0022] 0030  3  5.0    5.57    0.02  6.00  26.23 n/a  0.000
*
*      ADD [ 0030+ 0029] 0030  1  5.0    5.82    0.02  6.00  25.14 n/a  0.000
*
*      ADD [ 0030+ 0052] 0030  3  5.0    6.16    0.02  6.00  23.88 n/a  0.000
*
=====
=====
```

```
V      V      I      SSSSS  U      U      A      L
V      V      I      SS      U      U      A A     L
  V      V      I      SS      U      U      AAAAA  L
  V      V      I      SS      U      U      A      A  L
    W      I      SSSSS  UUUUU  A      A  LLLLL
```

|     |       |       |   |   |   |   |    |    |     |    |
|-----|-------|-------|---|---|---|---|----|----|-----|----|
| 000 | TTTTT | TTTTT | H | H | Y | Y | M  | M  | 000 | TM |
| 0 0 | T     | T     | H | H | Y | Y | MM | MM | 0 0 |    |
| 0 0 | T     | T     | H | H | Y |   | M  | M  | 0 0 |    |
| 000 | T     | T     | H | H | Y |   | M  | M  | 000 |    |

Developed and Distributed by Smart City Water Inc  
Copyright 2007 - 2022 Smart City Water Inc  
All rights reserved.

\*\*\*\*\* S U M M A R Y O U T P U T \*\*\*\*\*

```
Input filename: C:\Program Files (x86)\Visual OTTHYMO 6.2\V02\voin.dat
Output filename: C:\Users\hymo\AppData\Local\Civica\XH5\c182f2f7-27a5-48b7-a29b-2f5977d7e46f\3f399e85-9dc1-43ca-b1a8-d2d687525725\scenari
Summary filename: C:\Users\hymo\AppData\Local\Civica\XH5\c182f2f7-27a5-48b7-a29b-2f5977d7e46f\3f399e85-9dc1-43ca-b1a8-d2d687525725\scenari
```

DATE: 06-03-2026

TIME: 11:11:31

USER:

COMMENTS:

```
*****
** SIMULATION : 2. CHICAGO [2 YR] [6 HR] **
*****
```

| W/E COMMAND                                          |      | HYD ID | DT min | AREA ha | ' Qpeak cms | Tpeak hrs | R.V. mm | R.C.  | Qbase cms |
|------------------------------------------------------|------|--------|--------|---------|-------------|-----------|---------|-------|-----------|
| START @ 0.00 hrs<br>-----                            |      |        |        |         |             |           |         |       |           |
| CHIC STORM<br>[ Ptot= 36.86 mm ]                     |      | 10.0   |        |         |             |           |         |       |           |
| * ** CALIB NASHYD<br>[CN=61.0]<br>[ N = 3.0:Tp 0.17] | 0008 | 1 5.0  | 0.09   | 0.00    | 2.25        | 3.04      | 0.08    | 0.000 |           |
| * ** Rain Garden<br>OVERFLOW                         | 0023 | 3 5.0  | 0.00   | 0.00    | 0.00        | 0.00      | n/a     | 0.000 |           |
| * CHIC STORM<br>[ Ptot= 36.86 mm ]                   |      | 10.0   |        |         |             |           |         |       |           |
| * ** CALIB NASHYD<br>[CN=61.0]<br>[ N = 3.0:Tp 0.17] | 0009 | 1 5.0  | 0.13   | 0.00    | 2.25        | 3.04      | 0.08    | 0.000 |           |
| * ** Swale<br>OVERFLOW :                             | 0025 | 3 5.0  | 0.00   | 0.00    | 0.00        | 0.00      | n/a     | 0.000 |           |
| * UNDERDRAIN:                                        | 0025 | 4 5.0  | 0.00   | 0.00    | 0.00        | 0.00      | n/a     | 0.000 |           |
| * CHIC STORM<br>[ Ptot= 36.86 mm ]                   |      | 10.0   |        |         |             |           |         |       |           |
| * ** CALIB NASHYD<br>[CN=61.0]<br>[ N = 3.0:Tp 0.17] | 0010 | 1 5.0  | 0.22   | 0.00    | 2.25        | 3.04      | 0.08    | 0.000 |           |



|    |                    |      |   |      |      |      |      |       |      |       |
|----|--------------------|------|---|------|------|------|------|-------|------|-------|
| ** | Swale              |      |   |      |      |      |      |       |      |       |
|    | OVERFLOW :         | 0027 | 3 | 5.0  | 0.00 | 0.00 | 0.00 | 0.00  | n/a  | 0.000 |
|    | UNDERDRAIN:        | 0027 | 4 | 5.0  | 0.00 | 0.00 | 0.00 | 0.00  | n/a  | 0.000 |
| *  |                    |      |   |      |      |      |      |       |      |       |
|    | CHIC STORM         |      |   | 10.0 |      |      |      |       |      |       |
|    | [ Ptot= 36.86 mm ] |      |   |      |      |      |      |       |      |       |
| *  |                    |      |   |      |      |      |      |       |      |       |
| ** | CALIB NASHYD       | 0011 | 1 | 5.0  | 0.25 | 0.00 | 2.25 | 3.47  | 0.09 | 0.000 |
|    | [CN=62.7 ]         |      |   |      |      |      |      |       |      |       |
|    | [ N = 3.0:Tp 0.17] |      |   |      |      |      |      |       |      |       |
| *  |                    |      |   |      |      |      |      |       |      |       |
| ** | Reservoir          |      |   |      |      |      |      |       |      |       |
|    | OUTFLOW:           | 0058 | 1 | 5.0  | 0.25 | 0.00 | 6.17 | 0.99  | n/a  | 0.000 |
| *  |                    |      |   |      |      |      |      |       |      |       |
| *  | ADD [ 0024+ 0026]  | 0029 | 3 | 0.0  | 0.00 | 0.00 | 0.00 | 0.00  | n/a  | 0.000 |
| *  |                    |      |   |      |      |      |      |       |      |       |
| *  | ADD [ 0029+ 0028]  | 0029 | 1 | 0.0  | 0.00 | 0.00 | 0.00 | 0.00  | n/a  | 0.000 |
| *  |                    |      |   |      |      |      |      |       |      |       |
| *  | ADD [ 0029+ 0058]  | 0029 | 3 | 5.0  | 0.25 | 0.00 | 6.17 | 0.99  | n/a  | 0.000 |
| *  |                    |      |   |      |      |      |      |       |      |       |
|    | CHIC STORM         |      |   | 10.0 |      |      |      |       |      |       |
|    | [ Ptot= 36.86 mm ] |      |   |      |      |      |      |       |      |       |
| *  |                    |      |   |      |      |      |      |       |      |       |
| ** | CALIB NASHYD       | 0012 | 1 | 5.0  | 0.13 | 0.00 | 2.25 | 3.33  | 0.09 | 0.000 |
|    | [CN=61.6 ]         |      |   |      |      |      |      |       |      |       |
|    | [ N = 3.0:Tp 0.17] |      |   |      |      |      |      |       |      |       |
| *  |                    |      |   |      |      |      |      |       |      |       |
|    | CHIC STORM         |      |   | 10.0 |      |      |      |       |      |       |
|    | [ Ptot= 36.86 mm ] |      |   |      |      |      |      |       |      |       |
| *  |                    |      |   |      |      |      |      |       |      |       |
| ** | CALIB NASHYD       | 0013 | 1 | 5.0  | 0.21 | 0.00 | 2.25 | 3.44  | 0.09 | 0.000 |
|    | [CN=61.0 ]         |      |   |      |      |      |      |       |      |       |
|    | [ N = 3.0:Tp 0.17] |      |   |      |      |      |      |       |      |       |
| *  |                    |      |   |      |      |      |      |       |      |       |
| *  | ADD [ 0012+ 0013]  | 0052 | 3 | 5.0  | 0.34 | 0.00 | 2.25 | 3.40  | n/a  | 0.000 |
| *  |                    |      |   |      |      |      |      |       |      |       |
|    | CHIC STORM         |      |   | 10.0 |      |      |      |       |      |       |
|    | [ Ptot= 36.86 mm ] |      |   |      |      |      |      |       |      |       |
| *  |                    |      |   |      |      |      |      |       |      |       |
| *  | CALIB STANDHYD     | 0001 | 1 | 5.0  | 0.42 | 0.09 | 2.00 | 35.66 | 0.97 | 0.000 |
|    | [I%=99.0:S%= 1.00] |      |   |      |      |      |      |       |      |       |
| *  |                    |      |   |      |      |      |      |       |      |       |
| ** | Reservoir          |      |   |      |      |      |      |       |      |       |
|    | OUTFLOW:           | 0014 | 1 | 5.0  | 0.42 | 0.00 | 1.42 | 35.67 | n/a  | 0.000 |
| *  |                    |      |   |      |      |      |      |       |      |       |
|    | CHIC STORM         |      |   | 10.0 |      |      |      |       |      |       |
|    | [ Ptot= 36.86 mm ] |      |   |      |      |      |      |       |      |       |
| *  |                    |      |   |      |      |      |      |       |      |       |
| *  | CALIB STANDHYD     | 0002 | 1 | 5.0  | 0.49 | 0.10 | 2.00 | 35.66 | 0.97 | 0.000 |
|    | [I%=99.0:S%= 1.00] |      |   |      |      |      |      |       |      |       |
| *  |                    |      |   |      |      |      |      |       |      |       |
| ** | Reservoir          |      |   |      |      |      |      |       |      |       |
|    | OUTFLOW:           | 0015 | 1 | 5.0  | 0.49 | 0.00 | 1.33 | 35.66 | n/a  | 0.000 |
| *  |                    |      |   |      |      |      |      |       |      |       |
|    | CHIC STORM         |      |   | 10.0 |      |      |      |       |      |       |
|    | [ Ptot= 36.86 mm ] |      |   |      |      |      |      |       |      |       |
| *  |                    |      |   |      |      |      |      |       |      |       |
| *  | CALIB STANDHYD     | 0003 | 1 | 5.0  | 0.41 | 0.09 | 2.00 | 35.66 | 0.97 | 0.000 |
|    | [I%=99.0:S%= 1.00] |      |   |      |      |      |      |       |      |       |
| *  |                    |      |   |      |      |      |      |       |      |       |
| ** | Reservoir          |      |   |      |      |      |      |       |      |       |
|    | OUTFLOW:           | 0016 | 1 | 5.0  | 0.41 | 0.00 | 1.25 | 35.66 | n/a  | 0.000 |
| *  |                    |      |   |      |      |      |      |       |      |       |
| *  | ADD [ 0014+ 0015]  | 0050 | 3 | 5.0  | 0.91 | 0.01 | 1.42 | 35.66 | n/a  | 0.000 |
| *  |                    |      |   |      |      |      |      |       |      |       |
| *  | ADD [ 0050+ 0016]  | 0050 | 1 | 5.0  | 1.32 | 0.01 | 1.42 | 35.66 | n/a  | 0.000 |
| *  |                    |      |   |      |      |      |      |       |      |       |
| *  | ADD [ 0014+ 0015]  | 0051 | 3 | 0.0  | 0.00 | 0.00 | 0.00 | 35.66 | n/a  | 0.000 |
| *  |                    |      |   |      |      |      |      |       |      |       |
| *  | ADD [ 0051+ 0016]  | 0051 | 1 | 0.0  | 0.00 | 0.00 | 0.00 | 0.00  | n/a  | 0.000 |
| *  |                    |      |   |      |      |      |      |       |      |       |



|                     |      |   |     |      |      |      |       |      |       |
|---------------------|------|---|-----|------|------|------|-------|------|-------|
| CHIC STORM          | 10.0 |   |     |      |      |      |       |      |       |
| [ Ptot= 36.86 mm ]  |      |   |     |      |      |      |       |      |       |
| * CALIB STANDHYD    | 0004 | 1 | 5.0 | 0.37 | 0.08 | 2.00 | 35.65 | 0.97 | 0.000 |
| [ I%=99.0:S%= 1.00] |      |   |     |      |      |      |       |      |       |
| ** Reservoir        |      |   |     |      |      |      |       |      |       |
| OUTFLOW:            | 0017 | 1 | 5.0 | 0.37 | 0.00 | 1.33 | 35.66 | n/a  | 0.000 |
| CHIC STORM          | 10.0 |   |     |      |      |      |       |      |       |
| [ Ptot= 36.86 mm ]  |      |   |     |      |      |      |       |      |       |
| * CALIB STANDHYD    | 0005 | 1 | 5.0 | 0.37 | 0.08 | 2.00 | 35.65 | 0.97 | 0.000 |
| [ I%=99.0:S%= 1.00] |      |   |     |      |      |      |       |      |       |
| ** Reservoir        |      |   |     |      |      |      |       |      |       |
| OUTFLOW:            | 0018 | 1 | 5.0 | 0.37 | 0.00 | 1.33 | 35.66 | n/a  | 0.000 |
| ADD [ 0017+ 0018]   | 0054 | 3 | 0.0 | 0.00 | 0.00 | 0.00 | 0.00  | n/a  | 0.000 |
| ADD [ 0017+ 0018]   | 0053 | 3 | 5.0 | 0.74 | 0.01 | 1.33 | 35.66 | n/a  | 0.000 |
| CHIC STORM          | 10.0 |   |     |      |      |      |       |      |       |
| [ Ptot= 36.86 mm ]  |      |   |     |      |      |      |       |      |       |
| * CALIB STANDHYD    | 0007 | 1 | 5.0 | 1.31 | 0.27 | 2.00 | 35.09 | 0.95 | 0.000 |
| [ I%=99.0:S%= 2.00] |      |   |     |      |      |      |       |      |       |
| ADD [ 0053+ 0054]   | 0056 | 3 | 5.0 | 0.74 | 0.01 | 1.33 | 35.66 | n/a  | 0.000 |
| ADD [ 0056+ 0007]   | 0056 | 1 | 5.0 | 2.04 | 0.28 | 2.00 | 35.30 | n/a  | 0.000 |
| ** Reservoir        |      |   |     |      |      |      |       |      |       |
| OUTFLOW:            | 0057 | 1 | 5.0 | 2.04 | 0.03 | 2.50 | 35.27 | n/a  | 0.000 |
| CHIC STORM          | 10.0 |   |     |      |      |      |       |      |       |
| [ Ptot= 36.86 mm ]  |      |   |     |      |      |      |       |      |       |
| * CALIB STANDHYD    | 0006 | 1 | 5.0 | 2.21 | 0.37 | 2.00 | 30.17 | 0.82 | 0.000 |
| [ I%=74.0:S%= 2.00] |      |   |     |      |      |      |       |      |       |
| ADD [ 0050+ 0051]   | 0019 | 3 | 5.0 | 1.32 | 0.01 | 1.42 | 35.66 | n/a  | 0.000 |
| ADD [ 0019+ 0057]   | 0019 | 1 | 5.0 | 3.36 | 0.04 | 2.50 | 35.42 | n/a  | 0.000 |
| ADD [ 0019+ 0006]   | 0019 | 3 | 5.0 | 5.57 | 0.41 | 2.00 | 33.33 | n/a  | 0.000 |
| ADD [ 0019+ 0059]   | 0062 | 3 | 5.0 | 5.57 | 0.41 | 2.00 | 33.33 | n/a  | 0.000 |
| ** Reservoir        |      |   |     |      |      |      |       |      |       |
| OUTFLOW:            | 0020 | 1 | 5.0 | 5.57 | 0.02 | 7.33 | 31.05 | n/a  | 0.000 |
| ADD [ 0021+ 0022]   | 0030 | 3 | 5.0 | 5.57 | 0.02 | 7.33 | 31.05 | n/a  | 0.000 |
| ADD [ 0030+ 0029]   | 0030 | 1 | 5.0 | 5.82 | 0.02 | 6.58 | 29.77 | n/a  | 0.000 |
| ADD [ 0030+ 0052]   | 0030 | 3 | 5.0 | 6.16 | 0.02 | 6.00 | 28.32 | n/a  | 0.000 |

=====

|     |   |       |       |       |   |       |       |     |  |  |              |
|-----|---|-------|-------|-------|---|-------|-------|-----|--|--|--------------|
| V   | V | I     | SSSSS | U     | U | A     | L     |     |  |  | (v 6.2.2015) |
| V   | V | I     | SS    | U     | U | A A   | L     |     |  |  |              |
| V   | V | I     | SS    | U     | U | AAAAA | L     |     |  |  |              |
| V   | V | I     | SS    | U     | U | A A   | L     |     |  |  |              |
| VV  |   | I     | SSSSS | UUUUU |   | A A   | LLLLL |     |  |  |              |
| 000 |   | TTTTT | TTTTT | H     | H | Y Y   | M M   | 000 |  |  | TM           |
| 0 0 |   | T     | T     | H     | H | Y Y   | MM MM | 0 0 |  |  |              |
| 0 0 |   | T     | T     | H     | H | Y     | M M   | 0 0 |  |  |              |
| 000 |   | T     | T     | H     | H | Y     | M M   | 000 |  |  |              |

Developed and Distributed by Smart City Water Inc  
Copyright 2007 - 2022 Smart City Water Inc  
All rights reserved.

\*\*\*\*\* S U M M A R Y O U T P U T \*\*\*\*\*

```
Input filename: C:\Program Files (x86)\Visual OTTHYMO 6.2\V02\voin.dat
Output filename: C:\Users\hymo\AppData\Local\Civica\XH5\c182f2f7-27a5-48b7-a29b-2f5977d7e46f\ec576dd3-4a1f-4781-b4e5-5ffdb0821d9d\scenari
Summary filename: C:\Users\hymo\AppData\Local\Civica\XH5\c182f2f7-27a5-48b7-a29b-2f5977d7e46f\ec576dd3-4a1f-4781-b4e5-5ffdb0821d9d\scenari
```

DATE: 06-03-2026

TIME: 11:11:35

USER:

COMMENTS:

```
*****
** SIMULATION : 3. CHICAGO [5 YR] [3 HR] **
*****
```

[illegible]



|    |                    |      |   |      |      |      |      |       |      |       |
|----|--------------------|------|---|------|------|------|------|-------|------|-------|
| ** | Swale              |      |   |      |      |      |      |       |      |       |
|    | OVERFLOW :         | 0027 | 3 | 5.0  | 0.00 | 0.00 | 0.00 | 0.00  | n/a  | 0.000 |
|    | UNDERDRAIN:        | 0027 | 4 | 5.0  | 0.00 | 0.00 | 0.00 | 0.00  | n/a  | 0.000 |
| *  |                    |      |   |      |      |      |      |       |      |       |
|    | CHIC STORM         |      |   | 10.0 |      |      |      |       |      |       |
|    | [ Ptot= 42.51 mm ] |      |   |      |      |      |      |       |      |       |
| *  |                    |      |   |      |      |      |      |       |      |       |
| ** | CALIB NASHYD       | 0011 | 1 | 5.0  | 0.25 | 0.00 | 1.25 | 5.08  | 0.12 | 0.000 |
|    | [CN=62.7           |      |   |      |      |      |      |       |      |       |
|    | [ N = 3.0:Tp 0.17] |      |   |      |      |      |      |       |      |       |
| *  |                    |      |   |      |      |      |      |       |      |       |
| ** | Reservoir          |      |   |      |      |      |      |       |      |       |
|    | OUTFLOW:           | 0058 | 1 | 5.0  | 0.25 | 0.00 | 3.33 | 0.61  | n/a  | 0.000 |
| *  |                    |      |   |      |      |      |      |       |      |       |
| *  | ADD [ 0024+ 0026]  | 0029 | 3 | 0.0  | 0.00 | 0.00 | 0.00 | 0.00  | n/a  | 0.000 |
| *  |                    |      |   |      |      |      |      |       |      |       |
| *  | ADD [ 0029+ 0028]  | 0029 | 1 | 0.0  | 0.00 | 0.00 | 0.00 | 0.00  | n/a  | 0.000 |
| *  |                    |      |   |      |      |      |      |       |      |       |
| *  | ADD [ 0029+ 0058]  | 0029 | 3 | 5.0  | 0.25 | 0.00 | 3.33 | 0.61  | n/a  | 0.000 |
| *  |                    |      |   |      |      |      |      |       |      |       |
|    | CHIC STORM         |      |   | 10.0 |      |      |      |       |      |       |
|    | [ Ptot= 42.51 mm ] |      |   |      |      |      |      |       |      |       |
| *  |                    |      |   |      |      |      |      |       |      |       |
| ** | CALIB NASHYD       | 0012 | 1 | 5.0  | 0.13 | 0.00 | 1.25 | 4.88  | 0.11 | 0.000 |
|    | [CN=61.6           |      |   |      |      |      |      |       |      |       |
|    | [ N = 3.0:Tp 0.17] |      |   |      |      |      |      |       |      |       |
| *  |                    |      |   |      |      |      |      |       |      |       |
|    | CHIC STORM         |      |   | 10.0 |      |      |      |       |      |       |
|    | [ Ptot= 42.51 mm ] |      |   |      |      |      |      |       |      |       |
| *  |                    |      |   |      |      |      |      |       |      |       |
| ** | CALIB NASHYD       | 0013 | 1 | 5.0  | 0.21 | 0.00 | 1.17 | 4.98  | 0.12 | 0.000 |
|    | [CN=61.0           |      |   |      |      |      |      |       |      |       |
|    | [ N = 3.0:Tp 0.17] |      |   |      |      |      |      |       |      |       |
| *  |                    |      |   |      |      |      |      |       |      |       |
| *  | ADD [ 0012+ 0013]  | 0052 | 3 | 5.0  | 0.34 | 0.00 | 1.17 | 4.94  | n/a  | 0.000 |
| *  |                    |      |   |      |      |      |      |       |      |       |
|    | CHIC STORM         |      |   | 10.0 |      |      |      |       |      |       |
|    | [ Ptot= 42.51 mm ] |      |   |      |      |      |      |       |      |       |
| *  |                    |      |   |      |      |      |      |       |      |       |
| *  | CALIB STANDHYD     | 0001 | 1 | 5.0  | 0.42 | 0.12 | 1.00 | 41.29 | 0.97 | 0.000 |
|    | [I%=99.0:S%= 1.00] |      |   |      |      |      |      |       |      |       |
| *  |                    |      |   |      |      |      |      |       |      |       |
| ** | Reservoir          |      |   |      |      |      |      |       |      |       |
|    | OUTFLOW:           | 0014 | 1 | 5.0  | 0.42 | 0.00 | 0.50 | 41.30 | n/a  | 0.000 |
| *  |                    |      |   |      |      |      |      |       |      |       |
|    | CHIC STORM         |      |   | 10.0 |      |      |      |       |      |       |
|    | [ Ptot= 42.51 mm ] |      |   |      |      |      |      |       |      |       |
| *  |                    |      |   |      |      |      |      |       |      |       |
| *  | CALIB STANDHYD     | 0002 | 1 | 5.0  | 0.49 | 0.14 | 1.00 | 41.29 | 0.97 | 0.000 |
|    | [I%=99.0:S%= 1.00] |      |   |      |      |      |      |       |      |       |
| *  |                    |      |   |      |      |      |      |       |      |       |
| ** | Reservoir          |      |   |      |      |      |      |       |      |       |
|    | OUTFLOW:           | 0015 | 1 | 5.0  | 0.49 | 0.00 | 0.50 | 41.30 | n/a  | 0.000 |
| *  |                    |      |   |      |      |      |      |       |      |       |
|    | CHIC STORM         |      |   | 10.0 |      |      |      |       |      |       |
|    | [ Ptot= 42.51 mm ] |      |   |      |      |      |      |       |      |       |
| *  |                    |      |   |      |      |      |      |       |      |       |
| *  | CALIB STANDHYD     | 0003 | 1 | 5.0  | 0.41 | 0.12 | 1.00 | 41.29 | 0.97 | 0.000 |
|    | [I%=99.0:S%= 1.00] |      |   |      |      |      |      |       |      |       |
| *  |                    |      |   |      |      |      |      |       |      |       |
| ** | Reservoir          |      |   |      |      |      |      |       |      |       |
|    | OUTFLOW:           | 0016 | 1 | 5.0  | 0.41 | 0.00 | 0.42 | 41.30 | n/a  | 0.000 |
| *  |                    |      |   |      |      |      |      |       |      |       |
| *  | ADD [ 0014+ 0015]  | 0050 | 3 | 5.0  | 0.91 | 0.01 | 0.50 | 41.30 | n/a  | 0.000 |
| *  |                    |      |   |      |      |      |      |       |      |       |
| *  | ADD [ 0050+ 0016]  | 0050 | 1 | 5.0  | 1.32 | 0.01 | 0.50 | 41.30 | n/a  | 0.000 |
| *  |                    |      |   |      |      |      |      |       |      |       |
| *  | ADD [ 0014+ 0015]  | 0051 | 3 | 0.0  | 0.00 | 0.00 | 0.00 | 41.30 | n/a  | 0.000 |
| *  |                    |      |   |      |      |      |      |       |      |       |
| *  | ADD [ 0051+ 0016]  | 0051 | 1 | 0.0  | 0.00 | 0.00 | 0.00 | 0.00  | n/a  | 0.000 |
| *  |                    |      |   |      |      |      |      |       |      |       |





|    |                    |      |      |     |      |      |      |       |      |       |
|----|--------------------|------|------|-----|------|------|------|-------|------|-------|
|    | CHIC STORM         |      | 10.0 |     |      |      |      |       |      |       |
| *  | [ Ptot= 42.51 mm ] |      |      |     |      |      |      |       |      |       |
| *  |                    |      |      |     |      |      |      |       |      |       |
| *  | CALIB STANDHYD     | 0004 | 1    | 5.0 | 0.37 | 0.11 | 1.00 | 41.29 | 0.97 | 0.000 |
| *  | [I%=99.0:S%= 1.00] |      |      |     |      |      |      |       |      |       |
| *  |                    |      |      |     |      |      |      |       |      |       |
| ** | Reservoir          |      |      |     |      |      |      |       |      |       |
| *  | OUTFLOW:           | 0017 | 1    | 5.0 | 0.37 | 0.00 | 0.50 | 41.30 | n/a  | 0.000 |
| *  |                    |      |      |     |      |      |      |       |      |       |
|    | CHIC STORM         |      | 10.0 |     |      |      |      |       |      |       |
| *  | [ Ptot= 42.51 mm ] |      |      |     |      |      |      |       |      |       |
| *  |                    |      |      |     |      |      |      |       |      |       |
| *  | CALIB STANDHYD     | 0005 | 1    | 5.0 | 0.37 | 0.11 | 1.00 | 41.29 | 0.97 | 0.000 |
| *  | [I%=99.0:S%= 1.00] |      |      |     |      |      |      |       |      |       |
| *  |                    |      |      |     |      |      |      |       |      |       |
| ** | Reservoir          |      |      |     |      |      |      |       |      |       |
| *  | OUTFLOW:           | 0018 | 1    | 5.0 | 0.37 | 0.00 | 0.50 | 41.30 | n/a  | 0.000 |
| *  |                    |      |      |     |      |      |      |       |      |       |
| *  | ADD [ 0017+ 0018]  | 0054 | 3    | 0.0 | 0.00 | 0.00 | 0.00 | 0.00  | n/a  | 0.000 |
| *  |                    |      |      |     |      |      |      |       |      |       |
| *  | ADD [ 0017+ 0018]  | 0053 | 3    | 5.0 | 0.74 | 0.01 | 0.50 | 41.30 | n/a  | 0.000 |
| *  |                    |      |      |     |      |      |      |       |      |       |
|    | CHIC STORM         |      | 10.0 |     |      |      |      |       |      |       |
| *  | [ Ptot= 42.51 mm ] |      |      |     |      |      |      |       |      |       |
| *  |                    |      |      |     |      |      |      |       |      |       |
| *  | CALIB STANDHYD     | 0007 | 1    | 5.0 | 1.31 | 0.37 | 1.00 | 40.73 | 0.96 | 0.000 |
| *  | [I%=99.0:S%= 2.00] |      |      |     |      |      |      |       |      |       |
| *  |                    |      |      |     |      |      |      |       |      |       |
| *  | ADD [ 0053+ 0054]  | 0056 | 3    | 5.0 | 0.74 | 0.01 | 0.50 | 41.30 | n/a  | 0.000 |
| *  |                    |      |      |     |      |      |      |       |      |       |
| *  | ADD [ 0056+ 0007]  | 0056 | 1    | 5.0 | 2.04 | 0.38 | 1.00 | 40.93 | n/a  | 0.000 |
| *  |                    |      |      |     |      |      |      |       |      |       |
| ** | Reservoir          |      |      |     |      |      |      |       |      |       |
| *  | OUTFLOW:           | 0057 | 1    | 5.0 | 2.04 | 0.04 | 1.58 | 40.90 | n/a  | 0.000 |
| *  |                    |      |      |     |      |      |      |       |      |       |
|    | CHIC STORM         |      | 10.0 |     |      |      |      |       |      |       |
| *  | [ Ptot= 42.51 mm ] |      |      |     |      |      |      |       |      |       |
| *  |                    |      |      |     |      |      |      |       |      |       |
| *  | CALIB STANDHYD     | 0006 | 1    | 5.0 | 2.21 | 0.51 | 1.00 | 35.39 | 0.83 | 0.000 |
| *  | [I%=74.0:S%= 2.00] |      |      |     |      |      |      |       |      |       |
| *  |                    |      |      |     |      |      |      |       |      |       |
| *  | ADD [ 0050+ 0051]  | 0019 | 3    | 5.0 | 1.32 | 0.01 | 0.50 | 41.30 | n/a  | 0.000 |
| *  |                    |      |      |     |      |      |      |       |      |       |
| *  | ADD [ 0019+ 0057]  | 0019 | 1    | 5.0 | 3.36 | 0.05 | 1.58 | 41.06 | n/a  | 0.000 |
| *  |                    |      |      |     |      |      |      |       |      |       |
| *  | ADD [ 0019+ 0006]  | 0019 | 3    | 5.0 | 5.57 | 0.55 | 1.00 | 38.81 | n/a  | 0.000 |
| *  |                    |      |      |     |      |      |      |       |      |       |
| *  | ADD [ 0019+ 0059]  | 0062 | 3    | 5.0 | 5.57 | 0.55 | 1.00 | 38.81 | n/a  | 0.000 |
| *  |                    |      |      |     |      |      |      |       |      |       |
| ** | Reservoir          |      |      |     |      |      |      |       |      |       |
| *  | OUTFLOW:           | 0020 | 1    | 5.0 | 5.57 | 0.02 | 6.75 | 36.53 | n/a  | 0.000 |
| *  |                    |      |      |     |      |      |      |       |      |       |
| *  | ADD [ 0021+ 0022]  | 0030 | 3    | 5.0 | 5.57 | 0.02 | 6.75 | 36.53 | n/a  | 0.000 |
| *  |                    |      |      |     |      |      |      |       |      |       |
| *  | ADD [ 0030+ 0029]  | 0030 | 1    | 5.0 | 5.82 | 0.02 | 6.75 | 35.00 | n/a  | 0.000 |
| *  |                    |      |      |     |      |      |      |       |      |       |
| *  | ADD [ 0030+ 0052]  | 0030 | 3    | 5.0 | 6.16 | 0.02 | 6.75 | 33.35 | n/a  | 0.000 |
| *  |                    |      |      |     |      |      |      |       |      |       |

=====

|     |   |       |       |       |   |       |       |     |  |  |              |
|-----|---|-------|-------|-------|---|-------|-------|-----|--|--|--------------|
| V   | V | I     | SSSSS | U     | U | A     | L     |     |  |  | (v 6.2.2015) |
| V   | V | I     | SS    | U     | U | A A   | L     |     |  |  |              |
| V   | V | I     | SS    | U     | U | AAAAA | L     |     |  |  |              |
| V   | V | I     | SS    | U     | U | A A   | L     |     |  |  |              |
| VV  |   | I     | SSSSS | UUUUU |   | A A   | LLLLL |     |  |  |              |
| 000 |   | TTTTT | TTTTT | H     | H | Y Y   | M M   | 000 |  |  | TM           |
| 0 0 |   | T     | T     | H     | H | Y Y   | MM MM | 0 0 |  |  |              |
| 0 0 |   | T     | T     | H     | H | Y     | M M   | 0 0 |  |  |              |
| 000 |   | T     | T     | H     | H | Y     | M M   | 000 |  |  |              |

Developed and Distributed by Smart City Water Inc  
Copyright 2007 - 2022 Smart City Water Inc  
All rights reserved.

\*\*\*\*\* S U M M A R Y O U T P U T \*\*\*\*\*

```
Input filename: C:\Program Files (x86)\Visual OTTHYMO 6.2\V02\voin.dat
Output filename: C:\Users\hymo\AppData\Local\Civica\XH5\c182f2f7-27a5-48b7-a29b-2f5977d7e46f\34c81e12-8ff4-405f-8e9b-f009ceca7513\scenari
Summary filename: C:\Users\hymo\AppData\Local\Civica\XH5\c182f2f7-27a5-48b7-a29b-2f5977d7e46f\34c81e12-8ff4-405f-8e9b-f009ceca7513\scenari
```

DATE: 06-03-2026

TIME: 11:11:31

USER:

COMMENTS:

```
*****
** SIMULATION : 4. CHICAGO [5 YR] [6 HR] **
*****
```

| W/E COMMAND                                          | HYD ID | DT min | AREA ha | Qpeak cms | Tpeak hrs | R.V. mm | R.C. | Qbase cms |
|------------------------------------------------------|--------|--------|---------|-----------|-----------|---------|------|-----------|
| START @ 0.00 hrs<br>-----                            |        |        |         |           |           |         |      |           |
| CHIC STORM<br>[ Ptot= 49.04 mm ]                     |        | 10.0   |         |           |           |         |      |           |
| * ** CALIB NASHYD<br>[CN=61.0]<br>[ N = 3.0:Tp 0.17] | 0008   | 1 5.0  | 0.09    | 0.00      | 2.17      | 6.52    | 0.13 | 0.000     |
| * ** Rain Garden<br>OVERFLOW                         | 0023   | 3 5.0  | 0.00    | 0.00      | 0.00      | 0.00    | n/a  | 0.000     |
| CHIC STORM<br>[ Ptot= 49.04 mm ]                     |        | 10.0   |         |           |           |         |      |           |
| * ** CALIB NASHYD<br>[CN=61.0]<br>[ N = 3.0:Tp 0.17] | 0009   | 1 5.0  | 0.13    | 0.00      | 2.17      | 6.52    | 0.13 | 0.000     |
| * ** Swale<br>OVERFLOW :                             | 0025   | 3 5.0  | 0.00    | 0.00      | 0.00      | 0.00    | n/a  | 0.000     |
| * UNDERDRAIN:                                        | 0025   | 4 5.0  | 0.00    | 0.00      | 0.00      | 0.00    | n/a  | 0.000     |
| CHIC STORM<br>[ Ptot= 49.04 mm ]                     |        | 10.0   |         |           |           |         |      |           |
| * ** CALIB NASHYD<br>[CN=61.0]<br>[ N = 3.0:Tp 0.17] | 0010   | 1 5.0  | 0.22    | 0.00      | 2.17      | 6.52    | 0.13 | 0.000     |



|    |                    |      |   |      |      |      |      |       |      |       |
|----|--------------------|------|---|------|------|------|------|-------|------|-------|
| ** | Swale              |      |   |      |      |      |      |       |      |       |
|    | OVERFLOW :         | 0027 | 3 | 5.0  | 0.22 | 0.00 | 2.83 | 0.20  | n/a  | 0.000 |
| *  | UNDERDRAIN:        | 0027 | 4 | 5.0  | 0.00 | 0.00 | 0.00 | 0.00  | n/a  | 0.000 |
| *  |                    |      |   |      |      |      |      |       |      |       |
|    | CHIC STORM         |      |   | 10.0 |      |      |      |       |      |       |
| *  | [ Ptot= 49.04 mm ] |      |   |      |      |      |      |       |      |       |
| *  |                    |      |   |      |      |      |      |       |      |       |
| ** | CALIB NASHYD       | 0011 | 1 | 5.0  | 0.25 | 0.00 | 2.17 | 7.23  | 0.15 | 0.000 |
|    | [CN=62.7 ]         |      |   |      |      |      |      |       |      |       |
| *  | [ N = 3.0:Tp 0.17] |      |   |      |      |      |      |       |      |       |
| *  |                    |      |   |      |      |      |      |       |      |       |
| ** | Reservoir          |      |   |      |      |      |      |       |      |       |
| *  | OUTFLOW:           | 0058 | 1 | 5.0  | 0.25 | 0.00 | 6.25 | 1.10  | n/a  | 0.000 |
| *  |                    |      |   |      |      |      |      |       |      |       |
| *  | ADD [ 0024+ 0026]  | 0029 | 3 | 0.0  | 0.00 | 0.00 | 0.00 | 0.00  | n/a  | 0.000 |
| *  |                    |      |   |      |      |      |      |       |      |       |
| *  | ADD [ 0029+ 0028]  | 0029 | 1 | 5.0  | 0.22 | 0.00 | 2.83 | 0.20  | n/a  | 0.000 |
| *  |                    |      |   |      |      |      |      |       |      |       |
| *  | ADD [ 0029+ 0058]  | 0029 | 3 | 5.0  | 0.47 | 0.00 | 2.83 | 0.67  | n/a  | 0.000 |
| *  |                    |      |   |      |      |      |      |       |      |       |
|    | CHIC STORM         |      |   | 10.0 |      |      |      |       |      |       |
| *  | [ Ptot= 49.04 mm ] |      |   |      |      |      |      |       |      |       |
| *  |                    |      |   |      |      |      |      |       |      |       |
| ** | CALIB NASHYD       | 0012 | 1 | 5.0  | 0.13 | 0.00 | 2.17 | 6.96  | 0.14 | 0.000 |
|    | [CN=61.6 ]         |      |   |      |      |      |      |       |      |       |
| *  | [ N = 3.0:Tp 0.17] |      |   |      |      |      |      |       |      |       |
| *  |                    |      |   |      |      |      |      |       |      |       |
|    | CHIC STORM         |      |   | 10.0 |      |      |      |       |      |       |
| *  | [ Ptot= 49.04 mm ] |      |   |      |      |      |      |       |      |       |
| *  |                    |      |   |      |      |      |      |       |      |       |
| ** | CALIB NASHYD       | 0013 | 1 | 5.0  | 0.21 | 0.00 | 2.17 | 7.05  | 0.14 | 0.000 |
|    | [CN=61.0 ]         |      |   |      |      |      |      |       |      |       |
| *  | [ N = 3.0:Tp 0.17] |      |   |      |      |      |      |       |      |       |
| *  |                    |      |   |      |      |      |      |       |      |       |
| *  | ADD [ 0012+ 0013]  | 0052 | 3 | 5.0  | 0.34 | 0.01 | 2.17 | 7.02  | n/a  | 0.000 |
| *  |                    |      |   |      |      |      |      |       |      |       |
|    | CHIC STORM         |      |   | 10.0 |      |      |      |       |      |       |
| *  | [ Ptot= 49.04 mm ] |      |   |      |      |      |      |       |      |       |
| *  |                    |      |   |      |      |      |      |       |      |       |
| *  | CALIB STANDHYD     | 0001 | 1 | 5.0  | 0.42 | 0.12 | 2.00 | 47.80 | 0.97 | 0.000 |
|    | [I%=99.0:S%= 1.00] |      |   |      |      |      |      |       |      |       |
| *  |                    |      |   |      |      |      |      |       |      |       |
| ** | Reservoir          |      |   |      |      |      |      |       |      |       |
| *  | OUTFLOW:           | 0014 | 1 | 5.0  | 0.42 | 0.00 | 1.17 | 47.80 | n/a  | 0.000 |
| *  |                    |      |   |      |      |      |      |       |      |       |
|    | CHIC STORM         |      |   | 10.0 |      |      |      |       |      |       |
| *  | [ Ptot= 49.04 mm ] |      |   |      |      |      |      |       |      |       |
| *  |                    |      |   |      |      |      |      |       |      |       |
| *  | CALIB STANDHYD     | 0002 | 1 | 5.0  | 0.49 | 0.14 | 2.00 | 47.80 | 0.97 | 0.000 |
|    | [I%=99.0:S%= 1.00] |      |   |      |      |      |      |       |      |       |
| *  |                    |      |   |      |      |      |      |       |      |       |
| ** | Reservoir          |      |   |      |      |      |      |       |      |       |
| *  | OUTFLOW:           | 0015 | 1 | 5.0  | 0.49 | 0.00 | 1.08 | 47.81 | n/a  | 0.000 |
| *  |                    |      |   |      |      |      |      |       |      |       |
|    | CHIC STORM         |      |   | 10.0 |      |      |      |       |      |       |
| *  | [ Ptot= 49.04 mm ] |      |   |      |      |      |      |       |      |       |
| *  |                    |      |   |      |      |      |      |       |      |       |
| *  | CALIB STANDHYD     | 0003 | 1 | 5.0  | 0.41 | 0.12 | 2.00 | 47.79 | 0.97 | 0.000 |
|    | [I%=99.0:S%= 1.00] |      |   |      |      |      |      |       |      |       |
| *  |                    |      |   |      |      |      |      |       |      |       |
| ** | Reservoir          |      |   |      |      |      |      |       |      |       |
| *  | OUTFLOW:           | 0016 | 1 | 5.0  | 0.41 | 0.00 | 1.00 | 47.79 | n/a  | 0.000 |
| *  |                    |      |   |      |      |      |      |       |      |       |
| *  | ADD [ 0014+ 0015]  | 0050 | 3 | 5.0  | 0.91 | 0.01 | 1.17 | 47.80 | n/a  | 0.000 |
| *  |                    |      |   |      |      |      |      |       |      |       |
| *  | ADD [ 0050+ 0016]  | 0050 | 1 | 5.0  | 1.32 | 0.01 | 1.17 | 47.80 | n/a  | 0.000 |
| *  |                    |      |   |      |      |      |      |       |      |       |
| *  | ADD [ 0014+ 0015]  | 0051 | 3 | 0.0  | 0.00 | 0.00 | 0.00 | 47.80 | n/a  | 0.000 |
| *  |                    |      |   |      |      |      |      |       |      |       |
| *  | ADD [ 0051+ 0016]  | 0051 | 1 | 0.0  | 0.00 | 0.00 | 0.00 | 0.00  | n/a  | 0.000 |
| *  |                    |      |   |      |      |      |      |       |      |       |



|    |                    |      |      |     |      |      |      |       |      |       |
|----|--------------------|------|------|-----|------|------|------|-------|------|-------|
|    | CHIC STORM         |      | 10.0 |     |      |      |      |       |      |       |
| *  | [ Ptot= 49.04 mm ] |      |      |     |      |      |      |       |      |       |
| *  |                    |      |      |     |      |      |      |       |      |       |
| *  | CALIB STANDHYD     | 0004 | 1    | 5.0 | 0.37 | 0.11 | 2.00 | 47.80 | 0.97 | 0.000 |
| *  | [I%=99.0:S%= 1.00] |      |      |     |      |      |      |       |      |       |
| *  |                    |      |      |     |      |      |      |       |      |       |
| ** | Reservoir          |      |      |     |      |      |      |       |      |       |
| *  | OUTFLOW:           | 0017 | 1    | 5.0 | 0.37 | 0.00 | 1.08 | 47.80 | n/a  | 0.000 |
| *  |                    |      |      |     |      |      |      |       |      |       |
|    | CHIC STORM         |      | 10.0 |     |      |      |      |       |      |       |
| *  | [ Ptot= 49.04 mm ] |      |      |     |      |      |      |       |      |       |
| *  |                    |      |      |     |      |      |      |       |      |       |
| *  | CALIB STANDHYD     | 0005 | 1    | 5.0 | 0.37 | 0.11 | 2.00 | 47.80 | 0.97 | 0.000 |
| *  | [I%=99.0:S%= 1.00] |      |      |     |      |      |      |       |      |       |
| *  |                    |      |      |     |      |      |      |       |      |       |
| ** | Reservoir          |      |      |     |      |      |      |       |      |       |
| *  | OUTFLOW:           | 0018 | 1    | 5.0 | 0.37 | 0.00 | 1.08 | 47.80 | n/a  | 0.000 |
| *  |                    |      |      |     |      |      |      |       |      |       |
| *  | ADD [ 0017+ 0018]  | 0054 | 3    | 0.0 | 0.00 | 0.00 | 0.00 | 0.00  | n/a  | 0.000 |
| *  |                    |      |      |     |      |      |      |       |      |       |
| *  | ADD [ 0017+ 0018]  | 0053 | 3    | 5.0 | 0.74 | 0.01 | 1.08 | 47.80 | n/a  | 0.000 |
| *  |                    |      |      |     |      |      |      |       |      |       |
|    | CHIC STORM         |      | 10.0 |     |      |      |      |       |      |       |
| *  | [ Ptot= 49.04 mm ] |      |      |     |      |      |      |       |      |       |
| *  |                    |      |      |     |      |      |      |       |      |       |
| *  | CALIB STANDHYD     | 0007 | 1    | 5.0 | 1.31 | 0.37 | 2.00 | 47.24 | 0.96 | 0.000 |
| *  | [I%=99.0:S%= 2.00] |      |      |     |      |      |      |       |      |       |
| *  |                    |      |      |     |      |      |      |       |      |       |
| *  | ADD [ 0053+ 0054]  | 0056 | 3    | 5.0 | 0.74 | 0.01 | 1.08 | 47.80 | n/a  | 0.000 |
| *  |                    |      |      |     |      |      |      |       |      |       |
| *  | ADD [ 0056+ 0007]  | 0056 | 1    | 5.0 | 2.04 | 0.38 | 2.00 | 47.44 | n/a  | 0.000 |
| *  |                    |      |      |     |      |      |      |       |      |       |
| ** | Reservoir          |      |      |     |      |      |      |       |      |       |
| *  | OUTFLOW:           | 0057 | 1    | 5.0 | 2.04 | 0.04 | 2.58 | 47.41 | n/a  | 0.000 |
| *  |                    |      |      |     |      |      |      |       |      |       |
|    | CHIC STORM         |      | 10.0 |     |      |      |      |       |      |       |
| *  | [ Ptot= 49.04 mm ] |      |      |     |      |      |      |       |      |       |
| *  |                    |      |      |     |      |      |      |       |      |       |
| *  | CALIB STANDHYD     | 0006 | 1    | 5.0 | 2.21 | 0.52 | 2.00 | 41.49 | 0.85 | 0.000 |
| *  | [I%=74.0:S%= 2.00] |      |      |     |      |      |      |       |      |       |
| *  |                    |      |      |     |      |      |      |       |      |       |
| *  | ADD [ 0050+ 0051]  | 0019 | 3    | 5.0 | 1.32 | 0.01 | 1.17 | 47.80 | n/a  | 0.000 |
| *  |                    |      |      |     |      |      |      |       |      |       |
| *  | ADD [ 0019+ 0057]  | 0019 | 1    | 5.0 | 3.36 | 0.05 | 2.58 | 47.56 | n/a  | 0.000 |
| *  |                    |      |      |     |      |      |      |       |      |       |
| *  | ADD [ 0019+ 0006]  | 0019 | 3    | 5.0 | 5.57 | 0.56 | 2.00 | 45.15 | n/a  | 0.000 |
| *  |                    |      |      |     |      |      |      |       |      |       |
| *  | ADD [ 0019+ 0059]  | 0062 | 3    | 5.0 | 5.57 | 0.56 | 2.00 | 45.15 | n/a  | 0.000 |
| *  |                    |      |      |     |      |      |      |       |      |       |
| ** | Reservoir          |      |      |     |      |      |      |       |      |       |
| *  | OUTFLOW:           | 0020 | 1    | 5.0 | 5.57 | 0.02 | 8.33 | 42.87 | n/a  | 0.000 |
| *  |                    |      |      |     |      |      |      |       |      |       |
| *  | ADD [ 0021+ 0022]  | 0030 | 3    | 5.0 | 5.57 | 0.02 | 8.33 | 42.87 | n/a  | 0.000 |
| *  |                    |      |      |     |      |      |      |       |      |       |
| *  | ADD [ 0030+ 0029]  | 0030 | 1    | 5.0 | 6.05 | 0.02 | 8.33 | 39.57 | n/a  | 0.000 |
| *  |                    |      |      |     |      |      |      |       |      |       |
| *  | ADD [ 0030+ 0052]  | 0030 | 3    | 5.0 | 6.38 | 0.02 | 8.33 | 37.85 | n/a  | 0.000 |
| *  |                    |      |      |     |      |      |      |       |      |       |

=====

```
V      V      I      SSSSS  U      U      A      L
V      V      I      SS      U      U      A A     L
  V      V      I      SS      U      U      AAAAA  L
  V      V      I      SS      U      U      A      A  L
    W      I      SSSSS  UUUUU  A      A  LLLLL
```

|     |       |       |   |   |   |   |    |    |     |    |
|-----|-------|-------|---|---|---|---|----|----|-----|----|
| 000 | TTTTT | TTTTT | H | H | Y | Y | M  | M  | 000 | TM |
| 0 0 | T     | T     | H | H | Y | Y | MM | MM | 0 0 |    |
| 0 0 | T     | T     | H | H | Y |   | M  | M  | 0 0 |    |
| 000 | T     | T     | H | H | Y |   | M  | M  | 000 |    |

Developed and Distributed by Smart City Water Inc  
Copyright 2007 - 2022 Smart City Water Inc  
All rights reserved.

\*\*\*\*\* S U M M A R Y O U T P U T \*\*\*\*\*

```
Input filename: C:\Program Files (x86)\Visual OTTHYMO 6.2\V02\voin.dat
Output filename: C:\Users\hymo\AppData\Local\Civica\XH5\c182f2f7-27a5-48b7-a29b-2f5977d7e46f\c518bd5f-2a6d-4476-9621-11b42a134b48\scenari
Summary filename: C:\Users\hymo\AppData\Local\Civica\XH5\c182f2f7-27a5-48b7-a29b-2f5977d7e46f\c518bd5f-2a6d-4476-9621-11b42a134b48\scenari
```

DATE: 06-03-2026

TIME: 11:11:35

USER:

COMMENTS:

```
*****
** SIMULATION : 5. CHICAGO [100 YR] [3 HR] **
*****
```

[illegible]



## Post-development Otthymo Analysis Summary Output

## Complete Model

2726 Moodie Drive, Ottawa

June 9, 2026

Project # 221099


14 of 30

|    |                    |      |   |      |      |      |      |       |      |       |
|----|--------------------|------|---|------|------|------|------|-------|------|-------|
| ** | Swale              |      |   |      |      |      |      |       |      |       |
| *  | OVERFLOW :         | 0027 | 3 | 5.0  | 0.22 | 0.01 | 1.17 | 9.84  | n/a  | 0.000 |
| *  | UNDERDRAIN:        | 0027 | 4 | 5.0  | 0.00 | 0.00 | 0.00 | 0.00  | n/a  | 0.000 |
| *  | CHIC STORM         |      |   | 10.0 |      |      |      |       |      |       |
| *  | [ Ptot= 71.66 mm ] |      |   |      |      |      |      |       |      |       |
| ** | CALIB NASHYD       | 0011 | 1 | 5.0  | 0.25 | 0.01 | 1.17 | 16.78 | 0.23 | 0.000 |
| *  | [CN=62.7 ]         |      |   |      |      |      |      |       |      |       |
| *  | [ N = 3.0:Tp 0.17] |      |   |      |      |      |      |       |      |       |
| ** | Reservoir          |      |   |      |      |      |      |       |      |       |
| *  | OUTFLOW:           | 0058 | 1 | 5.0  | 0.25 | 0.00 | 3.42 | 0.82  | n/a  | 0.000 |
| *  | ADD [ 0024+ 0026]  | 0029 | 3 | 5.0  | 0.13 | 0.01 | 1.25 | 7.07  | n/a  | 0.000 |
| *  | ADD [ 0029+ 0028]  | 0029 | 1 | 5.0  | 0.35 | 0.02 | 1.25 | 8.84  | n/a  | 0.000 |
| *  | ADD [ 0029+ 0058]  | 0029 | 3 | 5.0  | 0.60 | 0.02 | 1.25 | 5.52  | n/a  | 0.000 |
| *  | CHIC STORM         |      |   | 10.0 |      |      |      |       |      |       |
| *  | [ Ptot= 71.66 mm ] |      |   |      |      |      |      |       |      |       |
| ** | CALIB NASHYD       | 0012 | 1 | 5.0  | 0.13 | 0.01 | 1.17 | 16.22 | 0.23 | 0.000 |
| *  | [CN=61.6 ]         |      |   |      |      |      |      |       |      |       |
| *  | [ N = 3.0:Tp 0.17] |      |   |      |      |      |      |       |      |       |
| *  | CHIC STORM         |      |   | 10.0 |      |      |      |       |      |       |
| *  | [ Ptot= 71.66 mm ] |      |   |      |      |      |      |       |      |       |
| ** | CALIB NASHYD       | 0013 | 1 | 5.0  | 0.21 | 0.01 | 1.17 | 16.25 | 0.23 | 0.000 |
| *  | [CN=61.0 ]         |      |   |      |      |      |      |       |      |       |
| *  | [ N = 3.0:Tp 0.17] |      |   |      |      |      |      |       |      |       |
| *  | ADD [ 0012+ 0013]  | 0052 | 3 | 5.0  | 0.34 | 0.02 | 1.17 | 16.24 | n/a  | 0.000 |
| *  | CHIC STORM         |      |   | 10.0 |      |      |      |       |      |       |
| *  | [ Ptot= 71.66 mm ] |      |   |      |      |      |      |       |      |       |
| *  | CALIB STANDHYD     | 0001 | 1 | 5.0  | 0.42 | 0.21 | 1.00 | 70.39 | 0.98 | 0.000 |
| *  | [I%=99.0:S%= 1.00] |      |   |      |      |      |      |       |      |       |
| ** | Reservoir          |      |   |      |      |      |      |       |      |       |
| *  | OUTFLOW:           | 0014 | 1 | 5.0  | 0.36 | 0.00 | 0.33 | 71.75 | n/a  | 0.000 |
| *  | CHIC STORM         |      |   | 10.0 |      |      |      |       |      |       |
| *  | [ Ptot= 71.66 mm ] |      |   |      |      |      |      |       |      |       |
| *  | CALIB STANDHYD     | 0002 | 1 | 5.0  | 0.49 | 0.24 | 1.00 | 70.39 | 0.98 | 0.000 |
| *  | [I%=99.0:S%= 1.00] |      |   |      |      |      |      |       |      |       |
| ** | Reservoir          |      |   |      |      |      |      |       |      |       |
| *  | OUTFLOW:           | 0015 | 1 | 5.0  | 0.40 | 0.00 | 0.33 | 71.10 | n/a  | 0.000 |
| *  | CHIC STORM         |      |   | 10.0 |      |      |      |       |      |       |
| *  | [ Ptot= 71.66 mm ] |      |   |      |      |      |      |       |      |       |
| *  | CALIB STANDHYD     | 0003 | 1 | 5.0  | 0.41 | 0.20 | 1.00 | 70.39 | 0.98 | 0.000 |
| *  | [I%=99.0:S%= 1.00] |      |   |      |      |      |      |       |      |       |
| ** | Reservoir          |      |   |      |      |      |      |       |      |       |
| *  | OUTFLOW:           | 0016 | 1 | 5.0  | 0.27 | 0.00 | 0.33 | 74.95 | n/a  | 0.000 |
| *  | ADD [ 0014+ 0015]  | 0050 | 3 | 5.0  | 0.76 | 0.01 | 0.33 | 71.41 | n/a  | 0.000 |
| *  | ADD [ 0050+ 0016]  | 0050 | 1 | 5.0  | 1.03 | 0.01 | 0.33 | 72.32 | n/a  | 0.000 |
| *  | ADD [ 0014+ 0015]  | 0051 | 3 | 5.0  | 0.14 | 0.04 | 1.50 | 71.34 | n/a  | 0.000 |
| *  | ADD [ 0051+ 0016]  | 0051 | 1 | 5.0  | 0.28 | 0.09 | 1.08 | 73.16 | n/a  | 0.000 |



|                     |      |   |     |      |      |      |       |      |       |
|---------------------|------|---|-----|------|------|------|-------|------|-------|
| CHIC STORM          | 10.0 |   |     |      |      |      |       |      |       |
| [ Ptot= 71.66 mm ]  |      |   |     |      |      |      |       |      |       |
| * CALIB STANDHYD    | 0004 | 1 | 5.0 | 0.37 | 0.18 | 1.00 | 70.39 | 0.98 | 0.000 |
| [ I%=99.0:S%= 1.00] |      |   |     |      |      |      |       |      |       |
| ** Reservoir        |      |   |     |      |      |      |       |      |       |
| OUTFLOW:            | 0017 | 1 | 5.0 | 0.28 | 0.00 | 0.33 | 70.70 | n/a  | 0.000 |
| CHIC STORM          | 10.0 |   |     |      |      |      |       |      |       |
| [ Ptot= 71.66 mm ]  |      |   |     |      |      |      |       |      |       |
| * CALIB STANDHYD    | 0005 | 1 | 5.0 | 0.37 | 0.18 | 1.00 | 70.39 | 0.98 | 0.000 |
| [ I%=99.0:S%= 1.00] |      |   |     |      |      |      |       |      |       |
| ** Reservoir        |      |   |     |      |      |      |       |      |       |
| OUTFLOW:            | 0018 | 1 | 5.0 | 0.28 | 0.00 | 0.33 | 70.70 | n/a  | 0.000 |
| ADD [ 0017+ 0018]   | 0054 | 3 | 5.0 | 0.18 | 0.05 | 1.25 | 70.70 | n/a  | 0.000 |
| ADD [ 0017+ 0018]   | 0053 | 3 | 5.0 | 0.56 | 0.01 | 0.33 | 70.70 | n/a  | 0.000 |
| CHIC STORM          | 10.0 |   |     |      |      |      |       |      |       |
| [ Ptot= 71.66 mm ]  |      |   |     |      |      |      |       |      |       |
| * CALIB STANDHYD    | 0007 | 1 | 5.0 | 1.31 | 0.64 | 1.00 | 69.82 | 0.97 | 0.000 |
| [ I%=99.0:S%= 2.00] |      |   |     |      |      |      |       |      |       |
| ADD [ 0053+ 0054]   | 0056 | 3 | 5.0 | 0.74 | 0.06 | 1.25 | 70.70 | n/a  | 0.000 |
| ADD [ 0056+ 0007]   | 0056 | 1 | 5.0 | 2.04 | 0.65 | 1.00 | 70.14 | n/a  | 0.000 |
| ** Reservoir        |      |   |     |      |      |      |       |      |       |
| OUTFLOW:            | 0057 | 1 | 5.0 | 2.04 | 0.05 | 2.08 | 70.11 | n/a  | 0.000 |
| CHIC STORM          | 10.0 |   |     |      |      |      |       |      |       |
| [ Ptot= 71.66 mm ]  |      |   |     |      |      |      |       |      |       |
| * CALIB STANDHYD    | 0006 | 1 | 5.0 | 2.21 | 0.97 | 1.00 | 63.00 | 0.88 | 0.000 |
| [ I%=74.0:S%= 2.00] |      |   |     |      |      |      |       |      |       |
| ADD [ 0050+ 0051]   | 0019 | 3 | 5.0 | 1.31 | 0.10 | 1.08 | 72.50 | n/a  | 0.000 |
| ADD [ 0019+ 0057]   | 0019 | 1 | 5.0 | 3.36 | 0.14 | 1.08 | 71.05 | n/a  | 0.000 |
| ADD [ 0019+ 0006]   | 0019 | 3 | 5.0 | 5.57 | 1.01 | 1.00 | 67.85 | n/a  | 0.000 |
| ADD [ 0019+ 0059]   | 0062 | 3 | 5.0 | 5.57 | 1.01 | 1.00 | 67.85 | n/a  | 0.000 |
| ** Reservoir        |      |   |     |      |      |      |       |      |       |
| OUTFLOW:            | 0020 | 1 | 5.0 | 5.57 | 0.03 | 9.67 | 65.57 | n/a  | 0.000 |
| ADD [ 0021+ 0022]   | 0030 | 3 | 5.0 | 5.57 | 0.03 | 9.67 | 65.57 | n/a  | 0.000 |
| ADD [ 0030+ 0029]   | 0030 | 1 | 5.0 | 6.17 | 0.03 | 1.25 | 59.74 | n/a  | 0.000 |
| ADD [ 0030+ 0052]   | 0030 | 3 | 5.0 | 6.51 | 0.05 | 1.25 | 57.48 | n/a  | 0.000 |

=====



## Complete Model

2726 Moodie Drive, Ottawa

June 9, 2026

Project # 221099

16 of 30

```
V      V      I      SSSSS  U      U      A      L
V      V      I      SS      U      U      A A     L
  V      V      I      SS      U      U      AAAAA  L
  V      V      I      SS      U      U      A      A  L
    W      I      SSSSS  UUUUU  A      A  LLLLL
```

|     |       |       |   |   |   |   |    |    |     |    |
|-----|-------|-------|---|---|---|---|----|----|-----|----|
| 000 | TTTTT | TTTTT | H | H | Y | Y | M  | M  | 000 | TM |
| 0 0 | T     | T     | H | H | Y | Y | MM | MM | 0 0 |    |
| 0 0 | T     | T     | H | H | Y |   | M  | M  | 0 0 |    |
| 000 | T     | T     | H | H | Y |   | M  | M  | 000 |    |

Developed and Distributed by Smart City Water Inc  
Copyright 2007 - 2022 Smart City Water Inc  
All rights reserved.

\*\*\*\*\* S U M M A R Y O U T P U T \*\*\*\*\*

```
Input filename: C:\Program Files (x86)\Visual OTTHYMO 6.2\V02\voin.dat
Output filename: C:\Users\hymo\AppData\Local\Civica\XH5\c182f2f7-27a5-48b7-a29b-2f5977d7e46f\fd4e1089-4391-4386-81b6-715fcdcb3f50\scenari
Summary filename: C:\Users\hymo\AppData\Local\Civica\XH5\c182f2f7-27a5-48b7-a29b-2f5977d7e46f\fd4e1089-4391-4386-81b6-715fcdcb3f50\scenari
```

DATE: 06-03-2026

TIME: 11:11:36

USER:

COMMENTS: \_\_\_\_\_

```
*****
** SIMULATION : 6. CHICAGO [100 YR] [6 HR] **
*****
```

|   | W/E COMMAND                                        | HYD ID     | DT min | AREA ha | ' Qpeak cms | Tpeak hrs | R.V. mm | R.C.  | Qbase cms |
|---|----------------------------------------------------|------------|--------|---------|-------------|-----------|---------|-------|-----------|
|   | START @ 0.00 hrs<br>-----                          |            |        |         |             |           |         |       |           |
|   | CHIC STORM<br>[ Ptot= 82.32 mm ]                   | 10.0       |        |         |             |           |         |       |           |
| * | ** CALIB NASHYD<br>[CN=61.0]<br>[ N = 3.0:Tp 0.17] | 0008 1 5.0 | 0.09   | 0.01    | 2.17        | 20.66     | 0.25    | 0.000 |           |
| * | ** Rain Garden<br>OVERFLOW                         | 0023 3 5.0 | 0.00   | 0.00    | 0.00        | 0.00      | n/a     | 0.000 |           |
|   | CHIC STORM<br>[ Ptot= 82.32 mm ]                   | 10.0       |        |         |             |           |         |       |           |
| * | ** CALIB NASHYD<br>[CN=61.0]<br>[ N = 3.0:Tp 0.17] | 0009 1 5.0 | 0.13   | 0.01    | 2.17        | 20.66     | 0.25    | 0.000 |           |
| * | ** Swale<br>OVERFLOW :                             | 0025 3 5.0 | 0.13   | 0.01    | 2.25        | 8.83      | n/a     | 0.000 |           |
| * | UNDERDRAIN:                                        | 0025 4 5.0 | 0.00   | 0.00    | 0.00        | 0.00      | n/a     | 0.000 |           |
|   | CHIC STORM<br>[ Ptot= 82.32 mm ]                   | 10.0       |        |         |             |           |         |       |           |
| * | ** CALIB NASHYD<br>[CN=61.0]<br>[ N = 3.0:Tp 0.17] | 0010 1 5.0 | 0.22   | 0.01    | 2.17        | 20.66     | 0.25    | 0.000 |           |





## Post-development Otthymo Analysis Summary Output

## Complete Model

2726 Moodie Drive, Ottawa

June 9, 2026

Project # 221099

17 of 30

|    |                    |      |   |      |      |      |      |       |      |       |
|----|--------------------|------|---|------|------|------|------|-------|------|-------|
| ** | Swale              |      |   |      |      |      |      |       |      |       |
| *  | OVERFLOW :         | 0027 | 3 | 5.0  | 0.22 | 0.01 | 2.17 | 12.27 | n/a  | 0.000 |
| *  | UNDERDRAIN:        | 0027 | 4 | 5.0  | 0.00 | 0.00 | 0.00 | 0.00  | n/a  | 0.000 |
| *  | CHIC STORM         |      |   | 10.0 |      |      |      |       |      |       |
| *  | [ Ptot= 82.32 mm ] |      |   |      |      |      |      |       |      |       |
| ** | CALIB NASHYD       | 0011 | 1 | 5.0  | 0.25 | 0.02 | 2.17 | 22.20 | 0.27 | 0.000 |
| *  | [CN=62.7 ]         |      |   |      |      |      |      |       |      |       |
| *  | [ N = 3.0:Tp 0.17] |      |   |      |      |      |      |       |      |       |
| ** | Reservoir          |      |   |      |      |      |      |       |      |       |
| *  | OUTFLOW:           | 0058 | 1 | 5.0  | 0.25 | 0.00 | 6.33 | 1.53  | n/a  | 0.000 |
| *  | ADD [ 0024+ 0026]  | 0029 | 3 | 5.0  | 0.13 | 0.01 | 2.25 | 8.83  | n/a  | 0.000 |
| *  | ADD [ 0029+ 0028]  | 0029 | 1 | 5.0  | 0.35 | 0.02 | 2.25 | 11.03 | n/a  | 0.000 |
| *  | ADD [ 0029+ 0058]  | 0029 | 3 | 5.0  | 0.60 | 0.02 | 2.25 | 7.10  | n/a  | 0.000 |
| *  | CHIC STORM         |      |   | 10.0 |      |      |      |       |      |       |
| *  | [ Ptot= 82.32 mm ] |      |   |      |      |      |      |       |      |       |
| ** | CALIB NASHYD       | 0012 | 1 | 5.0  | 0.13 | 0.01 | 2.17 | 21.49 | 0.26 | 0.000 |
| *  | [CN=61.6 ]         |      |   |      |      |      |      |       |      |       |
| *  | [ N = 3.0:Tp 0.17] |      |   |      |      |      |      |       |      |       |
| *  | CHIC STORM         |      |   | 10.0 |      |      |      |       |      |       |
| *  | [ Ptot= 82.32 mm ] |      |   |      |      |      |      |       |      |       |
| ** | CALIB NASHYD       | 0013 | 1 | 5.0  | 0.21 | 0.01 | 2.17 | 21.48 | 0.26 | 0.000 |
| *  | [CN=61.0 ]         |      |   |      |      |      |      |       |      |       |
| *  | [ N = 3.0:Tp 0.17] |      |   |      |      |      |      |       |      |       |
| *  | ADD [ 0012+ 0013]  | 0052 | 3 | 5.0  | 0.34 | 0.02 | 2.17 | 21.48 | n/a  | 0.000 |
| *  | CHIC STORM         |      |   | 10.0 |      |      |      |       |      |       |
| *  | [ Ptot= 82.32 mm ] |      |   |      |      |      |      |       |      |       |
| *  | CALIB STANDHYD     | 0001 | 1 | 5.0  | 0.42 | 0.21 | 2.00 | 81.02 | 0.98 | 0.000 |
| *  | [I%=99.0:S%= 1.00] |      |   |      |      |      |      |       |      |       |
| ** | Reservoir          |      |   |      |      |      |      |       |      |       |
| *  | OUTFLOW:           | 0014 | 1 | 5.0  | 0.36 | 0.00 | 0.75 | 81.04 | n/a  | 0.000 |
| *  | CHIC STORM         |      |   | 10.0 |      |      |      |       |      |       |
| *  | [ Ptot= 82.32 mm ] |      |   |      |      |      |      |       |      |       |
| *  | CALIB STANDHYD     | 0002 | 1 | 5.0  | 0.49 | 0.24 | 2.00 | 81.03 | 0.98 | 0.000 |
| *  | [I%=99.0:S%= 1.00] |      |   |      |      |      |      |       |      |       |
| ** | Reservoir          |      |   |      |      |      |      |       |      |       |
| *  | OUTFLOW:           | 0015 | 1 | 5.0  | 0.39 | 0.00 | 0.67 | 82.45 | n/a  | 0.000 |
| *  | CHIC STORM         |      |   | 10.0 |      |      |      |       |      |       |
| *  | [ Ptot= 82.32 mm ] |      |   |      |      |      |      |       |      |       |
| *  | CALIB STANDHYD     | 0003 | 1 | 5.0  | 0.41 | 0.20 | 2.00 | 81.02 | 0.98 | 0.000 |
| *  | [I%=99.0:S%= 1.00] |      |   |      |      |      |      |       |      |       |
| ** | Reservoir          |      |   |      |      |      |      |       |      |       |
| *  | OUTFLOW:           | 0016 | 1 | 5.0  | 0.27 | 0.00 | 0.67 | 81.00 | n/a  | 0.000 |
| *  | ADD [ 0014+ 0015]  | 0050 | 3 | 5.0  | 0.74 | 0.01 | 0.75 | 81.78 | n/a  | 0.000 |
| *  | ADD [ 0050+ 0016]  | 0050 | 1 | 5.0  | 1.02 | 0.01 | 0.75 | 81.57 | n/a  | 0.000 |
| *  | ADD [ 0014+ 0015]  | 0051 | 3 | 5.0  | 0.16 | 0.05 | 2.25 | 81.94 | n/a  | 0.000 |
| *  | ADD [ 0051+ 0016]  | 0051 | 1 | 5.0  | 0.30 | 0.08 | 2.25 | 81.51 | n/a  | 0.000 |



|                     |      |   |     |      |      |       |       |      |       |
|---------------------|------|---|-----|------|------|-------|-------|------|-------|
| CHIC STORM          | 10.0 |   |     |      |      |       |       |      |       |
| [ Ptot= 82.32 mm ]  |      |   |     |      |      |       |       |      |       |
| * CALIB STANDHYD    | 0004 | 1 | 5.0 | 0.37 | 0.18 | 2.00  | 81.02 | 0.98 | 0.000 |
| [ I%=99.0:S%= 1.00] |      |   |     |      |      |       |       |      |       |
| ** Reservoir        |      |   |     |      |      |       |       |      |       |
| OUTFLOW:            | 0017 | 1 | 5.0 | 0.27 | 0.00 | 0.67  | 81.37 | n/a  | 0.000 |
| CHIC STORM          | 10.0 |   |     |      |      |       |       |      |       |
| [ Ptot= 82.32 mm ]  |      |   |     |      |      |       |       |      |       |
| * CALIB STANDHYD    | 0005 | 1 | 5.0 | 0.37 | 0.18 | 2.00  | 81.02 | 0.98 | 0.000 |
| [ I%=99.0:S%= 1.00] |      |   |     |      |      |       |       |      |       |
| ** Reservoir        |      |   |     |      |      |       |       |      |       |
| OUTFLOW:            | 0018 | 1 | 5.0 | 0.27 | 0.00 | 0.67  | 81.37 | n/a  | 0.000 |
| ADD [ 0017+ 0018]   | 0054 | 3 | 5.0 | 0.19 | 0.11 | 2.17  | 81.37 | n/a  | 0.000 |
| ADD [ 0017+ 0018]   | 0053 | 3 | 5.0 | 0.55 | 0.01 | 0.67  | 81.37 | n/a  | 0.000 |
| CHIC STORM          | 10.0 |   |     |      |      |       |       |      |       |
| [ Ptot= 82.32 mm ]  |      |   |     |      |      |       |       |      |       |
| * CALIB STANDHYD    | 0007 | 1 | 5.0 | 1.31 | 0.64 | 2.00  | 80.46 | 0.98 | 0.000 |
| [ I%=99.0:S%= 2.00] |      |   |     |      |      |       |       |      |       |
| ADD [ 0053+ 0054]   | 0056 | 3 | 5.0 | 0.74 | 0.11 | 2.17  | 81.37 | n/a  | 0.000 |
| ADD [ 0056+ 0007]   | 0056 | 1 | 5.0 | 2.04 | 0.65 | 2.00  | 80.79 | n/a  | 0.000 |
| ** Reservoir        |      |   |     |      |      |       |       |      |       |
| OUTFLOW:            | 0057 | 1 | 5.0 | 2.04 | 0.05 | 3.00  | 80.76 | n/a  | 0.000 |
| CHIC STORM          | 10.0 |   |     |      |      |       |       |      |       |
| [ Ptot= 82.32 mm ]  |      |   |     |      |      |       |       |      |       |
| * CALIB STANDHYD    | 0006 | 1 | 5.0 | 2.21 | 0.98 | 2.00  | 73.27 | 0.89 | 0.000 |
| [ I%=74.0:S%= 2.00] |      |   |     |      |      |       |       |      |       |
| ADD [ 0050+ 0051]   | 0019 | 3 | 5.0 | 1.31 | 0.08 | 2.25  | 81.56 | n/a  | 0.000 |
| ADD [ 0019+ 0057]   | 0019 | 1 | 5.0 | 3.36 | 0.13 | 2.25  | 81.07 | n/a  | 0.000 |
| ADD [ 0019+ 0006]   | 0019 | 3 | 5.0 | 5.57 | 1.03 | 2.00  | 77.97 | n/a  | 0.000 |
| ADD [ 0019+ 0059]   | 0062 | 3 | 5.0 | 5.57 | 1.03 | 2.00  | 77.97 | n/a  | 0.000 |
| ** Reservoir        |      |   |     |      |      |       |       |      |       |
| OUTFLOW:            | 0020 | 1 | 5.0 | 5.57 | 0.03 | 11.25 | 75.69 | n/a  | 0.000 |
| ADD [ 0021+ 0022]   | 0030 | 3 | 5.0 | 5.57 | 0.03 | 11.25 | 75.69 | n/a  | 0.000 |
| ADD [ 0030+ 0029]   | 0030 | 1 | 5.0 | 6.17 | 0.04 | 2.25  | 69.03 | n/a  | 0.000 |
| ADD [ 0030+ 0052]   | 0030 | 3 | 5.0 | 6.51 | 0.06 | 2.17  | 66.56 | n/a  | 0.000 |
| FINISH              |      |   |     |      |      |       |       |      |       |

=====

=====

=====

=====

|     |   |       |       |       |   |       |       |     |  |  |              |
|-----|---|-------|-------|-------|---|-------|-------|-----|--|--|--------------|
| V   | V | I     | SSSSS | U     | U | A     | L     |     |  |  | (v 6.2.2015) |
| V   | V | I     | SS    | U     | U | A A   | L     |     |  |  |              |
| V   | V | I     | SS    | U     | U | AAAAA | L     |     |  |  |              |
| V   | V | I     | SS    | U     | U | A A   | L     |     |  |  |              |
| VV  |   | I     | SSSSS | UUUUU |   | A A   | LLLLL |     |  |  |              |
| 000 |   | TTTTT | TTTTT | H     | H | Y Y   | M M   | 000 |  |  | TM           |
| 0 0 |   | T     | T     | H     | H | Y Y   | MM MM | 0 0 |  |  |              |
| 0 0 |   | T     | T     | H     | H | Y     | M M   | 0 0 |  |  |              |
| 000 |   | T     | T     | H     | H | Y     | M M   | 000 |  |  |              |

Developed and Distributed by Smart City Water Inc  
Copyright 2007 - 2022 Smart City Water Inc  
All rights reserved.

\*\*\*\*\* S U M M A R Y O U T P U T \*\*\*\*\*

```
Input filename: C:\Program Files (x86)\Visual OTTHYMO 6.2\V02\voin.dat
Output filename: C:\Users\hymo\AppData\Local\Civica\XH5\c182f2f7-27a5-48b7-a29b-2f5977d7e46f\1f6fca22-3f48-4f19-9535-8a79a44c9824\scenari
Summary filename: C:\Users\hymo\AppData\Local\Civica\XH5\c182f2f7-27a5-48b7-a29b-2f5977d7e46f\1f6fca22-3f48-4f19-9535-8a79a44c9824\scenari
```

DATE: 06-03-2026

TIME: 11:11:30

USER:

COMMENTS:

```
*****
** SIMULATION : 7. Historical Aug 4 1988 **
*****
```

| W/E COMMAND                                                                                                  | HYD  | ID | DT<br>min | AREA<br>ha | Qpeak<br>'<br>cms | Tpeak<br>hrs | R.V.<br>mm | R.C. | Qbase<br>cms |
|--------------------------------------------------------------------------------------------------------------|------|----|-----------|------------|-------------------|--------------|------------|------|--------------|
| START @ 0.00 hrs                                                                                             |      |    |           |            |                   |              |            |      |              |
| -----                                                                                                        |      |    |           |            |                   |              |            |      |              |
| READ STORM                                                                                                   |      |    | 5.0       |            |                   |              |            |      |              |
| [ Ptot= 80.57 mm ]                                                                                           |      |    |           |            |                   |              |            |      |              |
| fname : C:\Users\hymo\AppData\Local\Temp\de9f0e53-3aee-47d2-b7a2-72ed779c77cf\09eafe89-7e1a-4df3-a422-195407 |      |    |           |            |                   |              |            |      |              |
| remark: Historical Aug 4 1988                                                                                |      |    |           |            |                   |              |            |      |              |
| *                                                                                                            |      |    |           |            |                   |              |            |      |              |
| ** CALIB NASHYD                                                                                              | 0008 | 1  | 5.0       | 0.09       | 0.01              | 2.08         | 19.78      | 0.25 | 0.000        |
| [CN=61.0 ]                                                                                                   |      |    |           |            |                   |              |            |      |              |
| [ N = 3.0:Tp 0.17]                                                                                           |      |    |           |            |                   |              |            |      |              |
| *                                                                                                            |      |    |           |            |                   |              |            |      |              |
| ** Rain Garden                                                                                               |      |    |           |            |                   |              |            |      |              |
| OVERFLOW                                                                                                     | 0023 | 3  | 5.0       | 0.00       | 0.00              | 0.00         | 0.00       | n/a  | 0.000        |
| *                                                                                                            |      |    |           |            |                   |              |            |      |              |
| READ STORM                                                                                                   |      |    | 5.0       |            |                   |              |            |      |              |
| [ Ptot= 80.57 mm ]                                                                                           |      |    |           |            |                   |              |            |      |              |
| fname : C:\Users\hymo\AppData\Local\Temp\de9f0e53-3aee-47d2-b7a2-72ed779c77cf\09eafe89-7e1a-4df3-a422-195407 |      |    |           |            |                   |              |            |      |              |
| remark: Historical Aug 4 1988                                                                                |      |    |           |            |                   |              |            |      |              |
| *                                                                                                            |      |    |           |            |                   |              |            |      |              |
| ** CALIB NASHYD                                                                                              | 0009 | 1  | 5.0       | 0.13       | 0.01              | 2.08         | 19.78      | 0.25 | 0.000        |
| [CN=61.0 ]                                                                                                   |      |    |           |            |                   |              |            |      |              |
| [ N = 3.0:Tp 0.17]                                                                                           |      |    |           |            |                   |              |            |      |              |
| *                                                                                                            |      |    |           |            |                   |              |            |      |              |
| ** Swale                                                                                                     |      |    |           |            |                   |              |            |      |              |
| OVERFLOW :                                                                                                   | 0025 | 3  | 5.0       | 0.13       | 0.01              | 2.08         | 9.54       | n/a  | 0.000        |
| UNDERDRAIN:                                                                                                  | 0025 | 4  | 5.0       | 0.00       | 0.00              | 0.00         | 0.00       | n/a  | 0.000        |



```
READ STORM                      5.0
[ Ptot= 80.57 mm ]
fname : C:\Users\hymo\AppData\Local\Temp\de9f0e53-3aee-47d2-b7a2-72ed779c77cf\09eafe89-
7e1a-4df3-a422-195407
remark: Historical Aug 4 1988
*
** CALIB NASHYD                  0010  1  5.0    0.22    0.02  2.08  19.78 0.25    0.000
[CN=61.0                        ]
[ N = 3.0:Tp 0.17]
*
** Swale
OVERFLOW :                      0027  3  5.0    0.22    0.02  2.08  12.17 n/a    0.000
UNDERDRAIN:                     0027  4  5.0    0.00    0.00  0.00  0.00 n/a    0.000
*
READ STORM                      5.0
[ Ptot= 80.57 mm ]
fname : C:\Users\hymo\AppData\Local\Temp\de9f0e53-3aee-47d2-b7a2-72ed779c77cf\09eafe89-
7e1a-4df3-a422-195407
remark: Historical Aug 4 1988
*
** CALIB NASHYD                  0011  1  5.0    0.25    0.02  2.08  21.27 0.26    0.000
[CN=62.7                        ]
[ N = 3.0:Tp 0.17]
*
** Reservoir
OUTFLOW:                        0058  1  5.0    0.25    0.00  5.92  1.57 n/a    0.000
*
ADD [ 0024+ 0026] 0029  3  5.0    0.13    0.01  2.08  9.54 n/a    0.000
*
ADD [ 0029+ 0028] 0029  1  5.0    0.35    0.03  2.08  11.22 n/a    0.000
*
ADD [ 0029+ 0058] 0029  3  5.0    0.60    0.03  2.08  7.22 n/a    0.000
*
READ STORM                      5.0
[ Ptot= 80.57 mm ]
fname : C:\Users\hymo\AppData\Local\Temp\de9f0e53-3aee-47d2-b7a2-72ed779c77cf\09eafe89-
7e1a-4df3-a422-195407
remark: Historical Aug 4 1988
*
** CALIB NASHYD                  0012  1  5.0    0.13    0.01  2.08  20.59 0.26    0.000
[CN=61.6                        ]
[ N = 3.0:Tp 0.17]
*
READ STORM                      5.0
[ Ptot= 80.57 mm ]
fname : C:\Users\hymo\AppData\Local\Temp\de9f0e53-3aee-47d2-b7a2-72ed779c77cf\09eafe89-
7e1a-4df3-a422-195407
remark: Historical Aug 4 1988
*
** CALIB NASHYD                  0013  1  5.0    0.21    0.02  2.08  20.58 0.26    0.000
[CN=61.0                        ]
[ N = 3.0:Tp 0.17]
*
ADD [ 0012+ 0013] 0052  3  5.0    0.34    0.03  2.08  20.59 n/a    0.000
*
READ STORM                      5.0
[ Ptot= 80.57 mm ]
fname : C:\Users\hymo\AppData\Local\Temp\de9f0e53-3aee-47d2-b7a2-72ed779c77cf\09eafe89-
7e1a-4df3-a422-195407
remark: Historical Aug 4 1988
*
* CALIB STANDHYD                0001  1  5.0    0.42    0.18  2.00  79.27 0.98    0.000
[I%=99.0:S%= 1.00]
*
** Reservoir
OUTFLOW:                        0014  1  5.0    0.31    0.00  0.50  87.70 n/a    0.000
*
READ STORM                      5.0
[ Ptot= 80.57 mm ]
fname : C:\Users\hymo\AppData\Local\Temp\de9f0e53-3aee-47d2-b7a2-72ed779c77cf\09eafe89-
7e1a-4df3-a422-195407
remark: Historical Aug 4 1988
```



```
*
* CALIB STANDHYD          0002  1  5.0    0.49    0.21  2.00  79.27 0.98    0.000
  [I%=99.0:S%= 1.00]
*
** Reservoir
OUTFLOW:                  0015  1  5.0    0.37    0.00  0.50  84.03 n/a    0.000
*
  READ STORM                5.0
  [ Ptot= 80.57 mm ]
  fname : C:\Users\hymo\AppData\Local\Temp\de9f0e53-3aee-47d2-b7a2-72ed779c77cf\09eafe89-
7e1a-4df3-a422-195407
  remark: Historical Aug 4 1988
*
* CALIB STANDHYD          0003  1  5.0    0.41    0.17  2.00  79.27 0.98    0.000
  [I%=99.0:S%= 1.00]
*
** Reservoir
OUTFLOW:                  0016  1  5.0    0.25    0.00  0.50  85.85 n/a    0.000
*
  ADD [ 0014+ 0015] 0050  3  5.0    0.68    0.01  0.50  85.72 n/a    0.000
*
  ADD [ 0050+ 0016] 0050  1  5.0    0.94    0.01  0.50  85.75 n/a    0.000
*
  ADD [ 0014+ 0015] 0051  3  5.0    0.22    0.39  2.00  85.68 n/a    0.000
*
  ADD [ 0051+ 0016] 0051  1  5.0    0.38    0.56  2.00  85.75 n/a    0.000
*
  READ STORM                5.0
  [ Ptot= 80.57 mm ]
  fname : C:\Users\hymo\AppData\Local\Temp\de9f0e53-3aee-47d2-b7a2-72ed779c77cf\09eafe89-
7e1a-4df3-a422-195407
  remark: Historical Aug 4 1988
*
* CALIB STANDHYD          0004  1  5.0    0.37    0.16  2.00  79.27 0.98    0.000
  [I%=99.0:S%= 1.00]
*
** Reservoir
OUTFLOW:                  0017  1  5.0    0.26    0.00  0.50  83.69 n/a    0.000
*
  READ STORM                5.0
  [ Ptot= 80.57 mm ]
  fname : C:\Users\hymo\AppData\Local\Temp\de9f0e53-3aee-47d2-b7a2-72ed779c77cf\09eafe89-
7e1a-4df3-a422-195407
  remark: Historical Aug 4 1988
*
* CALIB STANDHYD          0005  1  5.0    0.37    0.16  2.00  79.27 0.98    0.000
  [I%=99.0:S%= 1.00]
*
** Reservoir
OUTFLOW:                  0018  1  5.0    0.26    0.00  0.50  83.69 n/a    0.000
*
  ADD [ 0017+ 0018] 0054  3  5.0    0.23    0.31  2.00  83.69 n/a    0.000
*
  ADD [ 0017+ 0018] 0053  3  5.0    0.51    0.01  0.50  83.69 n/a    0.000
*
  READ STORM                5.0
  [ Ptot= 80.57 mm ]
  fname : C:\Users\hymo\AppData\Local\Temp\de9f0e53-3aee-47d2-b7a2-72ed779c77cf\09eafe89-
7e1a-4df3-a422-195407
  remark: Historical Aug 4 1988
*
* CALIB STANDHYD          0007  1  5.0    1.31    0.55  2.00  78.71 0.98    0.000
  [I%=99.0:S%= 2.00]
*
  ADD [ 0053+ 0054] 0056  3  5.0    0.74    0.31  2.00  83.69 n/a    0.000
*
  ADD [ 0056+ 0007] 0056  1  5.0    2.04    0.86  2.00  80.51 n/a    0.000
*
** Reservoir
OUTFLOW:                  0057  1  5.0    1.97    0.05  2.08  81.17 n/a    0.000
*
  READ STORM                5.0
```



[ Ptot= 80.57 mm ]  
fname : C:\Users\hymo\AppData\Local\Temp\de9f0e53-3aee-47d2-b7a2-72ed779c77cf\09eafe89-  
7e1a-4df3-a422-195407

remark: Historical Aug 4 1988

\*  
\* CALIB STANDHYD 0006 1 5.0 2.21 0.78 2.00 71.58 0.89 0.000  
[I%=74.0:S%= 2.00]  
\*  
\* ADD [ 0050+ 0051] 0019 3 5.0 1.31 0.57 2.00 85.75 n/a 0.000  
\*  
\* ADD [ 0019+ 0057] 0019 1 5.0 3.28 0.62 2.00 83.01 n/a 0.000  
\*  
\* ADD [ 0019+ 0006] 0019 3 5.0 5.50 1.41 2.00 78.40 n/a 0.000  
\*  
\* ADD [ 0019+ 0059] 0062 3 5.0 5.57 1.60 2.00 78.44 n/a 0.000  
\*  
\*\* Reservoir  
\* OUTFLOW: 0020 1 5.0 5.57 0.03 10.50 76.16 n/a 0.000  
\*  
\* ADD [ 0021+ 0022] 0030 3 5.0 5.57 0.03 10.50 76.16 n/a 0.000  
\*  
\* ADD [ 0030+ 0029] 0030 1 5.0 6.17 0.05 2.08 69.47 n/a 0.000  
\*  
\* ADD [ 0030+ 0052] 0030 3 5.0 6.51 0.08 2.08 66.93 n/a 0.000  
\*

=====  
=====



```
V   V   I   SSSSS   U   U   A   L           (v 6.2.2015)
V   V   I   SS     U   U   A A   L
V   V   I   SS     U   U   AAAAA L
V   V   I   SS     U   U   A   A   L
VV    I   SSSSS   UUUUU   A   A   LLLLL
```

```
000   TTTTT   TTTTT   H   H   Y   Y   M   M   000   TM
0   0   T       T   H   H   Y   Y   MM MM   0   0
0   0   T       T   H   H   Y   Y   M   M   0   0
000   T       T   H   H   Y   Y   M   M   000
```

Developed and Distributed by Smart City Water Inc  
Copyright 2007 - 2022 Smart City Water Inc  
All rights reserved.

\*\*\*\*\* S U M M A R Y O U T P U T \*\*\*\*\*

Input filename: C:\Program Files (x86)\Visual OTTHYMO 6.2\V02\voin.dat  
Output filename: C:\Users\hymo\AppData\Local\Civica\XH5\c182f2f7-27a5-48b7-a29b-2f5977d7e46f\566b43e5-e1aa-4aff-94bf-e3fe2b738921\scenari  
Summary filename: C:\Users\hymo\AppData\Local\Civica\XH5\c182f2f7-27a5-48b7-a29b-2f5977d7e46f\566b43e5-e1aa-4aff-94bf-e3fe2b738921\scenari

DATE: 06-03-2026

TIME: 11:11:33

USER:

COMMENTS: \_\_\_\_\_

\*\*\*\*\*  
\*\* SIMULATION : 8. Historical July 1 1979 \*\*  
\*\*\*\*\*

| W/E COMMAND                                                                                                  | HYD ID | DT<br>min | AREA<br>ha | Qpeak<br>cms | Tpeak<br>hrs | R.V.<br>mm | R.C.  | Qbase<br>cms |
|--------------------------------------------------------------------------------------------------------------|--------|-----------|------------|--------------|--------------|------------|-------|--------------|
| START @ 0.00 hrs                                                                                             |        |           |            |              |              |            |       |              |
| -----                                                                                                        |        |           |            |              |              |            |       |              |
| READ STORM                                                                                                   | 5.0    |           |            |              |              |            |       |              |
| [ Ptot= 83.99 mm ]                                                                                           |        |           |            |              |              |            |       |              |
| fname : C:\Users\hymo\AppData\Local\Temp\de9f0e53-3aee-47d2-b7a2-72ed779c77cf\5174b7bd-8459-4409-b860-634d86 |        |           |            |              |              |            |       |              |
| remark: Historical July 1 1979                                                                               |        |           |            |              |              |            |       |              |
| *****                                                                                                        |        |           |            |              |              |            |       |              |
| ** CALIB NASHYD                                                                                              | 0008   | 1         | 5.0        | 0.09         | 0.01         | 1.67       | 21.51 | 0.26 0.000   |
| [CN=61.0 ]                                                                                                   |        |           |            |              |              |            |       |              |
| [ N = 3.0:Tp 0.17]                                                                                           |        |           |            |              |              |            |       |              |
| *****                                                                                                        |        |           |            |              |              |            |       |              |
| ** Rain Garden                                                                                               |        |           |            |              |              |            |       |              |
| OVERFLOW                                                                                                     | 0023   | 3         | 5.0        | 0.00         | 0.00         | 0.00       | 0.00  | n/a 0.000    |
| *****                                                                                                        |        |           |            |              |              |            |       |              |
| READ STORM                                                                                                   | 5.0    |           |            |              |              |            |       |              |
| [ Ptot= 83.99 mm ]                                                                                           |        |           |            |              |              |            |       |              |
| fname : C:\Users\hymo\AppData\Local\Temp\de9f0e53-3aee-47d2-b7a2-72ed779c77cf\5174b7bd-8459-4409-b860-634d86 |        |           |            |              |              |            |       |              |
| remark: Historical July 1 1979                                                                               |        |           |            |              |              |            |       |              |
| *****                                                                                                        |        |           |            |              |              |            |       |              |
| ** CALIB NASHYD                                                                                              | 0009   | 1         | 5.0        | 0.13         | 0.01         | 1.67       | 21.51 | 0.26 0.000   |
| [CN=61.0 ]                                                                                                   |        |           |            |              |              |            |       |              |
| [ N = 3.0:Tp 0.17]                                                                                           |        |           |            |              |              |            |       |              |
| *****                                                                                                        |        |           |            |              |              |            |       |              |
| ** Swale                                                                                                     |        |           |            |              |              |            |       |              |
| OVERFLOW :                                                                                                   | 0025   | 3         | 5.0        | 0.13         | 0.01         | 1.67       | 13.71 | n/a 0.000    |
| UNDERDRAIN:                                                                                                  | 0025   | 4         | 5.0        | 0.00         | 0.00         | 0.00       | 0.00  | n/a 0.000    |
| *****                                                                                                        |        |           |            |              |              |            |       |              |



```
READ STORM                                5.0
[ Ptot= 83.99 mm ]
fname : C:\Users\hymo\AppData\Local\Temp\de9f0e53-3aee-47d2-b7a2-72ed779c77cf\5174b7bd-
8459-4409-b860-634d86
remark: Historical July 1 1979
*
** CALIB NASHYD                        0010  1  5.0    0.22    0.02  1.67  21.51 0.26  0.000
[CN=61.0 ]
[ N = 3.0:Tp 0.17]
*
** Swale
OVERFLOW :                        0027  3  5.0    0.22    0.02  1.67  16.17 n/a  0.000
UNDERDRAIN:                       0027  4  5.0    0.00    0.00  0.00  0.00 n/a  0.000
*
READ STORM                                5.0
[ Ptot= 83.99 mm ]
fname : C:\Users\hymo\AppData\Local\Temp\de9f0e53-3aee-47d2-b7a2-72ed779c77cf\5174b7bd-
8459-4409-b860-634d86
remark: Historical July 1 1979
*
** CALIB NASHYD                        0011  1  5.0    0.25    0.02  1.67  23.09 0.27  0.000
[CN=62.7 ]
[ N = 3.0:Tp 0.17]
*
** Reservoir
OUTFLOW:                          0058  1  5.0    0.25    0.00  3.33   0.85 n/a  0.000
*
ADD [ 0024+ 0026] 0029  3  5.0    0.13    0.01  1.67  13.71 n/a  0.000
*
ADD [ 0029+ 0028] 0029  1  5.0    0.35    0.03  1.67  15.28 n/a  0.000
*
ADD [ 0029+ 0058] 0029  3  5.0    0.60    0.03  1.67   9.31 n/a  0.000
*
READ STORM                                5.0
[ Ptot= 83.99 mm ]
fname : C:\Users\hymo\AppData\Local\Temp\de9f0e53-3aee-47d2-b7a2-72ed779c77cf\5174b7bd-
8459-4409-b860-634d86
remark: Historical July 1 1979
*
** CALIB NASHYD                        0012  1  5.0    0.13    0.01  1.67  22.36 0.27  0.000
[CN=61.6 ]
[ N = 3.0:Tp 0.17]
*
READ STORM                                5.0
[ Ptot= 83.99 mm ]
fname : C:\Users\hymo\AppData\Local\Temp\de9f0e53-3aee-47d2-b7a2-72ed779c77cf\5174b7bd-
8459-4409-b860-634d86
remark: Historical July 1 1979
*
** CALIB NASHYD                        0013  1  5.0    0.21    0.02  1.67  22.34 0.27  0.000
[CN=61.0 ]
[ N = 3.0:Tp 0.17]
*
ADD [ 0012+ 0013] 0052  3  5.0    0.34    0.03  1.67  22.35 n/a  0.000
*
READ STORM                                5.0
[ Ptot= 83.99 mm ]
fname : C:\Users\hymo\AppData\Local\Temp\de9f0e53-3aee-47d2-b7a2-72ed779c77cf\5174b7bd-
8459-4409-b860-634d86
remark: Historical July 1 1979
*
* CALIB STANDHYD                      0001  1  5.0    0.42    0.12  1.50  82.69 0.98  0.000
[I%=99.0:S%= 1.00]
*
** Reservoir
OUTFLOW:                          0014  1  5.0    0.30    0.00  0.42  84.51 n/a  0.000
*
READ STORM                                5.0
[ Ptot= 83.99 mm ]
fname : C:\Users\hymo\AppData\Local\Temp\de9f0e53-3aee-47d2-b7a2-72ed779c77cf\5174b7bd-
8459-4409-b860-634d86
remark: Historical July 1 1979
```





```
*
* CALIB STANDHYD          0002  1  5.0    0.49    0.15  1.50  82.69 0.98    0.000
* [I%=99.0:S%= 1.00]
*
** Reservoir
OUTFLOW:                  0015  1  5.0    0.34    0.00  0.42  83.04 n/a    0.000
*
  READ STORM              5.0
  [ Ptot= 83.99 mm ]
  fname : C:\Users\hymo\AppData\Local\Temp\de9f0e53-3aee-47d2-b7a2-72ed779c77cf\5174b7bd-
8459-4409-b860-634d86
  remark: Historical July 1 1979
*
* CALIB STANDHYD          0003  1  5.0    0.41    0.12  1.50  82.69 0.98    0.000
* [I%=99.0:S%= 1.00]
*
** Reservoir
OUTFLOW:                  0016  1  5.0    0.24    0.00  0.42  83.20 n/a    0.000
*
  ADD [ 0014+ 0015] 0050  3  5.0    0.65    0.01  0.42  83.73 n/a    0.000
*
  ADD [ 0050+ 0016] 0050  1  5.0    0.89    0.01  0.42  83.59 n/a    0.000
*
  ADD [ 0014+ 0015] 0051  3  5.0    0.26    0.19  1.58  83.68 n/a    0.000
*
  ADD [ 0051+ 0016] 0051  1  5.0    0.43    0.27  1.58  83.49 n/a    0.000
*
  READ STORM              5.0
  [ Ptot= 83.99 mm ]
  fname : C:\Users\hymo\AppData\Local\Temp\de9f0e53-3aee-47d2-b7a2-72ed779c77cf\5174b7bd-
8459-4409-b860-634d86
  remark: Historical July 1 1979
*
* CALIB STANDHYD          0004  1  5.0    0.37    0.11  1.50  82.69 0.98    0.000
* [I%=99.0:S%= 1.00]
*
** Reservoir
OUTFLOW:                  0017  1  5.0    0.23    0.00  0.42  85.17 n/a    0.000
*
  READ STORM              5.0
  [ Ptot= 83.99 mm ]
  fname : C:\Users\hymo\AppData\Local\Temp\de9f0e53-3aee-47d2-b7a2-72ed779c77cf\5174b7bd-
8459-4409-b860-634d86
  remark: Historical July 1 1979
*
* CALIB STANDHYD          0005  1  5.0    0.37    0.11  1.50  82.69 0.98    0.000
* [I%=99.0:S%= 1.00]
*
** Reservoir
OUTFLOW:                  0018  1  5.0    0.23    0.00  0.42  85.17 n/a    0.000
*
  ADD [ 0017+ 0018] 0054  3  5.0    0.27    0.22  1.50  85.17 n/a    0.000
*
  ADD [ 0017+ 0018] 0053  3  5.0    0.46    0.01  0.42  85.18 n/a    0.000
*
  READ STORM              5.0
  [ Ptot= 83.99 mm ]
  fname : C:\Users\hymo\AppData\Local\Temp\de9f0e53-3aee-47d2-b7a2-72ed779c77cf\5174b7bd-
8459-4409-b860-634d86
  remark: Historical July 1 1979
*
* CALIB STANDHYD          0007  1  5.0    1.31    0.39  1.50  82.13 0.98    0.000
* [I%=99.0:S%= 2.00]
*
  ADD [ 0053+ 0054] 0056  3  5.0    0.74    0.23  1.50  85.18 n/a    0.000
*
  ADD [ 0056+ 0007] 0056  1  5.0    2.04    0.61  1.50  83.23 n/a    0.000
*
** Reservoir
OUTFLOW:                  0057  1  5.0    1.74    0.05  1.67  83.88 n/a    0.000
*
  READ STORM              5.0
```



[ Ptot= 83.99 mm ]  
fname : C:\Users\hymo\AppData\Local\Temp\de9f0e53-3aee-47d2-b7a2-72ed779c77cf\5174b7bd-  
8459-4409-b860-634d86  
remark: Historical July 1 1979

\*  
\* CALIB STANDHYD 0006 1 5.0 2.21 0.59 1.50 74.88 0.89 0.000  
[I%=74.0:S%= 2.00]  
\*  
\* ADD [ 0050+ 0051] 0019 3 5.0 1.31 0.28 1.58 83.55 n/a 0.000  
\*  
\* ADD [ 0019+ 0057] 0019 1 5.0 3.05 0.33 1.58 83.74 n/a 0.000  
\*  
\* ADD [ 0019+ 0006] 0019 3 5.0 5.26 0.80 1.50 80.02 n/a 0.000  
\*  
\* ADD [ 0019+ 0059] 0062 3 5.0 5.57 1.11 1.67 80.23 n/a 0.000  
\*  
\*\* Reservoir  
\* OUTFLOW: 0020 1 5.0 5.43 0.03 5.83 77.48 n/a 0.000  
\*  
\* ADD [ 0021+ 0022] 0030 3 5.0 5.57 0.05 5.83 77.48 n/a 0.000  
\*  
\* ADD [ 0030+ 0029] 0030 1 5.0 6.17 0.05 1.67 70.86 n/a 0.000  
\*  
\* ADD [ 0030+ 0052] 0030 3 5.0 6.51 0.08 1.67 68.35 n/a 0.000  
\*

=====  
=====



```
V V I SSSSS U U A L (v 6.2.2015)
V V I SS U U A A L
V V I SS U U AAAAA L
V V I SS U U A A L
VV I SSSSS UUUUU A A LLLLL
```

```
000 TTTT TTTT H H Y Y M M 000 TM
0 0 T T H H Y Y MM MM 0 0
0 0 T T H H Y M M 0 0
000 T T H H Y M M 000
```

Developed and Distributed by Smart City Water Inc  
Copyright 2007 - 2022 Smart City Water Inc  
All rights reserved.

\*\*\*\*\* S U M M A R Y O U T P U T \*\*\*\*\*

Input filename: C:\Program Files (x86)\Visual OTTHYMO 6.2\V02\voin.dat  
Output filename: C:\Users\hymo\AppData\Local\Civica\XH5\c182f2f7-27a5-48b7-a29b-2f5977d7e46f\461190ab-ebce-4ee7-adf4-a9a048ec4757\scenari  
Summary filename: C:\Users\hymo\AppData\Local\Civica\XH5\c182f2f7-27a5-48b7-a29b-2f5977d7e46f\461190ab-ebce-4ee7-adf4-a9a048ec4757\scenari

DATE: 06-03-2026

TIME: 11:11:32

USER:

COMMENTS: \_\_\_\_\_

\*\*\*\*\*  
\*\* SIMULATION : 9. 25mm4hrChicago \*\*  
\*\*\*\*\*

| W/E COMMAND                                                                                                  | HYD ID | DT<br>min | AREA<br>ha | Qpeak<br>cms | Tpeak<br>hrs | R.V.<br>mm | R.C.      | Qbase<br>cms |
|--------------------------------------------------------------------------------------------------------------|--------|-----------|------------|--------------|--------------|------------|-----------|--------------|
| START @ 0.00 hrs                                                                                             |        |           |            |              |              |            |           |              |
| -----                                                                                                        |        |           |            |              |              |            |           |              |
| READ STORM                                                                                                   | 10.0   |           |            |              |              |            |           |              |
| [ Ptot= 25.00 mm ]                                                                                           |        |           |            |              |              |            |           |              |
| fname : C:\Users\hymo\AppData\Local\Temp\de9f0e53-3aee-47d2-b7a2-72ed779c77cf\e9c0c91c-67a5-4dfb-b889-37391f |        |           |            |              |              |            |           |              |
| remark: 25mm4hrChicago                                                                                       |        |           |            |              |              |            |           |              |
| *****                                                                                                        |        |           |            |              |              |            |           |              |
| ** CALIB NASHYD                                                                                              | 0008   | 1         | 5.0        | 0.09         | 0.00         | 2.17       | 0.81 0.03 | 0.000        |
| [CN=61.0 ]                                                                                                   |        |           |            |              |              |            |           |              |
| [ N = 3.0:Tp 0.17]                                                                                           |        |           |            |              |              |            |           |              |
| *****                                                                                                        |        |           |            |              |              |            |           |              |
| ** Rain Garden                                                                                               |        |           |            |              |              |            |           |              |
| OVERFLOW                                                                                                     | 0023   | 3         | 5.0        | 0.00         | 0.00         | 0.00       | 0.00 n/a  | 0.000        |
| *****                                                                                                        |        |           |            |              |              |            |           |              |
| READ STORM                                                                                                   | 10.0   |           |            |              |              |            |           |              |
| [ Ptot= 25.00 mm ]                                                                                           |        |           |            |              |              |            |           |              |
| fname : C:\Users\hymo\AppData\Local\Temp\de9f0e53-3aee-47d2-b7a2-72ed779c77cf\e9c0c91c-67a5-4dfb-b889-37391f |        |           |            |              |              |            |           |              |
| remark: 25mm4hrChicago                                                                                       |        |           |            |              |              |            |           |              |
| *****                                                                                                        |        |           |            |              |              |            |           |              |
| ** CALIB NASHYD                                                                                              | 0009   | 1         | 5.0        | 0.13         | 0.00         | 2.17       | 0.82 0.03 | 0.000        |
| [CN=61.0 ]                                                                                                   |        |           |            |              |              |            |           |              |
| [ N = 3.0:Tp 0.17]                                                                                           |        |           |            |              |              |            |           |              |
| *****                                                                                                        |        |           |            |              |              |            |           |              |
| ** Swale                                                                                                     |        |           |            |              |              |            |           |              |
| OVERFLOW :                                                                                                   | 0025   | 3         | 5.0        | 0.00         | 0.00         | 0.00       | 0.00 n/a  | 0.000        |
| UNDERDRAIN:                                                                                                  | 0025   | 4         | 5.0        | 0.00         | 0.00         | 0.00       | 0.00 n/a  | 0.000        |
| *****                                                                                                        |        |           |            |              |              |            |           |              |



```
READ STORM                                10.0
[ Ptot= 25.00 mm ]
fname : C:\Users\hymo\AppData\Local\Temp\de9f0e53-3aee-47d2-b7a2-72ed779c77cf\e9c0c91c-
67a5-4dfb-b889-37391f
remark: 25mm4hrChicago
*
** CALIB NASHYD                        0010  1  5.0    0.22    0.00  2.17    0.82 0.03    0.000
[CN=61.0                               ]
[ N = 3.0:Tp 0.17]
*
** Swale
OVERFLOW :                        0027  3  5.0    0.00    0.00  0.00    0.00 n/a    0.000
UNDERDRAIN:                      0027  4  5.0    0.00    0.00  0.00    0.00 n/a    0.000
*
READ STORM                                10.0
[ Ptot= 25.00 mm ]
fname : C:\Users\hymo\AppData\Local\Temp\de9f0e53-3aee-47d2-b7a2-72ed779c77cf\e9c0c91c-
67a5-4dfb-b889-37391f
remark: 25mm4hrChicago
*
** CALIB NASHYD                        0011  1  5.0    0.25    0.00  2.00    1.01 0.04    0.000
[CN=62.7                               ]
[ N = 3.0:Tp 0.17]
*
** Reservoir
OUTFLOW:                          0058  1  5.0    0.25    0.00  4.17    0.47 n/a    0.000
*
ADD [ 0024+ 0026] 0029  3  0.0    0.00    0.00  0.00    0.00 n/a    0.000
*
ADD [ 0029+ 0028] 0029  1  0.0    0.00    0.00  0.00    0.00 n/a    0.000
*
ADD [ 0029+ 0058] 0029  3  5.0    0.25    0.00  4.17    0.47 n/a    0.000
*
READ STORM                                10.0
[ Ptot= 25.00 mm ]
fname : C:\Users\hymo\AppData\Local\Temp\de9f0e53-3aee-47d2-b7a2-72ed779c77cf\e9c0c91c-
67a5-4dfb-b889-37391f
remark: 25mm4hrChicago
*
** CALIB NASHYD                        0012  1  5.0    0.13    0.00  2.00    0.96 0.04    0.000
[CN=61.6                               ]
[ N = 3.0:Tp 0.17]
*
READ STORM                                10.0
[ Ptot= 25.00 mm ]
fname : C:\Users\hymo\AppData\Local\Temp\de9f0e53-3aee-47d2-b7a2-72ed779c77cf\e9c0c91c-
67a5-4dfb-b889-37391f
remark: 25mm4hrChicago
*
** CALIB NASHYD                        0013  1  5.0    0.21    0.00  1.92    1.04 0.04    0.000
[CN=61.0                               ]
[ N = 3.0:Tp 0.17]
*
ADD [ 0012+ 0013] 0052  3  5.0    0.34    0.00  2.00    1.01 n/a    0.000
*
READ STORM                                10.0
[ Ptot= 25.00 mm ]
fname : C:\Users\hymo\AppData\Local\Temp\de9f0e53-3aee-47d2-b7a2-72ed779c77cf\e9c0c91c-
67a5-4dfb-b889-37391f
remark: 25mm4hrChicago
*
* CALIB STANDHYD                      0001  1  5.0    0.42    0.06  1.50   23.83 0.95    0.000
[I%=99.0:S%= 1.00]
*
** Reservoir
OUTFLOW:                          0014  1  5.0    0.42    0.00  1.00   23.84 n/a    0.000
*
READ STORM                                10.0
[ Ptot= 25.00 mm ]
fname : C:\Users\hymo\AppData\Local\Temp\de9f0e53-3aee-47d2-b7a2-72ed779c77cf\e9c0c91c-
67a5-4dfb-b889-37391f
remark: 25mm4hrChicago
```



```
*
* CALIB STANDHYD          0002  1  5.0    0.49    0.07  1.50  23.83 0.95    0.000
  [I%=99.0:S%= 1.00]
*
** Reservoir
OUTFLOW:                  0015  1  5.0    0.49    0.00  0.92  23.83 n/a    0.000
*
  READ STORM                10.0
  [ Ptot= 25.00 mm ]
  fname : C:\Users\hymo\AppData\Local\Temp\de9f0e53-3aee-47d2-b7a2-72ed779c77cf\e9c0c91c-
67a5-4dfb-b889-37391f
  remark: 25mm4hrChicago
*
* CALIB STANDHYD          0003  1  5.0    0.41    0.06  1.50  23.83 0.95    0.000
  [I%=99.0:S%= 1.00]
*
** Reservoir
OUTFLOW:                  0016  1  5.0    0.41    0.00  0.83  23.84 n/a    0.000
*
  ADD [ 0014+ 0015] 0050  3  5.0    0.91    0.01  1.00  23.84 n/a    0.000
*
  ADD [ 0050+ 0016] 0050  1  5.0    1.32    0.01  1.00  23.84 n/a    0.000
*
  ADD [ 0014+ 0015] 0051  3  0.0    0.00    0.00  0.00  23.84 n/a    0.000
*
  ADD [ 0051+ 0016] 0051  1  0.0    0.00    0.00  0.00  0.00 n/a    0.000
*
  READ STORM                10.0
  [ Ptot= 25.00 mm ]
  fname : C:\Users\hymo\AppData\Local\Temp\de9f0e53-3aee-47d2-b7a2-72ed779c77cf\e9c0c91c-
67a5-4dfb-b889-37391f
  remark: 25mm4hrChicago
*
* CALIB STANDHYD          0004  1  5.0    0.37    0.05  1.50  23.83 0.95    0.000
  [I%=99.0:S%= 1.00]
*
** Reservoir
OUTFLOW:                  0017  1  5.0    0.37    0.00  0.92  23.84 n/a    0.000
*
  READ STORM                10.0
  [ Ptot= 25.00 mm ]
  fname : C:\Users\hymo\AppData\Local\Temp\de9f0e53-3aee-47d2-b7a2-72ed779c77cf\e9c0c91c-
67a5-4dfb-b889-37391f
  remark: 25mm4hrChicago
*
* CALIB STANDHYD          0005  1  5.0    0.37    0.05  1.50  23.83 0.95    0.000
  [I%=99.0:S%= 1.00]
*
** Reservoir
OUTFLOW:                  0018  1  5.0    0.37    0.00  0.92  23.84 n/a    0.000
*
  ADD [ 0017+ 0018] 0054  3  0.0    0.00    0.00  0.00  0.00 n/a    0.000
*
  ADD [ 0017+ 0018] 0053  3  5.0    0.74    0.01  0.92  23.84 n/a    0.000
*
  READ STORM                10.0
  [ Ptot= 25.00 mm ]
  fname : C:\Users\hymo\AppData\Local\Temp\de9f0e53-3aee-47d2-b7a2-72ed779c77cf\e9c0c91c-
67a5-4dfb-b889-37391f
  remark: 25mm4hrChicago
*
* CALIB STANDHYD          0007  1  5.0    1.31    0.18  1.50  23.27 0.93    0.000
  [I%=99.0:S%= 2.00]
*
  ADD [ 0053+ 0054] 0056  3  5.0    0.74    0.01  0.92  23.84 n/a    0.000
*
  ADD [ 0056+ 0007] 0056  1  5.0    2.04    0.18  1.50  23.48 n/a    0.000
*
** Reservoir
OUTFLOW:                  0057  1  5.0    2.04    0.03  1.92  23.44 n/a    0.000
*
  READ STORM                10.0
```



[ Ptot= 25.00 mm ]  
fname : C:\Users\hymo\AppData\Local\Temp\de9f0e53-3aee-47d2-b7a2-72ed779c77cf\e9c0c91c-  
67a5-4dfb-b889-37391f  
remark: 25mm4hrChicago

\*  
\* CALIB STANDHYD 0006 1 5.0 2.21 0.23 1.50 19.43 0.78 0.000  
[I%=74.0:S%= 2.00]  
\*  
\* ADD [ 0050+ 0051] 0019 3 5.0 1.32 0.01 1.00 23.84 n/a 0.000  
\*  
\* ADD [ 0019+ 0057] 0019 1 5.0 3.36 0.04 1.92 23.60 n/a 0.000  
\*  
\* ADD [ 0019+ 0006] 0019 3 5.0 5.57 0.27 1.50 21.94 n/a 0.000  
\*  
\* ADD [ 0019+ 0059] 0062 3 5.0 5.57 0.27 1.50 21.94 n/a 0.000  
\*  
\*\* Reservoir  
\* OUTFLOW: 0020 1 5.0 5.57 0.01 6.25 19.66 n/a 0.000  
\*  
\* ADD [ 0021+ 0022] 0030 3 5.0 5.57 0.01 6.25 19.66 n/a 0.000  
\*  
\* ADD [ 0030+ 0029] 0030 1 5.0 5.82 0.01 6.25 18.85 n/a 0.000  
\*  
\* ADD [ 0030+ 0052] 0030 3 5.0 6.16 0.01 6.25 17.87 n/a 0.000  
\*



## **Appendix I: Guelph Permeameter Test Results**

# Guelph Permeameter

Input

Result

## Single Head Method - Feb 27, 2024

Reservoir Cross-sectional area in cm<sup>2</sup>  
(enter "35.22" for Combined and "2.16" for Inner reservoir): **2.18**  
Enter water Head Height ("H" in cm): **5**  
Enter the Borehole Radius ("a" in cm): **6**

Enter the soil texture-structure category (enter one of the below numbers): **2**

1. Compacted, Structure-less, clayey or silty materials such as landfill caps and liners, lacustrine or marine sediments, etc.
2. Soils which are both fine textured (clayey or silty) and unstructured; may also include some fine sands.
3. Most structured soils from clays through loams; also includes unstructured medium and fine sands. The category most frequently applicable for agricultural soils.
4. Coarse and gravely sands; may also include some highly structured soils with large and/or numerous cracks, macropores, etc

Steady State Rate of Water Level Change ("R" in cm/min): **0.0100**

Res Type 2.18 \* "R" = three values in a row with matching Δh/Δt

|       |       |                 |                                    |
|-------|-------|-----------------|------------------------------------|
| H     | 5     | α*              | <b>0.04</b> cm <sup>-1</sup>       |
| a     | 6     | C               | <b>0.537554</b>                    |
| H/a   | 0.833 | Q               | <b>0.000363</b>                    |
| a*    | 0.04  | K <sub>fs</sub> | <b>1.95E-07 cm/sec</b>             |
| C0.01 | 0.524 |                 | <b>1.17E-05 cm/min</b>             |
| C0.04 | 0.538 |                 | <b>1.95E-09 m/sec</b>              |
| C0.12 | 0.489 |                 | <b>4.60E-06 inch/min</b>           |
| C0.36 | 0.489 |                 | <b>7.66E-08 inch/sec</b>           |
| C     | 0.538 |                 |                                    |
| R     | 0.010 |                 |                                    |
| Q     | 4E-04 |                 |                                    |
| pi    | 3.142 |                 |                                    |
|       |       | Φ <sub>m</sub>  | <b>4.87E-06 cm<sup>2</sup>/min</b> |

## Single Head Method - Nov 28, 2024

Reservoir Cross-sectional area in cm<sup>2</sup>  
(enter "35.22" for Combined and "2.16" for Inner reservoir): **2.18**  
Enter water Head Height ("H" in cm): **25**  
Enter the Borehole Radius ("a" in cm): **6**

Enter the soil texture-structure category (enter one of the below numbers): **2**

1. Compacted, Structure-less, clayey or silty materials such as landfill caps and liners, lacustrine or marine sediments, etc.
2. Soils which are both fine textured (clayey or silty) and unstructured; may also include some fine sands.
3. Most structured soils from clays through loams; also includes unstructured medium and fine sands. The category most frequently applicable for agricultural soils.
4. Coarse and gravely sands; may also include some highly structured soils with large and/or numerous cracks, macropores, etc

Steady State Rate of Water Level Change ("R" in cm/min): **0.0333**


Res Type 2.18 \* "R" = three values in a row with matching Δh/Δt

|       |         |                 |                                    |
|-------|---------|-----------------|------------------------------------|
| H     | 25      | α*              | <b>0.04</b> cm <sup>-1</sup>       |
| a     | 6       | C               | <b>1.469659</b>                    |
| H/a   | 4.16667 | Q               | <b>0.00121</b>                     |
| a*    | 0.04    | K <sub>fs</sub> | <b>2.22E-07 cm/sec</b>             |
| C0.01 | 1.37818 |                 | <b>1.33E-05 cm/min</b>             |
| C0.04 | 1.46966 |                 | <b>2.22E-09 m/sec</b>              |
| C0.12 | 1.48715 |                 | <b>5.24E-06 inch/min</b>           |
| C0.36 | 1.48715 |                 | <b>8.73E-08 inch/sec</b>           |
| C     | 1.46966 |                 |                                    |
| R     | 0.033   |                 |                                    |
| Q     | 0.00121 |                 |                                    |
| pi    | 3.1415  |                 |                                    |
|       |         | Φ <sub>m</sub>  | <b>5.54E-06 cm<sup>2</sup>/min</b> |

## Average

K<sub>fs</sub> = **2.08E-07 cm/sec**  
**1.25E-05 cm/min**  
**2.08E-09 m/s**  
**4.92E-06 inch/min**  
**8.20E-08 inch/sec**

Φ<sub>m</sub> = **5.20E-06 cm<sup>2</sup>/min**



Calculation formulas related to shape factor (C). Where H<sub>1</sub> is the first water head height (cm), H<sub>2</sub> is the second water head height (cm), a is borehole radius (cm) and α\* is microscopic capillary length factor which is decided according to the soil texture-structure category. For one-head method, only C<sub>1</sub> needs to be calculated while for two-head method, C<sub>1</sub> and C<sub>2</sub> are calculated (Zang et al., 1998).

| Soil Texture-Structure Category                                                                                                                                   | α*(cm <sup>-1</sup> ) | Shape Factor                                                                                                                           |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| Compacted, Structure-less, clayey or silty materials such as landfill caps and liners, lacustrine or marine sediments, etc.                                       | 0.01                  | $C_1 = \left( \frac{H_2/a}{2.081 + 0.121(H_2/a)} \right)^{0.672}$                                                                      |
| Soils which are both fine textured (clayey or silty) and unstructured, may also include some fine sands.                                                          | 0.04                  | $C_1 = \left( \frac{H_1/a}{1.992 + 0.091(H_1/a)} \right)^{0.683}$<br>$C_2 = \left( \frac{H_2/a}{1.992 + 0.091(H_2/a)} \right)^{0.683}$ |
| Most structured soils from clays through loams; also includes unstructured medium and fine sands. The category most frequently applicable for agricultural soils. | 0.12                  | $C_1 = \left( \frac{H_1/a}{2.074 + 0.093(H_1/a)} \right)^{0.754}$<br>$C_2 = \left( \frac{H_2/a}{2.074 + 0.093(H_2/a)} \right)^{0.754}$ |
| Coarse and gravely sands; may also include some highly structured soils with large and/or numerous cracks, macro pores, etc.                                      | 0.36                  | $C_1 = \left( \frac{H_1/a}{2.074 + 0.093(H_1/a)} \right)^{0.754}$<br>$C_2 = \left( \frac{H_2/a}{2.074 + 0.093(H_2/a)} \right)^{0.754}$ |

Calculation formulas related to one-head and two-head methods. Where R is steady-state rate of fall of water in reservoir (cm/s), K<sub>fs</sub> is Soil saturated hydraulic conductivity (cm/s), Φ<sub>m</sub> is Soil matric flux potential (cm<sup>2</sup>/s), a\* is Macroscopic capillary length parameter (from Table 2), a is Borehole radius (cm), H<sub>1</sub> is the first head of water established in borehole (cm), H<sub>2</sub> is the second head of water established in borehole (cm) and C is Shape factor (from Table 2).

|                              |                                                                                        |                                                                                                                                                                                                                                                                                              |
|------------------------------|----------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| One Head, Combined Reservoir | Q <sub>1</sub> = $\bar{R}_1 \times 35.22$                                              | $K_{fs} = \frac{C_1 \times Q_1}{2\pi H_1^2 + \pi a^2 C_1 + 2\pi \left( \frac{H_1}{a^*} \right)}$                                                                                                                                                                                             |
| One Head, Inner Reservoir    | Q <sub>1</sub> = $\bar{R}_1 \times 2.16$                                               | $\Phi_m = \frac{C_1 \times Q_1}{(2\pi H_1^2 + \pi a^2 C_1)a^* + 2\pi H_1}$                                                                                                                                                                                                                   |
| Two Head, Combined Reservoir | Q <sub>1</sub> = $\bar{R}_1 \times 35.22$<br>Q <sub>2</sub> = $\bar{R}_2 \times 35.22$ | $G_1 = \frac{H_2 C_1}{\pi (2H_1 H_2 (H_2 - H_1) + a^2 (H_1 C_2 - H_2 C_1))}$<br>$G_2 = \frac{H_1 C_2}{\pi (2H_1 H_2 (H_2 - H_1) + a^2 (H_1 C_2 - H_2 C_1))}$<br>$K_{fs} = G_2 Q_2 - G_1 Q_1$<br>$G_3 = \frac{(2H_1^2 + a^2 C_1) C_1}{2\pi (2H_1 H_2 (H_2 - H_1) + a^2 (H_1 C_2 - H_2 C_1))}$ |
| Two Head, Inner Reservoir    | Q <sub>1</sub> = $\bar{R}_1 \times 2.16$<br>Q <sub>2</sub> = $\bar{R}_2 \times 2.16$   | $G_4 = \frac{(2H_1^2 + a^2 C_1) C_2}{2\pi (2H_1 H_2 (H_2 - H_1) + a^2 (H_1 C_2 - H_2 C_1))}$<br>$\Phi_m = G_3 Q_1 - G_4 Q_2$                                                                                                                                                                 |






## Appendix J: Civil Drawings

|                   |                                   |
|-------------------|-----------------------------------|
| 221099-CP         | COVER PAGE                        |
| 221099-PRE        | PRE-DEVELOPMENT DRAWING           |
| 221099-NOTES      | NOTES                             |
| 221099-GR1,2,3,4  | PROPOSED GRADING PLANS 1-4        |
| 221099-SVC1,2,3,4 | PROPOSED SERVICING PLANS 1-4      |
| 221099-POST       | POST DEVELOPMENT DRAWING          |
| 221099-ESC        | EROSION AND SEDIMENT CONTROL PLAN |
| 221099-DET1,2,3   | DETAILS SHEETS 1-3                |

# 1000198532 Ontario Inc.

## PROPOSED WAREHOUSING

2726-2732 MOODIE DRIVE,  
OTTAWA, ONTARIO

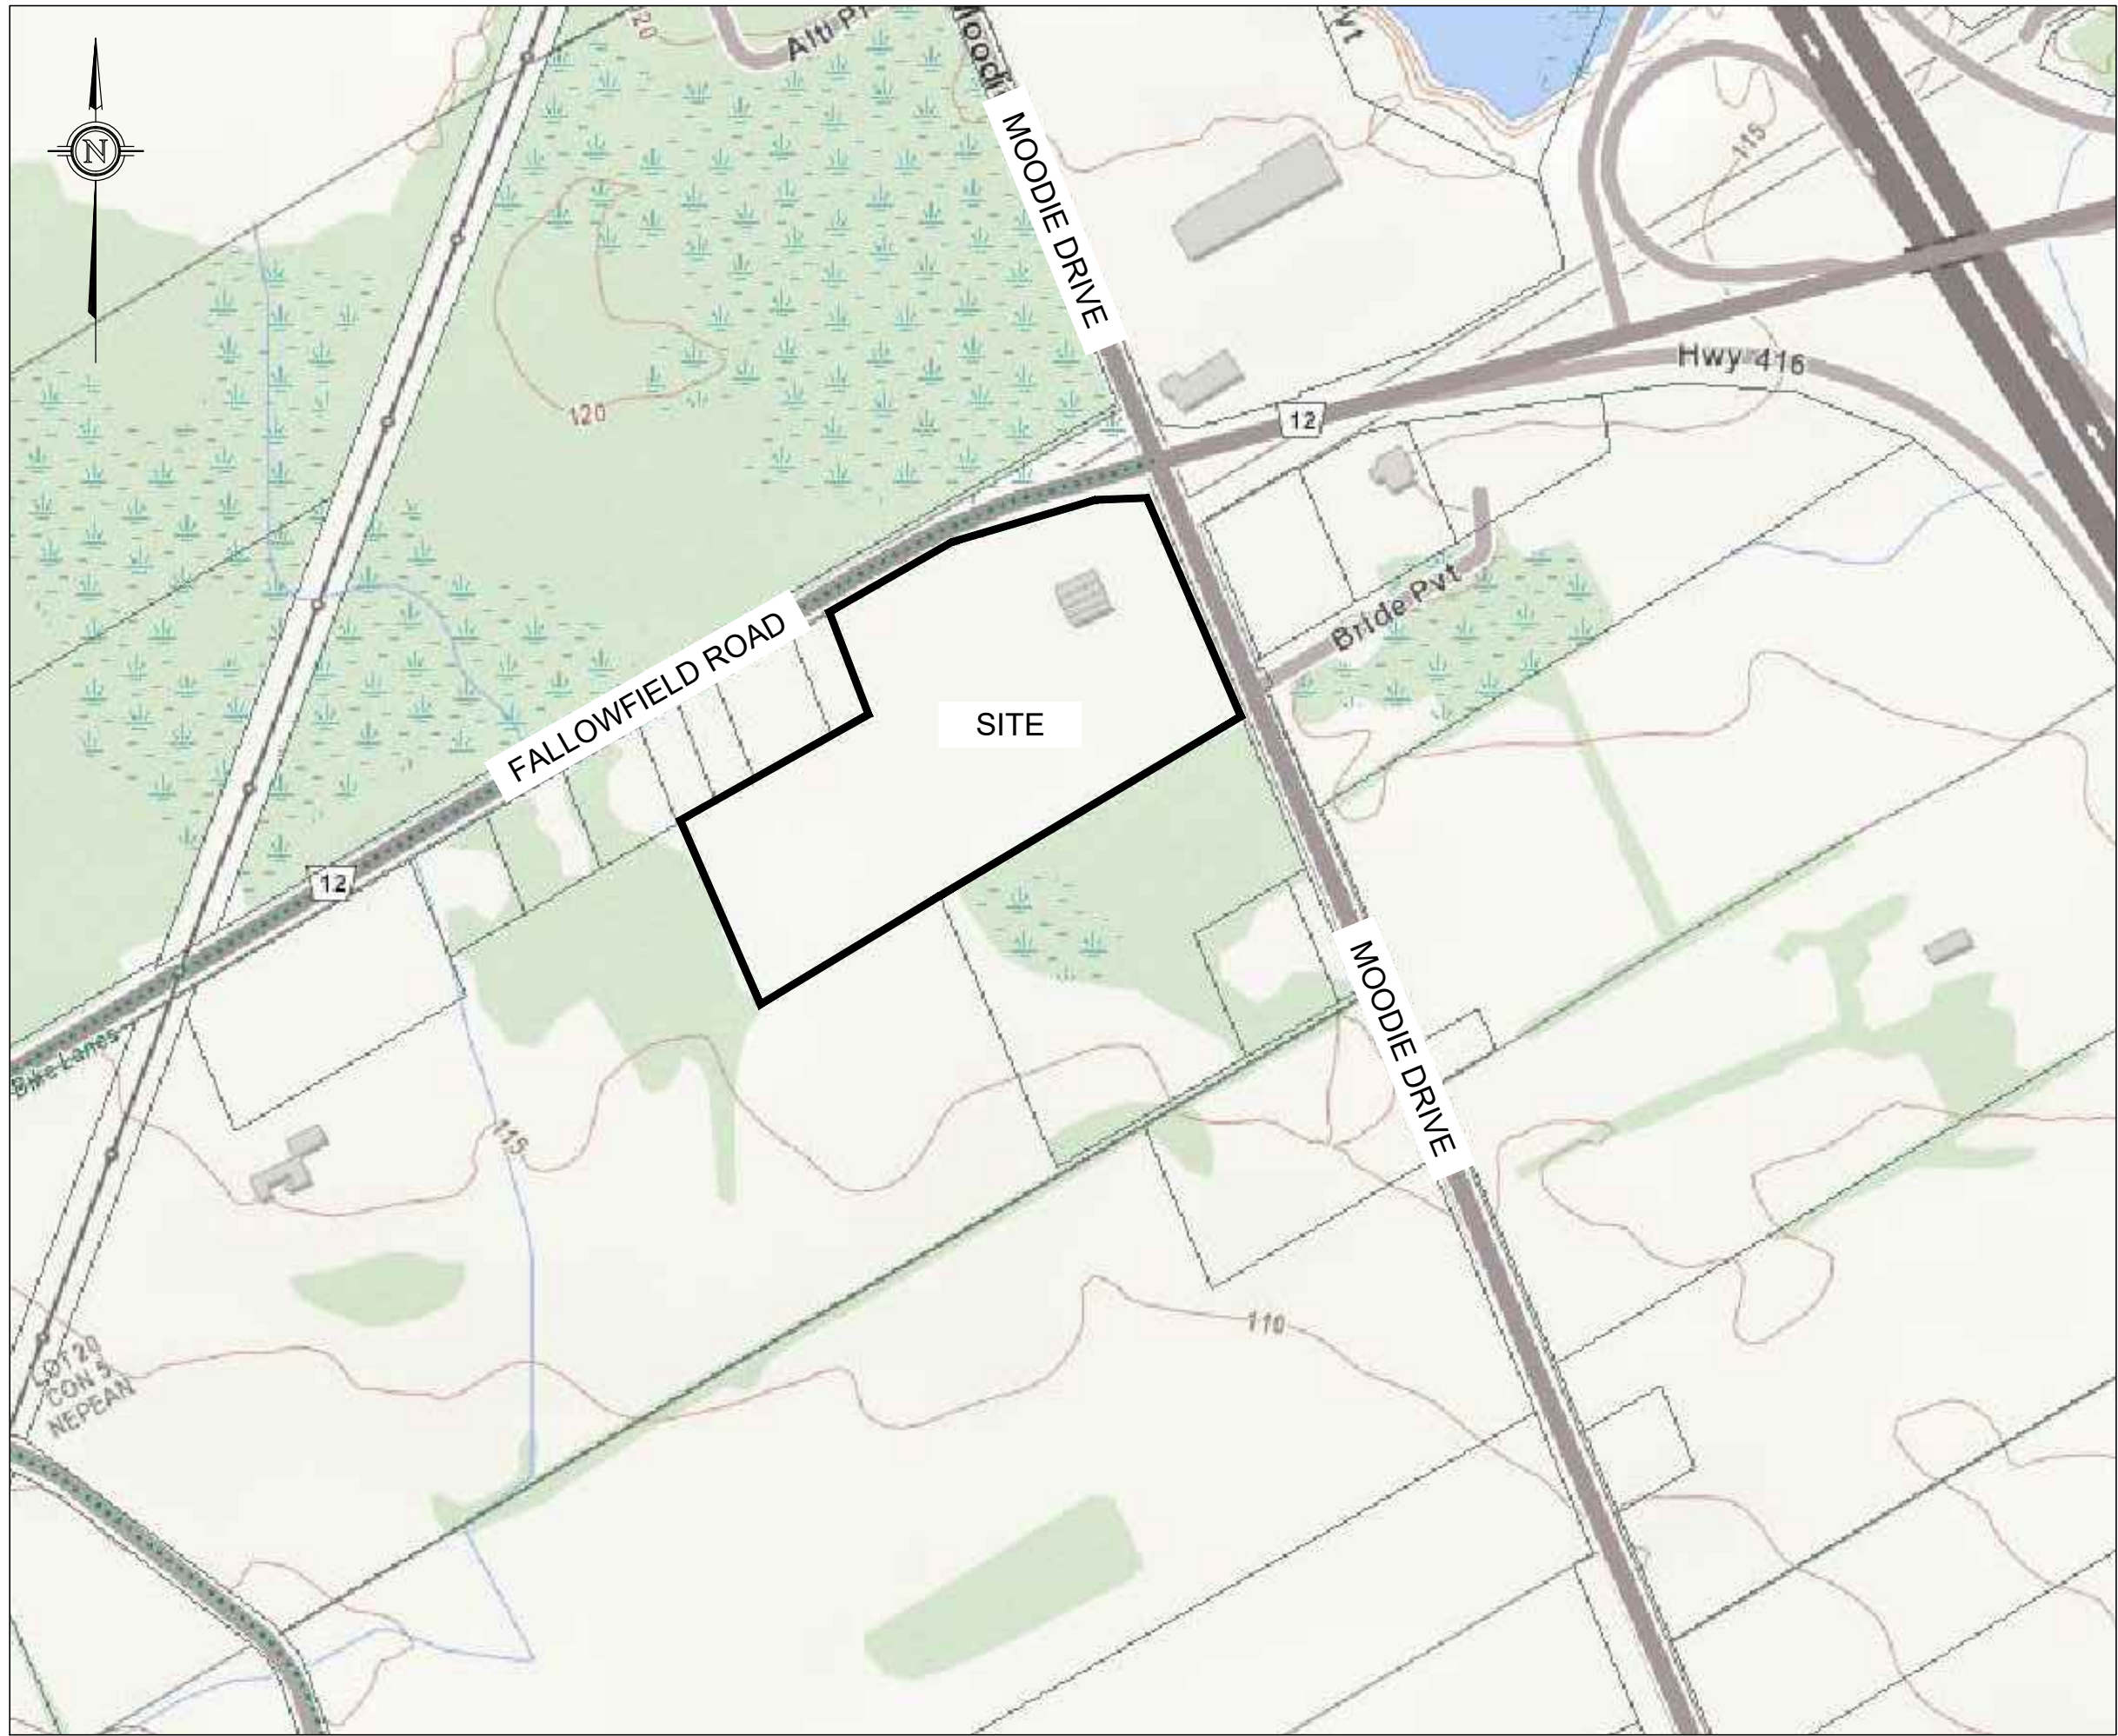


**KEY PLAN**  
NOT TO SCALE

| DRAWING TABLE LIST |                               |
|--------------------|-------------------------------|
| DRAWING NUMBER     | DRAWING TITLE                 |
| 221099-CP          | COVER PAGE                    |
| 221099-PRE         | PRE-DEVELOPMENT               |
| 221099-NOTES       | NOTES                         |
| 221099-GR1         | PROPOSED GRADING PLAN 1       |
| 221099-GR2         | PROPOSED GRADING PLAN 2       |
| 221099-GR3         | PROPOSED GRADING PLAN 3       |
| 221099-GR4         | PROPOSED GRADING PLAN 4       |
| 221099-SVC 1       | PROPOSED SERVICING PLAN 1     |
| 221099-SVC 2       | PROPOSED SERVICING PLAN 2     |
| 221099-SVC 3       | PROPOSED SERVICING PLAN 3     |
| 221099-SVC 4       | PROPOSED SERVICING PLAN 4     |
| 221099-POST        | POST DEVELOPMENT              |
| 221099-SCA         | STORM SUB-CATCHMENT AREAS     |
| 221099-ESC         | EROSION SEDIMENT CONTROL PLAN |
| 221099-DET1        | DETAILS 1                     |
| 221099-DET2        | DETAILS 2                     |
| 221099-DET3        | DETAILS 3                     |

© COPYRIGHT 2025  
KOLLAARD ASSOCIATES INCORPORATED

|     |                                                   |            |     |  |
|-----|---------------------------------------------------|------------|-----|--|
|     |                                                   |            |     |  |
|     |                                                   |            |     |  |
|     |                                                   |            |     |  |
| 2   | RESPONSE TO CITY OF OTTAWA FORMAL REVIEW COMMENTS | 2026.06.08 | ARK |  |
| 1   | RESPONSE TO CITY OF OTTAWA FORMAL REVIEW COMMENTS | 2026.02.27 | ARK |  |
| 0   | ISSUED FOR SITE PLAN CONTROL APPROVAL             | 2025.10.24 | SD  |  |
| No. | REVISION                                          | DATE       | BY  |  |



**Kollaard Associates  
Engineers**

BOX 189  
210 PRESCOTT STREET  
KEMPTVILLE, ONTARIO  
K0G 1L0  
FACSIMILE (613) 258-0475

(613) 860-0923

|                |
|----------------|
| DESIGN         |
| DRAWN<br>JR    |
| CHECKED<br>ARK |
| APPROVED<br>SD |

|             |            |
|-------------|------------|
| PROJECT No. | 221099     |
| DATE        | 2025.10.24 |
| DRAWING No. | 221099-CP  |

D07-12-25-0153







SEE TOPOGRAPHIC SURVEY OF PART OF LOT 20  
CONCESSION 5 (RIDEAU FRONT) GEOGRAPHIC  
TOWNSHIP OF NEPEAN CITY OF OTTAWA COMPLETED  
BY FAIRHALL MOFFATT & WOODLAND LIMITED DATED  
2021/04/07 FOR REFERENCES.

1. ALL DIMENSIONS ARE IN METRES; ALL ELEVATIONS ARE IN METRES AND ARE GEODETIC.
2. TBM = TOP OF WESTERNMOST OTTAWA TRAFFIC CONTROL ACCESS COVER IN MEDIAN OF FALLOWFIELD ROAD AND MOODIE DRIVE ELEVATION= 117.81.
3. THIS IS NOT A LEGAL SURVEY. BOUNDARY INFORMATION WAS DERIVED FROM FAIRHAIR, MOFFATT & WOODLAND LIMITED TOPOGRAPHIC SURVEY OF PART OF LOT 20, CONCESSION 5 (RIDEAU FRONT), GEOGRAPHIC TOWNSHIP OF NEPEAN, CITY OF OTTAWA, FROM APRIL 11, 2021.
4. CONTRACTOR IS RESPONSIBLE FOR LOCATION AND PROTECTION OF UTILITIES.
5. FINISHED GRADE AROUND BUILDING TO BE AS SHOWN.
6. MAXIMUM ALLOWABLE SLOPE ON SITE IS 1.5H:1V WITH RIPRAP PROTECTION AND 3H:1V ELSEWHERE.
7. ALL DIMENSIONS TO BE VERIFIED ON SITE BY CONTRACTOR PRIOR TO CONSTRUCTION.
8. ANY CHANGES MADE TO THIS PLAN MUST BE VERIFIED AND APPROVED BY KOLLAARD ASSOCIATES INC.
9. CLIENT IS RESPONSIBLE FOR ACQUIRING ALL NECESSARY PERMITS. THIS DRAWING IS NOT FOR CONSTRUCTION UNTIL A BUILDING PERMIT HAS BEEN GRANTED.
10. THE PROPOSED GRADES HAVE BEEN SET AND VERIFIED FOR SITE GRADING IN ACCORDANCE WITH THE GEOTECHNICAL REPORT PREPARED BY KOLLAARD ASSOCIATES.
11. THE UNDERSIDE OF FOOTING ELEVATION HAS BEEN SET TO INSURE A MAXIMUM SEPARATION FROM THE UNDERLYING BEDROCK OF LESS THAN 2.8 METRES.
12. KOLLAARD ASSOCIATES SHOULD BE RETAINED TO PROVIDE RECOMMENDATIONS WITH RESPECT TO THE SUB-GRADE CONDITIONS PRIOR TO FOOTING INSTALLATION.
13. THE OWNER AGREES TO PREPARE AND IMPLEMENT AN EROSION AND SEDIMENT CONTROL PLAN TO THE SATISFACTION OF THE CITY OF OTTAWA, APPROPRIATE TO THE SITE CONDITIONS, PRIOR TO UNDERTAKING ANY SITE ALTERATIONS (FILLING, GRADING, REMOVAL OF VEGETATION, ETC.) AND DURING ALL PHASES OF SITE PREPARATION AND CONSTRUCTION IN ACCORDANCE WITH THE CURRENT BEST MANAGEMENT PRACTICES FOR EROSION AND SEDIMENT CONTROL SUCH AS, AND NOT LIMITED TO INSTALLING FILTER SOCKS ACROSS MANHOLE/CATCHBASIN LIDS TO PREVENT SEDIMENTS FROM ENTERING STRUCTURES AND INSTALL AND MAINTAIN A LIGHT DUTY SILT FENCE BARRIER AS REQUIRED.
14. REFERENCE TO KOLLAARD FILE #221099 FOR STORM WATER MANAGEMENT DESIGN (2025-OCT-24), KOLLAARD FILE #221099 FOR SERVICING BRIEF REPORT (2025-OCT-24) AND GEOTECHNICAL REPORT FILE #221099 (2025-OCT-24).

| ITEM                                      | SPEC. No.          | City Std Dwg No.    | REFERENCE |
|-------------------------------------------|--------------------|---------------------|-----------|
| WATERMAIN BEDDING<br>AND BACKFILL<br>OPSD | 802.010/802.031    | W17 (trench detail) |           |
| CATHODIC PROTECTION<br>OPSD               | 1109.010           | W40                 |           |
| PRESSURE TESTING<br>AWWA                  | C-605-5            |                     |           |
| CHLORINATION<br>AWWA                      | C-651-05           |                     |           |
| WATERMAIN                                 | PVC DR18           | (CLASS 150)         |           |
| ON-SITE FIRE WATERMAIN                    | PVC DR18 / 200mm Ø | (CLASS 150)         |           |
| ON-SITE FIRE SPRINKLER MAIN               | PVC DR18 / 150mm Ø | (CLASS 150)         |           |


3. WATERMAIN SHALL BE MINIMUM 2.4m DEPTH BELOW GRADE UNLESS OTHERWISE INDICATED. WHERE LESS THAN 2.4m COVER, THERMAL INSULATION IS TO BE PROVIDED AS PER CITY STD DWG W22 (In shallow trenches), W23 (At open structures).
4. A MINIMUM OF 0.5m VERTICAL CLEARANCE IS REQUIRED BETWEEN THE WATERMAINS AND ALL UTILITIES AND SEWERS. IN LOCATIONS WHERE THIS IS NOT ACHIEVABLE, MUST FOLLOW PROCEDURE F-6-1 SEC. 5.2 OF THE ONTARIO DRINKING WATER RESOURCES ACT.
5. METALLIC WARNING TAPE SHALL BE USED OVER ALL WATERMAINS.
6. INSTALL AND TEST TRACER WIRE FOR ALL PROPOSED WATERMAIN IN ACCORDANCE WITH THE CITY OF OTTAWA DESIGN STANDARDS AS SPECIFIED IN SECTION 8.28.
7. EXISTING WATERMAIN INFORMATION SHOWN ON FALLOWFIELD ROAD AND MOODIE DRIVE IS BASED ON BEST CURRENT INFORMATION. CONTRACTOR TO VERIFY EXACT LOCATION OF WATERMAIN AND REPORT ANY DISCREPANCIES TO KOLLAARD ASSOCIATES INC.
8. WATER SHUTOFF VALVE TO BE LOCATED AT THE PROPERTY LINES AS SHOWN.
9. CONNECTIONS AT ELBOWS AND TEES IN WATER MAINS SHOULD BE MADE WITH THE USE OF JOINT RESTRAINERS DESIGNED FOR WATERMAIN APPLICATION. JOINT AND PIPE RESTRAINERS SHOULD MEET THE REQUIREMENTS OF AWWA C900, C905 AND C907 AND ASTM F1674-11. JOINT RETRAINERS SHOULD BE INSTALLED AS PER MANUFACTURERS RECOMMENDATIONS.
10. ALL CONNECTORS, RODS AND VALVE BOLTS SHALL BE STAINLESS STEEL.
11. VALVES ARE TO BE OPERATED BY CITY OF OTTAWA STAFF ONLY.
12. NO CONNECTION TO EXISTING WATER NETWORK SHALL BE COMPLETED UNTIL A WATER PERMIT IS OBTAINED FROM THE CITY OF OTTAWA AND CITY OF OTTAWA FORCES ARE ON HAND TO MAKE THE CONNECTION.

| ITEM                              | SPEC. No.    | CITY STD DWG No. |
|-----------------------------------|--------------|------------------|
| CATCH BASIN (600mm x 600mm)       | OPSD 705.010 | S2               |
| STORM/SANITARY MANHOLE (1200Ø)    | OPSD 701.010 |                  |
| STORM/SANITARY MANHOLE (1500Ø)    | OPSD 701.011 |                  |
| STORM/SANITARY MANHOLE (1800Ø)    | OPSD 701.012 |                  |
| SEWER SERVICE CONNECTION          |              | S11 & S11.1      |
| SANITARY BENCHING                 | OPSD 701.021 |                  |
| CATCH BASIN & MANHOLE ADJUSTMENTS | OPSD 704.010 |                  |
| STORM MANHOLE FRAME & COVER       | OPSD 401.010 | S24.1 & S25      |
| CATCH BASIN FRAME & COVER         | OPSD 400.020 | S19, S22 & S23   |
| SEWER TRENCH                      |              | S6 & S7          |
| SANITARY MANHOLE FRAME & COVER    | OPSD 401.030 | S24 & S25        |


10. WHERE THE SANITARY SEWER CROSSES ABOVE THE WATERMAIN, THE CONTRACTOR IS TO PROVIDE A MINIMUM OF 0.50m VERTICAL SEPARATION, ADEQUATE STRUCTURAL SUPPORT OF THE SEWER TO PREVENT SETTLING AND EXCESSIVE JOINT DEFLECTION AND ENSURE THAT THE LENGTH OF THE WATER PIPE BE CENTERED AT THE POINT OF CROSSING SO THAT THE JOINTS ARE EQUIDISTANT AND AS FAR AS POSSIBLE FROM THE SEWER.

[illegible]



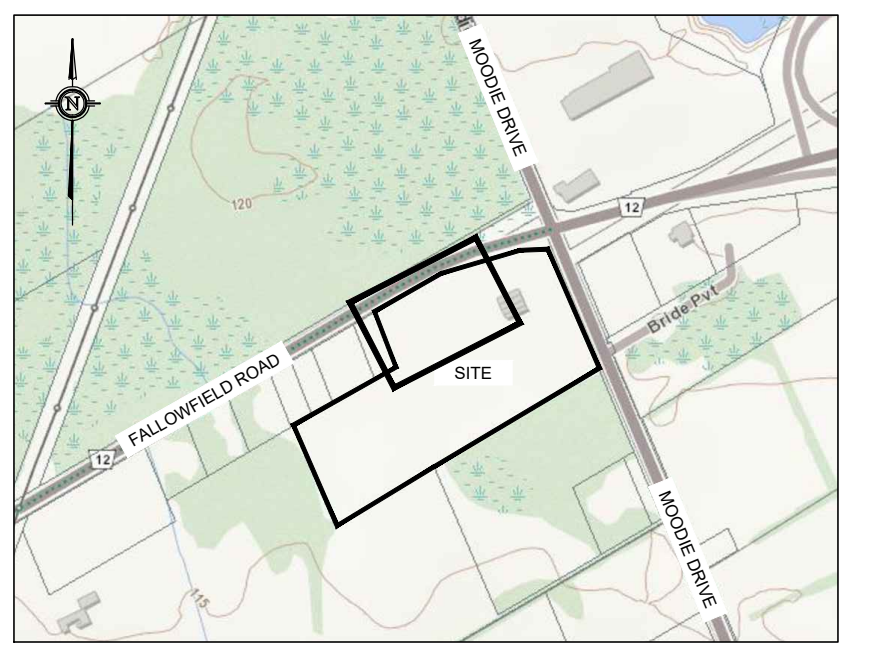



[illegible]

|  |                                                                                                                                                                    |
|--|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | EXISTING ELEVATION                                                                                                                                                 |
|  | PROPOSED ELEVATION                                                                                                                                                 |
|  | EXISTING ELEVATION                                                                                                                                                 |
|  | PROPOSED ELEVATION                                                                                                                                                 |
|  | PROPOSED TOP OF GRATE ELEVATION                                                                                                                                    |
|  | PROPOSED SIDEWALK ELEVATION                                                                                                                                        |
|  | PROPOSED SWALE ELEVATION                                                                                                                                           |
|  | PROPOSED CURB ELEVATION                                                                                                                                            |
|  | PROPOSED DRAINAGE SLOPE & ARROW                                                                                                                                    |
|  | PROPOSED MANHOLE STRUCTURE                                                                                                                                         |
|  | PROPOSED CATCHBASIN                                                                                                                                                |
|  | PROPOSED WATER VALVE                                                                                                                                               |
|  | PROPOSED FIRE HYDRANT                                                                                                                                              |
|  | EXISTING FENCE LINE                                                                                                                                                |
|  | EXISTING OVERHEAD WIRES                                                                                                                                            |
|  | EXISTING BOTTOM OF SLOPE                                                                                                                                           |
|  | EXISTING CENTERLINE OF SWALE / FLOW DIRECTION                                                                                                                      |
|  | PROPERTY BOUNDARY                                                                                                                                                  |
|  | PROPOSED TOP OF SLOPE                                                                                                                                              |
|  | PROPOSED BOTTOM OF SLOPE                                                                                                                                           |
|  | PROPOSED CENTERLINE OF FLOW                                                                                                                                        |
|  | PROPOSED RETAINING WALL                                                                                                                                            |
|  | PROPOSED LIGHT PAVEMENT STRUCTURE<br>(HEAVY PAVEMENT STRUCTURE ELSEWHERE<br>WITHIN ASPHALT AREA)<br>(PLEASE REFER TO 221099-DET<br>FOR PAVEMENT STRUCTURE DETAILS) |
|  | PROPOSED RIPRAP (AS PER OPS5 1004 (R-50))                                                                                                                          |

© COPYRIGHT 2025  
KOLLAARD ASSOCIATES INCORPORATED

- |        |                                                                                                                                                                         |                                                                                                                                          |
|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| NOTES: | 1. ALL DIMENSIONS ARE IN METRES, UNLESS OTHERWISE SPECIFIED; ALL ELEVATIONS ARE IN METRES.                                                                              | 9. INSPECTION OF ROUGH GRADE BY KOLLAARD ASSOCIATES INC. AND CITY OF OTTAWA MUST BE CONDUCTED PRIOR TO PLACEMENT OF TOPSOIL OR SOD.      |
| 2.     | THIS IS NOT A LEGAL SURVEY.                                                                                                                                             | 10. HYDRO SERVICE TO BE INSTALLED ACCORDING TO THE SPECIFICATIONS OF SERVICE PROVIDER AND THE MECHANICAL ENGINEER.                       |
| 3.     | EXISTING SERVICES INFORMATION SHOWN ARE BASED ON BEST CURRENT INFORMATION. CONTRACTOR TO VERIFY EXACT LOCATION AND REPORT ANY DISCREPANCIES TO KOLLAARD ASSOCIATES INC. | 11. ALL MATERIALS AND CONSTRUCTION TO BE IN ACCORDANCE WITH CITY OF OTTAWA STANDARDS AND ONTARIO PROVINCIAL STANDARDS AND SPECIFICATIONS |
| 4.     | CONTRACT IS RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS.                                                                                                            | 12. ANY CHANGES MADE TO THIS PLAN MUST BE VERIFIED AND APPROVED BY KOLLAARD ASSOCIATES, INC.                                             |
| 5.     | CONTRACTOR TO VERIFY THAT APPROPRIATE PERMITS HAVE BEEN ACQUIRED PRIOR TO ANY CONSTRUCTION.                                                                             | 13. THIS DRAWING IS PART OF KOLLAARD ASSOCIATES DESIGN REPORT #221099.                                                                   |
| 6.     | CONTRACTOR IS RESPONSIBLE FOR LOCATION AND PROTECTION OF UTILITIES.                                                                                                     |                                                                                                                                          |
| 7.     | ALL DIMENSIONS TO BE VERIFIED ON SITE BY CONTRACTOR PRIOR TO CONSTRUCTION.                                                                                              |                                                                                                                                          |
| 8.     | THIS DRAWING IS NOT FOR CONSTRUCTION UNTIL ALL APPROVALS HAVE BEEN GRANTED.                                                                                             |                                                                                                                                          |

|            |                                                   |             |           |  |
|------------|---------------------------------------------------|-------------|-----------|--|
|            |                                                   |             |           |  |
|            |                                                   |             |           |  |
|            |                                                   |             |           |  |
| 2          | RESPONSE TO CITY OF OTTAWA FORMAL REVIEW COMMENTS | 2026.06.08  | ARK       |  |
| 1          | RESPONSE TO CITY OF OTTAWA FORMAL REVIEW COMMENTS | 2026.02.27  | ARK       |  |
| 0          | ISSUED FOR SITE PLAN CONTROL APPROVAL             | 2025.10.24  | SD        |  |
| <b>No.</b> | <b>REVISION</b>                                   | <b>DATE</b> | <b>BY</b> |  |


## CONSULTANTS



(613) 860-0923

BOX 189  
210 PRESCOTT STREET  
KEMPTVILLE, ONTARIO  
K0G 1J0  
FACSIMILE (613) 258-0475


|          |        |
|----------|--------|
| DESIGN   | JR     |
| DRAWN    | ABD/JR |
| CHECKED  | ARK    |
| APPROVED | SD     |

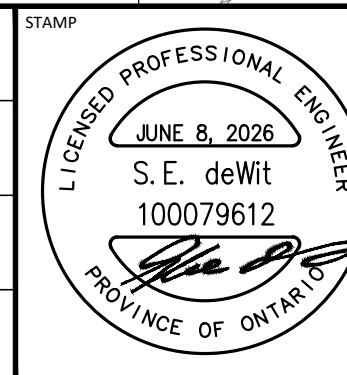

|                  |                                    |             |             |
|------------------|------------------------------------|-------------|-------------|
| CLIENT NAME      | 1000198532 ONTARIO INC.            | PROJECT No. | 221099      |
| PROJECT NAME     | PROPOSED WAREHOUSING               | DATE        | 2025.10.24  |
| PROJECT LOCATION | 2726-2732 MOODIE DRIVE, OTTAWA, ON | SCALE       | AS_NOTED    |
| DRAWING          | PROPOSED GRADING PLAN 2            | DRAWING No. | 221099-GR-2 |

D07-12-25-0153



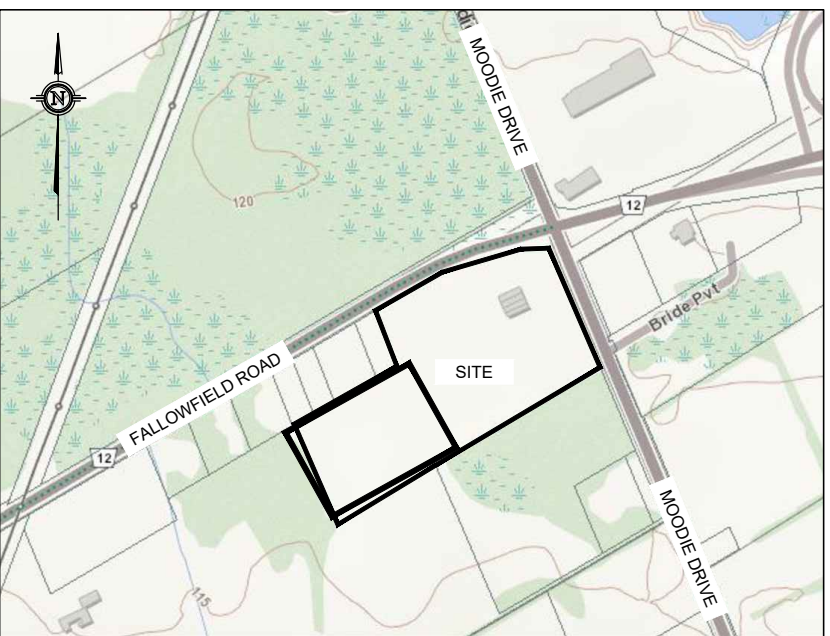

KEY PLAN  
NOT TO SCALE



LEGEND

- EXISTING ELEVATION
- PROPOSED ELEVATION
- PROPOSED ELEVATION
- PROPOSED TOP OF GRATE ELEVATION
- PROPOSED SIDEWALK ELEVATION
- PROPOSED SWALE ELEVATION
- PROPOSED CURB ELEVATION
- PROPOSED DRAINAGE SLOPE & ARROW
- PROPOSED MANHOLE STRUCTURE
- PROPOSED CATCHBASIN
- PROPOSED WATER VALVE
- PROPOSED FIRE HYDRANT
- EXISTING FENCELINE
- EXISTING OVERHEAD WIRES
- EXISTING BOTTOM OF SLOPE
- EXISTING CENTERLINE OF SWALE / FLOW DIRECTION
- PROPERTY BOUNDARY
- PROPOSED TOP OF SLOPE
- PROPOSED BOTTOM OF SLOPE
- PROPOSED CENTERLINE OF FLOW
- PROPOSED RETAINING WALL
- PROPOSED LIGHT PAVEMENT STRUCTURE (HEAVY PAVEMENT STRUCTURE ELSEWHERE WITHIN ASPHALT AREA) (PLEASE REFER TO 221099-DET FOR PAVEMENT STRUCTURE DETAILS)
- PROPOSED RIPRAP (AS PER OPS 1004 (R-50))

TOPOGRAPHIC INFORMATION AND PROJECT ORIENTATION WERE PROVIDED BY FAIRHALL MOFFATT & WOODLAND LIMITED ONTARIO LAND SURVEYORS.  
SEE TOPOGRAPHIC SURVEY OF PART OF LOT 20 CONCESSION 5 (RIDEAU FRONT) GEOGRAPHIC TOWNSHIP OF NEPEAN CITY OF OTTAWA COMPLETED BY FAIRHALL MOFFATT & WOODLAND LIMITED DATED 2021/04/07 FOR REFERENCES.

- NOTES:
- ALL DIMENSIONS ARE IN METRES, UNLESS OTHERWISE SPECIFIED; ALL ELEVATIONS ARE IN METRES.
  - THIS IS NOT A LEGAL SURVEY.
  - EXISTING SERVICES INFORMATION SHOWN ARE BASED ON BEST CURRENT INFORMATION. CONTRACTOR TO VERIFY EXACT LOCATION AND REPORT ANY DISCREPANCIES TO KOLLAARD ASSOCIATES INC.
  - CLIENT IS RESPONSIBLE FOR ACQUIRING ALL NECESSARY PERMITS.
  - CONTRACTOR TO VERIFY THAT APPROPRIATE PERMITS HAVE BEEN ACQUIRED PRIOR TO ANY CONSTRUCTION.
  - CONTRACTOR IS RESPONSIBLE FOR LOCATION AND PROTECTION OF UTILITIES.
  - ALL DIMENSIONS TO BE VERIFIED ON SITE BY CONTRACTOR PRIOR TO CONSTRUCTION.
  - THIS DRAWING IS NOT FOR CONSTRUCTION UNTIL ALL APPROVALS HAVE BEEN GRANTED.
  - INSPECTION OF ROUGH GRADE BY KOLLAARD ASSOCIATES INC. AND CITY OF OTTAWA MUST BE CONDUCTED PRIOR TO PLACEMENT OF TOPSOIL OR SOO.
  - HYDRO SERVICE TO BE INSTALLED ACCORDING TO THE SPECIFICATIONS OF SERVICE PROVIDER AND THE MECHANICAL ENGINEER.
  - ALL MATERIALS AND CONSTRUCTION TO BE IN ACCORDANCE WITH CITY OF OTTAWA STANDARDS AND ONTARIO PROVINCIAL STANDARDS AND SPECIFICATIONS.
  - ANY CHANGES MADE TO THIS PLAN MUST BE VERIFIED AND APPROVED BY KOLLAARD ASSOCIATES, INC.
  - THIS DRAWING IS PART OF KOLLAARD ASSOCIATES DESIGN REPORT #221099.

| No. | REVISION                                          | DATE       | BY  |
|-----|---------------------------------------------------|------------|-----|
| 2   | RESPONSE TO CITY OF OTTAWA FORMAL REVIEW COMMENTS | 2026.06.08 | ARK |
| 1   | RESPONSE TO CITY OF OTTAWA FORMAL REVIEW COMMENTS | 2026.02.27 | ARK |
| 0   | ISSUED FOR SITE PLAN CONTROL APPROVAL             | 2025.10.24 | SD  |

| CONSULTANTS |
|-------------|
|             |
|             |
|             |
|             |

**Kollaard Associates  
Engineers**

BOX 189  
210 PRESCOTT STREET  
KEMPTVILLE, ONTARIO  
K0G 1A0  
FACSIMILE (613) 258-0475

(613) 860-0923



DESIGN  
DRAWN  
CHECKED  
APPROVED

JR  
ABDJUR  
ARK  
SD


|                  |                                    |             |             |
|------------------|------------------------------------|-------------|-------------|
| CLIENT NAME      | 1000198532 ONTARIO INC.            | PROJECT NO. | 221099      |
| PROJECT NAME     | PROPOSED WAREHOUSING               | DATE        | 2025.10.24  |
| PROJECT LOCATION | 2726-2732 MOODIE DRIVE, OTTAWA, ON | SCALE       | AS NOTED    |
| DRAWING          | PROPOSED GRADING PLAN 3            | DRAWING NO. | 221099-GR-3 |

D07-12-25-0153



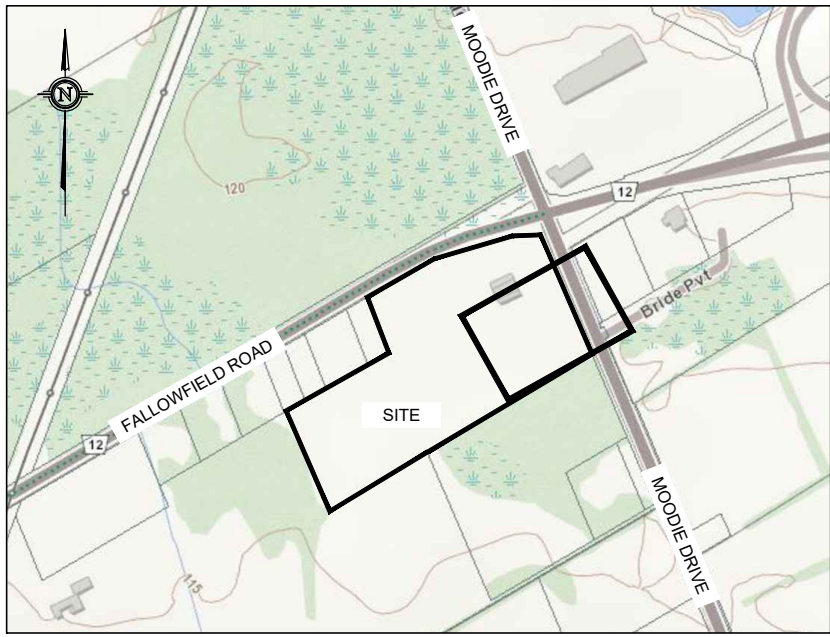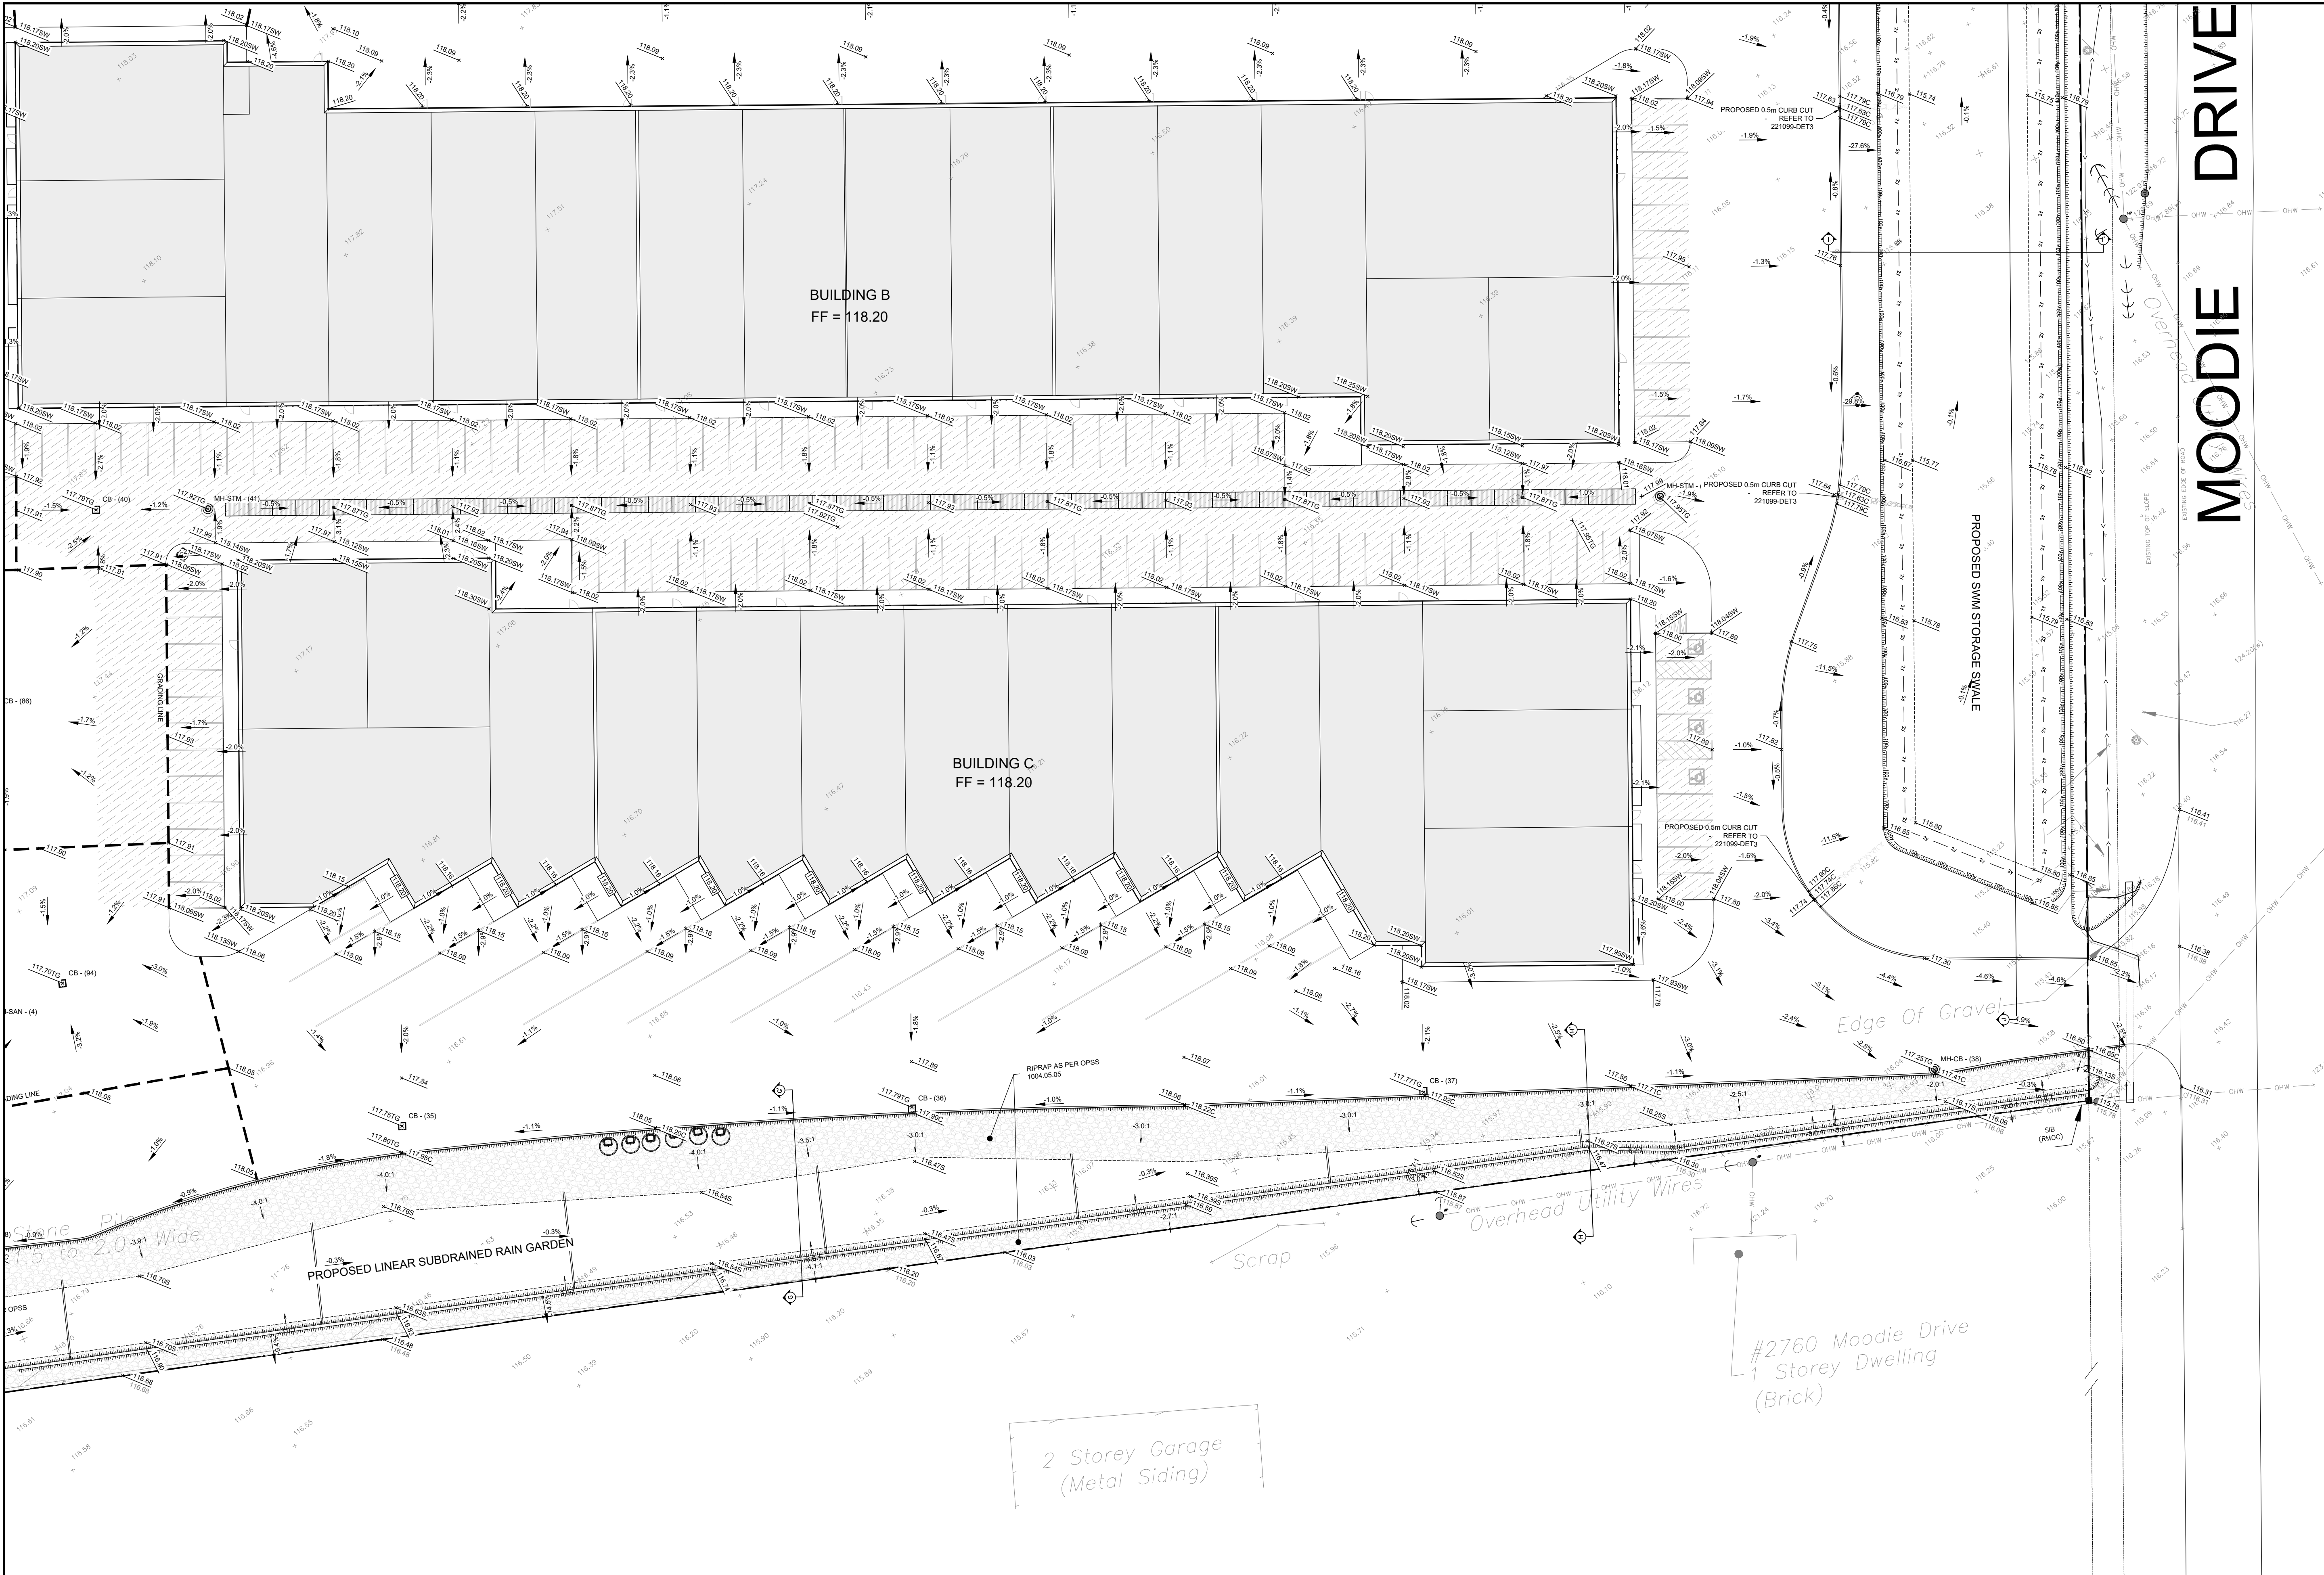

KEY PLAN  
NOT TO SCALE



LEGEND


- EXISTING ELEVATION
- PROPOSED ELEVATION
- EXISTING ELEVATION
- PROPOSED ELEVATION
- PROPOSED TOP OF GRATE ELEVATION
- PROPOSED SIDEWALK ELEVATION
- PROPOSED SWALE ELEVATION
- PROPOSED CURB ELEVATION
- PROPOSED DRAINAGE SLOPE & ARROW
- PROPOSED MANHOLE STRUCTURE
- PROPOSED CATCHBASIN
- PROPOSED WATER WAVER
- PROPOSED FIRE HYDRANT
- EXISTING FENCELINE
- EXISTING OVERHEAD WIRES
- EXISTING BOTTOM OF SLOPE
- EXISTING CENTERLINE OF SWALE / FLOW DIRECTION
- PROPERTY BOUNDARY
- PROPOSED TOP OF SLOPE
- PROPOSED BOTTOM OF SLOPE
- PROPOSED CENTERLINE OF FLOW
- PROPOSED RETAINING WALL
- PROPOSED LIGHT PAVEMENT STRUCTURE (HEAVY PAVEMENT STRUCTURE ELSEWHERE WITHIN ASPHALT AREA) (PLEASE REFER TO Z21099-DET FOR PAVEMENT STRUCTURE DETAILS)
- PROPOSED RIPRAP (AS PER OPS8 1004 (R-50))

TOPOGRAPHIC INFORMATION AND PROJECT ORIENTATION WERE PROVIDED BY FAIRHALL MOFFATT & WOODLAND LIMITED (ONTARIO LAND SURVEYORS). SEE TOPOGRAPHIC SURVEY OF PART OF LOT 20 CONCESSION 5 (RIDEAU FRONT) GEOGRAPHIC TOWNSHIP OF NEPEAN CITY OF OTTAWA COMPLETED BY FAIRHALL MOFFATT & WOODLAND LIMITED DATED 2021/04/07 FOR REFERENCES.

|        |                                                                                                                                                                            |
|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NOTES: | 1. ALL DIMENSIONS ARE IN METRES, UNLESS OTHERWISE SPECIFIED; ALL ELEVATIONS ARE IN METRES.                                                                                 |
|        | 2. THIS IS NOT A LEGAL SURVEY.                                                                                                                                             |
|        | 3. EXISTING SERVICES INFORMATION SHOWN ARE BASED ON BEST CURRENT INFORMATION. CONTRACTOR TO VERIFY EXACT LOCATION AND REPORT ANY DISCREPANCIES TO KOLLAARD ASSOCIATES INC. |
|        | 4. CLIENT IS RESPONSIBLE FOR ACQUIRING ALL NECESSARY PERMITS.                                                                                                              |
|        | 5. CONTRACTOR TO VERIFY THAT APPROPRIATE PERMITS HAVE BEEN ACQUIRED PRIOR TO ANY CONSTRUCTION.                                                                             |
|        | 6. CONTRACTOR IS RESPONSIBLE FOR LOCATION AND PROTECTION OF UTILITIES.                                                                                                     |
|        | 7. ALL DIMENSIONS TO BE VERIFIED ON SITE BY CONTRACTOR PRIOR TO CONSTRUCTION.                                                                                              |
|        | 8. THIS DRAWING IS NOT FOR CONSTRUCTION UNTIL ALL APPROVALS HAVE BEEN GRANTED.                                                                                             |
|        | 9. INSPECTION OF ROUGH GRADE BY KOLLAARD ASSOCIATES INC. AND CITY OF OTTAWA MUST BE CONDUCTED PRIOR TO PLACEMENT OF TOPSOIL OR SOO.                                        |
|        | 10. HYDRO SERVICE TO BE INSTALLED ACCORDING TO THE SPECIFICATIONS OF SERVICE PROVIDER AND THE MECHANICAL ENGINEER.                                                         |
|        | 11. ALL MATERIALS AND CONSTRUCTION TO BE IN ACCORDANCE WITH CITY OF OTTAWA STANDARDS AND ONTARIO PROVINCIAL STANDARDS AND SPECIFICATIONS.                                  |
|        | 12. ANY CHANGES MADE TO THIS PLAN MUST BE VERIFIED AND APPROVED BY KOLLAARD ASSOCIATES, INC.                                                                               |
|        | 13. THIS DRAWING IS PART OF KOLLAARD ASSOCIATES DESIGN REPORT #221099.                                                                                                     |

| No. | REVISION                                          | DATE       | BY  |
|-----|---------------------------------------------------|------------|-----|
| 2   | RESPONSE TO CITY OF OTTAWA FORMAL REVIEW COMMENTS | 2026.06.08 | ARK |
| 1   | RESPONSE TO CITY OF OTTAWA FORMAL REVIEW COMMENTS | 2026.02.27 | ARK |
| 0   | ISSUED FOR SITE PLAN CONTROL APPROVAL             | 2025.10.24 | SD  |

| CONSULTANTS |
|-------------|
|             |
|             |
|             |
|             |



**Kollaard Associates**  
Engineers

BOX 189  
210 PRESCOTT STREET  
KEMPSTOWN, ONTARIO  
K0G 1A0  
FACSIMILE (613) 258-0475

(613) 860-0923

|          |       |
|----------|-------|
| DESIGN   | JR    |
| DRAWN    | ABDJR |
| CHECKED  | ARK   |
| APPROVED | SD    |



|                  |                                    |
|------------------|------------------------------------|
| CLIENT NAME      | 1000198532 ONTARIO INC.            |
| PROJECT NAME     | PROPOSED WAREHOUSING               |
| PROJECT LOCATION | 2726-2732 MOODIE DRIVE, OTTAWA, ON |
| DRAWING          | PROPOSED GRADING PLAN 4            |

|             |             |
|-------------|-------------|
| PROJECT No. | 221099      |
| DATE        | 2025.10.24  |
| SCALE       | AS NOTED    |
| DRAWING No. | 221099-GR-4 |

D07-12-25-0153















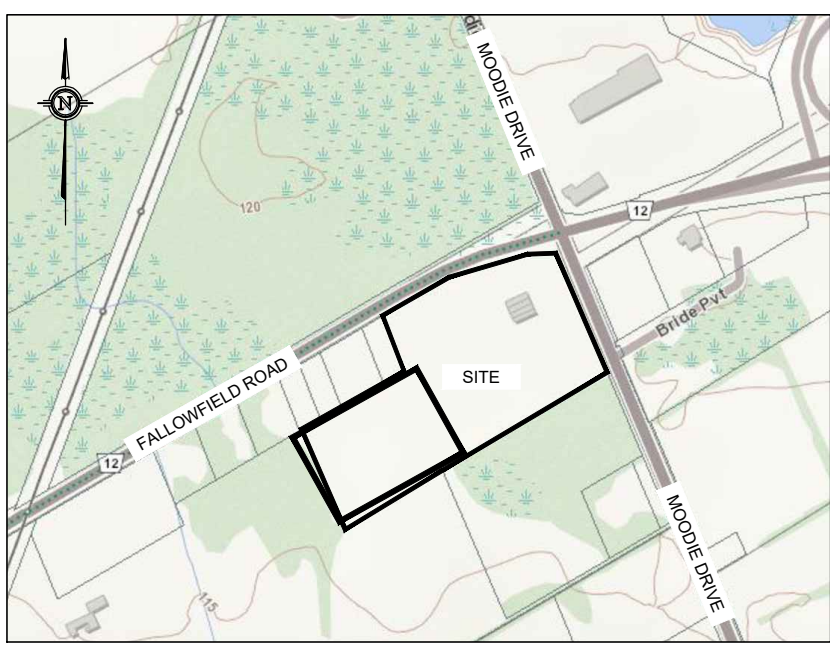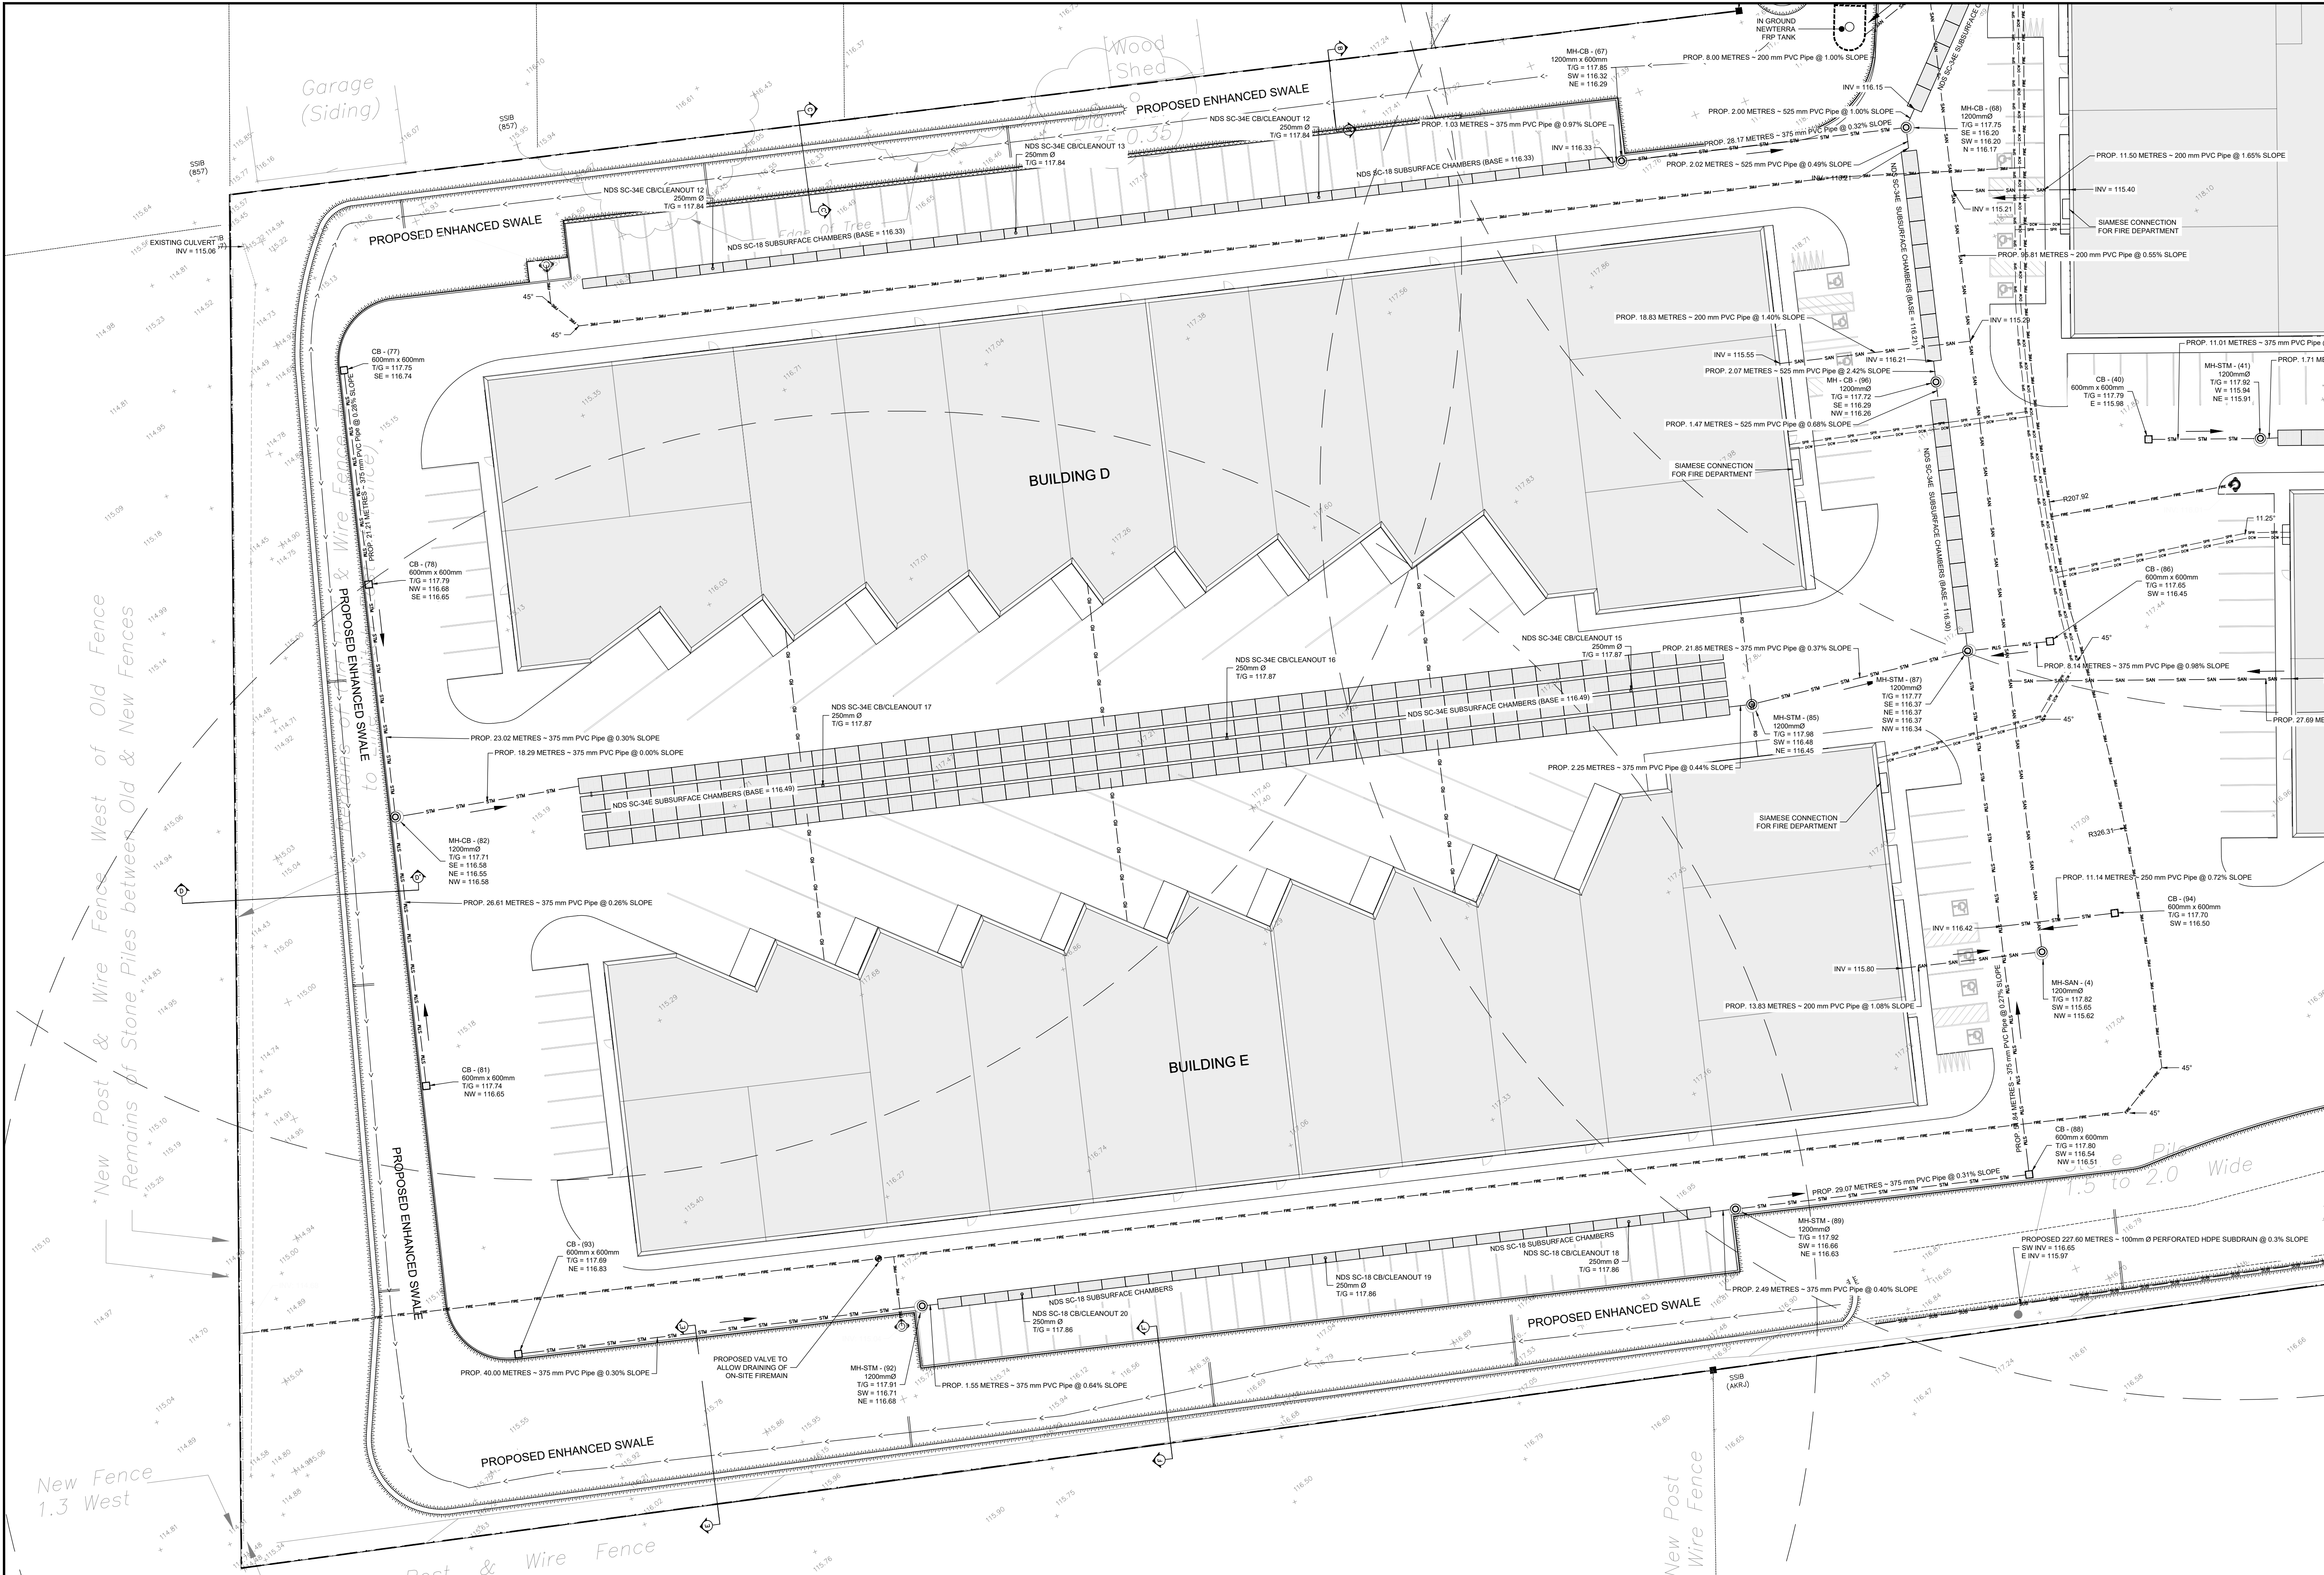

KEY PLAN  
NOT TO SCALE



LEGEND

- EXISTING ELEVATION
- PROPOSED MANHOLE STRUCTURE
- PROPOSED CATCHBASIN
- PROPOSED WATER VALVE
- PROPOSED FIRE HYDRANT
- EXISTING FENCELINE
- EXISTING OVERHEAD WIRES
- EXISTING BOTTOM OF SLOPE
- EXISTING CENTERLINE OF SWALE / FLOW DIRECTION
- PROPERTY BOUNDARY
- PROPOSED TOP OF SLOPE
- PROPOSED BOTTOM OF SLOPE
- PROPOSED CENTERLINE OF FLOW
- PROPOSED RETAINING WALL
- PROPOSED STORM PIPE
- PROPOSED SANITARY PIPE
- PROPOSED WATERMAIN
- PROPOSED SUBDRAIN
- PROPOSED ROOF DRAIN LATERAL
- PROPOSED DOMESTIC ON-SITE WATER
- PROPOSED SPRINKLER MAIN
- PROPOSED ON-SITE FIRE WATERMAIN

TOPOGRAPHIC INFORMATION AND PROJECT ORIENTATION WERE PROVIDED BY FAIRHALL MOFFATT & WOODLAND LIMITED ONTARIO LAND SURVEYORS.  
SEE TOPOGRAPHIC SURVEY OF PART OF LOT 20 CONCESSION 5 (RIDEAU FRONT) GEOGRAPHIC TOWNSHIP OF NEPEAN CITY OF OTTAWA COMPLETED BY FAIRHALL MOFFATT & WOODLAND LIMITED DATED 2021/04/07 FOR REFERENCES.

- NOTES:
- ALL DIMENSIONS ARE IN METRES, UNLESS OTHERWISE SPECIFIED; ALL ELEVATIONS ARE IN METRES.
  - THIS IS NOT A LEGAL SURVEY.
  - EXISTING SERVICES INFORMATION SHOWN ARE BASED ON BEST CURRENT INFORMATION. CONTRACTOR TO VERIFY EXACT LOCATION AND REPORT ANY DISCREPANCIES TO KOLLAARD ASSOCIATES INC.
  - CLIENT IS RESPONSIBLE FOR ACQUIRING ALL NECESSARY PERMITS.
  - CONTRACTOR TO VERIFY THAT APPROPRIATE PERMITS HAVE BEEN ACQUIRED PRIOR TO ANY CONSTRUCTION.
  - CONTRACTOR IS RESPONSIBLE FOR LOCATION AND PROTECTION OF UTILITIES.
  - ALL DIMENSIONS TO BE VERIFIED ON SITE BY CONTRACTOR PRIOR TO CONSTRUCTION.
  - THIS DRAWING IS NOT FOR CONSTRUCTION UNTIL ALL APPROVALS HAVE BEEN GRANTED.
  - INSPECTION OF ROUGH GRADE BY KOLLAARD ASSOCIATES INC. AND CITY OF OTTAWA MUST BE CONDUCTED PRIOR TO PLACEMENT OF TOPSOIL OR SOO.
  - HYDRO SERVICE TO BE INSTALLED ACCORDING TO THE SPECIFICATIONS OF SERVICE PROVIDER AND THE MECHANICAL ENGINEER.
  - ALL MATERIALS AND CONSTRUCTION TO BE IN ACCORDANCE WITH CITY OF OTTAWA STANDARDS AND ONTARIO PROVINCIAL STANDARDS AND SPECIFICATIONS.
  - ANY CHANGES MADE TO THIS PLAN MUST BE VERIFIED AND APPROVED BY KOLLAARD ASSOCIATES, INC.
  - THIS DRAWING IS PART OF KOLLAARD ASSOCIATES DESIGN REPORT #221099.

| No. | REVISION                                          | DATE       | BY  |
|-----|---------------------------------------------------|------------|-----|
| 2   | RESPONSE TO CITY OF OTTAWA FORMAL REVIEW COMMENTS | 2026.06.08 | ARK |
| 1   | RESPONSE TO CITY OF OTTAWA FORMAL REVIEW COMMENTS | 2026.02.27 | ARK |
| 0   | ISSUED FOR SITE PLAN CONTROL APPROVAL             | 2025.10.24 | SD  |


|             |  |
|-------------|--|
| CONSULTANTS |  |
|             |  |
|             |  |
|             |  |
|             |  |

**Kollaard Associates**  
Engineers

BOX 189  
210 PRESCOTT STREET  
KEMPSTOWN, ONTARIO  
K0G 1J0  
FACSIMILE (613) 258-0475

(613) 860-0923



|          |     |
|----------|-----|
| DESIGN   | ARK |
| DRAWN    | JR  |
| CHECKED  | ABD |
| APPROVED | SD  |

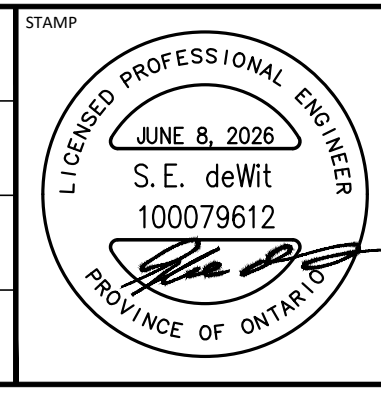


|                  |                                    |             |              |
|------------------|------------------------------------|-------------|--------------|
| CLIENT NAME      | 1000198532 ONTARIO INC.            | PROJECT No. | 221099       |
| PROJECT NAME     | PROPOSED WAREHOUSING               | DATE        | 2025.10.24   |
| PROJECT LOCATION | 2726-2732 MOODIE DRIVE, OTTAWA, ON | SCALE       | AS NOTED     |
| DRAWING          | SITE SERVICING PLAN - 3            | DRAWING No. | 221099-SVC-3 |

D07-12-25-0153



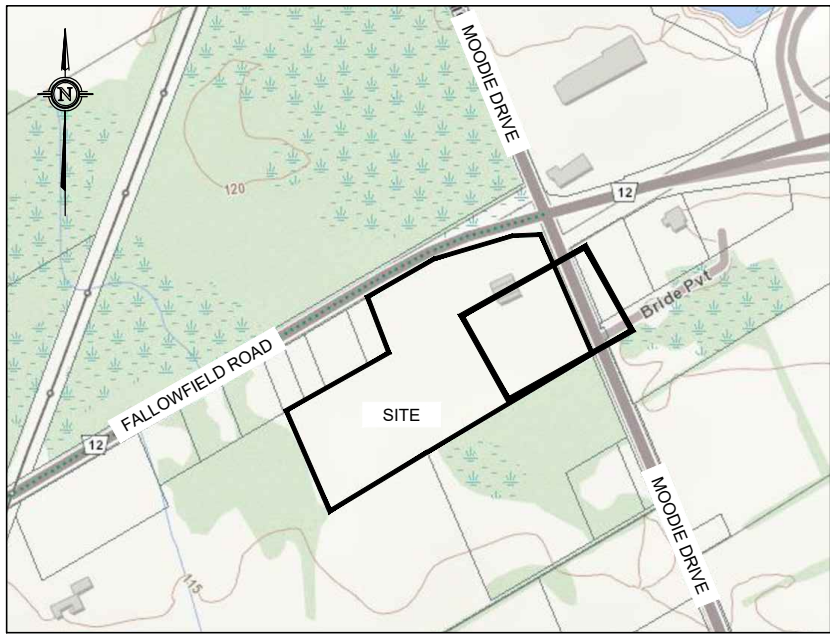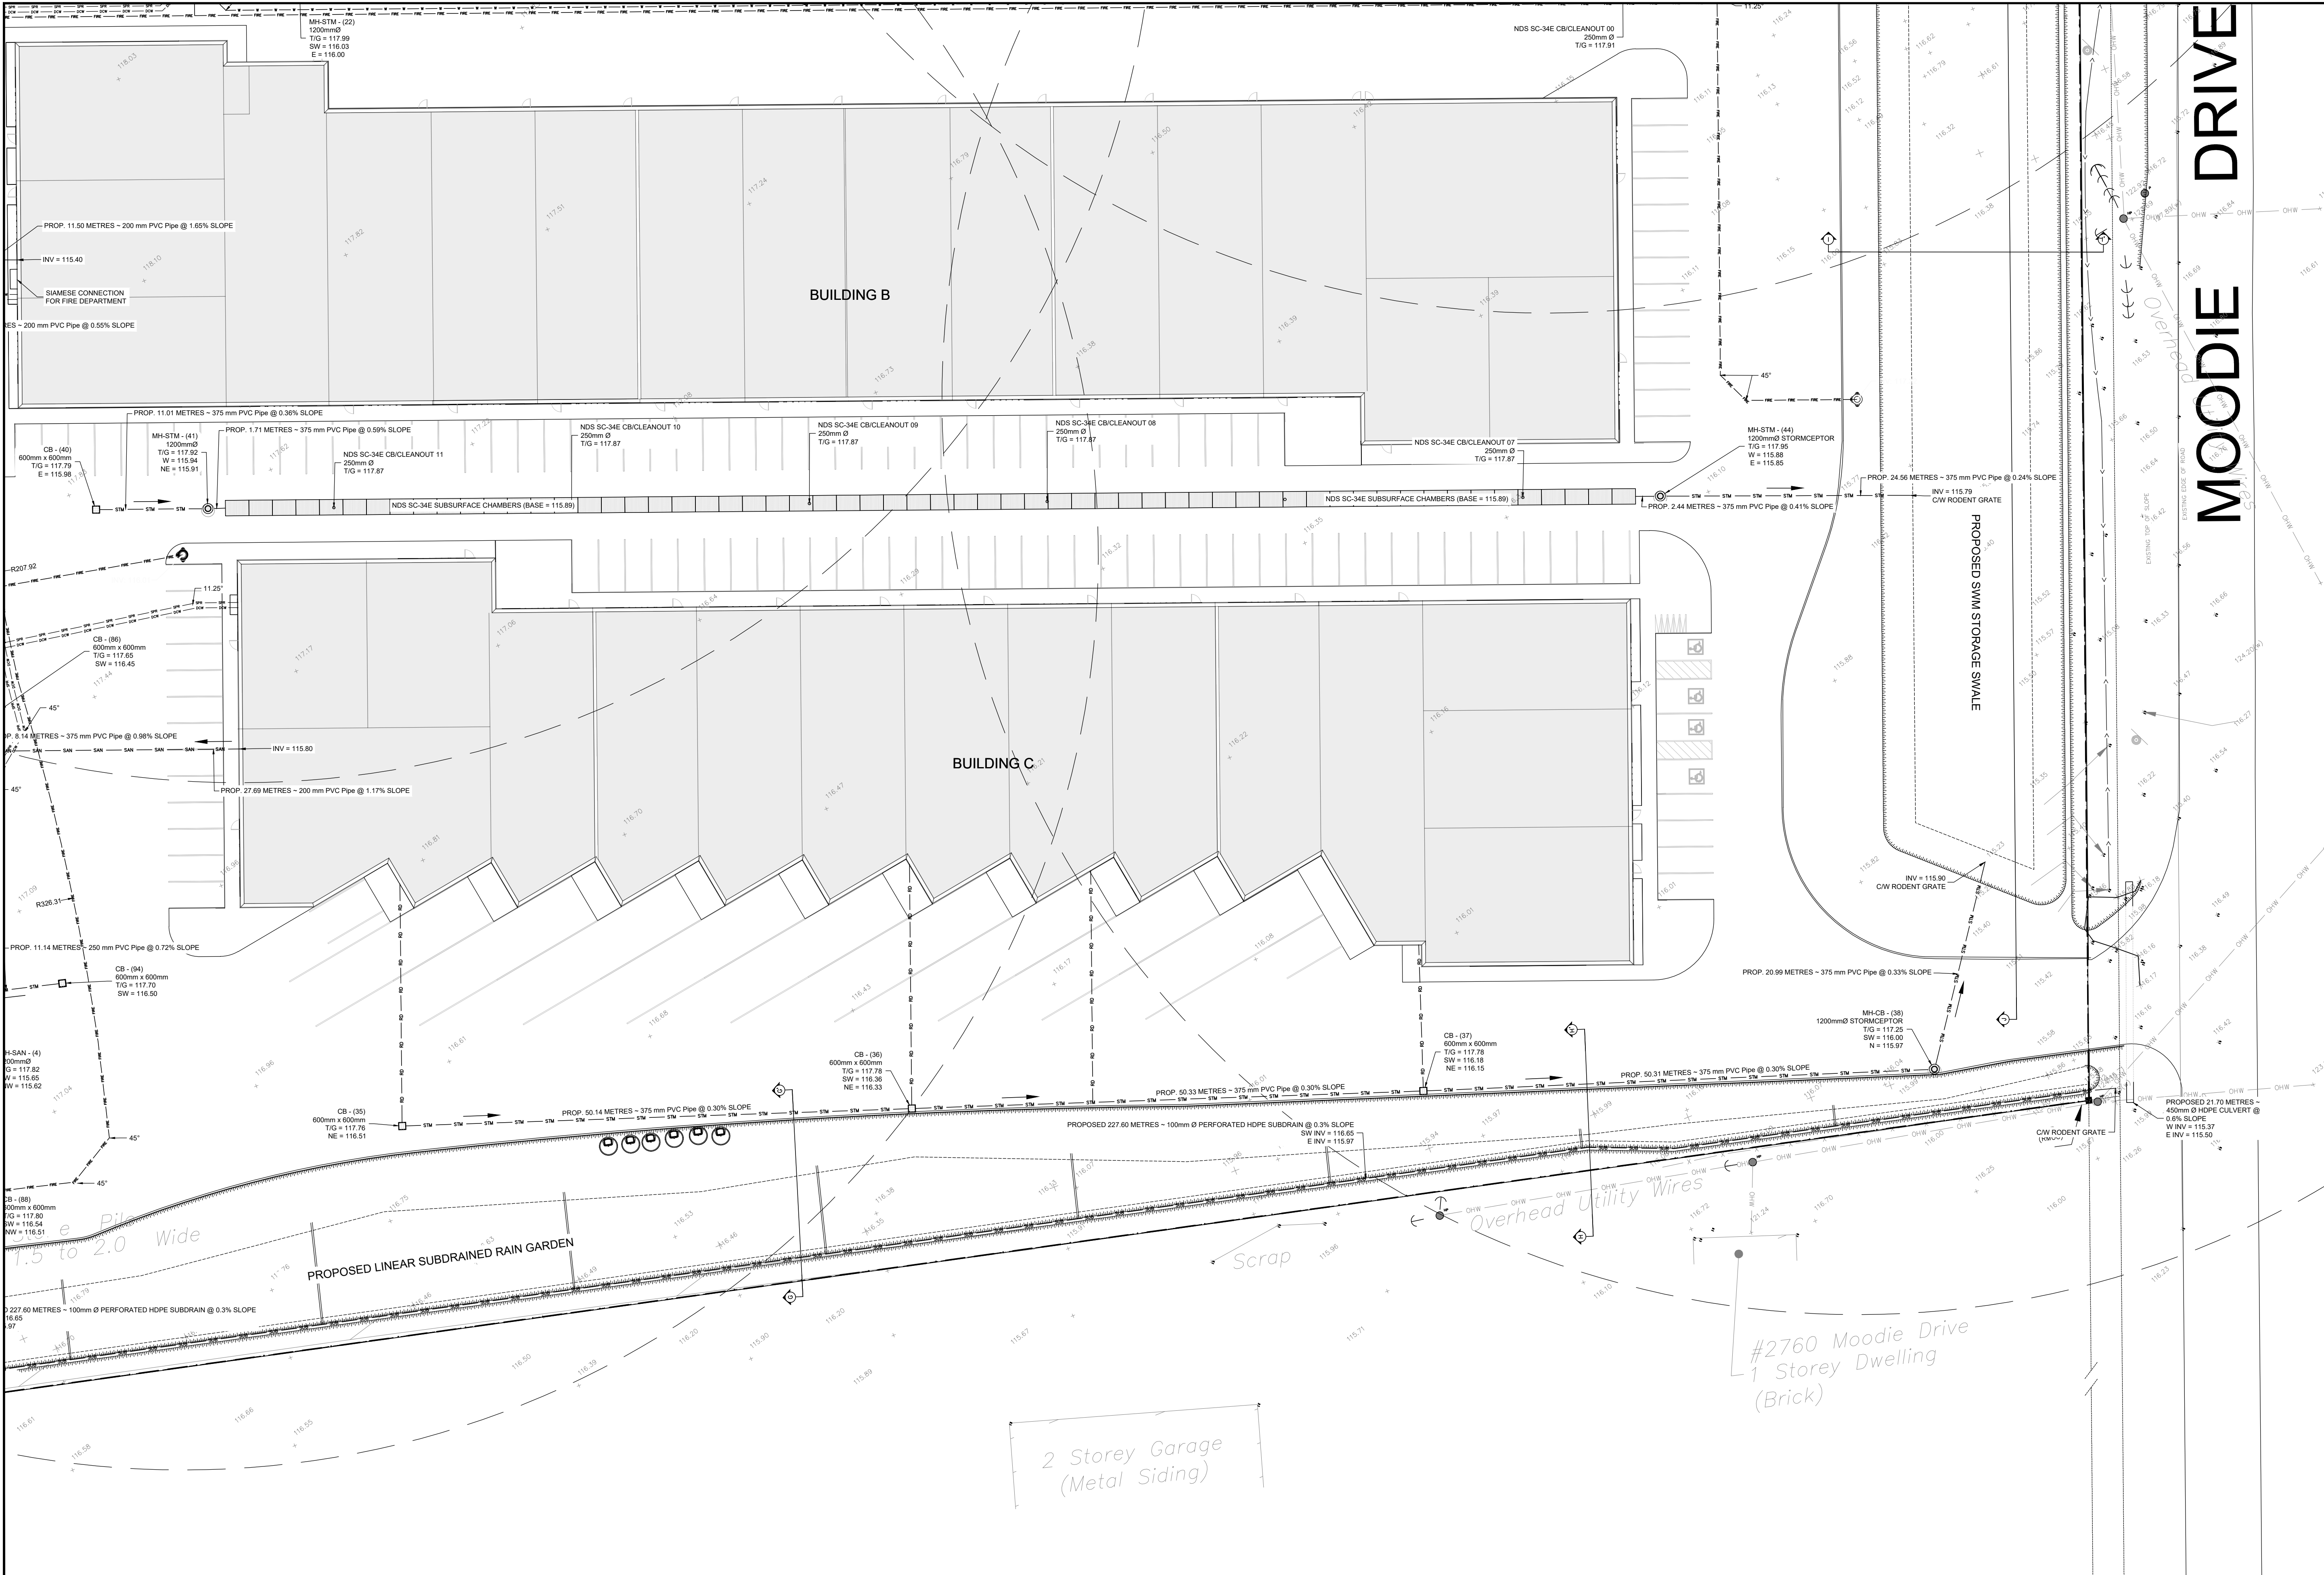

KEY PLAN  
NOT TO SCALE



LEGEND


- EXISTING ELEVATION
- PROPOSED MANHOLE STRUCTURE
- PROPOSED CATCHBASIN
- PROPOSED WATER VALVE
- PROPOSED FIRE HYDRANT
- EXISTING FENCELINE
- EXISTING OVERHEAD WIRES
- EXISTING BOTTOM OF SLOPE
- EXISTING CENTERLINE OF SWALE / FLOW DIRECTION
- PROPERTY BOUNDARY
- PROPOSED TOP OF SLOPE
- PROPOSED BOTTOM OF SLOPE
- PROPOSED CENTERLINE OF FLOW
- PROPOSED RETAINING WALL
- PROPOSED STORM PIPE
- PROPOSED SANITARY PIPE
- PROPOSED WATERMAIN
- PROPOSED SUBDRAIN
- PROPOSED ROOF DRAIN LATERAL
- PROPOSED DOMESTIC ON-SITE WATER
- PROPOSED SPRINKLER MAIN
- PROPOSED ON-SITE FIRE WATERMAIN

TOPOGRAPHIC INFORMATION AND PROJECT ORIENTATION WERE PROVIDED BY FAIRHALL MOFFATT & WOODLAND LIMITED ONTARIO LAND SURVEYORS.  
SEE TOPOGRAPHIC SURVEY OF PART OF LOT 20 CONCESSION 5 (RIDEAU FRONT) GEOGRAPHIC TOWNSHIP OF NEPEAN CITY OF OTTAWA COMPLETED BY FAIRHALL MOFFATT & WOODLAND LIMITED DATED 2021/04/07 FOR REFERENCES.

|        |                                                                                                                                                                            |
|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NOTES: | 1. ALL DIMENSIONS ARE IN METRES, UNLESS OTHERWISE SPECIFIED; ALL ELEVATIONS ARE IN METRES.                                                                                 |
|        | 2. THIS IS NOT A LEGAL SURVEY.                                                                                                                                             |
|        | 3. EXISTING SERVICES INFORMATION SHOWN ARE BASED ON BEST CURRENT INFORMATION. CONTRACTOR TO VERIFY EXACT LOCATION AND REPORT ANY DISCREPANCIES TO KOLLAARD ASSOCIATES INC. |
|        | 4. CLIENT IS RESPONSIBLE FOR ACQUIRING ALL NECESSARY PERMITS.                                                                                                              |
|        | 5. CONTRACTOR TO VERIFY THAT APPROPRIATE PERMITS HAVE BEEN ACQUIRED PRIOR TO ANY CONSTRUCTION.                                                                             |
|        | 6. CONTRACTOR IS RESPONSIBLE FOR LOCATION AND PROTECTION OF UTILITIES.                                                                                                     |
|        | 7. ALL DIMENSIONS TO BE VERIFIED ON SITE BY CONTRACTOR PRIOR TO CONSTRUCTION.                                                                                              |
|        | 8. THIS DRAWING IS NOT FOR CONSTRUCTION UNTIL ALL APPROVALS HAVE BEEN GRANTED.                                                                                             |
|        | 9. INSPECTION OF ROUGH GRADE BY KOLLAARD ASSOCIATES INC. AND CITY OF OTTAWA MUST BE CONDUCTED PRIOR TO PLACEMENT OF TOPSOIL OR SOD.                                        |
|        | 10. HYDRO SERVICE TO BE INSTALLED ACCORDING TO THE SPECIFICATIONS OF SERVICE PROVIDER AND THE MECHANICAL ENGINEER.                                                         |
|        | 11. ALL MATERIALS AND CONSTRUCTION TO BE IN ACCORDANCE WITH CITY OF OTTAWA STANDARDS AND ONTARIO PROVINCIAL STANDARDS AND SPECIFICATIONS.                                  |
|        | 12. ANY CHANGES MADE TO THIS PLAN MUST BE VERIFIED AND APPROVED BY KOLLAARD ASSOCIATES, INC.                                                                               |
|        | 13. THIS DRAWING IS PART OF KOLLAARD ASSOCIATES DESIGN REPORT #221099.                                                                                                     |

| No. | REVISION                                          | DATE       | BY  |
|-----|---------------------------------------------------|------------|-----|
| 2   | RESPONSE TO CITY OF OTTAWA FORMAL REVIEW COMMENTS | 2026.06.08 | ARK |
| 1   | RESPONSE TO CITY OF OTTAWA FORMAL REVIEW COMMENTS | 2026.02.27 | ARK |
| 0   | ISSUED FOR SITE PLAN CONTROL APPROVAL             | 2025.10.24 | SD  |

| CONSULTANTS |  |  |  |
|-------------|--|--|--|
|             |  |  |  |
|             |  |  |  |
|             |  |  |  |
|             |  |  |  |



**Kollaard Associates**  
Engineers

BOX 189  
210 PRESCOTT STREET  
KEMPSTOWN, ONTARIO  
K0G 1A0  
FACSIMILE (613) 258-0475

(613) 860-0923

|          |     |
|----------|-----|
| DESIGN   | ARK |
| DRAWN    | JR  |
| CHECKED  | ABD |
| APPROVED | SD  |

STAMP



|                  |                                    |
|------------------|------------------------------------|
| CLIENT NAME      | 1000198532 ONTARIO INC.            |
| PROJECT NAME     | PROPOSED WAREHOUSING               |
| PROJECT LOCATION | 2726-2732 MOODIE DRIVE, OTTAWA, ON |
| DRAWING          | SITE SERVICING PLAN - 4            |

|             |              |
|-------------|--------------|
| PROJECT No. | 221099       |
| DATE        | 2025.10.24   |
| SCALE       | AS NOTED     |
| DRAWING No. | 221099-SVC-4 |

© COPYRIGHT 2025  
KOLLAARD ASSOCIATES INCORPORATED

D07-12-25-0153














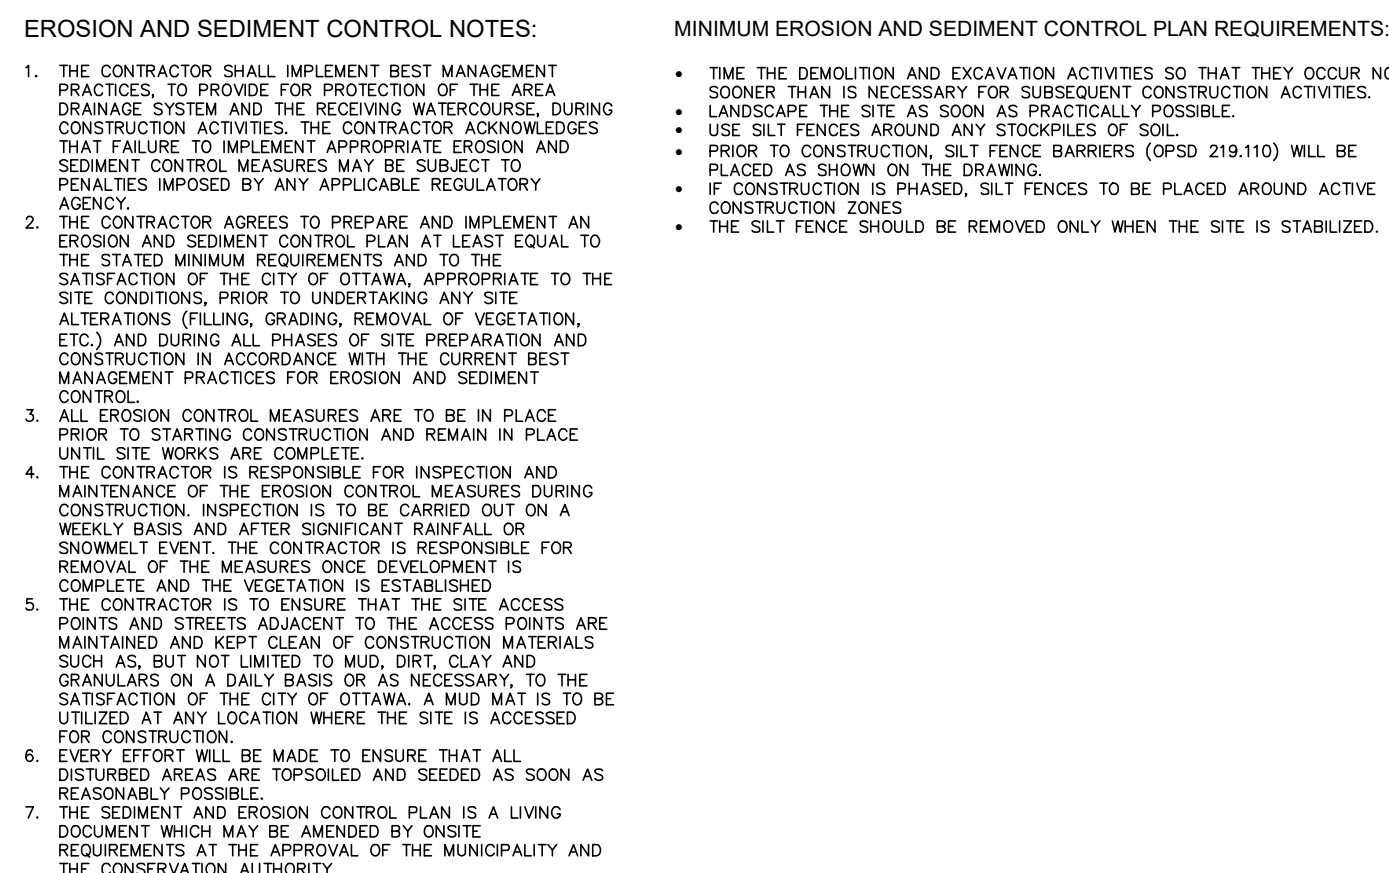

|                                                                                     |                               |
|-------------------------------------------------------------------------------------|-------------------------------|
|  | EXISTING ELEVATION            |
|  | PROPOSED MANHOLE STRUCTURE    |
|  | PROPOSED CATCHBASIN           |
|  | PROPOSED REAR YARD CATCHBASIN |
|  | PROPERTY BOUNDARY             |
|  | SILT FENCE                    |
|  | STRAW BALE FLOW CHECK DAM     |

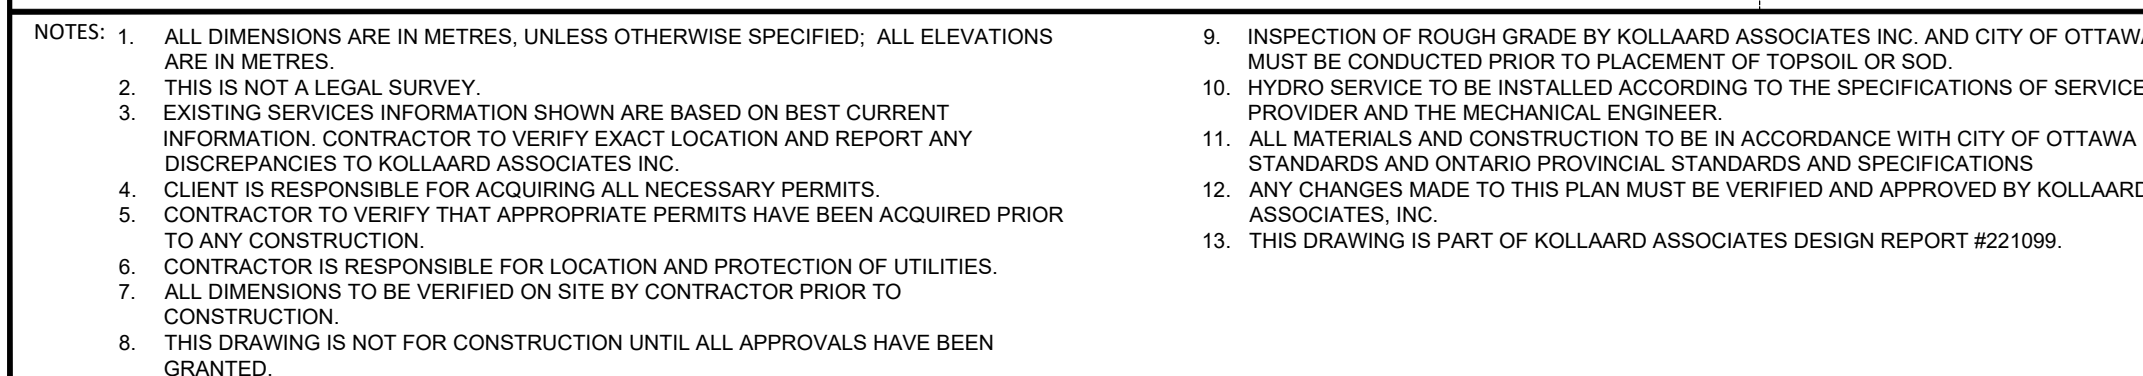

|   |     |                                                   |            |     |
|---|-----|---------------------------------------------------|------------|-----|
| A |     |                                                   |            |     |
| B |     |                                                   |            |     |
| C |     |                                                   |            |     |
| D |     |                                                   |            |     |
| E | 2   | RESPONSE TO CITY OF OTTAWA FORMAL REVIEW COMMENTS | 2026.06.08 | ARK |
| F | 1   | RESPONSE TO CITY OF OTTAWA FORMAL REVIEW COMMENTS | 2026.02.27 | ARK |
| G | 0   | ISSUED FOR SITE PLAN CONTROL APPROVAL             | 2025.10.24 | SD  |
|   | No. | REVISION                                          | DATE       | BY  |

CONSULTANT'S



(613) 860-0923

|          |                                                                                                                                                                                                                            |
|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DESIGN   |  <p>STAMP</p> <p>LICENSED PROFESSIONAL ENGINEER</p> <p>JUNE 8, 2026</p> <p>S.E. deWit</p> <p>100079612</p> <p>PROVINCE OF ONTARIO</p> |
| DRAWN    |                                                                                                                                                                                                                            |
| ABD      |                                                                                                                                                                                                                            |
| CHECKED  |                                                                                                                                                                                                                            |
| ARK      |                                                                                                                                                                                                                            |
| APPROVED |                                                                                                                                                                                                                            |
| SD       |                                                                                                                                                                                                                            |

|             |  |
|-------------|--|
| CLIENT NAME |  |
|-------------|--|

1000198532 ONTARIO INC

## PROPOSED WAREHOUSING

S-2732 MOODIE DRIVE, OTTAWA, ON

EROSION SEDIMENT CONTROL PLAN

© COPYRIGHT 2025  
KOLLAARD ASSOCIATES INCORPORATED

221099


2025.10.2

AS\_NOTE


221099-ES

[illegible]




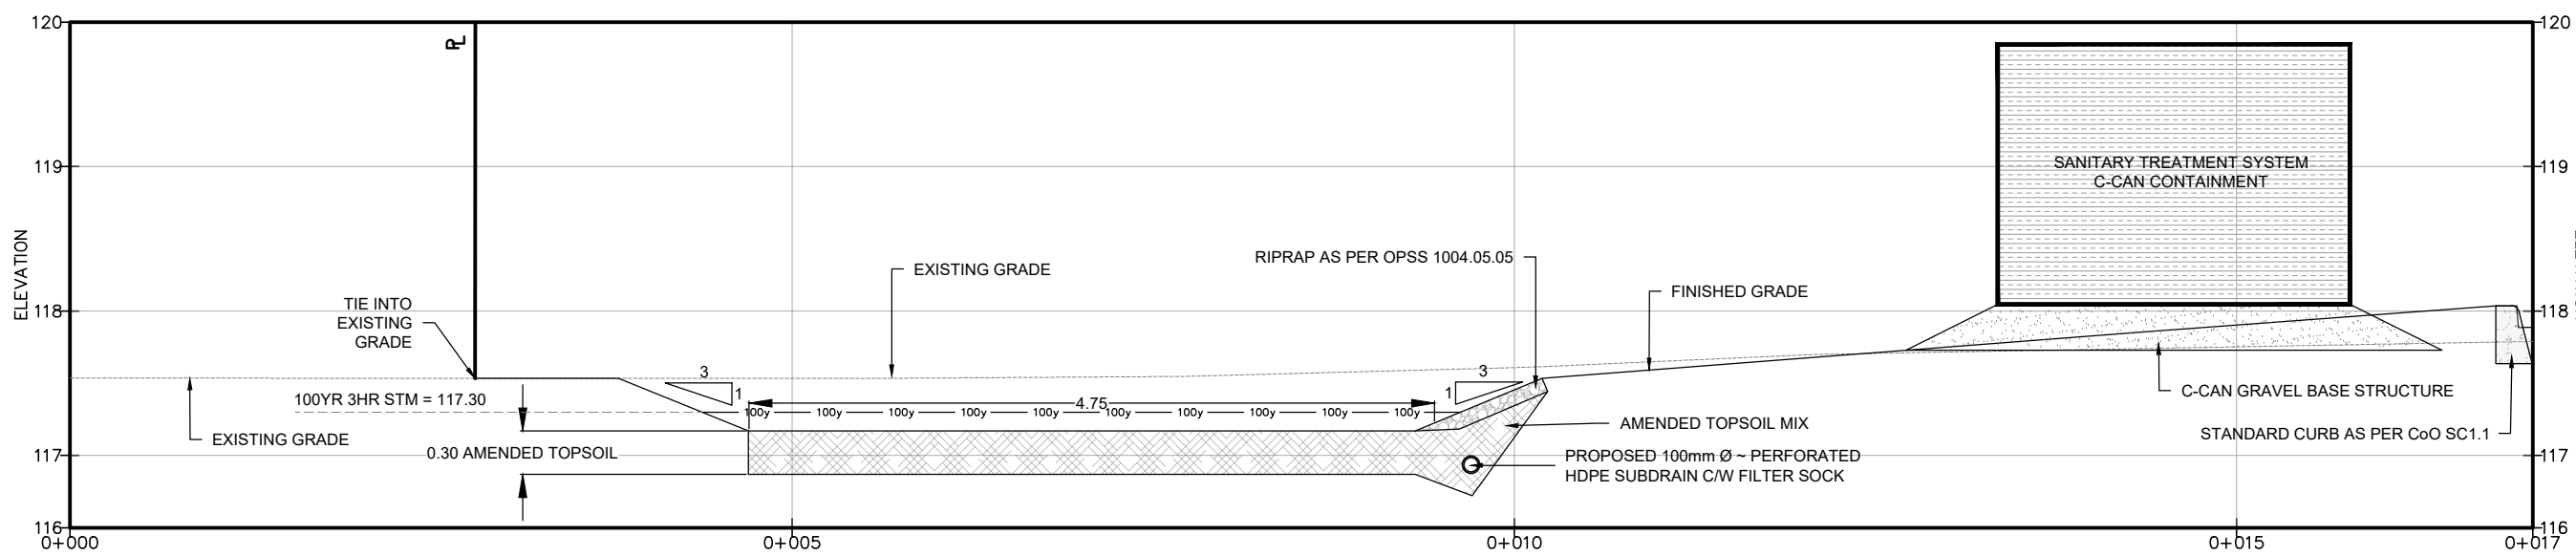


**RAIN GARDEN**  
**CROSS-SECTION A-A'**  
SCALE = 1:50

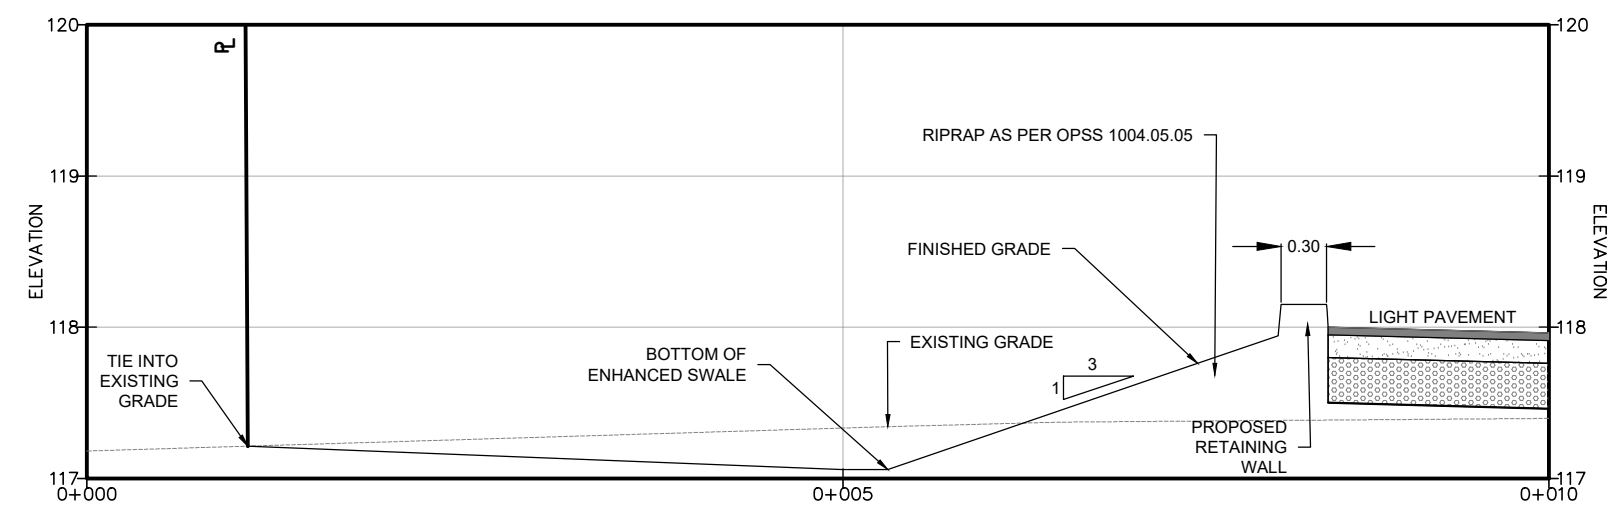


**ENHANCED SWALE**  
**CROSS-SECTION B-B'**  
SCALE = 1:50

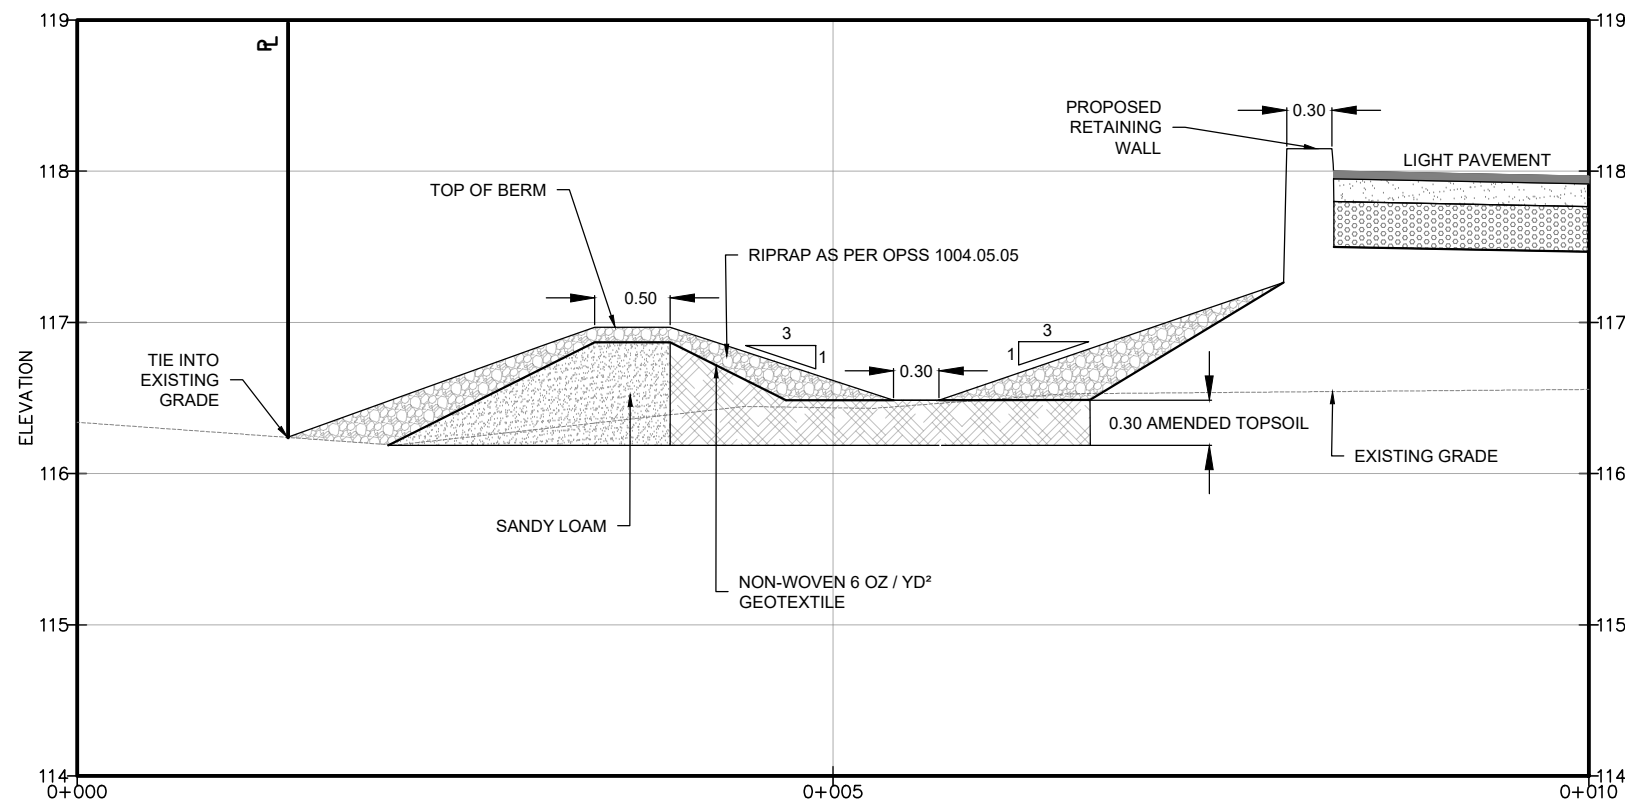


**ENHANCED SWALE**  
**CROSS-SECTION C-C'**  
SCALE = 1:50

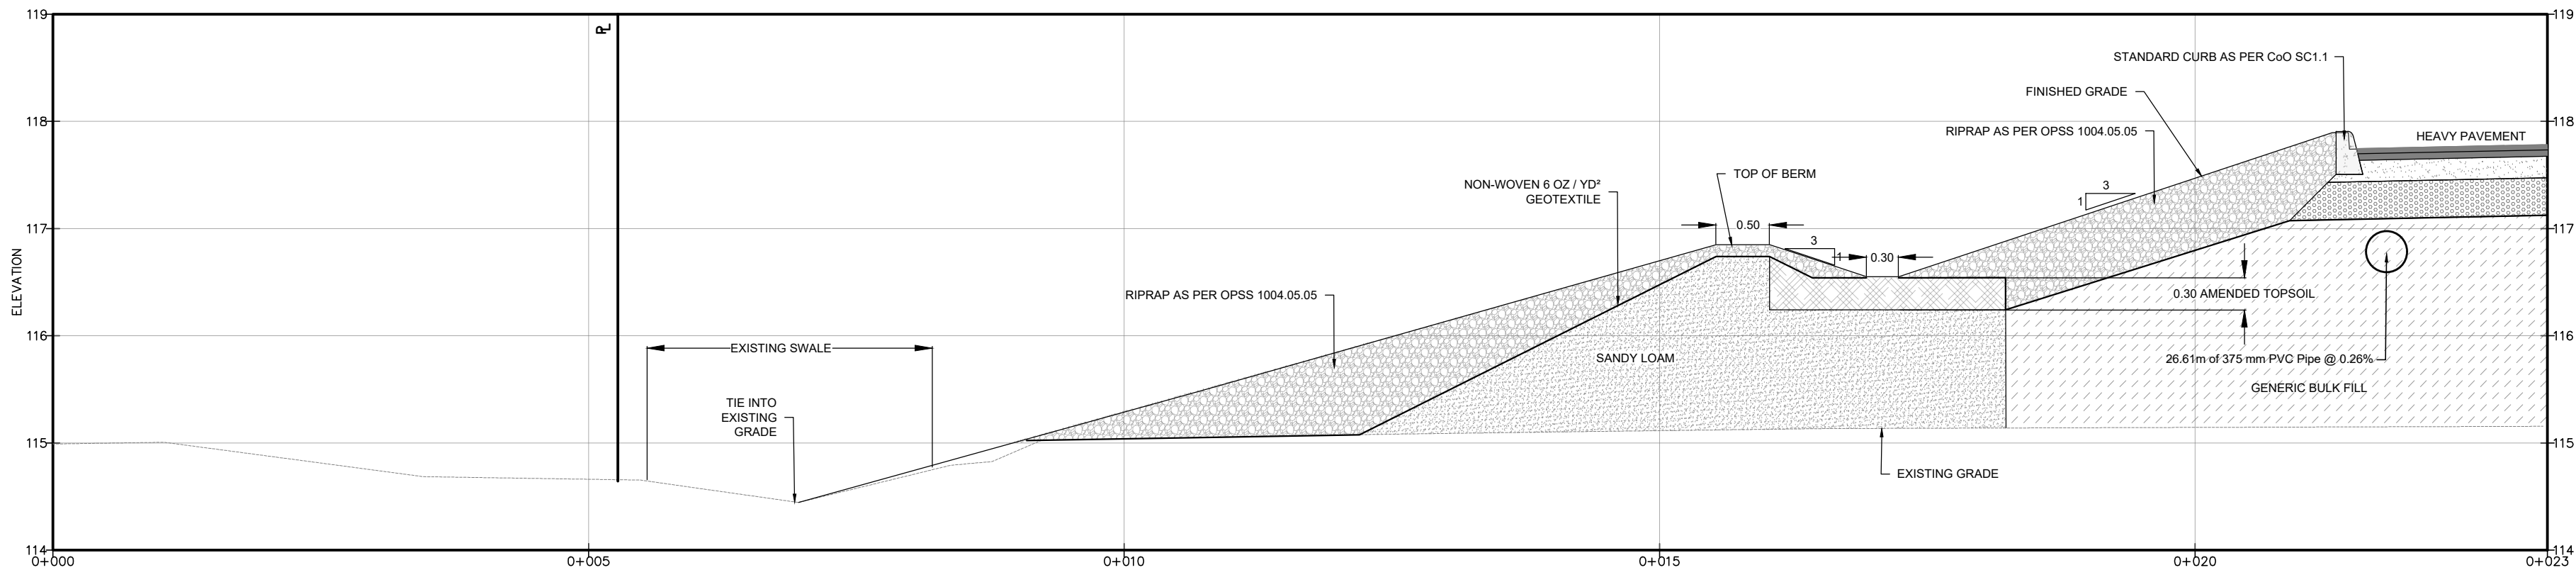


**ENHANCED SWALE**  
**CROSS-SECTION D-D'**  
SCALE = 1:50

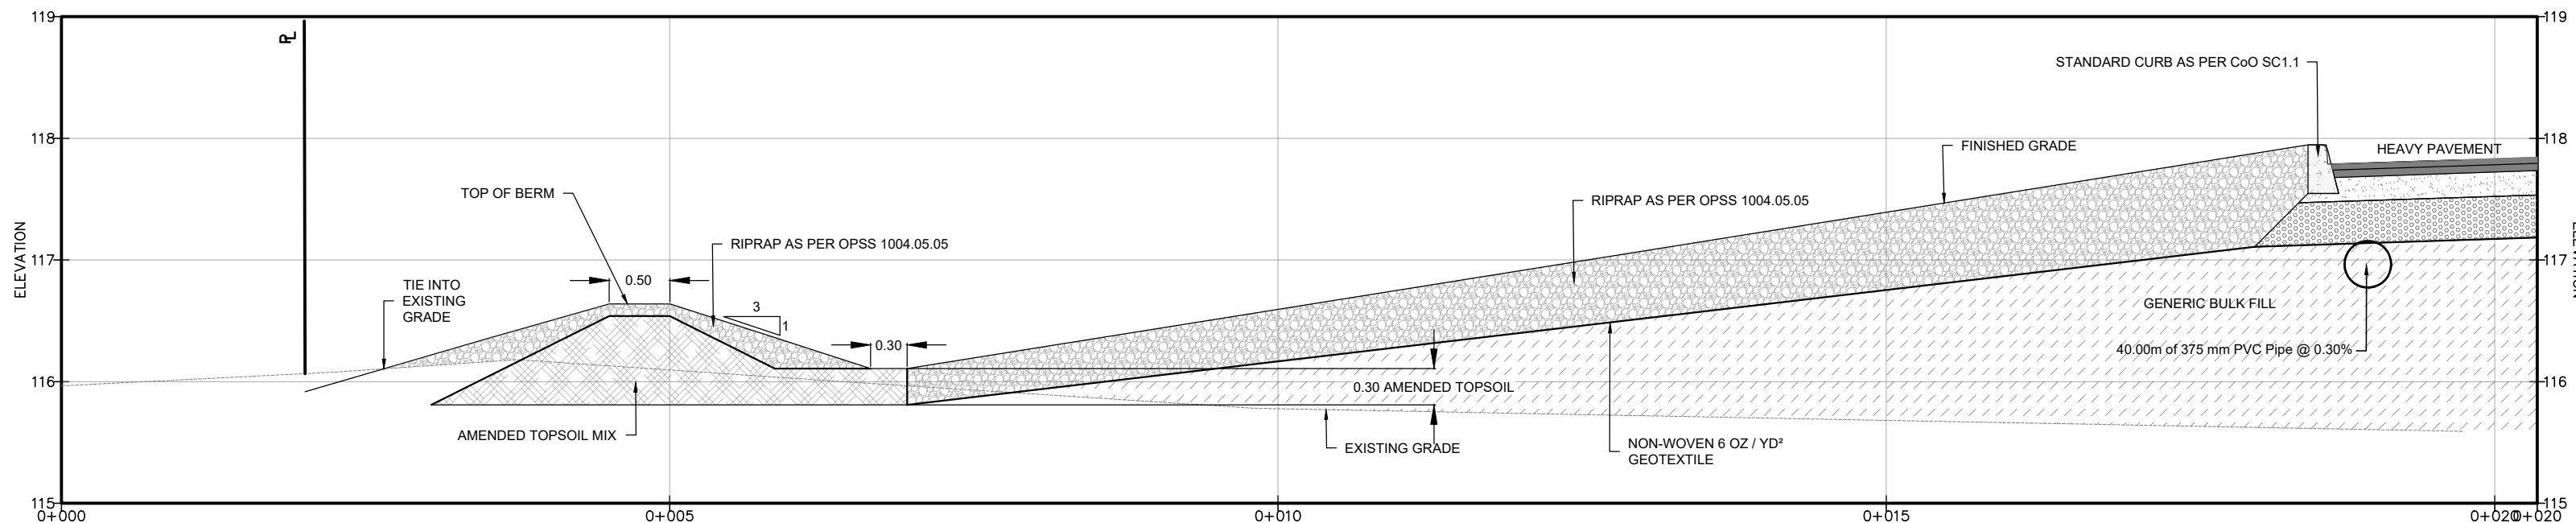


**ENHANCED SWALE**  
**CROSS-SECTION E-E'**  
SCALE = 1:50

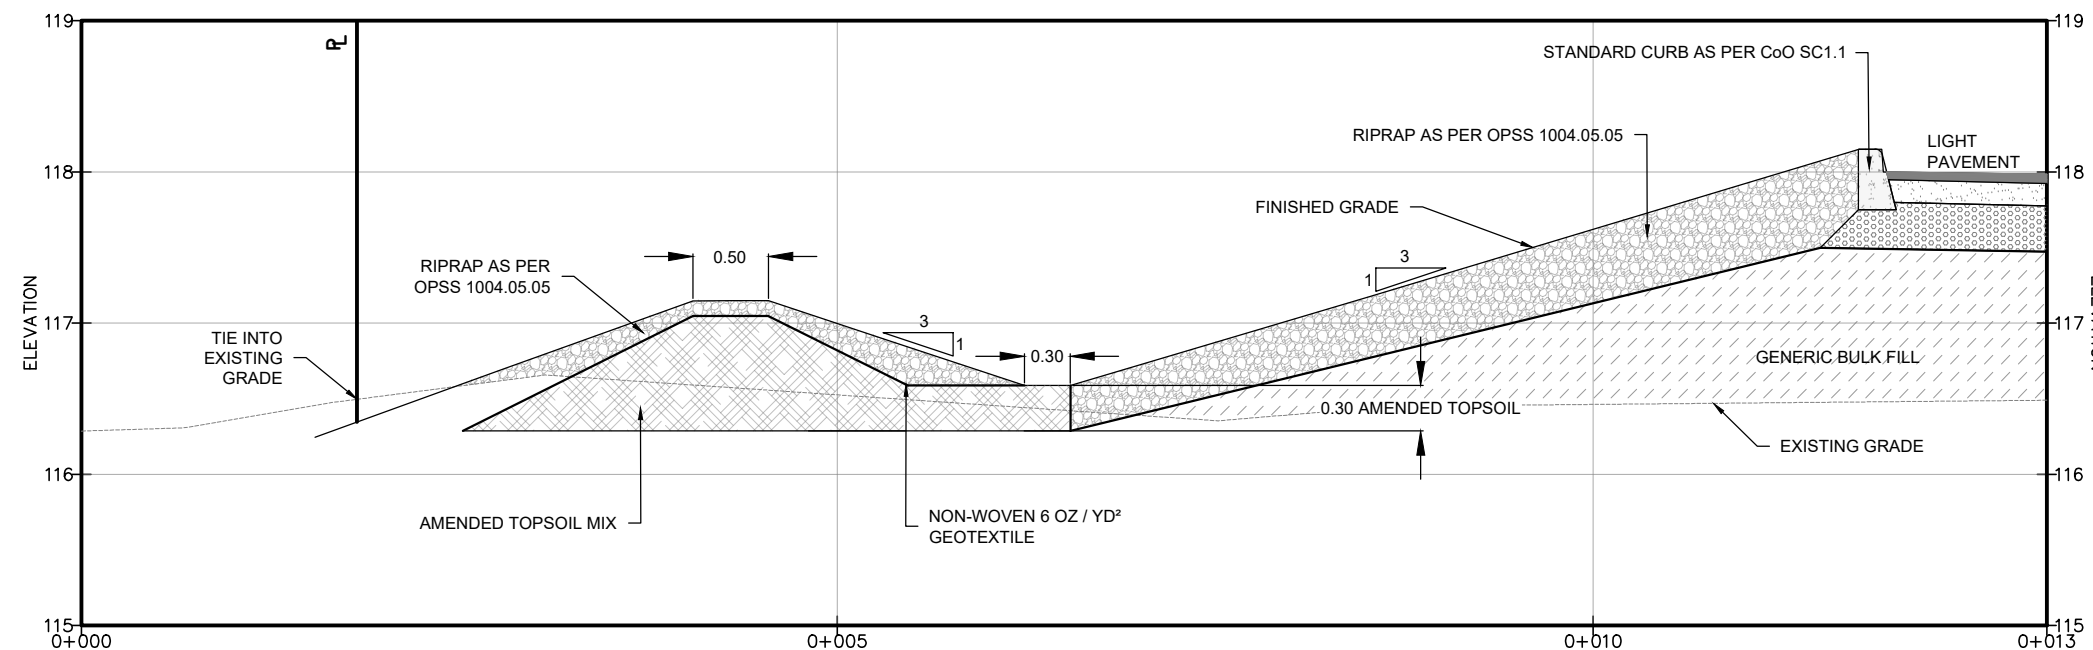


**ENHANCED SWALE**  
**CROSS-SECTION F-F'**  
SCALE = 1:50

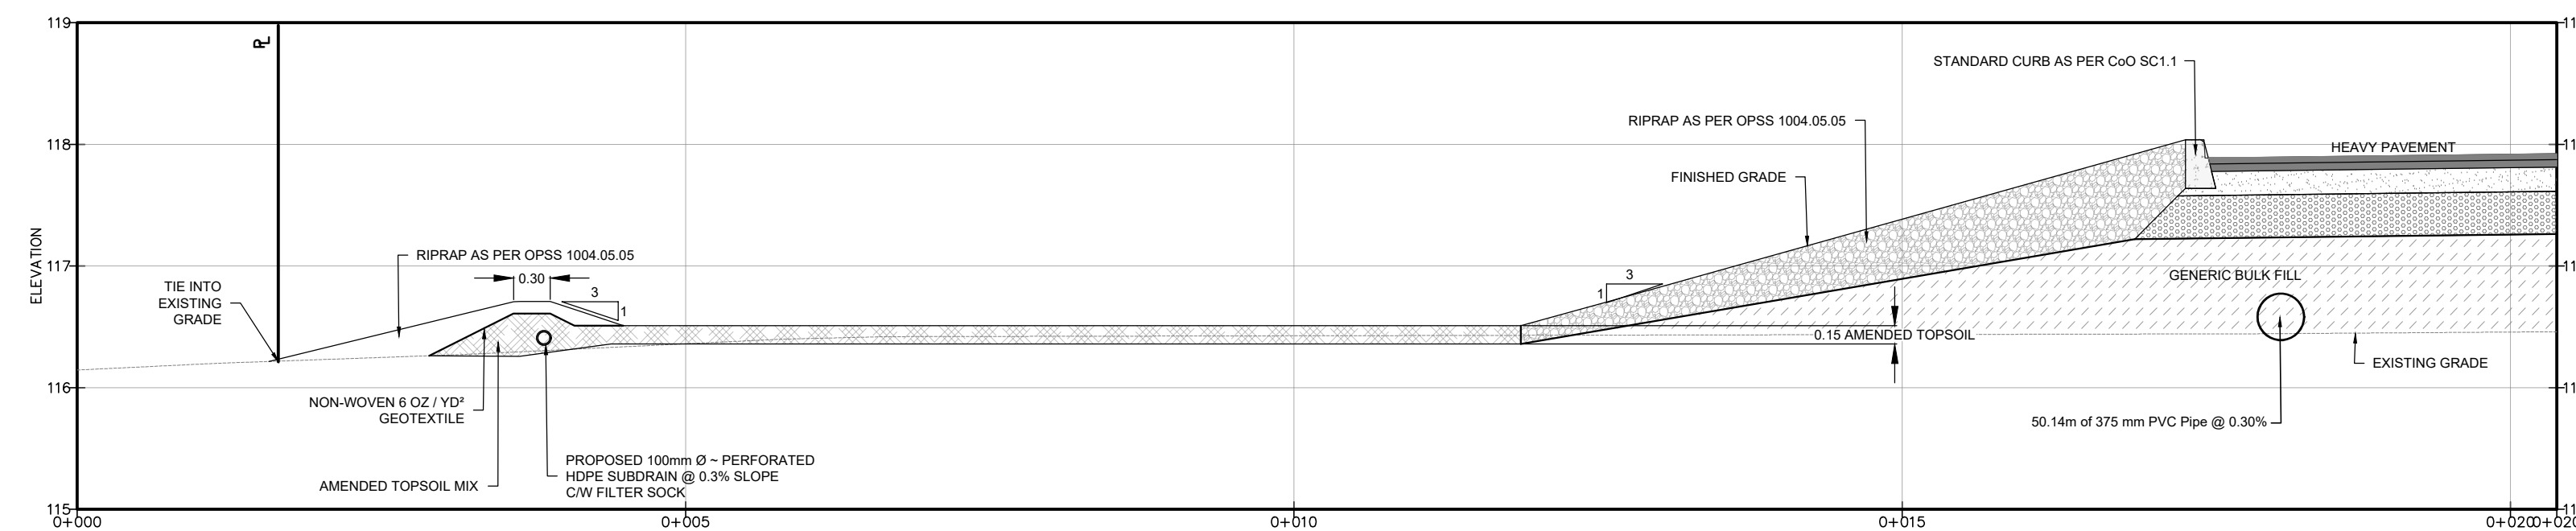

**LINEAR SUBDRAINED**  
**RAIN GARDEN**  
**CROSS-SECTION G-G'**  
SCALE = 1:50

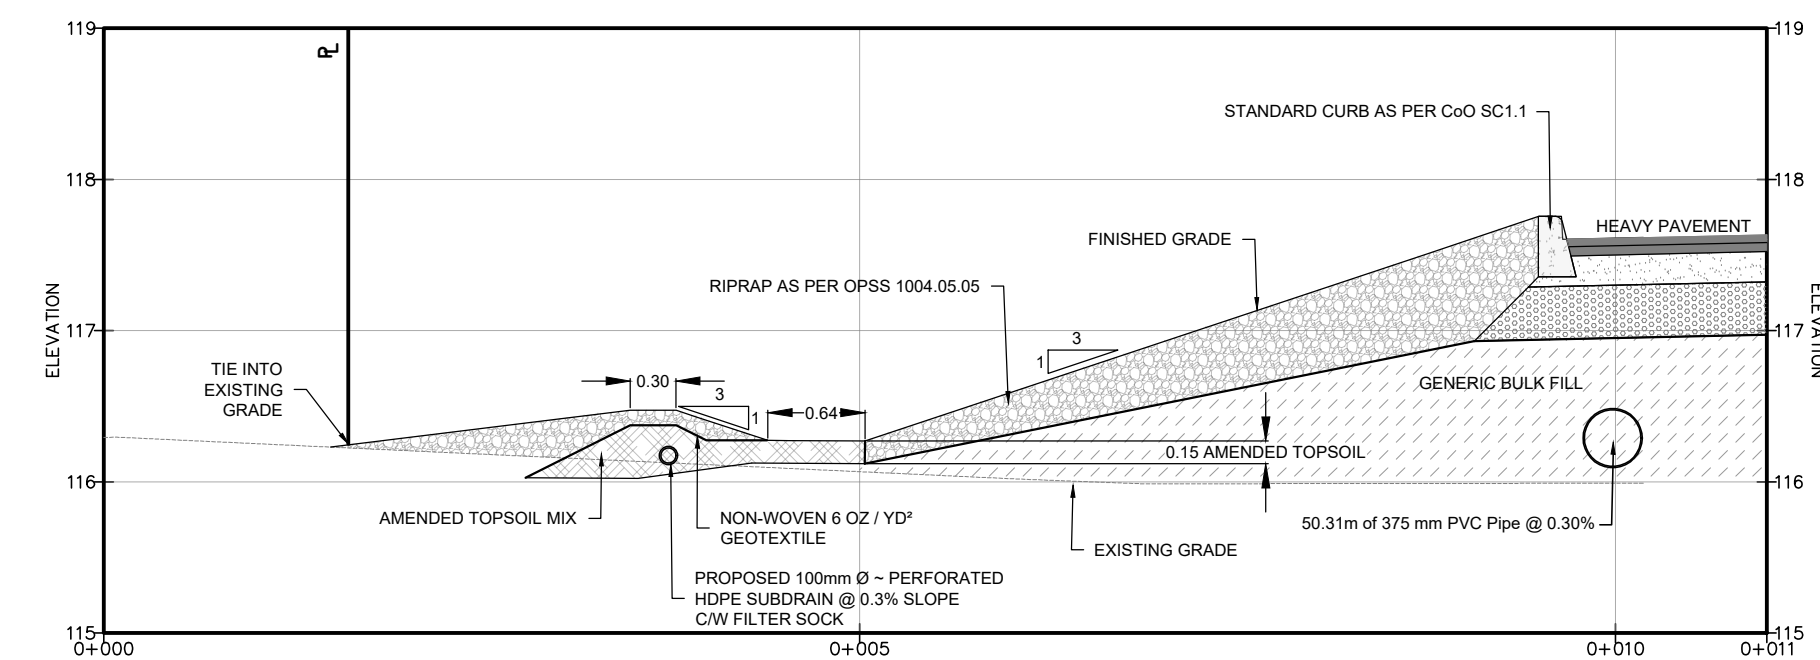

**LINEAR SUBDRAINED**  
**RAIN GARDEN**  
**CROSS-SECTION H-H'**  
SCALE = 1:50




NOTES: 1. ALL DIMENSIONS ARE IN METRES, UNLESS OTHERWISE SPECIFIED; ALL ELEVATIONS ARE IN METRES.  
2. THIS IS NOT A LEGAL SURVEY.  
3. EXISTING SERVICES INFORMATION SHOWN ARE BASED ON BEST CURRENT INFORMATION. CONTRACTOR TO VERIFY EXACT LOCATION AND REPORT ANY DISCREPANCIES TO KOLLAARD ASSOCIATES INC.  
4. CLIENT IS RESPONSIBLE FOR ACQUIRING ALL NECESSARY PERMITS.  
5. CONTRACTOR TO VERIFY THAT APPROPRIATE PERMITS HAVE BEEN ACQUIRED PRIOR TO ANY CONSTRUCTION.  
6. CONTRACTOR IS RESPONSIBLE FOR LOCATION AND PROTECTION OF UTILITIES.  
7. ALL DIMENSIONS TO BE VERIFIED ON SITE BY CONTRACTOR PRIOR TO CONSTRUCTION.  
8. THIS DRAWING IS NOT FOR CONSTRUCTION UNTIL ALL APPROVALS HAVE BEEN GRANTED.

9. INSPECTION OF ROUGH GRADE BY KOLLAARD ASSOCIATES INC. AND MUNICIPALITY MUST BE CONDUCTED PRIOR TO PLACEMENT OF TOPSOIL OR SOO.  
10. HYDRO SERVICE TO BE INSTALLED ACCORDING TO THE SPECIFICATIONS OF SERVICE PROVIDER AND THE MECHANICAL ENGINEER.  
11. ALL MATERIALS AND CONSTRUCTION TO BE IN ACCORDANCE WITH MUNICIPAL STANDARDS AND ONTARIO PROVINCIAL STANDARDS AND SPECIFICATIONS.  
12. ANY CHANGES MADE TO THIS PLAN MUST BE VERIFIED AND APPROVED BY KOLLAARD ASSOCIATES, INC.  
13. THIS DRAWING IS PART OF KOLLAARD ASSOCIATES DESIGN REPORT #221099.

| No. | REVISION                                          | DATE       | BY  |
|-----|---------------------------------------------------|------------|-----|
| 2   | RESPONSE TO CITY OF OTTAWA FORMAL REVIEW COMMENTS | 2026.06.08 | ARK |
| 1   | RESPONSE TO CITY OF OTTAWA FORMAL REVIEW COMMENTS | 2026.02.27 | ARK |
| 0   | ISSUED FOR SITE PLAN CONTROL APPROVAL             | 2025.10.24 | SD  |

CONSULTANTS



**Kollaard Associates**  
Engineers

(613) 860-0923

DESIGN  
DRAWN  
CHECKED  
APPROVED

STAMP  
JUNE 8, 2026  
S.E. deWit  
100079612  
PROVINCE OF ONTARIO

CLIENT NAME  
PROJECT NAME  
PROJECT LOCATION  
DRAWING

1000198532 ONTARIO INC.  
PROPOSED WAREHOUSING  
2726-2732 MOODIE DRIVE, OTTAWA, ON  
DETAILS 1


© COPYRIGHT 2025  
KOLLAARD ASSOCIATES INCORPORATED

PROJECT No.  
DATE  
SCALE  
DRAWING No.

221099  
2025.10.24  
SCALE  
221099-DET1

D07-12-25-0153



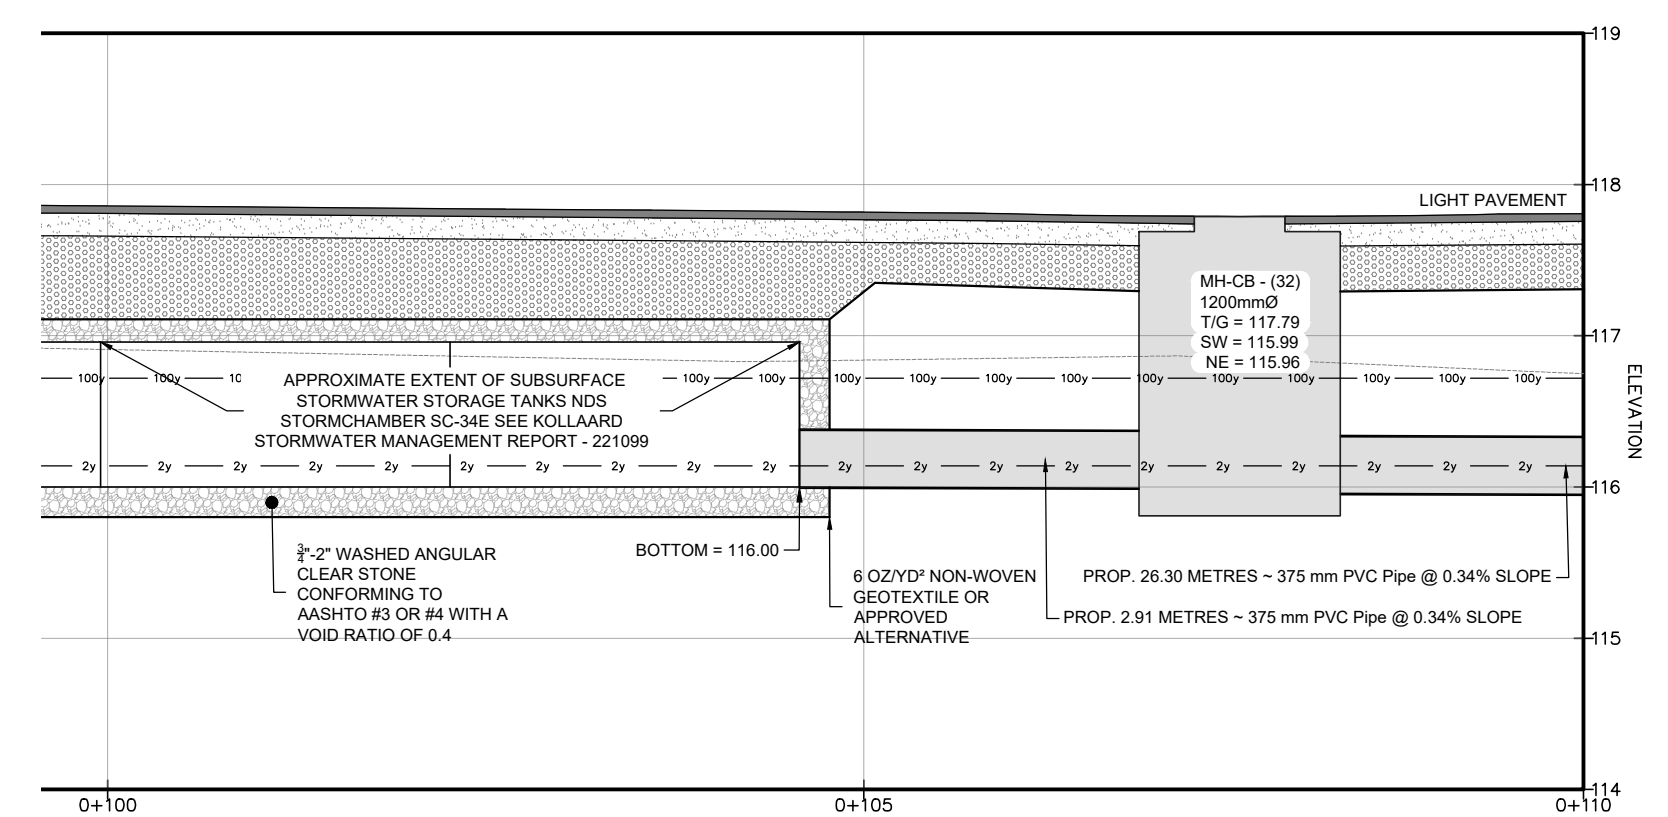

|             |             |
|-------------|-------------|
| PROJECT No. | 221099      |
| DATE        | 2025.10.24  |
| SCALE       |             |
| DRAWING No. | 221099-DET2 |



