


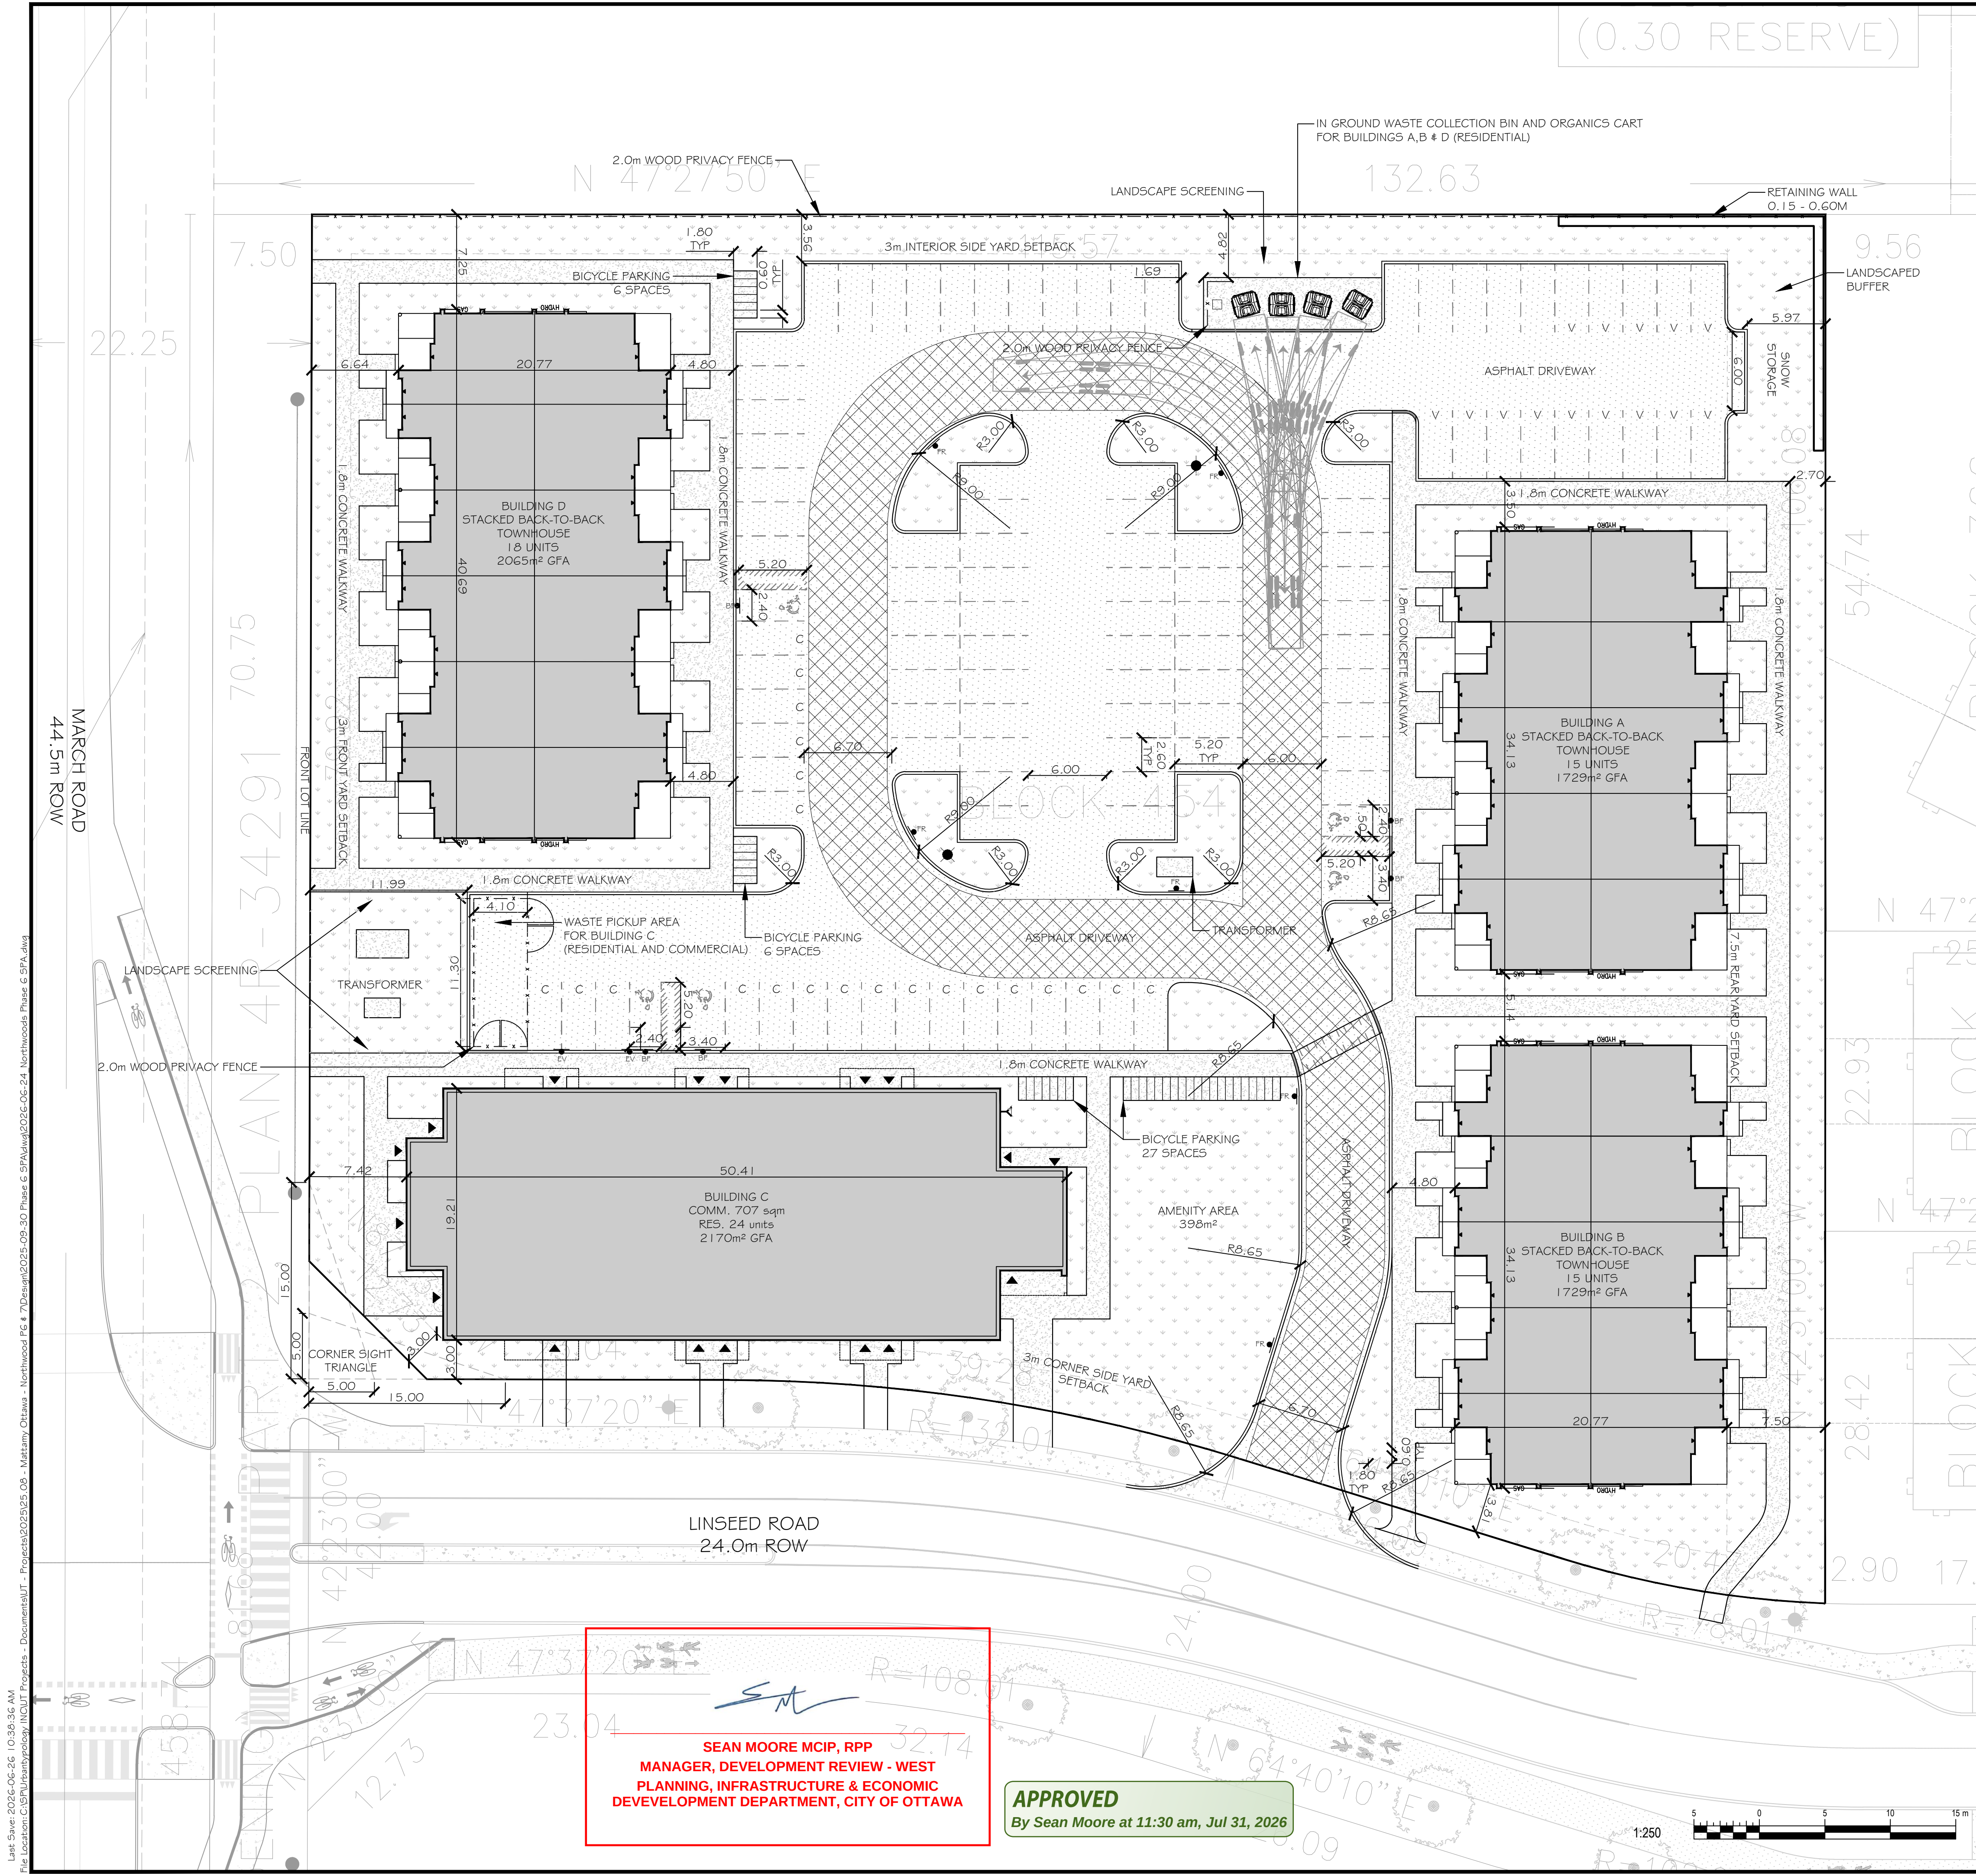

Site Statistics



Site Area	10,891 m ²
Paved Area	4,796 m ²
Landscaped Area	2,835 m ²
Building Coverage	3,348 m ²
Gross Floor Area	7,693 m ²
Commercial Gross Floor Area	707 m ²
Total Units	72 Units
	48 Townhouse
	24 Apartment
Density	66 UPH

Zoning Provisions

GM 15(302.1) Zone	Required	Proposed	Conforms
Front Yard Setback (min)	3m	6.64m	Y
Corner Side Yard Setback (min)	3m	3.0m	Y
Interior Side Yard Setback (min)	3m	7.25m	Y
Mixed Use	5m	66.74m	Y
Stacked Townhouse	3m	7.25m	Y
Rear Yard Setback (min)	7.5m	7.5m	Y
Lot Coverage Floor Space Index (max)	2	0.69	Y
Building Height (max)	18m	11.4m	Y
Mixed Use	18m	11.4m	Y
Stacked Townhouse	18m	11.4m	Y
Parking Spaces (min)	110 spaces	110 spaces	Y
Commercial (3.4/100m ²)	24 spaces	24 spaces	Y
Residential (1/unit)	72 spaces	72 spaces	Y
Residential Visitor (0.2/unit)	14 spaces	14 spaces	Y
Accessible Spaces	5 spaces	5 spaces	Y
Type A	2 spaces	2 spaces	Y
Type B	3 spaces	3 spaces	Y
Size of Space	2.6 x 5.2m	2.6 x 5.2m	Y
Driveway Width (min)	6m	6.7m	Y
Aisle Width (min)	6.7m	6.7m	Y
Residential Use	6.0m	6.0m	Y
Parking Lot Landscaped Area (min)	15%	24%	Y
Parking Lot Landscaped Buffer (min)	3m	11.99m	Y
Abutting a Street	3m	3.56m	Y
Not Abutting a Street			
Refuse Collection (min)			
Abutting a Public Street	9m	11.99m	Y
From any Lot Line	3m	4.82m	Y
Bicycle Parking (min)	39 spaces	39 spaces	Y
Commercial (1/250m ²)	3 spaces	3 spaces	Y
Residential (0.5/unit)	36 spaces	36 spaces	Y
Amenity Space (min) (6m ² /unit)	432m ²	965m ²	Y
Communal (50% of required)	216m ²	342m ²	Y
Private	N/A	623m ²	Y
Landscaped Area Width (min)			
Abutting a Street	3m	3m	Y
Abutting a Residential Zone	7.5m	7.5m	Y
Cumulative Non-Residential GFA (min)	700m ²	707m ²	Y
Private Way Width (min)	6m	6m	Y
Residential Setback to Private Way (min)	1.8m	3.8m	Y
Separation Area Between Buildings (min)	1.2m	5.14m	Y

- NOTES
- Property information from Plan 4M-1767, dated July 29, 2025, prepared by J.D. Barnes Limited, 62 Steacie Drive, Suite 103 Kanata, ON K2K 2A9
 - Excess snow to be removed from site at owner's expense
 - Building A, B, and D to be serviced by in ground waste collection bins. Building C to be serviced by internal waste room, with external pick-up area.

- Legend
- 240L CART ORGANICS (0.5m²)
 - EB260 RECYCLING (GMP)
 - EB500 GARBAGE
 - EB500 GARBAGE
 - EB260 RECYCLING (FIBRE)

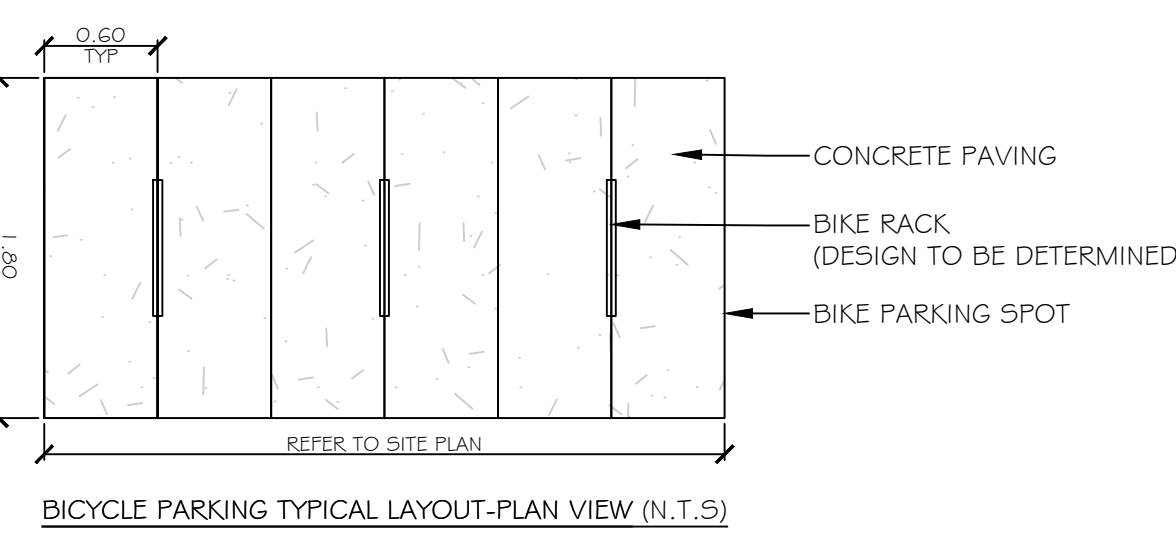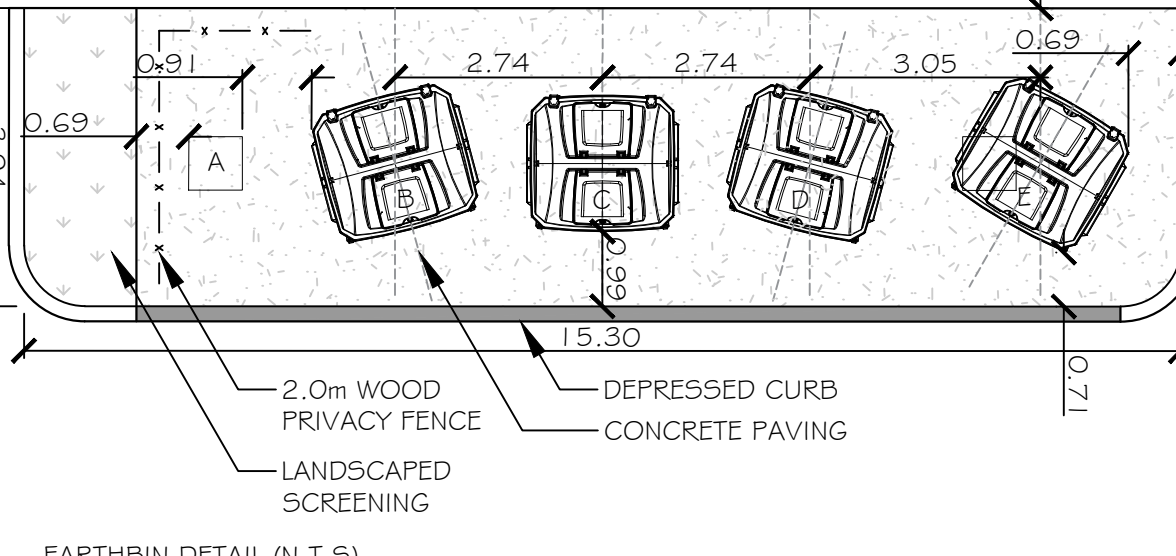

Urbantypology

UNIT 10-163 STERLING ROAD
OTTAWA, ONTARIO K1V 3P5
PH: 437.700.5446

UNIT 101 - 45 SPENCER STREET
OTTAWA, ONTARIO K1V 3P5
PH: 437.700.5446 / 613.897.1237

KEY PLAN:

LEGEND:

- PROPERTY LINE
- BUILDING
- ASPHALT
- CONCRETE
- CURB CUT
- LANDSCAPED
- BARRIER FREE PARKING
- BARRIER FREE PARKING SIGN
- EV CHARGING SPACE
- BUILDING ENTRANCE
- VISITOR PARKING
- COMMERCIAL PARKING
- FIRE ROUTE
- FIRE ROUTE SIGN
- PROPOSED FIRE HYDRANT
- PROPOSED SANITARY SEWER MANHOLE
- PROPOSED STORM SEWER MANHOLE
- PROPOSED CATCHBASIN MANHOLE
- PROPOSED CATCHBASIN
- EXISTING STREET TREE
- SIAMESE CONNECTION

GENERAL NOTES:

ALL MEASUREMENTS ARE IN METRIC UNLESS SPECIFIED OTHERWISE. DO NOT SCALE THE DRAWINGS.

COPYRIGHT RESERVED. THIS DRAWING IS THE EXCLUSIVE PROPERTY OF URBANTYPOLOGY INC. AND SHALL NOT BE REPRODUCED OR USED FOR PURPOSES OTHER THAN INTENDED BY THE OWNER, WITHOUT PERMISSION.

IT IS THE RESPONSIBILITY OF THE OWNER TO:

- VERIFY ALL DIMENSIONS AND CONDITIONS ON SITE.
- REPORT ALL ERRORS AND/OR OMISSIONS TO THE CONTRACT ADMINISTRATOR.
- COMPLY WITH ALL PERMITTING CODES, BY-LAWS AND LAWS.
- VERIFY LOCATION OF ALL UNDERGROUND SERVICES AND UTILITIES WITH RESPECTIVE AUTHORITIES PRIOR TO COMMENCEMENT OF WORK.

PROJECT TEAM:

LANDSCAPE ARCHITECTURE: URBANTYPOLOGY
100-163 STERLING ROAD
OTTAWA, ON K1V 3P5
PH: 437.700.5446

PLANNING: BHM STUDIO
440 OGDON STREET
OTTAWA, ON K2P 1K4

ARCHITECTURE: KOHN
110 OGDON AVENUE, SUITE 501
OTTAWA, ON K2P 1K4

TRANSPORTATION: STANTEC
100-163 STERLING ROAD
OTTAWA, ON K1V 3P5

CIVIL ENGINEER: STANTEC
100-163 STERLING ROAD
OTTAWA, ON K1V 3P5

PROJECT INFORMATION:

NORTHWOODS PHASE 6
1020-1070 MARCH ROAD
PIN 04527-1016
Block 188 Plan 4M-1767

TITLE:

SITE PLAN

FILE NO.: 25.08

DATE: 2025-11-05

DRAWN: VG

CHECKED: JH

SCALE: 1:250

SHEET NO.:

SP1.0

SEAN MOORE MCIP, RPP
MANAGER, DEVELOPMENT REVIEW - WEST
PLANNING, INFRASTRUCTURE & ECONOMIC
DEVELOPMENT DEPARTMENT, CITY OF OTTAWA

APPROVED
By Sean Moore at 11:30 am, Jul 31, 2026

