
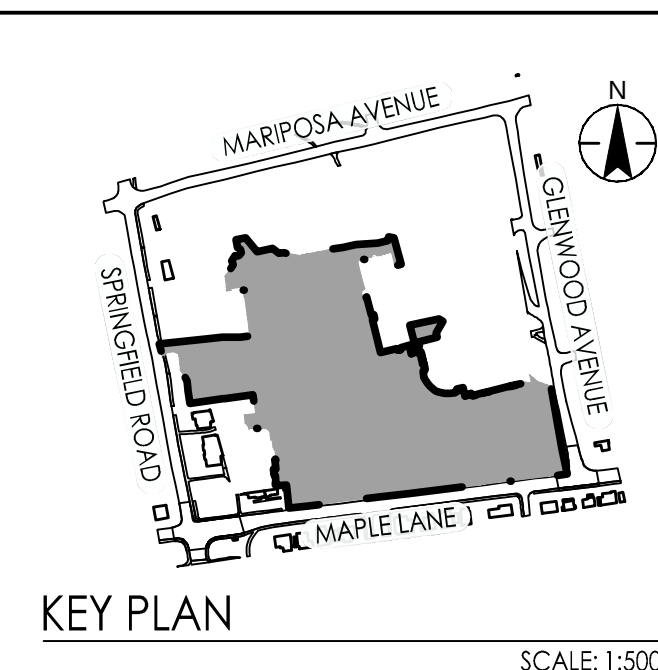


2025/09/14 10:43 AM By: ellijohnson
C:\Users\ellijohnson\Documents\116501019_Layout.dwg
2025/09/14 10:43 AM By: ellijohnson
C:\Users\ellijohnson\Documents\116501019_Layout.dwg

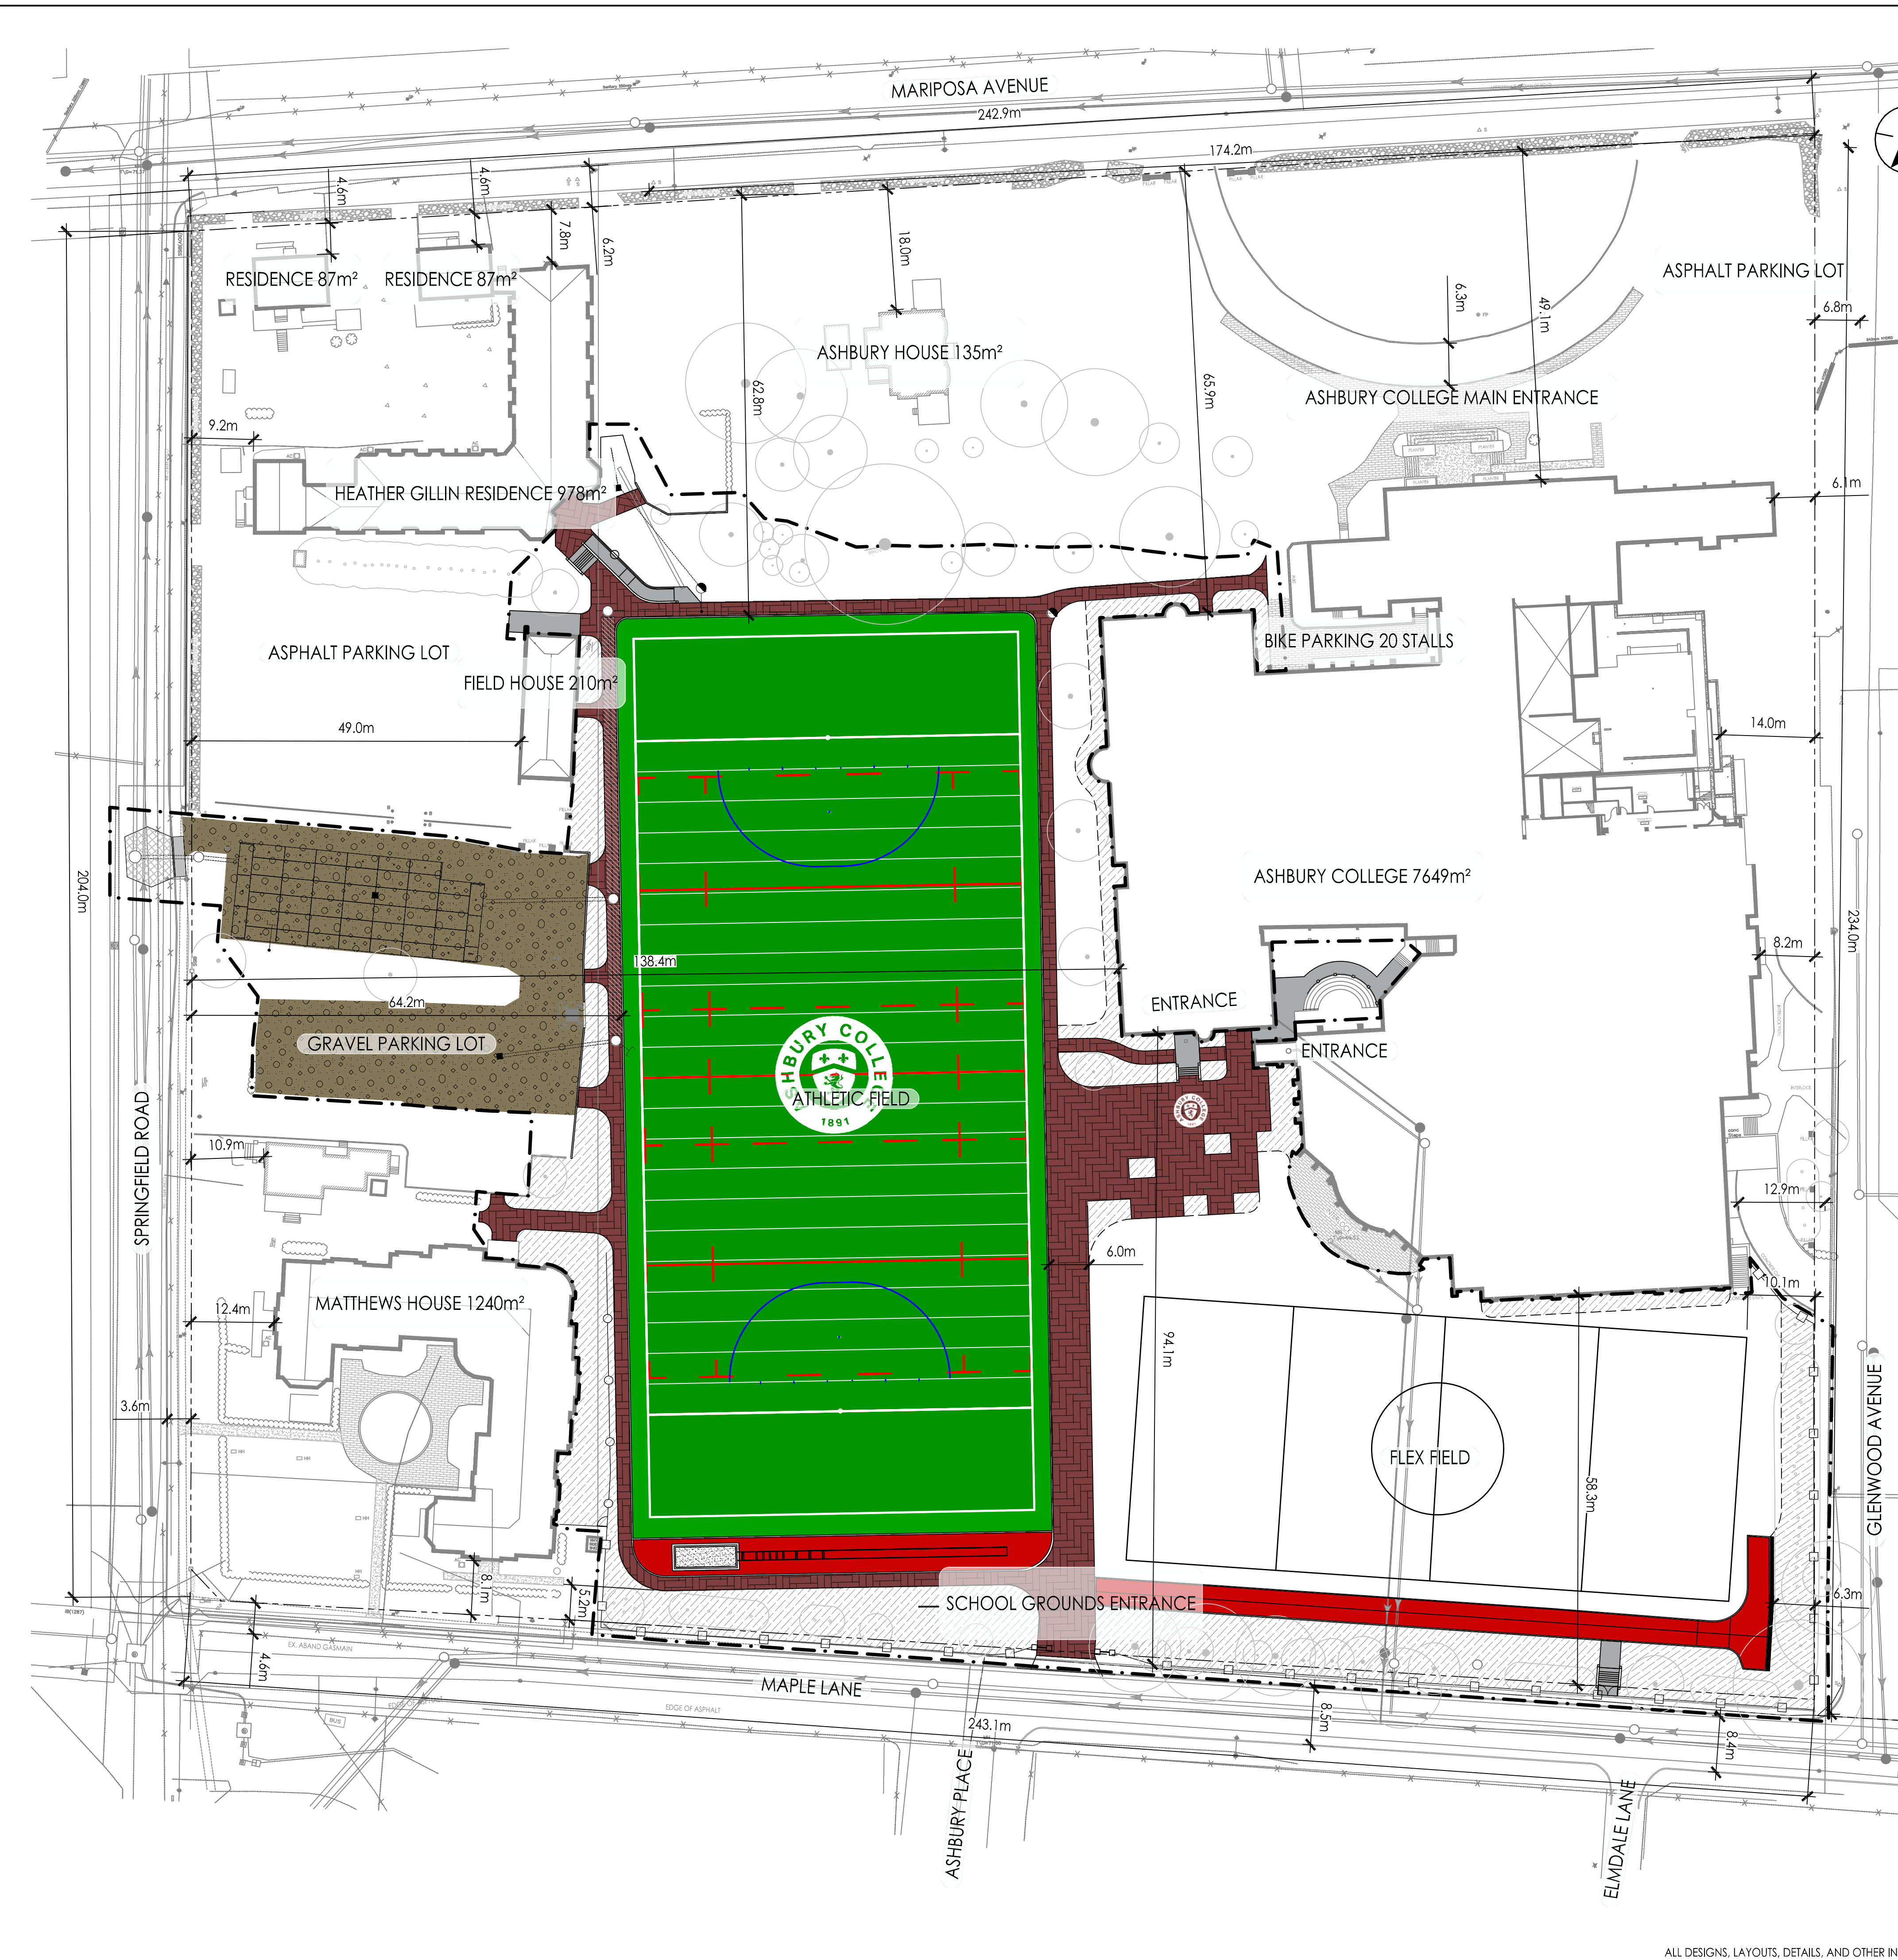

ZONING TABLE			
SECTION	PROVISION	REQUIRED	PROVIDED
TABLE 170A(A)	MINIMUM LOT WIDTH	15.0 m	210.5 m (SPRINGFIELD ROAD)
TABLE 170A(B)	MINIMUM LOT AREA	400 m²	5.3 HECTARES
TABLE 170A(C)	MINIMUM FRONT YARD SETBACK	ABUTTING A RESIDENTIAL ZONE IN AREA C ON SCHEDULE 1: 7.5 m	9.4 m FROM MATTHEWS HOUSE 62.99 m FROM PROPOSED SPORTS FIELD
TABLE 170A(D)	MINIMUM REAR YARD SETBACK	7.5 m	6.0 m FROM ASHBURY COLLEGE 7.5 m FROM PROPOSED SOCCER FIELD
TABLE 170A(E)	MINIMUM INTERIOR SIDE YARD SETBACK	7.5 m	10.8 m FROM RESIDENCE (MARIPOSA AVENUE) 61.8 m FROM PROPOSED SPORTS FIELD
TABLE 170A(F)	MINIMUM CORNER SIDE YARD SETBACK	4.5 m	8.0 m FROM MATTHEWS HOUSE (MAPLE LANE) 10.89 m FROM PROPOSED SPORTS FIELD
TABLE 170A(G)	MAXIMUM HEIGHT	15 m	N/A

ZONING TABLE - NEW BY-LAW			
SECTION	PROVISION	REQUIRED	PROVIDED
TABLE 1101(B)	MINIMUM LOT WIDTH	15.0 m	210.5 m (SPRINGFIELD ROAD)
TABLE 1101(A)	MINIMUM LOT AREA	400 m²	5.3 HECTARES
TABLE 1101(C)	MINIMUM FRONT YARD SETBACK	3.0 m	9.4 m FROM MATTHEWS HOUSE 62.99 m FROM PROPOSED SPORTS FIELD
TABLE 1101(F)	MINIMUM REAR YARD SETBACK	WHERE ABUTTING NI-N6 ZONES: 7.5 m ALL OTHER CASES: 4.5 m	6.0 m FROM ASHBURY COLLEGE 7.5 m FROM PROPOSED SOCCER FIELD
TABLE 1101(E)	MINIMUM INTERIOR SIDE YARD SETBACK	WHERE ABUTTING NI-N6 ZONES: 7.5 m ALL OTHER CASES: 3.0 m	10.8 m FROM RESIDENCE (MARIPOSA AVENUE) 61.8 m FROM PROPOSED SPORTS FIELD
TABLE 1101(D)	MINIMUM EXTERIOR SIDE YARD SETBACK	4.5 m	8.0 m FROM MATTHEWS HOUSE (MAPLE LANE) 10.89 m FROM PROPOSED SPORTS FIELD
TABLE 1101(G)	MAXIMUM BUILDING HEIGHT	15 m	N/A

I Zoning Mechanisms	Provisions		
	II Areas A and B on Schedule 1	III Abutting a residential zone in Area C on Schedule 1	IV Other cases
(a) Minimum Lot Width (m)	15		
(b) Minimum Lot Area (m²)	400		
(c) Minimum Front Yard Setback (m)	3	7.5	6
(d) Minimum Rear Yard Setback (m)		Abutting an R1, R2 or R3 Zone- 7.5 Other cases- 4.5	7.5
(e) Minimum Interior Side Yard Setback (m)	7.5		3
(f) Minimum Corner Side Yard Setback (m)	4.5		
(g) Maximum Height (m)	15 (By-law 2017-303)		

Stantec Consulting Ltd.
200-325 25th Street SE
Calgary, AB Canada
Tel. 403.716.8000
www.stantec.com

Copyright Reserved
The Contractor shall verify and be responsible for all dimensions. DO NOT scale the drawing - any errors or omissions shall be reported to Stantec without delay.
The Copyrights to all designs and drawings are the property of Stantec. Reproduction or use for any purpose other than that authorized by Stantec is forbidden.

Legend

- PROPERTY LINE
- UNDERGROUND POWER
- PROJECT BOUNDARY
- EXISTING FENCE
- LIMITS OF MULCH BEDS

Notes

DEVELOPER/OWNER: ASHBURY COLLEGE
MUNICIPAL ADDRESS:
362 MARIPOSA AVENUE, OTTAWA, ON K1M 0T3
LEGAL DESCRIPTION OF PROPERTY:
BLOCK A REGISTERED PLAN 251 & PART OF BLOCK 10 REGISTERED PLAN 92, CITY OF OTTAWA
N 74° 08'30" E, N 80° 44'30" E
N 81° 15'00" E, N 12° 23'30" W
N 12° 18'40" W, N 12° 27'00" W

PIN: 04224-0234
SITE AREA = 5.3 HECTARES

BOUNDARY INFORMATION COMPILED FROM EXISTING RECORDS AND FIELD SURVEY

BEARINGS ARE GRID. DERIVED FROM CAN-NET 2016 REAL TIME NETWORK GPS OBSERVATIONS AND ARE REFERENCED TO SPECIFIED CONTROL POINTS 01919680105 AND 019198434761.
MTM ZONE 9 (76°30' WEST LONGITUDE) NAD-83 (ORIGINAL).

FOR SITE SURVEY INFORMATION, REFER TO SURVEY PREPARED BY VOLLEBEKK LTD., DATED DECEMBER 13, 2018

FOR MATERIAL & PLANT SCHEDULES, REFER TO LANDSCAPE PLANS

3	RE-ISSUED FOR SITE PLAN APPLICATION	AJ/WQ	BT	26.09.09
2	RE-ISSUED FOR CITY DISCUSSION	AJ/WQ	BT	26.08.04
1	ISSUED FOR SITE PLAN APPLICATION	AJ/WQ	BT	26.04.21

Revision

By	Appd.	YY.MM.DD

File Name: 116501019_LAYOUT.DWG

Down.	Chkd.	Dsgn.	YY.MM.DD

Permit-Seal

Client/Project

ASHBURY COLLEGE

ASHBURY COLLEGE
SYNTHETIC TURF FIELD
OTTAWA, ON

Title

SITE PLAN

Project No.
116501019

Drawing No.

Scale
1:500

Sheet
1 of 1

Revision

Scale bar: 0 5 15 25m

SP101

3