GENERAL NOTES:

1. THIS DRAWING SHALL BE READ IN CONJUNCTION WITH ALL RELEVANT ARCHITECTURAL, ENGINEERING AND RELATED DRAWINGS AND DOCUMENTS.
2. REFER TO ENGINEERING DRAWINGS FOR GRADING.
3. REFER TO ARCHITECTURAL DRAWINGS FOR SITE LAYOUT.
4. CONTRACTOR SHALL PROVIDE THE LOCATION(S) OF ALL SERVICES/UTILITIES BY CONSULTING MUNICIPAL AUTHORITIES AND UTILITY COMPANIES AND SHALL BE RESPONSIBLE FOR ADEQUATE PROTECTION FROM DAMAGE DURING CONSTRUCTION.
5. PLANT MATERIAL SHALL BE NO. 1 GRADE AND SHALL COMPLY WITH THE METRIC GUIDE SPECIFICATIONS FOR NURSERY STOCK (LATEST EDITION), PUBLISHED BY THE CANADIAN NURSERY TRADES ASSOCIATION.
6. PLANT MATERIAL LOCATIONS ARE SHEMATIC/APPROXIMATE ONLY. CONTRACTOR SHALL STAKE OUT LOCATIONS ON SITE PRIOR TO WORK.
7. SODDED AREAS TO RECEIVE 125MM TOPSOIL. SOD SHALL BE NO. 1 QUALITY CONFORMING TO THE CANADIAN NURSERY SOD GROWERS SPECIFICATION.
8. REINSTATE ALL AREAS DAMAGED OR DISTURBED BEYPOND THE LIMIT OF WORK.
9. CONTRACTOR SHALL GUARANTEE ALL STREET TREE PLANT MATERIAL (DECIDUOUS AND CONIFEROUS) FOR A PERIOD OF TWO (2) FULL YEARS FROM THE DATE OF FINAL ACCEPTANCE.
10. TREES PLANTED SHALL BE:
    1. 6.0M MIN. FROM STREET LIGHTS.
    2. 1.5M MIN. FROM DRIVEWAYS AND SIDEWALKS.
    3. 2.5M MIN. FROM ROAD CURB.
    4. 2.5M MIN. FROM FIRE HYDRANTS.
    5. 3.0M MIN. FROM UTILITY PEDESTALS AND HYDRO TRANSFORMERS.
    6. 2.0M MIN. FROM WATER STANDPIPE.
11. PLANT MATERIAL SUBSTITUTIONS SHALL NOT BE PERMITTED WITHOUT WRITTEN APPROVAL FROM THE CONSULTANT.
12. THIS PLAN HAS BEEN PREPARED FOR MUNICIPAL APPROVAL AND MAY NOT BE USED FOR CONSTRUCTION.

TREE PLANTING –SECTION:

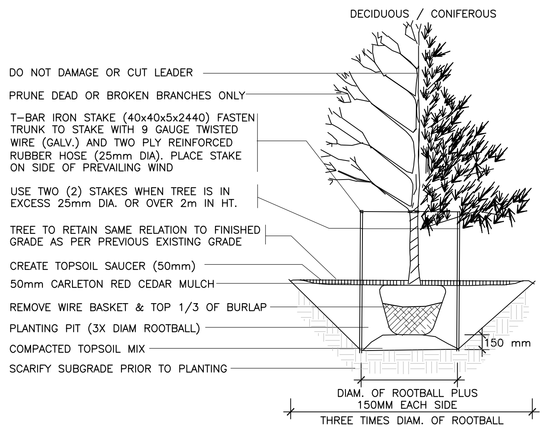

ENSURE 400mm DEPTH OF PLANTING SOIL FOR ALL PLANT MATERIAL.

SHRUB PLANTING –SECTION:

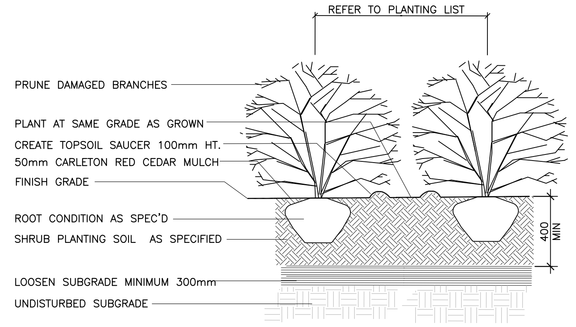

ENSURE 400mm DEPTH OF PLANTING SOIL FOR ALL PLANT MATERIAL.

PLANT LIST:

SYM.	BOTANICAL NAME	COMMON NAME	QTY.	SIZE	REMARKS
DECIDUOUS TREES					
AF	ACER FREEMANII AUTUMN BLAZE	AUTUMN BLAZE MAPLE	5	70 MM CAL.	B&B/W.B.
SR	SYRINGA RETICULATA ' IVORY SILK '	IVORY SILK TREE LILAC	18	40 MM CAL.	B&B
UA	ULMUS AMERICANA ' LIBERTY ELM '	LIBERTY ELM	77	50 MM CAL.	B&B/W.B.
PD	PRUNUS PADUS COMMUTATA	MAYDAY TREE	12	40 MM CAL.	B&B
AST	ACER SACCHARUM ' TEMPLE '	COLUMNAR TEMPLE MAPLE	65	50 MM CAL.	WB
MH	MALUS 'HARVEST GOLD'	HARVEST GOLD CRABAPPLE	1	50 MM CAL. (SPECIMEN)	WB
CONIFEROUS TREES					
PS	PINUS SYLVESTRIS	SCOT'S PINE	1	300 CM HT. (SPECIMEN)	B&B/W.B.
SHRUBS					
HK	HYPERICUM KALMIANUM	ST JOHN'S WORT	150	50 CM HT.	POT – 0.5M O.C.
RR	ROSA RUGOSA 'ALBA'	WHITE ROSA RUGOSA	19	80 CM HT.	POT – 1M O.C.
SI	SALIX INTREGRA HAKURO NISHIKI	HAKURO NISHIKIKI DAPPLED WILLOW	93	90 CM HT.	POT – 1m O.C.
JS	JUNIPERUS SABINA ' TAMARISCIFOLIA'	TAMARIX JUNIPER	375	50 CM SPREAD	POT – 1M O.C.
CSF	CORNUS SERICEA FLAVIRAMEA	YELLOW TWIG DOGWOOD	141	50 CM HT.	POT – 1M. O.C.
PERENIALS/GRASSES					
AS	ANDROPOGON SCOPARIUS	LITTLE BLUE STEM	85	1 GAL. POT	POT – 0.8M O.C.
CA	CALAMAGROSTIS ACUTIFLORA 'KARL FORESTER'	KARL FORESTER FEATHER REED GRASS	120	60 CM HT.	POT – 1M O.C.
DC	DESCHAMPSIA CESPITOSA 'BROZESCHLEIER'	BRONZE VEIL TUFTED HAIR GRASS	85	1 GAL. POT	POT – 1M O.C.
HP	HEMEROCALLIS 'PARDON ME'	PARDON ME DAYLILY	405	1 GAL. POT	POT – 0.4M O.C.
HN	HEMEROCALLIS 'NIGHT WHISPERS'	NIGHT WHISPERS DAYLILY	671	1 GAL. POT	POT – 0.4M O.C.
IS	IRIS SIBERICA 'BLUE KING'	BLUE KING SIBERIAN IRIS	150	1 GAL. POT	POT – 0.5M O.C.
LG	LIGULARIA GRANITO	GRANITO GOLDEN RAY	65	1 GAL. POT	POT – 0.5M O.C.
MD	MONARDA DIDYMA 'MARSHALL'S DELIGHT'	MARSHALL'S DELIGHT BEE BALM	105	1 GAL. POT	POT – 0.4M O.C.
PV	PANICUM VIRGATUM 'PRAIRIE FIRE'	RED SWITCH GRASS	100	1 GAL. POT	POT – 1M O.C.
PA	PENNISETUM ALOPECURIODES	FOUNTAIN GRASS	375	1 GAL. POT	POT – 1M O.C.
PH	PENNISETUM ALOPECUROIDES 'HAMELN'	HAMELN DWARF FOUNTAIN GRASS	205	1 GAL. POT	POT – 0.4M O.C.
SN	SALVIA NEMEROSA 'BLUE QUEEN'	BLUE QUEEN PERENNIAL SALVIA	70	1 GAL. POT	POT – 0.4M O.C.

LEGEND:

- DC — DROP CURB
- GRAVEL PATHWAY
- MAINTENANCE EDGE
- PEDESTRIAN LIGHT
- PROPOSED TREES
- PROPOSED SHRUBS
- PRECAST PAVERS 1.
- PRECAST PAVERS 2.
- PRECAST PAVERS 3.
- PRECAST PAVERS 4.

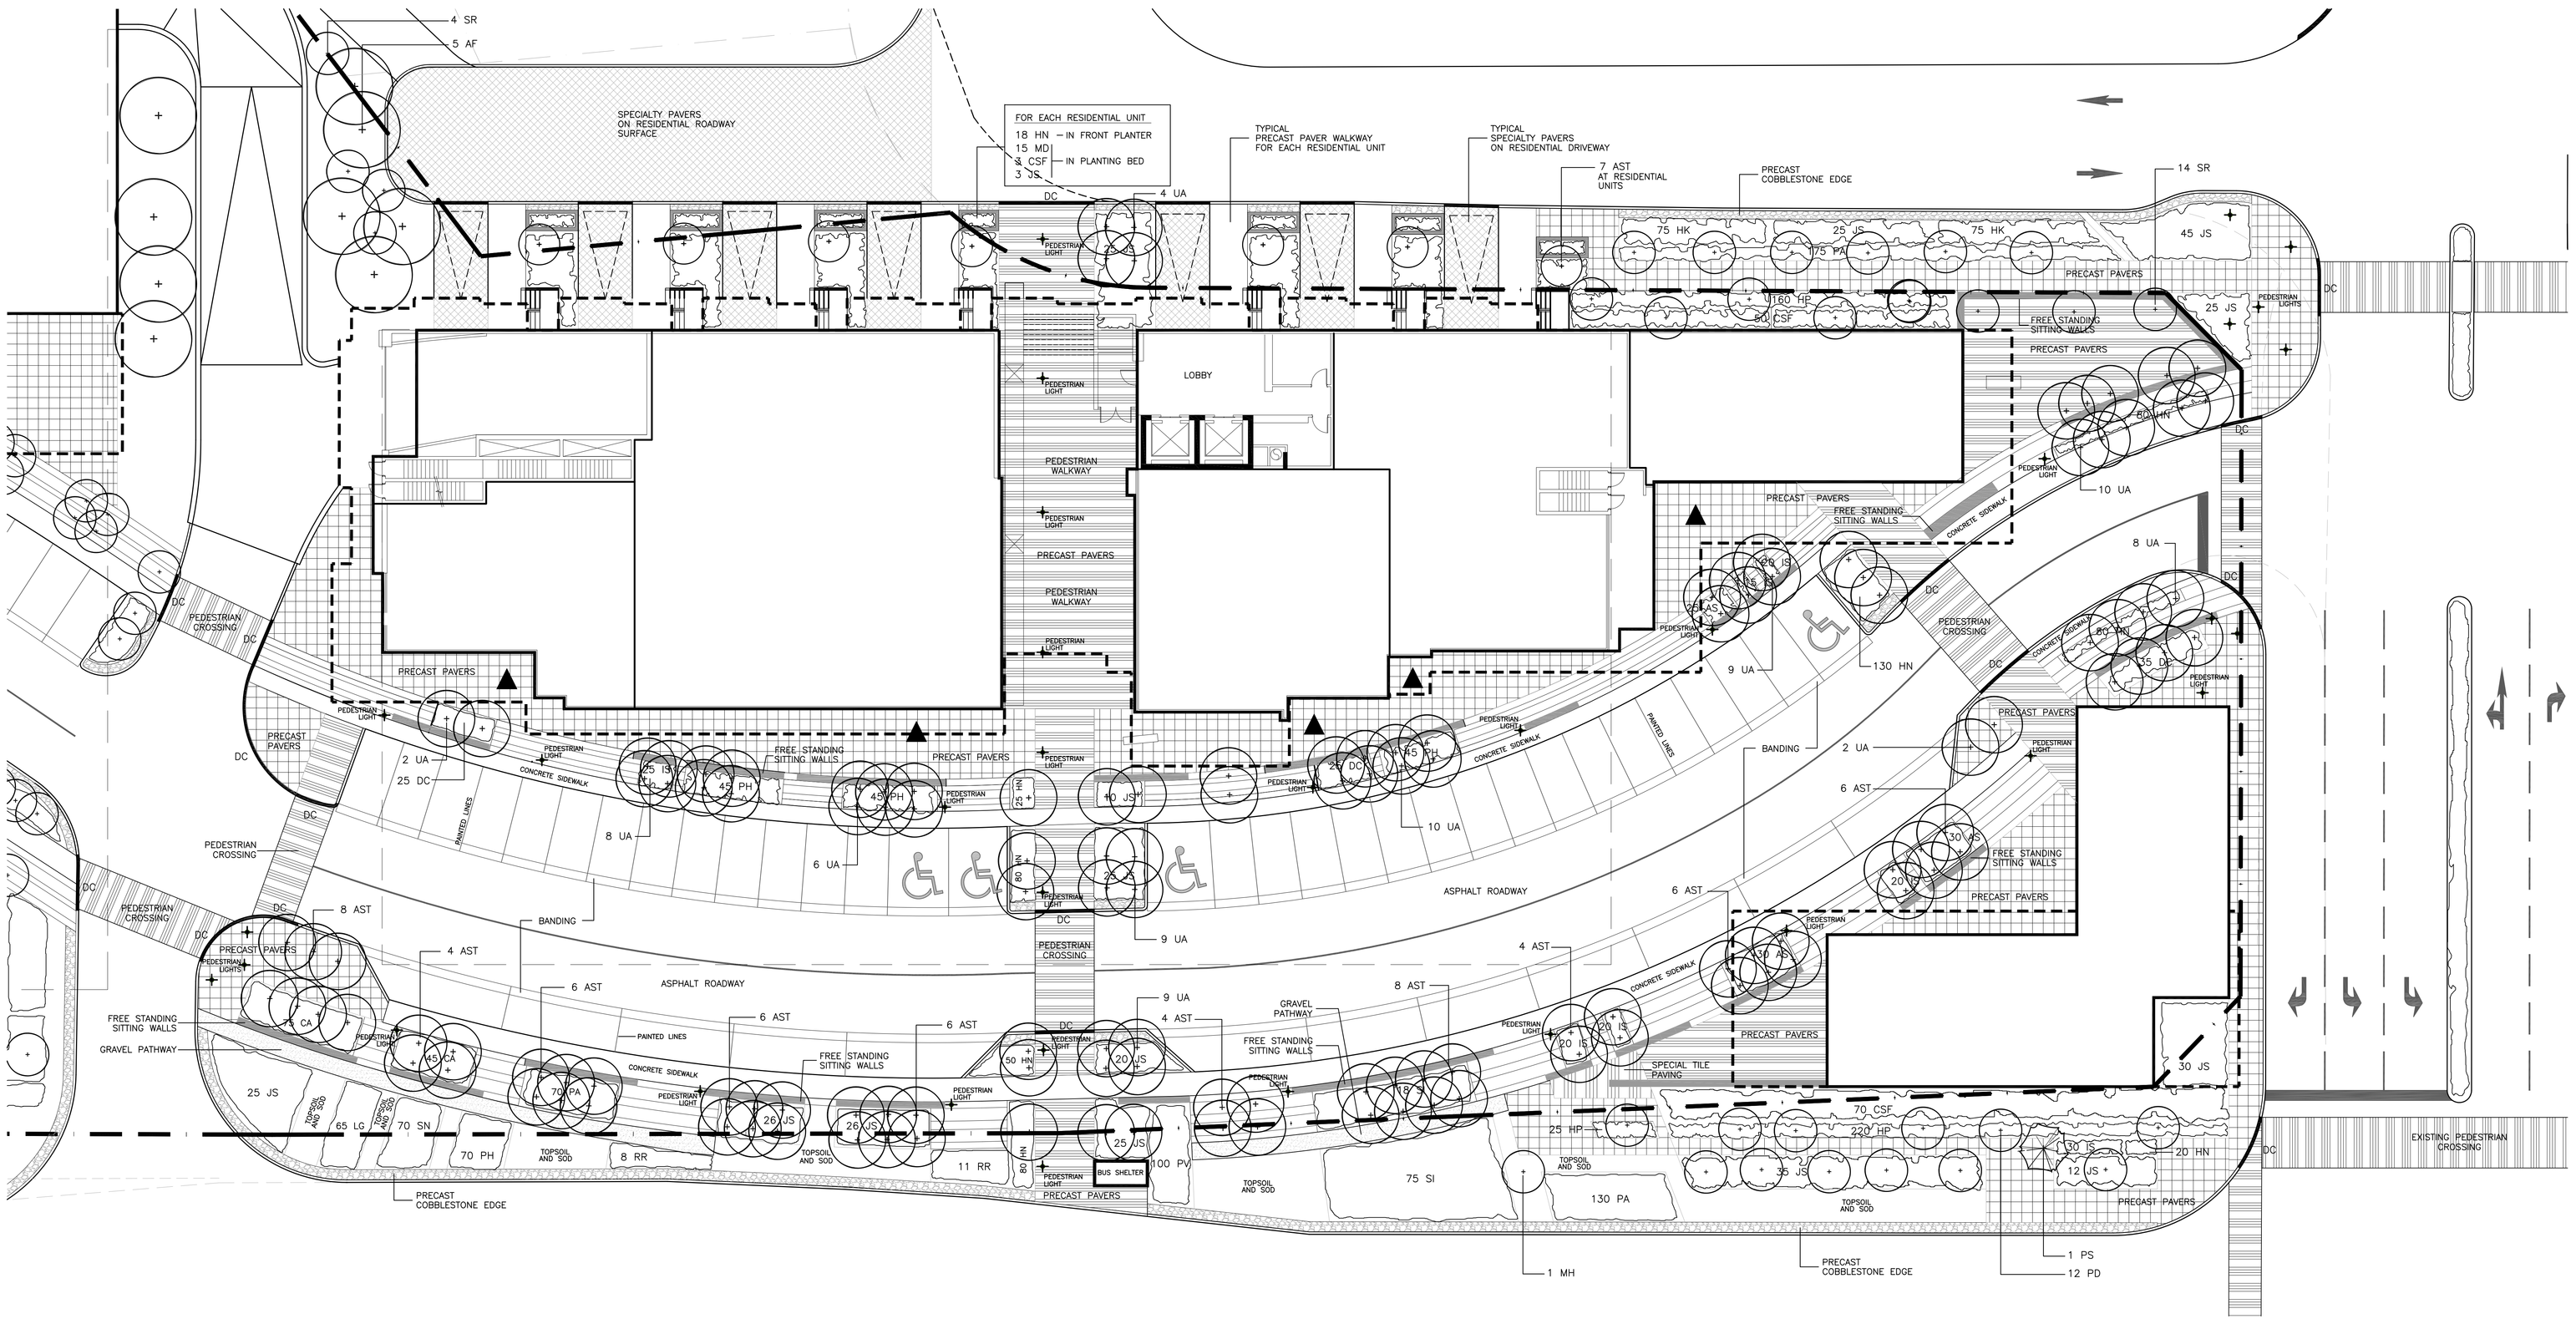

CORUSH SUNDERLAND WRIGHT
Landscape Architecture
Urban Design
Site Planning
Recreation and Park Planning
Project Management
1960 Scott Street, Suite 200, Ottawa, Ontario K1Z 8L8
Tel: (613) 729-4536 Fax: (613) 729-3018

NO.	DESCRIPTION	DATE	CHK
01	ISSUED FOR SITE PLAN APPROVAL	06.30.11	SS

REVISIONS/ISSUES:

CONTRACTOR SHALL CHECK AND VERIFY ALL DIMENSIONS AND REPORT ANY OMISSIONS OR DISCREPANCIES TO THE ARCHITECT BEFORE PROCEEDING WITH THE WORK.

DO NOT SCALE THE DRAWINGS.

THIS DRAWING IS ISSUED FOR SITE PLAN APPROVAL AND SHALL NOT BE USED FOR CONSTRUCTION.

PROJECT NORTH

DRAWN: S.K.J.G.
DATE: 06.30.11
CHECKED: S.S.

ASHCROFT

bbb architects

PROJECT
CENTRAL PARK
MERIVALE ROAD

DWG. TITLE
PHASE 1 LANDSCAPE PLAN
DETAILS/ PLANT LIST

SCALE	DWG. No.	REV.
1:150	L-2	01
PROJ. NO. 1187-01		