

# **PHASE 1 NOISE CONTROL FEASIBILITY STUDY**

**130 HUNTMAR DRIVE**

**Prepared for:  
LIONESS DEVELOPMENT INC.**

**PROJECT No: 191002**

**CITY OF OTTAWA**

**OCTOBER 2020**



**REVISION 1**

**PHASE 1 NOISE CONTROL FEASIBILITY STUDY**

**LIONESS DEVELOPMENT INC.**

**130 HUNTMAR DRIVE**

**CITY OF OTTAWA**

**TABLE OF CONTENTS**

**INDEX**

|            |  |          |
|------------|--|----------|
| <b>1.0</b> | <b>INTRODUCTION.....</b>                                   | <b>1</b> |
| <b>2.0</b> | <b>CRITERIA.....</b>                                       | <b>1</b> |
| 2.1        | Noise Level Criterion for Outdoor Living Areas .....       | 1        |
| 2.2        | Indoor Sound Level Criteria .....                          | 2        |
| 2.3        | Outdoor, Ventilation and Warning Clause Requirements ..... | 2        |
| 2.4        | Relevant Warning Clauses .....                             | 4        |
| <b>3.0</b> | <b>ANALYSIS .....</b>                                      | <b>4</b> |
| <b>4.0</b> | <b>NOISE MITIGATION MEASURES .....</b>                     | <b>6</b> |
| <b>5.0</b> | <b>RECOMMENDATION AND CONCLUSION .....</b>                 | <b>6</b> |

**PHASE 1 NOISE CONTROL FEASIBILITY STUDY**  
**LIONESS DEVELOPMENT INC.**  
**130 HUNTMAR DRIVE**  
**CITY OF OTTAWA**

**APPENDICES**

- APPENDIX 'A'** Location Map – 191002-SK1
- APPENDIX 'B'** Table 1 - Forecast Traffic Volume
- APPENDIX 'C'** Drawing 191002-N1 Critical setback distance – Living building face Day  
Drawing 191002-N2 Critical setback distance – Living building face  
Night  
Drawing 191002-N3 Critical setback distance – Living Outside  
Drawing 191002-N4 Proposed Mitigation Measures
- APPENDIX 'D'** Sample Calculation

## **1.0 INTRODUCTION**

Atrel Engineering has been retained by Lioness Development Inc. to conduct an environmental noise impact assessment in support of the major zoning by-law amendment and Plan of Subdivision application. The proposed residential development is located in the western Ottawa region at 130 Huntmar Drive. The purpose of this study is to identify the possible noise sources, and evaluate the potential location for noise mitigation measures. The current assessment is considered a phase 1 noise control feasibility study and will need to be revised to a phase 2 noise control detailed study at the detail design stage of the project. Refer to the location map in Appendix “A” for the site location and the study extent.

## **2.0 CRITERIA**

The criteria used in the current environmental noise impact assessment are outlined in the Ministry of Environment, Conservation and Parks (MOECP) and City of Ottawa Environmental Noise Control Guidelines. The guidelines offers traffic and road parameters as well as noise level limits for outdoor and indoor living areas.

A summary of the noise level criteria from the guidelines is described in the subsections.

### **2.1 Noise Level Criterion for Outdoor Living Areas**

As outlined in the MOECP and City of Ottawa Noise Control Guidelines, the recommended outdoor area noise level limit from 7:00 to 23:00 is 55dBA Leq. (NPC-300, 2013 Table C-1). The measuring unit “Leq” is defined as the energy equivalent sound level during an hour. The point of assessment for outdoor living area is at 3m from the building façade, 1.5m above grade and aligned with the midpoint of the subject façade.

When the calculated sound level are under the prescribed limits, no further action is required from the developer. If the sound levels exceeds the abovementioned limits, noise mitigation measure shall be evaluated as well as the addition of warning clauses on the deeds of the concerned lots.

## **2.2 Indoor Sound Level Criteria**

The recommended indoors sound level limits for dwellings given by the MOECP and the City of Ottawa Noise Control Guidelines are summarized in the following table:

| Type of Space   | Equivalent Sound Level (Leq), dBA |
|---|-----------------------------------|
| General offices, reception areas, retail stores, etc.<br>(Time period: 16 hr, 07:00 – 23:00)  | 50                                |
| Living/dining areas of residences, hospitals, schools, nursing/retirement homes, day-care centres, theatres, places of worship, libraries, individual or semi-private offices, conference rooms, reading rooms, etc.<br>(Time period: 16 hr, 07:00 – 23:00) | 45                                |
| Sleeping quarters of hotels/motels<br>(Time period: 8 hr, 23:00 – 07:00)  | 45                                |
| Sleeping quarters of residences, hospitals, nursing/retirement homes, etc.<br>(Time period: 8 hr, 23:00 – 07:00)  | 40                                |

The point of assessment for an indoor living area is at the center of the exposed window with a height of 1.5m minimum for a one story dwelling, 4.5m for a two stories dwelling and 7.5m for a three stories dwelling. For the purpose of this study, the typical dwelling first story center of window is located at 2.5m above the ground.

## **2.3 Outdoor, Ventilation and Warning Clause Requirements**

As per the MOECP and City of Ottawa and Noise Control Guidelines, if the noise levels exceeds the prescribed noise level limits and noise mitigation measures doesn't attenuate the noise level within the permissible limits, the purchaser or tenant should be advised, with a warning clause, that sound levels may occasionally interfere with outdoor activities.

The following table describes the warning clause requirements for Outdoor living condition, Indoor living daytime and also Indoor living nighttime condition.

| <b>Assessment Location</b>  | <b><math>L_{eq}</math>(8 or 16 hrs as noted) (dBA)</b>        | <b>Ventilation Requirements</b>                                | <b>Outdoor Control Measures</b>   | <b>Warning Clause</b>                                |
|-----------------------------|---|--|---|--|
| OUTDOOR LIVING AREA (OLA)   | Leq 16 hr Less than or equal to 55 dBA                        | N/A  | None required   | Not required   |
|                             | Leq 16 hr Greater than 55 dBA to less than or equal to 60 dBA | N/A  | Control measures (barriers) may not be required but should be considered  | Required if resultant $L_{eq}$ exceeds 55 dBA Type A |
|                             | Leq 16 hr Greater than 60 dBA                                 | N/A  | Control measures (barriers) required to reduce the $L_{eq}$ to below 60 dBA and as close to 55 dBA as technically, economically and administratively feasible | Required if resultant $L_{eq}$ exceeds 55 dBA Type B |
| PLANE OF LIVING ROOM WINDOW | Leq 16 hr Less than or equal to 55 dBA                        | None required  | N/A   | Not required   |
|                             | Leq 16 hr Greater than 55 dBA to less than or equal to 65 dBA | Forced air heating with provision for central air conditioning | N/A   | Required Type C                                      |
|                             | Leq 16 hr Greater than 65 dBA                                 | Central air Conditioning                                       | N/A   | Required Type D                                      |
| PLANE OF BEDROOM WINDOW     | Leq 8 hr Greater than 50 dBA to less than or equal to 60 dBA  | Forced air heating with provision for central air conditioning | N/A   | Required Type C                                      |
|                             | Leq 8 hr Greater than 60 dBA                                  | Central air conditioning                                       | N/A   | Required Type D                                      |

## **2.4 Relevant Warning Clauses**

The MOECP and City of Ottawa Noise Control Guidelines offers warning clauses samples for each scenario which are summarized in the following table:

| TYPE   | WARNING CLAUSE   |
|--------|--|
| Type A | "Purchasers/tenants are advised that sound levels due to increasing (road) (Transitway) (rail) (air) traffic may occasionally interfere with some activities of the dwelling occupants as the sound levels exceed the City's and the Ministry of the Environment's noise criteria."  |
| Type B | "Purchasers/tenants are advised that despite the inclusion of noise control features in the development and within the building units, sound levels due to increasing (road) (Transitway) (rail) (air) traffic may on occasions interfere with some activities of the dwelling occupants as the sound levels exceed the City's and the Ministry of the Environment's noise criteria."  |
| Type C | "This dwelling unit has been fitted with a forced air heating system and the ducting, etc. was sized to accommodate central air conditioning. Installation of central air conditioning by the occupant will allow windows and exterior doors to remain closed, thereby ensuring that the indoor sound levels are within the City's and the Ministry of the Environment's noise criteria. (Note: The location and installation of the outdoor air conditioning device should be done so as to comply with noise criteria of MOE Publication NPC-216, Residential Air Conditioning Devices and thus minimize the noise impacts both on and in the immediate vicinity of the subject property." |
| Type D | "This dwelling unit has been supplied with a central air conditioning system which will allow windows and exterior doors to remain closed, thereby ensuring that the indoor sound levels are within the City's and the Ministry of the Environment's noise criteria."  |

## **3.0 ANALYSIS**

The known significant noise sources in the proximity of the subject site results from the surface transportation. The noise source parameters are taken from the City of Ottawa guidelines for the exception of the LRT for which the parameters were estimated based on the available data and previous studies. The following table summarizes the noise source parameters used in this study:

| Noise Source              | AADT   | Speed Limit (km/h) | Gradient (%) | Pavement Type | Day/Night (%) |
|---------------------------|--------|--------------------|--------------|---------------|---------------|
| Maple Grove Road          | 35,000 | 60                 | 0.1          | 1             | 92/8          |
| Huntmar Drive             | 35,000 | 50                 | 0.1          | 1             | 92/8          |
| Palladium Drive           | 35,000 | 70                 | 0.1          | 1             | 92/8          |
| North-South Arterial Road | 35,000 | 50                 | 0.1          | 1             | 92/8          |
| LRT                       | 16,550 | 60                 | 0.1          | 1             | 90/10         |

The noise analysis was undertaken using the Stamson (version 5.03) program as supplied by the MOECP. As a phase 1 environmental noise control assessment, the subject site was studied using the critical noise level setback which returns a distance for a desired noise level in dBA. A summary of the critical setbacks for the three different conditions is shown in the following tables:

Living – Day condition

| Noise Source                              | Living daytime condition – Noise level setbacks (m) |           |           |           |           |           |
|---|---|-----------|-----------|-----------|-----------|-----------|
|   | <45<br>dBA  | 50<br>dBA | 55<br>dBA | 60<br>dBA | 65<br>dBA | 70<br>dBA |
| Huntmar Drive & North-South Arterial Road | 500+  | 281.2     | 138.9     | 68.5      | 33.8      | 16.7      |
| Maple Grove Road                          | 500+  | 348.5     | 172.0     | 84.9      | 41.9      | 20.7      |
| Palladium Drive                           | 500+  | 420.0     | 207.3     | 102.3     | 50.5      | 24.9      |
| LRT                                       | 500+  | 412.4     | 206.1     | 103.0     | 51.5      | 25.8      |

Living – Night condition

| Noise Source                              | Living night condition – Noise level setbacks (m) |           |           |           |           |           |
|---|---|-----------|-----------|-----------|-----------|-----------|
|   | <45<br>dBA  | 50<br>dBA | 55<br>dBA | 60<br>dBA | 65<br>dBA | 70<br>dBA |
| Huntmar Drive & North-South Arterial Road | 218.2   | 104.9     | 50.4      | 24.2      | <15       | <15       |
| Maple Grove Road                          | 272.7   | 131.0     | 63.0      | 30.2      | <15       | <15       |
| Palladium Drive                           | 330.9   | 159.0     | 76.4      | 36.7      | 17.6      | <15       |
| LRT                                       | 380.2   | 185.0     | 90.2      | 43.9      | 21.4      | <15       |

Outside condition

| Noise Source                              | Outside condition – Noise level setbacks (m) |           |           |           |           |           |
|---|--|-----------|-----------|-----------|-----------|-----------|
|   | <45<br>dBA                                   | 50<br>dBA | 55<br>dBA | 60<br>dBA | 65<br>dBA | 70<br>dBA |
| Huntmar Drive & North-South Arterial Road | 500+   | 265.0     | 132.5     | 66.2      | 33.1      | 16.5      |
| Maple Grove Road                          | 500+   | 327.1     | 163.5     | 81.7      | 40.8      | 20.4      |
| Palladium Drive                           | 500+   | 393.0     | 196.4     | 98.1      | 49.0      | 24.5      |
| LRT                                       | 500+   | 412.4     | 206.1     | 103.0     | 51.5      | 25.8      |

Drawing 191002-N1, 191002-N2 and 191002-N3 in appendix “C” illustrates the critical setback distance for each noise source and scenario.

## **4.0 NOISE MITIGATION MEASURES**

The results shows that part of the proposed project is subject to noise levels exceeding the prescribed City of Ottawa and MOECC noise level limits. In such areas, noise mitigation measures will be evaluated in order to reduce the calculated noise level within the allowable limits. As described in the City of Ottawa Noise Control Guidelines, the noise mitigation measure includes: distance setbacks, insertion of noise insensitive land, orientation of building, berms and acoustic barriers.

Where physically possible, noise barrier are proposed as a preliminary noise mitigation measure, refer to drawing 191002-N4 for the noise barrier location. The noise barriers shown on drawing 191002-N4 were found necessary based on an un-attenuated noise control analysis, however, will need to be re-evaluated and confirmed with a detailed grading plan and proposed dwellings. All parts of the subdivision with satisfactory noise levels are to be confirmed and re-evaluated with a detailed grading plan with dwellings as well.

## **5.0 RECOMMENDATION AND CONCLUSION**

The Projected noise level for the daytime building face area, nighttime building face area and the outdoor living area are expected to be above the City of Ottawa guideline limits at various location. Mitigation measure such as the orientation of dwellings and acoustic barriers will be provided in order to reduce the noise levels. Generic warning clauses and sound attenuating building materials will be applied to buildings located in proximity of the major arterial roads and where noise levels exceeds the prescribed limits. As a Phase 1 Environmental Noise Control Study, the following noise mitigation measures are proposed:

1. A noise barrier is proposed at the following location

- a) West and South boundary of Block 110;
- b) At the back of lot 1 to 9 (West boundary);
- c) North and West boundary of block 109;
- d) South boundary of lot 16 and 17;
- e) South boundary of lot 45 and 55;
- f) South and East boundary of Block 93;
- g) South and West boundary of Block 108;
- h) North boundary of lot Block 105 and 106;
- i) North boundary of lot 56 and 62;
- j) North boundary of lot Block 88 and 89;
- k) At the back of lot 68 to 86 (West boundary);
- l) South and East boundary of Block 87.

2. The noise generated from the North-South Arterial Road and the Future LRT will be attenuated by the future construction of mid-density site plans and commercial lands (Block 90, Block 91, Block 92, Block 94, Block 95, Block 96, Block 97 and Block 101). Similarly Block 110, Block 105, Block 106, lots 1 to 9 and 68 to 86 will experience shielding by the future schools (Block 107 and Pin 04509-0017).

3. Without noise mitigation methods, the entirety or part of Blocks 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 100, 101, 102, 103, 104, 105, 106, 108, 109, 110, as well as the entirety or part of lots 1 to 15, 18 to 44, 46 to 54, 57 to 61 and 63 to 84 are considered Type "C" and may be subject to noise warning clause for inside living area (refer to drawing 191002-N1 & 191002-N2).
4. Without noise mitigation methods, the entirety or part of Blocks 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 101, 104, 105, 106, 108, 109, 110, as well as the entirety or part of lots 16, 17 45, 55, 56, 62, 85 and 86 are considered Type "D" and may be subject to noise warning clause for inside living area (refer to drawing 191002-N1 & 191002-N2).
5. Without noise mitigation methods, the entirety or part of Blocks 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 100, 101, 102, 103, 104, 105, 106, 110, as well as the entirety or part of lots 1 to 12, 21 to 40, 46 to 50, 60, 61, 66 to 69 and 72 to 79 are considered Type "A" and may be subject to noise warning clause for outside living area (refer to drawing 191002-N3).
6. Without noise mitigation methods, the entirety or part of Block 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 101, 104, 105, 106, 108, 109, 110, as well as the entirety or part of lots 13 to 20, 41 to 45, 51 to 59, 62 to 65 and 80 to 86 considered Type "B" and may be subject to noise warning clause for outside living area (refer to drawing 191002-N3).

The environmental noise control study shall be updated at the detailed design stage in which the mitigation measures will be re-evaluated and design accordingly.

Respectfully submitted by:


**ATREL ENGINEERING LTD**



André Sauvé, P. Eng

## **APPENDIX 'A'**

Location Map – SK1

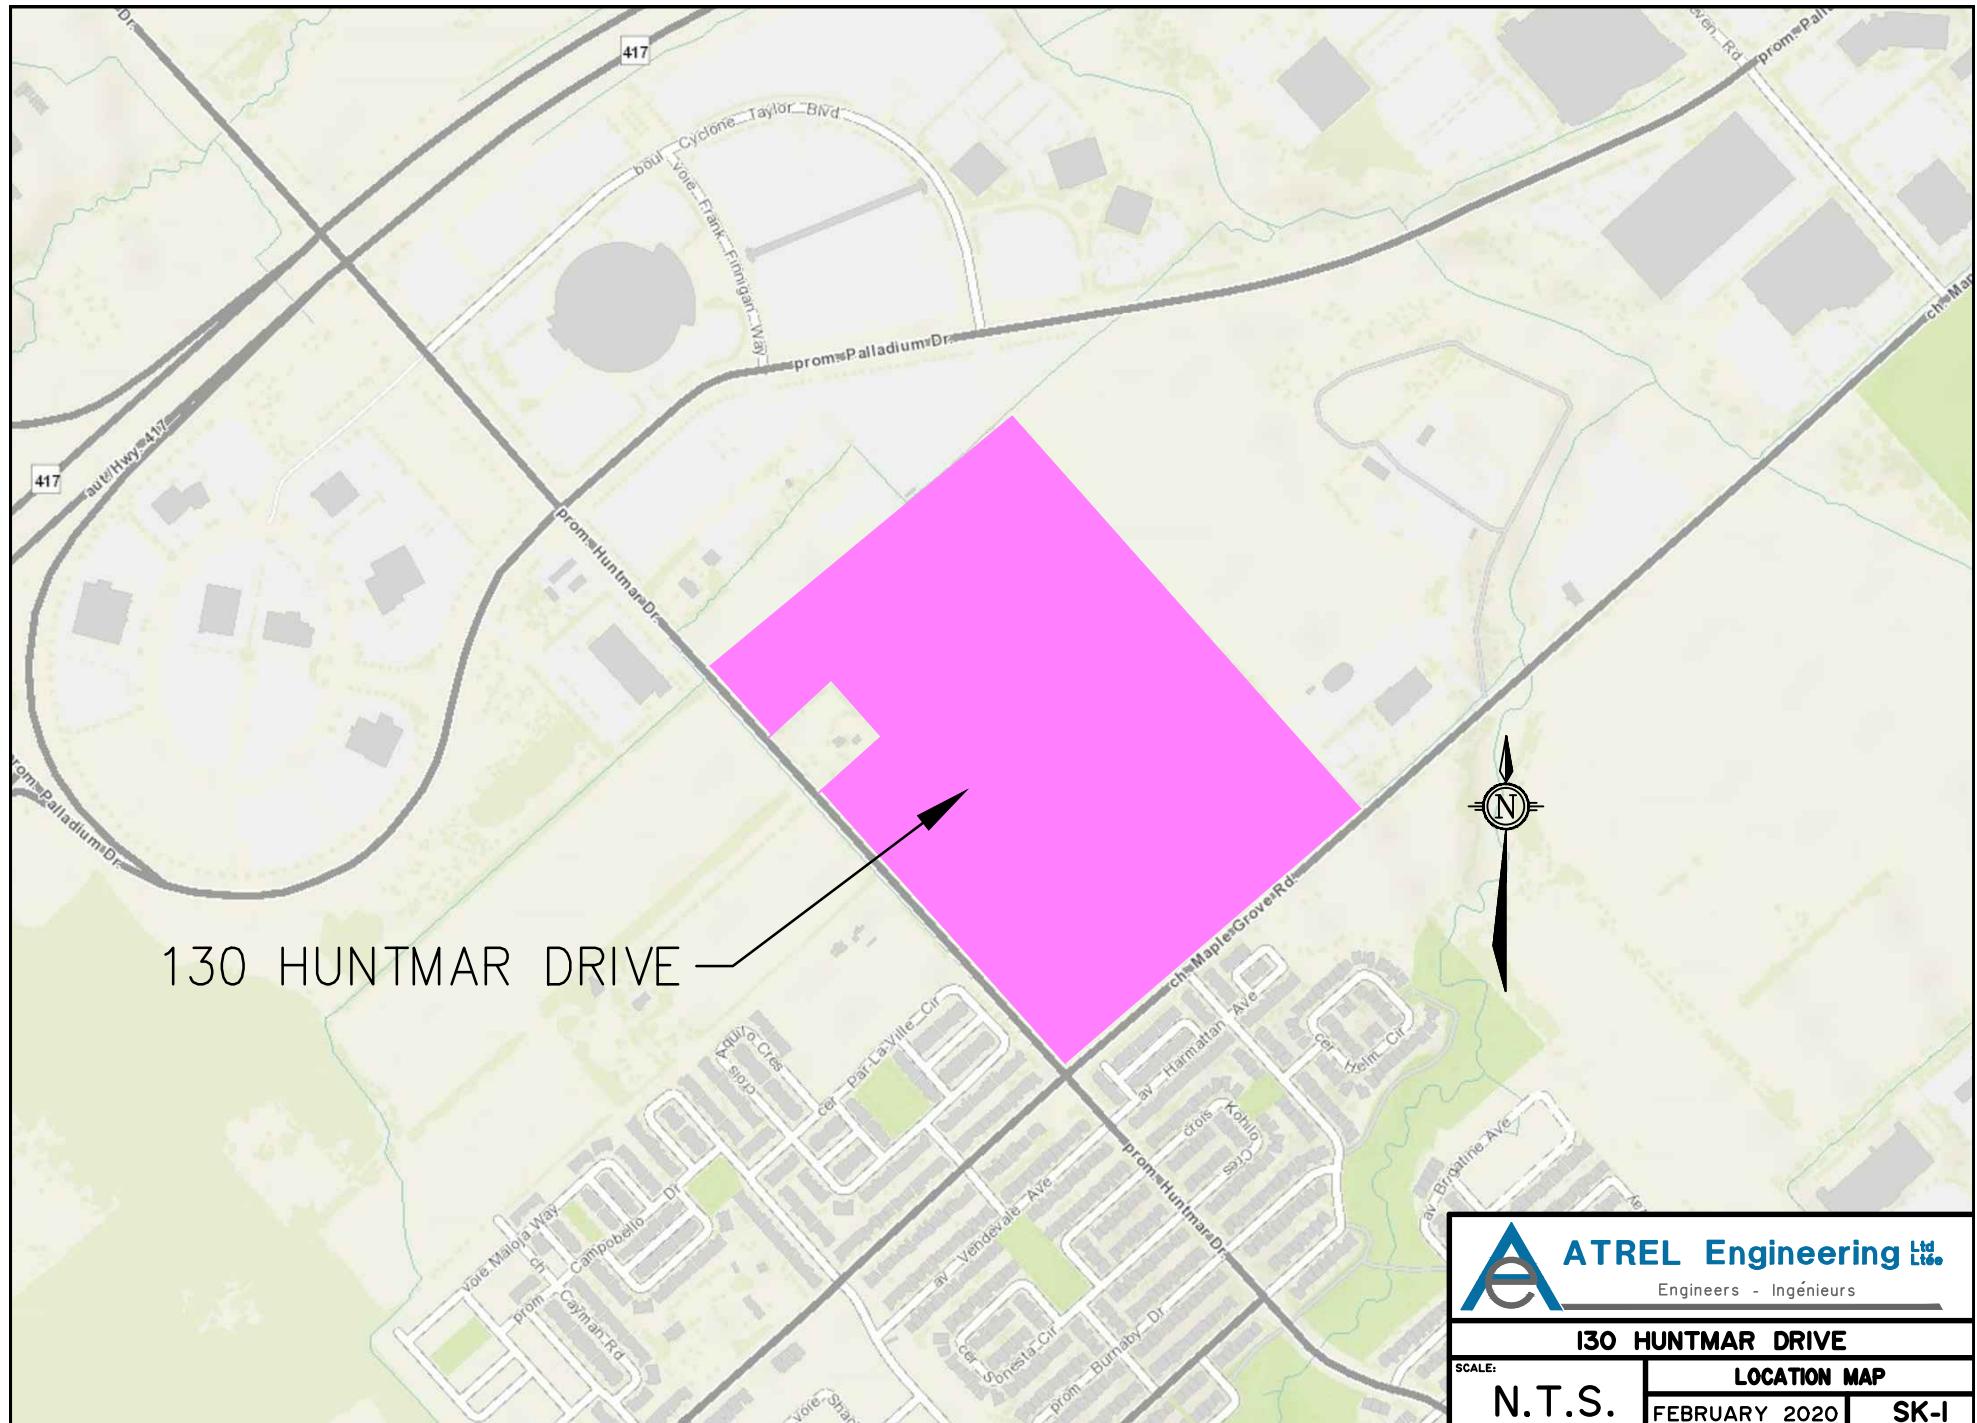

**ATREL Engineering Ltd.**  
Engineers - Ingénieurs

| 130 HUNTMAR DRIVE |               |
|-------------------|---------------|
| SCALE:            | LOCATION MAP  |
| N.T.S.            | FEBRUARY 2020 |
| SK-I              |               |

## **APPENDIX 'B'**

Table 1 - Forecast Traffic Volume


## Forecast Traffic Volume


TABLE 1



|   |   |
|---|---|
| <b>ROAD : Maple Grove Road</b><br><b>TOTAL AADT : 35,000</b>  | <b>POSTED SPEED LIMIT (km/h):</b><br><input type="text" value="60"/>  |
| <b>CALCULATION OF AADT (DAY / NIGHT)</b>  |   |
| <b>DAY</b><br><br>TOTAL TRAFFIC: <input type="text" value="32200"/><br><br>CAR: <input type="text" value="28336"/><br><br>MEDIUM TRUCK: <input type="text" value="2254"/><br><br>HEAVY TRUCK: <input type="text" value="1610"/><br><br>Total <input type="text" value="32200"/> | <b>NIGHT</b><br><br>TOTAL TRAFFIC: <input type="text" value="2800"/><br><br>CAR: <input type="text" value="2464"/><br><br>MEDIUM TRUCK: <input type="text" value="196"/><br><br>HEAVY TRUCK: <input type="text" value="140"/><br><br>2800 |
| <b>ROAD : Huntmar Drive</b><br><b>TOTAL AADT : 35,000</b>   | <b>POSTED SPEED LIMIT (km/h):</b><br><input type="text" value="50"/>  |
| <b>CALCULATION OF AADT (DAY / NIGHT)</b>  |   |
| <b>DAY</b><br><br>TOTAL TRAFFIC: <input type="text" value="32200"/><br><br>CAR: <input type="text" value="28336"/><br><br>MEDIUM TRUCK: <input type="text" value="2254"/><br><br>HEAVY TRUCK: <input type="text" value="1610"/><br><br>Total <input type="text" value="32200"/> | <b>NIGHT</b><br><br>TOTAL TRAFFIC: <input type="text" value="2800"/><br><br>CAR: <input type="text" value="2464"/><br><br>MEDIUM TRUCK: <input type="text" value="196"/><br><br>HEAVY TRUCK: <input type="text" value="140"/><br><br>2800 |
| <b>ROAD : Palladium Drive</b><br><b>TOTAL AADT : 35,000</b>   | <b>POSTED SPEED LIMIT (km/h):</b><br><input type="text" value="70"/>  |
| <b>CALCULATION OF AADT (DAY / NIGHT)</b>  |   |
| <b>DAY</b><br><br>TOTAL TRAFFIC: <input type="text" value="32200"/><br><br>CAR: <input type="text" value="28336"/><br><br>MEDIUM TRUCK: <input type="text" value="2254"/><br><br>HEAVY TRUCK: <input type="text" value="1610"/><br><br>Total <input type="text" value="32200"/> | <b>NIGHT</b><br><br>TOTAL TRAFFIC: <input type="text" value="2800"/><br><br>CAR: <input type="text" value="2464"/><br><br>MEDIUM TRUCK: <input type="text" value="196"/><br><br>HEAVY TRUCK: <input type="text" value="140"/><br><br>2800 |
| <b>ROAD : North-South Arterial Road</b><br><b>TOTAL AADT : 35,000</b>   | <b>POSTED SPEED LIMIT (km/h):</b><br><input type="text" value="50"/>  |
| <b>CALCULATION OF AADT (DAY / NIGHT)</b>  |   |
| <b>DAY</b><br><br>TOTAL TRAFFIC: <input type="text" value="32200"/><br><br>CAR: <input type="text" value="28336"/><br><br>MEDIUM TRUCK: <input type="text" value="2254"/><br><br>HEAVY TRUCK: <input type="text" value="1610"/><br><br>Total <input type="text" value="32200"/> | <b>NIGHT</b><br><br>TOTAL TRAFFIC: <input type="text" value="2800"/><br><br>CAR: <input type="text" value="2464"/><br><br>MEDIUM TRUCK: <input type="text" value="196"/><br><br>HEAVY TRUCK: <input type="text" value="140"/><br><br>2800 |
| <b>ROAD : LRT</b><br><b>TOTAL AADT : 16,550</b>   | <b>POSTED SPEED LIMIT (km/h):</b><br><input type="text" value="60"/>  |
| <b>CALCULATION OF AADT (DAY / NIGHT)</b>  |   |
| <b>DAY</b><br><br>TOTAL TRAFFIC: <input type="text" value="14895"/>   | <b>NIGHT</b><br><br>TOTAL TRAFFIC: <input type="text" value="1655"/>  |

## **APPENDIX 'C'**

Drawing 191002-N1 Critical setback distance – Living building face Day  
Drawing 191002-N2 Critical setback distance – Living building face Night  
Drawing 191002-N3 Critical setback distance – Living Outside  
Drawing 191002-N4 Proposed Mitigation Measures

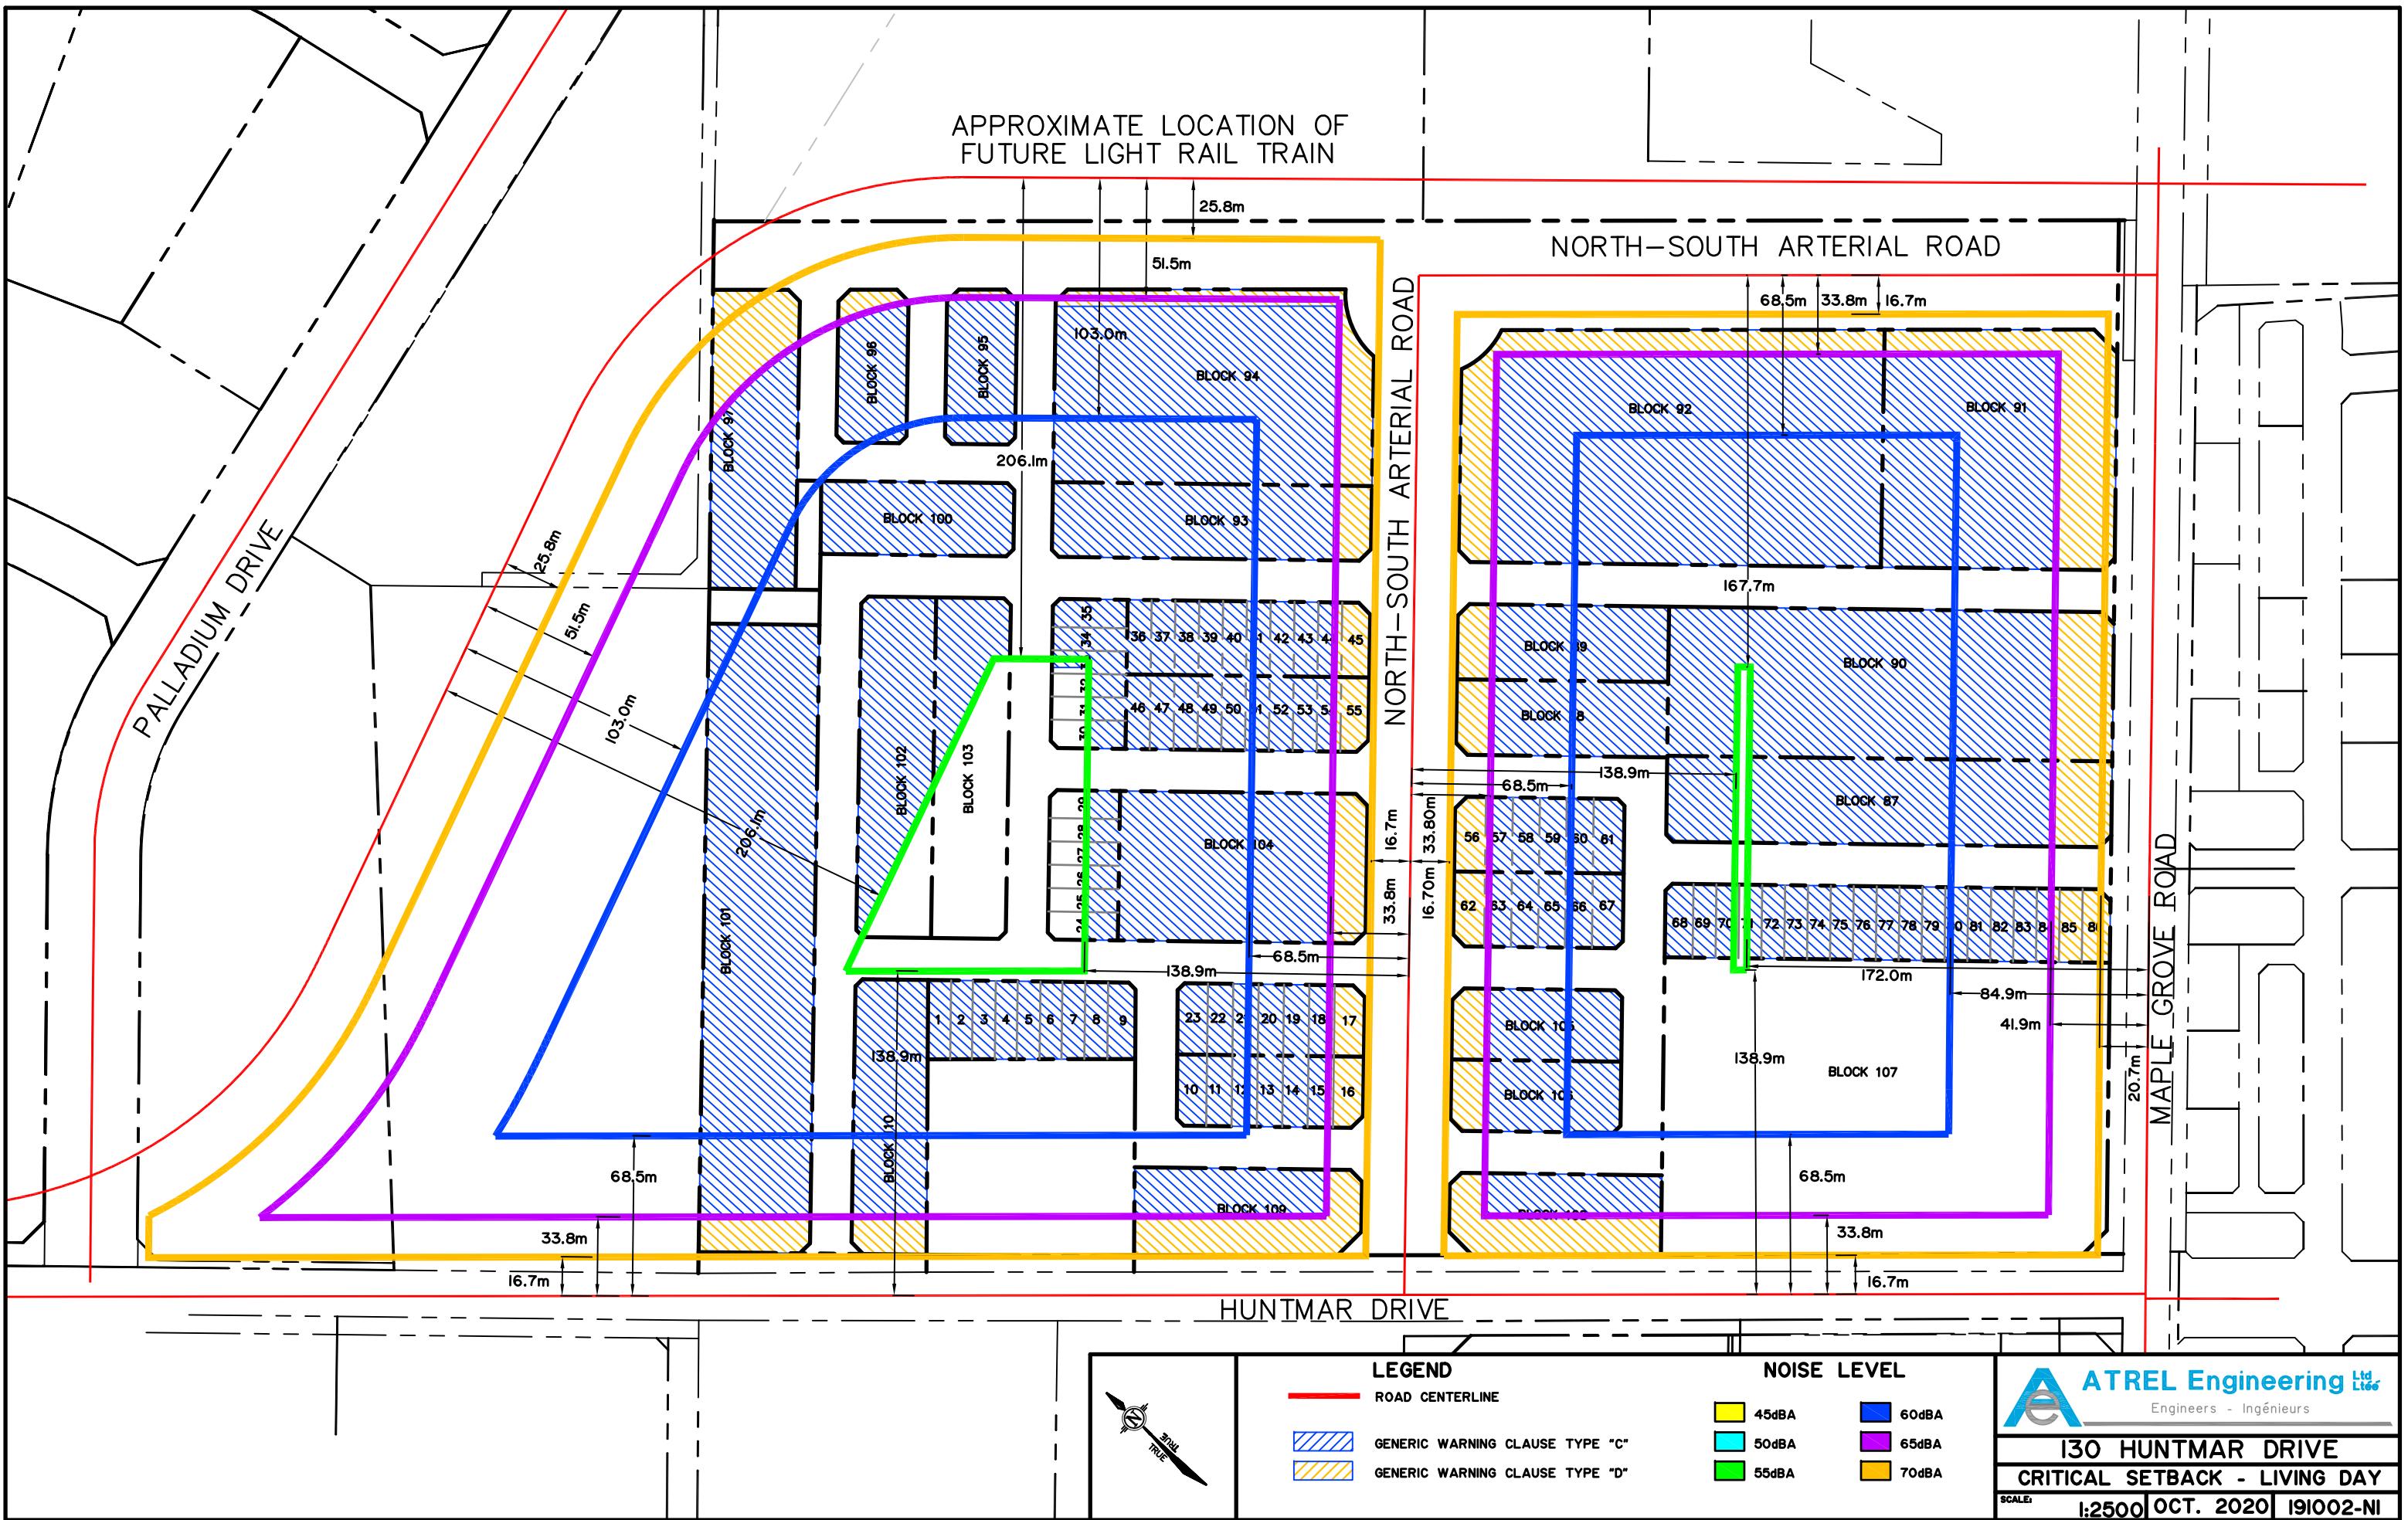

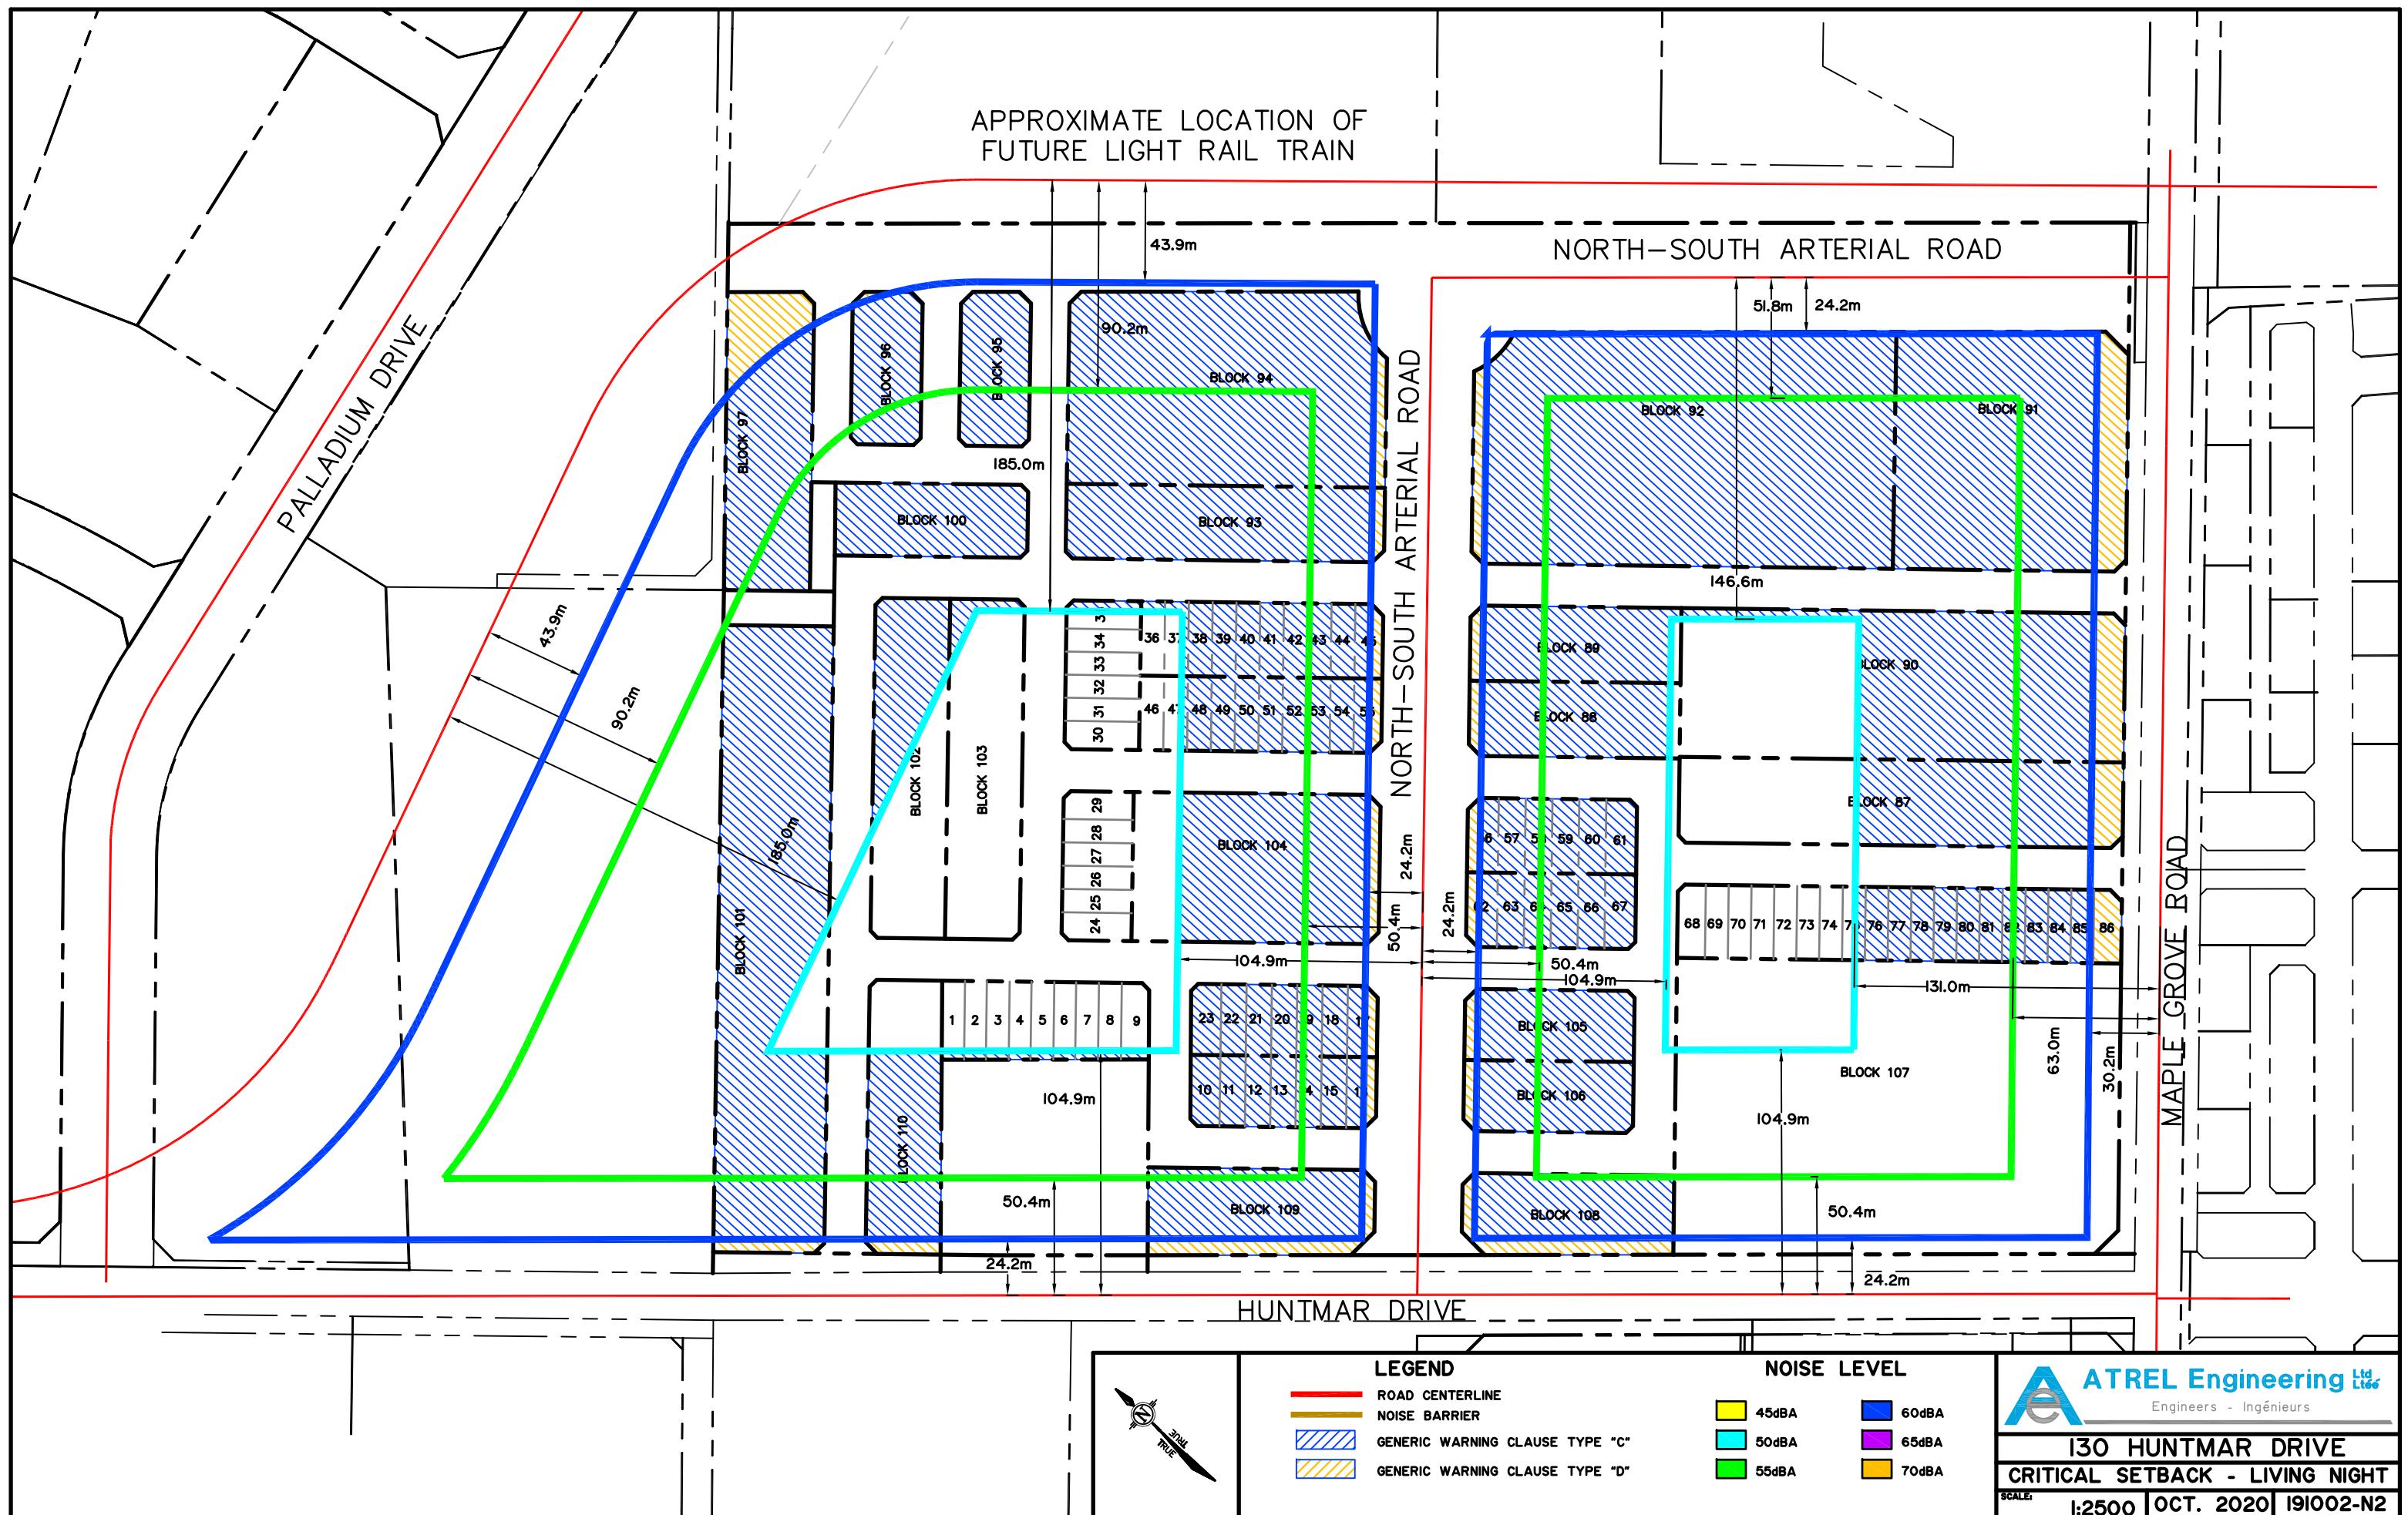

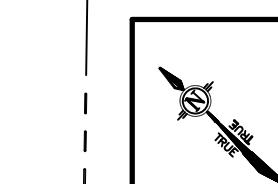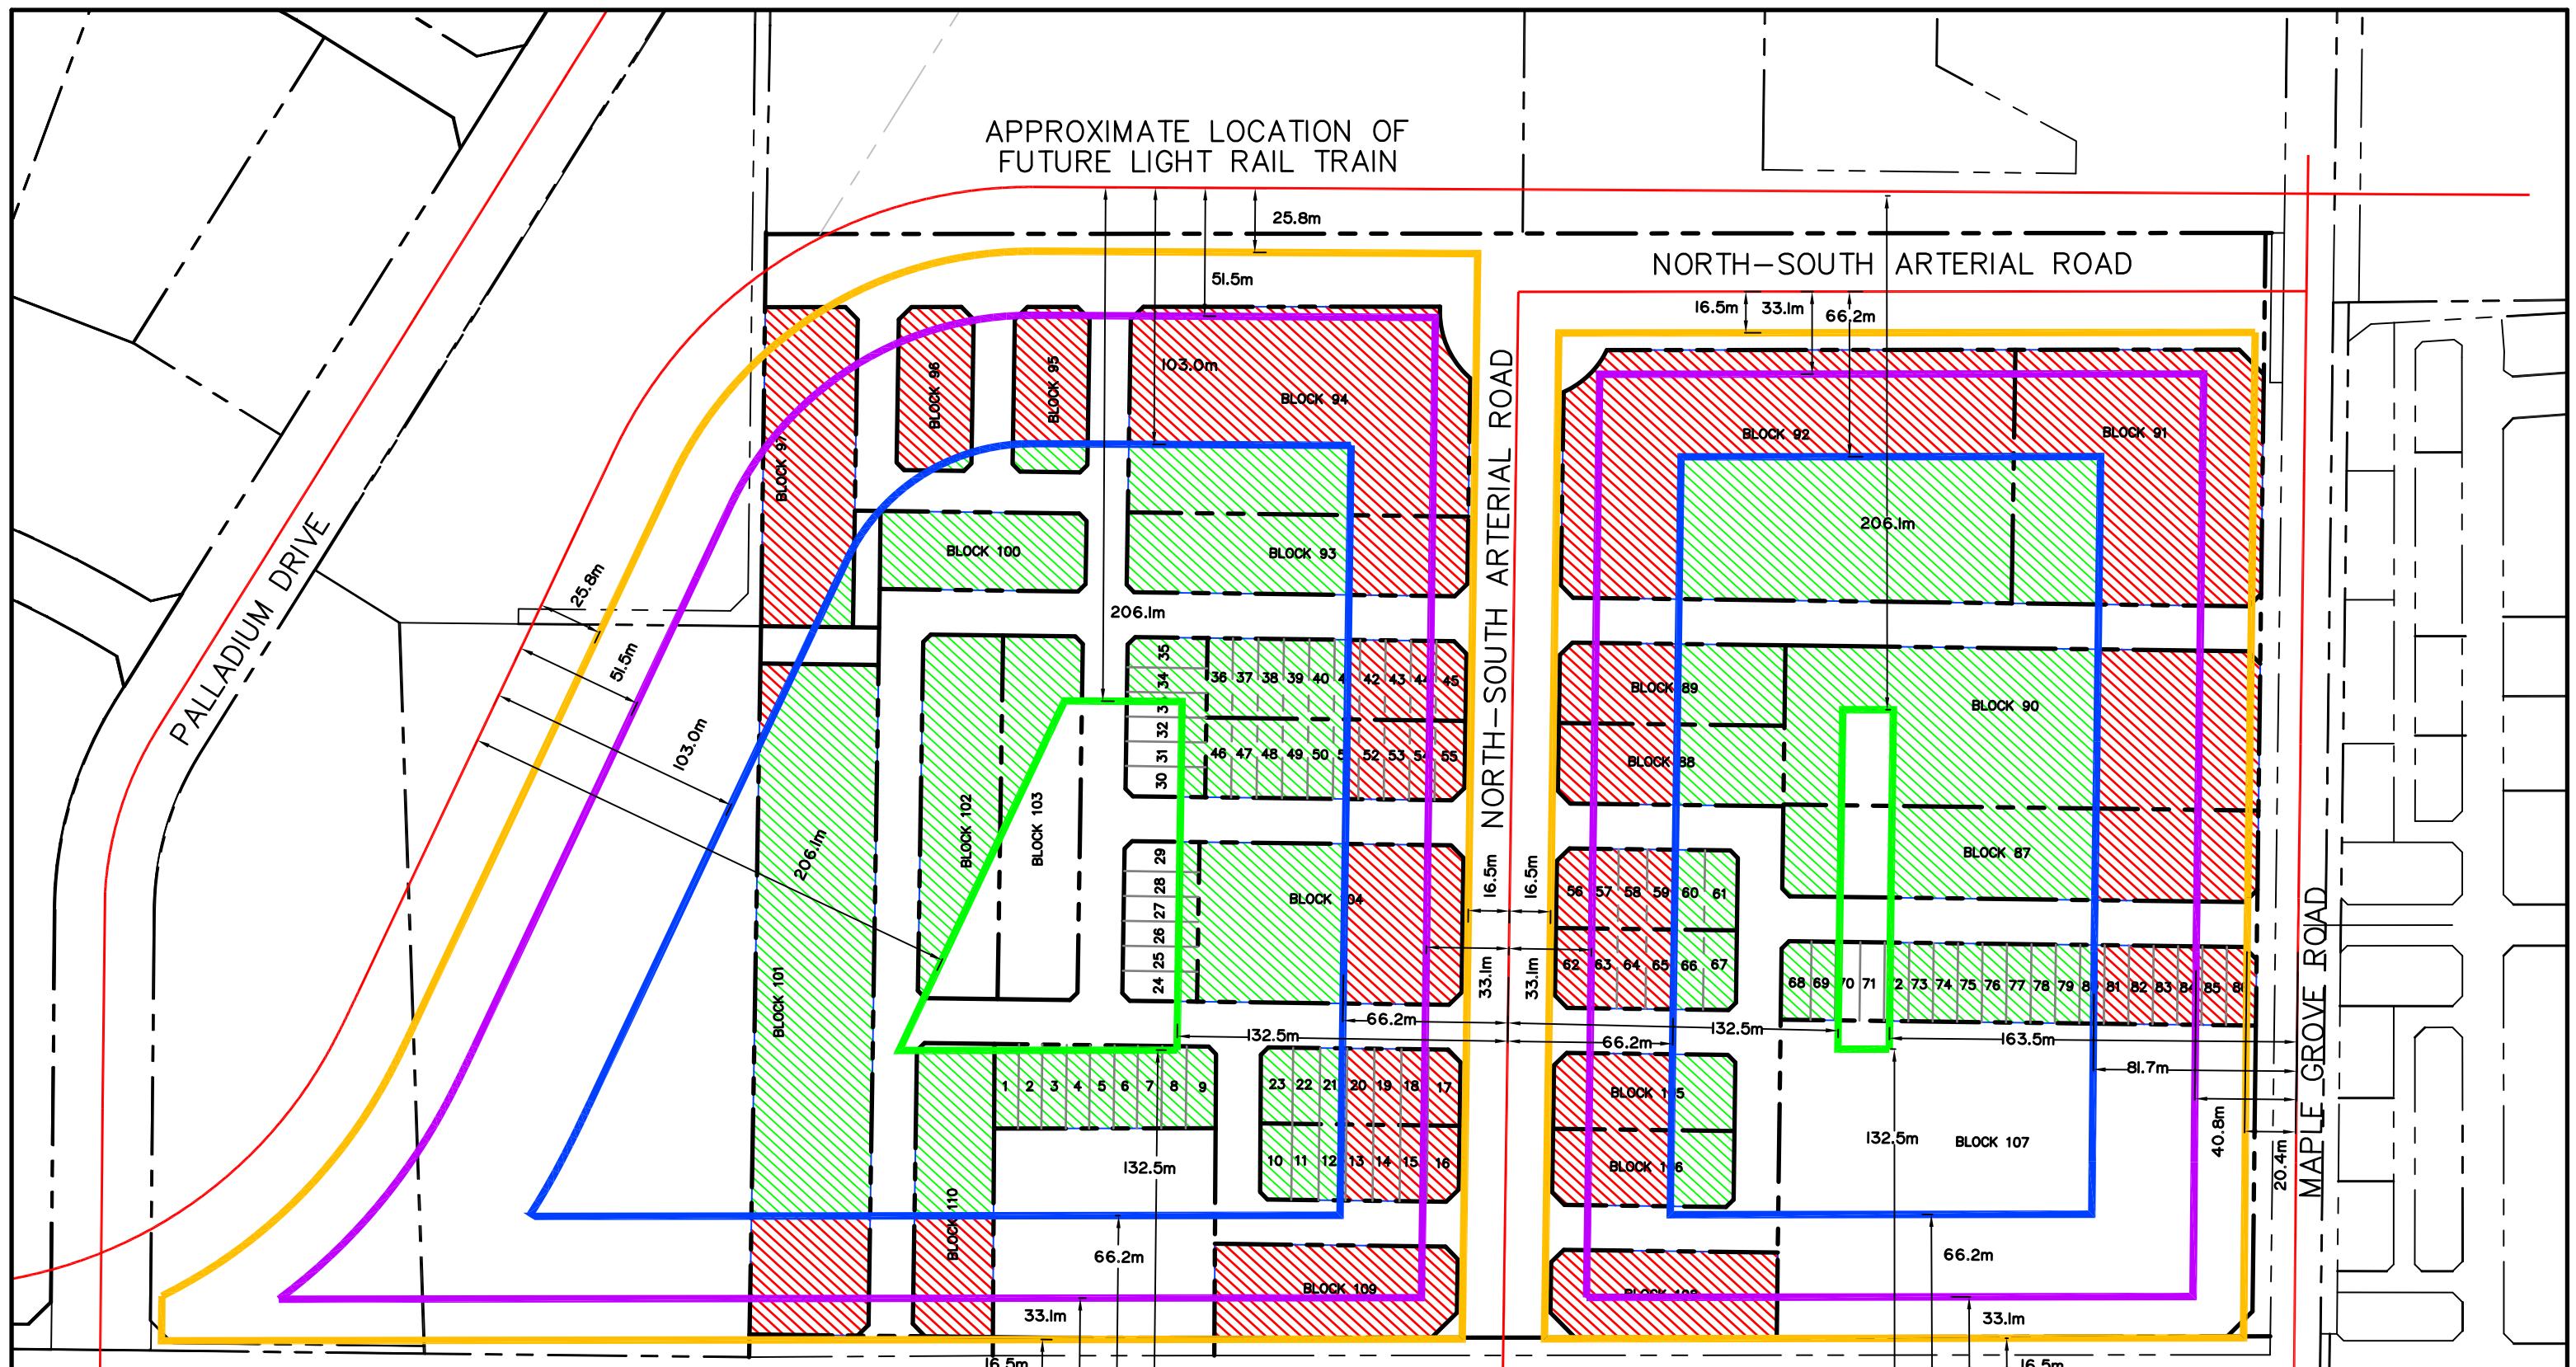

#### LEGEND

ROAD CENTERLINE

GENERIC WARNING CLAUSE TYPE "A"

EXTENSIVE MITIGATION OUTDOOR - TYPE "B"

#### NOISE LEVEL

45dBA


50dBA

55dBA

60dBA

65dBA

70dBA

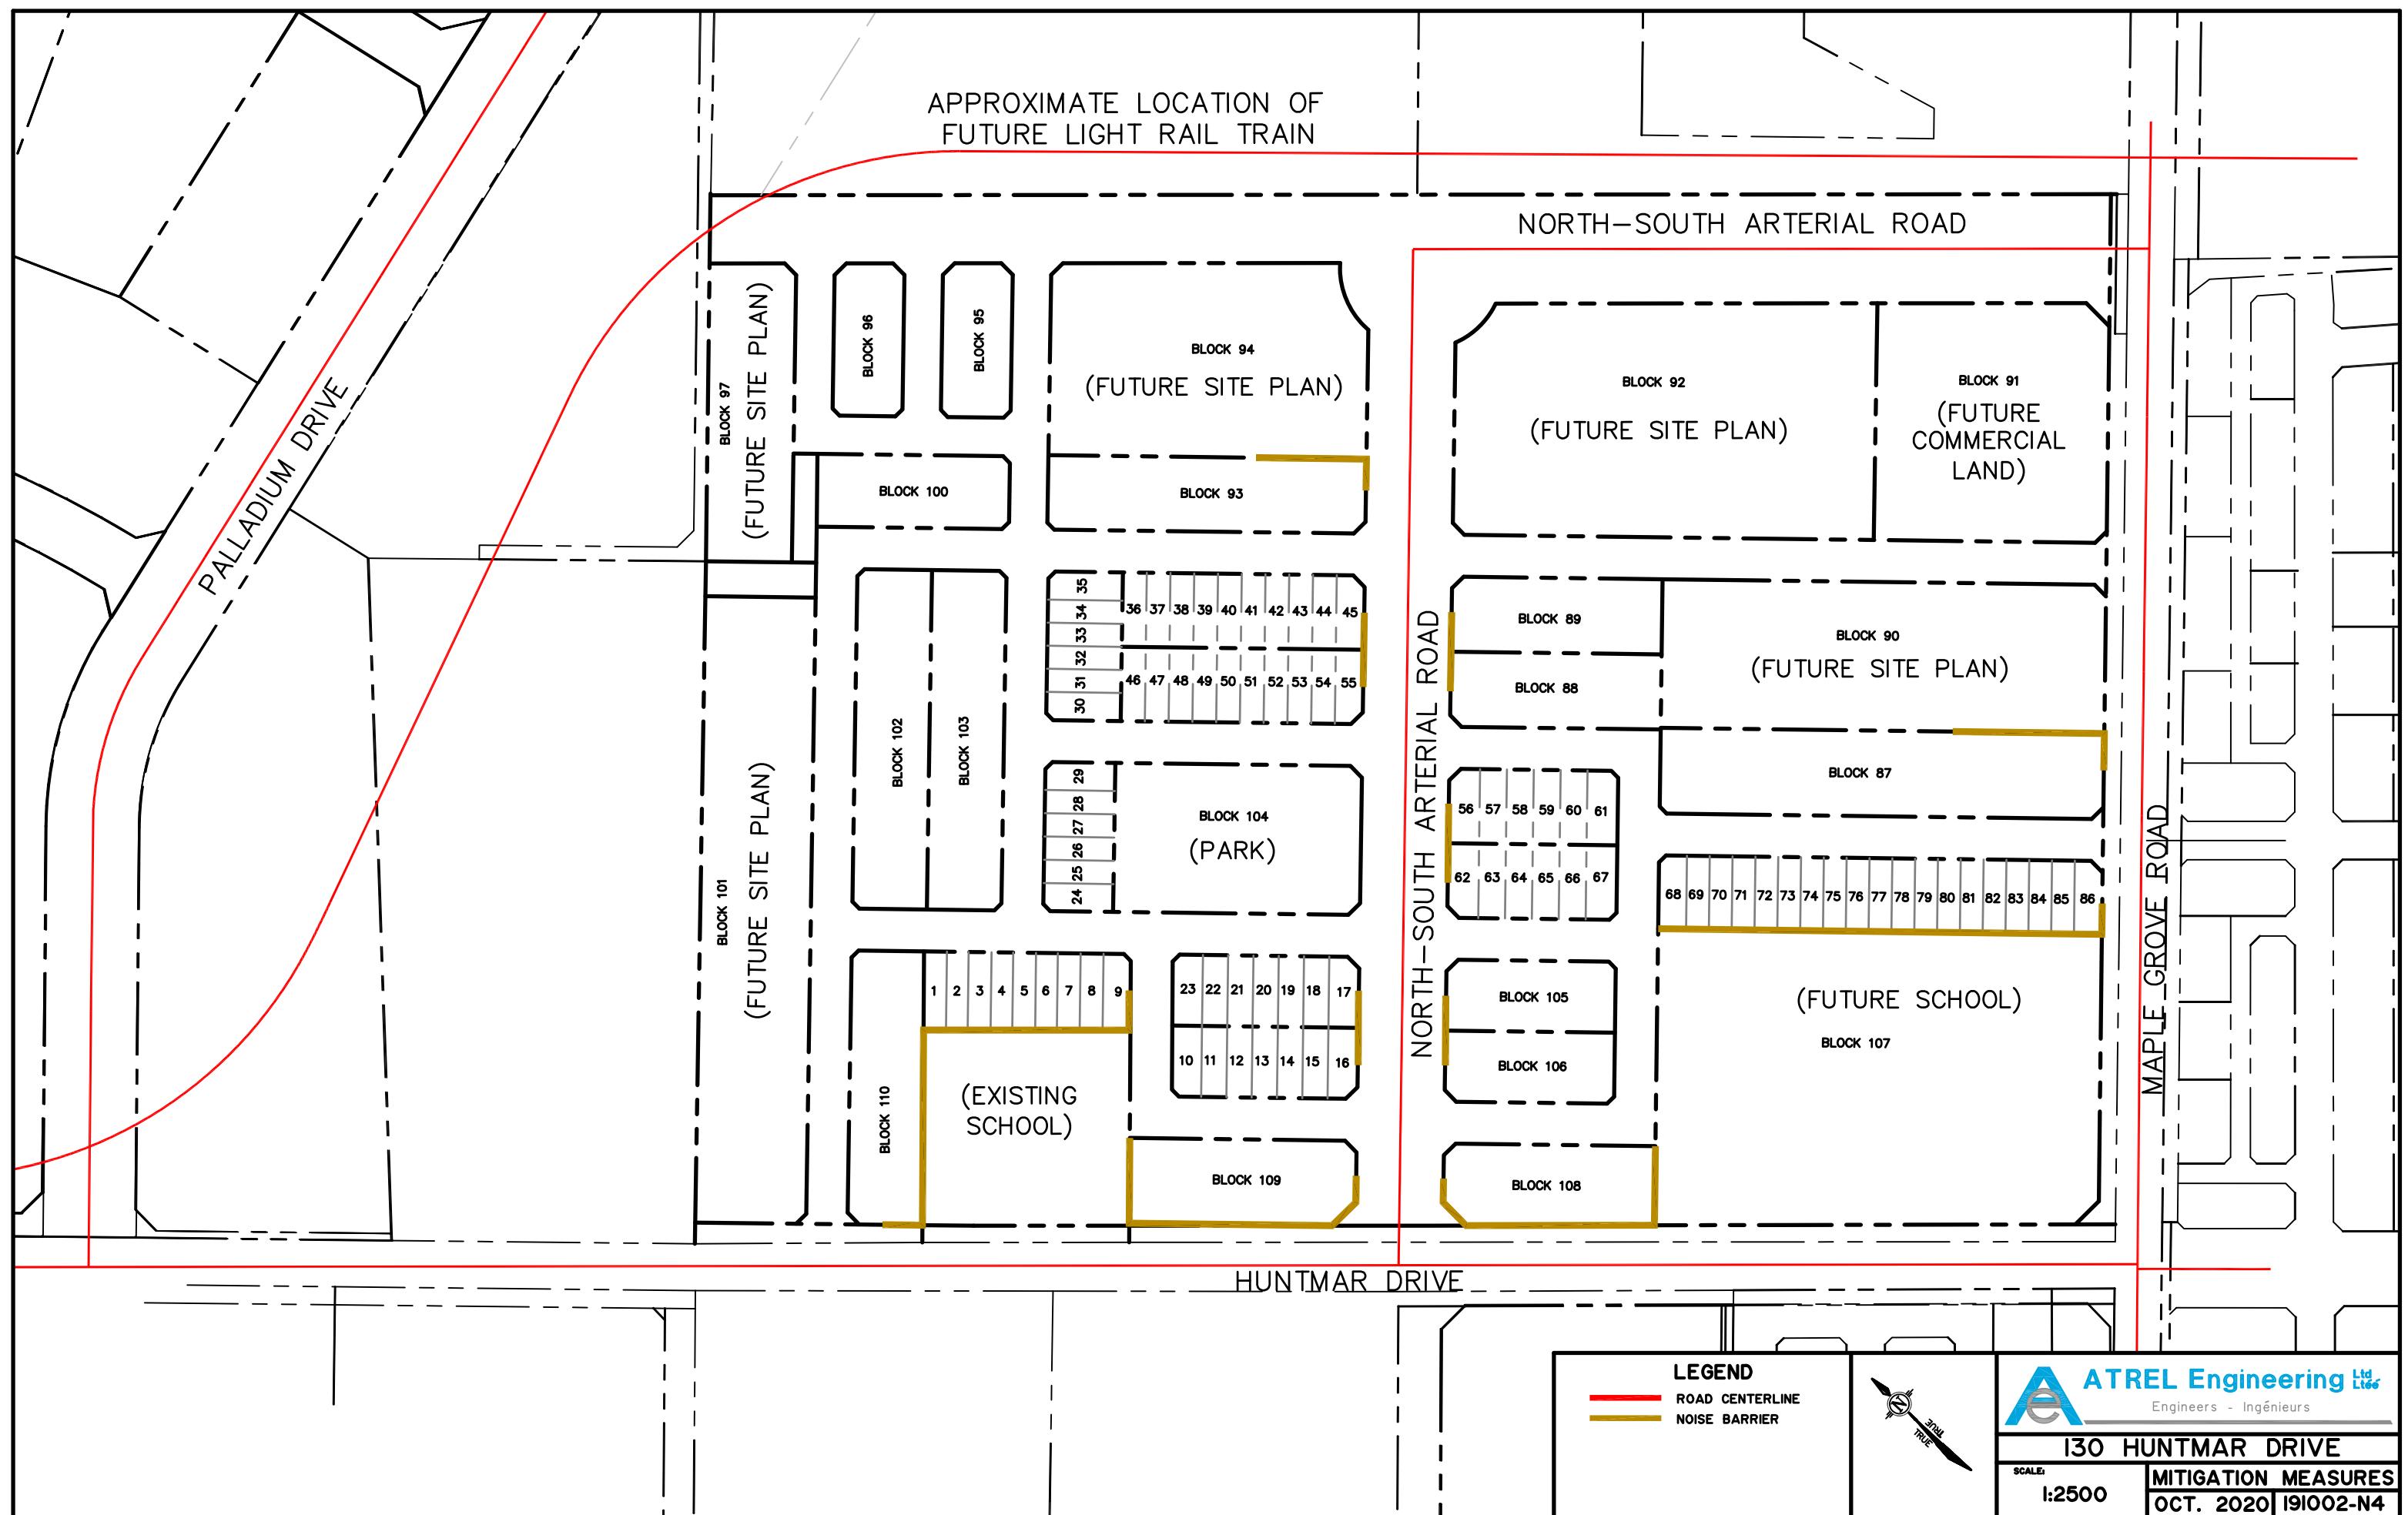

## **APPENDIX 'D'**

Sample Calculations

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 09:37:02  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: L45HUNT.te Time Period: Day/Night 16/8 hours  
Description:

Living - 45 dBA off Huntmar Drive, NS Arterial Road & EW Arterial Road

Road data, segment # 1: HUNTMAR ETC. (day/night)

Car traffic volume : 28336/2464 veh/TimePeriod  
Medium truck volume : 2254/196 veh/TimePeriod  
Heavy truck volume : 1610/140 veh/TimePeriod  
Posted speed limit : 50 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

Data for Segment # 1: HUNTMAR ETC. (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 500.00 / 218.19 m  
Receiver height : 2.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: HUNTMAR ETC. (day)

Source height = 1.50 m

ROAD (0.00 + 45.93 + 0.00) = 45.93 dBA  
Angle1 Angle2 Alpha RefLeq P. Adj D. Adj F. Adj W. Adj H. Adj B. Adj SubLeq  
-90 90 0.63 72.16 0.00 -24.83 -1.41 0.00 0.00 0.00 45.93

Segment Leq : 45.93 dBA

Total Leq All Segments: 45.93 dBA

Results segment # 1: HUNTMAR ETC. (night)

Source height = 1.50 m

ROAD (0.00 + 45.00 + 0.00) = 45.00 dBA  
Angle1 Angle2 Alpha RefLeq P. Adj D. Adj F. Adj W. Adj H. Adj B. Adj SubLeq  
-90 90 0.57 64.56 0.00 -18.26 -1.30 0.00 0.00 0.00 45.00

Segment Leq : 45.00 dBA

Total Leq All Segments: 45.00 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 45.93  
(NIGHT): 45.00

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 09:38:34  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: 045HUNT.te Time Period: Day/Night 16/8 hours  
Description:

Outside - 45 dBA off Huntmar Drive, NS Arterial Road & EW Arterial Road

Road data, segment # 1: HUNTMAR ETC. (day/night)

Car traffic volume : 28336/2464 veh/TimePeriod  
Medium truck volume : 2254/196 veh/TimePeriod  
Heavy truck volume : 1610/140 veh/TimePeriod  
Posted speed limit : 50 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

Data for Segment # 1: HUNTMAR ETC. (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 500.00 / 218.19 m  
Receiver height : 1.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: HUNTMAR ETC. (day)

Source height = 1.50 m

ROAD (0.00 + 45.42 + 0.00) = 45.42 dBA  
Angle1 Angle2 Alpha RefLeq P. Adj D. Adj F. Adj W. Adj H. Adj B. Adj SubLeq  
-90 90 0.66 72.16 0.00 -25.28 -1.46 0.00 0.00 0.00 45.42

Segment Leq : 45.42 dBA

Total Leq All Segments: 45.42 dBA

Results segment # 1: HUNTMAR ETC. (night)

Source height = 1.50 m

ROAD (0.00 + 45.00 + 0.00) = 45.00 dBA  
Angle1 Angle2 Alpha RefLeq P. Adj D. Adj F. Adj W. Adj H. Adj B. Adj SubLeq  
-90 90 0.57 64.56 0.00 -18.26 -1.30 0.00 0.00 0.00 45.00

Segment Leq : 45.00 dBA

Total Leq All Segments: 45.00 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 45.42  
(NIGHT): 45.00

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 08:55:10  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: L45MGROV.te Time Period: Day/Night 16/8 hours  
Description:

Living - 45 dBA off Maple Grove Road

Road data, segment # 1: Maple Grove (day/night)

Car traffic volume : 28336/2464 veh/TimePeriod  
Medium truck volume : 2254/196 veh/TimePeriod  
Heavy truck volume : 1610/140 veh/TimePeriod  
Posted speed limit : 60 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

Data for Segment # 1: Maple Grove (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 500.00 / 272.66 m  
Receiver height : 2.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: Maple Grove (day)

Source height = 1.50 m

ROAD (0.00 + 47.44 + 0.00) = 47.44 dBA  
Angle1 Angle2 Al pha RefLeq P. Adj D. Adj F. Adj W. Adj H. Adj B. Adj SubLeq  
-----  
-90 90 0.63 73.68 0.00 -24.83 -1.41 0.00 0.00 0.00 47.44

Segment Leq : 47.44 dBA

Total Leq All Segments: 47.44 dBA

Results segment # 1: Maple Grove (night)

Source height = 1.50 m

ROAD (0.00 + 45.00 + 0.00) = 45.00 dBA  
Angle1 Angle2 Al pha RefLeq P. Adj D. Adj F. Adj W. Adj H. Adj B. Adj SubLeq  
-----  
-90 90 0.57 66.08 0.00 -19.78 -1.30 0.00 0.00 0.00 45.00

Segment Leq : 45.00 dBA

Total Leq All Segments: 45.00 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 47.44  
(NIGHT): 45.00

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 09:06:26  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: 045MGROV.te Time Period: Day/Night 16/8 hours  
Description:

Outside - 45 dBA off Maple Grove Road

Road data, segment # 1: Maple Grove (day/night)

Car traffic volume : 28336/2464 veh/TimePeriod  
Medium truck volume : 2254/196 veh/TimePeriod  
Heavy truck volume : 1610/140 veh/TimePeriod  
Posted speed limit : 60 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

Data for Segment # 1: Maple Grove (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 500.00 / 15.00 m  
Receiver height : 1.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: Maple Grove (day)

Source height = 1.50 m

ROAD (0.00 + 46.94 + 0.00) = 46.94 dBA  
Angle1 Angle2 Al pha RefLeq P. Adj D. Adj F. Adj W. Adj H. Adj B. Adj SubLeq  
-----  
-90 90 0.66 73.68 0.00 -25.28 -1.46 0.00 0.00 0.00 46.94

Segment Leq : 46.94 dBA

Total Leq All Segments: 46.94 dBA

Results segment # 1: Maple Grove (night)

Source height = 1.50 m

ROAD (0.00 + 64.78 + 0.00) = 64.78 dBA  
Angle1 Angle2 Al pha RefLeq P. Adj D. Adj F. Adj W. Adj H. Adj B. Adj SubLeq  
-----  
-90 90 0.57 66.08 0.00 0.00 -1.30 0.00 0.00 0.00 64.78

Segment Leq : 64.78 dBA

Total Leq All Segments: 64.78 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 46.94  
(NIGHT): 64.78

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 09:16:17  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: L45PALLA.t Time Period: Day/Night 16/8 hours  
Description:

Living - 45 dBA off Palladium Drive

Road data, segment # 1: PALLADIUM (day/night)

Car traffic volume : 28336/2464 veh/TimePeriod  
Medium truck volume : 2254/196 veh/TimePeriod  
Heavy truck volume : 1610/140 veh/TimePeriod  
Posted speed limit : 70 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

Data for Segment # 1: PALLADIUM (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 500.00 / 330.91 m  
Receiver height : 1.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: PALLADIUM (day)

Source height = 1.50 m

ROAD (0.00 + 48.26 + 0.00) = 48.26 dBA

| Angle1 | Angle2 | Alpha | RefLeq | P. Adj | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.66  | 75.00  | 0.00   | -25.28 | -1.46  | 0.00   | 0.00   | 0.00   | 48.26  |

Segment Leq : 48.26 dBA

Total Leq All Segments: 48.26 dBA

Results segment # 1: PALLADIUM (night)

Source height = 1.50 m

ROAD (0.00 + 45.00 + 0.00) = 45.00 dBA

| Angle1 | Angle2 | Alpha | RefLeq | P. Adj | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.57  | 67.40  | 0.00   | -21.10 | -1.30  | 0.00   | 0.00   | 0.00   | 45.00  |

Segment Leq : 45.00 dBA

Total Leq All Segments: 45.00 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 48.26  
(NIGHT): 45.00

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 09:26:16  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: 045PALLA.t Time Period: Day/Night 16/8 hours  
Description:

Outside - 45 dBA off Palladium Drive

Road data, segment # 1: PALLADIUM (day/night)

Car traffic volume : 28336/2464 veh/TimePeriod  
Medium truck volume : 2254/196 veh/TimePeriod  
Heavy truck volume : 1610/140 veh/TimePeriod  
Posted speed limit : 70 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

Data for Segment # 1: PALLADIUM (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 500.00 / 15.00 m  
Receiver height : 1.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: PALLADIUM (day)

Source height = 1.50 m

ROAD (0.00 + 48.26 + 0.00) = 48.26 dBA

| Angle1 | Angle2 | Alpha | RefLeq | P. Adj | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.66  | 75.00  | 0.00   | -25.28 | -1.46  | 0.00   | 0.00   | 0.00   | 48.26  |

Segment Leq : 48.26 dBA

Total Leq All Segments: 48.26 dBA

Results segment # 1: PALLADIUM (night)

Source height = 1.50 m

ROAD (0.00 + 66.10 + 0.00) = 66.10 dBA

| Angle1 | Angle2 | Alpha | RefLeq | P. Adj | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.57  | 67.40  | 0.00   | 0.00   | -1.30  | 0.00   | 0.00   | 0.00   | 66.10  |

Segment Leq : 66.10 dBA

Total Leq All Segments: 66.10 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 48.26  
(NIGHT): 66.10

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 10:01:50  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: L45LRT.te Time Period: Day/Night 16/8 hours  
Description:

Living - 45 dBA off LRT

RT/Custom data, segment # 1: LRT (day/night)

1 - Bus:  
Traffic volume : 14895/1655 veh/TimePeriod  
Speed : 60 km/h

Data for Segment # 1: LRT (day/night)

|                          |        |   |                   |                                 |
|--------------------------|--------|---|-------------------|---------------------------------|
| Angle1                   | Angle2 | : | -90.00 deg        | 90.00 deg                       |
| Wood depth               |        | : | 0                 | (No woods.)                     |
| No of house rows         |        | : | 0 / 0             |                                 |
| Surface                  |        | : | 1                 | (Absorptive ground surface)     |
| Receiver source distance |        | : | 500.00 / 380.17 m |                                 |
| Receiver height          |        | : | 2.50 / 4.50 m     |                                 |
| Topography               |        | : | 1                 | (Flat/gentle slope; no barrier) |
| Reference angle          |        | : | 0.00              |                                 |

Results segment # 1: LRT (day)

Source height = 0.50 m

RT/Custom (0.00 + 48.61 + 0.00) = 48.61 dBA  
Angle1 Angle2 Al pha RefLeq D. Adj F. Adj W. Adj H. Adj B. Adj SubLeq  
-----  
-90 90 0.66 75.35 -25.28 -1.46 0.00 0.00 0.00 48.61

Segment Leq : 48.61 dBA

Total Leq All Segments: 48.61 dBA

Results segment # 1: LRT (night)

Source height = 0.50 m

RT/Custom (0.00 + 45.00 + 0.00) = 45.00 dBA  
Angle1 Angle2 Al pha RefLeq D. Adj F. Adj W. Adj H. Adj B. Adj SubLeq  
-----  
-90 90 0.60 68.82 -22.46 -1.35 0.00 0.00 0.00 45.00

Segment Leq : 45.00 dBA

Total Leq All Segments: 45.00 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 48.61  
(NIGHT): 45.00

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 10:03:24  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: 045LRT.te Time Period: Day/Night 16/8 hours  
Description:

Outside - 45 dBA off LRT

RT/Custom data, segment # 1: LRT (day/night)

1 - Bus:  
Traffic volume : 14895/1655 veh/TimePeriod  
Speed : 60 km/h

Data for Segment # 1: LRT (day/night)

|                          |        |   |                   |                                 |
|--------------------------|--------|---|-------------------|---------------------------------|
| Angle1                   | Angle2 | : | -90.00 deg        | 90.00 deg                       |
| Wood depth               |        | : | 0                 | (No woods.)                     |
| No of house rows         |        | : | 0 / 0             |                                 |
| Surface                  |        | : | 1                 | (Absorptive ground surface)     |
| Receiver source distance |        | : | 500.00 / 380.17 m |                                 |
| Receiver height          |        | : | 1.50 / 4.50 m     |                                 |
| Topography               |        | : | 1                 | (Flat/gentle slope; no barrier) |
| Reference angle          |        | : | 0.00              |                                 |

Results segment # 1: LRT (day)

Source height = 0.50 m

RT/Custom (0.00 + 48.61 + 0.00) = 48.61 dBA  
Angle1 Angle2 Al pha RefLeq D. Adj F. Adj W. Adj H. Adj B. Adj SubLeq  
-----  
-90 90 0.66 75.35 -25.28 -1.46 0.00 0.00 0.00 48.61

Segment Leq : 48.61 dBA

Total Leq All Segments: 48.61 dBA

Results segment # 1: LRT (night)

Source height = 0.50 m

RT/Custom (0.00 + 45.00 + 0.00) = 45.00 dBA  
Angle1 Angle2 Al pha RefLeq D. Adj F. Adj W. Adj H. Adj B. Adj SubLeq  
-----  
-90 90 0.60 68.82 -22.46 -1.35 0.00 0.00 0.00 45.00

Segment Leq : 45.00 dBA

Total Leq All Segments: 45.00 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 48.61  
(NIGHT): 45.00

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 09:36:31  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: L50HUNT.te Time Period: Day/Night 16/8 hours  
Description:

Living - 50 dBA off Huntmar Drive, NS Arterial Road & EW Arterial Road

Road data, segment # 1: HUNTMAR ETC. (day/night)

Car traffic volume : 28336/2464 veh/TimePeriod  
Medium truck volume : 2254/196 veh/TimePeriod  
Heavy truck volume : 1610/140 veh/TimePeriod  
Posted speed limit : 50 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

Data for Segment # 1: HUNTMAR ETC. (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 281.18 / 104.87 m  
Receiver height : 2.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: HUNTMAR ETC. (day)

Source height = 1.50 m

ROAD (0.00 + 50.00 + 0.00) = 50.00 dBA  
Angle1 Angle2 Alpha RefLeq P. Adj D. Adj F. Adj W. Adj H. Adj B. Adj SubLeq  
-90 90 0.63 72.16 0.00 -20.75 -1.41 0.00 0.00 0.00 50.00

Segment Leq : 50.00 dBA

Total Leq All Segments: 50.00 dBA

Results segment # 1: HUNTMAR ETC. (night)

Source height = 1.50 m

ROAD (0.00 + 50.00 + 0.00) = 50.00 dBA  
Angle1 Angle2 Alpha RefLeq P. Adj D. Adj F. Adj W. Adj H. Adj B. Adj SubLeq  
-90 90 0.57 64.56 0.00 -13.26 -1.30 0.00 0.00 0.00 50.00

Segment Leq : 50.00 dBA

Total Leq All Segments: 50.00 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 50.00  
(NIGHT): 50.00

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 09:39:01  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: 050HUNT.te Time Period: Day/Night 16/8 hours  
Description:

Outside - 50 dBA off Huntmar Drive, NS Arterial Road & EW Arterial Road

Road data, segment # 1: HUNTMAR ETC. (day/night)

Car traffic volume : 28336/2464 veh/TimePeriod  
Medium truck volume : 2254/196 veh/TimePeriod  
Heavy truck volume : 1610/140 veh/TimePeriod  
Posted speed limit : 50 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

Data for Segment # 1: HUNTMAR ETC. (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 265.00 / 218.19 m  
Receiver height : 1.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: HUNTMAR ETC. (day)

Source height = 1.50 m

ROAD (0.00 + 50.00 + 0.00) = 50.00 dBA  
Angle1 Angle2 Alpha RefLeq P. Adj D. Adj F. Adj W. Adj H. Adj B. Adj SubLeq  
-90 90 0.66 72.16 0.00 -20.70 -1.46 0.00 0.00 0.00 50.00

Segment Leq : 50.00 dBA

Total Leq All Segments: 50.00 dBA

Results segment # 1: HUNTMAR ETC. (night)

Source height = 1.50 m

ROAD (0.00 + 45.00 + 0.00) = 45.00 dBA  
Angle1 Angle2 Alpha RefLeq P. Adj D. Adj F. Adj W. Adj H. Adj B. Adj SubLeq  
-90 90 0.57 64.56 0.00 -18.26 -1.30 0.00 0.00 0.00 45.00

Segment Leq : 45.00 dBA

Total Leq All Segments: 45.00 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 50.00  
(NIGHT): 45.00

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 08:58:10  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: L50MGROV.te Time Period: Day/Night 16/8 hours  
Description:

Living - 50 dBA off Maple Grove Road

Road data, segment # 1: Maple Grove (day/night)

Car traffic volume : 28336/2464 veh/TimePeriod  
Medium truck volume : 2254/196 veh/TimePeriod  
Heavy truck volume : 1610/140 veh/TimePeriod  
Posted speed limit : 60 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

Data for Segment # 1: Maple Grove (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 348.44 / 131.04 m  
Receiver height : 2.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: Maple Grove (day)

Source height = 1.50 m

ROAD (0.00 + 50.00 + 0.00) = 50.00 dBA  
Angle1 Angle2 Al pha RefLeq P. Adj D. Adj F. Adj W. Adj H. Adj B. Adj SubLeq  
-----  
-90 90 0.63 73.68 0.00 -22.27 -1.41 0.00 0.00 0.00 50.00

Segment Leq : 50.00 dBA

Total Leq All Segments: 50.00 dBA

Results segment # 1: Maple Grove (night)

Source height = 1.50 m

ROAD (0.00 + 50.00 + 0.00) = 50.00 dBA  
Angle1 Angle2 Al pha RefLeq P. Adj D. Adj F. Adj W. Adj H. Adj B. Adj SubLeq  
-----  
-90 90 0.57 66.08 0.00 -14.78 -1.30 0.00 0.00 0.00 50.00

Segment Leq : 50.00 dBA

Total Leq All Segments: 50.00 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 50.00  
(NIGHT): 50.00

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 09:07:36  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: 050MGROV.te Time Period: Day/Night 16/8 hours  
Description:

Outside - 50 dBA off Maple Grove Road

Road data, segment # 1: Maple Grove (day/night)

Car traffic volume : 28336/2464 veh/TimePeriod  
Medium truck volume : 2254/196 veh/TimePeriod  
Heavy truck volume : 1610/140 veh/TimePeriod  
Posted speed limit : 60 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

Data for Segment # 1: Maple Grove (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 327.12 / 15.00 m  
Receiver height : 1.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: Maple Grove (day)

Source height = 1.50 m

ROAD (0.00 + 50.00 + 0.00) = 50.00 dBA  
Angle1 Angle2 Al pha RefLeq P. Adj D. Adj F. Adj W. Adj H. Adj B. Adj SubLeq  
-----  
-90 90 0.66 73.68 0.00 -22.22 -1.46 0.00 0.00 0.00 50.00

Segment Leq : 50.00 dBA

Total Leq All Segments: 50.00 dBA

Results segment # 1: Maple Grove (night)

Source height = 1.50 m

ROAD (0.00 + 64.78 + 0.00) = 64.78 dBA  
Angle1 Angle2 Al pha RefLeq P. Adj D. Adj F. Adj W. Adj H. Adj B. Adj SubLeq  
-----  
-90 90 0.57 66.08 0.00 0.00 -1.30 0.00 0.00 0.00 64.78

Segment Leq : 64.78 dBA

Total Leq All Segments: 64.78 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 50.00  
(NIGHT): 64.78

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 09:18:32  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: L50PALLA.t Time Period: Day/Night 16/8 hours  
Description:

Living - 50 dBA off Palladium Drive

Road data, segment # 1: PALLADIUM (day/night)

Car traffic volume : 28336/2464 veh/TimePeriod  
Medium truck volume : 2254/196 veh/TimePeriod  
Heavy truck volume : 1610/140 veh/TimePeriod  
Posted speed limit : 70 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

Data for Segment # 1: PALLADIUM (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 419.96 / 158.98 m  
Receiver height : 2.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: PALLADIUM (day)

Source height = 1.50 m

ROAD (0.00 + 50.00 + 0.00) = 50.00 dBA

| Angle1 | Angle2 | Alpha | RefLeq | P. Adj | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.63  | 75.00  | 0.00   | -23.59 | -1.41  | 0.00   | 0.00   | 0.00   | 50.00  |

Segment Leq : 50.00 dBA

Total Leq All Segments: 50.00 dBA

Results segment # 1: PALLADIUM (night)

Source height = 1.50 m

ROAD (0.00 + 50.00 + 0.00) = 50.00 dBA

| Angle1 | Angle2 | Alpha | RefLeq | P. Adj | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.57  | 67.40  | 0.00   | -16.10 | -1.30  | 0.00   | 0.00   | 0.00   | 50.00  |

Segment Leq : 50.00 dBA

Total Leq All Segments: 50.00 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 50.00  
(NIGHT): 50.00

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 09:27:25  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: 050PALLA.t Time Period: Day/Night 16/8 hours  
Description:

Outside - 50 dBA off Palladium Drive

Road data, segment # 1: PALLADIUM (day/night)

Car traffic volume : 28336/2464 veh/TimePeriod  
Medium truck volume : 2254/196 veh/TimePeriod  
Heavy truck volume : 1610/140 veh/TimePeriod  
Posted speed limit : 70 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

Data for Segment # 1: PALLADIUM (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 392.96 / 15.00 m  
Receiver height : 1.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: PALLADIUM (day)

Source height = 1.50 m

ROAD (0.00 + 50.00 + 0.00) = 50.00 dBA

| Angle1 | Angle2 | Alpha | RefLeq | P. Adj | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.66  | 75.00  | 0.00   | -23.54 | -1.46  | 0.00   | 0.00   | 0.00   | 50.00  |

Segment Leq : 50.00 dBA

Total Leq All Segments: 50.00 dBA

Results segment # 1: PALLADIUM (night)

Source height = 1.50 m

ROAD (0.00 + 66.10 + 0.00) = 66.10 dBA

| Angle1 | Angle2 | Alpha | RefLeq | P. Adj | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.57  | 67.40  | 0.00   | 0.00   | -1.30  | 0.00   | 0.00   | 0.00   | 66.10  |

Segment Leq : 66.10 dBA

Total Leq All Segments: 66.10 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 50.00  
(NIGHT): 66.10

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 10:01:07  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: L50LRT.te Time Period: Day/Night 16/8 hours  
Description:

Living - 50 dBA off LRT

RT/Custom data, segment # 1: LRT (day/night)

1 - Bus:  
Traffic volume : 14895/1655 veh/TimePeriod  
Speed : 60 km/h

Data for Segment # 1: LRT (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 412.38 / 185.03 m  
Receiver height : 2.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: LRT (day)

Source height = 0.50 m

RT/Custom (0.00 + 50.00 + 0.00) = 50.00 dBA

| Angle1 | Angle2 | Alpha | RefLeq | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.66  | 75.35  | -23.89 | -1.46  | 0.00   | 0.00   | 0.00   | 50.00  |

Segment Leq : 50.00 dBA

Total Leq All Segments: 50.00 dBA

Results segment # 1: LRT (night)

Source height = 0.50 m

RT/Custom (0.00 + 50.00 + 0.00) = 50.00 dBA

| Angle1 | Angle2 | Alpha | RefLeq | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.60  | 68.82  | -17.46 | -1.35  | 0.00   | 0.00   | 0.00   | 50.00  |

Segment Leq : 50.00 dBA

Total Leq All Segments: 50.00 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 50.00  
(NIGHT): 50.00

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 10:03:55  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: 050LRT.te Time Period: Day/Night 16/8 hours  
Description:

Outside - 50 dBA off LRT

RT/Custom data, segment # 1: LRT (day/night)

1 - Bus:  
Traffic volume : 14895/1655 veh/TimePeriod  
Speed : 60 km/h

Data for Segment # 1: LRT (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 412.38 / 380.17 m  
Receiver height : 1.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: LRT (day)

Source height = 0.50 m

RT/Custom (0.00 + 50.00 + 0.00) = 50.00 dBA

| Angle1 | Angle2 | Alpha | RefLeq | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.66  | 75.35  | -23.89 | -1.46  | 0.00   | 0.00   | 0.00   | 50.00  |

Segment Leq : 50.00 dBA

Total Leq All Segments: 50.00 dBA

Results segment # 1: LRT (night)

Source height = 0.50 m

RT/Custom (0.00 + 45.00 + 0.00) = 45.00 dBA

| Angle1 | Angle2 | Alpha | RefLeq | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.60  | 68.82  | -22.46 | -1.35  | 0.00   | 0.00   | 0.00   | 45.00  |

Segment Leq : 45.00 dBA

Total Leq All Segments: 45.00 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 50.00  
(NIGHT): 45.00

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 09:35:35  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: L55HUNT.te Time Period: Day/Night 16/8 hours  
Description:

Living - 55 dBA off Huntmar Drive, NS Arterial Road & EW Arterial Road

Road data, segment # 1: HUNTMAR ETC. (day/night)

Car traffic volume : 28336/2464 veh/TimePeriod  
Medium truck volume : 2254/196 veh/TimePeriod  
Heavy truck volume : 1610/140 veh/TimePeriod  
Posted speed limit : 50 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

Data for Segment # 1: HUNTMAR ETC. (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 138.85 / 50.40 m  
Receiver height : 2.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: HUNTMAR ETC. (day)

Source height = 1.50 m

ROAD (0.00 + 55.00 + 0.00) = 55.00 dBA  
Angle1 Angle2 Al pha RefLeq P. Adj D. Adj F. Adj W. Adj H. Adj B. Adj SubLeq  
-----  
-90 90 0.63 72.16 0.00 -15.75 -1.41 0.00 0.00 0.00 55.00

Segment Leq : 55.00 dBA

Total Leq All Segments: 55.00 dBA  
Results segment # 1: HUNTMAR ETC. (night)

Source height = 1.50 m

ROAD (0.00 + 55.00 + 0.00) = 55.00 dBA  
Angle1 Angle2 Al pha RefLeq P. Adj D. Adj F. Adj W. Adj H. Adj B. Adj SubLeq  
-----  
-90 90 0.57 64.56 0.00 -8.26 -1.30 0.00 0.00 0.00 55.00

Segment Leq : 55.00 dBA

Total Leq All Segments: 55.00 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 55.00  
(NIGHT): 55.00

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 09:39:35  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: 055HUNT.te Time Period: Day/Night 16/8 hours  
Description:

Outside - 55 dBA off Huntmar Drive, NS Arterial Road & EW Arterial Road

Road data, segment # 1: HUNTMAR ETC. (day/night)

Car traffic volume : 28336/2464 veh/TimePeriod  
Medium truck volume : 2254/196 veh/TimePeriod  
Heavy truck volume : 1610/140 veh/TimePeriod  
Posted speed limit : 50 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

Data for Segment # 1: HUNTMAR ETC. (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 132.46 / 218.19 m  
Receiver height : 1.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: HUNTMAR ETC. (day)

Source height = 1.50 m

ROAD (0.00 + 55.00 + 0.00) = 55.00 dBA  
Angle1 Angle2 Al pha RefLeq P. Adj D. Adj F. Adj W. Adj H. Adj B. Adj SubLeq  
-----  
-90 90 0.66 72.16 0.00 -15.70 -1.46 0.00 0.00 0.00 55.00

Segment Leq : 55.00 dBA

Total Leq All Segments: 55.00 dBA

Results segment # 1: HUNTMAR ETC. (night)

Source height = 1.50 m

ROAD (0.00 + 45.00 + 0.00) = 45.00 dBA  
Angle1 Angle2 Al pha RefLeq P. Adj D. Adj F. Adj W. Adj H. Adj B. Adj SubLeq  
-----  
-90 90 0.57 64.56 0.00 -18.26 -1.30 0.00 0.00 0.00 45.00

Segment Leq : 45.00 dBA

Total Leq All Segments: 45.00 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 55.00  
(NIGHT): 45.00

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 09:00:19  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: L55MGROV.te Time Period: Day/Night 16/8 hours  
Description:

Living - 55 dBA off Maple Grove Road

Road data, segment # 1: Maple Grove (day/night)

Car traffic volume : 28336/2464 veh/TimePeriod  
Medium truck volume : 2254/196 veh/TimePeriod  
Heavy truck volume : 1610/140 veh/TimePeriod  
Posted speed limit : 60 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

Data for Segment # 1: Maple Grove (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 172.01 / 62.96 m  
Receiver height : 2.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: Maple Grove (day)

Source height = 1.50 m

ROAD (0.00 + 55.00 + 0.00) = 55.00 dBA

| Angle1 | Angle2 | Alpha | RefLeq | P. Adj | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.63  | 73.68  | 0.00   | -17.27 | -1.41  | 0.00   | 0.00   | 0.00   | 55.00  |

Segment Leq : 55.00 dBA

Total Leq All Segments: 55.00 dBA

Results segment # 1: Maple Grove (night)

Source height = 1.50 m

ROAD (0.00 + 55.00 + 0.00) = 55.00 dBA

| Angle1 | Angle2 | Alpha | RefLeq | P. Adj | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.57  | 66.08  | 0.00   | -9.78  | -1.30  | 0.00   | 0.00   | 0.00   | 55.00  |

Segment Leq : 55.00 dBA

Total Leq All Segments: 55.00 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 55.00  
(NIGHT): 55.00

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 09:09:45  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: 055MGROV.te Time Period: Day/Night 16/8 hours  
Description:

Outside - 55 dBA off Maple Grove Road

Road data, segment # 1: Maple Grove (day/night)

Car traffic volume : 28336/2464 veh/TimePeriod  
Medium truck volume : 2254/196 veh/TimePeriod  
Heavy truck volume : 1610/140 veh/TimePeriod  
Posted speed limit : 60 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

Data for Segment # 1: Maple Grove (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 163.48 / 15.00 m  
Receiver height : 1.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: Maple Grove (day)

Source height = 1.50 m

ROAD (0.00 + 55.00 + 0.00) = 55.00 dBA

| Angle1 | Angle2 | Alpha | RefLeq | P. Adj | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.66  | 73.68  | 0.00   | -17.22 | -1.46  | 0.00   | 0.00   | 0.00   | 55.00  |

Segment Leq : 55.00 dBA

Total Leq All Segments: 55.00 dBA

Results segment # 1: Maple Grove (night)

Source height = 1.50 m

ROAD (0.00 + 64.78 + 0.00) = 64.78 dBA

| Angle1 | Angle2 | Alpha | RefLeq | P. Adj | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.57  | 66.08  | 0.00   | 0.00   | -1.30  | 0.00   | 0.00   | 0.00   | 64.78  |

Segment Leq : 64.78 dBA

Total Leq All Segments: 64.78 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 55.00  
(NIGHT): 64.78

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 09:19:53  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: L55PALLA.t Time Period: Day/Night 16/8 hours  
Description:

Living - 55 dBA off Palladium Drive

Road data, segment # 1: PALLADIUM (day/night)

Car traffic volume : 28336/2464 veh/TimePeriod  
Medium truck volume : 2254/196 veh/TimePeriod  
Heavy truck volume : 1610/140 veh/TimePeriod  
Posted speed limit : 70 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

Data for Segment # 1: PALLADIUM (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 207.29 / 76.34 m  
Receiver height : 2.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: PALLADIUM (day)

Source height = 1.50 m

ROAD (0.00 + 55.00 + 0.00) = 55.00 dBA

| Angle1 | Angle2 | Alpha | RefLeq | P. Adj | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.63  | 75.00  | 0.00   | -18.59 | -1.41  | 0.00   | 0.00   | 0.00   | 55.00  |

Segment Leq : 55.00 dBA

Total Leq All Segments: 55.00 dBA

Results segment # 1: PALLADIUM (night)

Source height = 1.50 m

ROAD (0.00 + 55.00 + 0.00) = 55.00 dBA

| Angle1 | Angle2 | Alpha | RefLeq | P. Adj | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.57  | 67.40  | 0.00   | -11.10 | -1.30  | 0.00   | 0.00   | 0.00   | 55.00  |

Segment Leq : 55.00 dBA

Total Leq All Segments: 55.00 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 55.00  
(NIGHT): 55.00

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 09:28:05  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: 055PALLA.t Time Period: Day/Night 16/8 hours  
Description:

Outside - 55 dBA off Palladium Drive

Road data, segment # 1: PALLADIUM (day/night)

Car traffic volume : 28336/2464 veh/TimePeriod  
Medium truck volume : 2254/196 veh/TimePeriod  
Heavy truck volume : 1610/140 veh/TimePeriod  
Posted speed limit : 70 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

Data for Segment # 1: PALLADIUM (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 196.40 / 15.00 m  
Receiver height : 1.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: PALLADIUM (day)

Source height = 1.50 m

ROAD (0.00 + 55.00 + 0.00) = 55.00 dBA

| Angle1 | Angle2 | Alpha | RefLeq | P. Adj | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.66  | 75.00  | 0.00   | -18.54 | -1.46  | 0.00   | 0.00   | 0.00   | 55.00  |

Segment Leq : 55.00 dBA

Total Leq All Segments: 55.00 dBA

Results segment # 1: PALLADIUM (night)

Source height = 1.50 m

ROAD (0.00 + 66.10 + 0.00) = 66.10 dBA

| Angle1 | Angle2 | Alpha | RefLeq | P. Adj | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.57  | 67.40  | 0.00   | 0.00   | -1.30  | 0.00   | 0.00   | 0.00   | 66.10  |

Segment Leq : 66.10 dBA

Total Leq All Segments: 66.10 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 55.00  
(NIGHT): 66.10

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 10:00:24  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: L55LRT.te  
Description:

Living - 55 dBA off LRT

RT/Custom data, segment # 1: LRT (day/night)

1 - Bus:  
Traffic volume : 14895/1655 veh/TimePeriod  
Speed : 60 km/h

Data for Segment # 1: LRT (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 206.11 / 90.19 m  
Receiver height : 2.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: LRT (day)

Source height = 0.50 m

RT/Custom (0.00 + 55.00 + 0.00) = 55.00 dBA

| Angle1 | Angle2 | Alpha | RefLeq | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.66  | 75.35  | -18.89 | -1.46  | 0.00   | 0.00   | 0.00   | 55.00  |

Segment Leq : 55.00 dBA

Total Leq All Segments: 55.00 dBA

Results segment # 1: LRT (night)

Source height = 0.50 m

RT/Custom (0.00 + 55.00 + 0.00) = 55.00 dBA

| Angle1 | Angle2 | Alpha | RefLeq | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.60  | 68.82  | -12.47 | -1.35  | 0.00   | 0.00   | 0.00   | 55.00  |

Segment Leq : 55.00 dBA

Total Leq All Segments: 55.00 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 55.00  
(NIGHT): 55.00

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 10:04:14  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: 055LRT.te  
Description:

Outside - 55 dBA off LRT

RT/Custom data, segment # 1: LRT (day/night)

1 - Bus:  
Traffic volume : 14895/1655 veh/TimePeriod  
Speed : 60 km/h

Data for Segment # 1: LRT (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 206.11 / 380.17 m  
Receiver height : 1.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: LRT (day)

Source height = 0.50 m

RT/Custom (0.00 + 55.00 + 0.00) = 55.00 dBA

| Angle1 | Angle2 | Alpha | RefLeq | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.66  | 75.35  | -18.89 | -1.46  | 0.00   | 0.00   | 0.00   | 55.00  |

Segment Leq : 55.00 dBA

Total Leq All Segments: 55.00 dBA

Results segment # 1: LRT (night)

Source height = 0.50 m

RT/Custom (0.00 + 45.00 + 0.00) = 45.00 dBA

| Angle1 | Angle2 | Alpha | RefLeq | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.60  | 68.82  | -22.46 | -1.35  | 0.00   | 0.00   | 0.00   | 45.00  |

Segment Leq : 45.00 dBA

Total Leq All Segments: 45.00 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 55.00  
(NIGHT): 45.00

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 09:34:55  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: L60HUNT.te Time Period: Day/Night 16/8 hours  
Description:

Living - 60 dBA off Huntmar Drive, NS Arterial Road & EW Arterial Road

Road data, segment # 1: HUNTMAR ETC. (day/night)

Car traffic volume : 28336/2464 veh/TimePeriod  
Medium truck volume : 2254/196 veh/TimePeriod  
Heavy truck volume : 1610/140 veh/TimePeriod  
Posted speed limit : 50 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

Data for Segment # 1: HUNTMAR ETC. (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 68.52 / 24.21 m  
Receiver height : 2.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: HUNTMAR ETC. (day)

Source height = 1.50 m

ROAD (0.00 + 60.00 + 0.00) = 60.00 dBA  
Angle1 Angle2 Al pha RefLeq P. Adj D. Adj F. Adj W. Adj H. Adj B. Adj SubLeq  
-----  
-90 90 0.63 72.16 0.00 -10.75 -1.41 0.00 0.00 0.00 60.00

Segment Leq : 60.00 dBA

Total Leq All Segments: 60.00 dBA

Results segment # 1: HUNTMAR ETC. (night)

Source height = 1.50 m

ROAD (0.00 + 60.00 + 0.00) = 60.00 dBA  
Angle1 Angle2 Al pha RefLeq P. Adj D. Adj F. Adj W. Adj H. Adj B. Adj SubLeq  
-----  
-90 90 0.57 64.56 0.00 -3.26 -1.30 0.00 0.00 0.00 60.00

Segment Leq : 60.00 dBA

Total Leq All Segments: 60.00 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 60.00  
(NIGHT): 60.00

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 09:40:00  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: 060HUNT.te Time Period: Day/Night 16/8 hours  
Description:

Outside - 60 dBA off Huntmar Drive, NS Arterial Road & EW Arterial Road

Road data, segment # 1: HUNTMAR ETC. (day/night)

Car traffic volume : 28336/2464 veh/TimePeriod  
Medium truck volume : 2254/196 veh/TimePeriod  
Heavy truck volume : 1610/140 veh/TimePeriod  
Posted speed limit : 50 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

Data for Segment # 1: HUNTMAR ETC. (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 66.21 / 218.19 m  
Receiver height : 1.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: HUNTMAR ETC. (day)

Source height = 1.50 m

ROAD (0.00 + 60.00 + 0.00) = 60.00 dBA  
Angle1 Angle2 Al pha RefLeq P. Adj D. Adj F. Adj W. Adj H. Adj B. Adj SubLeq  
-----  
-90 90 0.66 72.16 0.00 -10.70 -1.46 0.00 0.00 0.00 60.00

Segment Leq : 60.00 dBA

Total Leq All Segments: 60.00 dBA

Results segment # 1: HUNTMAR ETC. (night)

Source height = 1.50 m

ROAD (0.00 + 45.00 + 0.00) = 45.00 dBA  
Angle1 Angle2 Al pha RefLeq P. Adj D. Adj F. Adj W. Adj H. Adj B. Adj SubLeq  
-----  
-90 90 0.57 64.56 0.00 -18.26 -1.30 0.00 0.00 0.00 45.00

Segment Leq : 45.00 dBA

Total Leq All Segments: 45.00 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 60.00  
(NIGHT): 45.00

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 09:01:22  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: L60MGROV.te Time Period: Day/Night 16/8 hours  
Description:

Living - 60 dBA off Maple Grove Road

Road data, segment # 1: Maple Grove (day/night)

Car traffic volume : 28336/2464 veh/TimePeriod  
Medium truck volume : 2254/196 veh/TimePeriod  
Heavy truck volume : 1610/140 veh/TimePeriod  
Posted speed limit : 60 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

Data for Segment # 1: Maple Grove (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 84.86 / 30.22 m  
Receiver height : 2.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: Maple Grove (day)

Source height = 1.50 m

ROAD (0.00 + 60.00 + 0.00) = 60.00 dBA

| Angle1 | Angle2 | Alpha | RefLeq | P. Adj | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.63  | 73.68  | 0.00   | -12.27 | -1.41  | 0.00   | 0.00   | 0.00   | 60.00  |

Segment Leq : 60.00 dBA

Total Leq All Segments: 60.00 dBA

Results segment # 1: Maple Grove (night)

Source height = 1.50 m

ROAD (0.00 + 60.00 + 0.00) = 60.00 dBA

| Angle1 | Angle2 | Alpha | RefLeq | P. Adj | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.57  | 66.08  | 0.00   | -4.78  | -1.30  | 0.00   | 0.00   | 0.00   | 60.00  |

Segment Leq : 60.00 dBA

Total Leq All Segments: 60.00 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 60.00  
(NIGHT): 60.00

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 09:10:32  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: 060MGROV.te Time Period: Day/Night 16/8 hours  
Description:

Outside - 60 dBA off Maple Grove Road

Road data, segment # 1: Maple Grove (day/night)

Car traffic volume : 28336/2464 veh/TimePeriod  
Medium truck volume : 2254/196 veh/TimePeriod  
Heavy truck volume : 1610/140 veh/TimePeriod  
Posted speed limit : 60 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

Data for Segment # 1: Maple Grove (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 81.66 / 15.00 m  
Receiver height : 1.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: Maple Grove (day)

Source height = 1.50 m

ROAD (0.00 + 60.00 + 0.00) = 60.00 dBA

| Angle1 | Angle2 | Alpha | RefLeq | P. Adj | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.66  | 73.68  | 0.00   | -12.22 | -1.46  | 0.00   | 0.00   | 0.00   | 60.00  |

Segment Leq : 60.00 dBA

Total Leq All Segments: 60.00 dBA

Results segment # 1: Maple Grove (night)

Source height = 1.50 m

ROAD (0.00 + 64.78 + 0.00) = 64.78 dBA

| Angle1 | Angle2 | Alpha | RefLeq | P. Adj | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.57  | 66.08  | 0.00   | 0.00   | -1.30  | 0.00   | 0.00   | 0.00   | 64.78  |

Segment Leq : 64.78 dBA

Total Leq All Segments: 64.78 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 60.00  
(NIGHT): 64.78

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 09:21:58  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: L60PALLA.t Time Period: Day/Night 16/8 hours  
Description:

Living - 60 dBA off Palladium Drive

Road data, segment # 1: PALLADIUM (day/night)

Car traffic volume : 28336/2464 veh/TimePeriod  
Medium truck volume : 2254/196 veh/TimePeriod  
Heavy truck volume : 1610/140 veh/TimePeriod  
Posted speed limit : 70 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

Data for Segment # 1: PALLADIUM (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 102.27 / 36.67 m  
Receiver height : 2.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: PALLADIUM (day)

Source height = 1.50 m

ROAD (0.00 + 60.00 + 0.00) = 60.00 dBA

| Angle1 | Angle2 | Alpha | RefLeq | P. Adj | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.63  | 75.00  | 0.00   | -13.59 | -1.41  | 0.00   | 0.00   | 0.00   | 60.00  |

Segment Leq : 60.00 dBA

Total Leq All Segments: 60.00 dBA

Results segment # 1: PALLADIUM (night)

Source height = 1.50 m

ROAD (0.00 + 60.00 + 0.00) = 60.00 dBA

| Angle1 | Angle2 | Alpha | RefLeq | P. Adj | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.57  | 67.40  | 0.00   | -6.10  | -1.30  | 0.00   | 0.00   | 0.00   | 60.00  |

Segment Leq : 60.00 dBA

Total Leq All Segments: 60.00 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 60.00  
(NIGHT): 60.00

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 09:28:29  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: 060PALLA.t Time Period: Day/Night 16/8 hours  
Description:

Outside - 60 dBA off Palladium Drive

Road data, segment # 1: PALLADIUM (day/night)

Car traffic volume : 28336/2464 veh/TimePeriod  
Medium truck volume : 2254/196 veh/TimePeriod  
Heavy truck volume : 1610/140 veh/TimePeriod  
Posted speed limit : 70 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

Data for Segment # 1: PALLADIUM (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 98.12 / 15.00 m  
Receiver height : 1.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: PALLADIUM (day)

Source height = 1.50 m

ROAD (0.00 + 60.00 + 0.00) = 60.00 dBA

| Angle1 | Angle2 | Alpha | RefLeq | P. Adj | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.66  | 75.00  | 0.00   | -13.54 | -1.46  | 0.00   | 0.00   | 0.00   | 60.00  |

Segment Leq : 60.00 dBA

Total Leq All Segments: 60.00 dBA

Results segment # 1: PALLADIUM (night)

Source height = 1.50 m

ROAD (0.00 + 66.10 + 0.00) = 66.10 dBA

| Angle1 | Angle2 | Alpha | RefLeq | P. Adj | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.57  | 67.40  | 0.00   | 0.00   | -1.30  | 0.00   | 0.00   | 0.00   | 66.10  |

Segment Leq : 66.10 dBA

Total Leq All Segments: 66.10 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 60.00  
(NIGHT): 66.10

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 09:58:58  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: L60LRT.te Time Period: Day/Night 16/8 hours  
Description:

Living - 60 dBA off LRT

RT/Custom data, segment # 1: LRT (day/night)

1 - Bus:  
Traffic volume : 14895/1655 veh/TimePeriod  
Speed : 60 km/h

Data for Segment # 1: LRT (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 102.98 / 43.89 m  
Receiver height : 2.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: LRT (day)

Source height = 0.50 m

RT/Custom (0.00 + 60.00 + 0.00) = 60.00 dBA

| Angle1 | Angle2 | Alpha | RefLeq | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.66  | 75.35  | -13.89 | -1.46  | 0.00   | 0.00   | 0.00   | 60.00  |

Segment Leq : 60.00 dBA

Total Leq All Segments: 60.00 dBA

Results segment # 1: LRT (night)

Source height = 0.50 m

RT/Custom (0.00 + 60.00 + 0.00) = 60.00 dBA

| Angle1 | Angle2 | Alpha | RefLeq | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.60  | 68.82  | -7.46  | -1.35  | 0.00   | 0.00   | 0.00   | 60.00  |

Segment Leq : 60.00 dBA

Total Leq All Segments: 60.00 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 60.00  
(NIGHT): 60.00

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 10:04:38  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: 060LRT.te Time Period: Day/Night 16/8 hours  
Description:

Outside - 60 dBA off LRT

RT/Custom data, segment # 1: LRT (day/night)

1 - Bus:  
Traffic volume : 14895/1655 veh/TimePeriod  
Speed : 60 km/h

Data for Segment # 1: LRT (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 102.98 / 380.17 m  
Receiver height : 1.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: LRT (day)

Source height = 0.50 m

RT/Custom (0.00 + 60.00 + 0.00) = 60.00 dBA

| Angle1 | Angle2 | Alpha | RefLeq | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.66  | 75.35  | -13.89 | -1.46  | 0.00   | 0.00   | 0.00   | 60.00  |

Segment Leq : 60.00 dBA

Total Leq All Segments: 60.00 dBA

Results segment # 1: LRT (night)

Source height = 0.50 m

RT/Custom (0.00 + 45.00 + 0.00) = 45.00 dBA

| Angle1 | Angle2 | Alpha | RefLeq | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.60  | 68.82  | -22.46 | -1.35  | 0.00   | 0.00   | 0.00   | 45.00  |

Segment Leq : 45.00 dBA

Total Leq All Segments: 45.00 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 60.00  
(NIGHT): 45.00

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 09:34:18  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: L65HUNT.te Time Period: Day/Night 16/8 hours  
Description:

Living - 65 dBA off Huntmar Drive, NS Arterial Road & EW Arterial Road

Road data, segment # 1: HUNTMAR ETC. (day/night)

Car traffic volume : 28336/2464 veh/TimePeriod  
Medium truck volume : 2254/196 veh/TimePeriod  
Heavy truck volume : 1610/140 veh/TimePeriod  
Posted speed limit : 50 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

Data for Segment # 1: HUNTMAR ETC. (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 33.83 / 15.00 m  
Receiver height : 2.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: HUNTMAR ETC. (day)

Source height = 1.50 m

ROAD (0.00 + 65.00 + 0.00) = 65.00 dBA  
Angle1 Angle2 Alpha RefLeq P. Adj D. Adj F. Adj W. Adj H. Adj B. Adj SubLeq  
-90 90 0.63 72.16 0.00 -5.76 -1.41 0.00 0.00 0.00 65.00

Segment Leq : 65.00 dBA

Total Leq All Segments: 65.00 dBA

Results segment # 1: HUNTMAR ETC. (night)

Source height = 1.50 m

ROAD (0.00 + 63.26 + 0.00) = 63.26 dBA  
Angle1 Angle2 Alpha RefLeq P. Adj D. Adj F. Adj W. Adj H. Adj B. Adj SubLeq  
-90 90 0.57 64.56 0.00 0.00 -1.30 0.00 0.00 0.00 63.26

Segment Leq : 63.26 dBA

Total Leq All Segments: 63.26 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 65.00  
(NIGHT): 63.26

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 09:40:21  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: 065HUNT.te Time Period: Day/Night 16/8 hours  
Description:

Outside - 65 dBA off Huntmar Drive, NS Arterial Road & EW Arterial Road

Road data, segment # 1: HUNTMAR ETC. (day/night)

Car traffic volume : 28336/2464 veh/TimePeriod  
Medium truck volume : 2254/196 veh/TimePeriod  
Heavy truck volume : 1610/140 veh/TimePeriod  
Posted speed limit : 50 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

Data for Segment # 1: HUNTMAR ETC. (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 33.09 / 218.19 m  
Receiver height : 1.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: HUNTMAR ETC. (day)

Source height = 1.50 m

ROAD (0.00 + 65.00 + 0.00) = 65.00 dBA  
Angle1 Angle2 Alpha RefLeq P. Adj D. Adj F. Adj W. Adj H. Adj B. Adj SubLeq  
-90 90 0.66 72.16 0.00 -5.70 -1.46 0.00 0.00 0.00 65.00

Segment Leq : 65.00 dBA

Total Leq All Segments: 65.00 dBA

Results segment # 1: HUNTMAR ETC. (night)

Source height = 1.50 m

ROAD (0.00 + 45.00 + 0.00) = 45.00 dBA  
Angle1 Angle2 Alpha RefLeq P. Adj D. Adj F. Adj W. Adj H. Adj B. Adj SubLeq  
-90 90 0.57 64.56 0.00 0.00 -18.26 -1.30 0.00 0.00 0.00 45.00

Segment Leq : 45.00 dBA

Total Leq All Segments: 45.00 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 65.00  
(NIGHT): 45.00

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 09:03:19  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: L65MGROV.te Time Period: Day/Night 16/8 hours  
Description:

Living - 65 dBA off Maple Grove Road

Road data, segment # 1: Maple Grove (day/night)

Car traffic volume : 28336/2464 veh/TimePeriod  
Medium truck volume : 2254/196 veh/TimePeriod  
Heavy truck volume : 1610/140 veh/TimePeriod  
Posted speed limit : 60 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

Data for Segment # 1: Maple Grove (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 41.88 / 15.00 m  
Receiver height : 2.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: Maple Grove (day)

Source height = 1.50 m

ROAD (0.00 + 65.00 + 0.00) = 65.00 dBA

| Angle1 | Angle2 | Alpha | RefLeq | P. Adj | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.63  | 73.68  | 0.00   | -7.27  | -1.41  | 0.00   | 0.00   | 0.00   | 65.00  |

Segment Leq : 65.00 dBA

Total Leq All Segments: 65.00 dBA

Results segment # 1: Maple Grove (night)

Source height = 1.50 m

ROAD (0.00 + 64.78 + 0.00) = 64.78 dBA

| Angle1 | Angle2 | Alpha | RefLeq | P. Adj | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.57  | 66.08  | 0.00   | 0.00   | -1.30  | 0.00   | 0.00   | 0.00   | 64.78  |

Segment Leq : 64.78 dBA

Total Leq All Segments: 64.78 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 65.00  
(NIGHT): 64.78

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 09:11:50  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: 065MGROV.te Time Period: Day/Night 16/8 hours  
Description:

Outside - 65 dBA off Maple Grove Road

Road data, segment # 1: Maple Grove (day/night)

Car traffic volume : 28336/2464 veh/TimePeriod  
Medium truck volume : 2254/196 veh/TimePeriod  
Heavy truck volume : 1610/140 veh/TimePeriod  
Posted speed limit : 60 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

Data for Segment # 1: Maple Grove (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 40.81 / 15.00 m  
Receiver height : 1.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: Maple Grove (day)

Source height = 1.50 m

ROAD (0.00 + 65.00 + 0.00) = 65.00 dBA

| Angle1 | Angle2 | Alpha | RefLeq | P. Adj | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.66  | 73.68  | 0.00   | -7.22  | -1.46  | 0.00   | 0.00   | 0.00   | 65.00  |

Segment Leq : 65.00 dBA

Total Leq All Segments: 65.00 dBA

Results segment # 1: Maple Grove (night)

Source height = 1.50 m

ROAD (0.00 + 64.78 + 0.00) = 64.78 dBA

| Angle1 | Angle2 | Alpha | RefLeq | P. Adj | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.57  | 66.08  | 0.00   | 0.00   | -1.30  | 0.00   | 0.00   | 0.00   | 64.78  |

Segment Leq : 64.78 dBA

Total Leq All Segments: 64.78 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 65.00  
(NIGHT): 64.78

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 09:22:48  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: L65PALLA.t Time Period: Day/Night 16/8 hours  
Description:

Living - 65 dBA off Palladium Drive

Road data, segment # 1: PALLADIUM (day/night)

Car traffic volume : 28336/2464 veh/TimePeriod  
Medium truck volume : 2254/196 veh/TimePeriod  
Heavy truck volume : 1610/140 veh/TimePeriod  
Posted speed limit : 70 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

Data for Segment # 1: PALLADIUM (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 50.46 / 17.61 m  
Receiver height : 2.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: PALLADIUM (day)

Source height = 1.50 m

ROAD (0.00 + 65.00 + 0.00) = 65.00 dBA  
Angle1 Angle2 Al pha RefLeq P. Adj D. Adj F. Adj W. Adj H. Adj B. Adj SubLeq  
-----  
-90 90 0.63 75.00 0.00 -8.59 -1.41 0.00 0.00 0.00 65.00

Segment Leq : 65.00 dBA

Total Leq All Segments: 65.00 dBA

Results segment # 1: PALLADIUM (night)

Source height = 1.50 m

ROAD (0.00 + 65.00 + 0.00) = 65.00 dBA  
Angle1 Angle2 Al pha RefLeq P. Adj D. Adj F. Adj W. Adj H. Adj B. Adj SubLeq  
-----  
-90 90 0.57 67.40 0.00 -1.09 -1.30 0.00 0.00 0.00 65.00

Segment Leq : 65.00 dBA

Total Leq All Segments: 65.00 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 65.00  
(NIGHT): 65.00

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 09:29:07  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: 065PALLA.t Time Period: Day/Night 16/8 hours  
Description:

Outside - 65 dBA off Palladium Drive

Road data, segment # 1: PALLADIUM (day/night)

Car traffic volume : 28336/2464 veh/TimePeriod  
Medium truck volume : 2254/196 veh/TimePeriod  
Heavy truck volume : 1610/140 veh/TimePeriod  
Posted speed limit : 70 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

Data for Segment # 1: PALLADIUM (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 49.04 / 15.00 m  
Receiver height : 1.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: PALLADIUM (day)

Source height = 1.50 m

ROAD (0.00 + 65.00 + 0.00) = 65.00 dBA  
Angle1 Angle2 Al pha RefLeq P. Adj D. Adj F. Adj W. Adj H. Adj B. Adj SubLeq  
-----  
-90 90 0.66 75.00 0.00 -8.54 -1.46 0.00 0.00 0.00 65.00

Segment Leq : 65.00 dBA

Total Leq All Segments: 65.00 dBA

Results segment # 1: PALLADIUM (night)

Source height = 1.50 m

ROAD (0.00 + 66.10 + 0.00) = 66.10 dBA  
Angle1 Angle2 Al pha RefLeq P. Adj D. Adj F. Adj W. Adj H. Adj B. Adj SubLeq  
-----  
-90 90 0.57 67.40 0.00 -1.30 0.00 0.00 0.00 0.00 66.10

Segment Leq : 66.10 dBA

Total Leq All Segments: 66.10 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 65.00  
(NIGHT): 66.10

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 09:58:17  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: L65LRT.te  
Description:

Time Period: Day/Night 16/8 hours

Living - 65 dBA off LRT

RT/Custom data, segment # 1: LRT (day/night)

1 - Bus:  
Traffic volume : 14895/1655 veh/TimePeriod  
Speed : 60 km/h

Data for Segment # 1: LRT (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 51.47 / 21.36 m  
Receiver height : 2.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: LRT (day)

Source height = 0.50 m

RT/Custom (0.00 + 65.00 + 0.00) = 65.00 dBA

| Angle1 | Angle2 | Alpha | RefLeq | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.66  | 75.35  | -8.89  | -1.46  | 0.00   | 0.00   | 0.00   | 65.00  |

Segment Leq : 65.00 dBA

Total Leq All Segments: 65.00 dBA

Results segment # 1: LRT (night)

Source height = 0.50 m

RT/Custom (0.00 + 65.00 + 0.00) = 65.00 dBA

| Angle1 | Angle2 | Alpha | RefLeq | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.60  | 68.82  | -2.46  | -1.35  | 0.00   | 0.00   | 0.00   | 65.00  |

Segment Leq : 65.00 dBA

Total Leq All Segments: 65.00 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 65.00  
(NIGHT): 65.00

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 10:05:00  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: 065LRT.te  
Description:

Time Period: Day/Night 16/8 hours

Outside - 65 dBA off LRT

RT/Custom data, segment # 1: LRT (day/night)

1 - Bus:  
Traffic volume : 14895/1655 veh/TimePeriod  
Speed : 60 km/h

Data for Segment # 1: LRT (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 51.47 / 380.17 m  
Receiver height : 1.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: LRT (day)

Source height = 0.50 m

RT/Custom (0.00 + 65.00 + 0.00) = 65.00 dBA

| Angle1 | Angle2 | Alpha | RefLeq | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.66  | 75.35  | -8.89  | -1.46  | 0.00   | 0.00   | 0.00   | 65.00  |

Segment Leq : 65.00 dBA

Total Leq All Segments: 65.00 dBA

Results segment # 1: LRT (night)

Source height = 0.50 m

RT/Custom (0.00 + 45.00 + 0.00) = 45.00 dBA

| Angle1 | Angle2 | Alpha | RefLeq | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.60  | 68.82  | -22.46 | -1.35  | 0.00   | 0.00   | 0.00   | 45.00  |

Segment Leq : 45.00 dBA

Total Leq All Segments: 45.00 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 65.00  
(NIGHT): 45.00

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 09:33:53  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: L70HUNT.te Time Period: Day/Night 16/8 hours  
Description:

Living - 70 dBA off Huntmar Drive, NS Arterial Road & EW Arterial Road

Road data, segment # 1: HUNTMAR ETC. (day/night)

Car traffic volume : 28336/2464 veh/TimePeriod  
Medium truck volume : 2254/196 veh/TimePeriod  
Heavy truck volume : 1610/140 veh/TimePeriod  
Posted speed limit : 50 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

Data for Segment # 1: HUNTMAR ETC. (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 16.69 / 15.00 m  
Receiver height : 2.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: HUNTMAR ETC. (day)

Source height = 1.50 m

ROAD (0.00 + 70.00 + 0.00) = 70.00 dBA  
Angle1 Angle2 Al pha RefLeq P. Adj D. Adj F. Adj W. Adj H. Adj B. Adj SubLeq  
-----  
-90 90 0.63 72.16 0.00 -0.76 -1.41 0.00 0.00 0.00 70.00  
-----

Segment Leq : 70.00 dBA

Total Leq All Segments: 70.00 dBA

Results segment # 1: HUNTMAR ETC. (night)

Source height = 1.50 m

ROAD (0.00 + 63.26 + 0.00) = 63.26 dBA  
Angle1 Angle2 Al pha RefLeq P. Adj D. Adj F. Adj W. Adj H. Adj B. Adj SubLeq  
-----  
-90 90 0.57 64.56 0.00 0.00 -1.30 0.00 0.00 0.00 63.26  
-----

Segment Leq : 63.26 dBA

Total Leq All Segments: 63.26 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 70.00  
(NIGHT): 63.26

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 09:40:49  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: 070HUNT.te Time Period: Day/Night 16/8 hours  
Description:

Outside - 70 dBA off Huntmar Drive, NS Arterial Road & EW Arterial Road

Road data, segment # 1: HUNTMAR ETC. (day/night)

Car traffic volume : 28336/2464 veh/TimePeriod  
Medium truck volume : 2254/196 veh/TimePeriod  
Heavy truck volume : 1610/140 veh/TimePeriod  
Posted speed limit : 50 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

Data for Segment # 1: HUNTMAR ETC. (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 16.54 / 218.19 m  
Receiver height : 1.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: HUNTMAR ETC. (day)

Source height = 1.50 m

ROAD (0.00 + 70.00 + 0.00) = 70.00 dBA  
Angle1 Angle2 Al pha RefLeq P. Adj D. Adj F. Adj W. Adj H. Adj B. Adj SubLeq  
-----  
-90 90 0.66 72.16 0.00 -0.70 -1.46 0.00 0.00 0.00 70.00  
-----

Segment Leq : 70.00 dBA

Total Leq All Segments: 70.00 dBA

Results segment # 1: HUNTMAR ETC. (night)

Source height = 1.50 m

ROAD (0.00 + 45.00 + 0.00) = 45.00 dBA  
Angle1 Angle2 Al pha RefLeq P. Adj D. Adj F. Adj W. Adj H. Adj B. Adj SubLeq  
-----  
-90 90 0.57 64.56 0.00 0.00 -18.26 -1.30 0.00 0.00 0.00 45.00  
-----

Segment Leq : 45.00 dBA

Total Leq All Segments: 45.00 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 70.00  
(NIGHT): 45.00

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 09:04:05  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: L70MGROV.te Time Period: Day/Night 16/8 hours  
Description:

Living - 70 dBA off Maple Grove Road

Road data, segment # 1: Maple Grove (day/night)

Car traffic volume : 28336/2464 veh/TimePeriod  
Medium truck volume : 2254/196 veh/TimePeriod  
Heavy truck volume : 1610/140 veh/TimePeriod  
Posted speed limit : 60 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

Data for Segment # 1: Maple Grove (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 20.67 / 15.00 m  
Receiver height : 2.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: Maple Grove (day)

Source height = 1.50 m

ROAD (0.00 + 70.00 + 0.00) = 70.00 dBA

| Angle1 | Angle2 | Alpha | RefLeq | P. Adj | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.63  | 73.68  | 0.00   | -2.27  | -1.41  | 0.00   | 0.00   | 0.00   | 70.00  |

Segment Leq : 70.00 dBA

Total Leq All Segments: 70.00 dBA

Results segment # 1: Maple Grove (night)

Source height = 1.50 m

ROAD (0.00 + 64.78 + 0.00) = 64.78 dBA

| Angle1 | Angle2 | Alpha | RefLeq | P. Adj | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.57  | 66.08  | 0.00   | 0.00   | -1.30  | 0.00   | 0.00   | 0.00   | 64.78  |

Segment Leq : 64.78 dBA

Total Leq All Segments: 64.78 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 70.00  
(NIGHT): 64.78

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 09:12:44  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: 070MGROV.te Time Period: Day/Night 16/8 hours  
Description:

Outside - 70 dBA off Maple Grove Road

Road data, segment # 1: Maple Grove (day/night)

Car traffic volume : 28336/2464 veh/TimePeriod  
Medium truck volume : 2254/196 veh/TimePeriod  
Heavy truck volume : 1610/140 veh/TimePeriod  
Posted speed limit : 60 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

Data for Segment # 1: Maple Grove (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 20.42 / 15.00 m  
Receiver height : 1.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: Maple Grove (day)

Source height = 1.50 m

ROAD (0.00 + 70.00 + 0.00) = 70.00 dBA

| Angle1 | Angle2 | Alpha | RefLeq | P. Adj | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.66  | 73.68  | 0.00   | -2.22  | -1.46  | 0.00   | 0.00   | 0.00   | 70.00  |

Segment Leq : 70.00 dBA

Total Leq All Segments: 70.00 dBA

Results segment # 1: Maple Grove (night)

Source height = 1.50 m

ROAD (0.00 + 64.78 + 0.00) = 64.78 dBA

| Angle1 | Angle2 | Alpha | RefLeq | P. Adj | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.57  | 66.08  | 0.00   | 0.00   | -1.30  | 0.00   | 0.00   | 0.00   | 64.78  |

Segment Leq : 64.78 dBA

Total Leq All Segments: 64.78 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 70.00  
(NIGHT): 64.78

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 09:24:34  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: L70PALLA.t Time Period: Day/Night 16/8 hours  
Description:

Living - 70 dBA off Palladium Drive

Road data, segment # 1: PALLADIUM (day/night)

Car traffic volume : 28336/2464 veh/TimePeriod  
Medium truck volume : 2254/196 veh/TimePeriod  
Heavy truck volume : 1610/140 veh/TimePeriod  
Posted speed limit : 70 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

Data for Segment # 1: PALLADIUM (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 24.89 / 15.00 m  
Receiver height : 2.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: PALLADIUM (day)

Source height = 1.50 m

ROAD (0.00 + 70.00 + 0.00) = 70.00 dBA  
Angle1 Angle2 Al pha RefLeq P. Adj D. Adj F. Adj W. Adj H. Adj B. Adj SubLeq  
-----  
-90 90 0.63 75.00 0.00 -3.59 -1.41 0.00 0.00 0.00 70.00

Segment Leq : 70.00 dBA

Total Leq All Segments: 70.00 dBA

Results segment # 1: PALLADIUM (night)

Source height = 1.50 m

ROAD (0.00 + 66.10 + 0.00) = 66.10 dBA  
Angle1 Angle2 Al pha RefLeq P. Adj D. Adj F. Adj W. Adj H. Adj B. Adj SubLeq  
-----  
-90 90 0.57 67.40 0.00 0.00 -1.30 0.00 0.00 0.00 66.10

Segment Leq : 66.10 dBA

Total Leq All Segments: 66.10 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 70.00  
(NIGHT): 66.10

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 09:29:58  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: 070PALLA.t Time Period: Day/Night 16/8 hours  
Description:

Outside - 70 dBA off Palladium Drive

Road data, segment # 1: PALLADIUM (day/night)

Car traffic volume : 28336/2464 veh/TimePeriod  
Medium truck volume : 2254/196 veh/TimePeriod  
Heavy truck volume : 1610/140 veh/TimePeriod  
Posted speed limit : 70 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

Data for Segment # 1: PALLADIUM (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 24.50 / 15.00 m  
Receiver height : 1.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: PALLADIUM (day)

Source height = 1.50 m

ROAD (0.00 + 70.00 + 0.00) = 70.00 dBA  
Angle1 Angle2 Al pha RefLeq P. Adj D. Adj F. Adj W. Adj H. Adj B. Adj SubLeq  
-----  
-90 90 0.66 75.00 0.00 -3.54 -1.46 0.00 0.00 0.00 70.00

Segment Leq : 70.00 dBA

Total Leq All Segments: 70.00 dBA

Results segment # 1: PALLADIUM (night)

Source height = 1.50 m

ROAD (0.00 + 66.10 + 0.00) = 66.10 dBA  
Angle1 Angle2 Al pha RefLeq P. Adj D. Adj F. Adj W. Adj H. Adj B. Adj SubLeq  
-----  
-90 90 0.57 67.40 0.00 0.00 -1.30 0.00 0.00 0.00 66.10

Segment Leq : 66.10 dBA

Total Leq All Segments: 66.10 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 70.00  
(NIGHT): 66.10

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 09:57:45  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: L70LRT.te Time Period: Day/Night 16/8 hours  
Description:

Living - 70 dBA off LRT

RT/Custom data, segment # 1: LRT (day/night)

1 - Bus:  
Traffic volume : 14895/1655 veh/TimePeriod  
Speed : 60 km/h

Data for Segment # 1: LRT (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 25.75 / 15.00 m  
Receiver height : 2.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: LRT (day)

Source height = 0.50 m

RT/Custom (0.00 + 70.00 + 0.00) = 70.00 dBA

| Angle1 | Angle2 | Alpha | RefLeq | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.66  | 75.35  | -3.90  | -1.46  | 0.00   | 0.00   | 0.00   | 70.00  |

Segment Leq : 70.00 dBA

Total Leq All Segments: 70.00 dBA

Results segment # 1: LRT (night)

Source height = 0.50 m

RT/Custom (0.00 + 67.46 + 0.00) = 67.46 dBA

| Angle1 | Angle2 | Alpha | RefLeq | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.60  | 68.82  | 0.00   | -1.35  | 0.00   | 0.00   | 0.00   | 67.46  |

Segment Leq : 67.46 dBA

Total Leq All Segments: 67.46 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 70.00  
(NIGHT): 67.46

STAMSON 5.0 NORMAL REPORT Date: 12-02-2020 10:05:23  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: 070LRT.te Time Period: Day/Night 16/8 hours  
Description:

Outside - 70 dBA off LRT

RT/Custom data, segment # 1: LRT (day/night)

1 - Bus:  
Traffic volume : 14895/1655 veh/TimePeriod  
Speed : 60 km/h

Data for Segment # 1: LRT (day/night)

Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 1 (Absorptive ground surface)  
Receiver source distance : 25.75 / 380.17 m  
Receiver height : 1.50 / 4.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

Results segment # 1: LRT (day)

Source height = 0.50 m

RT/Custom (0.00 + 70.00 + 0.00) = 70.00 dBA

| Angle1 | Angle2 | Alpha | RefLeq | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.66  | 75.35  | -3.90  | -1.46  | 0.00   | 0.00   | 0.00   | 70.00  |

Segment Leq : 70.00 dBA

Total Leq All Segments: 70.00 dBA

Results segment # 1: LRT (night)

Source height = 0.50 m

RT/Custom (0.00 + 45.00 + 0.00) = 45.00 dBA

| Angle1 | Angle2 | Alpha | RefLeq | D. Adj | F. Adj | W. Adj | H. Adj | B. Adj | SubLeq |
|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|
| -90    | 90     | 0.60  | 68.82  | 22.46  | -1.35  | 0.00   | 0.00   | 0.00   | 45.00  |

Segment Leq : 45.00 dBA

Total Leq All Segments: 45.00 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 70.00  
(NIGHT): 45.00