

245- 275 Lamarche Avenue
Transportation Impact Assessment

Step 1 Screening Report

Step 2 Scoping Report

Step 3 Forecasting Report

Step 4 Strategy Report

Prepared for:

Caivan (Orleans Village 2) Ltd
2934 Baseline Road, Suite 302
Ottawa ON K2H 1B2

Prepared by:



6 Plaza Court
Ottawa, ON K2H 7W1

April 2022

PN: 2022-023

Table of Contents

1	Screening	1
2	Existing and Planned Conditions	1
2.1	Proposed Development.....	1
2.2	Existing Conditions	3
2.2.1	Area Road Network	3
2.2.2	Existing Intersections.....	3
2.2.3	Existing Driveways	4
2.2.4	Cycling and Pedestrian Facilities.....	5
2.2.5	Existing Transit.....	8
2.2.6	Existing Area Traffic Management Measures.....	9
2.2.7	Existing Peak Hour Travel Demand.....	9
2.2.8	Collision Analysis	11
2.3	Planned Conditions.....	13
2.3.1	Changes to the Area Transportation Network	13
2.3.2	Other Study Area Developments.....	13
3	Study Area and Time Periods	14
3.1	Study Area	14
3.2	Time Periods	14
3.3	Horizon Years.....	14
4	Exemption Review	14
5	Development-Generated Travel Demand	15
5.1	Mode Shares.....	15
5.2	Trip Generation	15
5.3	Trip Distribution.....	16
5.4	Trip Assignment.....	16
6	Background Network Travel Demands.....	17
6.1	Transportation Network Plans	17
6.2	Background Growth.....	17
6.3	Other Developments	18
7	Demand Rationalization	18
7.1	2025 Future Background Operations	18
7.2	2030 Future Background Operations	20
7.3	Modal Share Sensitivity and Demand Rationalization Conclusions	22
8	Development Design	22
8.1	Design for Sustainable Modes	22
8.2	New Street Networks	24
9	Boundary Street Design.....	25
10	Access Intersections Design	25
10.1	Location and Design of Access.....	25
10.2	Intersection Control.....	25
10.3	Access Intersection Design	26
	10.3.1 2025 Future Total Access Intersection Operations	26

10.3.2	2030 Future Total Access Intersection Operations	26
10.3.3	Access Intersection MMLOS	27
10.3.4	Recommended Design Elements.....	27
11	Transportation Demand Management	28
11.1	Context for TDM	28
11.2	Need and Opportunity.....	28
11.3	TDM Program	28
12	Transit.....	28
12.1	Transit Priority.....	28
13	Network Intersection Design.....	29
13.1	Network Intersection Control.....	29
13.2	Network Intersection Design	29
13.2.1	2025 Future Total Network Intersection Operations	29
13.2.2	2030 Future Total Network Intersection Operations	30
13.2.3	Network Intersection MMLOS.....	32
13.2.4	Recommended Design Elements.....	33
14	Summary of Improvements Indicated and Modifications Options	33
15	Conclusion	35

List of Figures

Figure 1:	Area Context Plan	1
Figure 2:	Concept Plan.....	2
Figure 3:	Existing Driveways	5
Figure 4:	Study Area Pedestrian Facilities	6
Figure 5:	Study Area Cycling Facilities	7
Figure 6:	Existing Pedestrian Volumes	7
Figure 7:	Existing Cyclist Volumes	8
Figure 8:	Existing Study Area Transit Service.....	8
Figure 9:	Existing Study Area Transit Stops	9
Figure 10:	Existing Traffic Counts	10
Figure 11:	Study Area Collision Records – Representation of Study Area Collisions	12
Figure 12:	New Site Generation Auto Volumes.....	17
Figure 13:	2025 Future Background Volumes	18
Figure 14:	2030 Future Background Volumes	20
Figure 15:	Concept Pedestrian Network	23
Figure 16:	On-Street Parking Plan	24
Figure 17:	Concept Traffic Calming Plan.....	25
Figure 18:	2025 Future Total Volumes	26
Figure 19:	2030 Future Total Volumes	27

Table of Tables

Table 1:	Intersection Count Date.....	9
----------	------------------------------	---

Table 2: Existing Intersection Operations.....	10
Table 3: Segments of Innes Road between Page Road & The 3615 Innes Road/3636 Innes Road Access Collision Summary, 2016-2020	12
Table 4: Exemption Review	14
Table 5: TRANS Trip Generation Manual Recommended Mode Shares – Orleans.....	15
Table 6: Trip Generation Person Trip Rates by Peak Period.....	15
Table 7: Total Residential Person Trip Generation by Peak Period	15
Table 8: Trip Generation by Mode	16
Table 9: OD Survey Distribution – Orleans	16
Table 10: Trip Assignment	16
Table 11: TRANS Regional Model Projections – Study Area Growth Rates.....	17
Table 12: Recommended Area Growth Rates	18
Table 13: 2025 Future Background Intersection Operations	19
Table 14: 2030 Future Background Intersection Operations	21
Table 15: Boundary Street MMLOS Analysis.....	25
Table 16: 2025 Future Total Access Intersection Operations	26
Table 17: 2030 Future Total Access Intersection Operations	27
Table 18: Trip Generation by Transit Mode	28
Table 19: 2025 Future Total Network Intersection Operations	29
Table 20: 2030 Future Total Network Intersection Operations	31
Table 21: Study Area Intersection MMLOS Analysis	32

List of Appendices

- Appendix A – TIA Screening Form and Certification Form
- Appendix B – Turning Movement Count Data
- Appendix C – Synchro Intersection Worksheets – Existing Conditions
- Appendix D – Collision Data
- Appendix E – City TRANS Forecasts – Background Growth
- Appendix F – Background Development Volumes
- Appendix G – Synchro Intersection Worksheets – 2025 Future Background Conditions
- Appendix H – Synchro Intersection Worksheets – 2030 Future Background Conditions
- Appendix I – MMLOS Analysis
- Appendix J – Synchro Intersection Worksheets – 2025 Future Total Conditions
- Appendix K – Synchro Intersection Worksheets – 2030 Future Total Conditions
- Appendix L – TDM Checklist

1 Screening


This study has been prepared according to the City of Ottawa's 2017 Transportation Impact Assessment (TIA) Guidelines. Accordingly, a Step 1 Screening Form has been prepared and is included as Appendix A, along with the Certification Form for the TIA Study PM. As shown in the Screening Form, a TIA is required including the Design Review component and the Network Impact Component. This study has been prepared to support a zoning by-law amendment and draft plan of subdivision application.

2 Existing and Planned Conditions

2.1 Proposed Development

The existing site, located at 245 and 275 Lamarche Avenue, is zoned as Development Reserve (DR). The proposed development consists of 103 townhomes, 72 back-to-backs dwellings. The new development will constitute the second phase of the Orleans Village subdivision. The concept plan includes two full-movement accesses onto Lamarche Avenue. The anticipated full build-out and occupancy horizon is 2025 with construction occurring in a single phase. The site is located within the Innes Arterial Mainstreet area. Figure 1 illustrates the study area context. Figure 2 illustrates the proposed concept plan.

Figure 1: Area Context Plan

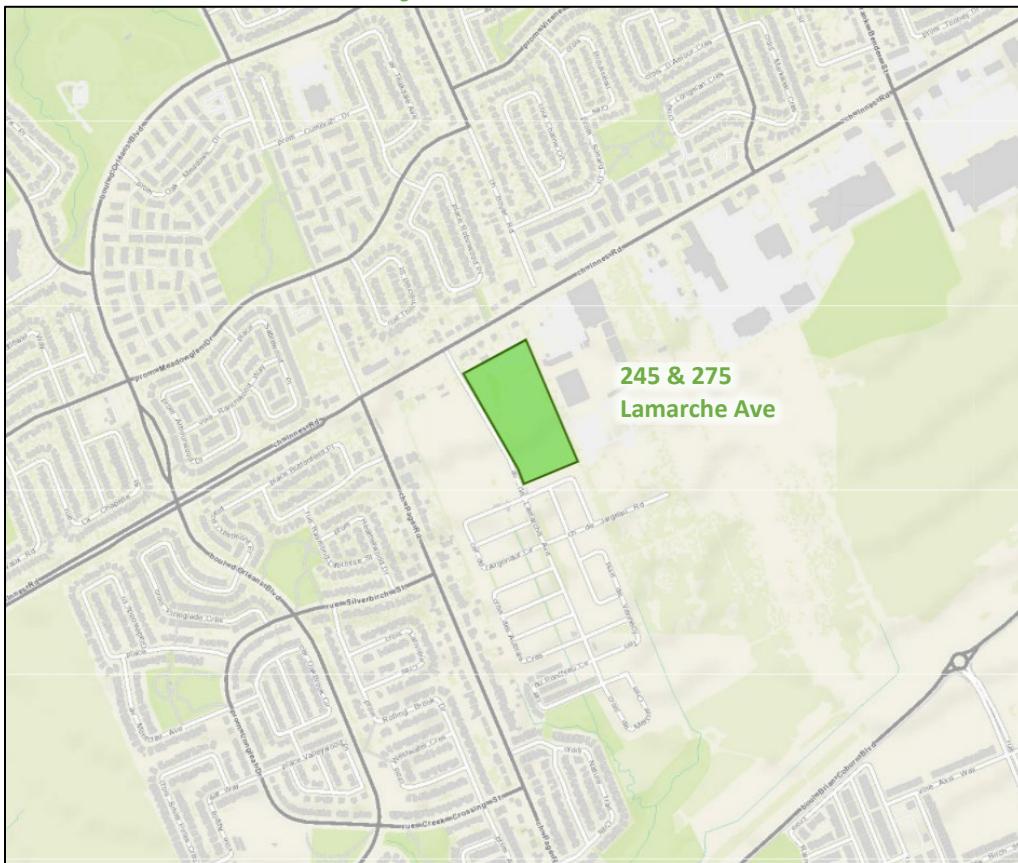


Source: <http://maps.ottawa.ca/geoOttawa/> Accessed: March 21, 2022

CAIVAN

LEGEND:

- 18.9m DEPTH RLTH
- B2B
- 24' STANDARD TOWNHOUSE
- FUTURE MIXED-USE BLOCK

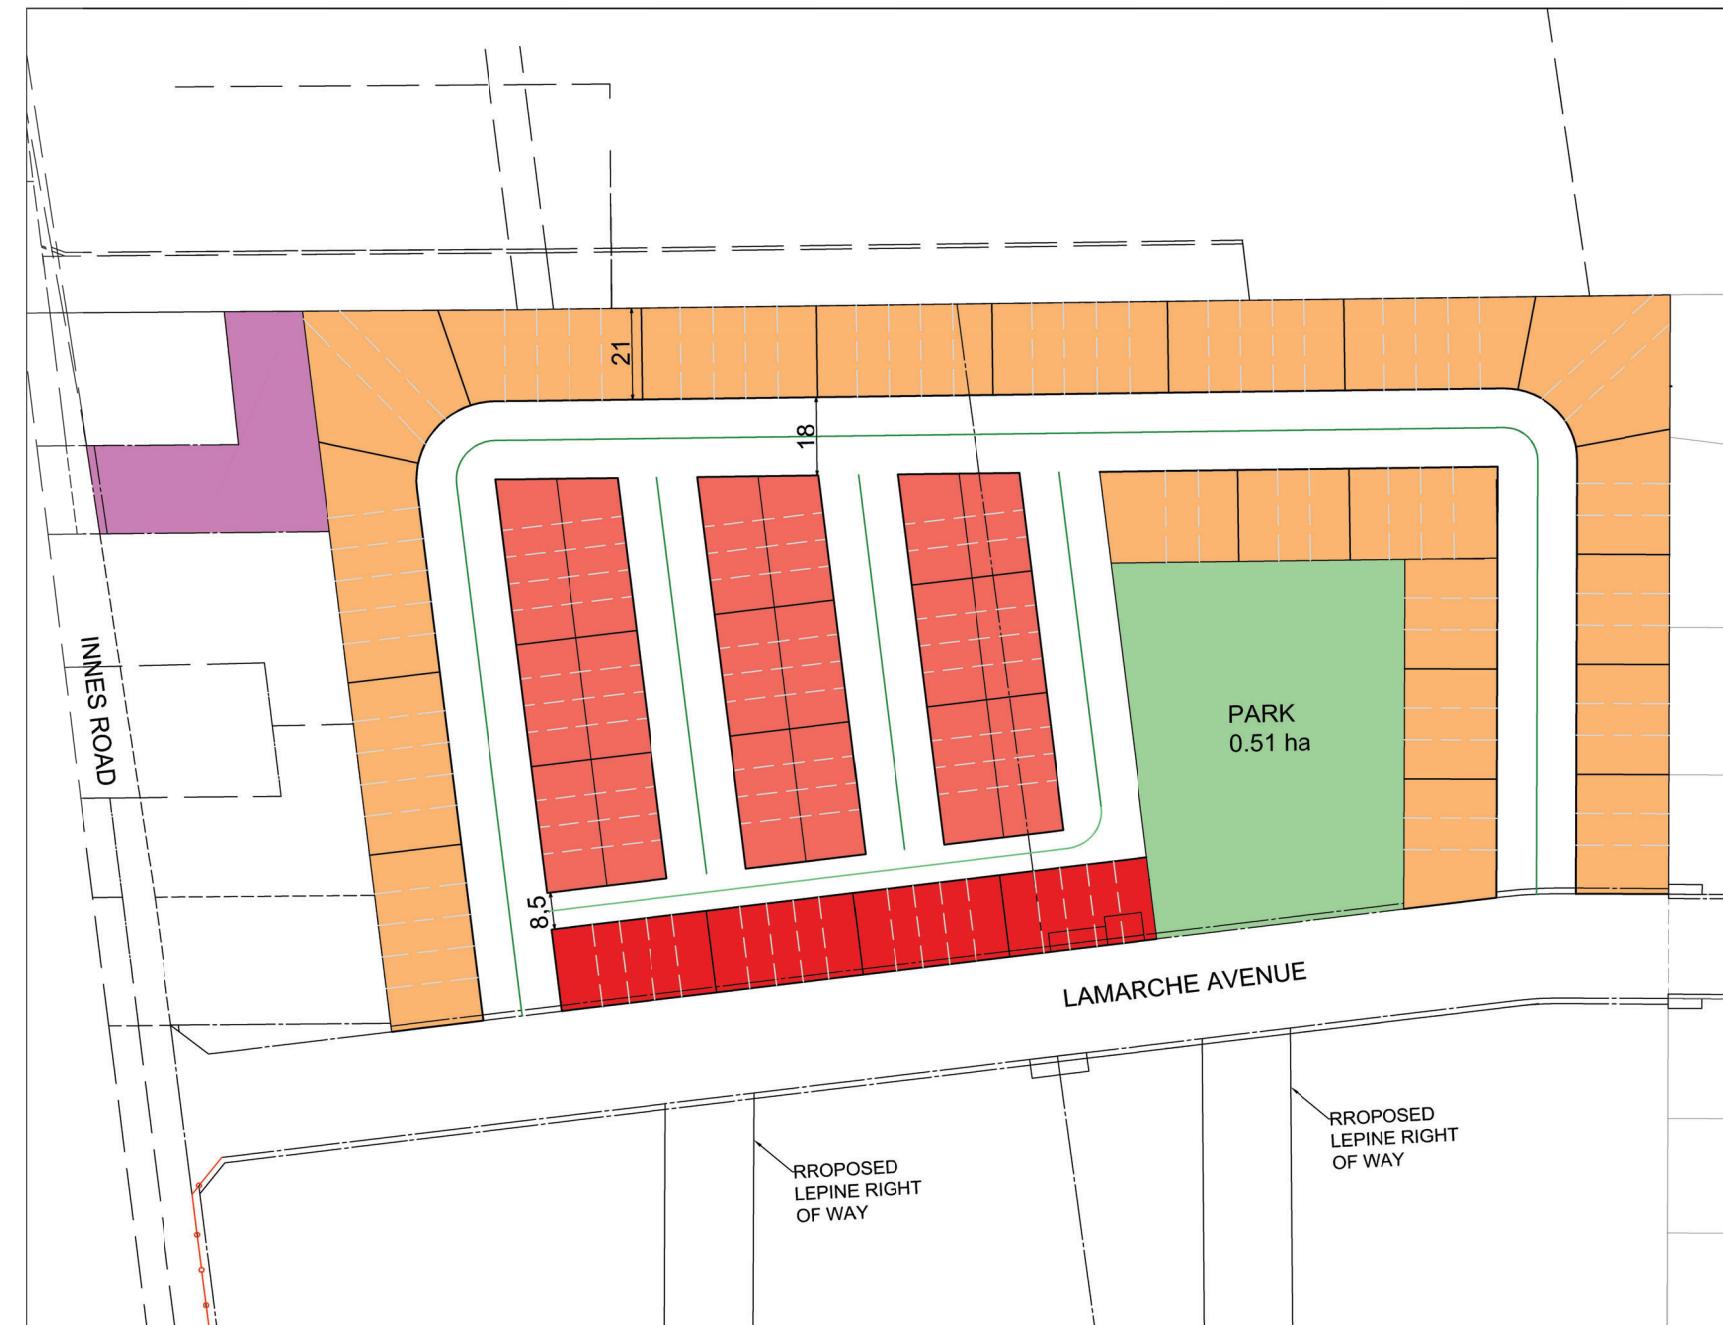

LOT COUNT

UNIT TYPE	# UNITS	%
18.9m DEPTH RLTH	20	11
B2B	72	41
24' STND TH	83	48
TOTAL	175	100

DATE:

22/03/09

PROJECT NO.:

OTL

PROJECT NAME:

OV PHASE 4

DRAWING #:

SK-06.5

2.2 Existing Conditions

2.2.1 Area Road Network

Innes Road: Innes Road is a City of Ottawa arterial road. It has a divided four-lane cross-section west of Page Road, and five-lane urban cross-section including a two-way left-turn lane to the east. Bike lanes and sidewalks are provided on both sides of the road east of Orleans Boulevard, and bike lane is also present on the north side of the road west of Orleans Boulevard. The posted speed limit is 60 km/h within the study area and the City-protected right-of-way is 37.5 metres. Innes Road is designated as a truck route.

Orleans Boulevard: Orleans Boulevard is a City of Ottawa arterial road with a four-lane divided cross-section and a two-lane cross-section south of Silverbirch Street. Sidewalks are present on both sides of the road to the north and on the west side of the road to the south of Silverbirch Street. The posted speed limit is 60 km/h north of Innes Road, and 50 km/h to the south. The city-protected right-of-way is 37.5 metres north of Innes Road, and the measured right-of-way is 34.0 metres south of Innes Road. Orleans Boulevard is designated as a truck route north of Innes Road.

Viseneau Drive: Viseneau Drive is a City of Ottawa collector road with a two-lane cross-section. A sidewalk is present on the west side of the road. The posted speed limit is 40 km/h and the city-protected right-of-way is 26.0 metres.

Page Road: Page Road is a City of Ottawa local road with a two-lane semi-urban cross-section north of Innes Road and a collector road with a two-lane urban cross-section south of Innes Road. Sidewalks are present on the west side of the road and for 205 metres south of Innes Road on east side of the road. The posted speed limit is 40 km/h and the measured right-of-way varies between 20.0 and 22.0 metres north of Silverbirch Street, and the City-protected right-of-way is 24.0 metres south of Silverbirch Street.

Lamarche Avenue: Lamarche Avenue is a City of Ottawa local road with a two-lane cross. A MUP is present on the west side of the road. A sidewalk is present on the east side of the road south of Argonaut Circle and is planning to be provided on the east side of the road north of Argonaut Circle. On-street parking is permitted on both sides of the road. The unposted speed limit is assumed to be 50 km/h, and the measured right-of-way is 24.0 metres.

2.2.2 Existing Intersections

The key existing signalized area intersections within one kilometre of the site have been summarized below:

Innes Road at Orleans Boulevard

The intersection of Innes Road at Orleans Boulevard is a signalized intersection. The northbound and southbound approaches each consist of an auxiliary left-turn lane, two through lanes, and an auxiliary channelized right-turn lane. The eastbound approach consists of two auxiliary left-turn lanes, two through lanes, and an auxiliary channelized right-turn lane, and the westbound approach consists of an auxiliary left-turn lane, two through lanes, a bike lane, and an auxiliary channelized right-turn lane. Trucks are restricted on southbound movement.

Innes Road at Page Road

The intersection of Innes Road at Page Road is a signalized intersection. The northbound and southbound approaches each consist of a shared all-movement lane. The eastbound approach consists of an auxiliary left-turn lane, a through lane, a shared through/right-turn lane, and a bike, and westbound approach consists of an auxiliary left-turn lane, which develops from the two-way left-

turn lane, a through lane, a shared through/right-turn lane, and a bike lane. No turn restrictions were noted.

Innes Road at Lamarche Avenue

The intersection of Innes Road at Lamarche Avenue is a T-intersection stop-controlled on the minor approach of Lamarche Avenue. The northbound approach consists of a shared all-movement lane. The eastbound approach consists of a through lane and a shared through/right-turn lane, and westbound approach consists of two through lanes. A two-way left-turn lane is present through the intersection on Innes Road. No turn restrictions were noted.

Innes Road at 3615 Innes Road/3636 Innes Road Access

The intersection of Innes Road at the 3615 Innes Road/3636 Innes Road access is a signalized intersection. The northbound approach functions as a left-turn lane and a shared through/right-turn lane, and the southbound approach consists of a shared all-movement lane. The eastbound approach consists of an auxiliary left-turn lane, which develops from the two-way left-turn lane, a through lane, a shared through/right-turn lane, and a bike lane, and the westbound approach consists of an auxiliary left-turn lane, a through lane, a shared through/right-turn lane, and a bike lane. No turn restrictions were noted.


Innes Road at Viseneau Drive

The intersection of Innes Road at Viseneau Drive is a signalized intersection. The northbound approach consists of a left-turn lane, a through lane, and an auxiliary right-turn lane, and the southbound approach consists of a shared all-movement lane. The eastbound approach consists of an auxiliary left-turn lane, two through lanes, a bike lane, and an auxiliary right-turn lane, and the westbound approach consists of an auxiliary left-turn lane, a through lane, a shared through/right-turn lane, and a bike lane. No turn restrictions were noted.

2.2.3 Existing Driveways

Within 200 metres of the site accesses, six driveways to detached homes and one to a clinic are located on the north side of Innes Road, and one driveway to a school bus parking lot, one to an office, one to a food truck and three to detached homes are located on the south side of Innes Road. South of the future access, driveways are provided to townhouses. Figure 3 illustrates the existing driveways.

Figure 3: Existing Driveways

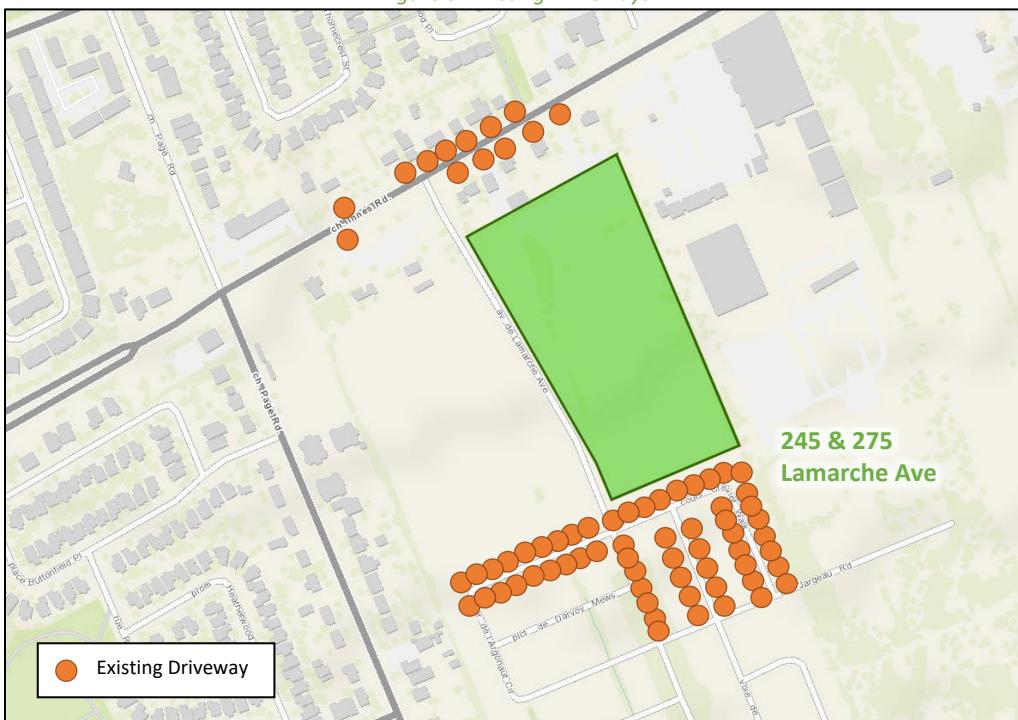

Source: <http://maps.ottawa.ca/geoOttawa/> Accessed: March 21, 2022

2.2.4 Cycling and Pedestrian Facilities


Figure 4 illustrates the pedestrian facilities in the study area and Figure 5 illustrates the cycling facilities.

Sidewalks are provided along both sides of Innes Road, on the west side of Page Road, on east side of Page Road for 205 metres south of Innes Road, and on the east side of Lamarche Avenue south of Argonaut Circle.

Cycling facilities include bike lanes along both side of Innes Road. A path is provided to connect Innes Road and Robinwood Place. A MUP is provided on the west side of Lamarche Avenue, and a major pathway is planned to be provided along Fern Casey Street connecting Innes Road to the Brian Coburn pathways. Innes Road, Orleans Boulevard are spine route, and Page Road north of Innes Road is suggested route. Innes Road is a cross-town bikeway.


245- 275 Lamarche Avenue Transportation Impact Assessment

Figure 4: Study Area Pedestrian Facilities

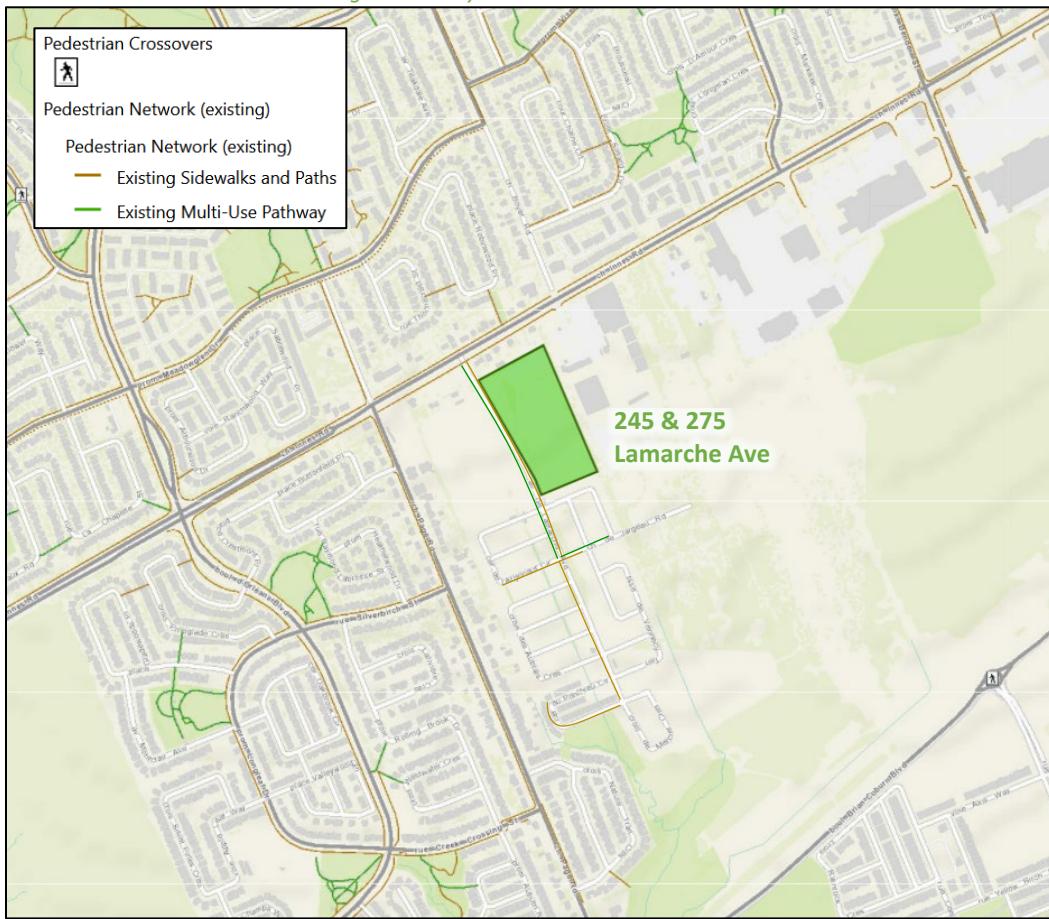

Source: <http://maps.ottawa.ca/geoOttawa/> Accessed: March 21, 2022

Figure 5: Study Area Cycling Facilities

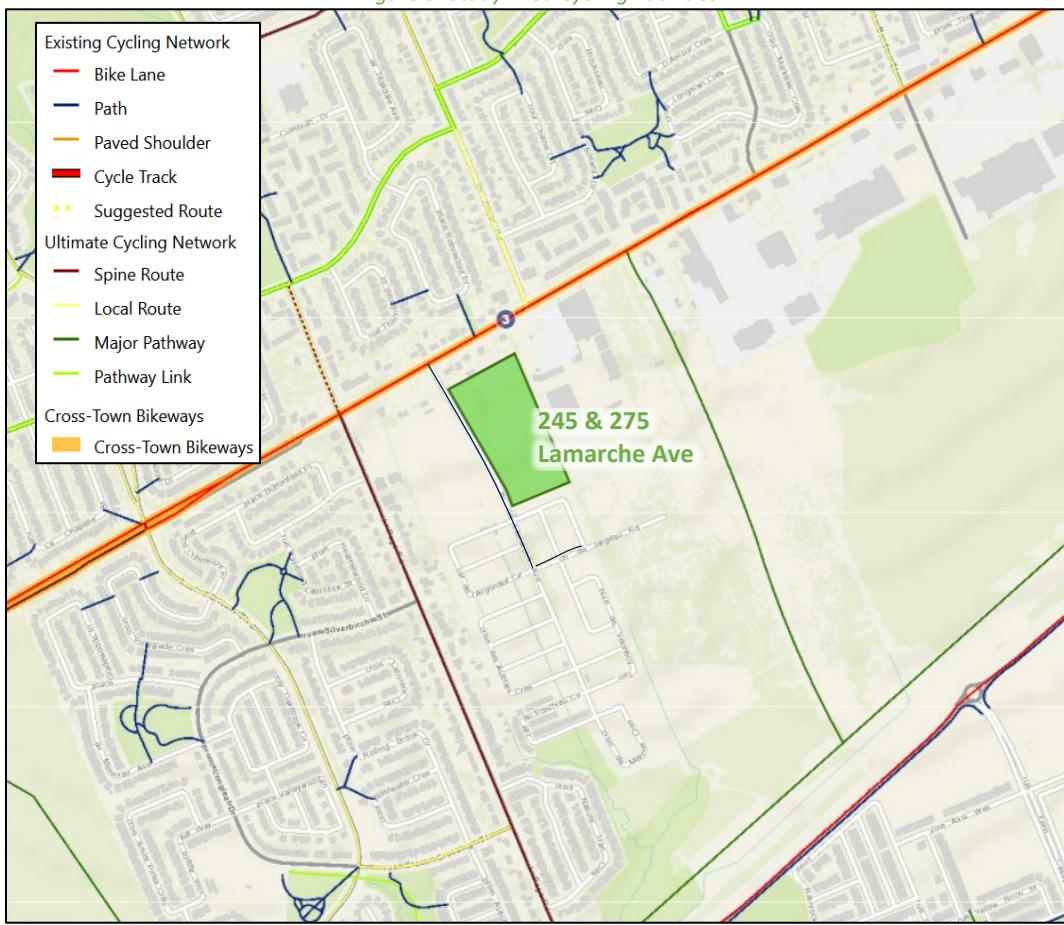

Source: <http://maps.ottawa.ca/geoOttawa/> Accessed: March 21, 2022

Pedestrian and cyclist volumes included in study area intersection counts, presented in Section 2.2.7, have been compiled and are illustrated in Figure 6 and Figure 7, respectively.

Figure 6: Existing Pedestrian Volumes


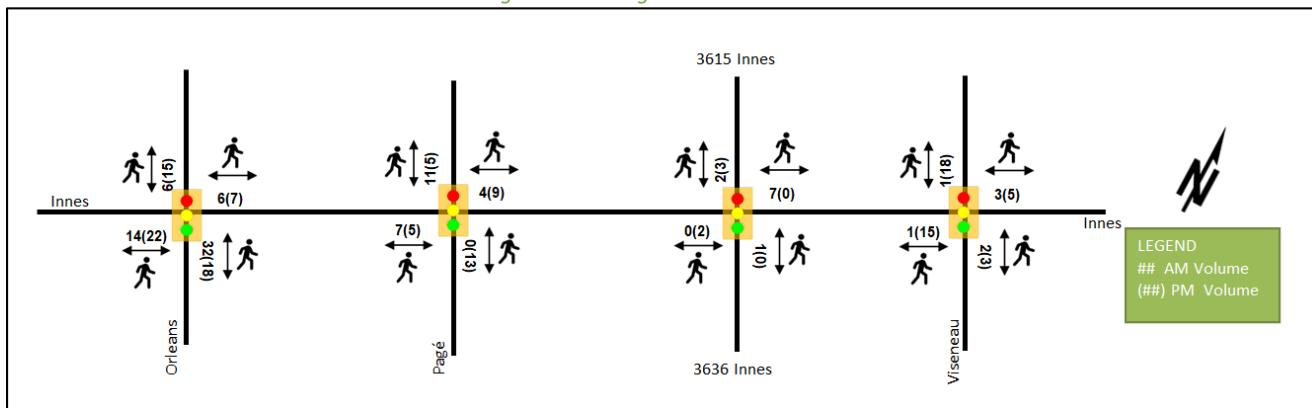


Figure 7: Existing Cyclist Volumes

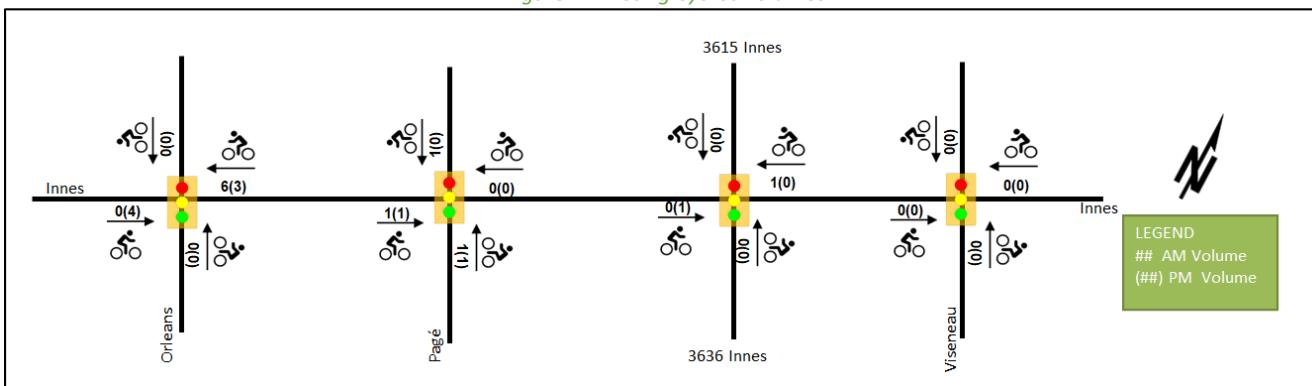

2.2.5 Existing Transit

Within the study area, routes # 25, #612, and #648 travel along Innes Road, and route # 34 travels along Orleans Boulevard. Primary stops are located at Innes Road at 3615 Innes Road/3636 Innes Road access and Innes Road at Page Road. The frequency of these routes within proximity of the proposed site currently are:

- Route # 25 – 10-15-minute service in the peak period/direction, 15-minute daytime service, 30-minute service after 8:00 PM


Figure 8 illustrates the transit system map in the study area and Figure 9 illustrates nearby transit stops.

Figure 8: Existing Study Area Transit Service



Source: <http://www.octranspo.com/> Accessed: March 21, 2022

Figure 9: Existing Study Area Transit Stops

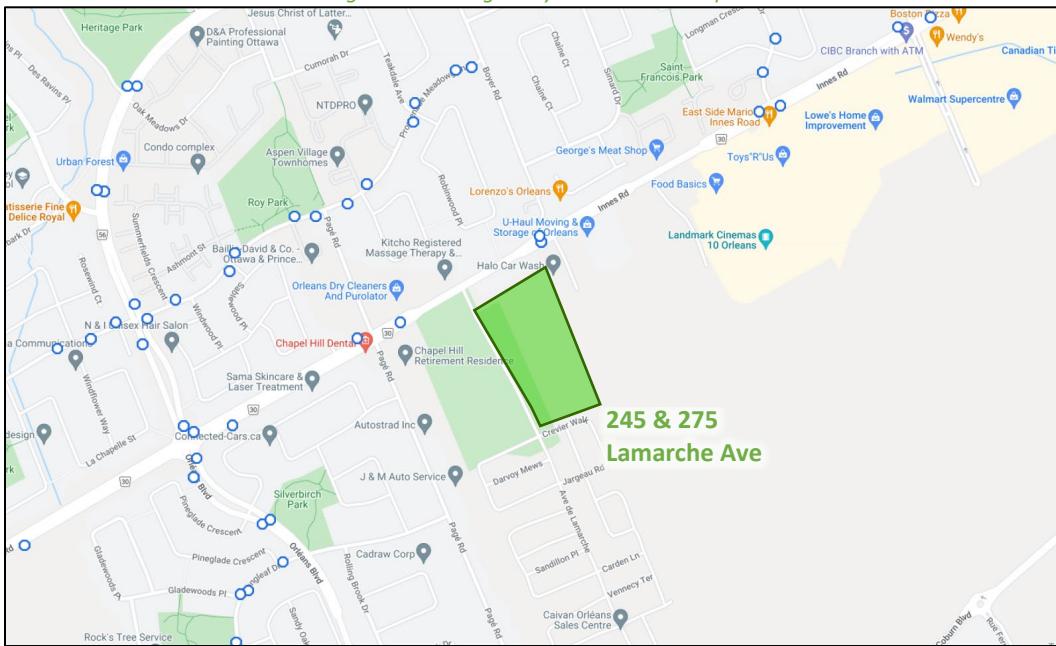

Source: <http://www.octranspo.com/> Accessed: March 21, 2022

2.2.6 Existing Area Traffic Management Measures

On-street parking is permitted on both sides of Lamarche Avenue and speed humps are present on Page Road north of Innes Road.

2.2.7 Existing Peak Hour Travel Demand

Existing turning movement counts were acquired from the City of Ottawa for the existing study area key intersections. It is confirmed that 131 townhomes and 121 detached houses of the 3490 Innes Road Phase 1-3 development have been constructed and are occupied, and the development trip generation using the TRANS Trip Generation Manual (2020) has been included in the existing conditions. The intersection of Innes Road at Lamarche Avenue has been estimated from the site trip generation of the previous phase of 3490 Innes Road development, and all intersections were balanced and grown to 2022. Table 1 summarizes the intersection count dates.

Table 1: Intersection Count Date

Intersection	Count Date	Source
Innes Road @ Orleans Boulevard	Wednesday, May 03, 2017	City of Ottawa
Innes Road @ Page Road	Tuesday, January 08, 2019	City of Ottawa
Innes Road @ 3615 Innes Road/3636 Innes Road Access	Thursday, January 31, 2019	City of Ottawa
Innes Road @ Viseneau Drive	Wednesday, January 25, 2017	City of Ottawa

Figure 10 illustrates the existing traffic counts balanced along Innes Road and Table 2 summarizes the existing intersection operations. The level of service for signalized intersections is based on volume-to-capacity (v/c) calculations for individual lane movements and HCM 2000 v/c calculations for the overall intersection, and HCM 2010 average delay for unsignalized intersections. Detailed turning movement count data is included in Appendix B and the Synchro worksheets are provided in Appendix C.

Figure 10: Existing Traffic Counts

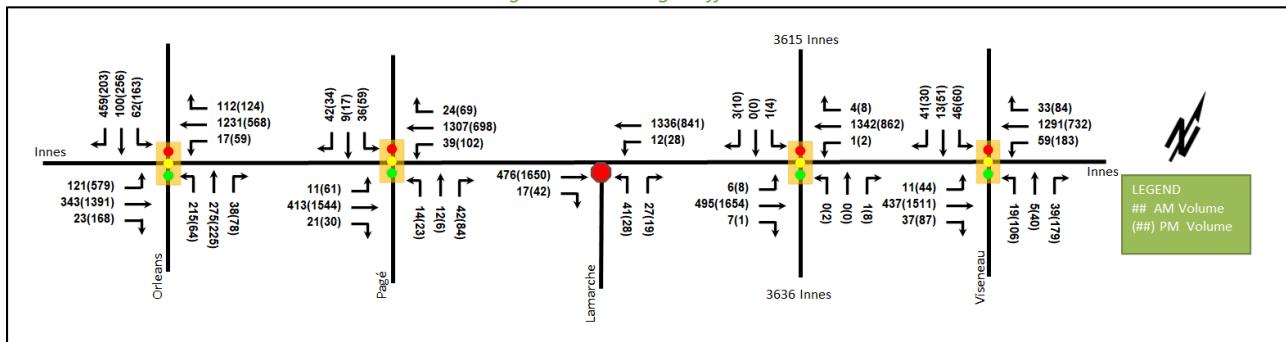


Table 2: Existing Intersection Operations

Intersection	Lane	AM Peak Hour				PM Peak Hour			
		LOS	V/C	Delay (s)	Q (95 th)	LOS	V/C	Delay (s)	Q (95 th)
Innes Road at Orleans Boulevard <i>Signalized</i>	EBL	D	0.85	101.3	#36.1	E	0.92	61.7	#100.9
	EBT	A	0.22	18.9	42.1	F	1.11	91.0	#254.2
	EBR	A	0.03	0.1	0.0	A	0.27	5.9	16.8
	WBL	A	0.23	66.4	13.0	A	0.51	56.0	29.7
	WBT	E	0.91	43.6	#207.8	C	0.74	52.8	94.8
	WBR	A	0.17	2.7	7.9	A	0.25	11.9	27.3
	NBL	B	0.61	40.2	70.1	A	0.22	26.5	20.4
	NBT	A	0.26	31.2	41.0	A	0.22	25.9	29.4
	NBR	A	0.08	0.8	1.0	A	0.14	0.5	0.0
	SBL	A	0.36	50.8	30.2	B	0.68	52.3	#69.2
	SBT	A	0.17	43.6	20.9	A	0.33	35.1	39.1
	SBR	F	1.23	155.9	#197.0	A	0.42	7.1	18.4
Innes Road at Page Road <i>Signalized</i>	Overall	E	0.99	56.8	-	E	0.99	57.9	-
	EBL	A	0.07	8.6	3.7	A	0.18	2.4	m1.8
	EBT/R	A	0.20	6.2	31.3	C	0.75	7.3	m23.7
	WBL	A	0.07	5.4	m2.8	F	1.08	136.7	#56.7
	WBT/R	B	0.61	8.0	27.3	A	0.37	12.4	109.1
	NB	A	0.29	20.4	17.4	A	0.47	36.6	33.5
	SB	A	0.40	30.4	25.2	A	0.53	40.0	33.7
Innes Road at Lamarche Avenue <i>Unsignalized</i>	Overall	A	0.55	9.3	-	E	0.95	16.0	-
	EBT/R	-	-	-	-	-	-	-	-
	WBL	A	0.01	8.6	0.0	C	0.10	17.7	2.3
	WBT	-	-	-	-	-	-	-	-
	NB	C	0.20	17.2	6.0	F	0.44	57.8	14.3
Innes Road at Access 3615 Innes Road/3636 Innes Road <i>Signalized</i>	Overall	A	-	0.7	-	A	-	1.2	-
	EBL	A	0.03	3.5	m1.9	A	0.02	1.5	m0.2
	EBT/R	A	0.18	1.9	27.4	B	0.62	3.3	162.7
	WBL	A	0.00	7.0	m0.2	A	0.01	5.0	1.0
	WBT/R	A	0.48	5.5	140.4	A	0.33	3.6	61.9
	NBL	A	0.00	0.0	0.0	A	0.01	38.0	2.3
	NBT/R	-	-	-	-	A	0.04	0.4	0.3
	SB	A	0.02	0.2	0.0	A	0.08	5.1	2.5
	Overall	A	0.50	4.1	-	B	0.63	3.4	-

Intersection	Lane	AM Peak Hour				PM Peak Hour			
		LOS	V/C	Delay	Q (95 th)	LOS	V/C	Delay	Q (95 th)
Innes Road at Viseneau Drive Signalized	EBL	A	0.06	8.1	1.3	A	0.16	19.5	15.9
	EBT	A	0.22	7.1	11.7	E	0.91	35.9	#292.4
	EBR	A	0.04	0.1	0.0	A	0.12	3.2	8.0
	WBL	A	0.10	5.3	10.4	C	0.77	51.9	63.1
	WBT/R	A	0.59	8.6	131.6	A	0.38	7.5	61.8
	NBL	A	0.14	44.6	10.6	C	0.73	75.1	47.3
	NBT	A	0.03	40.6	4.6	A	0.16	44.8	19.3
	NBR	A	0.15	1.2	0.0	A	0.50	9.9	19.3
	SB	A	0.55	45.0	32.1	B	0.67	60.3	55.1
	Overall	B	0.62	10.1	-	D	0.87	29.3	-

Notes: Saturation flow rate of 1800 veh/h/lane
 Queue is measured in metres
 Peak Hour Factor = 0.90
 Delay = average driver delay in seconds

m = metered queue
 # = volume for the 95th %ile cycle exceeds capacity
 v/c = volume to capacity ratio

During both the AM and PM peak hours, capacity issues are noted at the intersection of Innes Road at Orleans Boulevard. At this intersection, the southbound right-turn movement during AM peak hour and the eastbound through movement are over theoretical capacity during the PM peak hour and may be subject to high delays and extended queues. Extended queues may be exhibited on the eastbound left-turn and westbound through movements during the AM peak hour, and on the eastbound and southbound left-turn movements during PM peak hour. High delays are anticipated on the eastbound left-turn movement during AM peak hour.

The intersection of the Innes Road and Page Road may be subject to high delays and extended queues on the westbound left-turn movement during PM peak hour. The City may improve the operation by changing the eastbound and westbound left-turn to be protected/permissive phasing, and it would be subject to coordination of the Innes Road corridor.

At the intersection of Innes Road at Lamarche Avenue, the northbound movement may be subject to high delays during PM peak hour.

The eastbound through movement at the intersection of Innes Road and Viseneau Drive may exhibit extended queues during PM peak hour.

2.2.8 Collision Analysis

Collision data have been acquired from the City of Ottawa open data website (data.ottawa.ca) for five years prior to the commencement of this TIA for the surrounding study area road network. Within the study area, the segments of Innes Road between Page Road and the 3615 Innes Road/3636 Innes Road access is the only location noted to have experienced collisions. Figure 11 illustrates the intersections and segments analyzed. Table 3 summarizes the collision types and conditions for the location. Collision data are included in Appendix D.

Figure 11: Study Area Collision Records – Representation of Study Area Collisions



Table 3: Segments of Innes Road between Page Road & The 3615 Innes Road/3636 Innes Road Access Collision Summary, 2016-2020

	Number	%
Total Collisions	16	100%
Classification		
Fatality	0	0%
Non-Fatal Injury	3	19%
Property Damage Only	13	81%
Initial Impact Type		
Angle	5	31%
Rear end	4	25%
Sideswipe	3	19%
Turning Movement	1	6%
SMV Other	3	19%
Road Surface Condition		
Dry	12	75%
Loose Snow	1	6%
Slush	1	6%
Packed Snow	2	13%
Pedestrian Involved	0	0%
Cyclists Involved	0	0%

The segments of Innes Road between Page Road and the 3615 Innes Road/3636 Innes Road access intersection had a total of 16 collisions during the 2016-2020 time period, with 13 involving property damage only and the remaining three having non-fatal injuries. The collision types are most represented by angle with five collisions, followed by four rear end collisions, three collisions each for the sideswipe and SMV Other, and with the remaining one collision as turning movement. No pattern is noted from the collision distribution summarized above. Weather conditions do not affect collisions at this location.

2.3 Planned Conditions

2.3.1 Changes to the Area Transportation Network

Within the Transportation Master Plan, the Rapid Transit and Transit Priority Network's Network Concept diagram shows an isolated transit priority measures along Innes Road. The subject development is not within the CDP Area.

2.3.2 Other Study Area Developments

3817-3843 Innes Road

The proposed development application includes a site plan application for three apartment buildings with a total of 97 residential units. The development is assumed to be built out in 2024 and is predicted to generate 35 new AM and 45 new PM two-way peak hour auto trips. (D. J. Halpenny & Associates Ltd, 2021)

3484 Innes Road, 240 & 270 Lamarche Avenue

The proposed development application includes a zoning by-law amendment and plan of subdivision. The current option includes five seven-storey with a total of 525 residential units, 10,631 ft² of commercial space, a 26,905 ft² grocery store, a 2,217 ft² coffee shop with drive-thru, and a 1,550 ft² gas bar. The full buildout is currently estimated by 2031 and is forecasted to generate 261 new AM and 276 new PM two-way peak hour auto trips. (Parsons, 2021)

3490 Innes Road - Phase 1-3

The proposed development application includes a zoning by-law amendment and plan of subdivision. Phase 1 consists of approximately 267 units and has been built, and Phase 2 consists of the remaining 267 units expected to be constructed by 2024. Phase 1 was forecasted to generate 130 new AM and 165 new PM two-way peak hour auto trips. Phase 2 is forecasted to generate 112 new AM and 137 new PM two-way peak hour auto trips (Parsons, 2016). It has been confirmed that 131 townhomes and 121 detached of the development have been constructed, which is estimated to generate 97 new AM and 118 new PM two-way peak hour auto trips, and the traffic is included in the existing conditions. Phase 2 will include approximately 208 units, which is forecasted to generate 99 new AM and 121 new PM two-way peak hour auto trips, and the traffic will be included in the future horizons.

3443 Innes Road & 3437 Innes Road

The proposed development application includes a site plan application to include a six-storey, mixed-use building with ground floor commercial and 35 residential units. The development is anticipated to be built by 2023 and is forecasted to generate 24 new AM and 27 new PM two-way peak hour auto trips. (Novatech, 2018)

3604 Innes Road

The proposed development application includes a plan of subdivision for the construction of 180 single detached homes, 109 townhouse units and 168 stacked townhouses in two phases. Phase 1 is anticipated to be built by 2023 and is forecasted to generate 70 new AM and 92 new PM two-way peak-hour auto trips. Phase 2 is anticipated to be built by 2025 and is forecasted to generate 200 new AM two-way peak hour auto trips and 256 new PM two-way peak hour auto trips. (Novatech, 2019)

3672 Innes Road, 3730 Innes Road, and 3828 Innes Road

The proposed development application includes a zoning by-law amendment to permit the construction of 340 singles detached homes, 529 townhouses, 114 back-to-back townhomes, and 1,060 apartment units. Phase 1, which is anticipated to be built by 2037, is forecasted to generate 312-341 new AM and 380-415 new PM two-way peak hour auto trips. Phase 2, which is anticipated to be built by 2042, is forecasted to generate 603-659 new AM and 725-793 new PM two-way peak hour auto trips. Phase 3, which is anticipated to be built by 2047, is

forecasted to generate 968-1,056 new AM and 1,166-1,275 new PM two-way peak hour auto trips. (Castleglenn Consultants, 2021)

3 Study Area and Time Periods

3.1 Study Area

The study area will include the intersections of:

- Innes Road at:
 - Orleans Boulevard
 - Page Road
 - Lamarche Avenue
 - 3615 Innes Road/3636 Innes Road Access
 - Viseneau Drive

The boundary road will be Innes Road and Lamarche Avenue and SL 47 screenlines is present within proximity to the site but will not be analyzed as part of this study.

3.2 Time Periods

As the proposed development is composed entirely of residential units the AM and PM peak hours will be examined.

3.3 Horizon Years

The anticipated build-out year is 2025. As a result, the full build-out plus five years horizon year is 2030.

4 Exemption Review

Table 4 summarizes the exemptions for this TIA.

Table 4: Exemption Review

Module	Element	Explanation	Exempt/Required
Design Review Component			
4.1 Development Design	4.1.2 Circulation and Access	Only required for site plans	Exempt
	4.1.3 New Street Networks	Only required for plans of subdivision	Required
4.2 Parking	4.2.1 Parking Supply	Only required for site plans	Exempt
	4.2.2 Spillover Parking	Only required for site plans where parking supply is 15% below unconstrained demand	Exempt
Network Impact Component			
4.5 Transportation Demand Management	All Elements	Not required for site plans expected to have fewer than 60 employees and/or students on location at any given time	Required
4.6 Neighbourhood Traffic Management	4.6.1 Adjacent Neighbourhoods	Only required when the development relies on local or collector streets for access and total volumes exceed ATM capacity thresholds	Exempt
4.8 Network Concept		Only required when proposed development generates more than 200	Exempt

Module	Element	Explanation	Exempt/Required
		person-trips during the peak hour in excess of equivalent volume permitted by established zoning	

5 Development-Generated Travel Demand

5.1 Mode Shares

Examining the mode shares recommended in the TRANS Trip Generation Manual (2020) for the subject district, derived from the most recent National Capital Region Origin-Destination survey (OD Survey), the existing average district mode shares by land use for Orleans have been summarized in Table 5.

Table 5: TRANS Trip Generation Manual Recommended Mode Shares – Orleans

Travel Mode	Multi-Unit (Low-Rise)	
	AM	PM
Auto Driver	47%	51%
Auto Passenger	15%	19%
Transit	29%	24%
Cycling	1%	1%
Walking	9%	6%
Total	100%	100%

5.2 Trip Generation

This TIA has been prepared using the vehicle and person trip rates for the residential dwellings using the TRANS Trip Generation Manual (2020). Table 6 summarizes the person trip rates for the proposed residential land uses for each peak period.

Table 6: Trip Generation Person Trip Rates by Peak Period

Land Use	Land Use Code	Peak Period	Person Trip Rates
Multi-Unit (Low-Rise)	220 (TRANS)	AM	1.35
		PM	1.58

Using the above person trip rates, the total person trip generation has been estimated. Table 7 summarizes the total person trip generation for the residential land use.

Table 7: Total Residential Person Trip Generation by Peak Period

Land Use	Units	AM Peak Period			PM Peak Period		
		In	Out	Total	In	Out	Total
Multi-Unit (Low-Rise)	175	71	165	236	155	122	277

Trip generation by peak hour has been forecasted using the prescribed peak period conversion factors presented in the TRANS Trip Generation Manual (2020) for the residential component. Table 8 summarizes the residential trip generation.

Table 8: Trip Generation by Mode

Travel Mode	Mode Share	AM Peak Hour			PM Peak Hour				
		In	Out	Total	Mode Share	In	Out	Total	
Multi-Unit (Low-Rise)	Auto Driver	47%	16	37	53	51%	35	27	62
	Auto Passenger	15%	5	12	17	19%	13	10	23
	Transit	29%	12	26	37	24%	17	14	31
	Cycling	1%	1	1	1	1%	1	0	1
	Walking	9%	3	9	12	6%	5	4	9
	Total	100%	36	83	118	100%	68	54	122

As shown above, a total of 53 AM and 62 PM new peak hour two-way vehicle trips are projected as a result of the proposed development.

5.3 Trip Distribution

To understand the travel patterns of the subject development, the OD Survey has been reviewed to determine the travel for the residential component, and these patterns were applied based on the build-out of Orleans. Table 9 below summarizes the distributions.

Table 9: OD Survey Distribution – Orleans

To/From	Residential % of Trips
North	15%
South	0%
East	40%
West	45%
Total	100%


5.4 Trip Assignment

Using the distribution outlined above, turning movement splits, and access to major transportation infrastructure, the trips generated by the site have been assigned to the study area road network. Table 10 summarizes the proportional assignment to the study area roadways, and Figure 12 illustrates the new site generated volumes.

Table 10: Trip Assignment

To/From	Via
North	15% Orleans Boulevard (N)
South	-
East	40% Innes Road (E)
West	45% Innes Road (W)
Total	100%

Figure 12: New Site Generation Auto Volumes

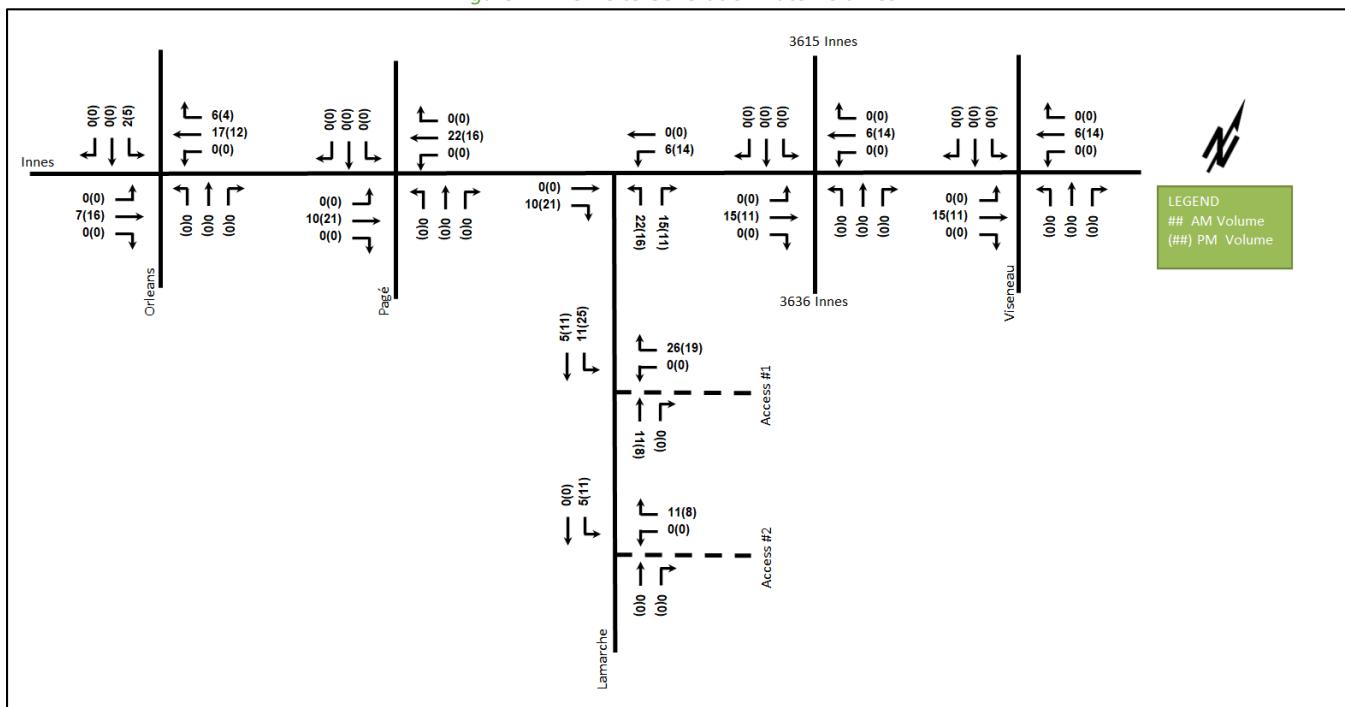

6 Background Network Travel Demands

6.1 Transportation Network Plans

The transportation network plans were discussed in Section 2.3 and no impacts on the study area traffic volumes and travel patterns are anticipated within the study horizons.

6.2 Background Growth

A review of the background projections from the City's TRANS Regional Model for the 2011 and 2031 horizons was completed to determine the background growth for each of the study area roadways. The background TRANS model growth rates are summarized in Table 11 and the TRANS model plots are provided in Appendix E.

Table 11: TRANS Regional Model Projections – Study Area Growth Rates

Street	TRANS Rate		Existing to 2031	
	Eastbound	Westbound	Eastbound	Westbound
Innes Road	-0.28%	-1.64%	-3.14%	-5.02%
	Northbound	Southbound	Northbound	Southbound
Orleans Boulevard	4.02%	-0.95%	0.45%	1.92%

In general, the growth rates in the study area derived from the two TRANS model horizons are projected to be negative along Innes Road in the eastbound and westbound directions and slightly positive along Orleans Boulevard in the northbound direction. The existing volumes are noted to be exceed the TRANS 2031 model forecasts for Innes Road.

As the continued development is expected in Orleans and result in additional volumes along the area road network, beyond the developments considered in Section 6.3, it is assumed that a 1.00% growth rate will be applied to Innes Road and a 2.00% growth rate will be applied on Orleans Boulevard in peak directions. The modified growth rates have been applied to the study area network, and it is summarized in Table 12.

Table 12: Recommended Area Growth Rates

Street	AM Peak Hour		PM Peak Hour	
	Eastbound	Westbound	Eastbound	Westbound
Innes Road	1.00%	1.00%	1.00%	1.00%
	Northbound	Southbound	Northbound	Southbound
Orleans Boulevard	2.00%	-	-	2.00%

6.3 Other Developments

The background developments explicitly considered in the background conditions (Section 6.2) include:

- 3817-3843 Innes Road
- 3490 Innes Road - Phase 1-3
- 3443 Innes Road & 3437 Innes Road
- 3604 Innes Road

The background development volumes within the study area have been provided in Appendix F.

7 Demand Rationalization

7.1 2025 Future Background Operations

The Innes Road at Lamarche Avenue intersection is assumed to be signalized prior to 2025 and has been modelled as a signal for all future horizons. Figure 13 illustrates the 2025 background volumes and Table 13 summarizes the 2025 background intersection operations. The level of service for signalized intersections is based on v/c calculations for individual lane movements and HCM 2000 v/c calculations for the overall intersection, and average delay for unsignalized intersections. The synchro worksheets for the 2025 future background horizon are provided in Appendix G.

Figure 13: 2025 Future Background Volumes

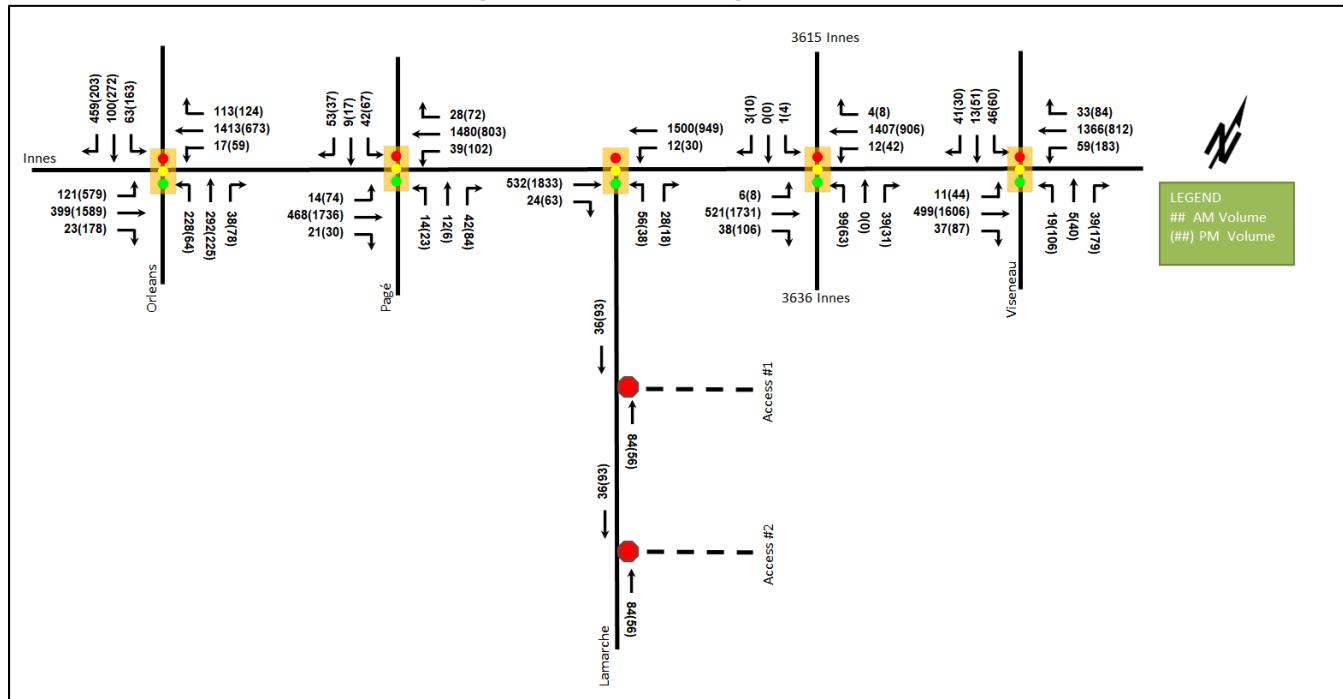


Table 13: 2025 Future Background Intersection Operations

Intersection	Lane	AM Peak Hour				PM Peak Hour			
		LOS	V/C	Delay	Q (95 th)	LOS	V/C	Delay	Q (95 th)
Innes Road at Orleans Boulevard <i>Signalized</i>	EBL	C	0.77	90.3	#31.4	D	0.86	55.6	#82.8
	EBT	A	0.23	19.0	44.1	F	1.13	101.2	#264.6
	EBR	A	0.03	0.1	0.0	A	0.26	5.3	15.3
	WBL	A	0.21	65.5	12.2	A	0.46	51.9	27.4
	WBT	E	0.94	47.4	#228.0	C	0.77	58.0	100.6
	WBR	A	0.15	1.9	6.0	A	0.22	11.2	23.3
	NBL	A	0.57	38.9	66.7	A	0.20	26.1	18.8
	NBT	A	0.25	31.0	39.3	A	0.19	25.7	26.6
	NBR	A	0.07	0.3	0.0	A	0.13	0.4	0.0
	SBL	A	0.32	49.7	28.0	A	0.60	47.6	#56.6
	SBT	A	0.15	43.4	19.2	A	0.31	35.0	37.4
	SBR	F	1.11	108.2	#166.3	A	0.38	5.4	13.5
	Overall	E	0.96	49.6	-	E	0.96	62.6	-
Innes Road at Page Road <i>Signalized</i>	EBL	A	0.08	8.9	4.2	A	0.20	2.3	m1.8
	EBT/R	A	0.20	6.3	31.7	C	0.76	8.5	m21.0
	WBL	A	0.06	5.7	m5.9	E	0.99	107.0	#58.0
	WBT/R	B	0.62	15.9	222.8	A	0.38	3.3	0.0
	NB	A	0.26	20.2	16.0	A	0.42	34.8	30.2
	SB	A	0.42	30.2	26.3	A	0.51	39.0	33.3
	Overall	A	0.57	14.8	-	C	0.89	10.4	-
Innes Road at Lamarche Avenue <i>Signalized</i>	EBT	A	0.24	8.5	32.2	D	0.90	24.9	#262.5
	EBR	A	0.02	8.9	5.4	A	0.07	13.9	m7.7
	WBL	A	0.14	60.2	m5.3	A	0.37	60.3	16.4
	WBT	B	0.63	10.8	92.0	A	0.42	11.1	94.2
	NBL	A	0.47	66.6	26.1	A	0.51	74.6	#21.6
	NBR	A	0.10	39.4	13.3	A	0.06	32.7	8.8
	Overall	B	0.61	12.3	-	C	0.77	21.3	-
Innes Road at Access 3615 Innes Road/3636 Innes Road <i>Signalized</i>	EBL	A	0.03	2.0	0.4	A	0.02	2.5	m0.5
	EBT/R	A	0.22	1.7	6.7	B	0.70	13.4	245.8
	WBL	A	0.02	7.3	m2.5	A	0.33	15.5	15.4
	WBT/R	A	0.56	9.1	128.5	A	0.34	5.0	57.5
	NB	A	0.57	60.6	36.3	A	0.38	49.0	22.6
	NBT/R	A	0.07	0.3	0.0	A	0.14	14.1	7.5
	SB	A	0.02	0.2	0.0	A	0.07	4.5	2.2
	Overall	A	0.56	9.3	-	B	0.68	11.5	-

Intersection	Lane	AM Peak Hour				PM Peak Hour			
		LOS	V/C	Delay	Q (95 th)	LOS	V/C	Delay	Q (95 th)
Innes Road at Viseneau Drive <i>Signalized</i>	EBL	A	0.05	6.2	1.4	A	0.14	18.5	14.3
	EBT	A	0.22	4.9	16.5	D	0.84	29.8	#272.0
	EBR	A	0.04	0.1	0.1	A	0.10	2.4	6.1
	WBL	A	0.09	5.2	9.6	C	0.71	41.1	52.4
	WBT/R	A	0.56	8.0	120.5	A	0.37	7.2	61.0
	NBL	A	0.13	44.5	9.8	B	0.66	69.3	42.5
	NBT	A	0.02	40.6	4.2	A	0.15	45.0	18.2
	NBR	A	0.14	1.1	0.0	A	0.48	10.2	18.6
	SB	A	0.51	42.3	28.9	B	0.62	58.1	49.7
	Overall	A	0.58	8.9	-	D	0.80	25.0	-

Notes: Saturation flow rate of 1800 veh/h/lane
Queue is measured in metres
Peak Hour Factor = 1.00
Delay = average driver delay in seconds

m = metered queue
= volume for the 95th %ile cycle exceeds capacity
v/c = volume to capacity ratio

Overall, the study area intersections will operate similar to the existing conditions. The westbound through movement during PM peak hour at Innes Road and Page intersection may exhibit extended queues and high delays. At the intersection of Innes Road at Lamarche Avenue, the eastbound through and northbound left-turn movements during PM peak hour may exhibit extended queues.

7.2 2030 Future Background Operations

Figure 14 illustrates the 2030 background volumes and Table 14 summarizes the 2030 background intersection operations. The level of service for signalized intersections is based on v/c calculations for individual lane movements and HCM 2000 v/c calculations for the overall intersection, and average delay for unsignalized intersections. The synchro worksheets for the 2030 future background horizon are provided in Appendix H.

Figure 14: 2030 Future Background Volumes

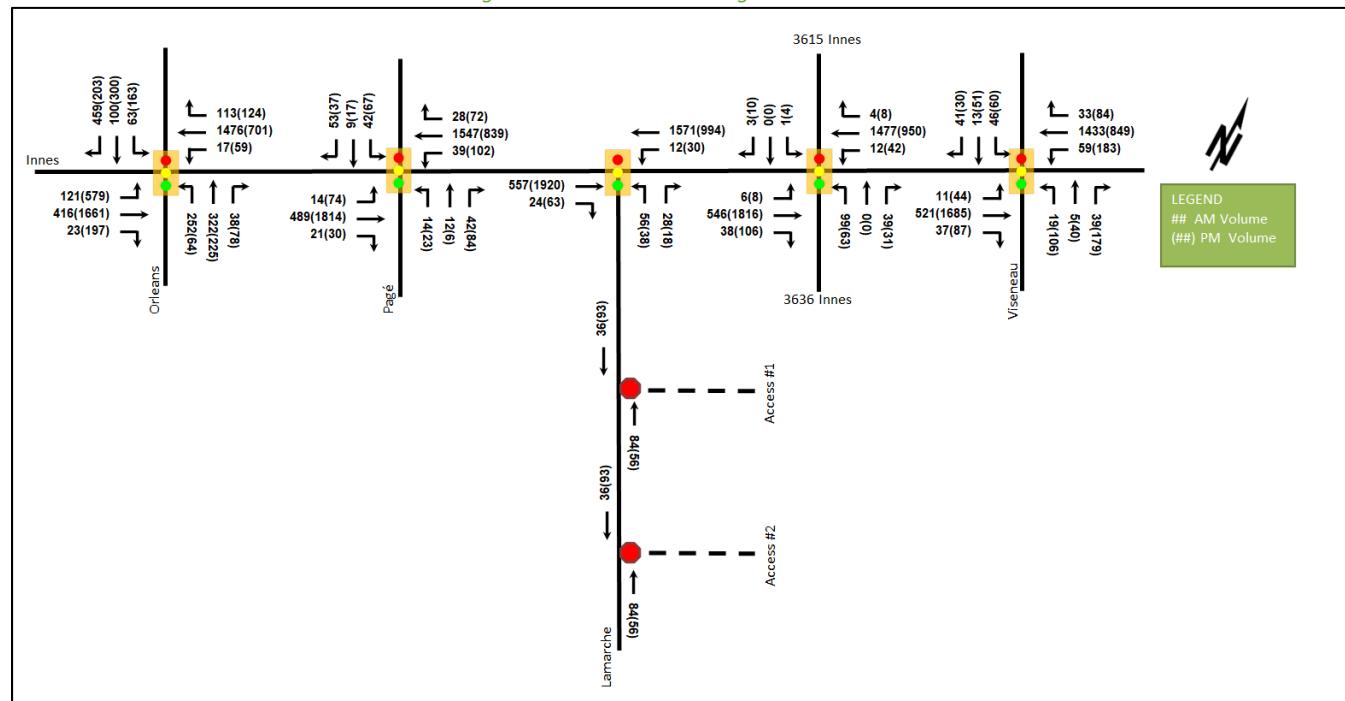


Table 14: 2030 Future Background Intersection Operations

Intersection	Lane	AM Peak Hour				PM Peak Hour			
		LOS	V/C	Delay	Q (95 th)	LOS	V/C	Delay	Q (95 th)
Innes Road at Orleans Boulevard <i>Signalized</i>	EBL	C	0.77	90.3	#31.4	D	0.86	55.6	#82.8
	EBT	A	0.24	19.1	46.1	F	1.19	121.8	#281.8
	EBR	A	0.03	0.1	0.0	A	0.29	6.5	18.8
	WBL	A	0.21	65.5	12.2	A	0.46	51.6	27.2
	WBT	E	0.98	55.2	#245.9	C	0.80	59.3	#106.6
	WBR	A	0.15	1.9	6.0	A	0.22	11.0	22.8
	NBL	B	0.63	41.4	73.7	A	0.21	26.2	18.8
	NBT	A	0.28	31.4	43.0	A	0.19	25.7	26.6
	NBR	A	0.07	0.3	0.0	A	0.13	0.4	0.0
	SBL	A	0.33	50.1	28.1	A	0.60	47.6	#56.6
	SBT	A	0.15	43.4	19.2	A	0.35	35.4	41.1
	SBR	F	1.13	116.6	#170.3	A	0.38	5.4	13.5
	Overall	E	1.00	53.9	-	E	0.99	70.9	-
Innes Road at Page Road <i>Signalized</i>	EBL	A	0.09	9.2	4.3	A	0.21	2.2	m1.8
	EBT/R	A	0.21	6.3	33.3	C	0.79	11.2	m20.5
	WBL	A	0.07	5.4	m5.4	F	1.16	164.0	#61.1
	WBT/R	B	0.65	16.1	231.9	A	0.39	3.3	0.0
	NB	A	0.26	20.2	16.0	A	0.43	36.4	31.0
	SB	A	0.42	31.0	26.7	A	0.51	39.0	33.3
	Overall	A	0.59	14.5	-	F	1.01	15.6	-
Innes Road at Lamarche Avenue <i>Signalized</i>	EBT	A	0.25	8.2	33.1	E	0.94	32.6	#283.3
	EBR	A	0.02	8.6	5.2	A	0.07	13.8	m7.5
	WBL	A	0.14	60.2	m5.1	A	0.37	59.8	#16.6
	WBT	B	0.66	10.7	92.3	A	0.44	11.5	102.6
	NBL	A	0.47	66.6	26.1	A	0.51	74.6	#21.6
	NBR	A	0.11	40.3	13.5	A	0.06	32.7	8.8
	Overall	B	0.63	12.1	-	C	0.80	26.2	-
Innes Road at Access 3615 Innes Road/3636 Innes Road <i>Signalized</i>	EBL	A	0.03	2.3	m0.4	A	0.02	2.5	m0.5
	EBT/R	A	0.23	1.8	7.4	C	0.73	15.3	m249.3
	WBL	A	0.02	7.5	m2.3	A	0.38	19.5	#21.2
	WBT/R	A	0.58	9.6	138.9	A	0.36	5.1	61.3
	NBL	A	0.57	60.6	36.3	A	0.38	49.0	22.6
	NBT/R	A	0.07	0.3	0.0	A	0.14	14.1	7.5
	SB	A	0.02	0.2	0.0	A	0.07	4.5	2.2
	Overall	A	0.58	9.6	-	C	0.71	12.7	-

Intersection	Lane	AM Peak Hour				PM Peak Hour			
		LOS	V/C	Delay	Q (95 th)	LOS	V/C	Delay	Q (95 th)
Innes Road at Viseneau Drive Signalized	EBL	A	0.05	6.7	1.4	A	0.14	18.7	14.4
	EBT	A	0.23	5.1	20.4	D	0.88	32.2	#293.8
	EBR	A	0.04	0.1	0.0	A	0.10	2.4	6.1
	WBL	A	0.10	5.2	9.6	C	0.75	50.2	56.3
	WBT/R	A	0.58	8.3	130.7	A	0.39	7.4	64.4
	NBL	A	0.13	44.5	9.8	B	0.66	69.3	42.5
	NBT	A	0.02	40.6	4.2	A	0.15	45.0	18.2
	NBR	A	0.14	1.1	0.0	A	0.48	10.2	18.6
	SB	A	0.51	42.3	28.9	B	0.62	58.1	49.7
	Overall	B	0.61	9.1	-	D	0.84	26.7	-

Notes: Saturation flow rate of 1800 veh/h/lane
 Queue is measured in metres
 Peak Hour Factor = 1.00
 Delay = average driver delay in seconds

m = metered queue
 # = volume for the 95th %ile cycle exceeds capacity
 v/c = volume to capacity ratio

In general, the study area intersections will operate similar to the 2025 conditions, with decreasing operations due to the background growth.

The westbound left-turn movement at the intersection of the Innes Road and Page Road will become over theoretical capacity and may be subject to high delays and extended queues during PM peak hour, which is similar to the existing conditions. A City review for a protected/permissive phasing should be conducted.

7.3 Modal Share Sensitivity and Demand Rationalization Conclusions

Capacity constraints have been noted along Innes Road during the existing and background horizons, which are subject to regional travel not associated with the development traffic. Given the forecasted auto trips are low, they are not anticipated to be contributing factors to the area operations. No further demand rationalization is required for this development.

8 Development Design


8.1 Design for Sustainable Modes

The proposed development is a residential subdivision where each dwelling will include a driveway and the typical townhomes will include a garage. Bicycle parking is assumed to be within the individual units. On-street parking will be provided along Lamarche Avenue and the new subdivision roadways. Figure 15 illustrates the pedestrian concept network with connections to adjacent pedestrian facilities, and Figure 16 illustrates the on-street parking plan.

Figure 15: Concept Pedestrian Network



Figure 16: On-Street Parking Plan

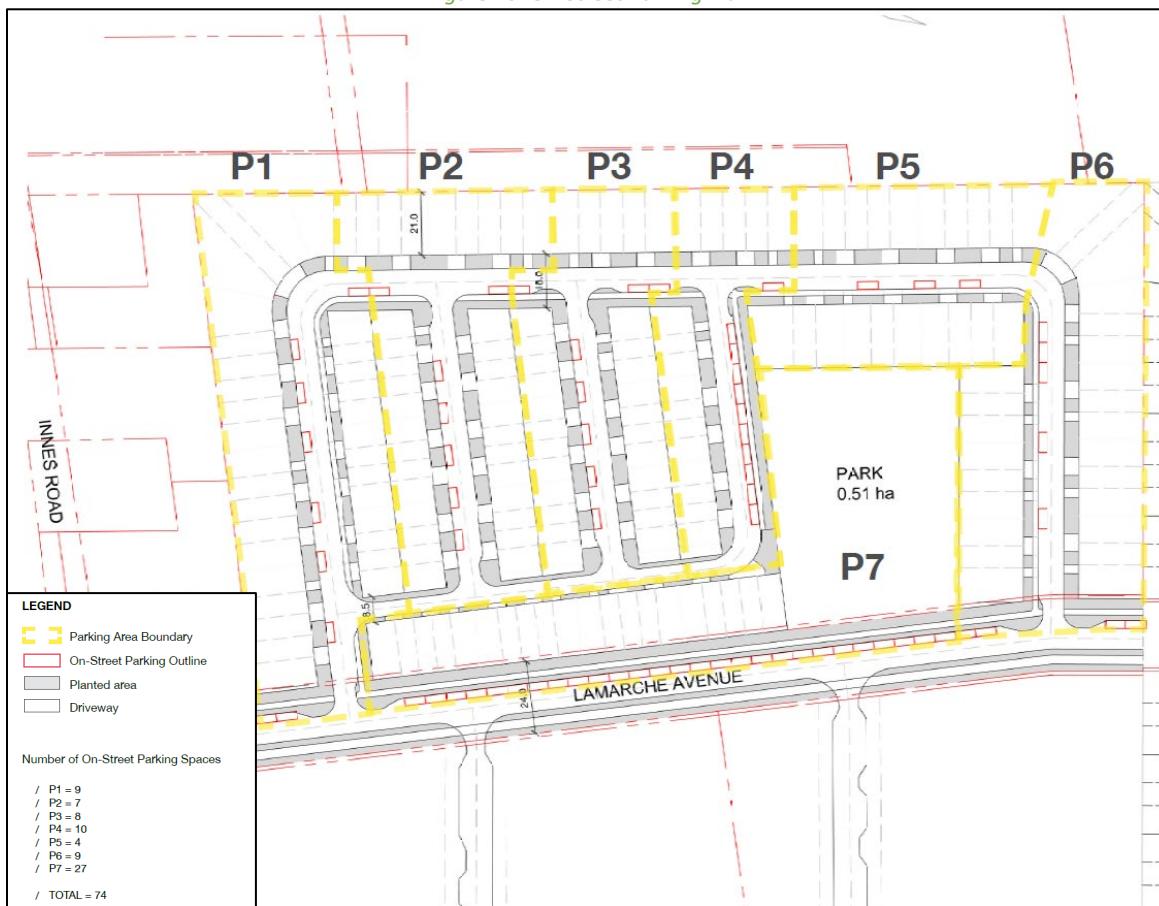


8.2 New Street Networks

The planned street network will include an 8.5-metre laneway and 18-metre local roadways. The local roads will accommodate on-street parking. The local roads are proposed to be posted as 30 km/h.

To support the pedestrian and cycling connectivity within the subdivision, Figure 17 illustrates the concept traffic calming plan. Traffic calming elements are recommended at the internal intersections, including bulb-outs to narrow each approach to the intersection (e.g. reduced crossing distance). The location of speed humps is subject to minor changes and will need to be refined as part of the detailed engineering submission once the locations of the driveway, stormwater flows, surface ponding, and servicing elements, such as utilities and fire hydrants, have been established.

The internal road intersections are recommended to be stop-controlled on the minor approaches of all intersections.

Figure 17: Concept Traffic Calming Plan

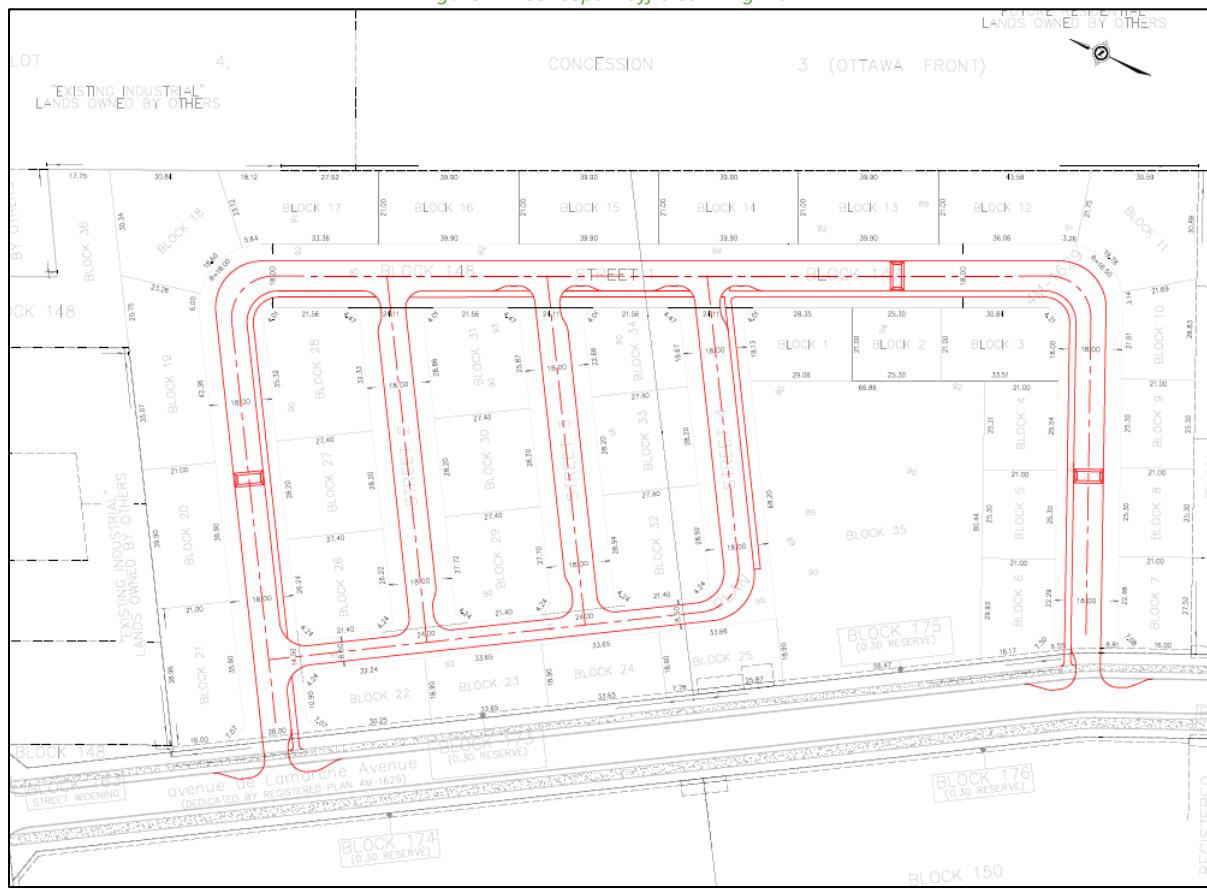

9 Boundary Street Design

Table 15 summarizes the MMLOS analysis for the boundary streets of Lamarche Avenue. The boundary street analysis is based on the land use of general urban area. The MMLOS worksheets has been provided in Appendix I.

Table 15: Boundary Street MMLOS Analysis

Segment	Pedestrian LOS		Bicycle LOS		Transit LOS		Truck LOS	
	PLOS	Target	BLOS	Target	TLOS	Target	TrLOS	Target
Lamarche Avenue (Existing/ Future)	A	C	A	D	N/A	N/A	N/A	N/A

Lamarche Avenue meets MMLOS targets for the area and no mitigation or additional elements are required.

10 Access Intersections Design

10.1 Location and Design of Access

The residential accesses will connect to the adjacent road network via local roads connection to Lamarche Avenue. Within the subdivision, no turn lanes are proposed for the internal intersections which will be controlled by minor stop control.

10.2 Intersection Control

Based upon the projected volumes, the site accesses will have stop-control on the minor approach. No further traffic control is necessary to address operational issues.

10.3 Access Intersection Design

10.3.1 2025 Future Total Access Intersection Operations

The 2025 future total intersection volumes are illustrated in Figure 18 and the access intersection operations are summarized below in Table 16. Synchro 11 has been used to model the unsignalized intersections and HCM 2010 methodology was used for unsignalized intersection operations. The synchro worksheets have been provided in Appendix J.

Figure 18: 2025 Future Total Volumes

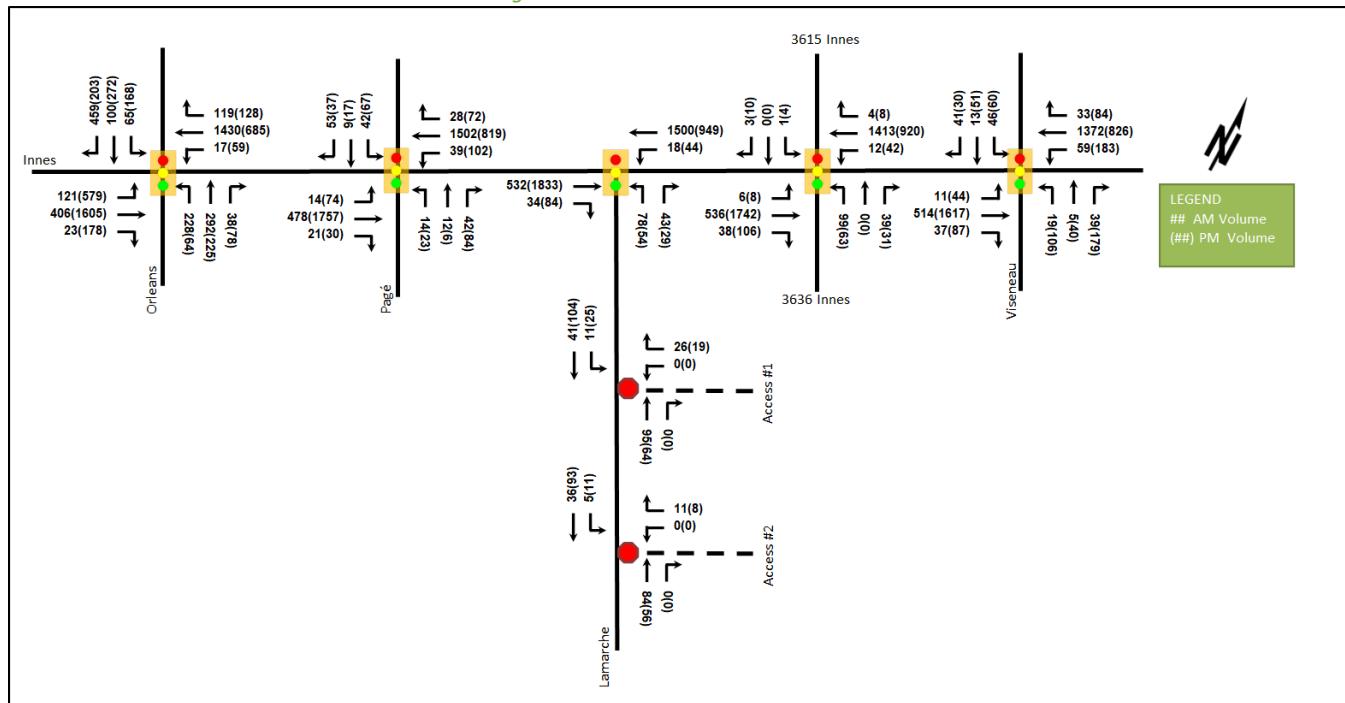


Table 16: 2025 Future Total Access Intersection Operations

Intersection	Lane	AM Peak Hour				PM Peak Hour			
		LOS	V/C	Delay	Q (95 th)	LOS	V/C	Delay	Q (95 th)
Access #1 at Lamarche Avenue Unsignalized	WB	A	0.03	8.8	0.8	A	0.02	8.7	0.8
	NB	-	-	-	-	-	-	-	-
	SB	A	0.01	7.4	0.0	A	0.02	7.4	0.8
	Overall	A	-	1.8	-	A	-	1.6	-
Access #2 at Lamarche Avenue Unsignalized	WB	A	0.01	8.7	0.0	A	0.01	8.6	0.0
	NB	-	-	-	-	-	-	-	-
	SB	A	0.00	7.4	0.0	A	0.01	7.3	0.0
	Overall	A	-	1.0	-	A	-	0.9	-

Notes: Saturation flow rate of 1800 veh/h/lane

m = metered queue

Queue is measured in metres

= volume for the 95th %ile cycle exceeds capacity

Peak Hour Factor = 1.00

v/c = volume to capacity ratio

Delay = average driver delay in seconds

The 2025 future total access intersections operate satisfactorily.

10.3.2 2030 Future Total Access Intersection Operations

The 2030 future total intersection volumes are illustrated in Figure 19 and the access intersection operations are summarized below in Table 17. Synchro 11 has been used to model the unsignalized intersections and HCM 2010

methodology was used for unsignalized intersection operations. The synchro worksheets have been provided in Appendix K.

Figure 19: 2030 Future Total Volumes

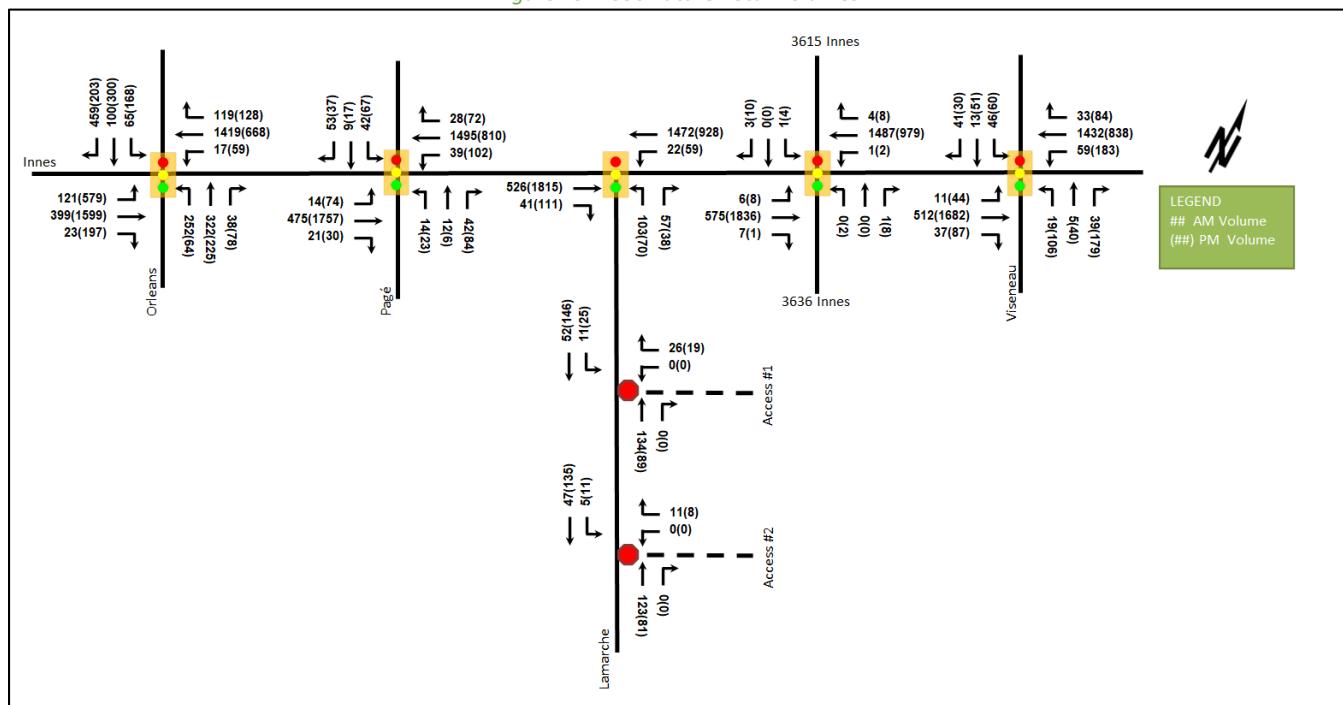


Table 17: 2030 Future Total Access Intersection Operations

Intersection	Lane	AM Peak Hour				PM Peak Hour			
		LOS	V/C	Delay	Q (95 th)	LOS	V/C	Delay	Q (95 th)
Access #1 at Lamarche Avenue Unsignalized	WB	A	0.03	8.8	0.8	A	0.02	8.7	0.8
	NB	-	-	-	-	-	-	-	-
	SB	A	0.01	7.4	0.0	A	0.02	7.4	0.8
	Overall	A	-	1.8	-	A	-	1.6	-
Access #2 at Lamarche Avenue Unsignalized	WB	A	0.01	8.7	0.0	A	0.01	8.6	0.0
	NB	-	-	-	-	-	-	-	-
	SB	A	0.00	7.4	0.0	A	0.01	7.3	0.0
	Overall	A	-	1.0	-	A	-	0.9	-

Notes: Saturation flow rate of 1800 veh/h/lane

Queue is measured in metres

Peak Hour Factor = 1.00

Delay = average driver delay in seconds

m = metered queue

= volume for the 95th %ile cycle exceeds capacity

v/c = volume to capacity ratio

The 2030 future total access intersections operate satisfactorily.

10.3.3 Access Intersection MMLOS

The access intersections are proposed to as minor stop-controlled intersections, therefore no access intersection MMLOS analysis has been conducted.

10.3.4 Recommended Design Elements

No changes to the site accesses are proposed.

11 Transportation Demand Management

11.1 Context for TDM

The mode shares used within the TIA represent the unmodified district mode shares. Overall, the modal shares are likely to be achieved and supporting TDM measures should be provided to encourage shifts towards sustainable modes.

The subject site is not within a design priority area. The total bedroom count within the development is subject to the final unit breakdown and layout selections by purchasers. No age restrictions are noted.

11.2 Need and Opportunity

The subject site has been assumed to rely predominantly on auto travel and those assumptions have been carried through the analysis. As the unmodified district mode shares have been applied, risks to other network users from failing to meet mode share targets are low.

11.3 TDM Program

The “suite of post occupancy TDM measures” has been summarized in the TDM checklists for the residential land uses. The checklist is provided in Appendix L. The key TDM measures recommended include:

- Inclusion of a 1-year Presto card for first time new townhome purchase, with a set time frame for this offer (e.g. 6-months) from the initial opening of the site
- Provide a multimodal travel option information package to new residents

12 Transit

In Section 5.1 the trip generation by mode was estimated, including an estimate of the number of transit trips that will be generated by the proposed development. Table 18 summarizes the transit trip generation.

Table 18: Trip Generation by Transit Mode

Travel Mode	Mode Share	AM Peak Period			PM Peak Period		
		In	Out	Total	In	Out	Total
Transit	Varies	12	26	37	17	14	31

The proposed development is anticipated to generate an additional 37 AM peak hour transit trips and 31 PM peak hour transit trips. Of these trips, 26 outbound AM trips and 17 inbound PM trips are anticipated. From the trip distribution found in Section 5.2, these values can be further broken down. Site-generated outbound AM trips break down to 16 trips west from the site and ten trips east from the site.

All trips are assumed to be served by bus route #25, which provides four buses in the peak hour/ direction. Overall, the forecasted new transit trips would result in an averaged increase of under three additional riders per bus. Therefore, no service changes are anticipated as being required to accommodate site-generated transit trips.

12.1 Transit Priority

Examining the study area intersection delays, negligible impacts are noted on most of transit movements at the study area intersections as a result of the development site traffic except for the eastbound through movement at Innes Road at Lamarche Avenue intersection. Ultimately, the transit delay at this intersection will be subject to the cycling and pedestrian crossing locations and types.

13 Network Intersection Design

13.1 Network Intersection Control

No change to the existing signalized control is recommended for the network intersections.

13.2 Network Intersection Design

13.2.1 2025 Future Total Network Intersection Operations

The 2025 future total network intersection operations are summarized below in Table 19. The level of service for signalized intersections is based on v/c calculations for individual lane movements and HCM 2000 v/c calculations for the overall intersection. The synchro worksheets have been provided in Appendix J.

Table 19: 2025 Future Total Network Intersection Operations

Intersection	Lane	AM Peak Hour				PM Peak Hour			
		LOS	V/C	Delay	Q (95 th)	LOS	V/C	Delay	Q (95 th)
Innes Road at Orleans Boulevard Signalized	EBL	C	0.77	90.3	#31.4	D	0.86	55.6	#82.8
	EBT	A	0.24	19.1	44.8	F	1.15	105.7	#268.4
	EBR	A	0.03	0.1	0.0	A	0.26	5.3	15.3
	WBL	A	0.21	65.5	12.2	A	0.46	51.3	27.1
	WBT	E	0.95	49.2	#232.7	C	0.78	61.7	#102.3
	WBR	A	0.16	2.4	7.0	A	0.23	11.7	24.4
	NBL	A	0.57	38.9	66.7	A	0.20	26.1	18.8
	NBT	A	0.25	31.0	39.3	A	0.19	25.7	26.6
	NBR	A	0.07	0.3	0.0	A	0.13	0.4	0.0
	SBL	A	0.33	50.0	28.8	B	0.62	48.5	#60.8
	SBT	A	0.15	43.4	19.2	A	0.31	35.0	37.4
	SBR	F	1.11	109.2	#166.8	A	0.38	5.4	13.5
	Overall	E	0.96	50.3	-	E	0.98	65.0	-
Innes Road at Page Road Signalized	EBL	A	0.08	9.0	4.3	A	0.20	2.3	m1.8
	EBT/R	A	0.21	6.3	32.5	C	0.77	8.9	m21.4
	WBL	A	0.07	6.4	m6.3	F	1.03	120.2	m#58.2
	WBT/R	B	0.63	17.3	224.7	A	0.39	3.5	0.0
	NB	A	0.26	20.2	16.0	A	0.42	35.2	30.4
	SB	A	0.42	30.2	26.3	A	0.51	39.0	33.3
	Overall	A	0.57	15.3	-	E	0.91	13.0	-
Innes Road at Lamarche Avenue Signalized	EBT	A	0.24	8.5	33.1	E	0.96	36.6	#262.6
	EBR	A	0.03	9.0	7.2	A	0.10	14.7	m10.3
	WBL	A	0.20	61.1	m7.9	A	0.57	75.6	#25.9
	WBT	B	0.63	10.7	91.5	A	0.43	12.0	95.0
	NBL	A	0.55	66.2	33.2	C	0.72	98.5	#32.8
	NBR	A	0.17	40.9	18.3	A	0.09	32.8	12.3
	Overall	B	0.63	13.1	-	C	0.79	29.8	-

Intersection	Lane	AM Peak Hour				PM Peak Hour			
		LOS	V/C	Delay	Q (95 th)	LOS	V/C	Delay	Q (95 th)
Innes Road at Access 3615 Innes Road/3636 Innes Road Signalized	EBL	A	0.03	2.5	0.6	A	0.02	2.4	m0.5
	EBT/R	A	0.23	2.0	8.5	B	0.70	12.2	m233.8
	WBL	A	0.02	7.3	m2.5	A	0.33	15.8	15.6
	WBT/R	A	0.56	9.1	129.3	A	0.35	5.0	58.7
	NBL	A	0.57	60.6	36.3	A	0.38	49.0	22.6
	NBT/R	A	0.07	0.3	0.0	A	0.14	14.1	7.5
	SB	A	0.02	0.2	0.0	A	0.07	4.5	2.2
	Overall	A	0.56	9.4	-	B	0.69	10.7	-
Innes Road at Viseneau Drive Signalized	EBL	A	0.05	6.4	1.5	A	0.14	18.5	14.4
	EBT	A	0.23	4.9	18.6	D	0.84	30.1	#275.1
	EBR	A	0.04	0.1	0.2	A	0.10	2.4	6.1
	WBL	A	0.10	5.2	9.6	C	0.71	42.5	53.0
	WBT/R	A	0.56	8.0	121.4	A	0.38	7.3	62.3
	NBL	A	0.13	44.5	9.8	B	0.66	69.3	42.5
	NBT	A	0.02	40.6	4.2	A	0.15	45.0	18.2
	NBR	A	0.14	1.1	0.0	A	0.48	10.2	18.6
	SB	A	0.51	42.3	28.9	B	0.62	58.1	49.7
Overall		A	0.59	8.9	-	E	0.81	25.2	-

Notes: Saturation flow rate of 1800 veh/h/lane

m = metered queue

Queue is measured in metres

= volume for the 95th %ile cycle exceeds capacity

Peak Hour Factor = 1.00

v/c = volume to capacity ratio

Delay = average driver delay in seconds

Overall, the study area intersections operate similar to the existing and background conditions.

The PM peak operations in the eastbound direction along Innes Road will be at or over capacity at a number of locations and is a result on the background conditions for the corridor. The site traffic will contribute less than 2% of the total eastbound volumes to Lamarche Avenue and should be an acceptable increase for any roadway. The volumes along Innes Road may be reduced once the LRT is active and could be further reduced once Brian Coburn Boulevard is extended west to Blair Road. No mitigation is required for the subject site.

13.2.2 2030 Future Total Network Intersection Operations

The 2030 future total network intersection operations are summarized below in Table 20. The level of service for signalized intersections is based on v/c calculations for individual lane movements and HCM 2000 v/c calculations for the overall intersection. The synchro worksheets have been provided in Appendix K.

Table 20: 2030 Future Total Network Intersection Operations

Intersection	Lane	AM Peak Hour				PM Peak Hour			
		LOS	V/C	Delay	Q (95 th)	LOS	V/C	Delay	Q (95 th)
Innes Road at Orleans Boulevard <i>Signalized</i>	EBL	C	0.77	90.3	#31.4	D	0.86	55.6	#82.8
	EBT	A	0.25	19.2	46.7	F	1.20	126.5	#285.3
	EBR	A	0.03	0.1	0.0	A	0.29	6.5	18.8
	WBL	A	0.21	65.5	12.2	A	0.46	51.1	27.2
	WBT	E	1.00	57.9	#250.4	D	0.81	63.0	#109.6
	WBR	A	0.16	2.4	7.0	A	0.23	11.6	24.1
	NBL	B	0.63	41.4	73.7	A	0.21	26.2	18.8
	NBT	A	0.28	31.4	43.0	A	0.19	25.7	26.6
	NBR	A	0.07	0.3	0.0	A	0.13	0.4	0.0
	SBL	A	0.34	50.4	28.9	B	0.62	48.5	#60.8
	SBT	A	0.15	43.4	19.2	A	0.35	35.4	41.1
	SBR	F	1.13	116.6	#170.3	A	0.38	5.4	13.5
	Overall	E	1.00	54.9	-	F	1.01	64.4	-
Innes Road at Page Road <i>Signalized</i>	EBL	A	0.09	9.4	4.4	A	0.21	2.2	m1.7
	EBT/R	A	0.21	6.4	33.9	C	0.80	11.9	m20.8
	WBL	A	0.07	6.1	m5.8	F	1.21	185.3	m#61.6
	WBT/R	B	0.66	17.6	233.8	A	0.40	3.3	0.0
	NB	A	0.26	20.2	16.0	A	0.43	36.9	31.2
	SB	A	0.42	31.8	27.2	A	0.51	39.0	33.3
	Overall	A	0.60	15.6	-	F	1.05	16.6	-
Innes Road at Lamarche Avenue <i>Signalized</i>	EBT	A	0.25	8.2	34.1	F	1.01	60.4	#284.4
	EBR	A	0.03	8.7	7.0	A	0.10	14.9	m9.9
	WBL	A	0.20	60.8	m7.7	A	0.57	75.4	#25.9
	WBT	B	0.65	10.5	91.9	A	0.46	12.6	104.6
	NBL	A	0.55	66.2	33.2	B	0.68	91.5	#31.8
	NBR	A	0.18	41.9	18.5	A	0.09	32.6	12.2
	Overall	B	0.65	12.8	-	D	0.83	44.5	-
Innes Road at Access 3615 Innes Road/3636 Innes Road <i>Signalized</i>	EBL	A	0.03	2.7	m0.6	A	0.02	2.4	m0.5
	EBT/R	A	0.24	2.1	9.2	C	0.73	14.0	m232.8
	WBL	A	0.02	7.4	m2.3	A	0.39	20.8	#21.8
	WBT/R	A	0.59	9.6	139.7	A	0.37	5.2	62.5
	NBL	A	0.57	60.6	36.3	A	0.38	49.0	22.6
	NBT/R	A	0.08	0.3	0.0	A	0.14	14.1	7.5
	SB	A	0.02	0.2	0.0	A	0.07	4.5	2.2
	Overall	A	0.58	9.6	-	C	0.72	11.9	-

Intersection	Lane	AM Peak Hour				PM Peak Hour			
		LOS	V/C	Delay	Q (95 th)	LOS	V/C	Delay	Q (95 th)
Innes Road at Viseneau Drive Signalized	EBL	A	0.06	6.9	1.5	A	0.15	18.7	14.5
	EBT	A	0.24	5.2	22.3	D	0.89	32.6	#296.9
	EBR	A	0.04	0.1	0.0	A	0.10	2.4	6.1
	WBL	A	0.10	5.2	9.6	C	0.75	50.7	56.5
	WBT/R	A	0.58	8.4	131.7	A	0.39	7.5	65.7
	NBL	A	0.13	44.5	9.8	B	0.66	69.3	42.5
	NBT	A	0.02	40.6	4.2	A	0.15	45.0	18.2
	NBR	A	0.14	1.1	0.0	A	0.48	10.2	18.6
	SB	A	0.51	42.3	28.9	B	0.62	58.1	49.7
	Overall	B	0.61	9.1	-	D	0.84	26.8	-

Notes: Saturation flow rate of 1800 veh/h/lane
 Queue is measured in metres
 Peak Hour Factor = 1.00
 Delay = average driver delay in seconds

m = metered queue
 # = volume for the 95th %ile cycle exceeds capacity
 v/c = volume to capacity ratio

The 2030 future total conditions are expected to operate similar to the background conditions. As discussed in Section 13.2.1, the PM peak eastbound volumes are near capacity on Innes Road and would require a regional solution, such as the LRT or Brian Coburn Boulevard to address potential capacity constraints.

13.2.3 Network Intersection MMLOS

Table 21 summarizes the MMLOS analysis for the network intersections within the study area. The existing and future conditions for both intersections will be the same and are considered in one row. The intersection analysis of Innes Road at Orleans Boulevard is based on the land use of general urban area, and other intersections analysis are based on the land use of arterial main street. The MMLOS worksheets has been provided in Appendix I.

Table 21: Study Area Intersection MMLOS Analysis

Intersection	Pedestrian LOS		Bicycle LOS		Transit LOS		Truck LOS		Auto LOS	
	PLOS	Target	BLOS	Target	TLOS	Target	TrLOS	Target	ALOS	Target
Innes Road at Orleans Boulevard	F	C	F	B	F	D	A	D	F	D
Innes Road at Page Road	F	C	F	B	C	D	N/A	N/A	F	D
Innes Road at Lamarche Avenue (Future)	E	C	A	B	F	D	N/A	N/A	D	D
Innes Road at Access 3615 Innes Road/3636 Innes Road	F	C	F	B	B	D	N/A	N/A	C	D
Innes Road at Viseneau Drive	F	C	F	B	F	D	N/A	N/A	D	D

The pedestrian LOS targets will not be met at the existing or future intersections within the study area. As typical for arterial roads, the crossing distance does not permit the targets to be met. To meet pedestrian LOS targets, the maximum crossing distance would need to be reduced to three lane-widths on all pedestrian crossings.

The bicycle LOS targets will not be met at the existing or future intersections within the study area except for the future Innes Road at Lamarche Avenue intersection. To meet bicycle LOS targets, the left-turn configurations would need to be two-stage, turn boxes or protected facilities.

The transit LOS targets will not be met in the existing or future condition at the intersections of Innes Road at Orleans Boulevard and Innes Road at Viseneau Drive and in the future condition of Innes Road at Lamarche Avenue intersection. To meet transit LOS, the delay at the intersections would need to be reduced to below 30 seconds.

The auto LOS targets will not be met in the existing or future condition at the intersections of Innes Road at Orleans Boulevard and Innes Road at Page Road. To meet auto LOS, the volume to capacity ratio to less or equal to 0.90.

The improvements for these intersections are not the responsibility of the development and are provided for the City's planning. The intersection of Innes Road at Lamarche Avenue is currently being reviewed and the exact facilities will be subject to the approval of a roadway modification approval.

13.2.4 Recommended Design Elements

No study area intersection design elements are proposed as part of this study.

14 Summary of Improvements Indicated and Modifications Options

The following summarizes the analysis and results presented in this TIA report:

Proposed Site and Screening

- The proposed site includes 103 townhomes and 72 back-to-backs dwellings
- Two accesses on Lamarche Avenue will be provided
- The development is proposed to be completed as a single phase by 2025
- The trip generation, location, and safety triggers were met for the TIA Screening

Existing Conditions

- Innes Road and Orleans Boulevard are arterial roads, and Viseneau Drive is a collector road in the study area
- Sidewalks are provided along both sides of Innes Road, on the west side of Page Road, and on east side of Page Road for 205 metres south of Innes Road
- A MUP is provided on the west side of Lamarche Avenue
- Bike lanes along both side of Innes Road
- Innes Road, Orleans Boulevard are spine route, Page Road north of Innes Road is suggested route, and Innes Road is a cross-town bikeway
- The segments of Innes Road between Page Road and the 3615 Innes Road/3636 Innes Road access intersection, which is the only location noted to have experienced collisions, had a total of 16 collisions
- Capacity issues are noted at the intersections of Innes Road at Orleans Boulevard, Innes Road at Page Road, and Innes Road at Lamarche Avenue
- The Innes Road at Page Road intersection requires the City to review the signal timing and explore a protected/permissive phasing for the eastbound and westbound left-turn movements
- The intersection of Innes Road at Lamarche Avenue is planned to be signalized in the future and likely will address the capacity constraints

Development Generated Travel Demand

- The proposed development is forecasted produce 118 two-way people trips during the AM peak hour and 122 two-way people trips during the PM peak hour
- Of the forecasted people trips, 53 two-way trips will be vehicle trips during the AM peak hour and 62 two-way trips will be vehicle trips during the PM peak hour
- Of the forecasted trips, 15 % are anticipated to travel north, 40 % to the east, and 45 % to the west

Background Conditions

- It is assumed that a 1.00% growth rate will be applied to Innes Road and a 2.00% growth rate will be applied on Orleans Boulevard in peak directions
- The Innes Road at Lamarche Avenue intersection is assumed to be signalized prior to 2025
- The study area intersections are expected to operate similar to the existing conditions in the 2025 and 2030 background horizons
- No demand rationalization was required for the site generated trips as they are forecasted to be low and not anticipated to be a contributing factor to the network constraints

Development Design

- On-street parking will be provided along Lamarche Avenue and the subdivision roadways
- Traffic calming elements are recommended at the future internal road intersections including bulb-outs to narrow each approach to the intersection and reduce pedestrian crossing distances and speed humps

Boundary Street Design

- Lamarche Avenue meets MMLOS targets for the area and no mitigation or additional elements are required

Access Intersections Design

- The residential accesses will connect to the adjacent road network via local roads connection to Lamarche Avenue
- Within the subdivision, no turn lanes are proposed for the internal intersections which will be controlled by minor stop control
- The 2025 and 2030 future total access intersections operate satisfactorily

TDM

- Supportive TDM measures to be included within the proposed development should include:
 - Inclusion of a 1-year Presto card for first time new townhome purchase, with a set time frame for this offer (e.g. 6-months) from the initial opening of the site
 - Provide a multimodal travel option information package to new residents

Transit

- The proposed development is anticipated to generate an additional 37 AM peak hour transit trips and 31 PM peak hour transit trips
- All trips are assumed to be served by bus route #25, which provides four buses in the peak hour/ direction
- No service changes are anticipated as being required to accommodate site-generated transit trips
- Negligible impacts are noted on most of transit movements at the study area intersections except for the eastbound through movement at Innes Road at Lamarche Avenue intersection, which is subject to the signalized intersection design and cycling/pedestrian facilities

Network Intersection Design

- The study area intersections are expected to operate similarly during the existing, background and future total horizons, and experiencing capacity constraints due to the volumes along Innes Road
- The pedestrian LOS targets will not be met at the existing or future intersections within the study area, and no mitigation is recommended as the crossing distances would need to be reduced to equal or less than three lane widths
- Except for the future Innes Road at Lamarche Avenue intersection, the bicycle LOS targets will not be met at the existing or future intersections within the study area, and it is limited by the lack of dedicated facilities and improved left-turn configurations
- The transit LOS targets will not be met in the existing or future condition at the intersections of Innes Road at Orleans Boulevard and Innes Road at Viseneau Drive and in the future condition of Innes Road at Lamarche Avenue intersection, and require the delay to be below 30 seconds
- The auto LOS targets will not be met in the existing or future condition at the intersections of Innes Road at Orleans Boulevard and Innes Road at Page Road, and require the volume to capacity ratio to be improved to less or equal to 0.90
- The cycling, transit and auto targets will require a regional solution by the City to implement addition cycling facilities at the area intersections and reduce Innes Road volumes to meet the capacity and delay targets

15 Conclusion

It is recommended that, from a transportation perspective, the proposed development applications proceed.

Prepared By:



Yu-Chu Chen, EIT
Transportation Engineering-Intern

Reviewed By:



Andrew Harte, P.Eng.
Senior Transportation Engineer

Appendix A

TIA Screening Form and PM Certification Form



City of Ottawa 2017 TIA Guidelines
 Step 1 - Screening Form

Date: 25-Mar-22
 Project Number: 2022-023

Project Reference: 245 and 275 Lamarche Avenue

1.1 Description of Proposed Development	
Municipal Address	245 and 275 Lamarche Avenue
Description of Location	Ward 2. South of Innes Road between 3615 Innes Road/3636 Innes Road Access and Lamarche Avenue
Land Use Classification	Development Reserve (DR)
Development Size	approximately 103 townhomes and 72 back-to-backs dwellings
Accesses	One access onto Innes Road
Phase of Development	Single
Buildout Year	2025
TIA Requirement	Full TIA Required

1.2 Trip Generation Trigger		
Land Use Type	Townhomes or apartments	
Development Size	175	Units
Trip Generation Trigger	Yes	

1.3 Location Triggers	
Does the development propose a new driveway to a boundary street that is designated as part of the City's Transit Priority, Rapid Transit or Spine Bicycle Networks?	Yes
Is the development in a Design Priority Area (DPA) or Transit-oriented Development (TOD) zone?	Yes
Location Trigger	Yes

1.4. Safety Triggers	
Are posted speed limits on a boundary street 80 km/hr or greater?	No
Are there any horizontal/vertical curvatures on a boundary street limits sight lines at a proposed driveway?	No
Is the proposed driveway within the area of influence of an adjacent traffic signal or roundabout (i.e. within 300 m of intersection in rural conditions, or within 150 m of intersection in urban/ suburban conditions)?	Yes
Is the proposed driveway within auxiliary lanes of an intersection?	No
Does the proposed driveway make use of an existing median break that serves an existing site?	No
Is there is a documented history of traffic operations or safety concerns on the boundary streets within 500 m of the development?	No
Does the development include a drive-thru facility?	No
Safety Trigger	Yes



TIA Plan Reports

On 14 June 2017, the Council of the City of Ottawa adopted new Transportation Impact Assessment (TIA) Guidelines. In adopting the guidelines, Council established a requirement for those preparing and delivering transportation impact assessments and reports to sign a letter of certification.

Individuals submitting TIA reports will be responsible for all aspects of development-related transportation assessment and reporting, and undertaking such work, in accordance and compliance with the City of Ottawa's Official Plan, the Transportation Master Plan and the Transportation Impact Assessment (2017) Guidelines.

By submitting the attached TIA report (and any associated documents) and signing this document, the individual acknowledges that s/he meets the four criteria listed below.

CERTIFICATION

1. I have reviewed and have a sound understanding of the objectives, needs and requirements of the City of Ottawa's Official Plan, Transportation Master Plan and the Transportation Impact Assessment (2017) Guidelines;
2. I have a sound knowledge of industry standard practice with respect to the preparation of transportation impact assessment reports, including multi modal level of service review;
3. I have substantial experience (more than 5 years) in undertaking and delivering transportation impact studies (analysis, reporting and geometric design) with strong background knowledge in transportation planning, engineering or traffic operations; and
4. I am either a licensed¹ or registered² professional in good standing, whose field of expertise [check appropriate field(s)] is either transportation engineering or transportation planning .

^{1,2} License of registration body that oversees the profession is required to have a code of conduct and ethics guidelines that will ensure appropriate conduct and representation for transportation planning and/or transportation engineering works.

Dated at Ottawa this 20 day of September, 2018.
(City)

Name: Andrew Harte
(Please Print)

Professional Title: Professional Engineer


Signature of Individual certifier that s/he meets the above four criteria

Office Contact Information (Please Print)
Address: 13 Markham Avenue
City / Postal Code: Ottawa / K2G 3Z1
Telephone / Extension: (613) 697-3797
E-Mail Address: Andrew.Harte@CGHTransportation.com



Appendix B

Turning Movement Counts



Transportation Services - Traffic Services

Turning Movement Count - Full Study Peak Hour Diagram


INNES RD @ ORLEANS BLVD

Survey Date: Wednesday, May 03, 2017

Start Time: 07:00

WO No: 36978

Device: Miovision

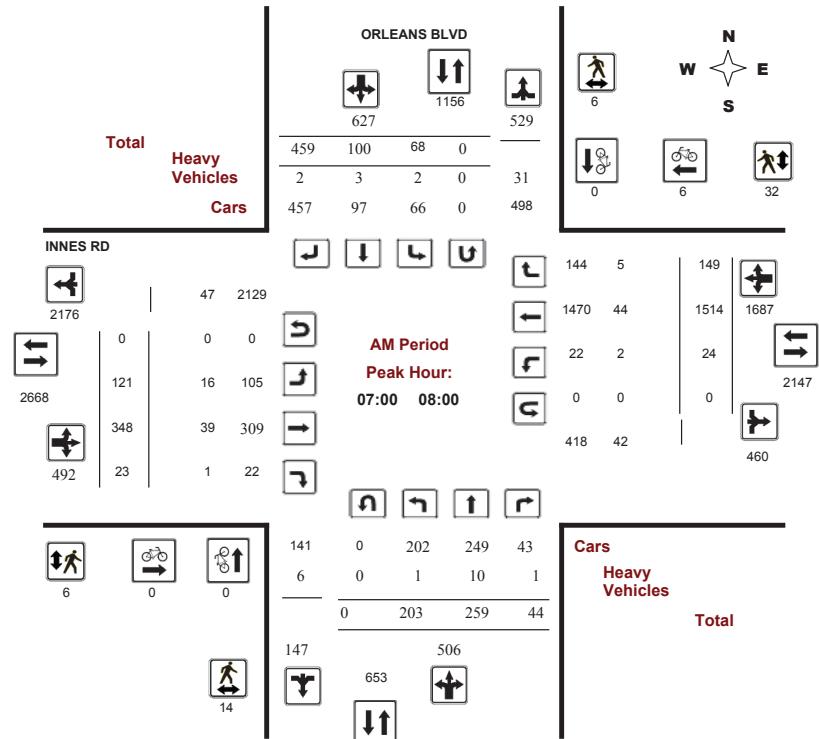

Comments



Transportation Services - Traffic Services

Turning Movement Count - Full Study Peak Hour Diagram


INNES RD @ ORLEANS BLVD

Survey Date: Wednesday, May 03, 2017

Start Time: 07:00

WO No: 36978

Device: Miovision

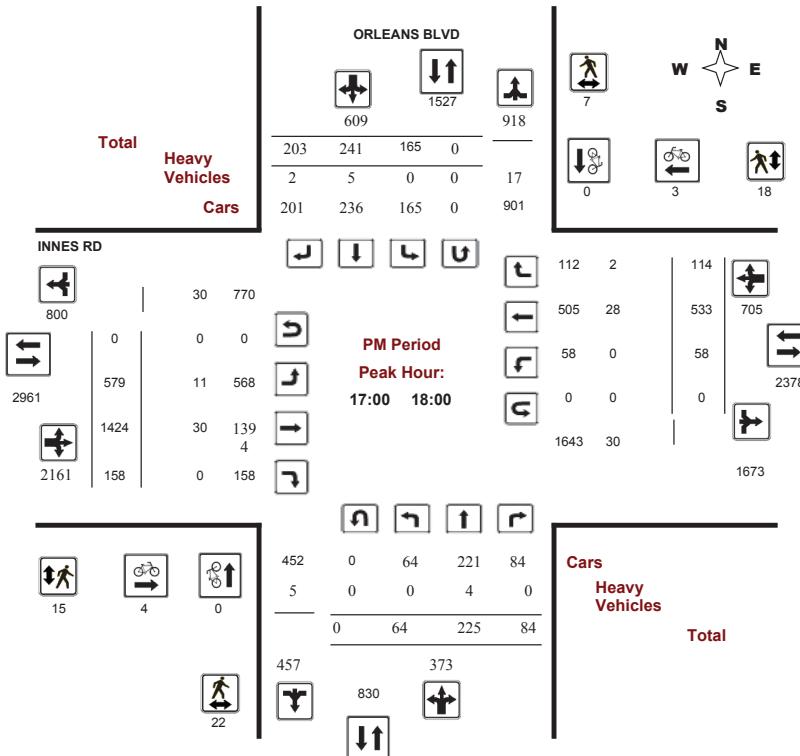

Comments




Transportation Services - Traffic Services

Turning Movement Count - Peak Hour Diagram

Survey Date: Tuesday, January 08, 2019

Start Time: 07:00

WO No: 38221
Device: Miovision

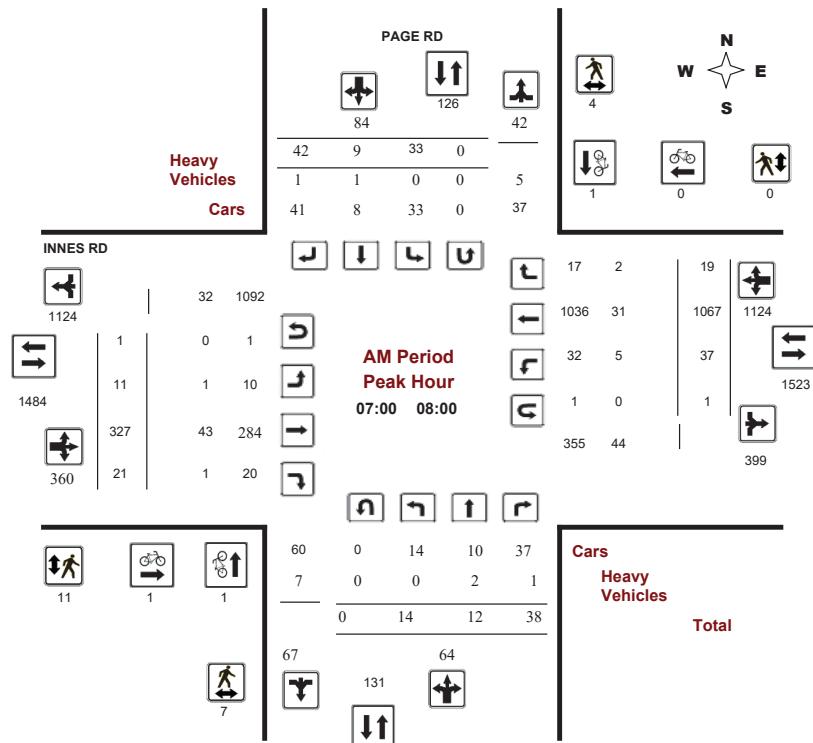

Comments




Transportation Services - Traffic Services

Turning Movement Count - Peak Hour Diagram

Survey Date: Tuesday, January 08, 2019

Start Time: 07:00

WO No: 38221
Device: Miovision

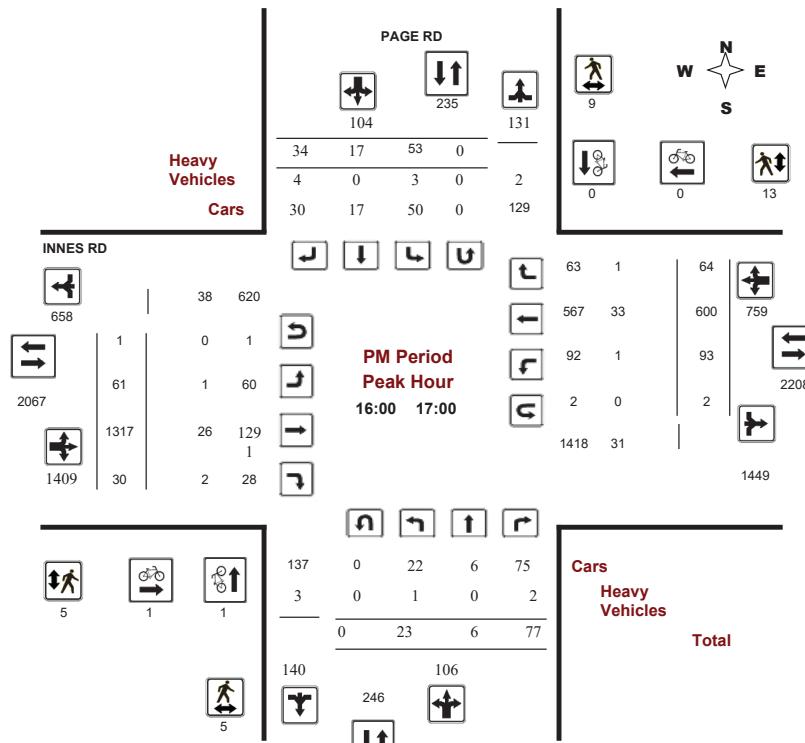



Transportation Services - Traffic Services

Turning Movement Count - Peak Hour Diagram


INNES RD @ 473 E OF PAGE RD/BUILDERS' WAREHOUSE

Survey Date: Thursday, January 31, 2019

Start Time: 07:00

WO No: 38223

Device: Miovision

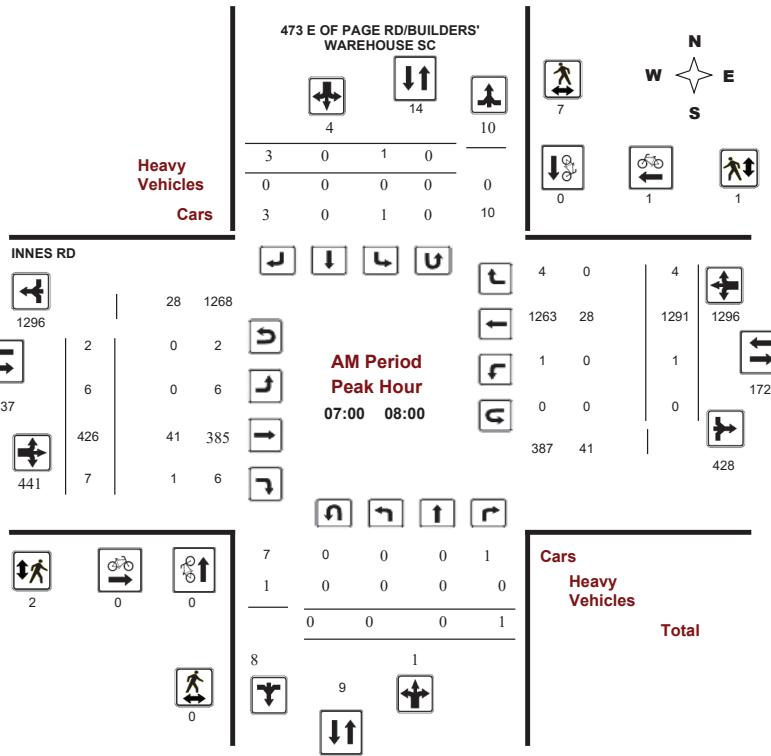

Transportation Services - Traffic Services

Turning Movement Count - Peak Hour Diagram


INNES RD @ 473 E OF PAGE RD/BUILDERS' WAREHOUSE

Survey Date: Thursday, January 31, 2019

Start Time: 07:00

WO No: 38223

Device: Miovision

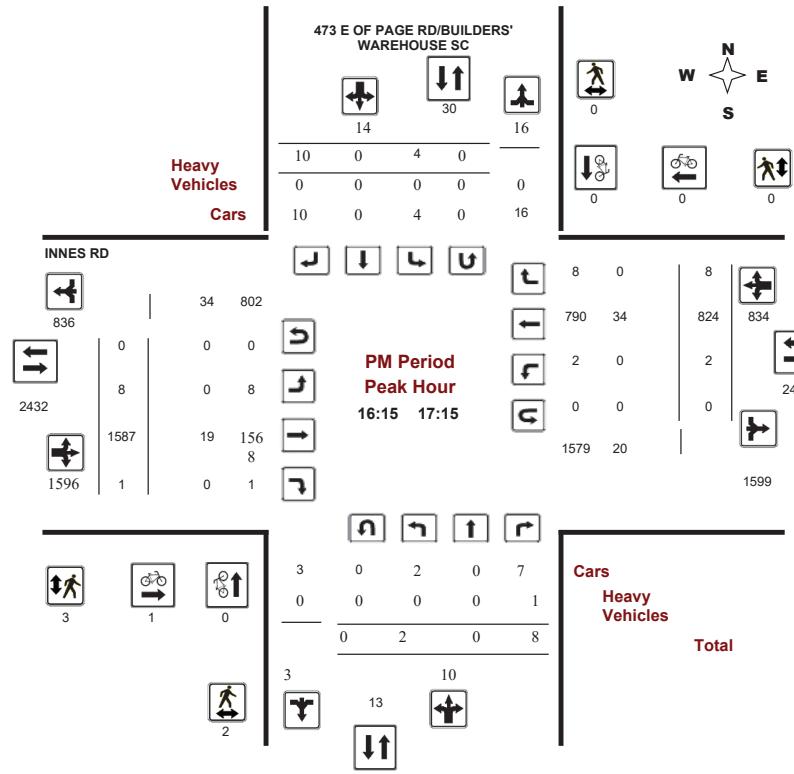



Transportation Services - Traffic Services W.O. 36661

Turning Movement Count - 15 Minute Summary Report

INNES RD @ VISENEAU DR

Survey Date: Wednesday, January 25, 2017

Total Observed U-Turns

Northbound: 0 Southbound: 0
Eastbound: 12 Westbound: 4

VISENEAU DR

INNES RD

Time Period	Northbound			Southbound			Eastbound			Westbound			Grand Total				
	N	S	STR	TOT	LT	ST	RT	TOT	LT	ST	RT	TOT	LT	ST	RT	TOT	
07:00 07:15	17	4	6	27	12	2	12	26	53	4	64	5	73	6	368	4	378 451
07:15 07:30	5	1	9	15	11	1	12	24	39	2	82	3	87	10	385	9	404 491
07:30 07:45	5	1	13	19	15	3	13	31	50	4	108	9	121	8	358	5	371 492
07:45 08:00	7	0	9	16	9	6	7	22	38	4	109	12	125	11	350	14	375 500
08:00 08:15	5	3	8	16	11	3	15	29	45	1	99	13	113	30	333	5	368 481
08:15 08:30	16	1	7	24	10	7	12	29	53	2	108	12	122	26	299	11	336 458
08:30 08:45	11	5	8	24	11	8	4	23	47	2	106	20	128	42	277	10	329 457
08:45 09:00	8	3	8	19	16	6	11	33	52	2	114	19	135	43	191	8	242 377
09:00 09:15	8	4	12	24	11	10	7	28	52	7	111	11	129	30	216	8	254 383
09:15 09:30	22	1	16	39	10	11	5	26	65	3	131	14	148	38	163	12	213 361
09:30 09:45	23	2	18	43	9	6	8	23	66	1	141	6	149	22	159	6	187 336
09:45 10:00	21	0	18	39	10	8	5	23	62	3	135	17	155	34	124	9	167 322
11:30 11:45	35	5	51	91	14	7	6	27	118	4	160	21	185	27	138	14	179 364
11:45 12:00	26	5	35	66	9	8	3	20	86	2	199	22	225	48	171	16	235 460
12:00 12:15	36	13	36	85	8	6	3	17	102	3	163	13	181	36	161	10	207 388
12:15 12:30	29	7	35	71	13	6	3	22	93	4	212	18	235	36	183	12	232 467
12:30 12:45	36	4	34	74	13	2	7	22	96	4	126	14	145	37	185	7	229 374
12:45 13:00	22	10	34	66	15	8	3	26	92	2	147	18	168	36	165	15	216 384
13:00 13:15	34	22	34	90	9	12	10	31	121	8	145	16	169	31	169	10	210 379
13:15 13:30	27	9	46	82	15	9	4	28	110	7	167	23	197	39	147	22	208 405
15:00 15:15	35	5	37	77	13	8	3	24	101	7	278	17	303	34	207	22	263 566
15:15 15:30	28	6	47	81	14	6	3	23	104	15	296	23	334	32	176	24	232 566
15:30 15:45	19	10	40	69	9	7	8	24	93	10	311	16	337	38	193	20	251 588
15:45 16:00	26	7	38	71	15	13	8	36	107	12	332	22	367	45	166	21	232 599
16:00 16:15	31	12	37	80	18	23	6	47	127	11	343	16	370	54	134	26	215 585
16:15 16:30	19	13	52	84	21	8	8	37	121	13	365	22	400	42	173	23	238 638
16:30 16:45	36	11	38	85	19	13	6	38	123	9	374	21	404	40	170	20	230 634
16:45 17:00	24	10	45	79	11	12	7	30	109	10	348	25	383	41	163	25	230 613
17:00 17:15	27	6	44	77	9	18	9	36	113	12	369	19	401	60	167	16	243 644
17:15 17:30	32	8	37	77	16	9	6	31	108	13	328	21	363	60	147	20	228 591
17:30 17:45	26	5	37	68	23	6	10	39	107	8	319	18	345	55	183	19	257 602
17:45 18:00	28	13	42	83	14	12	6	32	115	8	302	16	326	57	158	17	232 558

TOTAL: 724 206 931 1861 413 264 230 907 2768 197 6592 522 7323 1148 6579 460 8191 15514 18282

Note: U-Turns are included in Totals.

Comment:



Transportation Services - Traffic Services

Turning Movement Count - Cyclist Volume Report

Work Order
36661

INNES RD @ VISENEAU DR

Count Date: Wednesday, January 25, 2017

Start Time: 07:00

Time Period	VISENEAU DR			INNES RD			Grand Total
	Northbound	Southbound	Street Total	Eastbound	Westbound	Street Total	
07:00 08:00	0	0	0	0	0	0	0
08:00 09:00	0	0	0	0	0	0	0
09:00 10:00	0	0	0	0	0	0	0
11:30 12:30	0	0	0	0	0	0	0
12:30 13:30	0	0	0	0	0	0	0
15:00 16:00	0	0	0	0	0	0	0
16:00 17:00	0	0	0	0	0	0	0
17:00 18:00	0	0	0	0	0	0	0
Total	0	0	0	0	0	1	1

Comment:

Note: These volumes consists of bicycles only (no mopeds or motorcycles) and ARE NOT included in the Turning Movement Count Summary.

2017-Oct-20

Page 1 of 1

Page 1 of 1




Transportation Services - Traffic Services

Turning Movement Count - Full Study Diagram

INNES RD @ VISENEAU DR

Survey Date: Wednesday, January 25, 2017

WO#: 36661
Device: Miovision

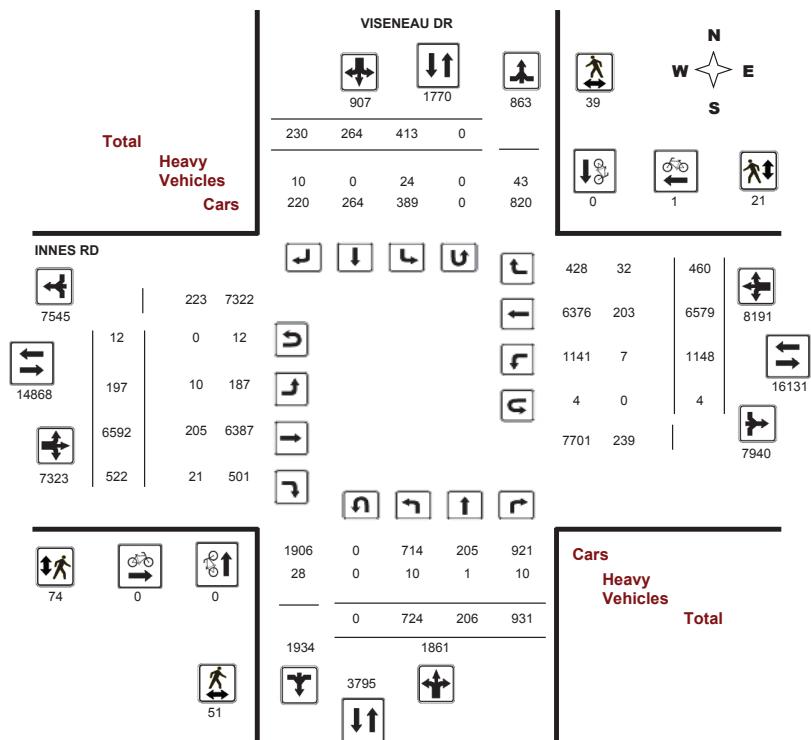

Comments



Transportation Services - Traffic Services

Turning Movement Count - Heavy Vehicle Report

W.O.
36661

INNES RD @ VISENEAU DR

Survey Date: Wednesday, January 25, 2017

Time Period	VISENEAU DR			INNES RD		
	Northbound	Southbound	Eastbound	Westbound	Northbound	Southbound
07:00 - 08:00	0	0	4	2	0	2
08:00 - 09:00	1	0	1	5	0	6
09:00 - 10:00	4	0	2	6	0	8
11:30 - 12:30	1	0	1	3	0	5
12:30 - 13:30	3	0	1	4	0	2
15:00 - 16:00	1	0	1	2	0	7
16:00 - 17:00	0	1	0	1	0	0
17:00 - 18:00	0	0	0	0	0	0
Sub Total	10	1	21	24	0	34
U-Turns (Heavy Vehicles)	0				0	0
Total	10	1	10	0	24	55

Heavy Vehicles include Buses, Single-Unit Trucks and Articulated Trucks. Further, they ARE included in the Turning Movement Count Summary.



Transportation Services - Traffic Services

Work Order
36661

Turning Movement Count - Pedestrian Volume Report

INNES RD @ VISENEAU DR							
Count Date: Wednesday, January 25, 2017			Start Time: 07:00				
Time Period	NB Approach (E or W Crossing)	SB Approach (E or W Crossing)	Total	EB Approach (N or S Crossing)	WB Approach (N or S Crossing)	Total	Grand Total
07:00 07:15	0	0	0	3	0	3	3
07:15 07:30	1	1	2	0	1	1	3
07:30 07:45	0	1	1	0	0	0	1
07:45 08:00	0	1	1	0	1	1	2
07:00 08:00	1	3	4	3	2	5	9
08:00 08:15	0	0	0	1	0	1	1
08:15 08:30	0	0	0	0	0	0	0
08:30 08:45	1	1	2	1	1	2	4
08:45 09:00	2	1	3	2	1	3	6
08:00 09:00	3	2	5	4	2	6	11
09:00 09:15	0	0	0	0	0	0	0
09:15 09:30	1	2	3	2	0	2	5
09:30 09:45	0	0	0	0	0	0	0
09:45 10:00	1	0	1	4	0	4	5
09:00 10:00	2	2	4	6	0	6	10
11:30 11:45	2	0	2	2	0	2	4
11:45 12:00	1	0	1	2	0	2	3
12:00 12:15	0	5	5	3	3	6	11
12:15 12:30	0	7	7	5	0	5	12
11:30 12:30	3	12	15	12	3	15	30
12:30 12:45	0	0	0	4	0	4	4
12:45 13:00	1	1	2	2	0	2	4
13:00 13:15	2	0	2	0	0	0	2
13:15 13:30	6	1	7	2	3	5	12
12:30 13:30	9	2	11	8	3	11	22
15:00 15:15	0	0	0	0	2	2	2
15:15 15:30	2	5	7	4	1	5	12
15:30 15:45	3	2	5	1	1	2	7
15:45 16:00	1	1	2	2	0	2	4
15:00 16:00	6	8	14	7	4	11	25
16:00 16:15	4	0	4	5	0	5	9
16:15 16:30	5	0	5	6	1	7	12
16:30 16:45	3	2	5	3	1	4	9
16:45 17:00	3	3	6	4	1	5	11
16:00 17:00	15	5	20	18	3	21	41
17:00 17:15	4	0	4	5	0	5	9
17:15 17:30	1	1	2	3	1	4	6
17:30 17:45	6	2	8	4	1	5	13
17:45 18:00	1	2	3	4	2	6	9
17:00 18:00	12	5	17	16	4	20	37
Total	51	39	90	74	21	95	185

Comment:

2017-Oct-20

Page 1 of 1



Transportation Services - Traffic Services

Work Order
36661

Turning Movement Count - Full Study Summary Report

INNES RD @ VISENEAU DR																						
Full Study																						
INNES RD																						
Northbound			Southbound						Eastbound		Westbound											
Period	LT	ST	RT	NB TOT	LT	ST	RT	SB TOT	STR TOT	LT	ST	RT	WB TOT	STR TOT	Grand Total							
07:00 08:00	34	6	37	77	47	12	44	103	180	14	363	29	406	35	1461	32	1528	1934	2114			
08:00 09:00	40	12	31	83	48	24	42	114	197	7	427	64	498	141	1100	34	1275	1773	1970			
09:00 10:00	74	7	64	145	40	35	25	100	245	14	518	48	580	124	662	35	821	1401	1646			
11:30 12:30	126	30	157	313	44	27	15	86	399	13	734	74	821	147	653	52	852	1673	2072			
12:30 13:30	119	45	148	312	52	31	24	107	419	21	585	71	677	143	666	54	863	1540	1959			
15:00 16:00	108	28	162	298	51	34	22	107	405	44	1217	78	1339	149	742	87	978	2317	2722			
16:00 17:00	110	46	172	328	69	56	27	152	480	43	1430	84	1557	177	640	94	911	2468	2948			
17:00 18:00	113	32	160	305	62	45	31	138	443	41	1318	74	1433	232	655	72	959	2392	2835			
Sub Total	724	206	931	1861	413	264	230	907	2768	197	6592	522	7311	1148	6579	460	8187	15498	18266			
U Turns	0						0						12		4			16	16			
Total	724	206	931	1861	413	264	230	907	2768	197	6592	522	7323	1148	6579	460	8191	15514	18282			
EQ 12Hr	1006	286	1294	2587	574	367	320	1261	3848	274	9163	726	10179	1596	9145	639	11385	21564	25412			
Note: These values are calculated by multiplying the totals by the appropriate expansion factor.												1.39										
AVG 12Hr	1006	286	1294	2587	574	367	320	1261	3848	274	9163	726	10179	1596	9145	639	11385	21564	25412			
Note: These volumes are calculated by multiplying the Equivalent 12 hr. totals by the AADT factor.												1.00										
AVG 24Hr	1318	375	1695	3389	752	481	419	1652	5041	359	12003	951	13334	2090	11980	838	14915	28249	33290			
Note: These volumes are calculated by multiplying the Average Daily 12 hr. totals by 12 to 24 expansion factor.												1.31										

2017-Oct-20

Page 1 of 1



Transportation Services - Traffic Services

Turning Movement Count - Full Study Peak Hour Diagram


INNES RD @ VISENEAU DR

Survey Date: Wednesday, January 25, 2017

Start Time: 07:00

WO No: 36661

Device: Miovision

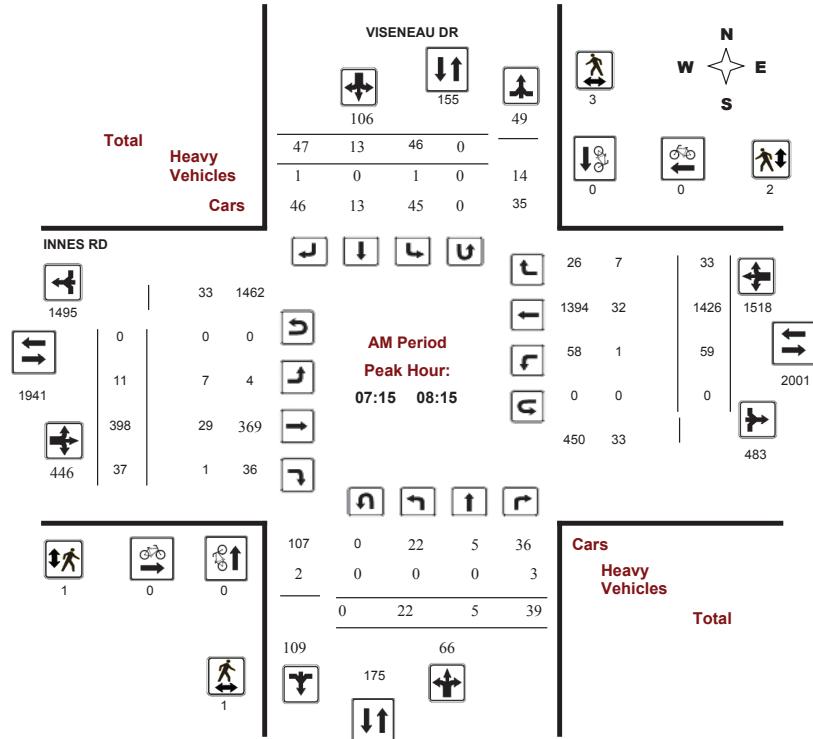

Comments



Transportation Services - Traffic Services

Turning Movement Count - Full Study Peak Hour Diagram


INNES RD @ VISENEAU DR

Survey Date: Wednesday, January 25, 2017

Start Time: 07:00

WO No: 36661

Device: Miovision

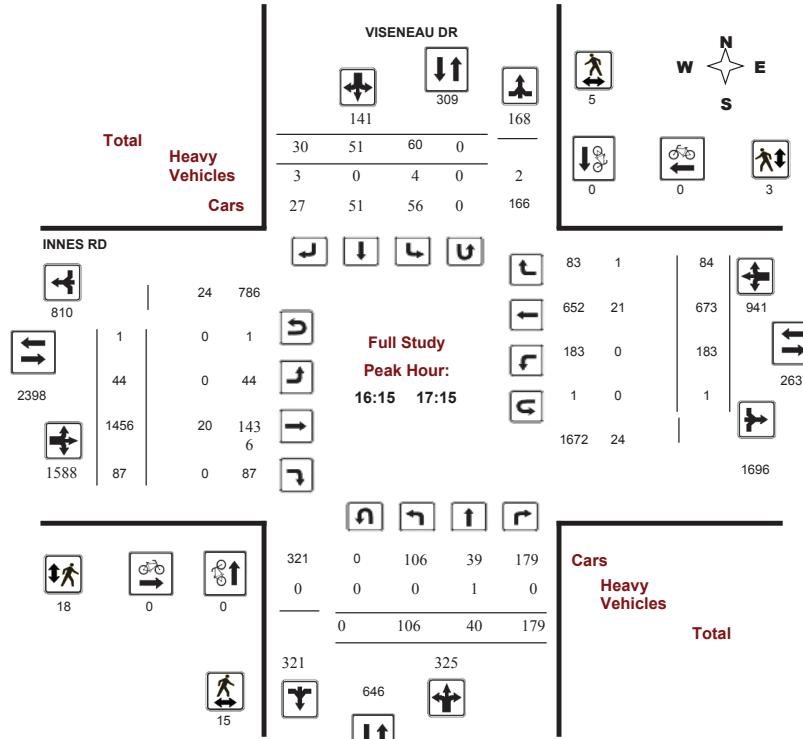

Comments



Transportation Services - Traffic Services

Turning Movement Count - Full Study Peak Hour Diagram


INNES RD @ VISENEAU DR

Survey Date: Wednesday, January 25, 2017

Start Time: 07:00

WO No: 36661

Device: Miovision

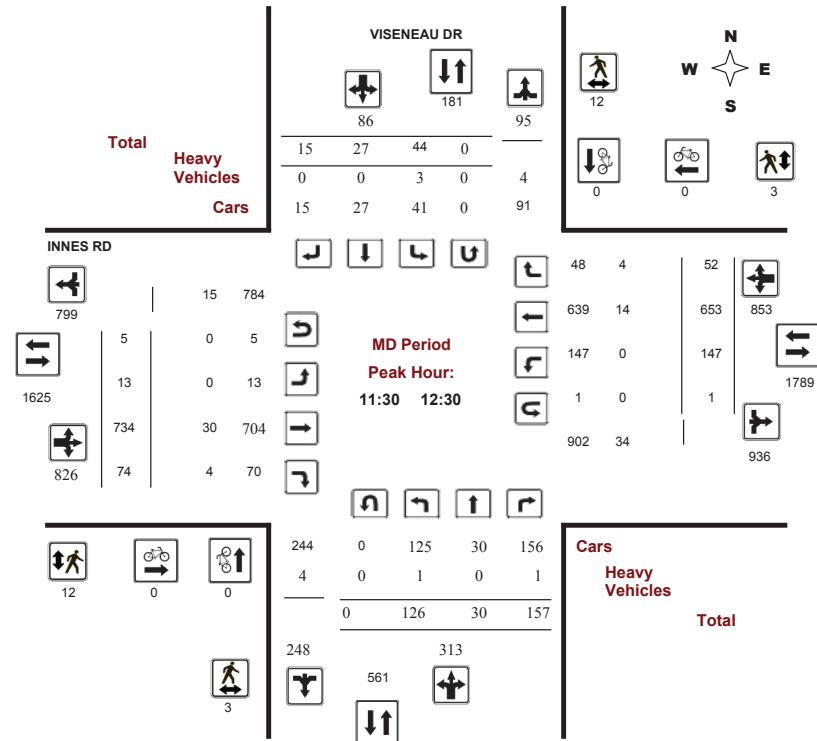

Comments



Transportation Services - Traffic Services

Turning Movement Count - Full Study Peak Hour Diagram


INNES RD @ VISENEAU DR

Survey Date: Wednesday, January 25, 2017

Start Time: 07:00

WO No: 36661

Device: Miovision

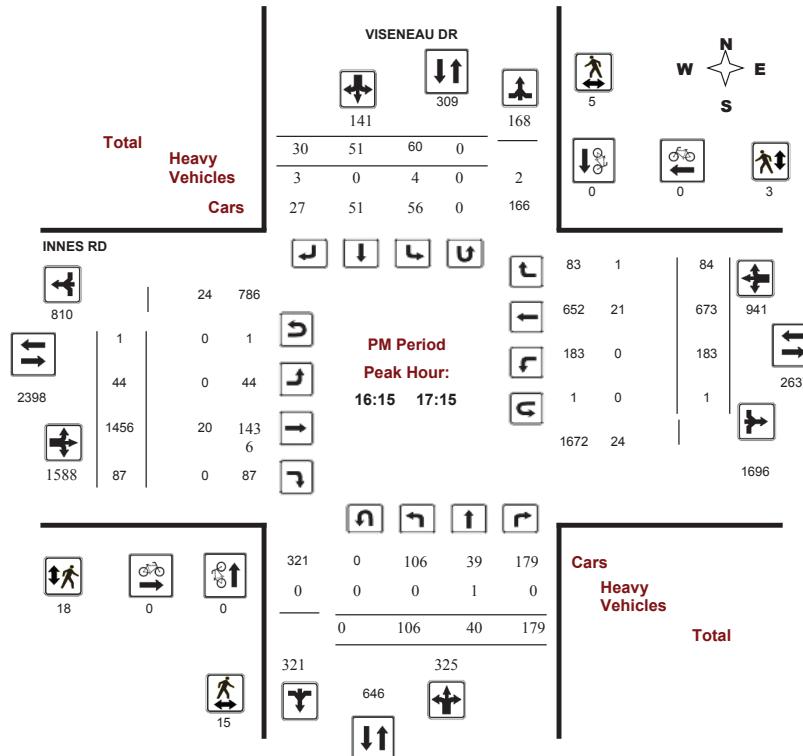

Comments



Transportation Services - Traffic Services

Work Order
36661

Turning Movement Count - 15 Min U-Turn Total Report

INNES RD @ VISENEAU DR

Survey Date: Wednesday, January 25, 2017

Time Period	Northbound U-Turn Total	Southbound U-Turn Total	Eastbound U-Turn Total	Westbound U-Turn Total	Total
07:00 - 07:15	0	0	0	0	0
07:15 - 07:30	0	0	0	0	0
07:30 - 07:45	0	0	0	0	0
07:45 - 08:00	0	0	0	0	0
08:00 - 08:15	0	0	0	0	0
08:15 - 08:30	0	0	0	0	0
08:30 - 08:45	0	0	0	0	0
08:45 - 09:00	0	0	0	0	0
09:00 - 09:15	0	0	0	0	0
09:15 - 09:30	0	0	0	0	0
09:30 - 09:45	0	0	1	0	1
09:45 - 10:00	0	0	0	0	0
11:30 - 11:45	0	0	0	0	0
11:45 - 12:00	0	0	2	0	2
12:00 - 12:15	0	0	2	0	2
12:15 - 12:30	0	0	1	1	2
12:30 - 12:45	0	0	1	0	1
12:45 - 13:00	0	0	1	0	1
13:00 - 13:15	0	0	0	0	0
13:15 - 13:30	0	0	0	0	0
15:00 - 15:15	0	0	1	0	1
15:15 - 15:30	0	0	0	0	0
15:30 - 15:45	0	0	0	0	0
15:45 - 16:00	0	0	1	0	1
16:00 - 16:15	0	0	0	1	1
16:15 - 16:30	0	0	0	0	0
16:30 - 16:45	0	0	0	0	0
16:45 - 17:00	0	0	0	1	1
17:00 - 17:15	0	0	1	0	1
17:15 - 17:30	0	0	1	1	2
17:30 - 17:45	0	0	0	0	0
17:45 - 18:00	0	0	0	0	0
Total	0	0	12	4	16

Appendix C

Synchro Intersection Worksheets – Existing Conditions

Lanes, Volumes, Timings
1: Orleans Blvd & Innes Rd

2022 Existing AM Peak Hour												
Lane Group	EBL	EBT	EBC	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑↓	↑↓	↑↓	↑↓	↑↓	↑↓	↑↓	↑↓	↑↓	↑↓	↑↓	
Traffic Volume (vph)	121	343	23	17	1231	112	215	275	38	62	100	459
Future Volume (vph)	121	343	23	17	1231	112	215	275	38	62	100	459
Satl. Flow (prot)	3216	3316	1483	1658	3316	1483	1658	3316	1483	1658	3316	1483
Flt Permitted	0.950	0.950			0.543			0.565				
Satl. Flow (perm)	3207	3316	1426	1631	3316	1444	941	3316	1396	955	3316	1452
Satl. Flow (RTOR)			143			143			82			150
Lane Group Flow (vph)	134	381	26	19	1368	124	239	306	42	69	111	510
Turn Type	Prot	NA	Perm	Prot	NA	Perm	pm+pt	NA	Perm	Perm	NA	Perm
Protected Phases	5	2		1	6		7	4		4	8	
Permitted Phases			2			6	4		4	8		8
Detector Phase	5	2	2	1	6	6	7	4	4	8	8	8
Switch Phase												
Minimum Initial (s)	5.0	10.0	10.0	5.0	10.0	10.0	5.0	10.0	10.0	10.0	10.0	10.0
Minimum Split (s)	11.6	26.2	26.2	11.2	26.2	26.2	11.7	32.7	32.7	32.7	32.7	32.7
Total Split (s)	13.0	65.0	65.0	13.0	65.0	65.0	19.0	52.0	52.0	33.0	33.0	33.0
Total Split (%)	10.0%	50.0%	50.0%	10.0%	50.0%	50.0%	14.6%	40.0%	40.0%	25.4%	25.4%	25.4%
Yellow Time (s)	3.7	3.7	3.7	3.7	3.7	3.7	3.3	3.3	3.3	3.3	3.3	3.3
All-Red Time (s)	2.9	2.5	2.5	2.5	2.5	2.5	3.4	3.4	3.4	3.4	3.4	3.4
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.6	6.2	6.2	6.2	6.2	6.2	6.7	6.7	6.7	6.7	6.7	6.7
Lead/Lag	Lead	Lag	Lag	Lead	Lag	Lag	Lead		Lag	Lag	Lag	
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	C-Max	C-Max	None	C-Max	C-Max	None	None	None	None	None	None
Act Efft Green (s)	6.4	66.6	66.6	6.4	58.8	58.8	45.3	45.3	45.3	26.3	26.3	26.3
Actuated g/C Ratio	0.05	0.51	0.51	0.05	0.45	0.45	0.35	0.35	0.35	0.20	0.20	0.20
v/c Ratio	0.85	0.22	0.03	0.23	0.91	0.17	0.61	0.26	0.08	0.36	0.17	1.23
Control Delay	101.3	18.9	0.1	66.4	43.6	2.7	40.2	31.2	0.8	50.8	43.6	155.9
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	101.3	18.9	0.1	66.4	43.6	2.7	40.2	31.2	0.8	50.8	43.6	155.9
LOS	F	B	A	E	D	A	D	C	A	D	D	F
Approach Delay		38.4			40.6			32.7		127.3		
Approach LOS		D			D			C		F		
Queue Length 50th (m)	17.8	24.9	0.0	4.8	168.7	0.0	46.4	29.4	0.0	15.3	12.4	~129.4
Queue Length 95th (m)	#36.1	42.1	0.0	13.0	#207.8	7.9	70.1	41.0	1.0	30.2	20.9	#197.0
Internal Link Dist (m)	265.9			463.6			69.4			101.9		
Turn Bay Length (m)	135.5		87.0	106.0		57.0	48.0		43.5	50.0		53.0
Base Capacity (vph)	158	1698	800	86	1499	731	395	1155	539	193	670	413
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.85	0.22	0.03	0.22	0.91	0.17	0.61	0.26	0.08	0.36	0.17	1.23

Intersection Summary

Cycle Length: 130
Actuated Cycle Length: 130
Offset: 99 (76%), Referenced to phase 2:EBT and 6:WBT, Start of Green
Natural Cycle: 125
Control Type: Actuated-Coordinated

Scenario 1 245 and 275 Lamarche Avenue 11:59 pm 03/04/2022 2022 Existing


Synchro 11 Report
Page 1

Lanes, Volumes, Timings
1: Orleans Blvd & Innes Rd

2022 Existing AM Peak Hour												
Lane Group	EBL	EBT	EBC	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR

Maximum v/c Ratio: 1.23
Intersection Signal Delay: 56.8
Intersection LOS: E
ICU Level of Service F
Analysis Period (min) 15
~ Volume exceeds capacity, queue is theoretically infinite.
Queue shown is maximum after two cycles.
95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.

Splits and Phases: 1: Orleans Blvd & Innes Rd



Scenario 1 245 and 275 Lamarche Avenue 11:59 pm 03/04/2022 2022 Existing

Synchro 11 Report
Page 2

Lanes, Volumes, Timings
2: Page Rd & Innes Rd

2022 Existing
AM Peak Hour

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑	↑	↑↑	↑	↑	↑	↑	↑	↑	↑
Traffic Volume (vph)	11	413	21	39	1307	24	14	12	42	36	9	42
Future Volume (vph)	11	413	21	39	1307	24	14	12	42	36	9	42
Satd. Flow (prot)	1658	3287	0	1658	3304	0	0	1572	0	0	1579	0
Flt Permitted	0.141			0.477				0.920			0.853	
Satd. Flow (perm)	246	3287	0	827	3304	0	0	1457	0	0	1375	0
Satd. Flow (RTOR)		8		3			47				38	
Lane Group Flow (vph)	12	482	0	43	1479	0	0	76	0	0	97	0
Turn Type	Perm	NA										
Protected Phases		2			6			4			8	
Permitted Phases		2			6			4			8	
Detector Phase		2			6			4			8	
Switch Phase												
Minimum Initial (s)	10.0	10.0		10.0	10.0		10.0	10.0		10.0	10.0	
Minimum Split (s)	39.2	39.2		39.2	39.2		37.8	37.8		37.8	37.8	
Total Split (s)	82.0	82.0		82.0	82.0		38.0	38.0		38.0	38.0	
Total Split (%)	68.3%	68.3%		68.3%	68.3%		31.7%	31.7%		31.7%	31.7%	
Yellow Time (s)	3.7	3.7		3.7	3.7		3.0	3.0		3.0	3.0	
All-Red Time (s)	2.5	2.5		2.5	2.5		3.8	3.8		3.8	3.8	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0			0.0		
Total Lost Time (s)	6.2	6.2		6.2	6.2		6.8			6.8		
Lead/Lag												
Lead-Lag Optimize?												
Recall Mode	C-Max	C-Max		C-Max	C-Max		None	None		None	None	
Act Efft Green (s)	88.5	88.5		88.5	88.5		18.5			18.5		
Actuated g/C Ratio	0.74	0.74		0.74	0.74		0.15			0.15		
v/c Ratio	0.07	0.20		0.07	0.61		0.29			0.40		
Control Delay	8.6	6.2		5.4	8.0		20.4			30.4		
Queue Delay	0.0	0.0		0.0	0.0		0.0			0.0		
Total Delay	8.6	6.2		5.4	8.0		20.4			30.4		
LOS	A	A		A	A		C			C		
Approach Delay		6.3			7.9		20.4			30.4		
Approach LOS		A			A		C			C		
Queue Length 50th (m)	0.5	10.8		1.6	48.9		6.5			13.5		
Queue Length 95th (m)	3.7	31.3		m2.8	27.3		17.4			25.2		
Internal Link Dist (m)		463.6			206.5		143.5			112.1		
Turn Bay Length (m)	104.5			106.0								
Base Capacity (vph)	181	2425		609	2436		413			385		
Starvation Cap Reductn	0	0		0	0		0			0		
Spillback Cap Reductn	0	0		0	0		0			0		
Storage Cap Reductn	0	0		0	0		0			0		
Reduced v/c Ratio	0.07	0.20		0.07	0.61		0.18			0.25		

Lanes, Volumes, Timings
2: Page Rd & Innes Rd

2022 Existing
AM Peak Hour

Maximum v/c Ratio: 0.61	Intersection Signal Delay: 9.0	Intersection LOS: A
Intersection Capacity Utilization 65.0%		ICU Level of Service C
Analysis Period (min) 15		
m Volume for 95th percentile queue is metered by upstream signal.		
Splits and Phases: 2: Page Rd & Innes Rd		

Lanes, Volumes, Timings
3: 3636 Innes Rd/3615 Innes Rd & Innes Rd

2022 Existing
AM Peak Hour

Lane Group	EBL	EBT	EBC	WBL	WBT	WBC	NBL	NBT	NBC	SBL	SBT	SBC
Lane Configurations												
Traffic Volume (vph)	6	495		7	1	1342	4	0	0	1	1	0
Future Volume (vph)	6	495		7	1	1342	4	0	0	1	1	0
Satd. Flow (prot)	1658	3309	0	1658	3315	0	1745	1464	0	0	1533	0
Flt Permitted	0.161											0.914
Satd. Flow (perm)	281	3309	0	773	3315	0	1745	1464	0	0	1418	0
Satd. Flow (RTOR)		3										28
Lane Group Flow (vph)	7	558	0	1	1495	0	0	1	0	0	4	0
Turn Type	Perm	NA		Perm	NA		Perm	NA		Perm	NA	
Protected Phases		2					6				4	
Permitted Phases		2					6				8	
Detector Phase		2					6				8	
Switch Phase												
Minimum Initial (s)	10.0	10.0		10.0	10.0		10.0	10.0		10.0	10.0	
Minimum Split (s)	32.1	32.1		32.1	32.1		32.3	32.3		32.3	32.3	
Total Split (s)	87.0	87.0		87.0	87.0		33.0	33.0		33.0	33.0	
Total Split (%)	72.5%	72.5%		72.5%	72.5%		27.5%	27.5%		27.5%	27.5%	
Yellow Time (s)	3.7	3.7		3.7	3.7		3.3	3.3		3.3	3.3	
All-Red Time (s)	2.4	2.4		2.4	2.4		3.0	3.0		3.0	3.0	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0		
Total Lost Time (s)	6.1	6.1		6.1	6.1		6.3	6.3		6.3		
Lead/Lag												
Lead-Lag Optimize?												
Recall Mode	C-Max	C-Max		C-Max	C-Max		None	None		None	None	
Act Efect Green (s)	112.3	112.3		112.3	112.3			13.2			13.2	
Actuated g/C Ratio	0.94	0.94		0.94	0.94			0.11			0.11	
v/c Ratio	0.03	0.18		0.00	0.48			0.00			0.02	
Control Delay	3.5	1.9		7.0	5.5			0.0			0.2	
Queue Delay	0.0	0.0		0.0	0.0			0.0			0.0	
Total Delay	3.5	1.9		7.0	5.5			0.0			0.2	
LOS	A	A		A	A			A			A	
Approach Delay		1.9				5.5					0.3	
Approach LOS		A				A					A	
Queue Length 50th (m)	0.0	0.0		0.0	0.0			0.0			0.0	
Queue Length 95th (m)	m1.9	27.4		m0.2	140.4			0.0			0.0	
Internal Link Dist (m)		221.9			561.5			129.3			33.2	
Turn Bay Length (m)	85.0			40.0								
Base Capacity (vph)	263	3097		723	3103			621			337	
Starvation Cap Reductn	0	0		0	0			0			0	
Spillback Cap Reductn	0	0		0	0			0			0	
Storage Cap Reductn	0	0		0	0			0			0	
Reduced v/c Ratio	0.03	0.18		0.00	0.48			0.00			0.01	
Intersection Summary												
Cycle Length: 120												
Actuated Cycle Length: 120												
Offset: 0 (0%), Referenced to phase 2:EBTL and 6:WBTL, Start of Green												
Natural Cycle: 75												
Control Type: Actuated-Coordinated												

Scenario 1 245 and 275 Lamarche Avenue 11:59 pm 03/04/2022 2022 Existing

Synchro 11 Report

Page 5

Lanes, Volumes, Timings
3: 3636 Innes Rd/3615 Innes Rd & Innes Rd

2022 Existing
AM Peak Hour

Maximum v/c Ratio: 0.48	Intersection Signal Delay: 4.5	Intersection LOS: A
	Intersection Capacity Utilization 58.8%	ICU Level of Service B
	Analysis Period (min) 15	
	m Volume for 95th percentile queue is metered by upstream signal.	
Splits and Phases: 3: 3636 Innes Rd/3615 Innes Rd & Innes Rd		

Scenario 1 245 and 275 Lamarche Avenue 11:59 pm 03/04/2022 2022 Existing

Synchro 11 Report

Page 6

Lanes, Volumes, Timings
4: Innes Rd & Viseneau Dr

2022 Existing
AM Peak Hour

Lane Group	EBL	EBT	EBC	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑	↑↑	↑↑	↑	↑	↑	↑	↑	↑	↑
Traffic Volume (vph)	11	437	37	59	1291	33	19	5	39	46	13	41
Future Volume (vph)	11	437	37	59	1291	33	19	5	39	46	13	41
Satl. Flow (prot)	1658	3316	1483	1658	3300	0	1658	1745	1483	0	1602	0
Flt Permitted	0.170			0.437			0.669				0.850	
Satl. Flow (perm)	296	3316	1450	762	3300	0	1166	1745	1462	0	1391	0
Satl. Flow (RTOR)			115		4				105		28	
Lane Group Flow (vph)	12	486	41	66	1471	0	21	6	43	0	111	0
Turn Type	Perm	NA	Perm	pm+pt	NA		Perm	NA	Perm	Perm	NA	
Protected Phases		2		1	6			4		4	8	
Permitted Phases	2		2	6			4		4	4	8	
Detector Phase	2	2	2	1	6		4	4	4	4	8	8
Switch Phase												
Minimum Initial (s)	10.0	10.0	10.0	5.0	10.0		10.0	10.0	10.0	10.0	10.0	
Minimum Split (s)	32.3	32.3	32.3	11.3	32.3		36.3	36.3	36.3	36.3	36.3	
Total Split (s)	66.0	66.0	66.0	12.0	78.0		37.0	37.0	37.0	37.0	37.0	
Total Split (%)	55.0%	55.0%	55.0%	10.0%	65.0%		30.8%	30.8%	30.8%	30.8%	30.8%	
Yellow Time (s)	3.7	3.7	3.7	3.7	3.7		3.0	3.0	3.0	3.0	3.0	
All-Red Time (s)	2.6	2.6	2.6	2.6	2.6		4.3	4.3	4.3	4.3	4.3	
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Total Lost Time (s)	6.3	6.3	6.3	6.3	6.3		7.3	7.3	7.3	7.3	7.3	
Lead/Lag	Lag	Lag	Lag	Lead			Lag	Lag	Lag	Lag	Lag	
Lead-Lag Optimize?	Yes	Yes	Yes	Yes			Yes	Yes	Yes	Yes	Yes	
Recall Mode	C-Max	C-Max	C-Max	None	C-Max		None	None	None	None	None	
Act Effct Green (s)	80.3	80.3	80.3	91.0	91.0		15.4	15.4	15.4		15.4	
Actuated g/C Ratio	0.67	0.67	0.67	0.76	0.76		0.13	0.13	0.13		0.13	
v/c Ratio	0.06	0.22	0.04	0.10	0.59		0.14	0.03	0.15		0.55	
Control Delay	8.1	7.1	0.1	5.3	8.6		44.6	40.6	1.2		45.0	
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0		0.0	
Total Delay	8.1	7.1	0.1	5.3	8.6		44.6	40.6	1.2		45.0	
LOS	A	A	A	A	A		D	D	A		D	
Approach Delay		6.6			8.4			17.6			45.0	
Approach LOS		A			A			B			D	
Queue Length 50th (m)	0.8	19.2	0.0	2.9	59.4		4.6	1.3	0.0		18.9	
Queue Length 95th (m)	1.3	11.7	0.0	10.4	131.6		10.6	4.6	0.0		32.1	
Internal Link Dist (m)	561.5			183.4			77.4			48.4		
Turn Bay Length (m)	47.5		58.5	58.5			48.5		20.0			
Base Capacity (vph)	197	2218	1008	629	2504		288	431	440		365	
Starvation Cap Reductn	0	0	0	0	0		0	0	0		0	
Spillback Cap Reductn	0	0	0	0	0		0	0	0		0	
Storage Cap Reductn	0	0	0	0	0		0	0	0		0	
Reduced v/c Ratio	0.06	0.22	0.04	0.10	0.59		0.07	0.01	0.10		0.30	
Intersection Summary												
Cycle Length: 120												
Actuated Cycle Length: 120												
Offset: 40 (33%), Referenced to phase 2:EBTL and 6:WBTL, Start of Green												
Natural Cycle: 85												
Control Type: Actuated-Coordinated												

Scenario 1 245 and 275 Lamarche Avenue 11:59 pm 03/04/2022 2022 Existing

Synchro 11 Report

Page 7

Lanes, Volumes, Timings
4: Innes Rd & Viseneau Dr

2022 Existing
AM Peak Hour

Lane Group	03	07
Lane Configurations		
Traffic Volume (vph)		
Future Volume (vph)		
Satl. Flow (prot)		
Flt Permitted		
Satl. Flow (perm)		
Satl. Flow (RTOR)		
Lane Group Flow (vph)		
Turn Type		
Protected Phases	3	7
Permitted Phases		
Detector Phase		
Switch Phase		
Minimum Initial (s)	1.0	1.0
Minimum Split (s)	3.0	4.0
Total Split (s)	5.0	5.0
Total Split (%)	4%	4%
Yellow Time (s)	2.0	2.0
All-Red Time (s)	0.0	0.0
Lost Time Adjust (s)		
Total Lost Time (s)		
Lead/Lag	Lead	Lead
Lead-Lag Optimize?	Yes	Yes
Recall Mode	None	None
Act Effct Green (s)		
Actuated g/C Ratio		
v/c Ratio		
Control Delay		
Queue Delay		
Total Delay		
LOS		
Approach Delay		
Approach LOS		
Queue Length 50th (m)		
Queue Length 95th (m)		
Internal Link Dist (m)		
Turn Bay Length (m)		
Base Capacity (vph)		
Starvation Cap Reductn		
Spillback Cap Reductn		
Storage Cap Reductn		
Reduced v/c Ratio		
Intersection Summary		

Scenario 1 245 and 275 Lamarche Avenue 11:59 pm 03/04/2022 2022 Existing

Synchro 11 Report

Page 8

Lanes, Volumes, Timings
4: Innes Rd & Viseneau Dr

Maximum v/c Ratio: 0.59

Intersection Signal Delay: 10.1


Intersection LOS: B

Intersection Capacity Utilization 76.2%

ICU Level of Service D

Analysis Period (min) 15

Splits and Phases: 4: Innes Rd & Viseneau Dr



2022 Existing
AM Peak Hour

HCM 2010 TWSC
5: Lamarche Ave & Innes Rd

2022 Existing
AM Peak Hour

Intersection

Int Delay, s/veh 0.7

Movement	EBT	EBR	WBL	WBT	NBL	NBR
----------	-----	-----	-----	-----	-----	-----

Lane Configurations						
Traffic Vol, veh/h	476	17	12	1336	41	27
Future Vol, veh/h	476	17	12	1336	41	27
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	0	-	0	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	529	19	13	1484	46	30

Major/Minor	Major1	Major2	Minor1
-------------	--------	--------	--------

Conflicting Flow All	0	0	548	0	1307	274
Stage 1	-	-	-	-	539	-
Stage 2	-	-	-	-	768	-
Critical Hdwy	-	-	4.14	-	6.84	6.94
Critical Hdwy Stg 1	-	-	-	-	5.84	-
Critical Hdwy Stg 2	-	-	-	-	5.84	-
Follow-up Hdwy	-	-	2.22	-	3.52	3.32
Pot Cap-1 Maneuver	-	-	1018	-	151	724
Stage 1	-	-	-	-	549	-
Stage 2	-	-	-	-	418	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	-	-	1018	-	149	724
Mov Cap-2 Maneuver	-	-	-	-	281	-
Stage 1	-	-	-	-	549	-
Stage 2	-	-	-	-	413	-

Approach	EB	WB	NB
----------	----	----	----

HCM Control Delay, s	0	0.1	17.2
HCM LOS			C

Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT
-----------------------	-------	-----	-----	-----	-----

Capacity (veh/h)	371	-	-	1018	-
HCM Lane V/C Ratio	0.204	-	-	0.013	-
HCM Control Delay (s)	17.2	-	-	8.6	-
HCM Lane LOS	C	-	-	A	-
HCM 95th %tile Q(veh)	0.8	-	-	0	-

Lanes, Volumes, Timings
1: Orleans Blvd & Innes Rd

2022 Existing PM Peak Hour												
Lane Group	EBL	EBT	EBC	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	579	1391	168	59	568	124	64	225	78	163	256	203
Future Volume (vph)	579	1391	168	59	568	124	64	225	78	163	256	203
Satl. Flow (prot)	3216	3316	1483	1658	3316	1483	1658	3316	1483	1658	3316	1483
Flt Permitted	0.950	0.950			0.457			0.597				
Satl. Flow (perm)	3190	3316	1410	1651	3316	1445	789	3316	1432	1025	3316	1438
Satl. Flow (RTOR)			165		230			159				226
Lane Group Flow (vph)	643	1546	187	66	631	138	71	250	87	181	284	226
Turn Type	Prot	NA	Perm	Prot	NA	Perm	pm+pt	NA	Perm	Perm	NA	Perm
Protected Phases	5	2		1	6		7	4		4	8	8
Permitted Phases			2		6	4		4	8		8	
Detector Phase	5	2	2	1	6	6	7	4	4	8	8	8
Switch Phase												
Minimum Initial (s)	5.0	10.0	10.0	5.0	10.0	10.0	5.0	10.0	10.0	10.0	10.0	10.0
Minimum Split (s)	16.6	26.2	26.2	11.2	26.2	26.2	11.7	32.7	32.7	32.7	32.7	32.7
Total Split (s)	31.0	49.0	49.0	16.0	34.0	34.0	12.0	45.0	45.0	33.0	33.0	33.0
Total Split (%)	28.2%	44.5%	44.5%	14.5%	30.9%	30.9%	10.9%	40.9%	40.9%	30.0%	30.0%	30.0%
Yellow Time (s)	3.7	3.7	3.7	3.7	3.7	3.7	3.3	3.3	3.3	3.3	3.3	3.3
All-Red Time (s)	2.9	2.5	2.5	2.5	2.5	2.5	3.4	3.4	3.4	3.4	3.4	3.4
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.6	6.2	6.2	6.2	6.2	6.2	6.7	6.7	6.7	6.7	6.7	6.7
Lead/Lag	Lead	Lag	Lag	Lead	Lag	Lag	Lead		Lag	Lag	Lag	
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes	Yes	Yes		Yes	Yes	Yes	
Recall Mode	None	C-Max	C-Max	None	C-Max	C-Max	None	Max	Max	Max	Max	Max
Act Efct Green (s)	23.9	46.3	46.3	8.7	28.3	28.3	38.3	38.3	38.3	28.7	28.7	28.7
Actuated g/C Ratio	0.22	0.42	0.42	0.08	0.26	0.26	0.35	0.35	0.35	0.26	0.26	0.26
v/c Ratio	0.92	1.11	0.27	0.51	0.74	0.25	0.22	0.22	0.14	0.68	0.33	0.42
Control Delay	61.7	91.0	5.9	56.0	52.8	11.9	26.5	25.9	0.5	52.3	35.1	7.1
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	61.7	91.0	5.9	56.0	52.8	11.9	26.5	25.9	0.5	52.3	35.1	7.1
LOS	E	F	A	E	D	B	C	C	A	D	D	A
Approach Delay		76.4			46.3			20.6			30.5	
Approach LOS			E		D		C		C			
Queue Length 50th (m)	69.5	-211.9	2.9	13.6	50.9	0.0	10.3	19.7	0.0	36.1	26.7	0.0
Queue Length 95th (m)	#100.9	#254.2	16.8	29.7	94.8	27.3	20.4	29.4	0.0	#69.2	39.1	18.4
Internal Link Dist (m)	265.9			463.6			69.4			101.9		
Turn Bay Length (m)	135.5		87.0	106.0		57.0	48.0		43.5	50.0		53.0
Base Capacity (vph)	713	1397	689	147	852	542	316	1154	602	267	864	541
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.90	1.11	0.27	0.45	0.74	0.25	0.22	0.22	0.14	0.68	0.33	0.42
Intersection Summary												
Cycle Length: 110												
Actuated Cycle Length: 110												
Offset: 0 (0%), Referenced to phase 2:EBT and 6:WBT, Start of Green												
Natural Cycle: 110												
Control Type: Actuated-Coordinated												

Lanes, Volumes, Timings
1: Orleans Blvd & Innes Rd

2022 Existing PM Peak Hour											
-------------------------------	--	--	--	--	--	--	--	--	--	--	--

Maximum v/c Ratio: 1.11

Intersection Signal Delay: 57.9

Intersection LOS: E

ICU Level of Service F

Analysis Period (min) 15


~ Volume exceeds capacity, queue is theoretically infinite.

Queue shown is maximum after two cycles.

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 1: Orleans Blvd & Innes Rd



Scenario 1 245 and 275 Lamarche Avenue 11:59 pm 03/04/2022 2022 Existing

Synchro 11 Report

Page 1

Scenario 1 245 and 275 Lamarche Avenue 11:59 pm 03/04/2022 2022 Existing

Synchro 11 Report

Page 2

Lanes, Volumes, Timings
2: Page Rd & Innes Rd

2022 Existing
PM Peak Hour

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↓	↓	↑	↑↓	↓	↑	↑↓	↓	↑	↑↓	↓
Traffic Volume (vph)	61	1544	30	102	698	69	23	6	84	59	17	34
Future Volume (vph)	61	1544	30	102	698	69	23	6	84	59	17	34
Satl. Flow (prot)	1658	3304	0	1658	3259	0	0	1525	0	0	1620	0
Flt Permitted	0.312							0.919				0.742
Satl. Flow (perm)	542	3304	0	150	3259	0	0	1414	0	0	1227	0
Satl. Flow (RTOR)		3			17			22			20	
Lane Group Flow (vph)	68	1749	0	113	853	0	0	126	0	0	123	0
Turn Type	Perm	NA		Perm	NA		Perm	NA		Perm	NA	
Protected Phases		2			6			4			8	
Permitted Phases	2			6			4			8		
Detector Phase	2	2		6	6		4	4		8	8	
Switch Phase												
Minimum Initial (s)	10.0	10.0		10.0	10.0		10.0	10.0		10.0	10.0	
Minimum Split (s)	39.2	39.2		39.2	39.2		37.8	37.8		37.8	37.8	
Total Split (s)	72.0	72.0		72.0	72.0		38.0	38.0		38.0	38.0	
Total Split (%)	65.5%	65.5%		65.5%	65.5%		34.5%	34.5%		34.5%	34.5%	
Yellow Time (s)	3.7	3.7		3.7	3.7		3.0	3.0		3.0	3.0	
All-Red Time (s)	2.5	2.5		2.5	2.5		3.8	3.8		3.8	3.8	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0			0.0		
Total Lost Time (s)	6.2	6.2		6.2	6.2		6.8			6.8		
Lead/Lag												
Lead-Lag Optimize?												
Recall Mode	C-Max	C-Max		C-Max	C-Max		None	None		None	None	
Act Efect Green (s)	77.5	77.5		77.5	77.5			19.5			19.5	
Actuated g/C Ratio	0.70	0.70		0.70	0.70			0.18			0.18	
v/c Ratio	0.18	0.75		1.08	0.37			0.47			0.53	
Control Delay	2.4	7.3		136.7	12.4			36.6			40.0	
Queue Delay	0.0	0.0		0.0	0.0			0.0			0.0	
Total Delay	2.4	7.3		136.7	12.4			36.6			40.0	
LOS	A	A		F	B			D			D	
Approach Delay				7.1		27.0		36.6			40.0	
Approach LOS				A		C		D			D	
Queue Length 50th (m)	1.4	29.1		20.5	26.4			21.4			21.5	
Queue Length 95th (m)	m1.8	m23.7		#56.7	109.1			33.5			33.7	
Internal Link Dist (m)		463.6			206.5			143.5			112.1	
Turn Bay Length (m)	104.5			106.0								
Base Capacity (vph)	382	2329		105	2301			416			362	
Starvation Cap Reductn	0	0		0	0			0			0	
Spillback Cap Reductn	0	0		0	0			0			0	
Storage Cap Reductn	0	0		0	0			0			0	
Reduced v/c Ratio	0.18	0.75		1.08	0.37			0.30			0.34	
Intersection Summary												
Cycle Length: 110												
Actuated Cycle Length: 110												
Offset: 2 (2%), Referenced to phase 2:EBTL and 6:WBT, Start of Green												
Natural Cycle: 150												
Control Type: Actuated-Coordinated												

Scenario 1 245 and 275 Lamarche Avenue 11:59 pm 03/04/2022 2022 Existing

Synchro 11 Report
Page 3

Lanes, Volumes, Timings
2: Page Rd & Innes Rd

2022 Existing
PM Peak Hour

Maximum v/c Ratio: 1.08	Intersection Signal Delay: 16.0	Intersection LOS: B
	Intersection Capacity Utilization 85.7%	ICU Level of Service E
	Analysis Period (min) 15	
#	95th percentile volume exceeds capacity, queue may be longer.	
m	Volume for 95th percentile queue is metered by upstream signal.	
Splits and Phases:	2: Page Rd & Innes Rd	

Scenario 1 245 and 275 Lamarche Avenue 11:59 pm 03/04/2022 2022 Existing

Synchro 11 Report
Page 4

Lanes, Volumes, Timings
3: 3636 Innes Rd/3615 Innes Rd & Innes Rd

2022 Existing
PM Peak Hour

Lane Group												
Lane Group	EBL	EBT	EBC	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑
Traffic Volume (vph)	8	1654	1	2	862	8	2	0	8	4	0	10
Future Volume (vph)	8	1654	1	2	862	8	2	0	8	4	0	10
Satd. Flow (prot)	1658	3316	0	1658	3312	0	1658	1483	0	0	1534	0
Flt Permitted	0.291			0.100			0.748				0.906	
Satd. Flow (perm)	508	3316	0	175	3312	0	1300	1483	0	0	1408	0
Satd. Flow (RTOR)				2			31				31	
Lane Group Flow (vph)	9	1839	0	2	967	0	2	9	0	0	15	0
Turn Type	Perm	NA										
Protected Phases	2			6			4			4		8
Permitted Phases	2			6			4			8		
Detector Phase	2	2		6	6		4	4		8	8	
Switch Phase												
Minimum Initial (s)	10.0	10.0		10.0	10.0		10.0	10.0		10.0	10.0	
Minimum Split (s)	34.1	34.1		32.1	32.1		32.3	32.3		32.3	32.3	
Total Split (s)	77.0	77.0		77.0	77.0		33.0	33.0		33.0	33.0	
Total Split (%)	70.0%	70.0%		70.0%	70.0%		30.0%	30.0%		30.0%	30.0%	
Yellow Time (s)	3.7	3.7		3.7	3.7		3.3	3.3		3.3	3.3	
All-Red Time (s)	2.4	2.4		2.4	2.4		3.0	3.0		3.0	3.0	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0		
Total Lost Time (s)	6.1	6.1		6.1	6.1		6.3	6.3		6.3		
Lead/Lag												
Lead-Lag Optimize?												
Recall Mode	C-Max	C-Max		C-Max	C-Max		None	None		None	None	
Act Efect Green (s)	97.8	97.8		97.8	97.8		13.2	13.2		13.2		
Actuated g/C Ratio	0.89	0.89		0.89	0.89		0.12	0.12		0.12		
v/c Ratio	0.02	0.62		0.01	0.33		0.01	0.04		0.08		
Control Delay	1.5	3.3		5.0	3.6		38.0	0.4		5.1		
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.0		0.0		
Total Delay	1.5	3.3		5.0	3.6		38.0	0.4		5.1		
LOS	A	A		A	A		D	A		A		
Approach Delay					3.6			7.2		5.1		
Approach LOS					A			A		A		
Queue Length 50th (m)	0.0	0.0		0.0	0.0		0.4	0.0		0.0		
Queue Length 95th (m)	m0.2	162.7		1.0	61.9		2.3	0.3		2.5		
Internal Link Dist (m)	221.9			561.5			129.3			33.2		
Turn Bay Length (m)	85.0			40.0								
Base Capacity (vph)	452	2949		155	2946		315	383		365		
Starvation Cap Reductn	0	0		0	0		0	0		0		
Spillback Cap Reductn	0	0		0	0		0	0		0		
Storage Cap Reductn	0	0		0	0		0	0		0		
Reduced v/c Ratio	0.02	0.62		0.01	0.33		0.01	0.02		0.04		

Lanes, Volumes, Timings
3: 3636 Innes Rd/3615 Innes Rd & Innes Rd

2022 Existing
PM Peak Hour

Maximum v/c Ratio: 0.62	Intersection Signal Delay: 3.4	Intersection LOS: A
Intersection Capacity Utilization 68.2%		ICU Level of Service C
Analysis Period (min) 15		
m Volume for 95th percentile queue is metered by upstream signal.		
Splits and Phases: 3: 3636 Innes Rd/3615 Innes Rd & Innes Rd		
Ø2 (R) 77 s	Ø4 33 s	Ø8 77 s
Ø6 (R) 77 s	33 s	

Lanes, Volumes, Timings
4: Innes Rd & Viseneau Dr

2022 Existing
PM Peak Hour

Lane Group	EBL	EBT	EBC	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑
Traffic Volume (vph)	44	1511	87	183	732	84	106	40	179	60	51	30
Future Volume (vph)	44	1511	87	183	732	84	106	40	179	60	51	30
Satl. Flow (prot)	1658	3316	1483	1658	3255	0	1658	1745	1483	0	1648	0
Flt Permitted	0.315						0.588					0.841
Satl. Flow (perm)	548	3316	1399	89	3255	0	1008	1745	1460	0	1414	0
Satl. Flow (RTOR)			106		18			199			10	
Lane Group Flow (vph)	49	1679	97	203	906	0	118	44	199	0	157	0
Turn Type	Perm	NA	Perm	pm+pt	NA		Perm	NA	Perm	Perm	NA	
Protected Phases		2		1	6			4		4	8	
Permitted Phases	2		2	6			4		4	4	8	
Detector Phase	2	2	2	1	6		4	4	4	4	8	8
Switch Phase												
Minimum Initial (s)	10.0	10.0	10.0	5.0	10.0		10.0	10.0	10.0	10.0	10.0	
Minimum Split (s)	32.3	32.3	32.3	11.3	32.3		36.3	36.3	36.3	36.3	36.3	
Total Split (s)	68.0	68.0	68.0	20.0	88.0		37.0	37.0	37.0	37.0	37.0	
Total Split (%)	52.3%	52.3%	52.3%	15.4%	67.7%		28.5%	28.5%	28.5%	28.5%	28.5%	
Yellow Time (s)	3.7	3.7	3.7	3.7	3.7		3.0	3.0	3.0	3.0	3.0	
All-Red Time (s)	2.6	2.6	2.6	2.6	2.6		4.3	4.3	4.3	4.3	4.3	
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Total Lost Time (s)	6.3	6.3	6.3	6.3	6.3		7.3	7.3	7.3	7.3	7.3	
Lead/Lag	Lag	Lag	Lag	Lead			Lag	Lag	Lag	Lag	Lag	
Lead-Lag Optimize?	Yes	Yes	Yes	Yes			Yes	Yes	Yes	Yes	Yes	
Recall Mode	C-Max	C-Max	C-Max	None	C-Max		None	None	None	None	None	
Act Effct Green (s)	72.5	72.5	72.5	95.4	95.4		21.0	21.0	21.0	21.0	21.0	
Actuated g/C Ratio	0.56	0.56	0.56	0.73	0.73		0.16	0.16	0.16	0.16	0.16	
v/c Ratio	0.16	0.91	0.12	0.77	0.38		0.73	0.16	0.50	0.67		
Control Delay	19.5	35.9	3.2	51.9	7.5		75.1	44.8	9.9	60.3		
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Total Delay	19.5	35.9	3.2	51.9	7.5		75.1	44.8	9.9	60.3		
LOS	B	D	A	D	A		E	D	A	E		
Approach Delay		33.7			15.6			35.5		60.3		
Approach LOS		C		B			D		E			
Queue Length 50th (m)	5.9	195.7	0.0	34.9	37.1		29.4	9.9	0.0	36.3		
Queue Length 95th (m)	15.9	#292.4	8.0	63.1	61.8		47.3	19.3	19.3	55.1		
Internal Link Dist (m)		561.5			183.0			77.4		48.4		
Turn Bay Length (m)	47.5		58.5	58.5			48.5		20.0			
Base Capacity (vph)	305	1849	827	272	2394		230	398	487	330		
Starvation Cap Reductn	0	0	0	0	0		0	0	0	0		
Spillback Cap Reductn	0	0	0	0	0		0	0	0	0		
Storage Cap Reductn	0	0	0	0	0		0	0	0	0		
Reduced v/c Ratio	0.16	0.91	0.12	0.75	0.38		0.51	0.11	0.41	0.48		
Intersection Summary												
Cycle Length: 130												
Actuated Cycle Length: 130												
Offset: 105 (81%), Referenced to phase 2:EBTL and 6:WBTL, Start of Green												
Natural Cycle: 125												
Control Type: Actuated-Coordinated												

Scenario 1 245 and 275 Lamarche Avenue 11:59 pm 03/04/2022 2022 Existing

Synchro 11 Report

Page 7

Lanes, Volumes, Timings
4: Innes Rd & Viseneau Dr

2022 Existing
PM Peak Hour

Lane Group	03	07	
Lane Configurations			
Traffic Volume (vph)			
Future Volume (vph)			
Satl. Flow (prot)			
Flt Permitted			
Satl. Flow (perm)			
Satl. Flow (RTOR)			
Lane Group Flow (vph)			
Turn Type			
Protected Phases	3	7	
Permitted Phases			
Detector Phase			
Switch Phase			
Minimum Initial (s)	1.0	1.0	
Minimum Split (s)	3.0	3.0	
Total Split (s)	5.0	5.0	
Total Split (%)	4%	4%	
Yellow Time (s)	2.0	2.0	
All-Red Time (s)	0.0	0.0	
Lost Time Adjust (s)			
Total Lost Time (s)			
Lead/Lag	Lead	Lead	
Lead-Lag Optimize?	Yes	Yes	
Recall Mode	None	None	
Act Effct Green (s)			
Actuated g/C Ratio			
v/c Ratio			
Control Delay			
Queue Delay			
Total Delay			
LOS			
Approach Delay			
Approach LOS			
Queue Length 50th (m)			
Queue Length 95th (m)			
Internal Link Dist (m)			
Turn Bay Length (m)			
Base Capacity (vph)			
Starvation Cap Reductn			
Spillback Cap Reductn			
Storage Cap Reductn			
Reduced v/c Ratio			
Intersection Summary			

Scenario 1 245 and 275 Lamarche Avenue 11:59 pm 03/04/2022 2022 Existing

Synchro 11 Report

Page 8

Lanes, Volumes, Timings
4: Innes Rd & Viseneau Dr

Maximum v/c Ratio: 0.91

Intersection Signal Delay: 29.3

Intersection LOS: C

Intersection Capacity Utilization 90.7%

ICU Level of Service E

Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 4: Innes Rd & Viseneau Dr



2022 Existing
PM Peak Hour

HCM 2010 TWSC
5: Lamarche Ave & Innes Rd

2022 Existing
PM Peak Hour

Intersection

Int Delay, s/veh 1.2

Movement	EBT	EBR	WBL	WBT	NBL	NBR
----------	-----	-----	-----	-----	-----	-----

Lane Configurations	↑↑		↑↑		↑↑	
---------------------	----	--	----	--	----	--

Traffic Vol, veh/h	1650	42	28	841	28	19
--------------------	------	----	----	-----	----	----

Future Vol, veh/h	1650	42	28	841	28	19
-------------------	------	----	----	-----	----	----

Conflicting Peds, #/hr	0	0	0	0	0	0
------------------------	---	---	---	---	---	---

Sign Control	Free	Free	Free	Free	Stop	Stop
--------------	------	------	------	------	------	------

RT Channelized	-	None	-	None	-	None
----------------	---	------	---	------	---	------

Storage Length	-	-	-	-	0	-
----------------	---	---	---	---	---	---

Veh in Median Storage, #	0	-	-	0	0	-
--------------------------	---	---	---	---	---	---

Grade, %	0	-	-	0	0	-
----------	---	---	---	---	---	---

Peak Hour Factor	90	90	90	90	90	90
------------------	----	----	----	----	----	----

Heavy Vehicles, %	2	2	2	2	2	2
-------------------	---	---	---	---	---	---

Mvmt Flow	1833	47	31	934	31	21
-----------	------	----	----	-----	----	----

Appendix D

Collision Data

Accident Date	Accident Year	Accident Time	Location	Environment Condition	Light	Traffic Control	Traffic Control Condition	Classification Of Accident	Initial Impact Type	Road Surface Condition	# Vehicles	# Motorcycles	# Bicycles	# Pedestrians
9/30/2016	2016	18:25	INNES RD btwn PAGE RD & 473 E OF PAGE RD/BUILDERS' WAREHOUSE SC (I-3ZAYFDA)	01 - Clear	01 - Daylight	10 - No control	0	02 - Non-fatal injury	03 - Rear end	01 - Dry	2	0	0	0
10/19/2016	2016	17:00	INNES RD btwn PAGE RD & 473 E OF PAGE RD/BUILDERS' WAREHOUSE SC (I-3ZAYFDA)	01 - Clear	01 - Daylight	10 - No control	0	02 - Non-fatal injury	02 - Angle	01 - Dry	2	0	0	0
2/17/2016	2016	16:00	INNES RD btwn PAGE RD & 473 E OF PAGE RD/BUILDERS' WAREHOUSE SC (I-3ZAYFDA)	01 - Clear	07 - Dark	10 - No control	0	03 - P.D. only	02 - Angle	01 - Packed snow	2	0	0	0
4/20/2016	2016	16:58	INNES RD btwn PAGE RD & 473 E OF PAGE RD/BUILDERS' WAREHOUSE SC (I-3ZAYFDA)	01 - Clear	01 - Daylight	10 - No control	0	03 - P.D. only	04 - Side swipe	01 - Dry	2	0	0	0
11/14/2016	2017	16:12	INNES RD btwn PAGE RD & 473 E OF PAGE RD/BUILDERS' WAREHOUSE SC (I-3ZAYFDA)	01 - Clear	01 - Daylight	10 - No control	0	03 - P.D. only	03 - Rear end	01 - Dry	2	0	0	0
1/31/2017	2017	16:38	INNES RD btwn PAGE RD & 473 E OF PAGE RD/BUILDERS' WAREHOUSE SC (I-3ZAYFDA)	01 - Clear	01 - Daylight	10 - No control	0	03 - P.D. only	04 - Side swipe	01 - Dry	2	0	0	0
2/1/2017	2017	16:42	INNES RD btwn PAGE RD & 473 E OF PAGE RD/BUILDERS' WAREHOUSE SC (I-3ZAYFDA)	01 - Clear	03 - Downt	10 - No control	0	03 - P.D. only	03 - Rear end	03 - Loose snow	2	0	0	0
6/1/2017	2017	1:16	INNES RD btwn PAGE RD & 473 E OF PAGE RD/BUILDERS' WAREHOUSE SC (I-3ZAYFDA)	01 - Clear	07 - Dark	10 - No control	0	03 - P.D. only	04 - Side swipe	01 - Dry	2	0	0	0
11/22/2018	2018	14:37	INNES RD btwn PAGE RD & 473 E OF PAGE RD/BUILDERS' WAREHOUSE SC (I-3ZAYFDA)	01 - Clear	01 - Daylight	10 - No control	0	03 - P.D. only	02 - Angle	01 - Dry	2	0	0	0
12/31/2018	2018	10:00	INNES RD btwn PAGE RD & 473 E OF PAGE RD/BUILDERS' WAREHOUSE SC (I-3ZAYFDA)	03 - Snow	07 - Dark	10 - No control	0	03 - P.D. only	02 - Angle	01 - Packed snow	2	0	0	0
4/20/2018	2018	18:06	INNES RD btwn PAGE RD & 473 E OF PAGE RD/BUILDERS' WAREHOUSE SC (I-3ZAYFDA)	01 - Clear	01 - Daylight	10 - No control	0	03 - P.D. only	05 - Turn or movement	00 - Dry	2	0	0	0
4/21/2019	2019	19:26	INNES RD btwn PAGE RD & 473 E OF PAGE RD/BUILDERS' WAREHOUSE SC (I-3ZAYFDA)	01 - Clear	01 - Daylight	10 - No control	0	03 - P.D. only	07 - SMV other	01 - Dry	1	0	0	0
7/10/2019	2019	7:15	INNES RD btwn PAGE RD & 473 E OF PAGE RD/BUILDERS' WAREHOUSE SC (I-3ZAYFDA)	01 - Clear	01 - Daylight	10 - No control	0	03 - P.D. only	02 - Angle	01 - Dry	2	0	0	0
1/25/2020	2020	17:00	INNES RD btwn PAGE RD & 473 E OF PAGE RD/BUILDERS' WAREHOUSE SC (I-3ZAYFDA)	03 - Snow	05 - Dusk	10 - No control	0	03 - P.D. only	07 - SMV other	04 - Slush	1	0	0	0
4/20/2020	2020	19:59	INNES RD btwn PAGE RD & 473 E OF PAGE RD/BUILDERS' WAREHOUSE SC (I-3ZAYFDA)	01 - Clear	05 - Dusk	10 - No control	0	03 - P.D. only	03 - Rear end	01 - Dry	2	0	0	0
7/6/2020	2020	7:05	INNES RD btwn PAGE RD & 473 E OF PAGE RD/BUILDERS' WAREHOUSE SC (I-3ZAYFDA)	01 - Clear	01 - Daylight	10 - No control	0	02 - Non-fatal injury	07 - SMV other	01 - Dry	1	1	0	0

Appendix E

City TRANS Forecasts – Background Growth

TRANS Regional Model

Version 2.15 - Assigned June 16, 2020

AM Peak Hour Total Traffic Volume

245 and 275 Lamarche Avenue

2011 Model - Basecase


N/A

User Initials: TIMW
Plot Prepared: Feb, 2022
EMME Scenario: 21713



Legend

AM Peak Hour Total Traffic Volume



Distance (m)




The TRANS model is continuously refined & maintained, and all information is provided in good faith. However, model outputs are provided "as is", and no warranty or guarantee is provided as to the accuracy, reliability, or reasonableness of the results. In using this data, you agree to accept any and all risks arising from any incorrect, incomplete, or misleading information.

Recipients are required to use caution and professional judgement in using and interpreting model outputs. In particular, caution should be used when focusing on a geographically limited area (such as a single road or intersection), as the model is primarily designed to simulate regional-scale phenomena and has been calibrated at a regional level.

As general good practice, it is recommended that the user confirm the network coding within the area of interest, and compare base year forecasts against traffic count data to assess the extent to which the model may be over- or under-estimating the travel demand.

Mq

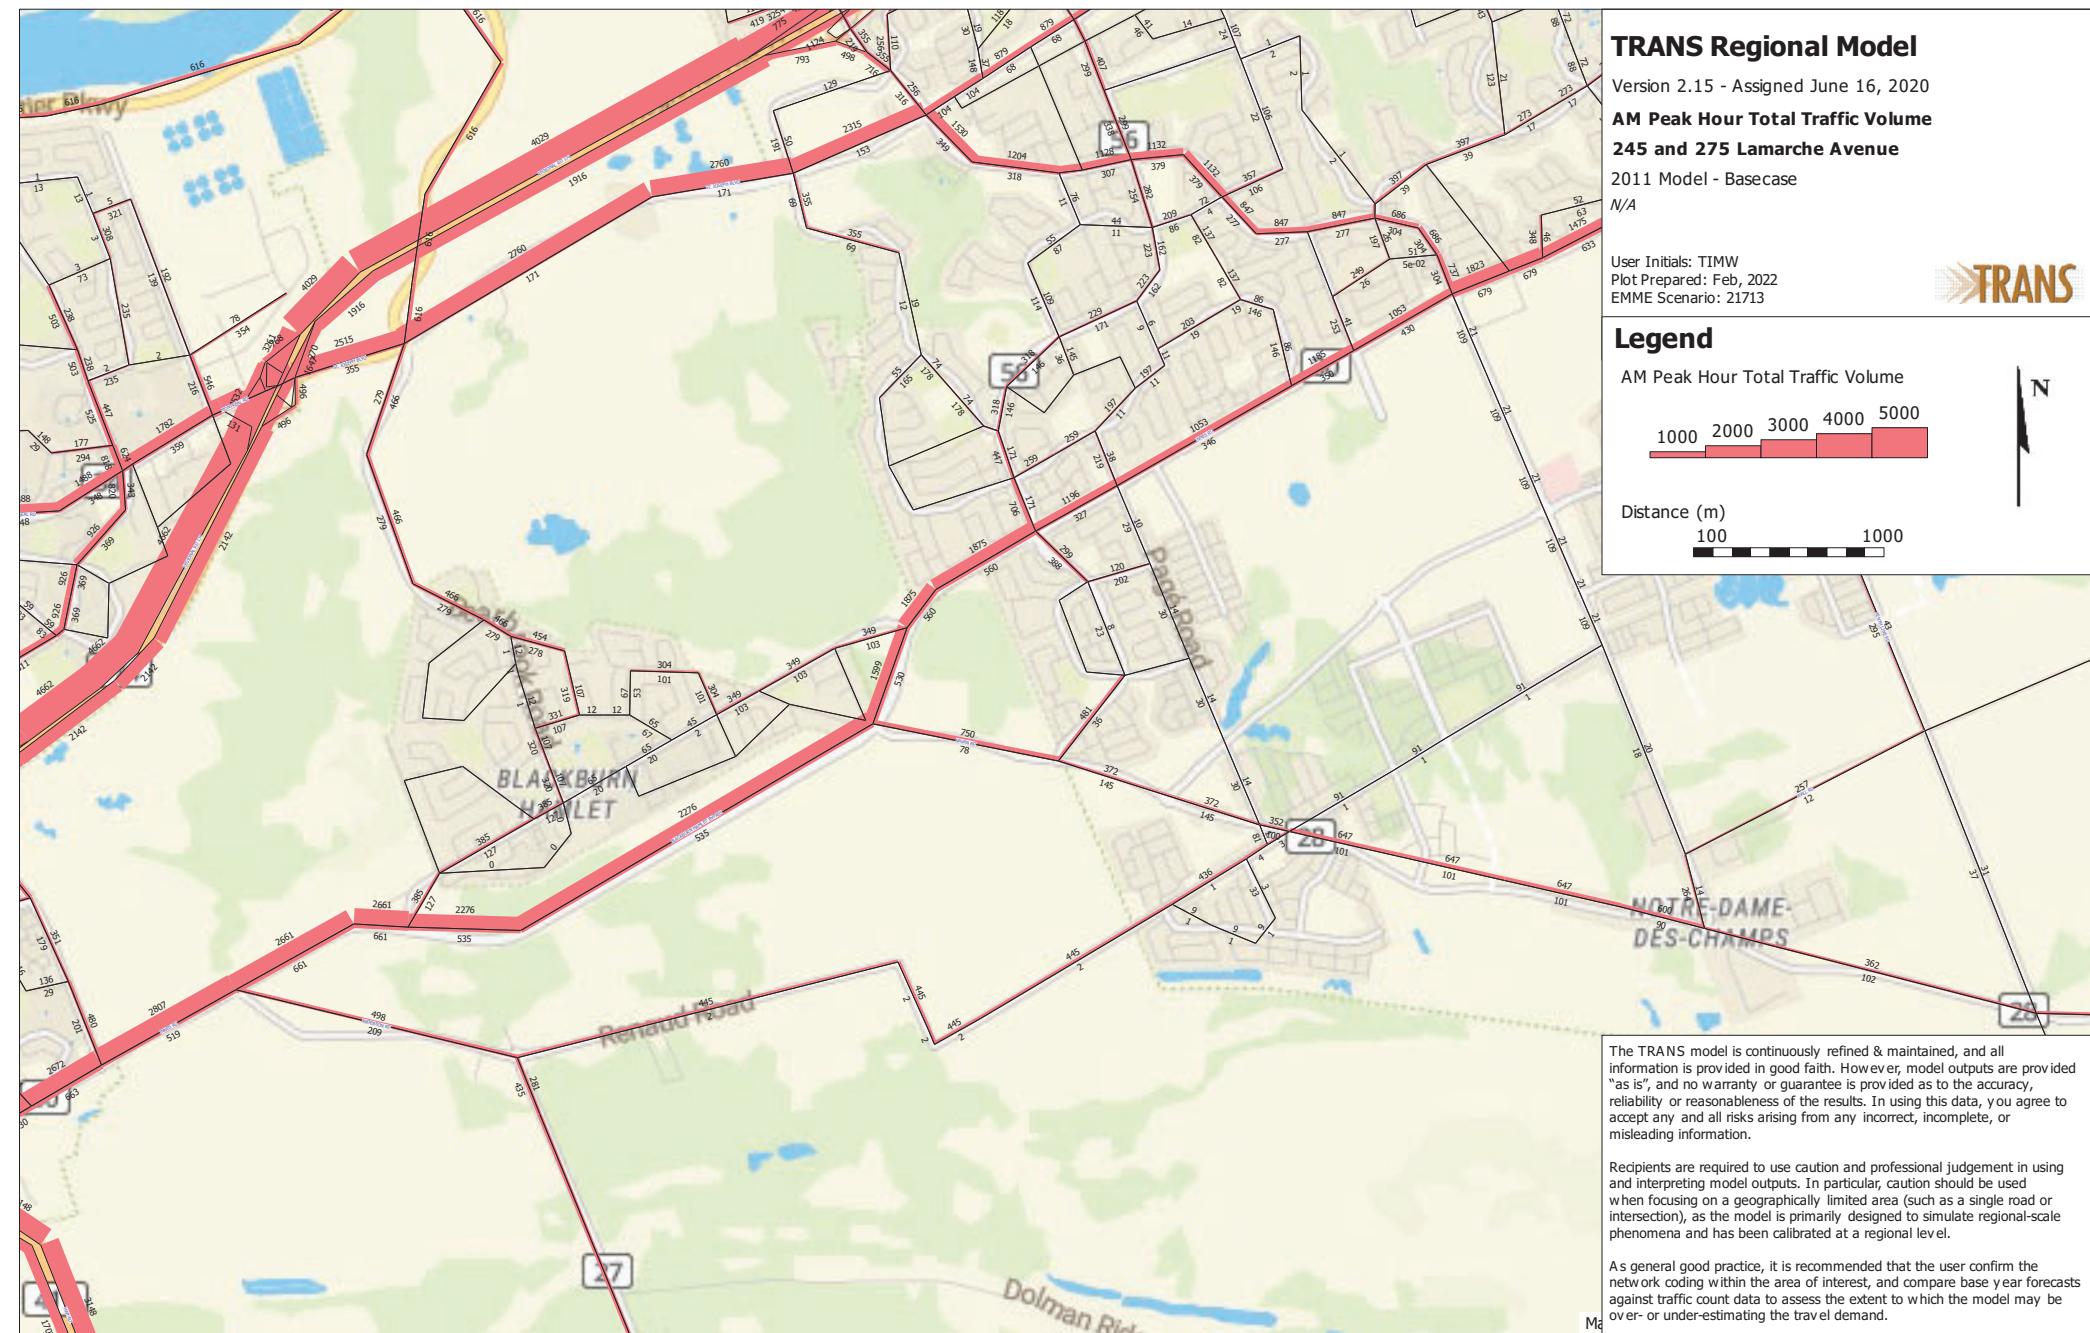

TRANS Regional Model

Version 2.15 - Assigned June 16, 2020

AM Peak Hour Total Traffic Volume

245 and 275 Lamarche Avenue

2031 Model - Basecase


N/A

User Initials: TIMW
Plot Prepared: Feb, 2022
EMME Scenario: 21714



Legend

AM Peak Hour Total Traffic Volume



Distance (m)



The TRANS model is continuously refined & maintained, and all information is provided in good faith. However, model outputs are provided "as is", and no warranty or guarantee is provided as to the accuracy, reliability or reasonableness of the results. In using this data, you agree to accept any and all risks arising from any incorrect, incomplete, or misleading information.


Recipients are required to use caution and professional judgement in using and interpreting model outputs. In particular, caution should be used when focusing on a geographically limited area (such as a single road or intersection), as the model is primarily designed to simulate regional-scale phenomena and has been calibrated at a regional level.

As general good practice, it is recommended that the user confirm the network coding within the area of interest, and compare base year forecasts against traffic count data to assess the extent to which the model may be over- or under-estimating the travel demand.

Appendix F


Background Development Volumes

FIGURE 3.1
PEAK AM AND PM HOUR SITE GENERATED TRIPS

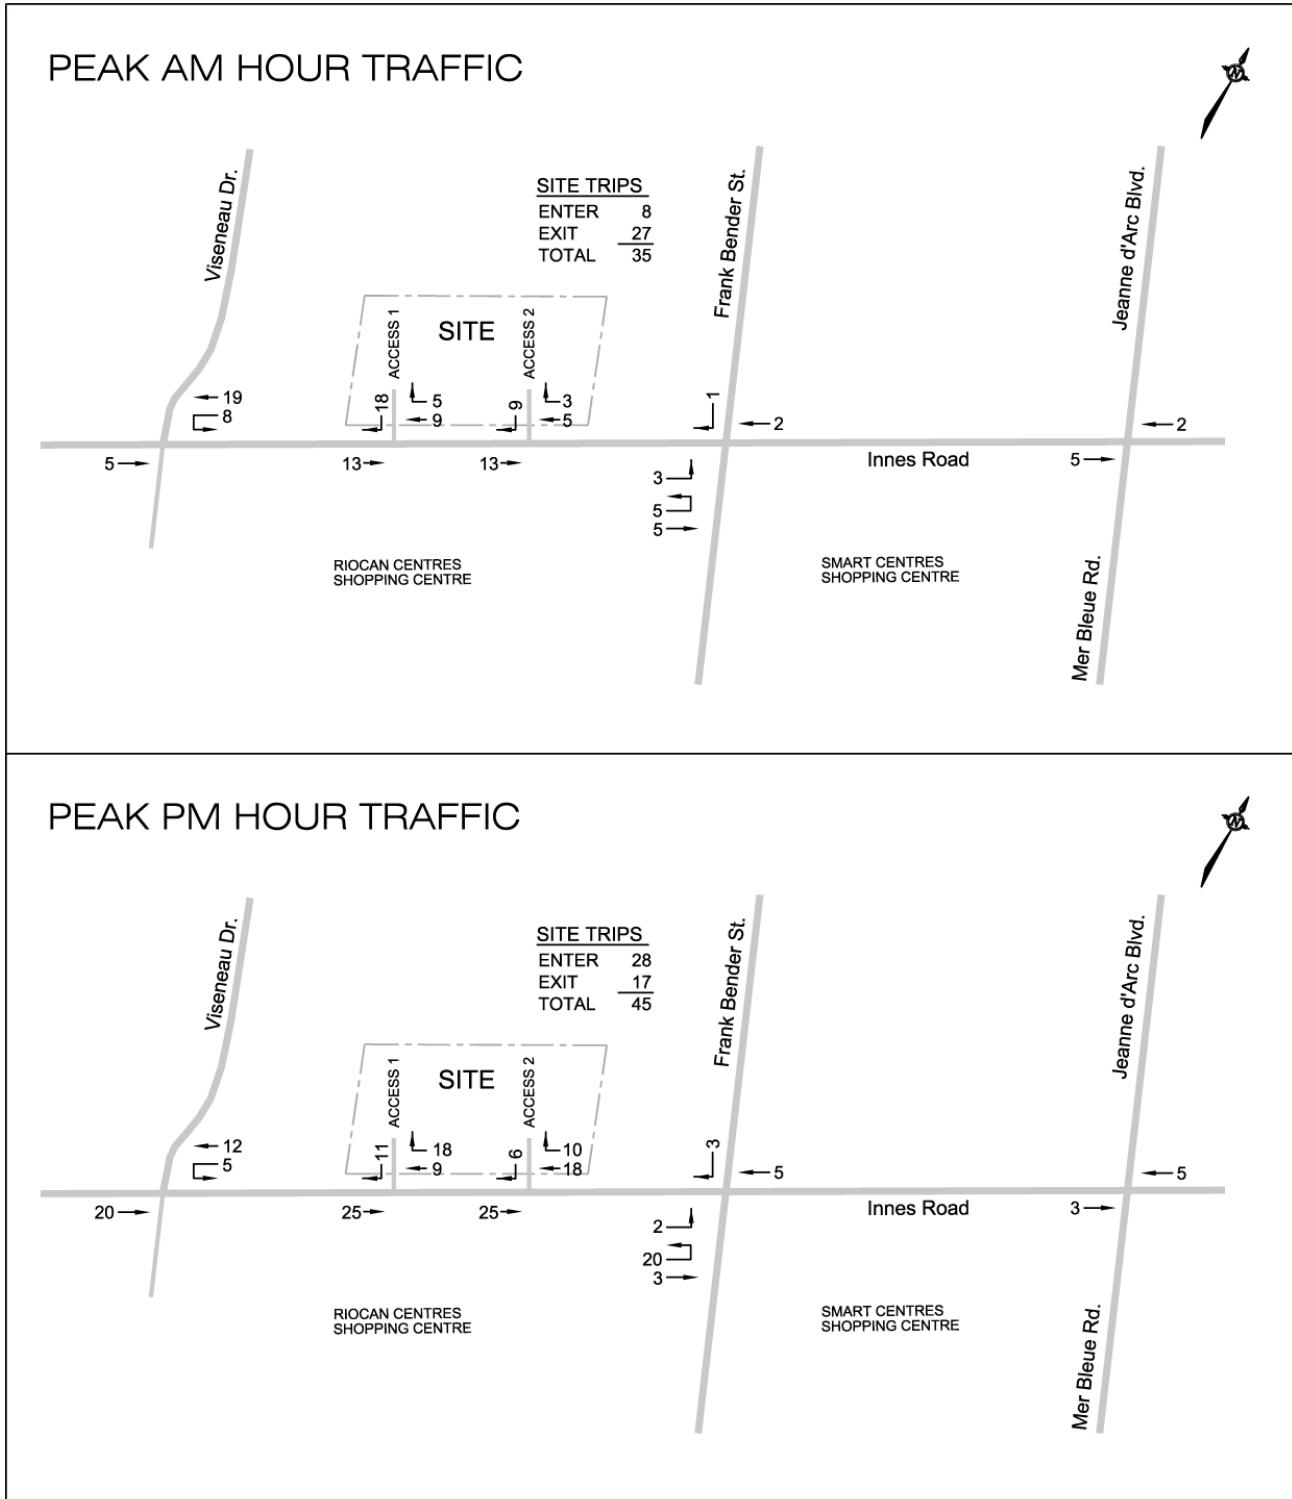

NOT TO SCALE

3490 Innes Road - Phase 1-3 (Phase 1)

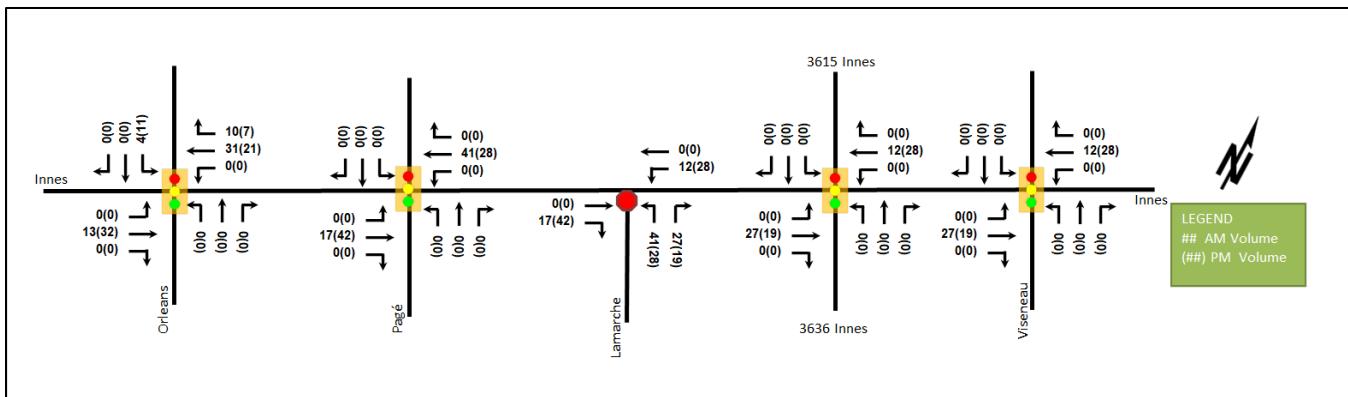

3490 Innes Road - Phase 1-3 (Phase 1+2)

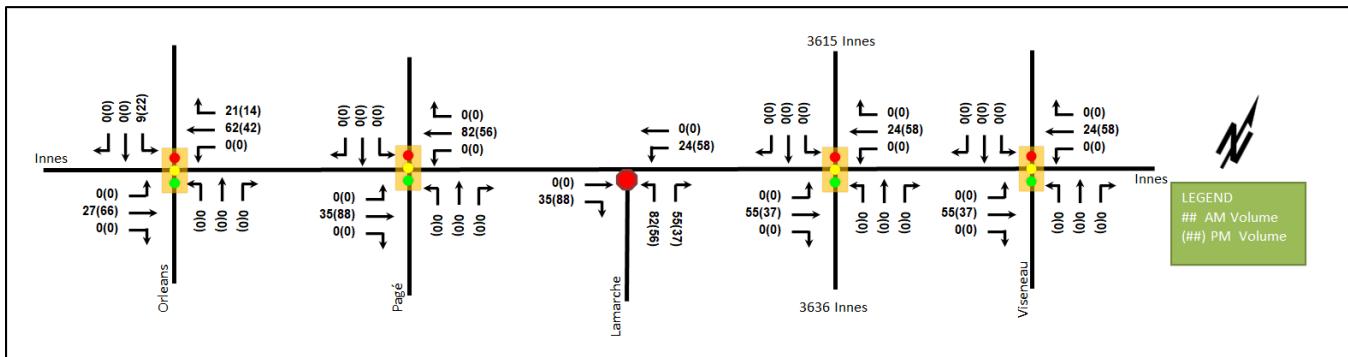


Figure 2: 2024 Background Traffic Volumes

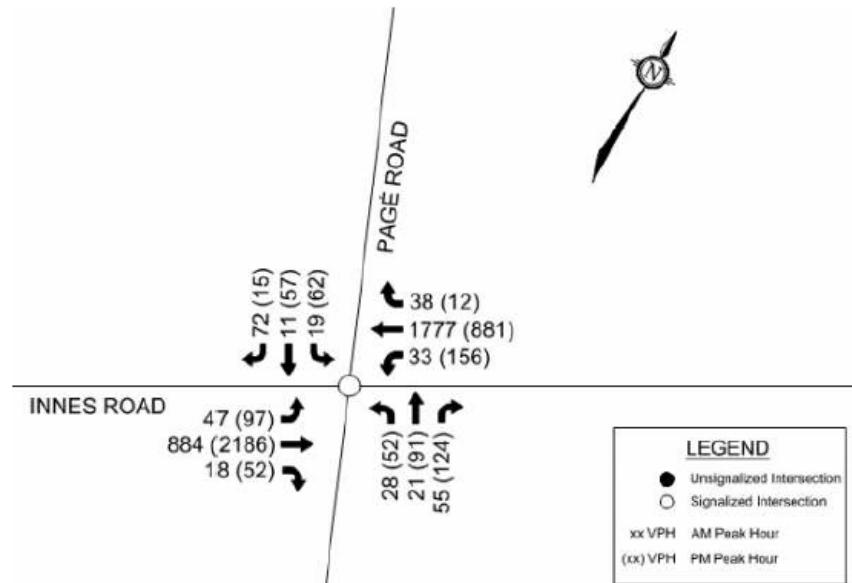


Figure 4: 2024 Total Traffic Volumes

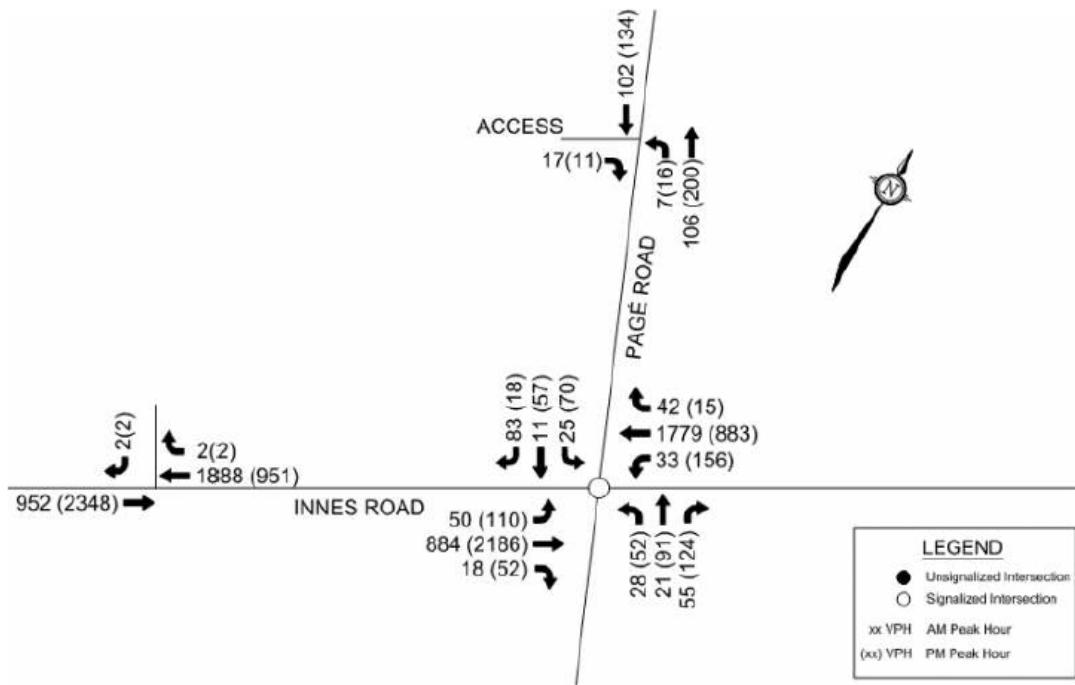
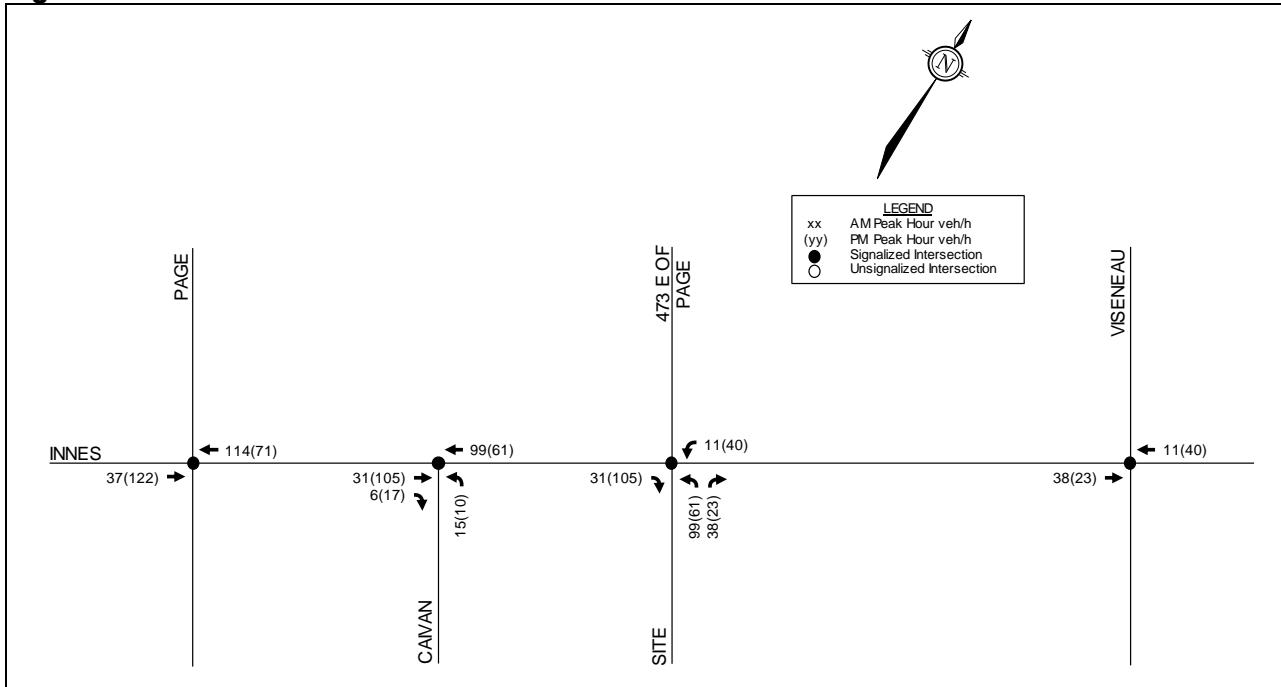


Figure 6: 2023/2028 Site-Generated Traffic

Appendix G

Synchro Intersection Worksheets – 2025 Future Background Conditions

Lanes, Volumes, Timings
1: Orleans Blvd & Innes Rd

2025 Future Background AM Peak Hour												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑↓	↑↓	↑↓	↑↓	↑↓	↑↓	↑↓	↑↓	↑↓	↑↓	↑↓	
Traffic Volume (vph)	121	399	23	17	1413	113	228	292	38	63	100	459
Future Volume (vph)	121	399	23	17	1413	113	228	292	38	63	100	459
Satd. Flow (prot)	3216	3316	1483	1658	3316	1483	1658	3316	1483	1658	3316	1483
Flt Permitted	0.950	0.950			0.549			0.573				
Satd. Flow (perm)	3206	3316	1426	1632	3316	1444	952	3316	1396	968	3316	1452
Satd. Flow (RTOR)			143			143			82			152
Lane Group Flow (vph)	121	399	23	17	1413	113	228	292	38	63	100	459
Turn Type	Prot	NA	Perm	Prot	NA	Perm	pm+pt	NA	Perm	Perm	NA	Perm
Protected Phases	5	2		1	6		7	4		4	8	
Permitted Phases			2			6	4		4	8		8
Detector Phase	5	2	2	1	6	6	7	4	4	8	8	8
Switch Phase												
Minimum Initial (s)	5.0	10.0	10.0	5.0	10.0	10.0	5.0	10.0	10.0	10.0	10.0	10.0
Minimum Split (s)	11.6	26.2	26.2	11.2	26.2	26.2	11.7	32.7	32.7	32.7	32.7	32.7
Total Split (s)	13.0	65.0	65.0	13.0	65.0	65.0	19.0	52.0	52.0	33.0	33.0	33.0
Total Split (%)	10.0%	50.0%	50.0%	10.0%	50.0%	50.0%	14.6%	40.0%	40.0%	25.4%	25.4%	25.4%
Yellow Time (s)	3.7	3.7	3.7	3.7	3.7	3.7	3.3	3.3	3.3	3.3	3.3	3.3
All-Red Time (s)	2.9	2.5	2.5	2.5	2.5	2.5	3.4	3.4	3.4	3.4	3.4	3.4
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.6	6.2	6.2	6.2	6.2	6.2	6.7	6.7	6.7	6.7	6.7	6.7
Lead/Lag	Lead	Lag	Lag	Lead	Lag	Lag	Lead		Lag	Lag	Lag	
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	C-Max	C-Max	None	C-Max	C-Max	None	None	None	None	None	None
Act Efft Green (s)	6.4	66.6	66.6	6.4	58.8	58.8	45.3	45.3	45.3	26.3	26.3	26.3
Actuated g/C Ratio	0.05	0.51	0.05	0.45	0.45	0.45	0.35	0.35	0.35	0.20	0.20	0.20
v/c Ratio	0.77	0.23	0.03	0.21	0.94	0.15	0.57	0.25	0.07	0.32	0.15	1.11
Control Delay	90.3	19.0	0.1	65.5	47.4	1.9	38.9	31.0	0.3	49.7	43.4	108.2
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	90.3	19.0	0.1	65.5	47.4	1.9	38.9	31.0	0.3	49.7	43.4	108.2
LOS	F	B	A	E	D	A	D	C	A	D	D	F
Approach Delay		34.1			44.3			32.1			91.8	
Approach LOS		C			D			C			F	
Queue Length 50th (m)	16.0	26.3	0.0	4.3	178.4	0.0	44.0	28.0	0.0	13.9	11.2	~100.9
Queue Length 95th (m)	#31.4	44.1	0.0	12.2	#228.0	6.0	66.7	39.3	0.0	28.0	19.2	#166.3
Internal Link Dist (m)		265.9			463.6		69.4			101.9		
Turn Bay Length (m)	135.5		87.0	106.0		57.0	48.0		43.5	50.0		53.0
Base Capacity (vph)	158	1698	800	86	1499	731	398	1155	539	195	670	415
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.77	0.23	0.03	0.20	0.94	0.15	0.57	0.25	0.07	0.32	0.15	1.11
Intersection Summary												
Cycle Length: 130												
Actuated Cycle Length: 130												
Offset: 99 (76%), Referenced to phase 2:EBT and 6:WBT, Start of Green												
Natural Cycle: 105												
Control Type: Actuated-Coordinated												

Scenario 1 245 and 275 Lamarche Avenue 11:59 pm 03/04/2022 2025 Future Background

Synchro 11 Report

Page 1

Lanes, Volumes, Timings
1: Orleans Blvd & Innes Rd

2025 Future Background AM Peak Hour

Maximum v/c Ratio: 1.11	Intersection Signal Delay: 49.6	Intersection LOS: D
	Intersection Capacity Utilization 101.5%	ICU Level of Service G
	Analysis Period (min) 15	
	~ Volume exceeds capacity, queue is theoretically infinite.	
	Queue shown is maximum after two cycles.	
	# 95th percentile volume exceeds capacity, queue may be longer.	
	Queue shown is maximum after two cycles.	

Splits and Phases: 1: Orleans Blvd & Innes Rd



Scenario 1 245 and 275 Lamarche Avenue 11:59 pm 03/04/2022 2025 Future Background

Synchro 11 Report

Page 2

Lanes, Volumes, Timings
2: Page Rd & Innes Rd

2025 Future Background
AM Peak Hour

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑	↑↑	↑↑	↑↑	↑	↑	↑	↑	↑	↑
Traffic Volume (vph)	14	468	21	39	1480	28	14	12	42	42	9	53
Future Volume (vph)	14	468	21	39	1480	28	14	12	42	42	9	53
Satd. Flow (prot)	1658	3291	0	1658	3304	0	0	1572	0	0	1572	0
Flt Permitted	0.136							0.923				0.859
Satd. Flow (perm)	237	3291	0	822	3304	0	0	1462	0	0	1378	0
Satd. Flow (RTOR)				7		3		42			42	
Lane Group Flow (vph)	14	489	0	39	1508	0	0	68	0	0	104	0
Turn Type	Perm	NA		Perm	NA		Perm	NA		Perm	NA	
Protected Phases	2			6			4		4		8	
Permitted Phases	2			6			4		4		8	
Detector Phase	2	2		6	6		4	4		8	8	
Switch Phase												
Minimum Initial (s)	10.0	10.0		10.0	10.0		10.0	10.0		10.0	10.0	
Minimum Split (s)	39.2	39.2		39.2	39.2		37.8	37.8		37.8	37.8	
Total Split (s)	82.0	82.0		82.0	82.0		38.0	38.0		38.0	38.0	
Total Split (%)	68.3%	68.3%		68.3%	68.3%		31.7%	31.7%		31.7%	31.7%	
Yellow Time (s)	3.7	3.7		3.7	3.7		3.0	3.0		3.0	3.0	
All-Red Time (s)	2.5	2.5		2.5	2.5		3.8	3.8		3.8	3.8	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0			0.0		
Total Lost Time (s)	6.2	6.2		6.2	6.2		6.8			6.8		
Lead/Lag												
Lead-Lag Optimize?												
Recall Mode	C-Max	C-Max		C-Max	C-Max		None	None		None	None	
Act Efect Green (s)	88.4	88.4		88.4	88.4		18.6			18.6		
Actuated g/C Ratio	0.74	0.74		0.74	0.74		0.16			0.16		
v/c Ratio	0.08	0.20		0.06	0.62		0.26			0.42		
Control Delay	8.9	6.3		5.7	15.3		20.2			30.2		
Queue Delay	0.0	0.0		0.0	0.7		0.0			0.0		
Total Delay	8.9	6.3		5.7	15.9		20.2			30.2		
LOS	A	A		A	B		C			C		
Approach Delay				6.3		15.7		20.3		30.2		
Approach LOS				A		B		C		C		
Queue Length 50th (m)	0.6	11.2		0.4	136.2		5.8			14.2		
Queue Length 95th (m)	4.2	31.7		m5.9	222.8		16.0			26.3		
Internal Link Dist (m)		463.6			206.5		143.5			112.1		
Turn Bay Length (m)	104.5			120.0								
Base Capacity (vph)	174	2426		605	2435		411			389		
Starvation Cap Reductn	0	0		0	516		0			0		
Spillback Cap Reductn	0	0		0	0		0			0		
Storage Cap Reductn	0	0		0	0		0			0		
Reduced v/c Ratio	0.08	0.20		0.06	0.79		0.17			0.27		
Intersection Summary												
Cycle Length: 120												
Actuated Cycle Length: 120												
Offset: 26 (22%), Referenced to phase 2:EBTL and 6:WBTL, Start of Green												
Natural Cycle: 90												
Control Type: Actuated-Coordinated												

Scenario 1 245 and 275 Lamarche Avenue 11:59 pm 03/04/2022 2025 Future Background

Synchro 11 Report

Page 3

Lanes, Volumes, Timings
2: Page Rd & Innes Rd

2025 Future Background
AM Peak Hour

Maximum v/c Ratio: 0.62	Intersection Signal Delay: 14.4	Intersection LOS: B
	Intersection Capacity Utilization 71.4%	ICU Level of Service C
	Analysis Period (min) 15	
	m Volume for 95th percentile queue is metered by upstream signal.	
Splits and Phases: 2: Page Rd & Innes Rd		
Ø2 (R) 82 s	Ø4 38 s	Ø8 82 s 38 s

Scenario 1 245 and 275 Lamarche Avenue 11:59 pm 03/04/2022 2025 Future Background

Synchro 11 Report

Page 4

Lanes, Volumes, Timings
3: 3636 Innes Rd/3615 Innes Rd & Innes Rd

2025 Future Background AM Peak Hour											
Lane Group	EBL	EBT	EBR	WBL	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑	↑	↑↑	↑	↑	↑	↑	↑↑	↑
Traffic Volume (vph)	6	521	38	12	1407	4	99	0	39	1	0
Future Volume (vph)	6	521	38	12	1407	4	99	0	39	1	0
Satd. Flow (prot)	1658	3283	0	1658	3315	0	1658	1464	0	0	1533
Flt Permitted	0.161			0.442		0.755			0.952		
Satd. Flow (perm)	281	3283	0	771	3315	0	1314	1464	0	0	1477
Satd. Flow (RTOR)							402				28
Lane Group Flow (vph)	6	559	0	12	1411	0	99	39	0	0	4
Turn Type	Perm	NA	Perm	NA	Perm	NA	Perm	NA	Perm	NA	
Protected Phases	2			6			4		4		8
Permitted Phases	2			6			4		4		8
Detector Phase	2	2		6	6		4	4	8		8
Switch Phase											
Minimum Initial (s)	10.0	10.0		10.0	10.0		10.0	10.0		10.0	10.0
Minimum Split (s)	32.1	32.1		32.1	32.1		32.3	32.3		32.3	32.3
Total Split (s)	87.0	87.0		87.0	87.0		33.0	33.0		33.0	33.0
Total Split (%)	72.5%	72.5%		72.5%	72.5%		27.5%	27.5%		27.5%	27.5%
Yellow Time (s)	3.7	3.7		3.7	3.7		3.3	3.3		3.3	3.3
All-Red Time (s)	2.4	2.4		2.4	2.4		3.0	3.0		3.0	3.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	
Total Lost Time (s)	6.1	6.1		6.1	6.1		6.3	6.3		6.3	
Lead/Lag											
Lead-Lag Optimize?											
Recall Mode	C-Max	C-Max		C-Max	C-Max		None	None		None	None
Act Efect Green (s)	91.8	91.8		91.8	91.8		15.8	15.8		15.8	
Actuated g/C Ratio	0.76	0.76		0.76	0.76		0.13	0.13		0.13	
v/c Ratio	0.03	0.22		0.02	0.56		0.57	0.07		0.02	
Control Delay	2.0	1.7		7.3	9.1		60.6	0.3		0.2	
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.0		0.0	
Total Delay	2.0	1.7		7.3	9.1		60.6	0.3		0.2	
LOS	A	A		A	A		E	A		A	
Approach Delay		1.7			9.1			43.5		0.3	
Approach LOS		A			A			D		A	
Queue Length 50th (m)	0.1	5.1		0.5	53.2		22.6	0.0		0.0	
Queue Length 95th (m)	0.4	6.7		m2.5	128.5		36.3	0.0		0.0	
Internal Link Dist (m)		221.9			561.5			129.3		33.2	
Turn Bay Length (m)	80.0			40.0							
Base Capacity (vph)	215	2511		590	2536		292	638		350	
Starvation Cap Reductn	0	0		0	0		0	0		0	
Spillback Cap Reductn	0	0		0	0		0	0		0	
Storage Cap Reductn	0	0		0	0		0	0		0	
Reduced v/c Ratio	0.03	0.22		0.02	0.56		0.34	0.06		0.01	
Intersection Summary											
Cycle Length: 120											
Actuated Cycle Length: 120											
Offset: 0 (0%), Referenced to phase 2:EBTL and 6:WBTL, Start of Green											
Natural Cycle: 70											
Control Type: Actuated-Coordinated											

Scenario 1 245 and 275 Lamarche Avenue 11:59 pm 03/04/2022 2025 Future Background

Synchro 11 Report

Page 5

Lanes, Volumes, Timings
3: 3636 Innes Rd/3615 Innes Rd & Innes Rd

2025 Future Background AM Peak Hour

2025 Future Background AM Peak Hour											
Lane Group	EBL	EBT	EBR	WBL	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑	↑	↑↑	↑	↑	↑	↑	↑↑	↑
Traffic Volume (vph)	6	521	38	12	1407	4	99	0	39	1	0
Future Volume (vph)	6	521	38	12	1407	4	99	0	39	1	0
Satd. Flow (prot)	1658	3283	0	1658	3315	0	1658	1464	0	0	1533
Flt Permitted	0.161			0.442		0.755			0.952		
Satd. Flow (perm)	281	3283	0	771	3315	0	1314	1464	0	0	1477
Satd. Flow (RTOR)							402				28
Lane Group Flow (vph)	6	559	0	12	1411	0	99	39	0	0	4
Turn Type	Perm	NA	Perm	NA	Perm	NA	Perm	NA	Perm	NA	
Protected Phases	2			6			4		4		8
Permitted Phases	2			6			4		4		8
Detector Phase	2	2		6	6		4	4	8		8
Switch Phase											
Minimum Initial (s)	10.0	10.0		10.0	10.0		10.0	10.0		10.0	10.0
Minimum Split (s)	32.1	32.1		32.1	32.1		32.3	32.3		32.3	32.3
Total Split (s)	87.0	87.0		87.0	87.0		33.0	33.0		33.0	33.0
Total Split (%)	72.5%	72.5%		72.5%	72.5%		27.5%	27.5%		27.5%	27.5%
Yellow Time (s)	3.7	3.7		3.7	3.7		3.3	3.3		3.3	3.3
All-Red Time (s)	2.4	2.4		2.4	2.4		3.0	3.0		3.0	3.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	
Total Lost Time (s)	6.1	6.1		6.1	6.1		6.3	6.3		6.3	
Lead/Lag											
Lead-Lag Optimize?											
Recall Mode	C-Max	C-Max		C-Max	C-Max		None	None		None	None
Act Efect Green (s)	91.8	91.8		91.8	91.8		15.8	15.8		15.8	
Actuated g/C Ratio	0.76	0.76		0.76	0.76		0.13	0.13		0.13	
v/c Ratio	0.03	0.22		0.02	0.56		0.57	0.07		0.02	
Control Delay	2.0	1.7		7.3	9.1		60.6	0.3		0.2	
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.0		0.0	
Total Delay	2.0	1.7		7.3	9.1		60.6	0.3		0.2	
LOS	A	A		A	A		E	A		A	
Approach Delay		1.7			9.1			43.5		0.3	
Approach LOS		A			A			D		A	
Queue Length 50th (m)	0.1	5.1		0.5	53.2		22.6	0.0		0.0	
Queue Length 95th (m)	0.4	6.7		m2.5	128.5		36.3	0.0		0.0	
Internal Link Dist (m)		221.9			561.5			129.3		33.2	
Turn Bay Length (m)	80.0			40.0							
Base Capacity (vph)	215	2511		590	2536		292	638		350	
Starvation Cap Reductn	0	0		0	0		0	0		0	
Spillback Cap Reductn	0	0		0	0		0	0		0	
Storage Cap Reductn	0	0		0	0		0	0		0	
Reduced v/c Ratio	0.03	0.22		0.02	0.56		0.34	0.06		0.01	
Intersection Summary											
Cycle Length: 120											
Actuated Cycle Length: 120											
Offset: 0 (0%), Referenced to phase 2:EBTL and 6:WBTL, Start of Green											
Natural Cycle: 70											
Control Type: Actuated-Coordinated											

Scenario 1 245 and 275 Lamarche Avenue 11:59 pm 03/04/2022 2025 Future Background

Synchro 11 Report

Page 6

Lanes, Volumes, Timings
4: Innes Rd & Viseneau Dr

2025 Future Background
AM Peak Hour

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑	↑↑	↑↑	↑↑	↑	↑↑	↑↑	↑	↑↑	↑↑
Traffic Volume (vph)	11	499	37	59	1366	33	19	5	39	46	13	41
Future Volume (vph)	11	499	37	59	1366	33	19	5	39	46	13	41
Satl. Flow (prot)	1658	3316	1483	1658	3300	0	1658	1745	1483	0	1604	0
Flt Permitted	0.188			0.431			0.695				0.850	
Satl. Flow (perm)	328	3316	1450	751	3300	0	1212	1745	1462	0	1393	0
Satl. Flow (RTOR)			115		3				105		28	
Lane Group Flow (vph)	11	499	37	59	1399	0	19	5	39	0	100	0
Turn Type	Perm	NA	Perm	pm+pt	NA		Perm	NA	Perm	Perm	NA	
Protected Phases		2		1	6			4		4	8	
Permitted Phases	2		2	6			4		4	4	8	
Detector Phase	2	2	2	1	6		4	4	4	4	8	8
Switch Phase												
Minimum Initial (s)	10.0	10.0	10.0	5.0	10.0		10.0	10.0	10.0	10.0	10.0	
Minimum Split (s)	32.3	32.3	32.3	11.3	32.3		36.3	36.3	36.3	36.3	36.3	
Total Split (s)	66.0	66.0	66.0	12.0	78.0		37.0	37.0	37.0	37.0	37.0	
Total Split (%)	55.0%	55.0%	55.0%	10.0%	65.0%		30.8%	30.8%	30.8%	30.8%	30.8%	
Yellow Time (s)	3.7	3.7	3.7	3.7	3.7		3.0	3.0	3.0	3.0	3.0	
All-Red Time (s)	2.6	2.6	2.6	2.6	2.6		4.3	4.3	4.3	4.3	4.3	
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Total Lost Time (s)	6.3	6.3	6.3	6.3	6.3		7.3	7.3	7.3	7.3	7.3	
Lead/Lag	Lag	Lag	Lag	Lead			Lag	Lag	Lag	Lag	Lag	
Lead-Lag Optimize?	Yes	Yes	Yes	Yes			Yes	Yes	Yes	Yes	Yes	
Recall Mode	C-Max	C-Max	C-Max	None	C-Max		None	None	None	None	None	
Act Effct Green (s)	80.8	80.8	80.8	91.5	91.5		14.9	14.9	14.9		14.9	
Actuated g/C Ratio	0.67	0.67	0.67	0.76	0.76		0.12	0.12	0.12		0.12	
v/c Ratio	0.05	0.22	0.04	0.09	0.56		0.13	0.02	0.14		0.51	
Control Delay	6.2	4.9	0.1	5.2	8.0		44.5	40.6	1.1		42.3	
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0		0.0	
Total Delay	6.2	4.9	0.1	5.2	8.0		44.5	40.6	1.1		42.3	
LOS	A	A	A	A	A		D	D	A		D	
Approach Delay		4.6			7.8			17.3			42.3	
Approach LOS		A			A			B			D	
Queue Length 50th (m)	0.4	8.7	0.0	2.5	51.7		4.2	1.1	0.0		16.4	
Queue Length 95th (m)	1.4	16.5	0.1	9.6	120.5		9.8	4.2	0.0		28.9	
Internal Link Dist (m)		561.5			188.9			77.4			48.4	
Turn Bay Length (m)	47.5		58.5	58.5			48.5		20.0			
Base Capacity (vph)	220	2233	1014	623	2515		299	431	440		365	
Starvation Cap Reductn	0	0	0	0	0		0	0	0		0	
Spillback Cap Reductn	0	0	0	0	0		0	0	0		0	
Storage Cap Reductn	0	0	0	0	0		0	0	0		0	
Reduced v/c Ratio	0.05	0.22	0.04	0.09	0.56		0.06	0.01	0.09		0.27	
Intersection Summary												
Cycle Length: 120												
Actuated Cycle Length: 120												
Offset: 40 (33%), Referenced to phase 2:EBTL and 6:WBTL, Start of Green												
Natural Cycle: 85												
Control Type: Actuated-Coordinated												

Scenario 1 245 and 275 Lamarche Avenue 11:59 pm 03/04/2022 2025 Future Background

Synchro 11 Report

Page 7

Lanes, Volumes, Timings
4: Innes Rd & Viseneau Dr

2025 Future Background
AM Peak Hour

Lane Group	03	07
Lane Configurations		
Traffic Volume (vph)		
Future Volume (vph)		
Satl. Flow (prot)		
Flt Permitted		
Satl. Flow (perm)		
Satl. Flow (RTOR)		
Lane Group Flow (vph)		
Turn Type		
Protected Phases	3	7
Permitted Phases		
Detector Phase		
Switch Phase		
Minimum Initial (s)	1.0	1.0
Minimum Split (s)	3.0	4.0
Total Split (s)	5.0	5.0
Total Split (%)	4%	4%
Yellow Time (s)	2.0	2.0
All-Red Time (s)	0.0	0.0
Lost Time Adjust (s)		
Total Lost Time (s)		
Lead/Lag	Lead	Lead
Lead-Lag Optimize?	Yes	Yes
Recall Mode	None	None
Act Effct Green (s)		
Actuated g/C Ratio		
v/c Ratio		
Control Delay		
Queue Delay		
Total Delay		
LOS		
Approach Delay		
Approach LOS		
Queue Length 50th (m)		
Queue Length 95th (m)		
Internal Link Dist (m)		
Turn Bay Length (m)		
Base Capacity (vph)		
Starvation Cap Reductn		
Spillback Cap Reductn		
Storage Cap Reductn		
Reduced v/c Ratio		
Intersection Summary		

Scenario 1 245 and 275 Lamarche Avenue 11:59 pm 03/04/2022 2025 Future Background

Synchro 11 Report

Page 8

Lanes, Volumes, Timings
4: Innes Rd & Viseneau Dr


Maximum v/c Ratio: 0.56

Intersection Signal Delay: 8.9

Intersection LOS: A
ICU Level of Service D

Analysis Period (min) 15

Splits and Phases: 4: Innes Rd & Viseneau Dr



2025 Future Background
AM Peak Hour

Lanes, Volumes, Timings
5: Lamarche Ave & Innes Rd

2025 Future Background
AM Peak Hour

Lane Group	EBT	EBR	WBL	WBT	NBL	NBR	Ø8
Lane Configurations	↑↑	↑↑	↑↑	↑↑	↑↑	↑↑	↑↑
Traffic Volume (vph)	532	24	12	1500	56	28	
Future Volume (vph)	532	24	12	1500	56	28	
Satd. Flow (prot)	3316	1483	1658	3316	1658	1483	
Flt Permitted			0.950		0.950		
Satd. Flow (perm)	3316	1483	1658	3316	1658	1483	
Satd. Flow (RTOR)							
Lane Group Flow (vph)	532	24	12	1500	56	28	
Turn Type	NA	Perm	Prot	NA	Prot	Perm	
Protected Phases	2		1	6	7	8	
Permitted Phases						4	
Detector Phase	2	2	1	6	7	4	
Switch Phase							
Minimum Initial (s)	10.0	10.0	5.0	10.0	5.0	5.0	1.0
Minimum Split (s)	24.0	24.0	11.7	24.0	11.3	30.5	4.0
Total Split (s)	75.0	75.0	13.0	88.0	16.2	32.0	15.8
Total Split (%)	62.5%	62.5%	10.8%	73.3%	13.5%	26.7%	13%
Yellow Time (s)	3.7	3.7	3.7	3.7	3.3	3.5	2.0
All-Red Time (s)	2.3	2.3	3.0	2.3	3.0	3.0	1.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	
Total Lost Time (s)	6.0	6.0	6.7	6.0	6.3	6.5	
Lead/Lag	Lag	Lag	Lead		Lag	Lead	
Lead-Lag Optimize?	Yes	Yes	Yes		Yes	Yes	
Recall Mode	C-Max	C-Max	None	C-Max	None	None	Max
Act Effct Green (s)	80.5	80.5	6.0	85.7	8.6	21.8	
Actuated g/C Ratio	0.67	0.67	0.05	0.71	0.07	0.18	
v/c Ratio	0.24	0.02	0.14	0.63	0.47	0.10	
Control Delay	8.5	8.9	60.2	10.7	66.6	39.4	
Queue Delay	0.0	0.0	0.0	0.2	0.0	0.0	
Total Delay	8.5	8.9	60.2	10.8	66.6	39.4	
LOS	A	A	E	B	E	D	
Approach Delay	8.5			11.2	57.5		
Approach LOS	A			B	E		
Queue Length 50th (m)	20.3	1.5	2.8	62.2	12.8	5.4	
Queue Length 95th (m)	32.2	5.4	m5.3	92.0	26.1	13.3	
Internal Link Dist (m)	206.5			221.9	310.2		
Turn Bay Length (m)		40.0	80.0		80.0		
Base Capacity (vph)	2225	995	87	2369	136	315	
Starvation Cap Reductn	0	0	0	6	0	0	
Spillback Cap Reductn	0	0	0	211	0	0	
Storage Cap Reductn	0	0	0	0	0	0	
Reduced v/c Ratio	0.24	0.02	0.14	0.70	0.41	0.09	
Intersection Summary							
Cycle Length: 120							
Actuated Cycle Length: 120							
Offset: 0 (0%), Referenced to phase 2:EBT and 6:WBT, Start of Green							
Natural Cycle: 70							
Control Type: Actuated-Coordinated							

Lanes, Volumes, Timings
5: Lamarche Ave & Innes Rd

Maximum v/c Ratio: 0.63

Intersection Signal Delay: 12.3

Intersection LOS: B


Intersection Capacity Utilization 58.2%

ICU Level of Service B

Analysis Period (min) 15

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 5: Lamarche Ave & Innes Rd



2025 Future Background
AM Peak Hour

Lanes, Volumes, Timings
1: Orleans Blvd & Innes Rd

2025 Future Background
PM Peak Hour

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑↓	↑↓	↑↓	↑↓	↑↓	↑↓	↑↓	↑↓	↑↓	↑↓	↑↓	↑↓
Traffic Volume (vph)	579	1589	178	59	673	124	64	225	78	163	272	203
Future Volume (vph)	579	1589	178	59	673	124	64	225	78	163	272	203
Satd. Flow (prot)	3216	3316	1483	1658	3316	1483	1658	3316	1483	1658	3316	1483
Flt Permitted	0.950			0.950			0.468			0.611		
Satd. Flow (perm)	3190	3316	1410	1651	3316	1445	808	3316	1432	1048	3316	1438
Satd. Flow (RTOR)			165			230			159		225	
Lane Group Flow (vph)	579	1589	178	59	673	124	64	225	78	163	272	203
Turn Type	Prot	NA	Perm	Prot	NA	Perm	pm-pt	NA	Perm	Perm	NA	Perm
Protected Phases	5	2		1	6		7	4		8		
Permitted Phases				2		6	4		4	8		8
Detector Phase	5	2	2	1	6	6	7	4	4	8	8	8
Switch Phase												
Minimum Initial (s)	5.0	10.0	10.0	5.0	10.0	10.0	5.0	10.0	10.0	10.0	10.0	10.0
Minimum Split (s)	16.6	26.2	26.2	11.2	26.2	26.2	11.7	32.7	32.7	32.7	32.7	32.7
Total Split (s)	31.0	49.0	49.0	16.0	34.0	34.0	12.0	45.0	45.0	33.0	33.0	33.0
Total Split (%)	28.2%	44.5%	44.5%	14.5%	30.9%	30.9%	10.9%	40.9%	40.9%	30.0%	30.0%	30.0%
Yellow Time (s)	3.7	3.7	3.7	3.7	3.7	3.7	3.3	3.3	3.3	3.3	3.3	3.3
All-Red Time (s)	2.9	2.5	2.5	2.5	2.5	2.5	3.4	3.4	3.4	3.4	3.4	3.4
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.6	6.2	6.2	6.2	6.2	6.2	6.7	6.7	6.7	6.7	6.7	6.7
Lead/Lag	Lead	Lag	Lag	Lead	Lag	Lag	Lead			Lag	Lag	Lag
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	C-Max	C-Max	None	C-Max	C-Max	None	Max	Max	Max	Max	Max
Act Effct Green (s)	23.0	46.5	46.5	8.5	29.2	29.2	38.3	38.3	38.3	38.3	28.7	28.7
Actuated g/C Ratio	0.21	0.42	0.42	0.08	0.27	0.27	0.35	0.35	0.35	0.35	0.26	0.26
v/c Ratio	0.86	1.13	0.26	0.46	0.77	0.22	0.20	0.19	0.13	0.60	0.31	0.38
Control Delay	55.6	101.2	5.3	51.9	58.0	11.2	26.1	25.7	0.4	47.6	35.0	5.4
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	55.6	101.2	5.3	51.9	58.0	11.2	26.1	25.7	0.4	47.6	35.0	5.4
LOS	E	F	A	D	E	B	C	C	A	D	C	A
Approach Delay		82.7				50.8			20.4			28.8
Approach LOS		F				D			C			C
Queue Length 50th (m)	61.1	~220.6	1.7	10.2	79.2	3.3	9.2	17.6	0.0	31.7	25.5	0.0
Queue Length 95th (m)	#82.8	#264.6	15.3	27.4	100.6	23.3	18.8	26.6	0.0	#56.6	37.4	13.5
Internal Link Dist (m)		265.9				463.6			69.4			101.9
Turn Bay Length (m)	135.5		87.0	106.0		57.0	48.0		43.5	50.0		53.0
Base Capacity (vph)	713	1401	691	147	879	552	322	1154	602	273	864	541
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.81	1.13	0.26	0.40	0.77	0.22	0.20	0.19	0.13	0.60	0.31	0.38

Intersection Summary

Cycle Length: 110

Actuated Cycle Length: 110

Offset: 0 (0%), Referenced to phase 2:EBT and 6:WBT, Start of Green

Natural Cycle: 120

Control Type: Actuated-Coordinated

Lanes, Volumes, Timings
1: Orleans Blvd & Innes Rd

Maximum v/c Ratio: 1.13

Intersection Signal Delay: 62.6

Intersection Capacity Utilization 103.2%

Analysis Period (min) 15


~ Volume exceeds capacity, queue is theoretically infinite.

Queue shown is maximum after two cycles.

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 1: Orleans Blvd & Innes Rd



2025 Future Background
PM Peak Hour

Lanes, Volumes, Timings
2: Page Rd & Innes Rd

2025 Future Background
PM Peak Hour

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑	↑↑	↑↑	↑↑	↑	↑	↑	↑	↑	↑
Traffic Volume (vph)	74	1736	30	102	803	72	23	6	84	67	17	37
Future Volume (vph)	74	1736	30	102	803	72	23	6	84	67	17	37
Satd. Flow (prot)	1658	3304	0	1658	3267	0	0	1524	0	0	1620	0
Flt Permitted	0.304			0.084				0.923			0.762	
Satd. Flow (perm)	528	3304	0	147	3267	0	0	1420	0	0	1261	0
Satd. Flow (RTOR)		3			15			21			20	
Lane Group Flow (vph)	74	1766	0	102	875	0	0	113	0	0	121	0
Turn Type	Perm	NA		Perm	NA		Perm	NA		Perm	NA	
Protected Phases		2			6		6		4		8	
Permitted Phases	2				6		6		4		8	
Detector Phase	2	2		6	6		4	4		8	8	
Switch Phase												
Minimum Initial (s)	10.0	10.0		10.0	10.0		10.0	10.0		10.0	10.0	
Minimum Split (s)	39.2	39.2		39.2	39.2		37.8	37.8		37.8	37.8	
Total Split (s)	72.0	72.0		72.0	72.0		38.0	38.0		38.0	38.0	
Total Split (%)	65.5%	65.5%		65.5%	65.5%		34.5%	34.5%		34.5%	34.5%	
Yellow Time (s)	3.7	3.7		3.7	3.7		3.0	3.0		3.0	3.0	
All-Red Time (s)	2.5	2.5		2.5	2.5		3.8	3.8		3.8	3.8	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Total Lost Time (s)	6.2	6.2		6.2	6.2		6.8	6.8		6.8	6.8	
Lead/Lag												
Lead-Lag Optimize?												
Recall Mode	C-Max	C-Max		C-Max	C-Max		None	None		None	None	
Act Effct Green (s)	77.6	77.6		77.6	77.6		19.4					19.4
Actuated g/C Ratio	0.71	0.71		0.71	0.71		0.18					0.18
v/c Ratio	0.20	0.76		0.99	0.38		0.42					0.51
Control Delay	2.3	7.8		107.0	3.3		34.8					39.0
Queue Delay	0.0	0.6		0.0	0.0		0.0					0.0
Total Delay	2.3	8.5		107.0	3.3		34.8					39.0
LOS	A	A		F	A		C					D
Approach Delay				8.2			14.1					39.0
Approach LOS				A			B					D
Queue Length 50th (m)	1.5	32.2		9.3	0.0		18.7					21.0
Queue Length 95th (m)	m1.8	m21.0		#58.0	0.0		30.2					33.3
Internal Link Dist (m)		463.6				206.5			143.5			112.1
Turn Bay Length (m)	104.5			120.0								
Base Capacity (vph)	372	2331		103	2309		417					371
Starvation Cap Reductn	0	0		0	0		0					0
Spillback Cap Reductn	0	233		0	0		0					0
Storage Cap Reductn	0	0		0	0		0					0
Reduced v/c Ratio	0.20	0.84		0.99	0.38		0.27					0.33

Intersection Summary

Cycle Length: 110

Actuated Cycle Length: 110

Offset: 2 (2%), Referenced to phase 2:EBTL and 6:WBTL, Start of Green


Natural Cycle: 150

Control Type: Actuated-Coordinated

Lanes, Volumes, Timings
2: Page Rd & Innes Rd

Maximum v/c Ratio: 0.99
Intersection Signal Delay: 12.3 Intersection LOS: B
Intersection Capacity Utilization 91.9% ICU Level of Service F
Analysis Period (min) 15
95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.
m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 2: Page Rd & Innes Rd



2025 Future Background
PM Peak Hour

Lanes, Volumes, Timings
3: 3636 Innes Rd/3615 Innes Rd & Innes Rd


2025 Future Background
PM Peak Hour

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑	↑↑	↑↑	↑↑	↑	↑↑	↑	↑↑	↑↑	↑↑
Traffic Volume (vph)	8	1731	106	42	906	8	63	0	31	4	0	10
Future Volume (vph)	8	1731	106	42	906	8	63	0	31	4	0	10
Satd. Flow (prot)	1658	3281	0	1658	3312	0	1658	1483	0	0	1538	0
Flt Permitted	0.302			0.091			0.748				0.921	
Satd. Flow (perm)	527	3281	0	159	3312	0	1300	1483	0	0	1437	0
Satd. Flow (RTOR)		11			2			31			31	
Lane Group Flow (vph)	8	1837	0	42	914	0	63	31	0	0	14	0
Turn Type	Perm	NA										
Protected Phases		2			6		4	4		8		8
Permitted Phases	2			6			4			8		8
Detector Phase	2	2		6	6		4	4		8		8
Switch Phase												
Minimum Initial (s)	10.0	10.0		10.0	10.0		10.0	10.0		10.0	10.0	
Minimum Split (s)	34.1	34.1		32.1	32.1		32.3	32.3		32.3	32.3	
Total Split (s)	77.0	77.0		77.0	77.0		33.0	33.0		33.0	33.0	
Total Split (%)	70.0%	70.0%		70.0%	70.0%		30.0%	30.0%		30.0%	30.0%	
Yellow Time (s)	3.7	3.7		3.7	3.7		3.3	3.3		3.3	3.3	
All-Red Time (s)	2.4	2.4		2.4	2.4		3.0	3.0		3.0	3.0	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0		
Total Lost Time (s)	6.1	6.1		6.1	6.1		6.3	6.3		6.3		
Lead/Lag												
Lead-Lag Optimize?												
Recall Mode	C-Max	C-Max		C-Max	C-Max		None	None		None	None	
Act Effct Green (s)	88.2	88.2		88.2	88.2		13.9	13.9		13.9		
Actuated g/C Ratio	0.80	0.80		0.80	0.80		0.13	0.13		0.13		
v/c Ratio	0.02	0.70		0.33	0.34		0.38	0.14		0.07		
Control Delay	2.5	12.1		15.5	5.0		49.0	14.1		4.5		
Queue Delay	0.0	1.3		0.0	0.0		0.0	0.0		0.0		
Total Delay	2.5	13.4		15.5	5.0		49.0	14.1		4.5		
LOS	A	B		B	A		D	B		A		
Approach Delay		13.4			5.5			37.5		4.5		
Approach LOS		B			A			D		A		
Queue Length 50th (m)	0.0	223.6		2.1	24.0		13.0	0.0		0.0		
Queue Length 95th (m)	m0.5	245.8		15.4	57.5		22.6	7.5		2.2		
Internal Link Dist (m)		221.9			561.5			129.3		33.2		
Turn Bay Length (m)	80.0			40.0								
Base Capacity (vph)	422	2633		127	2655		315	383		372		
Starvation Cap Reductn	0	539		0	0		0	0		0		
Spillback Cap Reductn	0	0		0	0		0	0		0		
Storage Cap Reductn	0	0		0	0		0	0		0		
Reduced v/c Ratio	0.02	0.88		0.33	0.34		0.20	0.08		0.04		
Intersection Summary												
Cycle Length: 110												
Actuated Cycle Length: 110												
Offset: 36 (33%), Referenced to phase 2:EBTL and 6:WBTL, Start of Green												
Natural Cycle: 90												
Control Type: Actuated-Coordinated												

Lanes, Volumes, Timings
3: 3636 Innes Rd/3615 Innes Rd & Innes Rd

Maximum v/c Ratio: 0.70
Intersection Signal Delay: 11.5
Intersection LOS: B
Intersection Capacity Utilization 74.8%
ICU Level of Service D
Analysis Period (min) 15
m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 3: 3636 Innes Rd/3615 Innes Rd & Innes Rd



2025 Future Background
PM Peak Hour

Lanes, Volumes, Timings
4: Innes Rd & Viseneau Dr

2025 Future Background
PM Peak Hour

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑	↑	↑↑	↑↑	↑	↑	↑	↑	↑↑	↑
Traffic Volume (vph)	44	1606	87	183	812	84	106	40	179	60	51	30
Future Volume (vph)	44	1606	87	183	812	84	106	40	179	60	51	30
Satd. Flow (prot)	1658	3316	1483	1658	3259	0	1658	1745	1483	0	1646	0
Flt Permitted	0.318						0.063			0.608		0.844
Satd. Flow (perm)	553	3316	1399	110	3259	0	1042	1745	1460	0	1417	0
Satd. Flow (RTOR)			106		16				179		10	
Lane Group Flow (vph)	44	1606	87	183	896	0	106	40	179	0	141	0
Turn Type	Perm	NA	Perm	pm+pt	NA			Perm	NA	Perm	Perm	NA
Protected Phases		2		1	6				4		4	8
Permitted Phases	2	2	2	1	6				4		4	8
Detector Phase	2	2	2	1	6				4		4	8
Switch Phase												
Minimum Initial (s)	10.0	10.0	10.0	5.0	10.0		10.0	10.0	10.0	10.0	10.0	10.0
Minimum Split (s)	32.3	32.3	32.3	11.3	32.3		36.3	36.3	36.3	36.3	36.3	36.3
Total Split (s)	68.0	68.0	68.0	20.0	88.0		37.0	37.0	37.0	37.0	37.0	37.0
Total Split (%)	52.3%	52.3%	52.3%	15.4%	67.7%		28.5%	28.5%	28.5%	28.5%	28.5%	28.5%
Yellow Time (s)	3.7	3.7	3.7	3.7	3.7		3.0	3.0	3.0	3.0	3.0	3.0
All-Red Time (s)	2.6	2.6	2.6	2.6	2.6		4.3	4.3	4.3	4.3	4.3	4.3
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.3	6.3	6.3	6.3	6.3		7.3	7.3	7.3	7.3	7.3	7.3
Lead/Lag	Lag	Lag	Lag	Lead			Lag	Lag	Lag	Lag	Lag	Lag
Lead-Lag Optimize?	Yes	Yes	Yes	Yes			Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	C-Max	C-Max	C-Max	None	C-Max		None	None	None	None	None	None
Act Effct Green (s)	75.1	75.1	75.1	96.3	96.3		20.1	20.1	20.1	20.1	20.1	20.1
Actuated g/C Ratio	0.58	0.58	0.58	0.74	0.74		0.15	0.15	0.15	0.15	0.15	0.15
v/c Ratio	0.14	0.84	0.10	0.71	0.37		0.66	0.15	0.48	0.62		
Control Delay	18.5	29.8	2.4	41.1	7.2		69.3	45.0	10.2	58.1		
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	18.5	29.8	2.4	41.1	7.2		69.3	45.0	10.2	58.1		
LOS	B	C	A	D	A		E	D	B			E
Approach Delay		28.2				13.0			33.7			58.1
Approach LOS		C				B			C			E
Queue Length 50th (m)	4.8	163.2	0.0	25.5	34.1		26.5	9.2	0.0	32.5		
Queue Length 95th (m)	14.3	#272.0	6.1	52.4	61.0		42.5	18.2	18.6	49.7		
Internal Link Dist (m)		561.5				192.3			77.4			48.4
Turn Bay Length (m)	47.5		58.5	58.5			48.5			20.0		
Base Capacity (vph)	319	1915	852	274	2418		238	398	471	331		
Starvation Cap Reductn	0	0	0	0	0		0	0	0	0	0	
Spillback Cap Reductn	0	0	0	0	0		0	0	0	0	0	
Storage Cap Reductn	0	0	0	0	0		0	0	0	0	0	
Reduced v/c Ratio	0.14	0.84	0.10	0.67	0.37		0.45	0.10	0.38	0.43		
Intersection Summary												
Cycle Length: 130												
Actuated Cycle Length: 130												
Offset: 105 (81%), Referenced to phase 2:EBTL and 6:WBTL, Start of Green												
Natural Cycle: 115												
Control Type: Actuated-Coordinated												

Lanes, Volumes, Timings
4: Innes Rd & Viseneau Dr

2025 Future Background
PM Peak Hour

Lane Group	Ø3	Ø7
Lane Configurations		
Traffic Volume (vph)		
Future Volume (vph)		
Satd. Flow (prot)		
Flt Permitted		
Satd. Flow (perm)		
Satd. Flow (RTOR)		
Lane Group Flow (vph)		
Turn Type		
Protected Phases	3	7
Permitted Phases		
Detector Phase		
Switch Phase		
Minimum Initial (s)	1.0	1.0
Minimum Split (s)	3.0	3.0
Total Split (s)	5.0	5.0
Total Split (%)	4%	4%
Yellow Time (s)	2.0	2.0
All-Red Time (s)	0.0	0.0
Lost Time Adjust (s)		
Total Lost Time (s)		
Lead/Lag	Lead	Lead
Lead-Lag Optimize?	Yes	Yes
Recall Mode	None	None
Act Efect Green (s)		
Actuated g/C Ratio		
v/c Ratio		
Control Delay		
Queue Delay		
Total Delay		
LOS		
Approach Delay		
Approach LOS		
Queue Length 50th (m)		
Queue Length 95th (m)		
Internal Link Dist (m)		
Turn Bay Length (m)		
Base Capacity (vph)		
Starvation Cap Reductn		
Spillback Cap Reductn		
Storage Cap Reductn		
Reduced v/c Ratio		
Intersection Summary		

Lanes, Volumes, Timings
4: Innes Rd & Viseneau Dr


2025 Future Background
PM Peak Hour

Maximum v/c Ratio: 0.84
Intersection Signal Delay: 25.0 Intersection LOS: C
Intersection Capacity Utilization 93.5% ICU Level of Service F
Analysis Period (min) 15
95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.

Splits and Phases: 4: Innes Rd & Viseneau Dr




Lanes, Volumes, Timings
5: Lamarche Ave & Innes Rd

2025 Future Background PM Peak Hour							
							
Lane Group	EBT	EBR	WBL	WBT	NBL	NBR	Ø8
Lane Configurations							
Traffic Volume (vph)	1833	63	30	949	38	18	
Future Volume (vph)	1833	63	30	949	38	18	
Satd. Flow (prot)	3316	1483	1658	3316	1658	1483	
Flt Permitted		0.950			0.950		
Satd. Flow (perm)	3316	1483	1658	3316	1658	1483	
Satd. Flow (RTOR)							
Lane Group Flow (vph)	1833	63	30	949	38	18	
Turn Type	NA	Perm	Prot	NA	Prot	Perm	
Protected Phases	2		1	6	7		8
Permitted Phases		2			4		
Detector Phase	2	2	1	6	7	4	
Switch Phase							
Minimum Initial (s)	10.0	10.0	5.0	10.0	5.0	5.0	1.0
Minimum Split (s)	22.5	22.5	11.7	22.5	11.3	22.5	22.5
Total Split (s)	64.5	64.5	11.7	76.2	11.3	33.8	22.5
Total Split (%)	58.6%	58.6%	10.6%	69.3%	10.3%	30.7%	20%
Yellow Time (s)	3.7	3.7	3.7	3.7	3.3	3.5	2.0
All-Red Time (s)	2.3	2.3	3.0	2.3	3.0	3.0	1.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	
Total Lost Time (s)	6.0	6.0	6.7	6.0	6.3	6.5	
Lead/Lag	Lag	Lag	Lead		Lag		Lead
Lead-Lag Optimize?	Yes	Yes	Yes	C-Max	None	Yes	Max
Recall Mode	C-Max	C-Max	None	C-Max	None	None	Max
Act Efct Green (s)	67.7	67.7	5.4	74.7	5.0	22.8	
Actuated g/C Ratio	0.62	0.62	0.05	0.68	0.05	0.21	
v/c Ratio	0.90	0.07	0.37	0.42	0.51	0.06	
Control Delay	23.9	13.9	60.3	11.1	74.6	32.7	
Queue Delay	1.0	0.0	0.0	0.0	0.0	0.0	
Total Delay	24.9	13.9	60.3	11.1	74.6	32.7	
LOS	C	B	E	B	E	C	
Approach Delay	24.6			12.7	61.1		
Approach LOS	C			B	E		
Queue Length 50th (m)	~218.9	5.9	6.4	45.7	8.2	3.0	
Queue Length 95th (m)	#262.5	m7.7	16.4	94.2	#21.6	8.8	
Internal Link Dist (m)	206.5			221.9	256.5		
Turn Bay Length (m)		40.0	80.0		80.0		
Base Capacity (vph)	2040	912	81	2252	75	368	
Starvation Cap Reductn	0	0	0	0	0	0	
Spillback Cap Reductn	67	0	0	0	0	0	
Storage Cap Reductn	0	0	0	0	0	0	
Reduced v/c Ratio	0.93	0.07	0.37	0.42	0.51	0.05	
Intersection Summary							
Cycle Length: 110							
Actuated Cycle Length: 110							
Offset: 0 (0%), Referenced to phase 2:EBT and 6:WBT, Start of Green							
Natural Cycle: 110							
Control Type: Actuated-Coordinated							

Scenario 1 245 and 275 Lamarche Avenue 11:59 pm 03/04/2022 2025 Future Background

Synchro 11 Report
Page 10

Lanes, Volumes, Timings
5: Lamarche Ave & Innes Rd

2025 Future Background PM Peak Hour							
							
Lane Group	EBT	EBR	WBL	WBT	NBL	NBR	Ø8
Lane Configurations							
Traffic Volume (vph)	1833	63	30	949	38	18	
Future Volume (vph)	1833	63	30	949	38	18	
Satd. Flow (prot)	3316	1483	1658	3316	1658	1483	
Flt Permitted		0.950			0.950		
Satd. Flow (perm)	3316	1483	1658	3316	1658	1483	
Satd. Flow (RTOR)							
Lane Group Flow (vph)	1833	63	30	949	38	18	
Turn Type	NA	Perm	Prot	NA	Prot	Perm	
Protected Phases	2		1	6	7		8
Permitted Phases		2			4		
Detector Phase	2	2	1	6	7	4	
Switch Phase							
Minimum Initial (s)	10.0	10.0	5.0	10.0	5.0	5.0	1.0
Minimum Split (s)	22.5	22.5	11.7	22.5	11.3	22.5	22.5
Total Split (s)	64.5	64.5	11.7	76.2	11.3	33.8	22.5
Total Split (%)	58.6%	58.6%	10.6%	69.3%	10.3%	30.7%	20%
Yellow Time (s)	3.7	3.7	3.7	3.7	3.3	3.5	2.0
All-Red Time (s)	2.3	2.3	3.0	2.3	3.0	3.0	1.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	
Total Lost Time (s)	6.0	6.0	6.7	6.0	6.3	6.5	
Lead/Lag	Lag	Lag	Lead		Lag		Lead
Lead-Lag Optimize?	Yes	Yes	Yes	C-Max	None	Yes	Max
Recall Mode	C-Max	C-Max	None	C-Max	None	None	Max
Act Efct Green (s)	67.7	67.7	5.4	74.7	5.0	22.8	
Actuated g/C Ratio	0.62	0.62	0.05	0.68	0.05	0.21	
v/c Ratio	0.90	0.07	0.37	0.42	0.51	0.06	
Control Delay	23.9	13.9	60.3	11.1	74.6	32.7	
Queue Delay	1.0	0.0	0.0	0.0	0.0	0.0	
Total Delay	24.9	13.9	60.3	11.1	74.6	32.7	
LOS	C	B	E	B	E	C	
Approach Delay	24.6			12.7	61.1		
Approach LOS	C			B	E		
Queue Length 50th (m)	~218.9	5.9	6.4	45.7	8.2	3.0	
Queue Length 95th (m)	#262.5	m7.7	16.4	94.2	#21.6	8.8	
Internal Link Dist (m)	206.5			221.9	256.5		
Turn Bay Length (m)		40.0	80.0		80.0		
Base Capacity (vph)	2040	912	81	2252	75	368	
Starvation Cap Reductn	0	0	0	0	0	0	
Spillback Cap Reductn	67	0	0	0	0	0	
Storage Cap Reductn	0	0	0	0	0	0	
Reduced v/c Ratio	0.93	0.07	0.37	0.42	0.51	0.05	
Intersection Summary							
Cycle Length: 110							
Actuated Cycle Length: 110							
Offset: 0 (0%), Referenced to phase 2:EBT and 6:WBT, Start of Green							
Natural Cycle: 110							
Control Type: Actuated-Coordinated							

Scenario 1 245 and 275 Lamarche Avenue 11:59 pm 03/04/2022 2025 Future Background

Synchro 11 Report
Page 11

Appendix H

Synchro Intersection Worksheets – 2030 Future Background Conditions

Lanes, Volumes, Timings
1: Orleans Blvd & Innes Rd

2030 Future Background AM Peak Hour												
Lane Group	EBL	EBT	EBC	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑↓	↑↓	↑↓	↑↓	↑↓	↑↓	↑↓	↑↓	↑↓	↑↓	↑↓	
Traffic Volume (vph)	121	416	23	17	1476	113	252	322	38	63	100	459
Future Volume (vph)	121	416	23	17	1476	113	252	322	38	63	100	459
Satd. Flow (prot)	3216	3316	1483	1658	3316	1483	1658	3316	1483	1658	3316	1483
Flt Permitted	0.950	0.950			0.549		0.557					
Satd. Flow (perm)	3206	3316	1426	1632	3316	1444	952	3316	1396	942	3316	1452
Satd. Flow (RTOR)			143			143			82			143
Lane Group Flow (vph)	121	416	23	17	1476	113	252	322	38	63	100	459
Turn Type	Prot	NA	Perm	Prot	NA	Perm	pm+pt	NA	Perm	Perm	NA	Perm
Protected Phases	5	2		1	6		7	4		4	8	
Permitted Phases			2			6	4		4	8		8
Detector Phase	5	2	2	1	6	6	7	4	4	8	8	8
Switch Phase												
Minimum Initial (s)	5.0	10.0	10.0	5.0	10.0	10.0	5.0	10.0	10.0	10.0	10.0	10.0
Minimum Split (s)	11.6	26.2	26.2	11.2	26.2	26.2	11.7	32.7	32.7	32.7	32.7	32.7
Total Split (s)	13.0	65.0	65.0	13.0	65.0	65.0	19.0	52.0	52.0	33.0	33.0	33.0
Total Split (%)	10.0%	50.0%	50.0%	10.0%	50.0%	50.0%	14.6%	40.0%	40.0%	25.4%	25.4%	25.4%
Yellow Time (s)	3.7	3.7	3.7	3.7	3.7	3.7	3.3	3.3	3.3	3.3	3.3	3.3
All-Red Time (s)	2.9	2.5	2.5	2.5	2.5	2.5	3.4	3.4	3.4	3.4	3.4	3.4
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.6	6.2	6.2	6.2	6.2	6.2	6.7	6.7	6.7	6.7	6.7	6.7
Lead/Lag	Lead	Lag	Lag	Lead	Lag	Lag	Lead		Lag	Lag	Lag	
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	C-Max	C-Max	None	C-Max	C-Max	None	None	None	None	None	None
Act Efft Green (s)	6.4	66.6	66.6	6.4	58.8	58.8	45.3	45.3	45.3	26.3	26.3	26.3
Actuated g/C Ratio	0.05	0.51	0.51	0.05	0.45	0.45	0.35	0.35	0.35	0.20	0.20	0.20
v/c Ratio	0.77	0.24	0.03	0.21	0.98	0.15	0.63	0.28	0.07	0.33	0.15	1.13
Control Delay	90.3	19.1	0.1	65.5	55.2	1.9	41.4	31.4	0.3	50.1	43.4	116.6
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	90.3	19.1	0.1	65.5	55.2	1.9	41.4	31.4	0.3	50.1	43.4	116.6
LOS	F	B	A	E	E	A	D	C	A	D	D	F
Approach Delay		33.7			51.5			33.6		98.1		
Approach LOS		C			D			C		F		
Queue Length 50th (m)	16.0	27.6	0.0	4.3	192.7	0.0	49.4	31.2	0.0	13.9	11.2	~104.9
Queue Length 95th (m)	#31.4	46.1	0.0	12.2	#245.9	6.0	73.7	43.0	0.0	28.1	19.2	#170.3
Internal Link Dist (m)		265.9			463.6		69.4			101.9		
Turn Bay Length (m)	135.5		87.0	106.0		57.0	48.0		43.5	50.0		53.0
Base Capacity (vph)	158	1698	800	86	1499	731	398	1155	539	190	670	407
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.77	0.24	0.03	0.20	0.98	0.15	0.63	0.28	0.07	0.33	0.15	1.13

Intersection Summary

Cycle Length: 130

Actuated Cycle Length: 130

Offset: 99 (76%), Referenced to phase 2:EBT and 6:WBT, Start of Green

Natural Cycle: 115

Control Type: Actuated-Coordinated

Lanes, Volumes, Timings
1: Orleans Blvd & Innes Rd

2030 Future Background AM Peak Hour											
--	--	--	--	--	--	--	--	--	--	--	--

Maximum v/c Ratio: 1.13

Intersection Signal Delay: 53.9

Intersection LOS: D

ICU Level of Service G

Analysis Period (min) 15


~ Volume exceeds capacity, queue is theoretically infinite.

Queue shown is maximum after two cycles.

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 1: Orleans Blvd & Innes Rd



Lanes, Volumes, Timings
2: Page Rd & Innes Rd

2030 Future Background
AM Peak Hour

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	→	↑	↑↑	←	↑	↑	↑	↓	↑	↓
Traffic Volume (vph)	14	489	21	39	1547	28	14	12	42	42	9	53
Future Volume (vph)	14	489	21	39	1547	28	14	12	42	42	9	53
Satd. Flow (prot)	1658	3291	0	1658	3304	0	0	1572	0	0	1572	0
Flt Permitted	0.123							0.923				0.859
Satd. Flow (perm)	215	3291	0	805	3304	0	0	1462	0	0	1378	0
Satd. Flow (RTOR)			7		3			42			40	
Lane Group Flow (vph)	14	510	0	39	1575	0	0	68	0	0	104	0
Turn Type	Perm	NA										
Protected Phases	2			6			4		4		8	
Permitted Phases	2			6			4		4		8	
Detector Phase	2	2		6	6		4	4		8	8	
Switch Phase												
Minimum Initial (s)	10.0	10.0		10.0	10.0		10.0	10.0		10.0	10.0	
Minimum Split (s)	39.2	39.2		39.2	39.2		37.8	37.8		37.8	37.8	
Total Split (s)	82.0	82.0		82.0	82.0		38.0	38.0		38.0	38.0	
Total Split (%)	68.3%	68.3%		68.3%	68.3%		31.7%	31.7%		31.7%	31.7%	
Yellow Time (s)	3.7	3.7		3.7	3.7		3.0	3.0		3.0	3.0	
All-Red Time (s)	2.5	2.5		2.5	2.5		3.8	3.8		3.8	3.8	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0				0.0	
Total Lost Time (s)	6.2	6.2		6.2	6.2		6.8				6.8	
Lead/Lag												
Lead-Lag Optimize?												
Recall Mode	C-Max	C-Max		C-Max	C-Max		None	None		None	None	
Act Efect Green (s)	88.4	88.4		88.4	88.4			18.6			18.6	
Actuated g/C Ratio	0.74	0.74		0.74	0.74			0.16			0.16	
v/c Ratio	0.09	0.21		0.07	0.65			0.26			0.42	
Control Delay	9.2	6.3		5.4	15.3			20.2			31.0	
Queue Delay	0.0	0.0		0.0	0.8			0.0			0.0	
Total Delay	9.2	6.3		5.4	16.1			20.2			31.0	
LOS	A	A		A	B			C			C	
Approach Delay			6.4		15.9			20.2			31.0	
Approach LOS			A		B			C			C	
Queue Length 50th (m)	0.6	11.9		0.3	144.5			5.8			14.6	
Queue Length 95th (m)	4.3	33.3		m5.4	231.9			16.0			26.7	
Internal Link Dist (m)		463.6			206.5			143.5			112.1	
Turn Bay Length (m)	104.5			120.0								
Base Capacity (vph)	158	2425		592	2434			411			387	
Starvation Cap Reductn	0	0		0	498			0			0	
Spillback Cap Reductn	0	0		0	0			0			0	
Storage Cap Reductn	0	0		0	0			0			0	
Reduced v/c Ratio	0.09	0.21		0.07	0.81			0.17			0.27	
Intersection Summary												
Cycle Length: 120												
Actuated Cycle Length: 120												
Offset: 26 (22%), Referenced to phase 2:EBTL and 6:WBT, Start of Green												
Natural Cycle: 90												
Control Type: Actuated-Coordinated												

Scenario 1 245 and 275 Lamarche Avenue 11:59 pm 03/04/2022 2030 Future Background

Synchro 11 Report

Page 3

Lanes, Volumes, Timings
2: Page Rd & Innes Rd

2030 Future Background
AM Peak Hour

Maximum v/c Ratio: 0.65	Intersection Signal Delay: 14.5	Intersection LOS: B
Intersection Capacity Utilization 73.4%		ICU Level of Service D
Analysis Period (min) 15		
m Volume for 95th percentile queue is metered by upstream signal.		
Splits and Phases: 2: Page Rd & Innes Rd		
Ø2 (R) 82 s	Ø4 38 s	Ø8 82 s 38 s

Scenario 1 245 and 275 Lamarche Avenue 11:59 pm 03/04/2022 2030 Future Background

Synchro 11 Report

Page 4

Lanes, Volumes, Timings
3: 3636 Innes Rd/3615 Innes Rd & Innes Rd

2030 Future Background AM Peak Hour											
Lane Group	EBL	EBT	EBR	WBL	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑	↑	↑↑	↑	↑	↑	↑	↑↑	↑
Traffic Volume (vph)	6	546	38	12	1477	4	99	0	39	1	0
Future Volume (vph)	6	546	38	12	1477	4	99	0	39	1	0
Satd. Flow (prot)	1658	3283	0	1658	3315	0	1658	1464	0	0	1533
Flt Permitted	0.147				0.432		0.755				0.952
Satd. Flow (perm)	256	3283	0	754	3315	0	1314	1464	0	0	1477
Satd. Flow (RTOR)								383			28
Lane Group Flow (vph)	6	584	0	12	1481	0	99	39	0	0	4
Turn Type	Perm	NA	Perm	NA	Perm	NA	Perm	NA	Perm	NA	
Protected Phases	2			6			4		4		8
Permitted Phases	2			6			4		4		8
Detector Phase	2	2		6	6		4	4		8	8
Switch Phase											
Minimum Initial (s)	10.0	10.0		10.0	10.0		10.0	10.0			
Minimum Split (s)	32.1	32.1		32.1	32.1		32.3	32.3			
Total Split (s)	87.0	87.0		87.0	87.0		33.0	33.0			
Total Split (%)	72.5%	72.5%		72.5%	72.5%		27.5%	27.5%			
Yellow Time (s)	3.7	3.7		3.7	3.7		3.3	3.3			
All-Red Time (s)	2.4	2.4		2.4	2.4		3.0	3.0			
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0			
Total Lost Time (s)	6.1	6.1		6.1	6.1		6.3	6.3			
Lead/Lag											
Lead-Lag Optimize?											
Recall Mode	C-Max	C-Max		C-Max	C-Max		None	None			
Act Efect Green (s)	91.8	91.8		91.8	91.8		15.8	15.8			
Actuated g/C Ratio	0.76	0.76		0.76	0.76		0.13	0.13			
v/c Ratio	0.03	0.23		0.02	0.58		0.57	0.07			
Control Delay	2.3	1.8		7.5	9.6		60.6	0.3			
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.0			
Total Delay	2.3	1.8		7.5	9.6		60.6	0.3			
LOS	A	A		A	A		E	A			
Approach Delay		1.8			9.5			43.5			0.3
Approach LOS		A			A			D			A
Queue Length 50th (m)	0.1	5.7		0.5	58.2		22.6	0.0			0.0
Queue Length 95th (m)	m0.4	7.4		m2.3	138.9		36.3	0.0			0.0
Internal Link Dist (m)		221.9			561.5			129.3			33.2
Turn Bay Length (m)	80.0			40.0							
Base Capacity (vph)	196	2511		576	2536		292	623			350
Starvation Cap Reductn	0	0		0	0		0	0			0
Spillback Cap Reductn	0	0		0	0		0	0			0
Storage Cap Reductn	0	0		0	0		0	0			0
Reduced v/c Ratio	0.03	0.23		0.02	0.58		0.34	0.06			0.01
Intersection Summary											
Cycle Length: 120											
Actuated Cycle Length: 120											
Offset: 0 (0%), Referenced to phase 2:EBTL and 6:WBLT, Start of Green											
Natural Cycle: 75											
Control Type: Actuated-Coordinated											

Scenario 1 245 and 275 Lamarche Avenue 11:59 pm 03/04/2022 2030 Future Background

Synchro 11 Report

Page 5

Lanes, Volumes, Timings
3: 3636 Innes Rd/3615 Innes Rd & Innes Rd

2030 Future Background
AM Peak Hour

Maximum v/c Ratio: 0.58	Intersection Signal Delay: 9.6	Intersection LOS: A
	Intersection Capacity Utilization 66.3%	ICU Level of Service C
	Analysis Period (min) 15	
	m Volume for 95th percentile queue is metered by upstream signal.	
Splits and Phases: 3: 3636 Innes Rd/3615 Innes Rd & Innes Rd		

Scenario 1 245 and 275 Lamarche Avenue 11:59 pm 03/04/2022 2030 Future Background

Synchro 11 Report

Page 6

Lanes, Volumes, Timings
4: Innes Rd & Viseneau Dr

2030 Future Background
AM Peak Hour

Lane Group												
	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑	↑↑	↑↑	↑↑	↑	↑↑	↑↑	↑	↑↑	
Traffic Volume (vph)	11	521	37	59	1433	33	19	5	39	46	13	41
Future Volume (vph)	11	521	37	59	1433	33	19	5	39	46	13	41
Satl. Flow (prot)	1658	3316	1483	1658	3304	0	1658	1745	1483	0	1604	0
Flt Permitted	0.172						0.695					0.850
Satl. Flow (perm)	300	3316	1450	732	3304	0	1212	1745	1462	0	1393	0
Satl. Flow (RTOR)			115		3				105		28	
Lane Group Flow (vph)	11	521	37	59	1466	0	19	5	39	0	100	0
Turn Type	Perm	NA	Perm	pm+pt	NA		Perm	NA	Perm	Perm	NA	
Protected Phases		2		1	6			4		4	8	
Permitted Phases	2		2	6			4		4	4	8	
Detector Phase	2	2	2	1	6		4	4	4	8	8	
Switch Phase												
Minimum Initial (s)	10.0	10.0	10.0	5.0	10.0		10.0	10.0	10.0	10.0	10.0	
Minimum Split (s)	32.3	32.3	32.3	11.3	32.3		36.3	36.3	36.3	36.3	36.3	
Total Split (s)	66.0	66.0	66.0	12.0	78.0		37.0	37.0	37.0	37.0	37.0	
Total Split (%)	55.0%	55.0%	55.0%	10.0%	65.0%		30.8%	30.8%	30.8%	30.8%	30.8%	
Yellow Time (s)	3.7	3.7	3.7	3.7	3.7		3.0	3.0	3.0	3.0	3.0	
All-Red Time (s)	2.6	2.6	2.6	2.6	2.6		4.3	4.3	4.3	4.3	4.3	
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Total Lost Time (s)	6.3	6.3	6.3	6.3	6.3		7.3	7.3	7.3	7.3	7.3	
Lead/Lag	Lag	Lag	Lag	Lead			Lag	Lag	Lag	Lag	Lag	
Lead-Lag Optimize?	Yes	Yes	Yes	Yes			Yes	Yes	Yes	Yes	Yes	
Recall Mode	C-Max	C-Max	C-Max	None	C-Max		None	None	None	None	None	
Act Effct Green (s)	80.8	80.8	80.8	91.5	91.5		14.9	14.9	14.9		14.9	
Actuated g/C Ratio	0.67	0.67	0.67	0.76	0.76		0.12	0.12	0.12		0.12	
v/c Ratio	0.05	0.23	0.04	0.10	0.58		0.13	0.02	0.14		0.51	
Control Delay	6.7	5.1	0.1	5.2	8.3		44.5	40.6	1.1		42.3	
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0		0.0	
Total Delay	6.7	5.1	0.1	5.2	8.3		44.5	40.6	1.1		42.3	
LOS	A	A	A	A	A		D	D	A		D	
Approach Delay		4.8			8.2			17.3			42.3	
Approach LOS		A			A			B			D	
Queue Length 50th (m)	0.4	9.2	0.0	2.5	56.2		4.2	1.1	0.0		16.4	
Queue Length 95th (m)	1.4	20.4	0.0	9.6	130.7		9.8	4.2	0.0		28.9	
Internal Link Dist (m)		561.5			188.9			77.4			48.4	
Turn Bay Length (m)	47.5		58.5	58.5			48.5		20.0			
Base Capacity (vph)	202	2233	1014	609	2518		299	431	440		365	
Starvation Cap Reductn	0	0	0	0	0		0	0	0		0	
Spillback Cap Reductn	0	0	0	0	0		0	0	0		0	
Storage Cap Reductn	0	0	0	0	0		0	0	0		0	
Reduced v/c Ratio	0.05	0.23	0.04	0.10	0.58		0.06	0.01	0.09		0.27	
Intersection Summary												
Cycle Length: 120												
Actuated Cycle Length: 120												
Offset: 40 (33%), Referenced to phase 2:EBTL and 6:WBTL, Start of Green												
Natural Cycle: 85												
Control Type: Actuated-Coordinated												

Scenario 1 245 and 275 Lamarche Avenue 11:59 pm 03/04/2022 2030 Future Background

Synchro 11 Report

Page 7

Lanes, Volumes, Timings
4: Innes Rd & Viseneau Dr

2030 Future Background
AM Peak Hour

Lane Group		03	07
Lane Configurations			
Traffic Volume (vph)			
Future Volume (vph)			
Satl. Flow (prot)			
Flt Permitted			
Satl. Flow (perm)			
Satl. Flow (RTOR)			
Lane Group Flow (vph)			
Turn Type			
Protected Phases	3	7	
Permitted Phases			
Detector Phase			
Switch Phase			
Minimum Initial (s)	1.0	1.0	
Minimum Split (s)	3.0	4.0	
Total Split (s)	5.0	5.0	
Total Split (%)	4%	4%	
Yellow Time (s)	2.0	2.0	
All-Red Time (s)	0.0	0.0	
Lost Time Adjust (s)			
Total Lost Time (s)			
Lead/Lag	Lead	Lead	
Lead-Lag Optimize?	Yes	Yes	
Recall Mode	None	None	
Act Effct Green (s)			
Actuated g/C Ratio			
v/c Ratio			
Control Delay			
Queue Delay			
Total Delay			
LOS			
Approach Delay			
Approach LOS			
Queue Length 50th (m)			
Queue Length 95th (m)			
Internal Link Dist (m)			
Turn Bay Length (m)			
Base Capacity (vph)			
Starvation Cap Reductn			
Spillback Cap Reductn			
Storage Cap Reductn			
Reduced v/c Ratio			
Intersection Summary			

Scenario 1 245 and 275 Lamarche Avenue 11:59 pm 03/04/2022 2030 Future Background

Synchro 11 Report

Page 8

Lanes, Volumes, Timings
4: Innes Rd & Viseneau Dr


Maximum v/c Ratio: 0.58

Intersection Signal Delay: 9.1

Intersection Capacity Utilization 76.2%

Analysis Period (min) 15

Splits and Phases: 4: Innes Rd & Viseneau Dr



2030 Future Background
AM Peak Hour

Lanes, Volumes, Timings
5: Lamarche Ave & Innes Rd

2030 Future Background
AM Peak Hour

Lane Group	EBT	EBR	WBL	WBT	NBL	NBR	Ø8
Lane Configurations	↑↑	↑↑	↑↑	↑↑	↑↑	↑↑	↑↑
Traffic Volume (vph)	557	24	12	1571	56	28	
Future Volume (vph)	557	24	12	1571	56	28	
Satd. Flow (prot)	3316	1483	1658	3316	1658	1483	
Flt Permitted			0.950		0.950		
Satd. Flow (perm)	3316	1483	1658	3316	1658	1483	
Satd. Flow (RTOR)							
Lane Group Flow (vph)	557	24	12	1571	56	28	
Turn Type	NA	Perm	Prot	NA	Prot	Perm	
Protected Phases	2		1	6	7	8	
Permitted Phases						4	
Detector Phase	2	2	1	6	7	4	
Switch Phase							
Minimum Initial (s)	10.0	10.0	5.0	10.0	5.0	5.0	1.0
Minimum Split (s)	24.0	24.0	11.7	24.0	11.3	30.5	4.0
Total Split (s)	76.0	76.0	13.0	89.0	16.2	31.0	14.8
Total Split (%)	63.3%	63.3%	10.8%	74.2%	13.5%	25.8%	12%
Yellow Time (s)	3.7	3.7	3.7	3.7	3.3	3.5	2.0
All-Red Time (s)	2.3	2.3	3.0	2.3	3.0	3.0	1.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	
Total Lost Time (s)	6.0	6.0	6.7	6.0	6.3	6.5	
Lead/Lag	Lag	Lag	Lead	Lag	Lag	Lead	
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	C-Max	C-Max	None	C-Max	None	None	Max
Act Effct Green (s)	81.5	81.5	6.0	86.7	8.6	20.8	
Actuated g/C Ratio	0.68	0.68	0.05	0.72	0.07	0.17	
v/c Ratio	0.25	0.02	0.14	0.66	0.47	0.11	
Control Delay	8.2	8.6	60.2	10.4	66.6	40.3	
Queue Delay	0.0	0.0	0.0	0.2	0.0	0.0	
Total Delay	8.2	8.6	60.2	10.7	66.6	40.3	
LOS	A	A	E	B	E	D	
Approach Delay	8.2			11.0	57.8		
Approach LOS	A			B	E		
Queue Length 50th (m)	20.8	1.4	2.8	63.5	12.8	5.4	
Queue Length 95th (m)	33.1	5.2	m5.1	92.3	26.1	13.5	
Internal Link Dist (m)	206.5			221.9	310.2		
Turn Bay Length (m)		40.0	80.0		80.0		
Base Capacity (vph)	2253	1007	87	2396	136	302	
Starvation Cap Reductn	0	0	0	5	0	0	
Spillback Cap Reductn	0	0	0	221	0	0	
Storage Cap Reductn	0	0	0	0	0	0	
Reduced v/c Ratio	0.25	0.02	0.14	0.72	0.41	0.09	
Intersection Summary							
Cycle Length: 120							
Actuated Cycle Length: 120							
Offset: 0 (0%), Referenced to phase 2:EBT and 6:WBT, Start of Green							
Natural Cycle: 75							
Control Type: Actuated-Coordinated							

Lanes, Volumes, Timings
5: Lamarche Ave & Innes Rd

Maximum v/c Ratio: 0.66

Intersection Signal Delay: 12.1

Intersection LOS: B


Intersection Capacity Utilization 60.3%

ICU Level of Service B

Analysis Period (min) 15

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 5: Lamarche Ave & Innes Rd



2030 Future Background
AM Peak Hour

Lanes, Volumes, Timings
1: Orleans Blvd & Innes Rd

2030 Future Background
PM Peak Hour

Lane Group	EBL	EBT	EBR	WBL	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑
Traffic Volume (vph)	579	1661	197	59	701	124	64	225	78	163	300
Future Volume (vph)	579	1661	197	59	701	124	64	225	78	163	300
Satd. Flow (prot)	3216	3316	1483	1658	3316	1483	1658	3316	1483	1658	3316
Flt Permitted	0.950			0.950			0.443			0.611	
Satd. Flow (perm)	3191	3316	1410	1652	3316	1445	765	3316	1432	1048	3316
Satd. Flow (RTOR)			165			230			159		225
Lane Group Flow (vph)	579	1661	197	59	701	124	64	225	78	163	300
Turn Type	Prot	NA	Perm	Prot	NA	Perm	pm-pt	NA	Perm	Perm	NA
Protected Phases	5	2		1	6		7	4		8	
Permitted Phases				2		6	4		4	8	
Detector Phase	5	2	2	1	6	6	7	4	4	8	8
Switch Phase											
Minimum Initial (s)	5.0	10.0	10.0	5.0	10.0	10.0	5.0	10.0	10.0	10.0	10.0
Minimum Split (s)	16.6	26.2	26.2	11.2	26.2	26.2	11.7	32.7	32.7	32.7	32.7
Total Split (s)	31.0	49.0	49.0	16.0	34.0	34.0	12.0	45.0	45.0	33.0	33.0
Total Split (%)	28.2%	44.5%	44.5%	14.5%	30.9%	30.9%	10.8%	40.9%	40.9%	30.0%	30.0%
Yellow Time (s)	3.7	3.7	3.7	3.7	3.7	3.7	3.3	3.3	3.3	3.3	3.3
All-Red Time (s)	2.9	2.5	2.5	2.5	2.5	2.5	3.4	3.4	3.4	3.4	3.4
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.6	6.2	6.2	6.2	6.2	6.2	6.7	6.7	6.7	6.7	6.7
Lead/Lag	Lead	Lag	Lag	Lead	Lag	Lag	Lead		Lag	Lag	Lag
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	C-Max	C-Max	None	C-Max	C-Max	None	Max	Max	Max	Max
Act Effct Green (s)	23.0	46.5	46.5	8.5	29.2	29.2	38.3	38.3	38.3	28.7	28.7
Actuated g/C Ratio	0.21	0.42	0.42	0.08	0.27	0.27	0.35	0.35	0.35	0.26	0.26
v/c Ratio	0.86	1.19	0.29	0.46	0.80	0.22	0.21	0.19	0.13	0.60	0.35
Control Delay	55.6	121.8	6.5	51.6	59.3	11.0	26.2	25.7	0.4	47.6	35.4
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	55.6	121.8	6.5	51.6	59.3	11.0	26.2	25.7	0.4	47.6	35.4
LOS	E	F	A	D	E	B	C	C	A	D	D
Approach Delay		96.7				52.0			20.4		29.2
Approach LOS			F			D			C		C
Queue Length 50th (m)	61.1	~237.6	4.2	10.1	82.7	3.2	9.2	17.6	0.0	31.7	28.4
Queue Length 95th (m)	#82.8	#281.8	18.8	27.2	#106.6	22.8	18.8	26.6	0.0	#56.6	41.1
Internal Link Dist (m)		265.9				463.6			69.4		101.9
Turn Bay Length (m)	135.5		87.0	106.0		57.0	48.0		43.5	50.0	53.0
Base Capacity (vph)	713	1401	691	147	879	552	309	1154	602	273	864
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.81	1.19	0.29	0.40	0.80	0.22	0.21	0.19	0.13	0.60	0.35

Intersection Summary

Cycle Length: 110

Actuated Cycle Length: 110

Offset: 0 (0%), Referenced to phase 2:EBT and 6:WBT, Start of Green


Natural Cycle: 120

Control Type: Actuated-Coordinated

Lanes, Volumes, Timings
1: Orleans Blvd & Innes Rd

Maximum v/c Ratio: 1.19	Intersection Signal Delay: 70.9	Intersection LOS: E
Intersection Capacity Utilization 105.3%		ICU Level of Service G
Analysis Period (min) 15		
~ Volume exceeds capacity, queue is theoretically infinite.		
Queue shown is maximum after two cycles.		
# 95th percentile volume exceeds capacity, queue may be longer.		
Queue shown is maximum after two cycles.		

Splits and Phases: 1: Orleans Blvd & Innes Rd



2030 Future Background
PM Peak Hour


Lanes, Volumes, Timings
2: Page Rd & Innes Rd

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑	↑↑	↑↑	↑↑	↑	↑	↑	↑	↑	↑
Traffic Volume (vph)	74	1814	30	102	839	72	23	6	84	67	17	37
Future Volume (vph)	74	1814	30	102	839	72	23	6	84	67	17	37
Satd. Flow (prot)	1658	3308	0	1658	3267	0	0	1524	0	0	1620	0
Flt Permitted	0.291								0.923			0.762
Satd. Flow (perm)	506	3308	0	126	3267	0	0	1420	0	0	1261	0
Satd. Flow (RTOR)		3			14			17			20	
Lane Group Flow (vph)	74	1844	0	102	911	0	0	113	0	0	121	0
Turn Type	Perm	NA		Perm	NA		Perm	NA		Perm	NA	
Protected Phases	2			6			6		4		8	
Permitted Phases	2			6			6		4		8	
Detector Phase	2	2		6	6		4	4	4	8	8	
Switch Phase												
Minimum Initial (s)	10.0	10.0		10.0	10.0		10.0	10.0		10.0	10.0	
Minimum Split (s)	39.2	39.2		39.2	39.2		37.8	37.8		37.8	37.8	
Total Split (s)	72.0	72.0		72.0	72.0		38.0	38.0		38.0	38.0	
Total Split (%)	65.5%	65.5%		65.5%	65.5%		34.5%	34.5%		34.5%	34.5%	
Yellow Time (s)	3.7	3.7		3.7	3.7		3.0	3.0		3.0	3.0	
All-Red Time (s)	2.5	2.5		2.5	2.5		3.8	3.8		3.8	3.8	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Total Lost Time (s)	6.2	6.2		6.2	6.2		6.8	6.8		6.8	6.8	
Lead/Lag												
Lead-Lag Optimize?												
Recall Mode	C-Max	C-Max		C-Max	C-Max		None	None		None	None	
Act Effct Green (s)	77.6	77.6		77.6	77.6		19.4					19.4
Actuated g/C Ratio	0.71	0.71		0.71	0.71		0.18					0.18
v/c Ratio	0.21	0.79		1.16	0.39		0.43					0.51
Control Delay	2.2	9.4		164.0	3.3		36.4					39.0
Queue Delay	0.0	1.8		0.0	0.0		0.0					0.0
Total Delay	2.2	11.2		164.0	3.3		36.4					39.0
LOS	A	B		F	A		D					D
Approach Delay				10.8			19.5					39.0
Approach LOS				B			B					D
Queue Length 50th (m)	1.5	41.3		~20.2	0.0		19.6					21.0
Queue Length 95th (m)	m1.8	m20.5		#61.1	0.0		31.0					33.3
Internal Link Dist (m)				463.6			206.5					112.1
Turn Bay Length (m)	104.5				120.0							
Base Capacity (vph)	357	2334		88	2308		414					371
Starvation Cap Reductn	0	0		0	0		0					0
Spillback Cap Reductn	0	317		0	0		1					1
Storage Cap Reductn	0	0		0	0		0					0
Reduced v/c Ratio	0.21	0.91		1.16	0.39		0.27					0.33
Intersection Summary												
Cycle Length: 110												
Actuated Cycle Length: 110												
Offset: 2 (2%), Referenced to phase 2:EBTL and 6:WBTL, Start of Green												
Natural Cycle: 150												
Control Type: Actuated-Coordinated												

Lanes, Volumes, Timings
2: Page Rd & Innes Rd

Maximum v/c Ratio: 1.16
Intersection Signal Delay: 15.6 Intersection LOS: B
Intersection Capacity Utilization 94.2% ICU Level of Service F
Analysis Period (min) 15
~ Volume exceeds capacity, queue is theoretically infinite.
Queue shown is maximum after two cycles.
95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.
m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 2: Page Rd & Innes Rd



2030 Future Background
PM Peak Hour

Lanes, Volumes, Timings
3: 3636 Innes Rd/3615 Innes Rd & Innes Rd


2030 Future Background
PM Peak Hour

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↓	↑	↑	↑↓	↑	↑	↑	↑	↑	↑	↑
Traffic Volume (vph)	8	1816	106	42	950	8	63	0	31	4	0	10
Future Volume (vph)	8	1816	106	42	950	8	63	0	31	4	0	10
Satd. Flow (prot)	1658	3285	0	1658	3312	0	1658	1483	0	0	1538	0
Flt Permitted	0.287			0.080			0.748					0.921
Satd. Flow (perm)	501	3285	0	140	3312	0	1300	1483	0	0	1437	0
Satd. Flow (RTOR)		11			1				31			31
Lane Group Flow (vph)	8	1922	0	42	958	0	63	31	0	0	14	0
Turn Type	Perm	NA		Perm	NA		Perm	NA		Perm	NA	
Protected Phases		2			6		6		4		8	
Permitted Phases	2			6			4		4		8	
Detector Phase	2	2		6	6		4	4	4		8	8
Switch Phase												
Minimum Initial (s)	10.0	10.0		10.0	10.0		10.0	10.0		10.0	10.0	
Minimum Split (s)	34.1	34.1		32.1	32.1		32.3	32.3		32.3	32.3	
Total Split (s)	77.0	77.0		77.0	77.0		33.0	33.0		33.0	33.0	
Total Split (%)	70.0%	70.0%		70.0%	70.0%		30.0%	30.0%		30.0%	30.0%	
Yellow Time (s)	3.7	3.7		3.7	3.7		3.3	3.3		3.3	3.3	
All-Red Time (s)	2.4	2.4		2.4	2.4		3.0	3.0		3.0	3.0	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0		
Total Lost Time (s)	6.1	6.1		6.1	6.1		6.3	6.3		6.3		
Lead/Lag												
Lead-Lag Optimize?												
Recall Mode	C-Max	C-Max		C-Max	C-Max		None	None		None	None	
Act Effct Green (s)	88.2	88.2		88.2	88.2		13.9	13.9				13.9
Actuated g/C Ratio	0.80	0.80		0.80	0.80		0.13	0.13				0.13
v/c Ratio	0.02	0.73		0.38	0.36		0.38	0.14				0.07
Control Delay	2.5	13.2		19.5	5.1		49.0	14.1				4.5
Queue Delay	0.0	2.1		0.0	0.0		0.0	0.0				0.0
Total Delay	2.5	15.3		19.5	5.1		49.0	14.1				4.5
LOS	A	B		B	A		D	B				A
Approach Delay		15.2			5.7			37.5				4.5
Approach LOS		B			A			D				A
Queue Length 50th (m)	0.0	234.0		2.2	25.5		13.0	0.0				0.0
Queue Length 95th (m)	m0.5	m249.3		#21.2	61.3		22.6	7.5				2.2
Internal Link Dist (m)		221.9			561.5			129.3				33.2
Turn Bay Length (m)	80.0			40.0								
Base Capacity (vph)	401	2636		112	2655		315	383				372
Starvation Cap Reductn	0	540		0	0		0	0				0
Spillback Cap Reductn	0	0		0	0		0	0				0
Storage Cap Reductn	0	0		0	0		0	0				0
Reduced v/c Ratio	0.02	0.92		0.38	0.36		0.20	0.08				0.04
Intersection Summary												
Cycle Length: 110												
Actuated Cycle Length: 110												
Offset: 36 (33%), Referenced to phase 2:EBTL and 6:WBTL, Start of Green												
Natural Cycle: 90												
Control Type: Actuated-Coordinated												

Lanes, Volumes, Timings
3: 3636 Innes Rd/3615 Innes Rd & Innes Rd

Maximum v/c Ratio: 0.73
Intersection Signal Delay: 12.7 Intersection LOS: B
Intersection Capacity Utilization 77.2% ICU Level of Service D
Analysis Period (min) 15
95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.
m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 3: 3636 Innes Rd/3615 Innes Rd & Innes Rd



2030 Future Background
PM Peak Hour

Lanes, Volumes, Timings
4: Innes Rd & Viseneau Dr

2030 Future Background
PM Peak Hour

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑	↑↑	↑↑	↑↑	↑	↑	↑	↑	↑	↑
Traffic Volume (vph)	44	1685	87	183	849	84	106	40	179	60	51	30
Future Volume (vph)	44	1685	87	183	849	84	106	40	179	60	51	30
Satd. Flow (prot)	1658	3316	1483	1658	3260	0	1658	1745	1483	0	1646	0
Flt Permitted	0.306						0.050			0.608		0.844
Satd. Flow (perm)	532	3316	1399	87	3260	0	1042	1745	1460	0	1417	0
Satd. Flow (RTOR)			106		15				179		10	
Lane Group Flow (vph)	44	1685	87	183	933	0	106	40	179	0	141	0
Turn Type	Perm	NA	Perm	pm+pt	NA		Perm	NA	Perm	Perm	NA	
Protected Phases	2		1	6			4		4	4	8	
Permitted Phases	2	2	2	1	6		4	4	4	4	8	8
Detector Phase	2	2	2	1	6		4	4	4	4	8	8
Switch Phase												
Minimum Initial (s)	10.0	10.0	10.0	5.0	10.0		10.0	10.0	10.0	10.0	10.0	10.0
Minimum Split (s)	32.3	32.3	32.3	11.3	32.3		36.3	36.3	36.3	36.3	36.3	36.3
Total Split (s)	68.0	68.0	68.0	20.0	88.0		37.0	37.0	37.0	37.0	37.0	37.0
Total Split (%)	52.3%	52.3%	52.3%	15.4%	67.7%		28.5%	28.5%	28.5%	28.5%	28.5%	28.5%
Yellow Time (s)	3.7	3.7	3.7	3.7	3.7		3.0	3.0	3.0	3.0	3.0	3.0
All-Red Time (s)	2.6	2.6	2.6	2.6	2.6		4.3	4.3	4.3	4.3	4.3	4.3
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.3	6.3	6.3	6.3	6.3		7.3	7.3	7.3	7.3	7.3	7.3
Lead/Lag	Lag	Lag	Lag	Lead			Lag	Lag	Lag	Lag	Lag	Lag
Lead-Lag Optimize?	Yes	Yes	Yes	Yes			Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	C-Max	C-Max	C-Max	None	C-Max		None	None	None	None	None	None
Act Effct Green (s)	75.1	75.1	75.1	96.3	96.3		20.1	20.1	20.1	20.1	20.1	20.1
Actuated g/C Ratio	0.58	0.58	0.58	0.74	0.74		0.15	0.15	0.15	0.15	0.15	0.15
v/c Ratio	0.14	0.88	0.10	0.75	0.39		0.66	0.15	0.48	0.62		
Control Delay	18.7	32.2	2.4	50.2	7.4		69.3	45.0	10.2	58.1		
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	18.7	32.2	2.4	50.2	7.4		69.3	45.0	10.2	58.1		
LOS	B	C	A	D	A		E	D	B		E	
Approach Delay		30.5			14.4				33.7		58.1	
Approach LOS		C			B				C		E	
Queue Length 50th (m)	4.8	179.4	0.0	30.0	36.1		26.5	9.2	0.0	32.5		
Queue Length 95th (m)	14.4	#293.8	6.1	56.3	64.4		42.5	18.2	18.6	49.7		
Internal Link Dist (m)		561.5			192.3				77.4		48.4	
Turn Bay Length (m)	47.5		58.5	58.5			48.5			20.0		
Base Capacity (vph)	307	1915	852	260	2419		238	398	471	331		
Starvation Cap Reductn	0	0	0	0	0		0	0	0	0	0	
Spillback Cap Reductn	0	0	0	0	0		0	0	0	0	0	
Storage Cap Reductn	0	0	0	0	0		0	0	0	0	0	
Reduced v/c Ratio	0.14	0.88	0.10	0.70	0.39		0.45	0.10	0.38	0.43		
Intersection Summary												
Cycle Length: 130												
Actuated Cycle Length: 130												
Offset: 105 (81%), Referenced to phase 2:EBTL and 6:WBT, Start of Green												
Natural Cycle: 125												
Control Type: Actuated-Coordinated												

Lanes, Volumes, Timings
4: Innes Rd & Viseneau Dr

2030 Future Background
PM Peak Hour


Lane Group	Ø3	Ø7
Lane Configurations		
Traffic Volume (vph)		
Future Volume (vph)		
Satd. Flow (prot)		
Flt Permitted		
Satd. Flow (perm)		
Satd. Flow (RTOR)		
Lane Group Flow (vph)		
Turn Type		
Protected Phases	3	7
Permitted Phases		
Detector Phase		
Switch Phase		
Minimum Initial (s)	1.0	1.0
Minimum Split (s)	3.0	3.0
Total Split (s)	5.0	5.0
Total Split (%)	4%	4%
Yellow Time (s)	2.0	2.0
All-Red Time (s)	0.0	0.0
Lost Time Adjust (s)		
Total Lost Time (s)		
Lead/Lag	Lead	Lead
Lead-Lag Optimize?	Yes	Yes
Recall Mode	None	None
Act Efect Green (s)		
Actuated g/C Ratio		
v/c Ratio		
Control Delay		
Queue Delay		
Total Delay		
LOS		
Approach Delay		
Approach LOS		
Queue Length 50th (m)		
Queue Length 95th (m)		
Internal Link Dist (m)		
Turn Bay Length (m)		
Base Capacity (vph)		
Starvation Cap Reductn		
Spillback Cap Reductn		
Storage Cap Reductn		
Reduced v/c Ratio		
Intersection Summary		

Lanes, Volumes, Timings
4: Innes Rd & Viseneau Dr


2030 Future Background
PM Peak Hour

Maximum v/c Ratio: 0.88
Intersection Signal Delay: 26.7
Intersection Capacity Utilization 95.8%
Analysis Period (min) 15
95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.

Splits and Phases: 4: Innes Rd & Viseneau Dr



Lanes, Volumes, Timings
5: Lamarche Ave & Innes Rd

2030 Future Background PM Peak Hour							
							
Lane Group	EBT	EBR	WBL	WBT	NBL	NBR	Ø8
Lane Configurations							
Traffic Volume (vph)	1920	63	30	994	38	18	
Future Volume (vph)	1920	63	30	994	38	18	
Satd. Flow (prot)	3316	1483	1658	3316	1658	1483	
Flt Permitted		0.950			0.950		
Satd. Flow (perm)	3316	1483	1658	3316	1658	1483	
Satd. Flow (RTOR)							
Lane Group Flow (vph)	1920	63	30	994	38	18	
Turn Type	NA	Perm	Prot	NA	Prot	Perm	
Protected Phases	2		1	6	7		8
Permitted Phases		2				4	
Detector Phase	2	2	1	6	7	4	
Switch Phase							
Minimum Initial (s)	10.0	10.0	5.0	10.0	5.0	5.0	1.0
Minimum Split (s)	22.5	22.5	11.7	22.5	11.3	22.5	22.5
Total Split (s)	64.5	64.5	11.7	76.2	11.3	33.8	22.5
Total Split (%)	58.6%	58.6%	10.6%	69.3%	10.3%	30.7%	20%
Yellow Time (s)	3.7	3.7	3.7	3.7	3.3	3.5	2.0
All-Red Time (s)	2.3	2.3	3.0	2.3	3.0	3.0	1.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	
Total Lost Time (s)	6.0	6.0	6.7	6.0	6.3	6.5	
Lead/Lag	Lag	Lag	Lead		Lag		Lead
Lead-Lag Optimize?	Yes	Yes	Yes	C-Max	Yes	Yes	Max
Recall Mode	C-Max	C-Max	None	C-Max	None	None	Max
Act Effct Green (s)	67.7	67.7	5.4	74.7	5.0	22.8	
Actuated g/C Ratio	0.62	0.62	0.05	0.68	0.05	0.21	
v/c Ratio	0.94	0.07	0.37	0.44	0.51	0.06	
Control Delay	27.5	13.8	59.8	11.5	74.6	32.7	
Queue Delay	5.1	0.0	0.0	0.0	0.0	0.0	
Total Delay	32.6	13.8	59.8	11.5	74.6	32.7	
LOS	C	B	E	B	E	C	
Approach Delay	32.0			12.9	61.1		
Approach LOS	C			B	E		
Queue Length 50th (m)	~240.0	6.1	6.4	49.0	8.2	3.0	
Queue Length 95th (m)	#283.3	m7.5	#16.6	102.6	#21.6	8.8	
Internal Link Dist (m)	206.5			221.9	256.5		
Turn Bay Length (m)		40.0	80.0		80.0		
Base Capacity (vph)	2040	912	81	2252	75	368	
Starvation Cap Reductn	0	0	0	0	0	0	
Spillback Cap Reductn	98	0	0	0	0	0	
Storage Cap Reductn	0	0	0	0	0	0	
Reduced v/c Ratio	0.99	0.07	0.37	0.44	0.51	0.05	
Intersection Summary							
Cycle Length: 110							
Actuated Cycle Length: 110							
Offset: 0 (0%), Referenced to phase 2:EBT and 6:WBT, Start of Green							
Natural Cycle: 120							
Control Type: Actuated-Coordinated							

Scenario 1 245 and 275 Lamarche Avenue 11:59 pm 03/04/2022 2030 Future Background

Synchro 11 Report
Page 10

Lanes, Volumes, Timings
5: Lamarche Ave & Innes Rd

2030 Future Background
PM Peak Hour

Maximum v/c Ratio: 0.94
Intersection Signal Delay: 26.2
Intersection Capacity Utilization 70.6%
Analysis Period (min) 15
 ~ Volume exceeds capacity, queue is theoretically infinite.
 Queue shown is maximum after two cycles.
 # 95th percentile volume exceeds capacity, queue may be longer.
 Queue shown is maximum after two cycles.
 m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 5: Lamarche Ave & Innes Rd



Scenario 1 245 and 275 Lamarche Avenue 11:59 pm 03/04/2022 2030 Future Background

Synchro 11 Report
Page 11

Appendix I

MMLOS Analysis

Multi-Modal Level of Service - Intersections Form

Consultant Scenario Comments	CGH Transportation Inc. Existing/Future	Project Date	245 and 275 Lamarche Avenue

Intersection	Innes Road at Orleans Boulevard				Innes Road at Page Road				Innes Road at Lamarche Avenue (Future)				Innes Road at Access 3615 Innes Road/3636 Innes Road				Innes Road at Viseneau Drive					
	Crossing Side	North	South	East	West	North	South	East	West	North	South	East	West	North	South	East	West	North	South	East	West	
Pedestrian	Lanes Median	6	6	8	8	6	6	8	8	3	7	4	5	7	7	5	7	9	9	9	9	
	Conflicting Left Turns	Protected	Protected	Permissive	Protected/ Permissive	Permissive	Permissive	Permissive	Permissive	Protected	Protected	Permissive	Permissive	Permissive	Permissive	Permissive	No Median - 2.4 m	No Median - 2.4 m	Median > 2.4 m	No Median - 2.4 m	No Median - 2.4 m	No Median - 2.4 m
	Conflicting Right Turns	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	No right turn	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive/ Permissive	Protected/ Permissive	Permissive	Permissive	Permissive	Permissive			
	Right Turn on Red (RTOR) ?	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR prohibited	RTOR prohibited	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed	RTOR allowed
	Ped Signal Leading Interval?	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	Yes	Yes	Yes	Yes
	Right Turn Channel	Conventional with Receiving Lane	No Channel	No Channel	No Channel	No Channel	No Channel	No Right Turn	No Channel	No Channel	No Channel	No Channel	No Channel	No Channel	No Channel	No Channel	No Channel	No Channel	No Channel			
	Corner Radius	15-25m	15-25m	15-25m	15-25m	10-15m	10-15m	10-15m	10-15m	3-5m	No Right Turn	3-5m	5-10m	10-15m	5-10m	5-10m	10-15m	10-15m	10-15m	10-15m	10-15m	10-15m
	Crosswalk Type	Std transverse markings	Std transverse markings	Zebra stripe hi-vis markings	Zebra stripe hi-vis markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Zebra stripe hi-vis markings	Zebra stripe hi-vis markings	Zebra stripe hi-vis markings
	PETSI Score	27	27	-10	-7	20	20	-12	-12	83	30	55	38	4	11	38	4	-24	-24			
	Ped. Exposure to Traffic LoS	F	F	F	F	F	F	F	F	-	B	-	E	D	E	F	F	E	F	#N/A	#N/A	
Bicycle	Cycle Length	110	110	110	110	110	110	110	110	110	110	110	110	110	110	110	110	120	120	120	120	120
	Effective Walk Time	7	26	26	26	7	7	48	48	8	8	57	57	8	8	53	41					
	Average Pedestrian Delay	48	32	32	32	48	48	17	17	47	47	13	13	52	52	19	26					
	Pedestrian Delay LoS	E	D	D	D	E	E	B	B	-	-	-	-	E	E	B	B	E	E	B	C	
	Level of Service	F	F	F	F	F	F	F	F	-	B	-	E	E	E	F	F	E	F	#N/A	#N/A	
	Approach From	F				F				E				F				#N/A				
	Bicycle Lane Arrangement on Approach	Mixed Traffic	Mixed Traffic	Mixed Traffic	Curb Bike Lane, Cycletrack or MUP	Mixed Traffic	Mixed Traffic	Curb Bike Lane, Cycletrack or MUP	Curb Bike Lane, Cycletrack or MUP	Curb Bike Lane, Cycletrack or MUP	Curb Bike Lane, Cycletrack or MUP	Curb Bike Lane, Cycletrack or MUP	Curb Bike Lane, Cycletrack or MUP	Mixed Traffic	Mixed Traffic	Curb Bike Lane, Cycletrack or MUP	Curb Bike Lane, Cycletrack or MUP	Mixed Traffic	Mixed Traffic	Curb Bike Lane, Cycletrack or MUP	Curb Bike Lane, Cycletrack or MUP	
	Right Turn Lane Configuration	> 50 m	≤ 50 m	> 50 m	Not Applicable					Not Applicable	Not Applicable							≤ 50 m				
	Right Turning Speed	>25 km/h	>25 km/h	>25 km/h	Not Applicable					Not Applicable	Not Applicable							≤ 25 km/h				
	Cyclist relative to RT motorists	F	E	F	Not Applicable	#N/A	#N/A	Not Applicable	Not Applicable	-	Not Applicable	Not Applicable	Not Applicable	#N/A	#N/A	Not Applicable	Not Applicable	D	#N/A	Not Applicable	Not Applicable	
Transit	Separated or Mixed Traffic	Mixed Traffic	Mixed Traffic	Mixed Traffic	Separated	Mixed Traffic	Mixed Traffic	Separated	Separated	-	Separated	Separated	Separated	Mixed Traffic	Mixed Traffic	Separated	Separated	Mixed Traffic	Mixed Traffic	Separated	Separated	
	Left Turn Approach	≥ 2 lanes crossed	No lane crossed	No lane crossed	≥ 2 lanes crossed	≥ 2 lanes crossed	2-stage, LT box	2-stage, LT box	2-stage, LT box	2-stage, LT box	No lane crossed	No lane crossed	≥ 2 lanes crossed	≥ 2 lanes crossed	No lane crossed	≥ 2 lanes crossed	≥ 2 lanes crossed	≥ 2 lanes crossed				
	Operating Speed	≥ 60 km/h	≥ 50 to < 60 km/h	≥ 60 km/h	≥ 60 km/h	> 40 to ≤ 50 km/h	> 40 to ≤ 50 km/h	≥ 60 km/h	≥ 60 km/h	> 50 to < 60 km/h	≥ 60 km/h	> 50 to < 60 km/h	≥ 60 km/h	> 50 to < 60 km/h	> 50 to < 60 km/h	≥ 60 km/h	≥ 60 km/h	> 40 to ≤ 50 km/h	> 40 to ≤ 50 km/h	≥ 60 km/h	≥ 60 km/h	
	Left Turning Cyclist	F	F	F	F	B	B	F	F	-	A	A	A	C	C	F	F	B	E	F	F	
	Level of Service	F	F	F	F	#N/A	#N/A	F	F	-	A	A	A	#N/A	#N/A	F	F	D	#N/A	F	F	
	Average Signal Delay	> 40 sec	> 40 sec	> 40 sec	> 40 sec	≤ 10 sec	≤ 20 sec			> 40 sec	> 40 sec			≤ 10 sec	≤ 10 sec			> 40 sec	≤ 10 sec			
	Level of Service	F	F	F	F	-	-	B	C	-	-	-	-	F	F	-	-	B	B	F	E	
Truck	Effective Corner Radius	> 15 m	> 15 m																			
	Number of Receiving Lanes on Departure from Intersection	≥ 2	≥ 2	≥ 2																		
	Level of Service	A	-	A	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	A					-				-				-				-				
Auto	Volume to Capacity Ratio	0.91 - 1.00				0.91 - 1.00				0.71 - 0.80				0.61 - 0.70				0.81 - 0.90				
	Level of Service	E				E				C				B				D				

Multi-Modal Level of Service - Segments Form

Consultant	CGH Transportation Inc.	Project	245 and 275 Lamarche Avenue
Scenario	Existing/Future	Date	
Comments			

SEGMENTS		Lamarche Ave	Lamarche Ave	Section	Section
Pedestrian	Sidewalk Width Boulevard Width	Existing	Future	3	4
	Avg Daily Curb Lane Traffic Volume	≥ 2 m > 2 m	1.8 m > 2 m		
	Operating Speed	≤ 3000	≤ 3000		
	On-Street Parking	> 50 to 60 km/h yes	> 50 to 60 km/h yes		
	Exposure to Traffic PLoS	A	A	-	-
	Effective Sidewalk Width				
	Pedestrian Volume				
	Crowding PLoS	-	-	-	-
	Level of Service	-	-	-	-
Bicycle	Type of Cycling Facility	Physically Separated	Physically Separated		
	Number of Travel Lanes				
	Operating Speed				
	# of Lanes & Operating Speed LoS	-	-	-	-
	Bike Lane (+ Parking Lane) Width				
	Bike Lane Width LoS	-	-	-	-
	Bike Lane Blockages				
	Blockage LoS	-	-	-	-
	Median Refuge Width (no median = < 1.8 m)				
	No. of Lanes at Unsignalized Crossing				
Transit	Sidestreet Operating Speed				
	Unsignalized Crossing - Lowest LoS	A	A	-	-
	Level of Service	A	A	-	-
Truck	Facility Type				
	Friction or Ratio Transit:Posted Speed				
	Level of Service	-	-	-	-
	Truck Lane Width				
	Travel Lanes per Direction				
	Level of Service	-	-	-	-

Appendix J

Synchro Intersection Worksheets –2025 Future Total Conditions

Lanes, Volumes, Timings
1: Orleans Blvd & Innes Rd


2025 Future Total AM Peak Hour												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑
Traffic Volume (vph)	121	406	23	17	1430	119	228	292	38	65	100	459
Future Volume (vph)	121	406	23	17	1430	119	228	292	38	65	100	459
Satd. Flow (prot)	3216	3316	1483	1658	3316	1483	1658	3316	1483	1658	3316	1483
Flt Permitted	0.950				0.950		0.549		0.573			
Satd. Flow (perm)	3207	3316	1426	1632	3316	1444	952	3316	1396	968	3316	1452
Satd. Flow (RTOR)			143			143			82			151
Lane Group Flow (vph)	121	406	23	17	1430	119	228	292	38	65	100	459
Turn Type	Prot	NA	Perm	Prot	NA	Perm	pm+pt	NA	Perm	Perm	NA	Perm
Protected Phases	5	2		1	6		7	4		4	8	
Permitted Phases			2			6	4		4	8		8
Detector Phase	5	2	2	1	6	6	7	4	4	8	8	8
Switch Phase												
Minimum Initial (s)	5.0	10.0	10.0	5.0	10.0	10.0	5.0	10.0	10.0	10.0	10.0	10.0
Minimum Split (s)	11.6	26.2	26.2	11.2	26.2	26.2	11.7	32.7	32.7	32.7	32.7	32.7
Total Split (s)	13.0	65.0	65.0	13.0	65.0	65.0	19.0	52.0	52.0	33.0	33.0	33.0
Total Split (%)	10.0%	50.0%	50.0%	10.0%	50.0%	50.0%	14.6%	40.0%	40.0%	25.4%	25.4%	25.4%
Yellow Time (s)	3.7	3.7	3.7	3.7	3.7	3.7	3.3	3.3	3.3	3.3	3.3	3.3
All-Red Time (s)	2.9	2.5	2.5	2.5	2.5	2.5	3.4	3.4	3.4	3.4	3.4	3.4
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.6	6.2	6.2	6.2	6.2	6.2	6.7	6.7	6.7	6.7	6.7	6.7
Lead/Lag	Lead	Lag	Lag	Lead	Lag	Lag	Lead		Lag	Lag	Lag	
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	C-Max	C-Max	None	C-Max	C-Max	None	None	None	None	None	None
Act Efft Green (s)	6.4	66.6	66.6	6.4	58.8	58.8	45.3	45.3	45.3	26.3	26.3	26.3
Actuated g/C Ratio	0.05	0.51	0.51	0.05	0.45	0.45	0.35	0.35	0.35	0.20	0.20	0.20
v/c Ratio	0.77	0.24	0.03	0.21	0.95	0.16	0.57	0.25	0.07	0.33	0.15	1.11
Control Delay	90.3	19.1	0.1	65.5	49.2	2.4	38.9	31.0	0.3	50.0	43.4	109.2
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	90.3	19.1	0.1	65.5	49.2	2.4	38.9	31.0	0.3	50.0	43.4	109.2
LOS	F	B	A	E	D	A	D	C	A	D	D	F
Approach Delay	33.9			45.8			32.1			92.4		
Approach LOS	C			D			C			F		
Queue Length 50th (m)	16.0	26.8	0.0	4.3	182.1	0.0	44.0	28.0	0.0	14.4	11.2	~101.4
Queue Length 95th (m)	#31.4	44.8	0.0	12.2	#232.7	7.0	66.7	39.3	0.0	28.8	19.2	#166.8
Internal Link Dist (m)	265.9			463.6			69.4			101.9		
Turn Bay Length (m)	135.5		87.0	106.0		57.0	48.0		43.5	50.0		53.0
Base Capacity (vph)	158	1698	800	86	1499	731	398	1155	539	195	670	414
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.77	0.24	0.03	0.20	0.95	0.16	0.57	0.25	0.07	0.33	0.15	1.11

Lanes, Volumes, Timings
1: Orleans Blvd & Innes Rd

2025 Future Total AM Peak Hour											
--------------------------------	--	--	--	--	--	--	--	--	--	--	--

Maximum v/c Ratio: 1.11
Intersection Signal Delay: 50.3
Intersection Capacity Utilization 102.0%
Analysis Period (min) 15
~ Volume exceeds capacity, queue is theoretically infinite.
Queue shown is maximum after two cycles.
95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.

Splits and Phases: 1: Orleans Blvd & Innes Rd



Lanes, Volumes, Timings
2: Page Rd & Innes Rd

2025 Future Total
AM Peak Hour

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑	↑	↑↑	↑	↑	↑	↑	↑	↑	↑
Traffic Volume (vph)	14	478	21	39	1502	28	14	12	42	42	9	53
Future Volume (vph)	14	478	21	39	1502	28	14	12	42	42	9	53
Satd. Flow (prot)	1658	3291	0	1658	3304	0	0	1572	0	0	1572	0
Flt Permitted	0.131							0.923				0.859
Satd. Flow (perm)	228	3291	0	813	3304	0	0	1462	0	0	1378	0
Satd. Flow (RTOR)			7		3			42			42	
Lane Group Flow (vph)	14	499	0	39	1530	0	0	68	0	0	104	0
Turn Type	Perm	NA		Perm	NA		Perm	NA		Perm	NA	
Protected Phases	2			6			4		4		8	
Permitted Phases	2			6			4		4		8	
Detector Phase	2	2		6	6		4	4		8	8	
Switch Phase												
Minimum Initial (s)	10.0	10.0		10.0	10.0		10.0	10.0		10.0	10.0	
Minimum Split (s)	39.2	39.2		39.2	39.2		37.8	37.8		37.8	37.8	
Total Split (s)	82.0	82.0		82.0	82.0		38.0	38.0		38.0	38.0	
Total Split (%)	68.3%	68.3%		68.3%	68.3%		31.7%	31.7%		31.7%	31.7%	
Yellow Time (s)	3.7	3.7		3.7	3.7		3.0	3.0		3.0	3.0	
All-Red Time (s)	2.5	2.5		2.5	2.5		3.8	3.8		3.8	3.8	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0				0.0	
Total Lost Time (s)	6.2	6.2		6.2	6.2		6.8				6.8	
Lead/Lag												
Lead-Lag Optimize?												
Recall Mode	C-Max	C-Max		C-Max	C-Max		None	None		None	None	
Act Efect Green (s)	88.4	88.4		88.4	88.4			18.6			18.6	
Actuated g/C Ratio	0.74	0.74		0.74	0.74			0.16			0.16	
v/c Ratio	0.08	0.21		0.07	0.63			0.26			0.42	
Control Delay	9.0	6.3		6.4	16.5			20.2			30.2	
Queue Delay	0.0	0.0		0.0	0.7			0.0			0.0	
Total Delay	9.0	6.3		6.4	17.3			20.2			30.2	
LOS	A	A		A	B			C			C	
Approach Delay				6.4		17.0		20.3			30.2	
Approach LOS				A		B		C			C	
Queue Length 50th (m)	0.6	11.5		0.8	144.2			5.8			14.2	
Queue Length 95th (m)	4.3	32.5		m6.3	224.7			16.0			26.3	
Internal Link Dist (m)	463.6			206.5			143.5			112.1		
Turn Bay Length (m)	104.5			120.0								
Base Capacity (vph)	168	2426		599	2435			411			389	
Starvation Cap Reductn	0	0		0	523			0			0	
Spillback Cap Reductn	0	0		0	0			0			0	
Storage Cap Reductn	0	0		0	0			0			0	
Reduced v/c Ratio	0.08	0.21		0.07	0.80			0.17			0.27	
Intersection Summary												
Cycle Length: 120												
Actuated Cycle Length: 120												
Offset: 26 (22%), Referenced to phase 2:EBTL and 6:WBTL, Start of Green												
Natural Cycle: 90												
Control Type: Actuated-Coordinated												

Scenario 1 245 and 275 Lamarche Avenue 11:59 pm 03/04/2022 2025 Future Total

Synchro 11 Report

Page 3

Lanes, Volumes, Timings
2: Page Rd & Innes Rd

2025 Future Total
AM Peak Hour

Maximum v/c Ratio: 0.63	Intersection Signal Delay: 15.3	Intersection LOS: B
Intersection Capacity Utilization 72.0%		ICU Level of Service C
Analysis Period (min) 15		
m Volume for 95th percentile queue is metered by upstream signal.		
Splits and Phases: 2: Page Rd & Innes Rd		
Ø2 (R) 82 s	Ø4 38 s	Ø8 82 s 38 s

Scenario 1 245 and 275 Lamarche Avenue 11:59 pm 03/04/2022 2025 Future Total

Synchro 11 Report

Page 4

Lanes, Volumes, Timings
3: 3636 Innes Rd/3615 Innes Rd & Innes Rd

2025 Future Total
AM Peak Hour

Lane Group												
	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑	↑	↑↑	↑	↑	↑	↑	↑	↑↑	
Traffic Volume (vph)	6	536	38	12	1413	4	99	0	39	1	0	3
Future Volume (vph)	6	536	38	12	1413	4	99	0	39	1	0	3
Satd. Flow (prot)	1658	3283	0	1658	3315	0	1658	1464	0	0	1533	0
Flt Permitted	0.160			0.436			0.755				0.952	
Satd. Flow (perm)	279	3283	0	761	3315	0	1314	1464	0	0	1477	0
Satd. Flow (RTOR)								391			28	
Lane Group Flow (vph)	6	574	0	12	1417	0	99	39	0	0	4	0
Turn Type	Perm	NA	Perm	NA	Perm	NA	Perm	NA	Perm	NA		
Protected Phases	2			6			4		4		8	
Permitted Phases	2			6			4		4		8	
Detector Phase	2	2		6	6		4	4		8	8	
Switch Phase												
Minimum Initial (s)	10.0	10.0		10.0	10.0		10.0	10.0		10.0	10.0	
Minimum Split (s)	32.1	32.1		32.1	32.1		32.3	32.3		32.3	32.3	
Total Split (s)	87.0	87.0		87.0	87.0		33.0	33.0		33.0	33.0	
Total Split (%)	72.5%	72.5%		72.5%	72.5%		27.5%	27.5%		27.5%	27.5%	
Yellow Time (s)	3.7	3.7		3.7	3.7		3.3	3.3		3.3	3.3	
All-Red Time (s)	2.4	2.4		2.4	2.4		3.0	3.0		3.0	3.0	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0		
Total Lost Time (s)	6.1	6.1		6.1	6.1		6.3	6.3		6.3		
Lead/Lag												
Lead-Lag Optimize?												
Recall Mode	C-Max	C-Max		C-Max	C-Max		None	None		None	None	
Act Efect Green (s)	91.8	91.8		91.8	91.8		15.8	15.8		15.8		
Actuated g/C Ratio	0.76	0.76		0.76	0.76		0.13	0.13		0.13		
v/c Ratio	0.03	0.23		0.02	0.56		0.57	0.07		0.02		
Control Delay	2.5	2.0		7.3	9.1		60.6	0.3		0.2		
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.0		0.0		
Total Delay	2.5	2.0		7.3	9.1		60.6	0.3		0.2		
LOS	A	A		A	A		E	A		A		
Approach Delay		2.0			9.1			43.5		0.3		
Approach LOS		A			A			D		A		
Queue Length 50th (m)	0.1	6.4		0.5	53.8		22.6	0.0		0.0		
Queue Length 95th (m)	0.6	8.5		m2.5	129.3		36.3	0.0		0.0		
Internal Link Dist (m)		221.9			561.5			129.3		33.2		
Turn Bay Length (m)	80.0			40.0								
Base Capacity (vph)	213	2511		582	2536		292	629		350		
Starvation Cap Reductn	0	0		0	0		0	0		0		
Spillback Cap Reductn	0	0		0	0		0	0		0		
Storage Cap Reductn	0	0		0	0		0	0		0		
Reduced v/c Ratio	0.03	0.23		0.02	0.56		0.34	0.06		0.01		
Intersection Summary												
Cycle Length: 120												
Actuated Cycle Length: 120												
Offset: 0 (0%), Referenced to phase 2:EBTL and 6:WBT, Start of Green												
Natural Cycle: 70												
Control Type: Actuated-Coordinated												

Scenario 1 245 and 275 Lamarche Avenue 11:59 pm 03/04/2022 2025 Future Total

Synchro 11 Report

Page 5

Lanes, Volumes, Timings
3: 3636 Innes Rd/3615 Innes Rd & Innes Rd

2025 Future Total
AM Peak Hour

Maximum v/c Ratio: 0.57	Intersection Signal Delay: 9.4	Intersection LOS: A
Intersection Capacity Utilization 64.5%		ICU Level of Service C
Analysis Period (min) 15		
m Volume for 95th percentile queue is metered by upstream signal.		
Splits and Phases: 3: 3636 Innes Rd/3615 Innes Rd & Innes Rd		

Scenario 1 245 and 275 Lamarche Avenue 11:59 pm 03/04/2022 2025 Future Total

Synchro 11 Report

Page 6

Lanes, Volumes, Timings
4: Innes Rd & Viseneau Dr

2025 Future Total
AM Peak Hour

Lane Group	EBL	EBT	EBC	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑	↑	↑↑	↑	↑	↑	↑	↑	↑	↑
Traffic Volume (vph)	11	514	37	59	1372	33	19	5	39	46	13	41
Future Volume (vph)	11	514	37	59	1372	33	19	5	39	46	13	41
Satl. Flow (prot)	1658	3316	1483	1658	3300	0	1658	1745	1483	0	1604	0
Flt Permitted	0.187			0.424			0.695				0.850	
Satl. Flow (perm)	326	3316	1450	739	3300	0	1212	1745	1462	0	1393	0
Satl. Flow (RTOR)			115		3				105		28	
Lane Group Flow (vph)	11	514	37	59	1405	0	19	5	39	0	100	0
Turn Type	Perm	NA	Perm	pm+pt	NA		Perm	NA	Perm	Perm	NA	
Protected Phases		2		1	6			4		4	8	
Permitted Phases	2		2	6			4		4	4	8	
Detector Phase	2	2	2	1	6		4	4	4	4	8	8
Switch Phase												
Minimum Initial (s)	10.0	10.0	10.0	5.0	10.0		10.0	10.0	10.0	10.0	10.0	
Minimum Split (s)	32.3	32.3	32.3	11.3	32.3		36.3	36.3	36.3	36.3	36.3	
Total Split (s)	66.0	66.0	66.0	12.0	78.0		37.0	37.0	37.0	37.0	37.0	
Total Split (%)	55.0%	55.0%	55.0%	10.0%	65.0%		30.8%	30.8%	30.8%	30.8%	30.8%	
Yellow Time (s)	3.7	3.7	3.7	3.7	3.7		3.0	3.0	3.0	3.0	3.0	
All-Red Time (s)	2.6	2.6	2.6	2.6	2.6		4.3	4.3	4.3	4.3	4.3	
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Total Lost Time (s)	6.3	6.3	6.3	6.3	6.3		7.3	7.3	7.3	7.3	7.3	
Lead/Lag	Lag	Lag	Lag	Lead			Lag	Lag	Lag	Lag	Lag	
Lead-Lag Optimize?	Yes	Yes	Yes	Yes			Yes	Yes	Yes	Yes	Yes	
Recall Mode	C-Max	C-Max	C-Max	None	C-Max		None	None	None	None	None	
Act Effct Green (s)	80.8	80.8	80.8	91.5	91.5		14.9	14.9	14.9		14.9	
Actuated g/C Ratio	0.67	0.67	0.67	0.76	0.76		0.12	0.12	0.12		0.12	
v/c Ratio	0.05	0.23	0.04	0.10	0.56		0.13	0.02	0.14		0.51	
Control Delay	6.4	4.9	0.1	5.2	8.0		44.5	40.6	1.1		42.3	
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0		0.0	
Total Delay	6.4	4.9	0.1	5.2	8.0		44.5	40.6	1.1		42.3	
LOS	A	A	A	A	A		D	D	A		D	
Approach Delay		4.7			7.9			17.3			42.3	
Approach LOS		A			A			B			D	
Queue Length 50th (m)	0.4	8.8	0.0	2.5	52.1		4.2	1.1	0.0		16.4	
Queue Length 95th (m)	1.5	18.6	0.2	9.6	121.4		9.8	4.2	0.0		28.9	
Internal Link Dist (m)		561.5			188.9			77.4			48.4	
Turn Bay Length (m)	47.5		58.5	58.5			48.5		20.0			
Base Capacity (vph)	219	2233	1014	614	2515		299	431	440		365	
Starvation Cap Reductn	0	0	0	0	0		0	0	0		0	
Spillback Cap Reductn	0	0	0	0	0		0	0	0		0	
Storage Cap Reductn	0	0	0	0	0		0	0	0		0	
Reduced v/c Ratio	0.05	0.23	0.04	0.10	0.56		0.06	0.01	0.09		0.27	
Intersection Summary												
Cycle Length: 120												
Actuated Cycle Length: 120												
Offset: 40 (33%), Referenced to phase 2:EBTL and 6:WBTL, Start of Green												
Natural Cycle: 85												
Control Type: Actuated-Coordinated												

Lanes, Volumes, Timings
4: Innes Rd & Viseneau Dr

2025 Future Total
AM Peak Hour

Lane Group	03	07
Lane Configurations		
Traffic Volume (vph)		
Future Volume (vph)		
Satl. Flow (prot)		
Flt Permitted		
Satl. Flow (perm)		
Satl. Flow (RTOR)		
Lane Group Flow (vph)		
Turn Type		
Protected Phases	3	7
Permitted Phases		
Detector Phase		
Switch Phase		
Minimum Initial (s)	1.0	1.0
Minimum Split (s)	3.0	4.0
Total Split (s)	5.0	5.0
Total Split (%)	4%	4%
Yellow Time (s)	2.0	2.0
All-Red Time (s)	0.0	0.0
Lost Time Adjust (s)		
Total Lost Time (s)		
Lead/Lag	Lead	Lead
Lead-Lag Optimize?	Yes	Yes
Recall Mode	None	None
Act Effct Green (s)		
Actuated g/C Ratio		
v/c Ratio		
Control Delay		
Queue Delay		
Total Delay		
LOS		
Approach Delay		
Approach LOS		
Queue Length 50th (m)		
Queue Length 95th (m)		
Internal Link Dist (m)		
Turn Bay Length (m)		
Base Capacity (vph)		
Starvation Cap Reductn		
Spillback Cap Reductn		
Storage Cap Reductn		
Reduced v/c Ratio		
Intersection Summary		
Cycle Length: 120		
Actuated Cycle Length: 120		
Offset: 40 (33%), Referenced to phase 2:EBTL and 6:WBTL, Start of Green		
Natural Cycle: 85		
Control Type: Actuated-Coordinated		

Lanes, Volumes, Timings
4: Innes Rd & Viseneau Dr

Maximum v/c Ratio: 0.56

Intersection Signal Delay: 8.9


Intersection LOS: A

Intersection Capacity Utilization 76.2%

ICU Level of Service D

Analysis Period (min) 15

Splits and Phases: 4: Innes Rd & Viseneau Dr



2025 Future Total
AM Peak Hour

Lanes, Volumes, Timings
5: Lamarche Ave & Innes Rd

2025 Future Total
AM Peak Hour

Lane Group	EBT	EBR	WBL	WBT	NBL	NBR	Ø8
Lane Configurations	↑↑	↑↑	↑↑	↑↑	↑↑	↑↑	↑↑
Traffic Volume (vph)	532	34	18	1500	78	43	
Future Volume (vph)	532	34	18	1500	78	43	
Satd. Flow (prot)	3316	1483	1658	3316	1658	1483	
Flt Permitted			0.950		0.950		
Satd. Flow (perm)	3316	1483	1658	3316	1658	1483	
Satd. Flow (RTOR)							
Lane Group Flow (vph)	532	34	18	1500	78	43	
Turn Type	NA	Perm	Prot	NA	Prot	Perm	
Protected Phases	2		1	6	7	8	
Permitted Phases						4	
Detector Phase	2	2	1	6	7	4	
Switch Phase							
Minimum Initial (s)	10.0	10.0	5.0	10.0	5.0	5.0	1.0
Minimum Split (s)	24.0	24.0	11.7	24.0	11.3	30.5	4.0
Total Split (s)	74.0	74.0	14.0	88.0	18.9	32.0	13.1
Total Split (%)	61.7%	61.7%	11.7%	73.3%	15.8%	26.7%	11%
Yellow Time (s)	3.7	3.7	3.7	3.7	3.3	3.5	2.0
All-Red Time (s)	2.3	2.3	3.0	2.3	3.0	3.0	1.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	
Total Lost Time (s)	6.0	6.0	6.7	6.0	6.3	6.5	
Lead/Lag	Lag	Lag	Lead		Lag	Lead	
Lead-Lag Optimize?	Yes	Yes	Yes		Yes	Yes	
Recall Mode	C-Max	C-Max	None	C-Max	None	None	Max
Act Effct Green (s)	81.2	81.2	6.5	86.8	10.4	20.7	
Actuated g/C Ratio	0.68	0.68	0.05	0.72	0.09	0.17	
v/c Ratio	0.24	0.03	0.20	0.63	0.55	0.17	
Control Delay	8.5	9.0	61.1	10.5	66.2	40.9	
Queue Delay	0.0	0.0	0.0	0.2	0.0	0.0	
Total Delay	8.5	9.0	61.1	10.7	66.2	40.9	
LOS	A	A	E	B	E	D	
Approach Delay	8.5			11.3	57.2		
Approach LOS	A			B	E		
Queue Length 50th (m)	19.6	2.1	4.3	65.8	17.8	8.4	
Queue Length 95th (m)	33.1	7.2	m7.9	91.5	33.2	18.3	
Internal Link Dist (m)	206.5			221.9	65.1		
Turn Bay Length (m)		40.0	80.0		80.0		
Base Capacity (vph)	2243	1003	100	2397	174	315	
Starvation Cap Reductn	0	0	0	8	0	0	
Spillback Cap Reductn	0	0	0	206	0	0	
Storage Cap Reductn	0	0	0	0	0	0	
Reduced v/c Ratio	0.24	0.03	0.18	0.68	0.45	0.14	
Intersection Summary							
Cycle Length: 120							
Actuated Cycle Length: 120							
Offset: 0 (0%), Referenced to phase 2:EBT and 6:WBT, Start of Green							
Natural Cycle: 70							
Control Type: Actuated-Coordinated							

Lanes, Volumes, Timings
5: Lamarche Ave & Innes Rd

Maximum v/c Ratio: 0.63

Intersection Signal Delay: 13.1

Intersection LOS: B


Intersection Capacity Utilization 58.6%

ICU Level of Service B

Analysis Period (min) 15

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 5: Lamarche Ave & Innes Rd



2025 Future Total
AM Peak Hour

HCM 2010 TWSC
6: Lamarche Ave & Access #1

2025 Future Total
AM Peak Hour

Intersection

Int Delay, s/veh 1.8

Movement WBL WBR NBT NBR SBL SBT

Lane Configurations	Y	T			
Traffic Vol, veh/h	0	26	95	0	11 41
Future Vol, veh/h	0	26	95	0	11 41
Conflicting Peds, #/hr	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free
RT Channelized	-	None	-	None	-
Storage Length	0	-	-	-	-
Veh in Median Storage, #	0	-	0	-	0
Grade, %	0	-	0	-	0
Peak Hour Factor	100	100	100	100	100
Heavy Vehicles, %	2	2	2	2	2
Mvmt Flow	0	26	95	0	11 41

Major/Minor Minor1 Major1 Major2

Conflicting Flow All	158	95	0	0	95	0
Stage 1	95	-	-	-	-	-
Stage 2	63	-	-	-	-	-
Critical Hdwy	6.42	6.22	-	-	4.12	-
Critical Hdwy Stg 1	5.42	-	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-	-
Follow-up Hdwy	3.518	3.318	-	-	2.218	-
Pot Cap-1 Maneuver	833	962	-	-	1499	-
Stage 1	929	-	-	-	-	-
Stage 2	960	-	-	-	-	-
Platoon blocked, %		-	-	-	-	-
Mov Cap-1 Maneuver	826	962	-	-	1499	-
Mov Cap-2 Maneuver	826	-	-	-	-	-
Stage 1	929	-	-	-	-	-
Stage 2	952	-	-	-	-	-

Approach WB NB SB

HCM Control Delay, s	8.8	0	1.6
HCM LOS	A		

Minor Lane/Major Mvmt NBT NBRWBLn1 SBL SBT

Capacity (veh/h)	-	-	962	1499	-
HCM Lane V/C Ratio	-	-	0.027	0.007	-
HCM Control Delay (s)	-	-	8.8	7.4	0
HCM Lane LOS	-	-	A	A	A
HCM 95th %tile Q(veh)	-	-	0.1	0	-

HCM 2010 TWSC
7: Lamarche Ave & Access #2

2025 Future Total
AM Peak Hour

Intersection							
Int Delay, s/veh	1						
Movement	WBL	WBR	NBT	NBR	SBL	SBT	
Lane Configurations	Y	Y	Y	Y	Y	Y	
Traffic Vol, veh/h	0	11	84	0	5	36	
Future Vol, veh/h	0	11	84	0	5	36	
Conflicting Peds, #/hr	0	0	0	0	0	0	
Sign Control	Stop	Stop	Free	Free	Free	Free	
RT Channelized	-	None	-	None	-	None	
Storage Length	0	-	-	-	-	-	
Veh in Median Storage, #	0	-	0	-	-	0	
Grade, %	0	-	0	-	-	0	
Peak Hour Factor	100	100	100	100	100	100	
Heavy Vehicles, %	2	2	2	2	2	2	
Mvmt Flow	0	11	84	0	5	36	
Major/Minor	Minor1	Major1	Major2				
Conflicting Flow All	130	84	0	0	84	0	
Stage 1	84	-	-	-	-	-	
Stage 2	46	-	-	-	-	-	
Critical Hdwy	6.42	6.22	-	-	4.12	-	
Critical Hdwy Stg 1	5.42	-	-	-	-	-	
Critical Hdwy Stg 2	5.42	-	-	-	-	-	
Follow-up Hdwy	3.518	3.318	-	-	2.218	-	
Pot Cap-1 Maneuver	864	975	-	-	1513	-	
Stage 1	939	-	-	-	-	-	
Stage 2	976	-	-	-	-	-	
Platoon blocked, %	-	-	-	-	-	-	
Mov Cap-1 Maneuver	861	975	-	-	1513	-	
Mov Cap-2 Maneuver	861	-	-	-	-	-	
Stage 1	939	-	-	-	-	-	
Stage 2	973	-	-	-	-	-	
Approach	WB	NB	SB				
HCM Control Delay, s	8.7	0	0.9				
HCM LOS	A						
Minor Lane/Major Mvmt	NBT	NBR	WBLn1	SBL	SBT		
Capacity (veh/h)	-	-	975	1513	-		
HCM Lane V/C Ratio	-	-	0.011	0.003	-		
HCM Control Delay (s)	-	-	8.7	7.4	0		
HCM Lane LOS	-	-	A	A	A		
HCM 95th %tile Q(veh)	-	-	0	0	-		


2025 Future Total
PM Peak Hour

Lanes, Volumes, Timings	→	←	↑	↓	↑	↓	↑	↓	↑	↓	↑	↓
1: Orleans Blvd & Innes Rd												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
Traffic Volume (vph)	579	1605	178	59	685	128	64	225	78	168	272	203
Future Volume (vph)	579	1605	178	59	685	128	64	225	78	168	272	203
Satd. Flow (prot)	3216	3316	1483	1658	3316	1483	1658	3316	1483	1658	3316	1483
Flt Permitted	0.950						0.468				0.611	
Satd. Flow (perm)	3191	3316	1410	1651	3316	1445	808	3316	1432	1048	3316	1438
Satd. Flow (RTOR)			165			230				159		225
Lane Group Flow (vph)	579	1605	178	59	685	128	64	225	78	168	272	203
Turn Type	Prot	NA	Perm	Prot	NA	Perm	pm-pt	NA	Perm	Perm	NA	Perm
Protected Phases	5	2		1	6		6	4	7	4	8	8
Permitted Phases				2			6	4	4	8	8	8
Detector Phase	5	2	2	1	6	6	7	4	4	8	8	8
Switch Phase												
Minimum Initial (s)	5.0	10.0	10.0	5.0	10.0	10.0	5.0	10.0	10.0	10.0	10.0	10.0
Minimum Split (s)	16.6	26.2	26.2	11.2	26.2	26.2	11.7	32.7	32.7	32.7	32.7	32.7
Total Split (s)	31.0	49.0	49.0	16.0	34.0	34.0	12.0	45.0	45.0	33.0	33.0	33.0
Total Split (%)	28.2%	44.5%	44.5%	14.5%	30.9%	30.9%	10.8%	40.9%	40.9%	30.0%	30.0%	30.0%
Yellow Time (s)	3.7	3.7	3.7	3.7	3.7	3.7	3.3	3.3	3.3	3.3	3.3	3.3
All-Red Time (s)	2.9	2.5	2.5	2.5	2.5	2.5	3.4	3.4	3.4	3.4	3.4	3.4
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.6	6.2	6.2	6.2	6.2	6.2	6.7	6.7	6.7	6.7	6.7	6.7
Lead/Lag	Lead	Lag	Lag	Lead	Lag	Lag	Lead	Lag	Lag	Lag	Lag	Lag
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	C-Max	C-Max	None	C-Max	C-Max	None	Max	Max	Max	Max	Max
Act Efft Green (s)	23.0	46.5	46.5	8.5	29.2	29.2	38.3	38.3	38.3	28.7	28.7	28.7
Actuated g/C Ratio	0.21	0.42	0.42	0.08	0.27	0.27	0.35	0.35	0.35	0.26	0.26	0.26
v/c Ratio	0.86	1.15	0.26	0.46	0.78	0.23	0.20	0.19	0.13	0.62	0.31	0.38
Control Delay	55.6	105.7	5.3	51.3	61.7	11.7	26.1	25.7	0.4	48.5	35.0	5.4
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	55.6	105.7	5.3	51.3	61.7	11.7	26.1	25.7	0.4	48.5	35.0	5.4
LOS	E	F	A	D	E	B	C	C	A	D	C	A
Approach Delay		85.8			53.6			20.4		29.2		
Approach LOS		F			D			C		C		
Queue Length 50th (m)	61.1	~224.4	1.7	10.2	79.4	3.4	9.2	17.6	0.0	32.8	25.5	0.0
Queue Length 95th (m)	#82.8	#268.4	15.3	27.1	#102.3	24.4	18.8	26.6	0.0	#60.8	37.4	13.5
Internal Link Dist (m)		265.9			463.6			69.4			101.9	
Turn Bay Length (m)	135.5		87.0	106.0		57.0	48.0		43.5	50.0		53.0
Base Capacity (vph)	713	1401	691	147	879	552	322	1154	602	273	864	541
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.81	1.15	0.26	0.40	0.78	0.23	0.20	0.19	0.13	0.62	0.31	0.38
Intersection Summary												
Cycle Length: 110												
Actuated Cycle Length: 110												
Offset: 0 (0%)												
Referenced to phase 2:EBT and 6:WBT, Start of Green												
Natural Cycle: 120												
Control Type: Actuated-Coordinated												

Lanes, Volumes, Timings
1: Orleans Blvd & Innes Rd

Maximum v/c Ratio: 1.15	Intersection Signal Delay: 65.0	Intersection LOS: E
Analysis Period (min) 15		ICU Level of Service G
~ Volume exceeds capacity, queue is theoretically infinite.		
# Queue shown is maximum after two cycles.		
Queue shown is maximum after two cycles.		

Splits and Phases: 1: Orleans Blvd & Innes Rd



2025 Future Total
PM Peak Hour


Lanes, Volumes, Timings
2: Page Rd & Innes Rd

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↓	↑	↑	↑↓	↑	↑	↑	↑	↑	↑	↑
Traffic Volume (vph)	74	1757	30	102	819	72	23	6	84	67	17	37
Future Volume (vph)	74	1757	30	102	819	72	23	6	84	67	17	37
Satd. Flow (prot)	1658	3304	0	1658	3267	0	0	1524	0	0	1620	0
Flt Permitted	0.298			0.081				0.923			0.762	
Satd. Flow (perm)	518	3304	0	141	3267	0	0	1420	0	0	1261	0
Satd. Flow (RTOR)		3			15			20			20	
Lane Group Flow (vph)	74	1787	0	102	891	0	0	113	0	0	121	0
Turn Type	Perm	NA		Perm	NA		Perm	NA		Perm	NA	
Protected Phases		2			6		6		4		8	
Permitted Phases	2				6		6		4		8	
Detector Phase	2	2		6	6		4	4		8	8	
Switch Phase												
Minimum Initial (s)	10.0	10.0		10.0	10.0		10.0	10.0		10.0	10.0	
Minimum Split (s)	39.2	39.2		39.2	39.2		37.8	37.8		37.8	37.8	
Total Split (s)	72.0	72.0		72.0	72.0		38.0	38.0		38.0	38.0	
Total Split (%)	65.5%	65.5%		65.5%	65.5%		34.5%	34.5%		34.5%	34.5%	
Yellow Time (s)	3.7	3.7		3.7	3.7		3.0	3.0		3.0	3.0	
All-Red Time (s)	2.5	2.5		2.5	2.5		3.8	3.8		3.8	3.8	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Total Lost Time (s)	6.2	6.2		6.2	6.2		6.8	6.8		6.8	6.8	
Lead/Lag												
Lead-Lag Optimize?												
Recall Mode	C-Max	C-Max		C-Max	C-Max		None	None		None	None	
Act Effct Green (s)	77.6	77.6		77.6	77.6		19.4					19.4
Actuated g/C Ratio	0.71	0.71		0.71	0.71		0.18					0.18
v/c Ratio	0.20	0.77		1.03	0.39		0.42					0.51
Control Delay	2.3	8.2		120.2	3.5		35.2					39.0
Queue Delay	0.0	0.7		0.0	0.0		0.0					0.0
Total Delay	2.3	8.9		120.2	3.5		35.2					39.0
LOS	A	A		F	A		D					D
Approach Delay				8.6			15.5					39.0
Approach LOS				A			B					D
Queue Length 50th (m)	1.5	34.2		9.2	0.0		19.0					21.0
Queue Length 95th (m)	m1.8	m21.4		m#58.2	0.0		30.4					33.3
Internal Link Dist (m)				463.6			206.5					112.1
Turn Bay Length (m)	104.5				120.0							
Base Capacity (vph)	365	2331		99	2309		417					371
Starvation Cap Reductn	0	0		0	0		0					0
Spillback Cap Reductn	0	235		0	0		0					0
Storage Cap Reductn	0	0		0	0		0					0
Reduced v/c Ratio	0.20	0.85		1.03	0.39		0.27					0.33
Intersection Summary												
Cycle Length: 110												
Actuated Cycle Length: 110												
Offset: 2 (2%), Referenced to phase 2:EBTL and 6:WBTL, Start of Green												
Natural Cycle: 150												
Control Type: Actuated-Coordinated												

Lanes, Volumes, Timings
2: Page Rd & Innes Rd

Maximum v/c Ratio: 1.03
Intersection Signal Delay: 13.0 Intersection LOS: B
Intersection Capacity Utilization 92.5% ICU Level of Service F
Analysis Period (min) 15
95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.
m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 2: Page Rd & Innes Rd



2025 Future Total
PM Peak Hour

Lanes, Volumes, Timings
3: 3636 Innes Rd/3615 Innes Rd & Innes Rd

2025 Future Total
PM Peak Hour

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑	↑↑	↑↑	↑↑	↑	↑↑	↑	↑	↑↑	↑↑
Traffic Volume (vph)	8	1742	106	42	920	8	63	0	31	4	0	10
Future Volume (vph)	8	1742	106	42	920	8	63	0	31	4	0	10
Satd. Flow (prot)	1658	3281	0	1658	3312	0	1658	1483	0	0	1538	0
Flt Permitted	0.297			0.090			0.748				0.921	
Satd. Flow (perm)	518	3281	0	157	3312	0	1300	1483	0	0	1437	0
Satd. Flow (RTOR)		11			2			31			31	
Lane Group Flow (vph)	8	1848	0	42	928	0	63	31	0	0	14	0
Turn Type	Perm	NA		Perm	NA		Perm	NA		Perm	NA	
Protected Phases		2			6		4		4		8	
Permitted Phases	2			6			4		4		8	
Detector Phase	2	2		6	6		4	4		8	8	
Switch Phase												
Minimum Initial (s)	10.0	10.0		10.0	10.0		10.0	10.0		10.0	10.0	
Minimum Split (s)	34.1	34.1		32.1	32.1		32.3	32.3		32.3	32.3	
Total Split (s)	77.0	77.0		77.0	77.0		33.0	33.0		33.0	33.0	
Total Split (%)	70.0%	70.0%		70.0%	70.0%		30.0%	30.0%		30.0%	30.0%	
Yellow Time (s)	3.7	3.7		3.7	3.7		3.3	3.3		3.3	3.3	
All-Red Time (s)	2.4	2.4		2.4	2.4		3.0	3.0		3.0	3.0	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0		
Total Lost Time (s)	6.1	6.1		6.1	6.1		6.3	6.3		6.3		
Lead/Lag												
Lead-Lag Optimize?												
Recall Mode	C-Max	C-Max		C-Max	C-Max		None	None		None	None	
Act Effct Green (s)	88.2	88.2		88.2	88.2		13.9	13.9			13.9	
Actuated g/C Ratio	0.80	0.80		0.80	0.80		0.13	0.13			0.13	
v/c Ratio	0.02	0.70		0.33	0.35		0.38	0.14			0.07	
Control Delay	2.4	11.0		15.8	5.0		49.0	14.1			4.5	
Queue Delay	0.0	1.2		0.0	0.0		0.0	0.0			0.0	
Total Delay	2.4	12.2		15.8	5.0		49.0	14.1			4.5	
LOS	A	B		B	A		D	B			A	
Approach Delay		12.2			5.5			37.5			4.5	
Approach LOS		B			A			D			A	
Queue Length 50th (m)	0.0	222.3		2.1	24.4		13.0	0.0			0.0	
Queue Length 95th (m)	m0.5	m233.8		15.6	58.7		22.6	7.5			2.2	
Internal Link Dist (m)		221.9			561.5			129.3			33.2	
Turn Bay Length (m)	80.0			40.0								
Base Capacity (vph)	415	2633		126	2655		315	383			372	
Starvation Cap Reductn	0	509		0	0		0	0			0	
Spillback Cap Reductn	0	0		0	0		0	0			0	
Storage Cap Reductn	0	0		0	0		0	0			0	
Reduced v/c Ratio	0.02	0.87		0.33	0.35		0.20	0.08			0.04	
Intersection Summary												
Cycle Length: 110												
Actuated Cycle Length: 110												
Offset: 36 (33%), Referenced to phase 2:EBTL and 6:WBTL, Start of Green												
Natural Cycle: 90												
Control Type: Actuated-Coordinated												

Lanes, Volumes, Timings
3: 3636 Innes Rd/3615 Innes Rd & Innes Rd

Maximum v/c Ratio: 0.70

Intersection Signal Delay: 10.7

Intersection LOS: B


Intersection Capacity Utilization 75.1%

ICU Level of Service D

Analysis Period (min) 15

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 3: 3636 Innes Rd/3615 Innes Rd & Innes Rd



2025 Future Total
PM Peak Hour

Lanes, Volumes, Timings
4: Innes Rd & Viseneau Dr

2025 Future Total
PM Peak Hour

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑	↑↑	↑↑	↑↑	↑	↑↑	↑	↑↑	↑↑	↑↑
Traffic Volume (vph)	44	1617	87	183	826	84	106	40	179	60	51	30
Future Volume (vph)	44	1617	87	183	826	84	106	40	179	60	51	30
Satd. Flow (prot)	1658	3316	1483	1658	3260	0	1658	1745	1483	0	1646	0
Flt Permitted	0.313						0.608				0.844	
Satd. Flow (perm)	544	3316	1399	106	3260	0	1042	1745	1460	0	1417	0
Satd. Flow (RTOR)			106		16				179		10	
Lane Group Flow (vph)	44	1617	87	183	910	0	106	40	179	0	141	0
Turn Type	Perm	NA	Perm	pm+pt	NA		Perm	NA	Perm	Perm	NA	
Protected Phases	2		1		6				4		8	
Permitted Phases	2		2		6				4		8	
Detector Phase	2	2	2	1	6				4		8	
Switch Phase												
Minimum Initial (s)	10.0	10.0	10.0	5.0	10.0		10.0	10.0	10.0	10.0	10.0	
Minimum Split (s)	32.3	32.3	32.3	11.3	32.3		36.3	36.3	36.3	36.3	36.3	
Total Split (s)	68.0	68.0	68.0	20.0	88.0		37.0	37.0	37.0	37.0	37.0	
Total Split (%)	52.3%	52.3%	52.3%	15.4%	67.7%		28.5%	28.5%	28.5%	28.5%	28.5%	
Yellow Time (s)	3.7	3.7	3.7	3.7	3.7		3.0	3.0	3.0	3.0	3.0	
All-Red Time (s)	2.6	2.6	2.6	2.6	2.6		4.3	4.3	4.3	4.3	4.3	
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Total Lost Time (s)	6.3	6.3	6.3	6.3	6.3		7.3	7.3	7.3	7.3	7.3	
Lead/Lag	Lag	Lag	Lag	Lead			Lag	Lag	Lag	Lag	Lag	
Lead-Lag Optimize?	Yes	Yes	Yes	Yes			Yes	Yes	Yes	Yes	Yes	
Recall Mode	C-Max	C-Max	C-Max	None	C-Max		None	None	None	None	None	
Act Effct Green (s)	75.1	75.1	75.1	96.3	96.3		20.1	20.1	20.1	20.1	20.1	
Actuated g/C Ratio	0.58	0.58	0.58	0.74	0.74		0.15	0.15	0.15	0.15	0.15	
v/c Ratio	0.14	0.84	0.10	0.71	0.38		0.66	0.15	0.48	0.62		
Control Delay	18.5	30.1	2.4	42.5	7.3		69.3	45.0	10.2	58.1		
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Total Delay	18.5	30.1	2.4	42.5	7.3		69.3	45.0	10.2	58.1		
LOS	B	C	A	D	A		E	D	B	E		
Approach Delay		28.5			13.2				33.7		58.1	
Approach LOS		C			B				C		E	
Queue Length 50th (m)	4.8	165.2	0.0	26.3	34.8		26.5	9.2	0.0	32.5		
Queue Length 95th (m)	14.4	#275.1	6.1	53.0	62.3		42.5	18.2	18.6	49.7		
Internal Link Dist (m)		561.5			192.3				77.4		48.4	
Turn Bay Length (m)	47.5		58.5	58.5			48.5		20.0			
Base Capacity (vph)	314	1915	852	271	2419		238	398	471	331		
Starvation Cap Reductn	0	0	0	0	0		0	0	0	0	0	
Spillback Cap Reductn	0	0	0	0	0		0	0	0	0	0	
Storage Cap Reductn	0	0	0	0	0		0	0	0	0	0	
Reduced v/c Ratio	0.14	0.84	0.10	0.68	0.38		0.45	0.10	0.38	0.43		
Intersection Summary												
Cycle Length: 130												
Actuated Cycle Length: 130												
Offset: 105 (81%), Referenced to phase 2:EBTL and 6:WBTl, Start of Green												
Natural Cycle: 115												
Control Type: Actuated-Coordinated												

Lanes, Volumes, Timings
4: Innes Rd & Viseneau Dr

2025 Future Total
PM Peak Hour

Lane Group	Ø3	Ø7
Lane Configurations		
Traffic Volume (vph)		
Future Volume (vph)		
Satd. Flow (prot)		
Flt Permitted		
Satd. Flow (perm)		
Satd. Flow (RTOR)		
Lane Group Flow (vph)		
Turn Type		
Protected Phases	3	7
Permitted Phases		
Detector Phase		
Switch Phase		
Minimum Initial (s)	1.0	1.0
Minimum Split (s)	3.0	3.0
Total Split (s)	5.0	5.0
Total Split (%)	4%	4%
Yellow Time (s)	2.0	2.0
All-Red Time (s)	0.0	0.0
Lost Time Adjust (s)		
Total Lost Time (s)		
Lead/Lag	Lead	Lead
Lead-Lag Optimize?	Yes	Yes
Recall Mode	None	None
Act Efect Green (s)		
Actuated g/C Ratio		
v/c Ratio		
Control Delay		
Queue Delay		
Total Delay		
LOS		
Approach Delay		
Approach LOS		
Queue Length 50th (m)		
Queue Length 95th (m)		
Internal Link Dist (m)		
Turn Bay Length (m)		
Base Capacity (vph)		
Starvation Cap Reductn		
Spillback Cap Reductn		
Storage Cap Reductn		
Reduced v/c Ratio		
Intersection Summary		

Lanes, Volumes, Timings
4: Innes Rd & Viseneau Dr

2025 Future Total
PM Peak Hour

Maximum v/c Ratio: 0.84
Intersection Signal Delay: 25.2
Intersection Capacity Utilization 93.8%
Analysis Period (min) 15
95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.

Splits and Phases: 4: Innes Rd & Viseneau Dr



Lanes, Volumes, Timings
5: Lamarche Ave & Innes Rd

2025 Future Total
PM Peak Hour

Lane Group	EBT	EBR	WBL	WBT	NBL	NBR	Ø8
Lane Configurations	↑	↓	↙	↖	↑	↓	↗
Traffic Volume (vph)	1833	84	44	949	54	29	
Future Volume (vph)	1833	84	44	949	54	29	
Satd. Flow (prot)	3316	1483	1658	3316	1658	1483	
Flt Permitted		0.950			0.950		
Satd. Flow (perm)	3316	1483	1658	3316	1658	1483	
Satd. Flow (RTOR)							
Lane Group Flow (vph)	1833	84	44	949	54	29	
Turn Type	NA	Perm	Prot	NA	Prot	Perm	
Protected Phases	2		1	6	7		8
Permitted Phases		2			4		
Detector Phase	2	2	1	6	7	4	
Switch Phase							
Minimum Initial (s)	10.0	10.0	5.0	10.0	5.0	5.0	1.0
Minimum Split (s)	22.5	22.5	11.7	22.5	11.3	22.5	22.5
Total Split (s)	64.5	64.5	11.7	76.2	11.3	33.8	22.5
Total Split (%)	58.6%	58.6%	10.6%	69.3%	10.3%	30.7%	20%
Yellow Time (s)	3.7	3.7	3.7	3.7	3.3	3.5	2.0
All-Red Time (s)	2.3	2.3	3.0	2.3	3.0	3.0	1.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	
Total Lost Time (s)	6.0	6.0	6.7	6.0	6.3	6.5	
Lead/Lag	Lag	Lag	Lead		Lag		Lead
Lead-Lag Optimize?	Yes	Yes	Yes	C-Max	Yes	Yes	Max
Recall Mode	C-Max	C-Max	None	C-Max	None	None	Max
Act Efect Green (s)	63.1	63.1	5.1	72.5	5.0	25.0	
Actuated g/C Ratio	0.57	0.57	0.05	0.66	0.05	0.23	
v/c Ratio	0.96	0.10	0.57	0.43	0.72	0.09	
Control Delay	31.4	14.7	75.6	12.0	98.5	32.7	
Queue Delay	5.2	0.0	0.0	0.0	0.0	0.1	
Total Delay	36.6	14.7	75.6	12.0	98.5	32.8	
LOS	D	B	E	B	F	C	
Approach Delay	35.6			14.8	75.5		
Approach LOS	D			B	E		
Queue Length 50th (m)	-219.2	8.0	9.4	45.7	11.7	4.8	
Queue Length 95th (m)	#262.6	m10.3	#25.9	95.0	#32.8	12.3	
Internal Link Dist (m)	206.5			221.9	61.3		
Turn Bay Length (m)		40.0	80.0		80.0		
Base Capacity (vph)	1902	850	77	2184	75	368	
Starvation Cap Reductn	0	0	0	0	0	0	
Spillback Cap Reductn	63	0	0	0	0	88	
Storage Cap Reductn	0	0	0	0	0	0	
Reduced v/c Ratio	1.00	0.10	0.57	0.43	0.72	0.10	
Intersection Summary							
Cycle Length: 110							
Actuated Cycle Length: 110							
Offset: 0 (0%), Referenced to phase 2:EBT and 6:WBT, Start of Green							
Natural Cycle: 110							
Control Type: Actuated-Coordinated							

Scenario 1 245 and 275 Lamarche Avenue 11:59 pm 03/04/2022 2025 Future Total

Synchro 11 Report
Page 10

Lanes, Volumes, Timings
5: Lamarche Ave & Innes Rd

2025 Future Total
PM Peak Hour

Maximum v/c Ratio: 0.96	Intersection Signal Delay: 29.8	Intersection LOS: C
	Intersection Capacity Utilization 68.1%	ICU Level of Service C
	Analysis Period (min) 15	
~ Volume exceeds capacity, queue is theoretically infinite.		
Queue shown is maximum after two cycles.		
# 95th percentile volume exceeds capacity, queue may be longer.		
Queue shown is maximum after two cycles.		
m Volume for 95th percentile queue is metered by upstream signal.		

Splits and Phases: 5: Lamarche Ave & Innes Rd



Scenario 1 245 and 275 Lamarche Avenue 11:59 pm 03/04/2022 2025 Future Total

Synchro 11 Report
Page 11

Lanes, Volumes, Timings
6: Lamarche Ave

						2025 Future Total PM Peak Hour
Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	W		B		S	
Traffic Volume (vph)	0	19	64	0	25	104
Future Volume (vph)	0	19	64	0	25	104
Satl. Flow (prot)	1510	0	1745	0	0	1728
Flt Permitted						0.990
Satl. Flow (perm)	1510	0	1745	0	0	1728
Lane Group Flow (vph)	19	0	64	0	0	129
Sign Control	Stop	Free		Free		
Intersection Summary						
Control Type: Unsignalized						
Intersection Capacity Utilization 23.9%						
ICU Level of Service A						
Analysis Period (min) 15						

HCM 2010 TWSC
6: Lamarche Ave

2025 Future Total PM Peak Hour						
Intersection						
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	W		B		S	
Traffic Vol, veh/h	0	19	64	0	25	104
Future Vol, veh/h	0	19	64	0	25	104
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	-	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	100	100	100	100	100	100
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	0	19	64	0	25	104
Major/Minor	Minor1	Major1	Major2			
Conflicting Flow All	218	64	0	0	64	0
Stage 1	64	-	-	-	-	-
Stage 2	154	-	-	-	-	-
Critical Hdwy	6.42	6.22	-	-	4.12	-
Critical Hdwy Stg 1	5.42	-	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-	-
Follow-up Hdwy	3.518	3.318	-	-	2.218	-
Pot Cap-1 Maneuver	770	1000	-	-	1538	-
Stage 1	959	-	-	-	-	-
Stage 2	874	-	-	-	-	-
Platoon blocked, %		-	-	-	-	-
Mov Cap-1 Maneuver	757	1000	-	-	1538	-
Mov Cap-2 Maneuver	757	-	-	-	-	-
Stage 1	959	-	-	-	-	-
Stage 2	859	-	-	-	-	-
Approach	WB	NB	SB			
HCM Control Delay, s	8.7	-	0	1.4		
HCM LOS	A					
Minor Lane/Major Mvmt	NBT	NBRWBLn1	SBL	SBT		
Capacity (veh/h)	-	-	1000	1538	-	
HCM Lane V/C Ratio	-	-	0.019	0.016	-	
HCM Control Delay (s)	-	-	8.7	7.4	0	
HCM Lane LOS	-	-	A	A	A	
HCM 95th %tile Q(veh)	-	-	0.1	0.1	-	

Lanes, Volumes, Timings
7: Lamarche Ave

						2025 Future Total PM Peak Hour
Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	Y		T			R
Traffic Volume (vph)	0	8	56	0	11	93
Future Volume (vph)	0	8	56	0	11	93
Satl. Flow (prot)	1510	0	1745	0	0	1736
Flt Permitted						0.995
Satl. Flow (perm)	1510	0	1745	0	0	1736
Lane Group Flow (vph)	8	0	56	0	0	104
Sign Control	Stop	Free		Free		
Intersection Summary						
Control Type: Unsignalized						
Intersection Capacity Utilization 22.5%				ICU Level of Service A		
Analysis Period (min) 15						

HCM 2010 TWSC
7: Lamarche Ave

HCM 2010 TWSC 7: Lamarche Ave						
2025 Future Total PM Peak Hour						
Intersection						
Int Delay, s/veh						0.9
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	Y		T			R
Traffic Vol, veh/h	0	8	56	0	11	93
Future Vol, veh/h	0	8	56	0	11	93
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	-	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	100	100	100	100	100	100
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	0	8	56	0	11	93
Major/Minor						
Conflicting Flow All	171	56	0	0	56	0
Stage 1	56	-	-	-	-	-
Stage 2	115	-	-	-	-	-
Critical Hdwy	6.42	6.22	-	-	4.12	-
Critical Hdwy Stg 1	5.42	-	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-	-
Follow-up Hdwy	3.518	3.318	-	-	2.218	-
Pot Cap-1 Maneuver	819	1011	-	-	1549	-
Stage 1	967	-	-	-	-	-
Stage 2	910	-	-	-	-	-
Platoon blocked, %		-	-	-	-	-
Mov Cap-1 Maneuver	813	1011	-	-	1549	-
Mov Cap-2 Maneuver	813	-	-	-	-	-
Stage 1	967	-	-	-	-	-
Stage 2	904	-	-	-	-	-
Approach						
WB		NB		SB		
HCM Control Delay, s	8.6		0		0.8	
HCM LOS	A					
Minor Lane/Major Mvmt						
	NBT	NBRWBLn1	SBL	SBT		
Capacity (veh/h)	-	-	1011	1549	-	-
HCM Lane V/C Ratio	-	-	0.008	0.007	-	-
HCM Control Delay (s)	-	-	8.6	7.3	0	-
HCM Lane LOS	-	-	A	A	A	-
HCM 95th %tile Q(veh)	-	-	0	0	-	-

Appendix K

Synchro Intersection Worksheets – 2030 Future Total Conditions

Lanes, Volumes, Timings
1: Orleans Blvd & Innes Rd

2030 Future Total AM Peak Hour												
Lane Group	EBL	EBT	EBC	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑↓	↑↓	↑↓	↑↓	↑↓	↑↓	↑↓	↑↓	↑↓	↑↓	↑↓	
Traffic Volume (vph)	121	423	23	17	1493	119	252	322	38	65	100	459
Future Volume (vph)	121	423	23	17	1493	119	252	322	38	65	100	459
Satd. Flow (prot)	3216	3316	1483	1658	3316	1483	1658	3316	1483	1658	3316	1483
Flt Permitted	0.950	0.950			0.549		0.557					
Satd. Flow (perm)	3207	3316	1426	1633	3316	1444	952	3316	1396	942	3316	1452
Satd. Flow (RTOR)			143			143			82			143
Lane Group Flow (vph)	121	423	23	17	1493	119	252	322	38	65	100	459
Turn Type	Prot	NA	Perm	Prot	NA	Perm	pm+pt	NA	Perm	Perm	NA	Perm
Protected Phases	5	2		1	6		7	4		4	8	8
Permitted Phases			2			6	4		4	8	8	8
Detector Phase	5	2	2	1	6	6	7	4	4	8	8	8
Switch Phase												
Minimum Initial (s)	5.0	10.0	10.0	5.0	10.0	10.0	5.0	10.0	10.0	10.0	10.0	10.0
Minimum Split (s)	11.6	26.2	26.2	11.2	26.2	26.2	11.7	32.7	32.7	32.7	32.7	32.7
Total Split (s)	13.0	65.0	65.0	13.0	65.0	65.0	19.0	52.0	52.0	33.0	33.0	33.0
Total Split (%)	10.0%	50.0%	50.0%	10.0%	50.0%	50.0%	14.6%	40.0%	40.0%	25.4%	25.4%	25.4%
Yellow Time (s)	3.7	3.7	3.7	3.7	3.7	3.7	3.3	3.3	3.3	3.3	3.3	3.3
All-Red Time (s)	2.9	2.5	2.5	2.5	2.5	2.5	3.4	3.4	3.4	3.4	3.4	3.4
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.6	6.2	6.2	6.2	6.2	6.2	6.7	6.7	6.7	6.7	6.7	6.7
Lead/Lag	Lead	Lag	Lag	Lead	Lag	Lag	Lead		Lag	Lag	Lag	
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	C-Max	C-Max	None	C-Max	C-Max	None	None	None	None	None	None
Act Efft Green (s)	6.4	66.6	66.6	6.4	58.8	58.8	45.3	45.3	45.3	26.3	26.3	26.3
Actuated g/C Ratio	0.05	0.51	0.51	0.05	0.45	0.45	0.35	0.35	0.35	0.20	0.20	0.20
v/c Ratio	0.77	0.25	0.03	0.21	1.00	0.16	0.63	0.28	0.07	0.34	0.15	1.13
Control Delay	90.3	19.2	0.1	65.5	57.9	2.4	41.4	31.4	0.3	50.4	43.4	116.6
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	90.3	19.2	0.1	65.5	57.9	2.4	41.4	31.4	0.3	50.4	43.4	116.6
LOS	F	B	A	E	E	A	D	C	A	D	D	F
Approach Delay	33.6			53.9			33.6			98.0		
Approach LOS	C			D			C			F		
Queue Length 50th (m)	16.0	28.1	0.0	4.3	197.0	0.0	49.4	31.2	0.0	14.4	11.2	~104.9
Queue Length 95th (m)	#31.4	46.7	0.0	12.2	#250.4	7.0	73.7	43.0	0.0	28.9	19.2	#170.3
Internal Link Dist (m)	265.9			463.6			69.4			101.9		
Turn Bay Length (m)	135.5			87.0	106.0		57.0	48.0		43.5	50.0	53.0
Base Capacity (vph)	158	1698	800	86	1499	731	398	1155	539	190	670	407
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.77	0.25	0.03	0.20	1.00	0.16	0.63	0.28	0.07	0.34	0.15	1.13

Lanes, Volumes, Timings
1: Orleans Blvd & Innes Rd

2030 Future Total AM Peak Hour											
Lane Group	EBL	EBT	EBC	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBR

Maximum v/c Ratio: 1.13

Intersection Signal Delay: 54.9

Intersection LOS: D

ICU Level of Service G

Analysis Period (min) 15


~ Volume exceeds capacity, queue is theoretically infinite.

Queue shown is maximum after two cycles.

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 1: Orleans Blvd & Innes Rd



Lanes, Volumes, Timings
2: Page Rd & Innes Rd

2030 Future Total
AM Peak Hour

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑	↑↑	↑↑	↑↑	↑	↑	↑	↑	↑	↑
Traffic Volume (vph)	14	499	21	39	1569	28	14	12	42	42	9	53
Future Volume (vph)	14	499	21	39	1569	28	14	12	42	42	9	53
Satd. Flow (prot)	1658	3291	0	1658	3304	0	0	1572	0	0	1572	0
Flt Permitted	0.119			0.460			0.923			0.859		
Satd. Flow (perm)	208	3291	0	798	3304	0	0	1462	0	0	1378	0
Satd. Flow (RTOR)		7		3			42			38		
Lane Group Flow (vph)	14	520	0	39	1597	0	0	68	0	0	104	0
Turn Type	Perm	NA										
Protected Phases	2			6			4			4		8
Permitted Phases	2			6			4			8		8
Detector Phase	2	2		6	6		4	4		8	8	
Switch Phase												
Minimum Initial (s)	10.0	10.0		10.0	10.0		10.0	10.0		10.0	10.0	
Minimum Split (s)	39.2	39.2		39.2	39.2		37.8	37.8		37.8	37.8	
Total Split (s)	82.0	82.0		82.0	82.0		38.0	38.0		38.0	38.0	
Total Split (%)	68.3%	68.3%		68.3%	68.3%		31.7%	31.7%		31.7%	31.7%	
Yellow Time (s)	3.7	3.7		3.7	3.7		3.0	3.0		3.0	3.0	
All-Red Time (s)	2.5	2.5		2.5	2.5		3.8	3.8		3.8	3.8	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0			0.0		
Total Lost Time (s)	6.2	6.2		6.2	6.2		6.8			6.8		
Lead/Lag												
Lead-Lag Optimize?												
Recall Mode	C-Max	C-Max		C-Max	C-Max		None	None		None	None	
Act Efect Green (s)	88.3	88.3		88.3	88.3		18.7			18.7		
Actuated g/C Ratio	0.74	0.74		0.74	0.74		0.16			0.16		
v/c Ratio	0.09	0.21		0.07	0.66		0.26			0.42		
Control Delay	9.4	6.4		6.1	16.7		20.2			31.8		
Queue Delay	0.0	0.0		0.0	0.9		0.0			0.0		
Total Delay	9.4	6.4		6.1	17.6		20.2			31.8		
LOS	A	A		A	B		C			C		
Approach Delay		6.4			17.3		20.2			31.8		
Approach LOS		A		B			C			C		
Queue Length 50th (m)	0.6	12.3		0.8	154.0		5.7			15.0		
Queue Length 95th (m)	4.4	33.9		m5.8	233.8		16.0			27.2		
Internal Link Dist (m)	463.6			206.5			143.5			112.1		
Turn Bay Length (m)	104.5			120.0								
Base Capacity (vph)	153	2424		587	2433		411			386		
Starvation Cap Reductn	0	0		0	505		0			0		
Spillback Cap Reductn	0	0		0	0		0			0		
Storage Cap Reductn	0	0		0	0		0			0		
Reduced v/c Ratio	0.09	0.21		0.07	0.83		0.17			0.27		
Intersection Summary												
Cycle Length: 120												
Actuated Cycle Length: 120												
Offset: 26 (22%), Referenced to phase 2:EBTL and 6:WBTL, Start of Green												
Natural Cycle: 90												
Control Type: Actuated-Coordinated												

Scenario 1 245 and 275 Lamarche Avenue 11:59 pm 03/04/2022 2030 Future Total

Synchro 11 Report

Page 3

Lanes, Volumes, Timings
2: Page Rd & Innes Rd

2030 Future Total
AM Peak Hour

Maximum v/c Ratio: 0.66	Intersection Signal Delay: 15.6	Intersection LOS: B
Intersection Capacity Utilization 74.0%		ICU Level of Service D
Analysis Period (min) 15		
m Volume for 95th percentile queue is metered by upstream signal.		
Splits and Phases: 2: Page Rd & Innes Rd		
Ø2 (R) 82 s	Ø4 38 s	Ø8 82 s 38 s

Scenario 1 245 and 275 Lamarche Avenue 11:59 pm 03/04/2022 2030 Future Total

Synchro 11 Report

Page 4

Lanes, Volumes, Timings
3: 3636 Innes Rd/3615 Innes Rd & Innes Rd

2030 Future Total AM Peak Hour												
Lane Group	EBL	EBT	EBC	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	→	↑	↑↑	←	↑	↑	↑	↓	↑	↓
Traffic Volume (vph)	6	561	38	12	1483	4	99	0	39	1	0	3
Future Volume (vph)	6	561	38	12	1483	4	99	0	39	1	0	3
Satd. Flow (prot)	1658	3283	0	1658	3315	0	1658	1464	0	0	1533	0
Flt Permitted	0.146			0.426			0.755				0.952	
Satd. Flow (perm)	255	3283	0	743	3315	0	1314	1464	0	0	1477	0
Satd. Flow (RTOR)								372			28	
Lane Group Flow (vph)	6	599	0	12	1487	0	99	39	0	0	4	0
Turn Type	Perm	NA										
Protected Phases	2			6			4			4		8
Permitted Phases	2			6			4			8		8
Detector Phase	2	2		6	6		4	4		8		8
Switch Phase												
Minimum Initial (s)	10.0	10.0		10.0	10.0		10.0	10.0		10.0		10.0
Minimum Split (s)	32.1	32.1		32.1	32.1		32.3	32.3		32.3		32.3
Total Split (s)	87.0	87.0		87.0	87.0		33.0	33.0		33.0		33.0
Total Split (%)	72.5%	72.5%		72.5%	72.5%		27.5%	27.5%		27.5%		27.5%
Yellow Time (s)	3.7	3.7		3.7	3.7		3.3	3.3		3.3		3.3
All-Red Time (s)	2.4	2.4		2.4	2.4		3.0	3.0		3.0		3.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0		
Total Lost Time (s)	6.1	6.1		6.1	6.1		6.3	6.3		6.3		
Lead/Lag												
Lead-Lag Optimize?												
Recall Mode	C-Max	C-Max		C-Max	C-Max		None	None		None	None	
Act Efect Green (s)	91.8	91.8		91.8	91.8		15.8	15.8			15.8	
Actuated g/C Ratio	0.76	0.76		0.76	0.76		0.13	0.13			0.13	
v/c Ratio	0.03	0.24		0.02	0.59		0.57	0.08			0.02	
Control Delay	2.7	2.1		7.4	9.6		60.6	0.3			0.2	
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.0			0.0	
Total Delay	2.7	2.1		7.4	9.6		60.6	0.3			0.2	
LOS	A	A		A	A		E	A			A	
Approach Delay		2.1			9.6			43.5			0.3	
Approach LOS		A			A			D			A	
Queue Length 50th (m)	0.1	7.1		0.5	58.7		22.6	0.0			0.0	
Queue Length 95th (m)	m0.6	9.2		m2.3	139.7		36.3	0.0			0.0	
Internal Link Dist (m)		221.9			561.5			129.3			33.2	
Turn Bay Length (m)	80.0			40.0								
Base Capacity (vph)	195	2511		568	2536		292	614			350	
Starvation Cap Reductn	0	0		0	0		0	0			0	
Spillback Cap Reductn	0	0		0	0		0	0			0	
Storage Cap Reductn	0	0		0	0		0	0			0	
Reduced v/c Ratio	0.03	0.24		0.02	0.59		0.34	0.06			0.01	

Lanes, Volumes, Timings
3: 3636 Innes Rd/3615 Innes Rd & Innes Rd

2030 Future Total AM Peak Hour												
Lane Group	EBL	EBT	EBC	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	→	↑	↑↑	←	↑	↑	↑	↓	↑	↓
Traffic Volume (vph)	6	561	38	12	1483	4	99	0	39	1	0	3
Future Volume (vph)	6	561	38	12	1483	4	99	0	39	1	0	3
Satd. Flow (prot)	1658	3283	0	1658	3315	0	1658	1464	0	0	1533	0
Flt Permitted	0.146			0.426			0.755				0.952	
Satd. Flow (perm)	255	3283	0	743	3315	0	1314	1464	0	0	1477	0
Satd. Flow (RTOR)							372				28	
Lane Group Flow (vph)	6	599	0	12	1487	0	99	39	0	0	4	0
Turn Type	Perm	NA										
Protected Phases	2			6			4			4		8
Permitted Phases	2			6			4			8		8
Detector Phase	2	2		6	6		4	4		8		8
Switch Phase												
Minimum Initial (s)	10.0	10.0		10.0	10.0		10.0	10.0		10.0		10.0
Minimum Split (s)	32.1	32.1		32.1	32.1		32.3	32.3		32.3		32.3
Total Split (s)	87.0	87.0		87.0	87.0		33.0	33.0		33.0		33.0
Total Split (%)	72.5%	72.5%		72.5%	72.5%		27.5%	27.5%		27.5%		27.5%
Yellow Time (s)	3.7	3.7		3.7	3.7		3.3	3.3		3.3		3.3
All-Red Time (s)	2.4	2.4		2.4	2.4		3.0	3.0		3.0		3.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0		
Total Lost Time (s)	6.1	6.1		6.1	6.1		6.3	6.3		6.3		
Lead/Lag												
Lead-Lag Optimize?												
Recall Mode	C-Max	C-Max		C-Max	C-Max		None	None		None	None	
Act Efect Green (s)	91.8	91.8		91.8	91.8		15.8	15.8			15.8	
Actuated g/C Ratio	0.76	0.76		0.76	0.76		0.13	0.13			0.13	
v/c Ratio	0.03	0.24		0.02	0.59		0.57	0.08			0.02	
Control Delay	2.7	2.1		7.4	9.6		60.6	0.3			0.2	
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.0			0.0	
Total Delay	2.7	2.1		7.4	9.6		60.6	0.3			0.2	
LOS	A	A		A	A		E	A			A	
Approach Delay		2.1			9.6			43.5			0.3	
Approach LOS		A			A			D			A	
Queue Length 50th (m)	0.1	7.1		0.5	58.7		22.6	0.0			0.0	
Queue Length 95th (m)	m0.6	9.2		m2.3	139.7		36.3	0.0			0.0	
Internal Link Dist (m)		221.9			561.5			129.3			33.2	
Turn Bay Length (m)	80.0			40.0								
Base Capacity (vph)	195	2511		568	2536		292	614			350	
Starvation Cap Reductn	0	0		0	0		0	0			0	
Spillback Cap Reductn	0	0		0	0		0	0			0	
Storage Cap Reductn	0	0		0	0		0	0			0	
Reduced v/c Ratio	0.03	0.24		0.02	0.59		0.34	0.06			0.01	

Intersection Summary

Cycle Length: 120

Actuated Cycle Length: 120

Offset: 0 (0%), Referenced to phase 2:EBTL and 6:WBTL, Start of Green

Natural Cycle: 75

Control Type: Actuated-Coordinated

Scenario 1 245 and 275 Lamarche Avenue 11:59 pm 03/04/2022 2030 Future Total

Synchro 11 Report

Page 5

Scenario 1 245 and 275 Lamarche Avenue 11:59 pm 03/04/2022 2030 Future Total

Synchro 11 Report

Page 6

Lanes, Volumes, Timings
4: Innes Rd & Viseneau Dr

2030 Future Total
AM Peak Hour

Lane Group	EBL	EBT	EBC	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑	↑	↑↑	↑	↑	↑	↑	↑	↑	↑
Traffic Volume (vph)	11	536	37	59	1439	33	19	5	39	46	13	41
Future Volume (vph)	11	536	37	59	1439	33	19	5	39	46	13	41
Satl. Flow (prot)	1658	3316	1483	1658	3304	0	1658	1745	1483	0	1604	0
Flt Permitted	0.171						0.695					0.850
Satl. Flow (perm)	298	3316	1450	720	3304	0	1212	1745	1462	0	1393	0
Satl. Flow (RTOR)			115		3				105			28
Lane Group Flow (vph)	11	536	37	59	1472	0	19	5	39	0	100	0
Turn Type	Perm	NA	Perm	pm+pt	NA		Perm	NA	Perm	Perm	NA	
Protected Phases		2		1	6			4		4		8
Permitted Phases	2		2	6			4		4	4	8	
Detector Phase	2	2	2	1	6		4	4	4	8	8	
Switch Phase												
Minimum Initial (s)	10.0	10.0	10.0	5.0	10.0		10.0	10.0	10.0	10.0	10.0	
Minimum Split (s)	32.3	32.3	32.3	11.3	32.3		36.3	36.3	36.3	36.3	36.3	
Total Split (s)	66.0	66.0	66.0	12.0	78.0		37.0	37.0	37.0	37.0	37.0	
Total Split (%)	55.0%	55.0%	55.0%	10.0%	65.0%		30.8%	30.8%	30.8%	30.8%	30.8%	
Yellow Time (s)	3.7	3.7	3.7	3.7	3.7		3.0	3.0	3.0	3.0	3.0	
All-Red Time (s)	2.6	2.6	2.6	2.6	2.6		4.3	4.3	4.3	4.3	4.3	
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Total Lost Time (s)	6.3	6.3	6.3	6.3	6.3		7.3	7.3	7.3	7.3	7.3	
Lead/Lag	Lag	Lag	Lag	Lead			Lag	Lag	Lag	Lag	Lag	
Lead-Lag Optimize?	Yes	Yes	Yes	Yes			Yes	Yes	Yes	Yes	Yes	
Recall Mode	C-Max	C-Max	C-Max	None	C-Max		None	None	None	None	None	
Act Effct Green (s)	80.8	80.8	80.8	91.5	91.5		14.9	14.9	14.9			14.9
Actuated g/C Ratio	0.67	0.67	0.67	0.76	0.76		0.12	0.12	0.12			0.12
v/c Ratio	0.06	0.24	0.04	0.10	0.58		0.13	0.02	0.14			0.51
Control Delay	6.9	5.2	0.1	5.2	8.4		44.5	40.6	1.1			42.3
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0			0.0
Total Delay	6.9	5.2	0.1	5.2	8.4		44.5	40.6	1.1			42.3
LOS	A	A	A	A	A		D	D	A			D
Approach Delay		4.9			8.2			17.3				42.3
Approach LOS		A			A			B				D
Queue Length 50th (m)	0.4	9.3	0.0	2.5	56.5		4.2	1.1	0.0			16.4
Queue Length 95th (m)	1.5	22.3	0.0	9.6	131.7		9.8	4.2	0.0			28.9
Internal Link Dist (m)		561.5			188.9			77.4				48.4
Turn Bay Length (m)	47.5		58.5	58.5			48.5		20.0			
Base Capacity (vph)	200	2233	1014	601	2518		299	431	440			365
Starvation Cap Reductn	0	0	0	0	0		0	0	0			0
Spillback Cap Reductn	0	0	0	0	0		0	0	0			0
Storage Cap Reductn	0	0	0	0	0		0	0	0			0
Reduced v/c Ratio	0.06	0.24	0.04	0.10	0.58		0.06	0.01	0.09			0.27
Intersection Summary												
Cycle Length: 120												
Actuated Cycle Length: 120												
Offset: 40 (33%), Referenced to phase 2:EBTL and 6:WBTL, Start of Green												
Natural Cycle: 85												
Control Type: Actuated-Coordinated												

Lanes, Volumes, Timings
4: Innes Rd & Viseneau Dr

2030 Future Total
AM Peak Hour

Lane Group	03	07
Lane Configurations		
Traffic Volume (vph)		
Future Volume (vph)		
Satl. Flow (prot)		
Flt Permitted		
Satl. Flow (perm)		
Satl. Flow (RTOR)		
Lane Group Flow (vph)		
Turn Type		
Protected Phases	3	7
Permitted Phases		
Detector Phase		
Switch Phase		
Minimum Initial (s)	1.0	1.0
Minimum Split (s)	3.0	4.0
Total Split (s)	5.0	5.0
Total Split (%)	4%	4%
Yellow Time (s)	2.0	2.0
All-Red Time (s)	0.0	0.0
Lost Time Adjust (s)		
Total Lost Time (s)		
Lead/Lag	Lead	Lead
Lead-Lag Optimize?	Yes	Yes
Recall Mode	None	None
Act Effct Green (s)		
Actuated g/C Ratio		
v/c Ratio		
Control Delay		
Queue Delay		
Total Delay		
LOS		
Approach Delay		
Approach LOS		
Queue Length 50th (m)		
Queue Length 95th (m)		
Internal Link Dist (m)		
Turn Bay Length (m)		
Base Capacity (vph)		
Starvation Cap Reductn		
Spillback Cap Reductn		
Storage Cap Reductn		
Reduced v/c Ratio		
Intersection Summary		

Lanes, Volumes, Timings
4: Innes Rd & Viseneau Dr

Maximum v/c Ratio: 0.58

Intersection Signal Delay: 9.1


Intersection LOS: A

Intersection Capacity Utilization 76.2%

ICU Level of Service D

Analysis Period (min) 15

Splits and Phases: 4: Innes Rd & Viseneau Dr



2030 Future Total
AM Peak Hour

Lanes, Volumes, Timings
5: Lamarche Ave & Innes Rd

2030 Future Total
AM Peak Hour

Lane Group	EBT	EBR	WBL	WBT	NBL	NBR	Ø8
Lane Configurations	↑↑	↑↑	↑↑	↑↑	↑↑	↑↑	↑↑
Traffic Volume (vph)	557	34	18	1571	78	43	
Future Volume (vph)	557	34	18	1571	78	43	
Satd. Flow (prot)	3316	1483	1658	3316	1658	1483	
Flt Permitted			0.950		0.950		
Satd. Flow (perm)	3316	1483	1658	3316	1658	1483	
Satd. Flow (RTOR)							
Lane Group Flow (vph)	557	34	18	1571	78	43	
Turn Type	NA	Perm	Prot	NA	Prot	Perm	
Protected Phases	2		1	6	7	8	
Permitted Phases						4	
Detector Phase	2	2	1	6	7	4	
Switch Phase							
Minimum Initial (s)	10.0	10.0	5.0	10.0	5.0	5.0	1.0
Minimum Split (s)	24.0	24.0	11.7	24.0	11.3	30.5	4.0
Total Split (s)	75.0	75.0	14.0	89.0	18.9	31.0	12.1
Total Split (%)	62.5%	62.5%	11.7%	74.2%	15.8%	25.8%	10%
Yellow Time (s)	3.7	3.7	3.7	3.7	3.3	3.5	2.0
All-Red Time (s)	2.3	2.3	3.0	2.3	3.0	3.0	1.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	
Total Lost Time (s)	6.0	6.0	6.7	6.0	6.3	6.5	
Lead/Lag	Lag	Lag	Lead		Lag	Lead	
Lead-Lag Optimize?	Yes	Yes	Yes		Yes	Yes	
Recall Mode	C-Max	C-Max	None	C-Max	None	None	Max
Act Effct Green (s)	82.2	82.2	6.5	87.8	10.4	19.7	
Actuated g/C Ratio	0.68	0.68	0.05	0.73	0.09	0.16	
v/c Ratio	0.25	0.03	0.20	0.65	0.55	0.18	
Control Delay	8.2	8.7	60.8	10.3	66.2	41.9	
Queue Delay	0.0	0.0	0.0	0.2	0.0	0.0	
Total Delay	8.2	8.7	60.8	10.5	66.2	41.9	
LOS	A	A	E	B	E	D	
Approach Delay	8.2			11.1	57.5		
Approach LOS	A			B	E		
Queue Length 50th (m)	20.1	2.0	4.2	67.2	17.8	8.5	
Queue Length 95th (m)	34.1	7.0	m7.7	91.9	33.2	18.5	
Internal Link Dist (m)	206.5			221.9	65.1		
Turn Bay Length (m)		40.0	80.0		80.0		
Base Capacity (vph)	2270	1015	100	2425	174	302	
Starvation Cap Reductn	0	0	0	7	0	0	
Spillback Cap Reductn	0	0	0	216	0	0	
Storage Cap Reductn	0	0	0	0	0	0	
Reduced v/c Ratio	0.25	0.03	0.18	0.71	0.45	0.14	
Intersection Summary							
Cycle Length: 120							
Actuated Cycle Length: 120							
Offset: 0 (0%), Referenced to phase 2:EBT and 6:WBT, Start of Green							
Natural Cycle: 75							
Control Type: Actuated-Coordinated							

Lanes, Volumes, Timings
5: Lamarche Ave & Innes Rd

2030 Future Total
AM Peak Hour

Maximum v/c Ratio: 0.65

Intersection Signal Delay: 12.8

Intersection LOS: B


Intersection Capacity Utilization 60.7%

ICU Level of Service B

Analysis Period (min) 15

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 5: Lamarche Ave & Innes Rd



HCM 2010 TWSC
6: Lamarche Ave & Access #1

2030 Future Total
AM Peak Hour

Intersection

Int Delay, s/veh 1.8

Movement	WBL	WBR	NBT	NBR	SBL	SBT
----------	-----	-----	-----	-----	-----	-----

Lane Configurations						
Traffic Vol, veh/h	0	26	95	0	11	41
Future Vol, veh/h	0	26	95	0	11	41
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	-	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	100	100	100	100	100	100
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	0	26	95	0	11	41

Major/Minor	Minor1	Major1	Major2
-------------	--------	--------	--------

Conflicting Flow All	158	95	0	0	95	0
Stage 1	95	-	-	-	-	-
Stage 2	63	-	-	-	-	-
Critical Hdwy	6.42	6.22	-	-	4.12	-
Critical Hdwy Stg 1	5.42	-	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-	-
Follow-up Hdwy	3.518	3.318	-	-	2.218	-
Pot Cap-1 Maneuver	833	962	-	-	1499	-
Stage 1	929	-	-	-	-	-
Stage 2	960	-	-	-	-	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	826	962	-	-	1499	-
Mov Cap-2 Maneuver	826	-	-	-	-	-
Stage 1	929	-	-	-	-	-
Stage 2	952	-	-	-	-	-

Approach	WB	NB	SB
----------	----	----	----

HCM Control Delay, s	8.8	0	1.6
HCM LOS	A		

Minor Lane/Major Mvmt	NBT	NBR	WBLn1	SBL	SBT
-----------------------	-----	-----	-------	-----	-----

Capacity (veh/h)	-	-	962	1499	-
HCM Lane V/C Ratio	-	-	0.027	0.007	-
HCM Control Delay (s)	-	-	8.8	7.4	0
HCM Lane LOS	-	-	A	A	A
HCM 95th %tile Q(veh)	-	-	0.1	0	-

HCM 2010 TWSC
7: Lamarche Ave & Access #2

2030 Future Total
AM Peak Hour

Intersection							
Int Delay, s/veh	1						
Movement	WBL	WBR	NBT	NBR	SBL	SBT	
Lane Configurations	Y	Y	Y	Y	Y	Y	
Traffic Vol, veh/h	0	11	84	0	5	36	
Future Vol, veh/h	0	11	84	0	5	36	
Conflicting Peds, #/hr	0	0	0	0	0	0	
Sign Control	Stop	Stop	Free	Free	Free	Free	
RT Channelized	-	None	-	None	-	None	
Storage Length	0	-	-	-	-	-	
Veh in Median Storage, #	0	-	0	-	-	0	
Grade, %	0	-	0	-	-	0	
Peak Hour Factor	100	100	100	100	100	100	
Heavy Vehicles, %	2	2	2	2	2	2	
Mvmt Flow	0	11	84	0	5	36	
Major/Minor	Minor1	Major1	Major2				
Conflicting Flow All	130	84	0	0	84	0	
Stage 1	84	-	-	-	-	-	
Stage 2	46	-	-	-	-	-	
Critical Hdwy	6.42	6.22	-	-	4.12	-	
Critical Hdwy Stg 1	5.42	-	-	-	-	-	
Critical Hdwy Stg 2	5.42	-	-	-	-	-	
Follow-up Hdwy	3.518	3.318	-	-	2.218	-	
Pot Cap-1 Maneuver	864	975	-	-	1513	-	
Stage 1	939	-	-	-	-	-	
Stage 2	976	-	-	-	-	-	
Platoon blocked, %	-	-	-	-	-	-	
Mov Cap-1 Maneuver	861	975	-	-	1513	-	
Mov Cap-2 Maneuver	861	-	-	-	-	-	
Stage 1	939	-	-	-	-	-	
Stage 2	973	-	-	-	-	-	
Approach	WB	NB	SB				
HCM Control Delay, s	8.7	0	0.9				
HCM LOS	A						
Minor Lane/Major Mvmt	NBT	NBR	WBLn1	SBL	SBT		
Capacity (veh/h)	-	-	975	1513	-		
HCM Lane V/C Ratio	-	-	0.011	0.003	-		
HCM Control Delay (s)	-	-	8.7	7.4	0		
HCM Lane LOS	-	-	A	A	A		
HCM 95th %tile Q(veh)	-	-	0	0	-		

2030 Future Total
PM Peak Hour

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
Traffic Volume (vph)	579	1677	197	59	713	128	64	225	78	168	300	203
Future Volume (vph)	579	1677	197	59	713	128	64	225	78	168	300	203
Satd. Flow (prot)	3216	3316	1483	1658	3316	1483	1658	3316	1483	1658	3316	1483
Flt Permitted	0.950			0.950			0.443			0.611		
Satd. Flow (perm)	3192	3316	1410	1652	3316	1445	765	3316	1432	1048	3316	1438
Satd. Flow (RTOR)			165			230			159			225
Lane Group Flow (vph)	579	1677	197	59	713	128	64	225	78	168	300	203
Turn Type	Prot	NA	Perm	Prot	NA	Perm	pm-pt	NA	Perm	Perm	NA	Perm
Protected Phases	5	2		1	6		6	4	4	8		8
Permitted Phases				2			6		4	8		8
Detector Phase	5	2	2	1	6	6	7	4	4	8	8	8
Switch Phase												
Minimum Initial (s)	5.0	10.0	10.0	5.0	10.0	10.0	5.0	10.0	10.0	10.0	10.0	10.0
Minimum Split (s)	16.6	26.2	26.2	11.2	26.2	26.2	11.7	32.7	32.7	32.7	32.7	32.7
Total Split (s)	31.0	49.0	49.0	16.0	34.0	34.0	12.0	45.0	45.0	33.0	33.0	33.0
Total Split (%)	28.2%	44.5%	44.5%	14.5%	30.9%	30.9%	10.8%	40.9%	40.9%	30.0%	30.0%	30.0%
Yellow Time (s)	3.7	3.7	3.7	3.7	3.7	3.7	3.3	3.3	3.3	3.3	3.3	3.3
All-Red Time (s)	2.9	2.5	2.5	2.5	2.5	2.5	3.4	3.4	3.4	3.4	3.4	3.4
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.6	6.2	6.2	6.2	6.2	6.2	6.7	6.7	6.7	6.7	6.7	6.7
Lead/Lag	Lead	Lag	Lag	Lead	Lag	Lag	Lead	Lag	Lag	Lag	Lag	Lag
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	C-Max	C-Max	None	C-Max	C-Max	None	Max	Max	Max	Max	Max
Act Efft Green (s)	23.0	46.5	46.5	8.5	29.2	29.2	38.3	38.3	38.3	28.7	28.7	28.7
Actuated g/C Ratio	0.21	0.42	0.42	0.08	0.27	0.27	0.35	0.35	0.35	0.26	0.26	0.26
v/c Ratio	0.86	1.20	0.29	0.46	0.81	0.23	0.21	0.19	0.13	0.62	0.35	0.38
Control Delay	55.6	126.5	6.5	51.1	63.0	11.6	26.2	25.7	0.4	48.5	35.4	5.4
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	55.6	126.5	6.5	51.1	63.0	11.6	26.2	25.7	0.4	48.5	35.4	5.4
LOS	E	F	A	D	E	B	C	C	A	D	D	A
Approach Delay		100.1			54.9			20.4		29.6		
Approach LOS		F			D		C					
Queue Length 50th (m)	61.1	-241.4	4.2	10.2	82.9	3.4	9.2	17.6	0.0	32.8	28.4	0.0
Queue Length 95th (m)	#82.8	#285.3	18.8	27.2	#109.6	24.1	18.8	26.6	0.0	#60.8	41.1	13.5
Internal Link Dist (m)		265.9			463.6			69.4			101.9	
Turn Bay Length (m)	135.5		87.0	106.0		57.0	48.0		43.5	50.0		53.0
Base Capacity (vph)	713	1401	691	147	879	552	309	1154	602	273	864	541
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.81	1.20	0.29	0.40	0.81	0.23	0.21	0.19	0.13	0.62	0.35	0.38
Intersection Summary												
Cycle Length: 110												
Actuated Cycle Length: 110												
Offset: 0 (0%), Referenced to phase 2:EBT and 6:WBT, Start of Green												
Natural Cycle: 120												
Control Type: Actuated-Coordinated												

Lanes, Volumes, Timings
1: Orleans Blvd & Innes Rd

Maximum v/c Ratio: 1.20

Intersection Signal Delay: 73.4

Intersection Capacity Utilization 106.1%

Analysis Period (min) 15


~ Volume exceeds capacity, queue is theoretically infinite.

Queue shown is maximum after two cycles.

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 1: Orleans Blvd & Innes Rd



2030 Future Total
PM Peak Hour

Lanes, Volumes, Timings
2: Page Rd & Innes Rd


2030 Future Total
PM Peak Hour

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑	↑↑	↑↑	↑↑	↑	↑	↑	↑	↑	↑
Traffic Volume (vph)	74	1835	30	102	855	72	23	6	84	67	17	37
Future Volume (vph)	74	1835	30	102	855	72	23	6	84	67	17	37
Satd. Flow (prot)	1658	3308	0	1658	3267	0	0	1524	0	0	1620	0
Flt Permitted	0.285										0.923	0.762
Satd. Flow (perm)	495	3308	0	120	3267	0	0	1420	0	0	1261	0
Satd. Flow (RTOR)		3			14			16			20	
Lane Group Flow (vph)	74	1865	0	102	927	0	0	113	0	0	121	0
Turn Type	Perm	NA		Perm	NA		Perm	NA		Perm	NA	
Protected Phases	2			6			4			4		8
Permitted Phases	2	2		6	6		4	4		8	8	
Detector Phase	2	2		6	6		4	4		8	8	
Switch Phase												
Minimum Initial (s)	10.0	10.0		10.0	10.0		10.0	10.0		10.0	10.0	
Minimum Split (s)	39.2	39.2		39.2	39.2		37.8	37.8		37.8	37.8	
Total Split (s)	72.0	72.0		72.0	72.0		38.0	38.0		38.0	38.0	
Total Split (%)	65.5%	65.5%		65.5%	65.5%		34.5%	34.5%		34.5%	34.5%	
Yellow Time (s)	3.7	3.7		3.7	3.7		3.0	3.0		3.0	3.0	
All-Red Time (s)	2.5	2.5		2.5	2.5		3.8	3.8		3.8	3.8	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Total Lost Time (s)	6.2	6.2		6.2	6.2		6.8	6.8		6.8	6.8	
Lead/Lag												
Lead-Lag Optimize?												
Recall Mode	C-Max	C-Max		C-Max	C-Max		None	None		None	None	
Act Effct Green (s)	77.6	77.6		77.6	77.6		19.4					19.4
Actuated g/C Ratio	0.71	0.71		0.71	0.71		0.18					0.18
v/c Ratio	0.21	0.80		1.21	0.40		0.43					0.51
Control Delay	2.2	9.8		185.3	3.3		36.9					39.0
Queue Delay	0.0	2.1		0.0	0.0		0.0					0.0
Total Delay	2.2	11.9		185.3	3.3		36.9					39.0
LOS	A	B		F	A		D					D
Approach Delay				11.5			21.3					39.0
Approach LOS				B			C					D
Queue Length 50th (m)	1.4	43.3		~25.6	0.0		19.9					21.0
Queue Length 95th (m)	m1.7	m20.8		m#61.6	0.0		31.2					33.3
Internal Link Dist (m)				463.6			206.5					112.1
Turn Bay Length (m)	104.5				120.0							
Base Capacity (vph)	349	2334		84	2308		414					371
Starvation Cap Reductn	0	0		0	0		0					0
Spillback Cap Reductn	0	319		0	0		1					1
Storage Cap Reductn	0	0		0	0		0					0
Reduced v/c Ratio	0.21	0.93		1.21	0.40		0.27					0.33
Intersection Summary												
Cycle Length: 110												
Actuated Cycle Length: 110												
Offset: 2 (2%), Referenced to phase 2:EBTL and 6:WBTL, Start of Green												
Natural Cycle: 150												
Control Type: Actuated-Coordinated												

Lanes, Volumes, Timings
2: Page Rd & Innes Rd

Maximum v/c Ratio: 1.21
 Intersection Signal Delay: 16.6 Intersection LOS: B
 Intersection Capacity Utilization 94.8% ICU Level of Service F
 Analysis Period (min) 15
 ~ Volume exceeds capacity, queue is theoretically infinite.
 Queue shown is maximum after two cycles.
 # 95th percentile volume exceeds capacity, queue may be longer.
 Queue shown is maximum after two cycles.
 m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 2: Page Rd & Innes Rd



2030 Future Total
PM Peak Hour

Lanes, Volumes, Timings
3: 3636 Innes Rd/3615 Innes Rd & Innes Rd


2030 Future Total
PM Peak Hour

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑	↑↑	↑↑	↑↑	↑	↑↑	↑	↑	↑↑	↑↑
Traffic Volume (vph)	8	1827	106	42	964	8	63	0	31	4	0	10
Future Volume (vph)	8	1827	106	42	964	8	63	0	31	4	0	10
Satd. Flow (prot)	1658	3285	0	1658	3312	0	1658	1483	0	0	1538	0
Flt Permitted	0.282			0.078			0.748				0.921	
Satd. Flow (perm)	492	3285	0	136	3312	0	1300	1483	0	0	1437	0
Satd. Flow (RTOR)		11			1				31			31
Lane Group Flow (vph)	8	1933	0	42	972	0	63	31	0	0	14	0
Turn Type	Perm	NA		Perm	NA		Perm	NA		Perm	NA	
Protected Phases		2			6		6		4		8	
Permitted Phases	2	2		6	6		4	4		8	8	
Detector Phase	2	2		6	6		4	4		8	8	
Switch Phase												
Minimum Initial (s)	10.0	10.0		10.0	10.0		10.0	10.0		10.0	10.0	
Minimum Split (s)	34.1	34.1		32.1	32.1		32.3	32.3		32.3	32.3	
Total Split (s)	77.0	77.0		77.0	77.0		33.0	33.0		33.0	33.0	
Total Split (%)	70.0%	70.0%		70.0%	70.0%		30.0%	30.0%		30.0%	30.0%	
Yellow Time (s)	3.7	3.7		3.7	3.7		3.3	3.3		3.3	3.3	
All-Red Time (s)	2.4	2.4		2.4	2.4		3.0	3.0		3.0	3.0	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0		
Total Lost Time (s)	6.1	6.1		6.1	6.1		6.3	6.3		6.3		
Lead/Lag												
Lead-Lag Optimize?												
Recall Mode	C-Max	C-Max		C-Max	C-Max		None	None		None	None	
Act Effct Green (s)	88.2	88.2		88.2	88.2		13.9	13.9				13.9
Actuated g/C Ratio	0.80	0.80		0.80	0.80		0.13	0.13				0.13
v/c Ratio	0.02	0.73		0.39	0.37		0.38	0.14				0.07
Control Delay	2.4	12.1		20.8	5.2		49.0	14.1				4.5
Queue Delay	0.0	1.8		0.0	0.0		0.0	0.0				0.0
Total Delay	2.4	14.0		20.8	5.2		49.0	14.1				4.5
LOS	A	B		C	A		D	B				A
Approach Delay					5.8				37.5			4.5
Approach LOS					A				D			A
Queue Length 50th (m)	0.0	232.7		2.2	26.0		13.0	0.0				0.0
Queue Length 95th (m)	m0.5	m232.8		#21.8	62.5		22.6	7.5				2.2
Internal Link Dist (m)		221.9				561.5			129.3			33.2
Turn Bay Length (m)	80.0			40.0								
Base Capacity (vph)	394	2636		109	2655		315	383				372
Starvation Cap Reductn	0	510		0	0		0	0				0
Spillback Cap Reductn	0	0		0	0		0	0				0
Storage Cap Reductn	0	0		0	0		0	0				0
Reduced v/c Ratio	0.02	0.91		0.39	0.37		0.20	0.08				0.04
Intersection Summary												
Cycle Length: 110												
Actuated Cycle Length: 110												
Offset: 36 (33%), Referenced to phase 2:EBTL and 6:WBTL, Start of Green												
Natural Cycle: 90												
Control Type: Actuated-Coordinated												

Lanes, Volumes, Timings
3: 3636 Innes Rd/3615 Innes Rd & Innes Rd

Maximum v/c Ratio: 0.73
Intersection Signal Delay: 11.9 Intersection LOS: B
Intersection Capacity Utilization 77.6% ICU Level of Service D
Analysis Period (min) 15
95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.
m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 3: 3636 Innes Rd/3615 Innes Rd & Innes Rd



2030 Future Total
PM Peak Hour

Lanes, Volumes, Timings
4: Innes Rd & Viseneau Dr

2030 Future Total
PM Peak Hour

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑	↑↑	↑↑	↑↑	↑	↑	↑↑	↑	↑↑	↑↑
Traffic Volume (vph)	44	1696	87	183	863	84	106	40	179	60	51	30
Future Volume (vph)	44	1696	87	183	863	84	106	40	179	60	51	30
Satd. Flow (prot)	1658	3316	1483	1658	3263	0	1658	1745	1483	0	1646	0
Flt Permitted	0.302						0.049			0.608		0.844
Satd. Flow (perm)	525	3316	1399	86	3263	0	1042	1745	1460	0	1417	0
Satd. Flow (RTOR)			106		15				179		10	
Lane Group Flow (vph)	44	1696	87	183	947	0	106	40	179	0	141	0
Turn Type	Perm	NA	Perm	pm+pt	NA		Perm	NA	Perm	Perm	NA	
Protected Phases		2		1	6			4		4	8	
Permitted Phases	2	2	2	1	6		4	4	4	4	8	8
Detector Phase	2	2	2	1	6		4	4	4	4	8	8
Switch Phase												
Minimum Initial (s)	10.0	10.0	10.0	5.0	10.0		10.0	10.0	10.0	10.0	10.0	10.0
Minimum Split (s)	32.3	32.3	32.3	11.3	32.3		36.3	36.3	36.3	36.3	36.3	36.3
Total Split (s)	68.0	68.0	68.0	20.0	88.0		37.0	37.0	37.0	37.0	37.0	37.0
Total Split (%)	52.3%	52.3%	52.3%	15.4%	67.7%		28.5%	28.5%	28.5%	28.5%	28.5%	28.5%
Yellow Time (s)	3.7	3.7	3.7	3.7	3.7		3.0	3.0	3.0	3.0	3.0	3.0
All-Red Time (s)	2.6	2.6	2.6	2.6	2.6		4.3	4.3	4.3	4.3	4.3	4.3
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.3	6.3	6.3	6.3	6.3		7.3	7.3	7.3	7.3	7.3	7.3
Lead/Lag	Lag	Lag	Lag	Lead			Lag	Lag	Lag	Lag	Lag	Lag
Lead-Lag Optimize?	Yes	Yes	Yes	Yes			Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	C-Max	C-Max	C-Max	None	C-Max		None	None	None	None	None	None
Act Effct Green (s)	75.1	75.1	75.1	96.3	96.3		20.1	20.1	20.1	20.1	20.1	20.1
Actuated g/C Ratio	0.58	0.58	0.58	0.74	0.74		0.15	0.15	0.15	0.15	0.15	0.15
v/c Ratio	0.15	0.89	0.10	0.75	0.39		0.66	0.15	0.48	0.62		
Control Delay	18.7	32.6	2.4	50.7	7.5		69.3	45.0	10.2	58.1		
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	18.7	32.6	2.4	50.7	7.5		69.3	45.0	10.2	58.1		
LOS	B	C	A	D	A		E	D	B		E	
Approach Delay		30.9			14.5				33.7		58.1	
Approach LOS		C			B				C		E	
Queue Length 50th (m)	4.8	181.7	0.0	30.2	37.0		26.5	9.2	0.0	32.5		
Queue Length 95th (m)	14.5	#296.9	6.1	56.5	65.7		42.5	18.2	18.6	49.7		
Internal Link Dist (m)		561.5			192.3				77.4		48.4	
Turn Bay Length (m)	47.5		58.5	58.5			48.5			20.0		
Base Capacity (vph)	303	1915	852	259	2421		238	398	471	331		
Starvation Cap Reductn	0	0	0	0	0		0	0	0	0	0	
Spillback Cap Reductn	0	0	0	0	0		0	0	0	0	0	
Storage Cap Reductn	0	0	0	0	0		0	0	0	0	0	
Reduced v/c Ratio	0.15	0.89	0.10	0.71	0.39		0.45	0.10	0.38	0.43		
Intersection Summary												
Cycle Length: 130												
Actuated Cycle Length: 130												
Offset: 105 (81%), Referenced to phase 2:EBTL and 6:WBT, Start of Green												
Natural Cycle: 125												
Control Type: Actuated-Coordinated												

Lanes, Volumes, Timings
4: Innes Rd & Viseneau Dr

2030 Future Total
PM Peak Hour

Lane Group	Ø3	Ø7
Lane Configurations		
Traffic Volume (vph)		
Future Volume (vph)		
Satd. Flow (prot)		
Flt Permitted		
Satd. Flow (perm)		
Satd. Flow (RTOR)		
Lane Group Flow (vph)		
Turn Type		
Protected Phases	3	7
Permitted Phases		
Detector Phase		
Switch Phase		
Minimum Initial (s)	1.0	1.0
Minimum Split (s)	3.0	3.0
Total Split (s)	5.0	5.0
Total Split (%)	4%	4%
Yellow Time (s)	2.0	2.0
All-Red Time (s)	0.0	0.0
Lost Time Adjust (s)		
Total Lost Time (s)		
Lead/Lag	Lead	Lead
Lead-Lag Optimize?	Yes	Yes
Recall Mode	None	None
Act Efect Green (s)		
Actuated g/C Ratio		
v/c Ratio		
Control Delay		
Queue Delay		
Total Delay		
LOS		
Approach Delay		
Approach LOS		
Queue Length 50th (m)		
Queue Length 95th (m)		
Internal Link Dist (m)		
Turn Bay Length (m)		
Base Capacity (vph)		
Starvation Cap Reductn		
Spillback Cap Reductn		
Storage Cap Reductn		
Reduced v/c Ratio		
Intersection Summary		

Lanes, Volumes, Timings
4: Innes Rd & Viseneau Dr

2030 Future Total
PM Peak Hour

Maximum v/c Ratio: 0.89
Intersection Signal Delay: 26.8
Intersection Capacity Utilization 96.1%
Analysis Period (min) 15
95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.

Splits and Phases: 4: Innes Rd & Viseneau Dr



Lanes, Volumes, Timings
5: Lamarche Ave & Innes Rd

2030 Future Total
PM Peak Hour

Lane Group	EBT	EBR	WBL	WBT	NBL	NBR	Ø8
Lane Configurations	↑	↓	↑	↓	↑	↓	
Traffic Volume (vph)	1920	84	44	994	54	29	
Future Volume (vph)	1920	84	44	994	54	29	
Satd. Flow (prot)	3316	1483	1658	3316	1658	1483	
Flt Permitted		0.950			0.950		
Satd. Flow (perm)	3316	1483	1658	3316	1658	1483	
Satd. Flow (RTOR)							
Lane Group Flow (vph)	1920	84	44	994	54	29	
Turn Type	NA	Perm	Prot	NA	Prot	Perm	
Protected Phases	2		1	6	7		8
Permitted Phases		2			4		
Detector Phase	2	2	1	6	7	4	
Switch Phase							
Minimum Initial (s)	10.0	10.0	5.0	10.0	5.0	5.0	1.0
Minimum Split (s)	22.5	22.5	11.7	22.5	11.3	22.5	22.5
Total Split (s)	64.2	64.2	11.7	75.9	11.6	34.1	22.5
Total Split (%)	58.4%	58.4%	10.6%	69.0%	10.5%	31.0%	20%
Yellow Time (s)	3.7	3.7	3.7	3.7	3.3	3.5	2.0
All-Red Time (s)	2.3	2.3	3.0	2.3	3.0	3.0	1.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	
Total Lost Time (s)	6.0	6.0	6.7	6.0	6.3	6.5	
Lead/Lag	Lag	Lag	Lead		Lag		Lead
Lead-Lag Optimize?	Yes	Yes	Yes		Yes		Yes
Recall Mode	C-Max	C-Max	None	C-Max	None	None	Max
Act Effct Green (s)	62.9	62.9	5.1	72.2	5.3	25.3	
Actuated g/C Ratio	0.57	0.57	0.05	0.66	0.05	0.23	
v/c Ratio	1.01	0.10	0.57	0.46	0.68	0.09	
Control Delay	42.5	14.9	75.4	12.6	91.5	32.4	
Queue Delay	17.9	0.0	0.0	0.0	0.0	0.2	
Total Delay	60.4	14.9	75.4	12.6	91.5	32.6	
LOS	E	B	E	B	F	C	
Approach Delay	58.5			15.3	70.9		
Approach LOS	E			B	E		
Queue Length 50th (m)	~241.3	8.2	9.4	49.4	11.6	4.8	
Queue Length 95th (m)	#284.4	m9.9	#25.9	104.6	#31.8	12.2	
Internal Link Dist (m)	206.5			221.9	61.3		
Turn Bay Length (m)		40.0	80.0		80.0		
Base Capacity (vph)	1894	847	77	2177	79	372	
Starvation Cap Reductn	0	0	0	0	0	0	
Spillback Cap Reductn	88	0	0	0	0	129	
Storage Cap Reductn	0	0	0	0	0	0	
Reduced v/c Ratio	1.06	0.10	0.57	0.46	0.68	0.12	
Intersection Summary							
Cycle Length: 110							
Actuated Cycle Length: 110							
Offset: 0 (0%), Referenced to phase 2:EBT and 6:WBT, Start of Green							
Natural Cycle: 120							
Control Type: Actuated-Coordinated							

Scenario 1 245 and 275 Lamarche Avenue 11:59 pm 03/04/2022 2030 Future Total


Synchro 11 Report
Page 10

Lanes, Volumes, Timings
5: Lamarche Ave & Innes Rd

2030 Future Total
PM Peak Hour

Maximum v/c Ratio: 1.01	Intersection Signal Delay: 44.5	Intersection LOS: D
	Intersection Capacity Utilization 70.6%	ICU Level of Service C
	Analysis Period (min) 15	
~ Volume exceeds capacity, queue is theoretically infinite.		
Queue shown is maximum after two cycles.		
# 95th percentile volume exceeds capacity, queue may be longer.		
Queue shown is maximum after two cycles.		
m Volume for 95th percentile queue is metered by upstream signal.		

Splits and Phases: 5: Lamarche Ave & Innes Rd



Scenario 1 245 and 275 Lamarche Avenue 11:59 pm 03/04/2022 2030 Future Total

Synchro 11 Report
Page 11

HCM 2010 TWSC
6: Lamarche Ave & Access #1

2030 Future Total
PM Peak Hour

Intersection						
Int Delay, s/veh	1.6					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	Y	Y	Y	Y	Y	Y
Traffic Vol, veh/h	0	19	64	0	25	104
Future Vol, veh/h	0	19	64	0	25	104
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	-	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	100	100	100	100	100	100
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	0	19	64	0	25	104
Major/Minor						
Minor1		Major1		Major2		
Conflicting Flow All	218	64	0	0	64	0
Stage 1	64	-	-	-	-	-
Stage 2	154	-	-	-	-	-
Critical Hdwy	6.42	6.22	-	-	4.12	-
Critical Hdwy Stg 1	5.42	-	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-	-
Follow-up Hdwy	3.518	3.318	-	-	2.218	-
Pot Cap-1 Maneuver	770	1000	-	-	1538	-
Stage 1	959	-	-	-	-	-
Stage 2	874	-	-	-	-	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	757	1000	-	-	1538	-
Mov Cap-2 Maneuver	757	-	-	-	-	-
Stage 1	959	-	-	-	-	-
Stage 2	859	-	-	-	-	-
Approach						
WB		NB		SB		
HCM Control Delay, s	8.7	-	0	-	1.4	-
HCM LOS	A	-	-	-	-	-
Minor Lane/Major Mvmt						
NBT		NBRWBLn1		SBL		SBT
Capacity (veh/h)	-	-	1000	1538	-	-
HCM Lane V/C Ratio	-	-	0.019	0.016	-	-
HCM Control Delay (s)	-	-	8.7	7.4	0	-
HCM Lane LOS	-	-	A	A	A	-
HCM 95th %tile Q(veh)	-	-	0.1	0.1	-	-

HCM 2010 TWSC
7: Lamarche Ave & Access #2

2030 Future Total
PM Peak Hour

Intersection						
Int Delay, s/veh	0.9					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	Y	Y	Y	Y	Y	Y
Traffic Vol, veh/h	0	8	56	0	11	93
Future Vol, veh/h	0	8	56	0	11	93
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	-	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	100	100	100	100	100	100
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	0	8	56	0	11	93
Major/Minor						
Minor1		Major1		Major2		
Conflicting Flow All	171	56	0	0	56	0
Stage 1	56	-	-	-	-	-
Stage 2	115	-	-	-	-	-
Critical Hdwy	6.42	6.22	-	-	4.12	-
Critical Hdwy Stg 1	5.42	-	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-	-
Follow-up Hdwy	3.518	3.318	-	-	2.218	-
Pot Cap-1 Maneuver	819	1011	-	-	1549	-
Stage 1	967	-	-	-	-	-
Stage 2	910	-	-	-	-	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	813	1011	-	-	1549	-
Mov Cap-2 Maneuver	813	-	-	-	-	-
Stage 1	967	-	-	-	-	-
Stage 2	904	-	-	-	-	-
Approach						
WB		NB		SB		
HCM Control Delay, s	8.6	-	0	-	0.8	-
HCM LOS	A	-	-	-	-	-
Minor Lane/Major Mvmt						
NBT		NBRWBLn1		SBL		SBT
Capacity (veh/h)	-	-	1011	1549	-	-
HCM Lane V/C Ratio	-	-	0.008	0.007	-	-
HCM Control Delay (s)	-	-	8.6	7.3	0	-
HCM Lane LOS	-	-	A	A	A	-
HCM 95th %tile Q(veh)	-	-	0	0	-	-

Appendix L

TDM Checklist

TDM Measures Checklist:
Residential Developments (multi-family, condominium or subdivision)

Legend	
BASIC	The measure is generally feasible and effective, and in most cases would benefit the development and its users
BETTER	The measure could maximize support for users of sustainable modes, and optimize development performance
★	The measure is one of the most dependably effective tools to encourage the use of sustainable modes

TDM measures: Residential developments		Check if proposed & add descriptions
1. TDM PROGRAM MANAGEMENT		
1.1 Program coordinator		
BASIC	1.1.1 Designate an internal coordinator, or contract with an external coordinator	<input type="checkbox"/>
1.2 Travel surveys		
BETTER	1.2.1 Conduct periodic surveys to identify travel-related behaviours, attitudes, challenges and solutions, and to track progress	<input type="checkbox"/>
2. WALKING AND CYCLING		
2.1 Information on walking/cycling routes & destinations		
BASIC	2.1.1 Display local area maps with walking/cycling access routes and key destinations at major entrances (<i>multi-family, condominium</i>)	<input type="checkbox"/>
2.2 Bicycle skills training		
BETTER	2.2.1 Offer on-site cycling courses for residents, or subsidize off-site courses	<input type="checkbox"/>

TDM measures: <i>Residential developments</i>			Check if proposed & add descriptions
3. TRANSIT			
3.1 Transit information			
BASIC	3.1.1	Display relevant transit schedules and route maps at entrances (<i>multi-family, condominium</i>)	<input type="checkbox"/>
BETTER	3.1.2	Provide real-time arrival information display at entrances (<i>multi-family, condominium</i>)	<input type="checkbox"/>
3.2 Transit fare incentives			
BASIC ★	3.2.1	Offer PRESTO cards preloaded with one monthly transit pass on residence purchase/move-in, to encourage residents to use transit	<input checked="" type="checkbox"/>
BETTER	3.2.2	Offer at least one year of free monthly transit passes on residence purchase/move-in	<input checked="" type="checkbox"/>
3.3 Enhanced public transit service			
BETTER ★	3.3.1	Contract with OC Transpo to provide early transit services until regular services are warranted by occupancy levels (<i>subdivision</i>)	<input type="checkbox"/>
3.4 Private transit service			
BETTER	3.4.1	Provide shuttle service for seniors homes or lifestyle communities (e.g. scheduled mall or supermarket runs)	<input type="checkbox"/>
4. CARSHARING & BIKE SHARING			
4.1 Bikeshare stations & memberships			
BETTER	4.1.1	Contract with provider to install on-site bikeshare station (<i>multi-family</i>)	<input type="checkbox"/>
BETTER	4.1.2	Provide residents with bikeshare memberships, either free or subsidized (<i>multi-family</i>)	<input type="checkbox"/>
4.2 Carshare vehicles & memberships			
BETTER	4.2.1	Contract with provider to install on-site carshare vehicles and promote their use by residents	<input type="checkbox"/>
BETTER	4.2.2	Provide residents with carshare memberships, either free or subsidized	<input type="checkbox"/>
5. PARKING			
5.1 Priced parking			
BASIC ★	5.1.1	Unbundle parking cost from purchase price (<i>condominium</i>)	<input type="checkbox"/>
BASIC ★	5.1.2	Unbundle parking cost from monthly rent (<i>multi-family</i>)	<input type="checkbox"/>

TDM measures: <i>Residential developments</i>		Check if proposed & add descriptions
6. TDM MARKETING & COMMUNICATIONS		
6.1 Multimodal travel information		
BASIC	★	6.1.1 Provide a multimodal travel option information package to new residents <input checked="" type="checkbox"/>
6.2 Personalized trip planning		
BETTER	★	6.2.1 Offer personalized trip planning to new residents <input type="checkbox"/>