

NOTES:

1. INSTALL FENCE PRIOR TO ANY CONSTRUCTION ACTIVITY.
2. NO CONSTRUCTION ACTIVITIES INCLUDING MATERIAL STORAGE OR DISPOSAL, OR PARKING IS TO TAKE PLACE WITHIN THE DESIGNATED PROTECTION AREA.
3. ANY ROOTS ENCOUNTERED, ARE TO BE CLEANLY CUT WITH A SAW OR PRUNERS (DO NOT USE BACKHOE OR OTHER HEAVY EQUIPMENT), ROOTS ARE TO BE COVERED IMMEDIATELY WITH TOPSOIL, BURLAP OR MULCH AND KEPT DAMP.

PROTECTION MEASURES TO BE TAKEN DURING CONSTRUCTION:

1. UNDER THE GUIDANCE OF AN ARBORIST, ERECT A FENCE AT THE CRITICAL ROOT ZONE (CRZ) OF TREES WHERE THE CRZ IS ESTABLISHED AS BEING 10 CENTIMETRES FROM THE TRUNK OF A TREE FOR EVERY CENTIMETRE OF TRUNK DIAMETER AT BREAST HEIGHT. THE CRZ IS CALCULATED AS DBH X 10 CM.;

2. DO NOT PLACE ANY MATERIAL OR EQUIPMENT WITHIN THE CRZ OF THE TREE

3. DO NOT ATTACH ANY SIGNS, NOTICES OR POSTERS TO ANY TREE;

TREE;
4. DO NOT RAISE OR LOWER THE EXISTING GRADE WITHIN THE CRZ WITHOUT APPROVAL;
5. TUNNEL OR BORE WHEN DIGGING WITHIN THE CRZ OF A TREE;

TREE:

6. DO NOT DAMAGE THE ROOT SYSTEM, TRUNK, OR BRANCHES OR ANY TREE;

7. ENSURE THAT EXHAUST FUMES FROM ALL EQUIPMENT ARE NOT DIRECTED TOWARDS ANY TREE CANOPY.


 1.2m SNOW FENCE WIRED (MIN 3) TO STEEL 'T' BAR POSTS (@ 2.4m O.C. MAX.) 50 x 150 WOOD TOP RAIL BOLTED TO POSTS.

EXISTING TREE

2 TREE PROTECTION FENCE

TCR SCALE: NTS



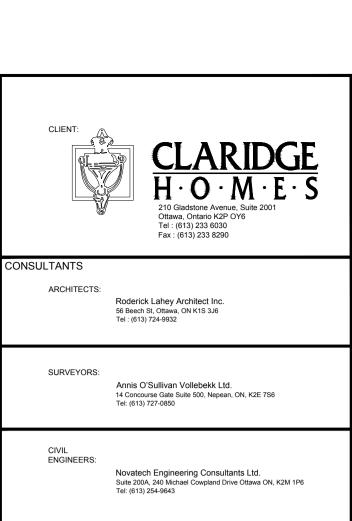

	EXISTING TREE TO REMAIN
	GROUP OF EXISTING TREES TO REMAIN
	EXISTING TREE TO BE REMOVED
	GROUP OF EXISTING TREES TO BE REMOVED
~~~~~	TREE PROTECTION FENCE

1	ISSUED FOR DISCUSSION AND REVIEW	05/15/2018	ML	JI
No.	Issue	Date MM/DD/YY	DR	CI

JAMES B. LENNOX & ASSOCIATES INC.

LANDSCAPE ARCHITECTS

3332 CARLING AVE. OTTAWA, ONTARIO K2H 5A8

Tel. (613) 722-5168 Fax. 1(866) 343-3942


PROJECT

SPRING VALLEY TRAILS ZENS

ROLLING MEADOW CRESCENT, OTTAWA ON

DRAWING

TREE CONSERVATION REPORT



1:250
PROJECT NUMBER

DATE MARCH 2018

PROJECT NORTH



TCR