



## **Pedestrian Level Wind Study**

**Greystone Village  
10 Oblats Avenue**

**Ottawa, Ontario**

REPORT: GWE18-022-CFDPLW

### **Prepared For:**

Erin O'Connor  
Manager, Land Development  
**Greystone Village Inc.**  
1737 Woodward Drive  
Ottawa, ON, K2C 0P9

### **Prepared By:**

Nicolas Pratt, M.E.Sc., Junior Wind Scientist  
Andrew Sliassas, M.A.Sc., Project Manager  
Vincent Ferraro, M.Eng., P.Eng., Managing Principal

February 20, 2018

---

## EXECUTIVE SUMMARY

This report describes a computer-based pedestrian level wind study in support of a Site Plan Approval (SPA) application for the proposed mixed-use development at 10 Oblats Avenue within the Greystone Village master-planned community in Ottawa, Ontario. The study involves simulation of wind speeds for selected wind directions in a three-dimensional (3D) computer model using the Computational Fluid Dynamics (CFD) technique, combined with meteorological data integration, to assess pedestrian comfort and safety within and surrounding the development site. The results and recommendations derived from these considerations are summarized in the following paragraphs and detailed in the subsequent report.

A complete summary of the predicted wind conditions is presented in Section 5. Based on CFD test results, interpretation and experience with similar developments, and reference to City of Ottawa wind criteria, we conclude that all grade-level areas within and surrounding the development site will be acceptable for the intended pedestrian uses on a seasonal basis. More specifically, wind conditions along surrounding sidewalks and walkways, as well as at building access points and the transit stops along Main Street, will be acceptable for the intended pedestrian uses throughout the year.

Regarding the Building 2A rooftop amenity areas, the central and eastern portions of the terrace will be comfortable for sitting, or more sedentary activities, from the late spring through the early autumn. If seating areas will be provided at the western side of the amenity area, the introduction of 1.8-m tall wind barriers in place of standard height perimeter guards extending along the south, west, and north perimeter of the space is recommended. For the Building 2B rooftop amenity areas, the eastern side of the amenity area will be comfortable for sitting, or more sedentary activities, during the summer. If wind conditions comfortable for sitting are desired for the southern side of the amenity area, or extended into the spring and autumn for the remaining terrace spaces, the introduction of 1.8-m tall wind barriers in place of standard height perimeter guards extending along the south and west perimeter of the space is recommended.

Excluding anomalous localized storm events such as tornadoes and downbursts, no areas over the study site are considered uncomfortable or unsafe.

---

## TABLE OF CONTENTS

<b>1.</b>	<b>INTRODUCTION</b>	<b>1</b>
<b>2.</b>	<b>TERMS OF REFERENCE</b>	<b>1</b>
<b>3.</b>	<b>OBJECTIVES</b>	<b>2</b>
<b>4.</b>	<b>METHODOLOGY</b>	<b>2</b>
<b>4.1</b>	<b>Computer-Based Context Modelling</b>	<b>3</b>
<b>4.2</b>	<b>Wind Speed Measurements</b>	<b>3</b>
<b>4.3</b>	<b>Meteorological Data Analysis</b>	<b>4</b>
<b>4.4</b>	<b>Pedestrian Comfort Criteria – City of Ottawa</b>	<b>6</b>
<b>5.</b>	<b>RESULTS AND DISCUSSION</b>	<b>8</b>
<b>6.</b>	<b>SUMMARY AND RECOMMENDATIONS</b>	<b>10</b>

### FIGURES

### APPENDICES

**Appendix A – Simulation of the Natural Wind**

**Appendix B – Pedestrian Level Wind Measurement Methodology**

## **1. INTRODUCTION**

Gradient Wind Engineering Inc. (GWE) was retained by Greystone Village Inc. to undertake a Pedestrian Level Wind (PLW) study in support of a Site Plan Approval (SPA) application for the proposed mixed-use development at 10 Oblats Avenue within the Greystone Village master-planned community in Ottawa, Ontario.

Our mandate within this study, as outlined in GWE proposal #18-015P, dated January 19, 2018, is to investigate pedestrian wind comfort within and surrounding the development site, and to identify any areas where wind conditions may interfere with certain pedestrian activities so that mitigation measures may be considered, where necessary. Our work is based on industry standard computer simulations using the Computational Fluid Dynamics (CFD) technique and data analysis procedures, City of Ottawa wind criteria, architectural drawings provided by Hobin Architecture in January 2018, surrounding street layouts and existing and approved future building massing information obtained from the City of Ottawa, as well as recent site imagery.

## **2. TERMS OF REFERENCE**

The focus of this PLW study is a proposed mixed-use development located at 10 Oblats Avenue within the Greystone Village master-planned community in Ottawa, Ontario. The development is located at the west corner of the Greystone Village on a parcel of land bounded by Main Street to the west, Oblats Avenue to the north, Deschatelets Avenue to the east, and the pedestrian Grande Allee to the south, approximately 2.0 kilometers southeast of downtown Ottawa.

The proposed development comprises Building 2A, a six-storey building on the west side of the site, and Building 2B, a nine-storey building on the east side of the site. The buildings are separated west to east by grade-level parking. Building 2A features a nearly rectangular planform at grade with the long axis oriented along Oblats Avenue. The ground level comprises of primarily retail space with an entrance lobby located towards the northeast corner. Access to one level of shared underground parking is via a ramp at the northeast corner of the building. At Level 2, the floorplate reduces to a U-Shaped planform, above which the building rises uniformly and features various configurations of protruding and recessed balconies. Building 2A also features rooftop outdoor amenity areas.

Building 2B features a L-shape planform which rises with various configurations of protruding and recessed balconies. The ground level includes an entrance lobby and building services at the northwest corner and a retail space at the southwest corner. The remainder of the ground level comprises of residential units. Building 2B also features rooftop outdoor amenity areas.

The study site is surrounded in the near-field, within a radius of approximately 200-500 metres (m), by a suburban mix of low- and mid-rise developments in all directions. The near field is bordered by the Rideau Canal to the west and the Rideau River to the east, beyond which is large area of greenspace. At greater distances from the study site, the mix of low- and mid-rise developments continues in the northeast, southeast, and southwest quadrants while the exposures in the northwest quadrant gradually transition to the more urban environs of downtown Ottawa.

Key areas under consideration for pedestrian wind comfort include surrounding sidewalks, walkways, building access points and nearby transit stops, as well as the rooftop outdoor amenity areas. Figure 1A illustrates the study site and surrounding context, while Figure 1B illustrates the rooftop outdoor amenity areas. Figures 2A and 2B illustrate the computational model used to conduct the study.

### **3. OBJECTIVES**

The principal objectives of this study are to: (i) determine pedestrian level comfort and safety conditions at key outdoor areas; (ii) identify areas where future wind conditions may interfere with the intended uses of outdoor spaces; and (iii) recommend suitable mitigation measures, where required.

### **4. METHODOLOGY**

The approach followed to quantify pedestrian wind conditions over the site is based on computer simulations of wind speeds across the study site within a virtual environment using the CFD technique, meteorological analysis of the Ottawa area wind climate, and synthesis of computational data with City of Ottawa criteria<sup>1</sup>. The following sections describe the analysis procedures, including a discussion of the pedestrian comfort criteria.

---

<sup>1</sup> City of Ottawa Terms of References: Wind Analysis

*Greystone Village Inc.*

---

## 4.1 Computer-Based Context Modelling

A computer-based PLW study is performed to determine the influence of the wind environment on pedestrian comfort over the proposed development site. Pedestrian comfort predictions, based on the mechanical effects of wind, are determined by combining measured wind speed data from CFD simulations with statistical weather data obtained from Macdonald-Cartier International Airport. The general concept and approach to CFD modelling is to represent building and topographic details in the immediate vicinity of the study site on the surrounding model, and to create suitable atmospheric wind profiles at the model boundary. The wind profiles are designed to have similar mean and turbulent wind properties consistent with actual site exposures.

An industry standard practice is to omit trees, vegetation, and other existing and planned landscape elements from the computational model due to the difficulty of providing accurate seasonal representation of vegetation. The omission of trees and other landscaping elements produces slightly more conservative wind speed values.

## 4.2 Wind Speed Measurements

The PLW analysis was performed by simulating wind flows and gathering velocity data over a CFD model of the site for 12 wind directions. The CFD simulation model was centered on the study building, complete with surrounding massing within a diameter of approximately 840 m.

Mean and peak wind speed data obtained over the study site for each wind direction were interpolated to 36 wind directions at 10° intervals, representing the full compass azimuth. Measured wind speeds approximately 1.5 m above local grade, as well as 1.5 m above the elevated outdoor amenity areas, were referenced to the wind speed at gradient height to generate mean and peak velocity ratios, which were used to calculate full-scale values. The gradient height represents the theoretical depth of the boundary layer of the Earth's atmosphere, above which the mean wind speed remains constant. Appendices A and B provide greater detail of the theory behind wind speed measurements.


---

### 4.3 Meteorological Data Analysis

A statistical model for winds in Ottawa was developed from approximately forty years of hourly meteorological wind data recorded at Macdonald-Cartier International Airport, and obtained from the local branch of Atmospheric Environment Services of Environment Canada. Wind speed and direction data were analyzed for each month of the year in order to determine the statistically prominent wind directions and corresponding speeds, and to characterize similarities between monthly weather patterns. Based on this portion of the analysis, the four seasons are represented by grouping data from consecutive months based on similarity of weather patterns, and not according to the traditional calendar method.

The statistical model of the Ottawa area wind climate, which indicates the directional character of local winds on a seasonal basis, is illustrated on the following page. The plots illustrate seasonal distribution of measured wind speeds and directions in metres per second (m/s). Probabilities of occurrence of different wind speeds are represented as stacked polar bars in sixteen azimuth divisions. The radial direction represents the percentage of time for various wind speed ranges per wind direction during the measurement period. The preferred wind speeds and directions can be identified by the longer length of bars. For Ottawa, the most common winds occur for westerly wind directions, followed by those from the east, while the most common wind speeds are below 10 m/s. The directional preference and relative magnitude of wind speed changes somewhat from season to season. By convention in microclimate studies, wind direction refers to the wind origin (e.g., a north wind blows from north to south).

## SEASONAL DISTRIBUTION OF WINDS FOR VARIOUS PROBABILITIES MACDONALD-CARTIER INTERNATIONAL AIRPORT, OTTAWA, ONTARIO

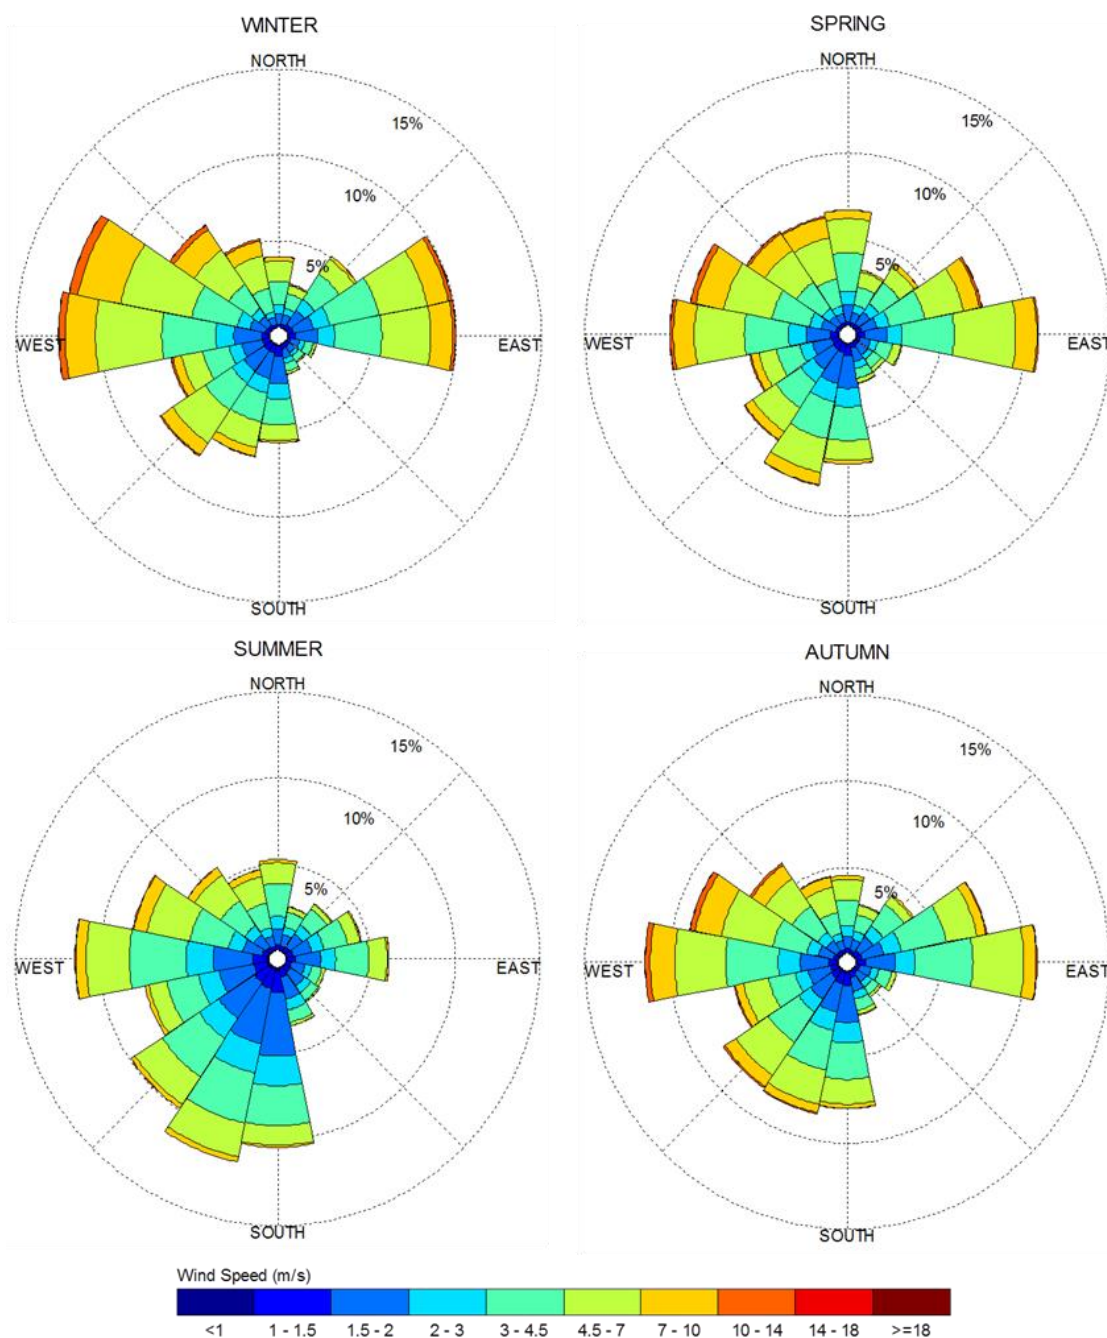

### Notes:

1. Radial distances indicate percentage of time of wind events.
2. Mean hourly wind speeds in m/s measured at 10 m above the ground.
3. Apply a factor of 3.6 to convert m/s to km/h (e.g., 10 m/s is equivalent to 36 km/h).



## 4.4 Pedestrian Comfort Criteria – City of Ottawa

Pedestrian comfort criteria are based on mechanical wind effects without consideration of other meteorological conditions (i.e., temperature, relative humidity). The City of Ottawa criteria provide an assessment of comfort, assuming pedestrians are appropriately dressed for a specified outdoor activity during any given season. Five pedestrian comfort classes and corresponding gust wind speed ranges are used to assess pedestrian comfort, which include: (i) Sitting; (ii) Standing; (iii) Strolling; (iv) Walking; (v) Uncomfortable; and (vi) Dangerous. More specifically, the comfort classes, associated wind speed ranges, and limiting criteria are summarized as follows:

- (i) **Sitting:** Mean wind speeds no greater than 10 km/h occurring at least 80% of the time. The gust equivalent mean wind speed is approximately 14 km/h.
- (ii) **Standing:** Mean wind speeds no greater than 14 km/h occurring at least 80% of the time. The gust equivalent mean wind speed is approximately 20 km/h.
- (iii) **Strolling:** Mean wind speeds no greater than 17 km/h occurring at least 80% of the time. The gust equivalent mean wind speed is approximately 25 km/h.
- (iv) **Walking:** Mean wind speeds no greater than 20 km/h occurring at least 80% of the time. The gust equivalent mean wind speed is approximately 30 km/h.
- (v) **Uncomfortable:** Uncomfortable conditions are characterized by predicted values that fall below the 80% target for walking. Brisk walking and exercise, such as jogging, would be acceptable for moderate excesses of this criterion.
- (vi) **Dangerous:** Gust equivalent mean wind speeds greater than or equal to 90 km/h, occurring more often than 0.1% of the time, are classified as dangerous. From calculations of stability, it can be shown that gust wind speeds of 90 km/h would be the approximate threshold wind speed that would cause an average elderly person in good health to fall.

Gust speeds are used in the criteria because people tend to be more sensitive to wind gusts than to steady winds for lower wind speed ranges. For strong winds approaching dangerous levels, this effect is less important because the mean wind can also cause problems for pedestrians. The mean gust speed ranges are selected based on 'The Beaufort Scale', which describes the effect of forces produced by varying wind speeds on levels on objects.

## THE BEAUFORT SCALE

Number	Description	Wind Speed (km/h)	Description
2	Light Breeze	4-8	Wind felt on faces.
3	Gentle Breeze	8-15	Leaves and small twigs in constant motion; Wind extends light flags.
4	Moderate Breeze	15-22	Wind raises dust and loose paper; Small branches are moved.
5	Fresh Breeze	22-30	Small trees in leaf begin to sway.
6	Strong Breeze	30-40	Large branches in motion; Whistling heard in electrical wires; Umbrellas used with difficulty.
7	Moderate Gale	40-50	Whole trees in motion; Inconvenient walking against wind.
8	Gale	50-60	Breaks twigs off trees; Generally impedes progress.

Experience and research on people's perception of mechanical wind effects has shown that if the wind speed levels are exceeded for more than 20% of the time, the activity level would be judged to be uncomfortable by most people. For instance, if gust wind speeds of 14 km/h were exceeded for more than 20% of the time, most pedestrians would judge that location to be too windy for sitting or more sedentary activities. Similarly, if 30 km/h at a location were exceeded for more than 20% of the time, walking or less vigorous activities would be considered uncomfortable. As most of these criteria are based on subjective reactions of a population to wind forces, their application is partly based on experience and judgment.

Once the pedestrian wind speed predictions have been established across the study site, the assessment of pedestrian comfort involves determining the suitability of the predicted wind conditions for their associated spaces. This step involves comparing the predicted comfort class to the desired comfort class, which is dictated by the location type. An overview of common pedestrian location types and their desired comfort classes are summarized on the following page.

## DESIRED PEDESTRIAN COMFORT CLASSES FOR VARIOUS LOCATION TYPES

Location Types	Desired Comfort Classes
Major Building Entrances	Standing
Secondary Building Access Points	Walking
Primary Public Sidewalks	Strolling
Secondary Public Sidewalks / Bicycle Paths	Walking
Outdoor Amenity Spaces	Sitting
Cafés / Patios / Benches / Gardens	Sitting
Transit Shelters	Standing
Public Parks / Plazas	Strolling
Garage / Service Entrances	Walking
Parking Lots	Walking
Vehicular Drop-Off Zones	Walking

## 5. RESULTS AND DISCUSSION

The foregoing discussion of the predicted pedestrian wind conditions for the study site is accompanied by Figures 3A through 6B (following the main text), which illustrate seasonal wind conditions at grade level and at the rooftop outdoor amenity areas. The colour contours indicate predicted regions of the various comfort classes, as dictated by City of Ottawa criteria. Wind conditions suitable for sitting are represented by the colour green, standing by yellow, strolling by orange, while conditions suitable for walking are represented by the colour blue.

**Oblats Avenue Sidewalk including Entrances (Figures 3A-6A, Tags A-C):** The sidewalk along the north side of the Buildings 2A and 2B (Tag A) will be comfortable for sitting during the summer season, becoming suitable for standing, or better, during the remaining seasons. Closer to the buildings, including at the retail entrances (Tag B) and residential lobby entrances for both buildings (Tag C), conditions will be calmer and comfortable for sitting throughout the year. The noted conditions are acceptable for the intended pedestrian uses of the spaces.

**Deschatelets Avenue Sidewalk (Figures 3A-6A, Tag D):** Much of the sidewalk along the east side of Building 2B will be comfortable for sitting throughout the year. Towards the northeast and southeast corners of Building 2B, conditions will be somewhat windier and suitable for standing during the three

colder seasons. The noted conditions are considered acceptable for the intended pedestrian uses of the space.

**South Walkway including Retail Entrances (Figures 3A-6A, Tags E and F):** Much of the sidewalk along the south side of the Buildings 2A and 2B (Tag E), including at the retail entrances (Tag F) will be comfortable for sitting throughout the year. Towards the southern corners of Buildings 2A and 2B, conditions will be somewhat windier and suitable for standing during the three colder seasons. The noted conditions are considered acceptable for the intended pedestrian uses of the spaces.

**Main Street Sidewalk including Retail Entrances (Figures 3A-6A, Tags G and H):** The sidewalk along the west side of Building 2A (Tag G) will be comfortable for sitting during the summer season, becoming suitable for standing, or better, during the three remaining seasons. Closer to the building, including at the retail entrances (Tag H), conditions will be calmer and comfortable for sitting throughout the year. The noted conditions are acceptable for the intended pedestrian uses of the spaces.

**Grade-Level Parking (Figures 3A-6A, Tag I):** The grade-level parking between buildings 2A and 2B will be comfortable for sitting during the summer season, becoming suitable for standing, or better, during the three remaining seasons, which is acceptable.

**Building 2A Rooftop Outdoor Amenity Areas (Figures 3B-6B, Tags J-N):** The eastern and central areas of amenity terrace (Tags J-L) will be comfortable for sitting, or more sedentary activities, from the late spring through the early autumn, becoming suitable for standing, or better, during the colder seasons, which is acceptable. During the warmer months, the western portion of the amenity space (Tags M and N) will generally be comfortable for sitting near the outer perimeter, becoming suitable for standing near the centre of the rooftop. If seating areas will be provided near the centre of the roof at the western side of the terrace, the introduction of 1.8-m tall wind barriers in place of standard height perimeter guards along the south, west, and north perimeter of the space is recommended. The wind barriers may take the form of high-solidity architectural wind screens and/or dense coniferous plantings.

**Building 2B Rooftop Outdoor Amenity Areas (Figures 3B-6B, Tags O-Q):** The eastern portion of the amenity areas (Tags P and Q) will be comfortable for sitting, or more sedentary activities, during the summer season, becoming suitable for standing, or better, during the three colder seasons, which is acceptable. The southern area of the terrace (Tag O) will generally be comfortable for standing during the summer. If wind conditions suitable for sitting are desired for the southern portion of the amenity area, or extended into the spring and autumn for the remaining terrace spaces, the introduction of 1.8-m tall

wind barriers in place of standard height perimeter guards extending along the south and west perimeter of the space is recommended. The wind barriers may take the form of high-solidity architectural wind screens and/or dense coniferous plantings.

**Influence of the Proposed Development on Existing Wind Conditions near the Study Site:** Wind conditions over surrounding sidewalks beyond the development site, as well as at nearby building entrances, will be comfortable for their intended pedestrian uses during each seasonal period upon the introduction of the proposed development at 10 Oblats Avenue. Furthermore, transit stops located along Main Street, at Oblats Avenue, will be comfortable for standing, or better, throughout the year, which is acceptable.

**Wind Safety:** Within the context of typical weather patterns, which exclude anomalous localized storm events such as tornadoes and downbursts, no areas over the study site were found to experience wind conditions that are considered uncomfortable or unsafe.

## 6. SUMMARY AND RECOMMENDATIONS

This document describes the results of a PLW study in support of a SPA application for the proposed mixed-use development 10 Oblats Avenue within the Greystone Village master-planned community in Ottawa, Ontario.

Based on CFD test results, interpretation and experience with similar developments, and reference to City of Ottawa wind criteria, we conclude that all grade-level areas within and surrounding the development site will be acceptable for the intended pedestrian uses on a seasonal basis. More specifically, wind conditions along surrounding sidewalks and walkways, as well as in close proximity to building access points and the transit stops along Main Street, will be acceptable for the intended pedestrian uses of the areas throughout the year.

Regarding the Building 2A rooftop amenity areas, the central and eastern portions of the terrace will be comfortable for sitting, or more sedentary activities, from the late spring through the early autumn. If seating areas will be provided at the western side of the amenity area, the introduction of 1.8-m tall wind barriers in place of standard height perimeter guards extending along the south, west, and north perimeter of the space is recommended. For the Building 2B rooftop amenity areas, the eastern side of the amenity area will be comfortable for sitting, or more sedentary activities, during the summer. If wind conditions comfortable for sitting are desired for the southern side of the amenity area, or extended into

---

the spring and autumn for the remaining terrace spaces, the introduction of 1.8-m tall wind barriers in place of standard height perimeter guards extending along the south and west perimeter of the space is recommended.

Excluding anomalous localized storm events such as tornadoes and downbursts, no areas over the study site are considered uncomfortable or unsafe.


This concludes our pedestrian level wind report. Please advise the undersigned of any questions or comments.

Sincerely,

***Gradient Wind Engineering Inc.***

A handwritten signature in blue ink, appearing to read 'A. Sliwas', on a light yellow background.

Andrew Sliwas, M.A.Sc.  
Project Manager

A handwritten signature in blue ink, appearing to read 'Vincent Ferraro', on a light yellow background.

Vincent Ferraro, M.Eng., P.Eng.  
Managing Principal



127 Walgreen Road  
Ottawa, Ontario  
(613) 836 0934

**GRADIENTWIND**  
ENGINEERING INC.

PROJECT

10 OBLATS AVENUE, OTTAWA  
PEDESTRIAN LEVEL WIND STUDY

SCALE

1:800 (APPROX.)

DRAWING NO.

GWE18-022-PLW-1A

DATE



FEBRUARY 20, 2018

DRAWN BY

B.J.

DESCRIPTION

FIGURE 1A: SITE PLAN &  
SURROUNDING CONTEXT

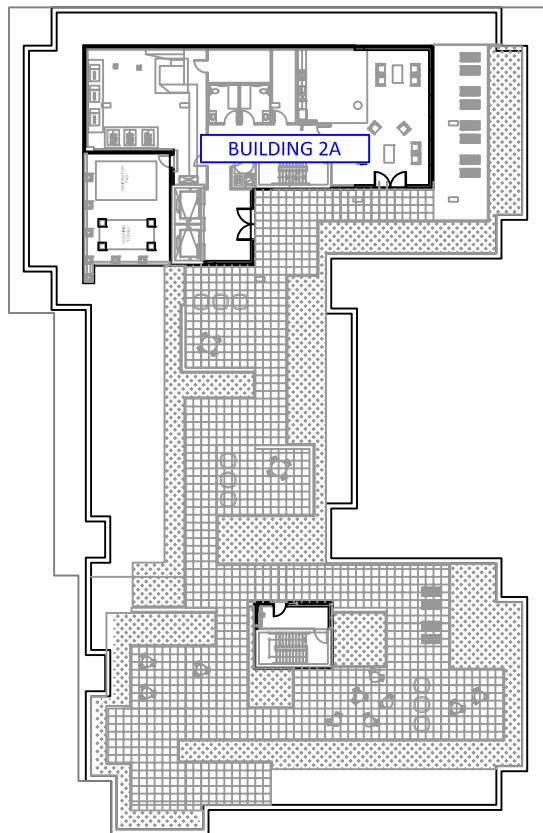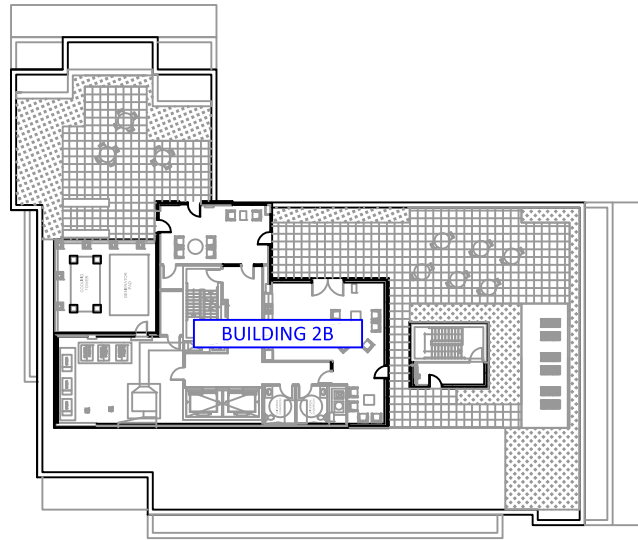

127 Walgreen Road  
Ottawa, Ontario  
(613) 836 0934

**GRADIENTWIND**  
ENGINEERING INC.

PROJECT

10 OBLATS AVENUE, OTTAWA  
PEDESTRIAN LEVEL WIND STUDY

SCALE

1:600 (APPROX.)

DRAWING NO.

GWE18-022-PLW-1B

DATE

FEBRUARY 20, 2018

DRAWN BY

B.J.


DESCRIPTION

FIGURE 1B: ROOFTOP OUTDOOR  
AMENITY AREAS





**FIGURE 2A: COMPUTATIONAL MODEL, SOUTHWEST PERSPECTIVE**

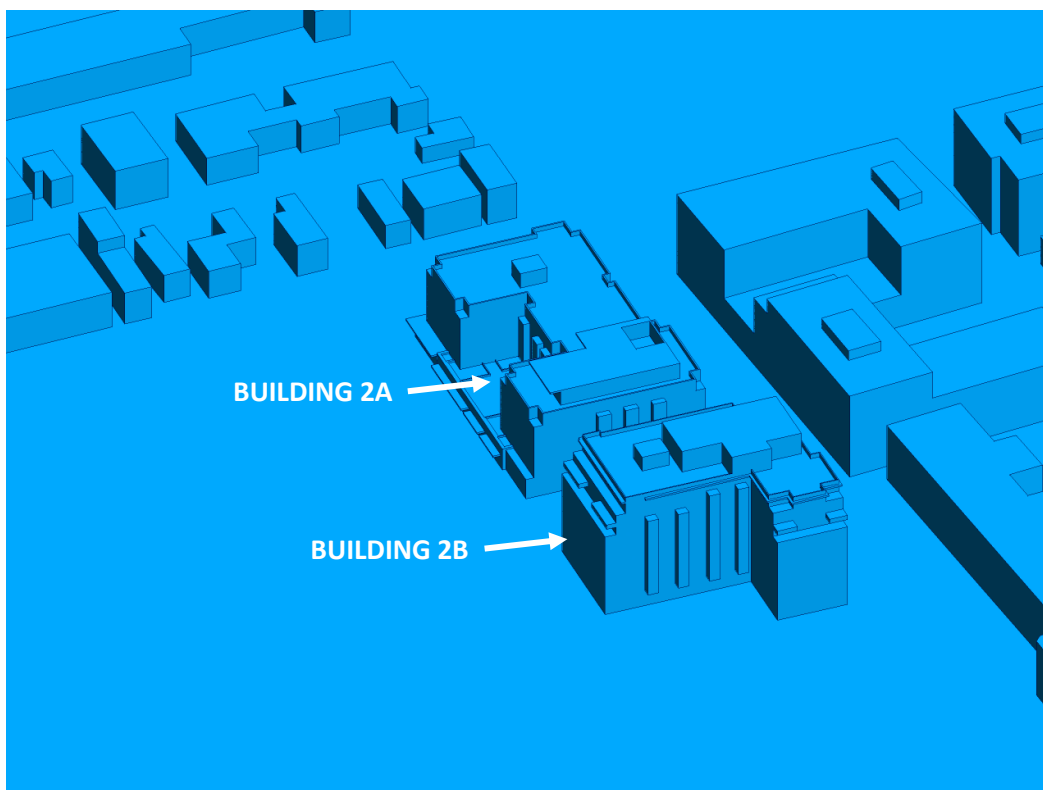


**FIGURE 2B: STUDY BUILDING, EAST PERSPECTIVE**




**FIGURE 3A: SPRING – GRADE-LEVEL PEDESTRIAN WIND CONDITIONS**



**10 Oblats Avenue - REFERENCE MARKER LOCATIONS**

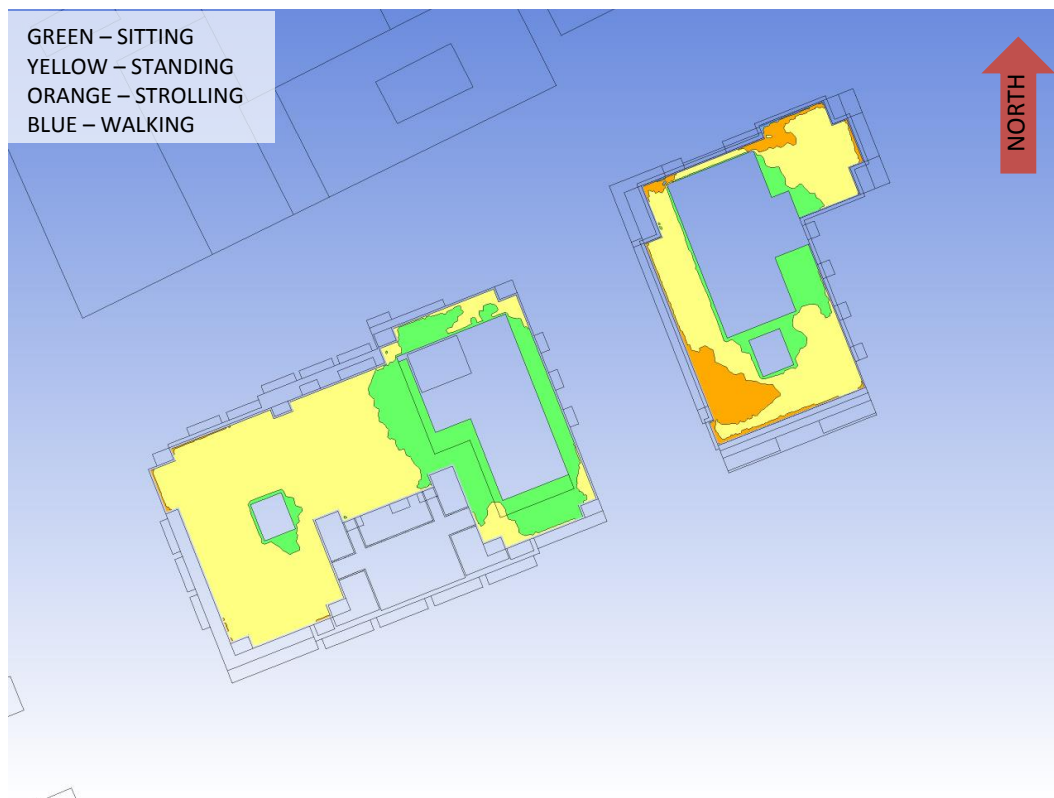

**FIGURE 3B: SPRING – LEVEL 16 OUTDOOR AMENITY AREA WIND CONDITIONS**

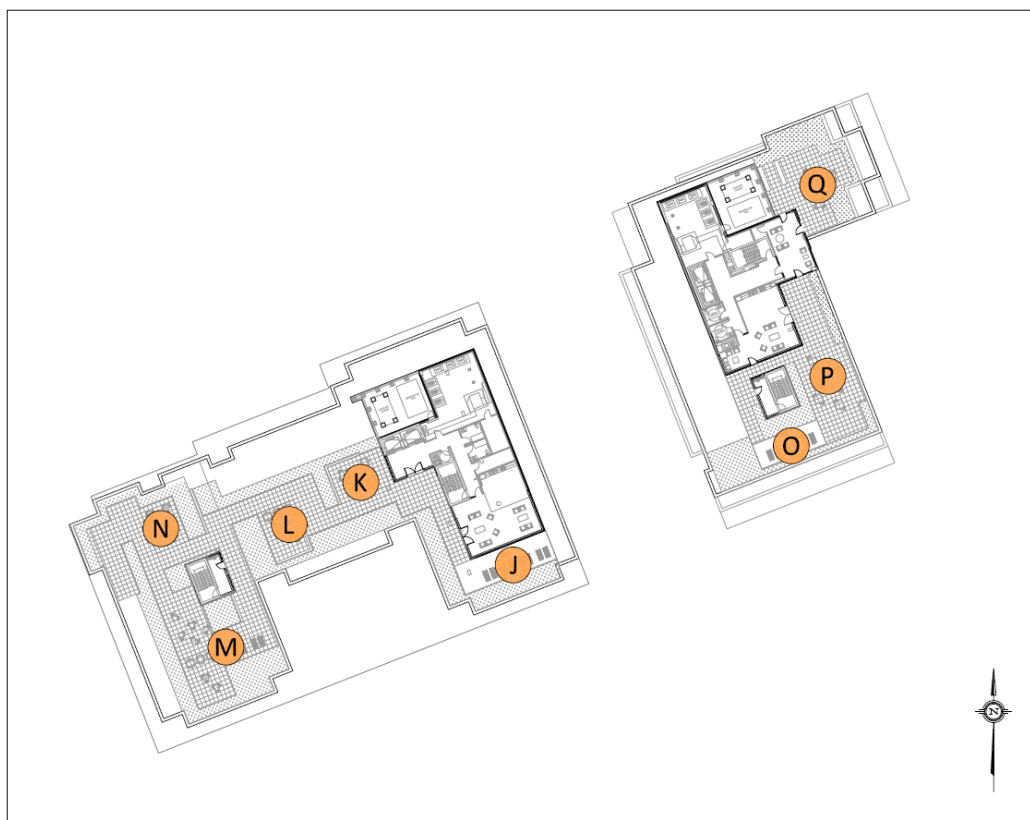


**10 OBLATS AVENUE - REFERENCE MARKER LOCATIONS**




**FIGURE 4A: SUMMER – GRADE-LEVEL PEDESTRIAN WIND CONDITIONS**



**10 OBLATS AVENUE - REFERENCE MARKER LOCATIONS**

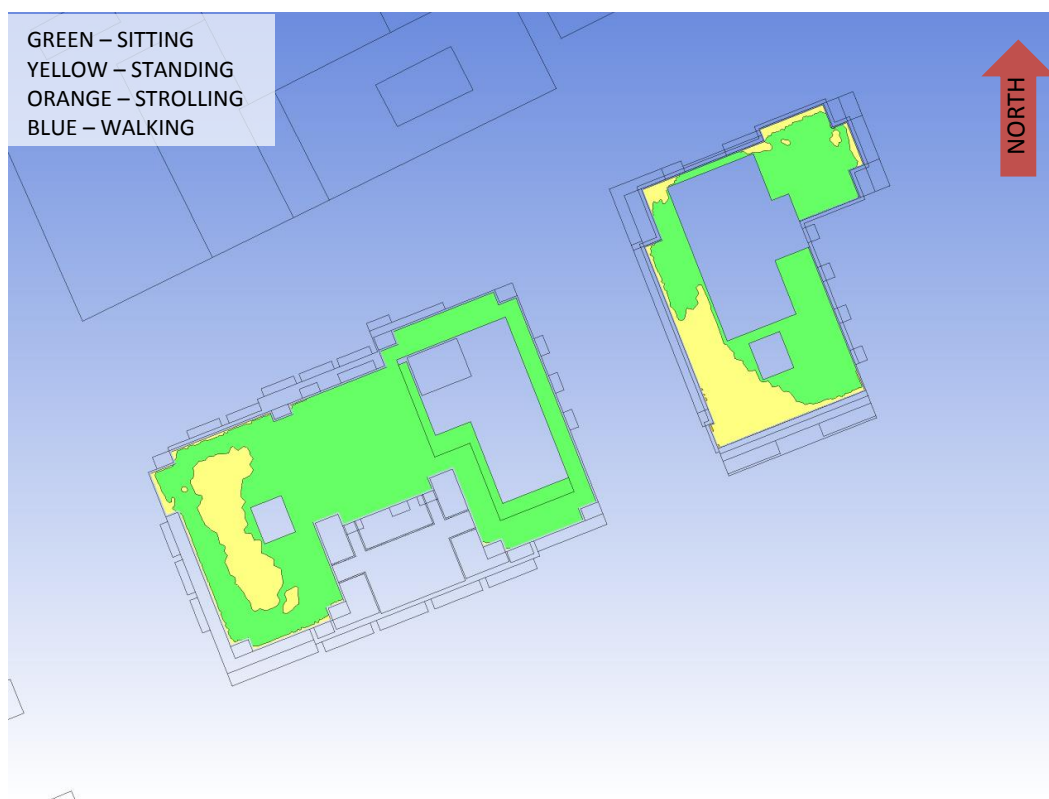

**FIGURE 4B: SUMMER – LEVEL 16 OUTDOOR AMENITY AREA WIND CONDITIONS**

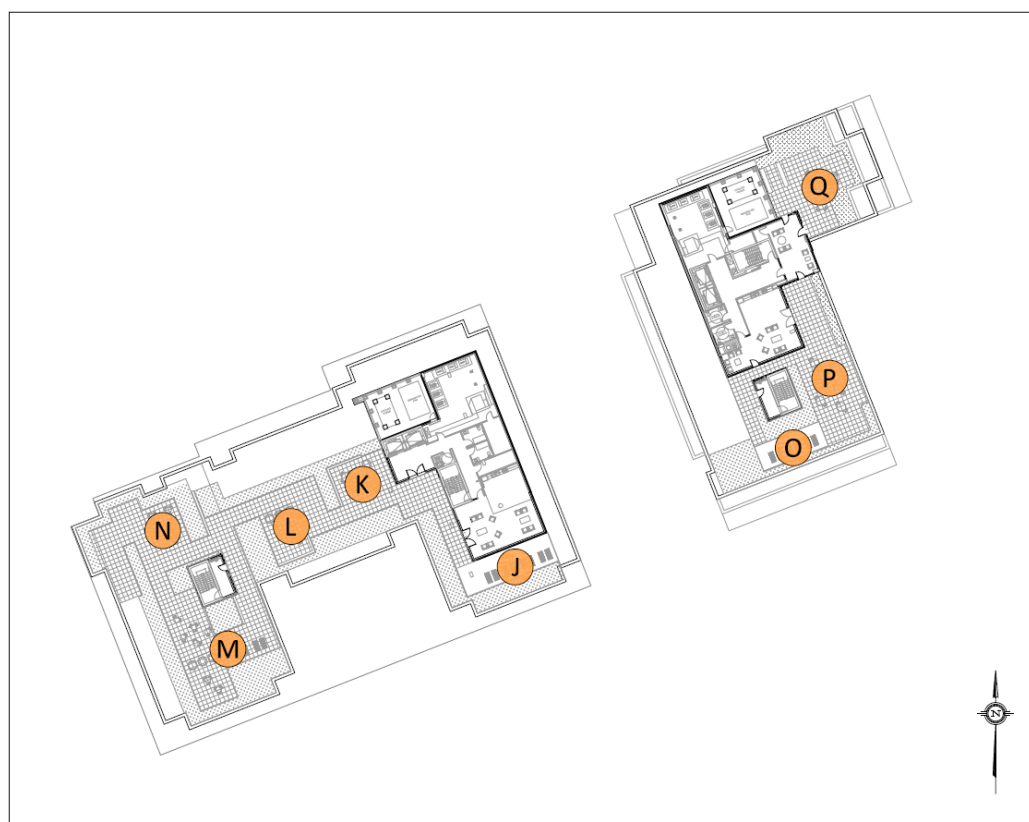

**10 OBLATS AVENUE - REFERENCE MARKER LOCATIONS**




**FIGURE 5A: AUTUMN – GRADE-LEVEL PEDESTRIAN WIND CONDITIONS**




**10 OBLATS AVENUE - REFERENCE MARKER LOCATIONS**



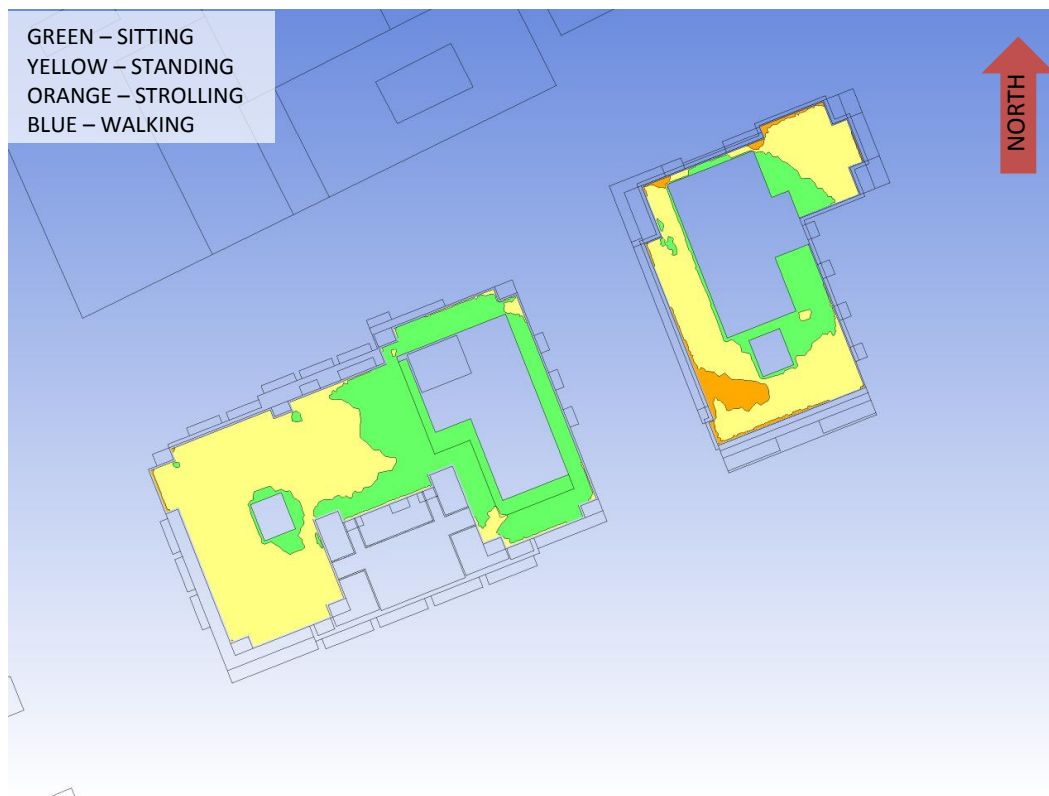

**FIGURE 5B: AUTUMN – LEVEL 16 OUTDOOR AMENITY AREA WIND CONDITIONS**

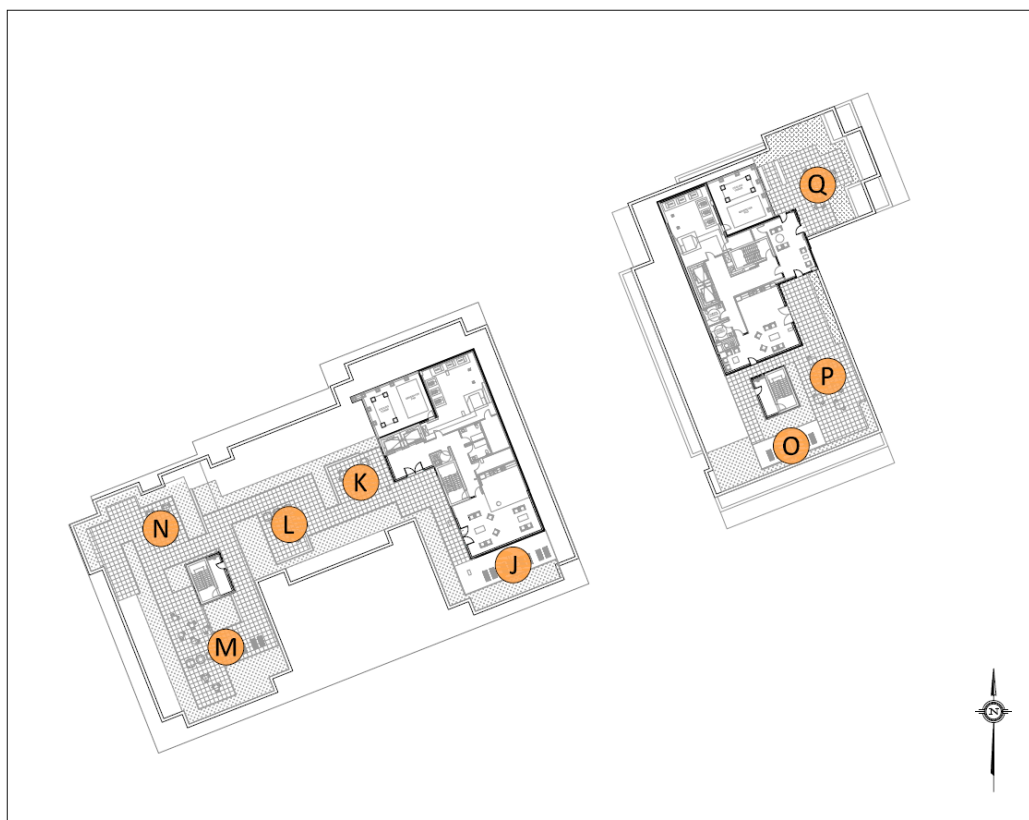

**10 OBLATS - REFERENCE MARKER LOCATIONS**




**FIGURE 6A: WINTER – GRADE-LEVEL PEDESTRIAN WIND CONDITIONS**




**10 OBLATS AVENUE - REFERENCE MARKER LOCATIONS**



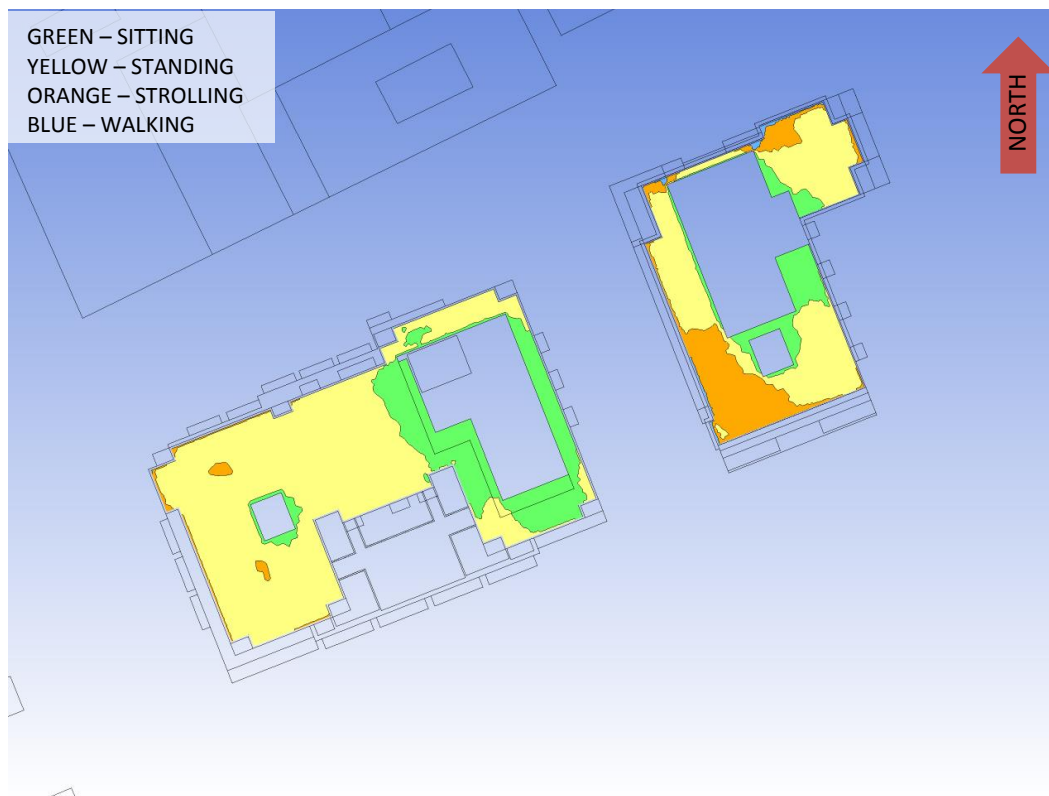

**FIGURE 6B: WINTER – LEVEL 2 OUTDOOR AMENITY AREA WIND CONDITIONS**

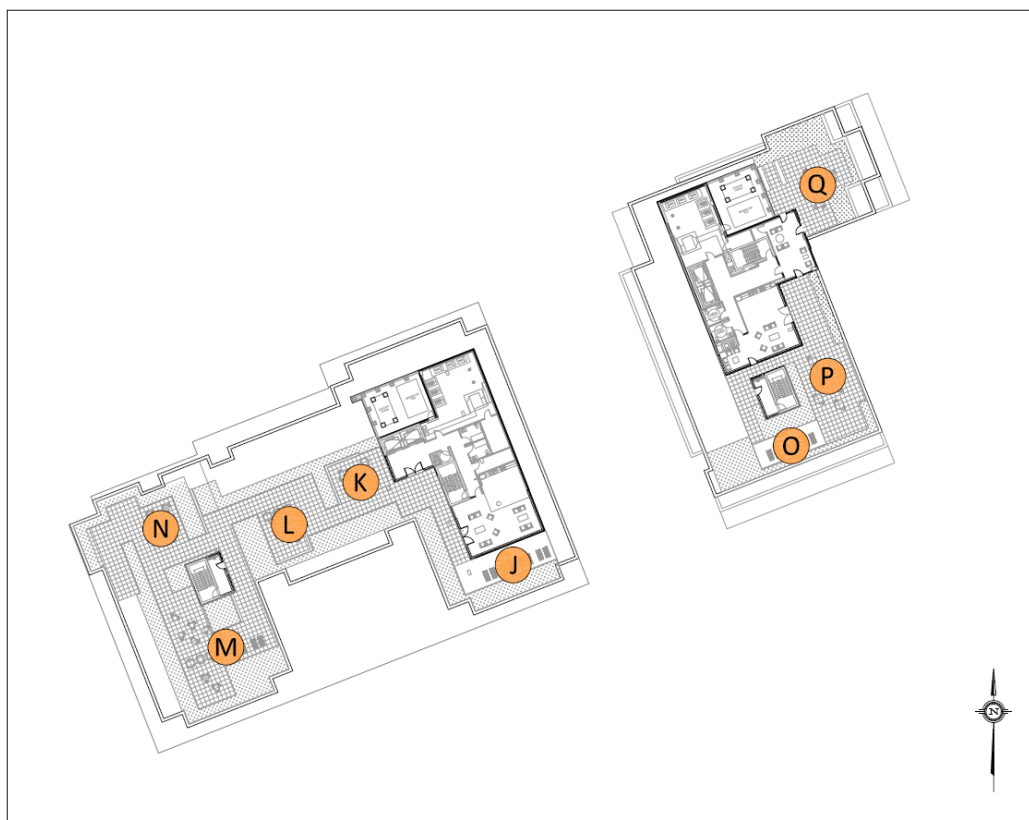

**10 OBLATS AVENUE - REFERENCE MARKER LOCATIONS**

## **APPENDIX A**

### **SIMULATION OF THE NATURAL WIND**

*The information contained within this appendix is offered to provide a greater understanding of the relationship between the physical wind tunnel testing method and virtual computer-based simulations*

## WIND TUNNEL AND CFD SIMULATION OF THE NATURAL WIND

Wind flowing over the surface of the earth develops a boundary layer due to the drag produced by surface features such as vegetation and man-made structures. Within this boundary layer, the mean wind speed varies from zero at the surface to the gradient wind speed at the top of the layer. The height of the top of the boundary layer is referred to as the gradient height, above which the velocity remains more-or-less constant for a given synoptic weather system. The mean wind speed is taken to be the average value over one hour. Superimposed on the mean wind speed are fluctuating (or turbulent) components in the longitudinal (i.e. along wind), vertical and lateral directions. Although turbulence varies according to the roughness of the surface, the turbulence level generally increases from nearly zero (smooth flow) at gradient height to maximum values near the ground. While for a calm ocean the maximum could be 20%, the maximum for a very rough surface such as the center of a city could be 100%, or equal to the local mean wind speed. The height of the boundary layer varies in time and over different terrain roughness within the range of 400 m to 600 m.

Simulating real wind behavior in a wind tunnel, or by computer models (CFD), requires simulating the variation of mean wind speed with height, simulating the turbulence intensity, and matching the typical length scales of turbulence. It is the ratio between wind tunnel turbulence length scales and turbulence scales in the atmosphere that determines the geometric scales that models can assume in a wind tunnel. Hence, when a 1:200 scale model is quoted, this implies that the turbulence scales in the wind tunnel and the atmosphere have the same ratios. Some flexibility in this requirement has been shown to produce reasonable wind tunnel predictions compared to full-scale. In model scale the mean and turbulence characteristics of the wind are obtained with the use of spires at one end of the tunnel and roughness elements along the floor of the tunnel. The fan is located at the model end and wind is pulled over the spires, roughness elements and model. It has been found that, to a good approximation, the mean wind profile can be represented by a power law relation, shown below, giving height above ground versus wind speed.

$$U = U_g \left( \frac{Z}{Z_g} \right)^\alpha$$

Where;  $U$  = mean wind speed,  $U_g$  = gradient wind speed,  $Z$  = height above ground,  $Z_g$  = depth of the boundary layer (gradient height) and  $\alpha$  is the power law exponent.

Figure A1 plots three such profiles for the open country, suburban and urban exposures. The exponent  $\alpha$  varies according to the type of terrain;  $\alpha = 0.14, 0.25$  and  $0.33$  for open country, suburban and urban exposures respectively. Figure A2 illustrates the theoretical variation of turbulence in full scale and some wind tunnel measurement for comparison.

The integral length scale of turbulence can be thought of as an average size of gust in the atmosphere. Although it varies with height and ground roughness, it has been found to generally be in the range of 100 m to 200 m in the upper half of the boundary layer. For a 1:300 scale, for example, the model value should be between 1/3 and 2/3 of a meter. Integral length scales are derived from power spectra, which describe the energy content of wind as a function of frequency. There are several ways of determining integral length scales of turbulence. One way is by comparison of a measured power spectrum in model scale to a non-dimensional theoretical spectrum such as the Davenport spectrum of longitudinal turbulence. Using the Davenport spectrum, which agrees well with full-scale spectra, one can estimate the integral scale by plotting the theoretical spectrum with varying  $L$  until it matches as closely as possible the measured spectrum:

$$f \times S(f) = \frac{\frac{4(Lf)^2}{U_{10}^2}}{\left[1 + \frac{4(Lf)^2}{U_{10}^2}\right]^{\frac{4}{3}}}$$

Where,  $f$  is frequency,  $S(f)$  is the spectrum value at frequency  $f$ ,  $U_{10}$  is the wind speed 10 m above ground level, and  $L$  is the characteristic length of turbulence.

Once the wind simulation is correct, the model, constructed to a suitable scale, is installed at the center of the working section of the wind tunnel. Different wind directions are represented by rotating the model to align with the wind tunnel center-line axis.

## REFERENCES

1. Teunissen, H.W., 'Characteristics Of The Mean Wind And Turbulence In The Planetary Boundary Layer', Institute For Aerospace Studies, University Of Toronto, UTIAS # 32, Oct. 1970
2. Flay, R.G., Stevenson, D.C., 'Integral Length Scales In An Atmospheric Boundary Layer Near The Ground', 9<sup>th</sup> Australian Fluid Mechanics Conference, Auckland, Dec. 1966
3. ESDU, 'Characteristics of Atmospheric Turbulence Near the Ground', 74030
4. Bradley, E.F., Coppin, P.A., Katen, P.C., 'Turbulent Wind Structure Above Very Rugged Terrain', 9<sup>th</sup> Australian Fluid Mechanics Conference, Auckland, Dec. 1966

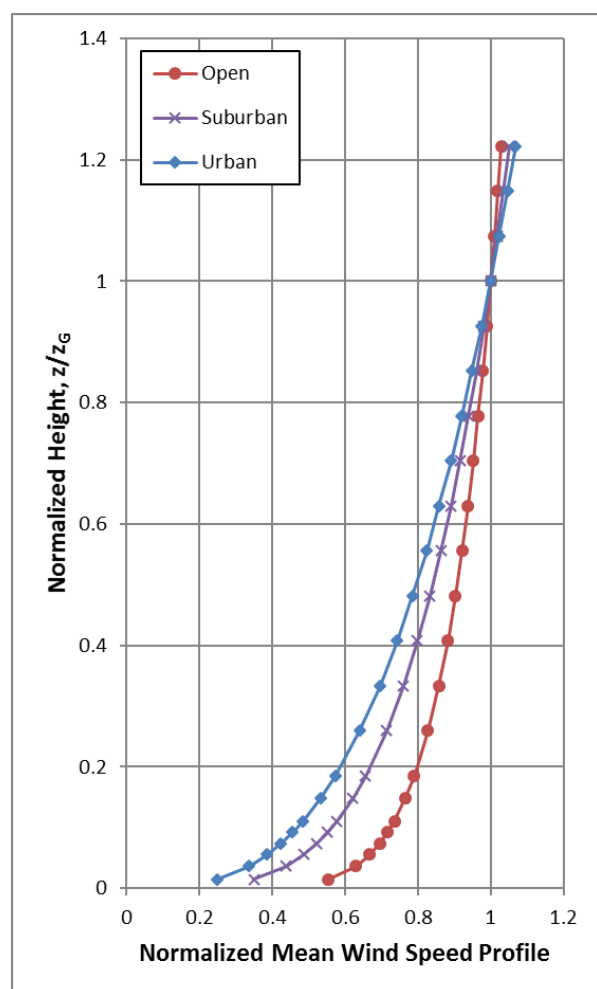


Figure A1: Mean Wind Speed Profiles

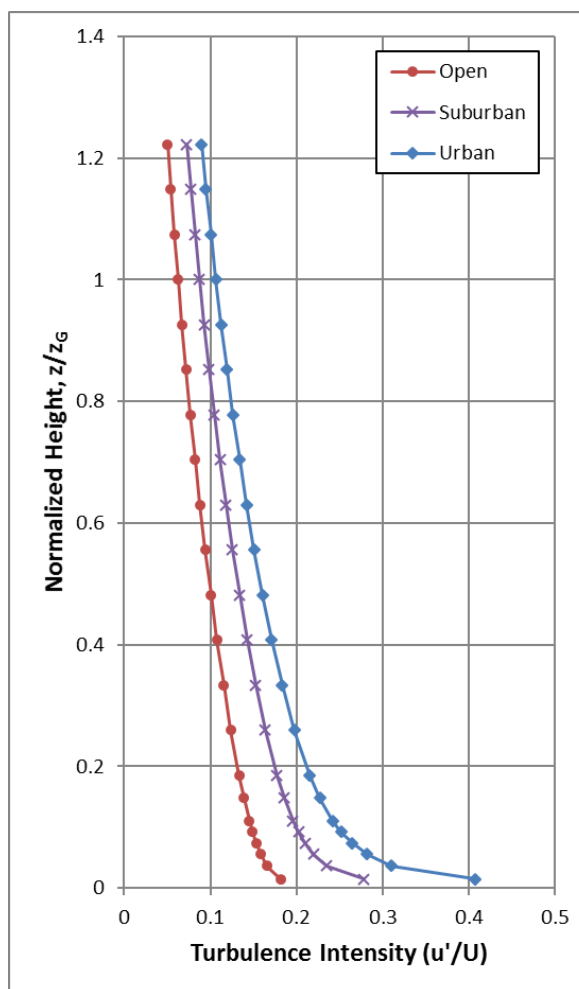


Figure A2: Turbulence Intensity Profiles

## **APPENDIX B**

### **PEDESTRIAN LEVEL WIND MEASUREMENT METHODOLOGY**

*The information contained within this appendix is offered to provide a greater understanding of the relationship between the physical wind tunnel testing method and virtual computer-based simulations*

---

## PEDESTRIAN LEVEL WIND MEASUREMENT METHODOLOGY

Pedestrian level wind studies are performed in a wind tunnel on a physical model of the study buildings at a suitable scale. Instantaneous wind speed measurements are recorded at a model height corresponding to 1.5 m full scale using either a hot wire anemometer or a pressure-based transducer. Measurements are performed at any number of locations on the model and usually for 36 wind directions. For each wind direction, the roughness of the upwind terrain is matched in the wind tunnel to generate the correct mean and turbulent wind profiles approaching the model.

The hot wire anemometer is an instrument consisting of a thin metallic wire conducting an electric current. It is an omni-directional device equally sensitive to wind approaching from any direction in the horizontal plane. By compensating for the cooling effect of wind flowing over the wire, the associated electronics produce an analog voltage signal that can be calibrated against velocity of the air stream. For all measurements, the wire is oriented vertically so as to be sensitive to wind approaching from all directions in a horizontal plane.

The pressure sensor is a small cylindrical device that measures instantaneous pressure differences over a small area. The sensor is connected via tubing to a transducer that translates the pressure to a voltage signal that is recorded by computer. With appropriately designed tubing, the sensor is sensitive to a suitable range of fluctuating velocities.

For a given wind direction and location on the model, a time history of the wind speed is recorded for a period of time equal to one hour in full-scale. The analog signal produced by the hot wire or pressure sensor is digitized at a rate of 400 samples per second. A sample recording for several seconds is illustrated in Figure B. This data is analyzed to extract the mean, root-mean-square (rms) and the peak of the signal. The peak value, or gust wind speed, is formed by averaging a number of peaks obtained from sub-intervals of the sampling period. The mean and gust speeds are then normalized by the wind tunnel gradient wind speed, which is the speed at the top of the model boundary layer, to obtain mean and gust ratios. At each location, the measurements are repeated for 36 wind directions to produce normalized polar plots, which will be provided upon request.

In order to determine the duration of various wind speeds at full-scale for a given measurement location the gust ratios are combined with a statistical (mathematical) model of the wind climate for the project

site. This mathematical model is based on hourly wind data obtained from one or more meteorological stations (usually airports) close to the project location. The probability model used to represent the data is the Weibull distribution expressed as:

$$P(> U_g) = A_{\theta} \cdot \exp \left[ - \left( \frac{U_g}{C_{\theta}} \right)^{K_{\theta}} \right]$$

Where,

$P(> U_g)$  is the probability, fraction of time, that the gradient wind speed  $U_g$  is exceeded;  $\theta$  is the wind direction measured clockwise from true north,  $A, C, K$  are the Weibull coefficients, (Units:  $A$  - dimensionless,  $C$  - wind speed units [km/h] for instance,  $K$  - dimensionless).  $A_{\theta}$  is the fraction of time wind blows from a  $10^{\circ}$  sector centered on  $\theta$ .

Analysis of the hourly wind data recorded for a length of time, on the order of 10 to 30 years, yields the  $A_{\theta}, C_{\theta}$  and  $K_{\theta}$  values. The probability of exceeding a chosen wind speed level, say 20 km/h, at sensor  $N$  is given by the following expression:

$$P_N(> 20) = \sum_{\theta} P \left[ \frac{(> 20)}{\left( \frac{U_N}{U_g} \right)} \right]$$


$$P_N(> 20) = \sum_{\theta} P \{ > 20 / (U_N / U_g) \}$$

Where,  $U_N / U_g$  is the aforementioned normalized gust velocity ratios where the summation is taken over all 36 wind directions at  $10^{\circ}$  intervals.

If there are significant seasonal variations in the weather data, as determined by inspection of the  $C_{\theta}$  and  $K_{\theta}$  values, then the analysis is performed separately for two or more times corresponding to the groupings of seasonal wind data. Wind speed levels of interest for predicting pedestrian comfort are based on the comfort guidelines chosen to represent various pedestrian activity levels as discussed in the main text.



**FIGURE B: TIME VERSUS VELOCITY TRACE FOR A TYPICAL WIND SENSOR**

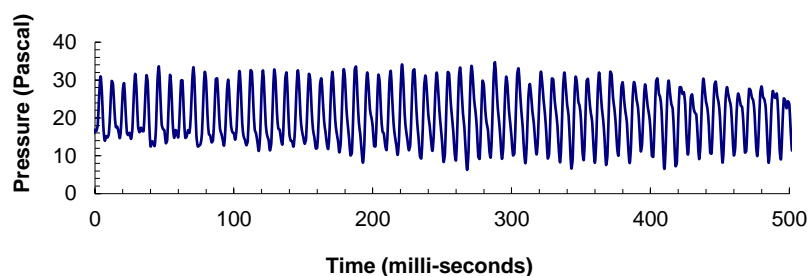

## REFERENCES

1. Davenport, A.G., '*The Dependence of Wind Loading on Meteorological Parameters*', Proc. of Int. Res. Seminar, Wind Effects On Buildings & Structures, NRC, Ottawa, 1967, University of Toronto Press.
2. Wu, S., Bose, N., '*An extended power law model for the calibration of hot-wire/hot-film constant temperature probes*', Int. J. of Heat Mass Transfer, Vol.17, No.3, pp.437-442, Pergamon Press.