



# 359 Kent Street

## Transportation Impact Assessment Report

Prepared for:

359 Kent Street Ltd.  
c/o Taggart Realty Management  
225 Metcalfe Street, Suite 708  
Ottawa, ON  
K2P 1P9

Prepared by:

**Parsons**

1223 Michael Street North, Suite 100  
Ottawa, ON K1J 7T2

477931 - 01000

## DOCUMENT CONTROL PAGE

CLIENT:	359 Kent Street Ltd. c/o Taggart Realty Management
PROJECT NAME:	359 Kent Street TIA
REPORT TITLE:	TIA Step 5 Transportation Impact Assessment Report
APPLICATION TYPE:	Zoning By-Law Amendment (ZBLA) and Official Plan Amendment (OPA) Applications
PARSONS PROJECT NO:	477931 - 01000
VERSION:	Final
DIGITAL MASTER:	\\xcan57fs01\data\ISO\477931\1000\DOCS\STEP5-First Review Comments - ZBLA\359 Kent St - TIA Step 5 - 2023.03.02.docx
ORIGINATOR	Basel Ansari, P.Eng.
REVIEWER:	Jake Berube, P.Eng
AUTHORIZATION:	Jake Berube, P.Eng
CIRCULATION LIST:	Neeti Paudel, P.Eng.
HISTORY:	<ol style="list-style-type: none"> <li>1. TIA Step 1 Screening Form – June 28, 2021</li> <li>2. TIA Step 2 Scoping Report – July 16, 2021</li> <li>3. TIA Step 3 Forecasting Report – August 06, 2021</li> <li>4. TIA Step 4 Strategy Report – August 31, 2021</li> <li>5. TIA Step 5 Transportation Impact Report – March 02, 2023</li> </ol>

## TABLE OF CONTENTS

1.	SCREENING FORM.....	1
2.	SCOPING REPORT.....	1
2.1.	EXISTING AND PLANNED CONDITIONS.....	1
2.1.1.	PROPOSED DEVELOPMENT.....	1
2.1.2.	EXISTING CONDITIONS.....	4
2.1.3.	PLANNED CONDITIONS.....	11
2.2.	STUDY AREA AND TIME PERIODS.....	12
2.3.	EXEMPTION REVIEW.....	13
3.	FORECASTING REPORT.....	13
3.1.	DEVELOPMENT GENERATED TRAVEL DEMAND.....	13
3.1.1.	TRIP GENERATION AND MODE SHARES.....	13
3.1.2.	TRIP DISTRIBUTION AND ASSIGNMENT.....	16
3.2.	BACKGROUND NETWORK TRAFFIC.....	18
3.2.1.	TRANSPORTATION NETWORK PLANS.....	18
3.2.2.	BACKGROUND GROWTH.....	18
3.2.3.	OTHER DEVELOPMENTS.....	21
3.3.	DEMAND RATIONALIZATION.....	21
4.	ANALYSIS.....	22
4.1.	DEVELOPMENT DESIGN.....	22
4.2.	PARKING.....	22
4.3.	BOUNDARY STREET DESIGN.....	23
4.4.	ACCESS INTERSECTION DESIGN.....	23
4.5.	TRANSPORTATION DEMAND MANAGEMENT.....	23
4.5.1.	CONTEXT FOR TDM.....	23
4.5.2.	NEED AND OPPORTUNITY.....	23
4.5.3.	TDM PROGRAM.....	23
4.6.	NEIGHBOURHOOD TRAFFIC MANAGEMENT.....	24
4.7.	TRANSIT.....	25
4.8.	REVIEW OF NETWORK CONCEPT.....	25
4.9.	INTERSECTION DESIGN.....	25
4.9.1.	INTERSECTION CONTROL.....	25
4.9.2.	INTERSECTION DESIGN.....	25
5.	FINDINGS, CONCLUSIONS AND RECOMMENDATIONS.....	27

## LIST OF FIGURES

FIGURE 1: LOCAL CONTEXT.....	1
FIGURE 2: EXISTING LAND USES AND ACCESSES ON SITE.....	2
FIGURE 3: PROPOSED 359 KENT SITE CONCEPT (FEBRUARY 2023).....	3
FIGURE 4: ADJACENT DRIVEWAYS TO PROPOSED SITE ACCESS.....	6
FIGURE 5: EXISTING PEDESTRIAN AND CYCLING NETWORK.....	7
FIGURE 6: AREA TRANSIT NETWORK.....	8
FIGURE 7: AREA TRANSIT STOP LOCATIONS.....	8
FIGURE 8: EXISTING PEAK HOUR VEHICLE TRAFFIC VOLUMES.....	9
FIGURE 9: EXISTING PEAK HOUR PEDESTRIAN AND CYCLIST VOLUMES.....	9
FIGURE 10: STAGE 2 LRT SYSTEM MAP.....	11
FIGURE 11: OTHER AREA DEVELOPMENTS.....	12
FIGURE 12: STUDY AREA INTERSECTIONS.....	13
FIGURE 13: EXISTING OFFICE BUILDING AREA MEASUREMENT.....	14
FIGURE 14: 2024 SITE-GENERATED TRAFFIC.....	17

FIGURE 15: EXISTING OFFICE BUILDING STUDY AREA TRAFFIC REDUCTIONS ..... 18

FIGURE 16: VEHICLE GROWTH RATES AT INTERSECTIONS WITHIN THE CITY OF OTTAWA..... 19

FIGURE 17: FUTURE BACKGROUND 2024 TRAFFIC VOLUMES ..... 20

FIGURE 18: FUTURE BACKGROUND 2029 TRAFFIC VOLUMES ..... 20

FIGURE 19: TOTAL PROJECTED 2024 TRAFFIC VOLUMES..... 21

FIGURE 20: TOTAL PROJECTED 2029 TRAFFIC VOLUMES..... 22

**LIST OF TABLES**

TABLE 1: EXEMPTIONS REVIEW SUMMARY ..... 13

TABLE 2: EXISTING OFFICE BUILDING TRIP RATES..... 13

TABLE 3: EXISTING OFFICE BUILDING PEAK HOUR PERSON TRIP GENERATION..... 14

TABLE 4: EXISTING OFFICE BUILDING MORNING AND AFTERNOON TRAVEL MODE BREAKDOWN ..... 14

TABLE 5: HIGH-RISE APARTMENTS TRIP RATES ..... 15

TABLE 6: APARTMENT BUILDING PEAK PERIOD PERSON TRIP GENERATION ..... 15

TABLE 7: APARTMENT BUILDING PEAK PERIOD TRIPS MODE SHARES BREAKDOWN ..... 15

TABLE 8: PEAK PERIOD TO PEAK HOUR CONVERSION FACTORS (2020 TRANS MANUAL)..... 15

TABLE 9: APARTMENT BUILDING PEAK HOUR TRAVEL MODE TRIPS..... 16

TABLE 10: 'NEW' TRIPS GENERATED BY THE PROPOSED DEVELOPMENT ..... 16

TABLE 11: EXISTING CONDITIONS INTERSECTION PERFORMANCE ..... 25

TABLE 12: FUTURE BACKGROUND 2024 INTERSECTION PERFORMANCE..... 26

TABLE 13: TOTAL FUTURE BACKGROUND 2029 INTERSECTION PERFORMANCE..... 26

**LIST OF APPENDICES**

- APPENDIX A – SCREENING FORM AND CITY COMMENT RESPONSES
- APPENDIX B – TRAFFIC COUNT DATA
- APPENDIX C – COLLISION DATA
- APPENDIX D – TDM CHECKLISTS
- APPENDIX E – SYNCHRO ANALYSIS REPORTS

# TIA Report

Parsons has been retained by 359 Kent Street Ltd. (c/o Taggart Realty Management) to prepare a Transportation Impact Assessment (TIA) in support of an Official Plan Amendment (OPA) and Zoning By-Law Amendment (ZBLA) applications for a residential development located at 359 Kent Street. This document follows the TIA process, as outlined in the City Transportation Impact Assessment (TIA) Guidelines (2017). The following report represents Step 5 – TIA Report. Note that information provided in this report are subject to update at Site Plan Control (SPC).

## 1. Screening Form

The screening form confirmed the need for a TIA Report based on the site meeting the trip generation, location and safety triggers. The trip generation trigger is met due to the number of person trips anticipated to be generated by the development exceeding 60 person trips per hour. The location trigger is met due to the development being located within a Design Priority Area (DPA). The safety trigger is met due to the proximity of the proposed site driveway within 150m of a signalized intersection. The Screening Form has been provided in Appendix A along with a copy of the Site Plan and documented responses to City comments.

## 2. Scoping Report

### 2.1. Existing and Planned Conditions

#### 2.1.1. Proposed Development


The proposed development borders both Kent St and Gilmour St, at the municipal address of 359 Kent St. The development is anticipated to consist of a 30-storey residential tower, housing 322 apartment units and 4,278 ft<sup>2</sup> commercial space. The commercial space is assumed to be utilized primarily by the local traffic. A four-level underground parking lot is anticipated to be provided for vehicle and bicycle parking spaces, with an access provided along Gilmour St near the east end of the development site. For the purposes of this report it is assumed that the site is constructed in a single phase by 2024 (subject to change as part of future Site Plan Control application). The site is currently zoned as R4UD[479]. Figure 1 illustrates the local site context and the direction of travel for one-way streets in the study area.

Figure 1: Local Context




Figure 2 illustrates the existing land uses and accesses of the site. The site is currently occupied mainly by a 6-storey office building and a surface parking lot. A section at the north end of the building is currently used as a parking and storage area by the two existing 2-storey buildings located north of the site. These parking spaces will be relocated to the underground parking lot of the proposed future development. Note that there are currently two left-in/left-out accesses into the existing parking lot, however, the future development will have a single left-in/left-out access to the underground parking lot near the east end of the site.

Figure 2: Existing Land Uses and Accesses on Site

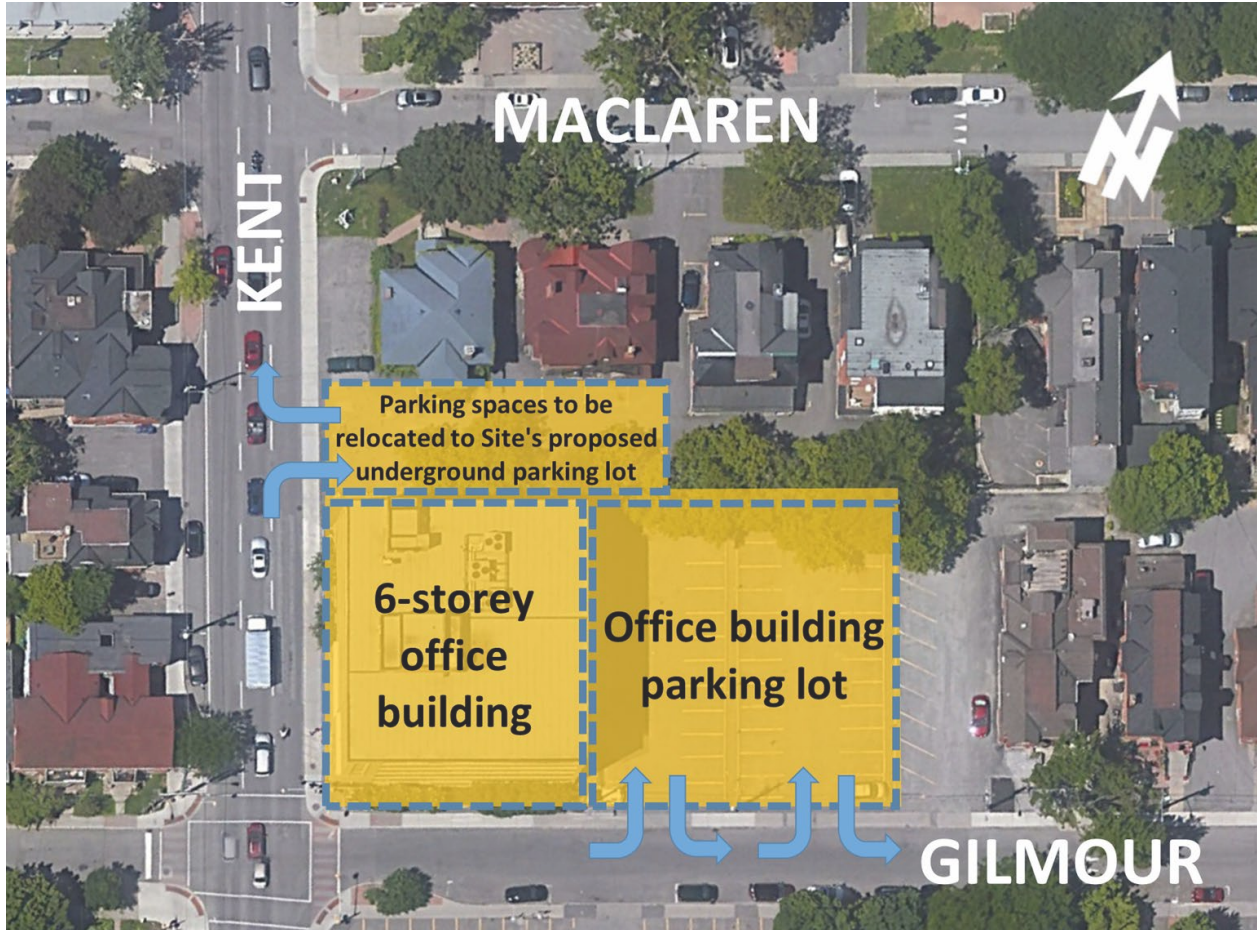

The Site Concept of the proposed development is illustrated in Figure 3 below.

Figure 3: Proposed 359 Kent Site Concept (February 2023)

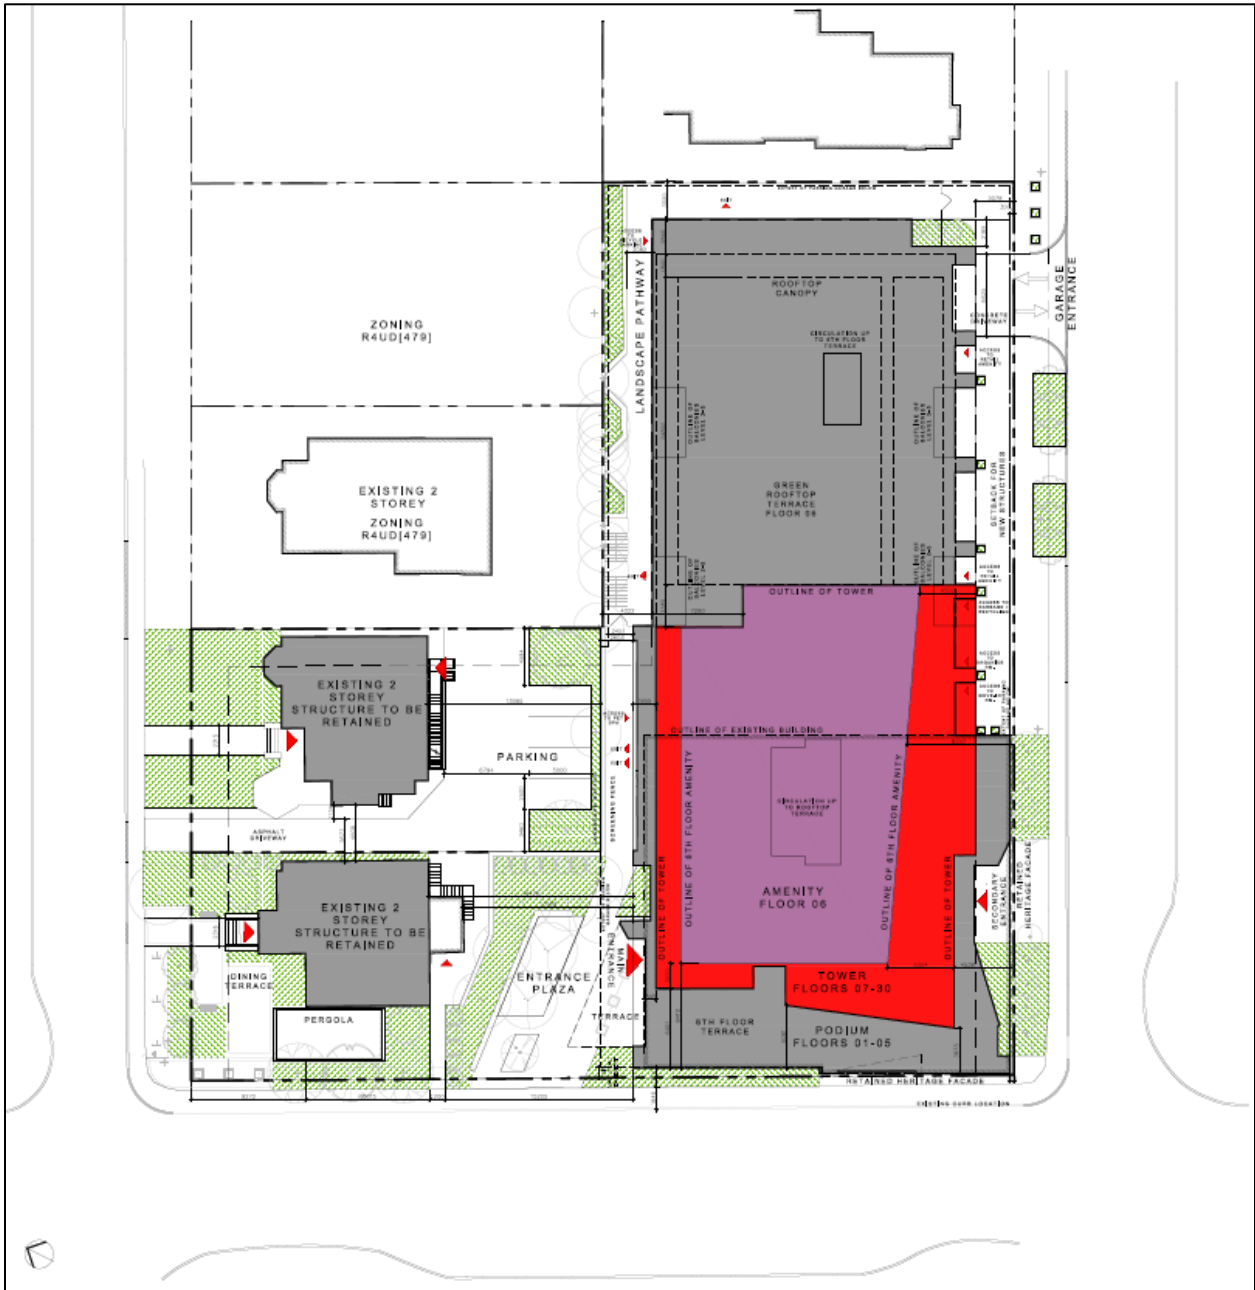

## 2.1.2. Existing Conditions

### Area Road Network

**Kent Street** is a north-south municipal arterial road that extends from Chamberlain Ave in the south to Wellington St in the north. The roadway operates as a one-way northbound road with a three-lane cross-section and on-street parking. The posted speed limit is 50km/h. There is currently a no-stopping zone along the frontage of the development.

**Bank St** is a north-south municipal arterial road that extends from Wellington St in the north to past the City of Ottawa's limits in the south. Within the study area, the roadway consists of a two-way two-lane cross-section with a posted speed limit of 50km/h.

**Gladstone Ave** is an east-west municipal major collector road that extends from Parkdale Ave in the west to Cartier St in the east. Within the study area, the road consists of a two-way two-lane cross-section with on-street parking and a speed limit of 50km/h.

**Somerset St W** is an east-west municipal arterial road that extends from Queen Elizabeth Dr in the east to Garland St in the west, where it continues as Wellington St W. Within the study area, the roadway consists of a two-way two-lane cross-section, with on-street parking and an assumed speed limit of 50km/h.

**Gilmour St** is an east-west municipal local road that extends from Bronson Ave in the west to The Driveway in the east. The roadway operates as a one-way eastbound road between Bronson Ave and Elgin St. Within the study area, Gilmour St consists of one travel lane with on-street parking and an assumed speed limit of 50km/h.

**MacLaren St** is an east-west municipal local road that extends from The Driveway in the east to Bronson Ave in the west. The roadway operates as a one-way westbound road between Elgin St and Bronson Ave. Within the study area, MacLaren St consists of one travel lane with on-street parking and an assumed speed limit of 50km/h.

**O'Connor Street** is a north-south municipal road that extends from Wellington St in the north to Holmwood Ave in the south. Within the study area, O'Connor St is classified as an arterial road, which operates as a southbound only roadway with two-lane cross-section, on-street parking lane and a bi-directional cycle track on the east side. The speed limit is assumed to be 50km/h.

### Existing Study Area Intersections

The following describes the existing physical geometry of the study area intersections.

#### Somerset/Kent

The Somerset/Kent intersection is a signalized four-legged intersection. Kent St operates as a one-way northbound road, with two through lanes, one shared through/right-turn lane and a left-turn lane on the south side and three receiving lanes on the north side. Somerset St provides one shared movement lane and one receiving lane on both sides, with an auxiliary left-turn lane. Westbound right-turn on red is prohibited. Painted crosswalks have been provided on all legs of this intersection. Cyclists operate in mixed traffic conditions.





### MacLaren/Kent

The MacLaren/Kent intersection is an unsignalized four-legged intersection between two one-way streets, where Kent St operates northbound only and MacLaren St as westbound only. The northbound approach is uncontrolled, provides two through travel lanes and a shared through/left-turn lane. Westbound approach is composed of a single shared through/right-turn lane. Painted crosswalks have been provided crossing MacLaren St. Cyclists operate in mixed traffic conditions.



### Gilmour/Kent

The Gilmour/Kent intersection is a signalized four-legged intersection connecting two one-way streets, where Kent St operates northbound only and Gilmour St as eastbound only. The northbound approach has two through lanes and a shared through/left-turn lane. The eastbound approach consists of a single shared through/right-turn lane. Painted crosswalks have been provided on all legs of this intersection. Cyclists operate in mixed traffic conditions.



### Gladstone/Kent

The Gladstone/Kent intersection is a signalized four-legged intersection. Kent St operates in the northbound direction only. At the northbound approach, the roadway consists of two through lanes, one shared through/right-turn lane and a left-turn lane. The eastbound approach is composed of a through lane and an auxiliary left-turn lane. The westbound approach is comprised of a single shared through/right-turn lane. Painted crosswalks have been provided on all legs of this intersection. Cyclists operate in mixed traffic conditions.



### MacLaren/Bank

The MacLaren/Bank intersection is a signalized four-legged intersection. MacLaren St is a one-way road operating westbound only. The northbound approach consists of a single shared through/left-turn lane. The Southbound approach is composed of a shared through/right-turn lane and the westbound approach is comprised of a single shared through/right-turn/left-turn lane. Painted crosswalks have been provided on all legs of this intersection. Cyclists operate in mixed traffic conditions.



### Gilmour/Bank

The Gilmour/Bank intersection is a signalized four-legged intersection. Gilmour St is an eastbound only. The northbound approach consists of a single shared through/left-turn lane. The southbound approach is comprised of a single shared through/right-turn lane. The eastbound approach consists of a single shared through/right-turn/left-turn lane. Painted crosswalks have been provided on all legs of this intersection. Cyclists operate in mixed traffic conditions.



### Gilmour/O'Connor

The Gilmour/O'Connor intersection is a signalized four-legged intersection. O'Connor St is a southbound only road and Gilmour St is an eastbound only road. The southbound approach consists of a shared through/left-turn lane and a through lane. The eastbound approach consists of a single shared through/right-turn lane. Painted crosswalks have been provided on all legs of this intersection. A cycle track is provided on the east side of O'Connor St, with bike signals and crossing on the east leg of the intersection.



### Existing Driveways to Adjacent Developments

As mentioned previously, the proposed site access is located along Gilmour St, near the east end of the site. Figure 4 illustrates the location of adjacent driveways along Gilmour St, within 200 m of the proposed site access.

Figure 4: Adjacent Driveways to Proposed Site Access



West of Kent St:

- On the north side, there are nine driveway accesses to residential units.
- On the south side, there are five driveway accesses to residential units.

Between Kent St and Bank St:

- On the north side, there are a total of four driveways which provide access to small businesses, residential units and to an underground parking lot.

- On the south side, there are a total of five driveways which provide access to office/commercial parking, small businesses, residential units and a driveway connection between Gilmour St and James St where surface parking spaces and underground parking is provided for residential buildings.

East of Bank St:

- On the north side, there is one access for employee parking spaces at a commercial building.
- On the south side, there are three driveways providing access to commercial and office parking spaces and an access to a surface parking lot.

### Existing Area Traffic Management Measures


Existing area traffic management measures within the study area include:

- Speed humps;
- On-street parking;
- Textured crosswalks at study area intersections;
- Curb extensions at some locations; and,
- One-way traffic operations along study area roadways.

### Pedestrian/Cycling Network

Figure 5 illustrates active transportation facilities within the study area. Sidewalks are provided on both sides of roadways throughout the study area. A cycle track is provided along O'Connor St, while Somerset St W, Bank St and Gladstone Ave are all suggested cycling routes. Gladstone Ave, O'Connor St and Somerset St W are classified as Spine Routes in the City of Ottawa Transportation Master Plan (TMP).

Figure 5: Existing Pedestrian and Cycling Network


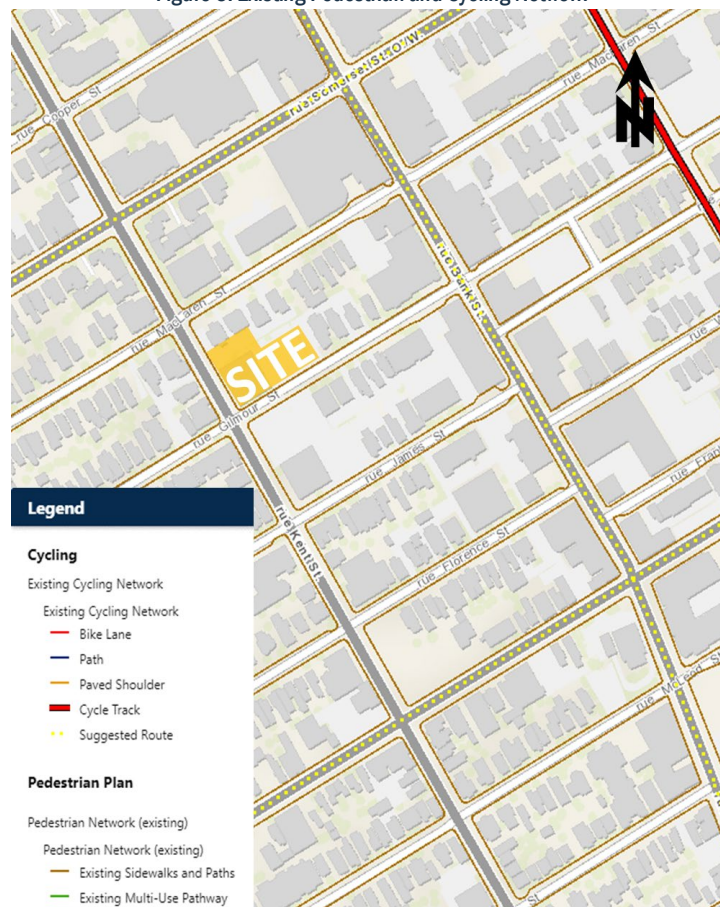


### Transit Network

The existing transit network surrounding the proposed development site is illustrated in Figure 6. It is noted that no bus routes currently operate within the study area, along Kent St, MacLaren St, O'Connor St and Gilmour St.

Transit stop locations are shown highlighted blue in Figure 7. Brief descriptions of the nearby transit routes are provided below:

- O-Train Confederation Line: an east-west Light-Rail Transit (LRT) that runs from Blair Station in the east to Tunney’s Pasture in the west, providing service to 13 stations. During peak hours, service is provided every 5 minutes or less and every 15 minutes or less at all other times. The O-Train can be accessed approximately 1.0 km north of the proposed development at Lyon Station.
- Bus route #6 (Greenboro <-> Rockcliffe): designated as a “frequent route” and operates 7 days a week, providing service every 15 minutes or less. The nearest bus stop to the site is along Kent St south of Gilmour St.
- Bus route #7 (Carleton <-> St. Laurent): designated as a “frequent route” and operates 7 days a week, providing service every 15 minutes or less. The nearest bus stop to the site is along Kent St south of Gilmour St.
- Bus route #11 (Bayshore <-> Parliament): designated as a “frequent route” and operates 7 days a week, providing service every 15 minutes or less. The nearest bus stop to the site is along Somerset St W at the Kent St intersection.
- Bus route #14 (Tunney’s Pasture <-> St. Laurent): designated as a “frequent route” and operates 7 days a week, providing service every 15 minutes or less. The nearest bus stop to the site is along Gladstone Ave at the Kent St intersection.
- Bus route #114 (Carlington <-> Rideau): designated as a “local route” and operate Monday to Friday on a custom schedule. The nearest bus stop to the site is along Gladstone Ave at the Kent St intersection.

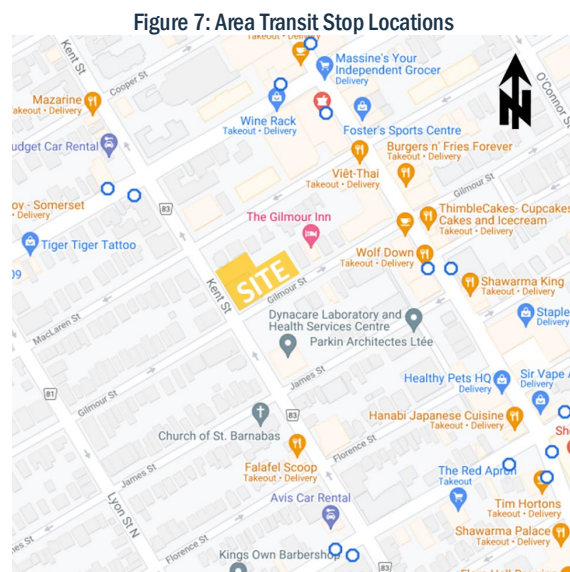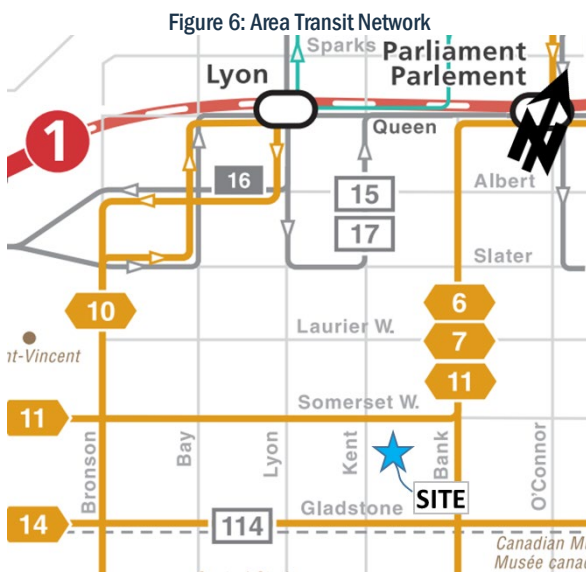

### Peak Hour Travel Demands

The existing peak hour traffic volumes within the study area were obtained from the City of Ottawa for the following intersections:

- Somerset/Kent – conducted Wednesday, April 05, 2017.
- MacLaren/Kent – conducted Tuesday, March 05, 2019.
- Gilmour/Kent – conducted Wednesday, April 05, 2017.
- Gladstone/Kent – conducted Tuesday, April 25, 2017.
- MacLaren/Bank – conducted Tuesday, April 16, 2019.
- Gilmour/Bank – conducted Tuesday, August 25, 2015
- Gilmour/O’Connor – conducted Tuesday, March 21, 2017.

Figure 8 displays the existing vehicle traffic volumes while Figure 9 shows the existing pedestrian and cyclist volumes. Peak hour count data is provided in Appendix B.

Figure 8: Existing Peak Hour Vehicle Traffic Volumes


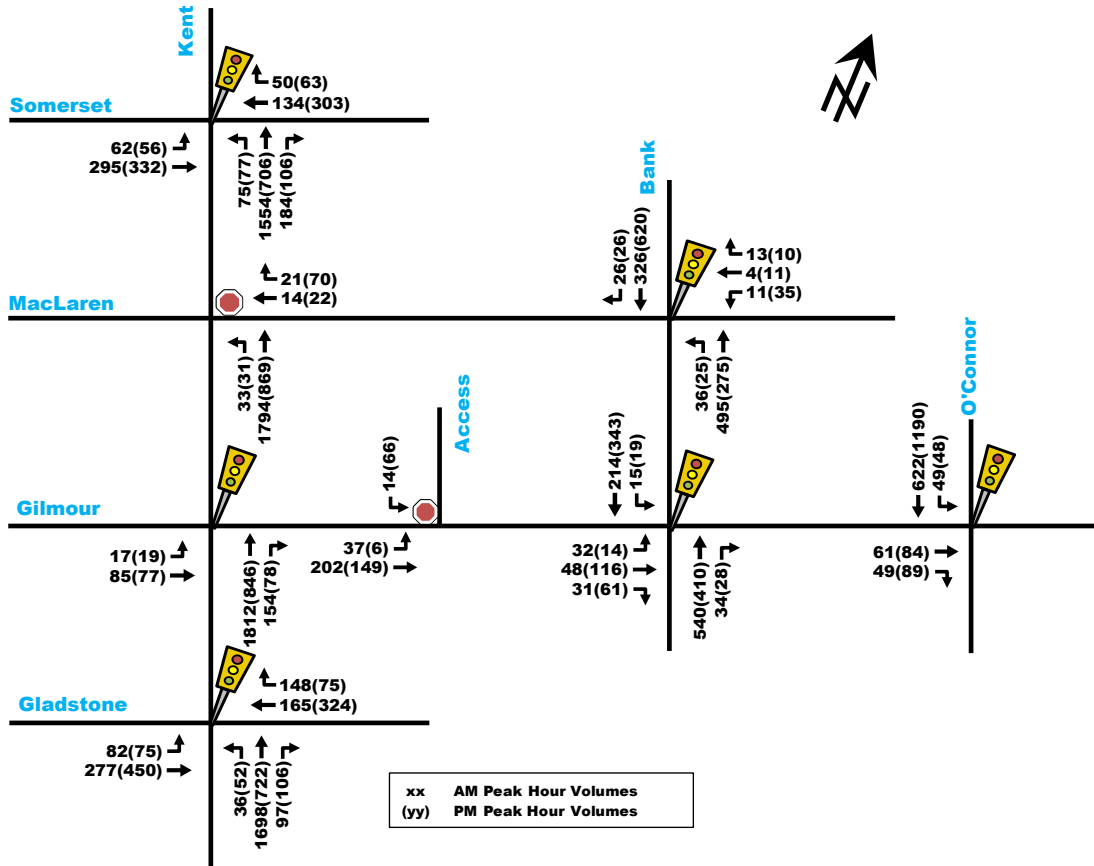


Figure 9: Existing Peak Hour Pedestrian and Cyclist Volumes

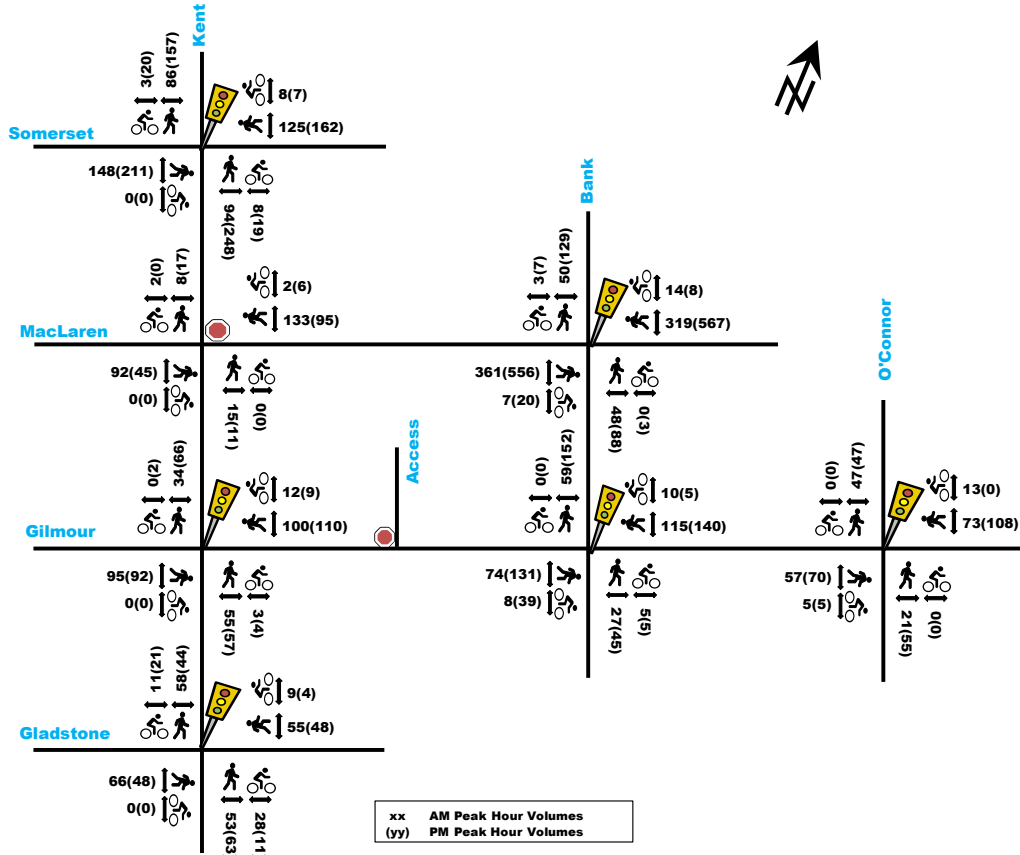

### Existing Road Safety Conditions

A five-year collision history data (2015-2019, inclusive) was requested and obtained from the City of Ottawa for all intersections and road segments within the study area. Upon analyzing the collision data, the total number of collisions occurring between two or more vehicles within the study area was determined to be 112 collisions within the past five-years. Of the reported collisions, 90 (80%) resulted in property damage only, 21 (19%) resulted in non-fatal injury and 1 (1%) was classified as “non-reportable”. The types of impact were broken down into the following: 24 (21%) sideswipe, 20 (18%) angled, 19 (17%) rear end, 19 (17%) Single Unattended Vehicle, 17 (15%) turning movement, 9 (8%) Single Vehicle, 3 (3%) “other” and 1 (1%) approaching.

To help quantify the relative safety risk at intersections within the study area, an industry standard unit of measure for assessing collisions at an intersection was used based on the number of collisions per million entering vehicles (MEV). An MEV value greater than 1.00 indicates a relatively high frequency of collisions. Furthermore, the City of Ottawa TIA Guidelines identifies more than six collisions of the same nature occurring within a five-year period to be a collision pattern. Reported collisions at study area intersections have historically taken place at a rate of:

- Bank/Gilmour: 0.58 collisions/MEV, with a total of 11 collisions occurring within the five-year period. No particular collision pattern is present.
- Bank/MacLaren: 0.05 collisions/MEV, with only 1 collision occurring within the five-year period. No particular collision pattern is present.
- Gilmour/Kent: 0.17 collisions/MEV, with 5 collisions occurring within the five-year period. No particular collision pattern is present.
- Kent/MacLaren: 0.38 collisions/MEV, with a total of 11 collisions occurring within the five-year period. No particular collision pattern is present.
- Kent/Gladstone: 0.69 collisions/MEV, with a total of 29 collisions occurring within the five-year period. Although there are 7 rear end collisions at this intersection, the collisions occurred between different movements and travel directions. On the other hand, 14 angled collisions have occurred at this intersection, where 7 of the collisions were the result of northbound and eastbound vehicles “going ahead”. As such, this may indicate a collision pattern is present with regards to angled collisions between northbound and southbound vehicles. However, it is noted that the collisions/MEV at this intersection is well below 1.00.
- Kent/Somerset: 0.59 collisions/MEV, with a total of 23 collisions occurring within the five-year period. Although there are 7 turning movement collisions at this intersection, the collisions occurred between different movements and travel directions. As such, there are no particular collision patterns identified.

With regards to road segments within the study area, the following collision data is provided:

- Bank St. between MacLaren St and Gilmour St: a total of 4 collisions occurred along this road segment within the five-year period.
- Kent St. between Gladstone Ave and Somerset St: in total, 17 collisions occurred in the five-year period. As this is a relatively long road segment, with 4 intersections between the two roads, there are no concerns with regards to the number of collisions.
- MacLaren St. between Bank St and Kent St: a total of 10 collisions have occurred in the five-year period. Of the total, 8 collisions involved single unattended vehicles, where 5 collisions recorded “unknown” circumstances. The single unattended vehicle collisions likely occurred between a moving vehicle on MacLaren St and an on-street parked vehicle.
- Gilmour St. between Kent St and Bank St: no recorded collisions data was available for the five-year period, indicating no collisions occurred.

A total of 8 pedestrian collisions have occurred in the study area out of the total 112 collisions. 6 of the pedestrian collisions occurred at the intersection of Kent/Somerset, while 1 occurred at Gladstone/Kent and 1 occurred at Gilmour/Kent. Additionally, a total of 2 bicycle collisions occurred within the study area, with 1 occurring at Kent/Somerset and 1 at Bank/Gilmour. All pedestrian and bicycle collisions resulted in non-fatal injuries.

The source collision data as provided by the City of Ottawa and related analysis are provided as Appendix C.


### 2.1.3. Planned Conditions

#### Planned Study Area Transportation Network Changes

##### LRT Stage 2

Stage 2 of the City of Ottawa LRT system is currently under construction. Stage 2, as shown in Figure 10, is a combination of three extensions – south, east and west – totaling 44 km of new rail and 24 new LRT stations. The proposed development site is within a 1km walking distance to Lyon Station.

Figure 10: Stage 2 LRT System Map

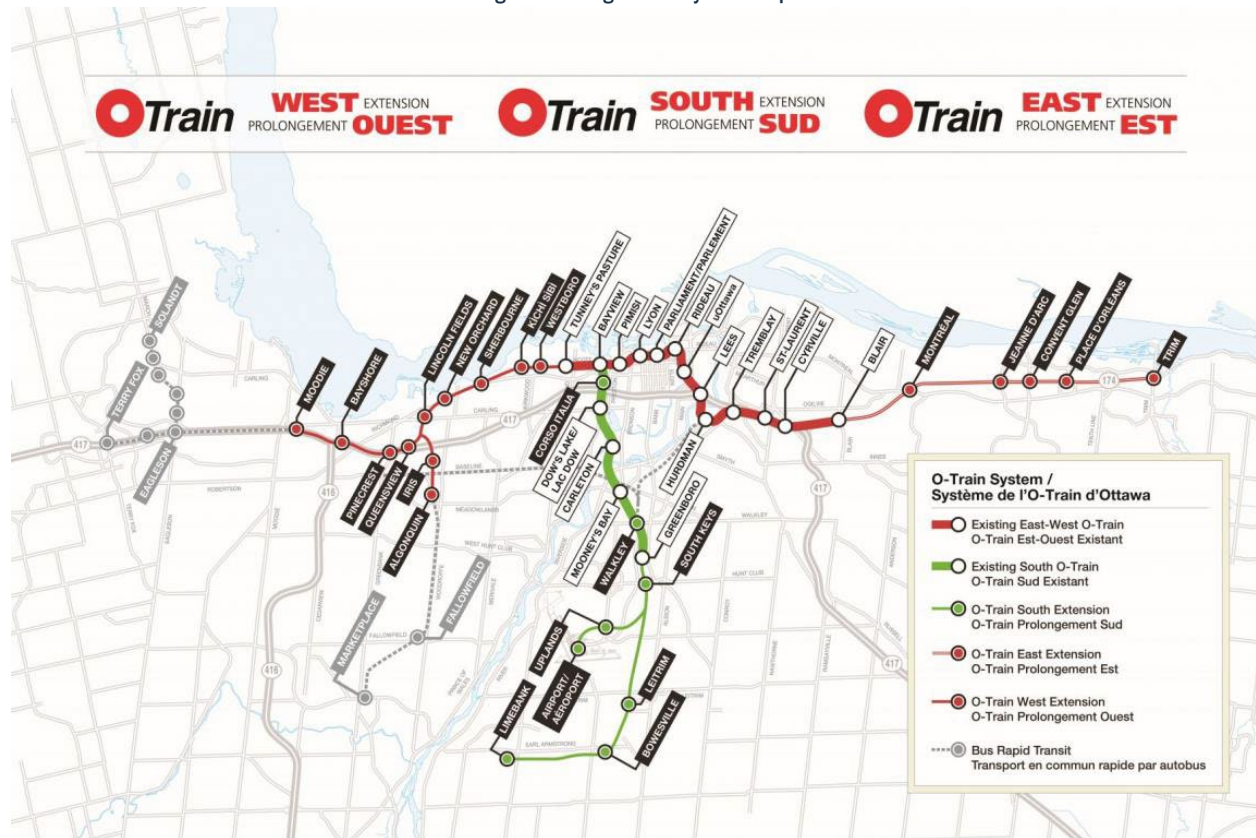

#### Centretown Community Design Plan (CDP)

The purpose of the CDP is to create a comprehensive design plan to guide and manage future growth in the Centretown area of Ottawa. The study area is generally square in shape and is bounded by Elgin St to the east, Kent St to the west, Highway 417 to the south and Gloucester St to the north. The CDP was completed in 2013 and discussed the potential conversion of Kent St to a two-way road.

#### Other Area Developments

The following section outlines adjacent developments in the general area that were considered in the TIA. The criteria for inclusion of other area developments are the proximity to the proposed development site and the potential impact to study area intersections. Developments that are either approved or have an active planning application in the City are included below, with the location illustrated in Figure 11.

Figure 11: Other Area Developments



### 390 Bank Street

A TIA was prepared by CGH Transportation in June 2021, for a residential development consisting of 127 apartment units and 6,828 ft<sup>2</sup> of retail space. The buildout of the development was anticipated to be constructed by 2024. The development was anticipated to generate 16 and 19 veh/h during the morning and afternoon peak hours, respectively.

## 2.2. Study Area and Time Periods

For the purposes of this report, it is assumed that full buildout of the proposed residential development will be 2024. As such, the horizon years being analyzed in this report are 2024 and 2029 (five years after full buildout) horizon years, using the weekday morning and afternoon peak hour time periods. The assumed buildout year is subject to change at the time of the future Site Plan Control application.

Proposed study area intersections and boundary roads are outlined below and highlighted in Figure 12.

- Somerset/Kent (signalized)
- MacLaren/Kent (unsignalized)
- Gilmour/Kent (signalized)
- Gladstone/Kent (signalized)
- Gilmour/O'Connor (signalized)
- Gilmour/Bank (signalized)
- MacLaren/Bank (signalized)
- Kent St, at site frontage
- Gilmour St, at site frontage



Figure 12: Study Area Intersections



### 2.3. Exemption Review

The following modules/elements of the TIA process recommended to be exempt in the subsequent steps of the TIA process, based on the City’s TIA guidelines and the subject site:

Table 1: Exemptions Review Summary

Module	Element	Exemption Consideration
4.1 – 4.4 Design Review Component	All elements	Not required for applications involving ZBLA or OPA. However, a brief description may be provided.
4.8 Network Concept	4.8 Network Concept	Only required if proposed development is anticipated to generate more than 200 person-trips over the permitted zoning

## 3. Forecasting Report

### 3.1. Development Generated Travel Demand

#### 3.1.1. Trip Generation and mode shares

##### Existing Development Trips

As mentioned previously, the site is currently occupied by an office building that is 6-storeys high. The trips that are currently generated by the office building are accounted for as they reduce the number of ‘new’ trips that will be generated by the proposed development within the study area. Appropriate trip rates for an office building have been obtained from the ITE Trip Generation Manual (10<sup>th</sup> edition) and provided as shown in Table 2.

Table 2: Existing Office Building Trip Rates

Land Use	Data Source	Trip Rates	
		AM Peak Hour	PM Peak Hour
Office Building (7-Storey)	ITE 710	$T = 1.16(x);$ $T = 0.94(x) + 26.49;$	$T = 1.15(x);$ $\ln(T) = 0.95\ln(x) + 0.36;$
Notes: $T$ = Average Vehicle Trip Ends $x$ = Gross Floor Area (GFA) (1000 ft <sup>2</sup> )			

The gross floor area used for the office building was determined using the GeoOttawa measuring tool, as shown in Figure 13, which indicates a total area of approximately 8,668 ft<sup>2</sup> per floor (i.e. a total area of approximately 52,000 ft<sup>2</sup> for 6-storesys).

Figure 13: Existing Office Building Area Measurement



Using the total gross floor area and the office building trip rates, the person trips generated by the existing office building can be calculated. Note that the trip rates are multiplied by a factor of 1.28, as per TIA standards, to account for typical North American auto occupancy values of approximately 1.15 and combined transit and non-motorized modal shares of less than 10%. The resulting total person trips/hour for the existing office building are provided in Table 3. The inbound and outbound percentages were also obtained from the ITE Manual.

Table 3: Existing Office Building Peak Hour Person Trip Generation

Land Use	Area (ft <sup>2</sup> )	AM Peak (Person Trips/h)			PM Peak (Person Trips/h)		
		In (86%)	Out (14%)	Total	In (16%)	Out (84%)	Total
Office Building (6-Storey)	52,000	82	14	96	12	66	78

As shown in Table 3, the existing office building generates a total of 96 and 78 person trips during the morning and afternoon peak hours. Mode shares for different travel modes were obtained from the 2020 TRANS Trip Generation Manual for Employment Generators in the Ottawa Inner Area district. As such, a breakdown of the trips generated by the different travel modes is provided in Table 4 below.

Table 4: Existing Office Building Morning and Afternoon Travel Mode Breakdown

Travel Mode	Mode Shares	AM Peak (Person Trips/h)			Mode Shares	PM Peak (Person Trips/h)		
		In (86%)	Out (14%)	Total		In (16%)	Out (84%)	Total
Auto Driver	45%	37	7	44	45%	6	30	36
Passenger	7%	6	1	7	7%	1	5	6
Transit	29%	24	4	28	29%	3	19	22
Bike	8%	6	1	7	8%	1	5	6
Walk	11%	9	1	10	11%	1	7	8
<b>Total Person Trips</b>	<b>100%</b>	<b>82</b>	<b>14</b>	<b>96</b>	<b>100%</b>	<b>12</b>	<b>66</b>	<b>78</b>

The existing office building generates a total of 44 and 36 vehicle trips during the morning and afternoon peak hours, respectively.

### Proposed Development Trips

The proposed development will consist of 322 residential units and 4,278 ft<sup>2</sup> commercial space within a 30-storey high-rise apartment building. The commercial space is expected to be utilized primarily by walking trips in the local area. The sections below determine trips generated by the residential land use.

The appropriate trip generation rates for a high-rise apartment land use were obtained from the 2020 TRANS Trip Generation Manual. Table 3 in the Manual provides person-trip rates during the peak AM and PM periods (7am-9:30am and 3:30PM-6PM). The trip rates are summarized in Table 5 below.

Table 5: High-Rise Apartments Trip Rates

Land Use	Data Source	Trip Rates	
		AM Peak Period (7-9:30am)	PM Peak Period (3:30-6pm)
High-Rise Apartments (30 floors)	TRANS 2020	T = 0.8(du);	T = 0.9(du);
Notes: T = Average Vehicle Trip Ends du = Dwelling unit			

Using the trip rates provided in Table 5, the total number of person trips generated during the morning and afternoon peak periods can be found in Table 6.

Table 6: Apartment Building Peak Period Person Trip Generation

Land Use	Dwelling Units	AM Peak Period Person Trips	PM Peak Period Person Trips
High-Rise Apartments (30 floors)	322	255	287

The proposed development is anticipated to generate 255 and 287 person trips during the morning and afternoon peak periods, respectively. The total peak period person trips in Table 6 are then divided into different travel modes, as shown in Table 7, using mode share percentages obtained from the 2020 TRANS Manual for the “Ottawa Inner Area” district.

Table 7: Apartment Building Peak Period Trips Mode Shares Breakdown

Travel Mode	Mode Share	AM Peak Period Person Trip	Mode Share	PM Peak Period Person Trips
Auto Driver	26%	67	25%	73
Auto Passenger	6%	16	8%	23
Transit	28%	71	21%	61
Cycling	5%	14	6%	17
Walking	34%	88	39%	113
<b>Total Person Trips</b>	<b>100%</b>	<b>255</b>	<b>100%</b>	<b>287</b>

Standard traffic analysis is usually conducted using the morning and afternoon peak hour trips as they represent a worst-case scenario. The conversion rates from peak period to peak hour as provided in the 2020 TRANS Manual are shown in Table 8 below.

Table 8: Peak Period to Peak Hour Conversion Factors (2020 TRANS Manual)

Travel Mode	Peak Period to Peak Hour Conversion Factors	
	AM	PM
Auto Driver and Passenger	0.48	0.44
Transit	0.55	0.47
Bike	0.58	0.48
Walk	0.58	0.52

Using the conversion rates in Table 8 and the peak period person trips for different travel modes in Table 7, the peak hour trips for different travel modes can be calculated as shown in Table 9. The trips are divided into inbound and outbound trips using percentages obtained from the 2020 TRANS Manual.

Table 9: Apartment Building Peak Hour Travel Mode Trips

Travel Mode	AM Peak (Person Trips/h)			PM Peak (Person Trips/h)		
	In (31%)	Out (69%)	Total	In (58%)	Out (42%)	Total
Auto Driver	10	22	32	19	13	32
Passenger	2	5	7	6	4	10
Transit	12	27	39	17	12	29
Bike	3	6	8	5	3	8
Walk	16	35	51	34	25	59
<b>Total Person Trips</b>	<b>43</b>	<b>95</b>	<b>138</b>	<b>80</b>	<b>58</b>	<b>138</b>

Active transportation mode shares (bike and walk) are expected to generate the highest number of trips for the proposed development (59 to 67 trips during peak hours), which is reasonable given the location of the development in a core sector of the City of Ottawa. Transit trips are expected to generate 29 to 39 trips during peak hours, while vehicle trips are expected to generate 32 trips during peak hours.

### Net Total Trips Generated

The 'new' number of trips that are anticipated to be generated by the proposed development are provided in Table 10, which reflect the difference between the total trips anticipated to be generated by the proposed development in Table 9 and the existing office building trips in Table 4.

Table 10: 'New' Trips Generated by the Proposed Development

Travel Mode	AM Peak (Person Trips/h)			PM Peak (Person Trips/h)		
	In	Out	Total	In	Out	Total
Auto Driver	-27	15	-12	13	-17	-4
Passenger	-4	4	0	5	-1	4
Transit	-12	23	11	14	-7	7
Bike	-3	5	1	4	-2	2
Walk	7	34	41	33	18	51
<b>Total Person Trips</b>	<b>-39</b>	<b>81</b>	<b>42</b>	<b>68</b>	<b>-8</b>	<b>60</b>

The total number of 'new' person trips anticipated to be generated by the proposed development are 42 and 60 two-way person trips during the morning and afternoon peak hours, respectively. The proposed development is anticipated to generate a negative number of two-way vehicle trips during peak hours. Note that 7 to 11 'new' two-way transit trips and 42 to 53 'new' two-way active transportation trips are anticipated during the peak hours.

### 3.1.2. Trip Distribution and Assignment

Based on the 2011 OD Survey (Ottawa Inner Area district) and the location of adjacent arterial roadways and neighbourhoods, the distribution of site-generated traffic volumes was estimated as follows:


- 25% to/from the north;
- 25% to/from the south;
- 20% to/from the east; and,
- 30% to/from the west.

The anticipated site-generated auto trips for the proposed development from Table 9 were then assigned to the road networks as shown in Figure 14. Since the proposed development access located along Gilmour St permits left-in/left-out movements only and the road network is composed of one-way travel, the following trip distribution assumptions were made:

- Traffic to/from the north:
  - Arriving traffic:
    - If travelling southbound on a north-south road east of the site, take a circuitous route by travelling southbound on Bank St, turn right and head westbound on James St, then turn right on Kent St, where traffic can head northbound to turn right onto Gilmour St and finally turn left into the site's driveway.
    - If travelling southbound on a north-south road west of the site, approach from the west of the Kent St/Gilmour St intersection and turn left into the site's driveway.


- Departing traffic will travel east on Gilmour St away from the site driveway and turn left onto Bank St to head north.
- Traffic to/from the south:
  - Arriving traffic may use Bank St to travel northbound turn left and head westbound on James St, then turn right on Kent St, where traffic can head northbound to turn right onto Gilmour St and finally turn left into the site's driveway.
  - Departing traffic will travel east on Gilmour St away from the site driveway and turn right onto Bank St to head south.
- Traffic to/from the east:
  - Arriving traffic is assumed to use Hwy 417 WB primarily and take the Metcalfe St exit, travelling westbound on Catherine St, then northbound on Kent St to turn right onto Gilmour St and finally turn left into the site's driveway.
  - Departing traffic is assumed to use Hwy 417 EB primarily by travelling east on Gilmour St away from the site driveway and turning right on O'Connor St to travel southbound to Isabella St and travel eastbound to access the highway.
- Traffic to/from the west:
  - Arriving traffic is assumed to use Hwy 417 EB primarily and take the Kent St exit to travel northbound, then turn right onto Gilmour St and finally turn left into the site's driveway.
  - Departing traffic is assumed to use Hwy 417 WB primarily by travelling east on Gilmour St away from the site driveway and turning right on O'Connor St to travel southbound to Catherine St, then turning right onto the highway ramp.

Figure 14: 2024 Site-Generated Traffic

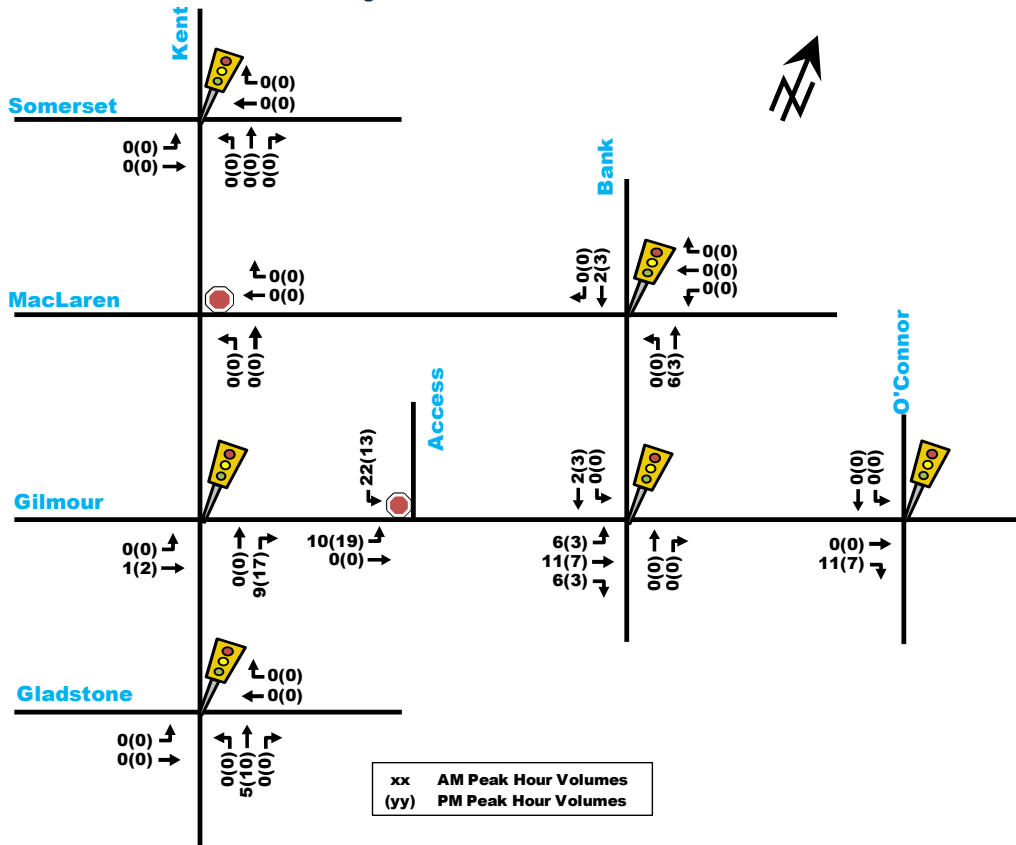

Based on the site-generated vehicle trips of the existing office building (provided in Table 4), study area traffic volumes are expected to decrease as shown in Figure 15. A similar trip distribution and assignment has been assumed for the existing office building's vehicle trips as the proposed residential development. This reduction in traffic volumes will be applied to the total projected traffic volumes for horizon years 2024 and 2029.

Figure 15: Existing Office Building Study Area Traffic Reductions

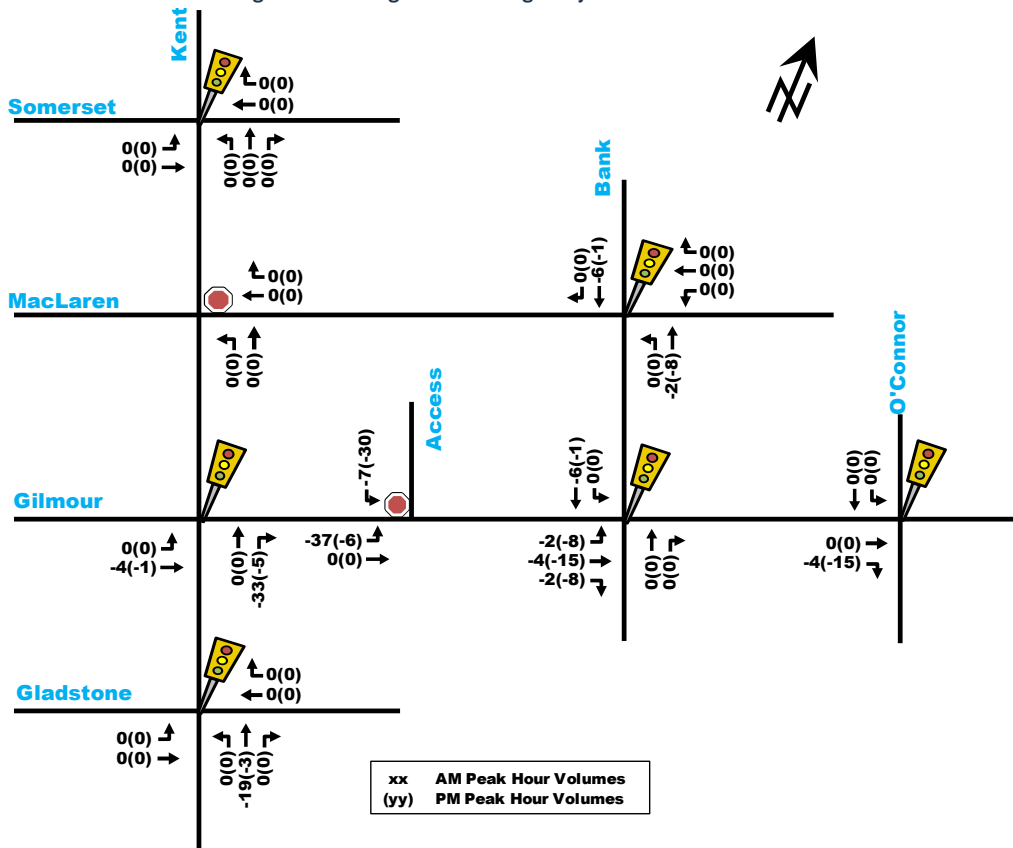

### 3.2. Background Network Traffic

#### 3.2.1. Transportation network plans

Refer to Section 2.1.3: Planned Study Area Transportation Network Changes.


#### 3.2.2. Background Growth

Historically, traffic within the study area has seen a decline in growth, as illustrated by the growth rates map obtained from the City of Ottawa in Figure 16.

Figure 16: Vehicle Growth Rates at Intersections within the City of Ottawa

### INTERSECTION TRAFFIC GROWTH RATES, AM PEAK PERIOD (0700 to 0900)

Total Vehicular Volume Entering the Intersection, 1995 to 2013, Scenario F AM 2

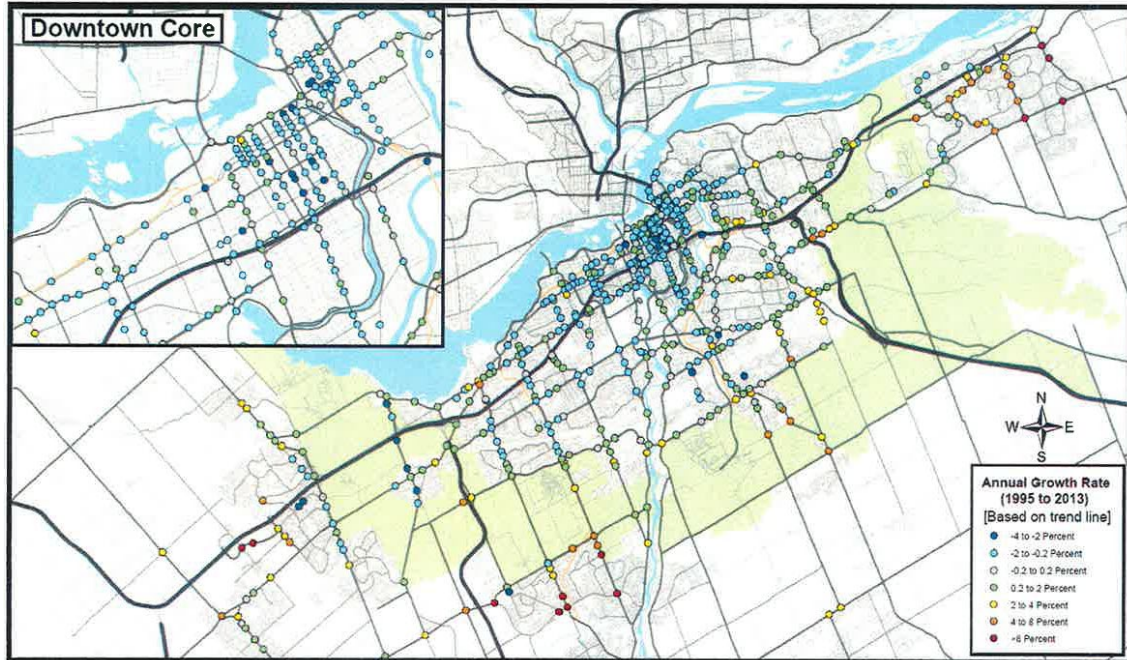

Given that the proposed development will be located in the well-developed core downtown area of the city of Ottawa, where there is a high level of transit and active transportation connectivity, traffic along study area roadways is not anticipated to increase drastically within the future horizon years. Additionally, although the development is outside of the 600 m TOD distance of the LRT stations, the LRT can be accessed approximately 1.0 km north of the development site via frequent bus routes on Bank St.

Nonetheless, a conservative background growth rate of 1% has been applied to through movements of major study area roadways (Bank St, Kent St, Gladstone Ave, Somerset St W and O'Connor St) to account for trips that may be generated by future other area developments that are minor or located outside the scope of the study area. Figure 17 provides the future background traffic at horizon year 2024 and Figure 18 provides the future background traffic at horizon year 2029.

Figure 17: Future Background 2024 Traffic Volumes


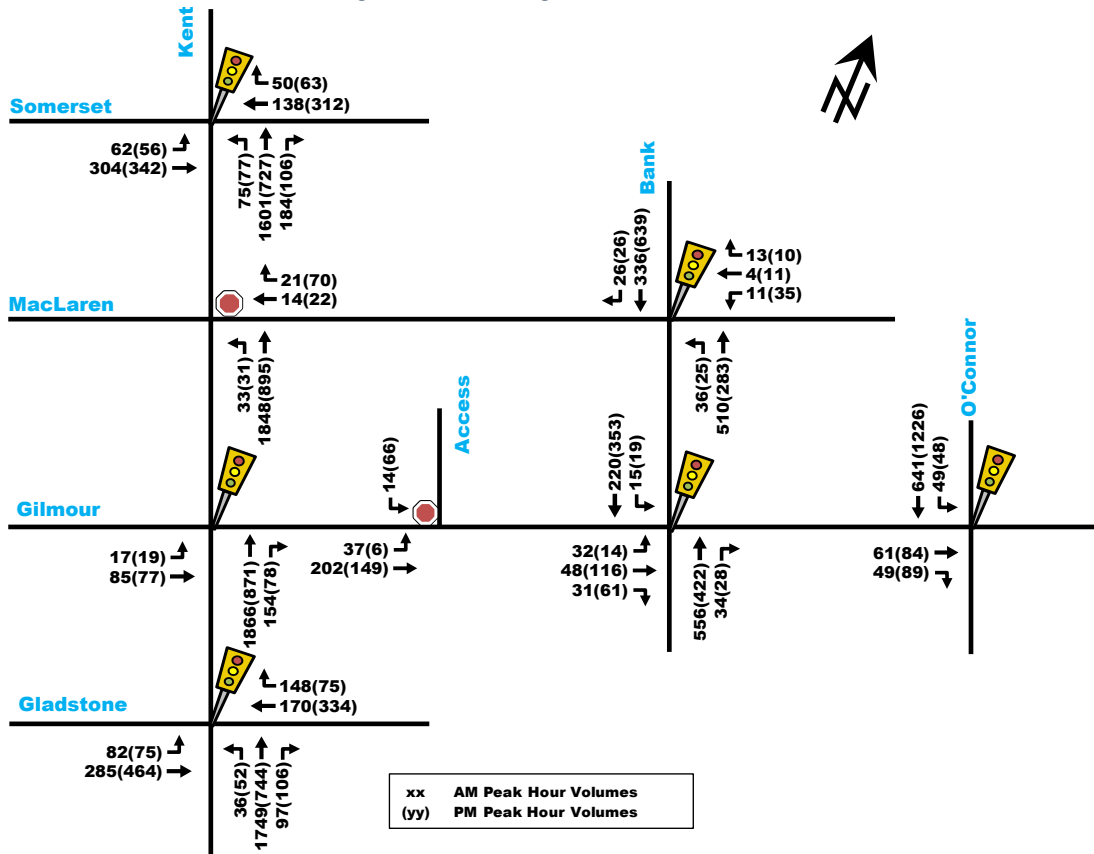


Figure 18: Future Background 2029 Traffic Volumes



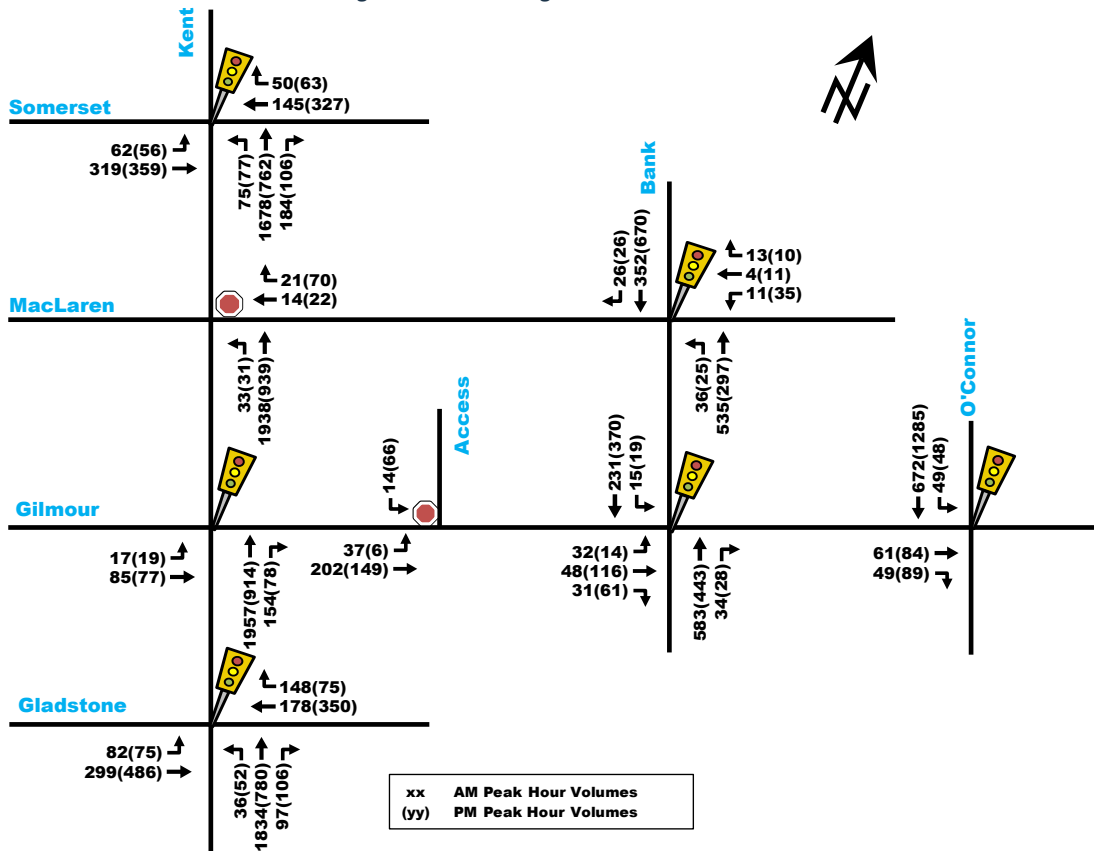

### 3.2.3. Other Developments

Description of other area developments taking place within the study area was provided in Section 2.1.3: Other Area Developments. Only one future development, located at 390 Bank St, was identified. Traffic volumes anticipated to be generated by this development at study area intersections are very minimal (5 vehicles or less). Therefore, these volumes have not been included and are assumed to be a part of the anticipated background growth percentage.

### 3.3. Demand Rationalization

The total projected future traffic volumes can be determined by superimposing the site-generated traffic volumes in Figure 14, onto the future background traffic volumes in Figure 17 and Figure 18, and providing a reduction due to the existing office building trips in Figure 15. The resulting total projected traffic volumes 2024 and 2029 illustrated in Figure 19 and Figure 20.

Due to the reduction in volumes from the existing office building, some movements show a decrease in volume compared to the equivalent future background volumes for each horizon year. Additionally, volume increases at any study area intersection as a result of the proposed development are fairly low, with a maximum total increase of up to 20 vehicles at any intersection.

Figure 19: Total Projected 2024 Traffic Volumes


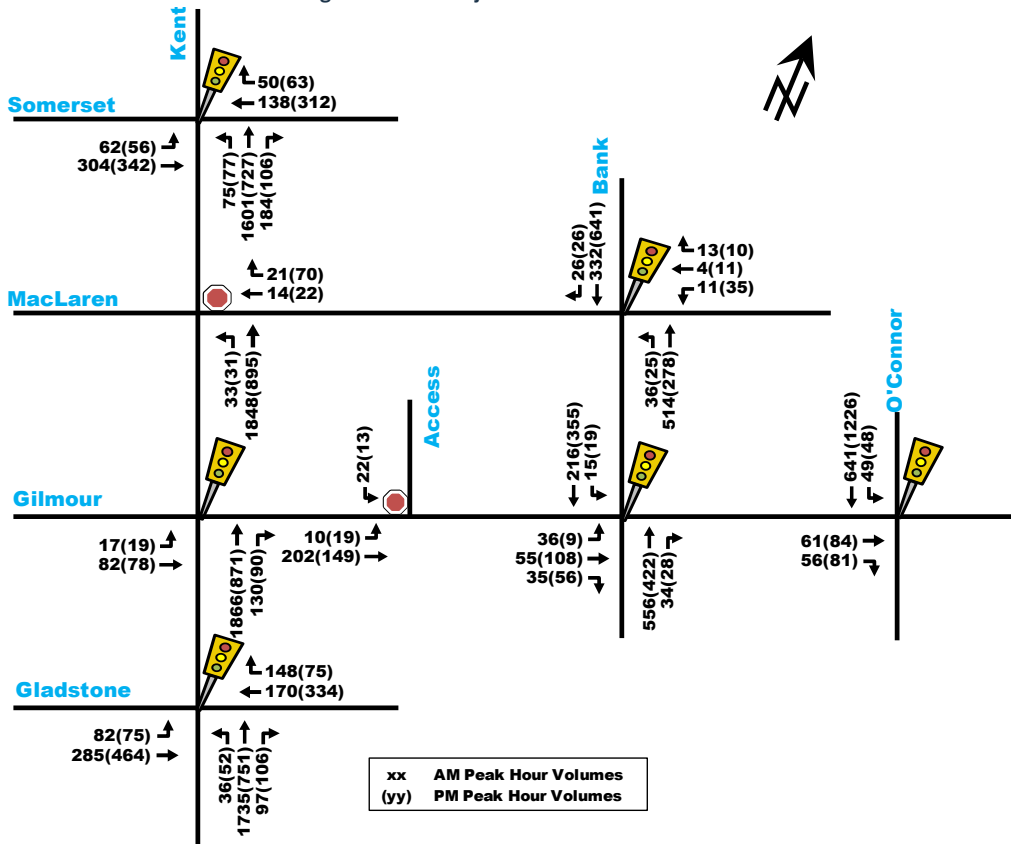


Figure 20: Total Projected 2029 Traffic Volumes

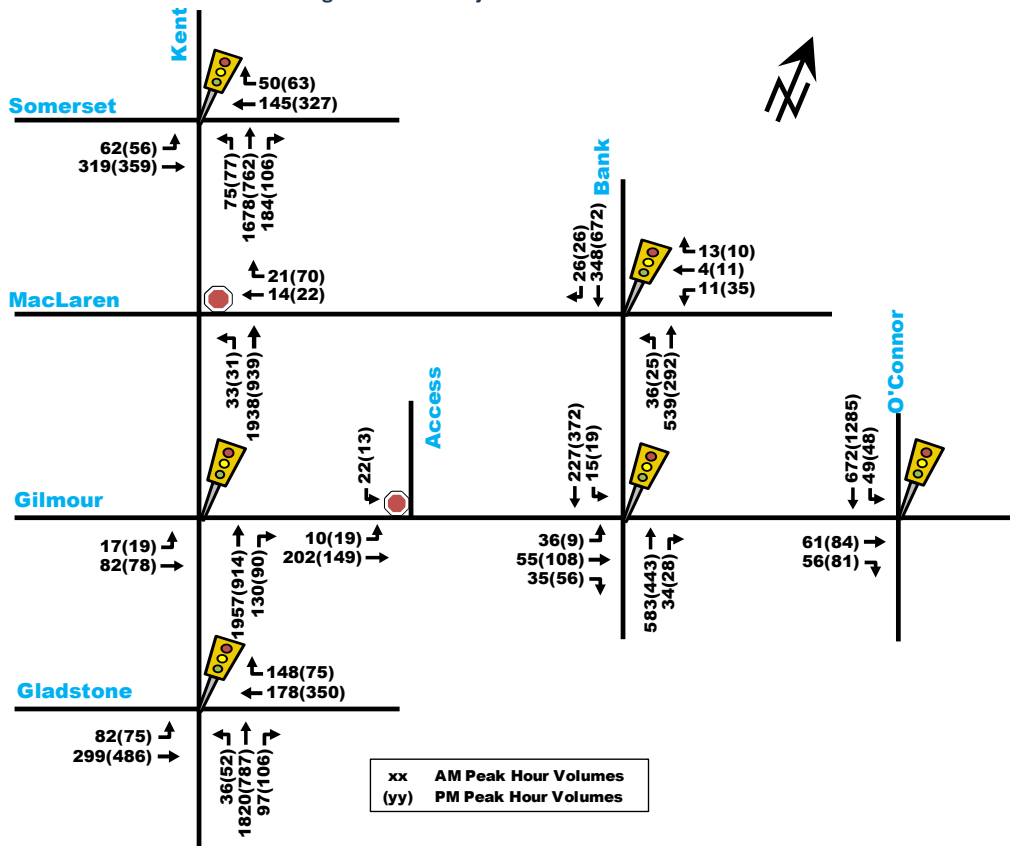

## 4. Analysis

### 4.1. Development Design

As this is a ZBLA, design related elements will be provided in more detail in the future Site Plan Application (SPA) submission of the proposed development. Vehicle and bicycle parking spaces are proposed to be provided in a four-level underground parking garage. Pedestrian, cyclist and transit amenities are expected to be maintained in the future. At this time, loading and garbage pick-up is anticipated to be completed along the Gilmour Street frontage. The City of Ottawa's TDM-supportive Development Design and Infrastructure checklist has been provided in Appendix D and discussed in more detail in Section 4.5.

It should be noted that there may be an opportunity along Kent Street for consideration of a lane reduction at the site frontage from three lanes to two lanes, in order to provide for Para-Transpo opportunities, formalize on-street short-term parking and provide an improved public realm. This would be achieved by providing a curb extension on Kent St at the northeast corner of its intersection with Gilmour St. At this time, this is only a preliminary concept and will be explored in the future Site Plan Control application for this development.

### 4.2. Parking

Based on City of Ottawa Parking Provisions, Schedule 1A, the proposed development is located in "Area X", where no off-street resident or visitor parking is required for the first twelve units. For residential land uses in Area X, residents parking is required at a rate of 0.5 spaces per dwelling units, which equates to 154 parking spaces. Visitor parking is required at a rate of 0.1 spaces per unit and up to a maximum of 30 spaces, which means that 30 parking spaces must be provided for the 322 units. Bicycle parking is required at a rate of 0.5 per dwelling unit, which equates to 161 bicycle parking spaces.

The total number of parking spaces that will be provided by the proposed development is 216 vehicle parking spaces (185 resident and 31 visitor) and 299 bicycle parking spaces. As such, the proposed development meets the minimum required parking supply for vehicle and bicycle parking.

### **4.3. Boundary Street Design**

---

The detailed Multi-Modal Level of Service (MMLoS) analysis for boundary streets and signalized intersections will be provided in the future Site Plan Application.

### **4.4. Access Intersection Design**

---

Vehicle access to the underground parking garage of the proposed development will be provided along Gilmour St, near the east end of the site.

### **4.5. Transportation Demand Management**

---

#### **4.5.1. Context for TDM**

Based on the type of development, it is assumed that most trips generated by the proposed site will be residents leaving the site in the AM peak to go to work and returning from work to the proposed site in the PM peak. Trips related to the office land use will exhibit the opposite travel pattern, where trips generated will travel to the site during the AM peak and leave the site during the PM peak. Sections 3.1.1 and 3.1.2 describe how many trips are anticipated per travel mode and anticipates the likely locations that they will travel to and from based on the OD-Survey 2011 for Ottawa. The site is located in the “Downtown Ottawa Urban Design Strategy” Design Priority Area (DPA) according to the Official Plan.

#### **4.5.2. Need and Opportunity**

The proposed development is located in a well-developed core area of the City of Ottawa, where transit and active transportation facilities, such as the LRT, the bike tracks and the sidewalks, are well-maintained and developed, which naturally results in increased transit and active transportation usage and decreased auto trips. In addition, the proposed development is expected to utilize measures to maintain sustainable transit and active mode shares, as described in more detail in Section 4.5.3 below.

#### **4.5.3. TDM Program**

The TDM Infrastructure and TDM Measures Checklists have been provided in Appendix D. Both the residential and non-residential checklists have been provided, given that both land uses will be present on site. The proposed measures for each respective checklist are provided below.

#### **Proposed measures identified in the TDM Measures Checklist are:**

- Display local area maps with walking/cycling access routes and key destinations at major entrances
- Display relevant transit schedules and route maps at entrances
- Provide online links to OC Transpo and STO information
- Contract with provider to install on-site carshare vehicles and promote their use by residents (note that this will be investigated and confirmed as part of the future SPA)
- Unbundle parking cost from monthly rent and lease rates at multi-tenant sites
- Provide a multimodal travel option information package to new residents

#### **Proposed measures identified in the TDM-supportive Development Design and Infrastructure Checklist are:**

- Locate building close to the street, and do not locate parking areas between the street and building
- Locate building entrances in order to minimize walking distances to sidewalks and transit stops/stations
- Locate building doors and windows to ensure visibility of pedestrians from the building, for their security and comfort
- Provide convenient, direct access to stations or major stops along rapid transit routes within 600 metres; minimize walking distances from buildings to rapid transit; provide pedestrian-friendly, weather protected (where possible) environment between rapid transit accesses and building

entrances; ensure quality linkages from sidewalks through building entrances to integrated stops/stations

- Provide safe, direct and attractive pedestrian access from public sidewalks to building entrances through such measures as: reducing distances between public sidewalks and major building entrances; providing walkways from public streets to major building entrances; within a site, providing walkways along the front of adjoining buildings, between adjacent buildings, and connecting areas where people may congregate, such as courtyards and transit stops; and providing weather protection through canopies, colonnades, and other design elements wherever possible
- Provide sidewalks of smooth, well-drained walking surfaces of contrasting materials or treatments to differentiate pedestrian areas from vehicle areas, and provide marked pedestrian crosswalks at intersection sidewalks
- Make sidewalks and open space areas easily accessible through features such as gradual grade transition, depressed curbs at street corners and convenient access to extra-wide parking spaces and ramps
- Include adequately spaced inter-block/street cycling and pedestrian connections to facilitate travel by active transportation. Provide links to the existing or planned network of public sidewalks, multi-use pathways and on- road cycle routes. Where public sidewalks and multi-use pathways intersect with roads, consider providing traffic control devices to give priority to cyclists and pedestrians
- Provide safe, direct and attractive walking routes from building entrances to nearby transit stops
- Ensure that walking routes to transit stops are secure and lighted wherever possible
- Provide lighting, landscaping and benches along walking and cycling routes between building entrances and streets, sidewalks and trails
- Provide bicycle parking in highly visible and lighted areas, sheltered from the weather wherever possible
- Provide the number of bicycle parking spaces specified for various land uses in different parts of Ottawa; provide convenient access to main entrances or well- used areas
- Ensure that bicycle parking spaces and access aisles meet minimum dimensions; that no more than 50% of spaces are vertical spaces; and that parking racks are securely anchored
- Where more than 50 bicycle parking spaces are provided for a single residential building, locate at least 25% of spaces within a building/structure, a secure area (e.g. supervised parking lot or enclosure) or bicycle lockers
- Provide carshare parking spaces in permitted non-residential zones, occupying either required or provided parking spaces (note that this will be investigated and confirmed as part of the future SPA)
- Do not provide more parking than permitted by zoning, nor less than required by zoning, unless a variance is being applied for (for residents, parking is provided at a rate of 0.7 and 0.1 per unit for residents and visitors, respectively)

#### **4.6. Neighbourhood Traffic Management**

---

This module compares the maximum traffic of a local or collector road during morning and afternoon peak hours, to the respective threshold provided by the City of Ottawa TIA Guidelines. Site-generated traffic of the proposed development are expected to use local road Gilmour St as part of their access route to/from the proposed development. The thresholds provided in the TIA Guidelines indicate a maximum traffic volume of 120 veh/h for local roads. Using the total projected 2029 traffic volumes in Figure 20, future traffic volumes along Gilmour St can be compared to its local road threshold as follows:

- The maximum traffic volume anticipated is approximately 210 veh/h at the east leg of the Kent/Gilmour intersection during the morning peak hour. This volume is greater than the 120 veh/h threshold of a local road and is approaching a collector road threshold of 300 veh/h. Notably, these volumes are higher in existing conditions, as the existing office building generated more inbound traffic during the morning peak hour compared to the proposed residential building.

Since Gilmour St is a one-way eastbound road with a relatively wide travel lane of approximately 6.0 m in some sections, it can be expected that the road can accommodate a greater amount of traffic than a regular local road. Therefore, there are no anticipated capacity issues for vehicles on this road.

#### 4.7. Transit

Transit facilities are anticipated to continue operating in the future as mentioned in Section 2.1.2: Transit Network. The proposed development is anticipated to generate 39 and 29 transit trips, with only 11 and 7 ‘new’ trips, during the morning and afternoon peak hours respectively. As such, the proposed development will have little impact to the surrounding transit network.

#### 4.8. Review of Network Concept

Exempt – see Table 1.

#### 4.9. Intersection Design

##### 4.9.1. Intersection control

The site access to the existing underground parking garage is assumed to use Stop control for vehicles exiting, which will be sufficient given the low volumes.

##### 4.9.2. Intersection design

Synchro 10 Trafficware was used to analyze intersection performance of intersections within the study area. Critical movements at each of the intersections were assessed based on either the movement with the highest volume-to-capacity ratio (for signalized intersections), or the movement experiencing the highest average delay (for unsignalized intersections). It should be noted that, as per the TIA Guidelines, the Peak Hour Factor (PHF) used for analysis was 0.9 in existing conditions and 1.0 in all future scenario conditions. All Synchro report outputs for existing and future conditions have been provided in Appendix E.

#### Existing Conditions

Table 11 below summarizes the intersection performance of study area intersections, based on the existing conditions traffic volumes illustrated in Figure 8.

Table 11: Existing Conditions Intersection Performance

Intersection	Weekday AM Peak (PM Peak)					
	Critical Movement			Intersection ‘As a Whole’		
	LOS	max. v/c or avg. delay (s)	Movement	Delay (s)	LOS	v/c
Kent St/Somerset St W (S)	B(A)	0.70(0.49)	NBT(WBT)	18.9(18.9)	B(A)	0.69(0.48)
Kent St/Gilmour St (S)	B(A)	0.69(0.34)	NBT(NBT)	22.6(10.3)	B(A)	0.67(0.33)
Kent St/Gladstone Ave (S)	C(A)	0.76(0.59)	NBT(EBT)	18.5(17.3)	C(A)	0.73(0.52)
Bank St/MacLaren St (S)	A(B)	0.55(0.66)	NBT(SBT)	5.4(10.3)	A(A)	0.53(0.53)
Bank St/Gilmour St (S)	A(A)	0.59(0.45)	NBT(NBT)	11.6(8.5)	A(A)	0.46(0.40)
O'Connor St/Gilmour St (S)	A(B)	0.36(0.67)	SBT(SBT)	8.7(13.8)	A(B)	0.35(0.64)
Kent St/MacLaren St (U)	D(B)	29.5(13.7)	WB(WB)	0.7(1.5)	A(A)	-

Note: Analysis of signalized intersections assumes a PHF of 0.9 and a saturation flow rate of 1800 veh/h/lane.  
(S) – Signalized intersection, critical movement based on max v/c  
(U) – Unsignalized Intersection, critical movement based on highest average delay

As shown in Table 11, signalized intersections ‘as a whole’ operate at a LOS ‘C’ or better during both peak hours, with critical movement also operating at LOS ‘C’ or better. Critical movements of unsignalized intersections operate at a LOS ‘D’ or better during both peak hours.

#### Total Future Background 2024

Table 12 below summarizes the Synchro traffic operations at study area intersections, based on the future background 2024 conditions in Figure 17.

Table 12: Future Background 2024 Intersection Performance

Intersection	Weekday AM Peak (PM Peak)					
	Critical Movement			Intersection 'As a Whole'		
	LOS	max. v/c or avg. delay (s)	Movement	Delay (s)	LOS	v/c
Kent St/Somerset St W (S)	B(A)	0.67(0.47)	NBT(WBT)	18.3(18.4)	B(A)	0.66(0.46)
Kent St/Gilmour St (S)	B(A)	0.67(0.31)	NBT(NBT)	22.3(9.8)	B(A)	0.65(0.30)
Kent St/Gladstone Ave (S)	C(A)	0.73(0.56)	NBT(EBT)	17.9(16.8)	B(A)	0.70(0.49)
Bank St/MacLaren St (S)	A(B)	0.53(0.63)	NBT(SBT)	5.2(9.9)	A(A)	0.51(0.51)
Bank St/Gilmour St (S)	A(A)	0.57(0.43)	NBT(EBT)	11.1(9.4)	A(A)	0.45(0.40)
O'Connor St/Gilmour St (S)	A(B)	0.35(0.64)	SBT(SBT)	8.7(13.9)	A(B)	0.34(0.62)
Kent St/MacLaren St (U)	D(B)	26.0(13.3)	WB(WB)	0.6(1.5)	A(A)	-

Note: Analysis of signalized intersections assumes a PHF of 1.0 and a saturation flow rate of 1800 veh/h/lane.  
(S) – Signalized intersection, critical movement based on max v/c  
(U) – Unsignalized Intersection, critical movement based on highest average delay

As shown in Table 12, study area intersections are projected to operate similar or slightly better than existing conditions due to increasing the PHF to 1.0.

### Total Future Background 2029

Table 13 below summarizes the Synchro traffic operations at study area intersections, based on future background 2029 traffic volumes in Figure 18.

Table 13: Total Future Background 2029 Intersection Performance

Intersection	Weekday AM Peak (PM Peak)					
	Critical Movement			Intersection 'As a Whole'		
	LOS	max. v/c or avg. delay (s)	Movement	Delay (s)	LOS	v/c
Kent St/Somerset St W (S)	B(A)	0.70(0.49)	NBT(WBT)	19.0(18.9)	B(A)	0.69(0.48)
Kent St/Gilmour St (S)	B(A)	0.70(0.33)	NBT(NBT)	22.8(10.2)	B(A)	0.68(0.32)
Kent St/Gladstone Ave (S)	C(A)	0.76(0.59)	NBT(EBT)	18.6(17.2)	C(A)	0.73(0.51)
Bank St/MacLaren St (S)	A(B)	0.55(0.66)	NBT(SBT)	5.3(10.3)	A(A)	0.53(0.53)
Bank St/Gilmour St (S)	A(A)	0.59(0.45)	NBT(NBT)	11.4(9.5)	A(A)	0.46(0.42)
O'Connor St/Gilmour St (S)	A(B)	0.36(0.67)	SBT(SBT)	8.8(14.2)	A(B)	0.35(0.64)
Kent St/MacLaren St (U)	D(B)	27.5(13.4)	WB(WB)	0.6(1.4)	A(A)	-

Note: Analysis of signalized intersections assumes a PHF of 1.0 and a saturation flow rate of 1800 veh/h/lane.  
(S) – Signalized intersection, critical movement based on max v/c  
(U) – Unsignalized Intersection, critical movement based on highest average delay

As indicated by Table 13, traffic operations are anticipated to be similar to the future background 2024 traffic operations, with slightly higher delays and v/c ratios.

### Total Projected 2024 and 2029

As indicated by the trip generation in Section 3.1 and shown in the total projected 2024 and 2029 traffic volumes in Figure 19 and Figure 20, the increase in traffic volumes in the study area due to the development is considered negligible and even results in a decrease in two-way vehicle traffic volumes during the peak hours. This is due to the reduction in traffic volumes that is applied when accounting for the traffic volumes generated by the existing office building. Therefore, traffic operations at study area intersections are not expected to show any noticeable difference for the total projected 2024 and 2029 scenarios compared to the equivalent future background analysis scenarios.

The future background 2024 and 2029 traffic operations provided in previous section demonstrated that intersections are expected to operate similar to existing conditions, with intersections 'as a whole' operating at LOS 'C' or better and critical movements at LOS 'D' or better during peak hours.

## 5. Findings, Conclusions and Recommendations

Based on the results summarized herein, the transportation related conclusions are offered below. Note that some elements of the TIA Report may be subject to an update in the future as part of the future Site Plan Control (SPC) application.

### Proposed Development

- The proposed development will be located at the municipal address of 359 Kent St, which is at the northeast corner of the intersection of Kent/Gilmour. The site is currently occupied by a 6-storey office building and a surface parking lot, which will be replaced by the proposed development.
- The development will consist of a 30-storey high-rise residential building with 322 apartment units and 4,278 ft<sup>2</sup> commercial space and will be constructed in a single phase. Note that the assumed buildout date is subject to change in the future Site Plan Control application.
- Access will be provided via an underground parking garage ramp along Gilmour St. The proposed development will provide 216 vehicle parking and 299 bicycle parking spaces within a four-level underground parking garage.
- At full buildout in 2024, the development is anticipated to generate a total of approximately 138 person trips during both peak hours. Vehicle trips are anticipated to be 32 veh/h during both peak hours. Transit trips are anticipated to be 29 and 39 trips during the morning and afternoon peak hours respectively. Active transportation modes (bike and walk) are anticipated to generate the most trips given the site location in a core sector of the City of Ottawa, with 59 and 67 trips generated during the morning and afternoon peak hours respectively.
- Accounting for trips generated by the existing office building, the proposed development is anticipated to generate 42 to 60 'new' total person trips, a negative number of vehicle trips, 7 to 11 'new' transit trips and 42 to 53 'new' active transportation trips during peak hours.

### Existing and Background Conditions

- In existing conditions, all intersections 'as a whole' are anticipated to operate at LOS 'C' or better during both peak hours. Critical movements of signalized intersections are anticipated to operate at LOS 'C' or better during peak hours. Critical movements of unsignalized intersections are anticipated to operate at LOS 'D' or better during peak hours.
- A background growth rate of 1% per year was conservatively applied to through movements at major study area intersections during horizon years 2024 and 2029.
- As required by the TIA Guidelines, the PHF in future conditions is increased to 1.0, which results in similar traffic operations for total future background 2024 and 2029 compared to existing conditions.

### Projected Conditions

- Intersection operations are expected to be similar to existing conditions as well as future background 2024 and 2029 conditions. This is due to the negligible number of 'new' traffic volumes expected to be generated by the proposed development.
- In future conditions, traffic along Gilmour St exceeds the 120 veh/h threshold of a local road, with 210 veh/h, which is notably lower than the 240 veh/h experienced in existing conditions. There are no capacity concerns along the Gilmour St as traffic operations at study area intersections are acceptable

and the road may accommodate more traffic due to eastbound only operations. As such, there are no recommended modifications or reclassification of Gilmour St.

In summary, based on the preceding report, the proposed development will have little impact on the surrounding road network and transit facilities and is recommended to proceed from a transportation perspective.

Prepared By:



Basel Ansari, P.Eng  
Transportation Engineer

Reviewed By:




Jake Berube, P.Eng.  
Transportation Engineer



# APPENDIX A

SCREENING FORM AND CITY COMMENT RESPONSES

---

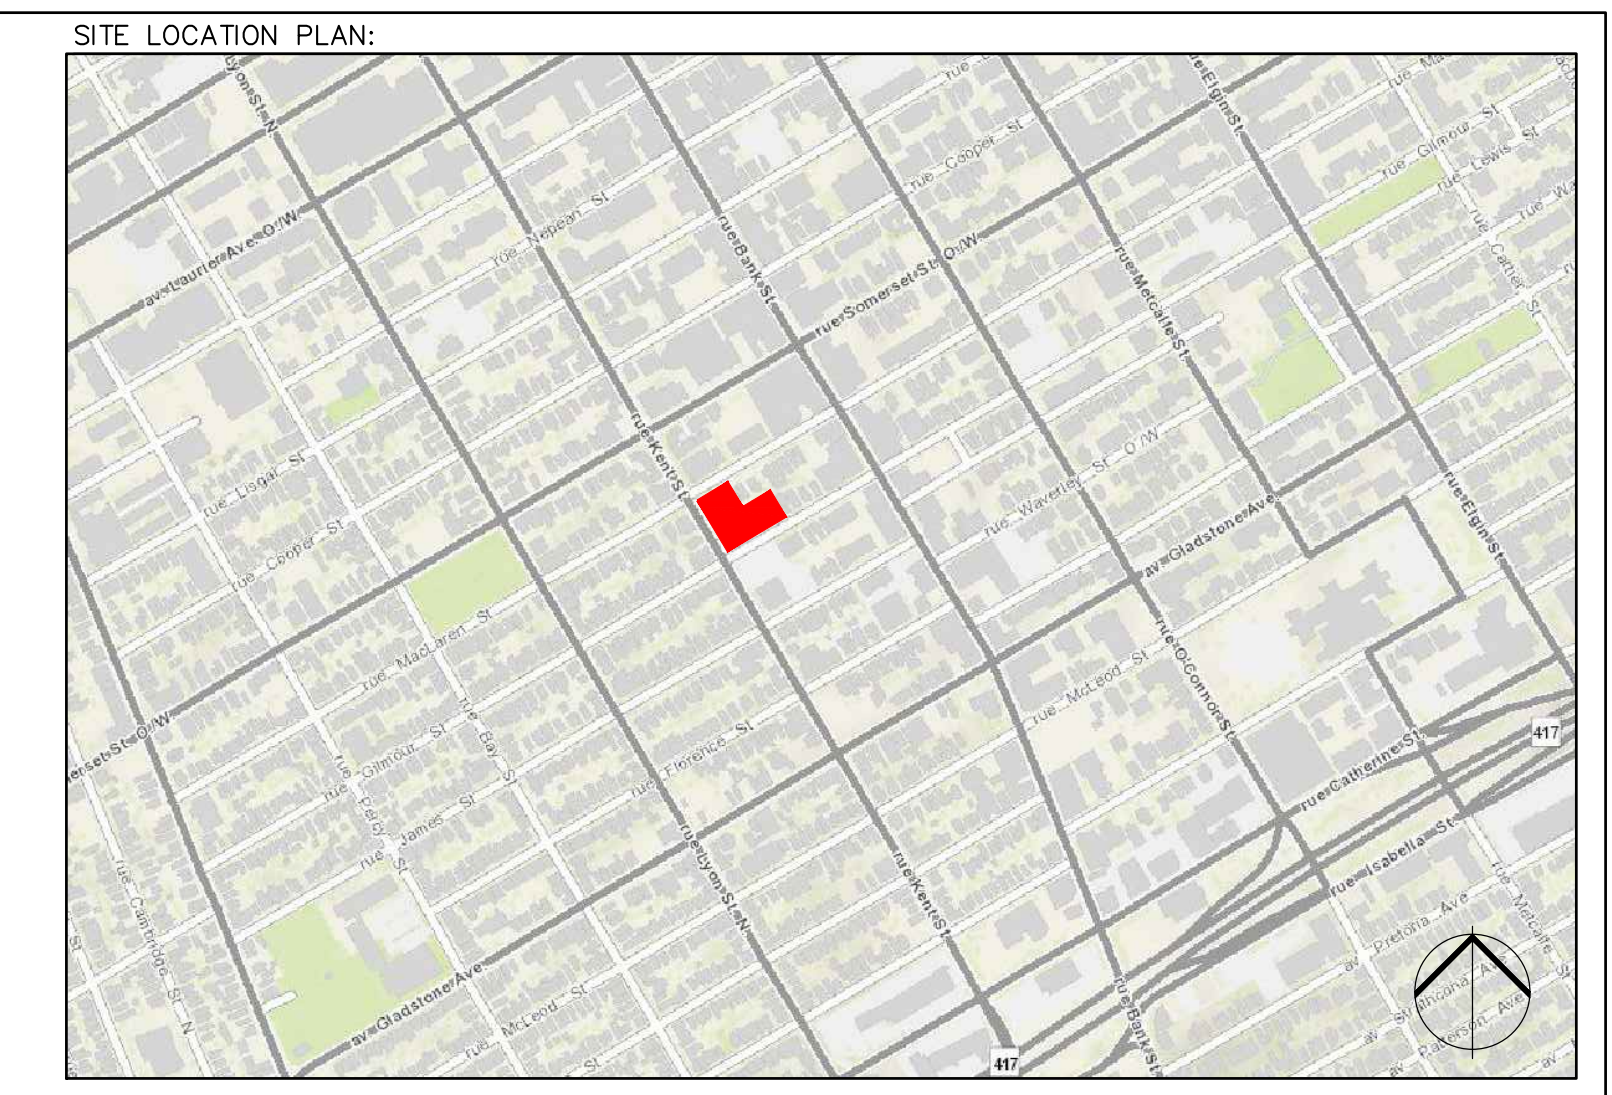

**ZONING NOTES**

CURRENT ZONING: NORTH PARCEL  
 LOT AREA : 3,606 m<sup>2</sup>  
 DEVELOPMENT STATS

DEVELOPMENT STATS	REQUIRED EXISTING BLDG.	PROPOSED
LOT WIDTH		MIN 33.2m MAX 66.5m
LOT DEPTH		MIN 36.4m MAX 72.0m
UNITS		
TOTAL UNITS		322
FRONT YARD SETBACK	KENT STREET	0 m
REAR YARD SETBACK		7.5 MIN. 3.0 m
CORNER SIDE YARD SETBACK	GILMOUR AVE.	0 m
CORNER SIDE YARD SETBACK	MACLAUREN AVE.	VARIES 3.0 m
BUILDING HEIGHTS		
PODIUM		24 m
34 STOREY TOWER		96 m
BUILDING AREA		
TOTAL GROSS		+/-320,744 sq.ft. (29,798 sq.m.)
TOTAL NET (RESIDENTIAL + COMMERCIAL/RETAIL)		+/-250,271 sq.ft. (23,251 sq.m.)
GROSS FLOOR AREA (city def.)		+/-250,271 sq.ft. (23,251 sq.m.)

NOTE: ALL EXISTING SITE INFORMATION AS PER SITE SURVEY PLAN DATED APRIL 16, 2021 AND PREPARED BY ANNIS O'SULLIVAN VOLLEBEK LTD

**UNIT RATIOS**

	PROPOSED	322
TOTAL UNIT COUNT		
STUDIOS	33	10%
1 INTERNAL BEDROOM	2	1%
1 BEDROOM	106	33%
1 BEDROOM + DEN	51	16%
2 BEDROOM (1 INTERNAL)	17	5%
2 BEDROOM	110	34%
2 BEDROOM + DEN	3	1%

**AMENITY SPACE REQUIREMENTS: 6 m<sup>2</sup> REQUIRED PER UNIT (322 X 6 SQ.M. = 1,932 SQ.M. REQUIRED TO BE COMMON AMENITY SPACE) (966 SQ.M. REQUIRED TO BE COMMON AMENITY SPACE)**

PROVIDED AMENITY SPACE
2,894 SQ.M. TOTAL AMENITY PROVIDED
1,826 SQ.M. PROVIDED TO BE COMMON AMENITY SPACE

**PARKING REQUIREMENTS: 322 units (\*Reduced by 12) 310\*0.5 = 155 + 310\*0.1 = 31 = 186 (\*all parking located below grade, required parking reduced by 10%) = 168 (required parking spaces required)**

PROVIDED RESIDENTIAL PARKING
185 RESIDENTIAL PARKING SPACES PROVIDED FOR 322 UNITS (0.57/UNIT)
PROVIDED VISITOR PARKING
31 VISITOR PARKING SPACES PROVIDED FOR 322 UNITS (0.10/UNIT)
216 TOTAL PARKING SPACES PROVIDED (*76 SHORT CAR PARKING SPACES (35% OF TOTAL PARKING))

**BICYCLE PARKING REQUIREMENTS: 322 units \* 0.5 = 161**

PROVIDED BICYCLE PARKING
299 (152 VERTICAL + 147 HORIZONTAL) BICYCLE PARKING SPACES PROVIDED FOR 322 UNITS (0.93/UNIT) * LOCATED IN UNDERGROUND PARKING GARAGE AND AT GROUND LEVEL (NT)



**PROJECT TEAM**

**ARCHITECT**  
 HOBIN ARCHITECTURE  
 PATRICK BISSON  
 T: 613-238-7200

**PLANNING**  
 POTERNI CONSULTANTS INC.  
 STEPHANIE MORRIS  
 T: 613-730-5709

**CIVIL**  
 J.L. RICHARDS  
 LUCIE DALRYMPLE  
 T: 613-913-4368

**LANDSCAPE ARCHITECT**  
 LASHLEY & ASSOCIATES LANDSCAPE ARCHITECT  
 DANIELA CORRIGIA  
 T: 613-233-8579

**TRANSPORTATION**  
 PARSONS  
 MAIT MANIATE  
 T: 613-222-8234

**ENVIRONMENTAL**  
 GRADIENT WIND ENGINEERING  
 JOSHUA FOSTER  
 T: 613-938-0634

**SURVEYOR**  
 ANNIS O'SULLIVAN VOLLEBEK LTD.  
 ED HERWEYER  
 T: 613-272-0850

no.	date	revision
1	21-09-02	ISSUED FOR REZONING
1	21-06-16	CITY OF OTTAWA PRECONSULTATION

It is the responsibility of the appropriate contractor to check and verify all dimensions on site and report all errors and/or omissions to the architect.  
 All contractors must comply with all pertinent codes and by-laws.  
 Do not scale drawings.  
 This drawing may not be used for construction until signed.  
 Copyright reserved.

**Hobin Architecture Incorporated**  
 63 Pamela Street  
 Ottawa, Ontario  
 Canada K1S3K7  
 T: 613-238-7200  
 F: 613-235-2005  
 E: mail@hobin.com  
 hobin.com

**PROJECT LOCATION:**  
 359 KENT STREET  
 OTTAWA ON.

**DRAWING TITLE:**  
 SITE PLAN

<b>DRAWN BY:</b> PB	<b>DATE:</b> 23-02-28	<b>SCALE:</b> 1:150
<b>PROJECT:</b> 2027	<b>DRAWING NO.:</b> A1.00	<b>REVISION NO.:</b>

**LEGEND:**

PROPOSED FIRE ROUTE	EDGE OF SIDEWALK	CB	EXISTING CATCH BASIN
PROPOSED BUILDING	PROPERTY LINE	CB	PROPOSED CATCH BASIN
BUILDING TO BE DEMOLISHED	SETBACK	AS	SIGNAGE FOR ACCESSIBLE PARKING SPACE
MH	PROPOSED DEPRESSED CURB DETAIL TO CITY OF OTTAWA STANDARD SC-7	FRS	SIGNAGE FOR FIRE ROUTE ACCESS
EX	CURB TO BE REBUILT	AS	EXISTING SIGN
TSP	ROLL CURB	EL	EXISTING LIGHT POLE
EH	EXISTING UTILITY POLE	EL	NEW LIGHT POLE
CONC. CURB DETAIL TO CITY OF OTTAWA STANDARDS	EXISTING UTILITY POLE	OP	PROPOSED WALL MOUNTED LIGHT
BIKE PARKING SPACE	EXTENT OF PARKING GARAGE BELOW	SL	EXISTING STREET LIGHTING BOX
		TB	EXISTING TRAFFIC SIGNAL BOX

0 5 10 15 20  
 SCALE 1 : 150

City of Ottawa 2017 TIA Guidelines

Date

1-Mar-23

**TIA Screening Form**

Project

359 Kent Street TIA

Project Number

477931-01000

Results of Screening	Yes/No
Development Satisfies the Trip Generation Trigger	Yes
Development Satisfies the Location Trigger	Yes
Development Satisfies the Safety Trigger	Yes

Module 1.1 - Description of Proposed Development	
Municipal Address	359 Kent St, Ottawa, ON K2P 2M8
Description of location	Northeast corner of Kent/Gilmour intersection
Land Use	High-rise residential apartment building
Development Size	30-storeys, 319 units
Number of Accesses and Locations	Access to underground parking garage along Gilmour St
Development Phasing	One phase
Buildout Year	Assumed 2024
Sketch Plan / Site Plan	See attached

Module 1.2 - Trip Generation Trigger		
Land Use Type	Townhomes or Apartments	
Development Size	319	Units
Trip Generation Trigger Met?	Yes	

Module 1.3 - Location Triggers		
Development Proposes a new driveway to a boundary street that is designated as part of the City's Transit Priority, Rapid Transit, or Spine Bicycle Networks (See Sheet 3)	No	
Development is in a Design Priority Area (DPA) or Transit-oriented Development (TOD) zone. (See Sheet 3)	Yes	Downtown Ottawa Urban Design Strategy DPA
Location Trigger Met?	Yes	

Module 1.4 - Safety Triggers		
Posted Speed Limit on any boundary road	<80	km/h
Horizontal / Vertical Curvature on a boundary street limits sight lines at a proposed driveway	No	
A proposed driveway is within the area of influence of an adjacent traffic signal or roundabout (i.e. within 300 m of intersection in rural conditions, or within 150 m of intersection in urban/ suburban conditions) or within auxiliary lanes of an intersection;	Yes	Signalized intersections along Gilmour St
A proposed driveway makes use of an existing median break that serves an existing site	No	
There is a documented history of traffic operations or safety concerns on the boundary streets within 500 m of the development	No	
The development includes a drive-thru facility	No	
Safety Trigger Met?	Yes	

2 March 2023

City of Ottawa  
Development Review Services  
110 Laurier Avenue West  
Ottawa, ON K1P 1J1

**Attention: Neeti Paudel, Transportation Project Manager**

Dear Neeti:

**Re: 359 Kent, 426 and 444 Maclaren  
Step 4 (August 2021 Report) – Response to City Comments**

The following response has been prepared in response to City of Ottawa comments received on July 3<sup>rd</sup>, 2022. City comments have been noted in black with the corresponding responses from Parsons in Green. It should be noted that some elements of the TIA Report may be subject to change/update at the time of the future Site Plan Control (SPC) application.

### **Traffic Signal Design**

**Comment 1.** There is existing traffic signal infrastructure in close proximity to the proposed development site (intersection of Kent Street & Gilmour Street).

Underground traffic plant and traffic signal hardware is to be maintained and protected at all times during construction. A minimum distance of 1.0m must be maintained from traffic plant/interconnect. The proponent of the project and its contractor are liable for all potential outages and fully responsible for reinstatement of all damages to existing underground traffic infrastructure including all the costs associated with it. All traffic infrastructure components must remain fully accessible and in full view at all times throughout the construction process unless otherwise agreed upon.

Should any traffic signal plant relocations be required to accommodate site construction and/or excavation, the proponent would be required to contact the City of Ottawa Traffic Signal Design Unit to complete a necessary traffic signal plant design and also to coordinate the installation/relocation of underground traffic plant, traffic signal hardware.

Please contact Christopher Geen at Christopher.Geen@ottawa.ca to coordinate any possible installation/relocation of underground traffic plant, traffic signal hardware; and to provide a cost estimate for such work.

Provide a traffic control plan before/if entering a signalized intersection to do work.

Traffic Signal Design comments noted for Site Plan.

## Transit Services

**Comment 2.** The TIA in section '2.1.3 Planned Conditions' notes that that the proposed development site is within 600m of the LRT's Parliament Station. Please correct.

Noted. TIA has been corrected to note that the development site is approximately 1km walking distance to Lyon station.

**Comment 3.** The number of proposed units and storeys in the TIA are inconsistent. Please correct.

The TIA has been adjusted to reflect the proper/new unit and storey count.

**Comment 4.** At site plan, how will the development accommodate Para Transpo service for the site (accessible pick-up and drop-off location)? Currently the only passenger side curb fronting the site is a no-stopping zone.

Para Transpo opportunities can be reviewed in more detail during Site Plan Control. At this time, Kent St is designated a no-stopping zone fronting the development.

The future Site Plan Control TIA submission will consider the opportunity for significant road modifications to reduce northbound vehicle lanes on Kent Street to create an accessible drop-off zone, improved public realm and incorporate a Para Transpo service to the site, as discussed in the TIA Report (Section 4.1).

## Street Lighting

No comments with the TIA for this circulation

**Comment 5.** Future considerations are as follows:

- Street Lighting plant is located on existing Hydro Plant. If Hydro plant is modified a street lighting design will be required.
- The applicant is 100% responsible for all costs of any required street light plant alterations and/or repairs.
- Please contact Barrie Forrester at 613-580-2424 ext. 23332(barrie.forrester@ottawa.ca) to coordinate any possible installation/relocation of street lighting plant.

Noted for proponent

## Development Review - Transportation

**Comment 6.** Minimum bicycle parking as per the zoning by law will be required.

Noted. A total of 299 bicycle parking spaces will be provided, which significantly exceeds the minimum requirements of the Zoning By-Law.

**Comment 7.** At site plan:

Turning movements for herbage, loading should be provided.

AODA legislation applies for all areas accessible to the public (i.e. outdoor pathways, parking, etc.).

- Clearly define accessible parking stalls and ensure they meet AODA standards.

- Please consider using the City's Accessibility Design Standards, which provide a summary of AODA requirements, including number of parking. <https://ottawa.ca/en/city-hall/creating-equal-inclusive-and-diverse-city/accessibility-services/accessibility-design-standards-features#accessibility-design-standards> [ottawa.ca].

Noted for future considerations at site plan.

# APPENDIX B

TRAFFIC COUNT DATA

---

## Turning Movement Count - Study Results

### BANK ST @ GILMOUR ST


**Survey Date:** Tuesday, August 25, 2015

**WO No:** 35291

**Start Time:** 07:00

**Device:** Jamar Technologies, Inc

### Full Study Diagram

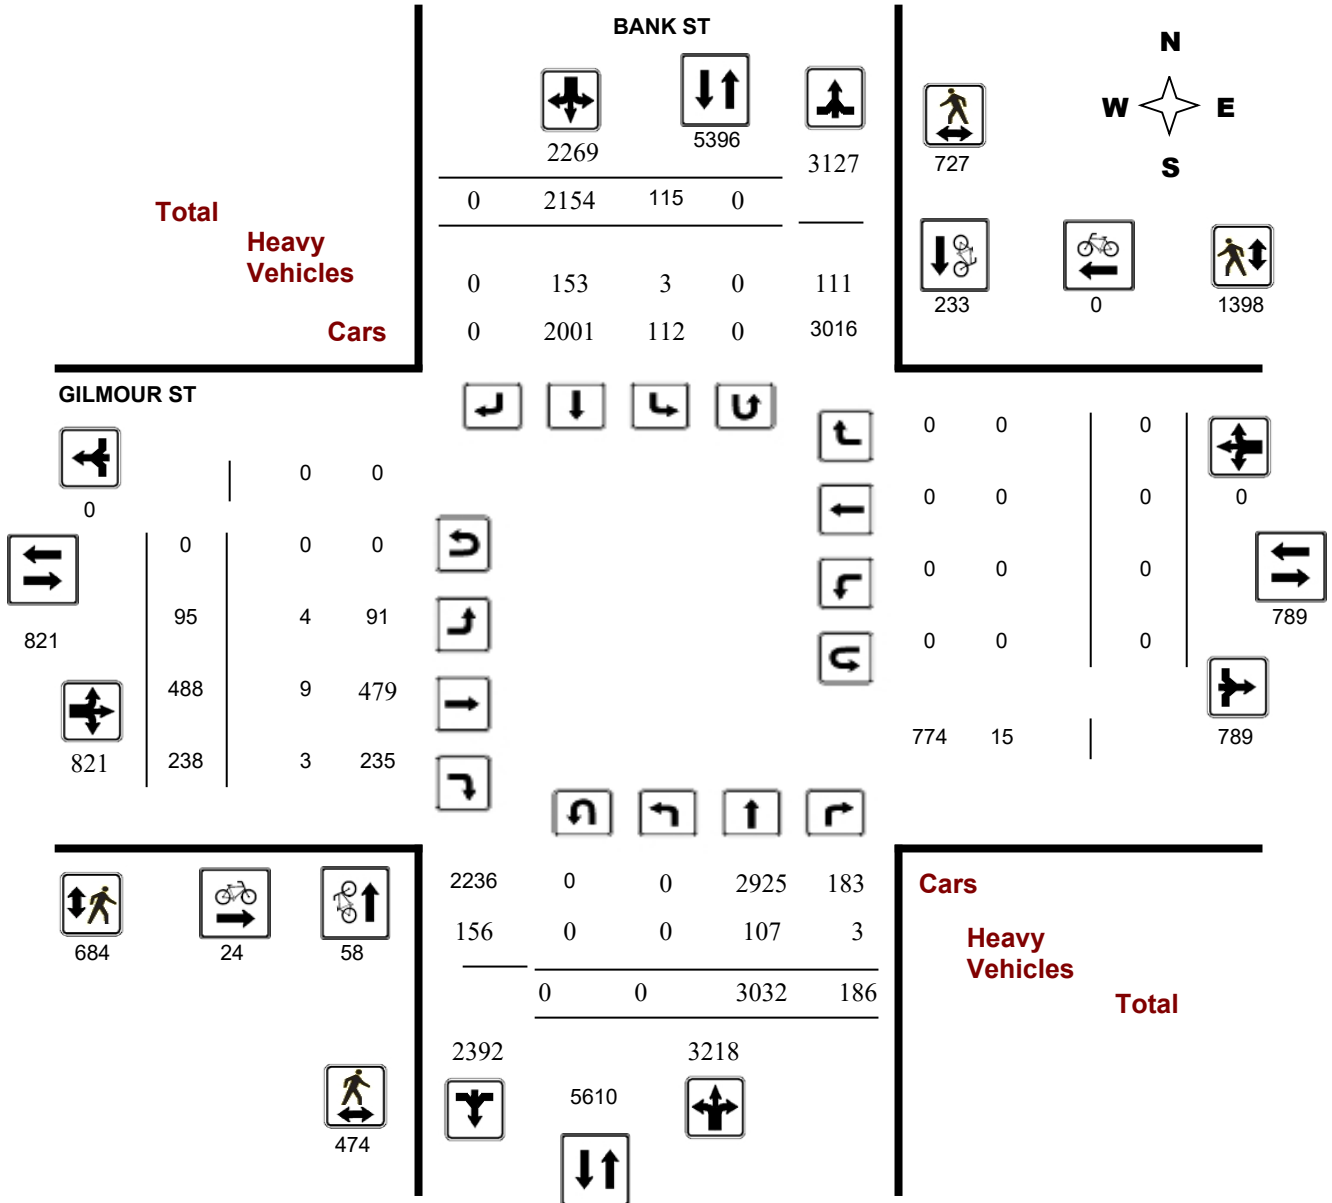



## Turning Movement Count - Study Results

### BANK ST @ GILMOUR ST


**Survey Date:** Tuesday, August 25, 2015

**WO No:** 35291

**Start Time:** 07:00

**Device:** Jamar Technologies, Inc

### Full Study Peak Hour Diagram

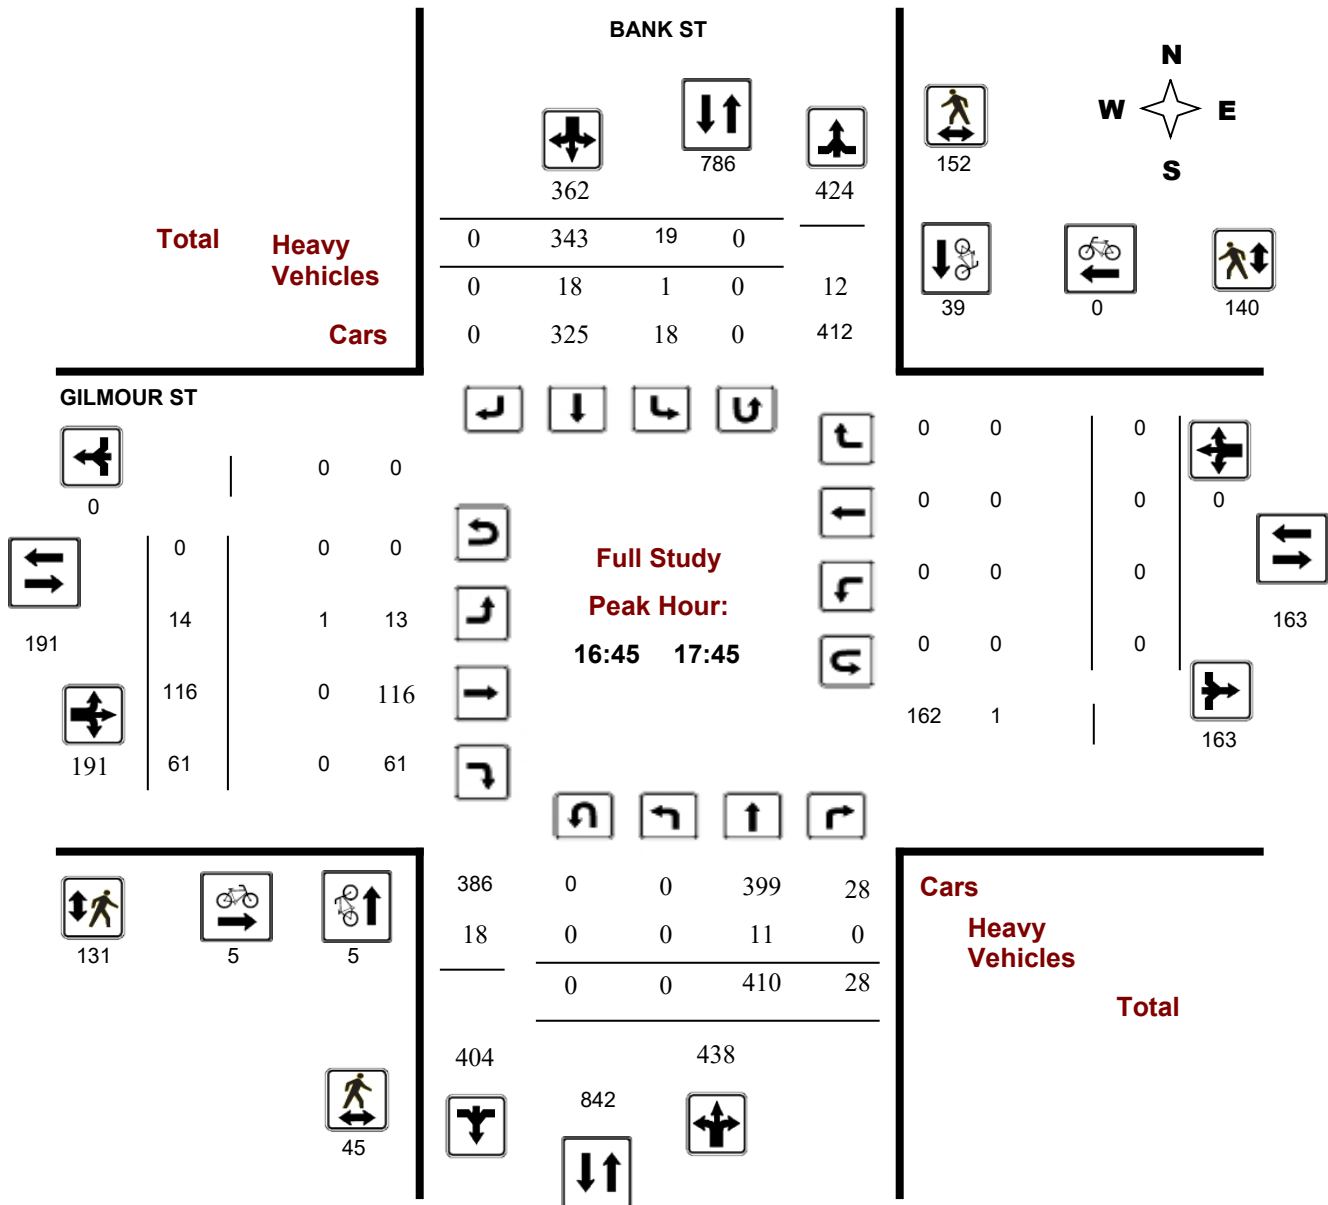

## Turning Movement Count - Peak Hour Diagram


### BANK ST @ GILMOUR ST

**Survey Date:** Tuesday, August 25, 2015

**Start Time:** 07:00

**WO No:** 35291

**Device:** Jamar Technologies, Inc

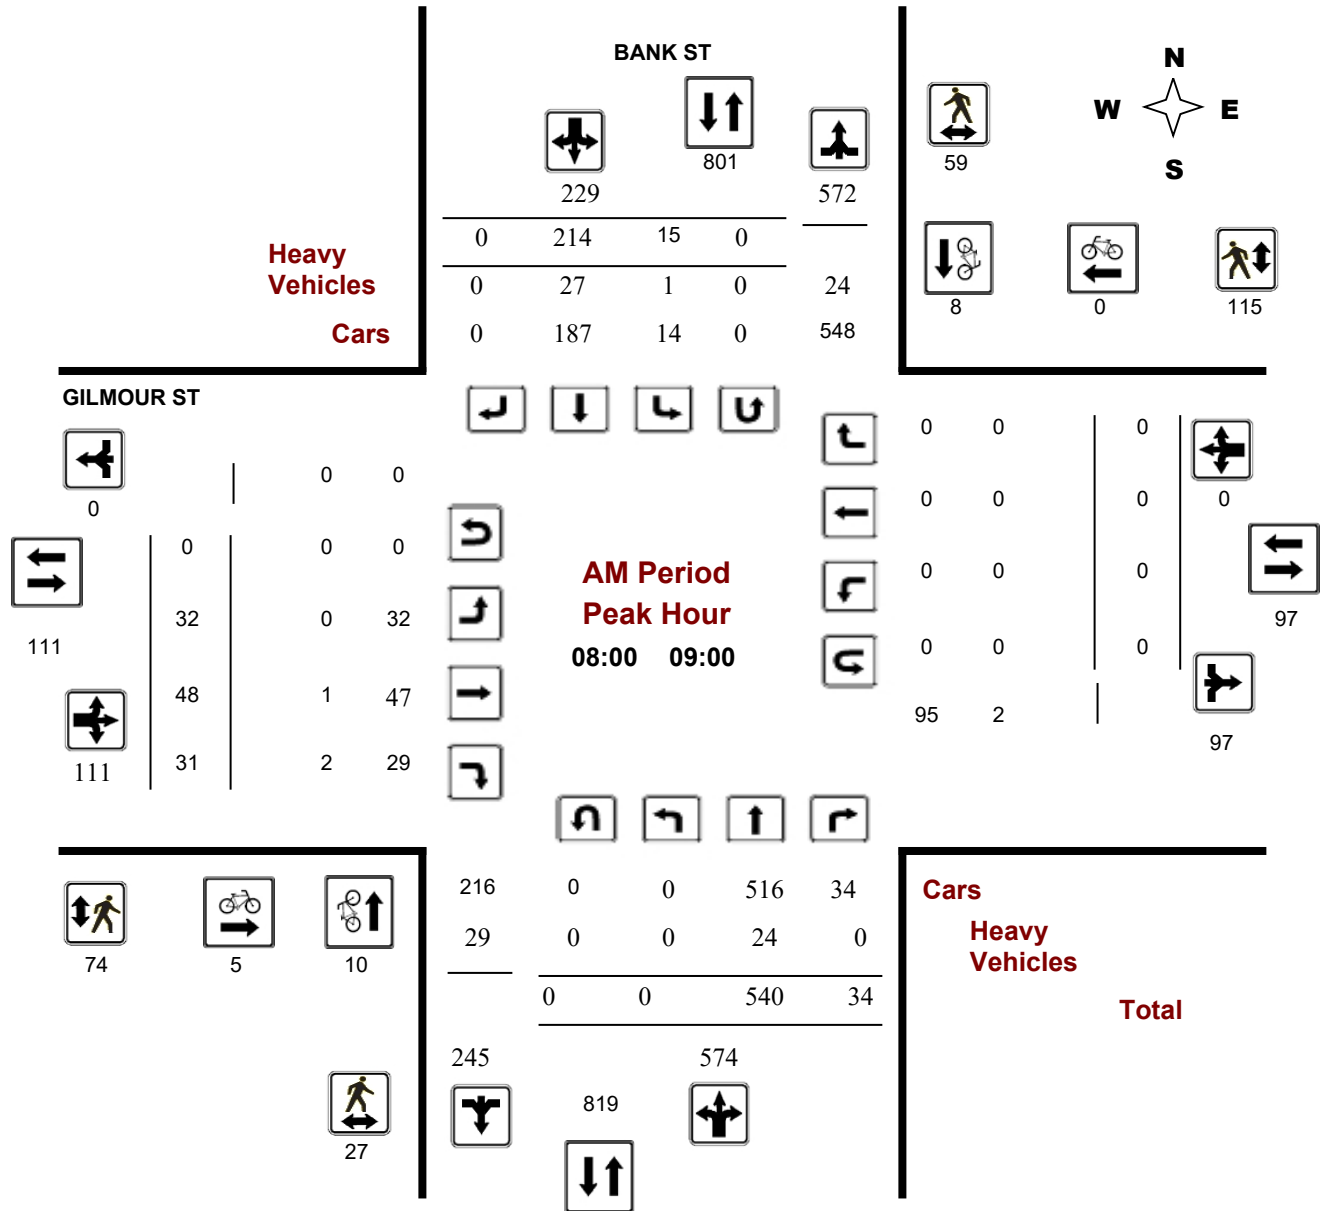



# Transportation Services - Traffic Services

## Turning Movement Count - Peak Hour Diagram


### BANK ST @ GILMOUR ST

**Survey Date:** Tuesday, August 25, 2015

**Start Time:** 07:00

**WO No:** 35291

**Device:** Jamar Technologies, Inc

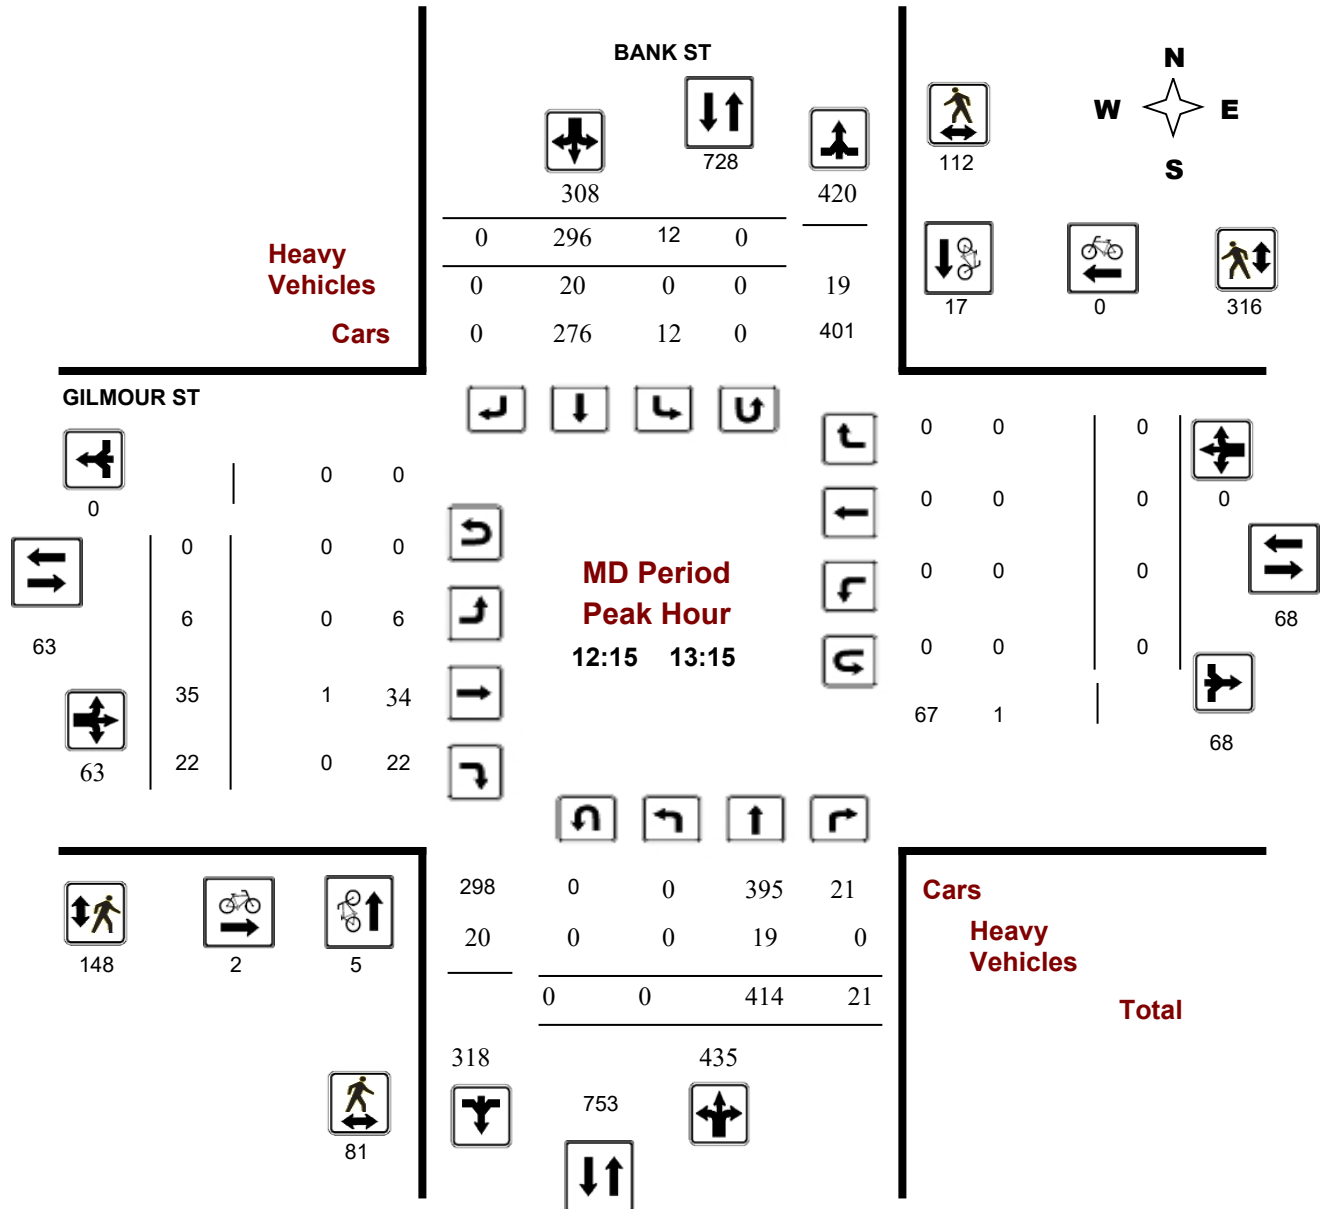

## Turning Movement Count - Peak Hour Diagram


### BANK ST @ GILMOUR ST

**Survey Date:** Tuesday, August 25, 2015

**Start Time:** 07:00

**WO No:** 35291

**Device:** Jamar Technologies, Inc

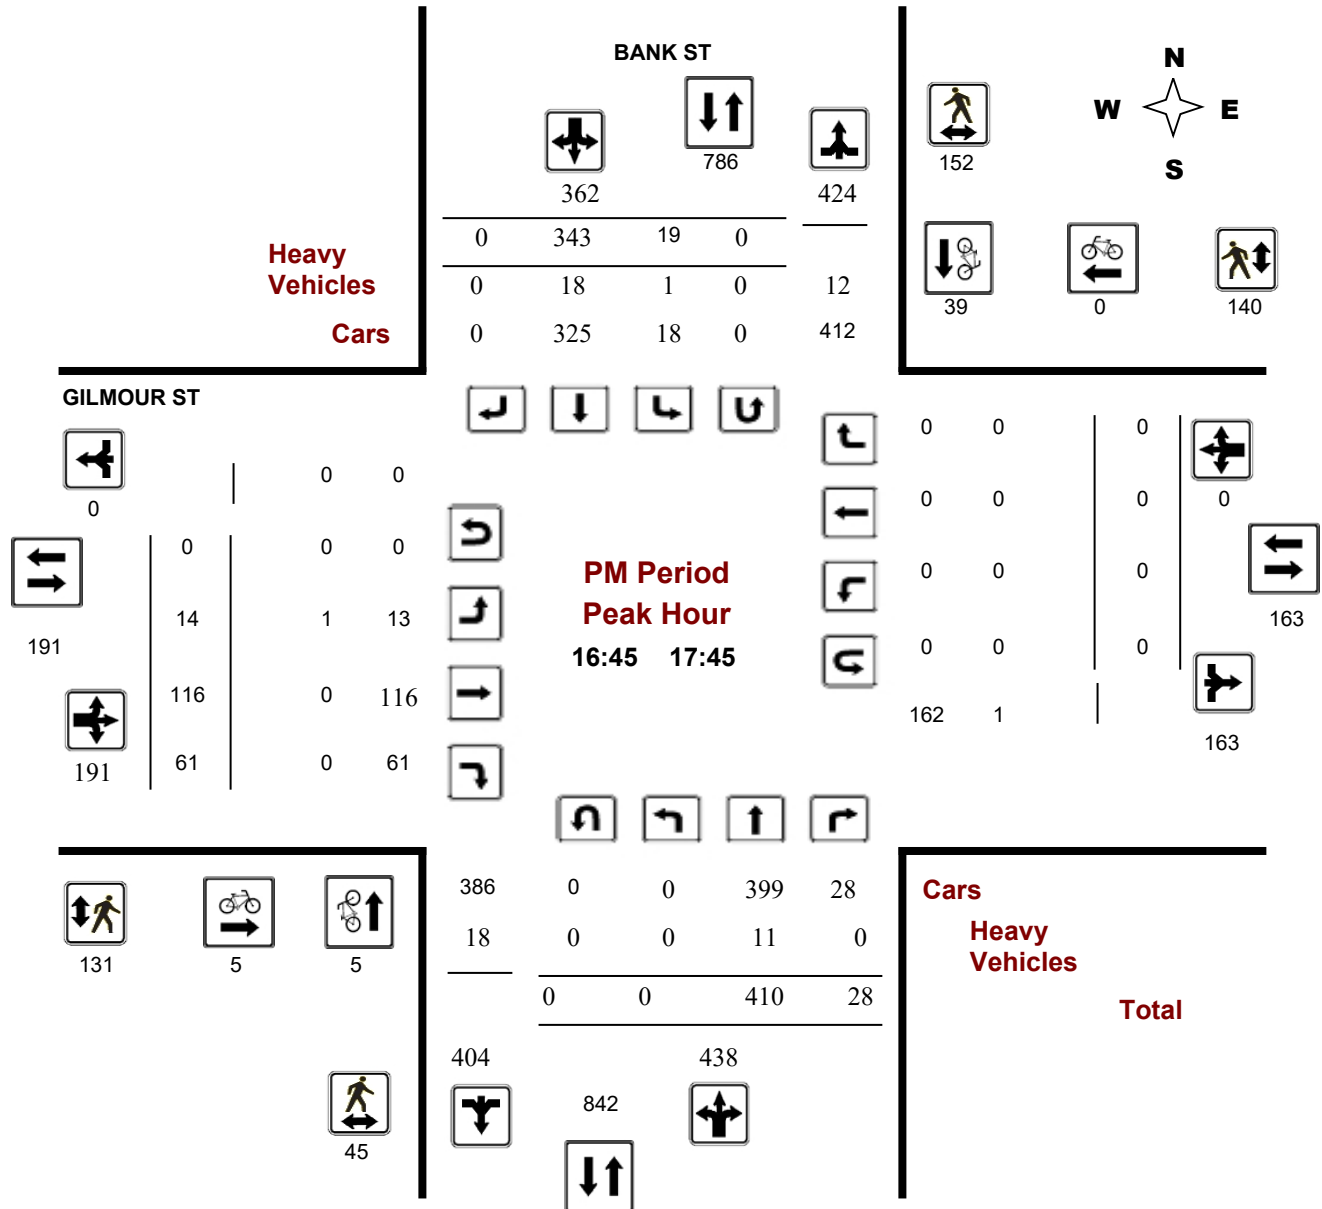



# Transportation Services - Traffic Services

## Turning Movement Count - Study Results

### BANK ST @ GILMOUR ST

**Survey Date:** Tuesday, August 25, 2015

**WO No:** 35291

**Start Time:** 07:00

**Device:** Jamar Technologies, Inc

### Full Study Summary (8 HR Standard)

**Survey Date:** Tuesday, August 25, 2015

**Total Observed U-Turns**

**AADT Factor**

Northbound: 0      Southbound: 0

.90

Eastbound: 0      Westbound: 0

Period	BANK ST									GILMOUR ST									Grand Total	
	Northbound				Southbound				STR TOT	Eastbound				Westbound				WB TOT		STR TOT
	LT	ST	RT	NB TOT	LT	ST	RT	SB TOT		LT	ST	RT	EB TOT	LT	ST	RT	WB TOT			
07:00 08:00	0	277	22	299	12	174	0	186	485	8	51	13	72	0	0	0	0	72	557	
08:00 09:00	0	540	34	574	15	214	0	229	803	32	48	31	111	0	0	0	0	111	914	
09:00 10:00	0	362	21	383	12	209	0	221	604	11	31	17	59	0	0	0	0	59	663	
11:30 12:30	0	381	6	387	8	271	0	279	666	5	40	23	68	0	0	0	0	68	734	
12:30 13:30	0	342	24	366	10	280	0	290	656	6	26	22	54	0	0	0	0	54	710	
15:00 16:00	0	376	29	405	23	352	0	375	780	7	62	36	105	0	0	0	0	105	885	
16:00 17:00	0	389	26	415	23	326	0	349	764	10	103	29	142	0	0	0	0	142	906	
17:00 18:00	0	365	24	389	12	328	0	340	729	16	127	67	210	0	0	0	0	210	939	
<b>Sub Total</b>	0	3032	186	3218	115	2154	0	2269	5487	95	488	238	821	0	0	0	0	821	6308	
<b>U Turns</b>	0			0	0			0	0	0			0	0			0	0	0	
<b>Total</b>	0	3032	186	3218	115	2154	0	2269	5487	95	488	238	821	0	0	0	0	821	6308	
<b>EQ 12Hr</b>	0	4214	259	4473	160	2994	0	3154	7627	132	678	331	1141	0	0	0	0	1141	8768	
Note: These values are calculated by multiplying the totals by the appropriate expansion factor.													<b>1.39</b>							
<b>AVG 12Hr</b>	0	3793	233	4026	144	2695	0	2839	6865	119	610	298	1027	0	0	0	0	1027	7892	
Note: These volumes are calculated by multiplying the Equivalent 12 hr. totals by the AADT factor.													<b>.90</b>							
<b>AVG 24Hr</b>	0	4969	305	5274	189	3530	0	3719	8993	156	799	390	1345	0	0	0	0	1345	10338	

Note: These volumes are calculated by multiplying the Average Daily 12 hr. totals by 12 to 24 expansion factor. **1.31**

Note: U-Turns provided for approach totals. Refer to 'U-Turn' Report for specific breakdown.



# Transportation Services - Traffic Services

## Turning Movement Count - Study Results

### BANK ST @ GILMOUR ST

**Survey Date:** Tuesday, August 25, 2015

**WO No:** 35291

**Start Time:** 07:00

**Device:** Jamar Technologies, Inc

### Full Study 15 Minute Increments

BANK ST					GILMOUR ST															
Northbound					Southbound					Eastbound					Westbound					
Time Period	LT	ST	RT	N TOT	LT	ST	RT	S TOT	STR TOT	LT	ST	RT	E TOT	LT	ST	RT	W TOT	STR TOT	Grand Total	
07:00 07:15	0	49	7	56	3	37	0	40	96	3	7	2	12	0	0	0	0	12	108	
07:15 07:30	0	71	7	78	0	52	0	52	130	2	12	5	19	0	0	0	0	19	149	
07:30 07:45	0	78	4	82	6	44	0	50	132	2	10	2	14	0	0	0	0	14	146	
07:45 08:00	0	79	4	83	3	41	0	44	127	1	22	4	27	0	0	0	0	27	154	
08:00 08:15	0	146	3	149	3	58	0	61	210	9	10	7	26	0	0	0	0	26	236	
08:15 08:30	0	150	9	159	4	57	0	61	220	10	20	2	32	0	0	0	0	32	252	
08:30 08:45	0	128	11	139	4	63	0	67	206	11	10	16	37	0	0	0	0	37	243	
08:45 09:00	0	116	11	127	4	36	0	40	167	2	8	6	16	0	0	0	0	16	183	
09:00 09:15	0	82	11	93	3	44	0	47	140	5	12	4	21	0	0	0	0	21	161	
09:15 09:30	0	85	1	86	3	51	0	54	140	6	11	1	18	0	0	0	0	18	158	
09:30 09:45	0	106	2	108	4	52	0	56	164	0	3	6	9	0	0	0	0	9	173	
09:45 10:00	0	89	7	96	2	62	0	64	160	0	5	6	11	0	0	0	0	11	171	
11:30 11:45	0	110	2	112	0	45	0	45	157	0	8	10	18	0	0	0	0	18	175	
11:45 12:00	0	77	1	78	2	58	0	60	138	1	13	3	17	0	0	0	0	17	155	
12:00 12:15	0	88	3	91	4	75	0	79	170	3	6	3	12	0	0	0	0	12	182	
12:15 12:30	0	106	0	106	2	93	0	95	201	1	13	7	21	0	0	0	0	21	222	
12:30 12:45	0	102	8	110	1	54	0	55	165	1	7	6	14	0	0	0	0	14	179	
12:45 13:00	0	120	8	128	5	71	0	76	204	2	9	4	15	0	0	0	0	15	219	
13:00 13:15	0	86	5	91	4	78	0	82	173	2	6	5	13	0	0	0	0	13	186	
13:15 13:30	0	34	3	37	0	77	0	77	114	1	4	7	12	0	0	0	0	12	126	
15:00 15:15	0	79	1	80	4	66	0	70	150	2	7	5	14	0	0	0	0	14	164	
15:15 15:30	0	124	4	128	8	96	0	104	232	3	13	5	21	0	0	0	0	21	253	
15:30 15:45	0	87	15	102	6	103	0	109	211	1	17	7	25	0	0	0	0	25	236	
15:45 16:00	0	86	9	95	5	87	0	92	187	1	25	19	45	0	0	0	0	45	232	
16:00 16:15	0	67	5	72	2	91	0	93	165	2	26	12	40	0	0	0	0	40	205	
16:15 16:30	0	67	8	75	4	73	0	77	152	5	30	7	42	0	0	0	0	42	194	
16:30 16:45	0	110	3	113	10	64	0	74	187	1	28	4	33	0	0	0	0	33	220	
16:45 17:00	0	145	10	155	7	98	0	105	260	2	19	6	27	0	0	0	0	27	287	
17:00 17:15	0	128	9	137	4	78	0	82	219	4	35	11	50	0	0	0	0	50	269	
17:15 17:30	0	49	3	52	5	63	0	68	120	5	46	20	71	0	0	0	0	71	191	
17:30 17:45	0	88	6	94	3	104	0	107	201	3	16	24	43	0	0	0	0	43	244	
17:45 18:00	0	100	6	106	0	83	0	83	189	4	30	12	46	0	0	0	0	46	235	
<b>Total:</b>	<b>0</b>	<b>3032</b>	<b>186</b>	<b>3218</b>	<b>115</b>	<b>2154</b>	<b>0</b>	<b>2269</b>	<b>5487</b>	<b>95</b>	<b>488</b>	<b>238</b>	<b>821</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>5487</b>	<b>6,308</b>	

Note: U-Turns are included in Totals.



# Transportation Services - Traffic Services

## Turning Movement Count - Study Results

### BANK ST @ GILMOUR ST

**Survey Date:** Tuesday, August 25, 2015

**WO No:** 35291

**Start Time:** 07:00

**Device:** Jamar Technologies, Inc

### Full Study Cyclist Volume

Time Period	BANK ST			GILMOUR ST			Grand Total
	Northbound	Southbound	Street Total	Eastbound	Westbound	Street Total	
07:00 07:15	3	0	3	0	0	0	3
07:15 07:30	3	1	4	0	0	0	4
07:30 07:45	1	3	4	1	0	1	5
07:45 08:00	4	0	4	1	0	1	5
08:00 08:15	1	3	4	0	0	0	4
08:15 08:30	1	1	2	3	0	3	5
08:30 08:45	3	0	3	2	0	2	5
08:45 09:00	5	4	9	0	0	0	9
09:00 09:15	1	1	2	1	0	1	3
09:15 09:30	2	5	7	0	0	0	7
09:30 09:45	5	7	12	0	0	0	12
09:45 10:00	0	3	3	0	0	0	3
11:30 11:45	0	6	6	0	0	0	6
11:45 12:00	0	9	9	0	0	0	9
12:00 12:15	3	13	16	4	0	4	20
12:15 12:30	0	4	4	1	0	1	5
12:30 12:45	0	2	2	0	0	0	2
12:45 13:00	0	4	4	0	0	0	4
13:00 13:15	5	7	12	1	0	1	13
13:15 13:30	0	0	0	0	0	0	0
15:00 15:15	0	7	7	1	0	1	8
15:15 15:30	2	6	8	2	0	2	10
15:30 15:45	1	21	22	0	0	0	22
15:45 16:00	2	8	10	1	0	1	11
16:00 16:15	1	21	22	0	0	0	22
16:15 16:30	1	15	16	1	0	1	17
16:30 16:45	2	20	22	0	0	0	22
16:45 17:00	2	13	15	0	0	0	15
17:00 17:15	1	10	11	4	0	4	15
17:15 17:30	0	6	6	0	0	0	6
17:30 17:45	2	10	12	1	0	1	13
17:45 18:00	7	23	30	0	0	0	30
<b>Total</b>	<b>58</b>	<b>233</b>	<b>291</b>	<b>24</b>	<b>0</b>	<b>24</b>	<b>315</b>



# Transportation Services - Traffic Services

## Turning Movement Count - Study Results

### BANK ST @ GILMOUR ST

**Survey Date:** Tuesday, August 25, 2015

**WO No:** 35291

**Start Time:** 07:00

**Device:** Jamar Technologies, Inc

### Full Study Pedestrian Volume

#### BANK ST

#### GILMOUR ST

Time Period	NB Approach (E or W Crossing)	SB Approach (E or W Crossing)	Total	EB Approach (N or S Crossing)	WB Approach (N or S Crossing)	Total	Grand Total
07:00 07:15	7	9	16	6	5	11	27
07:15 07:30	6	5	11	16	13	29	40
07:30 07:45	7	3	10	9	16	25	35
07:45 08:00	13	12	25	29	28	57	82
08:00 08:15	4	13	17	6	7	13	30
08:15 08:30	7	20	27	50	29	79	106
08:30 08:45	3	12	15	10	42	52	67
08:45 09:00	13	14	27	8	37	45	72
09:00 09:15	11	21	32	9	21	30	62
09:15 09:30	4	17	21	6	32	38	59
09:30 09:45	5	8	13	21	15	36	49
09:45 10:00	23	21	44	8	43	51	95
11:30 11:45	15	9	24	23	34	57	81
11:45 12:00	21	24	45	11	64	75	120
12:00 12:15	38	45	83	29	143	172	255
12:15 12:30	21	46	67	31	115	146	213
12:30 12:45	18	15	33	42	79	121	154
12:45 13:00	23	29	52	51	91	142	194
13:00 13:15	19	22	41	24	31	55	96
13:15 13:30	15	32	47	22	45	67	114
15:00 15:15	18	17	35	7	32	39	74
15:15 15:30	35	24	59	21	33	54	113
15:30 15:45	10	14	24	27	11	38	62
15:45 16:00	38	18	56	10	49	59	115
16:00 16:15	20	32	52	14	72	86	138
16:15 16:30	11	38	49	13	75	88	137
16:30 16:45	9	22	31	1	45	46	77
16:45 17:00	9	39	48	11	48	59	107
17:00 17:15	16	54	70	51	58	109	179
17:15 17:30	5	27	32	27	10	37	69
17:30 17:45	15	32	47	42	24	66	113
17:45 18:00	15	33	48	49	51	100	148
<b>Total</b> .....	<b>474</b>	<b>727</b>	<b>1201</b>	<b>684</b>	<b>1398</b>	<b>2082</b>	<b>3283</b>





# Transportation Services - Traffic Services

## Turning Movement Count - Study Results

### BANK ST @ GILMOUR ST

**Survey Date:** Tuesday, August 25, 2015

**WO No:** 35291

**Start Time:** 07:00

**Device:** Jamar Technologies, Inc

### Full Study Heavy Vehicles

BANK ST					GILMOUR ST															Grand Total	
Time Period	Northbound			N TOT	Southbound			S TOT	STR TOT	Eastbound			E TOT	Westbound			W TOT	STR TOT			
	LT	ST	RT		LT	ST	RT			LT	ST	RT		LT	ST	RT					
07:00	07:15	0	3	2	5	0	5	0	5	10	0	0	0	0	0	0	0	0	0	0	10
07:15	07:30	0	4	0	4	0	4	0	4	8	0	1	0	1	0	0	0	0	0	1	9
07:30	07:45	0	2	0	2	0	6	0	6	8	0	0	0	0	0	0	0	0	0	0	8
07:45	08:00	0	1	0	1	0	3	0	3	4	0	3	0	3	0	0	0	0	0	3	7
08:00	08:15	0	8	0	8	0	4	0	4	12	0	0	1	1	0	0	0	0	0	1	13
08:15	08:30	0	4	0	4	0	4	0	4	8	0	0	0	0	0	0	0	0	0	0	8
08:30	08:45	0	6	0	6	1	7	0	8	14	0	0	0	0	0	0	0	0	0	0	14
08:45	09:00	0	6	0	6	0	12	0	12	18	0	1	1	2	0	0	0	0	0	2	20
09:00	09:15	0	3	0	3	0	3	0	3	6	0	0	0	0	0	0	0	0	0	0	6
09:15	09:30	0	3	0	3	0	7	0	7	10	1	1	0	2	0	0	0	0	0	2	12
09:30	09:45	0	4	0	4	0	6	0	6	10	0	0	0	0	0	0	0	0	0	0	10
09:45	10:00	0	4	0	4	0	5	0	5	9	0	0	0	0	0	0	0	0	0	0	9
11:30	11:45	0	3	0	3	0	5	0	5	8	0	0	1	1	0	0	0	0	0	1	9
11:45	12:00	0	2	0	2	0	4	0	4	6	0	0	0	0	0	0	0	0	0	0	6
12:00	12:15	0	3	0	3	1	2	0	3	6	2	0	0	2	0	0	0	0	0	2	8
12:15	12:30	0	5	0	5	0	5	0	5	10	0	1	0	1	0	0	0	0	0	1	11
12:30	12:45	0	5	0	5	0	3	0	3	8	0	0	0	0	0	0	0	0	0	0	8
12:45	13:00	0	2	0	2	0	5	0	5	7	0	0	0	0	0	0	0	0	0	0	7
13:00	13:15	0	7	0	7	0	7	0	7	14	0	0	0	0	0	0	0	0	0	0	14
13:15	13:30	0	1	0	1	0	3	0	3	4	0	0	0	0	0	0	0	0	0	0	4
15:00	15:15	0	4	0	4	0	4	0	4	8	0	0	0	0	0	0	0	0	0	0	8
15:15	15:30	0	4	0	4	0	6	0	6	10	0	0	0	0	0	0	0	0	0	0	10
15:30	15:45	0	1	0	1	0	6	0	6	7	0	1	0	1	0	0	0	0	0	1	8
15:45	16:00	0	2	0	2	0	4	0	4	6	0	0	0	0	0	0	0	0	0	0	6
16:00	16:15	0	3	0	3	0	3	0	3	6	0	1	0	1	0	0	0	0	0	1	7
16:15	16:30	0	1	0	1	0	3	0	3	4	0	0	0	0	0	0	0	0	0	0	4
16:30	16:45	0	2	0	2	0	4	0	4	6	0	0	0	0	0	0	0	0	0	0	6
16:45	17:00	0	3	0	3	1	5	0	6	9	0	0	0	0	0	0	0	0	0	0	9
17:00	17:15	0	2	0	2	0	4	0	4	6	1	0	0	1	0	0	0	0	0	1	7
17:15	17:30	0	1	0	1	0	3	0	3	4	0	0	0	0	0	0	0	0	0	0	4
17:30	17:45	0	5	0	5	0	6	0	6	11	0	0	0	0	0	0	0	0	0	0	11
17:45	18:00	0	3	1	4	0	5	0	5	9	0	0	0	0	0	0	0	0	0	0	9
Total:	None	0	107	3	110	3	153	0	156	266	4	9	3	16	0	0	0	0	0	16	282



# Transportation Services - Traffic Services

## Turning Movement Count - Study Results

### BANK ST @ GILMOUR ST

**Survey Date:** Tuesday, August 25, 2015

**WO No:** 35291

**Start Time:** 07:00

**Device:** Jamar Technologies, Inc

### Full Study 15 Minute U-Turn Total

BANK ST

GILMOUR ST

Time Period		Northbound U-Turn Total	Southbound U-Turn Total	Eastbound U-Turn Total	Westbound U-Turn Total	Total
07:00	07:15	0	0	0	0	0
07:15	07:30	0	0	0	0	0
07:30	07:45	0	0	0	0	0
07:45	08:00	0	0	0	0	0
08:00	08:15	0	0	0	0	0
08:15	08:30	0	0	0	0	0
08:30	08:45	0	0	0	0	0
08:45	09:00	0	0	0	0	0
09:00	09:15	0	0	0	0	0
09:15	09:30	0	0	0	0	0
09:30	09:45	0	0	0	0	0
09:45	10:00	0	0	0	0	0
11:30	11:45	0	0	0	0	0
11:45	12:00	0	0	0	0	0
12:00	12:15	0	0	0	0	0
12:15	12:30	0	0	0	0	0
12:30	12:45	0	0	0	0	0
12:45	13:00	0	0	0	0	0
13:00	13:15	0	0	0	0	0
13:15	13:30	0	0	0	0	0
15:00	15:15	0	0	0	0	0
15:15	15:30	0	0	0	0	0
15:30	15:45	0	0	0	0	0
15:45	16:00	0	0	0	0	0
16:00	16:15	0	0	0	0	0
16:15	16:30	0	0	0	0	0
16:30	16:45	0	0	0	0	0
16:45	17:00	0	0	0	0	0
17:00	17:15	0	0	0	0	0
17:15	17:30	0	0	0	0	0
17:30	17:45	0	0	0	0	0
17:45	18:00	0	0	0	0	0
Total		0	0	0	0	0

## Turning Movement Count - Study Results

### BANK ST @ MACLAREN ST


**Survey Date:** Tuesday, April 16, 2019

**WO No:** 38538

**Start Time:** 07:00

**Device:** Miovision

### Full Study Diagram

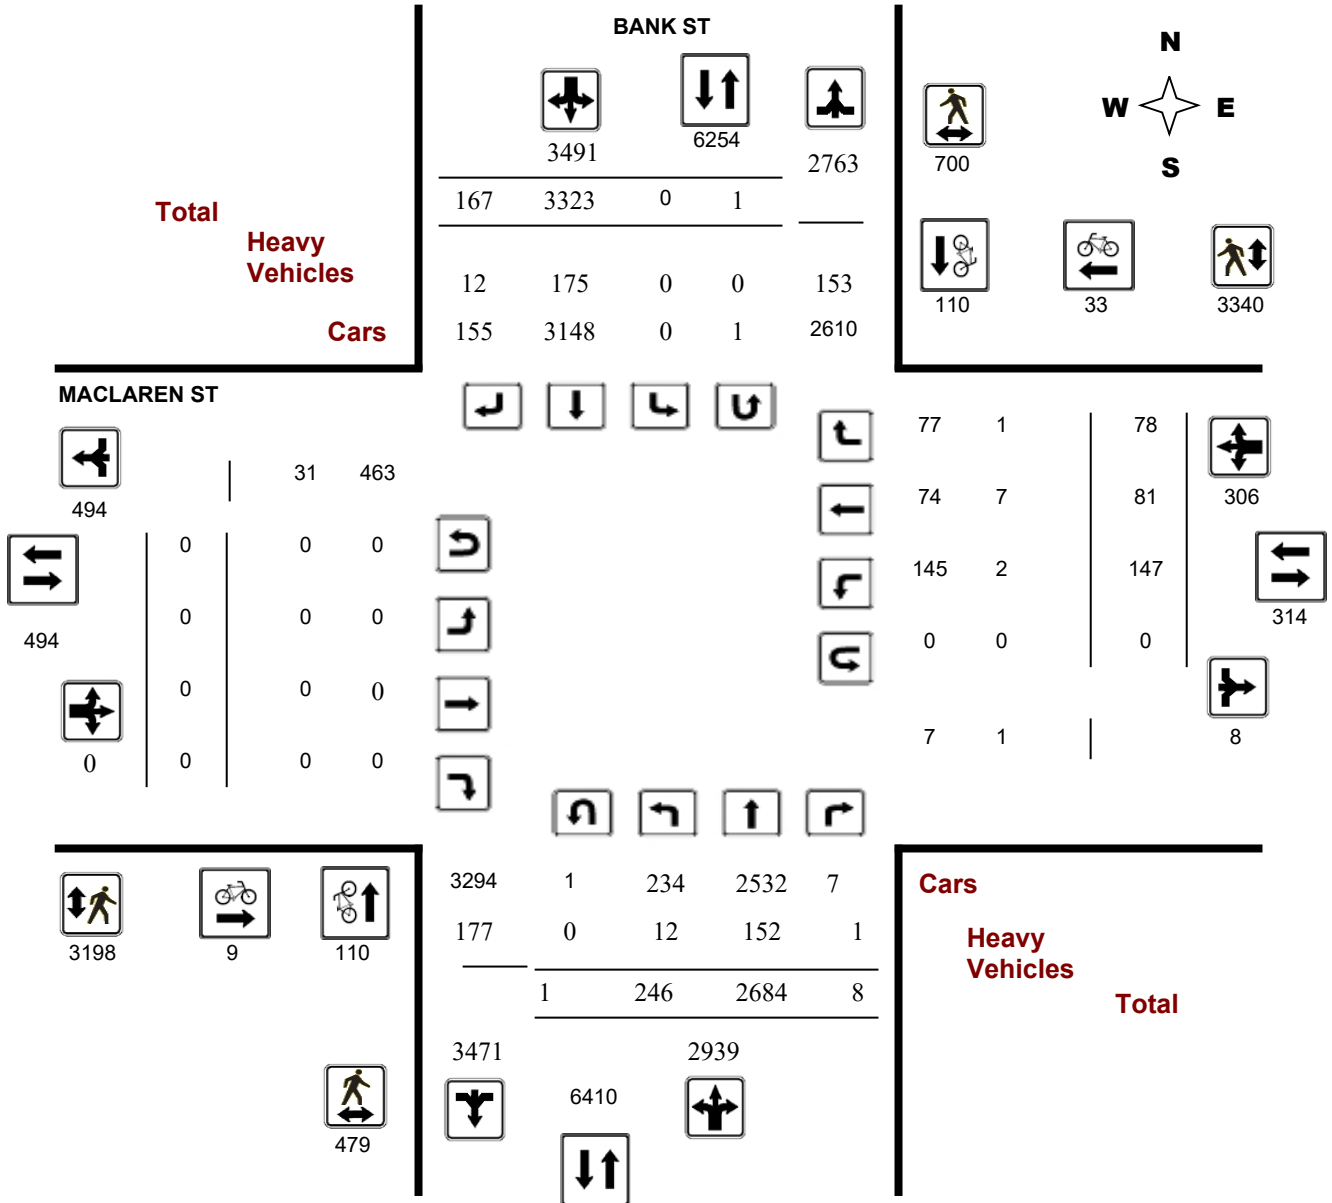

## Turning Movement Count - Study Results

### BANK ST @ MACLAREN ST


**Survey Date:** Tuesday, April 16, 2019

**WO No:** 38538

**Start Time:** 07:00

**Device:** Miovision

### Full Study Peak Hour Diagram

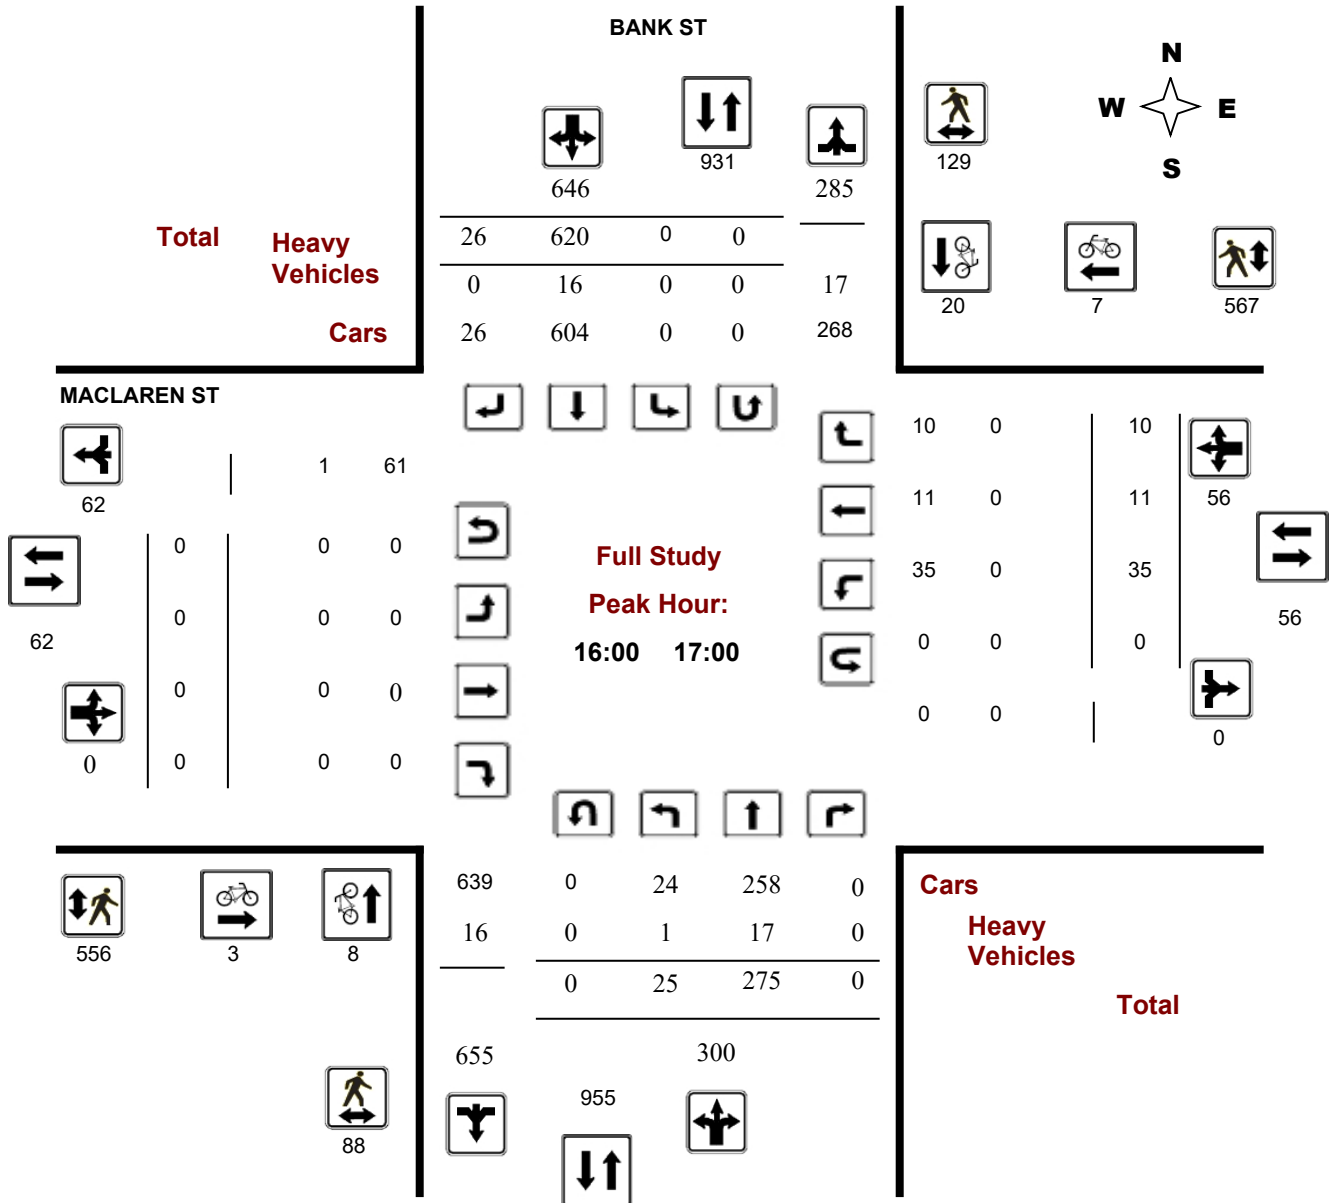

## Turning Movement Count - Peak Hour Diagram


### BANK ST @ MACLAREN ST

**Survey Date:** Tuesday, April 16, 2019

**Start Time:** 07:00

**WO No:** 38538

**Device:** Miovision

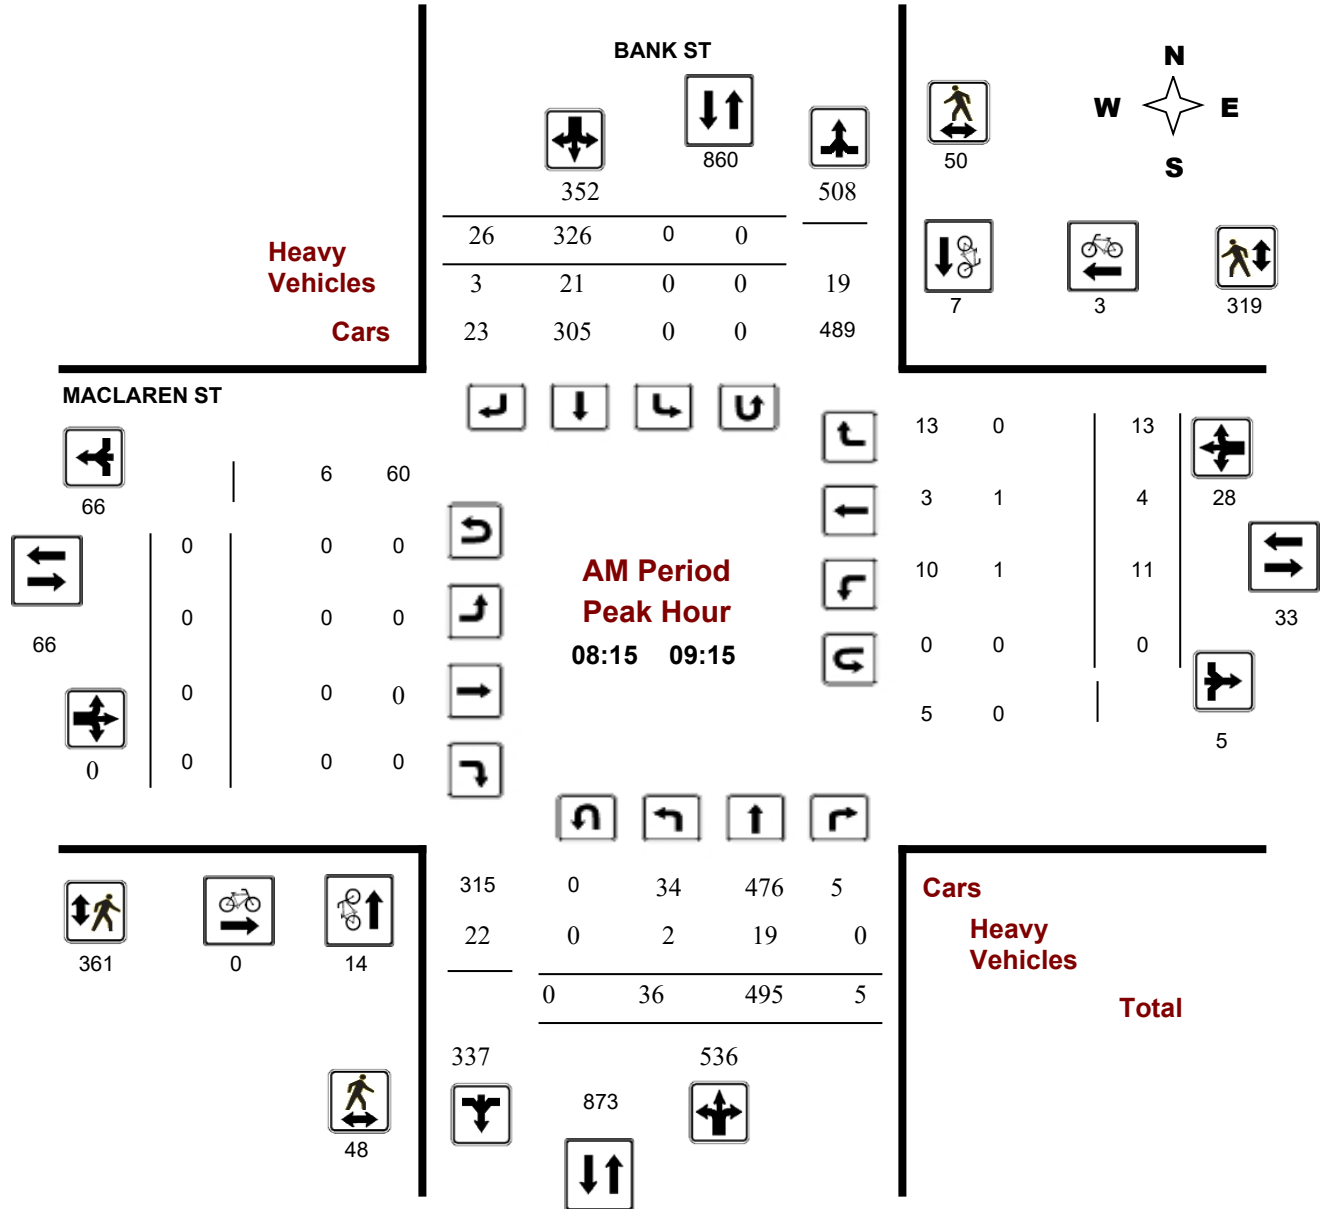

## Turning Movement Count - Peak Hour Diagram


### BANK ST @ MACLAREN ST

**Survey Date:** Tuesday, April 16, 2019

**Start Time:** 07:00

**WO No:** 38538

**Device:** Miovision

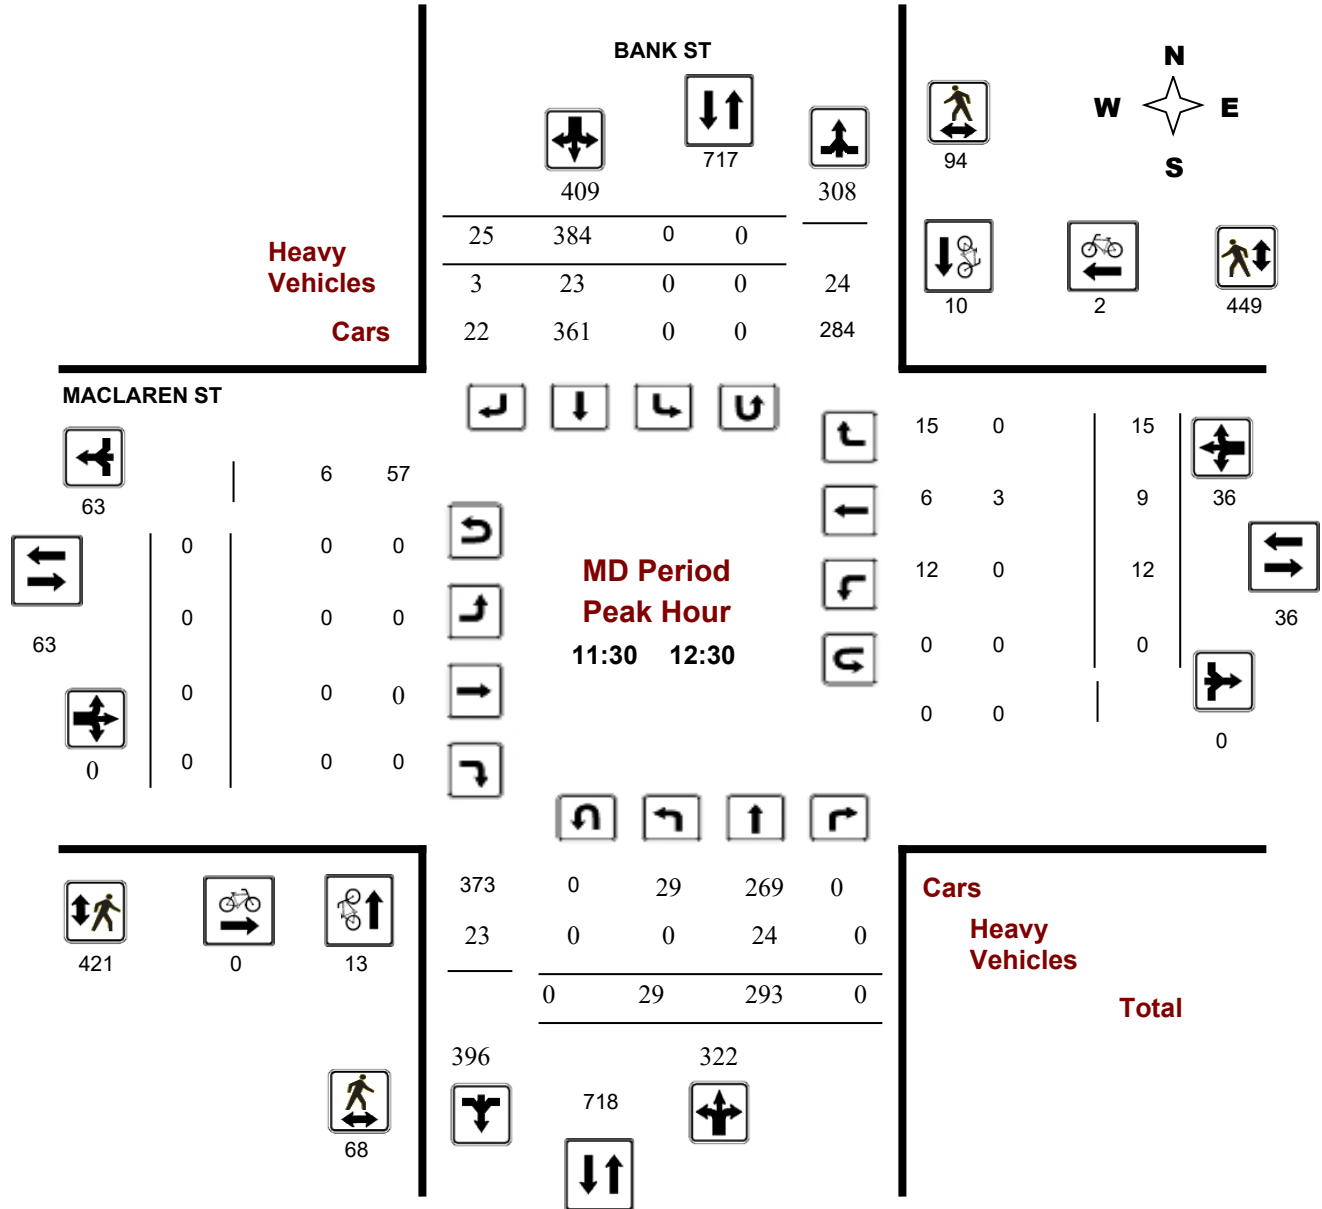

## Turning Movement Count - Peak Hour Diagram


### BANK ST @ MACLAREN ST

**Survey Date:** Tuesday, April 16, 2019

**Start Time:** 07:00

**WO No:** 38538

**Device:** Miovision

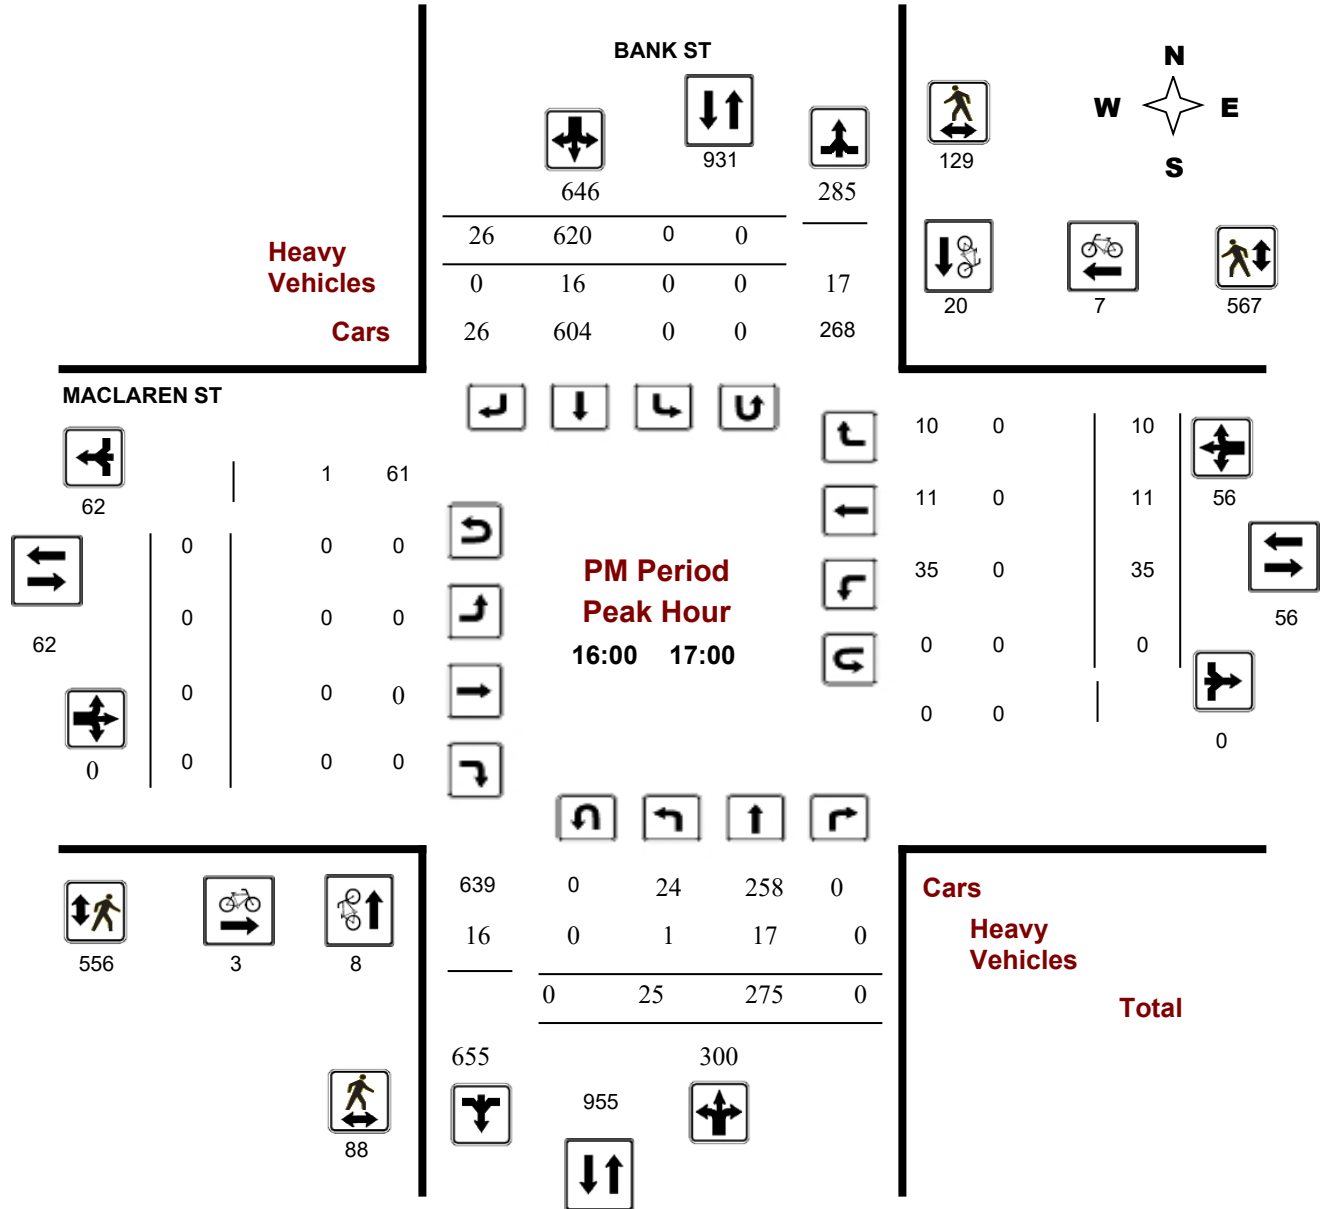



# Transportation Services - Traffic Services

## Turning Movement Count - Study Results

### BANK ST @ MACLAREN ST

**Survey Date:** Tuesday, April 16, 2019

**WO No:** 38538

**Start Time:** 07:00

**Device:** Miovision

### Full Study Summary (8 HR Standard)

**Survey Date:** Tuesday, April 16, 2019

**Total Observed U-Turns**  
 Northbound: 1      Southbound: 1  
 Eastbound: 0      Westbound: 0

**AADT Factor**  
 .90

Period	BANK ST									MACLAREN ST									Grand Total
	Northbound			NB TOT	Southbound			SB TOT	STR TOT	Eastbound			EB TOT	Westbound			WB TOT	STR TOT	
LT	ST	RT	LT		ST	RT	LT			ST	RT	LT		ST	RT	LT			ST
07:00 08:00	29	386	0	415	0	237	12	249	664	0	0	0	0	12	6	8	26	26	690
08:00 09:00	34	488	2	524	0	304	21	325	849	0	0	0	0	17	7	11	35	35	884
09:00 10:00	42	448	6	496	0	355	20	375	871	0	0	0	0	3	0	4	7	7	878
11:30 12:30	29	293	0	322	0	384	25	409	731	0	0	0	0	12	9	15	36	36	767
12:30 13:30	29	282	0	311	0	362	25	387	698	0	0	0	0	12	15	13	40	40	738
15:00 16:00	35	245	0	280	0	524	16	540	820	0	0	0	0	24	16	8	48	48	868
16:00 17:00	25	275	0	300	0	620	26	646	946	0	0	0	0	35	11	10	56	56	1002
17:00 18:00	23	267	0	290	0	537	22	559	849	0	0	0	0	32	17	9	58	58	907
<b>Sub Total</b>	246	2684	8	2938	0	3323	167	3490	6428	0	0	0	0	147	81	78	306	306	6734
<b>U Turns</b>	1			1	1			1	2	0			0	0			0	0	2
<b>Total</b>	247	2684	8	2939	1	3323	167	3491	6430	0	0	0	0	147	81	78	306	306	6736
<b>EQ 12Hr</b>	343	3731	11	4085	1	4619	232	4852	8937	0	0	0	0	204	113	108	425	425	9362
Note: These values are calculated by multiplying the totals by the appropriate expansion factor.													<b>1.39</b>						
<b>AVG 12Hr</b>	309	3358	10	3677	1	4157	209	4367	8044	0	0	0	0	184	102	97	383	383	8427
Note: These volumes are calculated by multiplying the Equivalent 12 hr. totals by the AADT factor.													<b>.90</b>						
<b>AVG 24Hr</b>	405	4399	13	4817	1	5446	274	5721	10538	0	0	0	0	241	134	127	502	502	11040
Note: These volumes are calculated by multiplying the Average Daily 12 hr. totals by 12 to 24 expansion factor.													<b>1.31</b>						

Note: U-Turns provided for approach totals. Refer to 'U-Turn' Report for specific breakdown.





# Transportation Services - Traffic Services

## Turning Movement Count - Study Results

### BANK ST @ MACLAREN ST

**Survey Date:** Tuesday, April 16, 2019

**WO No:** 38538

**Start Time:** 07:00

**Device:** Miovision

### Full Study 15 Minute Increments

Time Period	BANK ST									MACLAREN ST									Grand Total	
	Northbound			Southbound			Eastbound			Westbound			W TOT	STR TOT						
	LT	ST	RT	N TOT	LT	ST	RT	S TOT	STR TOT	LT	ST	RT			E TOT	LT	ST	RT		
07:00	07:15	5	84	0	89	0	52	3	55	144	0	0	0	0	2	1	1	4	4	148
07:15	07:30	8	94	0	102	0	62	2	64	166	0	0	0	0	3	1	0	4	4	170
07:30	07:45	6	91	0	97	0	67	4	71	168	0	0	0	0	2	4	2	8	8	176
07:45	08:00	10	117	0	127	0	56	3	59	186	0	0	0	0	5	0	5	10	10	196
08:00	08:15	10	122	0	132	0	69	3	72	204	0	0	0	0	6	3	1	10	10	214
08:15	08:30	8	121	0	129	0	84	7	91	220	0	0	0	0	5	1	7	13	13	233
08:30	08:45	6	115	0	121	0	74	6	80	201	0	0	0	0	4	3	1	8	8	209
08:45	09:00	10	130	2	142	0	77	5	82	224	0	0	0	0	2	0	2	4	4	228
09:00	09:15	12	129	3	144	0	91	8	99	243	0	0	0	0	0	0	3	3	3	246
09:15	09:30	11	124	2	137	0	82	3	85	222	0	0	0	0	1	0	0	1	1	223
09:30	09:45	9	113	1	123	0	84	5	89	212	0	0	0	0	1	0	0	1	1	213
09:45	10:00	10	82	0	92	0	98	4	102	194	0	0	0	0	1	0	1	2	2	196
11:30	11:45	10	82	0	92	0	80	6	86	178	0	0	0	0	3	1	2	6	6	184
11:45	12:00	5	71	0	76	0	92	5	97	173	0	0	0	0	1	2	3	6	6	179
12:00	12:15	11	78	0	89	0	111	6	117	206	0	0	0	0	3	4	6	13	13	219
12:15	12:30	3	62	0	65	0	101	8	109	174	0	0	0	0	5	2	4	11	11	185
12:30	12:45	8	64	0	72	0	79	3	82	154	0	0	0	0	5	4	4	13	13	167
12:45	13:00	6	75	0	81	0	90	10	100	181	0	0	0	0	1	2	3	6	6	187
13:00	13:15	11	69	0	80	0	85	3	88	168	0	0	0	0	3	4	1	8	8	176
13:15	13:30	5	74	0	79	1	108	9	118	197	0	0	0	0	3	5	5	13	13	210
15:00	15:15	8	65	0	73	0	124	5	129	202	0	0	0	0	9	5	3	17	17	219
15:15	15:30	11	71	0	82	0	134	7	141	223	0	0	0	0	6	4	2	12	12	235
15:30	15:45	8	60	0	68	0	132	2	134	202	0	0	0	0	0	4	3	7	7	209
15:45	16:00	8	49	0	57	0	134	2	136	193	0	0	0	0	9	3	0	12	12	205
16:00	16:15	4	80	0	84	0	156	2	158	242	0	0	0	0	10	5	1	16	16	258
16:15	16:30	4	55	0	59	0	152	11	163	222	0	0	0	0	8	0	5	13	13	235
16:30	16:45	8	64	0	72	0	151	5	156	228	0	0	0	0	5	4	1	10	10	238
16:45	17:00	9	76	0	85	0	161	8	169	254	0	0	0	0	12	2	3	17	17	271
17:00	17:15	6	58	0	64	0	168	6	174	238	0	0	0	0	12	3	3	18	18	256
17:15	17:30	4	65	0	69	0	124	6	130	199	0	0	0	0	8	7	1	16	16	215
17:30	17:45	7	67	0	74	0	127	6	133	207	0	0	0	0	4	3	3	10	10	217
17:45	18:00	6	77	0	83	0	118	4	122	205	0	0	0	0	8	4	2	14	14	219
Total:		247	2684	8	2939	1	3323	167	3491	6430	0	0	0	0	147	81	78	306	6430	6,736

Note: U-Turns are included in Totals.



# Transportation Services - Traffic Services

## Turning Movement Count - Study Results

### BANK ST @ MACLAREN ST

**Survey Date:** Tuesday, April 16, 2019

**WO No:** 38538

**Start Time:** 07:00

**Device:** Miovision

### Full Study Cyclist Volume

Time Period	BANK ST			MACLAREN ST			Grand Total
	Northbound	Southbound	Street Total	Eastbound	Westbound	Street Total	
07:00 07:15	2	0	2	0	0	0	2
07:15 07:30	3	0	3	0	0	0	3
07:30 07:45	5	1	6	0	1	1	7
07:45 08:00	4	0	4	0	1	1	5
08:00 08:15	7	0	7	0	1	1	8
08:15 08:30	1	2	3	0	1	1	4
08:30 08:45	8	0	8	0	1	1	9
08:45 09:00	4	2	6	0	0	0	6
09:00 09:15	1	3	4	0	1	1	5
09:15 09:30	6	1	7	0	1	1	8
09:30 09:45	1	3	4	0	1	1	5
09:45 10:00	3	0	3	0	0	0	3
11:30 11:45	3	5	8	0	1	1	9
11:45 12:00	3	2	5	0	0	0	5
12:00 12:15	5	2	7	0	0	0	7
12:15 12:30	2	1	3	0	1	1	4
12:30 12:45	4	3	7	0	0	0	7
12:45 13:00	4	5	9	0	0	0	9
13:00 13:15	3	5	8	1	1	2	10
13:15 13:30	4	5	9	0	1	1	10
15:00 15:15	4	2	6	1	1	2	8
15:15 15:30	4	2	6	0	0	0	6
15:30 15:45	1	5	6	1	2	3	9
15:45 16:00	3	5	8	1	2	3	11
16:00 16:15	4	3	7	0	2	2	9
16:15 16:30	3	7	10	1	2	3	13
16:30 16:45	1	7	8	0	2	2	10
16:45 17:00	0	3	3	2	1	3	6
17:00 17:15	6	8	14	1	2	3	17
17:15 17:30	2	15	17	0	5	5	22
17:30 17:45	2	9	11	0	1	1	12
17:45 18:00	7	4	11	1	1	2	13
<b>Total</b>	110	110	220	9	33	42	262



# Transportation Services - Traffic Services

## Turning Movement Count - Study Results

### BANK ST @ MACLAREN ST

**Survey Date:** Tuesday, April 16, 2019

**WO No:** 38538

**Start Time:** 07:00

**Device:** Miovision

### Full Study Pedestrian Volume

#### BANK ST

#### MACLAREN ST

Time Period	NB Approach (E or W Crossing)	SB Approach (E or W Crossing)	Total	EB Approach (N or S Crossing)	WB Approach (N or S Crossing)	Total	Grand Total
07:00 07:15	3	4	7	26	35	61	68
07:15 07:30	5	5	10	35	34	69	79
07:30 07:45	6	7	13	56	49	105	118
07:45 08:00	14	8	22	65	68	133	155
08:00 08:15	12	9	21	78	72	150	171
08:15 08:30	13	10	23	89	87	176	199
08:30 08:45	12	14	26	87	77	164	190
08:45 09:00	15	11	26	106	99	205	231
09:00 09:15	8	15	23	79	56	135	158
09:15 09:30	12	18	30	61	48	109	139
09:30 09:45	6	9	15	60	45	105	120
09:45 10:00	7	13	20	61	34	95	115
11:30 11:45	8	25	33	76	78	154	187
11:45 12:00	21	25	46	104	99	203	249
12:00 12:15	20	22	42	131	121	252	294
12:15 12:30	19	22	41	110	151	261	302
12:30 12:45	9	22	31	96	138	234	265
12:45 13:00	20	27	47	97	142	239	286
13:00 13:15	24	21	45	92	110	202	247
13:15 13:30	10	41	51	88	113	201	252
15:00 15:15	15	15	30	105	84	189	219
15:15 15:30	8	23	31	87	106	193	224
15:30 15:45	17	36	53	90	142	232	285
15:45 16:00	16	23	39	96	124	220	259
16:00 16:15	16	17	33	138	112	250	283
16:15 16:30	17	43	60	120	169	289	349
16:30 16:45	36	37	73	157	122	279	352
16:45 17:00	19	32	51	141	164	305	356
17:00 17:15	28	37	65	184	155	339	404
17:15 17:30	20	46	66	170	214	384	450
17:30 17:45	16	30	46	144	159	303	349
17:45 18:00	27	33	60	169	133	302	362
<b>Total</b> .....	<b>479</b>	<b>700</b>	<b>1179</b>	<b>3198</b>	<b>3340</b>	<b>6538</b>	<b>7717</b>



# Transportation Services - Traffic Services

## Turning Movement Count - Study Results

### BANK ST @ MACLAREN ST

**Survey Date:** Tuesday, April 16, 2019

**WO No:** 38538

**Start Time:** 07:00

**Device:** Miovision

### Full Study Heavy Vehicles

BANK ST					MACLAREN ST															Grand Total		
Time Period	Northbound			N TOT	Southbound			S TOT	STR TOT	Eastbound			E TOT	Westbound			W TOT	STR TOT				
	LT	ST	RT		LT	ST	RT			LT	ST	RT		LT	ST	RT						
07:00	07:15	1	9	0	10	0	5	0	5	15	0	0	0	0	0	0	0	0	0	0	0	15
07:15	07:30	0	5	0	5	0	8	0	8	13	0	0	0	0	0	0	0	0	0	0	0	13
07:30	07:45	0	3	0	3	0	4	0	4	7	0	0	0	0	0	0	0	0	0	0	0	7
07:45	08:00	1	4	0	5	0	5	0	5	10	0	0	0	0	0	0	0	0	0	0	0	10
08:00	08:15	1	4	0	5	0	4	0	4	9	0	0	0	0	0	0	0	0	0	0	0	9
08:15	08:30	1	6	0	7	0	6	2	8	15	0	0	0	0	1	1	0	2	2	0	0	17
08:30	08:45	0	5	0	5	0	7	0	7	12	0	0	0	0	0	0	0	0	0	0	0	12
08:45	09:00	0	3	0	3	0	4	1	5	8	0	0	0	0	0	0	0	0	0	0	0	8
09:00	09:15	1	5	0	6	0	4	0	4	10	0	0	0	0	0	0	0	0	0	0	0	10
09:15	09:30	1	3	1	5	0	9	1	10	15	0	0	0	0	0	0	0	0	0	0	0	15
09:30	09:45	0	8	0	8	0	8	1	9	17	0	0	0	0	0	0	0	0	0	0	0	17
09:45	10:00	1	6	0	7	0	2	1	3	10	0	0	0	0	0	0	0	0	0	0	0	10
11:30	11:45	0	5	0	5	0	8	2	10	15	0	0	0	0	0	0	0	0	0	0	0	15
11:45	12:00	0	5	0	5	0	4	0	4	9	0	0	0	0	0	1	0	1	1	0	0	10
12:00	12:15	0	9	0	9	0	2	1	3	12	0	0	0	0	0	1	0	1	1	0	0	13
12:15	12:30	0	5	0	5	0	9	0	9	14	0	0	0	0	0	1	0	1	1	0	0	15
12:30	12:45	0	7	0	7	0	7	0	7	14	0	0	0	0	0	1	1	2	2	0	0	16
12:45	13:00	1	5	0	6	0	3	0	3	9	0	0	0	0	0	0	0	0	0	0	0	9
13:00	13:15	1	3	0	4	0	9	0	9	13	0	0	0	0	0	1	0	1	1	0	0	14
13:15	13:30	1	4	0	5	0	9	2	11	16	0	0	0	0	0	0	0	0	0	0	0	16
15:00	15:15	0	4	0	4	0	7	0	7	11	0	0	0	0	0	0	0	0	0	0	0	11
15:15	15:30	0	6	0	6	0	2	1	3	9	0	0	0	0	0	0	0	0	0	0	0	9
15:30	15:45	1	2	0	3	0	5	0	5	8	0	0	0	0	0	1	0	1	1	0	0	9
15:45	16:00	0	3	0	3	0	9	0	9	12	0	0	0	0	1	0	0	1	1	0	0	13
16:00	16:15	1	3	0	4	0	3	0	3	7	0	0	0	0	0	0	0	0	0	0	0	7
16:15	16:30	0	6	0	6	0	4	0	4	10	0	0	0	0	0	0	0	0	0	0	0	10
16:30	16:45	0	4	0	4	0	7	0	7	11	0	0	0	0	0	0	0	0	0	0	0	11
16:45	17:00	0	4	0	4	0	2	0	2	6	0	0	0	0	0	0	0	0	0	0	0	6
17:00	17:15	0	3	0	3	0	3	0	3	6	0	0	0	0	0	0	0	0	0	0	0	6
17:15	17:30	0	6	0	6	0	4	0	4	10	0	0	0	0	0	0	0	0	0	0	0	10
17:30	17:45	0	3	0	3	0	7	0	7	10	0	0	0	0	0	0	0	0	0	0	0	10
17:45	18:00	0	4	0	4	0	5	0	5	9	0	0	0	0	0	0	0	0	0	0	0	9
Total:	None	12	152	1	165	0	175	12	187	352	0	0	0	0	2	7	1	10	10	0	0	362



# Transportation Services - Traffic Services

## Turning Movement Count - Study Results

### BANK ST @ MACLAREN ST

**Survey Date:** Tuesday, April 16, 2019

**WO No:** 38538

**Start Time:** 07:00

**Device:** Miovision

### Full Study 15 Minute U-Turn Total

BANK ST

MACLAREN ST

Time Period		Northbound U-Turn Total	Southbound U-Turn Total	Eastbound U-Turn Total	Westbound U-Turn Total	Total
07:00	07:15	0	0	0	0	0
07:15	07:30	0	0	0	0	0
07:30	07:45	0	0	0	0	0
07:45	08:00	0	0	0	0	0
08:00	08:15	0	0	0	0	0
08:15	08:30	0	0	0	0	0
08:30	08:45	0	0	0	0	0
08:45	09:00	0	0	0	0	0
09:00	09:15	0	0	0	0	0
09:15	09:30	0	0	0	0	0
09:30	09:45	0	0	0	0	0
09:45	10:00	0	0	0	0	0
11:30	11:45	0	0	0	0	0
11:45	12:00	0	0	0	0	0
12:00	12:15	0	0	0	0	0
12:15	12:30	0	0	0	0	0
12:30	12:45	0	0	0	0	0
12:45	13:00	0	0	0	0	0
13:00	13:15	1	0	0	0	1
13:15	13:30	0	1	0	0	1
15:00	15:15	0	0	0	0	0
15:15	15:30	0	0	0	0	0
15:30	15:45	0	0	0	0	0
15:45	16:00	0	0	0	0	0
16:00	16:15	0	0	0	0	0
16:15	16:30	0	0	0	0	0
16:30	16:45	0	0	0	0	0
16:45	17:00	0	0	0	0	0
17:00	17:15	0	0	0	0	0
17:15	17:30	0	0	0	0	0
17:30	17:45	0	0	0	0	0
17:45	18:00	0	0	0	0	0
Total		1	1	0	0	2

## Turning Movement Count - Study Results

### GILMOUR ST @ KENT ST


**Survey Date:** Wednesday, April 05, 2017

**WO No:** 36849

**Start Time:** 07:00

**Device:** Miovision

### Full Study Diagram

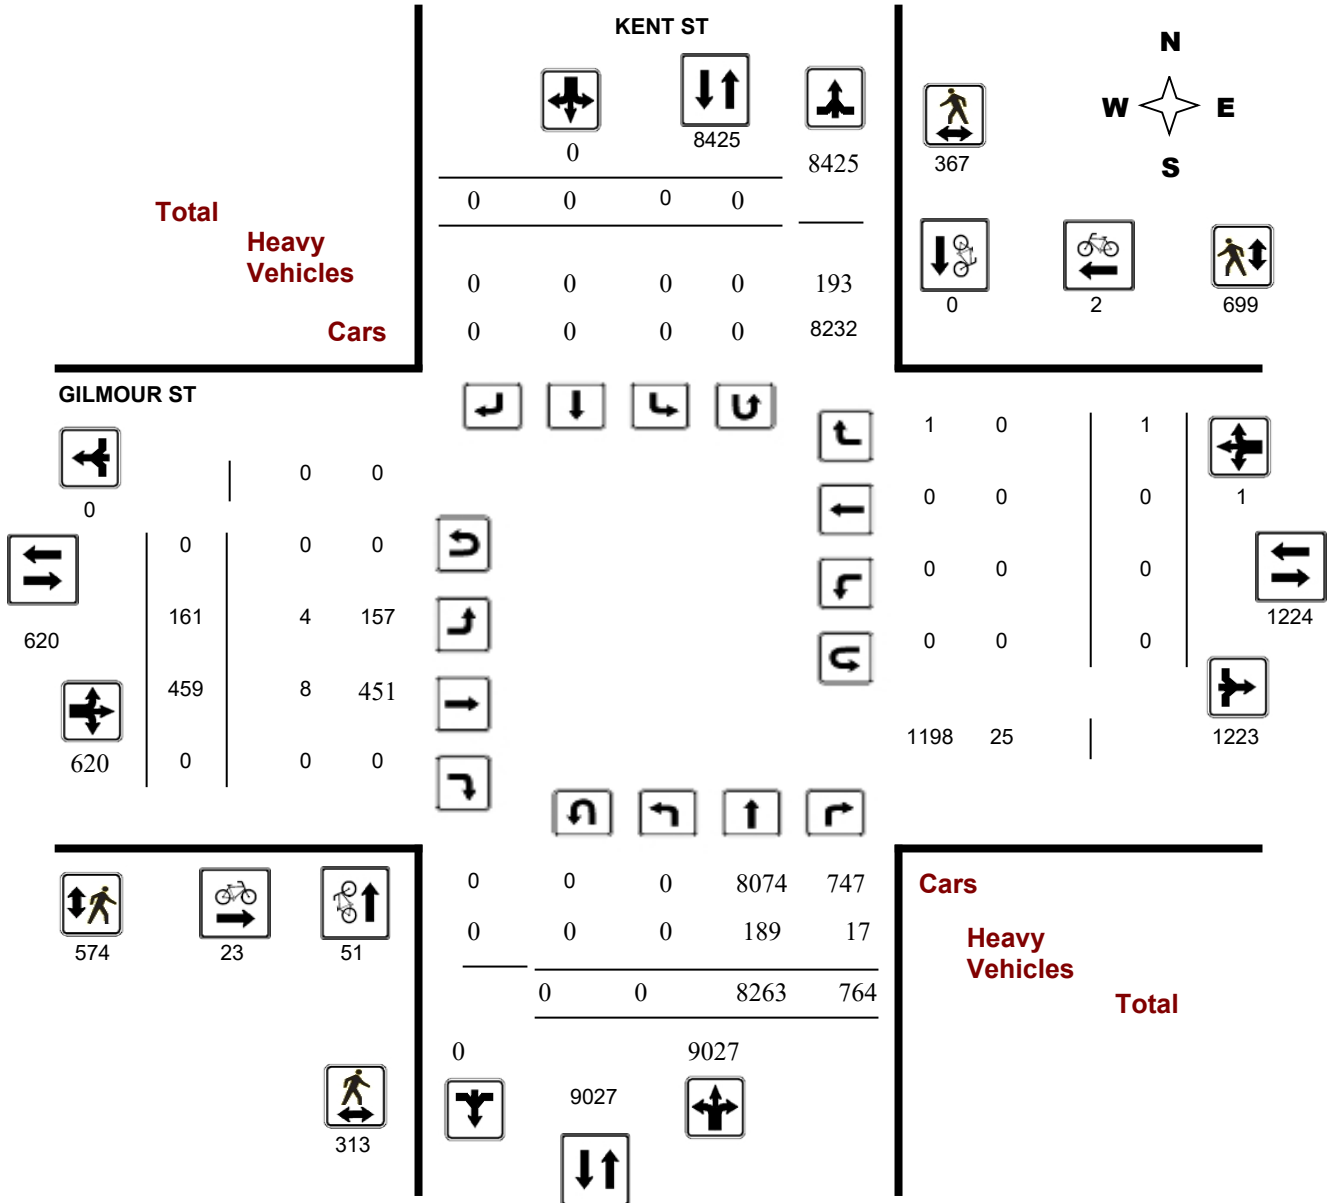

## Turning Movement Count - Study Results

### GILMOUR ST @ KENT ST


**Survey Date:** Wednesday, April 05, 2017

**WO No:** 36849

**Start Time:** 07:00

**Device:** Miovision

### Full Study Peak Hour Diagram

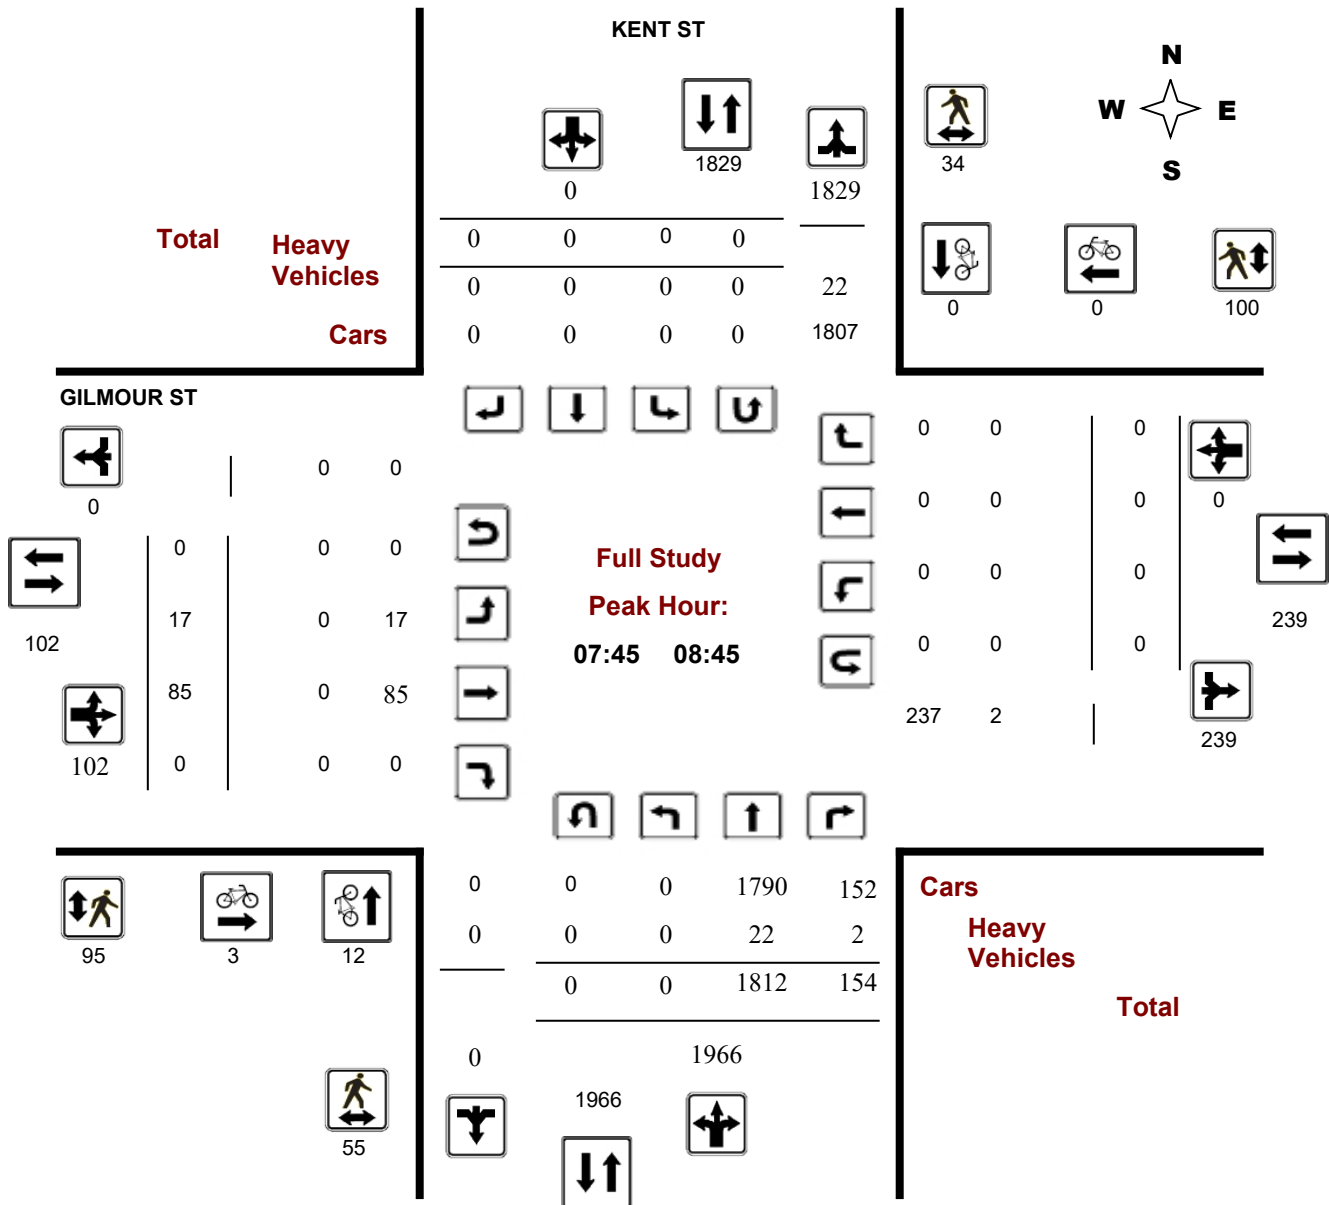

## Turning Movement Count - Peak Hour Diagram


### GILMOUR ST @ KENT ST

**Survey Date:** Wednesday, April 05, 2017

**Start Time:** 07:00

**WO No:** 36849

**Device:** Miovision

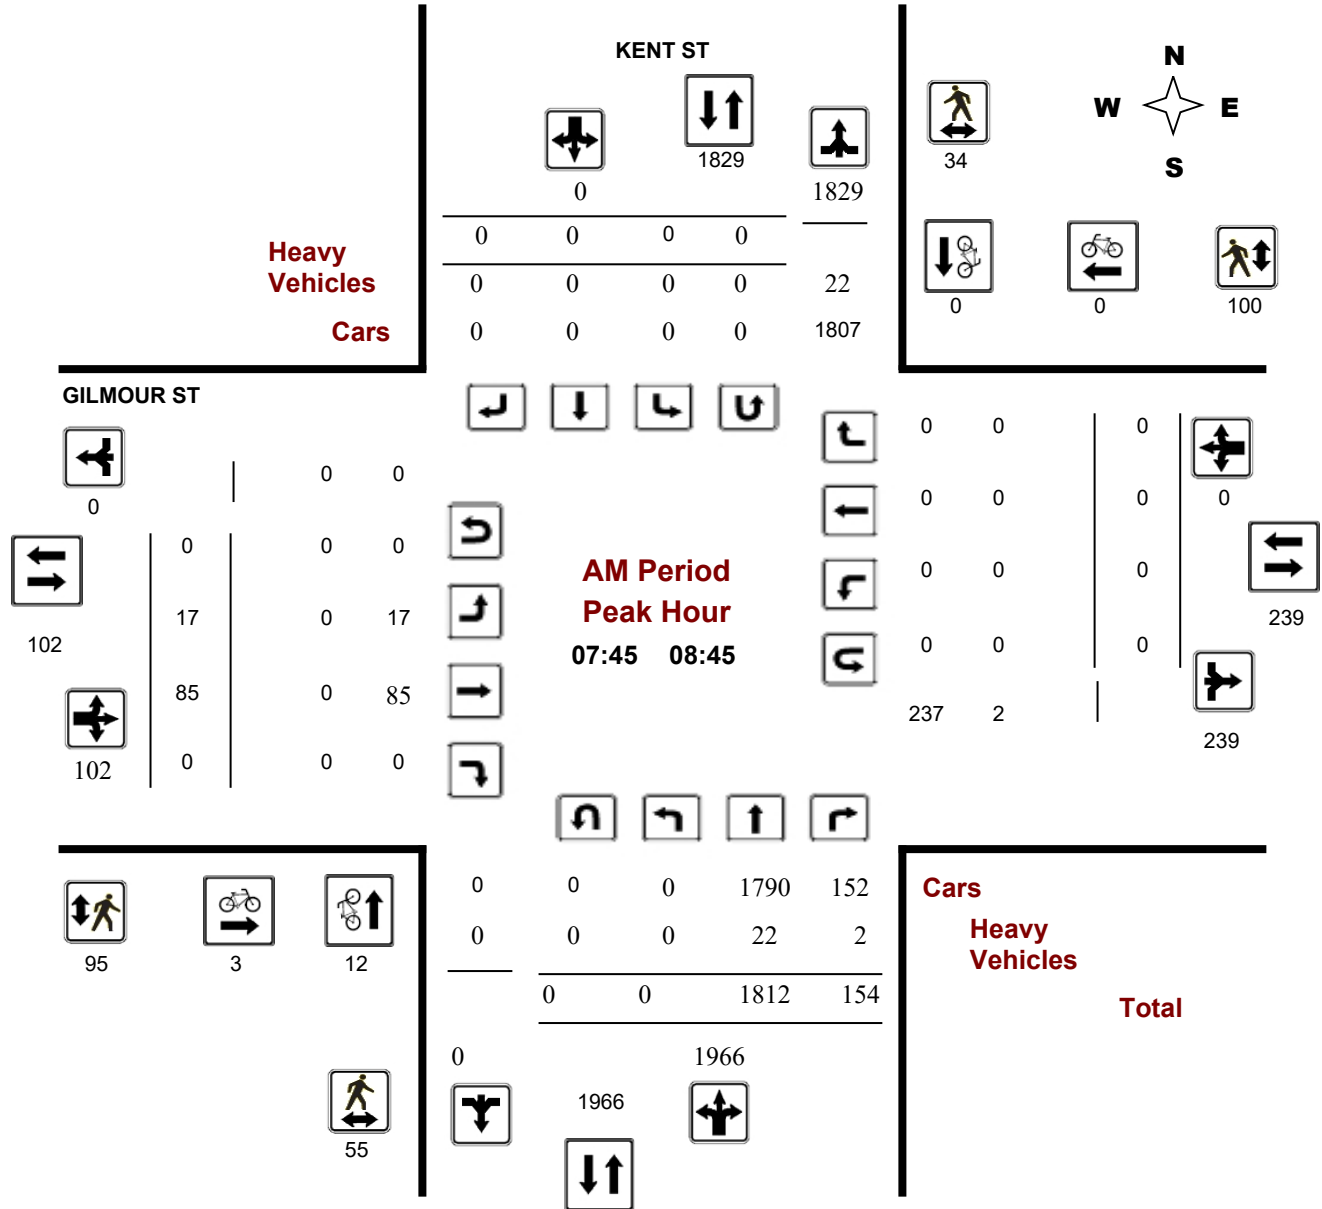



## Turning Movement Count - Peak Hour Diagram


### GILMOUR ST @ KENT ST

**Survey Date:** Wednesday, April 05, 2017

**WO No:** 36849

**Start Time:** 07:00

**Device:** Miovision

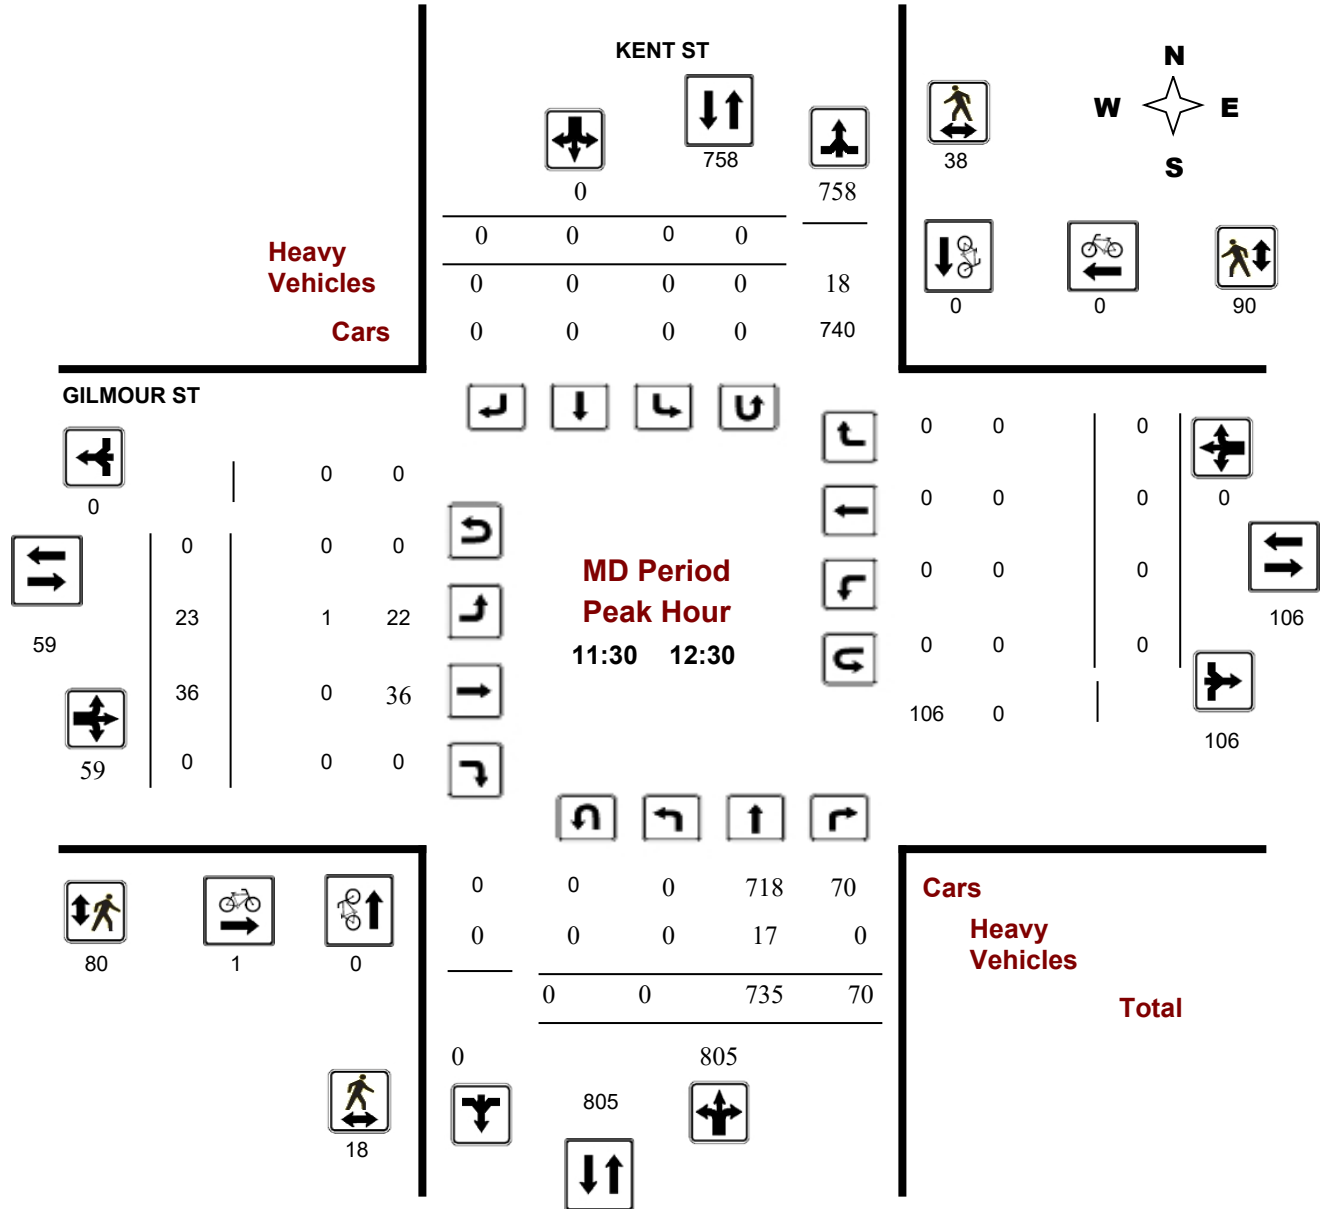

## Turning Movement Count - Peak Hour Diagram


### GILMOUR ST @ KENT ST

**Survey Date:** Wednesday, April 05, 2017

**Start Time:** 07:00

**WO No:** 36849

**Device:** Miovision

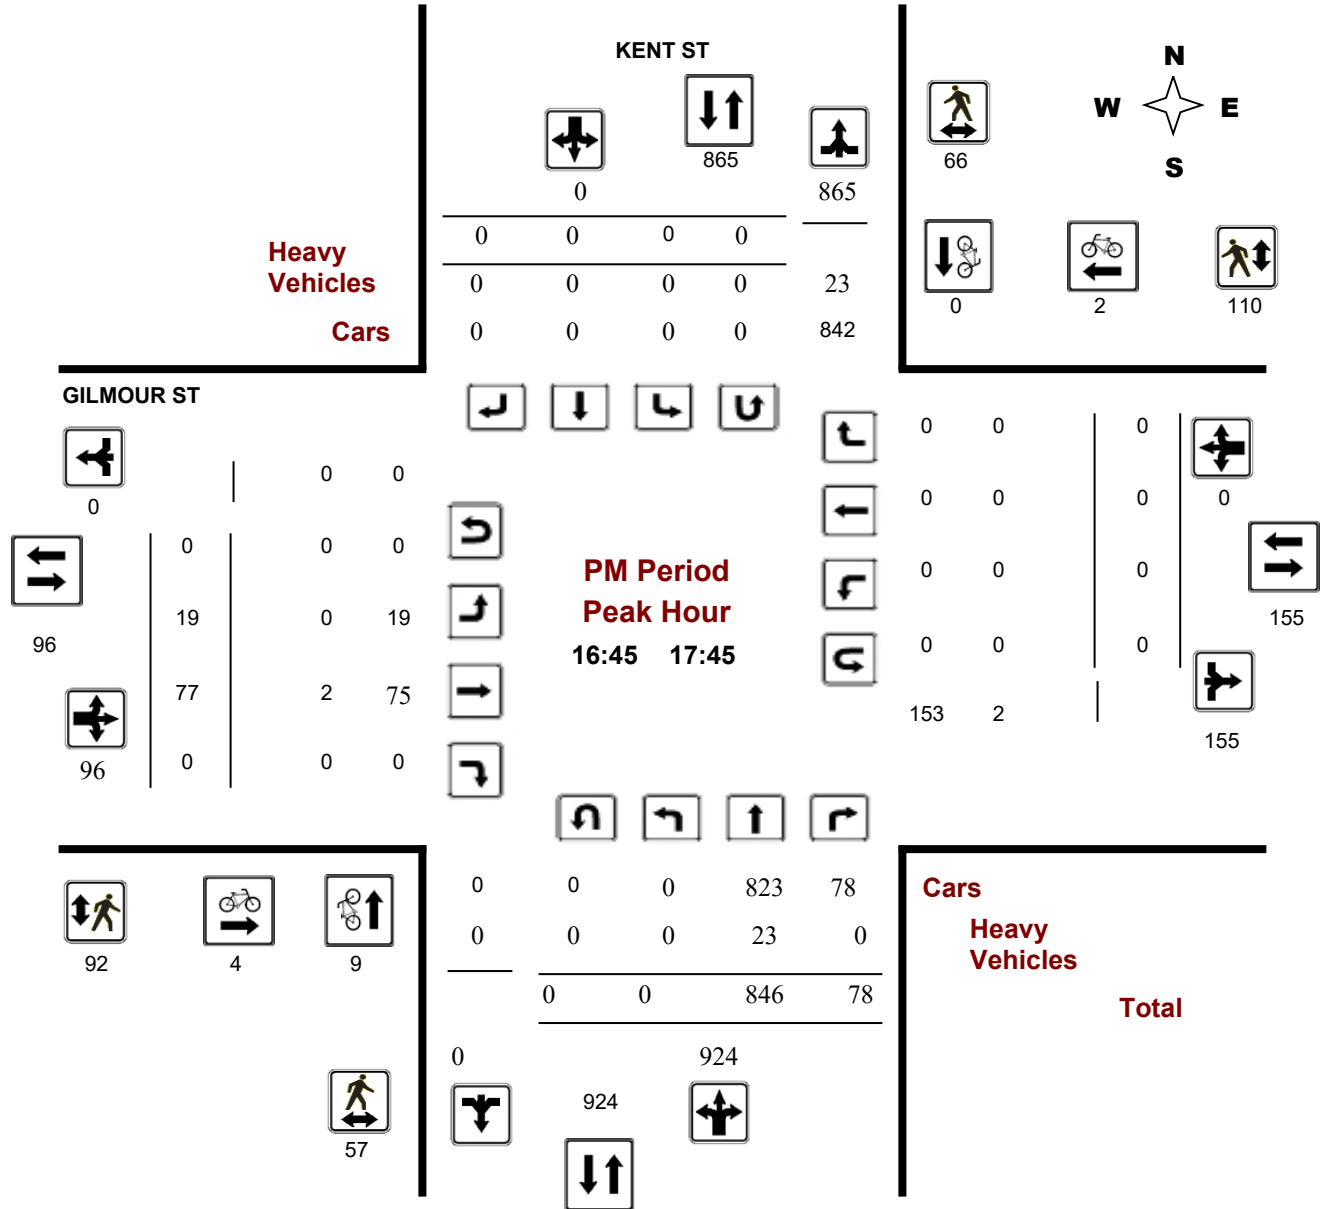

**Comments**



# Transportation Services - Traffic Services

## Turning Movement Count - Study Results

### GILMOUR ST @ KENT ST

**Survey Date:** Wednesday, April 05, 2017

**WO No:** 36849

**Start Time:** 07:00

**Device:** Miovision

### Full Study Summary (8 HR Standard)

**Survey Date:** Wednesday, April 05, 2017

**Total Observed U-Turns**  
 Northbound: 0      Southbound: 0  
 Eastbound: 0      Westbound: 0

**AADT Factor**  
 .90

Period	KENT ST									GILMOUR ST									Grand Total
	Northbound				Southbound					Eastbound			Westbound						
	LT	ST	RT	NB TOT	LT	ST	RT	SB TOT	STR TOT	LT	ST	RT	EB TOT	LT	ST	RT	WB TOT	STR TOT	
07:00 08:00	0	1629	91	1720	0	0	0	0	1720	14	41	0	55	0	0	0	0	55	1775
08:00 09:00	0	1767	156	1923	0	0	0	0	1923	19	98	0	117	0	0	0	0	117	2040
09:00 10:00	0	1075	123	1198	0	0	0	0	1198	30	46	0	76	0	0	1	1	77	1275
11:30 12:30	0	735	70	805	0	0	0	0	805	23	36	0	59	0	0	0	0	59	864
12:30 13:30	0	638	86	724	0	0	0	0	724	18	60	0	78	0	0	0	0	78	802
15:00 16:00	0	777	83	860	0	0	0	0	860	24	45	0	69	0	0	0	0	69	929
16:00 17:00	0	792	86	878	0	0	0	0	878	15	60	0	75	0	0	0	0	75	953
17:00 18:00	0	850	69	919	0	0	0	0	919	18	73	0	91	0	0	0	0	91	1010
<b>Sub Total</b>	0	8263	764	9027	0	0	0	0	9027	161	459	0	620	0	0	1	1	621	9648
<b>U Turns</b>	0			0	0			0	0	0			0	0			0	0	0
<b>Total</b>	0	8263	764	9027	0	0	0	0	9027	161	459	0	620	0	0	1	1	621	9648
<b>EQ 12Hr</b>	0	11486	1062	12548	0	0	0	0	12548	224	638	0	862	0	0	1	1	863	13411
Note: These values are calculated by multiplying the totals by the appropriate expansion factor.																<b>1.39</b>			
<b>AVG 12Hr</b>	0	10337	956	11293	0	0	0	0	11293	202	574	0	776	0	0	1	1	777	12070
Note: These volumes are calculated by multiplying the Equivalent 12 hr. totals by the AADT factor.																<b>.90</b>			
<b>AVG 24Hr</b>	0	13541	1252	14793	0	0	0	0	14793	265	752	0	1017	0	0	1	1	1018	15811
Note: These volumes are calculated by multiplying the Average Daily 12 hr. totals by 12 to 24 expansion factor.																<b>1.31</b>			

Note: U-Turns provided for approach totals. Refer to 'U-Turn' Report for specific breakdown.



# Transportation Services - Traffic Services

## Turning Movement Count - Study Results

### GILMOUR ST @ KENT ST

**Survey Date:** Wednesday, April 05, 2017

**WO No:** 36849

**Start Time:** 07:00

**Device:** Miovision

### Full Study 15 Minute Increments

Time Period	KENT ST									GILMOUR ST									Grand Total
	Northbound			Southbound			Eastbound			Westbound			W TOT	STR TOT					
	LT	ST	RT	N TOT	LT	ST	RT	S TOT	STR TOT	LT	ST	RT			E TOT	LT	ST	RT	
07:00-07:15	0	361	16	377	0	0	0	0	377	2	8	0	10	0	0	0	0	10	387
07:15-07:30	0	394	21	415	0	0	0	0	415	3	10	0	13	0	0	0	0	13	428
07:30-07:45	0	409	23	432	0	0	0	0	432	3	10	0	13	0	0	0	0	13	445
07:45-08:00	0	465	31	496	0	0	0	0	496	6	13	0	19	0	0	0	0	19	515
08:00-08:15	0	430	43	473	0	0	0	0	473	7	30	0	37	0	0	0	0	37	510
08:15-08:30	0	480	43	523	0	0	0	0	523	3	19	0	22	0	0	0	0	22	545
08:30-08:45	0	437	37	474	0	0	0	0	474	1	23	0	24	0	0	0	0	24	498
08:45-09:00	0	420	33	453	0	0	0	0	453	8	26	0	34	0	0	0	0	34	487
09:00-09:15	0	351	26	377	0	0	0	0	377	7	17	0	24	0	0	0	0	24	401
09:15-09:30	0	276	30	306	0	0	0	0	306	8	12	0	20	0	0	0	0	20	326
09:30-09:45	0	248	30	278	0	0	0	0	278	8	12	0	20	0	0	1	1	21	299
09:45-10:00	0	200	37	237	0	0	0	0	237	7	5	0	12	0	0	0	0	12	249
11:30-11:45	0	179	23	202	0	0	0	0	202	4	5	0	9	0	0	0	0	9	211
11:45-12:00	0	220	21	241	0	0	0	0	241	6	14	0	20	0	0	0	0	20	261
12:00-12:15	0	165	16	181	0	0	0	0	181	5	9	0	14	0	0	0	0	14	195
12:15-12:30	0	171	10	181	0	0	0	0	181	8	8	0	16	0	0	0	0	16	197
12:30-12:45	0	169	12	181	0	0	0	0	181	4	13	0	17	0	0	0	0	17	198
12:45-13:00	0	154	26	180	0	0	0	0	180	4	12	0	16	0	0	0	0	16	196
13:00-13:15	0	161	25	186	0	0	0	0	186	6	14	0	20	0	0	0	0	20	206
13:15-13:30	0	154	23	177	0	0	0	0	177	4	21	0	25	0	0	0	0	25	202
15:00-15:15	0	178	17	195	0	0	0	0	195	7	13	0	20	0	0	0	0	20	215
15:15-15:30	0	205	23	228	0	0	0	0	228	5	10	0	15	0	0	0	0	15	243
15:30-15:45	0	206	22	228	0	0	0	0	228	4	13	0	17	0	0	0	0	17	245
15:45-16:00	0	188	21	209	0	0	0	0	209	8	9	0	17	0	0	0	0	17	226
16:00-16:15	0	179	24	203	0	0	0	0	203	5	13	0	18	0	0	0	0	18	221
16:15-16:30	0	191	18	209	0	0	0	0	209	4	17	0	21	0	0	0	0	21	230
16:30-16:45	0	215	19	234	0	0	0	0	234	2	14	0	16	0	0	0	0	16	250
16:45-17:00	0	207	25	232	0	0	0	0	232	4	16	0	20	0	0	0	0	20	252
17:00-17:15	0	200	13	213	0	0	0	0	213	6	21	0	27	0	0	0	0	27	240
17:15-17:30	0	226	26	252	0	0	0	0	252	7	18	0	25	0	0	0	0	25	277
17:30-17:45	0	213	14	227	0	0	0	0	227	2	22	0	24	0	0	0	0	24	251
17:45-18:00	0	211	16	227	0	0	0	0	227	3	12	0	15	0	0	0	0	15	242
<b>Total:</b>	<b>0</b>	<b>8263</b>	<b>764</b>	<b>9027</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>9027</b>	<b>161</b>	<b>459</b>	<b>0</b>	<b>620</b>	<b>0</b>	<b>0</b>	<b>1</b>	<b>1</b>	<b>9027</b>	<b>9,648</b>

Note: U-Turns are included in Totals.



# Transportation Services - Traffic Services

## Turning Movement Count - Study Results

### GILMOUR ST @ KENT ST

**Survey Date:** Wednesday, April 05, 2017

**WO No:** 36849

**Start Time:** 07:00

**Device:** Miovision

### Full Study Cyclist Volume

Time Period	KENT ST			GILMOUR ST			Grand Total
	Northbound	Southbound	Street Total	Eastbound	Westbound	Street Total	
07:00 07:15	3	0	3	0	0	0	3
07:15 07:30	2	0	2	1	0	1	3
07:30 07:45	0	0	0	1	0	1	1
07:45 08:00	2	0	2	1	0	1	3
08:00 08:15	2	0	2	1	0	1	3
08:15 08:30	3	0	3	1	0	1	4
08:30 08:45	5	0	5	0	0	0	5
08:45 09:00	3	0	3	0	0	0	3
09:00 09:15	1	0	1	2	0	2	3
09:15 09:30	0	0	0	1	0	1	1
09:30 09:45	0	0	0	1	0	1	1
09:45 10:00	2	0	2	1	0	1	3
11:30 11:45	0	0	0	0	0	0	0
11:45 12:00	0	0	0	0	0	0	0
12:00 12:15	0	0	0	1	0	1	1
12:15 12:30	0	0	0	0	0	0	0
12:30 12:45	0	0	0	0	0	0	0
12:45 13:00	2	0	2	1	0	1	3
13:00 13:15	0	0	0	1	0	1	1
13:15 13:30	1	0	1	1	0	1	2
15:00 15:15	1	0	1	0	0	0	1
15:15 15:30	3	0	3	2	0	2	5
15:30 15:45	1	0	1	1	0	1	2
15:45 16:00	0	0	0	1	0	1	1
16:00 16:15	5	0	5	0	0	0	5
16:15 16:30	0	0	0	0	0	0	0
16:30 16:45	3	0	3	0	0	0	3
16:45 17:00	1	0	1	1	0	1	2
17:00 17:15	1	0	1	1	0	1	2
17:15 17:30	5	0	5	0	1	1	6
17:30 17:45	2	0	2	2	1	3	5
17:45 18:00	3	0	3	1	0	1	4
<b>Total</b>	<b>51</b>	<b>0</b>	<b>51</b>	<b>23</b>	<b>2</b>	<b>25</b>	<b>76</b>



# Transportation Services - Traffic Services

## Turning Movement Count - Study Results

### GILMOUR ST @ KENT ST

**Survey Date:** Wednesday, April 05, 2017

**WO No:** 36849

**Start Time:** 07:00

**Device:** Miovision

### Full Study Pedestrian Volume

#### KENT ST

#### GILMOUR ST

Time Period	NB Approach (E or W Crossing)	SB Approach (E or W Crossing)	Total	EB Approach (N or S Crossing)	WB Approach (N or S Crossing)	Total	Grand Total
07:00 07:15	3	9	12	3	13	16	28
07:15 07:30	5	7	12	9	6	15	27
07:30 07:45	1	5	6	5	18	23	29
07:45 08:00	12	8	20	14	22	36	56
08:00 08:15	10	8	18	21	22	43	61
08:15 08:30	15	7	22	32	24	56	78
08:30 08:45	18	11	29	28	32	60	89
08:45 09:00	18	9	27	17	21	38	65
09:00 09:15	11	6	17	19	17	36	53
09:15 09:30	15	10	25	14	11	25	50
09:30 09:45	9	7	16	17	19	36	52
09:45 10:00	8	13	21	14	20	34	55
11:30 11:45	3	9	12	12	17	29	41
11:45 12:00	4	10	14	22	30	52	66
12:00 12:15	4	9	13	19	23	42	55
12:15 12:30	7	10	17	27	20	47	64
12:30 12:45	11	14	25	27	30	57	82
12:45 13:00	8	13	21	16	23	39	60
13:00 13:15	9	15	24	12	16	28	52
13:15 13:30	9	12	21	8	17	25	46
15:00 15:15	8	9	17	16	20	36	53
15:15 15:30	13	20	33	18	18	36	69
15:30 15:45	13	13	26	25	24	49	75
15:45 16:00	9	17	26	13	31	44	70
16:00 16:15	6	11	17	14	22	36	53
16:15 16:30	8	16	24	17	28	45	69
16:30 16:45	11	17	28	28	31	59	87
16:45 17:00	15	21	36	23	45	68	104
17:00 17:15	15	17	32	18	29	47	79
17:15 17:30	20	11	31	28	19	47	78
17:30 17:45	7	17	24	23	17	40	64
17:45 18:00	8	6	14	15	14	29	43
<b>Total</b> .....	<b>313</b>	<b>367</b>	<b>680</b>	<b>574</b>	<b>699</b>	<b>1273</b>	<b>1953</b>



# Transportation Services - Traffic Services

## Turning Movement Count - Study Results

### GILMOUR ST @ KENT ST

**Survey Date:** Wednesday, April 05, 2017

**WO No:** 36849

**Start Time:** 07:00

**Device:** Miovision

### Full Study Heavy Vehicles

KENT ST					GILMOUR ST															Grand Total		
Time Period	Northbound			N TOT	Southbound			S TOT	STR TOT	Eastbound			E TOT	Westbound			W TOT	STR TOT				
	LT	ST	RT		LT	ST	RT			LT	ST	RT		LT	ST	RT			LT		ST	RT
07:00	07:15	0	3	1	4	0	0	0	0	4	0	0	0	0	0	0	0	0	0	0	0	4
07:15	07:30	0	7	1	8	0	0	0	0	8	0	0	0	0	0	0	0	0	0	0	0	8
07:30	07:45	0	6	0	6	0	0	0	0	6	0	0	0	0	0	0	0	0	0	0	0	6
07:45	08:00	0	6	0	6	0	0	0	0	6	0	0	0	0	0	0	0	0	0	0	0	6
08:00	08:15	0	5	0	5	0	0	0	0	5	0	0	0	0	0	0	0	0	0	0	0	5
08:15	08:30	0	4	1	5	0	0	0	0	5	0	0	0	0	0	0	0	0	0	0	0	5
08:30	08:45	0	7	1	8	0	0	0	0	8	0	0	0	0	0	0	0	0	0	0	0	8
08:45	09:00	0	8	0	8	0	0	0	0	8	0	1	0	1	0	0	0	0	0	0	1	9
09:00	09:15	0	8	1	9	0	0	0	0	9	0	0	0	0	0	0	0	0	0	0	0	9
09:15	09:30	0	5	0	5	0	0	0	0	5	0	0	0	0	0	0	0	0	0	0	0	5
09:30	09:45	0	10	3	13	0	0	0	0	13	0	0	0	0	0	0	0	0	0	0	0	13
09:45	10:00	0	5	1	6	0	0	0	0	6	1	0	0	1	0	0	0	0	0	0	1	7
11:30	11:45	0	6	0	6	0	0	0	0	6	0	0	0	0	0	0	0	0	0	0	0	6
11:45	12:00	0	6	0	6	0	0	0	0	6	0	0	0	0	0	0	0	0	0	0	0	6
12:00	12:15	0	3	0	3	0	0	0	0	3	0	0	0	0	0	0	0	0	0	0	0	3
12:15	12:30	0	2	0	2	0	0	0	0	2	1	0	0	1	0	0	0	0	0	0	1	3
12:30	12:45	0	3	0	3	0	0	0	0	3	0	0	0	0	0	0	0	0	0	0	0	3
12:45	13:00	0	4	0	4	0	0	0	0	4	0	0	0	0	0	0	0	0	0	0	0	4
13:00	13:15	0	5	0	5	0	0	0	0	5	0	1	0	1	0	0	0	0	0	0	1	6
13:15	13:30	0	5	1	6	0	0	0	0	6	0	0	0	0	0	0	0	0	0	0	0	6
15:00	15:15	0	6	2	8	0	0	0	0	8	1	1	0	2	0	0	0	0	0	0	2	10
15:15	15:30	0	12	0	12	0	0	0	0	12	0	1	0	1	0	0	0	0	0	0	1	13
15:30	15:45	0	12	0	12	0	0	0	0	12	0	0	0	0	0	0	0	0	0	0	0	12
15:45	16:00	0	3	2	5	0	0	0	0	5	1	1	0	2	0	0	0	0	0	0	2	7
16:00	16:15	0	5	2	7	0	0	0	0	7	0	0	0	0	0	0	0	0	0	0	0	7
16:15	16:30	0	11	0	11	0	0	0	0	11	0	1	0	1	0	0	0	0	0	0	1	12
16:30	16:45	0	6	1	7	0	0	0	0	7	0	0	0	0	0	0	0	0	0	0	0	7
16:45	17:00	0	8	0	8	0	0	0	0	8	0	0	0	0	0	0	0	0	0	0	0	8
17:00	17:15	0	5	0	5	0	0	0	0	5	0	1	0	1	0	0	0	0	0	0	1	6
17:15	17:30	0	5	0	5	0	0	0	0	5	0	0	0	0	0	0	0	0	0	0	0	5
17:30	17:45	0	5	0	5	0	0	0	0	5	0	1	0	1	0	0	0	0	0	0	1	6
17:45	18:00	0	3	0	3	0	0	0	0	3	0	0	0	0	0	0	0	0	0	0	0	3
Total:	None	0	189	17	206	0	0	0	0	206	4	8	0	12	0	0	0	0	0	12	218	



# Transportation Services - Traffic Services

## Turning Movement Count - Study Results

### GILMOUR ST @ KENT ST

**Survey Date:** Wednesday, April 05, 2017

**WO No:** 36849

**Start Time:** 07:00

**Device:** Miovision

### Full Study 15 Minute U-Turn Total

KENT ST

GILMOUR ST

Time Period		Northbound U-Turn Total	Southbound U-Turn Total	Eastbound U-Turn Total	Westbound U-Turn Total	Total
07:00	07:15	0	0	0	0	0
07:15	07:30	0	0	0	0	0
07:30	07:45	0	0	0	0	0
07:45	08:00	0	0	0	0	0
08:00	08:15	0	0	0	0	0
08:15	08:30	0	0	0	0	0
08:30	08:45	0	0	0	0	0
08:45	09:00	0	0	0	0	0
09:00	09:15	0	0	0	0	0
09:15	09:30	0	0	0	0	0
09:30	09:45	0	0	0	0	0
09:45	10:00	0	0	0	0	0
11:30	11:45	0	0	0	0	0
11:45	12:00	0	0	0	0	0
12:00	12:15	0	0	0	0	0
12:15	12:30	0	0	0	0	0
12:30	12:45	0	0	0	0	0
12:45	13:00	0	0	0	0	0
13:00	13:15	0	0	0	0	0
13:15	13:30	0	0	0	0	0
15:00	15:15	0	0	0	0	0
15:15	15:30	0	0	0	0	0
15:30	15:45	0	0	0	0	0
15:45	16:00	0	0	0	0	0
16:00	16:15	0	0	0	0	0
16:15	16:30	0	0	0	0	0
16:30	16:45	0	0	0	0	0
16:45	17:00	0	0	0	0	0
17:00	17:15	0	0	0	0	0
17:15	17:30	0	0	0	0	0
17:30	17:45	0	0	0	0	0
17:45	18:00	0	0	0	0	0
Total		0	0	0	0	0





# Transportation Services - Traffic Services

## Turning Movement Count - Full Study Peak Hour Diagram


### GILMOUR ST @ O'CONNOR ST

**Survey Date:** Tuesday, March 21, 2017

**Start Time:** 07:00

**WO No:** 36785

**Device:** Miovision

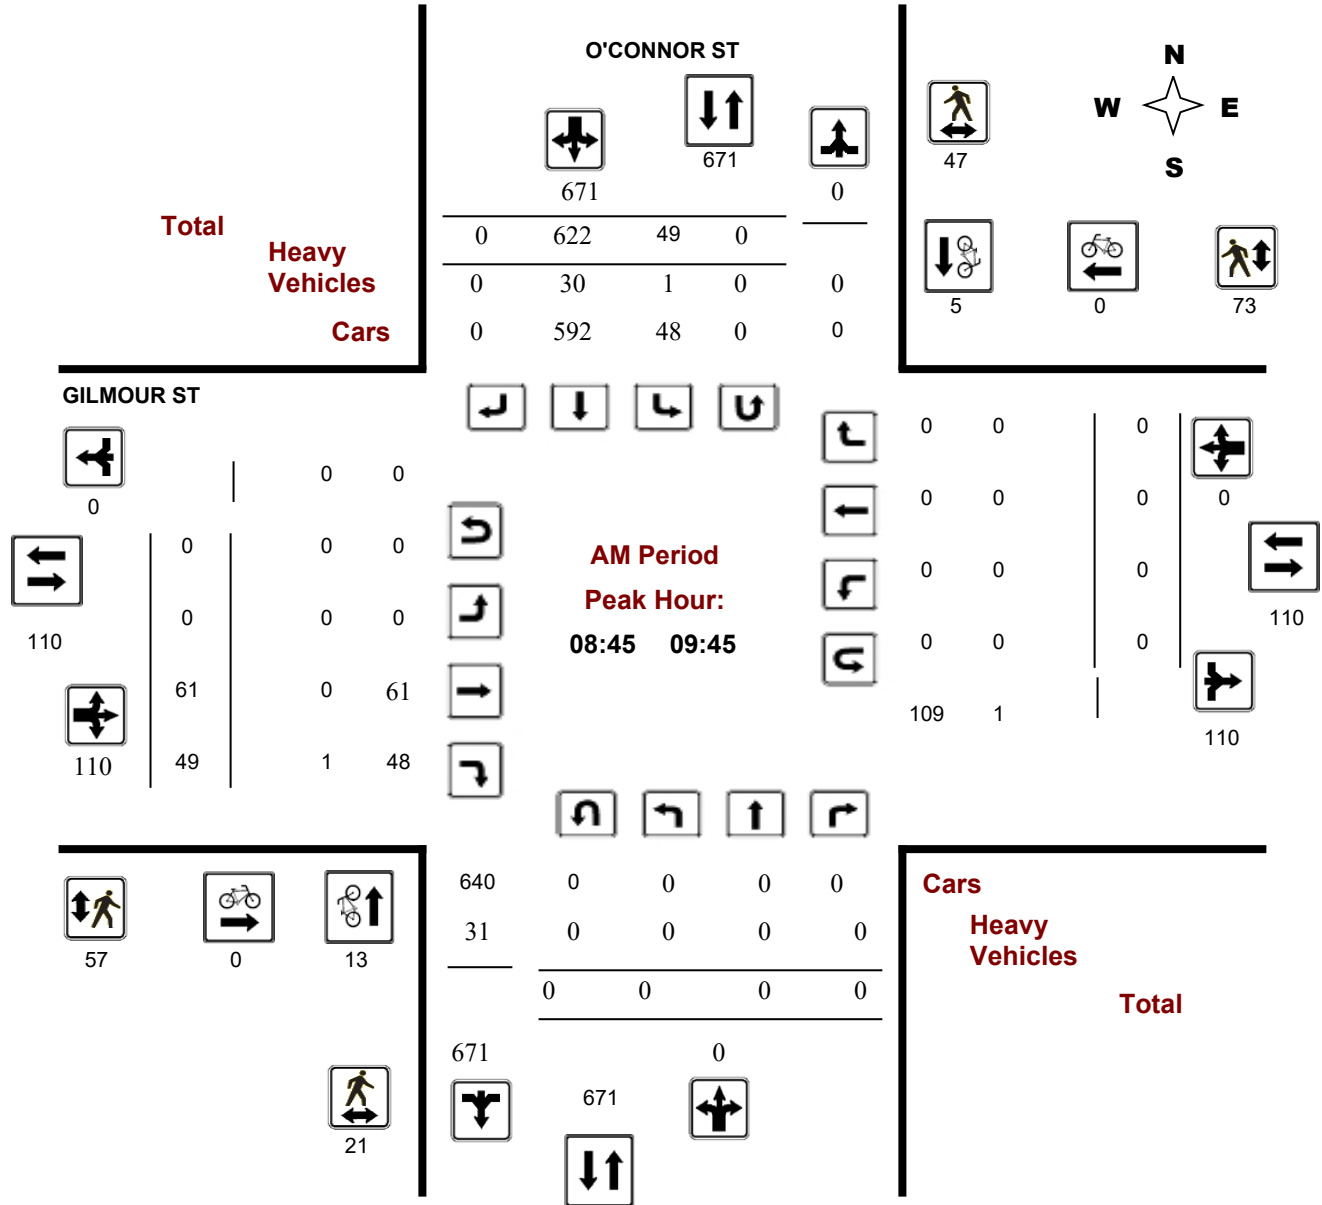


**Comments**

**Survey Date:** Tuesday, March 21, 2017

**Start Time:** 07:00

**WO No:** 36785

**Device:** Miovision

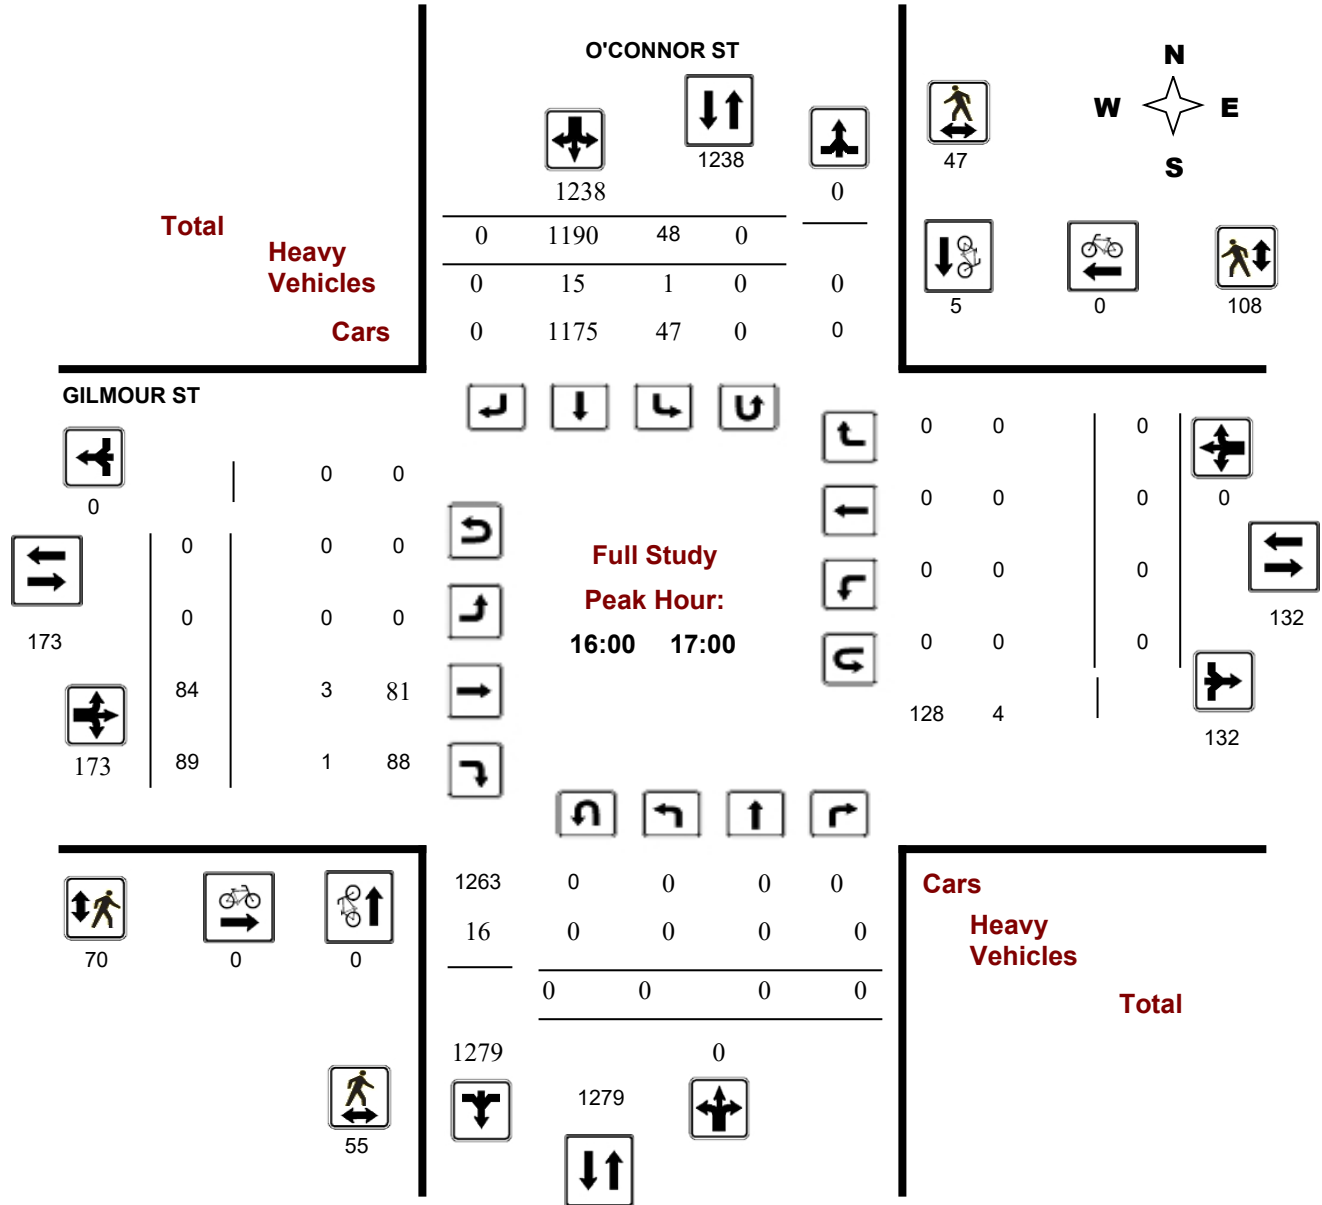


**Comments**

**Survey Date:** Tuesday, March 21, 2017

**Start Time:** 07:00

**WO No:** 36785

**Device:** Miovision

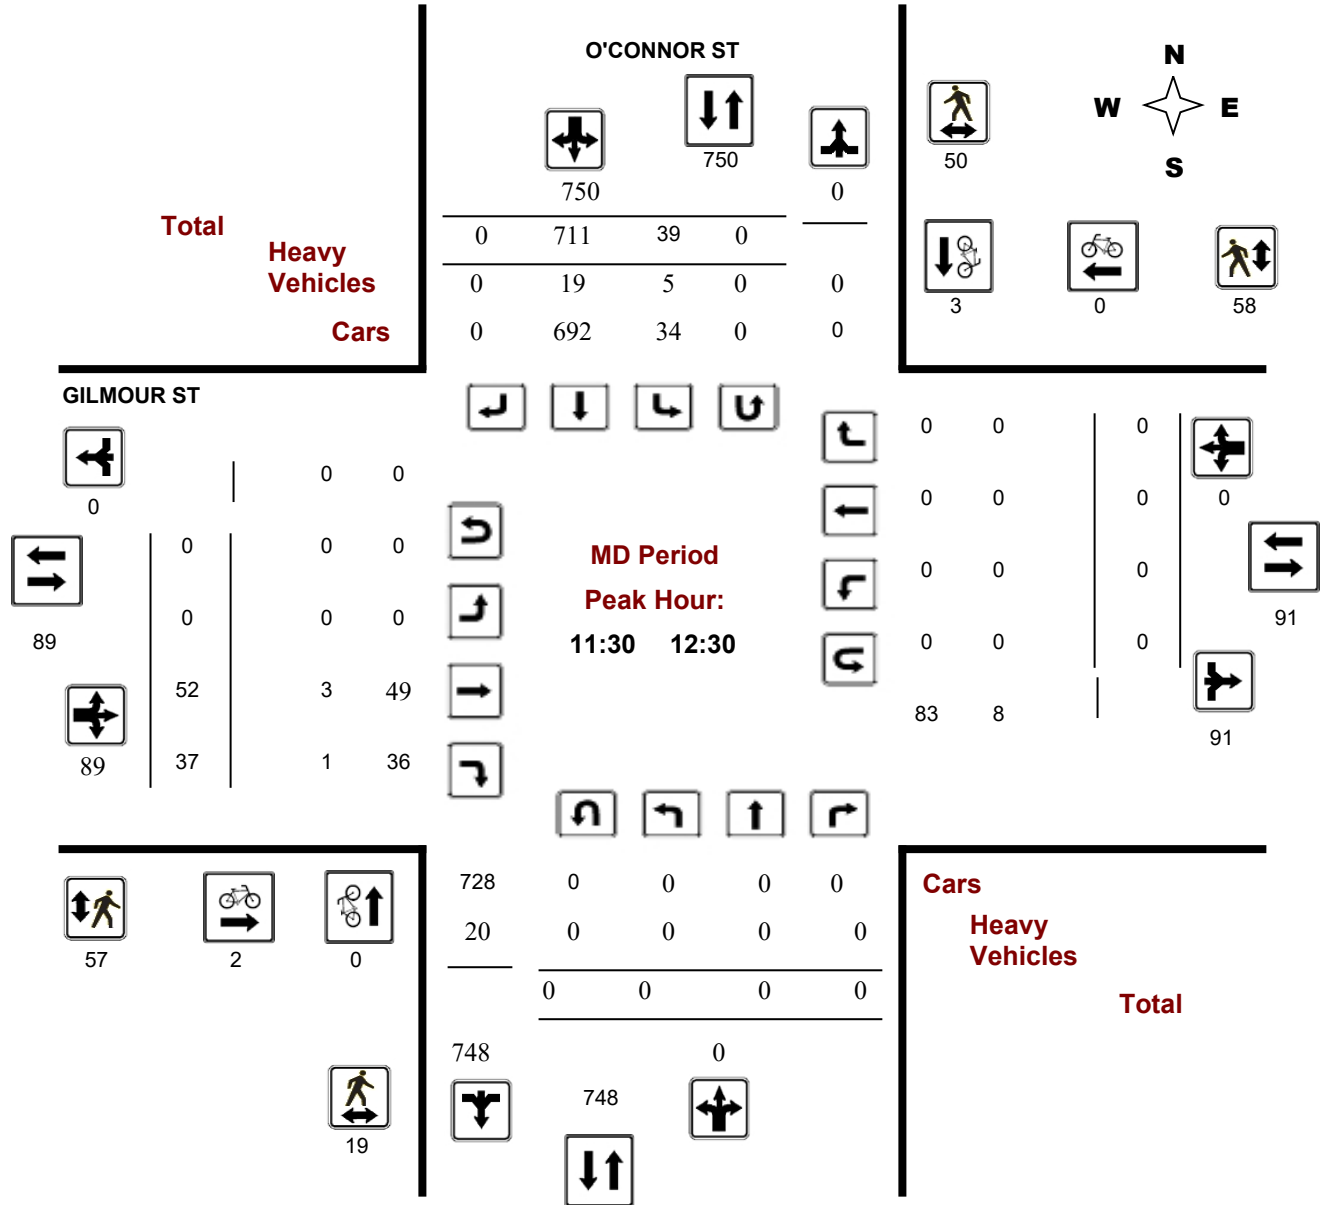


**Survey Date:** Tuesday, March 21, 2017

**Start Time:** 07:00

**WO No:** 36785

**Device:** Miovision

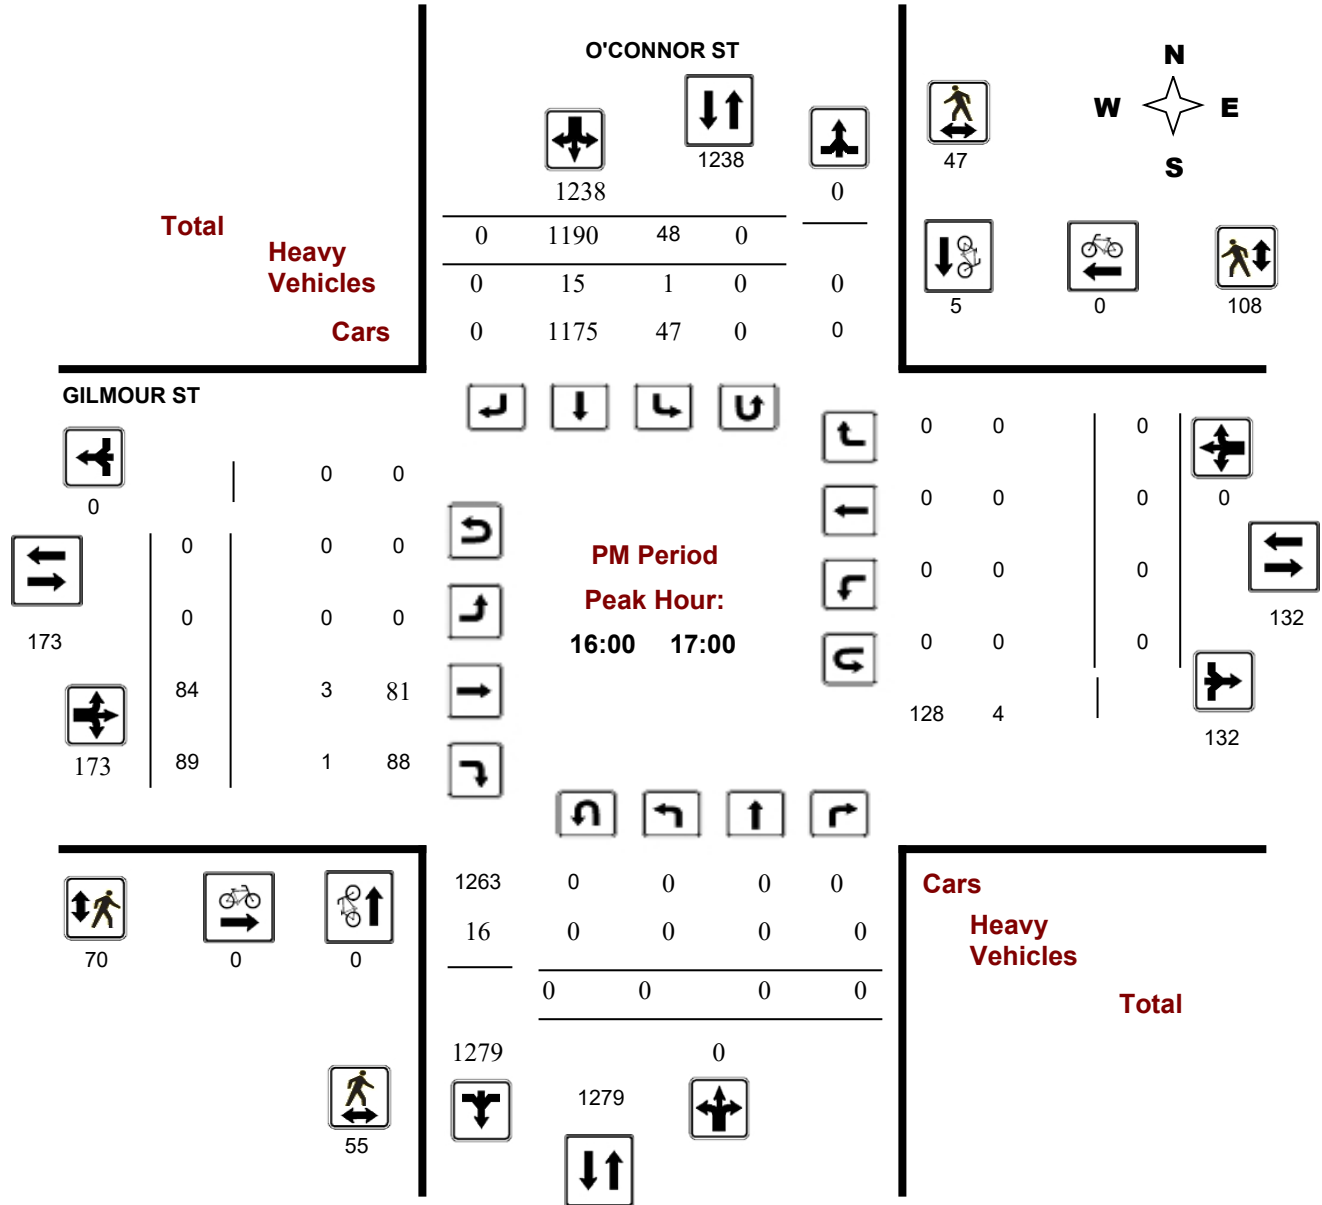

# Transportation Services - Traffic Services


## Turning Movement Count - Full Study Diagram

### GILMOUR ST @ O'CONNOR ST

**Survey Date:** Tuesday, March 21, 2017

**WO#:** 36785

**Device:** Miovision

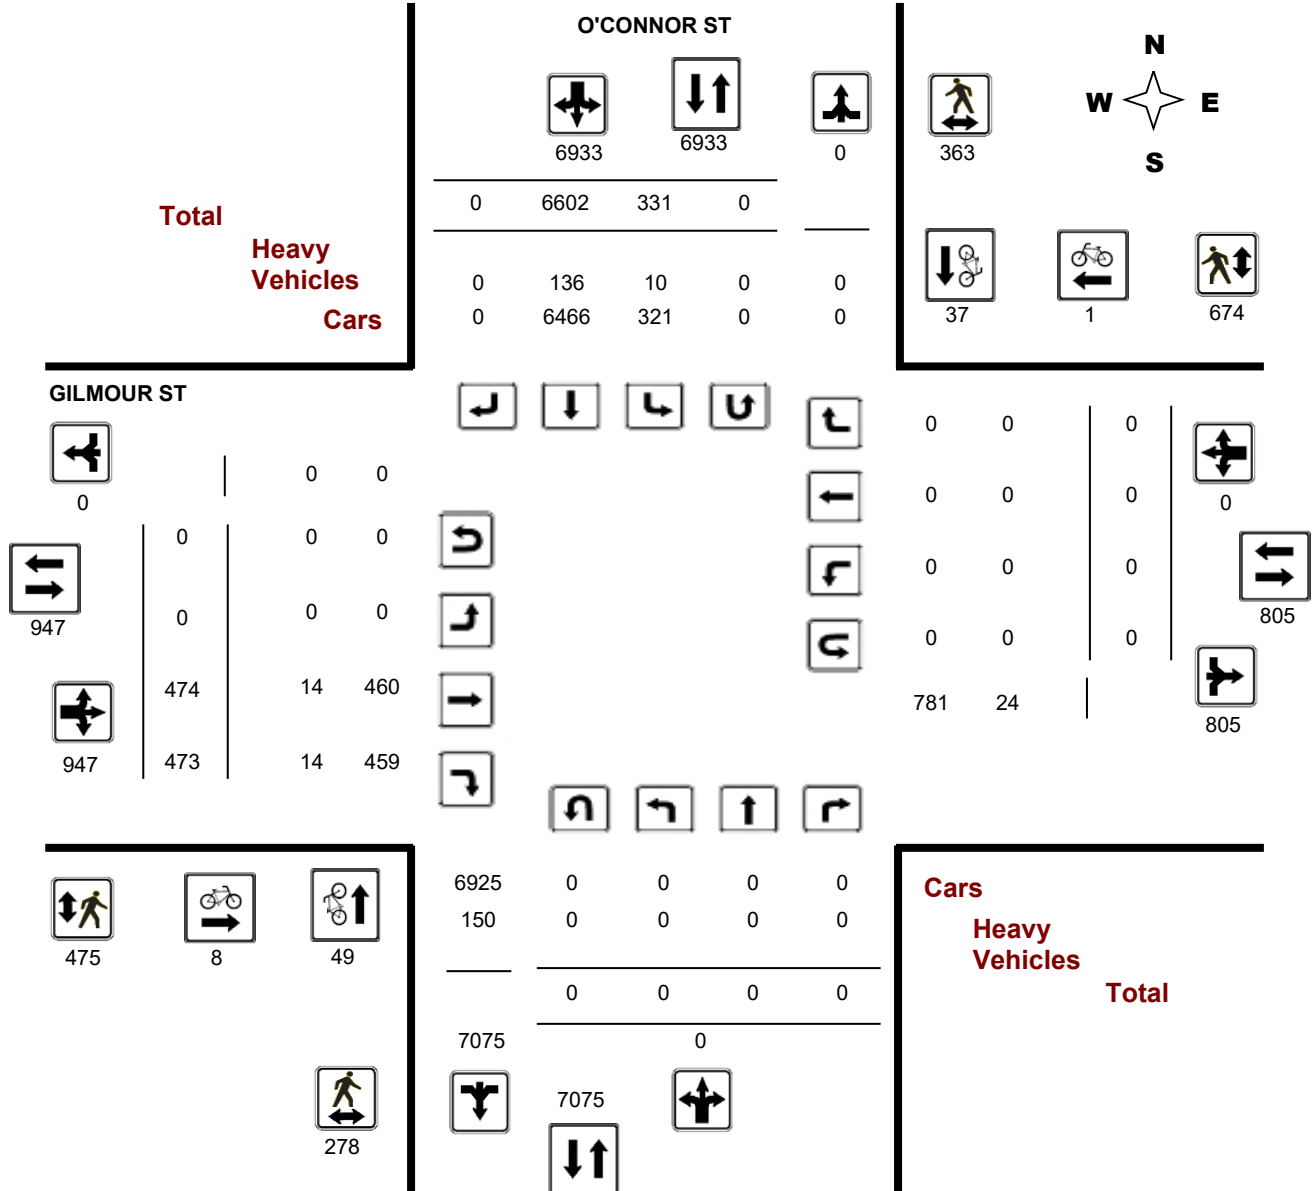

**Comments**

## Turning Movement Count - Full Study Summary Report

### GILMOUR ST @ O'CONNOR ST

**Survey Date:** Tuesday, March 21, 2017

**Total Observed U-Turns**

Northbound: 0      Southbound: 0  
Eastbound: 0      Westbound: 0

**AADT Factor**

1.00

**Full Study**

Period	O'CONNOR ST								GILMOUR ST								Grand Total		
	Northbound				Southbound				Eastbound				Westbound						
	LT	ST	RT	NB TOT	LT	ST	RT	SB TOT	STR TOT	LT	ST	RT	EB TOT	LT	ST	RT		WB TOT	STR TOT
07:00 08:00	0	0	0	0	39	555	0	594	594	0	39	26	65	0	0	0	0	65	659
08:00 09:00	0	0	0	0	45	601	0	646	646	0	79	43	122	0	0	0	0	122	768
09:00 10:00	0	0	0	0	51	619	0	670	670	0	52	41	93	0	0	0	0	93	763
11:30 12:30	0	0	0	0	39	711	0	750	750	0	52	37	89	0	0	0	0	89	839
12:30 13:30	0	0	0	0	25	615	0	640	640	0	41	50	91	0	0	0	0	91	731
15:00 16:00	0	0	0	0	38	1192	0	1230	1230	0	54	96	150	0	0	0	0	150	1380
16:00 17:00	0	0	0	0	48	1190	0	1238	1238	0	84	89	173	0	0	0	0	173	1411
17:00 18:00	0	0	0	0	46	1119	0	1165	1165	0	73	91	164	0	0	0	0	164	1329
<b>Sub Total</b>	0	0	0	0	331	6602	0	6933	6933	0	474	473	947	0	0	0	0	947	7880
<b>U Turns</b>				0				0	0				0				0	0	0
<b>Total</b>	0	0	0	0	331	6602	0	6933	6933	0	474	473	947	0	0	0	0	947	7880
<b>EQ 12Hr</b>	0	0	0	0	460	9177	0	9637	9637	0	659	657	1316	0	0	0	0	1316	10953
Note: These values are calculated by multiplying the totals by the appropriate expansion factor.													<b>1.39</b>						
<b>AVG 12Hr</b>	0	0	0	0	460	9177	0	9637	9637	0	659	657	1316	0	0	0	0	1316	10953
Note: These volumes are calculated by multiplying the Equivalent 12 hr. totals by the AADT factor.													<b>1.00</b>						
<b>AVG 24Hr</b>	0	0	0	0	603	12022	0	12624	12624	0	863	861	1724	0	0	0	0	1724	14348
Note: These volumes are calculated by multiplying the Average Daily 12 hr. totals by 12 to 24 expansion factor.													<b>1.31</b>						

**Comments:**

Note: U-Turns provided for approach totals. Refer to 'U-Turn' Report for specific breakdown.



Turning Movement Count - 15 Minute Summary Report

GILMOUR ST @ O'CONNOR ST

Survey Date: Tuesday, March 21, 2017

Total Observed U-Turns

Northbound: 0 Southbound: 0  
Eastbound: 0 Westbound: 0

Time Period	O'CONNOR ST						GILMOUR ST						Grand Total						
	Northbound			Southbound			Eastbound			Westbound									
	LT	ST	RT	N TOT	LT	ST	RT	S TOT	STR TOT	LT	ST	RT	E TOT	LT	ST	RT	W TOT	STR TOT	
07:00 07:15	0	0	0	0	8	103	0	111	111	0	1	2	3	0	0	0	0	3	114
07:15 07:30	0	0	0	0	12	129	0	141	141	0	9	3	12	0	0	0	0	12	153
07:30 07:45	0	0	0	0	10	162	0	172	172	0	15	12	27	0	0	0	0	27	199
07:45 08:00	0	0	0	0	9	161	0	170	170	0	14	9	23	0	0	0	0	23	193
08:00 08:15	0	0	0	0	14	156	0	170	170	0	24	9	33	0	0	0	0	33	203
08:15 08:30	0	0	0	0	13	127	0	140	140	0	19	10	29	0	0	0	0	29	169
08:30 08:45	0	0	0	0	7	159	0	166	166	0	14	7	21	0	0	0	0	21	187
08:45 09:00	0	0	0	0	11	159	0	170	170	0	22	17	39	0	0	0	0	39	209
09:00 09:15	0	0	0	0	13	158	0	171	171	0	15	9	24	0	0	0	0	24	195
09:15 09:30	0	0	0	0	11	137	0	148	148	0	20	11	31	0	0	0	0	31	179
09:30 09:45	0	0	0	0	14	168	0	182	182	0	4	12	16	0	0	0	0	16	198
09:45 10:00	0	0	0	0	13	156	0	169	169	0	13	9	22	0	0	0	0	22	191
11:30 11:45	0	0	0	0	6	184	0	190	190	0	13	5	18	0	0	0	0	18	208
11:45 12:00	0	0	0	0	17	178	0	195	195	0	9	11	20	0	0	0	0	20	215
12:00 12:15	0	0	0	0	8	179	0	187	187	0	19	9	28	0	0	0	0	28	215
12:15 12:30	0	0	0	0	8	170	0	178	178	0	11	12	23	0	0	0	0	23	201
12:30 12:45	0	0	0	0	7	152	0	159	159	0	11	15	26	0	0	0	0	26	185
12:45 13:00	0	0	0	0	10	160	0	170	170	0	11	15	26	0	0	0	0	26	196
13:00 13:15	0	0	0	0	3	154	0	157	157	0	7	9	16	0	0	0	0	16	173
13:15 13:30	0	0	0	0	5	149	0	154	154	0	12	11	23	0	0	0	0	23	177
15:00 15:15	0	0	0	0	5	335	0	340	340	0	19	30	49	0	0	0	0	49	389
15:15 15:30	0	0	0	0	14	288	0	302	302	0	14	20	34	0	0	0	0	34	336
15:30 15:45	0	0	0	0	7	277	0	284	284	0	10	23	33	0	0	0	0	33	317
15:45 16:00	0	0	0	0	12	292	0	304	304	0	11	23	34	0	0	0	0	34	338
16:00 16:15	0	0	0	0	16	298	0	314	314	0	22	29	51	0	0	0	0	51	365
16:15 16:30	0	0	0	0	13	305	0	318	318	0	18	22	40	0	0	0	0	40	358
16:30 16:45	0	0	0	0	7	291	0	298	298	0	19	14	33	0	0	0	0	33	331
16:45 17:00	0	0	0	0	12	296	0	308	308	0	25	24	49	0	0	0	0	49	357
17:00 17:15	0	0	0	0	16	303	0	319	319	0	21	24	45	0	0	0	0	45	364
17:15 17:30	0	0	0	0	11	288	0	299	299	0	28	23	51	0	0	0	0	51	350
17:30 17:45	0	0	0	0	13	285	0	298	298	0	13	23	36	0	0	0	0	36	334
17:45 18:00	0	0	0	0	6	243	0	249	249	0	11	21	32	0	0	0	0	32	281
<b>TOTAL:</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>331</b>	<b>6602</b>	<b>0</b>	<b>6933</b>	<b>6933</b>	<b>0</b>	<b>474</b>	<b>473</b>	<b>947</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>947</b>	<b>7880</b>

Note: U-Turns are included in Totals.

Comment:



# Transportation Services - Traffic Services

## Turning Movement Count - Cyclist Volume Report

**Work Order**  
**36785**

### GILMOUR ST @ O'CONNOR ST

**Count Date:** Tuesday, March 21, 2017

**Start Time:** 07:00

Time Period	O'CONNOR ST			GILMOUR ST			Grand Total
	Northbound	Southbound	Street Total	Eastbound	Westbound	Street Total	
07:00 08:00	5	0	<b>5</b>	1	0	<b>1</b>	<b>6</b>
08:00 09:00	26	1	<b>27</b>	2	0	<b>2</b>	<b>29</b>
09:00 10:00	8	5	<b>13</b>	0	0	<b>0</b>	<b>13</b>
11:30 12:30	0	3	<b>3</b>	2	0	<b>2</b>	<b>5</b>
12:30 13:30	3	0	<b>3</b>	1	1	<b>2</b>	<b>5</b>
15:00 16:00	5	2	<b>7</b>	0	0	<b>0</b>	<b>7</b>
16:00 17:00	0	5	<b>5</b>	0	0	<b>0</b>	<b>5</b>
17:00 18:00	2	21	<b>23</b>	2	0	<b>2</b>	<b>25</b>
<b>Total .....</b>	<b>49</b>	<b>37</b>	<b>86</b>	<b>8</b>	<b>1</b>	<b>9</b>	<b>95</b>

**Comment:**

Note: These volumes consists of bicycles only (no mopeds or motorcycles) and ARE NOT included in the Turning Movement Count Summary.





# Transportation Services - Traffic Services

W.O.  
36785

## Turning Movement Count - Heavy Vehicle Report

### GILMOUR ST @ O'CONNOR ST

**Survey Date:** Tuesday, March 21, 2017

Time Period	O'CONNOR ST									GILMOUR ST									Grand Total	
	Northbound			Southbound			S TOT	STR TOT	Eastbound			Westbound			W TOT	STR TOT				
	LT	ST	RT	N TOT	LT	ST			RT	LT	ST	RT	E TOT	LT			ST	RT		
07:00 08:00	0	0	0	0	0	18	0	18	18	0	0	0	0	0	0	0	0	0	0	18
08:00 09:00	0	0	0	0	1	22	0	23	23	0	2	1	3	0	0	0	0	0	3	26
09:00 10:00	0	0	0	0	0	29	0	29	29	0	0	1	1	0	0	0	0	0	1	30
11:30 12:30	0	0	0	0	5	19	0	24	24	0	3	1	4	0	0	0	0	0	4	28
12:30 13:30	0	0	0	0	2	16	0	18	18	0	4	3	7	0	0	0	0	0	7	25
15:00 16:00	0	0	0	0	0	8	0	8	8	0	1	3	4	0	0	0	0	0	4	12
16:00 17:00	0	0	0	0	1	15	0	16	16	0	3	1	4	0	0	0	0	0	4	20
17:00 18:00	0	0	0	0	1	9	0	10	10	0	1	4	5	0	0	0	0	0	5	15
<b>Sub Total</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>10</b>	<b>136</b>	<b>0</b>	<b>146</b>	<b>146</b>	<b>0</b>	<b>14</b>	<b>14</b>	<b>28</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>28</b>	<b>174</b>
<b>U-Turns (Heavy Vehicles)</b>				<b>0</b>				<b>0</b>	<b>0</b>				<b>0</b>					<b>0</b>	<b>0</b>	<b>0</b>
<b>Total</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>10</b>	<b>136</b>	<b>0</b>	<b>146</b>	<b>146</b>	<b>0</b>	<b>14</b>	<b>14</b>	<b>28</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>28</b>	<b>174</b>

Heavy Vehicles include Buses, Single-Unit Trucks and Articulated Trucks. Further, they ARE included in the Turning Movement Count Summary.



# Transportation Services - Traffic Services

Work Order

36785

## Turning Movement Count - Pedestrian Volume Report

### GILMOUR ST @ O'CONNOR ST

Count Date: Tuesday, March 21, 2017

Start Time: 07:00

Time Period	NB Approach (E or W Crossing)	SB Approach (E or W Crossing)	Total	EB Approach (N or S Crossing)	WB Approach (N or S Crossing)	Total	Grand Total
07:00 07:15	3	2	5	9	7	16	21
07:15 07:30	3	2	5	9	12	21	26
07:30 07:45	6	8	14	9	22	31	45
07:45 08:00	4	10	14	15	16	31	45
<b>07:00 08:00</b>	<b>16</b>	<b>22</b>	<b>38</b>	<b>42</b>	<b>57</b>	<b>99</b>	<b>137</b>
08:00 08:15	18	12	30	16	17	33	63
08:15 08:30	4	18	22	29	33	62	84
08:30 08:45	6	16	22	31	37	68	90
08:45 09:00	8	18	26	19	30	49	75
<b>08:00 09:00</b>	<b>36</b>	<b>64</b>	<b>100</b>	<b>95</b>	<b>117</b>	<b>212</b>	<b>312</b>
09:00 09:15	5	8	13	16	18	34	47
09:15 09:30	2	8	10	13	15	28	38
09:30 09:45	6	13	19	9	10	19	38
09:45 10:00	2	6	8	5	12	17	25
<b>09:00 10:00</b>	<b>15</b>	<b>35</b>	<b>50</b>	<b>43</b>	<b>55</b>	<b>98</b>	<b>148</b>
11:30 11:45	6	6	12	15	12	27	39
11:45 12:00	3	8	11	8	11	19	30
12:00 12:15	5	18	23	15	20	35	58
12:15 12:30	5	18	23	19	15	34	57
<b>11:30 12:30</b>	<b>19</b>	<b>50</b>	<b>69</b>	<b>57</b>	<b>58</b>	<b>115</b>	<b>184</b>
12:30 12:45	13	16	29	18	31	49	78
12:45 13:00	4	11	15	10	17	27	42
13:00 13:15	5	10	15	10	9	19	34
13:15 13:30	5	14	19	4	16	20	39
<b>12:30 13:30</b>	<b>27</b>	<b>51</b>	<b>78</b>	<b>42</b>	<b>73</b>	<b>115</b>	<b>193</b>
15:00 15:15	13	12	25	13	14	27	52
15:15 15:30	8	12	20	15	12	27	47
15:30 15:45	9	13	22	21	18	39	61
15:45 16:00	15	10	25	5	19	24	49
<b>15:00 16:00</b>	<b>45</b>	<b>47</b>	<b>92</b>	<b>54</b>	<b>63</b>	<b>117</b>	<b>209</b>
16:00 16:15	17	15	32	14	29	43	75
16:15 16:30	10	8	18	18	20	38	56
16:30 16:45	13	10	23	19	23	42	65
16:45 17:00	15	14	29	19	36	55	84
<b>16:00 17:00</b>	<b>55</b>	<b>47</b>	<b>102</b>	<b>70</b>	<b>108</b>	<b>178</b>	<b>280</b>
17:00 17:15	14	18	32	19	34	53	85
17:15 17:30	25	9	34	16	33	49	83
17:30 17:45	13	11	24	22	30	52	76
17:45 18:00	13	9	22	15	46	61	83
<b>17:00 18:00</b>	<b>65</b>	<b>47</b>	<b>112</b>	<b>72</b>	<b>143</b>	<b>215</b>	<b>327</b>
<b>Total .....</b>	<b>278</b>	<b>363</b>	<b>641</b>	<b>475</b>	<b>674</b>	<b>1149</b>	<b>1790</b>

Comment:

## Turning Movement Count - 15 Min U-Turn Total Report

### GILMOUR ST @ O'CONNOR ST

**Survey Date:** Tuesday, March 21, 2017

Time Period		Northbound U-Turn Total	Southbound U-Turn Total	Eastbound U-Turn Total	Westbound U-Turn Total	Total
07:00	07:15	0	0	0	0	0
07:15	07:30	0	0	0	0	0
07:30	07:45	0	0	0	0	0
07:45	08:00	0	0	0	0	0
08:00	08:15	0	0	0	0	0
08:15	08:30	0	0	0	0	0
08:30	08:45	0	0	0	0	0
08:45	09:00	0	0	0	0	0
09:00	09:15	0	0	0	0	0
09:15	09:30	0	0	0	0	0
09:30	09:45	0	0	0	0	0
09:45	10:00	0	0	0	0	0
11:30	11:45	0	0	0	0	0
11:45	12:00	0	0	0	0	0
12:00	12:15	0	0	0	0	0
12:15	12:30	0	0	0	0	0
12:30	12:45	0	0	0	0	0
12:45	13:00	0	0	0	0	0
13:00	13:15	0	0	0	0	0
13:15	13:30	0	0	0	0	0
15:00	15:15	0	0	0	0	0
15:15	15:30	0	0	0	0	0
15:30	15:45	0	0	0	0	0
15:45	16:00	0	0	0	0	0
16:00	16:15	0	0	0	0	0
16:15	16:30	0	0	0	0	0
16:30	16:45	0	0	0	0	0
16:45	17:00	0	0	0	0	0
17:00	17:15	0	0	0	0	0
17:15	17:30	0	0	0	0	0
17:30	17:45	0	0	0	0	0
17:45	18:00	0	0	0	0	0
Total		0	0	0	0	0

## Turning Movement Count - Study Results

### GLADSTONE AVE @ KENT ST


**Survey Date:** Tuesday, April 25, 2017

**WO No:** 36848

**Start Time:** 07:00

**Device:** Miovision

### Full Study Diagram

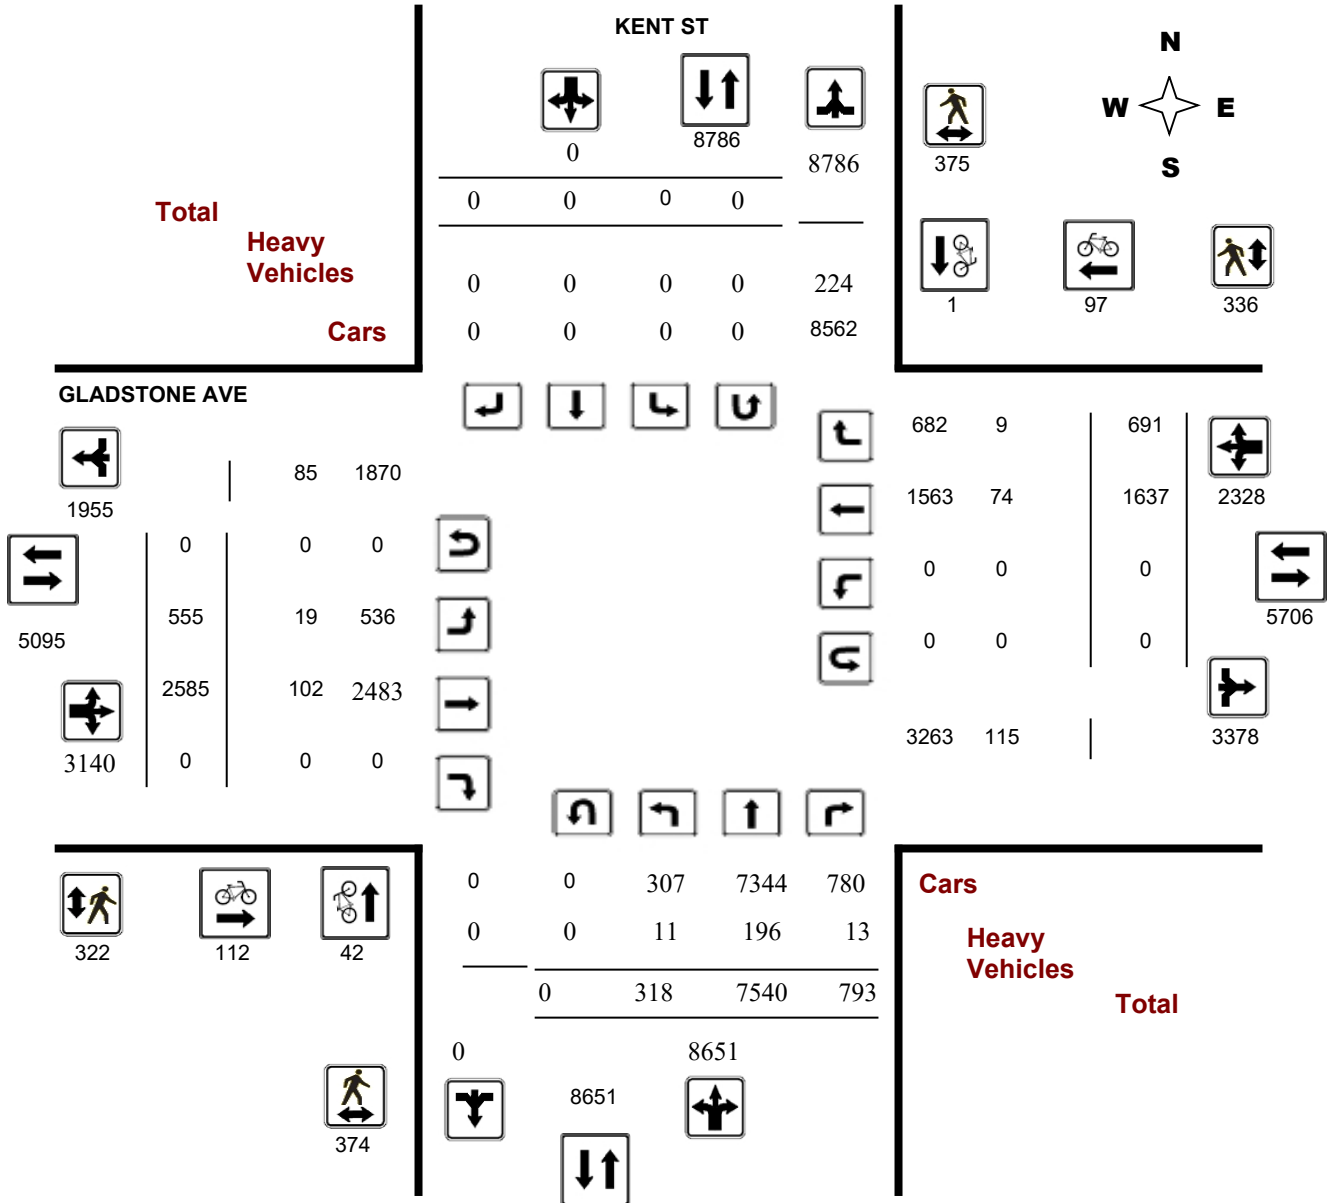

## Turning Movement Count - Study Results

### GLADSTONE AVE @ KENT ST


**Survey Date:** Tuesday, April 25, 2017

**WO No:** 36848

**Start Time:** 07:00

**Device:** Miovision

### Full Study Peak Hour Diagram

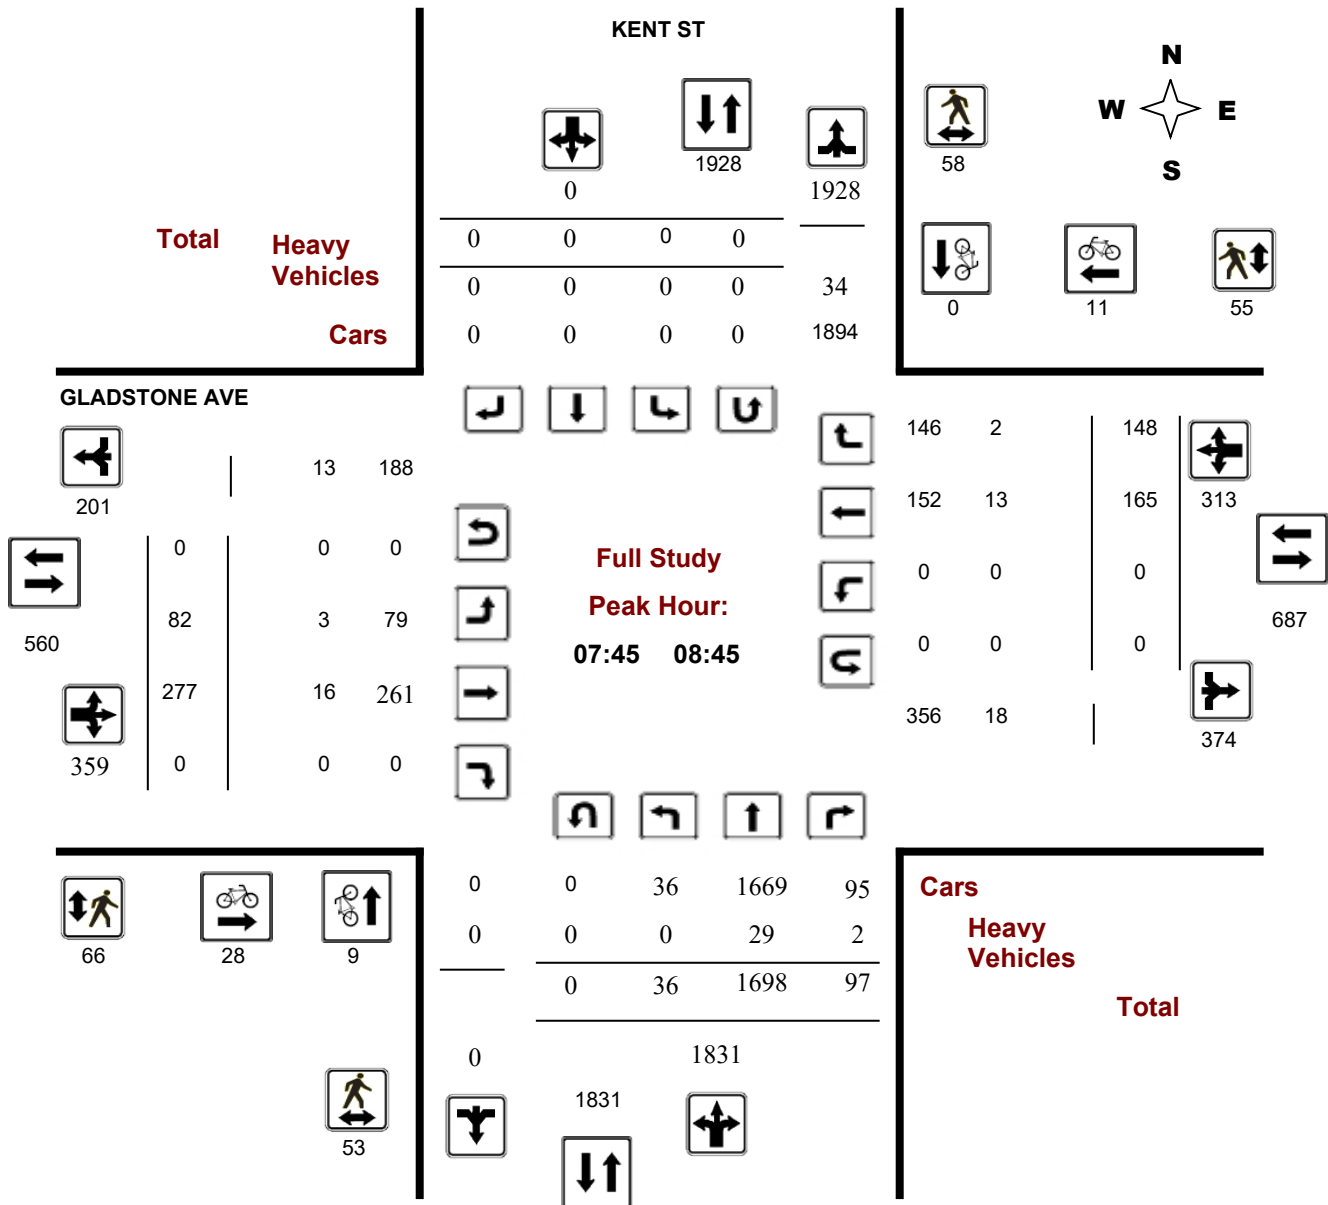

## Turning Movement Count - Peak Hour Diagram


### GLADSTONE AVE @ KENT ST

**Survey Date:** Tuesday, April 25, 2017

**Start Time:** 07:00

**WO No:** 36848

**Device:** Miovision

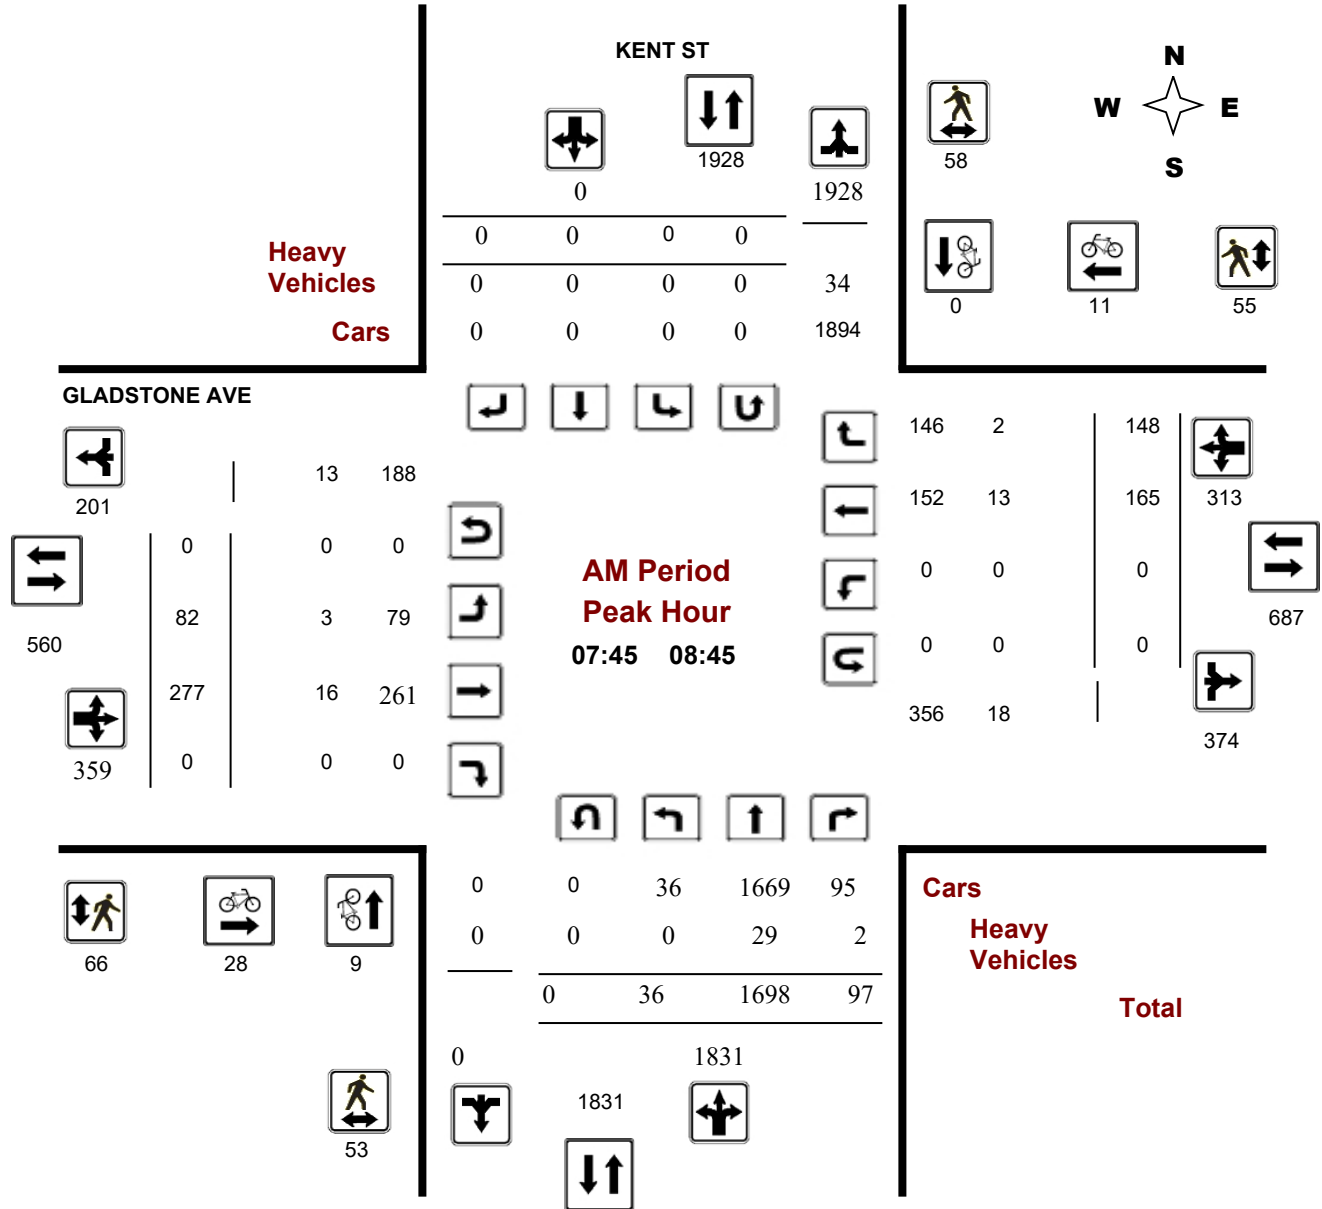

## Turning Movement Count - Peak Hour Diagram


### GLADSTONE AVE @ KENT ST

**Survey Date:** Tuesday, April 25, 2017

**Start Time:** 07:00

**WO No:** 36848

**Device:** Miovision

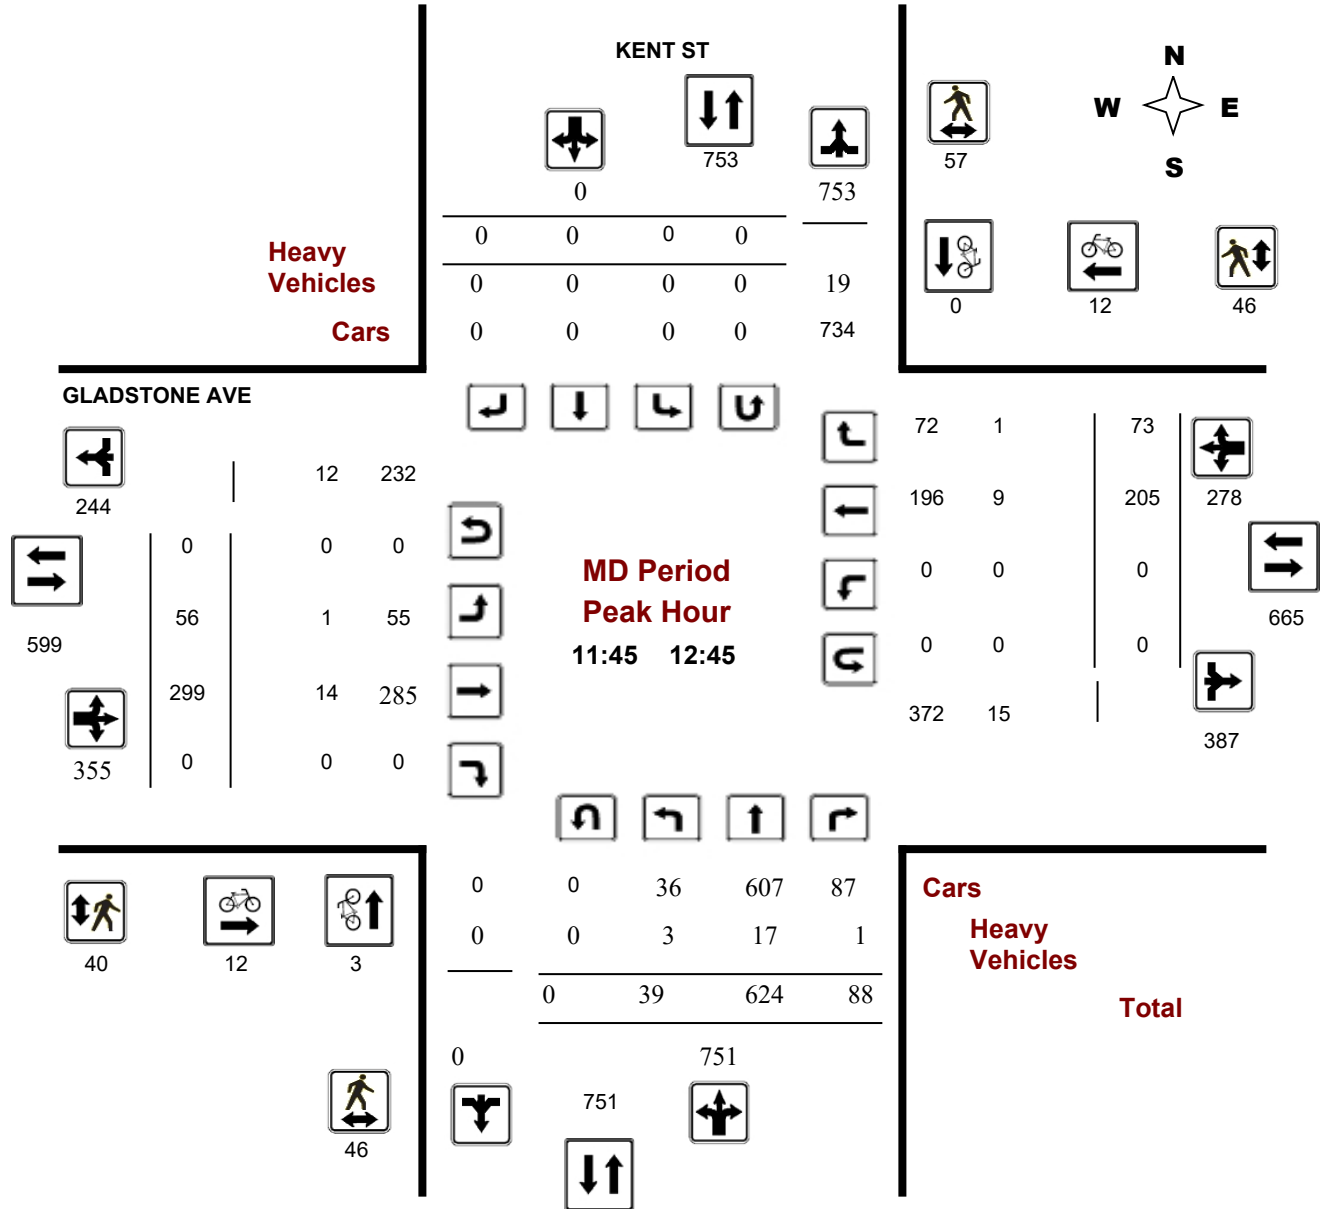



# Transportation Services - Traffic Services

## Turning Movement Count - Peak Hour Diagram


### GLADSTONE AVE @ KENT ST

Survey Date: Tuesday, April 25, 2017

Start Time: 07:00

WO No: 36848

Device: Miovision

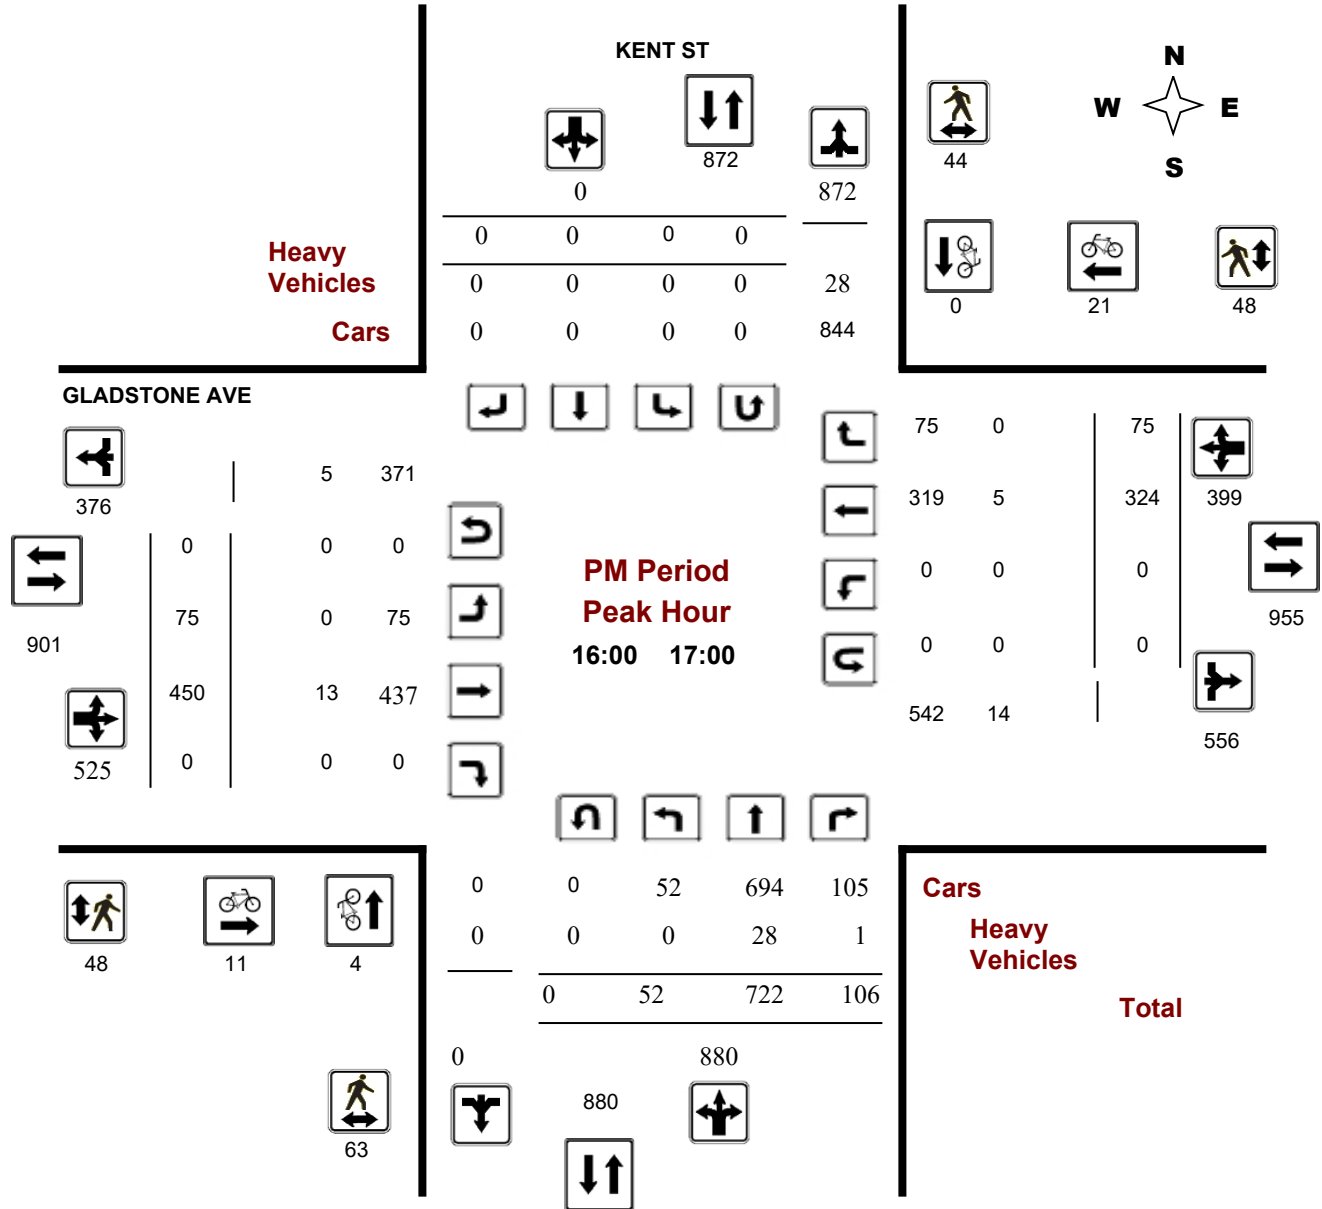





# Transportation Services - Traffic Services

## Turning Movement Count - Study Results

### GLADSTONE AVE @ KENT ST

**Survey Date:** Tuesday, April 25, 2017

**WO No:** 36848

**Start Time:** 07:00

**Device:** Miovision

### Full Study Summary (8 HR Standard)

**Survey Date:** Tuesday, April 25, 2017

**Total Observed U-Turns**  
 Northbound: 0      Southbound: 0  
 Eastbound: 0      Westbound: 0

**AADT Factor**  
 .90

Period	KENT ST									GLADSTONE AVE									Grand Total
	Northbound				Southbound					Eastbound			Westbound						
	LT	ST	RT	NB TOT	LT	ST	RT	SB TOT	STR TOT	LT	ST	RT	EB TOT	LT	ST	RT	WB TOT	STR TOT	
07:00 08:00	14	1536	96	1646	0	0	0	0	1646	61	214	0	275	0	100	104	204	479	2125
08:00 09:00	42	1679	98	1819	0	0	0	0	1819	82	291	0	373	0	172	130	302	675	2494
09:00 10:00	34	943	107	1084	0	0	0	0	1084	76	256	0	332	0	173	76	249	581	1665
11:30 12:30	36	633	80	749	0	0	0	0	749	55	288	0	343	0	182	77	259	602	1351
12:30 13:30	33	569	97	699	0	0	0	0	699	54	321	0	375	0	201	74	275	650	1349
15:00 16:00	47	667	108	822	0	0	0	0	822	66	394	0	460	0	237	72	309	769	1591
16:00 17:00	52	722	106	880	0	0	0	0	880	75	450	0	525	0	324	75	399	924	1804
17:00 18:00	60	791	101	952	0	0	0	0	952	86	371	0	457	0	248	83	331	788	1740
<b>Sub Total</b>	318	7540	793	8651	0	0	0	0	8651	555	2585	0	3140	0	1637	691	2328	5468	14119
<b>U Turns</b>	0			0	0			0	0	0			0	0			0	0	0
<b>Total</b>	318	7540	793	8651	0	0	0	0	8651	555	2585	0	3140	0	1637	691	2328	5468	14119
<b>EQ 12Hr</b>	442	10481	1102	12025	0	0	0	0	12025	771	3593	0	4364	0	2275	960	3235	7599	19624
Note: These values are calculated by multiplying the totals by the appropriate expansion factor.																	<b>1.39</b>		
<b>AVG 12Hr</b>	398	9433	992	10823	0	0	0	0	10823	694	3234	0	3928	0	2048	864	2912	6840	17663
Note: These volumes are calculated by multiplying the Equivalent 12 hr. totals by the AADT factor.																	<b>.90</b>		
<b>AVG 24Hr</b>	521	12357	1300	14178	0	0	0	0	14178	909	4237	0	5146	0	2683	1132	3815	8961	23139
Note: These volumes are calculated by multiplying the Average Daily 12 hr. totals by 12 to 24 expansion factor.																	<b>1.31</b>		

Note: U-Turns provided for approach totals. Refer to 'U-Turn' Report for specific breakdown.



# Transportation Services - Traffic Services

## Turning Movement Count - Study Results

### GLADSTONE AVE @ KENT ST

**Survey Date:** Tuesday, April 25, 2017

**WO No:** 36848

**Start Time:** 07:00

**Device:** Miovision

### Full Study 15 Minute Increments

#### KENT ST

#### GLADSTONE AVE

Northbound

Southbound

Eastbound

Westbound

Time Period	LT	ST	RT	N TOT	LT	ST	RT	S TOT	STR TOT	LT	ST	RT	E TOT	LT	ST	RT	W TOT	STR TOT	Grand Total
07:00 07:15	1	319	24	344	0	0	0	0	344	17	51	0	68	0	20	10	30	98	442
07:15 07:30	2	382	24	408	0	0	0	0	408	13	40	0	53	0	18	21	39	92	500
07:30 07:45	6	402	25	433	0	0	0	0	433	15	64	0	79	0	22	31	53	132	565
07:45 08:00	5	433	23	461	0	0	0	0	461	16	59	0	75	0	40	42	82	157	618
08:00 08:15	8	428	33	469	0	0	0	0	469	22	79	0	101	0	31	42	73	174	643
08:15 08:30	7	435	19	461	0	0	0	0	461	22	70	0	92	0	50	28	78	170	631
08:30 08:45	16	402	22	440	0	0	0	0	440	22	69	0	91	0	44	36	80	171	611
08:45 09:00	11	414	24	449	0	0	0	0	449	16	73	0	89	0	47	24	71	160	609
09:00 09:15	6	319	28	353	0	0	0	0	353	17	66	0	83	0	51	31	82	165	518
09:15 09:30	14	243	26	283	0	0	0	0	283	27	66	0	93	0	33	17	50	143	426
09:30 09:45	4	177	29	210	0	0	0	0	210	15	61	0	76	0	41	15	56	132	342
09:45 10:00	10	204	24	238	0	0	0	0	238	17	63	0	80	0	48	13	61	141	379
11:30 11:45	6	158	12	176	0	0	0	0	176	14	67	0	81	0	33	18	51	132	308
11:45 12:00	8	167	28	203	0	0	0	0	203	17	82	0	99	0	55	25	80	179	382
12:00 12:15	14	153	25	192	0	0	0	0	192	13	65	0	78	0	44	19	63	141	333
12:15 12:30	8	155	15	178	0	0	0	0	178	11	74	0	85	0	50	15	65	150	328
12:30 12:45	9	149	20	178	0	0	0	0	178	15	78	0	93	0	56	14	70	163	341
12:45 13:00	6	153	19	178	0	0	0	0	178	12	66	0	78	0	47	22	69	147	325
13:00 13:15	15	141	32	188	0	0	0	0	188	16	96	0	112	0	48	19	67	179	367
13:15 13:30	3	126	26	155	0	0	0	0	155	11	81	0	92	0	50	19	69	161	316
15:00 15:15	11	154	15	180	0	0	0	0	180	20	85	0	105	0	59	19	78	183	363
15:15 15:30	14	157	28	199	0	0	0	0	199	18	102	0	120	0	56	21	77	197	396
15:30 15:45	9	167	21	197	0	0	0	0	197	16	107	0	123	0	65	14	79	202	399
15:45 16:00	13	189	44	246	0	0	0	0	246	12	100	0	112	0	57	18	75	187	433
16:00 16:15	14	172	23	209	0	0	0	0	209	14	118	0	132	0	86	25	111	243	452
16:15 16:30	9	195	28	232	0	0	0	0	232	24	111	0	135	0	71	19	90	225	457
16:30 16:45	16	167	18	201	0	0	0	0	201	19	116	0	135	0	89	18	107	242	443
16:45 17:00	13	188	37	238	0	0	0	0	238	18	105	0	123	0	78	13	91	214	452
17:00 17:15	19	176	29	224	0	0	0	0	224	20	99	0	119	0	69	17	86	205	429
17:15 17:30	14	201	27	242	0	0	0	0	242	26	109	0	135	0	53	25	78	213	455
17:30 17:45	15	215	26	256	0	0	0	0	256	25	93	0	118	0	69	21	90	208	464
17:45 18:00	12	199	19	230	0	0	0	0	230	15	70	0	85	0	57	20	77	162	392
<b>Total:</b>	<b>318</b>	<b>7540</b>	<b>793</b>	<b>8651</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>8651</b>	<b>555</b>	<b>2585</b>	<b>0</b>	<b>3140</b>	<b>0</b>	<b>1637</b>	<b>691</b>	<b>2328</b>	<b>8651</b>	<b>14,119</b>

Note: U-Turns are included in Totals.



# Transportation Services - Traffic Services

## Turning Movement Count - Study Results

### GLADSTONE AVE @ KENT ST

**Survey Date:** Tuesday, April 25, 2017

**WO No:** 36848

**Start Time:** 07:00

**Device:** Miovision

### Full Study Cyclist Volume

Time Period	KENT ST			GLADSTONE AVE			Grand Total
	Northbound	Southbound	Street Total	Eastbound	Westbound	Street Total	
07:00-07:15	1	0	1	2	3	5	6
07:15-07:30	1	0	1	3	2	5	6
07:30-07:45	0	0	0	4	5	9	9
07:45-08:00	3	0	3	6	2	8	11
08:00-08:15	2	0	2	9	3	12	14
08:15-08:30	4	0	4	6	1	7	11
08:30-08:45	0	0	0	7	5	12	12
08:45-09:00	7	0	7	7	4	11	18
09:00-09:15	0	0	0	7	1	8	8
09:15-09:30	7	0	7	1	2	3	10
09:30-09:45	1	0	1	2	1	3	4
09:45-10:00	0	0	0	3	2	5	5
11:30-11:45	0	0	0	3	3	6	6
11:45-12:00	1	0	1	1	4	5	6
12:00-12:15	0	0	0	6	2	8	8
12:15-12:30	1	0	1	2	2	4	5
12:30-12:45	1	0	1	3	4	7	8
12:45-13:00	3	0	3	2	7	9	12
13:00-13:15	1	0	1	3	1	4	5
13:15-13:30	3	0	3	0	1	1	4
15:00-15:15	0	0	0	4	1	5	5
15:15-15:30	0	1	1	1	0	1	2
15:30-15:45	0	0	0	3	2	5	5
15:45-16:00	0	0	0	0	2	2	2
16:00-16:15	0	0	0	4	2	6	6
16:15-16:30	3	0	3	1	7	8	11
16:30-16:45	0	0	0	2	7	9	9
16:45-17:00	1	0	1	4	5	9	10
17:00-17:15	0	0	0	6	5	11	11
17:15-17:30	1	0	1	4	7	11	12
17:30-17:45	0	0	0	3	3	6	6
17:45-18:00	1	0	1	3	1	4	5
<b>Total</b>	<b>42</b>	<b>1</b>	<b>43</b>	<b>112</b>	<b>97</b>	<b>209</b>	<b>252</b>



# Transportation Services - Traffic Services

## Turning Movement Count - Study Results

### GLADSTONE AVE @ KENT ST

**Survey Date:** Tuesday, April 25, 2017

**WO No:** 36848

**Start Time:** 07:00

**Device:** Miovision

### Full Study Pedestrian Volume

#### KENT ST

#### GLADSTONE AVE

Time Period	NB Approach (E or W Crossing)	SB Approach (E or W Crossing)	Total	EB Approach (N or S Crossing)	WB Approach (N or S Crossing)	Total	Grand Total
07:00 07:15	2	4	6	3	4	7	13
07:15 07:30	3	9	12	9	5	14	26
07:30 07:45	8	5	13	16	5	21	34
07:45 08:00	9	8	17	13	8	21	38
08:00 08:15	10	11	21	18	12	30	51
08:15 08:30	17	24	41	21	17	38	79
08:30 08:45	17	15	32	14	18	32	64
08:45 09:00	12	10	22	13	10	23	45
09:00 09:15	6	11	17	7	14	21	38
09:15 09:30	6	6	12	8	6	14	26
09:30 09:45	6	13	19	4	4	8	27
09:45 10:00	6	15	21	8	7	15	36
11:30 11:45	9	6	15	11	5	16	31
11:45 12:00	5	13	18	4	8	12	30
12:00 12:15	13	16	29	8	12	20	49
12:15 12:30	12	13	25	14	17	31	56
12:30 12:45	16	15	31	14	9	23	54
12:45 13:00	14	10	24	3	9	12	36
13:00 13:15	15	16	31	4	13	17	48
13:15 13:30	12	16	28	6	8	14	42
15:00 15:15	10	14	24	5	12	17	41
15:15 15:30	12	6	18	17	15	32	50
15:30 15:45	13	11	24	2	16	18	42
15:45 16:00	12	9	21	5	11	16	37
16:00 16:15	12	11	23	9	10	19	42
16:15 16:30	17	12	29	17	14	31	60
16:30 16:45	18	10	28	9	12	21	49
16:45 17:00	16	11	27	13	12	25	52
17:00 17:15	23	13	36	13	13	26	62
17:15 17:30	8	17	25	13	14	27	52
17:30 17:45	20	12	32	9	10	19	51
17:45 18:00	15	13	28	12	6	18	46
<b>Total</b> .....	<b>374</b>	<b>375</b>	<b>749</b>	<b>322</b>	<b>336</b>	<b>658</b>	<b>1407</b>



# Transportation Services - Traffic Services

## Turning Movement Count - Study Results

### GLADSTONE AVE @ KENT ST

**Survey Date:** Tuesday, April 25, 2017

**WO No:** 36848

**Start Time:** 07:00

**Device:** Miovision

### Full Study Heavy Vehicles

KENT ST					GLADSTONE AVE															Grand Total
Time Period	Northbound			N TOT	Southbound			S TOT	STR TOT	Eastbound			E TOT	Westbound			W TOT	STR TOT		
	LT	ST	RT		LT	ST	RT			LT	ST	RT		LT	ST	RT			LT	
07:00	07:15	0	5	0	5	0	0	0	0	5	3	2	0	5	0	2	0	2	7	12
07:15	07:30	1	3	1	5	0	0	0	0	5	1	2	0	3	0	1	1	2	5	10
07:30	07:45	1	4	0	5	0	0	0	0	5	1	5	0	6	0	5	0	5	11	16
07:45	08:00	0	5	1	6	0	0	0	0	6	0	3	0	3	0	3	0	3	6	12
08:00	08:15	0	7	1	8	0	0	0	0	8	3	4	0	7	0	2	2	4	11	19
08:15	08:30	0	10	0	10	0	0	0	0	10	0	3	0	3	0	4	0	4	7	17
08:30	08:45	0	7	0	7	0	0	0	0	7	0	6	0	6	0	4	0	4	10	17
08:45	09:00	2	7	0	9	0	0	0	0	9	2	3	0	5	0	0	0	0	5	14
09:00	09:15	2	5	3	10	0	0	0	0	10	0	5	0	5	0	3	2	5	10	20
09:15	09:30	0	4	1	5	0	0	0	0	5	0	2	0	2	0	3	0	3	5	10
09:30	09:45	0	9	1	10	0	0	0	0	10	1	2	0	3	0	2	0	2	5	15
09:45	10:00	0	6	0	6	0	0	0	0	6	1	3	0	4	0	7	0	7	11	17
11:30	11:45	0	5	0	5	0	0	0	0	5	1	2	0	3	0	2	0	2	5	10
11:45	12:00	1	7	1	9	0	0	0	0	9	0	2	0	2	0	3	0	3	5	14
12:00	12:15	0	4	0	4	0	0	0	0	4	0	4	0	4	0	2	1	3	7	11
12:15	12:30	1	4	0	5	0	0	0	0	5	1	4	0	5	0	1	0	1	6	11
12:30	12:45	1	2	0	3	0	0	0	0	3	0	4	0	4	0	3	0	3	7	10
12:45	13:00	0	3	0	3	0	0	0	0	3	1	3	0	4	0	0	0	0	4	7
13:00	13:15	0	3	0	3	0	0	0	0	3	0	2	0	2	0	3	0	3	5	8
13:15	13:30	1	4	0	5	0	0	0	0	5	1	7	0	8	0	2	0	2	10	15
15:00	15:15	0	13	1	14	0	0	0	0	14	1	4	0	5	0	5	1	6	11	25
15:15	15:30	0	11	2	13	0	0	0	0	13	0	1	0	1	0	1	1	2	3	16
15:30	15:45	0	12	0	12	0	0	0	0	12	0	6	0	6	0	3	0	3	9	21
15:45	16:00	0	9	0	9	0	0	0	0	9	1	2	0	3	0	3	1	4	7	16
16:00	16:15	0	8	0	8	0	0	0	0	8	0	4	0	4	0	2	0	2	6	14
16:15	16:30	0	9	0	9	0	0	0	0	9	0	5	0	5	0	1	0	1	6	15
16:30	16:45	0	7	1	8	0	0	0	0	8	0	1	0	1	0	1	0	1	2	10
16:45	17:00	0	4	0	4	0	0	0	0	4	0	3	0	3	0	1	0	1	4	8
17:00	17:15	1	6	0	7	0	0	0	0	7	1	4	0	5	0	1	0	1	6	13
17:15	17:30	0	7	0	7	0	0	0	0	7	0	0	0	0	0	0	0	0	0	7
17:30	17:45	0	4	0	4	0	0	0	0	4	0	4	0	4	0	1	0	1	5	9
17:45	18:00	0	2	0	2	0	0	0	0	2	0	0	0	0	0	3	0	3	3	5
Total:	None	11	196	13	220	0	0	0	0	220	19	102	0	121	0	74	9	83	204	424



# Transportation Services - Traffic Services

## Turning Movement Count - Study Results

### GLADSTONE AVE @ KENT ST

**Survey Date:** Tuesday, April 25, 2017

**WO No:** 36848

**Start Time:** 07:00

**Device:** Miovision

### Full Study 15 Minute U-Turn Total

KENT ST

GLADSTONE AVE

Time Period		Northbound U-Turn Total	Southbound U-Turn Total	Eastbound U-Turn Total	Westbound U-Turn Total	Total
07:00	07:15	0	0	0	0	0
07:15	07:30	0	0	0	0	0
07:30	07:45	0	0	0	0	0
07:45	08:00	0	0	0	0	0
08:00	08:15	0	0	0	0	0
08:15	08:30	0	0	0	0	0
08:30	08:45	0	0	0	0	0
08:45	09:00	0	0	0	0	0
09:00	09:15	0	0	0	0	0
09:15	09:30	0	0	0	0	0
09:30	09:45	0	0	0	0	0
09:45	10:00	0	0	0	0	0
11:30	11:45	0	0	0	0	0
11:45	12:00	0	0	0	0	0
12:00	12:15	0	0	0	0	0
12:15	12:30	0	0	0	0	0
12:30	12:45	0	0	0	0	0
12:45	13:00	0	0	0	0	0
13:00	13:15	0	0	0	0	0
13:15	13:30	0	0	0	0	0
15:00	15:15	0	0	0	0	0
15:15	15:30	0	0	0	0	0
15:30	15:45	0	0	0	0	0
15:45	16:00	0	0	0	0	0
16:00	16:15	0	0	0	0	0
16:15	16:30	0	0	0	0	0
16:30	16:45	0	0	0	0	0
16:45	17:00	0	0	0	0	0
17:00	17:15	0	0	0	0	0
17:15	17:30	0	0	0	0	0
17:30	17:45	0	0	0	0	0
17:45	18:00	0	0	0	0	0
Total		0	0	0	0	0



## Turning Movement Count - Study Results

### KENT ST @ MACLAREN ST


**Survey Date:** Tuesday, March 05, 2019

**WO No:** 38413

**Start Time:** 07:00

**Device:** Miovision

### Full Study Peak Hour Diagram

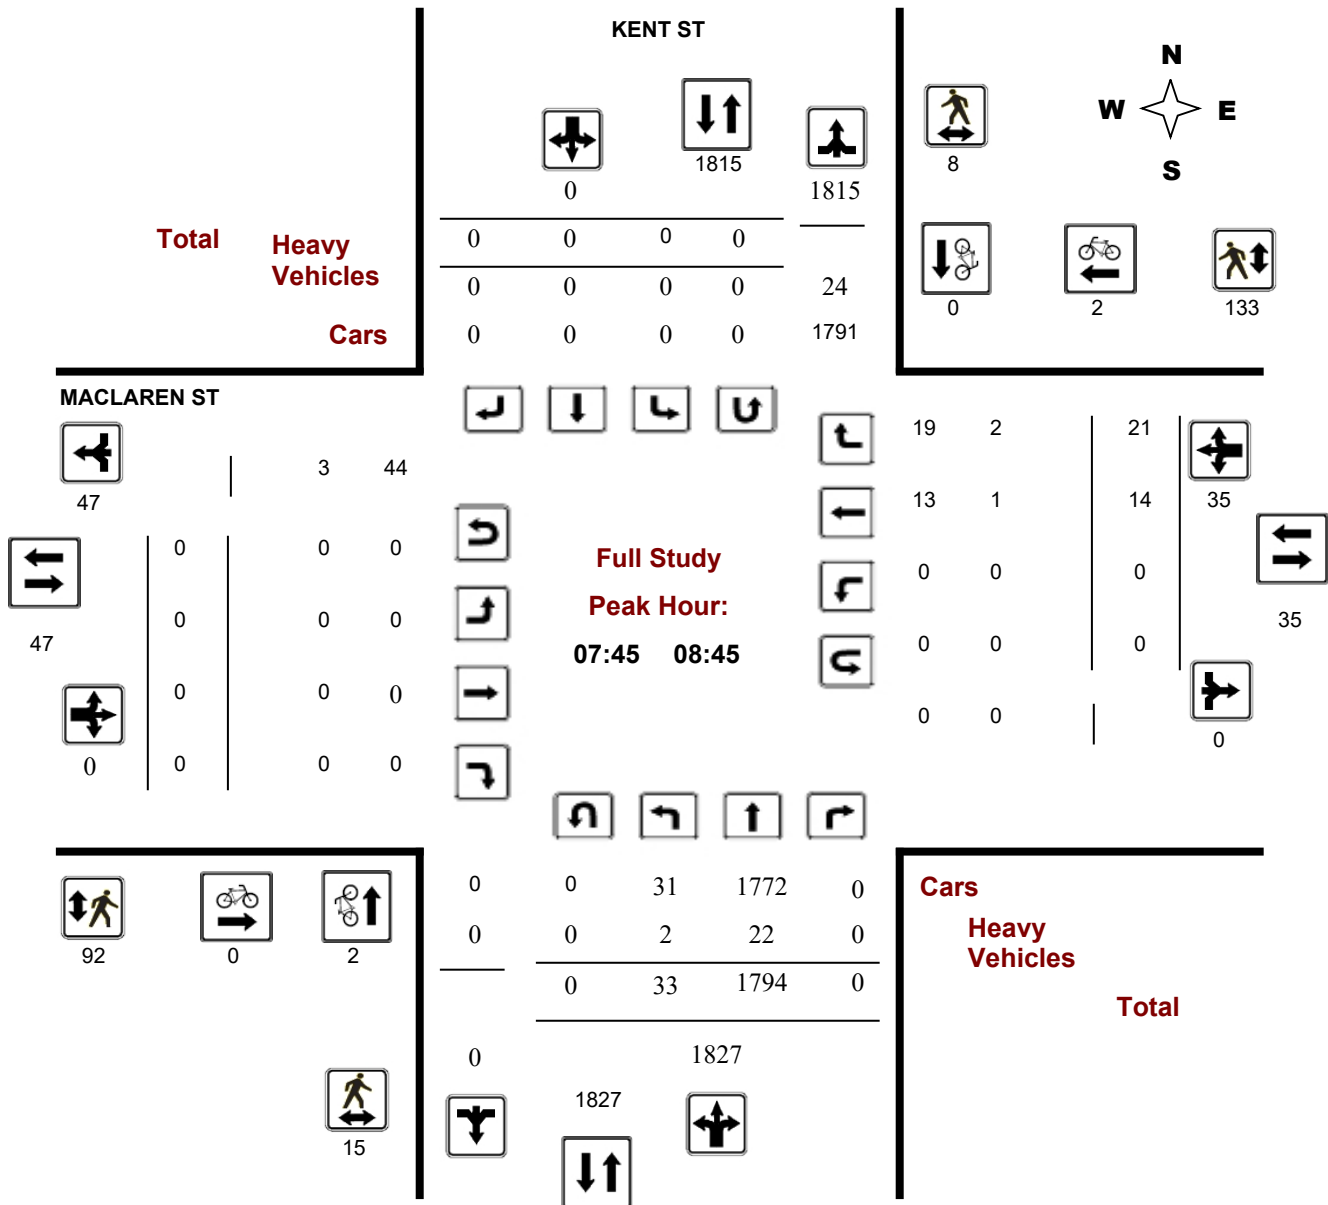



## Turning Movement Count - Peak Hour Diagram


### KENT ST @ MACLAREN ST

**Survey Date:** Tuesday, March 05, 2019

**Start Time:** 07:00

**WO No:** 38413

**Device:** Miovision

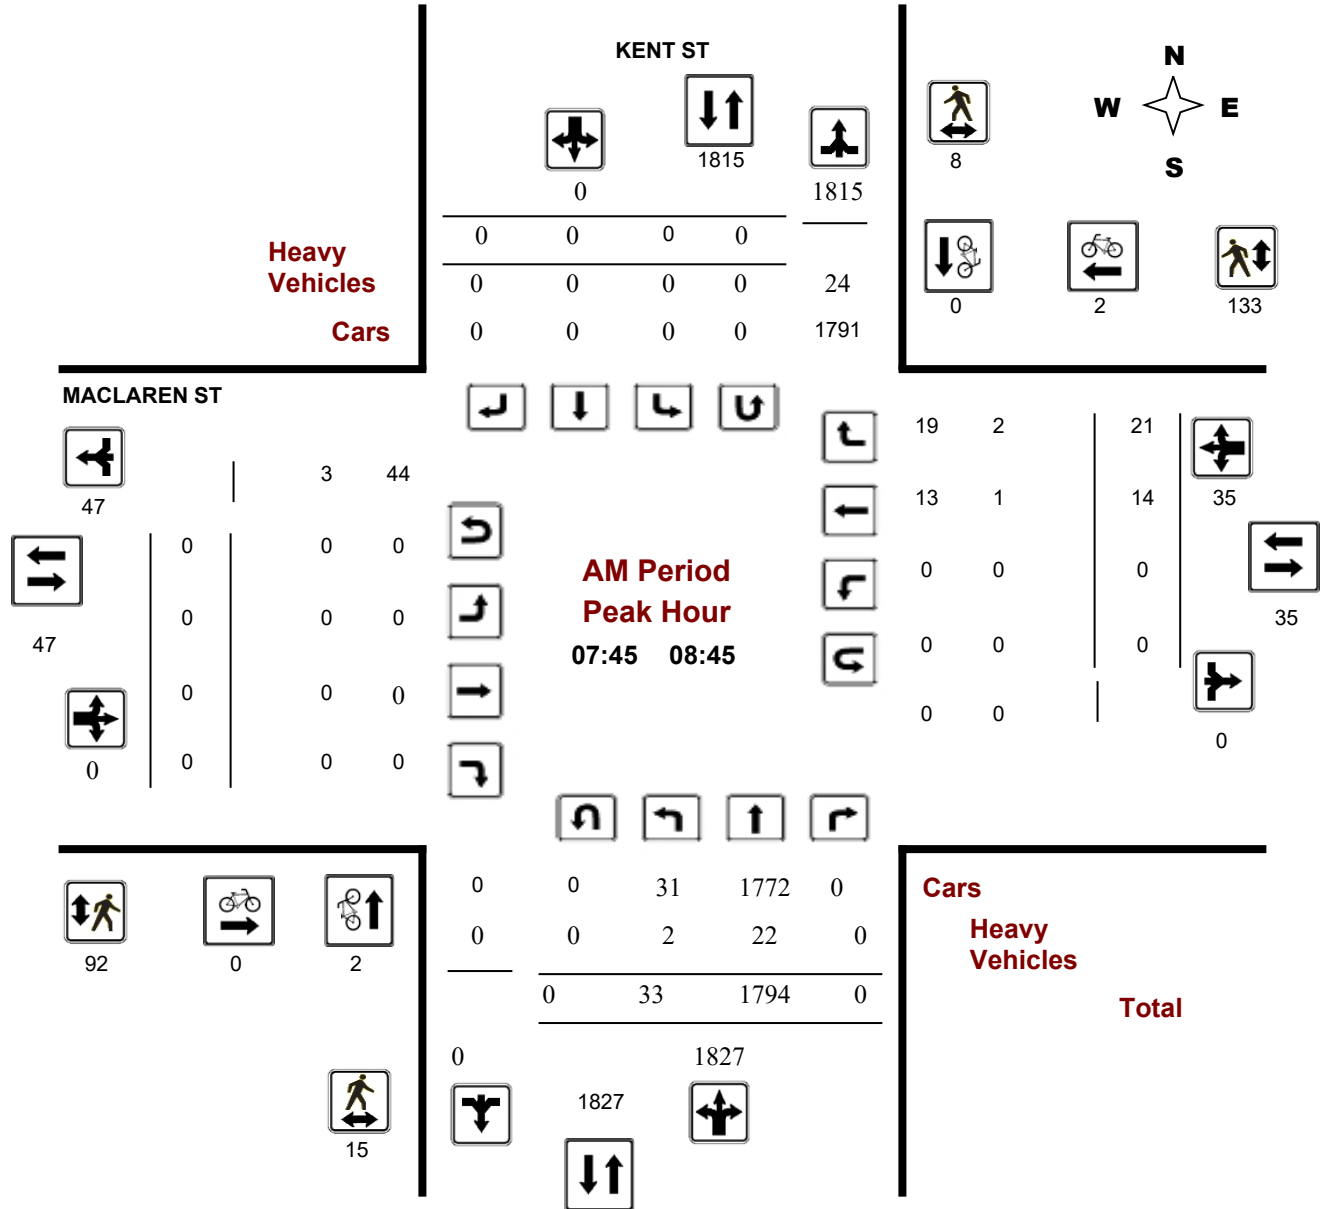

**Comments**

## Turning Movement Count - Peak Hour Diagram


### KENT ST @ MACLAREN ST

**Survey Date:** Tuesday, March 05, 2019

**Start Time:** 07:00

**WO No:** 38413

**Device:** Miovision

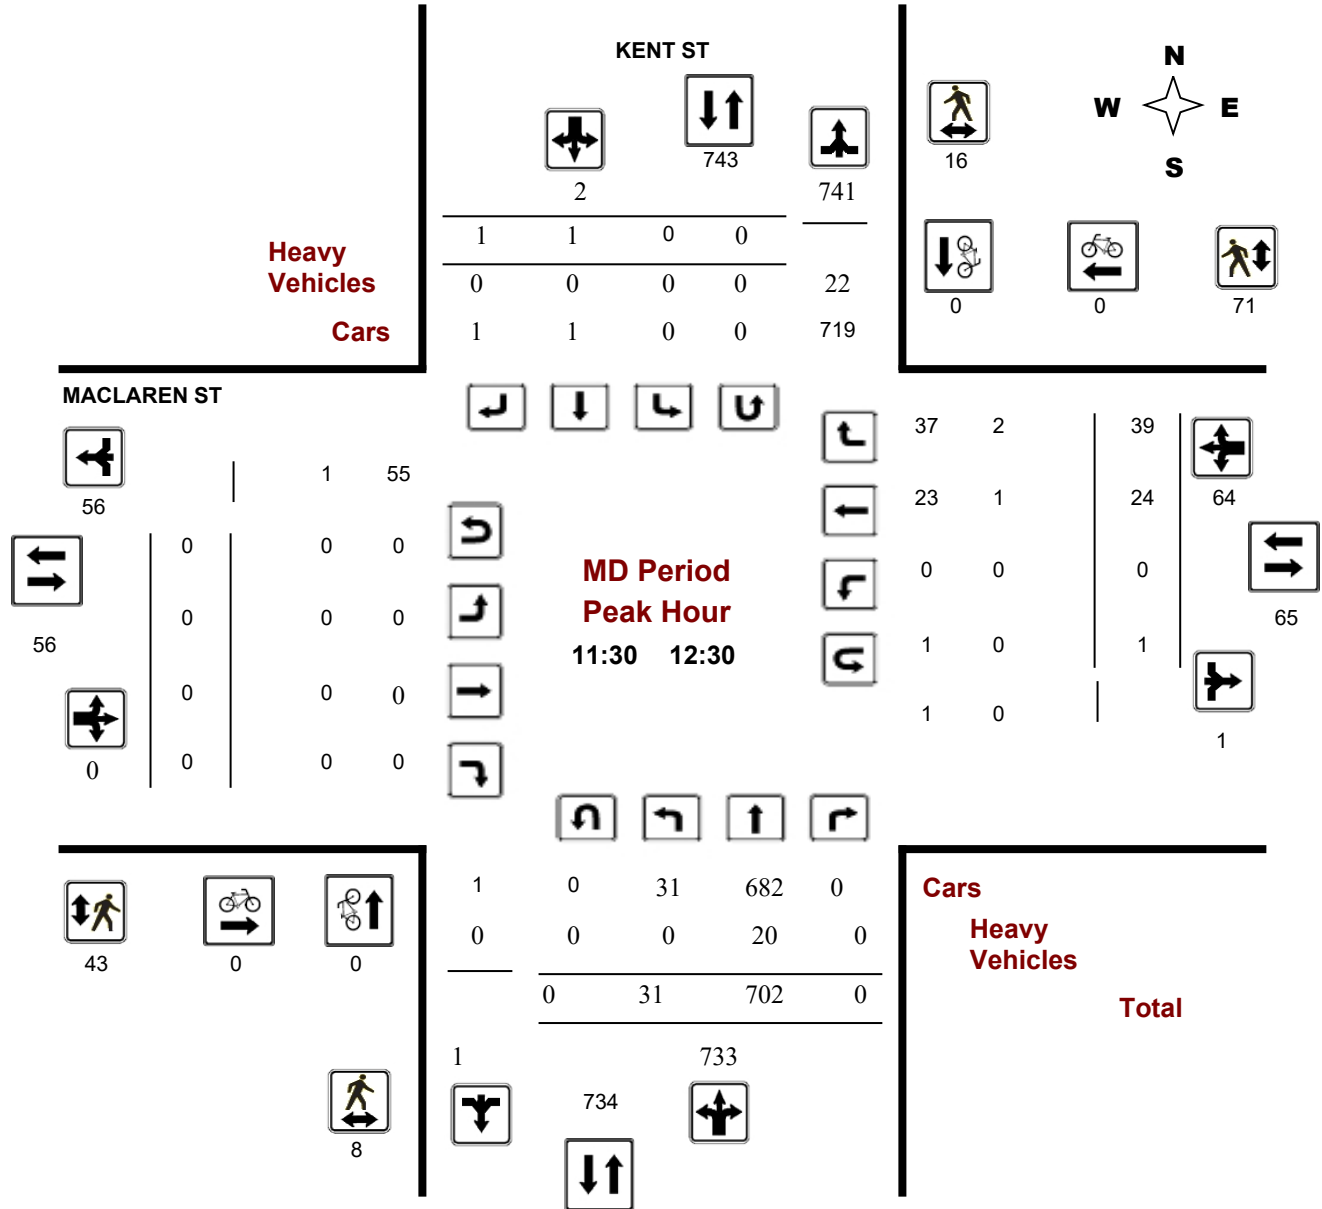

**Comments**





# Transportation Services - Traffic Services

## Turning Movement Count - Study Results

### KENT ST @ MACLAREN ST

**Survey Date:** Tuesday, March 05, 2019

**WO No:** 38413

**Start Time:** 07:00

**Device:** Miovision

### Full Study Summary (8 HR Standard)

**Survey Date:** Tuesday, March 05, 2019

**Total Observed U-Turns**

**AADT Factor**

Northbound: 0      Southbound: 0  
 Eastbound: 0      Westbound: 2

1.00

Period	KENT ST									MACLAREN ST									Grand Total
	Northbound				Southbound					Eastbound				Westbound					
	LT	ST	RT	NB TOT	LT	ST	RT	SB TOT	STR TOT	LT	ST	RT	EB TOT	LT	ST	RT	WB TOT	STR TOT	
07:00 08:00	16	1672	0	1688	0	0	0	0	1688	0	0	0	0	0	9	23	32	32	1720
08:00 09:00	38	1780	0	1818	0	0	0	0	1818	0	0	0	0	0	16	22	38	38	1856
09:00 10:00	31	1103	0	1134	0	0	0	0	1134	0	0	0	0	0	16	29	45	45	1179
11:30 12:30	31	702	0	733	0	1	1	2	735	0	0	0	0	0	24	39	63	63	798
12:30 13:30	21	689	0	710	0	0	0	0	710	0	0	0	0	0	23	44	67	67	777
15:00 16:00	22	839	0	861	0	0	0	0	861	0	0	0	0	0	27	58	85	85	946
16:00 17:00	32	825	0	857	0	0	0	0	857	0	0	0	0	0	23	55	78	78	935
17:00 18:00	35	856	0	891	0	0	0	0	891	1	0	0	1	0	43	48	91	92	983
<b>Sub Total</b>	226	8466	0	8692	0	1	1	2	8694	1	0	0	1	0	181	318	499	500	9194
<b>U Turns</b>				0				0	0				0				2	2	2
<b>Total</b>	226	8466	0	8692	0	1	1	2	8694	1	0	0	1	0	181	318	501	502	9196
<b>EQ 12Hr</b>	314	11768	0	12082	0	1	1	3	12085	1	0	0	1	0	252	442	696	698	12782
Note: These values are calculated by multiplying the totals by the appropriate expansion factor.													<b>1.39</b>						
<b>AVG 12Hr</b>	296	11090	0	11387	0	1	1	3	12085	1	0	0	1	0	237	417	656	698	12782
Note: These volumes are calculated by multiplying the Equivalent 12 hr. totals by the AADT factor.													<b>1</b>						
<b>AVG 24Hr</b>	388	14529	0	14916	0	2	2	3	14919	2	0	0	2	0	311	546	860	862	15781

Note: These volumes are calculated by multiplying the Average Daily 12 hr. totals by 12 to 24 expansion factor. **1.31**

Note: U-Turns provided for approach totals. Refer to 'U-Turn' Report for specific breakdown.



# Transportation Services - Traffic Services

## Turning Movement Count - Study Results

### KENT ST @ MACLAREN ST

**Survey Date:** Tuesday, March 05, 2019

**WO No:** 38413

**Start Time:** 07:00

**Device:** Miovision

### Full Study 15 Minute Increments

#### KENT ST

#### MACLAREN ST

Northbound

Southbound

Eastbound

Westbound

Time Period	LT	ST	RT	N TOT	LT	ST	RT	S TOT	STR TOT	LT	ST	RT	E TOT	LT	ST	RT	W TOT	STR TOT	Grand Total
07:00 07:15	5	362	0	367	0	0	0	0	8	0	0	0	0	0	3	3	6	8	373
07:15 07:30	2	429	0	431	0	0	0	0	8	0	0	0	0	0	0	10	10	8	441
07:30 07:45	5	436	0	441	0	0	0	0	9	0	0	0	0	0	3	5	8	9	449
07:45 08:00	4	445	0	449	0	0	0	0	5	0	0	0	0	0	3	5	8	5	457
08:00 08:15	10	425	0	435	0	0	0	0	5	0	0	0	0	0	2	7	9	5	444
08:15 08:30	8	455	0	463	0	0	0	0	6	0	0	0	0	0	3	5	8	6	471
08:30 08:45	11	469	0	480	0	0	0	0	8	0	0	0	0	0	6	4	10	8	490
08:45 09:00	9	431	0	440	0	0	0	0	7	0	0	0	0	0	5	6	11	7	451
09:00 09:15	8	375	0	383	0	0	0	0	12	0	0	0	0	0	3	7	10	12	393
09:15 09:30	4	247	0	251	0	0	0	0	6	0	0	0	0	0	7	5	12	6	263
09:30 09:45	12	261	0	273	0	0	0	0	7	0	0	0	0	0	4	10	14	7	287
09:45 10:00	7	220	0	227	0	0	0	0	9	0	0	0	0	0	2	7	9	9	236
11:30 11:45	6	188	0	194	0	0	1	1	7	0	0	0	0	0	5	9	14	7	209
11:45 12:00	8	213	0	221	0	0	0	0	3	0	0	0	0	0	5	11	17	3	238
12:00 12:15	13	177	0	190	0	0	0	0	7	0	0	0	0	0	6	10	16	7	206
12:15 12:30	4	124	0	128	0	1	0	1	3	0	0	0	0	0	8	9	17	3	146
12:30 12:45	5	155	0	160	0	0	0	0	5	0	0	0	0	0	5	10	15	5	175
12:45 13:00	4	206	0	210	0	0	0	0	6	0	0	0	0	0	8	10	18	6	228
13:00 13:15	7	161	0	168	0	0	0	0	3	0	0	0	0	0	4	11	15	3	183
13:15 13:30	5	167	0	172	0	0	0	0	7	0	0	0	0	0	6	13	19	7	191
15:00 15:15	2	179	0	181	0	0	0	0	7	0	0	0	0	0	8	13	21	7	202
15:15 15:30	5	216	0	221	0	0	0	0	14	0	0	0	0	0	9	16	25	14	246
15:30 15:45	8	216	0	224	0	0	0	0	12	0	0	0	0	0	6	15	22	12	246
15:45 16:00	7	228	0	235	0	0	0	0	10	0	0	0	0	0	4	14	18	10	253
16:00 16:15	11	209	0	220	0	0	0	0	9	0	0	0	0	0	3	25	28	9	248
16:15 16:30	13	196	0	209	0	0	0	0	5	0	0	0	0	0	5	11	16	5	225
16:30 16:45	5	220	0	225	0	0	0	0	11	0	0	0	0	0	10	11	21	11	246
16:45 17:00	3	200	0	203	0	0	0	0	3	0	0	0	0	0	5	8	13	3	216
17:00 17:15	2	223	0	225	0	0	0	0	3	0	0	0	0	0	10	12	22	3	247
17:15 17:30	12	209	0	221	0	0	0	0	2	1	0	0	1	0	11	17	28	2	250
17:30 17:45	13	201	0	214	0	0	0	0	4	0	0	0	0	0	12	11	23	4	237
17:45 18:00	8	223	0	231	0	0	0	0	2	0	0	0	0	0	10	8	18	2	249
<b>Total:</b>	<b>226</b>	<b>8466</b>	<b>0</b>	<b>8692</b>	<b>0</b>	<b>1</b>	<b>1</b>	<b>2</b>	<b>213</b>	<b>1</b>	<b>0</b>	<b>0</b>	<b>1</b>	<b>0</b>	<b>181</b>	<b>318</b>	<b>501</b>	<b>213</b>	<b>9,196</b>

Note: U-Turns are included in Totals.



# Transportation Services - Traffic Services

## Turning Movement Count - Study Results

### KENT ST @ MACLAREN ST

**Survey Date:** Tuesday, March 05, 2019

**WO No:** 38413

**Start Time:** 07:00

**Device:** Miovision

### Full Study Cyclist Volume

Time Period	KENT ST			MACLAREN ST			Grand Total
	Northbound	Southbound	Street Total	Eastbound	Westbound	Street Total	
07:00 07:15	0	0	0	0	0	0	0
07:15 07:30	0	0	0	0	0	0	0
07:30 07:45	0	0	0	0	0	0	0
07:45 08:00	0	0	0	0	0	0	0
08:00 08:15	1	0	1	0	1	1	2
08:15 08:30	1	0	1	0	1	1	2
08:30 08:45	0	0	0	0	0	0	0
08:45 09:00	1	0	1	0	0	0	1
09:00 09:15	0	0	0	0	1	1	1
09:15 09:30	2	0	2	0	0	0	2
09:30 09:45	0	0	0	0	0	0	0
09:45 10:00	0	0	0	0	0	0	0
11:30 11:45	0	0	0	0	0	0	0
11:45 12:00	0	0	0	0	0	0	0
12:00 12:15	0	0	0	0	0	0	0
12:15 12:30	0	0	0	0	0	0	0
12:30 12:45	0	0	0	0	1	1	1
12:45 13:00	2	0	2	1	2	3	5
13:00 13:15	0	0	0	0	0	0	0
13:15 13:30	0	0	0	0	0	0	0
15:00 15:15	0	0	0	0	0	0	0
15:15 15:30	5	0	5	0	0	0	5
15:30 15:45	1	0	1	0	0	0	1
15:45 16:00	0	0	0	0	0	0	0
16:00 16:15	0	0	0	0	0	0	0
16:15 16:30	0	0	0	0	0	0	0
16:30 16:45	1	0	1	0	0	0	1
16:45 17:00	0	0	0	0	0	0	0
17:00 17:15	0	0	0	0	0	0	0
17:15 17:30	0	0	0	0	1	1	1
17:30 17:45	0	0	0	0	0	0	0
17:45 18:00	1	0	1	0	0	0	1
<b>Total</b>	<b>15</b>	<b>0</b>	<b>15</b>	<b>1</b>	<b>7</b>	<b>8</b>	<b>23</b>



# Transportation Services - Traffic Services

## Turning Movement Count - Study Results

### KENT ST @ MACLAREN ST

**Survey Date:** Tuesday, March 05, 2019

**WO No:** 38413

**Start Time:** 07:00

**Device:** Miovision

### Full Study Pedestrian Volume

#### KENT ST

#### MACLAREN ST

Time Period	NB Approach (E or W Crossing)	SB Approach (E or W Crossing)	Total	EB Approach (N or S Crossing)	WB Approach (N or S Crossing)	Total	Grand Total
07:00 07:15	0	4	4	4	8	12	16
07:15 07:30	1	4	5	11	13	24	29
07:30 07:45	2	2	4	10	21	31	35
07:45 08:00	9	1	10	19	30	49	59
08:00 08:15	2	2	4	23	28	51	55
08:15 08:30	3	3	6	28	37	65	71
08:30 08:45	1	2	3	22	38	60	63
08:45 09:00	1	3	4	30	38	68	72
09:00 09:15	0	3	3	12	18	30	33
09:15 09:30	0	5	5	16	15	31	36
09:30 09:45	1	4	5	8	11	19	24
09:45 10:00	1	4	5	4	10	14	19
11:30 11:45	2	1	3	9	21	30	33
11:45 12:00	2	6	8	11	17	28	36
12:00 12:15	4	6	10	13	16	29	39
12:15 12:30	0	3	3	10	17	27	30
12:30 12:45	3	0	3	11	15	26	29
12:45 13:00	1	7	8	20	24	44	52
13:00 13:15	3	7	10	10	12	22	32
13:15 13:30	3	6	9	11	14	25	34
15:00 15:15	3	5	8	18	17	35	43
15:15 15:30	3	5	8	12	15	27	35
15:30 15:45	2	4	6	9	23	32	38
15:45 16:00	5	7	12	12	19	31	43
16:00 16:15	1	1	2	12	38	50	52
16:15 16:30	5	7	12	19	29	48	60
16:30 16:45	7	2	9	20	27	47	56
16:45 17:00	7	2	9	23	28	51	60
17:00 17:15	2	2	4	27	35	62	66
17:15 17:30	2	11	13	23	32	55	68
17:30 17:45	1	6	7	23	16	39	46
17:45 18:00	0	9	9	21	17	38	47
<b>Total</b> .....	<b>77</b>	<b>134</b>	<b>211</b>	<b>501</b>	<b>699</b>	<b>1200</b>	<b>1411</b>



# Transportation Services - Traffic Services

## Turning Movement Count - Study Results

### KENT ST @ MACLAREN ST

**Survey Date:** Tuesday, March 05, 2019

**WO No:** 38413

**Start Time:** 07:00

**Device:** Miovision

### Full Study Heavy Vehicles

KENT ST					MACLAREN ST															Grand Total
Time Period	Northbound			N TOT	Southbound			S TOT	STR TOT	Eastbound			E TOT	Westbound			W TOT	STR TOT		
	LT	ST	RT		LT	ST	RT			LT	ST	RT		LT	ST	RT				
07:00	07:15	0	8	0	8	0	0	0	0	8	0	0	0	0	0	1	0	1	1	9
07:15	07:30	0	8	0	8	0	0	0	0	8	0	0	0	0	0	0	2	2	2	10
07:30	07:45	0	9	0	9	0	0	0	0	9	0	0	0	0	0	0	0	0	0	9
07:45	08:00	1	4	0	5	0	0	0	0	5	0	0	0	0	0	1	1	1	6	
08:00	08:15	0	5	0	5	0	0	0	0	5	0	0	0	0	0	0	0	0	5	
08:15	08:30	0	6	0	6	0	0	0	0	6	0	0	0	0	1	1	2	2	8	
08:30	08:45	1	7	0	8	0	0	0	0	8	0	0	0	0	0	0	0	0	8	
08:45	09:00	0	7	0	7	0	0	0	0	7	0	0	0	0	1	1	2	2	9	
09:00	09:15	1	11	0	12	0	0	0	0	12	0	0	0	0	0	3	3	3	15	
09:15	09:30	0	6	0	6	0	0	0	0	6	0	0	0	0	0	1	1	1	7	
09:30	09:45	0	7	0	7	0	0	0	0	7	0	0	0	0	0	3	3	3	10	
09:45	10:00	1	8	0	9	0	0	0	0	9	0	0	0	0	0	0	0	0	9	
11:30	11:45	0	7	0	7	0	0	0	0	7	0	0	0	0	1	1	2	2	9	
11:45	12:00	0	3	0	3	0	0	0	0	3	0	0	0	0	0	1	1	1	4	
12:00	12:15	0	7	0	7	0	0	0	0	7	0	0	0	0	0	0	0	0	7	
12:15	12:30	0	3	0	3	0	0	0	0	3	0	0	0	0	0	0	0	0	3	
12:30	12:45	0	5	0	5	0	0	0	0	5	0	0	0	0	1	1	2	2	7	
12:45	13:00	0	6	0	6	0	0	0	0	6	0	0	0	0	0	2	2	2	8	
13:00	13:15	0	3	0	3	0	0	0	0	3	0	0	0	0	1	1	2	2	5	
13:15	13:30	0	7	0	7	0	0	0	0	7	0	0	0	0	0	1	1	1	8	
15:00	15:15	0	7	0	7	0	0	0	0	7	0	0	0	0	0	0	0	0	7	
15:15	15:30	0	14	0	14	0	0	0	0	14	0	0	0	0	0	0	0	0	14	
15:30	15:45	0	12	0	12	0	0	0	0	12	0	0	0	0	1	1	2	2	14	
15:45	16:00	0	10	0	10	0	0	0	0	10	0	0	0	0	0	0	0	0	10	
16:00	16:15	1	8	0	9	0	0	0	0	9	0	0	0	0	0	0	0	0	9	
16:15	16:30	0	5	0	5	0	0	0	0	5	0	0	0	0	0	1	1	1	6	
16:30	16:45	0	11	0	11	0	0	0	0	11	0	0	0	0	0	0	0	0	11	
16:45	17:00	0	3	0	3	0	0	0	0	3	0	0	0	0	0	0	0	0	3	
17:00	17:15	0	3	0	3	0	0	0	0	3	0	0	0	0	0	0	0	0	3	
17:15	17:30	0	2	0	2	0	0	0	0	2	0	0	0	0	0	1	1	1	3	
17:30	17:45	0	4	0	4	0	0	0	0	4	0	0	0	0	0	1	1	1	5	
17:45	18:00	0	2	0	2	0	0	0	0	2	0	0	0	0	0	0	0	0	2	
Total:	None	5	208	0	213	0	0	0	0	213	0	0	0	0	0	7	23	30	30	243





# Transportation Services - Traffic Services

## Turning Movement Count - Study Results

### KENT ST @ MACLAREN ST

**Survey Date:** Tuesday, March 05, 2019

**WO No:** 38413

**Start Time:** 07:00

**Device:** Miovision

### Full Study 15 Minute U-Turn Total

KENT ST

MACLAREN ST

Time Period		Northbound U-Turn Total	Southbound U-Turn Total	Eastbound U-Turn Total	Westbound U-Turn Total	Total
07:00	07:15	0	0	0	0	0
07:15	07:30	0	0	0	0	0
07:30	07:45	0	0	0	0	0
07:45	08:00	0	0	0	0	0
08:00	08:15	0	0	0	0	0
08:15	08:30	0	0	0	0	0
08:30	08:45	0	0	0	0	0
08:45	09:00	0	0	0	0	0
09:00	09:15	0	0	0	0	0
09:15	09:30	0	0	0	0	0
09:30	09:45	0	0	0	0	0
09:45	10:00	0	0	0	0	0
11:30	11:45	0	0	0	0	0
11:45	12:00	0	0	0	1	1
12:00	12:15	0	0	0	0	0
12:15	12:30	0	0	0	0	0
12:30	12:45	0	0	0	0	0
12:45	13:00	0	0	0	0	0
13:00	13:15	0	0	0	0	0
13:15	13:30	0	0	0	0	0
15:00	15:15	0	0	0	0	0
15:15	15:30	0	0	0	0	0
15:30	15:45	0	0	0	1	1
15:45	16:00	0	0	0	0	0
16:00	16:15	0	0	0	0	0
16:15	16:30	0	0	0	0	0
16:30	16:45	0	0	0	0	0
16:45	17:00	0	0	0	0	0
17:00	17:15	0	0	0	0	0
17:15	17:30	0	0	0	0	0
17:30	17:45	0	0	0	0	0
17:45	18:00	0	0	0	0	0
Total		0	0	0	2	2

## Turning Movement Count - Study Results

### KENT ST @ SOMERSET ST


**Survey Date:** Wednesday, April 05, 2017

**WO No:** 36850

**Start Time:** 07:00

**Device:** Miovision

### Full Study Diagram

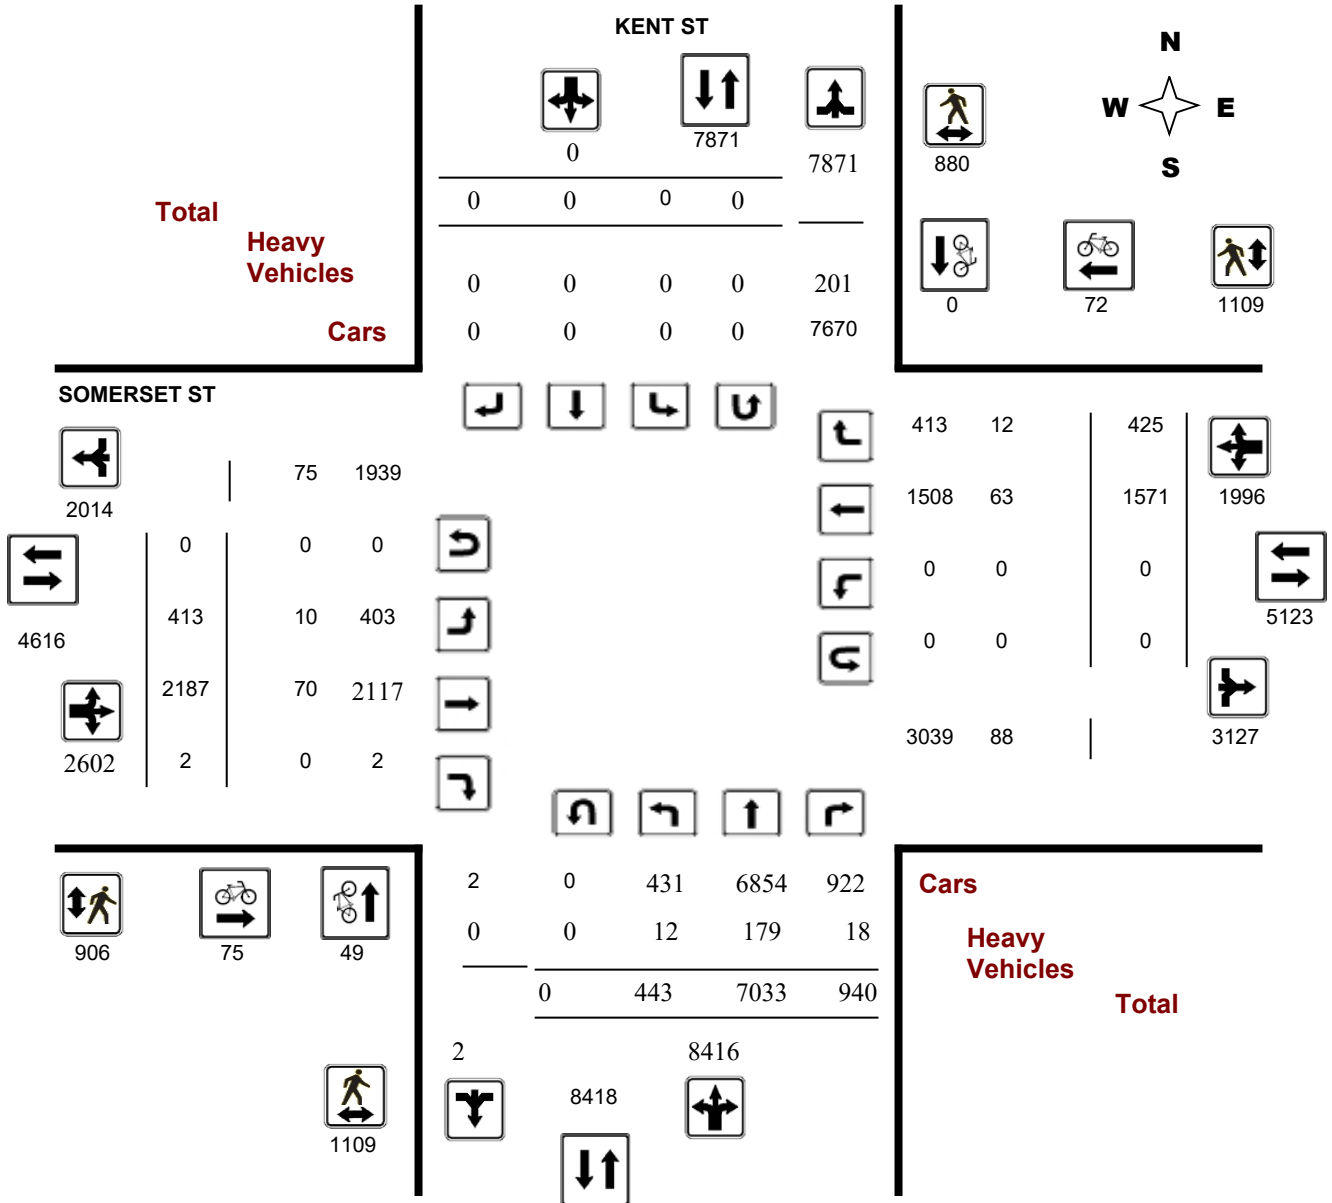

## Turning Movement Count - Study Results

### KENT ST @ SOMERSET ST


**Survey Date:** Wednesday, April 05, 2017

**WO No:** 36850

**Start Time:** 07:00

**Device:** Miovision

### Full Study Peak Hour Diagram

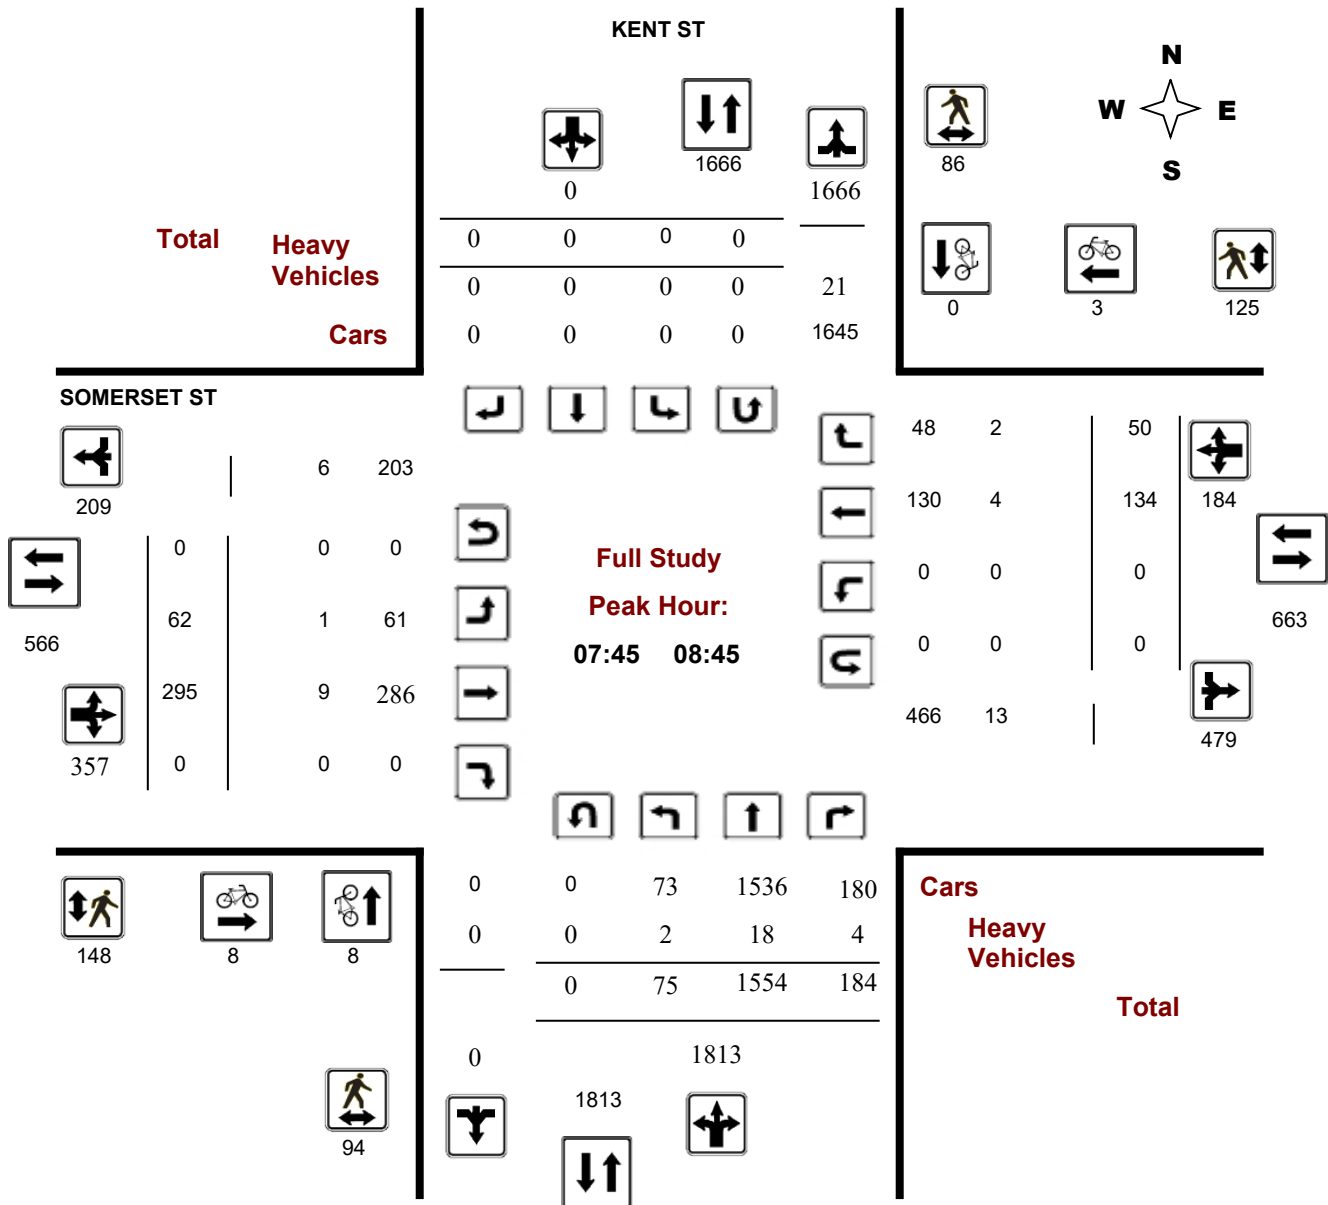

## Turning Movement Count - Peak Hour Diagram


### KENT ST @ SOMERSET ST

**Survey Date:** Wednesday, April 05, 2017

**Start Time:** 07:00

**WO No:** 36850

**Device:** Miovision

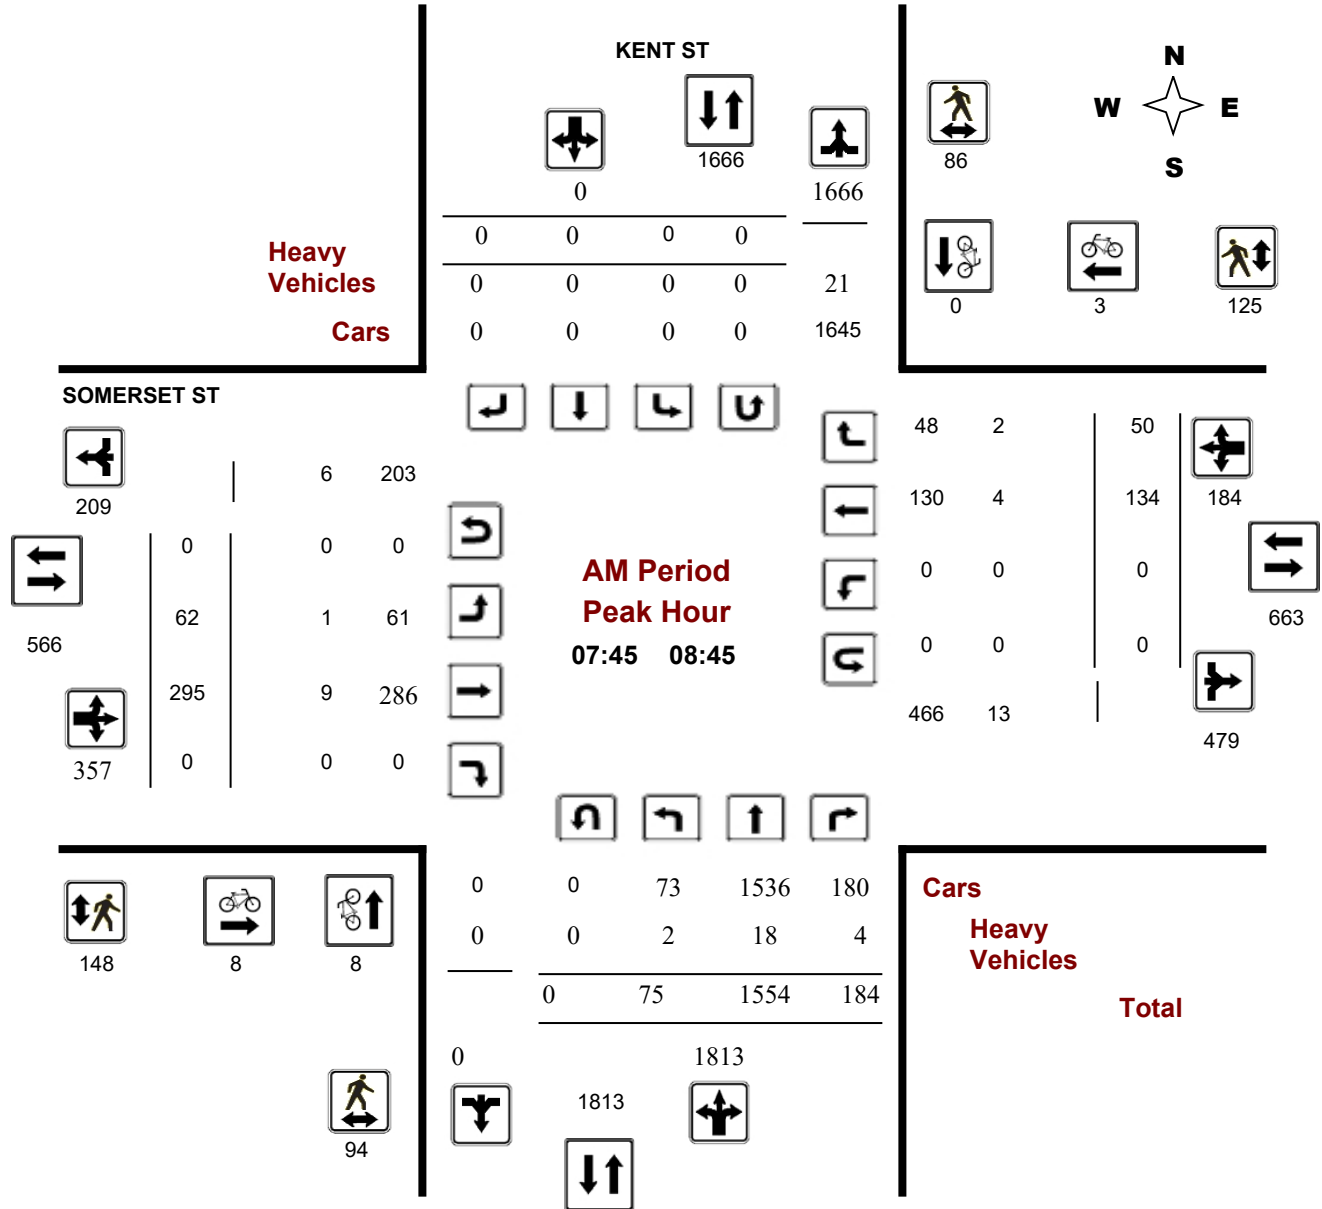

## Turning Movement Count - Peak Hour Diagram


### KENT ST @ SOMERSET ST

**Survey Date:** Wednesday, April 05, 2017

**Start Time:** 07:00

**WO No:** 36850

**Device:** Miovision

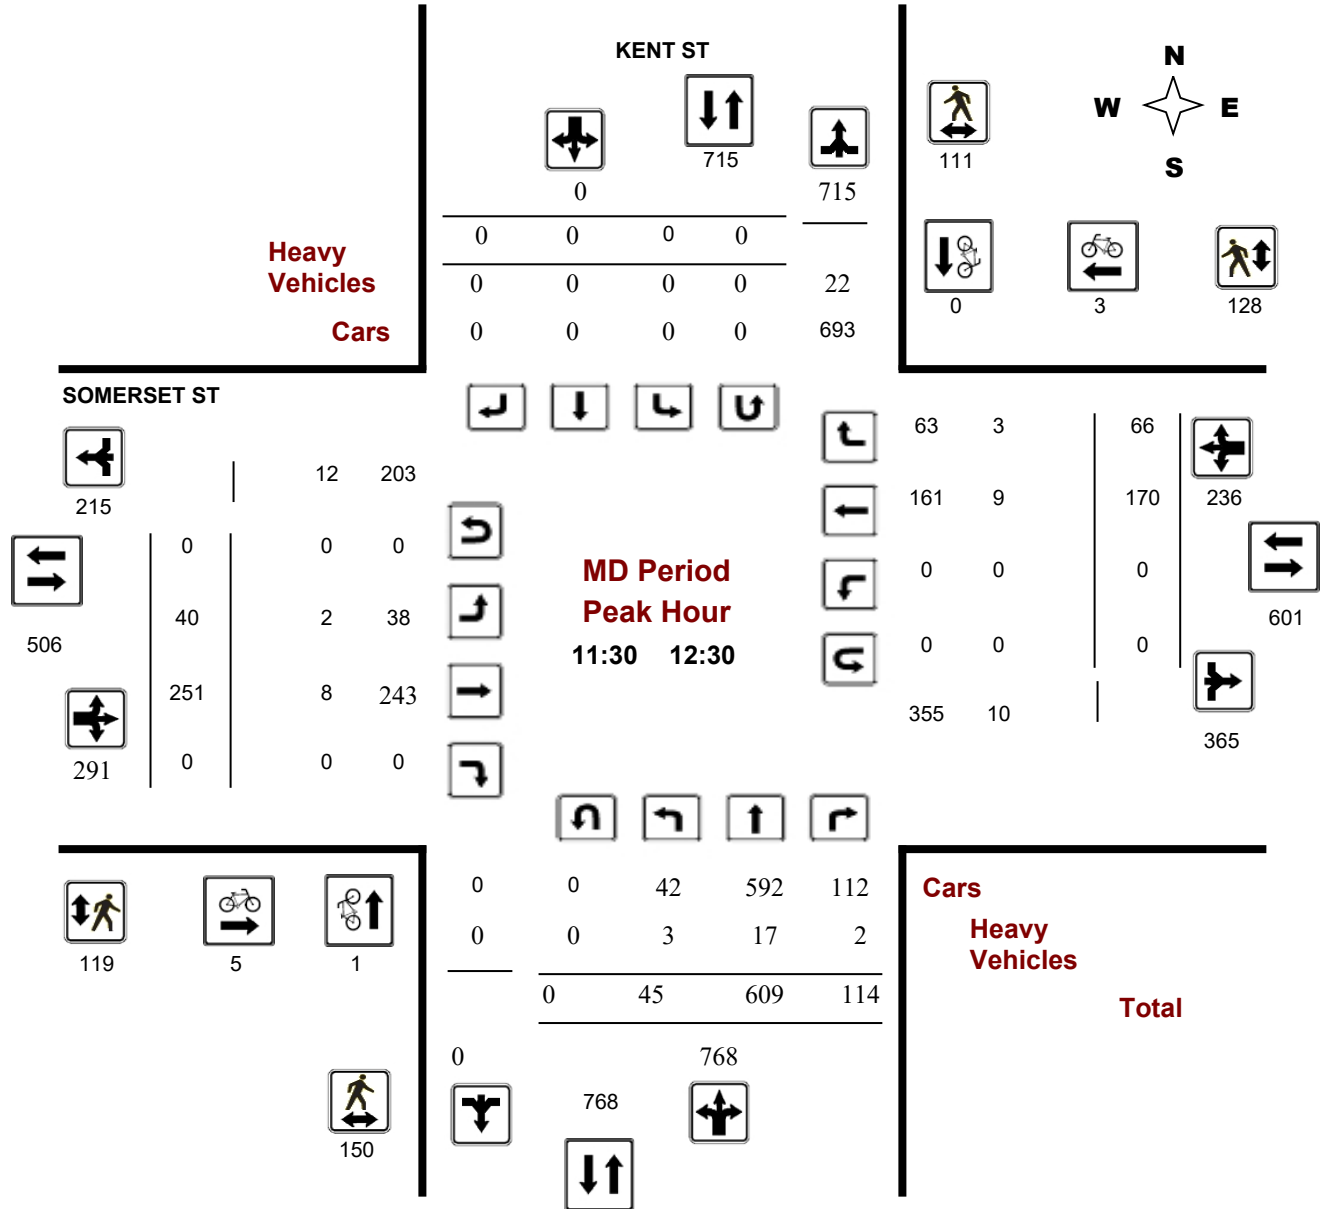

## Turning Movement Count - Peak Hour Diagram


### KENT ST @ SOMERSET ST

**Survey Date:** Wednesday, April 05, 2017

**Start Time:** 07:00

**WO No:** 36850

**Device:** Miovision

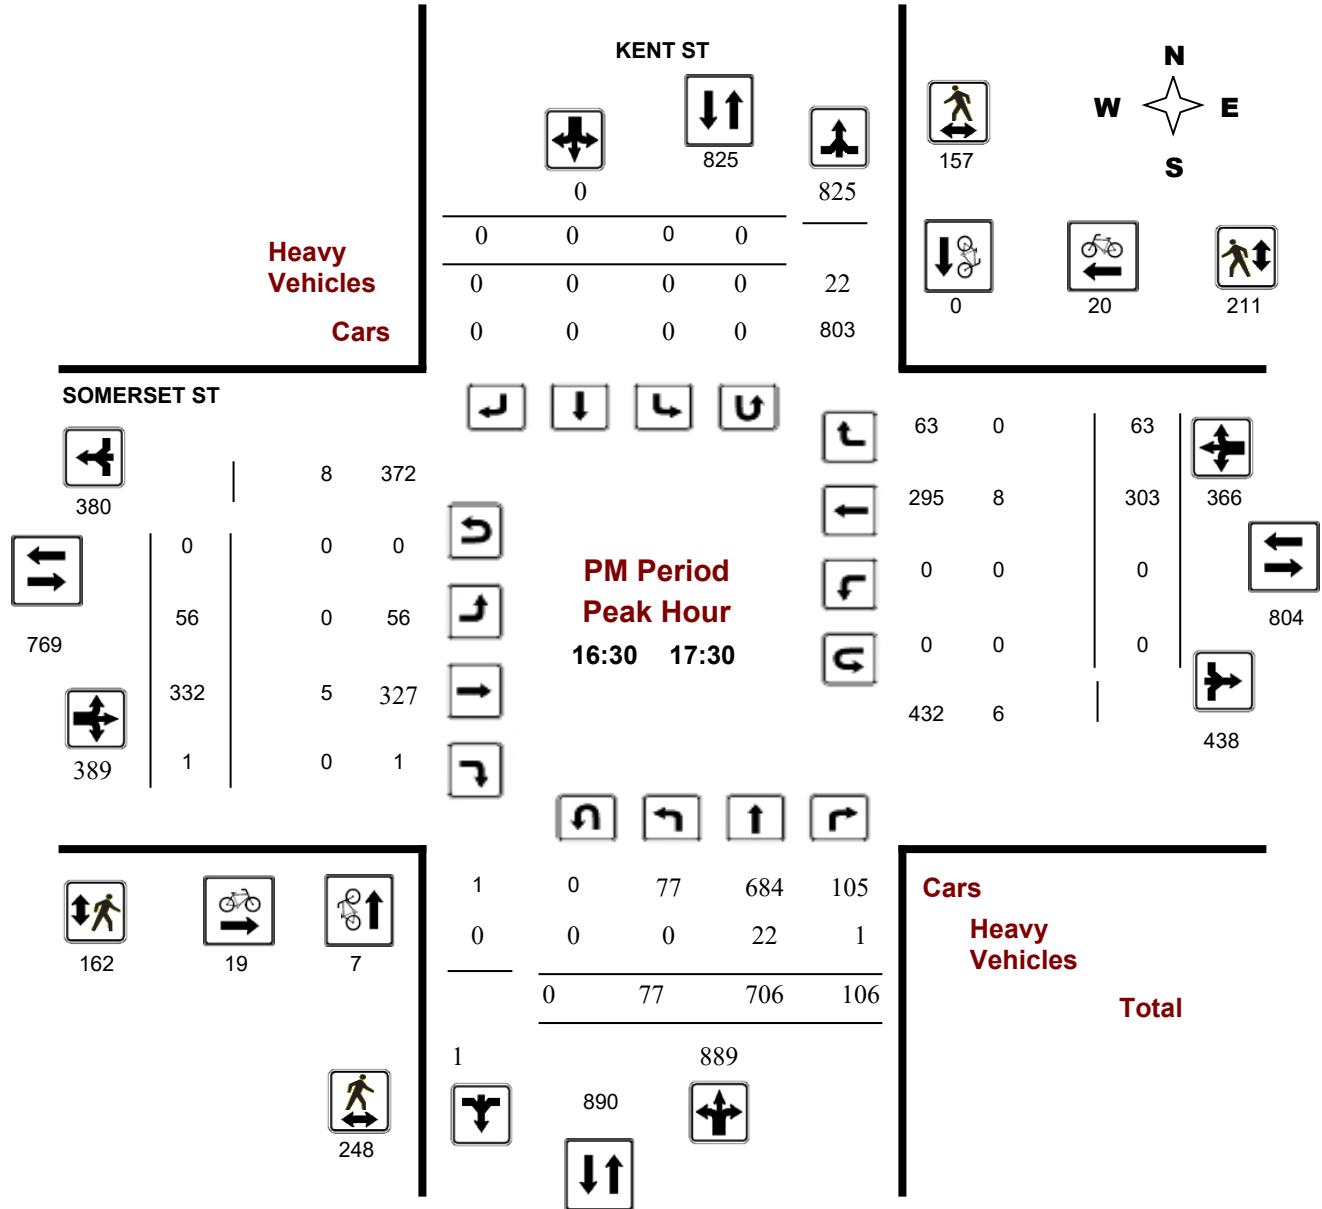



# Transportation Services - Traffic Services

## Turning Movement Count - Study Results

### KENT ST @ SOMERSET ST

**Survey Date:** Wednesday, April 05, 2017

**WO No:** 36850

**Start Time:** 07:00

**Device:** Miovision

### Full Study Summary (8 HR Standard)

**Survey Date:** Wednesday, April 05, 2017

**Total Observed U-Turns**  
 Northbound: 0      Southbound: 0  
 Eastbound: 0      Westbound: 0

**AADT Factor**  
 .90

Period	KENT ST									SOMERSET ST									Grand Total
	Northbound				Southbound					Eastbound				Westbound					
	LT	ST	RT	NB TOT	LT	ST	RT	SB TOT	STR TOT	LT	ST	RT	EB TOT	LT	ST	RT	WB TOT	STR TOT	
07:00 08:00	53	1393	126	1572	0	0	0	0	1572	46	245	0	291	0	93	44	137	428	2000
08:00 09:00	69	1516	190	1775	0	0	0	0	1775	68	301	0	369	0	152	48	200	569	2344
09:00 10:00	48	944	106	1098	0	0	0	0	1098	56	233	0	289	0	166	40	206	495	1593
11:30 12:30	45	609	114	768	0	0	0	0	768	40	251	0	291	0	170	66	236	527	1295
12:30 13:30	42	530	90	662	0	0	0	0	662	45	242	1	288	0	161	41	202	490	1152
15:00 16:00	56	651	113	820	0	0	0	0	820	35	305	0	340	0	251	56	307	647	1467
16:00 17:00	64	682	96	842	0	0	0	0	842	61	330	1	392	0	318	66	384	776	1618
17:00 18:00	66	708	105	879	0	0	0	0	879	62	280	0	342	0	260	64	324	666	1545
<b>Sub Total</b>	443	7033	940	8416	0	0	0	0	8416	413	2187	2	2602	0	1571	425	1996	4598	13014
<b>U Turns</b>	0			0	0			0	0	0			0	0			0	0	0
<b>Total</b>	443	7033	940	8416	0	0	0	0	8416	413	2187	2	2602	0	1571	425	1996	4598	13014
<b>EQ 12Hr</b>	616	9776	1307	11699	0	0	0	0	11699	574	3040	3	3617	0	2184	591	2775	6392	18091
Note: These values are calculated by multiplying the totals by the appropriate expansion factor.													<b>1.39</b>						
<b>AVG 12Hr</b>	554	8798	1176	10528	0	0	0	0	10528	517	2736	3	3256	0	1966	532	2498	5754	16282
Note: These volumes are calculated by multiplying the Equivalent 12 hr. totals by the AADT factor.													<b>.90</b>						
<b>AVG 24Hr</b>	726	11525	1541	13792	0	0	0	0	13792	677	3584	4	4265	0	2575	697	3272	7537	21329

Note: These volumes are calculated by multiplying the Average Daily 12 hr. totals by 12 to 24 expansion factor. **1.31**

Note: U-Turns provided for approach totals. Refer to 'U-Turn' Report for specific breakdown.



# Transportation Services - Traffic Services

## Turning Movement Count - Study Results

### KENT ST @ SOMERSET ST

**Survey Date:** Wednesday, April 05, 2017

**WO No:** 36850

**Start Time:** 07:00

**Device:** Miovision

### Full Study 15 Minute Increments

Time Period	KENT ST					SOMERSET ST					Grand Total									
	Northbound			Southbound		Eastbound			Westbound											
	LT	ST	RT	N TOT	LT	ST	RT	S TOT	STR TOT	LT	ST	RT	E TOT	LT	ST	RT	W TOT	STR TOT		
07:00	07:15	8	312	26	346	0	0	0	0	346	6	61	0	67	0	14	12	26	93	439
07:15	07:30	8	335	33	376	0	0	0	0	376	7	46	0	53	0	22	9	31	84	460
07:30	07:45	12	348	30	390	0	0	0	0	390	16	65	0	81	0	35	11	46	127	517
07:45	08:00	25	398	37	460	0	0	0	0	460	17	73	0	90	0	22	12	34	124	584
08:00	08:15	17	373	39	429	0	0	0	0	429	14	68	0	82	0	29	12	41	123	552
08:15	08:30	18	416	46	480	0	0	0	0	480	12	67	0	79	0	41	15	56	135	615
08:30	08:45	15	367	62	444	0	0	0	0	444	19	87	0	106	0	42	11	53	159	603
08:45	09:00	19	360	43	422	0	0	0	0	422	23	79	0	102	0	40	10	50	152	574
09:00	09:15	9	306	34	349	0	0	0	0	349	14	59	0	73	0	42	11	53	126	475
09:15	09:30	16	250	20	286	0	0	0	0	286	13	60	0	73	0	42	9	51	124	410
09:30	09:45	10	202	27	239	0	0	0	0	239	13	55	0	68	0	38	13	51	119	358
09:45	10:00	13	186	25	224	0	0	0	0	224	16	59	0	75	0	44	7	51	126	350
11:30	11:45	12	145	31	188	0	0	0	0	188	10	61	0	71	0	40	22	62	133	321
11:45	12:00	9	197	28	234	0	0	0	0	234	12	63	0	75	0	49	12	61	136	370
12:00	12:15	15	125	27	167	0	0	0	0	167	9	66	0	75	0	47	17	64	139	306
12:15	12:30	9	142	28	179	0	0	0	0	179	9	61	0	70	0	34	15	49	119	298
12:30	12:45	9	139	23	171	0	0	0	0	171	13	56	0	69	0	48	9	57	126	297
12:45	13:00	14	121	24	159	0	0	0	0	159	8	64	0	72	0	37	9	46	118	277
13:00	13:15	8	141	21	170	0	0	0	0	170	8	68	0	76	0	44	19	63	139	309
13:15	13:30	11	129	22	162	0	0	0	0	162	16	54	1	71	0	32	4	36	107	269
15:00	15:15	11	144	30	185	0	0	0	0	185	3	80	0	83	0	53	20	73	156	341
15:15	15:30	16	183	26	225	0	0	0	0	225	13	78	0	91	0	60	8	68	159	384
15:30	15:45	15	175	17	207	0	0	0	0	207	9	72	0	81	0	70	13	83	164	371
15:45	16:00	14	149	40	203	0	0	0	0	203	10	75	0	85	0	68	15	83	168	371
16:00	16:15	18	158	21	197	0	0	0	0	197	18	88	0	106	0	73	16	89	195	392
16:15	16:30	13	172	17	202	0	0	0	0	202	15	64	0	79	0	85	22	107	186	388
16:30	16:45	14	181	26	221	0	0	0	0	221	12	85	0	97	0	82	11	93	190	411
16:45	17:00	19	171	32	222	0	0	0	0	222	16	93	1	110	0	78	17	95	205	427
17:00	17:15	24	167	29	220	0	0	0	0	220	9	76	0	85	0	76	12	88	173	393
17:15	17:30	20	187	19	226	0	0	0	0	226	19	78	0	97	0	67	23	90	187	413
17:30	17:45	7	193	24	224	0	0	0	0	224	16	69	0	85	0	68	18	86	171	395
17:45	18:00	15	161	33	209	0	0	0	0	209	18	57	0	75	0	49	11	60	135	344
Total:		443	7033	940	8416	0	0	0	0	8416	413	2187	2	2602	0	1571	425	1996	8416	13,014

Note: U-Turns are included in Totals.





# Transportation Services - Traffic Services

## Turning Movement Count - Study Results

### KENT ST @ SOMERSET ST

**Survey Date:** Wednesday, April 05, 2017

**WO No:** 36850

**Start Time:** 07:00

**Device:** Miovision

### Full Study Cyclist Volume

Time Period	KENT ST			SOMERSET ST			Grand Total
	Northbound	Southbound	Street Total	Eastbound	Westbound	Street Total	
07:00 07:15	3	0	3	3	2	5	8
07:15 07:30	2	0	2	4	0	4	6
07:30 07:45	0	0	0	1	2	3	3
07:45 08:00	3	0	3	4	0	4	7
08:00 08:15	0	0	0	1	1	2	2
08:15 08:30	3	0	3	3	0	3	6
08:30 08:45	2	0	2	0	2	2	4
08:45 09:00	5	0	5	4	2	6	11
09:00 09:15	1	0	1	2	0	2	3
09:15 09:30	1	0	1	3	0	3	4
09:30 09:45	1	0	1	0	4	4	5
09:45 10:00	4	0	4	2	2	4	8
11:30 11:45	0	0	0	3	0	3	3
11:45 12:00	1	0	1	1	2	3	4
12:00 12:15	0	0	0	0	0	0	0
12:15 12:30	0	0	0	1	1	2	2
12:30 12:45	0	0	0	5	0	5	5
12:45 13:00	2	0	2	4	1	5	7
13:00 13:15	1	0	1	1	5	6	7
13:15 13:30	1	0	1	1	2	3	4
15:00 15:15	1	0	1	1	3	4	5
15:15 15:30	2	0	2	3	1	4	6
15:30 15:45	1	0	1	1	1	2	3
15:45 16:00	0	0	0	3	5	8	8
16:00 16:15	4	0	4	0	8	8	12
16:15 16:30	0	0	0	3	2	5	5
16:30 16:45	3	0	3	5	6	11	14
16:45 17:00	1	0	1	10	4	14	15
17:00 17:15	0	0	0	1	5	6	6
17:15 17:30	3	0	3	3	5	8	11
17:30 17:45	2	0	2	1	1	2	4
17:45 18:00	2	0	2	1	5	6	8
<b>Total</b>	<b>49</b>	<b>0</b>	<b>49</b>	<b>75</b>	<b>72</b>	<b>147</b>	<b>196</b>



# Transportation Services - Traffic Services

## Turning Movement Count - Study Results

### KENT ST @ SOMERSET ST

**Survey Date:** Wednesday, April 05, 2017

**WO No:** 36850

**Start Time:** 07:00

**Device:** Miovision

### Full Study Pedestrian Volume

#### KENT ST

#### SOMERSET ST

Time Period	NB Approach (E or W Crossing)	SB Approach (E or W Crossing)	Total	EB Approach (N or S Crossing)	WB Approach (N or S Crossing)	Total	Grand Total
07:00 07:15	2	7	9	3	12	15	24
07:15 07:30	11	13	24	14	14	28	52
07:30 07:45	5	15	20	10	24	34	54
07:45 08:00	23	21	44	36	27	63	107
08:00 08:15	22	18	40	27	27	54	94
08:15 08:30	17	22	39	32	38	70	109
08:30 08:45	32	25	57	53	33	86	143
08:45 09:00	26	22	48	35	29	64	112
09:00 09:15	30	17	47	33	22	55	102
09:15 09:30	22	16	38	30	30	60	98
09:30 09:45	20	16	36	19	14	33	69
09:45 10:00	23	16	39	18	25	43	82
11:30 11:45	36	17	53	12	22	34	87
11:45 12:00	42	24	66	36	32	68	134
12:00 12:15	35	33	68	43	39	82	150
12:15 12:30	37	37	74	28	35	63	137
12:30 12:45	27	38	65	28	35	63	128
12:45 13:00	40	33	73	33	36	69	142
13:00 13:15	32	29	61	29	37	66	127
13:15 13:30	23	29	52	12	32	44	96
15:00 15:15	28	32	60	30	31	61	121
15:15 15:30	19	30	49	29	27	56	105
15:30 15:45	55	27	82	32	45	77	159
15:45 16:00	30	40	70	18	39	57	127
16:00 16:15	49	29	78	19	56	75	153
16:15 16:30	60	38	98	38	53	91	189
16:30 16:45	66	45	111	51	70	121	232
16:45 17:00	55	32	87	46	54	100	187
17:00 17:15	71	40	111	33	45	78	189
17:15 17:30	56	40	96	32	42	74	170
17:30 17:45	50	27	77	16	44	60	137
17:45 18:00	65	52	117	31	40	71	188
<b>Total</b> .....	1109	880	1989	906	1109	2015	4004



# Transportation Services - Traffic Services

## Turning Movement Count - Study Results

### KENT ST @ SOMERSET ST

**Survey Date:** Wednesday, April 05, 2017

**WO No:** 36850

**Start Time:** 07:00

**Device:** Miovision

### Full Study Heavy Vehicles

		KENT ST									SOMERSET ST										
		Northbound			Southbound			Eastbound			Westbound										
Time Period		LT	ST	RT	N TOT	LT	ST	RT	S TOT	STR TOT	LT	ST	RT	E TOT	LT	ST	RT	W TOT	STR TOT	Grand Total	
07:00	07:15	0	2	1	3	0	0	0	0	3	0	2	0	2	0	2	1	3	5	8	
07:15	07:30	1	5	0	6	0	0	0	0	6	1	4	0	5	0	3	0	3	8	14	
07:30	07:45	1	6	0	7	0	0	0	0	7	1	2	0	3	0	1	1	2	5	12	
07:45	08:00	0	5	0	5	0	0	0	0	5	0	2	0	2	0	1	0	1	3	8	
08:00	08:15	1	4	2	7	0	0	0	0	7	1	5	0	6	0	1	2	3	9	16	
08:15	08:30	0	3	1	4	0	0	0	0	4	0	0	0	0	0	1	0	1	1	5	
08:30	08:45	1	6	1	8	0	0	0	0	8	0	2	0	2	0	1	0	1	3	11	
08:45	09:00	1	7	1	9	0	0	0	0	9	1	6	0	7	0	3	0	3	10	19	
09:00	09:15	0	8	1	9	0	0	0	0	9	1	2	0	3	0	2	0	2	5	14	
09:15	09:30	1	6	0	7	0	0	0	0	7	0	3	0	3	0	6	1	7	10	17	
09:30	09:45	1	9	1	11	0	0	0	0	11	0	6	0	6	0	1	0	1	7	18	
09:45	10:00	0	7	1	8	0	0	0	0	8	0	4	0	4	0	4	0	4	8	16	
11:30	11:45	1	8	0	9	0	0	0	0	9	0	1	0	1	0	3	1	4	5	14	
11:45	12:00	1	4	1	6	0	0	0	0	6	0	5	0	5	0	1	2	3	8	14	
12:00	12:15	0	4	1	5	0	0	0	0	5	1	1	0	2	0	4	0	4	6	11	
12:15	12:30	1	1	0	2	0	0	0	0	2	1	1	0	2	0	1	0	1	3	5	
12:30	12:45	0	2	0	2	0	0	0	0	2	0	0	0	0	0	2	0	2	2	4	
12:45	13:00	0	3	0	3	0	0	0	0	3	0	2	0	2	0	1	0	1	3	6	
13:00	13:15	0	5	0	5	0	0	0	0	5	0	2	0	2	0	2	1	3	5	10	
13:15	13:30	1	4	0	5	0	0	0	0	5	2	1	0	3	0	1	1	2	5	10	
15:00	15:15	0	7	3	10	0	0	0	0	10	0	2	0	2	0	3	0	3	5	15	
15:15	15:30	0	12	0	12	0	0	0	0	12	0	1	0	1	0	1	0	1	2	14	
15:30	15:45	0	12	2	14	0	0	0	0	14	0	2	0	2	0	3	0	3	5	19	
15:45	16:00	0	3	0	3	0	0	0	0	3	0	2	0	2	0	1	0	1	3	6	
16:00	16:15	0	5	0	5	0	0	0	0	5	1	3	0	4	0	3	1	4	8	13	
16:15	16:30	1	11	0	12	0	0	0	0	12	0	1	0	1	0	1	0	1	2	14	
16:30	16:45	0	5	1	6	0	0	0	0	6	0	2	0	2	0	2	0	2	4	10	
16:45	17:00	0	6	0	6	0	0	0	0	6	0	1	0	1	0	1	0	1	2	8	
17:00	17:15	0	7	0	7	0	0	0	0	7	0	1	0	1	0	2	0	2	3	10	
17:15	17:30	0	4	0	4	0	0	0	0	4	0	1	0	1	0	3	0	3	4	8	
17:30	17:45	0	6	0	6	0	0	0	0	6	0	2	0	2	0	1	1	2	4	10	
17:45	18:00	0	2	1	3	0	0	0	0	3	0	1	0	1	0	1	0	1	2	5	
<b>Total:</b>	None	12	179	18	209	0	0	0	0	209	10	70	0	80	0	63	12	75	155	364	



# Transportation Services - Traffic Services

## Turning Movement Count - Study Results

### KENT ST @ SOMERSET ST

**Survey Date:** Wednesday, April 05, 2017

**WO No:** 36850

**Start Time:** 07:00

**Device:** Miovision

### Full Study 15 Minute U-Turn Total

KENT ST

SOMERSET ST

Time Period		Northbound U-Turn Total	Southbound U-Turn Total	Eastbound U-Turn Total	Westbound U-Turn Total	Total
07:00	07:15	0	0	0	0	0
07:15	07:30	0	0	0	0	0
07:30	07:45	0	0	0	0	0
07:45	08:00	0	0	0	0	0
08:00	08:15	0	0	0	0	0
08:15	08:30	0	0	0	0	0
08:30	08:45	0	0	0	0	0
08:45	09:00	0	0	0	0	0
09:00	09:15	0	0	0	0	0
09:15	09:30	0	0	0	0	0
09:30	09:45	0	0	0	0	0
09:45	10:00	0	0	0	0	0
11:30	11:45	0	0	0	0	0
11:45	12:00	0	0	0	0	0
12:00	12:15	0	0	0	0	0
12:15	12:30	0	0	0	0	0
12:30	12:45	0	0	0	0	0
12:45	13:00	0	0	0	0	0
13:00	13:15	0	0	0	0	0
13:15	13:30	0	0	0	0	0
15:00	15:15	0	0	0	0	0
15:15	15:30	0	0	0	0	0
15:30	15:45	0	0	0	0	0
15:45	16:00	0	0	0	0	0
16:00	16:15	0	0	0	0	0
16:15	16:30	0	0	0	0	0
16:30	16:45	0	0	0	0	0
16:45	17:00	0	0	0	0	0
17:00	17:15	0	0	0	0	0
17:15	17:30	0	0	0	0	0
17:30	17:45	0	0	0	0	0
17:45	18:00	0	0	0	0	0
Total		0	0	0	0	0

**Total Area**

Classification of Accident	Rear End	Turning Movement	Sideswipe	Angle	Approaching	SMV Other	SMV Unattended Vehicle	Other	Total
P.D. only	15	12	24	17	1	1	17	3	90
Non-fatal injury	4	5	0	3	0	8	1	0	21
Non-reportable	0	0	0	0	0	0	1	0	1
<b>Total</b>	<b>19</b>	<b>17</b>	<b>24</b>	<b>20</b>	<b>1</b>	<b>9</b>	<b>19</b>	<b>3</b>	<b>112</b>
	#3 or 17%	#5 or 15%	#1 or 21%	#2 or 18%	#8 or 1%	#6 or 8%	#3 or 17%	#7 or 3%	

80%  
19%  
1%  
100%

**Bank St/Gilmour St**

Years	Total # Collisions	24 Hr AADT Veh Volume	Days	Collisions/MEV
2015-2019	11	10,338	1825	<b>0.58</b>

Classification of Accident	Rear End	Turning Movement	Sideswipe	Angle	Approaching	Single Vehicle (other)	Single vehicle (Unattended vehicle)	Other	Total
P.D. only	4	0	3	0	0	0	0	1	8
Non-fatal injury	1	2	0	0	0	0	0	0	3
Non-reportable	0	0	0	0	0	0	0	0	0
<b>Total</b>	<b>5</b>	<b>2</b>	<b>3</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>1</b>	<b>11</b>
	45%	18%	27%	0%	0%	0%	0%	9%	

73%  
27%  
0%  
100%

**Bank St/MaClaren St**

Years	Total # Collisions	24 Hr AADT Veh Volume	Days	Collisions/MEV
2015-2019	1	11,040	1825	<b>0.05</b>

Classification of Accident	Rear End	Turning Movement	Sideswipe	Angle	Approaching	Single Vehicle (other)	Single vehicle (Unattended vehicle)	Other	Total
P.D. only	0	0	0	0	0	0	0	0	0
Non-fatal injury	1	0	0	0	0	0	0	0	1
Non-reportable	0	0	0	0	0	0	0	0	0
<b>Total</b>	<b>1</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>1</b>
	100%	0%	0%	0%	0%	0%	0%	0%	

0%  
100%  
0%  
100%

**Bank St, MaClaren St to Gilmour St**

Years	Total # Collisions	24 Hr AADT Veh Volume	Days	Collisions/MEV
2015-2019	4	n/a	1825	<b>n/a</b>

Classification of Accident	Rear End	Turning Movement	Sideswipe	Angle	Approaching	Single Vehicle (other)	Single vehicle (Unattended vehicle)	Other	Total
P.D. only	0	0	1	0	0	0	3	0	4
Non-fatal injury	0	0	0	0	0	0	0	0	0
Non-reportable	0	0	0	0	0	0	0	0	0
<b>Total</b>	<b>0</b>	<b>0</b>	<b>1</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>3</b>	<b>0</b>	<b>4</b>
	0%	0%	25%	0%	0%	0%	75%	0%	

100%  
0%  
0%  
100%

**Gilmour St/Kent St**

Years	Total # Collisions	24 Hr AADT Veh Volume	Days	Collisions/MEV
2015-2019	5	15,811	1825	<b>0.17</b>

Classification of Accident	Rear End	Turning Movement	Sideswipe	Angle	Approaching	Single Vehicle (other)	Single vehicle (Unattended vehicle)	Other	Total
P.D. only	0	1	2	0	0	0	0	1	4
Non-fatal injury	0	0	0	0	0	1	0	0	1
Non-reportable	0	0	0	0	0	0	0	0	0
<b>Total</b>	<b>0</b>	<b>1</b>	<b>2</b>	<b>0</b>	<b>0</b>	<b>1</b>	<b>0</b>	<b>1</b>	<b>5</b>
	0%	20%	40%	0%	0%	20%	0%	20%	

80%  
20%  
0%  
100%

**Gladstone Ave/Kent St**

Years	Total # Collisions	24 Hr AADT Veh Volume	Days	Collisions/MEV
2015-2019	29	23,139	1825	<b>0.69</b>

Classification of Accident	Rear End	Turning Movement	Sideswipe	Angle	Approaching	Single Vehicle (other)	Single vehicle (Unattended vehicle)	Other	Total
P.D. only	7	3	4	12	0	0	0	0	26
Non-fatal injury	0	0	0	2	0	1	0	0	3
Non-reportable	0	0	0	0	0	0	0	0	0
<b>Total</b>	<b>7</b>	<b>3</b>	<b>4</b>	<b>14</b>	<b>0</b>	<b>1</b>	<b>0</b>	<b>0</b>	<b>29</b>
	24%	10%	14%	48%	0%	3%	0%	0%	

90%  
10%  
0%  
100%

**Kent St/MaClaren st**

Years	Total # Collisions	24 Hr AADT Veh Volume	Days	Collisions/MEV
2015-2019	11	15,781	1825	<b>0.38</b>

# APPENDIX C

COLLISION DATA

---

Classification of Accident	Rear End	Turning Movement	Sideswipe	Angle	Approaching	Single Vehicle (other)	Single vehicle (Unattended vehicle)	Other	Total
P.D. only	1	4	4	1	0	0	0	0	10
Non-fatal injury	0	0	0	1	0	0	0	0	1
Non reportable	0	0	0	0	0	0	0	0	0
<b>Total</b>	<b>1</b>	<b>4</b>	<b>4</b>	<b>2</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>11</b>
	9%	36%	36%	18%	0%	0%	0%	0%	

91%  
9%  
0%  
100%

#### Kent St/Somerset St

Years	Total # Collisions	24 Hr AADT Veh Volume	Days	Collisions/MEV
2015-2019	23	21,329	1825	<b>0.59</b>

Classification of Accident	Rear End	Turning Movement	Sideswipe	Angle	Approaching	Single Vehicle (other)	Single vehicle (Unattended vehicle)	Other	Total
P.D. only	1	4	4	3	0	0	1	0	13
Non-fatal injury	1	3	0	0	0	6	0	0	10
Non reportable	0	0	0	0	0	0	0	0	0
<b>Total</b>	<b>2</b>	<b>7</b>	<b>4</b>	<b>3</b>	<b>0</b>	<b>6</b>	<b>1</b>	<b>0</b>	<b>23</b>
	9%	30%	17%	13%	0%	26%	4%	0%	

57%  
43%  
0%  
100%

#### Kent St, Florence St to Gladstone Ave

Years	Total # Collisions	24 Hr AADT Veh Volume	Days	Collisions/MEV
2015-2019	1	n/a	1825	<b>n/a</b>

Classification of Accident	Rear End	Turning Movement	Sideswipe	Angle	Approaching	Single Vehicle (other)	Single vehicle (Unattended vehicle)	Other	Total
P.D. only	0	0	1	0	0	0	0	0	1
Non-fatal injury	0	0	0	0	0	0	0	0	0
Non reportable	0	0	0	0	0	0	0	0	0
<b>Total</b>	<b>0</b>	<b>0</b>	<b>1</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>1</b>
	0%	0%	100%	0%	0%	0%	0%	0%	

100%  
0%  
0%  
100%

#### Kent St, Gilmour St to James St

Years	Total # Collisions	24 Hr AADT Veh Volume	Days	Collisions/MEV
2015-2019	3	n/a	1825	<b>n/a</b>

Classification of Accident	Rear End	Turning Movement	Sideswipe	Angle	Approaching	Single Vehicle (other)	Single vehicle (Unattended vehicle)	Other	Total
P.D. only	0	0	1	0	0	1	0	0	2
Non-fatal injury	0	0	0	0	0	0	1	0	1
Non reportable	0	0	0	0	0	0	0	0	0
<b>Total</b>	<b>0</b>	<b>0</b>	<b>1</b>	<b>0</b>	<b>0</b>	<b>1</b>	<b>1</b>	<b>0</b>	<b>3</b>
	0%	0%	33%	0%	0%	33%	33%	0%	

67%  
33%  
0%  
100%

#### Kent St, James St to Florence St

Years	Total # Collisions	24 Hr AADT Veh Volume	Days	Collisions/MEV
2015-2019	5	n/a	1825	<b>n/a</b>

Classification of Accident	Rear End	Turning Movement	Sideswipe	Angle	Approaching	Single Vehicle (other)	Single vehicle (Unattended vehicle)	Other	Total
P.D. only	0	0	1	0	0	0	3	0	4
Non-fatal injury	1	0	0	0	0	0	0	0	1
Non reportable	0	0	0	0	0	0	0	0	0
<b>Total</b>	<b>1</b>	<b>0</b>	<b>1</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>3</b>	<b>0</b>	<b>5</b>
	20%	0%	20%	0%	0%	0%	60%	0%	

80%  
20%  
0%  
100%

#### Kent St, MacLaren St to Gilmour St

Years	Total # Collisions	24 Hr AADT Veh Volume	Days	Collisions/MEV
2015-2019	5	n/a	1825	<b>n/a</b>

Classification of Accident	Rear End	Turning Movement	Sideswipe	Angle	Approaching	Single Vehicle (other)	Single vehicle (Unattended vehicle)	Other	Total
P.D. only	2	0	1	0	1	0	1	0	5
Non-fatal injury	0	0	0	0	0	0	0	0	0
Non reportable	0	0	0	0	0	0	0	0	0
<b>Total</b>	<b>2</b>	<b>0</b>	<b>1</b>	<b>0</b>	<b>1</b>	<b>0</b>	<b>1</b>	<b>0</b>	<b>5</b>
	40%	0%	20%	0%	20%	0%	20%	0%	

100%  
0%  
0%  
100%

#### Kent St, Somerset St to MacLaren St

Years	Total # Collisions	24 Hr AADT Veh Volume	Days	Collisions/MEV
2015-2019	3	n/a	1825	<b>n/a</b>

Classification of Accident	Rear End	Turning Movement	Sideswipe	Angle	Approaching	Single Vehicle (other)	Single vehicle (Unattended vehicle)	Other	Total
----------------------------	----------	------------------	-----------	-------	-------------	------------------------	-------------------------------------	-------	-------

P.D. only	0	0	2	0	0	0	1	0	3	100%
Non-fatal injury	0	0	0	0	0	0	0	0	0	0%
Non reportable	0	0	0	0	0	0	0	0	0	0%
<b>Total</b>	<b>0</b>	<b>0</b>	<b>2</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>1</b>	<b>0</b>	<b>3</b>	100%
	0%	0%	67%	0%	0%	0%	33%	0%		

**MaLaren St, Kent St to Bank St**

Years	Total # Collisions	24 Hr AADT Veh Volume	Days	Collisions/MEV
2015-2019	10	n/a	1825	<b>n/a</b>

Classification of Accident	Rear End	Turning Movement	Sideswipe	Angle	Approaching	Single Vehicle (other)	Single vehicle (Unattended vehicle)	Other	Total	
P.D. only	0	0	0	1	0	0	8	1	10	100%
Non-fatal injury	0	0	0	0	0	0	0	0	0	0%
Non reportable	0	0	0	0	0	0	0	0	0	0%
<b>Total</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>1</b>	<b>0</b>	<b>0</b>	<b>8</b>	<b>1</b>	<b>10</b>	100%
	0%	0%	0%	10%	0%	0%	80%	10%		





# Transportation Services - Traffic Services

## Collision Details Report - Public Version

**From:** January 1, 2015    **To:** December 31, 2019

**Location:** BANK ST @ GILMOUR ST

**Traffic Control:** Traffic signal

**Total Collisions:** 11

Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuver	Vehicle type	First Event	No. Ped
2015-Jul-17, Fri,14:13	Clear	Rear end	Non-fatal injury	Dry	South	Slowing or stopping	Automobile, station wagon	Other motor vehicle	0
					South	Stopped	Pick-up truck	Other motor vehicle	
2015-Nov-27, Fri,00:50	Clear	Rear end	P.D. only	Dry	North	Going ahead	Pick-up truck	Other motor vehicle	0
					North	Stopped	Automobile, station wagon	Other motor vehicle	
2015-Dec-02, Wed,03:00	Clear	Sideswipe	P.D. only	Dry	South	Going ahead	Automobile, station wagon	Other motor vehicle	0
					South	Stopped	Automobile, station wagon	Other motor vehicle	
2016-Jun-03, Fri,18:00	Clear	Turning movement	Non-fatal injury	Dry	North	Turning right	Unknown	Cyclist	0
					North	Stopped	Bicycle	Other motor vehicle	
2018-Jan-29, Mon,13:54	Clear	Sideswipe	P.D. only	Wet	East	Stopped	Automobile, station wagon	Other motor vehicle	0
					East	Going ahead	Automobile, station wagon	Other motor vehicle	
2018-Jun-08, Fri,15:16	Clear	Turning movement	Non-fatal injury	Dry	South	Overtaking	Motorcycle	Other motor vehicle	0
					South	Turning left	Automobile, station wagon	Other motor vehicle	
2018-Jul-13, Fri,20:47	Clear	Rear end	P.D. only	Dry	North	Slowing or stopping	Automobile, station wagon	Other motor vehicle	0
					North	Going ahead	Automobile, station wagon	Other motor vehicle	
2018-Aug-06, Mon,23:18	Clear	Rear end	P.D. only	Dry	North	Going ahead	Automobile, station wagon	Other motor vehicle	0
					North	Stopped	Automobile, station wagon	Other motor vehicle	
2018-Oct-10, Wed,20:37	Clear	Rear end	P.D. only	Dry	East	Slowing or stopping	Automobile, station wagon	Other motor vehicle	0
					East	Stopped	Automobile, station wagon	Other motor vehicle	
					South	Stopped	Unknown	Other motor vehicle	
2019-Mar-24, Sun,20:24	Clear	Other	P.D. only	Dry	North	Reversing	Pick-up truck	Other motor vehicle	0
					South	Stopped	Automobile, station wagon	Other motor vehicle	
2019-Jun-26, Wed,16:40	Clear	Sideswipe	P.D. only	Dry	East	Unknown	Unknown	Other motor vehicle	0
					East	Going ahead	Automobile, station wagon	Other motor vehicle	



# Transportation Services - Traffic Services

## Collision Details Report - Public Version

From: January 1, 2015 To: December 31, 2019

**Location:** BANK ST @ MACLAREN ST

**Traffic Control:** Traffic signal

**Total Collisions:** 2

Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuvre	Vehicle type	First Event	No. Ped
2017-Sep-25, Mon,11:10	Clear	SMV unattended vehicle	Non-reportable	Dry	North	Turning left	Truck - tractor	Unattended vehicle	0
2017-Oct-17, Tue,16:39	Clear	Rear end	Non-fatal injury	Dry	South South	Going ahead Stopped	Automobile, station wagon Automobile, station wagon	Other motor vehicle Other motor vehicle	0

**Location:** BANK ST btwn MACLAREN ST & GILMOUR ST

**Traffic Control:** No control

**Total Collisions:** 4

Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuvre	Vehicle type	First Event	No. Ped
2015-May-16, Sat,08:10	Clear	SMV unattended vehicle	P.D. only	Dry	East	Reversing	Delivery van	Unattended vehicle	0
2016-Sep-12, Mon,00:35	Clear	SMV unattended vehicle	P.D. only	Dry	South	Going ahead	Pick-up truck	Unattended vehicle	0
2017-Mar-26, Sun,03:04	Clear	Sideswipe	P.D. only	Dry	South South	Going ahead Stopped	Automobile, station wagon Automobile, station wagon	Other motor vehicle Other motor vehicle	0
2017-May-05, Fri,00:00	Clear	SMV unattended vehicle	P.D. only	Dry	Unknown	Unknown	Unknown	Unattended vehicle	0

**Location:** GILMOUR ST @ KENT ST

**Traffic Control:** Traffic signal

**Total Collisions:** 5

Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuvre	Vehicle type	First Event	No. Ped
2015-Jan-23, Fri,06:35	Clear	Turning movement	P.D. only	Wet	North North	Turning right Going ahead	Automobile, station wagon Pick-up truck	Other motor vehicle Other motor vehicle	0
2015-Oct-04, Sun,16:27	Clear	Other	P.D. only	Dry	South North	Reversing Stopped	Police vehicle Automobile, station wagon	Other motor vehicle Other motor vehicle	0
2016-Aug-21, Sun,16:33	Rain	SMV other	Non-fatal injury	Wet	East	Going ahead	Unknown	Pedestrian	1
2018-Sep-08, Sat,16:03	Clear	Sideswipe	P.D. only	Dry	North North	Unknown Going ahead	Unknown Automobile, station wagon	Other motor vehicle Other motor vehicle	0



# Transportation Services - Traffic Services

## Collision Details Report - Public Version

From: January 1, 2015 To: December 31, 2019

**Location:** GILMOUR ST @ KENT ST

**Traffic Control:** Traffic signal

**Total Collisions:** 5

Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuvre	Vehicle type	First Event	No. Ped
2019-Nov-17, Sun,09:07	Clear	Sideswipe	P.D. only	Dry	North	Turning right	Automobile, station wagon	Other motor vehicle	0
					North	Going ahead	Automobile, station wagon	Other motor vehicle	

**Location:** GLADSTONE AVE @ KENT ST

**Traffic Control:** Traffic signal

**Total Collisions:** 29

Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuvre	Vehicle type	First Event	No. Ped
2015-Jan-31, Sat,17:33	Clear	Sideswipe	P.D. only	Dry	North	Changing lanes	Automobile, station wagon	Other motor vehicle	0
					North	Stopped	Pick-up truck	Other motor vehicle	
2015-Feb-20, Fri,18:19	Clear	Angle	P.D. only	Wet	East	Going ahead	Pick-up truck	Other motor vehicle	0
					North	Going ahead	Automobile, station wagon	Other motor vehicle	
2015-Mar-29, Sun,21:53	Clear	Angle	Non-fatal injury	Dry	East	Going ahead	Automobile, station wagon	Other motor vehicle	0
					North	Going ahead	Automobile, station wagon	Other motor vehicle	
2015-Apr-11, Sat,15:41	Clear	Rear end	P.D. only	Dry	North	Going ahead	Automobile, station wagon	Other motor vehicle	0
					North	Changing lanes	Automobile, station wagon	Other motor vehicle	
2015-Jul-20, Mon,21:47	Clear	Angle	Non-fatal injury	Dry	North	Going ahead	Pick-up truck	Other motor vehicle	0
					East	Going ahead	Automobile, station wagon	Other motor vehicle	
2015-Aug-07, Fri,23:30	Clear	Angle	P.D. only	Dry	North	Turning right	Automobile, station wagon	Other motor vehicle	0
					East	Going ahead	Delivery van	Other motor vehicle	
2016-Jan-28, Thu,11:45	Snow	Rear end	P.D. only	Wet	North	Going ahead	Pick-up truck	Other motor vehicle	0
					North	Turning left	Automobile, station wagon	Other motor vehicle	
2016-Feb-26, Fri,12:19	Clear	Rear end	P.D. only	Dry	North	Going ahead	Automobile, station wagon	Other motor vehicle	0
					North	Stopped	Pick-up truck	Other motor vehicle	
2016-Apr-08, Fri,12:30	Clear	Angle	P.D. only	Dry	North	Slowing or stopping	Automobile, station wagon	Other motor vehicle	0
					East	Going ahead	Automobile, station wagon	Other motor vehicle	



# Transportation Services - Traffic Services

## Collision Details Report - Public Version

From: January 1, 2015 To: December 31, 2019

**Location:** GLADSTONE AVE @ KENT ST

**Traffic Control:** Traffic signal

**Total Collisions:** 29

Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuvre	Vehicle type	First Event	No. Ped
2017-Jan-23, Mon,19:34	Clear	Turning movement	P.D. only	Dry	North	Turning left	Automobile, station wagon	Other motor vehicle	0
					North	Going ahead	Automobile, station wagon	Other motor vehicle	
2017-Feb-09, Thu,12:11	Clear	Angle	P.D. only	Wet	East	Going ahead	Pick-up truck	Other motor vehicle	0
					North	Going ahead	Automobile, station wagon	Other motor vehicle	
2017-Feb-20, Mon,16:40	Clear	Angle	P.D. only	Dry	North	Going ahead	Automobile, station wagon	Other motor vehicle	0
					East	Going ahead	Automobile, station wagon	Other motor vehicle	
2017-Apr-25, Tue,13:36	Clear	Rear end	P.D. only	Dry	North	Turning right	Automobile, station wagon	Other motor vehicle	0
					North	Going ahead	Automobile, station wagon	Other motor vehicle	
2017-Jul-04, Tue,10:35	Clear	Angle	P.D. only	Dry	North	Going ahead	Automobile, station wagon	Other motor vehicle	0
					East	Turning left	Pick-up truck	Other motor vehicle	
2017-Jul-06, Thu,20:04	Clear	Rear end	P.D. only	Dry	North	Changing lanes	Automobile, station wagon	Other motor vehicle	0
					North	Turning right	Automobile, station wagon	Other motor vehicle	
2017-Sep-09, Sat,09:42	Clear	Angle	P.D. only	Dry	East	Going ahead	Passenger van	Other motor vehicle	0
					North	Going ahead	Automobile, station wagon	Other motor vehicle	
2017-Sep-30, Sat,21:13	Clear	Turning movement	P.D. only	Dry	North	Turning right	Automobile, station wagon	Other motor vehicle	0
					North	Going ahead	Automobile, station wagon	Other motor vehicle	
2017-Nov-10, Fri,08:27	Clear	Angle	P.D. only	Dry	West	Going ahead	Automobile, station wagon	Other motor vehicle	0
					North	Going ahead	Automobile, station wagon	Other motor vehicle	
2017-Dec-24, Sun,01:24	Clear	Angle	P.D. only	Wet	West	Going ahead	Automobile, station wagon	Other motor vehicle	0
					North	Going ahead	Passenger van	Other motor vehicle	
2018-Apr-04, Wed,11:31	Freezing Rain	Rear end	P.D. only	Ice	East	Going ahead	Automobile, station wagon	Other motor vehicle	0
					East	Stopped	Pick-up truck	Other motor vehicle	
2018-Dec-04, Tue,19:00	Clear	Angle	P.D. only	Dry	North	Going ahead	Automobile, station wagon	Other motor vehicle	0
					West	Going ahead	Automobile, station wagon	Other motor vehicle	



# Transportation Services - Traffic Services

## Collision Details Report - Public Version

From: January 1, 2015 To: December 31, 2019

**Location:** GLADSTONE AVE @ KENT ST

**Traffic Control:** Traffic signal

**Total Collisions:** 29

Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuvre	Vehicle type	First Event	No. Ped
2019-Jan-10, Thu,18:05	Clear	Angle	P.D. only	Wet	North	Unknown	Automobile, station wagon	Other motor vehicle	0
					East	Going ahead	Automobile, station wagon	Other motor vehicle	
2019-Feb-26, Tue,08:40	Clear	Turning movement	P.D. only	Dry	North	Turning right	Automobile, station wagon	Other motor vehicle	0
					North	Going ahead	Automobile, station wagon	Other motor vehicle	
2019-May-23, Thu,16:35	Rain	Sideswipe	P.D. only	Wet	North	Turning left	Automobile, station wagon	Other motor vehicle	0
					North	Turning left	Automobile, station wagon	Other motor vehicle	
2019-Jun-27, Thu,17:07	Clear	Rear end	P.D. only	Dry	West	Going ahead	Automobile, station wagon	Other motor vehicle	0
					West	Stopped	Automobile, station wagon	Other motor vehicle	
2019-Jul-19, Fri,17:45	Clear	Sideswipe	P.D. only	Dry	North	Unknown	Unknown	Other motor vehicle	0
					North	Stopped	Automobile, station wagon	Other motor vehicle	
2019-Oct-09, Wed,07:19	Clear	Sideswipe	P.D. only	Dry	North	Changing lanes	Automobile, station wagon	Other motor vehicle	0
					North	Going ahead	Pick-up truck	Other motor vehicle	
2019-Oct-20, Sun,18:07	Clear	Angle	P.D. only	Dry	North	Going ahead	Passenger van	Other motor vehicle	0
					West	Going ahead	Passenger van	Other motor vehicle	
2019-Dec-09, Mon,20:27	Rain	SMV other	Non-fatal injury	Wet	North	Turning left	Automobile, station wagon	Pedestrian	1

**Location:** KENT ST @ MACLAREN ST

**Traffic Control:** Stop sign

**Total Collisions:** 11

Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuvre	Vehicle type	First Event	No. Ped
2015-Jun-19, Fri,18:50	Clear	Rear end	P.D. only	Dry	North	Slowing or stopping	Automobile, station wagon	Other motor vehicle	0
					North	Stopped	Automobile, station wagon	Other motor vehicle	
					North	Going ahead	Pick-up truck	Other motor vehicle	
2015-Jul-20, Mon,16:00	Clear	Sideswipe	P.D. only	Dry	North	Changing lanes	Automobile, station wagon	Other motor vehicle	0
					North	Going ahead	Municipal transit bus	Other motor vehicle	



# Transportation Services - Traffic Services

## Collision Details Report - Public Version

From: January 1, 2015 To: December 31, 2019

**Location:** KENT ST @ MACLAREN ST

**Traffic Control:** Stop sign

**Total Collisions:** 11

Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuvre	Vehicle type	First Event	No. Ped
2015-Oct-08, Thu,12:08	Clear	Turning movement	P.D. only	Dry	North	Turning left	Automobile, station wagon	Other motor vehicle	0
					North	Going ahead	Automobile, station wagon	Other motor vehicle	
2015-Oct-09, Fri,09:29	Rain	Turning movement	P.D. only	Wet	North	Turning left	Automobile, station wagon	Other motor vehicle	0
					North	Going ahead	Truck-other	Other motor vehicle	
2017-Apr-14, Fri,12:39	Clear	Sideswipe	P.D. only	Dry	North	Changing lanes	Passenger van	Other motor vehicle	0
					North	Going ahead	Pick-up truck	Other motor vehicle	
2017-May-03, Wed,14:32	Clear	Angle	Non-fatal injury	Dry	West	Going ahead	Automobile, station wagon	Other motor vehicle	0
					North	Going ahead	Automobile, station wagon	Other motor vehicle	
2018-Jun-27, Wed,13:45	Clear	Sideswipe	P.D. only	Dry	North	Pulling away from shoulder or curb	Automobile, station wagon	Other motor vehicle	0
					North	Going ahead	Passenger van	Other motor vehicle	
2018-Jul-18, Wed,15:30	Clear	Sideswipe	P.D. only	Dry	North	Changing lanes	Passenger van	Other motor vehicle	0
					North	Going ahead	Automobile, station wagon	Other motor vehicle	
2019-Jan-23, Wed,10:05	Snow	Turning movement	P.D. only	Loose snow	North	Turning left	Automobile, station wagon	Other motor vehicle	0
					North	Going ahead	Delivery van	Other motor vehicle	
2019-May-14, Tue,09:52	Clear	Angle	P.D. only	Dry	West	Going ahead	Automobile, station wagon	Other motor vehicle	0
					North	Going ahead	Automobile, station wagon	Other motor vehicle	
2019-Dec-05, Thu,11:16	Clear	Turning movement	P.D. only	Wet	North	Turning left	Automobile, station wagon	Other motor vehicle	0
					North	Going ahead	Automobile, station wagon	Other motor vehicle	

**Location:** KENT ST @ SOMERSET ST

**Traffic Control:** Traffic signal

**Total Collisions:** 23

Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuvre	Vehicle type	First Event	No. Ped
2015-Mar-24, Tue,13:54	Clear	Sideswipe	P.D. only	Dry	North	Changing lanes	Passenger van	Other motor vehicle	0
					North	Going ahead	Automobile, station wagon	Other motor vehicle	



# Transportation Services - Traffic Services

## Collision Details Report - Public Version

**From:** January 1, 2015    **To:** December 31, 2019

**Location:** KENT ST @ SOMERSET ST

**Traffic Control:** Traffic signal

**Total Collisions:** 23

Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuvre	Vehicle type	First Event	No. Ped
2015-Jun-25, Thu,10:33	Clear	Sideswipe	P.D. only	Dry	North	Changing lanes	Automobile, station wagon	Other motor vehicle	0
					North	Going ahead	Automobile, station wagon	Other motor vehicle	
2015-Dec-10, Thu,16:30	Clear	SMV other	Non-fatal injury	Wet	North	Turning left	Pick-up truck	Pedestrian	1
2016-Jan-09, Sat,15:55	Rain	SMV other	Non-fatal injury	Wet	West	Turning right	Automobile, station wagon	Pedestrian	2
2016-Feb-03, Wed,17:37	Clear	SMV other	Non-fatal injury	Wet	North	Turning left	Automobile, station wagon	Pedestrian	1
2016-Apr-27, Wed,14:11	Clear	Turning movement	Non-fatal injury	Dry	East	Turning left	Automobile, station wagon	Other motor vehicle	0
					West	Going ahead	Pick-up truck	Other motor vehicle	
2016-Jul-10, Sun,18:52	Clear	Angle	P.D. only	Dry	East	Going ahead	Automobile, station wagon	Other motor vehicle	0
					North	Going ahead	Pick-up truck	Other motor vehicle	
2017-Mar-28, Tue,12:05	Clear	Turning movement	P.D. only	Wet	North	Turning left	Automobile, station wagon	Other motor vehicle	0
					North	Going ahead	Delivery van	Other motor vehicle	
2017-Jun-24, Sat,15:13	Clear	Angle	P.D. only	Dry	East	Going ahead	Automobile, station wagon	Other motor vehicle	0
					North	Going ahead	Automobile, station wagon	Other motor vehicle	
2017-Jul-06, Thu,22:12	Clear	SMV other	Non-fatal injury	Dry	North	Turning left	Pick-up truck	Pedestrian	1
2017-Oct-09, Mon,14:17	Clear	Turning movement	P.D. only	Wet	North	Turning left	Automobile, station wagon	Other motor vehicle	0
					North	Going ahead	Automobile, station wagon	Other motor vehicle	
2017-Dec-05, Tue,12:04	Rain	Rear end	Non-fatal injury	Wet	West	Slowing or stopping	Automobile, station wagon	Other motor vehicle	0
					West	Stopped	Automobile, station wagon	Other motor vehicle	
2017-Dec-21, Thu,17:15	Clear	SMV other	Non-fatal injury	Slush	North	Turning left	Automobile, station wagon	Pedestrian	1
2018-Jan-19, Fri,21:06	Clear	Turning movement	P.D. only	Wet	North	Turning left	Automobile, station wagon	Other motor vehicle	0
					North	Going ahead	Automobile, station wagon	Other motor vehicle	
2018-May-03, Thu,09:24	Rain	Angle	P.D. only	Wet	West	Going ahead	Automobile, station wagon	Other motor vehicle	0
					North	Going ahead	Automobile, station wagon	Other motor vehicle	



# Transportation Services - Traffic Services

## Collision Details Report - Public Version

From: January 1, 2015 To: December 31, 2019

**Location:** KENT ST @ SOMERSET ST

**Traffic Control:** Traffic signal

**Total Collisions:** 23

Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuvre	Vehicle type	First Event	No. Ped
2018-May-05, Sat,15:13	Clear	Turning movement	Non-fatal injury	Dry	North	Turning left	Automobile, station wagon	Other motor vehicle	0
					North	Going ahead	Automobile, station wagon	Other motor vehicle	
2018-Aug-12, Sun,21:31	Clear	Turning movement	Non-fatal injury	Dry	West	Turning right	Automobile, station wagon	Cyclist	0
					West	Going ahead	Bicycle	Other motor vehicle	
2018-Aug-24, Fri,18:18	Clear	SMV unattended vehicle	P.D. only	Dry	East	Going ahead	Municipal transit bus	Unattended vehicle	0
2018-Dec-12, Wed,17:50	Clear	SMV other	Non-fatal injury	Dry	North	Turning left	Automobile, station wagon	Pedestrian	1
2019-Mar-21, Thu,08:40	Clear	Sideswipe	P.D. only	Dry	North	Changing lanes	Automobile, station wagon	Other motor vehicle	0
					North	Going ahead	Automobile, station wagon	Other motor vehicle	
2019-Jun-02, Sun,18:30	Clear	Turning movement	P.D. only	Dry	North	Turning left	Automobile, station wagon	Other motor vehicle	0
					North	Going ahead	Automobile, station wagon	Other motor vehicle	
2019-Oct-13, Sun,12:53	Clear	Rear end	P.D. only	Dry	North	Slowing or stopping	Automobile, station wagon	Other motor vehicle	0
					North	Stopped	Automobile, station wagon	Other motor vehicle	
2019-Dec-19, Thu,20:59	Clear	Sideswipe	P.D. only	Dry	North	Turning left	Automobile, station wagon	Other motor vehicle	0
					North	Going ahead	Automobile, station wagon	Other motor vehicle	

**Location:** KENT ST btwn FLORENCE ST & GLADSTONE AVE

**Traffic Control:** No control

**Total Collisions:** 1

Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuvre	Vehicle type	First Event	No. Ped
2015-Sep-03, Thu,23:30	Clear	Sideswipe	P.D. only	Dry	North	Changing lanes	Passenger van	Other motor vehicle	0
					North	Unknown	Automobile, station wagon	Other motor vehicle	

**Location:** KENT ST btwn GILMOUR ST & JAMES ST

**Traffic Control:** No control

**Total Collisions:** 3

Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuvre	Vehicle type	First Event	No. Ped
---------------	-------------	-------------	----------------	----------------	----------	-------------------	--------------	-------------	---------





# Transportation Services - Traffic Services

## Collision Details Report - Public Version

From: January 1, 2015 To: December 31, 2019

**Location:** KENT ST btwn GILMOUR ST & JAMES ST

**Traffic Control:** No control

**Total Collisions:** 3

Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuver	Vehicle type	First Event	No. Ped
2015-Mar-05, Thu,10:03	Clear	SMV unattended vehicle	Non-fatal injury	Dry	North	Changing lanes	Pick-up truck	Unattended vehicle	0
2017-Mar-24, Fri,16:55	Clear	SMV other	P.D. only	Loose snow	North	Overtaking	Automobile, station wagon	Pole (sign, parking meter)	0
2019-Dec-20, Fri,12:30	Clear	Sideswipe	P.D. only	Dry	North	Pulling away from shoulder or curb	Unknown	Other motor vehicle	0
					North	Going ahead	Automobile, station wagon	Other motor vehicle	

**Location:** KENT ST btwn JAMES ST & FLORENCE ST

**Traffic Control:** No control

**Total Collisions:** 5

Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuver	Vehicle type	First Event	No. Ped
2015-Nov-03, Tue,07:53	Clear	SMV unattended vehicle	P.D. only	Dry	South	Reversing	Truck - open	Unattended vehicle	0
2016-Jul-13, Wed,16:42	Clear	Rear end	Non-fatal injury	Dry	West	Going ahead	Pick-up truck	Other motor vehicle	0
					West	Slowing or stopping	Pick-up truck	Other motor vehicle	
					West	Slowing or stopping	Passenger van	Other motor vehicle	
2017-Jun-14, Wed,00:00	Clear	SMV unattended vehicle	P.D. only	Dry	North	Unknown	Unknown	Unattended vehicle	0
2017-Oct-28, Sat,05:03	Clear	Sideswipe	P.D. only	Dry	North	Pulling away from shoulder or curb	Automobile, station wagon	Other motor vehicle	0
					North	Going ahead	Passenger van	Other motor vehicle	
2018-Jun-30, Sat,00:00	Clear	SMV unattended vehicle	P.D. only	Dry	Unknown	Unknown	Unknown	Unattended vehicle	0

**Location:** KENT ST btwn MACLAREN ST & GILMOUR ST

**Traffic Control:** No control

**Total Collisions:** 5

Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuver	Vehicle type	First Event	No. Ped
2016-Jun-17, Fri,14:04	Clear	Rear end	P.D. only	Dry	North	Going ahead	Automobile, station wagon	Other motor vehicle	0
					North	Slowing or stopping	Pick-up truck	Other motor vehicle	



# Transportation Services - Traffic Services

## Collision Details Report - Public Version

From: January 1, 2015 To: December 31, 2019

**Location:** KENT ST btwn MACLAREN ST & GILMOUR ST

**Traffic Control:** No control

**Total Collisions:** 5

Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuvre	Vehicle type	First Event	No. Ped
2017-May-31, Wed,21:12	Clear	Sideswipe	P.D. only	Dry	North	Changing lanes	Automobile, station wagon	Other motor vehicle	0
					North	Going ahead	Automobile, station wagon	Other motor vehicle	
2017-Dec-02, Sat,14:01	Clear	SMV unattended vehicle	P.D. only	Dry	North	Going ahead	Automobile, station wagon	Unattended vehicle	0
2019-Jul-26, Fri,16:17	Clear	Approaching	P.D. only	Dry	South	Unknown	Pick-up truck	Other motor vehicle	0
					North	Stopped	Automobile, station wagon	Other motor vehicle	
2019-Nov-01, Fri,06:55	Rain	Rear end	P.D. only	Wet	North	Going ahead	Automobile, station wagon	Other motor vehicle	0
					North	Stopped	Automobile, station wagon	Other motor vehicle	

**Location:** KENT ST btwn SOMERSET ST W & MACLAREN ST

**Traffic Control:** No control

**Total Collisions:** 3

Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuvre	Vehicle type	First Event	No. Ped
2018-Dec-15, Sat,13:45	Clear	Sideswipe	P.D. only	Dry	North	Changing lanes	Automobile, station wagon	Other motor vehicle	0
					North	Going ahead	Automobile, station wagon	Other motor vehicle	
2019-Sep-11, Wed,00:00	Clear	SMV unattended vehicle	P.D. only	Dry	Unknown	Unknown	Unknown	Unattended vehicle	0
2019-Nov-10, Sun,00:35	Clear	Sideswipe	P.D. only	Dry	North	Pulling away from shoulder or curb	Automobile, station wagon	Other motor vehicle	0
					North	Going ahead	Automobile, station wagon	Other motor vehicle	

**Location:** MACLAREN ST btwn KENT ST & BANK ST

**Traffic Control:** No control

**Total Collisions:** 10

Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuvre	Vehicle type	First Event	No. Ped
2015-May-14, Thu,11:47	Clear	SMV unattended vehicle	P.D. only	Dry	West	Pulling onto shoulder or toward curb	Pick-up truck	Unattended vehicle	0
2015-Sep-09, Wed,00:00	Clear	SMV unattended vehicle	P.D. only	Dry	Unknown	Unknown	Unknown	Unattended vehicle	0



# Transportation Services - Traffic Services

## Collision Details Report - Public Version

From: January 1, 2015 To: December 31, 2019

**Location:** MACLAREN ST btwn KENT ST & BANK ST

**Traffic Control:** No control

**Total Collisions:** 10

Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuvre	Vehicle type	First Event	No. Ped
2016-Mar-08, Tue,00:00	Rain	SMV unattended vehicle	P.D. only	Wet	Unknown	Unknown	Unknown	Unattended vehicle	0
2016-Apr-22, Fri,13:50	Clear	SMV unattended vehicle	P.D. only	Dry	South	Reversing	Unknown	Unattended vehicle	0
2016-May-16, Mon,18:46	Clear	SMV unattended vehicle	P.D. only	Dry	East	Reversing	Automobile, station wagon	Unattended vehicle	0
2017-Aug-23, Wed,18:05	Clear	Other	P.D. only	Dry	East West	Reversing Stopped	Automobile, station wagon Automobile, station wagon	Other motor vehicle Other motor vehicle	0
2018-Feb-08, Thu,00:00	Clear	SMV unattended vehicle	P.D. only	Wet	Unknown	Unknown	Unknown	Unattended vehicle	0
2018-Apr-08, Sun,00:00	Clear	SMV unattended vehicle	P.D. only	Dry	East	Unknown	Unknown	Unattended vehicle	0
2019-Jan-23, Wed,14:30	Snow	Angle	P.D. only	Packed snow	South West	Reversing Going ahead	Automobile, station wagon Automobile, station wagon	Other motor vehicle Other motor vehicle	0
2019-Mar-18, Mon,00:00	Clear	SMV unattended vehicle	P.D. only	Dry	Unknown	Unknown	Unknown	Unattended vehicle	0

# APPENDIX D

TDM CHECKLISTS

---

**TDM Measures Checklist:**  
*Non-Residential Developments (office, institutional, retail or industrial)*

<b>Legend</b>	
<b>BASIC</b>	The measure is generally feasible and effective, and in most cases would benefit the development and its users
<b>BETTER</b>	The measure could maximize support for users of sustainable modes, and optimize development performance
<b>★</b>	The measure is one of the most dependably effective tools to encourage the use of sustainable modes

<b>TDM measures: <i>Non-residential developments</i></b>		<b>Check if proposed &amp; add descriptions</b>
<b>1. TDM PROGRAM MANAGEMENT</b>		
<b>1.1 Program coordinator</b>		
<b>BASIC</b>	<b>★</b> 1.1.1 Designate an internal coordinator, or contract with an external coordinator	<input type="checkbox"/>
<b>1.2 Travel surveys</b>		
<b>BETTER</b>	1.2.1 Conduct periodic surveys to identify travel-related behaviours, attitudes, challenges and solutions, and to track progress	<input type="checkbox"/>
<b>2. WALKING AND CYCLING</b>		
<b>2.1 Information on walking/cycling routes &amp; destinations</b>		
<b>BASIC</b>	2.1.1 Display local area maps with walking/cycling access routes and key destinations at major entrances	<input checked="" type="checkbox"/>
<b>2.2 Bicycle skills training</b>		
<i>Commuter travel</i>		
<b>BETTER</b>	<b>★</b> 2.2.1 Offer on-site cycling courses for commuters, or subsidize off-site courses	<input type="checkbox"/>
<b>2.3 Valet bike parking</b>		
<i>Visitor travel</i>		
<b>BETTER</b>	2.3.1 Offer secure valet bike parking during public events when demand exceeds fixed supply (e.g. for festivals, concerts, games)	<input type="checkbox"/>

TDM measures: <i>Non-residential developments</i>		Check if proposed & add descriptions
<b>3. TRANSIT</b>		
<b>3.1 Transit information</b>		
BASIC	3.1.1 Display relevant transit schedules and route maps at entrances	<input checked="" type="checkbox"/>
BASIC	3.1.2 Provide online links to OC Transpo and STO information	<input checked="" type="checkbox"/>
BETTER	3.1.3 Provide real-time arrival information display at entrances	<input type="checkbox"/>
<b>3.2 Transit fare incentives</b>		
<i>Commuter travel</i>		
BETTER	3.2.1 Offer preloaded PRESTO cards to encourage commuters to use transit	<input type="checkbox"/>
BETTER ★	3.2.2 Subsidize or reimburse monthly transit pass purchases by employees	<input type="checkbox"/>
<i>Visitor travel</i>		
BETTER	3.2.3 Arrange inclusion of same-day transit fare in price of tickets (e.g. for festivals, concerts, games)	<input type="checkbox"/>
<b>3.3 Enhanced public transit service</b>		
<i>Commuter travel</i>		
BETTER	3.3.1 Contract with OC Transpo to provide enhanced transit services (e.g. for shift changes, weekends)	<input type="checkbox"/>
<i>Visitor travel</i>		
BETTER	3.3.2 Contract with OC Transpo to provide enhanced transit services (e.g. for festivals, concerts, games)	<input type="checkbox"/>
<b>3.4 Private transit service</b>		
<i>Commuter travel</i>		
BETTER	3.4.1 Provide shuttle service when OC Transpo cannot offer sufficient quality or capacity to serve demand (e.g. for shift changes, weekends)	<input type="checkbox"/>
<i>Visitor travel</i>		
BETTER	3.4.2 Provide shuttle service when OC Transpo cannot offer sufficient quality or capacity to serve demand (e.g. for festivals, concerts, games)	<input type="checkbox"/>

TDM measures: <i>Non-residential developments</i>		Check if proposed & add descriptions
<b>4. RIDESHARING</b>		
<b>4.1 Ridematching service</b>		
<i>Commuter travel</i>		
BASIC	★ 4.1.1 Provide a dedicated ridematching portal at OttawaRideMatch.com	<input type="checkbox"/>
<b>4.2 Carpool parking price incentives</b>		
<i>Commuter travel</i>		
BETTER	4.2.1 Provide discounts on parking costs for registered carpools	<input type="checkbox"/>
<b>4.3 Vanpool service</b>		
<i>Commuter travel</i>		
BETTER	4.3.1 Provide a vanpooling service for long-distance commuters	<input type="checkbox"/>
<b>5. CARSHARING &amp; BIKESHARING</b>		
<b>5.1 Bikeshare stations &amp; memberships</b>		
BETTER	5.1.1 Contract with provider to install on-site bikeshare station for use by commuters and visitors	<input type="checkbox"/>
<i>Commuter travel</i>		
BETTER	5.1.2 Provide employees with bikeshare memberships for local business travel	<input type="checkbox"/>
<b>5.2 Carshare vehicles &amp; memberships</b>		
<i>Commuter travel</i>		
BETTER	5.2.1 Contract with provider to install on-site carshare vehicles and promote their use by tenants	<input type="checkbox"/>
BETTER	5.2.2 Provide employees with carshare memberships for local business travel	<input type="checkbox"/>
<b>6. PARKING</b>		
<b>6.1 Priced parking</b>		
<i>Commuter travel</i>		
BASIC	★ 6.1.1 Charge for long-term parking (daily, weekly, monthly)	<input type="checkbox"/>
BASIC	6.1.2 Unbundle parking cost from lease rates at multi-tenant sites	<input checked="" type="checkbox"/>
<i>Visitor travel</i>		
BETTER	6.1.3 Charge for short-term parking (hourly)	<input checked="" type="checkbox"/>

TDM measures: <i>Non-residential developments</i>		Check if proposed & add descriptions
<b>7. TDM MARKETING &amp; COMMUNICATIONS</b>		
<b>7.1 Multimodal travel information</b>		
<i>Commuter travel</i>		
BASIC ★	7.1.1 Provide a multimodal travel option information package to new/relocating employees and students	<input type="checkbox"/>
<i>Visitor travel</i>		
BETTER ★	7.1.2 Include multimodal travel option information in invitations or advertising that attract visitors or customers (e.g. for festivals, concerts, games)	<input type="checkbox"/>
<b>7.2 Personalized trip planning</b>		
<i>Commuter travel</i>		
BETTER ★	7.2.1 Offer personalized trip planning to new/relocating employees	<input type="checkbox"/>
<b>7.3 Promotions</b>		
<i>Commuter travel</i>		
BETTER	7.3.1 Deliver promotions and incentives to maintain awareness, build understanding, and encourage trial of sustainable modes	<input type="checkbox"/>
<b>8. OTHER INCENTIVES &amp; AMENITIES</b>		
<b>8.1 Emergency ride home</b>		
<i>Commuter travel</i>		
BETTER ★	8.1.1 Provide emergency ride home service to non-driving commuters	<input type="checkbox"/>
<b>8.2 Alternative work arrangements</b>		
<i>Commuter travel</i>		
BASIC ★	8.2.1 Encourage flexible work hours	<input type="checkbox"/>
BETTER	8.2.2 Encourage compressed workweeks	<input type="checkbox"/>
BETTER ★	8.2.3 Encourage telework	<input type="checkbox"/>
<b>8.3 Local business travel options</b>		
<i>Commuter travel</i>		
BASIC ★	8.3.1 Provide local business travel options that minimize the need for employees to bring a personal car to work	<input type="checkbox"/>
<b>8.4 Commuter incentives</b>		
<i>Commuter travel</i>		
BETTER	8.4.1 Offer employees a taxable, mode-neutral commuting allowance	<input type="checkbox"/>
<b>8.5 On-site amenities</b>		
<i>Commuter travel</i>		
BETTER	8.5.1 Provide on-site amenities/services to minimize mid-day or mid-commute errands	<input type="checkbox"/>



**TDM-Supportive Development Design and Infrastructure Checklist:**  
*Non-Residential Developments (office, institutional, retail or industrial)*

<b>Legend</b>	
<b>REQUIRED</b>	The Official Plan or Zoning By-law provides related guidance that must be followed
<b>BASIC</b>	The measure is generally feasible and effective, and in most cases would benefit the development and its users
<b>BETTER</b>	The measure could maximize support for users of sustainable modes, and optimize development performance

TDM-supportive design & infrastructure measures: <i>Non-residential developments</i>		Check if completed & add descriptions, explanations or plan/drawing references
<b>1. WALKING &amp; CYCLING: ROUTES</b>		
<b>1.1 Building location &amp; access points</b>		
BASIC	1.1.1 Locate building close to the street, and do not locate parking areas between the street and building entrances	<input checked="" type="checkbox"/>
BASIC	1.1.2 Locate building entrances in order to minimize walking distances to sidewalks and transit stops/stations	<input checked="" type="checkbox"/>
BASIC	1.1.3 Locate building doors and windows to ensure visibility of pedestrians from the building, for their security and comfort	<input checked="" type="checkbox"/>
<b>1.2 Facilities for walking &amp; cycling</b>		
REQUIRED	1.2.1 Provide convenient, direct access to stations or major stops along rapid transit routes within 600 metres; minimize walking distances from buildings to rapid transit; provide pedestrian-friendly, weather-protected (where possible) environment between rapid transit accesses and building entrances; ensure quality linkages from sidewalks through building entrances to integrated stops/stations ( <i>see Official Plan policy 4.3.3</i> )	<input checked="" type="checkbox"/>
REQUIRED	1.2.2 Provide safe, direct and attractive pedestrian access from public sidewalks to building entrances through such measures as: reducing distances between public sidewalks and major building entrances; providing walkways from public streets to major building entrances; within a site, providing walkways along the front of adjoining buildings, between adjacent buildings, and connecting areas where people may congregate, such as courtyards and transit stops; and providing weather protection through canopies, colonnades, and other design elements wherever possible ( <i>see Official Plan policy 4.3.12</i> )	<input checked="" type="checkbox"/>

TDM-supportive design & infrastructure measures: <i>Non-residential developments</i>		Check if completed & add descriptions, explanations or plan/drawing references
REQUIRED	1.2.3 Provide sidewalks of smooth, well-drained walking surfaces of contrasting materials or treatments to differentiate pedestrian areas from vehicle areas, and provide marked pedestrian crosswalks at intersection sidewalks (see <i>Official Plan policy 4.3.10</i> )	<input checked="" type="checkbox"/>
REQUIRED	1.2.4 Make sidewalks and open space areas easily accessible through features such as gradual grade transition, depressed curbs at street corners and convenient access to extra-wide parking spaces and ramps (see <i>Official Plan policy 4.3.10</i> )	<input checked="" type="checkbox"/>
REQUIRED	1.2.5 Include adequately spaced inter-block/street cycling and pedestrian connections to facilitate travel by active transportation. Provide links to the existing or planned network of public sidewalks, multi-use pathways and on-road cycle routes. Where public sidewalks and multi-use pathways intersect with roads, consider providing traffic control devices to give priority to cyclists and pedestrians (see <i>Official Plan policy 4.3.11</i> )	<input checked="" type="checkbox"/>
BASIC	1.2.6 Provide safe, direct and attractive walking routes from building entrances to nearby transit stops	<input checked="" type="checkbox"/>
BASIC	1.2.7 Ensure that walking routes to transit stops are secure, visible, lighted, shaded and wind-protected wherever possible	<input checked="" type="checkbox"/> Will provide secure and lighted within property limits.
BASIC	1.2.8 Design roads used for access or circulation by cyclists using a target operating speed of no more than 30 km/h, or provide a separated cycling facility	<input type="checkbox"/>
<b>1.3 Amenities for walking &amp; cycling</b>		
BASIC	1.3.1 Provide lighting, landscaping and benches along walking and cycling routes between building entrances and streets, sidewalks and trails	<input checked="" type="checkbox"/>
BASIC	1.3.2 Provide wayfinding signage for site access (where required, e.g. when multiple buildings or entrances exist) and egress (where warranted, such as when directions to reach transit stops/stations, trails or other common destinations are not obvious)	<input type="checkbox"/>

TDM-supportive design & infrastructure measures: <i>Non-residential developments</i>		Check if completed & add descriptions, explanations or plan/drawing references
<b>2. WALKING &amp; CYCLING: END-OF-TRIP FACILITIES</b>		
<b>2.1 Bicycle parking</b>		
REQUIRED	2.1.1 Provide bicycle parking in highly visible and lighted areas, sheltered from the weather wherever possible (see <i>Official Plan policy 4.3.6</i> )	<input checked="" type="checkbox"/>
REQUIRED	2.1.2 Provide the number of bicycle parking spaces specified for various land uses in different parts of Ottawa; provide convenient access to main entrances or well-used areas (see <i>Zoning By-law Section 111</i> )	<input checked="" type="checkbox"/>
REQUIRED	2.1.3 Ensure that bicycle parking spaces and access aisles meet minimum dimensions; that no more than 50% of spaces are vertical spaces; and that parking racks are securely anchored (see <i>Zoning By-law Section 111</i> )	<input checked="" type="checkbox"/>
BASIC	2.1.4 Provide bicycle parking spaces equivalent to the expected number of commuter cyclists (assuming the cycling mode share target is met), plus the expected peak number of customer/visitor cyclists	<input type="checkbox"/>
BETTER	2.1.5 Provide bicycle parking spaces equivalent to the expected number of commuter and customer/visitor cyclists, plus an additional buffer (e.g. 25 percent extra) to encourage other cyclists and ensure adequate capacity in peak cycling season	<input type="checkbox"/>
<b>2.2 Secure bicycle parking</b>		
REQUIRED	2.2.1 Where more than 50 bicycle parking spaces are provided for a single office building, locate at least 25% of spaces within a building/structure, a secure area (e.g. supervised parking lot or enclosure) or bicycle lockers (see <i>Zoning By-law Section 111</i> )	<input checked="" type="checkbox"/>
BETTER	2.2.2 Provide secure bicycle parking spaces equivalent to the expected number of commuter cyclists (assuming the cycling mode share target is met)	<input type="checkbox"/>
<b>2.3 Shower &amp; change facilities</b>		
BASIC	2.3.1 Provide shower and change facilities for the use of active commuters	<input type="checkbox"/>
BETTER	2.3.2 In addition to shower and change facilities, provide dedicated lockers, grooming stations, drying racks and laundry facilities for the use of active commuters	<input type="checkbox"/>
<b>2.4 Bicycle repair station</b>		
BETTER	2.4.1 Provide a permanent bike repair station, with commonly used tools and an air pump, adjacent to the main bicycle parking area (or secure bicycle parking area, if provided)	<input type="checkbox"/>

<b>TDM-supportive design &amp; infrastructure measures: <i>Non-residential developments</i></b>		<b>Check if completed &amp; add descriptions, explanations or plan/drawing references</b>
<b>3. TRANSIT</b>		
<b>3.1 Customer amenities</b>		
<b>BASIC</b>	3.1.1 Provide shelters, lighting and benches at any on-site transit stops	<input type="checkbox"/> Not applicable.
<b>BASIC</b>	3.1.2 Where the site abuts an off-site transit stop and insufficient space exists for a transit shelter in the public right-of-way, protect land for a shelter and/or install a shelter	<input type="checkbox"/> Not applicable.
<b>BETTER</b>	3.1.3 Provide a secure and comfortable interior waiting area by integrating any on-site transit stops into the building	<input type="checkbox"/> Not applicable.
<b>4. RIDESHARING</b>		
<b>4.1 Pick-up &amp; drop-off facilities</b>		
<b>BASIC</b>	4.1.1 Provide a designated area for carpool drivers (plus taxis and ride-hailing services) to drop off or pick up passengers without using fire lanes or other no-stopping zones	<input type="checkbox"/>
<b>4.2 Carpool parking</b>		
<b>BASIC</b>	4.2.1 Provide signed parking spaces for carpools in a priority location close to a major building entrance, sufficient in number to accommodate the mode share target for carpools	<input type="checkbox"/>
<b>BETTER</b>	4.2.2 At large developments, provide spaces for carpools in a separate, access-controlled parking area to simplify enforcement	<input type="checkbox"/>
<b>5. CARSHARING &amp; BIKESHARING</b>		
<b>5.1 Carshare parking spaces</b>		
<b>BETTER</b>	5.1.1 Provide carshare parking spaces in permitted non-residential zones, occupying either required or provided parking spaces ( <i>see Zoning By-law Section 94</i> )	<input type="checkbox"/> Will be considered in site plan phase.
<b>5.2 Bikeshare station location</b>		
<b>BETTER</b>	5.2.1 Provide a designated bikeshare station area near a major building entrance, preferably lighted and sheltered with a direct walkway connection	<input type="checkbox"/>

TDM-supportive design & infrastructure measures: <i>Non-residential developments</i>		Check if completed & add descriptions, explanations or plan/drawing references
<b>6. PARKING</b>		
<b>6.1 Number of parking spaces</b>		
<b>REQUIRED</b>	6.1.1 Do not provide more parking than permitted by zoning, nor less than required by zoning, unless a variance is being applied for	<input checked="" type="checkbox"/>
<b>BASIC</b>	6.1.2 Provide parking for long-term and short-term users that is consistent with mode share targets, considering the potential for visitors to use off-site public parking	<input type="checkbox"/>
<b>BASIC</b>	6.1.3 Where a site features more than one use, provide shared parking and reduce the cumulative number of parking spaces accordingly ( <i>see Zoning By-law Section 104</i> )	<input type="checkbox"/>
<b>BETTER</b>	6.1.4 Reduce the minimum number of parking spaces required by zoning by one space for each 13 square metres of gross floor area provided as shower rooms, change rooms, locker rooms and other facilities for cyclists in conjunction with bicycle parking ( <i>see Zoning By-law Section 111</i> )	<input type="checkbox"/>
<b>6.2 Separate long-term &amp; short-term parking areas</b>		
<b>BETTER</b>	6.2.1 Separate short-term and long-term parking areas using signage or physical barriers, to permit access controls and simplify enforcement (i.e. to discourage employees from parking in visitor spaces, and vice versa)	<input type="checkbox"/>
<b>7. OTHER</b>		
<b>7.1 On-site amenities to minimize off-site trips</b>		
<b>BETTER</b>	7.1.1 Provide on-site amenities to minimize mid-day or mid-commute errands	<input type="checkbox"/>

## TDM-Supportive Development Design and Infrastructure Checklist: *Residential Developments (multi-family or condominium)*

<b>Legend</b>	
<b>REQUIRED</b>	The Official Plan or Zoning By-law provides related guidance that must be followed
<b>BASIC</b>	The measure is generally feasible and effective, and in most cases would benefit the development and its users
<b>BETTER</b>	The measure could maximize support for users of sustainable modes, and optimize development performance

TDM-supportive design & infrastructure measures: <i>Residential developments</i>		Check if completed & add descriptions, explanations or plan/drawing references
<b>1. WALKING &amp; CYCLING: ROUTES</b>		
<b>1.1 Building location &amp; access points</b>		
BASIC	1.1.1 Locate building close to the street, and do not locate parking areas between the street and building entrances	<input checked="" type="checkbox"/>
BASIC	1.1.2 Locate building entrances in order to minimize walking distances to sidewalks and transit stops/stations	<input checked="" type="checkbox"/>
BASIC	1.1.3 Locate building doors and windows to ensure visibility of pedestrians from the building, for their security and comfort	<input checked="" type="checkbox"/>
<b>1.2 Facilities for walking &amp; cycling</b>		
REQUIRED	1.2.1 Provide convenient, direct access to stations or major stops along rapid transit routes within 600 metres; minimize walking distances from buildings to rapid transit; provide pedestrian-friendly, weather-protected (where possible) environment between rapid transit accesses and building entrances; ensure quality linkages from sidewalks through building entrances to integrated stops/stations <i>(see Official Plan policy 4.3.3)</i>	<input checked="" type="checkbox"/>
REQUIRED	1.2.2 Provide safe, direct and attractive pedestrian access from public sidewalks to building entrances through such measures as: reducing distances between public sidewalks and major building entrances; providing walkways from public streets to major building entrances; within a site, providing walkways along the front of adjoining buildings, between adjacent buildings, and connecting areas where people may congregate, such as courtyards and transit stops; and providing weather protection through canopies, colonnades, and other design elements wherever possible <i>(see Official Plan policy 4.3.12)</i>	<input checked="" type="checkbox"/>

TDM-supportive design & infrastructure measures: <i>Residential developments</i>		Check if completed & add descriptions, explanations or plan/drawing references
REQUIRED	1.2.3 Provide sidewalks of smooth, well-drained walking surfaces of contrasting materials or treatments to differentiate pedestrian areas from vehicle areas, and provide marked pedestrian crosswalks at intersection sidewalks (see <i>Official Plan policy 4.3.10</i> )	<input checked="" type="checkbox"/>
REQUIRED	1.2.4 Make sidewalks and open space areas easily accessible through features such as gradual grade transition, depressed curbs at street corners and convenient access to extra-wide parking spaces and ramps (see <i>Official Plan policy 4.3.10</i> )	<input checked="" type="checkbox"/>
REQUIRED	1.2.5 Include adequately spaced inter-block/street cycling and pedestrian connections to facilitate travel by active transportation. Provide links to the existing or planned network of public sidewalks, multi-use pathways and on-road cycle routes. Where public sidewalks and multi-use pathways intersect with roads, consider providing traffic control devices to give priority to cyclists and pedestrians (see <i>Official Plan policy 4.3.11</i> )	<input checked="" type="checkbox"/>
BASIC	1.2.6 Provide safe, direct and attractive walking routes from building entrances to nearby transit stops	<input checked="" type="checkbox"/>
BASIC	1.2.7 Ensure that walking routes to transit stops are secure, visible, lighted, shaded and wind-protected wherever possible	<input checked="" type="checkbox"/>
BASIC	1.2.8 Design roads used for access or circulation by cyclists using a target operating speed of no more than 30 km/h, or provide a separated cycling facility	<input type="checkbox"/>
<b>1.3 Amenities for walking &amp; cycling</b>		
BASIC	1.3.1 Provide lighting, landscaping and benches along walking and cycling routes between building entrances and streets, sidewalks and trails	<input checked="" type="checkbox"/>
BASIC	1.3.2 Provide wayfinding signage for site access (where required, e.g. when multiple buildings or entrances exist) and egress (where warranted, such as when directions to reach transit stops/stations, trails or other common destinations are not obvious)	<input type="checkbox"/>

TDM-supportive design & infrastructure measures: <i>Residential developments</i>		Check if completed & add descriptions, explanations or plan/drawing references
<b>2. WALKING &amp; CYCLING: END-OF-TRIP FACILITIES</b>		
<b>2.1 Bicycle parking</b>		
REQUIRED	2.1.1 Provide bicycle parking in highly visible and lighted areas, sheltered from the weather wherever possible (see <i>Official Plan policy 4.3.6</i> )	<input checked="" type="checkbox"/>
REQUIRED	2.1.2 Provide the number of bicycle parking spaces specified for various land uses in different parts of Ottawa; provide convenient access to main entrances or well-used areas (see <i>Zoning By-law Section 111</i> )	<input checked="" type="checkbox"/>
REQUIRED	2.1.3 Ensure that bicycle parking spaces and access aisles meet minimum dimensions; that no more than 50% of spaces are vertical spaces; and that parking racks are securely anchored (see <i>Zoning By-law Section 111</i> )	<input checked="" type="checkbox"/>
BASIC	2.1.4 Provide bicycle parking spaces equivalent to the expected number of resident-owned bicycles, plus the expected peak number of visitor cyclists	<input type="checkbox"/>
<b>2.2 Secure bicycle parking</b>		
REQUIRED	2.2.1 Where more than 50 bicycle parking spaces are provided for a single residential building, locate at least 25% of spaces within a building/structure, a secure area (e.g. supervised parking lot or enclosure) or bicycle lockers (see <i>Zoning By-law Section 111</i> )	<input checked="" type="checkbox"/>
BETTER	2.2.2 Provide secure bicycle parking spaces equivalent to at least the number of units at condominiums or multi-family residential developments	<input type="checkbox"/>
<b>2.3 Bicycle repair station</b>		
BETTER	2.3.1 Provide a permanent bike repair station, with commonly used tools and an air pump, adjacent to the main bicycle parking area (or secure bicycle parking area, if provided)	<input type="checkbox"/>
<b>3. TRANSIT</b>		
<b>3.1 Customer amenities</b>		
BASIC	3.1.1 Provide shelters, lighting and benches at any on-site transit stops	<input type="checkbox"/>
BASIC	3.1.2 Where the site abuts an off-site transit stop and insufficient space exists for a transit shelter in the public right-of-way, protect land for a shelter and/or install a shelter	<input type="checkbox"/> No stop near development.
BETTER	3.1.3 Provide a secure and comfortable interior waiting area by integrating any on-site transit stops into the building	<input type="checkbox"/>



TDM-supportive design & infrastructure measures: <i>Residential developments</i>		Check if completed & add descriptions, explanations or plan/drawing references
<b>4. RIDESHARING</b>		
<b>4.1 Pick-up &amp; drop-off facilities</b>		
BASIC	4.1.1 Provide a designated area for carpool drivers (plus taxis and ride-hailing services) to drop off or pick up passengers without using fire lanes or other no-stopping zones	<input type="checkbox"/>
<b>5. CARSHARING &amp; BIKESHARING</b>		
<b>5.1 Carshare parking spaces</b>		
BETTER	5.1.1 Provide up to three carshare parking spaces in an R3, R4 or R5 Zone for specified residential uses (see <i>Zoning By-law Section 94</i> )	<input type="checkbox"/>
<b>5.2 Bikeshare station location</b>		
BETTER	5.2.1 Provide a designated bikeshare station area near a major building entrance, preferably lighted and sheltered with a direct walkway connection	<input type="checkbox"/>
<b>6. PARKING</b>		
<b>6.1 Number of parking spaces</b>		
REQUIRED	6.1.1 Do not provide more parking than permitted by zoning, nor less than required by zoning, unless a variance is being applied for	<input type="checkbox"/> Currently providing a parking ratio of 0.7 residents and 0.1 visitor.
BASIC	6.1.2 Provide parking for long-term and short-term users that is consistent with mode share targets, considering the potential for visitors to use off-site public parking	<input type="checkbox"/>
BASIC	6.1.3 Where a site features more than one use, provide shared parking and reduce the cumulative number of parking spaces accordingly (see <i>Zoning By-law Section 104</i> )	<input type="checkbox"/>
BETTER	6.1.4 Reduce the minimum number of parking spaces required by zoning by one space for each 13 square metres of gross floor area provided as shower rooms, change rooms, locker rooms and other facilities for cyclists in conjunction with bicycle parking (see <i>Zoning By-law Section 111</i> )	<input type="checkbox"/>
<b>6.2 Separate long-term &amp; short-term parking areas</b>		
BETTER	6.2.1 Provide separate areas for short-term and long-term parking (using signage or physical barriers) to permit access controls and simplify enforcement (i.e. to discourage residents from parking in visitor spaces, and vice versa)	<input type="checkbox"/>

**TDM Measures Checklist:**  
*Residential Developments (multi-family, condominium or subdivision)*

<b>Legend</b>	
<b>BASIC</b>	The measure is generally feasible and effective, and in most cases would benefit the development and its users
<b>BETTER</b>	The measure could maximize support for users of sustainable modes, and optimize development performance
★	The measure is one of the most dependably effective tools to encourage the use of sustainable modes

TDM measures: <i>Residential developments</i>		Check if proposed & add descriptions
<b>1. TDM PROGRAM MANAGEMENT</b>		
<b>1.1 Program coordinator</b>		
<b>BASIC</b>	★ 1.1.1 Designate an internal coordinator, or contract with an external coordinator	<input type="checkbox"/>
<b>1.2 Travel surveys</b>		
<b>BETTER</b>	1.2.1 Conduct periodic surveys to identify travel-related behaviours, attitudes, challenges and solutions, and to track progress	<input type="checkbox"/>
<b>2. WALKING AND CYCLING</b>		
<b>2.1 Information on walking/cycling routes &amp; destinations</b>		
<b>BASIC</b>	2.1.1 Display local area maps with walking/cycling access routes and key destinations at major entrances ( <i>multi-family, condominium</i> )	<input checked="" type="checkbox"/>
<b>2.2 Bicycle skills training</b>		
<b>BETTER</b>	2.2.1 Offer on-site cycling courses for residents, or subsidize off-site courses	<input type="checkbox"/>

TDM measures: <i>Residential developments</i>		Check if proposed & add descriptions
<b>3. TRANSIT</b>		
<b>3.1 Transit information</b>		
BASIC	3.1.1 Display relevant transit schedules and route maps at entrances ( <i>multi-family, condominium</i> )	<input checked="" type="checkbox"/>
BETTER	3.1.2 Provide real-time arrival information display at entrances ( <i>multi-family, condominium</i> )	<input type="checkbox"/>
<b>3.2 Transit fare incentives</b>		
BASIC ★	3.2.1 Offer PRESTO cards preloaded with one monthly transit pass on residence purchase/move-in, to encourage residents to use transit	<input type="checkbox"/>
BETTER	3.2.2 Offer at least one year of free monthly transit passes on residence purchase/move-in	<input type="checkbox"/>
<b>3.3 Enhanced public transit service</b>		
BETTER ★	3.3.1 Contract with OC Transpo to provide early transit services until regular services are warranted by occupancy levels ( <i>subdivision</i> )	<input type="checkbox"/>
<b>3.4 Private transit service</b>		
BETTER	3.4.1 Provide shuttle service for seniors homes or lifestyle communities (e.g. scheduled mall or supermarket runs)	<input type="checkbox"/>
<b>4. CARSHARING &amp; BIKESHARING</b>		
<b>4.1 Bikeshare stations &amp; memberships</b>		
BETTER	4.1.1 Contract with provider to install on-site bikeshare station ( <i>multi-family</i> )	<input type="checkbox"/>
BETTER	4.1.2 Provide residents with bikeshare memberships, either free or subsidized ( <i>multi-family</i> )	<input type="checkbox"/>
<b>4.2 Carshare vehicles &amp; memberships</b>		
BETTER	4.2.1 Contract with provider to install on-site carshare vehicles and promote their use by residents	<input checked="" type="checkbox"/> Will investigate at site plan phase.
BETTER	4.2.2 Provide residents with carshare memberships, either free or subsidized	<input type="checkbox"/>
<b>5. PARKING</b>		
<b>5.1 Priced parking</b>		
BASIC ★	5.1.1 Unbundle parking cost from purchase price ( <i>condominium</i> )	<input type="checkbox"/>
BASIC ★	5.1.2 Unbundle parking cost from monthly rent ( <i>multi-family</i> )	<input checked="" type="checkbox"/>

TDM measures: <i>Residential developments</i>		Check if proposed & add descriptions
<b>6. TDM MARKETING &amp; COMMUNICATIONS</b>		
<b>6.1 Multimodal travel information</b>		
<b>BASIC</b> ★	6.1.1 Provide a multimodal travel option information package to new residents	<input checked="" type="checkbox"/>
<b>6.2 Personalized trip planning</b>		
<b>BETTER</b> ★	6.2.1 Offer personalized trip planning to new residents	<input type="checkbox"/>

# APPENDIX E


SYNCHRO ANALYSIS REPORTS

---

## **Existing Conditions**

Lanes, Volumes, Timings  
1: Kent St & Somerset St W

Existing AM  
08/13/2021



Lane Group	EBL	EBT	WBT	NBL	NBT
Lane Configurations					
Traffic Volume (vph)	62	295	134	75	1554
Future Volume (vph)	62	295	134	75	1554
Lane Group Flow (vph)	69	328	205	83	1931
Turn Type	Perm	NA	NA	Perm	NA
Protected Phases		4	8		2
Permitted Phases	4			2	
Minimum Split (s)	23.5	23.5	23.5	23.4	23.4
Total Split (s)	27.0	27.0	27.0	48.0	48.0
Total Split (%)	36.0%	36.0%	36.0%	64.0%	64.0%
Yellow Time (s)	3.3	3.3	3.3	3.3	3.3
All-Red Time (s)	2.2	2.2	2.2	2.1	2.1
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.5	5.5	5.5	5.4	5.4
Lead/Lag					
Lead-Lag Optimize?					
Act Effct Green (s)	21.5	21.5	21.5	42.6	42.6
Actuated g/C Ratio	0.29	0.29	0.29	0.57	0.57
v/c Ratio	0.26	0.64	0.43	0.13	0.73
Control Delay	23.9	30.2	25.3	13.7	17.3
Queue Delay	0.0	0.0	0.0	0.0	0.0
Total Delay	23.9	30.2	25.3	13.7	17.3
LOS	C	C	C	B	B
Approach Delay		29.1	25.3		17.1
Approach LOS		C	C		B
Queue Length 50th (m)	7.5	40.4	23.5	6.9	57.9
Queue Length 95th (m)	17.7	66.1	41.5	m11.0	75.4
Internal Link Dist (m)		97.2	154.7		68.5
Turn Bay Length (m)	20.0			20.0	
Base Capacity (vph)	264	511	474	628	2652
Starvation Cap Reductn	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0
Reduced v/c Ratio	0.26	0.64	0.43	0.13	0.73

Intersection Summary

Cycle Length: 75	
Actuated Cycle Length: 75	
Offset: 66 (88%), Referenced to phase 2:NBTL, Start of Green	
Natural Cycle: 60	
Control Type: Pretimed	
Maximum v/c Ratio: 0.73	
Intersection Signal Delay: 19.6	Intersection LOS: B
Intersection Capacity Utilization 80.1%	ICU Level of Service D
Analysis Period (min) 15	

m Volume for 95th percentile queue is metered by upstream signal.


Splits and Phases: 1: Kent St & Somerset St W





Lanes, Volumes, Timings  
2: Kent St & MacLaren St

Existing AM  
08/13/2021



Lane Group	WBT	NBT
Lane Configurations		
Traffic Volume (vph)	14	1794
Future Volume (vph)	14	1794
Lane Group Flow (vph)	39	2030
Sign Control	Stop	Free

Intersection Summary

Control Type: Unsignalized

Intersection Capacity Utilization 51.9% ICU Level of Service A

Analysis Period (min) 15

# HCM Unsignalized Intersection Capacity Analysis

## 2: Kent St & MacLaren St

Existing AM  
08/13/2021



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	
Lane Configurations					↔			↔↔↔					
Traffic Volume (veh/h)	0	0	0	0	14	21	33	1794	0	0	0	0	
Future Volume (Veh/h)	0	0	0	0	14	21	33	1794	0	0	0	0	
Sign Control		Stop			Stop			Free			Free		
Grade		0%			0%			0%			0%		
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	
Hourly flow rate (vph)	0	0	0	0	16	23	37	1993	0	0	0	0	
Pedestrians		92			133			15			8		
Lane Width (m)		0.0			3.7			3.7			0.0		
Walking Speed (m/s)		1.1			1.1			1.1			1.1		
Percent Blockage		0			12			1			0		
Right turn flare (veh)													
Median type								None			None		
Median storage veh													
Upstream signal (m)								78			92		
pX, platoon unblocked	0.70	0.70		0.70	0.70	0.70				0.70			
vC, conflicting volume	869	2292	107	2215	2292	805	92			2126			
vC1, stage 1 conf vol													
vC2, stage 2 conf vol													
vCu, unblocked vol	0	1330	107	1219	1330	0	92			1091			
tC, single (s)	7.5	6.5	6.9	7.5	6.5	6.9	4.1			4.1			
tC, 2 stage (s)													
tF (s)	3.5	4.0	3.3	3.5	4.0	3.3	2.2			2.2			
p0 queue free %	100	100	100	100	82	97	98			100			
cM capacity (veh/h)	530	91	913	73	91	661	1501			387			
<b>Direction, Lane #</b>	<b>WB 1</b>	<b>NB 1</b>	<b>NB 2</b>	<b>NB 3</b>									
Volume Total	39	436	797	797									
Volume Left	0	37	0	0									
Volume Right	23	0	0	0									
cSH	186	1501	1700	1700									
Volume to Capacity	0.21	0.02	0.47	0.47									
Queue Length 95th (m)	5.8	0.6	0.0	0.0									
Control Delay (s)	29.5	0.9	0.0	0.0									
Lane LOS	D	A											
Approach Delay (s)	29.5	0.2											
Approach LOS	D												
<b>Intersection Summary</b>													
Average Delay			0.7										
Intersection Capacity Utilization			51.9%		ICU Level of Service					A			
Analysis Period (min)			15										

Lanes, Volumes, Timings  
3: Kent St & Gilmour St

Existing AM  
08/13/2021



Lane Group	EBT	NBT
Lane Configurations	↔	↑↑↑
Traffic Volume (vph)	85	1812
Future Volume (vph)	85	1812
Lane Group Flow (vph)	113	2184
Turn Type	NA	NA
Protected Phases	4	2
Permitted Phases		
Minimum Split (s)	21.5	21.1
Total Split (s)	22.0	53.0
Total Split (%)	29.3%	70.7%
Yellow Time (s)	3.3	3.3
All-Red Time (s)	2.2	1.8
Lost Time Adjust (s)	0.0	0.0
Total Lost Time (s)	5.5	5.1
Lead/Lag		
Lead-Lag Optimize?		
Act Effct Green (s)	16.5	47.9
Actuated g/C Ratio	0.22	0.64
v/c Ratio	0.28	0.72
Control Delay	20.1	23.1
Queue Delay	0.0	0.0
Total Delay	20.1	23.1
LOS	C	C
Approach Delay	20.1	23.1
Approach LOS	C	C
Queue Length 50th (m)	9.6	118.7
Queue Length 95th (m)	22.3	132.1
Internal Link Dist (m)	157.9	224.2
Turn Bay Length (m)		
Base Capacity (vph)	410	3025
Starvation Cap Reductn	0	0
Spillback Cap Reductn	0	0
Storage Cap Reductn	0	0
Reduced v/c Ratio	0.28	0.72

Intersection Summary

Cycle Length: 75	
Actuated Cycle Length: 75	
Offset: 5 (7%), Referenced to phase 2:NBT, Start of Green	
Natural Cycle: 60	
Control Type: Pretimed	
Maximum v/c Ratio: 0.72	
Intersection Signal Delay: 22.9	Intersection LOS: C
Intersection Capacity Utilization 63.2%	ICU Level of Service B
Analysis Period (min) 15	

Splits and Phases: 3: Kent St & Gilmour St



Lanes, Volumes, Timings  
4: Kent St & Gladstone Ave

Existing AM  
08/13/2021



Lane Group	EBL	EBT	WBT	NBL	NBT
Lane Configurations					
Traffic Volume (vph)	82	277	165	36	1698
Future Volume (vph)	82	277	165	36	1698
Lane Group Flow (vph)	91	308	347	40	1995
Turn Type	Perm	NA	NA	Perm	NA
Protected Phases		4	8		2
Permitted Phases	4			2	
Minimum Split (s)	23.4	23.4	23.4	23.4	23.4
Total Split (s)	30.0	30.0	30.0	45.0	45.0
Total Split (%)	40.0%	40.0%	40.0%	60.0%	60.0%
Yellow Time (s)	3.3	3.3	3.3	3.3	3.3
All-Red Time (s)	2.1	2.1	2.1	2.1	2.1
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.4	5.4	5.4	5.4	5.4
Lead/Lag					
Lead-Lag Optimize?					
Act Effct Green (s)	24.6	24.6	24.6	39.6	39.6
Actuated g/C Ratio	0.33	0.33	0.33	0.53	0.53
v/c Ratio	0.42	0.53	0.66	0.05	0.79
Control Delay	27.0	24.4	28.4	8.9	17.0
Queue Delay	0.0	0.0	0.0	0.0	0.0
Total Delay	27.0	24.4	28.4	8.9	17.0
LOS	C	C	C	A	B
Approach Delay		25.0	28.4		16.8
Approach LOS		C	C		B
Queue Length 50th (m)	9.9	35.0	40.8	2.6	76.8
Queue Length 95th (m)	23.2	57.7	68.0	6.7	95.9
Internal Link Dist (m)		152.2	162.6		69.7
Turn Bay Length (m)	25.0				
Base Capacity (vph)	217	585	526	747	2537
Starvation Cap Reductn	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0
Reduced v/c Ratio	0.42	0.53	0.66	0.05	0.79

Intersection Summary

Cycle Length: 75  
 Actuated Cycle Length: 75  
 Offset: 36 (48%), Referenced to phase 2:NBT, Start of Green  
 Natural Cycle: 60  
 Control Type: Pretimed  
 Maximum v/c Ratio: 0.79  
 Intersection Signal Delay: 19.5  
 Intersection Capacity Utilization 79.8%  
 Analysis Period (min) 15

Intersection LOS: B  
 ICU Level of Service D

Splits and Phases: 4: Kent St & Gladstone Ave



Lanes, Volumes, Timings  
5: Bank St & MacLaren St

Existing AM  
08/13/2021



Lane Group	WBT	NBL	NBT	SBT
Lane Configurations	↕		↕	↕
Traffic Volume (vph)	4	36	495	326
Future Volume (vph)	4	36	495	326
Lane Group Flow (vph)	30	0	590	391
Turn Type	NA	Perm	NA	NA
Protected Phases	8		2	6
Permitted Phases		2		
Minimum Split (s)	24.2	23.0	23.0	23.0
Total Split (s)	24.0	51.0	51.0	51.0
Total Split (%)	32.0%	68.0%	68.0%	68.0%
Yellow Time (s)	3.3	3.3	3.3	3.3
All-Red Time (s)	1.9	1.7	1.7	1.7
Lost Time Adjust (s)	0.0		0.0	0.0
Total Lost Time (s)	5.2		5.0	5.0
Lead/Lag				
Lead-Lag Optimize?				
Act Effct Green (s)	18.8		46.0	46.0
Actuated g/C Ratio	0.25		0.61	0.61
v/c Ratio	0.08		0.59	0.38
Control Delay	15.5		3.2	8.4
Queue Delay	0.0		0.2	0.0
Total Delay	15.5		3.3	8.4
LOS	B		A	A
Approach Delay	15.5		3.3	8.4
Approach LOS	B		A	A
Queue Length 50th (m)	1.7		4.9	24.0
Queue Length 95th (m)	7.7		6.9	39.2
Internal Link Dist (m)	126.3		56.4	50.2
Turn Bay Length (m)				
Base Capacity (vph)	383		1004	1037
Starvation Cap Reductn	0		51	0
Spillback Cap Reductn	0		0	0
Storage Cap Reductn	0		0	0
Reduced v/c Ratio	0.08		0.62	0.38

Intersection Summary

Cycle Length: 75

Actuated Cycle Length: 75

Offset: 42 (56%), Referenced to phase 2:NBT and 6:SBT, Start of Green

Natural Cycle: 60

Control Type: Pretimed

Maximum v/c Ratio: 0.59

Intersection Signal Delay: 5.6


Intersection LOS: A

Intersection Capacity Utilization 78.5%

ICU Level of Service D

Analysis Period (min) 15

Splits and Phases: 5: Bank St & MacLaren St

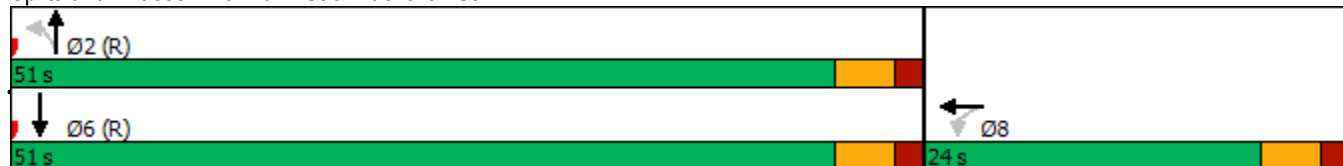

Lanes, Volumes, Timings  
6: Bank St & Gilmour St

Existing AM  
08/13/2021



Lane Group	EBT	NBT	SBL	SBT
Lane Configurations	↔	↑		↓
Traffic Volume (vph)	48	540	15	214
Future Volume (vph)	48	540	15	214
Lane Group Flow (vph)	123	638	0	255
Turn Type	NA	NA	Perm	NA
Protected Phases	4	2		6
Permitted Phases			6	
Minimum Split (s)	23.2	26.1	26.1	26.1
Total Split (s)	25.0	50.0	50.0	50.0
Total Split (%)	33.3%	66.7%	66.7%	66.7%
Yellow Time (s)	3.3	3.3	3.3	3.3
All-Red Time (s)	1.9	1.8	1.8	1.8
Lost Time Adjust (s)	0.0	0.0		0.0
Total Lost Time (s)	5.2	5.1		5.1
Lead/Lag				
Lead-Lag Optimize?				
Act Effct Green (s)	19.8	44.9		44.9
Actuated g/C Ratio	0.26	0.60		0.60
v/c Ratio	0.28	0.61		0.25
Control Delay	21.9	12.6		4.8
Queue Delay	0.0	0.0		0.3
Total Delay	21.9	12.6		5.1
LOS	C	B		A
Approach Delay	21.9	12.6		5.1
Approach LOS	C	B		A
Queue Length 50th (m)	11.4	50.6		7.2
Queue Length 95th (m)	m21.1	80.5		11.4
Internal Link Dist (m)	115.9	89.4		56.4
Turn Bay Length (m)				
Base Capacity (vph)	439	1043		1012
Starvation Cap Reductn	0	0		347
Spillback Cap Reductn	0	3		0
Storage Cap Reductn	0	0		0
Reduced v/c Ratio	0.28	0.61		0.38

Intersection Summary

Cycle Length: 75

Actuated Cycle Length: 75

Offset: 37 (49%), Referenced to phase 2:NBT and 6:SBTL, Start of Green

Natural Cycle: 60

Control Type: Pretimed

Maximum v/c Ratio: 0.61

Intersection Signal Delay: 11.8

Intersection LOS: B

Intersection Capacity Utilization 56.1%

ICU Level of Service B

Analysis Period (min) 15

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 6: Bank St & Gilmour St



Lanes, Volumes, Timings  
8: O'Connor St & Gilmour St

Existing AM  
08/13/2021



Lane Group	EBT	SBT	Ø9
Lane Configurations	↗	↖↗	
Traffic Volume (vph)	61	622	
Future Volume (vph)	61	622	
Lane Group Flow (vph)	122	745	
Turn Type	NA	NA	
Protected Phases	4	6	9
Permitted Phases			
Minimum Split (s)	20.1	26.1	5.0
Total Split (s)	21.0	49.0	5.0
Total Split (%)	28.0%	65.3%	7%
Yellow Time (s)	3.3	3.3	2.0
All-Red Time (s)	1.8	1.8	0.0
Lost Time Adjust (s)	0.0	0.0	
Total Lost Time (s)	5.1	5.1	
Lead/Lag			
Lead-Lag Optimize?			
Act Effct Green (s)	15.9	43.9	
Actuated g/C Ratio	0.21	0.59	
v/c Ratio	0.32	0.38	
Control Delay	14.5	8.2	
Queue Delay	0.0	0.0	
Total Delay	14.5	8.2	
LOS	B	A	
Approach Delay	14.5	8.2	
Approach LOS	B	A	
Queue Length 50th (m)	6.8	24.1	
Queue Length 95th (m)	m15.6	34.2	
Internal Link Dist (m)	159.1	135.3	
Turn Bay Length (m)			
Base Capacity (vph)	386	1976	
Starvation Cap Reductn	0	0	
Spillback Cap Reductn	0	0	
Storage Cap Reductn	0	0	
Reduced v/c Ratio	0.32	0.38	

Intersection Summary

Cycle Length: 75  
 Actuated Cycle Length: 75  
 Offset: 46 (61%), Referenced to phase 6:SBTL, Start of Green  
 Natural Cycle: 55  
 Control Type: Pretimed  
 Maximum v/c Ratio: 0.38  
 Intersection Signal Delay: 9.1  
 Intersection Capacity Utilization 44.0%  
 Analysis Period (min) 15  
 Intersection LOS: A  
 ICU Level of Service A

m Volume for 95th percentile queue is metered by upstream signal.




Splits and Phases: 8: O'Connor St & Gilmour St

<p>Ø9</p> <p>↓ Ø6 (R)</p> <p>49 s</p>	<p>→ Ø4</p> <p>21 s</p>	<p>5 s</p>
---------------------------------------	-------------------------	------------

Lanes, Volumes, Timings  
1: Kent St & Somerset St W

Existing PM  
08/13/2021




Lane Group	EBL	EBT	WBT	NBL	NBT
Lane Configurations					
Traffic Volume (vph)	56	332	303	77	706
Future Volume (vph)	56	332	303	77	706
Lane Group Flow (vph)	62	369	407	86	902
Turn Type	Perm	NA	NA	Perm	NA
Protected Phases		4	8		2
Permitted Phases	4			2	
Minimum Split (s)	23.5	23.5	23.5	23.4	23.4
Total Split (s)	41.0	41.0	41.0	34.0	34.0
Total Split (%)	54.7%	54.7%	54.7%	45.3%	45.3%
Yellow Time (s)	3.3	3.3	3.3	3.3	3.3
All-Red Time (s)	2.2	2.2	2.2	2.1	2.1
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.5	5.5	5.5	5.4	5.4
Lead/Lag					
Lead-Lag Optimize?					
Act Effct Green (s)	35.5	35.5	35.5	28.6	28.6
Actuated g/C Ratio	0.47	0.47	0.47	0.38	0.38
v/c Ratio	0.20	0.44	0.51	0.26	0.51
Control Delay	13.8	15.2	16.6	23.5	22.5
Queue Delay	0.0	0.0	0.0	0.0	0.0
Total Delay	13.8	15.2	16.6	23.5	22.5
LOS	B	B	B	C	C
Approach Delay		15.0	16.6		22.6
Approach LOS		B	B		C
Queue Length 50th (m)	4.9	33.0	38.0	8.1	30.2
Queue Length 95th (m)	12.3	53.2	61.6	21.4	60.2
Internal Link Dist (m)		97.2	154.7		68.5
Turn Bay Length (m)	20.0			20.0	
Base Capacity (vph)	305	844	791	326	1752
Starvation Cap Reductn	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0
Reduced v/c Ratio	0.20	0.44	0.51	0.26	0.51

Intersection Summary

Cycle Length: 75  
 Actuated Cycle Length: 75  
 Offset: 50 (67%), Referenced to phase 2:NBTL, Start of Green  
 Natural Cycle: 50  
 Control Type: Pretimed  
 Maximum v/c Ratio: 0.51  
 Intersection Signal Delay: 19.5  
 Intersection Capacity Utilization 72.1%  
 Analysis Period (min) 15


Intersection LOS: B  
 ICU Level of Service C

Splits and Phases: 1: Kent St & Somerset St W

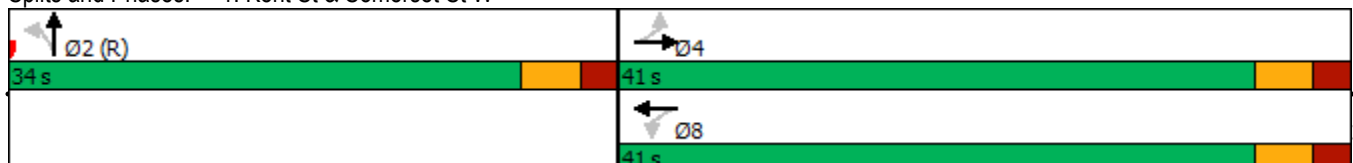

Lanes, Volumes, Timings  
2: Kent St & MacLaren St

Existing PM  
08/13/2021



Lane Group	WBT	NBT
Lane Configurations		
Traffic Volume (vph)	22	869
Future Volume (vph)	22	869
Lane Group Flow (vph)	102	1000
Sign Control	Stop	Free

Intersection Summary

Control Type: Unsignalized

Intersection Capacity Utilization 37.0% ICU Level of Service A

Analysis Period (min) 15

# HCM Unsignalized Intersection Capacity Analysis

## 2: Kent St & MacLaren St

Existing PM  
08/13/2021



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations					↔			↔↔↔				
Traffic Volume (veh/h)	0	0	0	0	22	70	31	869	0	0	0	0
Future Volume (Veh/h)	0	0	0	0	22	70	31	869	0	0	0	0
Sign Control		Stop			Stop			Free			Free	
Grade		0%			0%			0%			0%	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Hourly flow rate (vph)	0	0	0	0	24	78	34	966	0	0	0	0
Pedestrians		45			95			11			17	
Lane Width (m)		0.0			3.7			3.7			0.0	
Walking Speed (m/s)		1.1			1.1			1.1			1.1	
Percent Blockage		0			9			1			0	
Right turn flare (veh)												
Median type								None			None	
Median storage veh												
Upstream signal (m)								78			92	
pX, platoon unblocked	0.92	0.92		0.92	0.92	0.92				0.92		
vC, conflicting volume	542	1174	56	1140	1174	434	45			1061		
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	186	875	56	838	875	68	45			752		
tC, single (s)	7.5	6.5	6.9	7.5	6.5	6.9	4.1			4.1		
tC, 2 stage (s)												
tF (s)	3.5	4.0	3.3	3.5	4.0	3.3	2.2			2.2		
p0 queue free %	100	100	100	100	90	90	98			100		
cM capacity (veh/h)	532	234	988	197	234	820	1561			714		
<b>Direction, Lane #</b>	<b>WB 1</b>	<b>NB 1</b>	<b>NB 2</b>	<b>NB 3</b>								
Volume Total	102	227	386	386								
Volume Left	0	34	0	0								
Volume Right	78	0	0	0								
cSH	516	1561	1700	1700								
Volume to Capacity	0.20	0.02	0.23	0.23								
Queue Length 95th (m)	5.5	0.5	0.0	0.0								
Control Delay (s)	13.7	1.3	0.0	0.0								
Lane LOS	B	A										
Approach Delay (s)	13.7	0.3										
Approach LOS	B											
<b>Intersection Summary</b>												
Average Delay			1.5									
Intersection Capacity Utilization			37.0%		ICU Level of Service				A			
Analysis Period (min)			15									

Lanes, Volumes, Timings  
3: Kent St & Gilmour St

Existing PM  
08/13/2021



Lane Group	EBT	NBT
Lane Configurations	↔	↑↑↑
Traffic Volume (vph)	77	846
Future Volume (vph)	77	846
Lane Group Flow (vph)	107	1027
Turn Type	NA	NA
Protected Phases	4	2
Permitted Phases		
Minimum Split (s)	21.5	21.1
Total Split (s)	22.0	53.0
Total Split (%)	29.3%	70.7%
Yellow Time (s)	3.3	3.3
All-Red Time (s)	2.2	1.8
Lost Time Adjust (s)	0.0	0.0
Total Lost Time (s)	5.5	5.1
Lead/Lag		
Lead-Lag Optimize?		
Act Effct Green (s)	16.5	47.9
Actuated g/C Ratio	0.22	0.64
v/c Ratio	0.26	0.34
Control Delay	19.8	9.5
Queue Delay	0.0	0.0
Total Delay	19.8	9.5
LOS	B	A
Approach Delay	19.8	9.5
Approach LOS	B	A
Queue Length 50th (m)	8.8	23.6
Queue Length 95th (m)	21.2	37.7
Internal Link Dist (m)	157.9	224.2
Turn Bay Length (m)		
Base Capacity (vph)	405	3012
Starvation Cap Reductn	0	0
Spillback Cap Reductn	0	0
Storage Cap Reductn	0	0
Reduced v/c Ratio	0.26	0.34

Intersection Summary

Cycle Length: 75  
 Actuated Cycle Length: 75  
 Offset: 0 (0%), Referenced to phase 2:NBT, Start of Green  
 Natural Cycle: 45  
 Control Type: Pretimed  
 Maximum v/c Ratio: 0.34  
 Intersection Signal Delay: 10.5  
 Intersection Capacity Utilization 41.8%  
 Analysis Period (min) 15


Intersection LOS: B  
 ICU Level of Service A

Splits and Phases: 3: Kent St & Gilmour St



Lanes, Volumes, Timings  
4: Kent St & Gladstone Ave

Existing PM  
08/13/2021




Lane Group	EBL	EBT	WBT	NBL	NBT
Lane Configurations	↶	↷	↷	↶	↷↷↷
Traffic Volume (vph)	75	450	324	52	722
Future Volume (vph)	75	450	324	52	722
Lane Group Flow (vph)	83	500	443	58	920
Turn Type	Perm	NA	NA	Perm	NA
Protected Phases		4	8		2
Permitted Phases	4			2	
Minimum Split (s)	23.4	23.4	23.4	23.4	23.4
Total Split (s)	40.0	40.0	40.0	35.0	35.0
Total Split (%)	53.3%	53.3%	53.3%	46.7%	46.7%
Yellow Time (s)	3.3	3.3	3.3	3.3	3.3
All-Red Time (s)	2.1	2.1	2.1	2.1	2.1
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.4	5.4	5.4	5.4	5.4
Lead/Lag					
Lead-Lag Optimize?					
Act Effct Green (s)	34.6	34.6	34.6	29.6	29.6
Actuated g/C Ratio	0.46	0.46	0.46	0.39	0.39
v/c Ratio	0.27	0.61	0.55	0.10	0.49
Control Delay	15.4	19.1	17.1	15.0	17.3
Queue Delay	0.0	0.0	0.0	0.0	0.0
Total Delay	15.4	19.1	17.1	15.0	17.3
LOS	B	B	B	B	B
Approach Delay		18.5	17.1		17.1
Approach LOS		B	B		B
Queue Length 50th (m)	6.9	50.5	41.0	5.0	33.0
Queue Length 95th (m)	16.3	79.9	67.0	11.9	43.8
Internal Link Dist (m)		152.2	162.6		69.7
Turn Bay Length (m)	25.0				
Base Capacity (vph)	311	823	801	588	1877
Starvation Cap Reductn	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0
Reduced v/c Ratio	0.27	0.61	0.55	0.10	0.49

Intersection Summary

Cycle Length: 75  
 Actuated Cycle Length: 75  
 Offset: 23 (31%), Referenced to phase 2:NBT, Start of Green  
 Natural Cycle: 50  
 Control Type: Pretimed  
 Maximum v/c Ratio: 0.61  
 Intersection Signal Delay: 17.5  
 Intersection Capacity Utilization 63.0%  
 Analysis Period (min) 15  
 Intersection LOS: B  
 ICU Level of Service B

Splits and Phases: 4: Kent St & Gladstone Ave

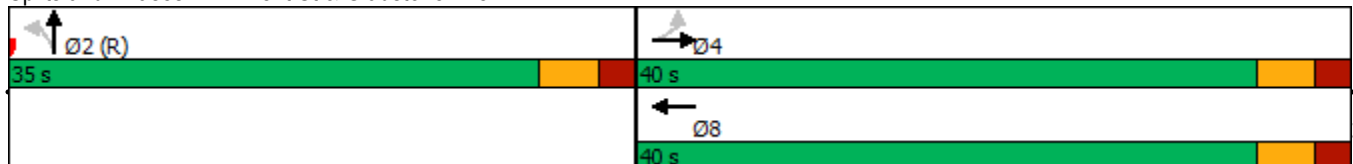

Lanes, Volumes, Timings  
5: Bank St & MacLaren St

Existing PM  
08/13/2021



Lane Group	WBT	NBL	NBT	SBT
Lane Configurations	↕		↕	↕
Traffic Volume (vph)	11	25	275	620
Future Volume (vph)	11	25	275	620
Lane Group Flow (vph)	62	0	334	718
Turn Type	NA	Perm	NA	NA
Protected Phases	8		2	6
Permitted Phases		2		
Minimum Split (s)	24.2	23.0	23.0	23.0
Total Split (s)	24.0	51.0	51.0	51.0
Total Split (%)	32.0%	68.0%	68.0%	68.0%
Yellow Time (s)	3.3	3.3	3.3	3.3
All-Red Time (s)	1.9	1.7	1.7	1.7
Lost Time Adjust (s)	0.0		0.0	0.0
Total Lost Time (s)	5.2		5.0	5.0
Lead/Lag				
Lead-Lag Optimize?				
Act Effct Green (s)	18.8		46.0	46.0
Actuated g/C Ratio	0.25		0.61	0.61
v/c Ratio	0.17		0.34	0.68
Control Delay	20.3		2.7	13.6
Queue Delay	0.0		0.2	0.0
Total Delay	20.3		2.9	13.6
LOS	C		A	B
Approach Delay	20.3		2.9	13.6
Approach LOS	C		A	B
Queue Length 50th (m)	5.6		4.3	59.4
Queue Length 95th (m)	14.7		6.1	95.7
Internal Link Dist (m)	126.3		56.4	50.2
Turn Bay Length (m)				
Base Capacity (vph)	366		980	1058
Starvation Cap Reductn	0		201	0
Spillback Cap Reductn	0		0	0
Storage Cap Reductn	0		0	0
Reduced v/c Ratio	0.17		0.43	0.68

Intersection Summary

Cycle Length: 75  
 Actuated Cycle Length: 75  
 Offset: 7 (9%), Referenced to phase 2:NBTL and 6:SBT, Start of Green  
 Natural Cycle: 60  
 Control Type: Pretimed  
 Maximum v/c Ratio: 0.68  
 Intersection Signal Delay: 10.8  
 Intersection Capacity Utilization 61.5%  
 Analysis Period (min) 15

Intersection LOS: B  
 ICU Level of Service B

Splits and Phases: 5: Bank St & MacLaren St



Lanes, Volumes, Timings  
6: Bank St & Gilmour St

Existing PM  
08/13/2021



Lane Group	EBT	NBT	SBL	SBT
Lane Configurations	↔	↑		↔
Traffic Volume (vph)	116	410	19	343
Future Volume (vph)	116	410	19	343
Lane Group Flow (vph)	213	487	0	402
Turn Type	NA	NA	Perm	NA
Protected Phases	4	2		6
Permitted Phases			6	
Minimum Split (s)	23.2	26.1	26.1	26.1
Total Split (s)	25.0	50.0	50.0	50.0
Total Split (%)	33.3%	66.7%	66.7%	66.7%
Yellow Time (s)	3.3	3.3	3.3	3.3
All-Red Time (s)	1.9	1.8	1.8	1.8
Lost Time Adjust (s)	0.0	0.0		0.0
Total Lost Time (s)	5.2	5.1		5.1
Lead/Lag				
Lead-Lag Optimize?				
Act Effct Green (s)	19.8	44.9		44.9
Actuated g/C Ratio	0.26	0.60		0.60
v/c Ratio	0.48	0.47		0.39
Control Delay	19.6	10.1		4.3
Queue Delay	0.0	0.0		0.6
Total Delay	19.6	10.1		5.0
LOS	B	B		A
Approach Delay	19.6	10.1		5.0
Approach LOS	B	B		A
Queue Length 50th (m)	14.5	33.9		9.3
Queue Length 95th (m)	28.4	54.3		13.5
Internal Link Dist (m)	115.9	89.4		56.4
Turn Bay Length (m)				
Base Capacity (vph)	444	1037		1026
Starvation Cap Reductn	0	0		312
Spillback Cap Reductn	0	0		0
Storage Cap Reductn	0	0		0
Reduced v/c Ratio	0.48	0.47		0.56

Intersection Summary

Cycle Length: 75

Actuated Cycle Length: 75

Offset: 6 (8%), Referenced to phase 2:NBT and 6:SBTL, Start of Green

Natural Cycle: 50

Control Type: Pretimed

Maximum v/c Ratio: 0.48

Intersection Signal Delay: 10.1

Intersection LOS: B

Intersection Capacity Utilization 63.0%

ICU Level of Service B

Analysis Period (min) 15

Splits and Phases: 6: Bank St & Gilmour St





Lanes, Volumes, Timings  
8: O'Connor St & Gilmour St

Existing PM  
08/13/2021



Lane Group	EBT	SBT	Ø9
Lane Configurations	↻	↻↻	
Traffic Volume (vph)	84	1190	
Future Volume (vph)	84	1190	
Lane Group Flow (vph)	192	1375	
Turn Type	NA	NA	
Protected Phases	4	6	9
Permitted Phases			
Minimum Split (s)	20.1	26.1	5.0
Total Split (s)	21.0	49.0	5.0
Total Split (%)	28.0%	65.3%	7%
Yellow Time (s)	3.3	3.3	2.0
All-Red Time (s)	1.8	1.8	0.0
Lost Time Adjust (s)	0.0	0.0	
Total Lost Time (s)	5.1	5.1	
Lead/Lag			
Lead-Lag Optimize?			
Act Effct Green (s)	15.9	43.9	
Actuated g/C Ratio	0.21	0.59	
v/c Ratio	0.50	0.69	
Control Delay	32.1	12.6	
Queue Delay	0.0	0.0	
Total Delay	32.1	12.6	
LOS	C	B	
Approach Delay	32.1	12.6	
Approach LOS	C	B	
Queue Length 50th (m)	19.8	61.7	
Queue Length 95th (m)	38.6	83.4	
Internal Link Dist (m)	159.1	135.3	
Turn Bay Length (m)			
Base Capacity (vph)	386	1985	
Starvation Cap Reductn	0	0	
Spillback Cap Reductn	0	0	
Storage Cap Reductn	0	0	
Reduced v/c Ratio	0.50	0.69	

Intersection Summary

Cycle Length: 75  
 Actuated Cycle Length: 75  
 Offset: 71 (95%), Referenced to phase 6:SBTL, Start of Green  
 Natural Cycle: 60  
 Control Type: Pretimed  
 Maximum v/c Ratio: 0.69  
 Intersection Signal Delay: 15.0  
 Intersection Capacity Utilization 60.6%  
 Analysis Period (min) 15

Intersection LOS: B  
 ICU Level of Service B

Splits and Phases: 8: O'Connor St & Gilmour St



## **Future Background 2024**

Lanes, Volumes, Timings  
1: Kent St & Somerset St W

Future Background 2024 AM

08/13/2021



Lane Group	EBL	EBT	WBT	NBL	NBT
Lane Configurations					
Traffic Volume (vph)	62	304	138	75	1601
Future Volume (vph)	62	304	138	75	1601
Lane Group Flow (vph)	62	304	188	75	1785
Turn Type	Perm	NA	NA	Perm	NA
Protected Phases		4	8		2
Permitted Phases	4			2	
Minimum Split (s)	23.5	23.5	23.5	23.4	23.4
Total Split (s)	27.0	27.0	27.0	48.0	48.0
Total Split (%)	36.0%	36.0%	36.0%	64.0%	64.0%
Yellow Time (s)	3.3	3.3	3.3	3.3	3.3
All-Red Time (s)	2.2	2.2	2.2	2.1	2.1
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.5	5.5	5.5	5.4	5.4
Lead/Lag					
Lead-Lag Optimize?					
Act Effct Green (s)	21.5	21.5	21.5	42.6	42.6
Actuated g/C Ratio	0.29	0.29	0.29	0.57	0.57
v/c Ratio	0.22	0.59	0.40	0.12	0.67
Control Delay	22.9	28.7	24.6	13.3	15.9
Queue Delay	0.0	0.0	0.0	0.0	0.0
Total Delay	22.9	28.7	24.6	13.3	15.9
LOS	C	C	C	B	B
Approach Delay		27.7	24.6		15.8
Approach LOS		C	C		B
Queue Length 50th (m)	6.6	36.7	21.3	5.8	49.4
Queue Length 95th (m)	15.9	61.0	38.3	m10.1	66.7
Internal Link Dist (m)		97.2	154.7		68.5
Turn Bay Length (m)	20.0			20.0	
Base Capacity (vph)	286	511	475	628	2656
Starvation Cap Reductn	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0
Reduced v/c Ratio	0.22	0.59	0.40	0.12	0.67

Intersection Summary

Cycle Length: 75

Actuated Cycle Length: 75

Offset: 66 (88%), Referenced to phase 2:NBT, Start of Green

Natural Cycle: 55

Control Type: Pretimed

Maximum v/c Ratio: 0.67

Intersection Signal Delay: 18.3

Intersection LOS: B


Intersection Capacity Utilization 81.5%


ICU Level of Service D

Analysis Period (min) 15

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 1: Kent St & Somerset St W

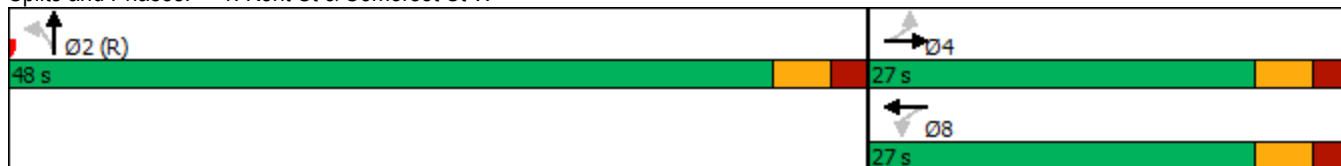



Lane Group	WBT	NBT
Lane Configurations		
Traffic Volume (vph)	14	1848
Future Volume (vph)	14	1848
Lane Group Flow (vph)	35	1881
Sign Control	Stop	Free

**Intersection Summary**

Control Type: Unsignalized

Intersection Capacity Utilization 53.0% ICU Level of Service A

Analysis Period (min) 15

HCM Unsignalized Intersection Capacity Analysis  
2: Kent St & MacLaren St

Future Background 2024 AM  
08/13/2021



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	
Lane Configurations					↔			↔↔↔					
Traffic Volume (veh/h)	0	0	0	0	14	21	33	1848	0	0	0	0	
Future Volume (Veh/h)	0	0	0	0	14	21	33	1848	0	0	0	0	
Sign Control		Stop			Stop			Free			Free		
Grade		0%			0%			0%			0%		
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	
Hourly flow rate (vph)	0	0	0	0	14	21	33	1848	0	0	0	0	
Pedestrians		92			133			15			8		
Lane Width (m)		0.0			3.7			3.7			0.0		
Walking Speed (m/s)		1.1			1.1			1.1			1.1		
Percent Blockage		0			12			1			0		
Right turn flare (veh)													
Median type								None			None		
Median storage veh													
Upstream signal (m)								78			92		
pX, platoon unblocked	0.74	0.74		0.74	0.74	0.74				0.74			
vC, conflicting volume	810	2139	107	2062	2139	757	92			1981			
vC1, stage 1 conf vol													
vC2, stage 2 conf vol													
vCu, unblocked vol	0	1308	107	1204	1308	0	92			1095			
tC, single (s)	7.5	6.5	6.9	7.5	6.5	6.9	4.1			4.1			
tC, 2 stage (s)													
tF (s)	3.5	4.0	3.3	3.5	4.0	3.3	2.2			2.2			
p0 queue free %	100	100	100	100	86	97	98			100			
cM capacity (veh/h)	585	100	913	79	100	702	1501			410			
<b>Direction, Lane #</b>	<b>WB 1</b>	<b>NB 1</b>	<b>NB 2</b>	<b>NB 3</b>									
Volume Total	35	403	739	739									
Volume Left	0	33	0	0									
Volume Right	21	0	0	0									
cSH	206	1501	1700	1700									
Volume to Capacity	0.17	0.02	0.43	0.43									
Queue Length 95th (m)	4.5	0.5	0.0	0.0									
Control Delay (s)	26.0	0.8	0.0	0.0									
Lane LOS	D	A											
Approach Delay (s)	26.0	0.2											
Approach LOS	D												
<b>Intersection Summary</b>													
Average Delay			0.6										
Intersection Capacity Utilization			53.0%		ICU Level of Service					A			
Analysis Period (min)			15										

Lanes, Volumes, Timings  
3: Kent St & Gilmour St

Future Background 2024 AM  
08/13/2021



Lane Group	EBT	NBT
Lane Configurations	↔	↑↑↑
Traffic Volume (vph)	85	1866
Future Volume (vph)	85	1866
Lane Group Flow (vph)	102	2020
Turn Type	NA	NA
Protected Phases	4	2
Permitted Phases		
Minimum Split (s)	21.5	21.1
Total Split (s)	22.0	53.0
Total Split (%)	29.3%	70.7%
Yellow Time (s)	3.3	3.3
All-Red Time (s)	2.2	1.8
Lost Time Adjust (s)	0.0	0.0
Total Lost Time (s)	5.5	5.1
Lead/Lag		
Lead-Lag Optimize?		
Act Effct Green (s)	16.5	47.9
Actuated g/C Ratio	0.22	0.64
v/c Ratio	0.25	0.67
Control Delay	19.4	22.4
Queue Delay	0.0	0.0
Total Delay	19.4	22.4
LOS	B	C
Approach Delay	19.4	22.4
Approach LOS	B	C
Queue Length 50th (m)	8.2	107.5
Queue Length 95th (m)	20.1	122.0
Internal Link Dist (m)	157.9	224.2
Turn Bay Length (m)		
Base Capacity (vph)	410	3029
Starvation Cap Reductn	0	0
Spillback Cap Reductn	0	0
Storage Cap Reductn	0	0
Reduced v/c Ratio	0.25	0.67


Intersection Summary

Cycle Length: 75	
Actuated Cycle Length: 75	
Offset: 5 (7%), Referenced to phase 2:NBT, Start of Green	
Natural Cycle: 55	
Control Type: Pretimed	
Maximum v/c Ratio: 0.67	
Intersection Signal Delay: 22.3	Intersection LOS: C
Intersection Capacity Utilization 64.3%	ICU Level of Service C
Analysis Period (min) 15	

Splits and Phases: 3: Kent St & Gilmour St



Lanes, Volumes, Timings  
4: Kent St & Gladstone Ave



Lane Group	EBL	EBT	WBT	NBL	NBT
Lane Configurations	↶	↷	↷	↶	↷↷↷
Traffic Volume (vph)	82	285	170	36	1749
Future Volume (vph)	82	285	170	36	1749
Lane Group Flow (vph)	82	285	318	36	1846
Turn Type	Perm	NA	NA	Perm	NA
Protected Phases		4	8		2
Permitted Phases	4			2	
Minimum Split (s)	23.4	23.4	23.4	23.4	23.4
Total Split (s)	30.0	30.0	30.0	45.0	45.0
Total Split (%)	40.0%	40.0%	40.0%	60.0%	60.0%
Yellow Time (s)	3.3	3.3	3.3	3.3	3.3
All-Red Time (s)	2.1	2.1	2.1	2.1	2.1
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.4	5.4	5.4	5.4	5.4
Lead/Lag					
Lead-Lag Optimize?					
Act Effct Green (s)	24.6	24.6	24.6	39.6	39.6
Actuated g/C Ratio	0.33	0.33	0.33	0.53	0.53
v/c Ratio	0.33	0.49	0.60	0.05	0.73
Control Delay	23.7	23.6	26.2	8.9	15.5
Queue Delay	0.0	0.0	0.0	0.0	0.0
Total Delay	23.7	23.6	26.2	8.9	15.5
LOS	C	C	C	A	B
Approach Delay		23.6	26.2		15.4
Approach LOS		C	C		B
Queue Length 50th (m)	8.6	31.8	36.0	2.3	67.5
Queue Length 95th (m)	20.1	53.0	60.9	6.3	84.4
Internal Link Dist (m)		152.2	162.6		69.7
Turn Bay Length (m)	25.0				
Base Capacity (vph)	247	585	529	747	2538
Starvation Cap Reductn	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0
Reduced v/c Ratio	0.33	0.49	0.60	0.05	0.73

Intersection Summary

Cycle Length: 75  
 Actuated Cycle Length: 75  
 Offset: 36 (48%), Referenced to phase 2:NBT, Start of Green  
 Natural Cycle: 60  
 Control Type: Pretimed  
 Maximum v/c Ratio: 0.73  
 Intersection Signal Delay: 17.9  
 Intersection Capacity Utilization 81.0%  
 Analysis Period (min) 15

Intersection LOS: B  
 ICU Level of Service D

Splits and Phases: 4: Kent St & Gladstone Ave





Lanes, Volumes, Timings  
5: Bank St & MacLaren St

Future Background 2024 AM

08/13/2021



Lane Group	WBT	NBL	NBT	SBT
Lane Configurations	↕		↕	↕
Traffic Volume (vph)	4	36	510	336
Future Volume (vph)	4	36	510	336
Lane Group Flow (vph)	28	0	546	362
Turn Type	NA	Perm	NA	NA
Protected Phases	8		2	6
Permitted Phases		2		
Minimum Split (s)	24.2	23.0	23.0	23.0
Total Split (s)	24.0	51.0	51.0	51.0
Total Split (%)	32.0%	68.0%	68.0%	68.0%
Yellow Time (s)	3.3	3.3	3.3	3.3
All-Red Time (s)	1.9	1.7	1.7	1.7
Lost Time Adjust (s)	0.0		0.0	0.0
Total Lost Time (s)	5.2		5.0	5.0
Lead/Lag				
Lead-Lag Optimize?				
Act Effct Green (s)	18.8		46.0	46.0
Actuated g/C Ratio	0.25		0.61	0.61
v/c Ratio	0.07		0.53	0.35
Control Delay	15.5		2.7	8.1
Queue Delay	0.0		0.1	0.0
Total Delay	15.5		2.8	8.1
LOS	B		A	A
Approach Delay	15.5		2.8	8.1
Approach LOS	B		A	A
Queue Length 50th (m)	1.6		4.3	21.6
Queue Length 95th (m)	7.3		6.1	35.6
Internal Link Dist (m)	126.3		56.4	50.2
Turn Bay Length (m)				
Base Capacity (vph)	383		1027	1039
Starvation Cap Reductn	0		66	0
Spillback Cap Reductn	0		0	0
Storage Cap Reductn	0		0	0
Reduced v/c Ratio	0.07		0.57	0.35

Intersection Summary

Cycle Length: 75  
 Actuated Cycle Length: 75  
 Offset: 42 (56%), Referenced to phase 2:NBT and 6:SBT, Start of Green  
 Natural Cycle: 55  
 Control Type: Pretimed  
 Maximum v/c Ratio: 0.53  
 Intersection Signal Delay: 5.2  
 Intersection Capacity Utilization 79.9%  
 Analysis Period (min) 15

Intersection LOS: A  
 ICU Level of Service D

Splits and Phases: 5: Bank St & MacLaren St



Lanes, Volumes, Timings  
6: Bank St & Gilmour St

Future Background 2024 AM  
08/13/2021



Lane Group	EBT	NBT	SBL	SBT
Lane Configurations	↔	↔		↔
Traffic Volume (vph)	48	556	15	220
Future Volume (vph)	48	556	15	220
Lane Group Flow (vph)	111	590	0	235
Turn Type	NA	NA	Perm	NA
Protected Phases	4	2		6
Permitted Phases			6	
Minimum Split (s)	23.2	26.1	26.1	26.1
Total Split (s)	25.0	50.0	50.0	50.0
Total Split (%)	33.3%	66.7%	66.7%	66.7%
Yellow Time (s)	3.3	3.3	3.3	3.3
All-Red Time (s)	1.9	1.8	1.8	1.8
Lost Time Adjust (s)	0.0	0.0		0.0
Total Lost Time (s)	5.2	5.1		5.1
Lead/Lag				
Lead-Lag Optimize?				
Act Effct Green (s)	19.8	44.9		44.9
Actuated g/C Ratio	0.26	0.60		0.60
v/c Ratio	0.25	0.57		0.23
Control Delay	21.2	11.7		4.8
Queue Delay	0.0	0.0		0.3
Total Delay	21.2	11.7		5.1
LOS	C	B		A
Approach Delay	21.2	11.7		5.1
Approach LOS	C	B		A
Queue Length 50th (m)	9.7	44.8		6.7
Queue Length 95th (m)	m19.4	71.3		10.7
Internal Link Dist (m)	115.9	89.4		56.4
Turn Bay Length (m)				
Base Capacity (vph)	439	1043		1020
Starvation Cap Reductn	0	0		379
Spillback Cap Reductn	0	0		0
Storage Cap Reductn	0	0		0
Reduced v/c Ratio	0.25	0.57		0.37

Intersection Summary

Cycle Length: 75  
 Actuated Cycle Length: 75  
 Offset: 37 (49%), Referenced to phase 2:NBT and 6:SBTL, Start of Green  
 Natural Cycle: 55  
 Control Type: Pretimed  
 Maximum v/c Ratio: 0.57  
 Intersection Signal Delay: 11.1  
 Intersection Capacity Utilization 57.0%  
 Analysis Period (min) 15

Intersection LOS: B

ICU Level of Service B

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 6: Bank St & Gilmour St





Lane Group	EBT	SBT	Ø9
Lane Configurations	↻	↻↻	
Traffic Volume (vph)	61	641	
Future Volume (vph)	61	641	
Lane Group Flow (vph)	110	690	
Turn Type	NA	NA	
Protected Phases	4	6	9
Permitted Phases			
Minimum Split (s)	20.1	26.1	5.0
Total Split (s)	21.0	49.0	5.0
Total Split (%)	28.0%	65.3%	7%
Yellow Time (s)	3.3	3.3	2.0
All-Red Time (s)	1.8	1.8	0.0
Lost Time Adjust (s)	0.0	0.0	
Total Lost Time (s)	5.1	5.1	
Lead/Lag			
Lead-Lag Optimize?			
Act Effct Green (s)	15.9	43.9	
Actuated g/C Ratio	0.21	0.59	
v/c Ratio	0.28	0.35	
Control Delay	13.9	7.9	
Queue Delay	0.0	0.0	
Total Delay	13.9	7.9	
LOS	B	A	
Approach Delay	13.9	7.9	
Approach LOS	B	A	
Queue Length 50th (m)	5.7	21.6	
Queue Length 95th (m)	m14.2	31.0	
Internal Link Dist (m)	159.1	135.3	
Turn Bay Length (m)			
Base Capacity (vph)	387	1977	
Starvation Cap Reductn	0	0	
Spillback Cap Reductn	0	0	
Storage Cap Reductn	0	0	
Reduced v/c Ratio	0.28	0.35	

**Intersection Summary**

Cycle Length: 75  
 Actuated Cycle Length: 75  
 Offset: 46 (61%), Referenced to phase 6:SBTL, Start of Green  
 Natural Cycle: 55  
 Control Type: Pretimed  
 Maximum v/c Ratio: 0.35  
 Intersection Signal Delay: 8.7  
 Intersection Capacity Utilization 44.5%  
 Analysis Period (min) 15

Intersection LOS: A


ICU Level of Service A

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 8: O'Connor St & Gilmour St

<p>Ø9</p> <p>↓ Ø6 (R)</p> <p>49 s</p>	<p>→ Ø4</p> <p>21 s</p>	<p>5 s</p>
---------------------------------------	-------------------------	------------

Lanes, Volumes, Timings  
1: Kent St & Somerset St W




Lane Group	EBL	EBT	WBT	NBL	NBT
Lane Configurations	↖	↗	↔	↖	↗↗↗
Traffic Volume (vph)	56	342	312	77	727
Future Volume (vph)	56	342	312	77	727
Lane Group Flow (vph)	56	342	375	77	833
Turn Type	Perm	NA	NA	Perm	NA
Protected Phases		4	8		2
Permitted Phases	4			2	
Minimum Split (s)	23.5	23.5	23.5	23.4	23.4
Total Split (s)	41.0	41.0	41.0	34.0	34.0
Total Split (%)	54.7%	54.7%	54.7%	45.3%	45.3%
Yellow Time (s)	3.3	3.3	3.3	3.3	3.3
All-Red Time (s)	2.2	2.2	2.2	2.1	2.1
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.5	5.5	5.5	5.4	5.4
Lead/Lag					
Lead-Lag Optimize?					
Act Effct Green (s)	35.5	35.5	35.5	28.6	28.6
Actuated g/C Ratio	0.47	0.47	0.47	0.38	0.38
v/c Ratio	0.16	0.41	0.47	0.24	0.47
Control Delay	12.8	14.7	15.9	22.4	21.1
Queue Delay	0.0	0.0	0.0	0.0	0.0
Total Delay	12.8	14.7	15.9	22.4	21.1
LOS	B	B	B	C	C
Approach Delay		14.4	15.9		21.2
Approach LOS		B	B		C
Queue Length 50th (m)	4.3	29.9	34.2	6.8	26.4
Queue Length 95th (m)	10.9	48.9	55.7	16.9	54.6
Internal Link Dist (m)		97.2	154.7		68.5
Turn Bay Length (m)	20.0			20.0	
Base Capacity (vph)	348	844	792	326	1755
Starvation Cap Reductn	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0
Reduced v/c Ratio	0.16	0.41	0.47	0.24	0.47


Intersection Summary

Cycle Length: 75  
 Actuated Cycle Length: 75  
 Offset: 50 (67%), Referenced to phase 2:NBT, Start of Green  
 Natural Cycle: 50  
 Control Type: Pretimed  
 Maximum v/c Ratio: 0.47  
 Intersection Signal Delay: 18.4  
 Intersection Capacity Utilization 73.5%  
 Analysis Period (min) 15

Intersection LOS: B  
 ICU Level of Service D

Splits and Phases: 1: Kent St & Somerset St W

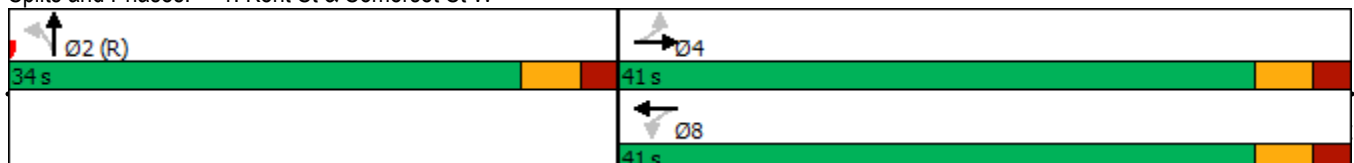



Lane Group	WBT	NBT
Lane Configurations		
Traffic Volume (vph)	22	895
Future Volume (vph)	22	895
Lane Group Flow (vph)	92	926
Sign Control	Stop	Free

**Intersection Summary**

Control Type: Unsignalized

Intersection Capacity Utilization 37.6% ICU Level of Service A

Analysis Period (min) 15

HCM Unsignalized Intersection Capacity Analysis  
2: Kent St & MacLaren St

Future Background 2024 PM  
08/13/2021



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	
Lane Configurations					↔			↔↔↔					
Traffic Volume (veh/h)	0	0	0	0	22	70	31	895	0	0	0	0	
Future Volume (Veh/h)	0	0	0	0	22	70	31	895	0	0	0	0	
Sign Control		Stop			Stop			Free			Free		
Grade		0%			0%			0%			0%		
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	
Hourly flow rate (vph)	0	0	0	0	22	70	31	895	0	0	0	0	
Pedestrians		45			95			11			17		
Lane Width (m)		0.0			3.7			3.7			0.0		
Walking Speed (m/s)		1.1			1.1			1.1			1.1		
Percent Blockage		0			9			1			0		
Right turn flare (veh)													
Median type								None			None		
Median storage veh													
Upstream signal (m)								78			92		
pX, platoon unblocked	0.93	0.93		0.93	0.93	0.93				0.93			
vC, conflicting volume	503	1097	56	1063	1097	410	45			990			
vC1, stage 1 conf vol													
vC2, stage 2 conf vol													
vCu, unblocked vol	191	831	56	794	831	91	45			716			
tC, single (s)	7.5	6.5	6.9	7.5	6.5	6.9	4.1			4.1			
tC, 2 stage (s)													
tF (s)	3.5	4.0	3.3	3.5	4.0	3.3	2.2			2.2			
p0 queue free %	100	100	100	100	91	91	98			100			
cM capacity (veh/h)	546	252	988	214	252	802	1561			744			
Direction, Lane #	WB 1	NB 1	NB 2	NB 3									
Volume Total	92	210	358	358									
Volume Left	0	31	0	0									
Volume Right	70	0	0	0									
cSH	527	1561	1700	1700									
Volume to Capacity	0.17	0.02	0.21	0.21									
Queue Length 95th (m)	4.8	0.5	0.0	0.0									
Control Delay (s)	13.3	1.2	0.0	0.0									
Lane LOS	B	A											
Approach Delay (s)	13.3	0.3											
Approach LOS	B												
<b>Intersection Summary</b>													
Average Delay			1.5										
Intersection Capacity Utilization			37.6%		ICU Level of Service				A				
Analysis Period (min)			15										



Lanes, Volumes, Timings  
3: Kent St & Gilmour St



Lane Group	EBT	NBT
Lane Configurations	↔	↑↑↑
Traffic Volume (vph)	77	871
Future Volume (vph)	77	871
Lane Group Flow (vph)	96	949
Turn Type	NA	NA
Protected Phases	4	2
Permitted Phases		
Minimum Split (s)	21.5	21.1
Total Split (s)	22.0	53.0
Total Split (%)	29.3%	70.7%
Yellow Time (s)	3.3	3.3
All-Red Time (s)	2.2	1.8
Lost Time Adjust (s)	0.0	0.0
Total Lost Time (s)	5.5	5.1
Lead/Lag		
Lead-Lag Optimize?		
Act Effct Green (s)	16.5	47.9
Actuated g/C Ratio	0.22	0.64
v/c Ratio	0.24	0.31
Control Delay	19.0	8.8
Queue Delay	0.0	0.0
Total Delay	19.0	8.8
LOS	B	A
Approach Delay	19.0	8.8
Approach LOS	B	A
Queue Length 50th (m)	7.5	20.1
Queue Length 95th (m)	19.0	33.2
Internal Link Dist (m)	157.9	224.2
Turn Bay Length (m)		
Base Capacity (vph)	405	3017
Starvation Cap Reductn	0	0
Spillback Cap Reductn	0	0
Storage Cap Reductn	0	0
Reduced v/c Ratio	0.24	0.31

**Intersection Summary**  
 Cycle Length: 75  
 Actuated Cycle Length: 75  
 Offset: 0 (0%), Referenced to phase 2:NBT, Start of Green  
 Natural Cycle: 45  
 Control Type: Pretimed  
 Maximum v/c Ratio: 0.31  
 Intersection Signal Delay: 9.8  
 Intersection Capacity Utilization 42.3%  
 Analysis Period (min) 15  
 Intersection LOS: A  
 ICU Level of Service A

Splits and Phases: 3: Kent St & Gilmour St



Lanes, Volumes, Timings  
4: Kent St & Gladstone Ave

Future Background 2024 PM

08/13/2021




Lane Group	EBL	EBT	WBT	NBL	NBT
Lane Configurations	↖	↑	↗	↖	↑↑↗
Traffic Volume (vph)	75	464	334	52	744
Future Volume (vph)	75	464	334	52	744
Lane Group Flow (vph)	75	464	409	52	850
Turn Type	Perm	NA	NA	Perm	NA
Protected Phases		4	8		2
Permitted Phases	4			2	
Minimum Split (s)	23.4	23.4	23.4	23.4	23.4
Total Split (s)	40.0	40.0	40.0	35.0	35.0
Total Split (%)	53.3%	53.3%	53.3%	46.7%	46.7%
Yellow Time (s)	3.3	3.3	3.3	3.3	3.3
All-Red Time (s)	2.1	2.1	2.1	2.1	2.1
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.4	5.4	5.4	5.4	5.4
Lead/Lag					
Lead-Lag Optimize?					
Act Effct Green (s)	34.6	34.6	34.6	29.6	29.6
Actuated g/C Ratio	0.46	0.46	0.46	0.39	0.39
v/c Ratio	0.22	0.56	0.51	0.09	0.45
Control Delay	14.4	18.0	16.3	14.9	16.8
Queue Delay	0.0	0.0	0.0	0.0	0.0
Total Delay	14.4	18.0	16.3	14.9	16.8
LOS	B	B	B	B	B
Approach Delay		17.5	16.3		16.7
Approach LOS		B	B		B
Queue Length 50th (m)	6.1	45.6	36.8	4.5	29.8
Queue Length 95th (m)	14.5	72.1	60.3	11.0	40.0
Internal Link Dist (m)		152.2	162.6		69.7
Turn Bay Length (m)	25.0				
Base Capacity (vph)	339	823	801	588	1877
Starvation Cap Reductn	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0
Reduced v/c Ratio	0.22	0.56	0.51	0.09	0.45

Intersection Summary

Cycle Length: 75  
 Actuated Cycle Length: 75  
 Offset: 23 (31%), Referenced to phase 2:NBT, Start of Green  
 Natural Cycle: 50  
 Control Type: Pretimed  
 Maximum v/c Ratio: 0.56  
 Intersection Signal Delay: 16.8  
 Intersection Capacity Utilization 64.0%  
 Analysis Period (min) 15

Intersection LOS: B  
 ICU Level of Service C

Splits and Phases: 4: Kent St & Gladstone Ave

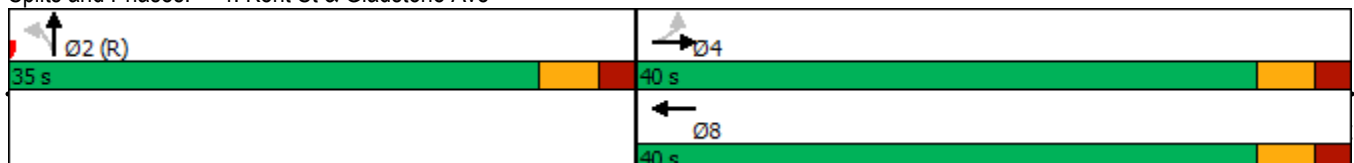

Lanes, Volumes, Timings  
5: Bank St & MacLaren St




Lane Group	WBT	NBL	NBT	SBT
Lane Configurations	↕		↕	↕
Traffic Volume (vph)	11	25	283	639
Future Volume (vph)	11	25	283	639
Lane Group Flow (vph)	56	0	308	665
Turn Type	NA	Perm	NA	NA
Protected Phases	8		2	6
Permitted Phases		2		
Minimum Split (s)	24.2	23.0	23.0	23.0
Total Split (s)	24.0	51.0	51.0	51.0
Total Split (%)	32.0%	68.0%	68.0%	68.0%
Yellow Time (s)	3.3	3.3	3.3	3.3
All-Red Time (s)	1.9	1.7	1.7	1.7
Lost Time Adjust (s)	0.0		0.0	0.0
Total Lost Time (s)	5.2		5.0	5.0
Lead/Lag				
Lead-Lag Optimize?				
Act Effct Green (s)	18.8		46.0	46.0
Actuated g/C Ratio	0.25		0.61	0.61
v/c Ratio	0.15		0.31	0.63
Control Delay	20.1		2.5	12.4
Queue Delay	0.0		0.3	0.0
Total Delay	20.1		2.8	12.4
LOS	C		A	B
Approach Delay	20.1		2.8	12.4
Approach LOS	C		A	B
Queue Length 50th (m)	5.0		3.9	52.1
Queue Length 95th (m)	13.5		5.7	83.4
Internal Link Dist (m)	126.3		56.4	50.2
Turn Bay Length (m)				
Base Capacity (vph)	366		1009	1059
Starvation Cap Reductn	0		257	0
Spillback Cap Reductn	0		0	0
Storage Cap Reductn	0		0	0
Reduced v/c Ratio	0.15		0.41	0.63

Intersection Summary

Cycle Length: 75  
 Actuated Cycle Length: 75  
 Offset: 7 (9%), Referenced to phase 2:NBTL and 6:SBT, Start of Green  
 Natural Cycle: 60  
 Control Type: Pretimed  
 Maximum v/c Ratio: 0.63  
 Intersection Signal Delay: 9.9  
 Intersection Capacity Utilization 61.9%  
 Analysis Period (min) 15

Intersection LOS: A  
 ICU Level of Service B

Splits and Phases: 5: Bank St & MacLaren St

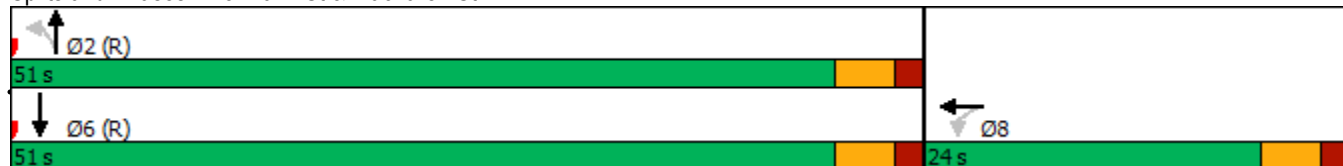

Lanes, Volumes, Timings  
6: Bank St & Gilmour St




Lane Group	EBT	NBT	SBL	SBT
Lane Configurations	↔	↔		↔
Traffic Volume (vph)	116	422	19	353
Future Volume (vph)	116	422	19	353
Lane Group Flow (vph)	191	450	0	372
Turn Type	NA	NA	Perm	NA
Protected Phases	4	2		6
Permitted Phases			6	
Minimum Split (s)	23.2	26.1	26.1	26.1
Total Split (s)	25.0	50.0	50.0	50.0
Total Split (%)	33.3%	66.7%	66.7%	66.7%
Yellow Time (s)	3.3	3.3	3.3	3.3
All-Red Time (s)	1.9	1.8	1.8	1.8
Lost Time Adjust (s)	0.0	0.0		0.0
Total Lost Time (s)	5.2	5.1		5.1
Lead/Lag				
Lead-Lag Optimize?				
Act Effct Green (s)	19.8	44.9		44.9
Actuated g/C Ratio	0.26	0.60		0.60
v/c Ratio	0.43	0.43		0.36
Control Delay	18.2	9.6		4.2
Queue Delay	0.0	0.0		0.5
Total Delay	18.2	9.6		4.8
LOS	B	A		A
Approach Delay	18.2	9.6		4.8
Approach LOS	B	A		A
Queue Length 50th (m)	12.4	30.2		8.6
Queue Length 95th (m)	24.5	48.9		12.5
Internal Link Dist (m)	115.9	89.4		56.4
Turn Bay Length (m)				
Base Capacity (vph)	444	1038		1029
Starvation Cap Reductn	0	0		313
Spillback Cap Reductn	0	0		0
Storage Cap Reductn	0	0		0
Reduced v/c Ratio	0.43	0.43		0.52

Intersection Summary

Cycle Length: 75  
 Actuated Cycle Length: 75  
 Offset: 6 (8%), Referenced to phase 2:NBT and 6:SBTL, Start of Green  
 Natural Cycle: 50  
 Control Type: Pretimed  
 Maximum v/c Ratio: 0.43  
 Intersection Signal Delay: 9.4  
 Intersection Capacity Utilization 63.6%  
 Analysis Period (min) 15

Intersection LOS: A  
 ICU Level of Service B

Splits and Phases: 6: Bank St & Gilmour St

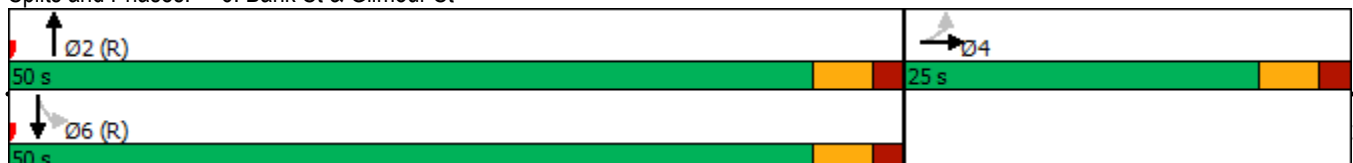

Lanes, Volumes, Timings  
8: O'Connor St & Gilmour St



Lane Group	EBT	SBT	Ø9
Lane Configurations	↻	↻↻	
Traffic Volume (vph)	84	1226	
Future Volume (vph)	84	1226	
Lane Group Flow (vph)	173	1274	
Turn Type	NA	NA	
Protected Phases	4	6	9
Permitted Phases			
Minimum Split (s)	20.1	26.1	5.0
Total Split (s)	21.0	49.0	5.0
Total Split (%)	28.0%	65.3%	7%
Yellow Time (s)	3.3	3.3	2.0
All-Red Time (s)	1.8	1.8	0.0
Lost Time Adjust (s)	0.0	0.0	
Total Lost Time (s)	5.1	5.1	
Lead/Lag			
Lead-Lag Optimize?			
Act Effct Green (s)	15.9	43.9	
Actuated g/C Ratio	0.21	0.59	
v/c Ratio	0.45	0.64	
Control Delay	30.3	11.6	
Queue Delay	0.0	0.0	
Total Delay	30.3	11.6	
LOS	C	B	
Approach Delay	30.3	11.6	
Approach LOS	C	B	
Queue Length 50th (m)	17.1	54.0	
Queue Length 95th (m)	34.8	73.1	
Internal Link Dist (m)	159.1	135.3	
Turn Bay Length (m)			
Base Capacity (vph)	386	1986	
Starvation Cap Reductn	0	0	
Spillback Cap Reductn	0	0	
Storage Cap Reductn	0	0	
Reduced v/c Ratio	0.45	0.64	

Intersection Summary

Cycle Length: 75  
 Actuated Cycle Length: 75  
 Offset: 71 (95%), Referenced to phase 6:SBTL, Start of Green  
 Natural Cycle: 60  
 Control Type: Pretimed  
 Maximum v/c Ratio: 0.64  
 Intersection Signal Delay: 13.9  
 Intersection Capacity Utilization 61.7%  
 Analysis Period (min) 15

Intersection LOS: B  
 ICU Level of Service B

Splits and Phases: 8: O'Connor St & Gilmour St



## **Future Background 2029**

Lanes, Volumes, Timings  
1: Kent St & Somerset St W

Future Background 2029 AM

08/13/2021



Lane Group	EBL	EBT	WBT	NBL	NBT
Lane Configurations					
Traffic Volume (vph)	62	319	145	75	1678
Future Volume (vph)	62	319	145	75	1678
Lane Group Flow (vph)	62	319	195	75	1862
Turn Type	Perm	NA	NA	Perm	NA
Protected Phases		4	8		2
Permitted Phases	4			2	
Minimum Split (s)	23.5	23.5	23.5	23.4	23.4
Total Split (s)	27.0	27.0	27.0	48.0	48.0
Total Split (%)	36.0%	36.0%	36.0%	64.0%	64.0%
Yellow Time (s)	3.3	3.3	3.3	3.3	3.3
All-Red Time (s)	2.2	2.2	2.2	2.1	2.1
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.5	5.5	5.5	5.4	5.4
Lead/Lag					
Lead-Lag Optimize?					
Act Effct Green (s)	21.5	21.5	21.5	42.6	42.6
Actuated g/C Ratio	0.29	0.29	0.29	0.57	0.57
v/c Ratio	0.22	0.62	0.41	0.12	0.70
Control Delay	23.0	29.6	24.8	13.4	16.7
Queue Delay	0.0	0.0	0.0	0.0	0.0
Total Delay	23.0	29.6	24.8	13.4	16.7
LOS	C	C	C	B	B
Approach Delay		28.5	24.8		16.6
Approach LOS		C	C		B
Queue Length 50th (m)	6.6	39.0	22.2	6.0	54.0
Queue Length 95th (m)	16.0	64.2	39.6	m10.1	71.5
Internal Link Dist (m)		97.2	154.7		68.5
Turn Bay Length (m)	20.0			20.0	
Base Capacity (vph)	281	511	476	628	2659
Starvation Cap Reductn	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0
Reduced v/c Ratio	0.22	0.62	0.41	0.12	0.70

Intersection Summary


Cycle Length: 75  
 Actuated Cycle Length: 75  
 Offset: 66 (88%), Referenced to phase 2:NBT, Start of Green  
 Natural Cycle: 60  
 Control Type: Pretimed  
 Maximum v/c Ratio: 0.70  
 Intersection Signal Delay: 19.0  
 Intersection Capacity Utilization 83.9%  
 Analysis Period (min) 15

Intersection LOS: B


ICU Level of Service E

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 1: Kent St & Somerset St W

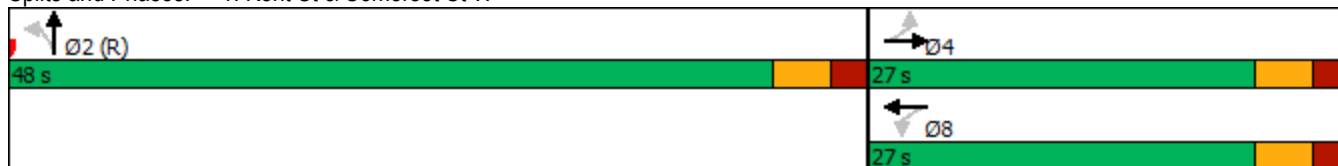





Lane Group	WBT	NBT
Lane Configurations		
Traffic Volume (vph)	14	1938
Future Volume (vph)	14	1938
Lane Group Flow (vph)	35	1971
Sign Control	Stop	Free

**Intersection Summary**

Control Type: Unsignalized	
Intersection Capacity Utilization 54.8%	ICU Level of Service A
Analysis Period (min) 15	

HCM Unsignalized Intersection Capacity Analysis  
2: Kent St & MacLaren St

Future Background 2029 AM  
08/13/2021



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	
Lane Configurations					↔			↔↔↔					
Traffic Volume (veh/h)	0	0	0	0	14	21	33	1938	0	0	0	0	
Future Volume (Veh/h)	0	0	0	0	14	21	33	1938	0	0	0	0	
Sign Control		Stop			Stop			Free			Free		
Grade		0%			0%			0%			0%		
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	
Hourly flow rate (vph)	0	0	0	0	14	21	33	1938	0	0	0	0	
Pedestrians		92			133			15			8		
Lane Width (m)		0.0			3.7			3.7			0.0		
Walking Speed (m/s)		1.1			1.1			1.1			1.1		
Percent Blockage		0			12			1			0		
Right turn flare (veh)													
Median type								None			None		
Median storage veh													
Upstream signal (m)								78			92		
pX, platoon unblocked	0.72	0.72		0.72	0.72	0.72				0.72			
vC, conflicting volume	840	2229	107	2152	2229	787	92			2071			
vC1, stage 1 conf vol													
vC2, stage 2 conf vol													
vCu, unblocked vol	0	1331	107	1223	1331	0	92			1110			
tC, single (s)	7.5	6.5	6.9	7.5	6.5	6.9	4.1			4.1			
tC, 2 stage (s)													
tF (s)	3.5	4.0	3.3	3.5	4.0	3.3	2.2			2.2			
p0 queue free %	100	100	100	100	85	97	98			100			
cM capacity (veh/h)	562	94	913	74	94	680	1501			392			
<b>Direction, Lane #</b>	<b>WB 1</b>	<b>NB 1</b>	<b>NB 2</b>	<b>NB 3</b>									
Volume Total	35	421	775	775									
Volume Left	0	33	0	0									
Volume Right	21	0	0	0									
cSH	195	1501	1700	1700									
Volume to Capacity	0.18	0.02	0.46	0.46									
Queue Length 95th (m)	4.8	0.5	0.0	0.0									
Control Delay (s)	27.5	0.8	0.0	0.0									
Lane LOS	D	A											
Approach Delay (s)	27.5	0.2											
Approach LOS	D												
<b>Intersection Summary</b>													
Average Delay			0.6										
Intersection Capacity Utilization			54.8%		ICU Level of Service					A			
Analysis Period (min)			15										

Lanes, Volumes, Timings  
3: Kent St & Gilmour St

Future Background 2029 AM  
08/13/2021



Lane Group	EBT	NBT
Lane Configurations	↔	↑↑↑
Traffic Volume (vph)	85	1957
Future Volume (vph)	85	1957
Lane Group Flow (vph)	102	2111
Turn Type	NA	NA
Protected Phases	4	2
Permitted Phases		
Minimum Split (s)	21.5	21.1
Total Split (s)	22.0	53.0
Total Split (%)	29.3%	70.7%
Yellow Time (s)	3.3	3.3
All-Red Time (s)	2.2	1.8
Lost Time Adjust (s)	0.0	0.0
Total Lost Time (s)	5.5	5.1
Lead/Lag		
Lead-Lag Optimize?		
Act Effct Green (s)	16.5	47.9
Actuated g/C Ratio	0.22	0.64
v/c Ratio	0.25	0.70
Control Delay	19.4	23.0
Queue Delay	0.0	0.0
Total Delay	19.4	23.0
LOS	B	C
Approach Delay	19.4	23.0
Approach LOS	B	C
Queue Length 50th (m)	8.2	114.7
Queue Length 95th (m)	20.1	128.7
Internal Link Dist (m)	157.9	224.2
Turn Bay Length (m)		
Base Capacity (vph)	410	3031
Starvation Cap Reductn	0	0
Spillback Cap Reductn	0	0
Storage Cap Reductn	0	0
Reduced v/c Ratio	0.25	0.70

Intersection Summary


Cycle Length: 75  
 Actuated Cycle Length: 75  
 Offset: 5 (7%), Referenced to phase 2:NBT, Start of Green  
 Natural Cycle: 60  
 Control Type: Pretimed  
 Maximum v/c Ratio: 0.70  
 Intersection Signal Delay: 22.8  
 Intersection Capacity Utilization 66.1%  
 Analysis Period (min) 15  
 Intersection LOS: C  
 ICU Level of Service C

Splits and Phases: 3: Kent St & Gilmour St



Lanes, Volumes, Timings  
4: Kent St & Gladstone Ave

Future Background 2029 AM  
08/13/2021



Lane Group	EBL	EBT	WBT	NBL	NBT
Lane Configurations					
Traffic Volume (vph)	82	299	178	36	1834
Future Volume (vph)	82	299	178	36	1834
Lane Group Flow (vph)	82	299	326	36	1931
Turn Type	Perm	NA	NA	Perm	NA
Protected Phases		4	8		2
Permitted Phases	4			2	
Minimum Split (s)	23.4	23.4	23.4	23.4	23.4
Total Split (s)	30.0	30.0	30.0	45.0	45.0
Total Split (%)	40.0%	40.0%	40.0%	60.0%	60.0%
Yellow Time (s)	3.3	3.3	3.3	3.3	3.3
All-Red Time (s)	2.1	2.1	2.1	2.1	2.1
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.4	5.4	5.4	5.4	5.4
Lead/Lag					
Lead-Lag Optimize?					
Act Effct Green (s)	24.6	24.6	24.6	39.6	39.6
Actuated g/C Ratio	0.33	0.33	0.33	0.53	0.53
v/c Ratio	0.34	0.51	0.62	0.05	0.76
Control Delay	24.0	24.1	26.8	8.9	16.3
Queue Delay	0.0	0.0	0.0	0.0	0.0
Total Delay	24.0	24.1	26.8	8.9	16.3
LOS	C	C	C	A	B
Approach Delay		24.1	26.8		16.2
Approach LOS		C	C		B
Queue Length 50th (m)	8.7	33.7	37.5	2.3	72.8
Queue Length 95th (m)	20.3	55.7	63.1	6.3	90.8
Internal Link Dist (m)		152.2	162.6		69.7
Turn Bay Length (m)	25.0				
Base Capacity (vph)	241	585	529	747	2538
Starvation Cap Reductn	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0
Reduced v/c Ratio	0.34	0.51	0.62	0.05	0.76

Intersection Summary

Cycle Length: 75  
 Actuated Cycle Length: 75  
 Offset: 36 (48%), Referenced to phase 2:NBT, Start of Green  
 Natural Cycle: 60  
 Control Type: Pretimed  
 Maximum v/c Ratio: 0.76  
 Intersection Signal Delay: 18.6  
 Intersection Capacity Utilization 83.2%  
 Analysis Period (min) 15  
 Intersection LOS: B  
 ICU Level of Service E

Splits and Phases: 4: Kent St & Gladstone Ave



Lanes, Volumes, Timings  
5: Bank St & MacLaren St




Lane Group	WBT	NBL	NBT	SBT
Lane Configurations	↔		↔	↔
Traffic Volume (vph)	4	36	535	352
Future Volume (vph)	4	36	535	352
Lane Group Flow (vph)	28	0	571	378
Turn Type	NA	Perm	NA	NA
Protected Phases	8		2	6
Permitted Phases		2		
Minimum Split (s)	24.2	23.0	23.0	23.0
Total Split (s)	24.0	51.0	51.0	51.0
Total Split (%)	32.0%	68.0%	68.0%	68.0%
Yellow Time (s)	3.3	3.3	3.3	3.3
All-Red Time (s)	1.9	1.7	1.7	1.7
Lost Time Adjust (s)	0.0		0.0	0.0
Total Lost Time (s)	5.2		5.0	5.0
Lead/Lag				
Lead-Lag Optimize?				
Act Effct Green (s)	18.8		46.0	46.0
Actuated g/C Ratio	0.25		0.61	0.61
v/c Ratio	0.07		0.55	0.36
Control Delay	15.5		2.7	8.2
Queue Delay	0.0		0.2	0.0
Total Delay	15.5		2.9	8.2
LOS	B		A	A
Approach Delay	15.5		2.9	8.2
Approach LOS	B		A	A
Queue Length 50th (m)	1.6		4.3	23.0
Queue Length 95th (m)	7.3		6.1	37.7
Internal Link Dist (m)	126.3		56.4	50.2
Turn Bay Length (m)				
Base Capacity (vph)	383		1030	1041
Starvation Cap Reductn	0		66	0
Spillback Cap Reductn	0		0	0
Storage Cap Reductn	0		0	0
Reduced v/c Ratio	0.07		0.59	0.36

Intersection Summary

Cycle Length: 75  
 Actuated Cycle Length: 75  
 Offset: 42 (56%), Referenced to phase 2:NBTL and 6:SBT, Start of Green  
 Natural Cycle: 60  
 Control Type: Pretimed  
 Maximum v/c Ratio: 0.55  
 Intersection Signal Delay: 5.3  
 Intersection Capacity Utilization 82.2%  
 Analysis Period (min) 15

Intersection LOS: A  
 ICU Level of Service E

Splits and Phases: 5: Bank St & MacLaren St

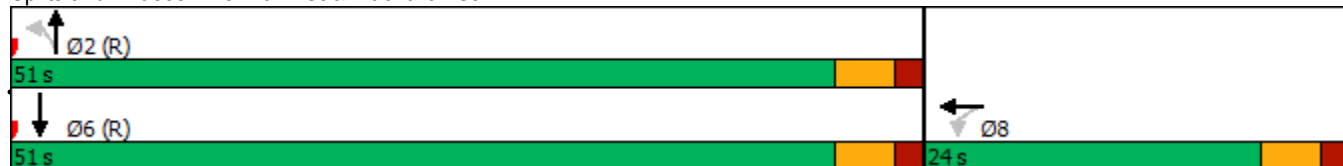

Lanes, Volumes, Timings  
6: Bank St & Gilmour St

Future Background 2029 AM

08/13/2021



Lane Group	EBT	NBT	SBL	SBT
Lane Configurations	↔	↔		↔
Traffic Volume (vph)	48	583	15	231
Future Volume (vph)	48	583	15	231
Lane Group Flow (vph)	111	617	0	246
Turn Type	NA	NA	Perm	NA
Protected Phases	4	2		6
Permitted Phases			6	
Minimum Split (s)	23.2	26.1	26.1	26.1
Total Split (s)	25.0	50.0	50.0	50.0
Total Split (%)	33.3%	66.7%	66.7%	66.7%
Yellow Time (s)	3.3	3.3	3.3	3.3
All-Red Time (s)	1.9	1.8	1.8	1.8
Lost Time Adjust (s)	0.0	0.0		0.0
Total Lost Time (s)	5.2	5.1		5.1
Lead/Lag				
Lead-Lag Optimize?				
Act Effct Green (s)	19.8	44.9		44.9
Actuated g/C Ratio	0.26	0.60		0.60
v/c Ratio	0.25	0.59		0.24
Control Delay	21.3	12.1		4.8
Queue Delay	0.0	0.0		0.3
Total Delay	21.3	12.1		5.1
LOS	C	B		A
Approach Delay	21.3	12.1		5.1
Approach LOS	C	B		A
Queue Length 50th (m)	9.8	48.1		6.9
Queue Length 95th (m)	m19.1	76.3		11.0
Internal Link Dist (m)	115.9	89.4		56.4
Turn Bay Length (m)				
Base Capacity (vph)	439	1045		1020
Starvation Cap Reductn	0	0		365
Spillback Cap Reductn	0	0		0
Storage Cap Reductn	0	0		0
Reduced v/c Ratio	0.25	0.59		0.38

Intersection Summary

Cycle Length: 75

Actuated Cycle Length: 75

Offset: 37 (49%), Referenced to phase 2:NBT and 6:SBTL, Start of Green

Natural Cycle: 60

Control Type: Pretimed

Maximum v/c Ratio: 0.59

Intersection Signal Delay: 11.4

Intersection LOS: B

Intersection Capacity Utilization 58.5%

ICU Level of Service B

Analysis Period (min) 15

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 6: Bank St & Gilmour St





Lane Group	EBT	SBT	Ø9
Lane Configurations	↻	↻↻	
Traffic Volume (vph)	61	672	
Future Volume (vph)	61	672	
Lane Group Flow (vph)	110	721	
Turn Type	NA	NA	
Protected Phases	4	6	9
Permitted Phases			
Minimum Split (s)	20.1	26.1	5.0
Total Split (s)	21.0	49.0	5.0
Total Split (%)	28.0%	65.3%	7%
Yellow Time (s)	3.3	3.3	2.0
All-Red Time (s)	1.8	1.8	0.0
Lost Time Adjust (s)	0.0	0.0	
Total Lost Time (s)	5.1	5.1	
Lead/Lag			
Lead-Lag Optimize?			
Act Effct Green (s)	15.9	43.9	
Actuated g/C Ratio	0.21	0.59	
v/c Ratio	0.28	0.36	
Control Delay	13.7	8.1	
Queue Delay	0.0	0.0	
Total Delay	13.7	8.1	
LOS	B	A	
Approach Delay	13.7	8.1	
Approach LOS	B	A	
Queue Length 50th (m)	5.6	23.0	
Queue Length 95th (m)	m14.0	32.7	
Internal Link Dist (m)	159.1	135.3	
Turn Bay Length (m)			
Base Capacity (vph)	387	1980	
Starvation Cap Reductn	0	0	
Spillback Cap Reductn	0	0	
Storage Cap Reductn	0	0	
Reduced v/c Ratio	0.28	0.36	

**Intersection Summary**

Cycle Length: 75  
 Actuated Cycle Length: 75  
 Offset: 46 (61%), Referenced to phase 6:SBTL, Start of Green  
 Natural Cycle: 55  
 Control Type: Pretimed  
 Maximum v/c Ratio: 0.36  
 Intersection Signal Delay: 8.8  
 Intersection Capacity Utilization 45.4%  
 Analysis Period (min) 15  
 Intersection LOS: A  
 ICU Level of Service A

m Volume for 95th percentile queue is metered by upstream signal.



Splits and Phases: 8: O'Connor St & Gilmour St

<p>Ø9</p> <p>↓ Ø6 (R)</p> <p>49 s</p>	<p>→ Ø4</p> <p>21 s</p>	<p></p> <p>5 s</p>
---------------------------------------	-------------------------	---

Lanes, Volumes, Timings  
1: Kent St & Somerset St W

Future Background 2029 PM

08/13/2021



Lane Group	EBL	EBT	WBT	NBL	NBT
Lane Configurations	↶	↷	↷↶	↶	↷↷↶
Traffic Volume (vph)	56	359	327	77	762
Future Volume (vph)	56	359	327	77	762
Lane Group Flow (vph)	56	359	390	77	868
Turn Type	Perm	NA	NA	Perm	NA
Protected Phases		4	8		2
Permitted Phases	4			2	
Minimum Split (s)	23.5	23.5	23.5	23.4	23.4
Total Split (s)	41.0	41.0	41.0	34.0	34.0
Total Split (%)	54.7%	54.7%	54.7%	45.3%	45.3%
Yellow Time (s)	3.3	3.3	3.3	3.3	3.3
All-Red Time (s)	2.2	2.2	2.2	2.1	2.1
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.5	5.5	5.5	5.4	5.4
Lead/Lag					
Lead-Lag Optimize?					
Act Effct Green (s)	35.5	35.5	35.5	28.6	28.6
Actuated g/C Ratio	0.47	0.47	0.47	0.38	0.38
v/c Ratio	0.17	0.43	0.49	0.24	0.49
Control Delay	12.9	15.0	16.2	22.7	21.8
Queue Delay	0.0	0.0	0.0	0.0	0.0
Total Delay	12.9	15.0	16.2	22.7	21.8
LOS	B	B	B	C	C
Approach Delay		14.7	16.2		21.9
Approach LOS		B	B		C
Queue Length 50th (m)	4.3	31.8	35.9	7.0	28.3
Queue Length 95th (m)	10.9	51.7	58.5	17.4	58.6
Internal Link Dist (m)		97.2	154.7		68.5
Turn Bay Length (m)	20.0			20.0	
Base Capacity (vph)	337	844	794	326	1759
Starvation Cap Reductn	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0
Reduced v/c Ratio	0.17	0.43	0.49	0.24	0.49

Intersection Summary

Cycle Length: 75

Actuated Cycle Length: 75

Offset: 50 (67%), Referenced to phase 2:NBT, Start of Green

Natural Cycle: 50

Control Type: Pretimed

Maximum v/c Ratio: 0.49

Intersection Signal Delay: 18.9


Intersection LOS: B


Intersection Capacity Utilization 75.9%

ICU Level of Service D

Analysis Period (min) 15

Splits and Phases: 1: Kent St & Somerset St W

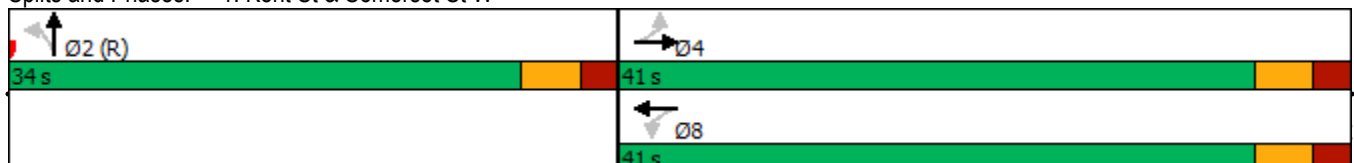



Lane Group	WBT	NBT
Lane Configurations		
Traffic Volume (vph)	22	939
Future Volume (vph)	22	939
Lane Group Flow (vph)	92	970
Sign Control	Stop	Free

**Intersection Summary**

Control Type: Unsignalized  
 Intersection Capacity Utilization 38.5% ICU Level of Service A  
 Analysis Period (min) 15

HCM Unsignalized Intersection Capacity Analysis  
2: Kent St & MacLaren St

Future Background 2029 PM  
08/13/2021



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	
Lane Configurations					↔			↔↔↔					
Traffic Volume (veh/h)	0	0	0	0	22	70	31	939	0	0	0	0	
Future Volume (Veh/h)	0	0	0	0	22	70	31	939	0	0	0	0	
Sign Control		Stop			Stop			Free			Free		
Grade		0%			0%			0%			0%		
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	
Hourly flow rate (vph)	0	0	0	0	22	70	31	939	0	0	0	0	
Pedestrians		45			95			11			17		
Lane Width (m)		0.0			3.7			3.7			0.0		
Walking Speed (m/s)		1.1			1.1			1.1			1.1		
Percent Blockage		0			9			1			0		
Right turn flare (veh)													
Median type								None			None		
Median storage (veh)													
Upstream signal (m)								78			92		
pX, platoon unblocked	0.92	0.92		0.92	0.92	0.92				0.92			
vC, conflicting volume	518	1141	56	1107	1141	425	45			1034			
vC1, stage 1 conf vol													
vC2, stage 2 conf vol													
vCu, unblocked vol	179	855	56	818	855	78	45			739			
tC, single (s)	7.5	6.5	6.9	7.5	6.5	6.9	4.1			4.1			
tC, 2 stage (s)													
tF (s)	3.5	4.0	3.3	3.5	4.0	3.3	2.2			2.2			
p0 queue free %	100	100	100	100	91	91	98			100			
cM capacity (veh/h)	552	242	988	204	242	812	1561			725			
<b>Direction, Lane #</b>	<b>WB 1</b>	<b>NB 1</b>	<b>NB 2</b>	<b>NB 3</b>									
Volume Total	92	219	376	376									
Volume Left	0	31	0	0									
Volume Right	70	0	0	0									
cSH	519	1561	1700	1700									
Volume to Capacity	0.18	0.02	0.22	0.22									
Queue Length 95th (m)	4.9	0.5	0.0	0.0									
Control Delay (s)	13.4	1.2	0.0	0.0									
Lane LOS	B	A											
Approach Delay (s)	13.4	0.3											
Approach LOS	B												
<b>Intersection Summary</b>													
Average Delay			1.4										
Intersection Capacity Utilization			38.5%		ICU Level of Service				A				
Analysis Period (min)			15										

Lanes, Volumes, Timings  
3: Kent St & Gilmour St



Lane Group	EBT	NBT
Lane Configurations	↔	↑↑↑
Traffic Volume (vph)	77	914
Future Volume (vph)	77	914
Lane Group Flow (vph)	96	992
Turn Type	NA	NA
Protected Phases	4	2
Permitted Phases		
Minimum Split (s)	21.5	21.1
Total Split (s)	22.0	53.0
Total Split (%)	29.3%	70.7%
Yellow Time (s)	3.3	3.3
All-Red Time (s)	2.2	1.8
Lost Time Adjust (s)	0.0	0.0
Total Lost Time (s)	5.5	5.1
Lead/Lag		
Lead-Lag Optimize?		
Act Effct Green (s)	16.5	47.9
Actuated g/C Ratio	0.22	0.64
v/c Ratio	0.24	0.33
Control Delay	19.0	9.4
Queue Delay	0.0	0.0
Total Delay	19.0	9.4
LOS	B	A
Approach Delay	19.0	9.4
Approach LOS	B	A
Queue Length 50th (m)	7.5	22.2
Queue Length 95th (m)	19.0	36.1
Internal Link Dist (m)	157.9	224.2
Turn Bay Length (m)		
Base Capacity (vph)	405	3019
Starvation Cap Reductn	0	0
Spillback Cap Reductn	0	0
Storage Cap Reductn	0	0
Reduced v/c Ratio	0.24	0.33

Intersection Summary


Cycle Length: 75	
Actuated Cycle Length: 75	
Offset: 0 (0%), Referenced to phase 2:NBT, Start of Green	
Natural Cycle: 45	
Control Type: Pretimed	
Maximum v/c Ratio: 0.33	
Intersection Signal Delay: 10.2	Intersection LOS: B
Intersection Capacity Utilization 43.1%	ICU Level of Service A
Analysis Period (min) 15	

Splits and Phases: 3: Kent St & Gilmour St



Lanes, Volumes, Timings  
4: Kent St & Gladstone Ave

Future Background 2029 PM  
08/13/2021




Lane Group	EBL	EBT	WBT	NBL	NBT
Lane Configurations	↖	↑	↗	↖	↑↑↗
Traffic Volume (vph)	75	486	350	52	780
Future Volume (vph)	75	486	350	52	780
Lane Group Flow (vph)	75	486	425	52	886
Turn Type	Perm	NA	NA	Perm	NA
Protected Phases		4	8		2
Permitted Phases	4			2	
Minimum Split (s)	23.4	23.4	23.4	23.4	23.4
Total Split (s)	40.0	40.0	40.0	35.0	35.0
Total Split (%)	53.3%	53.3%	53.3%	46.7%	46.7%
Yellow Time (s)	3.3	3.3	3.3	3.3	3.3
All-Red Time (s)	2.1	2.1	2.1	2.1	2.1
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.4	5.4	5.4	5.4	5.4
Lead/Lag					
Lead-Lag Optimize?					
Act Effct Green (s)	34.6	34.6	34.6	29.6	29.6
Actuated g/C Ratio	0.46	0.46	0.46	0.39	0.39
v/c Ratio	0.23	0.59	0.53	0.09	0.47
Control Delay	14.6	18.6	16.7	14.9	17.1
Queue Delay	0.0	0.0	0.0	0.0	0.0
Total Delay	14.6	18.6	16.7	14.9	17.1
LOS	B	B	B	B	B
Approach Delay		18.1	16.7		17.0
Approach LOS		B	B		B
Queue Length 50th (m)	6.1	48.6	38.9	4.5	31.5
Queue Length 95th (m)	14.6	76.6	63.7	11.0	42.1
Internal Link Dist (m)		152.2	162.6		69.7
Turn Bay Length (m)	25.0				
Base Capacity (vph)	327	823	801	588	1879
Starvation Cap Reductn	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0
Reduced v/c Ratio	0.23	0.59	0.53	0.09	0.47

Intersection Summary

Cycle Length: 75  
 Actuated Cycle Length: 75  
 Offset: 23 (31%), Referenced to phase 2:NBT, Start of Green  
 Natural Cycle: 50  
 Control Type: Pretimed  
 Maximum v/c Ratio: 0.59  
 Intersection Signal Delay: 17.2  
 Intersection Capacity Utilization 65.6%  
 Analysis Period (min) 15

Intersection LOS: B  
 ICU Level of Service C

Splits and Phases: 4: Kent St & Gladstone Ave

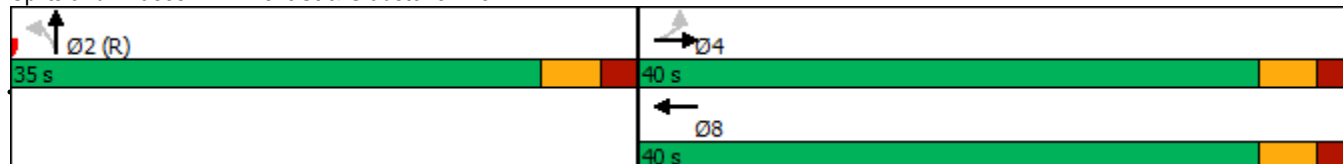

Lanes, Volumes, Timings  
5: Bank St & MacLaren St




Lane Group	WBT	NBL	NBT	SBT
Lane Configurations	↕		↕	↕
Traffic Volume (vph)	11	25	297	670
Future Volume (vph)	11	25	297	670
Lane Group Flow (vph)	56	0	322	696
Turn Type	NA	Perm	NA	NA
Protected Phases	8		2	6
Permitted Phases		2		
Minimum Split (s)	24.2	23.0	23.0	23.0
Total Split (s)	24.0	51.0	51.0	51.0
Total Split (%)	32.0%	68.0%	68.0%	68.0%
Yellow Time (s)	3.3	3.3	3.3	3.3
All-Red Time (s)	1.9	1.7	1.7	1.7
Lost Time Adjust (s)	0.0		0.0	0.0
Total Lost Time (s)	5.2		5.0	5.0
Lead/Lag				
Lead-Lag Optimize?				
Act Effct Green (s)	18.8		46.0	46.0
Actuated g/C Ratio	0.25		0.61	0.61
v/c Ratio	0.15		0.32	0.66
Control Delay	20.1		2.6	13.0
Queue Delay	0.0		0.3	0.0
Total Delay	20.1		2.8	13.0
LOS	C		A	B
Approach Delay	20.1		2.8	13.0
Approach LOS	C		A	B
Queue Length 50th (m)	5.0		4.0	56.2
Queue Length 95th (m)	13.5		5.8	90.1
Internal Link Dist (m)	126.3		56.4	50.2
Turn Bay Length (m)				
Base Capacity (vph)	366		1010	1061
Starvation Cap Reductn	0		239	0
Spillback Cap Reductn	0		0	0
Storage Cap Reductn	0		0	0
Reduced v/c Ratio	0.15		0.42	0.66

Intersection Summary

Cycle Length: 75  
 Actuated Cycle Length: 75  
 Offset: 7 (9%), Referenced to phase 2:NBT and 6:SBT, Start of Green  
 Natural Cycle: 60  
 Control Type: Pretimed  
 Maximum v/c Ratio: 0.66  
 Intersection Signal Delay: 10.3  
 Intersection Capacity Utilization 63.6%  
 Analysis Period (min) 15

Intersection LOS: B  
 ICU Level of Service B

Splits and Phases: 5: Bank St & MacLaren St

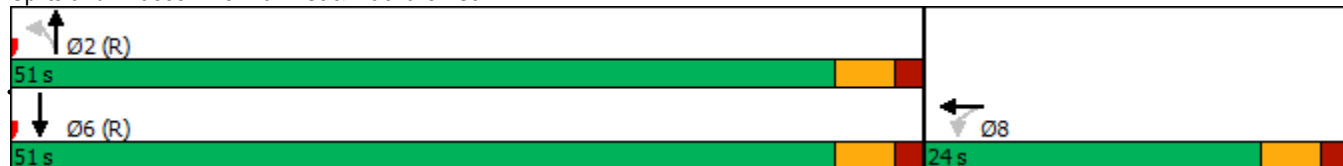

Lanes, Volumes, Timings  
6: Bank St & Gilmour St




Lane Group	EBT	NBT	SBL	SBT
Lane Configurations	↔	↑		↔
Traffic Volume (vph)	116	443	19	370
Future Volume (vph)	116	443	19	370
Lane Group Flow (vph)	191	471	0	389
Turn Type	NA	NA	Perm	NA
Protected Phases	4	2		6
Permitted Phases			6	
Minimum Split (s)	23.2	26.1	26.1	26.1
Total Split (s)	25.0	50.0	50.0	50.0
Total Split (%)	33.3%	66.7%	66.7%	66.7%
Yellow Time (s)	3.3	3.3	3.3	3.3
All-Red Time (s)	1.9	1.8	1.8	1.8
Lost Time Adjust (s)	0.0	0.0		0.0
Total Lost Time (s)	5.2	5.1		5.1
Lead/Lag				
Lead-Lag Optimize?				
Act Effct Green (s)	19.8	44.9		44.9
Actuated g/C Ratio	0.26	0.60		0.60
v/c Ratio	0.43	0.45		0.38
Control Delay	18.3	9.9		4.2
Queue Delay	0.0	0.0		0.6
Total Delay	18.3	9.9		4.8
LOS	B	A		A
Approach Delay	18.3	9.9		4.8
Approach LOS	B	A		A
Queue Length 50th (m)	12.6	32.3		8.8
Queue Length 95th (m)	24.6	51.7		12.8
Internal Link Dist (m)	115.9	89.4		56.4
Turn Bay Length (m)				
Base Capacity (vph)	444	1040		1030
Starvation Cap Reductn	0	0		314
Spillback Cap Reductn	0	0		0
Storage Cap Reductn	0	0		0
Reduced v/c Ratio	0.43	0.45		0.54

Intersection Summary

Cycle Length: 75  
 Actuated Cycle Length: 75  
 Offset: 6 (8%), Referenced to phase 2:NBT and 6:SBTL, Start of Green  
 Natural Cycle: 50  
 Control Type: Pretimed  
 Maximum v/c Ratio: 0.45  
 Intersection Signal Delay: 9.5  
 Intersection Capacity Utilization 64.5%  
 Analysis Period (min) 15

Intersection LOS: A  
 ICU Level of Service C

Splits and Phases: 6: Bank St & Gilmour St

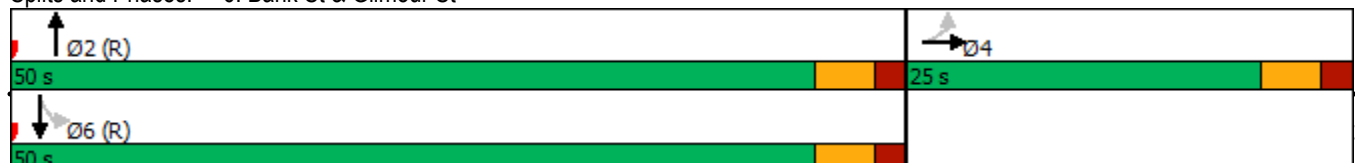



Lanes, Volumes, Timings  
8: O'Connor St & Gilmour St

Future Background 2029 PM

08/13/2021



Lane Group	EBT	SBT	Ø9
Lane Configurations	↻	↻↻	
Traffic Volume (vph)	84	1285	
Future Volume (vph)	84	1285	
Lane Group Flow (vph)	173	1333	
Turn Type	NA	NA	
Protected Phases	4	6	9
Permitted Phases			
Minimum Split (s)	20.1	26.1	5.0
Total Split (s)	21.0	49.0	5.0
Total Split (%)	28.0%	65.3%	7%
Yellow Time (s)	3.3	3.3	2.0
All-Red Time (s)	1.8	1.8	0.0
Lost Time Adjust (s)	0.0	0.0	
Total Lost Time (s)	5.1	5.1	
Lead/Lag			
Lead-Lag Optimize?			
Act Effct Green (s)	15.9	43.9	
Actuated g/C Ratio	0.21	0.59	
v/c Ratio	0.45	0.67	
Control Delay	30.3	12.2	
Queue Delay	0.0	0.0	
Total Delay	30.3	12.2	
LOS	C	B	
Approach Delay	30.3	12.2	
Approach LOS	C	B	
Queue Length 50th (m)	17.0	58.3	
Queue Length 95th (m)	34.7	79.0	
Internal Link Dist (m)	159.1	135.3	
Turn Bay Length (m)			
Base Capacity (vph)	386	1987	
Starvation Cap Reductn	0	0	
Spillback Cap Reductn	0	0	
Storage Cap Reductn	0	0	
Reduced v/c Ratio	0.45	0.67	

Intersection Summary

Cycle Length: 75  
 Actuated Cycle Length: 75  
 Offset: 71 (95%), Referenced to phase 6:SBTL, Start of Green  
 Natural Cycle: 60  
 Control Type: Pretimed  
 Maximum v/c Ratio: 0.67  
 Intersection Signal Delay: 14.2  
 Intersection Capacity Utilization 63.4%  
 Analysis Period (min) 15

Intersection LOS: B  
 ICU Level of Service B

Splits and Phases: 8: O'Connor St & Gilmour St

