

ORIGINAL SHEET - ARCH D

DATE: MAY 2001 REV. DATE: MARCH 2013

BEDDING

- R

YANYANYA

DWG. No.: W22

NSIONS ARE IN MILLIMETRES UNLESS SHOWN OTHERWISE D TO MEET THE INTENT OF THE MOE WATERMAIN DESIGN

Ottawa

). TRACER WIRE REQUIRED FOR PVC, PEX AND HDPE WATERMAIN PIPE ONLY AS PER W36.

RITERIA JUNE 2012

WATERMAIN CROSSING


OVER SEWER

39, W40, AND W42.

E: MAY 2001

_____ MARCH 2021

DWG. No.: W25.2

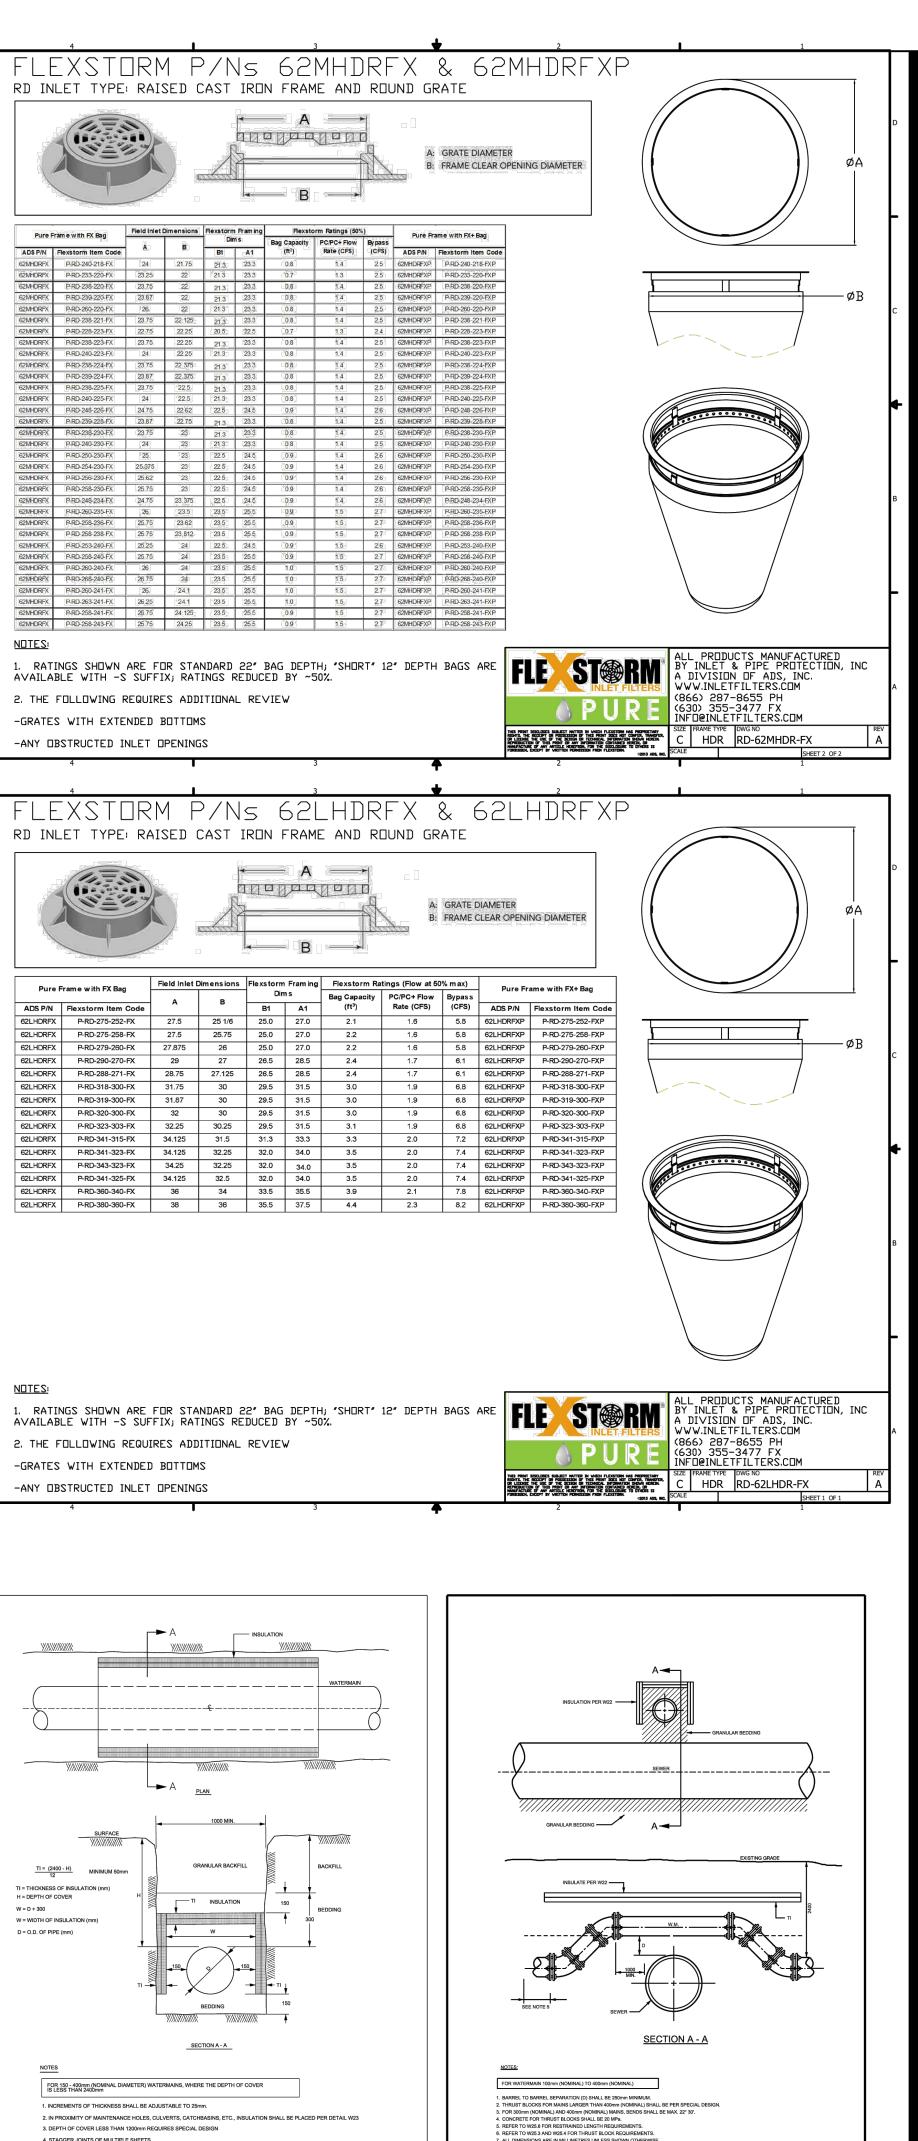



Stantec Consulting Ltd. 400 - 1331 Clyde Avenue Ottawa ON Tel. 613.722.4420 www.stantec.com

Copyright Reserved

The Contractor shall verify and be responsible for all dimensions. DO NOT scale the drawing - any errors or omissions shall be reported to Stantec without delay The Copyrights to all designs and drawings are the property of Stantec. Reproduction or use for any purpose other than that authorized by Stantec is forbidden.

Legend



PROPOSED SILT FENCE BOUNDARY AS PER OPSD 219.110 PROPOSED CONSTRUCTION FENCING

> PROPOSED CATCH BASIN PROTECTION AS PER FLEX STORM INLET FILTERS DETAIL. ITEM CODE P-RD-240-223-FX

PROPOSED CATCH BASIN MH PROTECTION AS PER FLEX STORM INLET FILTERS DETAIL. ITEM CODE P-RD-290-270-FX PROPOSED CATCH BASIN PROTECTION AS PER TERRAFIX SILTSACK DETAIL

PROPOSED MUD MAT LOCATION

PROPOSED VALVE BOX PROPOSED VALVE CHAMBER PROPOSED FIRE HYDRANT

PROPOSED SANITARY SEWER MANHOLE

PROPOSED STORM SEWER MANHOLE PROPOSED CATCHBASIN

Best Management Practices

CONTRACTOR TO PROVIDE EROSION AND SEDIMENT CONTROLS (BEST MANAGEMENT PRACTICES) URING CONSTRUCTION OF THIS PROJECT.

EROSION MUST BE MINIMIZED AND SEDIMENTS MUST BE REMOVED FROM CONSTRUCTION SITE RUN-OFF IN ORDER TO PROTECT DOWNSTREAM AREAS. DURING ALL CONSTRUCTION, EROSION AND SEDIMENTATION SHOULD BE CONTROLLED BY THE FOLLOWING TECHNIQUES:

- LIMIT THE EXTENT OF EXPOSED SOILS AT ANY GIVEN TIME.
- REVEGETATE EXPOSED AREAS AND SLOPES AS SOON AS POSSIBLE.
- MINIMIZE AREA TO BE CLEARED AND GRUBBED. PROTECT EXPOSED SLOPES WITH PLASTIC OR SYNTHETIC MULCHES.
- INSTALL CATCH BASIN INSERTS OR EQUIVALENT IN ALL PROPOSED CATCH BASINS AND CATCH BASIN MANHOLES AND IN ALL EXISTING CATCH BASINS THAT WILL RECEIVE RUN-OFF FROM THE
- A SILT FENCE SHALL BE INSTALLED AROUND THE PERIMETER OF ALL AND ANY STOCKPILES OF MATERIAL TO BE USED OR REMOVED FROM SITE. (LOCATION TO BE DETERMINED)
- A VISUAL INSPECTION SHALL BE DONE DAILY ON SEDIMENT CONTROL MEASURES AND CLEANED OF ANY ACCUMULATED SILT AS REQUIRED. THE DEPOSITS WILL BE DISPOSED OFF SITE AS PER THE REQUIREMENTS OF THE CONTRACT.
- SEDIMENT CONTROL BARRIERS MAY ONLY BE REMOVED TEMPORARILY WITH APPROVAL OF CONTRACT ADMINISTRATOR TO ACCOMMODATE CONSTRUCTION OPERATIONS. ALL AFFECTED BARRIERS MUST BE REINSTATED AT NIGHT WHEN CONSTRUCTION IS COMPLETED. NO REMOVAL WILL OCCUR IF THERE IS A SIGNIFICANT RAINFALL EVENT ANTICIPATED (>10mm) UNLESS A NEW DEVICE HAS BEEN INSTALLED TO PROTECT. EXISTING STORM AND SANITARY SEWER SYSTEM OR DOWNSTREAM WATERCOURSES.
- NO REFUELING OR CLEANING OF EQUIPMENT IS PERMITTED NEAR ANY EXISTING WATERWAY CONTRACTOR SHALL REMOVE SEDIMENT CONTROL MEASURES WHEN. IN THE OPINION OF THE CONTRACT ADMINISTRATOR, THE MEASURE(S) IS NO LONGER REQUIRED, NO CONTROL MEASURES SHALL BE PERMANENTLEY REMOVED WITHOUT PRIOR WRITTEN AUTHORIZATION FROM
- THE CONTRACT ADMINISTRATOR. THE CONTRACTOR SHALL PERIODICALLY, OR WHEN REQUESTED BY THE CONTRACT
- ADMINISTRATOR, CLEAN OUT ACCUMULATED SEDIMENTS AS REQUIRED.
- THE CONTRACTOR SHALL IMMEDIATELY REPORT TO THE ENGINEER ANY ACCIDENTAL DISCHARGES OF SEDIMENT MATERIAL INTO THE WATERCOURSE. APPROPRIATE RESPONSE MEASURES, INCLUDING ANY REPAIRS TO EXISTING CONTROL MEASURES OR THE IMPLEMENTATION OF ADDITIONAL CONTROL MEASURES, SHALL BE CARRIED OUT BY THE CONTRACTOR WITHOUT DELAY.
- 13. CONTRACTOR SHALL INSTALL MUD MATS AT BOTH ENTRANCES TO THE SITE.

4. STORMWATER SWALES TO BE COVERED WITH HYDRO-SEED AND MULCH.

1	REVISED AS PER CITY COMMENTS		SLW	PM	24.09.04
0	ISSUED FOR SPA		MJS	PM	23.06.01
Revision		Ву	Appd.	YY.MM.DD	
File Name:160401697 DB.dwg		ZLM	DT	MJS	23.05.01
		Dwn.	Chkd.	Dsgn.	YY.MM.DD

Permit-Seal



BRIGIL HOMES CLIENT2

1299 RICHMOND ROAD MIXED USE TOWER DEVELOPMENT

OTTAWA, ON, CANADA

Title EROSION CONTROL PLAN AND DETAIL SHEET

Project No. Scale 160401697 Sheet Revision Drawing No.

EC/DS-5 of 7