# Half Moon Bay South Phase 7 (4159 Obsidian Street) - Servicing and Stormwater Management Report

Stantec Project No. 160402143

September 19, 2025

Prepared for:

Mattamy Homes Ltd.

Prepared by:

Stantec Consulting Ltd.
400-1331 Clyde Avenue
Ottawa ON K2C 3G4

| Revision | Description | Author | | Quality Check | | Independent Review | |
|---|---|---|---|---|---|---|---|
| 1 | Issued for Approval | ZW | 2025-05-01 | DT | 2025-05-13 | SG | 2025-05-13 |
| 2 | Issued for Revised Site Plan | ZW | 2025-09-03 | DT | 2025-09-19 | SG | 2025-09-19 |
| | | | | | | | |

This document entitled Half Moon Bay South Phase 7 (4159 Obsidian Street) - Servicing and Stormwater Management Report was prepared by Stantec Consulting Ltd. (“Stantec”) for the account of Mattamy Homes Ltd. (the “Client”). Any reliance on this document by any third party is strictly prohibited. The material in it reflects Stantec’s professional judgment in light of the scope, schedule and other limitations stated in the document and in the contract between Stantec and the Client. The opinions in the document are based on conditions and information existing at the time the document was published and do not take into account any subsequent changes. In preparing the document, Stantec did not verify information supplied to it by others. Any use which a third party makes of this document is the responsibility of such third party. Such third party agrees that Stantec shall not be responsible for costs or damages of any kind, if any, suffered by it or any other third party as a result of decisions made or actions taken based on this document.

Prepared by _____

**Ziyi Wang**




Reviewed by _____

**Dustin Thiffault, P.Eng.**

Approved by _____

**Sheridan Gillis**

# Table of Contents

**1.0 INTRODUCTION ..... 1.1**
1.1 OBJECTIVE ..... 1.2

**2.0 REFERENCES ..... 2.1**

**3.0 POTABLE WATER SERVICING ..... 3.1**
3.1 BACKGROUND ..... 3.1
3.2 PROPOSED WATERMAIN SIZING AND LAYOUT ..... 3.1
3.2.1 Ground Elevations ..... 3.1
3.2.2 Domestic Water Demands ..... 3.1
3.3 LEVEL OF SERVICE ..... 3.2
3.3.1 Allowable Pressures ..... 3.2
3.3.2 Fire Flow ..... 3.2
3.4 HYDRAULIC MODEL ..... 3.3
3.4.1 System Layout ..... 3.3
3.4.2 Boundary Conditions ..... 3.4
3.4.3 Model Development ..... 3.4
3.5 HYDRAULIC MODELING RESULTS ..... 3.5
3.5.1 Average Day (AVDY) ..... 3.5
3.5.2 Peak Hour (PKHR) ..... 3.6
3.5.3 Maximum Day Plus Fire Flow (MXDY+FF) ..... 3.7
3.6 POTABLE WATER SUMMARY ..... 3.8

**4.0 WASTEWATER SERVICING ..... 4.9**
4.1 BACKGROUND ..... 4.9
4.2 DESIGN CRITERIA ..... 4.9
4.3 SANITARY SERVICING DESIGN ..... 4.10

**5.0 STORMWATER MANAGEMENT AND SERVICING ..... 5.1**
5.1 PROPOSED CONDITIONS ..... 5.1
5.2 DESIGN CRITERIA AND CONSTRAINTS ..... 5.1
5.2.1 Minor System ..... 5.2
5.2.2 Major System ..... 5.2
5.2.3 Allowable Release Rate ..... 5.3
5.3 MODELING METHODOLOGY ..... 5.4
5.3.1 Modeling Rationale ..... 5.4
5.3.2 SWMM Dual Drainage Methodology ..... 5.4
5.3.3 Model Input Parameters ..... 5.5
5.4 MODEL RESULTS AND DISCUSSION ..... 5.7
5.4.1 Hydrology ..... 5.8
5.4.2 Hydraulic Grade Line ..... 5.8
5.4.3 Overland Flow ..... 5.9
5.4.4 Peak System Outflows ..... 5.10
5.5 QUALITY CONTROL ..... 5.10

5.6 WATER BALANCE ..... 5.11

**6.0 GEOTECHNICAL CONSIDERATIONS AND GRADING ..... 6.1**
6.1 GEOTECHNICAL INVESTIGATION ..... 6.1
6.1.1 Groundwater Control ..... 6.1
6.2 GRADING PLAN ..... 6.2

**7.0 APPROVALS ..... 7.1**

**8.0 EROSION CONTROL ..... 8.1**

**9.0 CONCLUSIONS AND RECOMMENDATIONS ..... 9.1**
9.1 POTABLE WATER SERVICING ..... 9.1
9.2 WASTEWATER SERVICING ..... 9.1
9.3 STORMWATER MANAGEMENT AND SERVICING ..... 9.1
9.4 GRADING ..... 9.2
9.5 APPROVALS/PERMITS ..... 9.2

## LIST OF TABLES

Table 3–1: Residential Water Demands ..... 3.2
Table 3–2: Boundary Conditions ..... 3.4
Table 3–3: C-Factors Used in Watermain Hydraulic Model ..... 3.4
Table 4–1 Summary of Proposed Sanitary Peak Flows ..... 4.10
Table 5–1 Target Release Rate ..... 5.3
Table 5–2: General Subcatchment Parameters ..... 5.5
Table 5–3: Individual Subcatchment Parameters ..... 5.6
Table 5–4: Surface Storage Parameters ..... 5.6
Table 5–5: Exit Loss Coefficients for Bends at Manholes ..... 5.7
Table 5–6 : Proposed ICD Schedule ..... 5.8
Table 5–7: Hydraulic Grade Line Results ..... 5.9
Table 5–8: Maximum Static and Dynamic Water Depths ..... 5.9
Table 5–9: Peak Site Outflows ..... 5.10
Table 5–10: 22mm Event Simulated Infiltration Volumes ..... 5.12
Table 5–11: Summary of Field Saturated Hydraulic Conductivity Values and Infiltration Rates ..... 5.12
Table 5–12: 22mm Event Estimated Drawdown Times ..... 5.13

## LIST OF FIGURES

Figure 1: Key Plan of Half Moon Bay South Phase 7 ..... 1.1
Figure 2: Watermain Model Nodes ..... 3.3
Figure 3: Pressures (psi) Under AVDY Demand Scenario ..... 3.5
Figure 4: Pressures (psi) Under PKHR Demand Scenario ..... 3.6
Figure 5: Available Fire Flows (L/s) for MXDY+FF Demand Scenario ..... 3.7

## LIST OF APPENDICES

**APPENDIX A POTABLE WATER SERVICING ..... A.1**
A.1 Boundary Conditions - City of Ottawa ..... A.1
A.2 Domestic Water Demand Calculations ..... A.2
A.3 FUS (2020) Fire Flow Requirements ..... A.3

**APPENDIX B DRAFT SITE PLAN ..... B.1**

**APPENDIX C SANITARY SERVICING ..... C.1**
C.1 Sanitary Sewer Design Sheet ..... C.1

**APPENDIX D STORMWATER MANAGEMENT ..... D.1**
D.1 Storm Sewer Design Sheet ..... D.1
D.2 Sample PCSWMM Input (100yr Chicago) ..... D.2
D.3 Sample PCSWMM Output (100yr Chicago) ..... D.3

**APPENDIX E EXTERNAL REPORTS ..... E.1**
E.1 Design Brief (Site Servicing Study) for the Ridge (Brazeau Lands) By DSEL (July 2020) ..... E.1
E.2 Stormwater Management Report for Half Moon bay south Phase 8 by stantec (June, 2023) ..... E.2
E.3 Geotechncial Investigation report by Paterson Inc. ..... E.3

# 1.0 INTRODUCTION

Mattamy Homes Ltd. has retained Stantec Consulting Ltd. to prepare this Stormwater and Servicing Report in support of a site plan control application for 4159 Obsidian Street (Half Moon Bay South Phase 7 - Residential). The subject site is located within the Brazeau Lands development area also known as The Ridge, located at 3809 Borrisokane Road within the Barrhaven South Urban Expansion Area (BSUEA) in the City of Ottawa. This proposed site is bounded by Obsidian Street to the west and Future Greenbank Road to the east, the previous Half Moon Bay South Phase 8 development at 3718 Greenbank Road to the north and undeveloped area with municipal address of 3882 Barnsdale Road to the south. **Figure 1** below identifies the site location in relation to existing adjacent properties.

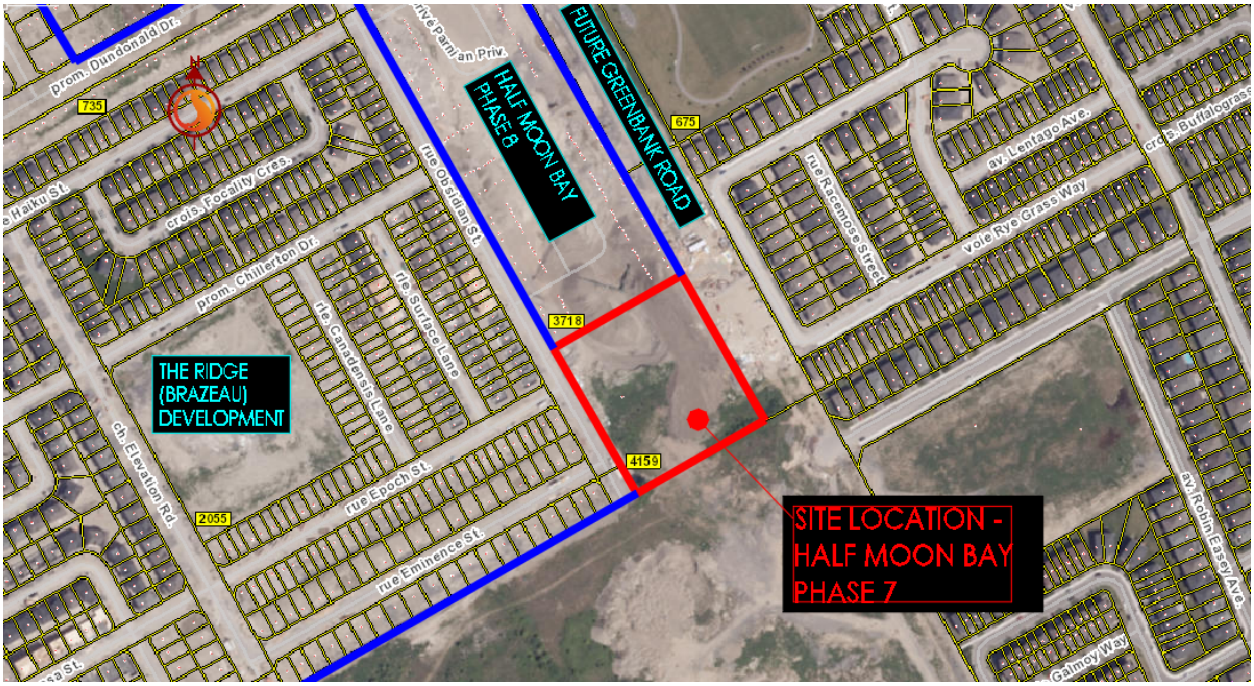



**Figure 1: Key Plan of Half Moon Bay South Phase 7 (4159 Obsidian Street) Development Area**

The development land is approximately 1.22ha in area and comprises 5 blocks of townhomes with a total of 90 units. This servicing and stormwater management report will demonstrate that the subject site can be fully serviced by the existing municipal water, sanitary, and storm services while complying with established design criteria recommended in background studies and City of Ottawa guidelines. The proposed site plan is included in **Appendix B** for reference.

This parcel is currently zoned as GM[2800]H(14.5) General Mixed-used Zone. The site is within the Jock River watershed within the regulatory boundary of the Rideau Valley Conservation Authority (RVCA).

# 1.1 OBJECTIVE

This Site Servicing and Stormwater Management Report has been prepared to present a servicing scheme that is free of conflicts and presents the most suitable servicing approach that complies with the relevant City design guidelines. The use of the existing infrastructure as obtained from available as-built drawings has been determined in consultation with David Schaeffer Engineering Ltd. (DSEL), J. F. Sabourin and Associates Inc. (JFSA), City of Ottawa staff, and the adjoining property owners. Infrastructure requirements for water supply, sanitary sewer, and storm sewer services are presented in this report.

Criteria and constraints provided by Brazeau Lands (The Ridge) Design brief and the City of Ottawa with further iterations through the 3718 Greenbank Road Functional Servicing Report have been used as a basis for the servicing design of the proposed development. Specific elements and potential development constraints to be addressed are as follows:

- **Potable Water Servicing**
    - Estimate water demands to characterize the feed for the proposed development which will be serviced by an existing 300mm diameter PVC watermain fronting the site along Obsidian Street and the existing 250mm diameter PVC watermain within the previous Half Moon Bay South Phase 8 development at the north of this site for a loop connection.
    - Watermain servicing for the development is to be able to provide average day and maximum day and peak hour demands (i.e., non-emergency conditions) at pressures within the allowable range of 40 to 80 psi (276 to 552 kPa).
    - Under fire flow (emergency) conditions with maximum day demands, the water distribution system is to maintain a minimum pressure greater than 20 psi (140 kPa).
- Prepare a grading plan in accordance with the proposed site plan and existing grades.
- **Stormwater Management and Servicing**
    - Define major and minor conveyance systems in line with guidelines used for the stormwater management of the Brazeau lands subdivision, as well as those provided in the October 2012 City of Ottawa Sewer Design Guidelines and subsequent technical memorandums, and generally accepted stormwater management design guidelines.
    - As documented in the Barrhaven South Urban Expansion Area Master Servicing Study, by J. L Richards 2018 and Stantec's 2022 Functional Servicing Report for the area, the development will be required to meet water balance criteria for the region equivalent to retention and infiltration of the 22mm storm event.
    - Connect to the existing storm maintenance hole structure at the intersection of Epoch and Obsidian Street.
- **Wastewater Servicing**

- Estimate wastewater flows generated by the development and size sanitary sewers which will outlet to the existing sanitary manhole within the private sanitary network in the previous Half Moon Bay South Phase 8 site, and ultimately discharge into the existing 200mm diameter PVC sanitary sewer on Obsidian Street.

The accompanying **Drawing SSP-1** illustrates the proposed internal servicing scheme for the site.

# 2.0 REFERENCES

The following documents were referenced in the preparation of this stormwater management and servicing report:


- *City of Ottawa Sewer Design Guidelines*, 2nd Edition, City of Ottawa, October 2012.
- *City of Ottawa Design Guidelines – Water Distribution*, First Edition, Infrastructure Services Department, City of Ottawa, July 2010.
- *Design Brief for Cavian Greenbank Development Corporation,* The Ridge (Brazeau Lands), David Schaeffer Engineering Ltd., July 2020.
- *Geotechnical Investigation,* Proposed Mixed Use Development Half Moon Bay South – Phase 8 3718 Greenbank Road - Ottawa, PG5690-1, Paterson Group, May 2023.
- *Hydraulic Capacity and Modeling Analysis Brazeau Lands*, Final Report, GeoAdvice Engineering Inc., July 2020.
- *Master Servicing Study – Barrhaven South Urban Expansion Area,* J.L. Richards & Associates Limited, Revision 2, May 2018.
- *Pond Design Brief for Brazeau Subdivision,* by J.F. Sabourin and Associates, July 2020.
- *Stormwater Management Report for Brazeau Subdivision,* by J.F. Sabourin and Associates (July 2020).
- *Stormwater Planning and Design Manual,* Ministry of the Environment, March 2003.
- *Technical Bulletin ISTB-2014-02 Revision to Ottawa Design Guidelines – Water*, City of Ottawa, May 2014.
- *Technical Bulletin PIEDTB-2016-01 Revisions to Ottawa Design Guidelines – Sewer,* City of Ottawa, September 2016.
- *3718 Greenbank Road – Servicing and Stormwater Management Report*, Stantec Consulting Ltd., June 13, 2023.

# 3.0 POTABLE WATER SERVICING

## 3.1 BACKGROUND

The subject site is located within Zone 3SW of the City of Ottawa water distribution system. The proposed residential development will include 5 blocks with 90 townhome units.

The development will be serviced from the existing 300mm diameter watermain located within Obsidian Street and the existing 200mm diameter watermain in the previous Half Moon Bay South Phase 8 (3718 Greenbank Road) site for a looped connection.

In June 2023, Stantec conducted a watermain analysis to determine the hydraulic capacity of the watermain network within the previous phase development at 3718 Greenbank Road as shown in the *3718 Greenbank Road – Servicing and Stormwater Management Report* by Stantec in **Appendix E.1** The analysis result will be used as boundary condition at the private connection location.

The updated boundary conditions for the proposed development at Obsidian Street have been received from the City of Ottawa and are used in the hydraulic analysis for this site. The City of Ottawa boundary conditions are included in **Appendix A.1**.

## 3.2 PROPOSED WATERMAIN SIZING AND LAYOUT

The proposed watermain alignment and sizing for the development is demonstrated on **Drawing SSP-1**. A 200 mm diameter watermain is proposed to connect with the existing 300mm diameter watermain on Obsidian Street and extend with a looped 200mm watermain within the parking area at the center of this development, connecting to the existing 250mm watermain in the previous phase 8 site at the northwest of the site.

### 3.2.1 Ground Elevations

The proposed ground elevations within the development range from approximately 103 m to 108 m, with the ground elevations highest in the southeast corner of the site. This significant variation in ground elevations was largely dictated by the original topography of the site, and to suit tie-in elevations at Obsidian Street.

### 3.2.2 Domestic Water Demands

The Half Moon Bay South Phase 7 development will contain a total of 5 blocks with 90 townhome units and outdoor amenity areas having a total estimated population of 243 persons. Refer to **Appendix A.2** for detailed domestic water demand calculations.

Water demands for the development were calculated using the City of Ottawa's Water Distribution Design Guidelines. For residential developments, the average day (AVDY) per capita water demand is 280L/cap/d.

For maximum day (MXDY) demand, AVDY was multiplied by a factor of 2.5 and for peak hour (PKHR) demand, MXDY was multiplied by a factor of 2.2. For maximum day (MXDY) demand of amenity areas, AVDY was multiplied by a factor of 1.5 and for peak hour (PKHR) demand, MXDY was multiplied by a factor of 1.8. The calculated residential water consumption is represented in **Table 3-1** below:

**Table 3–1: Residential Water Demands**

| Unit Type | Units/ Amenity areas ($m^2$) | Persons/Unit | Population | AVDY (L/s) | MXDY (L/s) | PKHR (L/s) |
|---|---|---|---|---|---|---|
| Townhome | 90 units | 2.7 | 243 | 0.79 | 1.97 | 4.33 |
| | | **Total** | **243** | **0.79** | **1.97** | **4.33** |

## 3.3 LEVEL OF SERVICE

### 3.3.1 Allowable Pressures

The City of Ottawa Water Distribution Design Guidelines state that the desired range of system pressures under normal demand conditions (i.e. basic day, maximum day, and peak hour) should be in the range of 350 to 552 kPa (50 to 80 psi) and no less than 275 kPa (40 psi) at the ground elevation in the streets (i.e. at hydrant level). The maximum pressure at any point in the distribution system is to be no higher than 552 kPa (80 psi). As per the Ontario Building Code & Guide for Plumbing, if pressures greater than 552 kPa (80 psi) are anticipated, pressure relief measures (such as pressure reducing valves) are required. Under emergency fire flow conditions, the minimum pressure in the distribution system is allowed to drop to 138 kPa (20 psi).

### 3.3.2 Fire Flow

FUS fire flow calculation spreadsheets for the governing fire flow demand scenarios (see **Appendix A.3**) were generated to calculate the expected fire flow demands from the proposed site.

The ground floor area of each block was estimated based on the building footprints shown on the architectural plans. The building exposures were reviewed on a block-by-block basis. Although Blocks 1 and 2 were determined to be the critical units for assessment given by the exposure distance from the adjacent buildings and its building footprint, firewalls are proposed to reduce effective floor area and the resulting fire flow demand. By consideration of the adjusted effective floor area of Block 1 and 2 with firewalls, the maximum required fire flow for this development was estimated to be 250 L/s.

## 3.4 HYDRAULIC MODEL

A hydraulic model for the site was constructed using the PCSWMM program developed by Computational Hydraulics Inc. (CHI) to provide an accurate network analysis of the proposed water distribution system. The results are presented and discussed in the following sections.

### 3.4.1 System Layout

The proposed watermain alignment including model node IDs, reservoirs (representing boundary conditions at connections to the existing watermain network), and pipe sizing for the proposed development is shown in **Figure 2** below.

**Figure 2: Watermain Model Nodes**



### 3.4.2 Boundary Conditions

Hydraulic boundary conditions provided by the City of Ottawa dated April 2, 2025, are based on the anticipated domestic water demands and a fire flow demand of 10,000L/min (166.7L/s) and 15,000L/min (250 L/s). Due to the proposed site plan layout, it is anticipated that a 15,000L/min fire flow is required for this this project, and has been applied in the analysis. Two fixed head reservoirs simulating the boundary conditions were placed for the watermain connection points at the Eminence/Obsidian Street (south) intersection and the private watermain within Half Moon Bay Phase 8 site (north) in the hydraulic model. A summary of the boundary conditions is provided in **Table 2** which shows the ground elevation at the proposed connections and the HGLs for average day, peak hour, and maximum day plus fire flow demand scenarios that have been used in the hydraulic model. The boundary conditions are included in **Appendix A.1**.

**Table 3–2: Boundary Conditions**

| Location | Ground Elevation (m) | AVDY (m) | PKHR (m) | MXDY+FF (15,000 L/min) (m) |
|---|---|---|---|---|
| Connection 1 – Half Moon Bay South Phase 8 | 106.0 | 148.1 | 143.0 | 130.1 |
| Connection 2 – Eminence St/ Obsidian St (Post SUC Zone Reconfiguration) | 108.9 | 146.8 | 142.7 | 129.6 |

### 3.4.3 Model Development

New watermains were added to the hydraulic model to simulate the proposed distribution system. A 200 mm dia. watermain network is used throughout the site. Hazen-Williams coefficients (C-factors) were applied to the proposed watermain in accordance with the City of Ottawa's Water Distribution Design Guidelines. The C-factors used are given in **Table 3-3** below.

**Table 3–3: C-Factors Used in Watermain Hydraulic Model**

| Pipe Diameter (mm) | C-Factor |
|---|---|
| 150 | 100 |
| 200 to 250 | 110 |
| 300 to 600 | 120 |
| Over 600 | 130 |

The labelling of the watermain junctions and reservoirs (representing boundary conditions at connections to the existing watermain network) is shown in **Figure 2**.

# 3.5 HYDRAULIC MODELING RESULTS

## 3.5.1 Average Day (AVDY)

The hydraulic modeling results show that under basic day demands the pressure in the distribution network falls between 409.5 kPa (59.3 psi) and 382.5 kPa (55.5 psi). Hydraulic modeling results for the average day demand scenario is illustrated in **Figure 3**.

**Figure 3: Pressures (psi) Under AVDY Demand Scenario**



### 3.5.2 Peak Hour (PKHR)

The hydraulic modeling results show that under peak hour demands the pressure in the distribution network ranges between 337.9 kPa (49.0 psi) and 361.5 kPa (52.4 psi). Hydraulic modeling results for the peak hour demand scenario is illustrated in **Figure 4.**

**Figure 4: Pressures (psi) Under PKHR Demand Scenario**



### 3.5.3 Maximum Day Plus Fire Flow (MXDY+FF)

A hydraulic analysis using the PCSWMM EPANET2.2 Water model was conducted to determine if the proposed water distribution network can achieve the required FUS fire flow requirement while maintaining a residual pressure of at least 138 kPa (20 psi), per City Water Distribution Design Guidelines. This was accomplished using a steady-state maximum day demand scenario along with the automated fire flow simulation feature of the software. Hydraulic modeling results for the maximum day plus fire flow scenario is shown on **Figure 5**.

**Figure 5: Available Fire Flows (L/s) for MXDY+FF Demand Scenario**




A fire flow of 15,000 L/min (250 L/s) was achieved at all serviced nodes. Sufficient fire flows for each block can be provided at every point within the distribution network for the proposed development.

## 3.6 POTABLE WATER SUMMARY

The proposed watermain alignment and sizing can achieve the required level of service throughout the development. Based on the hydraulic analysis conducted using PCSWMM EPANET modeling, the following conclusions were made:

- The proposed water distribution system applying 200mm diameter distribution mains for the overall site to form a looped connection from the existing 250mm watermain in Half Moon Bay Phase 8 and 300mm watermain in Obsidian Street.
- During peak hour conditions, the proposed system is capable of operating above the minimum pressure objective of 276 kPa (40 psi).
- During fire conditions, the proposed system can provide 15,000 L/min fire flows at all modeled nodes, which are sufficient based on FUS calculations for the units within the proposed site.



# 4.0 WASTEWATER SERVICING

## 4.1 BACKGROUND

The subject site located at the south of the previous Half Moon Bay South Phase 8 (3718 Greenbank Road) within the study area of Barrhaven South Urban Expansion Area (BSUEA). JLR associates conducted a conceptual master servicing study in 2018, which provided design data for wastewater servicing and estimated residual capacities for sanitary trunk sewer in the area. The subject site is referred to as part of the Minto Lands (commercial) in this study. DSEL prepared a design brief for adjacent The Ridge subdivision (Brazeau Lands) based on this study. This design brief is used for the sanitary analysis for the earlier stage development and provided the preliminary sanitary drainage plan as a guidance for this following development.

There is an existing 200mm diameter sanitary sewer on Obsidian Street which collects wastewater from the private sanitary sewer network within the previous Half Moon Bay South Phase 8 development to the north, and which ultimately flows into the 375mm diameter sanitary sewer along the future Greenbank Road.

Refer to **Appendix E.1** for excerpts from The Ridge site servicing study by DSEL (2020). The estimated peak sanitary flows for the subject site as well as adjacent Phase 8 lands were originally determined as 4.45L/s (for a residential area of 1.90ha and a commercial area of 2.99ha) using City of Ottawa design criteria. This total of 4.89 ha land now includes both the subject site Phase 7 (4159 Obsidian Street) and the previous Phase 8 (3718 Greenbank Road) of Half Moon Bay South development.

In the *3718 Greenbank Road – Servicing and Stormwater Management Report* by Stantec in June 2023, the estimated Phase 8 (3718 Greenbank Road) development outflow was revised to a peak rate of 7.7L/s. The proposed development will be serviced by an onsite sanitary sewer network connected with the previous phase 8 sanitary system to direct the wastewater flow into the 200mm diameter sanitary sewer on Obsidian Street and ultimately into the 375mm sanitary sewer along future Greenbank Road.

## 4.2 DESIGN CRITERIA

As outlined in the City's Sewer Design Guidelines, the following design parameters were used to calculate estimated wastewater flow rates and to preliminarily size on-site sanitary sewers for the subject site:

- Minimum Full Flow Velocity – 0.6 m/s
- Maximum Full Flow Velocity – 3.0 m/s
- Manning's roughness coefficient for all smooth-walled pipes – 0.013
- Townhouse persons per unit – 2.7
- Extraneous Flow Allowance – 0.33 L/s/ha
- Residential Average Flows – 280 L/cap/day
- Maintenance Hole Spacing – 120 m

- Minimum Cover – 2.5m
- Harmon Correction Factor – 0.8

In addition, a residential peak factor based on Harmon's Equation was used to determine the peak design flows per Ottawa's Sewer Design Guidelines. Refer to **Appendix C.1** for the sanitary sewer design sheet for 4159 Obsidian Street

## 4.3 SANITARY SERVICING DESIGN

Sanitary servicing is provided via the 200 mm diameter onsite sanitary sewer network along the private roadways in front of each block and ultimately outlet to existing SAN MH 12 located within the neighboring previous Half Moon Bay South Phase 8 development.

The proposed layout of the sanitary infrastructure is shown on **Drawing SA-1.** The connections to the existing sanitary sewer network and the associated peak flows are summarized in **Table 4–1** below.

**Table 4–1 Summary of Proposed Sanitary Peak Flows**

| Area ID Number | Total area (ha) | No. Units | Population | Total Peak Flow (L/s) |
|---|---|---|---|---|
| Proposed Half Moon Bay South Phase 7 | 1.22 | 90 | 243 | 3.2 |
| Existing Half Moon Bay South Phase 8 | 3.09 | 228 | 616 | 7.8 |
| To 200mm dia. sewer on Obsidian Street | 4.31 | 318 | 859 | 11.0 |

A population density of 2.7ppu was applied to the residential townhouse units on site. A residential peak factor based on Harmon Equation was used to determine the peak design flows. An allowance of 0.33 L/s/effective gross ha (for all areas) was used to generate peak extraneous flows.

This total estimate combined sanitary flow to be discharged into the existing 200mm diameter sanitary sewer on Obsidian Street is larger than the previous estimated flow of 4.45L/s by DSEL. It is anticipated that the existing 200mm receiving sewer in Obsidian Street has sufficient capacity to receive the additional 6.55 L/s sanitary flow based on sanitary sewer design sheets for the Obsidian Road sewer.

JLR Associates identified in its MSS for the BSUEA that there is residual capacity within the sanitary sewers serving Mattamy lands west to new Greenbank road based on a Stantec (2015) hydrodynamic model of trunk sanitary sewers (450 mm in diameter and greater), which in turn demonstrated that the existing downstream trunk system could accommodate the flows generated with no risk of surcharging or basement flooding. Consequently, Stantec concluded that system upgrades were not required. The residual capacity in the sanitary sewer downstream of Greenbank Road was estimated at 74.0L/s (Refer to **Appendix E.1** for details).

# 5.0 STORMWATER MANAGEMENT AND SERVICING

The following sections describe the stormwater management (SWM) design for 3718 Greenbank Road in accordance with the background documents and governing criteria.

## 5.1 PROPOSED CONDITIONS

The proposed residential development encompasses approximately 1.2 ha of land and consists of 90 stacked townhomes and outdoor amenity areas. J.F. Sabourin and Associates Inc. (JFSA) were retained by David Schaeffer Engineering Ltd. (DSEL) to prepare a Stormwater Management (SWM) Plan for the adjacent Ridge (Brazeau) Subdivision.

The storm sewer collection system for the proposed site will discharge to an existing manhole (existing MH 225 within Obsidian Street) located near the northwest corner of the site, at the intersection of Obsidian Street and Epoch Street. This manhole is part of The Ridge's stormwater collections system which eventually discharges to a dry pond (referred to as the Drummond Pond) located in the northwest corner of the subdivision. This pond provides stormwater quantity control for the subdivision. OGS units upstream of the pond provide stormwater quality control for the subdivision.

Detailed grading of the site has been designed to direct emergency overland flows above the 100-year event northwards through other property owned by the applicant, and ultimately Obsidian Street which runs along the west side of the subject site.

Minor grassed areas at the boundary of the subject site cannot be graded to drain internally and as such will sheet drain uncontrolled offsite. The uncontrolled areas on the west side of the site will drain to the existing Obsidian Street ROW and those on the east side of the site will drain to the Future Greenbank Road ROW.

## 5.2 DESIGN CRITERIA AND CONSTRAINTS

The design criteria and guidelines used for the stormwater management of the subject subdivision are those that were developed in the background documents by JFSA, DSEL and JLR in the BSUEA MSS with iterations as noted in the 3718 Greenbank Road Functional Servicing Report, as well as those provided in the October 2012 *City of Ottawa Sewer Design Guidelines* and subsequent technical memorandums and generally accepted stormwater management design guidelines.

The SWM design will ensure that the majority of storm runoff within the site be controlled, and site release to Obsidian Street restricted to the peak flow rate of 170 L/s for the 2-Year storm event and peak flow rate of 175 L/s for the 100-Year storm as calculated using a proportional method for the site. Details can be found in Section 5.3.1. No improvements to downstream infrastructure will be required to service the site.



Storm runoff within the site will be controlled and directed to an existing storm control point identified as MH 225 in the JFSA SWM model. MH 225 has a maximum upstream Hydraulic Grade Line of 103.572m based on JFSA's simulation under the 100-year 3-hour Chicago storm, 100-year 24-hour SCS Type II storm, and the three historical events, and 103.592m under the climate change scenario.

As identified by the approved FSR and the City of Ottawa's Sewer Design Guidelines, the minor and major system stormwater management design criteria and constraints will consist of:

### 5.2.1 Minor System

a) Storm sewers are to be designed to provide a minimum 2-year level of service.

b) The 100-year hydraulic grade line (HGL) within the development minor systems must be maintained at least 0.3 m below the underside of footing elevation where gravity house connections are installed.

c) For less frequent storms (i.e. larger than 1:2 year), the minor system shall, if required, be limited with the use of inlet control devices to prevent excessive hydraulic surcharges and to maximize the use of surface storage on the road where desired.

d) Catchbasins on the road are to be equipped with City standard type S19 (fish) grates or City standard type S22 side inlets, and grates for catchbasins in rear yards, park and open spaces with pedestrian traffic are to be City standard type S19, S30 and S31.

e) Single catchbasins are to be equipped with 200 mm minimum lead pipes, and double catchbasins are to be equipped with 250 mm minimum lead pipes.

f) Rear yard catchbasins are to be equipped with 250 mm minimum lead pipes. Catchbasins installed on the street, where rear yard catchbasins connect to the main storm sewer through the catchbasin, are to be equipped with 250 mm minimum lead pipes for both single and double catchbasins.

g) Under full flow conditions, the allowable velocity in storm sewers is to be no less than 0.80 m/s and no greater than 3.0 m/s. Where velocities over 3.0 m/s are proposed, provisions shall be made to protect against displacement of sewers by sudden jarring or movement. Velocities greater than 6 m/s are not permitted.

### 5.2.2 Major System

a) The major system shall be designed with enough road surface storage to allow the excess runoff of a 100-year storm to be retained within road ponding areas where desired.

b) Inlet control devices to be sized such that they do not create surface ponding on the road during the 2-year design storm on local roads (5-year design storm on collector and 10-year design storm on arterial roads); it should be noted that surface ponding over grates is present during rainfall under any design, as an appropriate depth of water is required for runoff to enter the grate.

c) Roof leaders shall be installed to direct the runoff to splash pads and on to grassed areas.

d) For the 100-year storm, the maximum total depth of water (static + dynamic) on all roads shall not exceed 35 cm at the gutter.

e) During the 100-year + 20% stress test, the maximum extent of surface water on streets, rear yards, public space and parking areas shall not touch the building envelope.

f) When catch basins are installed in rear yards, safe overland flow routes are to be provided to allow the release of excess flows from such areas.

g) The product of the maximum flow depths on streets and maximum flow velocity must be less than 0.60 $m^2/s$ on all roads.

h) The excess major system flows up to the 100-year return period are to be retained on-site in development blocks such as the proposed development.

i) There must be at least 15 cm of vertical clearance between the spill elevation on the street and the ground elevation at the nearest building envelope that is in the proximity of the flow route or ponding area.

j) There must be at least 30 cm of vertical clearance between the rear yard spill elevation and the ground elevation at the adjacent building envelope.

k) Provide adequate emergency overflow conveyance off-site to ensure water will spill to downstream rights-of-way in the event of a blockage.

### 5.2.3 Allowable Release Rate

Based on JFSA's Stormwater Management Plan for the Ridge (Brazeau) subdivision and iterated within the 3718 Greenbank Road Functional Servicing Study, the subject site is to control the 100-year flow on site and the minor system for the total site will be restricted to the 100-year storm event release rate of 175 L/s. The 2-year minor system outflow is to be controlled to 170 L/s. The noted flow rates are exclusively for the previously identified 1.22ha commercial development parcel as per the FSR.

**Table 5–1 Target Release Rate**

| Study | Storm Event | Total |
|---|---|---|
| 3718 Greenbank FSR (Commercial) | 2-Year Flow Rate (L/s) | **170** |
| | 100-Year Flow Rate (L/s) | **175** |

# 5.3 MODELING METHODOLOGY

## 5.3.1 Modeling Rationale

A hydrologic/hydraulic model was completed with PCSWMM for the sewers and roadways/parking areas within the proposed development, accounting for the estimated major and minor systems to evaluate the storm sewer infrastructure and ensure release rates meet the previously defined target criteria. The use of PCSWMM for modeling of the site hydrology and hydraulics allowed for an analysis of the system response during various storm events. The following assumptions were applied to the model:

- Hydrologic parameters as per Ottawa Sewer Design Guidelines, including Horton infiltration, Manning's 'n', and depression storage values.
- 3-hour Chicago distributions and 12-hour SCS Type II distributions for 2-year and 100-year storm events were used to evaluate the urban component of the dual drainage (i.e. minor system capture rates, total overland flow depth, hydraulic grade line (HGL), etc.).
- A 22 mm, 4-hour Chicago storm was used to evaluate the performance of the proposed infiltration measures to coincide with values presented in the MSS.
- The 'climate change' scenarios created by adding 20% of the individual intensity values of the 100-year 3-hour Chicago storm and the 100-year 12-hour SCS Type II storm at their specified time step were used as an analytical tool to establish the function of the system under extreme events.
- Minor system capture rates within the proposed development were restricted to the 2-year peak runoff rate.

## 5.3.2 SWMM Dual Drainage Methodology

The proposed development is modeled in one PCSWMM model as a dual conduit system, where:

1) The minor system consists of storm sewers, represented by circular conduits, and manholes, represented by storage nodes;

2) The major system consists of overland spills, represented by weirs and irregular conduits using street-shaped cross-sections to represent the assumed overland road network with streets at varying slopes, and catch basins with surface ponding areas, represented by storage nodes.

The two systems are connected by outlet/orifice link objects, which represent inlet control devices (ICDs), that connect storage nodes representing catch basins to storage nodes representing manholes. Subcatchments are linked to the nodes representing catch basins and ponding areas so that generated hydrographs are directed there firstly.

### 5.3.3 Model Input Parameters

**Drawing SD-1** summarizes the discretized subcatchments used in the analysis of the proposed development. All parameters were assigned as per applicable Ottawa Sewer Design Guidelines (OSDG); Ontario Ministry of the Environment, Conservation, and Parks (MECP); and background report requirements.

#### 5.3.3.1 Hydrologic Parameters

Key parameters for the proposed development areas are summarized below, while example input files are provided for the 100-year, 3-hour Chicago storm in **Appendix D** which indicate all other parameters. For all other input files and results of storm scenarios, please examine the electronic model files located on the digital media provided with this report. This analysis was performed using PCSWMM, which is a front-end GUI to the EPA-SWMM engine. Model files can be examined in any program which can read EPA-SWMM files version 5.1.014.

**Table 5–2**: presents the general subcatchment parameters used for the proposed development.

**Table 5–2: General Subcatchment Parameters**

| Parameter | Value |
|---|---|
| Infiltration Method | Horton |
| Max. Infil. Rate (mm/hr) | 76.2 |
| Min. Infil. Rate (mm/hr) | 13.2 |
| Decay Constant (1/hr) | 4.14 |
| N Imperv | 0.013 |
| N Perv | 0.25 |
| Dstore Imperv (mm) | 1.57 |
| Dstore Perv (mm) | 4.67 |
| Zero Imperv (%) | 0 |

**Table 5–3** presents the individual parameters that vary for each of the proposed subcatchments in the model. Subcatchment width parameters were determined by multiplying each subcatchment's area in hectares by 225. Subcatchment imperviousness was measured directly from the site plan within AutoCAD considering all paved access, sidewalks, and roof areas as entirely impervious areas, and remaining grassed areas as entirely pervious. Weighted runoff 'C' coefficients were determined for each subcatchment considering impervious areas as C=0.90, and pervious as C=0.20.



**Table 5–3: Individual Subcatchment Parameters**

| Subcatchment ID | Area (ha) | Width (m) | Slope (%) | % Impervious |
|---|---|---|---|---|
| L200A | 0.220 | 49.4 | 3.0 | 85.7 |
| L201A | 0.165 | 37.1 | 3.0 | 85.7 |
| L201B | 0.159 | 35.7 | 3.0 | 85.7 |
| L201C | 0.117 | 26.4 | 3.0 | 85.7 |
| L202A | 0.072 | 16.1 | 3.0 | 88.6 |
| L202B | 0.087 | 19.6 | 2.0 | 81.4 |
| L203A | 0.111 | 25.1 | 1.5 | 7.1 |
| UNC-1 | 0.065 | 14.5 | 3.0 | 71.4 |
| UNC-2 | 0.053 | 11.8 | 3.0 | 71.4 |
| UNC-3 | 0.080 | 18.0 | 3.0 | 71.4 |
| UNC-4 | 0.079 | 17.7 | 3.0 | 71.4 |

### 5.3.3.2 Surface and Subsurface Storage Parameters

**Table 5-4** summarizes the storage node parameters used in the model. Storage nodes represent the depth of the proposed catch basin barrel plus an additional depth to represent the maximum allowable surface water ponding depth. Surface storage was estimated based on surface models created in AutoCAD for the proposed grading plan. See **Drawing SD-1** for surface storage depths, areas, and volumes.

**Table 5–4: Surface Storage Parameters**

| Subcatchment ID | Structure | Invert Elevation (m) | Rim Elevation (m) | CB Barrel Depth (m) | Ponding Depth at Spill (m) | Ponding Area (m2) | Ponding Volume (m3) |
|---|---|---|---|---|---|---|---|
| L200A | CB 200 | 104.76 | 106.14 | 1.38 | 0.20 | 161.7 | 10.8 |
| L201A | CBMH201A | 104.27 | 106.19 | 1.92 | 0.18 | 171.8 | 10.3 |
| L201B | CB 201B | 105.81 | 107.19 | 1.38 | - | - | - |
| L201C | CB 201C | 104.67 | 106.05 | 1.38 | 0.20 | 180.1 | 12.0 |
| L202A | CB 202A | 104.60 | 105.98 | 1.38 | 0.20 | 153.9 | 10.3 |
| L202B | CB 202B | 104.62 | 106.00 | 1.38 | 0.18 | 195.3 | 11.7 |
| L203A | CBMH203A | 105.34 | 106.72 | 1.38 | - | - | - |

Runoff captured from on-site catch basins is directed to a subsurface storage facility composed of modular perforated chambers within a clear stone bedding (StormTech Model SC-740). Chambers within the facility are anticipated to maintain an invert of 103.70m, with top of chamber and top of clear stone elevations set at 104.46 and 104.62m respectively. The overall facility has been sized to provide an anticipated bottom



area of 500m2, and is to provide a total storage volume of 500m3 at the top of stone elevation. Storage volumes within clear stone areas below the outgoing facility invert of 103.70 have been modeled as initially full of water for conservative analysis of the 2-year storm and larger event scenarios.

The facility is to be equipped with a 200mm outlet pipe directed to receiving on-site sewers, with discharge ultimately directed to the Obsidian Street storm sewer system. No building foundation drain connections are proposed to occur upstream of the proposed subsurface storage facility. In the event of blockage or storm event exceeding the design 100-year storm, an additional overflow sewer connection is proposed near the top of the facility (elevation 104.60m) to provide additional relief for surface catch basins. This pipe is unused for all modeled storm scenarios up to and including the 100-year storm event.

#### 5.3.3.3 Hydraulic Parameters

As per the October 2012 City of Ottawa Sewer Design Guidelines, Manning's roughness values of 0.013 were used for sewer modeling and overland flow corridors representing roadways. Flow over grassed areas were modeled using a Manning's roughness value of 0.25. The storm sewers within the proposed development were modeled to estimate flow capacities and hydraulic grade lines (HGLs) in the proposed condition. The proposed storm sewer design sheet is included in **Appendix D**.

Exit losses at manholes were set for all pipe segments based on the flow angle through the structure. Exit losses were assigned as per City guidelines (Appendix 6b of the guidelines), see **Table 5-5** below.

**Table 5–5: Exit Loss Coefficients for Bends at Manholes**

| Degrees | Coefficient |
|---|---|
| 11 | 0.060 |
| 22 | 0.140 |
| 30 | 0.210 |
| 45 | 0.390 |
| 60 | 0.640 |
| 90 | 1.320 |
| 180 | 0.020 |

The proposed development's storm sewers were sized to convey runoff from a 2-Year storm using rational method calculations. The rational method design sheet can be found in **Appendix D**.

## 5.4 MODEL RESULTS AND DISCUSSION

The following section summarizes the key hydrologic and hydraulic model results. For detailed model results or inputs please refer to the example input files in **Appendix D** and the PCSWMM model on the enclosed digital files.

### 5.4.1 Hydrology

**Table 5–6** summarizes the orifice link maximum flow rates and heads across the proposed development under the 2-year and 100-year storm scenarios. Discharge curves are as provided by the manufacturer for the selected IPEX Tempest ICDs. Note that several catch basins have not been provided with an inlet control device. These catch basins are controlled by their respective catch basin lead sizing to ensure full capture of 2-year storm event runoff.

**Table 5–6 : Proposed ICD Schedule**

| Structure | Invert | ICD Type | 100yr Head (m) | 100yr Flow (L/s) | 2yr Head (m) | 2yr Flow (L/s) |
|---|---|---|---|---|---|---|
| CB 202A | 104.60 | IPEX TEMPEST HF 127mm | 1.22 | 34.6 | 0.24 | 13.6 |
| CB 202B | 104.62 | IPEX TEMPEST HF 102mm | 1.51 | 25.0 | 0.58 | 15.0 |

#### 5.4.1.1 Uncontrolled Area

Due to grading restrictions, several subcatchments have been designed without a storage component. These catchment areas discharge off-site uncontrolled to the adjacent streets surrounding the proposed site. Peak discharge from uncontrolled areas UNC-3 and 4 is directed to the future Greenbank Road ROW, whereas areas UNC-1 and 2 are directed to the Obsidian Street ROW.

As noted in the SWM Reports for The Ridge and Drummond Subdivisions (JFSA 2020 and 2022), drainage to Greenbank Road is tributary the Clarke wet pond SWMF, whereas drainage to Obsidian (as well as the site minor system outlet) discharges to a downstream dry pond SWMF and oil/grit separator at Borrisokane Road. Both facilities ultimately outlet to the Jock River. As identified in the JFSA report for the Drummond Subdivision, a substantial flow reduction is proposed for peak flows to the Clarke Pond via the Half Moon Bay Trunk Sewer (approximately 2610L/s during the 100-Year 3hr Chicago event, and 1380L/s during the 100yr 24hr SCS event). Per report excerpts within **Appendix E**, it can be seen that the Clarke Pond can receive peak flows and volumes from the minor uncontrolled areas along the future realigned Greenbank Road without further need for flow control. Uncontrolled areas will be coordinated with the design of the future realigned Greenbank Road.

Peak flow rates from uncontrolled areas to Obsidian Street have been considered in the overall allowable flow allotment for the site, whereas outflow to Greenbank Road is to be considered in future roadway design.

### 5.4.2 Hydraulic Grade Line

A design sheet has been prepared for the proposed storm sewer in **Appendix D.1** demonstrating all on-site sewers remain free-flowing (HGLs within the sewer) using an uncontrolled 2-year rate.

**Table 5–7** below summarizes the hydraulic grade line (HGL) results for the subject site's proposed minor system using the worst case storm event distribution. Per the City of Ottawa Sewer Design Guidelines (2012), a building's underside of footing (USF) must be a minimum 300 mm above the 100-year HGL in the nearest upstream storm manhole. In addition, the buildings USF must also be above the HGL resulting from the 100-year + 20% stress test event.

**Table 5–7: Hydraulic Grade Line Results**

| Block # | USF (m) | Adjacent Upstream MH ID | Adjacent 100-Year HGL (m) | Freeboard (m) | Adjacent 100-Year +20% HGL (m) | Freeboard (m) |
|---|---|---|---|---|---|---|
| 1 | 104.81 | 105 | 104.37 | 0.44 | 104.37 | 0.44 |
| 2 | 105.53 | 104 | 104.28 | 1.25 | 104.28 | 1.25 |
| 3 | 106.18 | 103 | 104.00 | 2.18 | 104.00 | 2.18 |
| 4 | 104.63 | 102 | 103.63 | 1.00 | 103.93 | 0.70 |
| 5 | 106.65 | 103 | 104.00 | 2.65 | 104.00 | 2.65 |
| | | EXMH | 103.57 | | 103.59 | |

Model results indicate that there is sufficient clearance between the 100-year and 100-year +20% stress test HGLs and the proposed USFs.

### 5.4.3 Overland Flow

**Table 5-8** below presents the total surface water depths (static ponding depth + dynamic flow) on the proposed roads/parking areas for the 2-year and 100-year design storm distribution and the 100-year +20% climate change storm. In no case do surface water depths on roadways exceed 0.35m during the design storm events.

**Table 5–8: Maximum Static and Dynamic Water Depths**

| Storage Node ID | Top of Grate Elevation (m) | Lowest Adjacent Building Elevation (m) | 2-Year | | 100-Year | | 100-Year + 20% | |
|---|---|---|---|---|---|---|---|---|
| | | | Max Surface HGL (m) | Total Surface Ponding Depth (m) | Max Surface HGL (m) | Total Surface Ponding Depth (m) | Max Surface HGL (m) | Total Surface Ponding Depth (m) |
| CB 200A | 106.14 | 106.68 | 105.09 | 0.00 | 106.22 | 0.08 | 106.34 | 0.20 |
| CBMH201A | 106.19 | 106.68 | 104.62 | 0.00 | 105.24 | 0.00 | 105.53 | 0.00 |
| CB 201B* | 107.19 | 107.40 | 105.95 | 0.00 | 106.39 | 0.00 | 106.71 | 0.00 |
| CB 201C | 106.05 | 106.48 | 104.84 | 0.00 | 105.68 | 0.00 | 106.11 | 0.06 |
| CB 202A | 105.98 | 106.45 | 104.84 | 0.00 | 105.82 | 0.00 | 106.05 | 0.07 |
| CB 202B | 106.00 | 106.45 | 105.20 | 0.00 | 106.13 | 0.13 | 106.18 | 0.18 |

| Storage Node ID | Top of Grate Elevation (m) | Lowest Adjacent Building Elevation (m) | 2-Year | | 100-Year | | 100-Year + 20% | |
|---|---|---|---|---|---|---|---|---|
| | | | Max Surface HGL (m) | Total Surface Ponding Depth (m) | Max Surface HGL (m) | Total Surface Ponding Depth (m) | Max Surface HGL (m) | Total Surface Ponding Depth (m) |
| CBMH203A* | 106.72 | 106.90 | 105.36 | 0.00 | 105.46 | 0.00 | 105.50 | 0.00 |

*Occurs within a managed landscaped area - not subject to road surface ponding.

Proposed site grading is such that should catch basin discharge orifices become blocked, flows will spill from catch basin grates overland to the site accesses in the northwest corner of the property, and out to Obsidian Street. Overland flows progress from Obsidian westward along existing Haiku Street.

### 5.4.4 Peak System Outflows

As identified in section 5.4.1.1 above, peak runoff from areas tributary to the realigned Greenbank Road proceed to a separate outfall designed with available capacity to receive such flows, and as such do not contribute directly to the allowable release rate to Obsidian Street. Peak discharge from the development is summarized in the table below:

**Table 5–9: Peak Site Outflows**

| | 2-Year | 100-Year | 100-Year + 20% |
|---|---|---|---|
| Minor System | 33.0 | 75.3 | 247.2 |
| Major System | 0 | 0 | 0 |
| UNC-1 | 9.9 | 29.1 | 36.3 |
| UNC-2 | 8.1 | 23.7 | 29.3 |
| **Total** | **51.0** | **128.1** | **312.8** |
| **Allowable** | **170.0** | **175.0** | **-** |
| | | | |
| **Greenbank** | **24.3** | **71.6** | **88.5** |

Peak discharge from the development is within the allowable rate for the 2-year and 100-year storm events.

## 5.5 QUALITY CONTROL

Quality treatment of runoff will be partially provided through provision of an extended depth clear stone layer below the proposed underground SWM facility as highlighted in **Section 5.6** below. This system has been sized to collect and infiltrate runoff from first flush rainfall events up to and including the 22mm rainfall event to meet water balance requirements noted below. In addition, further quality control for the overall development will be provided by the existing downstream oil-grit separator (OGS) for The Ridge subdivision located downstream of the proposed development and discharging to the Jock River via an existing ditch



on the west side of Borrisokane Road. The oil-and-grit separator has previously been sized to ensure 80% Total Suspended Solids (TSS) removal for the development inclusive of the proposed site. For more details regarding the OGS units within the downstream development, please refer to JFSA's July 2020, Pond Design Brief for the Ridge (Brazeau) Subdivision.

Based on assumptions made during design of the downstream phases, site development lands were assumed to contribute at an overall average imperviousness of 78.6% (C=0.75), and the OGS was sufficiently sized to provide the appropriate level of control at this value. The proposed development imperviousness is approximately 75%, which is within the assumed parameters for downstream OGS sizing.

According to Table 3.2 of the MOE Stormwater Management Planning and Design Manual, the storage volume required to achieve 80% long-term S.S. removal in an infiltration type system such as the proposed clear stone infiltration gallery is approximately 35 m3/impervious ha. The proposed 1.22ha development would then require approximately 42.7m3 of storage to provide quality control for the region. Per **Table 5-10** below, the proposed development provides approximately 180m3 of storage.

It is anticipated that the high level of treatment provided by implementation of the proposed on-site infiltration system (22mm of the required 25mm first flush storm event) in conjunction with the existing OGS via treatment train will provide more than adequate quality control to meet design criteria for the development.

## 5.6 WATER BALANCE

As a Best Management Practices (BMP) approach the Barrhaven South Urban Expansion Area (J.L. Richards & Associates, 2018) MSS requires the capture and infiltration of stormwater via exfiltration system installed on local roads, such as the private roads within the subject site, where the surface runoff is not impacted by the City's winter road salting program to meet pre-development water balance criteria. To avoid groundwater contamination, only salt-free agents may be used on site for winter maintenance of snow and ice. This includes, but is not limited to, all drive aisles, parking areas, sidewalks, and pathways.

The City and RVCA determined that predevelopment infiltration levels should be maintained under post development conditions and that the infiltration should be provided across the development. JFSA determined the infiltration target for the site to be of the average simulated annual rainfall volume (552.0 mm), which is calculated to be 220.8mm annually as reported by JFSA in **Appendix E.** Similar to the BSUEA MSS, a 22mm storm event was selected for application within the current site plan to conservatively address post-development infiltration targets and water balance concerns.

An infiltration gallery has been proposed to be located below the stormwater management area of the subject site (Stormtech chambers), the proposed location of which is highlighted on **Drawing SD-1**.

For this exercise, the infiltration gallery has been conservatively sized assuming no infiltration during rain events (seepage = 0 mm/hr). The gallery will consist of a 900 mm clear stone layer with dimensions as identified on **Drawing SSP-1**. Minimum 600mm deep sumps (as per City of Ottawa standards) will be



installed in upstream catch basins in order to prevent/mitigate debris and potential oils from entering the system. ICDs within proposed catch basins are proposed as Ipex Tempest models equipped with floatable controls to mitigate oil/debris incursion to the infiltration gallery.

**Table 5–10: 22mm Event Simulated Infiltration Volumes**

| Location | Clear Stone Depth (m) | Gallery Area (m2) | Clear Stone Porosity | Available Volume ($m^3$) | Used Volume ($m^3$) |
|---|---|---|---|---|---|
| Stormtech Chamber Bedding | 0.90 | 500 | 0.4 | 180.0 | 162.0 |

As can be seen in the above table, approximately 90% of the available volume in the gallery will be used in the 22mm event. There is no modeled outflow from controlled areas of the site during the 22mm event.

The Geotechnical Investigation for the adjacent residential development prepared by Paterson Group (May 2023) identifies hydraulic conductivity and infiltration values assumed to be roughly consistent with the proposed site. Table 2 on the Paterson report outlines infiltration rates determined through Pask Permeameter testing completed within six test pits for general coverage of the site (see table duplicated from the Paterson report below for reference).

**Table 5–11: Summary of Field Saturated Hydraulic Conductivity Values and Infiltration Rates**

| Test Hole ID | Ground Surface Elevation (m) | Depth of Testing (m) | Kfs (m/sec) | Infiltration Rate (mm/hr) | Soil Type |
|---|---|---|---|---|---|
| TP1-23 | 103.01 | 2.7 | Too Fast to Test | | Silty to Medium Sand |
| | | 3.2 | $3.2x10^{-4}$ | 216 | |
| TP2-23 | 103.87 | 2.6 | $9.6x10^{-5}$ | 156 | Silty Sand |
| | | 3.2 | Too Fast to Test | | |
| TP3-23 | 104.37 | 2.5 | $4.3x10^{-5}$ | 126 | Silty Sand |
| | | 3.0 | $9.6x10^{-5}$ | 156 | |
| TP4-23 | 104.50 | 2.5 | $9.6x10^{-5}$ | 156 | Silty Sand |
| | | 3.0 | $9.6x10^{-5}$ | 156 | |
| TP5-23 | 104.70 | 2.5 | $3.2x10^{-4}$ | 216 | Silty Sand with Gravel, Cobbles, and Occasional Boulders |
| | | 3.3 | Too Fast to Test | | |
| TP6-23 | 104.94 | 2.5 | $1.9x10^{-4}$ | 188 | Silty to Medium Sand |
| | | 3.2 | $2.2x10^{-4}$ | 195 | |

Infiltration rate testing at the lowest depth was used to assess inter-event drawdown times for the infiltration gallery. A safety factor of 3.5 was applied to the minimum infiltration rate at the lower elevation

(156mm/hr) per suggestion of the *Low Impact Development Stormwater Management Planning and Design Guide* (Credit Valley Conservation, 2010), and was determined to be approximately 44.6mm/hr. Based on this rate, the known bottom area of the gallery, as well as anticipated volume retained per **Table 5-11** above, estimated drawdown rates have been determined for the gallery in the table below:

**Table 5–12: 22mm Event Estimated Drawdown Times**

| Location | Bottom Area (m2) | Porosity | Used Volume ($m^3$) | Infiltration Rate (mm/hr) | Drawdown Time (hr) |
|---|---|---|---|---|---|
| Stormtech Chamber Bedding | 500 | 0.4 | 162 | 44.6 | 18.2 |

Anticipated drawdown times are less than the required 48 hours for storm events up to and including 22mm of overall rainfall depth.

### 5.6.1 Monitoring During Construction

The following practices are recommended during construction:

- Surface flows to be directed away from clear stone bedding as it is being installed prior to backfill;
- Fueling of machinery to be done at designated locations away from proposed infiltration locations;
- Storage of machinery and material, fill, etc. to be done in designated areas away proposed infiltration locations;
- Equipment movement through proposed infiltration locations to be controlled;
- Regular inspection and maintenance of erosion control features corresponding to catch basins, catch basin manholes, and perforated subdrains.
- The infiltration system is to be jet flushed and inspected via CCTV upon construction completion prior to activation.

# 6.0 GEOTECHNICAL CONSIDERATIONS AND GRADING

## 6.1 GEOTECHNICAL INVESTIGATION

A geotechnical investigation report for the development was completed by Paterson Group on March 30, 2021, and revised in May 2023. The geotechnical investigation report is included in **Appendix E.3**.

The objective of the investigation was to determine the subsoil and groundwater conditions at this site by means of a borehole program and to provide geotechnical recommendations for the design of the proposed development based on the results on the boreholes and other soil information available.

Based on the Paterson's report, the subject site is a former agricultural land. The bulk of the current phase of the proposed development has been recently cleared of topsoil which has been stockpiled in several piles across the site. Generally, the ground surface across the subject site is relatively flat within the central portion and slopes up towards the edges. It should be noted that parts of the subject site had undergone excavation and in-filling activities as part of a previous sand extraction operation.

Generally, the subsurface profile across the subject site consists of varying amounts of fill consisting of silty sand mixed with occasional silty clay, gravel and cobbles. Practical refusal to augering was encountered at a range between 4.6 m and 8.3 m below existing ground surface.

### 6.1.1 Groundwater Control

It is anticipated that groundwater infiltration into the excavations should be low to moderate and controllable using open sumps. The contractor should be prepared to direct water away from all bearing surfaces and subgrades, regardless of the source, to prevent disturbance to the founding medium.

A temporary Ministry of the Environment, Conservation and Parks (MECP) permit to take water (PTTW) may be required for this project if more than 400,000 L/day of ground and/or surface water is to be pumped during the construction phase. A minimum of 4 to 5 months should be allowed for completion of the PTTW application package and issuance of the permit by the MECP.

For typical ground or surface water volumes being pumped during the construction phase, between 50,000 to 400,000 L/day, it is required to register on the Environmental Activity and Sector Registry (EASR). A minimum of two to four weeks should be allotted for completion of the EASR registration and the Water Taking and Discharge Plan to be prepared by a Qualified Person as stipulated under O.Reg. 63/16. Requirements for a PTTW or EASR registration are to be identified by the geotechnical consultant.

## 6.2 GRADING PLAN

The proposed development site measures 1.22ha in area. The existing topography across the site generally slopes in the northwest direction with an approximate 3 to 4 m elevation change from the southeast property line to the northwest property line.

A detailed Grading Plan (**Drawing GP-1)** has been provided to satisfy the stormwater management requirements, adhere to permissible grade raise restrictions, and provide for minimum cover requirements for the storm and sanitary sewers where possible. Site grading has been established to provide emergency overland flow routes required for stormwater management in accordance with City of Ottawa requirements.

The site maintains emergency overland flow routes through the previous phase 8 development via the onsite roadway and ultimately directed toward the Obsidian Street ROW in accordance with the subdivision design report. A primary grading consideration for this development is the interface between the subject lands and the future Greenbank Road ROW. The proposed elevations along the property line shared with the future Greenbank Road ROW have been coordinated with the design team for Greenbank Road for this submission. As the design for Greenbank Road is currently ongoing, further communication with the City of Ottawa and the design team for Greenbank Road will be required throughout the design stage to ensure the proposed site development utilizes the latest Greenbank Road profiles and resulting property line elevations.

It should be noted that parts of the subject site have undergone excavation and in-filling activities as part of a previous sand extraction operation.

# 7.0 APPROVALS

An Environmental Compliance Approval (ECA) may be required from the Ontario Ministry of the Environment, Conservation and Parks (MECP) for the proposed works should the site be operated as multiple separate entities along with downstream infrastructure in Phase 8. If the site remains under single ownership, it will comply with the exemptions from O.Reg. 525/98 and an ECA for traditional storm and sanitary sewers as well as the infiltration system would not be required. These exemptions require that the site is not on industrial land or for industrial use, would drain to an approved outlet and would be under single ownership. If, however, the land will be divided into separate legal properties either through severance or through the condominium process, approvals for the shared on-site storm sewers can be obtained through the EASR process. Sanitary sewers would continue to be exempt per the OWRA, as they continue to be discharged ultimately to municipal sewers. The Rideau Valley Conservation Authority will need to be consulted in order to obtain municipal approval for site development.

An MECP Permit to Take Water (PTTW) or registration on the Environmental Activity and Sector Registry may be required as noted in **Section 5.0** above.

No other approval requirements from other regulatory agencies have been identified at the time of this report.

# 8.0 EROSION CONTROL

In order to protect downstream water quality and prevent sediment build up in catch basins and storm sewers, erosion and sediment control measures must be implemented during construction. The following recommendations will be included in the contract documents and communicated to the Contractor.

1. Implement best management practices to provide appropriate protection of the existing and proposed drainage system and the receiving water course(s).
2. Limit the extent of the exposed soils at any given time.
3. Re-vegetate exposed areas as soon as possible.
4. Minimize the area to be cleared and grubbed.
5. Protect exposed slopes with geotextiles, geogrid, or synthetic mulches.
6. Provide sediment traps and basins during dewatering works.
7. Install sediment traps (such as SiltSack® by Terrafix) between catch basins and frames.
8. Schedule the construction works at times which avoid flooding due to seasonal rains.

The Contractor will also be required to complete inspections and guarantee the proper performance of their erosion and sediment control measures at least after every rainfall. The inspections are to include:

- Verification that water is not flowing under silt barriers.
- Cleaning and changing the sediment traps placed on catch basins.

# 9.0 CONCLUSIONS AND RECOMMENDATIONS

## 9.1 POTABLE WATER SERVICING

The PCSWMM EPANET Water model demonstrates that the pressures in the proposed development's watermain fall within the range of target system pressures under both domestic demand and fire flow scenarios.

The subject lands can be adequately serviced by 200mm watermain connection through the previous Phase 8 development and 300mm diameter watermain on Obsidian Street. The private distribution network, consisting of 200 mm diameter watermains with lopped connection, will provide sufficient fire flow to meet FUS requirements. System pressures will fall within the City of Ottawa Water Distribution Guidelines.

## 9.2 WASTEWATER SERVICING

The new phase 7 development is anticipated to generate an additional sanitary flow of 3.2 L/s. This in combination with the approved sanitary flow from the previous Phase 8 development equates to a total sanitary contribution of approximately 11L/s to the existing 200mm diameter sanitary sewer on Obsidian Street.

JLR Associates identified in its MSS for BSUEA stated that there is residual capacity within the sanitary sewers draining Mattamy lands west to new Greenbank Road based on a Stantec (2015) hydrodynamic model of trunk sanitary sewers (450 mm in diameter and greater), which in turn demonstrated that the existing downstream trunk system could accommodate the flows generated with no risk of surcharging or basement flooding.

## 9.3 STORMWATER MANAGEMENT AND SERVICING

The following summarizes the stormwater management conclusions for the proposed development:

- The proposed stormwater management plan is in compliance with the objectives specified in the City of Ottawa Sewer Design Guidelines and in the background reports for the site.
- The minor system (storm sewers) is sized to convey the 2-year storm event under free-flow conditions using City of Ottawa I-D-F parameters.
- ICDs installed on the proposed catch basins force flows in excess of the 2-year event to be conveyed by overland paved areas and stored within proposed parking and access regions.
- Quality control for the development has been provided by an existing downstream oil-grit separator in conjunction with the installation of an on-site infiltration system.

Clear stone storage for water retention and infiltration has been proposed to be located below the proposed quantity control SWMF within the subject site to meet water balance requirements of the BSUEA. The stormwater drainage plan has been designed to achieve stormwater servicing that is free of conflict with other services, respects the stormwater management requirement listed in background studies and in conformity with the City of Ottawa guidelines.

## 9.4 GRADING

The existing topography across the site generally slopes in the northwest direction with an approximate 3 to 4 m elevation change from the southeast property line to the northwest property line. A detailed Grading Plan has been provided to satisfy the stormwater management requirements, adhere to permissible grade raise restrictions, and provide for minimum cover requirements for the storm and sanitary sewers where possible. Terracing along the southeast property line is proposed to tie into existing grades within the adjacent property to the south.

## 9.5 APPROVALS/PERMITS

Approvals for shared storm infrastructure will be required via EASR through the Ontario Ministry of the Environment, Conservation and Parks (MECP) for the proposed works should the Phase 7 property be managed independently from receiving sewers within Phase 8. An MECP Permit to Take Water (PTTW) or registration on the Environmental Activity and Sector Registry may be required as noted in Section 6.0 above. No other approval requirements from other regulatory agencies were identified at the time of this report. The Rideau Valley Conservation Authority will need to be consulted to obtain municipal approval for site development.

# APPENDICES

# Appendix A POTABLE WATER SERVICING


## A.1 BOUNDARY CONDITIONS - CITY OF OTTAWA

# Boundary Conditions
# Half Moon Bay – Phase 7

## Provided Information

| Scenario | Demand | |
|---|---|---|
| | L/min | L/s |
| Average Daily Demand | 47 | 0.79 |
| Maximum Daily Demand | 118 | 1.97 |
| Peak Hour | 260 | 4.33 |
| Fire Flow Demand #1 | 10,000 | 166.67 |
| Fire Flow Demand #2 | 15,000 | 250.00 |

## Location

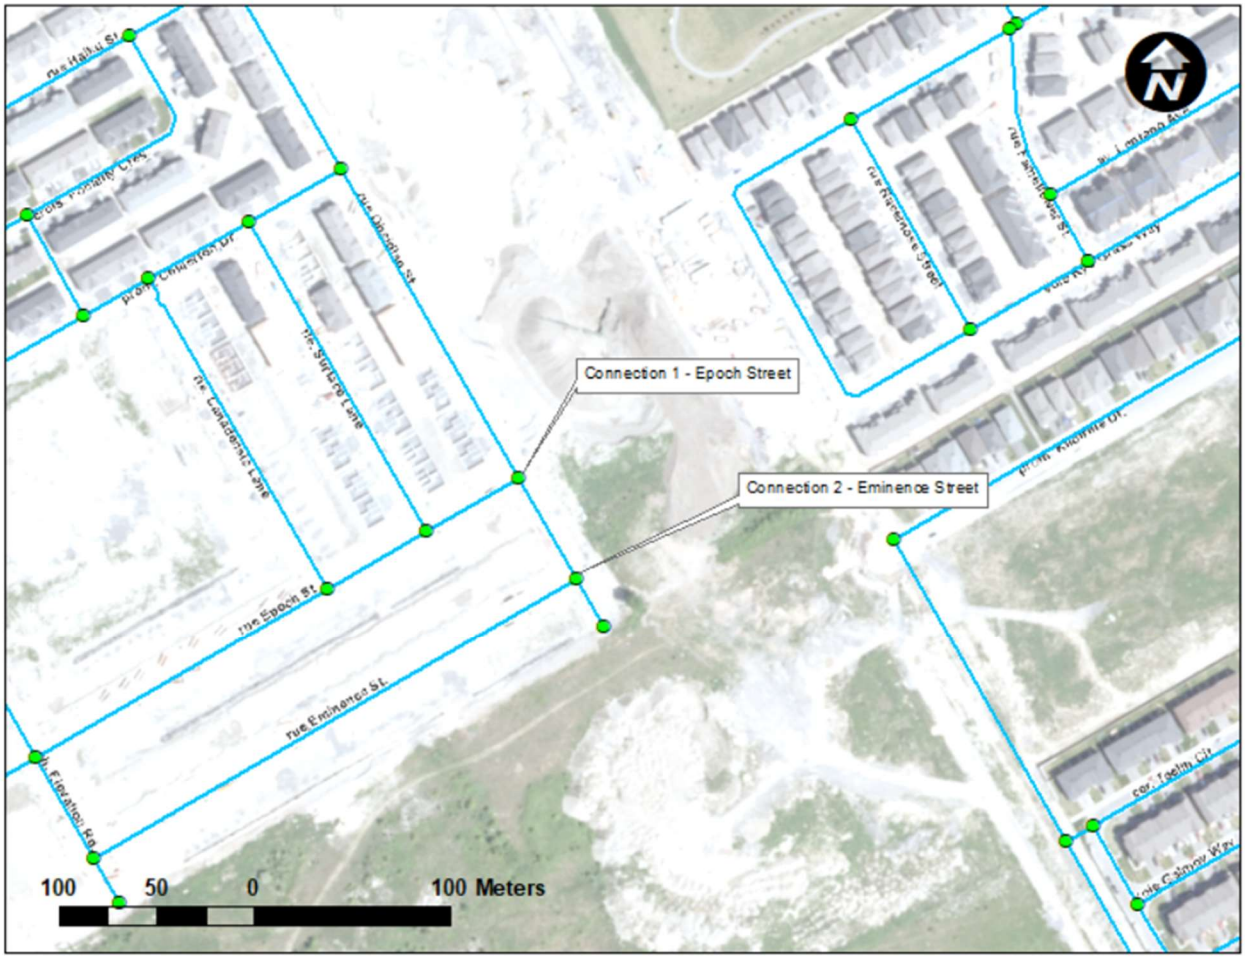

## Results

### Existing Condition (Pre- SUC Pressure Zone Reconfiguration)

**Connection 1 – Epoch Street**

| Demand Scenario | Head (m) | Pressure[1] (psi) |
|---|---|---|
| Maximum HGL | 156.5 | 78.2 |
| Peak Hour | 142.4 | 58.3 |
| Max Day plus Fire Flow #1 | 138.6 | 52.8 |
| Max Day plus Fire Flow #2 | 133.7 | 45.8 |

[1] Ground Elevation = 101.4 m

**Connection 2 – Eminence Street**

| Demand Scenario | Head (m) | Pressure[1] (psi) |
|---|---|---|
| Maximum HGL | 156.5 | 67.6 |
| Peak Hour | 142.4 | 47.7 |
| Max Day plus Fire Flow #1 | 138.6 | 42.2 |
| Max Day plus Fire Flow #2 | 132.5 | 33.6 |

[1] Ground Elevation = 108.9 m

### Future Condition (Post- SUC Pressure Zone Reconfiguration)

**Connection 1 - Epoch Street**

| Demand Scenario | Head (m) | Pressure[1] (psi) |
|---|---|---|
| Maximum HGL | 146.8 | 64.4 |
| Peak Hour | 142.7 | 58.6 |
| Max Day plus Fire Flow #1 | 138.0 | 52.0 |
| Max Day plus Fire Flow #2 | 130.7 | 41.6 |

[1] Ground Elevation = 101.4 m

**Connection 2 - Eminence Street**

| Demand Scenario | Head (m) | Pressure[1] (psi) |
|---|---|---|
| Maximum HGL | 146.8 | 53.8 |
| Peak Hour | 142.7 | 48.1 |
| Max Day plus Fire Flow #1 | 137.5 | 40.6 |
| Max Day plus Fire Flow #2 | 129.6 | 29.5 |

[1] Ground Elevation = 108.9 m

**Disclaimer**

*The boundary condition information is based on current operation of the city water distribution system. The computer model simulation is based on the best information available at the time. The operation of the water distribution system can change on a regular basis, resulting in a variation in boundary conditions. The physical properties of watermains deteriorate over time, as such must be assumed in the absence of actual field test data. The variation in physical watermain properties can therefore alter the results of the computer model simulation. Fire Flow analysis is a reflection of available flow in the watermain; there may be additional restrictions that occur between the watermain and the hydrant that the model cannot take into account.*

# A.2 DOMESTIC WATER DEMAND CALCULATIONS

**Domestic Water Demand Estimates - Half Moon Bay South Phase 7**

Site Plan provided by Korsiak Urban Planning dated 2025-JUL-22

Project No. 160402143

| Population densities as per Table 4.1 of the City of Ottawa Water Design Guidelines: | | |
|---|---|---|
| Townhouses | 2.7 | ppu |

| Block | Area (ha) | Units | Population | Daily Rate of Demand (L/cap/day) or (L/ha/day) | Avg Day Demand | | Max Day Demand[1] | | Peak Hour Demand[1] | |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | (L/min) | (L/s) | (L/min) | (L/s) | (L/min) | (L/s) |
| **Residential** | | | | | | | | | | |
| **1** | | 21 | 57 | 280 | 11.0 | 0.18 | 27.6 | 0.46 | 60.6 | 1.01 |
| **2** | | 24 | 65 | 280 | 12.6 | 0.21 | 31.5 | 0.53 | 69.3 | 1.16 |
| **3** | | 15 | 41 | 280 | 7.9 | 0.13 | 19.7 | 0.33 | 43.3 | 0.72 |
| **4** | | 15 | 41 | 280 | 7.9 | 0.13 | 19.7 | 0.33 | 43.3 | 0.72 |
| **5** | | 15 | 41 | 280 | 7.9 | 0.13 | 19.7 | 0.33 | 43.3 | 0.72 |
| | | | | **Subtotal** | **47.25** | **0.79** | **118.13** | **1.97** | **259.88** | **4.33** |
| | | | | | | | | | | |
| **Total Site :** | | **90** | **243** | **-** | **47.25** | **0.79** | **118.13** | **1.97** | **259.88** | **4.33** |

Notes:

1 Population density for all residential units based on an population densities provided in Table 4.1 - Per Unit Populations of the City of Ottawa Water Distribution Design Guidelines (July 2010).

2 Average day water demand for residential areas: 280 L/cap/d per ISTB-2021-03

3 Average day water demand for commercial areas: 28,000 L/ha/d per *Table 4.2 Consumption Rates for subdivisions of 501 to 3,000 persons* (Ottawa Design Guidelines - Water Distribution, 2010)

4 The City of Ottawa water demand criteria used to estimate peak demand rates for residential areas are as follows:

maximum day demand rate = 2.5 x average day demand rate for residential

peak hour demand rate = 2.2 x maximum day demand rate for residential

5 Water demand criteria used to estimate peak demand rates for amenity/common areas are as follows:

maximum daily demand rate = 1.5 x average day demand rate

peak hour demand rate = 1.8 x maximum day demand rate

# A.3 FUS (2020) FIRE FLOW REQUIREMENTS

**FUS Fire Flow Calculation Sheet - 2020 FUS Guidelines**

**Stantec Project #:** 160401657
**Project Name:** Half Moon Bay phase 7
**Date:** 9/19/2025
**Fire Flow Calculation #:** 1
**Description:** Stacked Towhouse (Block 1 - West)

**Notes:** Three-storey wood frame stacked townhome with 21 unit, West portion separated by firewall

| Step | Task | Notes | | | | | | | | | | Value Used | Req'd Fire Flow (L/min) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 | Determine Type of Construction | Type V - Wood Frame / Type IV-D - Mass Timber Construction | | | | | | | | | | 1.5 | - |
| 2 | Determine Effective Floor Area | Sum of All Floor Areas | | | | | | | | | | - | - |
| | | 465 | 465 | 465 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1395.36 | - |
| 3 | Determine Required Fire Flow | ($F = 220 \times C \times A^{1/2}$). Round to nearest 1000 L/min | | | | | | | | | | - | 12000 |
| 4 | Determine Occupancy Charge | Limited Combustible | | | | | | | | | | -15% | 10200 |
| 5 | Determine Sprinkler Reduction | None | | | | | | | | | | 0% | 0 |
| | | Non-Standard Water Supply or N/A | | | | | | | | | | 0% | |
| | | Not Fully Supervised or N/A | | | | | | | | | | 0% | |
| | | % Coverage of Sprinkler System | | | | | | | | | | 0% | |
| 6 | Determine Increase for Exposures (Max. 75%) | Direction | Exposure Distance (m) | Exposed Length (m) | Exposed Height (Stories) | Length-Height Factor (m x stories) | Construction of Adjacent Wall | Firewall / Sprinklered ? | | | | - | - |
| | | North | > 30 | 20 | 3 | 41-60 | Type V | NO | | | | 0% | 1734 |
| | | East | 0 to 3 | 20 | 3 | 41-60 | Type V | YES | | | | 0% | |
| | | South | > 30 | 20 | 3 | 41-60 | Type V | NO | | | | 0% | |
| | | West | 3.1 to 10 | 20 | 3 | 41-60 | Type V | NO | | | | 17% | |
| 7 | Determine Final Required Fire Flow | Total Required Fire Flow in L/min, Rounded to Nearest 1000L/min | | | | | | | | | | | 12000 |
| | | Total Required Fire Flow in L/s | | | | | | | | | | | 200.0 |
| | | Required Duration of Fire Flow (hrs) | | | | | | | | | | | 2.50 |
| | | Required Volume of Fire Flow ($m^3$) | | | | | | | | | | | 1800 |

**FUS Fire Flow Calculation Sheet - 2020 FUS Guidelines**

**Stantec Project #:** 160401657
**Project Name:** Half Moon Bay phase 7
**Date:** 9/19/2025
**Fire Flow Calculation #:** 2
**Description:** Stacked Towhouse (Block 1 - East)

**Notes:** Three-storey wood frame stacked townhome with 24 unit, East portion separated by firewall

| Step | Task | Notes | | | | | | | | | | Value Used | Req'd Fire Flow (L/min) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 | Determine Type of Construction | Type V - Wood Frame / Type IV-D - Mass Timber Construction | | | | | | | | | | 1.5 | - |
| 2 | Determine Effective Floor Area | Sum of All Floor Areas | | | | | | | | | | - | - |
| | | 352 | 352 | 352 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1055.28 | - |
| 3 | Determine Required Fire Flow | ($F = 220 \times C \times A^{1/2}$). Round to nearest 1000 L/min | | | | | | | | | | - | 11000 |
| 4 | Determine Occupancy Charge | Limited Combustible | | | | | | | | | | -15% | 9350 |
| 5 | Determine Sprinkler Reduction | None | | | | | | | | | | 0% | 0 |
| | | Non-Standard Water Supply or N/A | | | | | | | | | | 0% | |
| | | Not Fully Supervised or N/A | | | | | | | | | | 0% | |
| | | % Coverage of Sprinkler System | | | | | | | | | | 0% | |
| 6 | Determine Increase for Exposures (Max. 75%) | Direction | Exposure Distance (m) | Exposed Length (m) | Exposed Height (Stories) | Length-Height Factor (m x stories) | Construction of Adjacent Wall | Firewall / Sprinklered ? | | | | - | - |
| | | North | > 30 | 20 | 3 | 41-60 | Type V | NO | | | | 0% | 1122 |
| | | East | 10.1 to 20 | 20 | 3 | 41-60 | Type V | NO | | | | 12% | |
| | | South | > 30 | 20 | 3 | 41-60 | Type V | NO | | | | 0% | |
| | | West | 0 to 3 | 20 | 3 | 41-60 | Type V | YES | | | | 0% | |
| 7 | Determine Final Required Fire Flow | Total Required Fire Flow in L/min, Rounded to Nearest 1000L/min | | | | | | | | | | | 10000 |
| | | Total Required Fire Flow in L/s | | | | | | | | | | | 166.7 |
| | | Required Duration of Fire Flow (hrs) | | | | | | | | | | | 2.00 |
| | | Required Volume of Fire Flow ($m^3$) | | | | | | | | | | | 1200 |

**FUS Fire Flow Calculation Sheet - 2020 FUS Guidelines**

**Stantec Project #:** 160401657
**Project Name:** Half Moon Bay phase 7
**Date:** 9/19/2025
**Fire Flow Calculation #:** 3
**Description:** Stacked Towhouse (Block 2)

**Notes:** Three-storey wood frame stacked townhome with 30 unit, West portion separated by firewall

| Step | Task | Notes | | | | | | | | | | Value Used | Req'd Fire Flow (L/min) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 | Determine Type of Construction | Type V - Wood Frame / Type IV-D - Mass Timber Construction | | | | | | | | | | 1.5 | - |
| 2 | Determine Effective Floor Area | Sum of All Floor Areas | | | | | | | | | | - | - |
| | | 467 | 467 | 467 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1401 | - |
| 3 | Determine Required Fire Flow | ($F = 220 \times C \times A^{1/2}$). Round to nearest 1000 L/min | | | | | | | | | | - | 12000 |
| 4 | Determine Occupancy Charge | Limited Combustible | | | | | | | | | | -15% | 10200 |
| 5 | Determine Sprinkler Reduction | None | | | | | | | | | | 0% | 0 |
| | | Non-Standard Water Supply or N/A | | | | | | | | | | 0% | |
| | | Not Fully Supervised or N/A | | | | | | | | | | 0% | |
| | | % Coverage of Sprinkler System | | | | | | | | | | 0% | |
| 6 | Determine Increase for Exposures (Max. 75%) | Direction | Exposure Distance (m) | Exposed Length (m) | Exposed Height (Stories) | Length-Height Factor (m x stories) | Construction of Adjacent Wall | Firewall / Sprinklered ? | | | | - | - |
| | | North | > 30 | 27 | 3 | 81-100 | Type V | NO | | | | 0% | 1734 |
| | | East | 0 to 3 | 20 | 3 | 41-60 | Type V | YES | | | | 0% | |
| | | South | > 30 | 27 | 3 | 81-100 | Type V | NO | | | | 0% | |
| | | West | 3.1 to 10 | 20 | 3 | 41-60 | Type V | NO | | | | 17% | |
| 7 | Determine Final Required Fire Flow | Total Required Fire Flow in L/min, Rounded to Nearest 1000L/min | | | | | | | | | | | 12000 |
| | | Total Required Fire Flow in L/s | | | | | | | | | | | 200.0 |
| | | Required Duration of Fire Flow (hrs) | | | | | | | | | | | 2.50 |
| | | Required Volume of Fire Flow ($m^3$) | | | | | | | | | | | 1800 |

**FUS Fire Flow Calculation Sheet - 2020 FUS Guidelines**

**Stantec Project #:** 160401657
**Project Name:** Half Moon Bay phase 7
**Date:** 9/19/2025
**Fire Flow Calculation #:** 4
**Description:** Stacked Towhouse (Block 2)

**Notes:** Three-storey wood frame stacked townhome with 30 unit, East portion separated by firewall

| Step | Task | Notes | | | | | | | | | | Value Used | Req'd Fire Flow (L/min) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 | Determine Type of Construction | Type V - Wood Frame / Type IV-D - Mass Timber Construction | | | | | | | | | | 1.5 | - |
| 2 | Determine Effective Floor Area | Sum of All Floor Areas | | | | | | | | | | - | - |
| | | 467 | 467 | 467 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1399.71 | - |
| 3 | Determine Required Fire Flow | ($F = 220 \times C \times A^{1/2}$). Round to nearest 1000 L/min | | | | | | | | | | - | 12000 |
| 4 | Determine Occupancy Charge | Limited Combustible | | | | | | | | | | -15% | 10200 |
| 5 | Determine Sprinkler Reduction | None | | | | | | | | | | 0% | 0 |
| | | Non-Standard Water Supply or N/A | | | | | | | | | | 0% | |
| | | Not Fully Supervised or N/A | | | | | | | | | | 0% | |
| | | % Coverage of Sprinkler System | | | | | | | | | | 0% | |
| 6 | Determine Increase for Exposures (Max. 75%) | Direction | Exposure Distance (m) | Exposed Length (m) | Exposed Height (Stories) | Length-Height Factor (m x stories) | Construction of Adjacent Wall | Firewall / Sprinklered ? | | | | - | - |
| | | North | > 30 | 27 | 3 | 81-100 | Type V | NO | | | | 0% | 1428 |
| | | East | > 30 | 20 | 3 | 41-60 | Type V | NO | | | | 0% | |
| | | South | 10.1 to 20 | 27 | 3 | 81-100 | Type V | NO | | | | 14% | |
| | | West | 0 to 3 | 20 | 3 | 41-60 | Type V | YES | | | | 0% | |
| 7 | Determine Final Required Fire Flow | Total Required Fire Flow in L/min, Rounded to Nearest 1000L/min | | | | | | | | | | | 12000 |
| | | Total Required Fire Flow in L/s | | | | | | | | | | | 200.0 |
| | | Required Duration of Fire Flow (hrs) | | | | | | | | | | | 2.50 |
| | | Required Volume of Fire Flow ($m^3$) | | | | | | | | | | | 1800 |

**FUS Fire Flow Calculation Sheet - 2020 FUS Guidelines**

**Stantec Project #:** 160401657
**Project Name:** Half Moon Bay phase 7
**Date:** 9/19/2025
**Fire Flow Calculation #:** 5
**Description:** Stacked Towhouse (Block 3)

**Notes:** Three-storey wood frame stacked townhome with 15 unit

| Step | Task | Notes | | | | | | | | | | Value Used | Req'd Fire Flow (L/min) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 | Determine Type of Construction | Type V - Wood Frame / Type IV-D - Mass Timber Construction | | | | | | | | | | 1.5 | - |
| 2 | Determine Effective Floor Area | Sum of All Floor Areas | | | | | | | | | | - | - |
| | | 592 | 592 | 592 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1775.16 | - |
| 3 | Determine Required Fire Flow | ($F = 220 \times C \times A^{1/2}$). Round to nearest 1000 L/min | | | | | | | | | | - | 14000 |
| 4 | Determine Occupancy Charge | Limited Combustible | | | | | | | | | | -15% | 11900 |
| 5 | Determine Sprinkler Reduction | None | | | | | | | | | | 0% | 0 |
| | | Non-Standard Water Supply or N/A | | | | | | | | | | 0% | |
| | | Not Fully Supervised or N/A | | | | | | | | | | 0% | |
| | | % Coverage of Sprinkler System | | | | | | | | | | 0% | |
| 6 | Determine Increase for Exposures (Max. 75%) | Direction | Exposure Distance (m) | Exposed Length (m) | Exposed Height (Stories) | Length-Height Factor (m x stories) | Construction of Adjacent Wall | Firewall / Sprinklered ? | | | | - | - |
| | | North | 20.1 to 30 | 34 | 3 | > 100 | Type V | NO | | | | 10% | 2975 |
| | | East | > 30 | 21 | 3 | 61-80 | Type V | NO | | | | 0% | |
| | | South | 10.1 to 20 | 34 | 3 | > 100 | Type V | NO | | | | 15% | |
| | | West | > 30 | 21 | 3 | 61-80 | Type V | NO | | | | 0% | |
| 7 | Determine Final Required Fire Flow | Total Required Fire Flow in L/min, Rounded to Nearest 1000L/min | | | | | | | | | | | 15000 |
| | | Total Required Fire Flow in L/s | | | | | | | | | | | 250.0 |
| | | Required Duration of Fire Flow (hrs) | | | | | | | | | | | 3.00 |
| | | Required Volume of Fire Flow ($m^3$) | | | | | | | | | | | 2700 |

**FUS Fire Flow Calculation Sheet - 2020 FUS Guidelines**

**Stantec Project #:** 160401657
**Project Name:** Half Moon Bay phase 7
**Date:** 9/19/2025
**Fire Flow Calculation #:** 6
**Description:** Stacked Towhouse (Block 4)

**Notes:** Three-storey wood frame stacked townhome with 15 unit

| Step | Task | Notes | | | | | | | | | | Value Used | Req'd Fire Flow (L/min) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 | Determine Type of Construction | Type V - Wood Frame / Type IV-D - Mass Timber Construction | | | | | | | | | | 1.5 | - |
| 2 | Determine Effective Floor Area | Sum of All Floor Areas | | | | | | | | | | - | - |
| | | 592 | 592 | 592 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1775.16 | - |
| 3 | Determine Required Fire Flow | ($F = 220 \times C \times A^{1/2}$). Round to nearest 1000 L/min | | | | | | | | | | - | 14000 |
| 4 | Determine Occupancy Charge | Limited Combustible | | | | | | | | | | -15% | 11900 |
| 5 | Determine Sprinkler Reduction | None | | | | | | | | | | 0% | 0 |
| | | Non-Standard Water Supply or N/A | | | | | | | | | | 0% | |
| | | Not Fully Supervised or N/A | | | | | | | | | | 0% | |
| | | % Coverage of Sprinkler System | | | | | | | | | | 0% | |
| 6 | Determine Increase for Exposures (Max. 75%) | Direction | Exposure Distance (m) | Exposed Length (m) | Exposed Height (Stories) | Length-Height Factor (m x stories) | Construction of Adjacent Wall | Firewall / Sprinklered ? | | | | - | - |
| | | North | > 30 | 34 | 3 | > 100 | Type V | NO | | | | 0% | 1904 |
| | | East | 20.1 to 30 | 21 | 3 | 61-80 | Type V | NO | | | | 6% | |
| | | South | 20.1 to 30 | 34 | 3 | > 100 | Type V | NO | | | | 10% | |
| | | West | > 30 | 21 | 3 | 61-80 | Type V | NO | | | | 0% | |
| 7 | Determine Final Required Fire Flow | Total Required Fire Flow in L/min, Rounded to Nearest 1000L/min | | | | | | | | | | | 14000 |
| | | Total Required Fire Flow in L/s | | | | | | | | | | | 233.3 |
| | | Required Duration of Fire Flow (hrs) | | | | | | | | | | | 3.00 |
| | | Required Volume of Fire Flow ($m^3$) | | | | | | | | | | | 2520 |


**FUS Fire Flow Calculation Sheet - 2020 FUS Guidelines**

**Stantec Project #:** 160401657
**Project Name:** Half Moon Bay phase 7
**Date:** 9/19/2025
**Fire Flow Calculation #:** 7
**Description:** Stacked Towhouse (Block 5)

**Notes:** Three-storey wood frame stacked townhome with 15 unit

| Step | Task | Notes | | | | | | | | | | Value Used | Req'd Fire Flow (L/min) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 | Determine Type of Construction | Type V - Wood Frame / Type IV-D - Mass Timber Construction | | | | | | | | | | 1.5 | - |
| 2 | Determine Effective Floor Area | Sum of All Floor Areas | | | | | | | | | | - | - |
| | | 592 | 592 | 592 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1776 | - |
| 3 | Determine Required Fire Flow | ($F = 220 \times C \times A^{1/2}$). Round to nearest 1000 L/min | | | | | | | | | | - | 14000 |
| 4 | Determine Occupancy Charge | Limited Combustible | | | | | | | | | | -15% | 11900 |
| 5 | Determine Sprinkler Reduction | None | | | | | | | | | | 0% | 0 |
| | | Non-Standard Water Supply or N/A | | | | | | | | | | 0% | |
| | | Not Fully Supervised or N/A | | | | | | | | | | 0% | |
| | | % Coverage of Sprinkler System | | | | | | | | | | 0% | |
| 6 | Determine Increase for Exposures (Max. 75%) | Direction | Exposure Distance (m) | Exposed Length (m) | Exposed Height (Stories) | Length-Height Factor (m x stories) | Construction of Adjacent Wall | Firewall / Sprinklered ? | | | | - | - |
| | | North | 10.1 to 20 | 34 | 3 | > 100 | Type V | NO | | | | 15% | 2975 |
| | | East | > 30 | 21 | 3 | 61-80 | Type V | NO | | | | 0% | |
| | | South | 20.1 to 30 | 34 | 3 | > 100 | Type V | NO | | | | 10% | |
| | | West | > 30 | 21 | 3 | 61-80 | Type V | NO | | | | 0% | |
| 7 | Determine Final Required Fire Flow | Total Required Fire Flow in L/min, Rounded to Nearest 1000L/min | | | | | | | | | | | 15000 |
| | | Total Required Fire Flow in L/s | | | | | | | | | | | 250.0 |
| | | Required Duration of Fire Flow (hrs) | | | | | | | | | | | 3.00 |
| | | Required Volume of Fire Flow ($m^3$) | | | | | | | | | | | 2700 |

# Appendix B DRAFT SITE PLAN

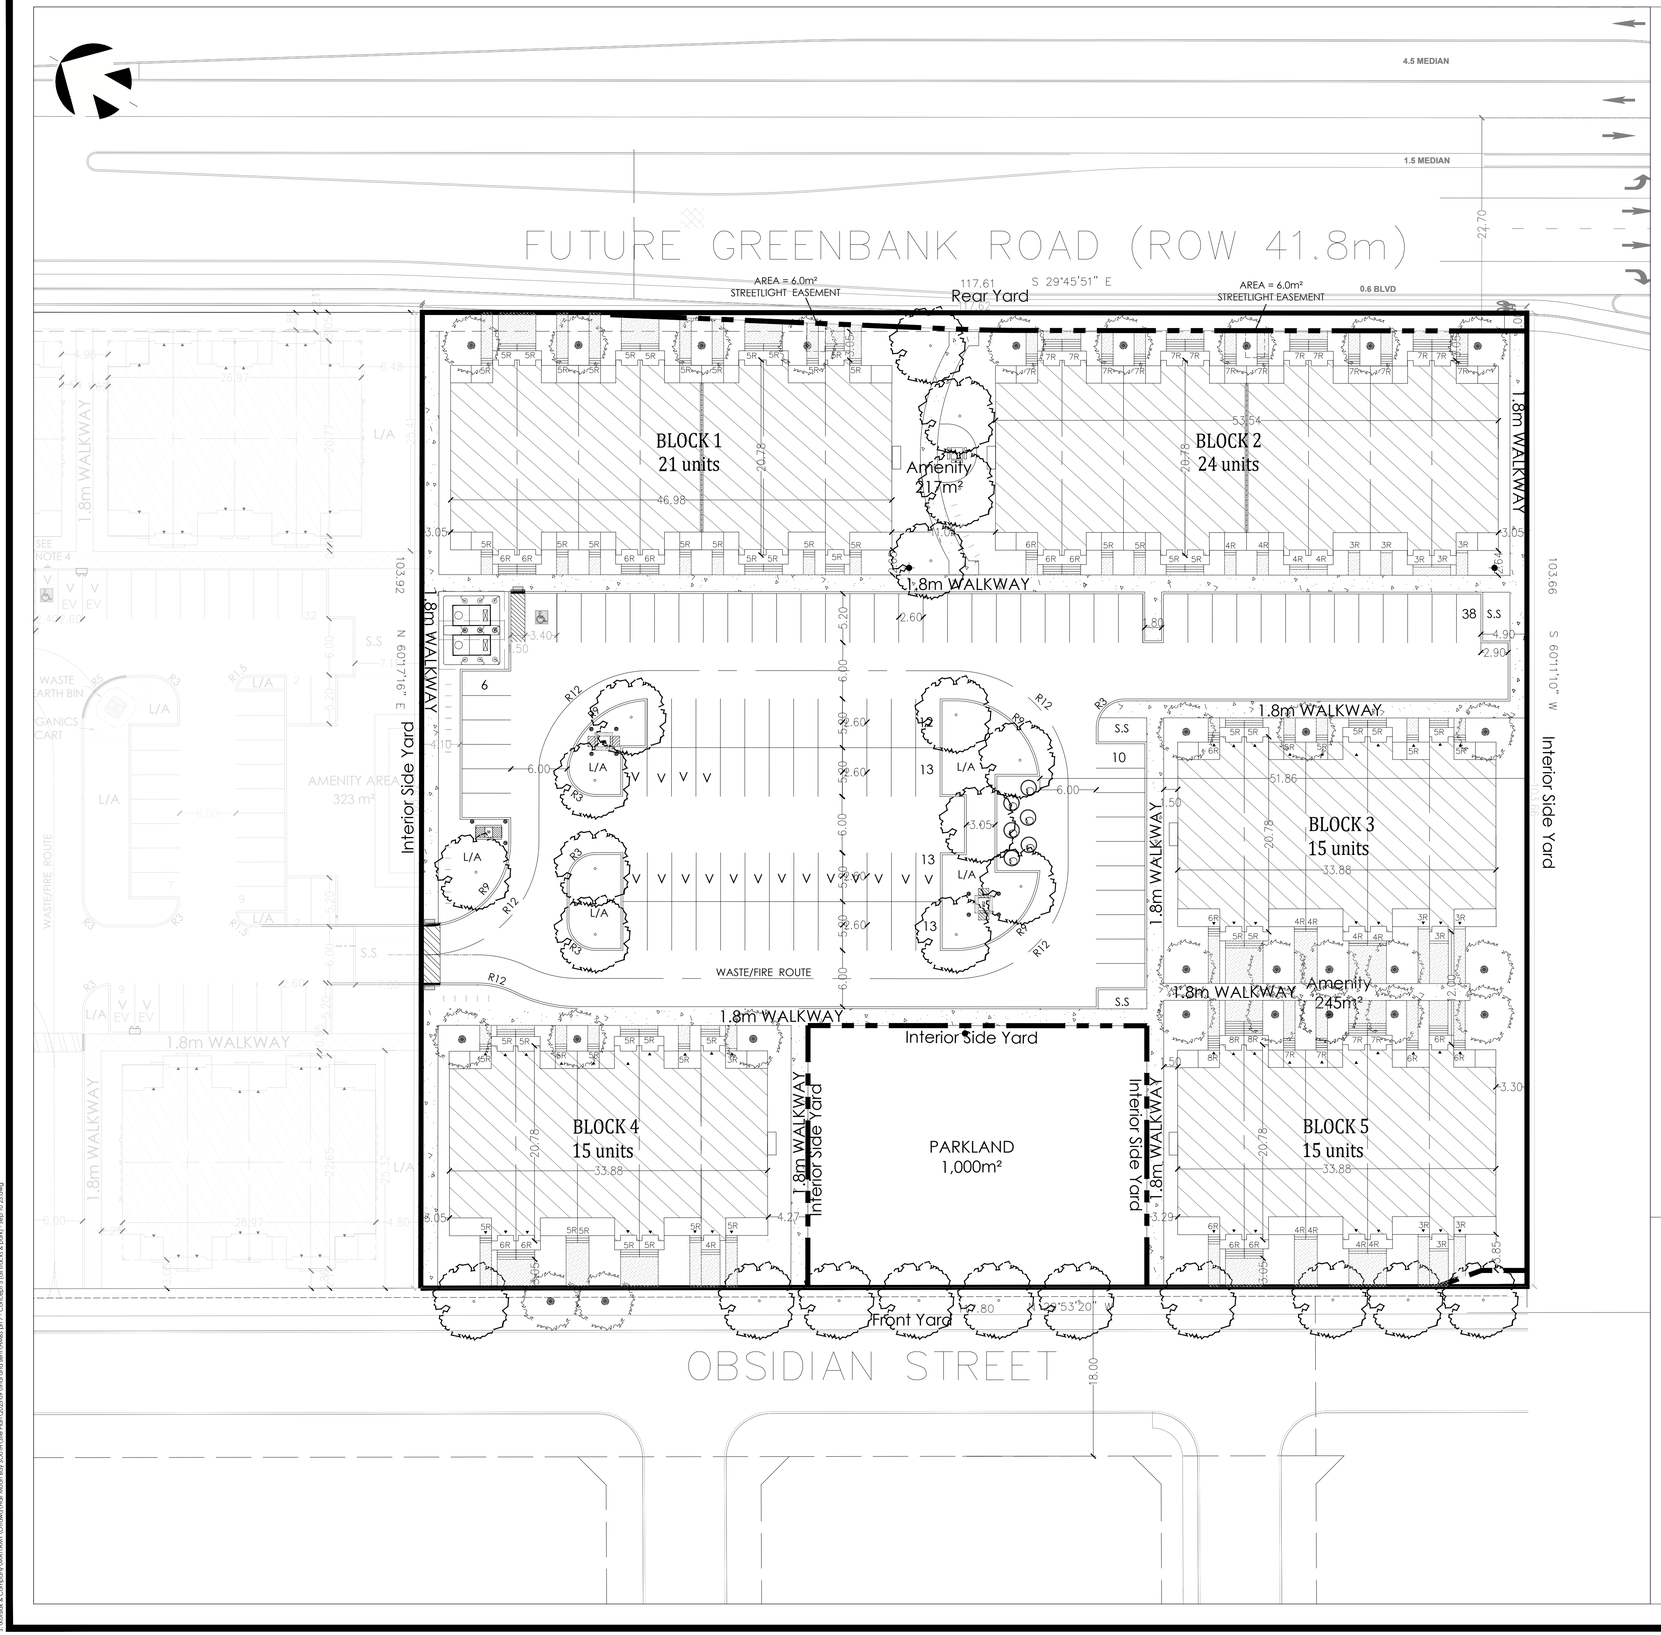


## SITE STATISTICS AND DEVELOPMENT DATA


| | |
|---|---|
| SITE AREA | 12,217.33 m² (1.22 ha) |
| NET AREA | 12,217 m² - 1000 m² (PARK) - 172 m²(ROAD WIDENING) = 11,045.97 m² |
| PAVED AREA | 3,289.52 m² (30%) |
| LANDSCAPED AREA | 4,163.02 m² (38%) |
| TOTAL BUILDING COVERAGE | 3,595.67 m² (32%) |
| TOTAL GROSS FLOOR AREA | ±10,324.40 m² |
| TOTAL UNITS | 90 |
| NET DENSITY (UPH) | 82 UPH |
| ZONE CATEGORY | GM(2800)H(14.5) |

| DWELLING BLOCK | DWELLING TYPE | GROSS FLOOR AREA (m²) | UNITS |
|---|---|---|---|
| BLOCK 1 | 21 UNIT B2B STACKED DWELLING | ±2,400.75 | 21 |
| BLOCK 2 | 24 UNIT B2B STACKED DWELLING | ±2,736.62 | 24 |
| BLOCK 3 | 15 UNIT B2B STACKED DWELLING | ±1,729.01 | 15 |
| BLOCK 4 | 15 UNIT B2B STACKED DWELLING | ±1,729.01 | 15 |
| BLOCK 5 | 15 UNIT B2B STACKED DWELLING | ±1,729.01 | 15 |
| | TOTAL | ±10,324.40 | 90 |

| SECTION | ZONE PROVISION - PLANNED UNIT DEVELOPMENT | REQUIRED | PROPOSED |
|---|---|---|---|
| 187 (Table) | MIN. LOT AREA (m²) | No minimum | 12,217.33m² |
| 187 (Table) | MIN. LOT WIDTH (m) | No minimum | 117.7m |
| 187 (Table) | MAX. BUILDING HEIGHT (m) | 14.5m | 11.2m |
| 187 (Table) | MIN. FRONT YARD SETBACK (m) | 3.0m | 3.05m |
| 187 (Table) | MIN. CORNER SIDE YARD SETBACK (m) | 3.0m | N/A |
| | MIN. INTERIOR SIDE YARD SETBACK (m) FOR A BUILDING HIGHER THAN 11m: | | |
| (2800) | NORTH INTERIOR SIDE LOT LINE | 7.5m | 3.05m |
| 187 (Table) | SOUTH INTERIOR SIDE LOT LINE | 3.0m | 3.05m |
| | INTERIOR SIDE LOT LINE (ABUTTING PARK) | 3.0m | 4.27m/3.29m |
| 187 (Table) | MIN. REAR YARD SETBACK: ALL OTHER CASES (m) | No minimum | 3.05m |
| 187 (Table) | MAX. FLOOR SPACE INDEX | 2 | 0.85 |
| 187 (Table) | MIN. WIDTH OF LANDSCAPED AREA | | |
| | ABUTTING A STREET (m) | 3m | 3.05m |
| | ABUTTING A RESIDENTIAL ZONE | 3m | 3.05m |
| 101 (Table) | RESIDENT PARKING - 1 spaces/unit | 90 | 87 |
| 102 (Table) | VISITOR PARKING - 0.2 spaces/unit | 18 | 18 |
| 111A (Table) | MIN. BICYCLE PARKING- 0.5 spaces/unit | 45 | 48 |
| 131(Table)(1) | MIN. WIDTH OF PRIVATE WAY/ PARKING AISLE (m) | 6.0m | 6.0m |
| 131(Table)(2) | MIN. SETBACK FOR ANY WALL OF A RESIDENTIAL USE BUILDING TO A PRIVATE WAY (m) | 1.8m | 3.5m |
| 131(Table)(4) | MIN. SEPARATION DISTANCE BETWEEN BUILDINGS WITHIN A PLANNED UNIT DEVELOPMENT (m) | 3.0m | 11.04m |

| SECTION | ADDITIONAL PROVISIONS | REQUIRED | PROPOSED |
|---|---|---|---|
| 65 | PERMITTED PROJECTIONS INTO REQUIRED YARDS: | | |
| 65 (5) | FIRE ESCAPES, OPEN STAIRWAYS, STOOP (m) | >0.6m to lot line | N/A |
| 65 (6) | COVERED OR UNCOVERED BALCONY, PORCH, DECK | >1m to lot line | N/A |
| 57 | MIN. TO CORNER SIGHT TRIANGLE (m) | 0m | N/A |
| 106 (1)(a) | MIN. PERPENDICULAR PARKING SPACE SIZE (m) | 2.6m x 5.2m | 2.6m x 5.2m |
| 106 (2)(b) | MIN. BARRIER FREE PARKING*: | 1 | 1 |
| | TYPE A PARKING SPACE SIZE | 3.4m wide | 3.4m wide |
| | ACCESS AISLE (m) | 1.5m | 1.5m |
| 111B(Table) | MIN. BICYCLE PARKING SPACE DIMENSIONS | 0.6m x 1.8m | 0.6m x 2.07m |
| 109 (3)(b) | MAX. WALKWAY WIDTH PERMITTED IN YARD (m) | 1.8m | 1.8m |
| 110 (Table) | LANDSCAPED AREA SURROUNDING PARKING LOT (100+ spaces): | 15% | 24% |
| | NOT ABUTTING A STREET (m) | 3.0m | >3.0m |
| 110 (3) | REFUSE COLLECTION AREAS: | | |
| 110 (3)(b) | MIN.WASTE COLLECTION SETBACK TO LOT LINE (m) | 3.0m | 51.86m |
| 137 (Table) | AMENITY AREA**: | | |
| | TOTAL MIN. AMENITY AREA (6m² per unit) (m²) | 540m² | 1,302 m² |
| | MIN. COMMUNAL AMENITY AREA (m²)(50% AREA) | 270m² | 462m² |

*Per the 2014 Guide to the Integrated Accessibility Standards Regulation - Design of Public Spaces Standard, 4% of parking spaces provided for public use must be accessible. 1 of the provided 18 visitor spaces have been designed to be barrier-free, Type A size.
**Individual amenity areas are provided on the balconies




KEY MAP N.T.S. Subject Lands

SCALE 1:300 0 5 10 15 20 25 30

LEGEND

- STACKED TOWNS
- ENTRANCE
- PORCH
- PROJECTION (STAIRS)
- CONCRETE
- CROSSWALK
- PAVERS
- CURB (0.2m)
- DEPRESSED CURB
- TACTILE WALKING SURFACE INDICATOR
- S.S SNOW STORAGE AREA
- L/A LANDSCAPED AREA
- PROPERTY LINE
- NO PARKING
- BARRIER FREE PARKING
- V VISITOR PARKING
- BIKE RACKS
- MOLOK BIN (6.5 yd³)
- R RISERS
- MINI-SUB
- SWITCHBOARD
- TRANSFORMER
- BOLLARD
- HYDRO CABINET
- LARGE DECIDUOUS TREE
- MEDIUM DECIDUOUS TREE
- PROPOSED FIRE HYDRANT

| DATE (M.D.Y) | REVISION | BY |
|---|---|---|
| 09/10/2025 | 2nd Submission | AS |
| 05/14/2025 | 1st Submission | AS |

GENERAL NOTES

1. DO NOT SCALE DRAWINGS FOR PRINT.
2. THIS DRAWING IS THE EXCLUSIVE PROPERTY OF KORSIAK URBAN PLANNING AND MATTAMY HOMES. COPYRIGHT RESERVED.
3. WALKWAYS AND CURBS TO BE TIED INTO PUBLIC ROW WHERE APPLICABLE.
4. REFERENCE CITY OF OTTAWA T.W.S.I. DETAIL SC7.3
5. SURVEY BOUNDARY PREPARED BY J.D BARNES LTD. 62 STEACIE DRIVE, SUITE 103, KANATA, ON K2K 2A9. TEL: (613) 731-7244 FAX: (613) 254-8659

PROJECT TEAM

SITE PLAN DESIGN: KORSIAK Urban Planning
LANDSCAPE ARCHITECTURE: NAK design strategies
PLANNING: FOTENN Planning + Design
TRANSPORTATION:
ARCHITECTURE: Q4A
MECHANICAL/ ELECTRICAL: LRJ
CIVIL ENGINEER: Stantec

mattamyHOMES
50 Hines Road, Suite 100, Ottawa, ON Canada K2K 2M5

Half Moon Bay South
Phase 7 Condo Block

4159 Obsidian St, Ottawa

PART OF LOT 8
CONCESSION 3 (RIDEAU FRONT)
GEOGRAPHIC TOWNSHIP OF NEPEAN
CITY OF OTTAWA

TITLE: SITE PLAN

| | | |
|---|---|---|
| DATE: September 10, 2025 | DRAWN BY: AS CHECKED BY: CR | DRAWING NO. A |
| FILE NO.: XXXXXXXXX | | |
| JOB NO.: Mattamy - Half Moon Bay | | |

S:\Active\4 Company\Mattamy\Ottawa\Half Moon Bay (OBSIDIAN Phase 7)\2025\07 Final and Permit\Half Moon Bay Phase 7 - Concept Plan (Block 4 Split) - Sept 2025.dwg

# Appendix C SANITARY SERVICING

## C.1 SANITARY SEWER DESIGN SHEET

Stantec

SUBDIVISION: **Half Moon Bay South Phase 7**

DATE: 9/19/2025
REVISION: 2
DESIGNED BY: ZW
CHECKED BY: DT

# SANITARY SEWER DESIGN SHEET
**(City of Ottawa)**

**FILE NUMBER:** 160402413

**DESIGN PARAMETERS**

| | | | | | |
|---|---|---|---|---|---|
| MAX PEAK FACTOR (RES.)= | 4.0 | AVG. DAILY FLOW / PERSON | 280 l/p/day | MINIMUM VELOCITY | 0.60 m/s |
| MIN PEAK FACTOR (RES.)= | 2.0 | COMMERCIAL | 28,000 l/ha/day | MAXIMUM VELOCITY | 3.00 m/s |
| PEAKING FACTOR (INDUSTRIAL): | 2.4 | INDUSTRIAL (HEAVY) | 55,000 l/ha/day | MANNINGS n | 0.013 |
| PEAKING FACTOR (ICI >20%): | 1.5 | INDUSTRIAL (LIGHT) | 35,000 l/ha/day | BEDDING CLASS | B |
| PERSONS / SINGLE | 3.4 | INSTITUTIONAL | 28,000 l/ha/day | MINIMUM COVER | 2.50 m |
| PERSONS / TOWNHOME | 2.7 | INFILTRATION | 0.33 l/s/Ha | HARMON CORRECTION FACTOR | 0.8 |
| PERSONS / APARTMENT | 1.8 | | | | |

| LOCATION | | | RESIDENTIAL AREA AND POPULATION | | | | | | | | | COMMERCIAL | | INDUSTRIAL (L) | | INDUSTRIAL (H) | | INSTITUTIONAL | | GREEN / UNUSED | | C+I+I | INFILTRATION | | | TOTAL | PIPE | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| AREA ID NUMBER | FROM M.H. | TO M.H. | AREA | SINGLE | UNITS TOWN | APT | POP. | CUMULATIVE AREA | CUMULATIVE POP. | PEAK FACT. | PEAK FLOW | AREA | ACCU. AREA | AREA | ACCU. AREA | AREA | ACCU. AREA | AREA | ACCU. AREA | AREA | ACCU. AREA | PEAK FLOW | TOTAL AREA | ACCU. AREA | INFILT. FLOW | FLOW | LENGTH | DIA | MATERIAL | CLASS | SLOPE | CAP. (FULL) | CAP. V PEAK FLOW | VEL. (FULL) | VEL. (ACT.) |
| | | | (ha) | | | | | (ha) | | | (l/s) | (ha) | (ha) | (ha) | (ha) | (ha) | (ha) | (ha) | (ha) | (ha) | (ha) | (l/s) | (ha) | (ha) | (l/s) | (l/s) | (m) | (mm) | | | (%) | (l/s) | (%) | (m/s) | (m/s) |
| R3A, R4A | 4 | 3 | 0.68 | 0 | 60 | 0 | 162 | 0.68 | 162 | 3.54 | 1.9 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.0 | 0.68 | 0.68 | 0.2 | 2.1 | 99.0 | 200 | PVC | SDR 35 | 0.40 | 21.1 | **9.86%** | 0.67 | 0.36 |
| G3A | 3 | 2 | 0.04 | 0 | 0 | 0 | 0 | 0.72 | 162 | 3.54 | 1.9 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.0 | 0.04 | 0.72 | 0.2 | 2.1 | 37.9 | 200 | PVC | SDR 35 | 0.40 | 21.1 | **9.94%** | 0.66 | 0.35 |
| R5A | 5 | 2 | 0.46 | 0 | 27 | 0 | 73 | 0.46 | 73 | 3.62 | 0.9 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.0 | 0.46 | 0.46 | 0.2 | 1.0 | 101.3 | 200 | PVC | SDR 35 | 0.40 | 21.1 | **4.77%** | 0.67 | 0.28 |
| R2A | 2 | 1 | 0.04 | 0 | 3 | 0 | 8 | 1.22 | 243 | 3.49 | 2.8 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.0 | 0.04 | 1.22 | 0.4 | 3.2 | 20.3 | 200 | PVC | SDR 35 | 0.52 | 24.2 | **13.04%** | 0.76 | 0.43 |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | 200 | | | | | | | |

# Appendix D STORMWATER MANAGEMENT

## D.1 STORM SEWER DESIGN SHEET

Stantec

HMBS 7

DATE: 2025-09-19
REVISION: 2
DESIGNED BY: DT
CHECKED BY: DT

# STORM SEWER DESIGN SHEET
(City of Ottawa)

**FILE NUMBER: 160402143**

DESIGN PARAMETERS

$I = a / (t+b)^c$ (As per City of Ottawa Guidelines, 2012)

| | 1:2 yr | 1:5 yr | 1:10 yr | 1:100 yr |
|---|---|---|---|---|
| a = | 732.951 | 998.071 | 1174.184 | 1735.688 |
| b = | 6.199 | 6.053 | 6.014 | 6.014 |
| c = | 0.810 | 0.814 | 0.816 | 0.820 |

MANNING'S n = 0.013
MINIMUM COVER: 2.00 m
TIME OF ENTRY 10 min
BEDDING CLASS = B

| LOCATION | | | DRAINAGE AREA | | | | | | | | | | | | | | | | | | | | | PIPE SELECTION | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| AREA ID NUMBER | FROM M.H. | TO M.H. | AREA (2-YEAR) (ha) | AREA (5-YEAR) (ha) | AREA (10-YEAR) (ha) | AREA (100-YEAR) (ha) | AREA (ROOF) (ha) | C (2-YEAR) (-) | C (5-YEAR) (-) | C (10-YEAR) (-) | C (100-YEAR) (-) | A x C (2-YEAR) (ha) | ACCUM AxC (2YR) (ha) | A x C (5-YEAR) (ha) | ACCUM. AxC (5YR) (ha) | A x C (10-YEAR) (ha) | ACCUM. AxC (10YR) (ha) | A x C (100-YEAR) (ha) | ACCUM. AxC (100YR) (ha) | T of C (min) | $I_{2\text{-YEAR}}$ (mm/h) | $I_{5\text{-YEAR}}$ (mm/h) | $I_{10\text{-YEAR}}$ (mm/h) | $I_{100\text{-YEAR}}$ (mm/h) | $Q_{CONTROL}$ (L/s) | ACCUM. $Q_{CONTROL}$ (L/s) | $Q_{ACT}$ (CIA/360) (L/s) | LENGTH (m) | PIPE WIDTH OR DIAMETEI (mm) | PIPE HEIGHT (mm) | PIPE SHAPE (-) | MATERIAL (-) | CLASS (-) | SLOPE % | $Q_{CAP}$ (FULL) (L/s) | % FULL (-) | VEL. (FULL) (m/s) | VEL. (ACT) (m/s) | TIME OF FLOW (min) |
| L201C | 201C | 201A | 0.12 | 0.00 | 0.00 | 0.00 | 0.00 | 0.80 | 0.00 | 0.00 | 0.00 | 0.096 | 0.096 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 10.00 | 76.81 | 104.19 | 122.14 | 178.56 | 0.0 | 0.0 | 20.5 | 21.8 | 200 | 200 | CIRCULAR | PVC | - | 1.00 | 33.3 | **61.49%** | 1.05 | 0.95 | 0.38 |
| | | | | | | | | | | | | | | | | | | | | **10.38** | | | | | | | | | 200 | 200 | | | | | | | | | |
| L201B | 201B | 201A | 0.16 | 0.00 | 0.00 | 0.00 | 0.00 | 0.80 | 0.00 | 0.00 | 0.00 | 0.128 | 0.128 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 10.00 | 76.81 | 104.19 | 122.14 | 178.56 | 0.0 | 0.0 | 27.3 | 31.3 | 250 | 250 | CIRCULAR | PVC | - | 1.00 | 60.3 | **45.30%** | 1.21 | 1.01 | 0.52 |
| | | | | | | | | | | | | | | | | | | | | **10.52** | | | | | | | | | 250 | 250 | | | | | | | | | |
| L202B | 202B | 202 | 0.09 | 0.00 | 0.00 | 0.00 | 0.00 | 0.77 | 0.00 | 0.00 | 0.00 | 0.069 | 0.069 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 10.00 | 76.81 | 104.19 | 122.14 | 178.56 | 0.0 | 0.0 | 14.8 | 9.8 | 200 | 200 | CIRCULAR | PVC | - | 1.01 | 33.4 | **44.27%** | 1.05 | 0.86 | 0.19 |
| L202A | 202 | TANK | 0.07 | 0.00 | 0.00 | 0.00 | 0.00 | 0.82 | 0.00 | 0.00 | 0.00 | 0.057 | 0.127 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 10.19 | 76.08 | 103.20 | 120.97 | 176.84 | 0.0 | 0.0 | 26.8 | 21.8 | 300 | 300 | CIRCULAR | PVC | - | 1.75 | 127.2 | **21.05%** | 1.81 | 1.19 | 0.30 |
| | | | | | | | | | | | | | | | | | | | | **10.49** | | | | | | | | | 300 | 300 | | | | | | | | | |
| | 201A | TANK | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.000 | 0.224 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 10.52 | 74.87 | 101.53 | 119.01 | 173.96 | 0.0 | 0.0 | 46.6 | 1.6 | 300 | 300 | CIRCULAR | PVC | - | 1.00 | 96.2 | **48.45%** | 1.37 | 1.16 | 0.02 |
| | | | | | | | | | | | | | | | | | | | | **10.54** | | | | | | | | | 300 | 300 | | | | | | | | | |

Stantec

HMBS 7

DATE: 2025-09-19
REVISION: 2
DESIGNED BY: DT
CHECKED BY: DT

# STORM SEWER DESIGN SHEET
(City of Ottawa)

FILE NUMBER: 160402143

DESIGN PARAMETERS

$I = a / (t+b)^c$ (As per City of Ottawa Guidelines, 2012)

| | 1:2 yr | 1:5 yr | 1:10 yr | 1:100 yr |
|---|---|---|---|---|
| a = | 732.951 | 998.071 | 1174.184 | 1735.688 |
| b = | 6.199 | 6.053 | 6.014 | 6.014 |
| c = | 0.810 | 0.814 | 0.816 | 0.820 |

MANNING'S n = 0.013
MINIMUM COVER: 2.00 m
TIME OF ENTRY 10 min
BEDDING CLASS = B

| LOCATION | | | DRAINAGE AREA | | | | | | | | | | | | | | | | | | | | PIPE SELECTION | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| AREA ID NUMBER | FROM M.H. | TO M.H. | AREA (2-YEAR) (ha) | AREA (5-YEAR) (ha) | AREA (10-YEAR) (ha) | AREA (100-YEAR) (ha) | AREA (ROOF) (ha) | C (2-YEAR) (-) | C (5-YEAR) (-) | C (10-YEAR) (-) | C (100-YEAR) (-) | A x C (2-YEAR) (ha) | ACCUM AxC (2YR) (ha) | A x C (5-YEAR) (ha) | ACCUM. AxC (5YR) (ha) | A x C (10-YEAR) (ha) | ACCUM. AxC (10YR) (ha) | A x C (100-YEAR) (ha) | ACCUM. AxC (100YR) (ha) | T of C (min) | $I_{2\text{-YEAR}}$ (mm/h) | $I_{5\text{-YEAR}}$ (mm/h) | $I_{10\text{-YEAR}}$ (mm/h) | $I_{100\text{-YEAR}}$ (mm/h) | $Q_{CONTROL}$ (L/s) | ACCUM. $Q_{CONTROL}$ (L/s) | $Q_{ACT}$ (CIA/360) (L/s) | LENGTH (m) | PIPE WIDTH OR DIAMETEI (mm) | PIPE HEIGHT (mm) | PIPE SHAPE (-) | MATERIAL (-) | CLASS (-) | SLOPE % | $Q_{CAP}$ (FULL) (L/s) | % FULL (-) | VEL. (FULL) (m/s) | VEL. (ACT) (m/s) | TIME OF FLOW (min) |
| | 105 | 104 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 10.00 | 76.81 | 104.19 | 122.14 | 178.56 | 0.0 | 0.0 | 0.0 | 23.1 | 300 | 300 | CIRCULAR | PVC | - | 0.40 | 60.9 | **0.00%** | 0.87 | 0.00 | 0.00 |
| | 104 | 103 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 10.00 | 76.81 | 104.19 | 122.14 | 178.56 | 0.0 | 0.0 | 0.0 | 40.5 | 300 | 300 | CIRCULAR | PVC | - | 0.40 | 60.8 | **0.00%** | 0.86 | 0.00 | 0.00 |
| | | | | | | | | | | | | | | | | | | | | **10.00** | | | | | | | | | | | | | | | | | | | |
| | 103 | 102 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 10.00 | 76.81 | 104.19 | 122.14 | 178.56 | 0.0 | 0.0 | 0.0 | 30.7 | 300 | 300 | CIRCULAR | PVC | - | 0.40 | 60.8 | **0.00%** | 0.86 | 0.00 | 0.00 |
| | | | | | | | | | | | | | | | | | | | | **10.00** | | | | | | | | | | | | | | | | | | | |
| | TANK 1 | 102 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 10.00 | 76.81 | 104.19 | 122.14 | 178.56 | 75.3 | 75.3 | 75.3 | 6.1 | 450 | 450 | CIRCULAR | CONCRETE | - | 1.50 | 363.9 | **20.69%** | 2.22 | 1.46 | 0.07 |
| | | | | | | | | | | | | | | | | | | | | **10.07** | | | | | | | | | | | | | | | | | | | |
| | 102 | 101 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 10.07 | 76.54 | 103.83 | 121.71 | 177.93 | 0.0 | 75.3 | 75.3 | 31.2 | 525 | 525 | CIRCULAR | CONCRETE | - | 0.30 | 245.1 | **30.72%** | 1.10 | 0.81 | 0.64 |
| | 101 | 100 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 10.71 | 74.19 | 100.59 | 117.90 | 172.33 | 0.0 | 75.3 | 75.3 | 14.3 | 525 | 525 | CIRCULAR | CONCRETE | - | 0.30 | 245.7 | **30.64%** | 1.10 | 0.81 | 0.29 |
| | | | | | | | | | | | | | | | | | | | | **11.00** | | | | | | | | | 525 | 525 | | | | | | | | | |

# D.2 SAMPLE PCSWMM INPUT (100YR CHICAGO)

```
[TITLE]
;;Project Title/Notes

[OPTIONS]
;;Option             Value
FLOW_UNITS           LPS
INFILTRATION         HORTON
FLOW_ROUTING         DYNWAVE
LINK_OFFSETS         ELEVATION
MIN_SLOPE            0
ALLOW_PONDING        YES
SKIP_STEADY_STATE    NO

START_DATE           04/25/2025
START_TIME           00:00:00
REPORT_START_DATE    04/25/2025
REPORT_START_TIME    00:00:00
END_DATE             04/26/2025
END_TIME             00:00:00
SWEEP_START          01/01
SWEEP_END            12/31
DRY_DAYS             0
REPORT_STEP          00:01:00
WET_STEP             00:01:00
DRY_STEP             00:01:00
ROUTING_STEP         1
RULE_STEP            00:00:00

INERTIAL_DAMPING     PARTIAL
NORMAL_FLOW_LIMITED  BOTH
FORCE_MAIN_EQUATION  H-W
VARIABLE_STEP        0
LENGTHENING_STEP     0
MIN_SURFAREA         0
MAX_TRIALS           8
HEAD_TOLERANCE       0.0015
SYS_FLOW_TOL         5
LAT_FLOW_TOL         5
MINIMUM_STEP         0.5
```

```
THREADS              8

[EVAPORATION]
;;Data Source    Parameters
;;-------------- ----------------
CONSTANT         0.0
DRY_ONLY         NO

[RAINGAGES]
;;Name           Format    Interval SCF      Source
;;-------------- --------- -------- -------- ----------
RG               INTENSITY 0:10     1.0      TIMESERIES 100C03

[SUBCATCHMENTS]
;;Name           Rain Gage        Outlet           Area     %Imperv  Width    %Slope   CurbLen  SnowPack

;;-------------- ---------------- ---------------- -------- -------- -------- -------- --------
----------------
;0.80
L200A            RG               200              0.219542 85.714   49.397   3        0

;0.80
L201A            RG               201A             0.165076 85.714   37.142   3        0

;0.80
L201B            RG               201B             0.158685 85.714   35.704   3        0

;0.80
L201C            RG               201C             0.117454 85.714   26.427   3        0

;0.82
L202A            RG               202A             0.071592 88.571   16.108   3        0

;0.77
L202B            RG               202B             0.087099 81.429   19.597   2        0

;0.25
L203A            RG               203A             0.111486 7.143    25.084   1.5      0
```

```
;0.70
UNC-1            RG               OBSIDIAN         0.064545 71.429   14.523   3        0

;0.70
UNC-2            RG               OBSIDIAN         0.052536 71.429   11.821   3        0

;0.70
UNC-3            RG               GB               0.079886 71.429   17.974   3        0

;0.70
UNC-4            RG               GB               0.078723 71.429   17.713   3        0


[SUBAREAS]
;;Subcatchment   N-Imperv   N-Perv     S-Imperv   S-Perv     PctZero    RouteTo    PctRouted
;;-------------- ---------- ---------- ---------- ---------- ---------- ---------- ----------
L200A            0.013      0.25       1.57       4.67       0          OUTLET
L201A            0.013      0.25       1.57       4.67       0          OUTLET
L201B            0.013      0.25       1.57       4.67       0          OUTLET
L201C            0.013      0.25       1.57       4.67       0          OUTLET
L202A            0.013      0.25       1.57       4.67       0          OUTLET
L202B            0.013      0.25       1.57       4.67       0          OUTLET
L203A            0.013      0.25       1.57       4.67       0          OUTLET
UNC-1            0.013      0.25       1.57       4.67       0          OUTLET
UNC-2            0.013      0.25       1.57       4.67       0          OUTLET
UNC-3            0.013      0.25       1.57       4.67       0          OUTLET
UNC-4            0.013      0.25       1.57       4.67       0          OUTLET

[INFILTRATION]
;;Subcatchment   Param1     Param2     Param3     Param4     Param5
;;-------------- ---------- ---------- ---------- ---------- ----------
L200A            76.2       13.2       4.14       7          0
L201A            76.2       13.2       4.14       7          0
L201B            76.2       13.2       4.14       7          0
L201C            76.2       13.2       4.14       7          0
L202A            76.2       13.2       4.14       7          0
L202B            76.2       13.2       4.14       7          0
L203A            76.2       13.2       4.14       7          0
UNC-1            76.2       13.2       4.14       7          0
```

```
UNC-2            76.2       13.2       4.14       7          0
UNC-3            76.2       13.2       4.14       7          0
UNC-4            76.2       13.2       4.14       7          0

[OUTFALLS]
;;Name           Elevation  Type       Stage Data       Gated    Route To
;;-------------- ---------- ---------- ---------------- -------- ----------------
GB               0          FREE                        NO
OBSIDIAN         0          FREE                        NO
SWR-OUT          103        FIXED      103.572          NO

[STORAGE]
;;Name           Elev.    MaxDepth   InitDepth  Shape       Curve Name/Params            SurDepth Fevap
Psi      Ksat     IMD
;;-------------- -------- ---------- ---------- ----------- ---------------------------- -------- --------
-------- -------- --------
100              103.1    3.28       0.472      FUNCTIONAL  0         0         1.13     0        0
101              103.2    3.44       0.372      FUNCTIONAL  0         0         1.13     0        0
102              103.35   3.32       0.222      FUNCTIONAL  0         0         1.13     0        0
103              103.7    4.08       0          FUNCTIONAL  0         0         1.13     0        0
104              103.92   3.05       0          FUNCTIONAL  0         0         1.13     0        0
105              104.07   2.4        0          FUNCTIONAL  0         0         1.13     0        0
200              104.76   1.78       0          TABULAR     200-V                          0        0
201A             104.27   2.32       0          TABULAR     201A-V                         0        0
201B             105.81   1.78       0          FUNCTIONAL  0         0         0.36     0        0
201C             104.67   1.78       0          TABULAR     201C-V                         0        0
202              104.46   1.74       0          FUNCTIONAL  0         0         1.13     0        0
202A             104.6    1.78       0          TABULAR     202A-V                         0        0
202B             104.62   1.78       0          TABULAR     202B-V                         0        0
203A             105.34   1.38       0          FUNCTIONAL  0         0         1.13     0        0
TANK             102.8    3.18       0.9        TABULAR     TANK-V                         0        0

[CONDUITS]
;;Name           From Node        To Node          Length     Roughness  InOffset   OutOffset  InitFlow
MaxFlow
;;-------------- ---------------- ---------------- ---------- ---------- ---------- ---------- ----------
----------
100-OUT          100              SWR-OUT          7.861      0.013      103.1      103.053    0          0
```

```
101-100          101              100              14.34      0.013      103.2      103.16     0          0

102-101          102              101              31.15      0.013      103.35     103.26     0          0

103-102          103              102              30.74      0.013      103.7      103.58     0          0

104-103          104              103              40.525     0.013      103.92     103.76     0          0

105-104          105              104              23.146     0.013      104.07     103.98     0          0

201B-201         201B             201A             31.319     0.013      105.81     105.5      0          0

201-O            201A             TANK             1.625      0.013      104.27     104.25     0          0

202-TANK         202              TANK             12.791     0.013      104.46     104.24     0          0

OVR              TANK             102              10.105     0.013      104.6      104.5      0          0


[ORIFICES]
;;Name           From Node        To Node          Type         Offset     Qcoeff     Gated    CloseTime
;;-------------- ---------------- ---------------- ------------ ---------- ---------- -------- ----------
200-O            200              TANK             SIDE         104.76     0.61       NO       0
201C-O           201C             201A             SIDE         104.67     0.61       NO       0
202A-O           202A             202              SIDE         104.6      0.572      NO       0
202B-O           202B             202              SIDE         104.62     0.572      NO       0
203A-O           203A             TANK             SIDE         105.34     0.61       NO       0
OR1              TANK             102              SIDE         103.7      0.61       NO       0

[WEIRS]
;;Name           From Node        To Node          Type         CrestHt    Qcoeff     Gated    EndCon
EndCoeff   Surcharge  RoadWidth  RoadSurf   Coeff. Curve
;;-------------- ---------------- ---------------- ------------ ---------- ---------- -------- --------
---------- ---------- ---------- ---------- ----------------
W1               200              202A             TRANSVERSE   106.34     1.67       NO       0        0
       YES

[XSECTIONS]
;;Link           Shape        Geom1            Geom2      Geom3      Geom4      Barrels    Culvert
```

```
;;-------------- ------------ ---------------- ---------- ---------- ---------- ---------- ----------
100-OUT          CIRCULAR     0.525            0          0          0          1
101-100          CIRCULAR     0.525            0          0          0          1
102-101          CIRCULAR     0.525            0          0          0          1
103-102          CIRCULAR     0.3              0          0          0          1
104-103          CIRCULAR     0.3              0          0          0          1
105-104          CIRCULAR     0.3              0          0          0          1
201B-201         CIRCULAR     0.25             0          0          0          1
201-O            CIRCULAR     0.3              0          0          0          1
202-TANK         CIRCULAR     0.3              0          0          0          1
OVR              CIRCULAR     0.45             0          0          0          1
200-O            CIRCULAR     0.2              0          0          0
201C-O           CIRCULAR     0.2              0          0          0
202A-O           CIRCULAR     0.127            0          0          0
202B-O           CIRCULAR     0.102            0          0          0
203A-O           CIRCULAR     0.3              0          0          0
OR1              CIRCULAR     0.2              0          0          0
W1               RECT_OPEN    0.2              6          0          0

[LOSSES]
;;Link           Kentry     Kexit      Kavg       Flap Gate  Seepage
;;-------------- ---------- ---------- ---------- ---------- ----------
101-100          0          1.344      0          NO         0
102-101          0          1.344      0          NO         0
103-102          0          1.344      0          NO         0
104-103          0          1.344      0          NO         0
105-104          0          1.344      0          NO         0
201B-201         0          1.344      0          NO         0
201-O            0          1.344      0          NO         0
202-TANK         0          1.344      0          NO         0

[CURVES]
;;Name           Type       X-Value    Y-Value
;;-------------- ---------- ---------- ----------
200-V            Storage    0          0.36
200-V                       1.38       0.36
200-V                       1.58       107.8
200-V                       1.58001    0
200-V                       1.78       0
```

```
201A-V           Storage    0          1.13
201A-V                      1.92       1.13
201A-V                      2.1        114.5
201A-V                      2.10001    0
201A-V                      2.32       0

201C-V           Storage    0          0.36
201C-V                      1.38       0.36
201C-V                      1.58       120.1
201C-V                      1.58001    0
201C-V                      1.78       0

202A-V           Storage    0          0.36
202A-V                      1.38       0.36
202A-V                      1.58       102.6
202A-V                      1.58001    0
202A-V                      1.78       0

202B-V           Storage    0          0.36
202B-V                      1.38       0.36
202B-V                      1.56       130.2
202B-V                      1.560001   0
202B-V                      1.78       0

TANK-V           Storage    0          198.5478
TANK-V                      0.89999    198.5478
TANK-V                      0.9        496.3695
TANK-V                      0.9254     452.0556969
TANK-V                      0.9508     489.873437
TANK-V                      0.9762     445.5596339
TANK-V                      1.0016     483.377374
TANK-V                      1.027      439.0635709
TANK-V                      1.0524     470.385248
TANK-V                      1.0778     426.0714449
TANK-V                      1.1032     457.393122
TANK-V                      1.1286     413.0793189
TANK-V                      1.154      444.4009961
TANK-V                      1.1794     400.0871929
```

```
TANK-V                      1.2048     431.4088701
TANK-V                      1.2302     387.0950669
TANK-V                      1.2556     418.4167441
TANK-V                      1.281      374.1029409
TANK-V                      1.3064     405.4246181
TANK-V                      1.3318     361.110815
TANK-V                      1.3572     392.4324921
TANK-V                      1.3826     341.622626
TANK-V                      1.408      372.9443031
TANK-V                      1.4334     315.638374
TANK-V                      1.4588     346.9600512
TANK-V                      1.4842     289.654122
TANK-V                      1.5096     320.9757992
TANK-V                      1.535      263.6698701
TANK-V                      1.5604     294.9915472
TANK-V                      1.5858     237.6856181
TANK-V                      1.6112     262.5112323
TANK-V                      1.6366     200.0435965
TANK-V                      1.662      207.8740157
TANK-V                      1.6874     207.8740157
TANK-V                      1.7128     207.8740157
TANK-V                      1.7382     207.8740157
TANK-V                      1.7636     207.8740157
TANK-V                      1.789      207.8740157
TANK-V                      1.8144     207.8740157
TANK-V                      1.8154     0
TANK-V                      5          0

[TIMESERIES]
;;Name            Date       Time       Value
;;--------------- ---------- ---------- ----------
002C03                      0:00       0
002C03                      0:10       2.81
002C03                      0:20       3.5
002C03                      0:30       4.69
002C03                      0:40       7.3
002C03                      0:50       18.21
002C03                      1:00       76.81
002C03                      1:10       24.08
```

```
002C03                  1:20    12.36
002C03                  1:30    8.32
002C03                  1:40    6.3
002C03                  1:50    5.09
002C03                  2:00    4.29
002C03                  2:10    3.72
002C03                  2:20    3.29
002C03                  2:30    2.95
002C03                  2:40    2.68
002C03                  2:50    2.46
002C03                  3:00    2.28

025M04                  0:10    1.516088055
025M04                  0:20    1.749115351
025M04                  0:30    2.078715445
025M04                  0:40    2.583625152
025M04                  0:50    3.461716789
025M04                  1:00    5.394996968
025M04                  1:10    13.44811663
025M04                  1:20    56.72433275
025M04                  1:30    17.78358976
025M04                  1:40    9.131254948
025M04                  1:50    6.147712357
025M04                  2:00    4.655383456
025M04                  2:10    3.762897479
025M04                  2:20    3.169361772
025M04                  2:30    2.745825503
025M04                  2:40    2.428071751
025M04                  2:50    2.180598417
025M04                  3:00    1.982179574
025M04                  3:10    1.819403154
025M04                  3:20    1.683310546
025M04                  3:30    1.567742242
025M04                  3:40    1.468311255
025M04                  3:50    1.381797508
025M04                  4:00    1.305793328

100C03                  0:00    0
100C03                  0:10    6.05
```

```
100C03                  0:20    7.54
100C03                  0:30    10.16
100C03                  0:40    15.97
100C03                  0:50    40.65
100C03                  1:00    178.56
100C03                  1:10    54.05
100C03                  1:20    27.32
100C03                  1:30    18.24
100C03                  1:40    13.74
100C03                  1:50    11.06
100C03                  2:00    9.29
100C03                  2:10    8.02
100C03                  2:20    7.08
100C03                  2:30    6.35
100C03                  2:40    5.76
100C03                  2:50    5.28
100C03                  3:00    4.88

120C03                  0:00    0
120C03                  0:10    7.26
120C03                  0:20    9.048
120C03                  0:30    12.192
120C03                  0:40    19.164
120C03                  0:50    48.78
120C03                  1:00    214.272
120C03                  1:10    64.86
120C03                  1:20    32.784
120C03                  1:30    21.888
120C03                  1:40    16.488
120C03                  1:50    13.272
120C03                  2:00    11.148
120C03                  2:10    9.624
120C03                  2:20    8.496
120C03                  2:30    7.62
120C03                  2:40    6.912
120C03                  2:50    6.336
120C03                  3:00    5.856

[REPORT]
```

```
;;Reporting Options
INPUT      YES
CONTROLS   NO
SUBCATCHMENTS ALL
NODES ALL
LINKS ALL

[TAGS]
Node       100              MN
Node       101              MN
Node       102              MN
Node       103              MN
Node       104              MN
Node       105              MN
Node       202              MN

[MAP]
DIMENSIONS       364298.29965     5011169.2269     364459.98535     5011337.9031
UNITS            Meters

[COORDINATES]
;;Node           X-Coord            Y-Coord
;;-------------- ------------------ ------------------
GB               364427.324         5011284.686
OBSIDIAN         364312.148         5011261.709
SWR-OUT          364312.558         5011252.692
100              364319.4           5011257
101              364326.5           5011244.2
102              364353.5           5011259.7
103              364368.9           5011233.1
104              364404.2           5011252.9
105              364392.6           5011273
200              364376.6           5011253
201A             364383.8           5011268.6
201B             364402.9           5011243.8
201C             364372.8           5011287.5
202              364356.2           5011288.4
202A             364364.3           5011276
202B             364345.6           5011281
```

```
203A             364355.2           5011245.5
TANK             364367.2           5011270

[VERTICES]
;;Link           X-Coord            Y-Coord
;;-------------- ------------------ ------------------
OVR              364359.373         5011261.981
203A-O           364365.536         5011254.031
W1               364374.603         5011264.235

[POLYGONS]
;;Subcatchment   X-Coord            Y-Coord
;;-------------- ------------------ ------------------
L200A            364393.585         5011193.357
L200A            364364.196         5011176.894
L200A            364364.196         5011176.894
L200A            364363.434         5011178.154
L200A            364363.434         5011178.154
L200A            364375.628         5011186.877
L200A            364375.628         5011186.877
L200A            364358.562         5011216.041
L200A            364358.562         5011216.041
L200A            364368.332         5011225.543
L200A            364368.332         5011225.543
L200A            364349.508         5011258.413
L200A            364349.508         5011258.413
L200A            364351.681         5011258.628
L200A            364351.681         5011258.628
L200A            364353.385         5011261.689
L200A            364353.385         5011261.689
L200A            364360.449         5011265.848
L200A            364360.449         5011265.848
L200A            364374.533         5011273.926
L200A            364374.533         5011273.926
L200A            364383.06          5011259.348
L200A            364383.06          5011259.348
L200A            364383.439         5011252.595
L200A            364383.439         5011252.595
L200A            364374.978         5011247.755
```

| | | |
|---|---|---|
| L200A | 364374.978 | 5011247.755 |
| L200A | 364377.213 | 5011243.846 |
| L200A | 364377.213 | 5011243.846 |
| L200A | 364378.549 | 5011241.015 |
| L200A | 364378.549 | 5011241.015 |
| L200A | 364378.58 | 5011238.047 |
| L200A | 364378.58 | 5011238.047 |
| L200A | 364378.475 | 5011231.586 |
| L200A | 364378.475 | 5011231.586 |
| L200A | 364380.335 | 5011228.614 |
| L200A | 364380.335 | 5011228.614 |
| L200A | 364387.224 | 5011232.561 |
| L200A | 364387.224 | 5011232.561 |
| L200A | 364387.247 | 5011232.52 |
| L200A | 364387.247 | 5011232.52 |
| L200A | 364386.999 | 5011232.336 |
| L200A | 364386.999 | 5011232.336 |
| L200A | 364387.247 | 5011232.52 |
| L200A | 364387.247 | 5011232.52 |
| L200A | 364403.829 | 5011202.916 |
| L200A | 364403.829 | 5011202.916 |
| L200A | 364393.585 | 5011193.357 |
| L201A | 364400.543 | 5011291.027 |
| L201A | 364407.321 | 5011279.171 |
| L201A | 364407.321 | 5011279.171 |
| L201A | 364423.139 | 5011278.933 |
| L201A | 364423.139 | 5011278.933 |
| L201A | 364413.044 | 5011269.815 |
| L201A | 364413.044 | 5011269.815 |
| L201A | 364421.472 | 5011254.899 |
| L201A | 364421.472 | 5011254.899 |
| L201A | 364404.02 | 5011244.417 |
| L201A | 364404.02 | 5011244.417 |
| L201A | 364397.66 | 5011240.275 |
| L201A | 364397.66 | 5011240.275 |
| L201A | 364387.247 | 5011232.52 |
| L201A | 364387.247 | 5011232.52 |
| L201A | 364387.224 | 5011232.561 |
| L201A | 364387.224 | 5011232.561 |

| | | |
|---|---|---|
| L201A | 364380.335 | 5011228.614 |
| L201A | 364380.335 | 5011228.614 |
| L201A | 364378.475 | 5011231.586 |
| L201A | 364378.475 | 5011231.586 |
| L201A | 364378.58 | 5011238.047 |
| L201A | 364378.58 | 5011238.047 |
| L201A | 364378.549 | 5011241.015 |
| L201A | 364378.549 | 5011241.015 |
| L201A | 364377.213 | 5011243.846 |
| L201A | 364377.213 | 5011243.846 |
| L201A | 364374.978 | 5011247.755 |
| L201A | 364374.978 | 5011247.755 |
| L201A | 364383.439 | 5011252.595 |
| L201A | 364383.439 | 5011252.595 |
| L201A | 364383.06 | 5011259.348 |
| L201A | 364383.06 | 5011259.348 |
| L201A | 364374.533 | 5011273.926 |
| L201A | 364374.533 | 5011273.926 |
| L201A | 364391.607 | 5011285.728 |
| L201A | 364391.607 | 5011285.728 |
| L201A | 364400.543 | 5011291.027 |
| L201B | 364421.472 | 5011254.899 |
| L201B | 364439.372 | 5011223.103 |
| L201B | 364439.372 | 5011223.103 |
| L201B | 364429.792 | 5011214.106 |
| L201B | 364429.792 | 5011214.106 |
| L201B | 364393.585 | 5011193.357 |
| L201B | 364393.585 | 5011193.357 |
| L201B | 364403.829 | 5011202.916 |
| L201B | 364403.829 | 5011202.916 |
| L201B | 364387.247 | 5011232.52 |
| L201B | 364387.247 | 5011232.52 |
| L201B | 364397.66 | 5011240.275 |
| L201B | 364397.66 | 5011240.275 |
| L201B | 364404.02 | 5011244.417 |
| L201B | 364404.02 | 5011244.417 |
| L201B | 364421.472 | 5011254.899 |
| L201C | 364355.509 | 5011307.185 |
| L201C | 364383.43 | 5011323.177 |

| | | |
|---|---|---|
| L201C | 364383.43 | 5011323.177 |
| L201C | 364383.979 | 5011319.944 |
| L201C | 364383.979 | 5011319.944 |
| L201C | 364400.543 | 5011291.027 |
| L201C | 364400.543 | 5011291.027 |
| L201C | 364391.607 | 5011285.728 |
| L201C | 364391.607 | 5011285.728 |
| L201C | 364374.533 | 5011273.926 |
| L201C | 364374.533 | 5011273.926 |
| L201C | 364366.362 | 5011288.723 |
| L201C | 364366.362 | 5011288.723 |
| L201C | 364363.242 | 5011290.781 |
| L201C | 364363.242 | 5011290.781 |
| L201C | 364361.178 | 5011292.468 |
| L201C | 364361.178 | 5011292.468 |
| L201C | 364359.811 | 5011295.159 |
| L201C | 364359.811 | 5011295.159 |
| L201C | 364357.685 | 5011303.702 |
| L201C | 364357.685 | 5011303.702 |
| L201C | 364355.509 | 5011307.185 |
| L202A | 364337.03 | 5011253.849 |
| L202A | 364330.155 | 5011265.967 |
| L202A | 364330.155 | 5011265.967 |
| L202A | 364340.668 | 5011272.009 |
| L202A | 364340.668 | 5011272.009 |
| L202A | 364345.602 | 5011275.299 |
| L202A | 364345.602 | 5011275.299 |
| L202A | 364346.858 | 5011277.574 |
| L202A | 364346.858 | 5011277.574 |
| L202A | 364351.317 | 5011280.08 |
| L202A | 364351.317 | 5011280.08 |
| L202A | 364356.583 | 5011283.08 |
| L202A | 364356.583 | 5011283.08 |
| L202A | 364355.121 | 5011285.646 |
| L202A | 364355.121 | 5011285.646 |
| L202A | 364363.242 | 5011290.781 |
| L202A | 364363.242 | 5011290.781 |
| L202A | 364366.362 | 5011288.723 |
| L202A | 364366.362 | 5011288.723 |

| | | |
|---|---|---|
| L202A | 364374.533 | 5011273.926 |
| L202A | 364374.533 | 5011273.926 |
| L202A | 364360.449 | 5011265.848 |
| L202A | 364360.449 | 5011265.848 |
| L202A | 364353.385 | 5011261.689 |
| L202A | 364353.385 | 5011261.689 |
| L202A | 364351.681 | 5011258.628 |
| L202A | 364351.681 | 5011258.628 |
| L202A | 364349.508 | 5011258.413 |
| L202A | 364349.508 | 5011258.413 |
| L202A | 364343.863 | 5011258.068 |
| L202A | 364343.863 | 5011258.068 |
| L202A | 364337.03 | 5011253.849 |
| L202B | 364333.798 | 5011294.846 |
| L202B | 364332.559 | 5011297.136 |
| L202B | 364332.559 | 5011297.136 |
| L202B | 364337.769 | 5011300.131 |
| L202B | 364337.769 | 5011300.131 |
| L202B | 364341.49 | 5011299.213 |
| L202B | 364341.49 | 5011299.213 |
| L202B | 364355.509 | 5011307.185 |
| L202B | 364355.509 | 5011307.185 |
| L202B | 364357.685 | 5011303.702 |
| L202B | 364357.685 | 5011303.702 |
| L202B | 364359.811 | 5011295.159 |
| L202B | 364359.811 | 5011295.159 |
| L202B | 364361.178 | 5011292.468 |
| L202B | 364361.178 | 5011292.468 |
| L202B | 364363.242 | 5011290.781 |
| L202B | 364363.242 | 5011290.781 |
| L202B | 364355.121 | 5011285.646 |
| L202B | 364355.121 | 5011285.646 |
| L202B | 364356.583 | 5011283.08 |
| L202B | 364356.583 | 5011283.08 |
| L202B | 364351.317 | 5011280.08 |
| L202B | 364351.317 | 5011280.08 |
| L202B | 364346.858 | 5011277.574 |
| L202B | 364346.858 | 5011277.574 |
| L202B | 364345.602 | 5011275.299 |

| | | |
|---|---|---|
| L202B | 364345.602 | 5011275.299 |
| L202B | 364340.668 | 5011272.009 |
| L202B | 364340.668 | 5011272.009 |
| L202B | 364330.155 | 5011265.967 |
| L202B | 364330.155 | 5011265.967 |
| L202B | 364320.064 | 5011283.491 |
| L202B | 364320.064 | 5011283.491 |
| L202B | 364326.957 | 5011287.451 |
| L202B | 364326.957 | 5011287.451 |
| L202B | 364329.64 | 5011290.478 |
| L202B | 364329.64 | 5011290.478 |
| L202B | 364333.798 | 5011294.846 |
| L203A | 364358.562 | 5011216.041 |
| L203A | 364344.872 | 5011210.379 |
| L203A | 364344.872 | 5011210.379 |
| L203A | 364326.099 | 5011243.356 |
| L203A | 364326.099 | 5011243.356 |
| L203A | 364338.945 | 5011250.313 |
| L203A | 364338.945 | 5011250.313 |
| L203A | 364337.03 | 5011253.849 |
| L203A | 364337.03 | 5011253.849 |
| L203A | 364343.863 | 5011258.068 |
| L203A | 364343.863 | 5011258.068 |
| L203A | 364349.508 | 5011258.413 |
| L203A | 364349.508 | 5011258.413 |
| L203A | 364368.332 | 5011225.543 |
| L203A | 364368.332 | 5011225.543 |
| L203A | 364358.562 | 5011216.041 |
| UNC-1 | 364338.945 | 5011250.313 |
| UNC-1 | 364326.099 | 5011243.356 |
| UNC-1 | 364326.099 | 5011243.356 |
| UNC-1 | 364305.649 | 5011278.69 |
| UNC-1 | 364305.649 | 5011278.69 |
| UNC-1 | 364333.798 | 5011294.846 |
| UNC-1 | 364333.798 | 5011294.846 |
| UNC-1 | 364329.64 | 5011290.478 |
| UNC-1 | 364329.64 | 5011290.478 |
| UNC-1 | 364326.957 | 5011287.451 |
| UNC-1 | 364326.957 | 5011287.451 |

| | | |
|---|---|---|
| UNC-1 | 364320.064 | 5011283.491 |
| UNC-1 | 364320.064 | 5011283.491 |
| UNC-1 | 364330.155 | 5011265.967 |
| UNC-1 | 364330.155 | 5011265.967 |
| UNC-1 | 364337.03 | 5011253.849 |
| UNC-1 | 364337.03 | 5011253.849 |
| UNC-1 | 364338.945 | 5011250.313 |
| UNC-2 | 364375.628 | 5011186.877 |
| UNC-2 | 364363.434 | 5011178.154 |
| UNC-2 | 364363.434 | 5011178.154 |
| UNC-2 | 364344.872 | 5011210.379 |
| UNC-2 | 364344.872 | 5011210.379 |
| UNC-2 | 364358.562 | 5011216.041 |
| UNC-2 | 364358.562 | 5011216.041 |
| UNC-2 | 364375.628 | 5011186.877 |
| UNC-3 | 364413.044 | 5011269.815 |
| UNC-3 | 364423.139 | 5011278.933 |
| UNC-3 | 364423.139 | 5011278.933 |
| UNC-3 | 364452.636 | 5011227.196 |
| UNC-3 | 364452.636 | 5011227.196 |
| UNC-3 | 364429.792 | 5011214.106 |
| UNC-3 | 364429.792 | 5011214.106 |
| UNC-3 | 364439.372 | 5011223.103 |
| UNC-3 | 364439.372 | 5011223.103 |
| UNC-3 | 364421.472 | 5011254.899 |
| UNC-3 | 364421.472 | 5011254.899 |
| UNC-3 | 364413.044 | 5011269.815 |
| UNC-4 | 364383.979 | 5011319.944 |
| UNC-4 | 364383.43 | 5011323.177 |
| UNC-4 | 364383.43 | 5011323.177 |
| UNC-4 | 364395.885 | 5011330.236 |
| UNC-4 | 364395.885 | 5011330.236 |
| UNC-4 | 364423.139 | 5011278.933 |
| UNC-4 | 364423.139 | 5011278.933 |
| UNC-4 | 364407.321 | 5011279.171 |
| UNC-4 | 364407.321 | 5011279.171 |
| UNC-4 | 364400.543 | 5011291.027 |
| UNC-4 | 364400.543 | 5011291.027 |
| UNC-4 | 364383.979 | 5011319.944 |

```
;;Storage Node   X-Coord            Y-Coord
;;-------------- ------------------ ------------------

[SYMBOLS]
;;Gage           X-Coord            Y-Coord
;;-------------- ------------------ ------------------
```

# D.3 SAMPLE PCSWMM OUTPUT (100YR CHICAGO)

EPA STORM WATER MANAGEMENT MODEL - VERSION 5.2 (Build 5.2.4)
---

**********
Element Count
**********
Number of rain gages ...... 1
Number of subcatchments ... 11
Number of nodes ........... 18
Number of links ........... 17
Number of pollutants ...... 0
Number of land uses ....... 0

****************
Raingage Summary
****************

| Name | Data Source | Data Type | Recording Interval |
|---|---|---|---|
| RG | 100C03 | INTENSITY | 10 min. |

********************
Subcatchment Summary
********************

| Name | Area | Width | %Imperv | %Slope | Rain Gage | Outlet |
|---|---|---|---|---|---|---|
| L200A | 0.22 | 49.40 | 85.71 | 3.0000 | RG | 200 |
| L201A | 0.17 | 37.14 | 85.71 | 3.0000 | RG | 201A |
| L201B | 0.16 | 35.70 | 85.71 | 3.0000 | RG | 201B |
| L201C | 0.12 | 26.43 | 85.71 | 3.0000 | RG | 201C |
| L202A | 0.07 | 16.11 | 88.57 | 3.0000 | RG | 202A |
| L202B | 0.09 | 19.60 | 81.43 | 2.0000 | RG | 202B |
| L203A | 0.11 | 25.08 | 7.14 | 1.5000 | RG | 203A |
| UNC-1 | 0.06 | 14.52 | 71.43 | 3.0000 | RG | OBSIDIAN |
| UNC-2 | 0.05 | 11.82 | 71.43 | 3.0000 | RG | OBSIDIAN |
| UNC-3 | 0.08 | 17.97 | 71.43 | 3.0000 | RG | GB |
| UNC-4 | 0.08 | 17.71 | 71.43 | 3.0000 | RG | GB |

************
Node Summary
************

| Name | Type | Invert Elev. | Max. Depth | Ponded Area | External Inflow |
|---|---|---|---|---|---|
| GB | OUTFALL | 0.00 | 0.00 | 0.0 | |
| OBSIDIAN | OUTFALL | 0.00 | 0.00 | 0.0 | |
| SWR-OUT | OUTFALL | 103.00 | 0.58 | 0.0 | |
| 100 | STORAGE | 103.10 | 3.28 | 0.0 | |
| 101 | STORAGE | 103.20 | 3.44 | 0.0 | |
| 102 | STORAGE | 103.35 | 3.32 | 0.0 | |
| 103 | STORAGE | 103.70 | 4.08 | 0.0 | |
| 104 | STORAGE | 103.92 | 3.05 | 0.0 | |
| 105 | STORAGE | 104.07 | 2.40 | 0.0 | |
| 200 | STORAGE | 104.76 | 1.78 | 0.0 | |
| 201A | STORAGE | 104.27 | 2.32 | 0.0 | |
| 201B | STORAGE | 105.81 | 1.78 | 0.0 | |
| 201C | STORAGE | 104.67 | 1.78 | 0.0 | |
| 202 | STORAGE | 104.46 | 1.74 | 0.0 | |
| 202A | STORAGE | 104.60 | 1.78 | 0.0 | |
| 202B | STORAGE | 104.62 | 1.78 | 0.0 | |
| 203A | STORAGE | 105.34 | 1.38 | 0.0 | |
| TANK | STORAGE | 102.80 | 3.18 | 0.0 | |

************
Link Summary
************

| Name | From Node | To Node | Type | Length | %Slope | Roughness |
|---|---|---|---|---|---|---|
| 100-OUT | 100 | SWR-OUT | CONDUIT | 7.9 | 0.5979 | 0.0130 |
| 101-100 | 101 | 100 | CONDUIT | 14.3 | 0.2789 | 0.0130 |
| 102-101 | 102 | 101 | CONDUIT | 31.1 | 0.2889 | 0.0130 |

| | | | | | | |
|---|---|---|---|---|---|---|
| 103-102 | 103 | 102 | CONDUIT | 30.7 | 0.3904 | 0.0130 |
| 104-103 | 104 | 103 | CONDUIT | 40.5 | 0.3948 | 0.0130 |
| 105-104 | 105 | 104 | CONDUIT | 23.1 | 0.3888 | 0.0130 |
| 201B-201 | 201B | 201A | CONDUIT | 31.3 | 0.9899 | 0.0130 |
| 201-O | 201A | TANK | CONDUIT | 1.6 | 1.2309 | 0.0130 |
| 202-TANK | 202 | TANK | CONDUIT | 12.8 | 1.7202 | 0.0130 |
| OVR | TANK | 102 | CONDUIT | 10.1 | 0.9897 | 0.0130 |
| 200-O | 200 | TANK | ORIFICE | | | |
| 201C-O | 201C | 201A | ORIFICE | | | |
| 202A-O | 202A | 202 | ORIFICE | | | |
| 202B-O | 202B | 202 | ORIFICE | | | |
| 203A-O | 203A | TANK | ORIFICE | | | |
| OR1 | TANK | 102 | ORIFICE | | | |
| W1 | 200 | 202A | WEIR | | | |

**********
Cross Section Summary
**********

| Conduit | Shape | Full Depth | Full Area | Hyd. Rad. | Max. Width | No. of Barrels | Full Flow |
|---|---|---|---|---|---|---|---|
| 100-OUT | CIRCULAR | 0.53 | 0.22 | 0.13 | 0.53 | 1 | 332.56 |
| 101-100 | CIRCULAR | 0.53 | 0.22 | 0.13 | 0.53 | 1 | 227.15 |
| 102-101 | CIRCULAR | 0.53 | 0.22 | 0.13 | 0.53 | 1 | 231.18 |
| 103-102 | CIRCULAR | 0.30 | 0.07 | 0.07 | 0.30 | 1 | 60.42 |
| 104-103 | CIRCULAR | 0.30 | 0.07 | 0.07 | 0.30 | 1 | 60.77 |
| 105-104 | CIRCULAR | 0.30 | 0.07 | 0.07 | 0.30 | 1 | 60.30 |
| 201B-201 | CIRCULAR | 0.25 | 0.05 | 0.06 | 0.25 | 1 | 59.17 |
| 201-O | CIRCULAR | 0.30 | 0.07 | 0.07 | 0.30 | 1 | 107.29 |
| 202-TANK | CIRCULAR | 0.30 | 0.07 | 0.07 | 0.30 | 1 | 126.84 |
| OVR | CIRCULAR | 0.45 | 0.16 | 0.11 | 0.45 | 1 | 283.65 |

***************
Analysis Options
***************
Flow Units ..... LPS
Process Models:

  Rainfall/Runoff ..... YES
  RDII ..... NO
  Snowmelt ..... NO
  Groundwater ..... NO
  Flow Routing ..... YES
  Ponding Allowed ..... YES
  Water Quality ..... NO
Infiltration Method ..... HORTON
Flow Routing Method ..... DYNWAVE
Surcharge Method ..... EXTRAN
Starting Date ..... 04/25/2025 00:00:00
Ending Date ..... 04/26/2025 00:00:00
Antecedent Dry Days ..... 0.0
Report Time Step ..... 00:01:00
Wet Time Step ..... 00:01:00
Dry Time Step ..... 00:01:00
Routing Time Step ..... 1.00 sec
Variable Time Step ..... NO
Maximum Trials ..... 8
Number of Threads ..... 1
Head Tolerance ..... 0.001500 m

| Runoff Quantity Continuity | Volume hectare-m | Depth mm |
|---|---|---|
| Total Precipitation ..... | 0.086 | 71.667 |
| Evaporation Loss ..... | 0.000 | 0.000 |
| Infiltration Loss ..... | 0.014 | 11.364 |
| Surface Runoff ..... | 0.071 | 59.197 |
| Final Storage ..... | 0.001 | 1.179 |
| Continuity Error (%) ..... | -0.102 | |

| Flow Routing Continuity | Volume hectare-m | Volume 10^6 ltr |
|---|---|---|
| Dry Weather Inflow ..... | 0.000 | 0.000 |
| Wet Weather Inflow ..... | 0.071 | 0.714 |

| | | |
|---|---|---|
| Groundwater Inflow ..... | 0.000 | 0.000 |
| RDII Inflow ..... | 0.000 | 0.000 |
| External Inflow ..... | 0.000 | 0.000 |
| External Outflow ..... | 0.071 | 0.713 |
| Flooding Loss ..... | 0.000 | 0.000 |
| Evaporation Loss ..... | 0.000 | 0.000 |
| Exfiltration Loss ..... | 0.000 | 0.000 |
| Initial Stored Volume .... | 0.019 | 0.187 |
| Final Stored Volume ..... | 0.019 | 0.188 |
| Continuity Error (%) ..... | 0.014 | |

**********
Highest Flow Instability Indexes
**********
All links are stable.

**********
Most Frequent Nonconverging Nodes
**********
Convergence obtained at all time steps.

**********
Routing Time Step Summary
**********
| | | |
|---|---|---|
| Minimum Time Step | : | 1.00 sec |
| Average Time Step | : | 1.00 sec |
| Maximum Time Step | : | 1.00 sec |
| % of Time in Steady State | : | 0.00 |
| Average Iterations per Step | : | 2.00 |
| % of Steps Not Converging | : | 0.00 |

**********
Subcatchment Runoff Summary
**********

| Subcatchment | Total Precip mm | Total Runon mm | Total Evap mm | Total Infil mm | Imperv Runoff mm | Perv Runoff mm | Total Runoff mm | Total Runoff 10^6 ltr | Peak Runoff LPS | Runoff Coeff |
|---|---|---|---|---|---|---|---|---|---|---|
| L200A | 71.67 | 0.00 | 0.00 | 6.31 | 60.15 | 3.93 | 64.09 | 0.14 | 105.87 | 0.894 |
| L201A | 71.67 | 0.00 | 0.00 | 6.31 | 60.15 | 3.93 | 64.09 | 0.11 | 79.61 | 0.894 |
| L201B | 71.67 | 0.00 | 0.00 | 6.31 | 60.15 | 3.93 | 64.09 | 0.10 | 76.53 | 0.894 |
| L201C | 71.67 | 0.00 | 0.00 | 6.31 | 60.15 | 3.93 | 64.09 | 0.08 | 56.64 | 0.894 |
| L202A | 71.67 | 0.00 | 0.00 | 5.04 | 62.15 | 3.16 | 65.32 | 0.05 | 34.81 | 0.911 |
| L202B | 71.67 | 0.00 | 0.00 | 8.26 | 57.14 | 5.06 | 62.19 | 0.05 | 41.07 | 0.868 |
| L203A | 71.67 | 0.00 | 0.00 | 44.29 | 5.01 | 22.27 | 27.29 | 0.03 | 18.60 | 0.381 |
| UNC-1 | 71.67 | 0.00 | 0.00 | 12.77 | 50.13 | 7.72 | 57.85 | 0.04 | 29.14 | 0.807 |
| UNC-2 | 71.67 | 0.00 | 0.00 | 12.77 | 50.13 | 7.72 | 57.85 | 0.03 | 23.72 | 0.807 |
| UNC-3 | 71.67 | 0.00 | 0.00 | 12.77 | 50.13 | 7.72 | 57.85 | 0.05 | 36.07 | 0.807 |
| UNC-4 | 71.67 | 0.00 | 0.00 | 12.77 | 50.13 | 7.72 | 57.85 | 0.05 | 35.54 | 0.807 |

**********
Node Depth Summary
**********

| Node | Type | Average Depth Meters | Maximum Depth Meters | Maximum HGL Meters | Time of Max Occurrence days hr:min | Reported Max Depth Meters |
|---|---|---|---|---|---|---|
| GB | OUTFALL | 0.00 | 0.00 | 0.00 | 0 00:00 | 0.00 |
| OBSIDIAN | OUTFALL | 0.00 | 0.00 | 0.00 | 0 00:00 | 0.00 |
| SWR-OUT | OUTFALL | 0.57 | 0.57 | 103.57 | 0 00:00 | 0.57 |
| 100 | STORAGE | 0.47 | 0.47 | 103.57 | 0 01:22 | 0.47 |
| 101 | STORAGE | 0.37 | 0.39 | 103.59 | 0 01:24 | 0.39 |
| 102 | STORAGE | 0.23 | 0.28 | 103.63 | 0 01:24 | 0.28 |
| 103 | STORAGE | 0.00 | 0.00 | 103.70 | 0 00:00 | 0.00 |
| 104 | STORAGE | 0.00 | 0.00 | 103.92 | 0 00:00 | 0.00 |
| 105 | STORAGE | 0.00 | 0.00 | 104.07 | 0 00:00 | 0.00 |
| 200 | STORAGE | 0.02 | 1.46 | 106.22 | 0 01:10 | 1.46 |
| 201A | STORAGE | 0.02 | 0.97 | 105.24 | 0 01:10 | 0.97 |
| 201B | STORAGE | 0.01 | 0.58 | 106.39 | 0 01:10 | 0.58 |
| 201C | STORAGE | 0.01 | 1.01 | 105.68 | 0 01:10 | 1.01 |
| 202 | STORAGE | 0.01 | 0.19 | 104.65 | 0 01:10 | 0.19 |
| 202A | STORAGE | 0.01 | 1.22 | 105.82 | 0 01:10 | 1.22 |
| 202B | STORAGE | 0.03 | 1.51 | 106.13 | 0 01:11 | 1.51 |
| 203A | STORAGE | 0.00 | 0.12 | 105.46 | 0 01:10 | 0.12 |
| TANK | STORAGE | 0.97 | 1.79 | 104.59 | 0 01:24 | 1.79 |

## Node Inflow Summary

| Node | Type | Maximum Lateral Inflow LPS | Maximum Total Inflow LPS | Time of Max Occurrence days hr:min | Lateral Inflow Volume 10^6 ltr | Total Inflow Volume 10^6 ltr | Flow Balance Error Percent |
|---|---|---|---|---|---|---|---|
| GB | OUTFALL | 71.61 | 71.61 | 0 01:10 | 0.0918 | 0.0918 | 0.000 |
| OBSIDIAN | OUTFALL | 52.86 | 52.86 | 0 01:10 | 0.0677 | 0.0677 | 0.000 |
| SWR-OUT | OUTFALL | 0.00 | 75.26 | 0 01:25 | 0 | 0.554 | 0.000 |
| 100 | STORAGE | 0.00 | 75.26 | 0 01:25 | 0 | 0.554 | -0.000 |
| 101 | STORAGE | 0.00 | 75.26 | 0 01:25 | 0 | 0.554 | -0.000 |
| 102 | STORAGE | 0.00 | 75.26 | 0 01:24 | 0 | 0.554 | 0.000 |
| 103 | STORAGE | 0.00 | 0.00 | 0 00:00 | 0 | 0 | 0.000 ltr |
| 104 | STORAGE | 0.00 | 0.00 | 0 00:00 | 0 | 0 | 0.000 ltr |
| 105 | STORAGE | 0.00 | 0.00 | 0 00:00 | 0 | 0 | 0.000 ltr |
| 200 | STORAGE | 105.87 | 105.87 | 0 01:10 | 0.141 | 0.141 | 0.022 |
| 201A | STORAGE | 79.61 | 211.96 | 0 01:10 | 0.106 | 0.283 | 0.019 |
| 201B | STORAGE | 76.53 | 76.53 | 0 01:10 | 0.102 | 0.102 | 0.020 |
| 201C | STORAGE | 56.64 | 56.64 | 0 01:10 | 0.0753 | 0.0753 | -0.000 |
| 202 | STORAGE | 0.00 | 59.55 | 0 01:10 | 0 | 0.101 | 0.196 |
| 202A | STORAGE | 34.81 | 34.81 | 0 01:10 | 0.0468 | 0.0468 | -0.000 |
| 202B | STORAGE | 41.07 | 41.07 | 0 01:10 | 0.0542 | 0.0542 | 0.010 |
| 203A | STORAGE | 18.60 | 18.60 | 0 01:10 | 0.0304 | 0.0304 | -0.000 |
| TANK | STORAGE | 0.00 | 388.72 | 0 01:10 | 0 | 0.733 | -0.026 |

## Node Surcharge Summary

No nodes were surcharged.

## Node Flooding Summary

No nodes were flooded.

## Storage Volume Summary

| Storage Unit | Average Volume 1000 m | Avg Pcnt Full | Evap Pcnt Loss | Exfil Pcnt Loss | Maximum Volume 1000 m | Max Pcnt Full | Time of Max Occurrence days hr:min | Maximum Outflow LPS |
|---|---|---|---|---|---|---|---|---|

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 100 | 0.001 | 14.4 | 0.0 | 0.0 | 0.001 | 14.4 | 0 | 01:22 | 75.26 |
| 101 | 0.000 | 10.8 | 0.0 | 0.0 | 0.000 | 11.3 | 0 | 01:24 | 75.26 |
| 102 | 0.000 | 6.8 | 0.0 | 0.0 | 0.000 | 8.3 | 0 | 01:24 | 75.26 |
| 103 | 0.000 | 0.0 | 0.0 | 0.0 | 0.000 | 0.0 | 0 | 00:00 | 0.00 |
| 104 | 0.000 | 0.0 | 0.0 | 0.0 | 0.000 | 0.0 | 0 | 00:00 | 0.00 |
| 105 | 0.000 | 0.0 | 0.0 | 0.0 | 0.000 | 0.0 | 0 | 00:00 | 0.00 |
| 200 | 0.000 | 0.1 | 0.0 | 0.0 | 0.002 | 20.0 | 0 | 01:10 | 99.03 |
| 201A | 0.000 | 0.2 | 0.0 | 0.0 | 0.001 | 8.7 | 0 | 01:10 | 211.78 |
| 201B | 0.000 | 0.6 | 0.0 | 0.0 | 0.000 | 32.7 | 0 | 01:10 | 75.98 |
| 201C | 0.000 | 0.0 | 0.0 | 0.0 | 0.000 | 2.9 | 0 | 01:10 | 56.43 |
| 202 | 0.000 | 0.4 | 0.0 | 0.0 | 0.000 | 10.8 | 0 | 01:10 | 59.52 |
| 202A | 0.000 | 0.0 | 0.0 | 0.0 | 0.000 | 4.1 | 0 | 01:10 | 34.57 |
| 202B | 0.000 | 0.4 | 0.0 | 0.0 | 0.007 | 55.6 | 0 | 01:11 | 25.03 |
| 203A | 0.000 | 0.2 | 0.0 | 0.0 | 0.000 | 8.6 | 0 | 01:10 | 18.47 |
| TANK | 0.207 | 41.6 | 0.0 | 0.0 | 0.491 | 98.8 | 0 | 01:24 | 75.26 |

**********
Outfall Loading Summary
**********

| Outfall Node | Flow Freq Pcnt | Avg Flow LPS | Max Flow LPS | Total Volume 10^6 ltr |
|---|---|---|---|---|
| GB | 14.05 | 7.55 | 71.61 | 0.092 |
| OBSIDIAN | 13.67 | 5.73 | 52.86 | 0.068 |
| SWR-OUT | 85.40 | 7.50 | 75.26 | 0.554 |
| System | 37.71 | 20.79 | 180.25 | 0.713 |

**********
Link Flow Summary
**********

| Link | Type | Maximum \|Flow\| LPS | Time of Max Occurrence days | hr:min | Maximum \|Veloc\| m/sec | Max/ Full Flow | Max/ Full Depth |
|---|---|---|---|---|---|---|---|
| 100-OUT | CONDUIT | 75.26 | 0 | 01:25 | 0.36 | 0.23 | 0.95 |
| 101-100 | CONDUIT | 75.26 | 0 | 01:25 | 0.42 | 0.33 | 0.76 |
| 102-101 | CONDUIT | 75.26 | 0 | 01:25 | 0.58 | 0.33 | 0.58 |
| 103-102 | CONDUIT | 0.00 | 0 | 00:00 | 0.00 | 0.00 | 0.08 |
| 104-103 | CONDUIT | 0.00 | 0 | 00:00 | 0.00 | 0.00 | 0.00 |
| 105-104 | CONDUIT | 0.00 | 0 | 00:00 | 0.00 | 0.00 | 0.00 |
| 201B-201 | CONDUIT | 75.98 | 0 | 01:10 | 1.59 | 1.28 | 0.94 |
| 201-O | CONDUIT | 211.78 | 0 | 01:10 | 3.00 | 1.97 | 1.00 |
| 202-TANK | CONDUIT | 59.52 | 0 | 01:10 | 1.48 | 0.47 | 0.71 |
| OVR | CONDUIT | 0.00 | 0 | 00:00 | 0.00 | 0.00 | 0.00 |
| 200-O | ORIFICE | 99.03 | 0 | 01:10 | | | 1.00 |
| 201C-O | ORIFICE | 56.43 | 0 | 01:10 | | | 1.00 |
| 202A-O | ORIFICE | 34.57 | 0 | 01:10 | | | 1.00 |
| 202B-O | ORIFICE | 25.03 | 0 | 01:11 | | | 1.00 |
| 203A-O | ORIFICE | 18.47 | 0 | 01:10 | | | 0.40 |
| OR1 | ORIFICE | 75.26 | 0 | 01:24 | | | 1.00 |
| W1 | WEIR | 0.00 | 0 | 00:00 | | | 0.00 |

**********
Flow Classification Summary
**********

| Conduit | Adjusted /Actual Length | Fraction of Time in Flow Class: Dry | Up Dry | Down Dry | Sub Crit | Sup Crit | Up Crit | Down Crit | Norm Ltd | Inlet Ctrl |
|---|---|---|---|---|---|---|---|---|---|---|
| 100-OUT | 1.00 | 0.00 | 0.00 | 0.00 | 1.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 101-100 | 1.00 | 0.00 | 0.00 | 0.00 | 1.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 102-101 | 1.00 | 0.00 | 0.00 | 0.00 | 1.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 103-102 | 1.00 | 0.90 | 0.10 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 104-103 | 1.00 | 1.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 105-104 | 1.00 | 1.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 201B-201 | 1.00 | 0.02 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.98 | 0.00 | 0.00 |

| | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| 201-O | 1.00 | 0.02 | 0.00 | 0.00 | 0.03 | 0.00 | 0.00 | 0.95 | 0.00 | 0.00 |
| 202-TANK | 1.00 | 0.02 | 0.00 | 0.00 | 0.04 | 0.00 | 0.00 | 0.94 | 0.02 | 0.00 |
| OVR | 1.00 | 1.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

**********
Conduit Surcharge Summary
**********

| | | | | Hours | Hours |
|---|---|---|---|---|---|
| | Hours Full | | | Above Full | Capacity |
| Conduit | Both Ends | Upstream | Dnstream | Normal Flow | Limited |
| 201B-201 | 0.01 | 0.15 | 0.01 | 0.14 | 0.01 |
| 201-O | 0.35 | 0.55 | 0.38 | 0.18 | 0.20 |
| 202-TANK | 0.01 | 0.01 | 0.28 | 0.01 | 0.01 |

Analysis begun on:  Fri Sep 19 11:29:45 2025
Analysis ended on:  Fri Sep 19 11:29:47 2025
Total elapsed time: 00:00:02

# Appendix E EXTERNAL REPORTS

## E.1 DESIGN BRIEF (SITE SERVICING STUDY) FOR THE RIDGE (BRAZEAU LANDS) BY DSEL (JULY 2020)

david schaeffer engineering ltd

120 Iber Road, Suite 103
Ottawa, Ontario K2S 1E9
Tel. (613)836-0856
Fax (613) 836-7183
www.DSEL.ca

# DESIGN BRIEF

*FOR*

# CAIVAN GREENBANK DEVELOPMENT CORPORATION

# THE RIDGE (BRAZEAU LANDS)

3809 BORRISOKANE ROAD

CITY OF OTTAWA

**PROJECT NO.: 18-1030**
**JULY 27TH , 2020**
**4TH SUBMISSION**
**© DSEL**

**DESIGN BRIEF**
**FOR**
**CAIVAN GREENBANK DEVELOPMENT CORPORATION**

**THE RIDGE (BRAZEAU LANDS)**

**PROJECT NO: 18-1030**

## TABLE OF CONTENTS


**TABLES** ..... **2**

**1.0 INTRODUCTION** ..... **1**

1.1 Existing Conditions ..... 1

**2.0 GUIDELINES, PREVIOUS STUDIES, AND REPORTS** ..... **2**

2.1 Existing Studies, Guidelines, and Reports ..... 2

**3.0 WATER SUPPLY SERVICING** ..... **5**

3.1 Existing Water Supply Services ..... 5

3.2 Water Supply Servicing Design ..... 5

3.3 Summary of Hydraulic Modeling Analysis ..... 8

3.4 Fire Flows – Fire Underwriters Survey ..... 8

3.5 Water Supply Conclusion ..... 9

**4.0 WASTEWATER SERVICING** ..... **10**

4.1 Existing Wastewater Services ..... 10

4.2 Wastewater Design ..... 10

4.2.1 Brazeau (The Ridge) Lands ..... 11
4.2.2 Greenbank Road Sewer Alignment ..... 11
4.2.3 Wastewater Design Criteria ..... 12

4.3 Wastewater Servicing Conclusion ..... 12

**5.0 STORMWATER CONVEYANCE** ..... **13**

5.1 Existing Stormwater Drainage ..... 13

5.2 Proposed Stormwater Management Strategy ..... 13

5.2.1 Infiltration – Etobicoke Exfiltration System (EES) ..... 14
5.2.2 EES Temporary Monitoring ..... 15

5.3 Post-Development Stormwater Management Targets ..... 16

5.3.1 Quality Control ..... 17
5.3.2 Quantity Control – Dry Pond ..... 18




© DSEL

5.4 Stormwater Management Design ..... 19
5.4.1 Borrisokane Road – Ministry of Transportation Requirements ..... 19
5.5 Proposed Minor System ..... 20
5.6 Quality Control (OGS Units) ..... 22
5.7 Hydraulic Grade Line Analysis ..... 22
5.8 Proposed Major System ..... 22
5.9 Stormwater Servicing Conclusions ..... 22

**6.0 PROPOSED GRADING ..... 23**

**7.0 EROSION AND SEDIMENT CONTROL ..... 23**
7.1 EES Protection During Construction ..... 24

**8.0 CONCLUSION AND RECOMMENDATIONS ..... 24**

## TABLES

Table 1A Water Supply Design Criteria (System Level Demands)
Table 1B Estimated Water Demands - Brazeau Land Updates
Table 1C Water Supply Design Criteria (Typical)
Table 2 Wastewater Design Criteria
Table 3 Storm Sewer Design Criteria

## APPENDICES

Appendix A Figure 1 – Key Plan
Figure 2 - MPlan

Appendix B Excerpts from JLR Master Servicing Study
Boundary Condition Request
Hydraulic Capacity and Modeling Analysis – GeoAdvice (Jul 2020)
Figure WAT-1 (Watermain Servicing Plan)

Appendix C Excerpts from JLR Master Servicing Study
- Master Sanitary Drainage Area (MSAN)
- MSS Table 6-3 & 6-4 and Figure 4-2

Sanitary Drainage Area Plans (The Ridge)
Sanitary Design Sheet (DSEL, July 2020)

Appendix D Excerpts from JLR Master Servicing Study
- Figure 3-1
- Table 5-2 & 5-5
- Master Storm Drainage Plan (MST-2)

Paterson – Groundwater Infiltration Review (Memo)
The Ridge Phase 1 Subdivision (Brazeau) - LID Design Update (JFSA)
Storm Drainage Area Plans (The Ridge)


© DSEL

Storm Design Sheet (DSEL, July 2020)
SWM Pond Drawings (No. 77 to 80)
OGS Unit Sizing Determinations
OGS Drainage Area Figure C1
Excerpts from ***BSUEA MSS*** (Section 5 excerpts)

Appendix E Grading Plans
Figure 3, 3A, 3B and 3C – General Plan Overview


© DSEL

# DESIGN BRIEF
# FOR
# CAIVAN GREENBANK DEVELOPMENT CORPORATION

# THE RIDGE (BRAZEAU LANDS)

# CITY OF OTTAWA
# PROJECT NO: 18-1030

## 1.0 INTRODUCTION

David Schaeffer Engineering Limited (DSEL) has been retained to prepare the detailed design of the Brazeau Lands development area located at 3809 Borrisokane Road within the Barrhaven South Urban Expansion Area (***BSUEA***) on behalf of Caivan Greenbank Development Corporation (CGDC). This design brief is submitted in support of that development. The development is now being referred to as "The Ridge" Subdivision for marketing purposes.

The proposed development area is illustrated in ***Figure 1*** (see ***Appendix A***) and is located north of Barnsdale Road, east of Highway 416 (and Borrisokane Road), south of Cambrian Road and west of the future New Greenbank Road alignment. The current zoning is Mineral Extraction (ME) and is amended to permit low-rise residential uses. The western portion of the property is outside of the urban boundary and will remain at the current zoning while the eastern side (approximately 24.7 ha) is within the urban boundary and is to be rezoned as noted above. The development will also include a 0.91 ha block for a road connection to Borrisokane Road, a future 0.89 ha right-of-way (ROW) area within the Drummond Lands (also owned by CGDC) for servicing outlets, and a 3.94 ha pond block within the Drummond Lands that will service both properties. The lands are planned to be developed with a mix of detached single homes, townhomes, park blocks, SWM blocks, open space and a road network (see ***Figure 2*** for the lotted legal plan in ***Appendix A***).

This design brief is prepared to demonstrate conformance with the design criteria of the City of Ottawa, background studies, including the Master Servicing Study, and general industry practice.

### 1.1 Existing Conditions

The Ridge subdivision was previously an aggregate extraction pit operated in accordance with the Ontario Aggregate Resources Act and Regulations. Processes have been undertaken to remove this designation.

The property ground surface is significantly disturbed as a result of the mineral extraction activities that have occurred over the years with stockpiles of materials at

 © DSEL

various locations and elevations. The eastern portion of the site adjacent to the New Greenbank Road future alignment range in elevations from approximately 108.0m to 104.5m. On-site elevations vary due to the various stockpiles of materials but are general averaging about 99.0m. Drainage is generally conveyed westward towards Borrisokane Road which is owned by, and under the jurisdiction of, the Ministry of Transportation.

The property is within the Jock River watershed and is under the jurisdiction of the Rideau Valley Conservation Authority (RVCA).

## 2.0 GUIDELINES, PREVIOUS STUDIES, AND REPORTS

### 2.1 Existing Studies, Guidelines, and Reports

The following studies were utilized in the preparation of this report.

- Ottawa Sewer Design Guidelines,
  City of Ottawa, *SDG002,* October 2012
  *(**Sewer Design Guidelines**)*

  - Technical Bulletin ISDTB-2014-01
    City of Ottawa, February 5, 2014
    *(ITSB-2014-01)*
  - Technical Bulletin PIEDTB-2016-01
    City of Ottawa, September 6, 2016
    *(PIEDTB-2016-01)*
  - Technical Bulletin ISTB-2018-01
    City of Ottawa, March 21, 2018
    *(ISTB-2018-01)*
  - Technical Bulletin ISTB-2018-04
    City of Ottawa, June 27, 2018
    *(ISTB-2018-04)*

- Ottawa Design Guidelines – Water Distribution
  City of Ottawa, July 2010.
  *(**Water Supply Guidelines**)*

  - Technical Bulletin ISD-2010-2
    City of Ottawa, December 15, 2010.
    *(ISD-2010-2)*
  - Technical Bulletin ISDTB-2014-2
    City of Ottawa, May 27, 2014.
    *(ISDTB-2014-2)*


© DSEL

  - Technical Bulletin ISTB-2018-02
    City of Ottawa, March 21, 2018
    *(ISTB-2018-02)*

- Design Guidelines for Sewage Works,
  Ministry of the Environment, Conservation and Parks, 2008. (formerly MOECC)
  ***(MECP Design Guidelines)***

- Highway Drainage Design Standards (MTO 2008)

- Drainage Management Manual (MTO 1997),
  Ministry of Transportation.
  ***(MTO Manuals)***

- Stormwater Planning and Design Manual,
  Ministry of the Environment, March 2003.
  ***(SWMP Design Manual)***

- City of Ottawa Official Plan,
  adopted by Council 2003.
  ***(Official Plan)***

- South Nepean Collector: Phase 2 Hydraulics Review / Assessment Technical Memorandum
  Novatech, August 2015
  ***(Novatech SNC Memo)***

- Master Servicing Study – Barrhaven South Urban Expansion Area, J.L. Richards & Associates Limited, Revision 2, May 2018
  ***(BSUEA MSS)***

- Servicing Brief – Quinn's Pointe Residential Stages 2, 3 & 4, J.L. Richards & Associates Limited, Revision 1, October 2018 (File No. 26610-001.1)
  ***(Quinn's Pointe Brief)***

- Stormwater Management Report for Brazeau Subdivision, by J.F. Sabourin and Associates (July 2020)
  ***(JFSA SWM Report)***

- Pond Design Brief for Brazeau Subdivision, by J.F. Sabourin and Associates (July 2020)
  ***(JFSA Pond Report)***

- Caivan Brazeau/Drummond Development – LID Design Update, by J.F. Sabourin and Associates (July 2020)
  ***(JFSA LID Analysis)***


© DSEL

- Geotechnical Investigation, Proposed Residential Development, Brazeau Lands – Borrisokane Road, Paterson Group (January 2019)
  *(**Geotechnical Report**)*

- Groundwater Infiltration Review, Proposed Residential Development, Brazeau Pit and Drummonds Pit – Borrisokane Road, Paterson Group (August 2019)
  *(**Infiltration Review**)*

- Supplemental Hydrogeological Review, Proposed Residential Development, The Ridge – Borrisokane Road, Paterson Group (March 4, 2020)
  *(**Hydrogeological Review**)*

- Borrisokane Ditch Erosion Assessment: The Ridge (Brazeau) Subdivision, J.F. Sabourin and Associates Inc. (June 2020)
  *(**JFSA Erosion Assessment**)*


© DSEL

# 3.0 WATER SUPPLY SERVICING

## 3.1 Existing Water Supply Services

The ***BSUEA MSS*** provided an overview of the existing watermain infrastructure associated with the BSUEA. The ***BSUEA MSS*** completed an overall assessment of the water supply for the area in order to examine the feasibility of the extension of existing infrastructure that would meet the required City and MECP criteria for the whole of the development area.

The 'Master Watermain" plan (Drawing MWM) from the ***BSUEA MSS*** is provided in ***Appendix B*** and illustrates the existing watermains in proximity to The Ridge development area. In addition, a conceptual watermain plan (Drawing CWM) from the preliminary Servicing Brief for Minto's Quinn's Pointe (Stages 2, 3 & 4) residential area is provided for reference. The proposed watermain servicing connections points for The Ridge development area are as follows:

- Existing 300mm diameter watermain terminating at Dundonald Drive and the future New Greenbank Road alignment;
- Proposed 300mm diameter watermain from the existing Cambrian Road 400mm diameter watermain forming part of the Tamarack Meadows development network located north of The Ridge and Drummond lands.

As adjacent developments to the east are advanced there will be a future required connection to the development from the existing 300mm diameter watermain on Kilbirnie Drive at Alex Polowin Avenue (or future extension location that is dependent upon the advancement of the Quinn's Pointe development).

## 3.2 Water Supply Servicing Design

The ***BSUEA MSS*** presents overall watermain infrastructure details for the BSUEA. The subject property was deemed serviceable and the ***MSS*** reviewed a number of servicing scenarios (i.e. existing and built-out conditions) that confirmed that the area could be adequately serviced conforming to relevant City and MECP Guidelines and Policies.

The water analysis contained in the ***BSUEA MSS*** utilized system level water demands as developed by the City due to the fact that the number of units and densities resulted in an overall population that would exceed 3,000. The excerpt of the system level demands listed in Table 7-1 of the ***MSS*** can be found in ***Appendix B*** and are summarized as follows:


© DSEL

## Table 1A: Water Supply Design Criteria (System Level Demands)

| Land Use Type | Consumption Rate |
|---|---|
| ***JLR BSUEA MSS, May 2018 for Population Exceeding 3000 Persons*** | |
| Single Family Residential | 180 L/cap/day |
| Multi-unit Residential (Townhouse / Back to Back) | 198 L/cap/day |
| Apartment Residential | 219 L/cap/day |
| Commercial | 50,000 L/ha/day |
| Institutional | 50,000 L/ha/day |
| Outdoor Water Demand | 1049 L/unit/day (single detached) |

The estimated water demands within the ***BSUEA MSS*** were summarized in Table 7-2 (excerpt found in ***Appendix B***). The table summarized a total population of 1,194 for the Brazeau Lands development area along with some commercial and institutional components. Based on the current development concept the water demand table is refined to reflect a revised residential unit count and the removal of the commercial, institutional and high density components. Based on the development layout illustrated in ***Figure 2*** the development area will have 347 single family homes and 279 towns with associated populations of 1,180 and 754 respectively. The adjusted water demands for comparison purposes are summarized in the following table:

## Table 1B: Estimated Water Demands - Brazeau Land Updates

| Design Parameter | Area (ha) | Units | Pop. | ADD SFH [1] | ADD MLT [2] | ADD APT [3] | ADD COM [4] | ADD INS [5] | Total BSDY | OWD [6] | Total MXDY |
|---|---|---|---|---|---|---|---|---|---|---|---|
| From Table 7-2 of MSS | 12.72 | 398 | 1194 | 1.56 | 0.87 | 0.17 | 0.39 | 0.85 | 3.84 | 2.67 | 6.51 |
| Revised per Updated Development Plan (Residential Area) | 23.83 | 626[7] | 1934 | 2.45 | 1.73 | 0 | 0 | 0 | 4.18 | 4.21 | 8.39 |
| | | +228 | +740 | | | | | | **+0.34** | +1.54 | **+1.88** |

1 Daily Demand, Single Family Homes, L/s (see Table 1A for Consumption Rate)
2 Average Daily Demand, Multi-Units (Townhouses and Back to Back Unit) L/s
3 Average Daily Demand, Apartment Units, L/s
4 Average Daily Demand, Commercial, L/s
5 Average Daily Demand, Institutional, L/s
6 Outdoor Water Demand, L/s, calculated as 1,049 L per SFH unit per day per MSS
7 Comprised of 347 Singles Family Homes and 279 Townhouses

With reference to Table 7-2, the overall Total BSDY increased by 0.34 L/s (to 19.00 L/s) which is a 1.8% increase over the previous 18.66 L/s. The total MXDY increases by 1.88 L/s which is a 5.9% increase over the previous 31.48 L/s.

The typical Water Supply Design Criteria used are as summarized in the following table:


© DSEL

## Table 1C: Water Supply Design Criteria

| Design Parameter | Value |
|---|---|
| Residential – Single Family | 3.4 p/unit |
| Residential – Semi-Detached | 2.7 p/unit |
| Residential – Townhome | 2.7 p/unit |
| Residential – Average Daily Demand | 350 L/p/day |
| Residential – Maximum Daily Demand | 2.5 x Average Daily Demand |
| Residential – Maximum Hourly Demand | 2.2 x Maximum Daily Demand |
| Residential – Minimum Hourly Demand | 0.5 x Average Daily Demand |
| Commercial / Institutional Average Daily Demand | 50,000 L/ha/day |
| Park Average Daily Demand | 28,000 L/ha/day |
| Commercial / Institutional / Park Maximum Daily Demand | 1.5 x Average Daily Demand |
| Commercial / Institutional / Park Maximum Hour Demand | 1.8 x Maximum Daily Demand |
| Commercial / Institutional / Park Minimum Hourly Demand | 0.5 x Average Daily Demand |
| Fire Flow | Calculated as per the Fire Underwriter's Survey 1999. |
| Minimum Watermain Size | 150 mm diameter |
| Service Lateral Size | 19 mm dia. Copper or equivalent |
| Minimum Depth of Cover | 2.4 m from top of watermain to finished grade |
| Peak hourly demand operating pressure | 275 kPa and 690 kPa |
| Fire flow operating pressure minimum | 140 kPa |
| *Extracted from Section 4: Ottawa Design Guidelines, Water Distribution (July 2010), ISDTB-2010-2* | |

A boundary condition request was submitted (provided in ***Appendix B*** for reference) in order to obtain water supply parameters for use in the hydraulic modelling assessment of the network. A hydraulic analysis was prepared for the water distribution network to confirm that water supply is available within the required pressure range, under the anticipated demand during average day, peak hour and fire flow conditions and was based on boundary conditions requested from the City of Ottawa. Refer to the *Hydraulic Capacity and Modeling Analysis, Brazeau Lands* prepared by *GeoAdvice Engineering Inc. dated June 10, 2020* ***(GeoAdvice Water Analysis)***, enclosed in ***Appendix B.***

The proposed water layout is shown in the general plan of services overview presented in ***Figures 3, 3A, 3B*** at the back of this report as well as in the GeoAdvice report figures. The Ridge development will initially require a minimum of two watermain feeds to the service the property. Based on the nearby existing infrastructure, and surrounding development plans, it is proposed that an extension of the existing Dundonald Drive 300mm watermain will provide service to the northeast portion of the property. In addition, the second proposed feed to service The Ridge will be through the Drummond Lands from the proposed 300mm watermain that is being advanced for the Tamarack Meadows development north of the property. Ultimately there will be future connections to Greenbank Road and Kilbirnie Drive (to the south) when those development areas are advanced.


© DSEL

## 3.3 Summary of Hydraulic Modeling Analysis

A complete watermain analysis has been prepared to confirm that the network is sized adequately, which is the greater of maximum day plus fire and maximum hour for both the Phase 1 and Phase 1&2 scenario. Refer to the ***GeoAdvice Report,*** enclosed in ***Appendix B.***

### System Pressures

The modeling indicates that the development can be adequately serviced by the proposed watermain network. Modeled service pressures for the development are summarized in the following table. The detailed pipe and junction tables are contained in the ***GeoAdvice Report***, enclosed in ***Appendix B.***

**Table 1D: Summary of Available System Pressures**

| | Minimum Hour Demand Maximum Pressure | | Peak Hour Demand Minimum Pressure | |
|---|---|---|---|---|
| | kPA | psi | kPA | psi |
| **Phase 1** | 538 | 78 | 290 | 42 |
| **Phases 1&2** | 538 | 78 | 262 | 38 |

The generally accepted best practice is to design new water distribution systems to operate between 350 kPa (50 psi) and 480 kPa (70 psi) as outlined in the City of Ottawa Design Guidelines. Low pressures (slightly below 40 psi) are predicted in the south and southeast area of the site due to higher ground elevations. However, this is without considering provision of the future watermain connection from the Quinn's Pointe development area. Per Section 4.1 of the ***GeoAdvice Report***, this future additional connection (as required by the ***BSUEA MSS***) will provide an additional head of up to seven meters and resolve this low pressure condition. Should the availability of the additional watermain feed not be in place during the advancement of Phase 2 of The Ridge, it would be recommended that oversized service laterals be provided in order to compensate. For now, the current design drawings have demonstrated the requirement of a 25mm water service lateral in the areas that are slightly below the 40psi threshold.

## 3.4 Fire Flows – Fire Underwriters Survey

Fire Flow requirements are established in the boundary condition request found in ***Appendix B*** as prepared by GeoAdvice. Calculations for the single detached dwellings and traditional townhomes reached the City of Ottawa's cap of 10,000 L/min (167 L/s) as outlined in *ISDTB-2014-02*. At this time, there is not enough information available to calculate the required fire flows of the park so a required fire flow of 250 L/s was assumed, which is a typical requirement for similar land uses. The fire flows are calculated in accordance with the Fire Underwriters Survey's Water Supply for Public


© DSEL

Fire Protection Guideline (1999). Detailed FUS calculations can be found in the GeoAdvice reporting.

### Available Fire Flows

The minimum allowable pressure under fire flow conditions is 140 kPa (20 psi) at the location of the fire. A summary of the available fire flows is presented in the following table. The detailed fire flow reports are found in the ***GeoAdvice Report*** enclosed in ***Appendix B***.

**1E: Summary of Available Fire Flows**

| | Required Fire Flow (L/s) | Minimum Available Flow (L/s) | Junction ID |
|---|---|---|---|
| **Phase 1** | 167 | 177 | J-45 |
| | 250 | 249 | J-47 |
| **Phase 1 & 2** | 167 | 194 | J-66 |
| | 250 | 269 | J-47 |

As shown in the above table the model predicts the network will be able to provide all required fire flows within the development limits. Detailed results are included in the ***GeoAdvice Report***, enclosed in ***Appendix B***.

## 3.5 Water Supply Conclusion

The subject lands have been previously reviewed within the ***BSUEA MSS*** for the BSUEA development areas. The interim condition of The Ridge subdivision can be serviced by City of Ottawa infrastructure through the extension of the existing 300mm watermain from Dundonald Road from the east side of the property and a proposed connection north of the property, through the Drummond Lands, to a new 300mm watermain extension from Cambrian Road. In the interim condition for Phase 2 areas (i.e. only two feeds into the development area) there are pockets of low pressure (slightly below 40psi) areas along the southern boundary that are proposed to have 25mm water service laterals to compensate. Ultimately there will be additional connections to future watermains along Greenbank Road and Kilbirnie Drive (from the south as the Minto Quinn's Pointe development advances) that will alleviate the low pressure condition. See ***Figure WAT-1*** in ***Appendix B*** for the watermain network overview. These extensions are in accordance with the ***MSS*** projected infrastructure. The proposed water supply design conforms to all relevant City and MECP Guidelines and Policies.


© DSEL

# 4.0 WASTEWATER SERVICING

## 4.1 Existing Wastewater Services

Sanitary flows from the ***BSUEA*** were proposed to outlet to the existing 900mm diameter Greenbank Road sanitary trunk sewer. The existing South Nepean Collector (SNC) will provide the sanitary outlet for the entire Barrhaven South Community, which includes the BSUEA development area.

Trunk sanitary sewers exist north of the Brazeau Lands area and are located along Cambrian Road (see JLR's *Master Sanitary Drainage Area* plan 'MSAN' in ***Appendix C***). The outlet connection point to existing for the Brazeau Lands is as follows:

- Existing 500 mm / 600 mm / 750 mm diameter sanitary trunk running east on Cambrian Road then extending north along existing Greenbank Road and east to the South Nepean Collector (SNC). The current sewer termination is at the New Greenbank Road alignment.

As per the ***BSUEA MSS*** the subject property is tributary to the existing sanitary trunk sewer along Cambrian Road.

## 4.2 Wastewater Design

The subject property will be serviced by an internal gravity sanitary sewer system that will generally follow the local road network with select servicing easements and land crossing permissions as required to achieve efficiencies in servicing and grading designs. The wastewater layout can be found in the general plan of services overview presented in ***Figures 3, 3A and 3B*** at the back of this report. The sanitary drainage area plans and design sheets, along with background ***BSUEA MSS*** information, can all be found in ***Appendix C*** for reference.

The ***BSUEA MSS*** proposed that the wastewater outlet from the Brazeau Lands would tie into the off-site Cambrian Road trunk sewer at existing sanitary 'EX MH57A' via the Future Greenbank Road alignment and that is now the intent of The Ridge (Brazeau) design. The *Master Sanitary Drainage Area* plan 'MSAN' from the ***BSUEA MSS*** is provided in ***Appendix C*** for reference. Sanitary flows from the adjacent Drummond Lands were originally proposed to be conveyed to Cambrian Road (MA11 to MA10) through Tamarack's "The Meadows Phase 7 & 8" (***Meadows***) development area at 3640 Greenbank Road (D07-16-18-0011) in the ***BSUEA MSS***. Although there were prior concepts of bringing The Ridge sanitary flows through the Drummond/Tamarack properties, the current sanitary sewer alignments, that are in line with the ***BSUEA MSS,*** are proposed in order to minimize overall sewer depths and alleviate City concerns with alternate routing.


© DSEL

### 4.2.1 Brazeau (The Ridge) Lands

In the ***BSUEA MSS***, Table 6-3 (provided in ***Appendix C***) summarized the anticipated flows from the "Brazeau Aggregate Extraction Area" lands (i.e. The Ridge development). With the more detailed development concept, the site statistics are refined and the sanitary design sheet found in ***Appendix C*** more accurately reflects the anticipated sanitary flows. As per Section 3.2 of this report, the anticipated unit count for The Ridge is 347 single family homes and 279 townhouse units.
When applying the City of Ottawa wastewater design criteria the estimated peak sanitary flows from The Ridge and other areas tributary to the sewer network results in the following:

i) The Ridge residential area + 4.3 ha of Drummond lands (~31.06 L/s);
ii) Drummond Lands (direct to Greenbank Road (~20.29 L/s);
iii) Mattamy lands adjacent to Future Greenbank Road (residential area of 1.90 ha and commercial area of 2.99 ha) (~4.45 L/s);
iv) Future Brazeau commercial area (13.83 ha) west of the subdivision (~9.05 L/s)
v) Commercial area (ABIC) (~4.84 L/s)

For comparison to the ***MSS*** Table 6-3 values, criteria the estimated peak sanitary flows from The Ridge and Mattamy areas is approximately 49.38 L/s. This would be in comparison to the ***MSS*** sum of the 21.50 L/s (Brazeau Lands flow), 1.8 L/s Mattamy Commercial, and approximately 1.9 L/s Mattamy Residential. For comparison this would be 69.69 L/s versus the 25.2 L/s (i.e. +44.49 L/s) previously summarized in the JLR's Table 6-3.

Table 6-4 in the ***BSUEA MSS*** identified critical residual capacities in existing trunk sanitary sewers associated with the BSUEA area. Specifically, the Cambrian Road sewer is the outlet for the Brazeau Lands property and has a limiting pipe reach from existing MH13A to MH15A with a residual capacity of approximately 52.9 L/s. The additional 44.49 L/s of anticipated sanitary flows uses approximately ~84% of the residual capacity leaving 8.41 L/s. Review of the ***BSUEA MSS*** sanitary design sheet indicates that there are no other sanitary sewer constraints up to the SNC.

### 4.2.2 Greenbank Road Sewer Alignment

As noted, the sanitary outlet for The Ridge will be along the Future Greenbank Road EA alignment as per the ***BSUEA MSS***. As per JLR's *Master Sanitary Drainage Area* plan 'MSAN' in ***Appendix C*** this alignment is represented by the sewer run from MH900 to EXMH57A on Cambrian Road ranging in size from 250mm to 375mm. The proposed design has a 375mm sanitary (capacities of the design can be seen in the sewer design sheet). MH900 would equate to the MH402A proposed within The Ridge design. Per Section 6.3.1.2 the depth of the sewer at this location was estimated to have a cover depth of approximately 7.43m. Based on The Ridge detailed design, which has taken into consideration all of the site grading and sewer crossing constraints that result from


© DSEL

detailed design, the proposed cover is 8.5m at MH402A per the profile drawing for this trunk sewer (See Drawing 61 in ***Appendix C***). The elevated EA road profile results in the greater depth of the sewer at this location. As the sewer progresses northward towards Cambrian Road the depth of cover is gradually reduced as the road profile drops down in elevation. The proposed sanitary sewer is set at either minimum slopes, to mitigate depth of cover, or at slopes to establish flow capacities that are approximately 75%-78% of the proposed sewer's capacity. See markups of the profile drawings in ***Appendix C*** for reference.

### 4.2.3 Wastewater Design Criteria

The following table summarizes the City design guidelines and criteria applied in the preliminary sanitary design information above and detailed in ***Appendix C***.

**Table 2: Wastewater Design Criteria**

| Design Parameter | Value |
|---|---|
| **Current Design Guidelines** | |
| Residential - Single Family / Townhome | 3.4 p/unit & 2.7 p/unit respectively |
| Residential – Apartment | 1.8 p/unit |
| Average Daily Demand | 280 L/d/person |
| Peaking Factor | Harmon's Peaking Factor. Max 4.0, Min 2.0 |
| Commercial / Institutional Flows | 28,000 L/ha/day |
| Commercial / Institutional Peak Factor | 1.5 |
| Infiltration and Inflow Allowance | 0.33 L/s/ha |
| Park Flows | 28,000 L/ha/d |
| Park Peaking Factor | 1.0 |
| Sanitary sewers are to be sized employing the Manning's Equation | $Q = \frac{1}{n} A R^{2/3} S^{1/2}$ |
| Minimum Sewer Size | 200mm diameter |
| Minimum Manning's 'n' | 0.013 |
| Minimum Depth of Cover | 2.5m from crown of sewer to grade |
| Minimum Full Flowing Velocity | 0.6m/s |
| Maximum Full Flowing Velocity | 3.0m/s |
| *Extracted from Sections 4 and 6 of the City of Ottawa Sewer Design Guidelines, October 2012, and recent residential subdivisions in City of Ottawa.* | |

## 4.3 Wastewater Servicing Conclusion

The subject property will be serviced by local sanitary sewers which will outlet to the Future Greenbank Road ROW alignment via new sanitary sewers. The sewer will connect to existing sewers along Cambrian Road as demonstrated in the ***BSUEA MSS*** at 'EX MH57A' per JLR's *Drawing* ***MSAN***. There is residual capacity in the downstream sewers providing sufficient capacity for the peak sanitary flows for the subject property.


© DSEL

# 5.0 STORMWATER CONVEYANCE

## 5.1 Existing Stormwater Drainage

The ***BSUEA*** is tributary to three sub-watersheds as depicted in the 'Figure 3-1' excerpt from the ***BSUEA MSS*** provided in ***Appendix D***. The Brazeau Lands are within the Jock River Subwatershed.

Due to the recent land use for mineral extraction the majority of the land area is lower than the surrounding topography. As identified in the ***BSUEA MSS***, the BSUEA *Existing Condition Report* identified that the original drainage pattern for the development area was northwards via overland flow paths with no defined channels. Per the existing topography characterized within available City of Ottawa base mapping, flows from the subject property will now be ultimately conveyed to the Jock River by storm systems (pipes and ditches as required) along Borrisokane Road.

## 5.2 Proposed Stormwater Management Strategy

The future flows from the land area are planned to meet the following criteria per the ***BSUEA MSS***:

- Meet the existing flow in the downstream system;
- Meet the quality control target of 80% TSS removal as per the Jock River Reach One Subwatershed Study (Stantec, 2007); and,
- Preserve pre-infiltration condition levels (Section 5.3.4 of ***BSUEA MSS***)

In order to provide drainage conveyance to a Borrisokane Road storm outlet, the site grading will be adjusted to convey flows westward. As noted in the ***BSUEA MSS***, the *Existing Conditions Report* for the BSUEA identified that the culvert downstream of the aggregate properties receives a pre-development flow of 1,300 L/s during the 1:100 year event (see Figure 3-1, and Tables 5-2 and 5-5 in ***Appendix D*** from the ECR noting the constrained culvert CVR-C1). Servicing of both The Ridge and Drummond properties have been developed such that the downstream pre-development flow is not exceeded. Any downstream systems should have sufficient capacity for the pre-development flow.

The ***BSUEA MSS*** conceptualized the following requirements for the development areas:

- The design of the storm drainage system has been undertaken using the dual-drainage approach. The ***BSUEA MSS*** sets out the design criteria for future draft plan and site plan applications for the BSUEA.


© DSEL

- Two (2) separate storm servicing solutions were developed; one conventional servicing strategy and one that incorporates the Etobicoke Exfiltration System (EES) or alternative, which was recommended (see ***BSUEA MSS*** Drawing MST-2 for details and Section 5.2.1 of this report for discussion).
- The downstream boundary conditions or flow criteria to achieve are developed in the ***BSUEA MSS*** and are used in the design constraints.
- Allowable minor system release rates were set at the required storm event and future design should maintain the same release rate criteria.
- Stormwater management facilities have been identified in the stormwater management solution for the aggregate extraction areas.

The stormwater management designs will consist of:

- A storm sewer system designed to capture at least the minimum design capture events required under PIETB-2016-01;
- One dry Stormwater Management (SWM) Pond designed to provide required quantity controls along with oil-grit separator (OGS) units that will provide an Enhanced Level of Protection [80% total suspended solids (TSS) removal] per MECP guidelines. The SWM pond will provide controls to levels which respect any downstream pre-development flows;
- An on-site road network designed to maximize the available storage in the on-site road network for the 100-year design event, where possible, with controlled release of stormwater to the minor storm system; and
- An overland flow route designed to safely convey stormwater runoff flows in excess of the on-site road storage.

### 5.2.1 Infiltration – Etobicoke Exfiltration System (EES)

Within the ***BSUEA MSS***, Section 5.4.4 discussed the recommendation of distributed infiltration for development areas. An analysis was carried out and summarized in the *Existing Conditions Report* which determined the various contributions of the water budget based on long-term simulation.

The section also notes that the overall pre-development infiltration from the ***BSUEA MSS*** area was determined but that the aggregate extraction areas were excluded in that determination. Ongoing investigations for both the Brazeau and Drummond properties have been completed and are summarized in the attached "*Groundwater Infiltration Review*" memorandum completed by Paterson Group (see ***Appendix D*** for reference). The memorandum summarizes the estimate infiltration rates that could be anticipated throughout the sites for various soil type conditions that were found during their investigations. These values were used during the detailed design determinations.


© DSEL

Section 5.5 of the ***BSUEA MSS*** discusses the various storm servicing strategies for the development areas. The section went through the various options to achieve the required infiltration targets with the preferred arrangement being the Etobicoke Exfiltration System (EES) Infiltration Strategy. Other alternatives were reviewed, however the EES system is the most suitable for the site and is proposed to be implemented in accordance with the City's preference.

A key point of note, as required by the ***MSS***, is that capture of stormwater by the exfiltration system has strategically located insofar as the system is to be installed on local roads (where required to achieve the required infiltration levels) where the surface runoff is less impacted by the City's winter road salting program. Therefore collector and arterial roads will have conventional storm sewer installations that will convey flows to a proposed downstream oil-grit-separator (OGS) units and end-of-line dry pond facility. JFSA has prepared their ***JFSA LID Analysis*** design memo to assess the infiltration volumes anticipated for the EES system proposed. See ***Appendix D*** for the analysis. A visual representation of the EES system and drainage capture areas can be seen in the *Figure 2* of the JFSA technical memorandum and can also be seen in the Storm Drainage Area plans.

As summarized in the JFSA analysis, there will be a total of 24 EES systems implemented within the development area in order to meet the infiltration requirements. The EES units will be installed underneath storm sewers within the ROW in specific areas determined as being suitable based on site constraints. Each system will consist of one or two 250 mm diameter perforated pipes surrounded by a 0.85 m deep by 1.20 m wide clear stone trench. Goss traps will be installed in upstream catchbasins in order to prevent/mitigate debris and potential oils from entering the perforated pipe system. Detail drawings of the proposed EES units provided in Figure 1 of the ***JFSA LID Analysis***. See ***Appendix D*** for the full summary of the design parameters for each EES in Tables A1 and A2 (pipe diameter, system lengths and volumes, inverts etc).

For protection measures of the EES system during construction see Section 7.1.

### 5.2.2 EES Temporary Monitoring

As per Section 5.5.1.8 of the ***BSUEA MSS*** there are requirements for temporary monitoring of the proposed infiltration system in order to assess and confirm that the EES operates as intended. The objectives of the monitoring will be to estimate the drawdown time of the EES (i.e. time for water levels to drop) to see if the infiltration values projected are in line with the results, and to determine the average rate of capture before runoff is conveyed by the traditional storm sewer system. The final locations and configuration will be coordinated with City staff through this detailed design process as it has been indicated that the City has vetted a "Smart Cover" arrangement through the advancement of the adjacent Minto development area.


© DSEL

Proposed monitoring locations have been circulated to the City and are identified in a markup of the *Figure 2* from the ***JFSA LID Analysis*** provided in ***Appendix D***. The City has concurred with the preliminary locations pending full acceptance of the EES design.

## 5.3 Post-Development Stormwater Management Targets

Stormwater management requirements for the proposed alternative Stormwater management scheme have been adopted from the ***Jock River SWS***, ***City Standards***, and the ***MECP SWMP Manual***.

Given the general criteria mentioned above, the following specific standards are expected to be required for stormwater management within the subject property:

- Enhanced quality treatment will be provided for stormwater runoff from the subject property, corresponding to a long-term average TSS removal efficiency of 80%, as defined by the MECP prescribed treatment levels;
- Downstream receiving drainage features, culverts, and sewers will be assessed for responses to planned stormwater management outflows, and infrastructure rehabilitation or capacity improvement measures will be planned, as required;
- Storm sewers on local roads are to be designed to provide at least a 2-year level of service without any ponding per the City's latest Technical Bulletin PIEDTB-2016-01;
- Storm sewers on collector roads are to be designed to provide at least a 5-year level of service without any ponding per the City's latest Technical Bulletin PIEDTB-2016-01;
- For less frequent storms (i.e. larger than 2-year or 5-year), the minor system sewer capture will be restricted with the use of inlet control devices to prevent excessive hydraulic surcharges;
- Under full flow conditions, the allowable velocity in storm sewers is to be no less than 0.80 m/s and no greater than 6.0 m/s;
- For the 100-year storm and for all roads, the maximum depth of water (static and/or dynamic) on streets, rear yards, public space and parking areas shall not exceed 0.35 m at the gutter;
- The major system shall be designed with sufficient capacity to allow the excess runoff of a 100-year storm to be conveyed within the public right-of-way ROW, or adjacent to the ROW, provided the water level does not touch any part of the building envelope; must remain below all building openings during the stress test event (100-year + 20%); and must maintain 15 cm vertical clearance between spill elevation on the street and the ground elevation at the nearest building envelope;


© DSEL

- Flow across road intersections shall not be permitted for minor storms (generally 5-year or less);
- When catchbasins are installed in rear yards, safe overland flow routes are to be provided to allow the release of excess flows from such areas. A minimum of 30 cm of vertical clearance is required between the rear yard spill elevation and the ground elevation at the adjacent building envelope; and
- The product of the maximum flow depths on streets and maximum flow velocity must be less than 0.60 $m^2/s$ on all roads.

### 5.3.1 Quality Control

As per the ***Jock River SWS,*** Enhanced quality treatment will be provided for stormwater runoff from the subject property, corresponding to a long-term average Total Suspended Solid removal efficiency of 80%, as described by the MECP prescribed treatment levels. This will be achieved via the proposed EES system installations (where possible) and OGS unit(s) for all other areas. The location/details of the OGS units near the SWM pond inlet can be seen in '*Storm Drainage Plan'* Drawing No. 88 and SWM Pond Drawings No. 77/79 found in ***Appendix D***.

The ***BSUEA MSS*** reviewed the quality control aspects of the proposed EES installations. Section 5.5.1.3 of the ***MSS*** concludes that based on the EES sizing for the 22mm rainfall (i.e. 95$^{th}$ percentile rainfall event) the storage requirements satisfies the requirements for water quality control per the MECP land uses and further downstream control measures would not be required.

#### 5.3.1.1 EES Infiltration Targets

As a part of the ***BSUEA MSS*** it was determined that pre-development infiltration within the study area accounted for 40% of the overall site's water budget. The City and RVCA determined that pre-development infiltration levels should be maintained under post-development conditions and that the infiltration should be provided across the development and not simply concentrated to one or two locations.

The EES is intended to capture frequent storm events and the initial "first flush" of large storm events by trapping flow in the perforated pipe sub drain and surrounding media. It is also intended to infiltrate runoff from frequent events into the surrounding soils, while runoff from larger events will overtop the capacity of the EES system and would then overflow to the conventional storm sewer system above

As specified by the Master Servicing Study, the proposed development should infiltrate 40% of the annual runoff. As the hourly rainfall data used in this simulation does not extend the full year, the infiltration target for this analysis has been assumed to be 40% of the average simulated rainfall volume (552.0 mm), which is calculated to be 220.8mm or 59,744 $m^3$ based on the study area. See the ***JFSA LID Analysis*** for full details.


© DSEL

### 5.3.2 Quantity Control – Dry Pond

The ***BSUEA MSS*** currently shows a stormwater pond servicing scenario on each of The Ridge and Brazeau Lands outside of the urban development area (refer to attached '*Barrhaven South Urban Expansion Area – Master Storm Drainage Plan EES'*) drawing from the ***BSUEA MSS*** for illustration). However, this two pond concept was proposed in the ***BSUEA MSS*** due to the desire at that time in order to not have the two properties 'linked' and therefore they would not be dependent upon one another in order to advance development.

As noted in prior sections of this report, the two properties have now coordinated servicing strategies to the benefit of both properties, as well as the City, as follows (refer to the Storm Drainage Area Plan and Pond Plan in ***Appendix D***):

- The single pond option will be a dry facility with OGS units to treat stormwater requiring treatment. This is in line with the ***MSS***;
- If a pond was proposed within the Brazeau Lands location shown in the ***MSS***, it would have required a large box culvert outlet in order to convey emergency flow out to Borrisokane Road due to topography constraints. Based on an increase in elevation downstream of that outlet, the emergency flows could not be conveyed overland. With the single pond concept on the Drummond Lands, a box culvert would no longer be required due to the more suitable topography at the Drummond outlet and the associated availability of emergency relief;
- A single pond option keeps more infrastructure within the new development areas and minimizes infrastructure proposed within the Borrisokane Road right-of-way (ROW);
- In accordance with the City's typical preference, there will be a reduction in maintenance costs with one less facility to manage.

Similar to the changes associated with the sanitary outlet revision, the only impacted properties are those proponents that are directly benefitting from the changes and would be considered a Minor Change per Section 11.1.1 of the ***BSUEA MSS***.

As noted in the ***Jock River SWS***, quantity control is not required for the Jock River; however, based on past reports (***BSUEA MSS*** and Existing Condition Report), the limited capacity of the ditch infrastructure along Borrisokane Road will require that the stormwater management facility provide a storage volume for quantity control. Any infrastructure upgrades or adjustments relating to the Borrisokane Road ROW will require appropriate permits and approvals from the Ministry of Transportation until such time as the ongoing process for the transfer of the roadway to be under the jurisdiction of the City of Ottawa is completed.


© DSEL

#### 5.3.2.1 Erosion Targets – Borrisokane Road ROW

As requested by City staff an erosion assessment has been completed for the Borrisokane Road ditch outlet. JFSA has prepared a technical memorandum under separate cover entitled "*Borrisokane Ditch Erosion Assessment: The Ridge (Brazeau) Subdivision*" (June 2020) which reviewed the pond outlet for the site (the west ditch of Borrisokane Road north of Cambrian Road). The study concluded that the critical erosion velocity of the receiver is approximately 1.2 m/s which was then converted to a critical discharge threshold using a 1D HEC-RAS model of the ditch which determined that the threshold ranges from 4.20 $m^3$/s to 7.9 $m^3$/s for the middle and lower reaches of the ditch. From JFSA's hydrologic modelling of the ditch, under proposed conditions, the peak flow is assessed at 3.82 $m^3$/s for the 100-year 24-hour SCS event which is lower than the existing threshold range determined.

## 5.4 Stormwater Management Design

As shown in the *Storm Drainage Area Plan*, the proposed stormwater management design consists of OGS units for quality control and an end-of-line dry SWM pond for quantity control prior to discharge along Borrisokane Road. The pond will be located within the portion of the Drummond quarry land that is between the future Drummond residential area to be developed (within the urban boundary) and Borrisokane Road. The facility will be sized to meet the required level of quantity control based on a restricted outflow of 1,300 L/s as noted in Section 5.2. See the ***JFSA Pond Report*** under separate cover for full details of the SWM pond design.

In accordance with the Paterson ***Hydrogeological Review*** (under separate cover) for the area of the pond, the bottom elevation has been set at an elevation of 96.00m and will be lined as required to mitigate the inflow of perched groundwater in the area due to seasonal conditions.

The SWM pond will outlet to the Borrisokane Road roadside ditch. It is proposed that there will be a new 900mm/1200mm storm sewer installation along Borrisokane Road which extends northward to the vicinity of Cambrian Road where it discharges to the western roadside ditch. The proposed alignment was submitted via the City's Municipal Consent process at the City's request. No significant concerns were raised with the proposal.

### 5.4.1 Borrisokane Road – Ministry of Transportation Requirements

Borrisokane Road, along the frontage of The Ridge development area and northwards to Cambrian Road, is currently owned by, and under the jurisdiction of, the Ministry of Transportation. As such, any proposed underground stormwater infrastructure or grading/landscaping will require permits to facilitate the design and implementation of those works until such time that the process underway to transfer jurisdiction to the City of Ottawa is complete. We are working directly with MTO for the required permitting.


© DSEL

Culverts:
For any stormwater flows outletting to any existing, or new, Borrisokane Road ROW culverts the stormwater management reporting will evaluate peak flow rates, velocities and headwater levels at pre- and post-development conditions for design and regulatory storms.

Ditches:
For any stormwater flows outletting to existing Borrisokane Road ROW ditches, the stormwater management reporting will evaluate peak flow rates, velocities and depth of flow at pre- and post-development conditions for design and regulatory storms.

Inlet Control Devices:
Insofar as the Ministry has indicated that they do not recognize any benefit from the attenuation of storm water runoff from inlet control devices. In the circumstance where on-site SWM measures do not operate as intended water from the pond will spill to the Borrisokane roadside ditch via a reinforced grassed emergency spillway as shown in the '*SWM Pond'* Drawing No. 76.

## 5.5 Proposed Minor System

The subject property will be serviced by an internal gravity storm sewer system that follows the local road network and servicing easements as required. The drainage is conveyed within the underground piped sewer system to the proposed SWM pond with select areas of local streets that will have the EES installed to achieve infiltration targets.

Street catchbasins will collect drainage from the streets and front yards, while rear yard catchbasins will capture drainage from backyards. Perforated catch basin leads will be provided in rear yards, to add to the infiltration network, except the last segment where it connects to the right-of-way which will be solid pipe, per City standards.

The preliminary rational method design of the minor system captures drainage for storm events up to and including the 2-year (local) and 5-year (collector) event assuming the use of inlet control devices (ICD) for all catchbasins within the subject property. The peak design flows are calculated based on an average predicted runoff coefficient (C-value) ranging from 0.71 to 0.54 for most of the development area (see storm design sheet in ***Appendix D*** for details. The storm system has also been sized to consider the potential for future commercial lands to the west where required.

The following table summarizes the standards that will be employed in the detailed design of the storm sewer network. The drainage area information can be found in the *Storm Drainage Plans* and rational method design sheets provided in ***Appendix D***.


© DSEL

## Table 3: Storm Sewer Design Criteria

| Design Parameter | Value |
|---|---|
| Minor System Design Return Period | 1:2 yr (PIEDTB-2016-01) for local roads, without ponding<br>1:5 yr for collector roads, without ponding |
| Major System Design Return Period | 1:100 year |
| Intensity Duration Frequency Curve (IDF) 2-year storm event:<br>A=732.951 \| B=6.199 \| C=0.810<br>5-year storm event:<br>A = 998.071 \| B = 6.053 \| C = 0.814 | $i = \frac{A}{(t_c + B)^C}$ |
| Minimum Time of Concentration | 10 minutes |
| Rational Method | $Q = CiA$ |
| Storm sewers are to be sized employing the Manning's Equation | $Q = \frac{1}{n} A R^{2/3} S^{1/2}$ |
| Runoff coefficient for paved and roof areas | 0.9 |
| Runoff coefficient for landscaped areas | 0.2 |
| Minimum Sewer Size | 250 mm diameter |
| Minimum Manning's 'n' for pipe flow | 0.013 |
| Minimum Depth of Cover | 1.5 m from crown of sewer to grade |
| Minimum Full Flowing Velocity | 0.8 m/s |
| Maximum Full Flowing Velocity | 6.0 m/s |
| Clearance from 100-Year Hydraulic Grade Line to Building Opening | 0.30 m |
| Max. Allowable Flow Depth on Municipal Roads | 35 cm above gutter (PIEDTB-2016-01) |
| Extent of Major System | Contained within the ROW, or adjacent to the ROW, provided that the water level not touch any part of the building envelope and remains below the lowest building opening during the stress test event (100-year + 20%) and 15cm vertical clearance is maintained between spill elevation on the street and the ground elevation at the building envelope (PIEDTB-2016-01) |
| Stormwater Management Model | DDSWMM (release 2.1), SWMHYMO (v. 5.02) |
| Model Parameters | Fo = 76.2 mm/hr, Fc = 13.2 mm/hr, DCAY = 4.14/hr,<br>D.Stor.Imp. = 1.57 mm, D.Stor.Per. = 4.67 mm |
| Imperviousness | Based on runoff coefficient (C) where<br>Percent Imperviousness = (C - 0.2) / 0.7 x 100%. |
| Design Storms | Chicago 3-hour Design Storms and 24-hour SCS Type II Design Storms. Max. Intensity averaged over 10 minutes. |
| Historical Events | July 1st, 1979, August 4th, 1988 and August 8th, 1996 |
| Climate Change Street Test | 20% increase in the 100-year, 3-hour Chicago storm |
| **Design Parameter** | **Value** |
| *Extracted from City of Ottawa Sewer Design Guidelines, October 2012, and ISSU,* | |


© DSEL

## 5.6 Quality Control (OGS Units)

Enhanced quality treatment for the development, corresponding to a long-term average Total Suspended Solid removal efficiency of 80%, will be achieved via the proposed EES system installations and two OGS unit(s). The location/details of the OGS units near the SWM pond inlet can be seen in '*Storm Drainage Plan'* Drawing No. 88 and SWM Pond Drawings No. 77/79 found in ***Appendix D*** along with the details of the OGS unit sizing provided by Contech. The units have been configured as off-line units to allow for the bypass of larger flows.

## 5.7 Hydraulic Grade Line Analysis

A detailed hydraulic grade line (HGL) modelling analysis has been completed for the proposed system based on the 100-year 3-hour Chicago, 12-hour SCS, and 24-hour SCS design storms, including historical design storms and climate change stress test as required. The HGL is provided in the plan and profile drawings for the subdivision and details of the modelling can be found in the ***JFSA SWM Report***.

## 5.8 Proposed Major System

Major system conveyance, or overland flow (OLF), is provided to accommodate flows in excess of the minor system capacity. OLF is accommodated by generally storing stormwater up to the 100-year design event in road sags then routing additional surface flow along the road network and service easements towards the proposed drainage features to the Jock River, as shown in the *Storm Drainage Plans*. Stormwater ultimately discharges to the Borrisokane Road ROW which will require appropriate permits and approvals from the Ministry of Transportation if the process to change the jurisdiction to the City of Ottawa does not occur.

## 5.9 Stormwater Servicing Conclusions

The stormwater runoff is designed to be captured by an internal gravity sewer system that is to convey flows to an end-of-line dry SWM pond facility and OGS units for the quality control treatment of stormwater flows that originate from collector and arterial roadways due to City salting procedures. An Enhanced Level of protection will be provided for stormwater runoff from the subject property before ultimately being discharged to the Jock River. Quantity control is not required for the Jock River, notwithstanding, some quantity control by on-site and SWM pond storage will be provided due to downstream infrastructure constraints.

Infiltration targets noted in the MSS will be achieved via the installation of the EES system within local ROWs which will also provide Enhanced Level quality control as detailed in the ***MSS***.


© DSEL

## 6.0 PROPOSED GRADING

The grading design includes a saw-toothed road design with varying road grades in order to maximize available surface storage for management of flows up to the 100-year design event where possible. The proposed site grading has also been developed to optimize earthworks and provide major system conveyance to the end-of-line facility which eventually outlets to the Borrisokane Road ROW and then to the Jock River. Roadway connections to the future New Greenbank Road will be coordinated with that future design based on the Environmental Assessment Study profile for that roadway. Reduced size grading plans are found in ***Appendix E*** in order to provide an overview context for the proposed grading.

The geotechnical review of the site makes note of the significant grade raises that will be found within the development area. No grade raise restrictions are indicated for the site. However, an extensive earthworks program is being undertaken which will be continuously monitored by the geotechnical consultant in order to ensure that appropriate fill material, placement, and compaction are provided throughout the property. The monitoring program is based on the detailed grading proposed and will ultimately be reviewed and signed off by a licensed Geotechnical Engineer. Any grading onto adjacent properties has been coordinated with adjacent landowners for permissions and retaining walls will be implemented where required.

## 7.0 EROSION AND SEDIMENT CONTROL

Soil erosion occurs naturally and is a function of soil type, climate and topography. The extent of erosions losses is exaggerated during construction where the vegetation has been removed and the top layer of soil is disturbed.

- Erosion and sediment controls must be in place during construction. The following recommendations to the contractor will be included in contract documents.
- Limit extent of exposed soils at any given time.
- Re-vegetate exposed areas as soon as possible.
- Minimize the area to be cleared and grubbed.
- Protect exposed slopes with plastic or synthetic mulches.
- Install silt fence to prevent sediment from entering existing ditches.
- No refueling or cleaning of equipment near existing watercourses.
- Provide sediment traps and basins during dewatering.
- Install filter cloth between catch basins and frames.
- Installation of mud mats at construction accesses.


© DSEL

## 7.1 EES Protection During Construction

From the *Low Impact Development Stormwater Management Planning and Design Guide* prepared by CVC and TRCA (ver 1.0, 2010):

- Prior to site works, the location of LIDs should be marked and vehicles are to avoid the area other than during the installation of the LID. Drainage not to be directed to the LID;
- To minimize siltation in the newly installed EES system, both the upstream and downstream ends of the EES system should be plugged immediately during the construction phase. The upstream plug is to be removed at approximately an occupancy of 80% similar to the Quinn's Pointe development;
- Upland drainage areas need to be properly stabilized with vegetation as soon as possible in order to reduce sediment loads;
- The facility should be excavated to design dimensions from the side using a backhoe or excavator. The base of the facility should be level or match the slope of the above storm sewer;
- The bottom of the facility should be scarified to improve infiltration; and
- Geotextile fabric should be correctly installed to optimize system function. When laying the geotextile, the width should include sufficient material to compensate for perimeter irregularities in the facility and a 150mm minimum top overlap.

## 8.0 CONCLUSION AND RECOMMENDATIONS

This report provides details on the planned on-site municipal services for the subject property and demonstrates that adequate municipal infrastructure capacity for the planned development of the subject property:

- The subject lands have been reviewed by the ***BSUEA MSS*** and has shown that water supply to the property can be provided. An analysis completed by GeoAdvice also documents the water supply network and results. The network will be expanded through neighboring properties to enhance/meet the water demands of the proposed development as adjacent properties are also developed.

- Sanitary service is to be provided to the subject property via connection to the sanitary sewer located along Cambrian Road through the Future Greenbank Road ROW as per the ***MSS***. With the inclusion of the subject property, the existing downstream sewers have sufficient capacity to accommodate the subject property's proposed sanitary flows.


© DSEL


- Stormwater service is to be provided by capturing stormwater runoff via an internal gravity sewer system that will convey flows to a proposed end-of-line dry SWM pond facility for quantity control. Quality control will be provided for arterial and collector roadway (and select local roadway) drainage via the use of OGS units to an Enhanced Level of protection (80% TSS removal) prior to discharge to the SWM Pond. Quality control for local streets will be provided via the proposed Etobicoke Exfiltration System as documented in the ***MSS***, as well as within the OGS units downstream. Quantity control is not required for the Jock River, however, some quantity control by on-site and SWM pond storage will be provided due to downstream infrastructure constraints. An erosion threshold assessment has been completed by JFSA for the Borrisokane Road west side ditch north of Cambrian Road (pond outlet) and has confirmed that the projected flows are lower than the threshold determined.

- As suggested in the ***BSUEA MSS*** the infiltration will be achieved via use of the preferred EES system. The JFSA reporting demonstrates that the required infiltration targets are met.

- Erosion and sediment control measures will be implemented and maintained throughout construction.

- The design of The Ridge has been completed in general conformance with the City of Ottawa Design Guidelines and criteria presented in other background study documents.

Prepared by,
**David Schaeffer Engineering Ltd.**




Per: Kevin L. Murphy, P.Eng.

© DSEL
2020-07-27_Brazeau_Servicing_Subm4.doc

# Hydraulic Capacity and Modeling Analysis Brazeau Lands

# Final Report

**Prepared for:**
David Schaeffer Engineering Ltd.
120 Iber Road, Unit 103
Stittsville, ON K2S 1E9

**Prepared by:**
GeoAdvice Engineering Inc.
Unit 203, 2502 St. John's Street
Port Moody, BC V3H 2B4

**Submission Date:** July 28, 2020

**Contact:** Mr. Werner de Schaetzen, Ph.D., P.Eng.
**Project:** 2019-091-DSE

**Copyright © 2020 GeoAdvice Engineering Inc.**

# Document History and Version Control

| Revision No. | Date | Document Description | Revised By | Reviewed By |
|---|---|---|---|---|
| **R0** | November 7, 2019 | Draft | Ben Loewen | Werner de Schaetzen |
| **R1** | December 20, 2019 | Final | Ben Loewen | Werner de Schaetzen |
| **R2** | June 10, 2020 | Updated Draft | Ferdinand de Schoutheete | Werner de Schaetzen |
| **R3** | July 28, 2020 | Final | Ferdinand de Schoutheete | Werner de Schaetzen |

## Confidentiality and Copyright

This document was prepared by GeoAdvice Engineering Inc. for David Schaeffer Engineering Ltd. The material in this document reflects the best judgment of GeoAdvice in light of the information available to it at the time of preparation. Any use which a third party makes of this report, or any reliance on or decisions made based on it, are the responsibilities of such third parties. GeoAdvice accepts no responsibility for damages, if any, suffered by any third party as a result of decision made or actions based on this document. Information in this document is to be considered the intellectual property of GeoAdvice Engineering Inc. in accordance with Canadian copyright law.

## Statement of Qualifications and Limitations

This document represents GeoAdvice Engineering Inc. best professional judgment based on the information available at the time of its completion and as appropriate for the project scope of work. Services performed in developing the content of this document have been conducted in a manner consistent with that level and skill ordinarily exercised by a member of the engineering profession currently practicing under similar conditions. No warranty, express or implied is made.

# Contents

**1 Introduction ..... 4**
**2 Modeling Considerations ..... 6**
2.1 Water Main Configuration ..... 6
2.2 Elevations ..... 6
2.3 Consumer Demands ..... 6
2.4 Fire Flow Demand ..... 8
2.5 Boundary Conditions ..... 9
**3 Hydraulic Capacity Design Criteria ..... 10**
3.1 Pipe Characteristics ..... 10
3.2 Pressure Requirements ..... 10
**4 Hydraulic Capacity Analysis ..... 11**
4.1 Development Pressure Analysis ..... 11
4.2 Development Fire Flow Analysis ..... 12
**5 Other Servicing Considerations ..... 14**
5.1 Water Supply Security ..... 14
5.2 Valves ..... 14
5.3 Hydrants ..... 15
**6 Conclusions ..... 16**
**Appendix A Domestic Water Demand Calculations and Allocation**
**Appendix B FUS Fire Flow Calculations and Allocation**
**Appendix C Boundary Conditions**
**Appendix D Pipe and Junction Model Inputs**
**Appendix E MHD and PHD Model Results**
**Appendix F MDD+FF Model Results**

# 1 Introduction

GeoAdvice Engineering Inc. ("GeoAdvice") was retained by David Schaeffer Engineering Ltd. ("DSEL") to size the proposed water main network for the Brazeau Lands development ("Development") in the City of Ottawa, ON ("City").

Under existing conditions, the development will be serviced by the Barrhaven pressure zone; however, in the future, it will be serviced by pressure zone 3C.

There are 347 single detached dwellings, 279 traditional townhomes and 1 park serviced as part of the development.


The Brazeau Lands development will have three (3) connections to the City water distribution system:

- Connection 1: Apolune Street and Cambrian Road;
- Connection 2: Jackdaw Avenue and Future Greenbank Road; and
- Connection 3: Dundonald Drive and Future Greenbank Road.

The development site is shown in **Figure 1.1** on the following page, with the final recommended pipe diameters.

This report describes the assumptions and results of the hydraulic modeling and capacity analysis using InfoWater (Innovyze), a GIS water distribution system modeling and management software application.

The results presented in this memo are based on the analysis of steady state simulations. The predicted available fire flows, as calculated by the hydraulic model, represent the flow available in the water main while maintaining a residual pressure of 20 psi. No extended period simulations were completed in this analysis to assess the water quality or to assess the hydraulic impact on storage and pumping.

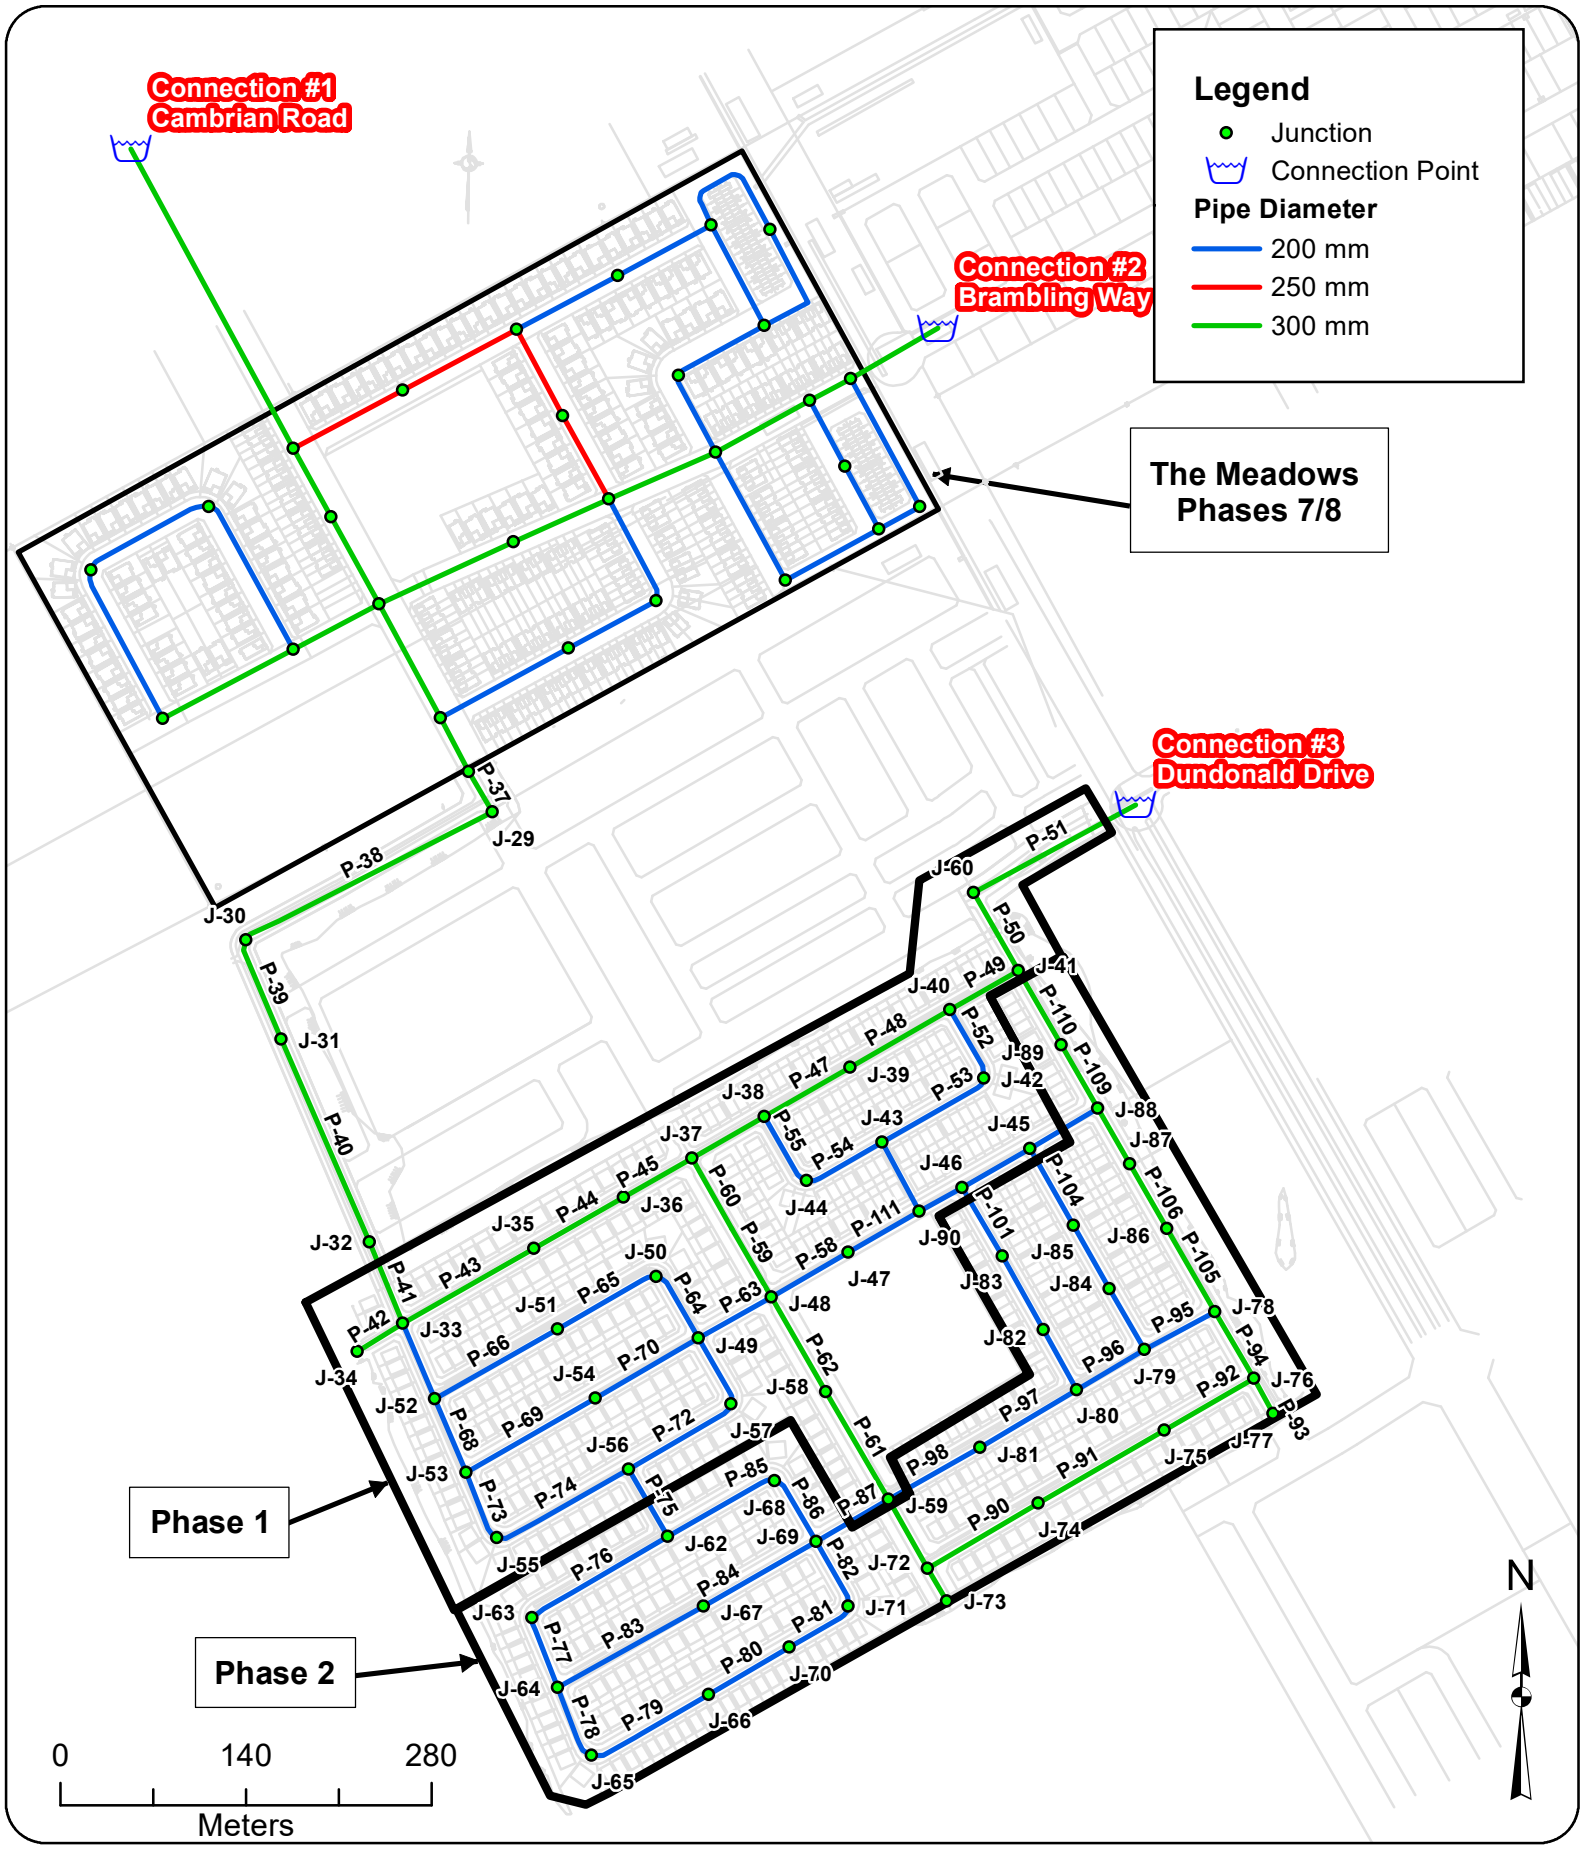


GeoAdvice Engineering Inc.

Project: **Hydraulic Capacity and Modeling Analysis of the Brazeau Lands**
Client: **David Schaeffer Engineering Ltd.**
Date: **June 2020**
Created by: **BL**
Reviewed by: **WdS**

DISCLAIMER: GeoAdvice does not warrant in any way the accuracy and completeness of the information shown on this map. Field verification of the accuracy and completeness of the information shown on this map is the sole responsibility of the user.

**Brazeau Lands Site Layout and Connection Points**

**Figure 1.1**

# 2 Modeling Considerations

## 2.1 Water Main Configuration

The water main network was modeled based on the drawing prepared by DSEL (1030_Gen_Rev4.dwg) and provided to GeoAdvice on June 2nd, 2020.

## 2.2 Elevations

Elevations of the modeled junctions were assigned according to a site grading plan prepared by DSEL (1030_Grad_Rev4.dwg) and provided to GeoAdvice on June 2nd, 2020.

## 2.3 Consumer Demands

Demand factors used for this analysis were taken according to the City of Ottawa 2010 Design Guidelines *Table 4.2 Consumption Rate for Subdivisions of 501 to 3,000 Persons*. Population densities were assigned according to *Table 4.1 Per Unit Populations* from the City of Ottawa Design Guidelines. A summary of these tables highlighting relevant data for this development is shown in **Table 2.1** below.

**Table 2.1: City of Ottawa Demand Factors**

| Demand Type | Amount | Units |
|---|---|---|
| **Average Day Demand** | | |
| Residential | 350 | L/c/d |
| Park | 28,000 | L/ha/d |
| **Maximum Daily Demand** | | |
| Residential | 2.5 x avg. day | L/c/d |
| Park | 1.5 x avg. day | L/ha/d |
| **Peak Hour Demand** | | |
| Residential | 2.2 x max. day | L/c/d |
| Park | 1.8 x max. day | L/ha/d |
| **Minimum Hour Demand** | | |
| Residential | 0.5 x avg. day | L/c/d |
| Park | 0.5 x avg. day | L/ha/d |

**Table 2.2** and **Table 2.4** summarize the residential water demand calculations for the Brazeau Lands development.

**Table 2.2: Development Population and Demand Calculations – Phase 1**

| Dwelling Type | Number of Units | Persons Per Unit* | Population | Average Day Demand (L/s) | Maximum Day Demand (L/s) | Peak Hour Demand (L/s) | Minimum Hour Demand (L/s) |
|---|---|---|---|---|---|---|---|
| Single Detached | 172 | 3.4 | 585 | 2.37 | 5.92 | 13.03 | 1.18 |
| Traditional Townhome | 133 | 2.7 | 360 | 1.46 | 3.65 | 8.02 | 0.73 |

***City of Ottawa Design Guidelines**

**Table 2.3: Development Population and Demand Calculations – Phases 1&2**

| Dwelling Type | Number of Units | Persons Per Unit* | Population | Average Day Demand (L/s) | Maximum Day Demand (L/s) | Peak Hour Demand (L/s) | Minimum Hour Demand (L/s) |
|---|---|---|---|---|---|---|---|
| Single Detached | 347 | 3.4 | 1,180 | 4.78 | 11.95 | 26.29 | 2.39 |
| Traditional Townhome | 279 | 2.7 | 754 | 3.05 | 7.64 | 16.80 | 1.53 |

***City of Ottawa Design Guidelines**

**Table 2.6** summarizes the non-residential water demand calculations for the Brazeau Lands development (included in both Phase 1 and Phases 1&2).

**Table 2.4: Non-Residential Demand Calculations**

| Land Use Type | Area (ha) | Average Day Demand (L/s) | Maximum Day Demand (L/s) | Peak Hour Demand (L/s) | Minimum Hour Demand (L/s) |
|---|---|---|---|---|---|
| Park | 1.72 | 0.56 | 0.84 | 1.51 | 0.28 |

**Table 2.5** summarizes the demands for the Meadows Phases 7/8 subdivision development located north of the Brazeau Lands and downstream of Connections 1 and 2 (accounted for in the HGLs provided by the City in the boundary conditions request).

**Table 2.5: The Meadows Phases 7/8**

| Average Day Demand (L/s) | Maximum Day Demand (L/s) | Peak Hour Demand (L/s) | Minimum Hour Demand (L/s) |
|---|---|---|---|
| 6.20 | 13.50 | 28.50 | 3.10 |

Demands were grouped into demand polygons then uniformly distributed to the model nodes located within each polygon. Detailed calculations of demands as well as the illustrated allocation areas are shown in **Appendix A**.

## 2.4 Fire Flow Demand

Fire flow calculations were completed for all dwelling types in accordance with the Fire Underwriters Survey's (FUS) Water Supply for Public Fire Protection Guideline (1999) and City of Ottawa Technical Bulletin ISTB-2018-02 as summarized in **Appendix B**.

All the single detached dwellings have a minimum separation of 10 m between the backs of adjacent units and are, therefore, subject to the 10,000 L/min (167 L/s) cap outlined in City of Ottawa Technical Bulletin ISDTB-2014-02.

Most of the traditional townhouse dwellings comply with the City of Ottawa Technical Bulletin ISDTB-2014-02 and are, therefore, subject to the 10,000 L/min (167 L/s) cap.

The traditional townhouse dwellings located on Blocks 168 and 384 do not have a minimum separation of 10 m between the backs of adjacent units and therefore do not comply with the provisions under the City of Ottawa Technical Bulletin ISDTB-2014-02. The required fire flow for those blocks were calculated to be 167 L/s based on the Fire Underwriters Survey's (FUS) Water Supply for Public Fire Protection Guideline (1999). The agreement of this calculation with the City of Ottawa cap of 167 L/s is purely coincidental.

At this time, there is not enough information available to calculate the required fire flow of the park. As such, a required fire flow of 250 L/s was assumed for the park. This is a typical, conservative value for similar land use.

Fire flow simulations were completed at each model node in the Brazeau development. The locations of nodes do not necessarily represent hydrant locations.

Detailed FUS fire flow calculations as well as the illustrated spatial allocation of the required fire flows are shown in **Appendix B**.

## 2.5 Boundary Conditions

The boundary conditions were provided by the City of Ottawa in the form of Hydraulic Grade Line (HGL) at the following locations:

- Connection 1: Apolune Street and Cambrian Road;
- Connection 2: Jackdaw Avenue and Future Greenbank Road; and
- Connection 3: Dundonald Drive and Future Greenbank Road.

The above connection points are illustrated in **Figure 1.1**.

Boundary conditions were provided for Peak Hour, Maximum Day plus Fire and Minimum Hour (high pressure check) conditions.

Under existing conditions, the Brazeau Lands development will be serviced by the Barrhaven pressure zone; however, in the future, it will be serviced by pressure zone 3C. As such, boundary conditions were provided under the existing and future pressure zone configurations.

In total, two (2) sets of boundary conditions were provided by the City and can be found in **Appendix C**.

**The boundary conditions for the existing pressure zone configuration are more conservative. As such, the results presented in this report are based on the boundary conditions for the existing pressure zone configuration.**

**Table 2.6** summarizes the boundary conditions used to size the Brazeau Lands water network.

**Table 2.6: Existing Boundary Conditions**

| Condition | Connection 1 HGL (m) | Connection 2 HGL (m) | Connection 3 HGL (m) |
|---|---|---|---|
| **Min Hour (max. pressure)** | 156.4 | 156.4 | 156.4 |
| **Peak Hour (min. pressure)** | 135.7 | 135.6 | 135.7 |
| **Max Day + Fire Flow (167 L/s)** | 144.0 | 141.2 | 142.0 |
| **Max Day + Fire Flow (250 L/s)** | 135.4 | 129.9 | 131.5 |

# 3 Hydraulic Capacity Design Criteria

## 3.1 Pipe Characteristics

Pipe characteristics of internal diameter (ID) and Hazen-Williams C factors were assigned in the model according to the City of Ottawa Design Guidelines for PVC water main material. Pipe characteristics used for the development are outlined in **Table 3.1** below.

**Table 3.1: Model Pipe Characteristics**

| Nominal Diameter (mm) | ID PVC (mm) | Hazen Williams C-Factor (/) |
|---|---|---|
| **200** | 204 | 110 |
| **250** | 250 | 110 |
| **300** | 297 | 120 |

## 3.2 Pressure Requirements

As outlined in the City of Ottawa Design Guidelines, the generally accepted best practice is to design new water distribution systems to operate between 350 kPa (50 psi) and 480 kPa (70 psi). The maximum pressure at any point in the distribution system in occupied areas outside of the public right-of-way shall not exceed 552 kPa (80 psi). Pressure requirements are outlined in **Table 3.2.**

**Table 3.2: Pressure Requirements**

| Demand Condition | Minimum Pressure | | Maximum Pressure | |
|---|---|---|---|---|
| | (kPa) | (psi) | (kPa) | (psi) |
| **Normal Operating Pressure (maximum daily flow)** | 350 | 50 | 480 | 70 |
| **Peak Hour Demand (minimum allowable pressure)** | 276 | 40 | - | - |
| **Maximum Fixture Pressure (Ontario Building Code)** | - | - | 552 | 80 |
| **Maximum Distribution Pressure (minimum hour check)** | - | - | 552 | 80 |
| **Maximum Day Plus Fire** | 140 | 20 | - | - |

# 4 Hydraulic Capacity Analysis

The proposed water mains within the development were sized to the minimum diameter which would satisfy the greater of maximum day plus fire and peak hour demand. Modeling was carried out for minimum hour, peak hour and maximum day plus fire flow using InfoWater. Only the existing pressure zone configuration was analyzed, since the boundary conditions are more conservative.

Detailed pipe and junction model input data can be found in **Appendix D**.

## 4.1 Development Pressure Analysis

Modeled service pressures for the development are summarized in **Table 4.1** below.

**Table 4.1: Summary of the Brazeau Lands Available Service Pressures**

| Phase | Minimum Hour Demand Maximum Pressure | Peak Hour Demand Minimum Pressure |
|---|---|---|
| Phase 1 | 538 kPa (78 psi) | 290 kPa (42 psi) |
| Phases 1&2 | 538 kPa (78 psi) | **262 kPa (38 psi)** |

As outlined in the City of Ottawa Design Guidelines, the generally accepted best practice is to design new water distribution systems to operate between 350 kPa (50 psi) and 480 kPa (70 psi). The maximum pressure at any point in the distribution system in occupied areas outside of the public right-of-way shall not exceed 552 kPa (80 psi).

Low pressures are predicted at junctions J-66, J-70, J-71, J-72, J-73, J-74, J-75, J-76 and J-77 under peak hour demand. Those low pressures are due to high elevations in the southern part of the Brazeau Lands development and are within 5% of the minimum allowable pressure of 276 kPa (40 psi). The future Zone 3C boundary conditions will provide an additional head of about seven (7) meters at each connection point, and will thus resolve the low PHD pressures at the southern part of the Brazeau Lands development.

Detailed pipe and junction result tables and maps can be found in **Appendix E**.

## 4.2 Development Fire Flow Analysis

A summary of the minimum available fire flows in the Brazeau Lands development is shown below in **Table 4.2**.

**Table 4.2: Summary of the Brazeau Lands Minimum Available Fire Flows**

| Phase | Required Fire Flow | Minimum Available Flow | Junction ID |
|---|---|---|---|
| Phase 1 | 167 L/s | 177 L/s | J-45 |
| | 250 L/s | 249 L/s | J-47 |
| Phases 1&2 | 167 L/s | 194 L/s | J-66 |
| | 250 L/s | 269 L/s | J-47 |

As shown in the table above, the available fire flow is greater than the required fire flow under both Phase 1 and Phases 1&2 conditions.

A summary of the residual pressures in the Brazeau Lands is shown below in **Table 4.3**. The minimum allowable pressure under fire flow conditions is 140 kPa (20 psi) at the location of the fire.

**Table 4.3: Summary of the Brazeau Lands Residual Pressures (MDD + FF)**

| Phase | Maximum Residual Pressure | Average Residual Pressure | Minimum Residual Pressure |
|---|---|---|---|
| Phase 1 | 365 kPa (53 psi) | 296 kPa (43 psi) | 140 kPa (20 psi) |
| Phases 1&2 | 365 kPa (53 psi) | 296 kPa (43 psi) | 159 kPa (23 psi) |

There is sufficient residual pressure at all the junctions within the Brazeau Lands development.

Detailed fire flow results and figures illustrating the fire flow results can be found in **Appendix F**.

# 5 Other Servicing Considerations

## 5.1 Water Supply Security

The City of Ottawa Design Guidelines allow single feed systems for developments up to a total average day demand of 50 $m^3$/day and require two (2) feeds if the development exceeds 50 $m^3$/day for supply security, according to Technical Bulletin ISDTB-2014-02.

The Brazeau Lands services a total average day demand of 725 $m^3$/day; as such, two (2) feeds are required.

## 5.2 Valves

No comment has been made in this technical memorandum with respect to exact placement of isolation valves within the distribution network for the Brazeau Lands other than to summarize the City of Ottawa Design Guidelines for number, location, and spacing of isolation valves:

- Tee intersection – two (2) valves
- Cross intersection – three (3) valves
- Valves shall be located 2 m away from the intersection
- 300 m spacing for 150 mm to 400 mm diameter valves
- Gate valves for 100 mm to 300 mm diameter mains
- Butterfly valves for 400 mm and larger diameter mains

Drain valves are not strictly required under the City of Ottawa Design Guidelines for water mains under 600 mm in diameter. The Guidelines indicate that “small diameter water mains shall be drained through hydrant via pumping if needed.”

Air valves are not strictly required under the City of Ottawa Design Guidelines for water mains up to and including 400 mm in diameter. The Guidelines indicate that air removal “can be accomplished by the strategic positioning of hydrant at the high points to remove the air or by installing or utilizing available 50 mm chlorination nozzles in 300 mm and 400 mm chambers.”

The detailed engineering drawings for the Brazeau Lands are expected to identify valves in accordance with the requirements noted above.

## 5.3 Hydrants

No comment has been made in this technical memorandum with respect to exact placement of hydrants within the distribution network for the Brazeau Lands other than to summarize the City of Ottawa Design Guidelines for maximum hydrant spacing:

- 125 m for single family unit residential areas on lots where frontage at the street line is 15 m or longer
- 110 m for single family unit residential areas on lots where frontage at the street line is less than 15 m and for residential areas zoned for row housing, doubles or duplexes
- 90 m for institutional, commercial, industrial, apartments and high-density areas

The detailed engineering drawings for the Brazeau Lands development are expected to identify hydrants in accordance with the requirements noted above.

# 6 Conclusions

The hydraulic capacity and modeling analysis of Phase 1 of the Brazeau Lands development yielded the following conclusions:

- The proposed water main network can deliver all domestic flows, with service pressures expected to range between 290 kPa (42 psi) and 538 kPa (78 psi).
- The proposed water main network is able to deliver fire flows to all junctions.
- Hydraulic modeling was only completed for the existing pressure zone configuration since the boundary conditions are more conservative.

The hydraulic capacity and modeling analysis of Phases 1&2 of the Brazeau Lands development yielded the following conclusions:

- The proposed water main network can deliver all domestic flows except for junctions J-66, J-70, J-71, J-72, J-73, J-74, J-75, J-76 and J-77, with service pressures expected to range between 262 kPa (38 psi) and 538 kPa (78 psi).
- The junctions with low pressures are due to high elevations in the southern part of the Brazeau Lands development and are within 5% of the minimum allowable pressure of 276 kPa (40 psi).
- The future Zone 3C boundary conditions will provide an additional head of about seven (7) meters at each connection point, and will thus resolve the low PHD pressures at the southern part of the Brazeau Lands development.
- The proposed water main network is able to deliver fire flows to all junctions.
- Hydraulic modeling was only completed for the existing pressure zone configuration since the boundary conditions are more conservative.

## Submission

**Prepared by:**

Ferdinand de Schoutheete
Hydraulic Modeler / Project Engineer


**Approved by:**

LICENSED PROFESSIONAL ENGINEER
W. B. F. de Schaetzen
100116349
PROVINCE OF ONTARIO

Werner de Schaetzen, Ph.D., P.Eng.
Senior Modeling Review / Project Manager

# Appendix A Domestic Water Demand Calculations and Allocation

# Appendix A Domestic Water Demand Calculations and Allocation

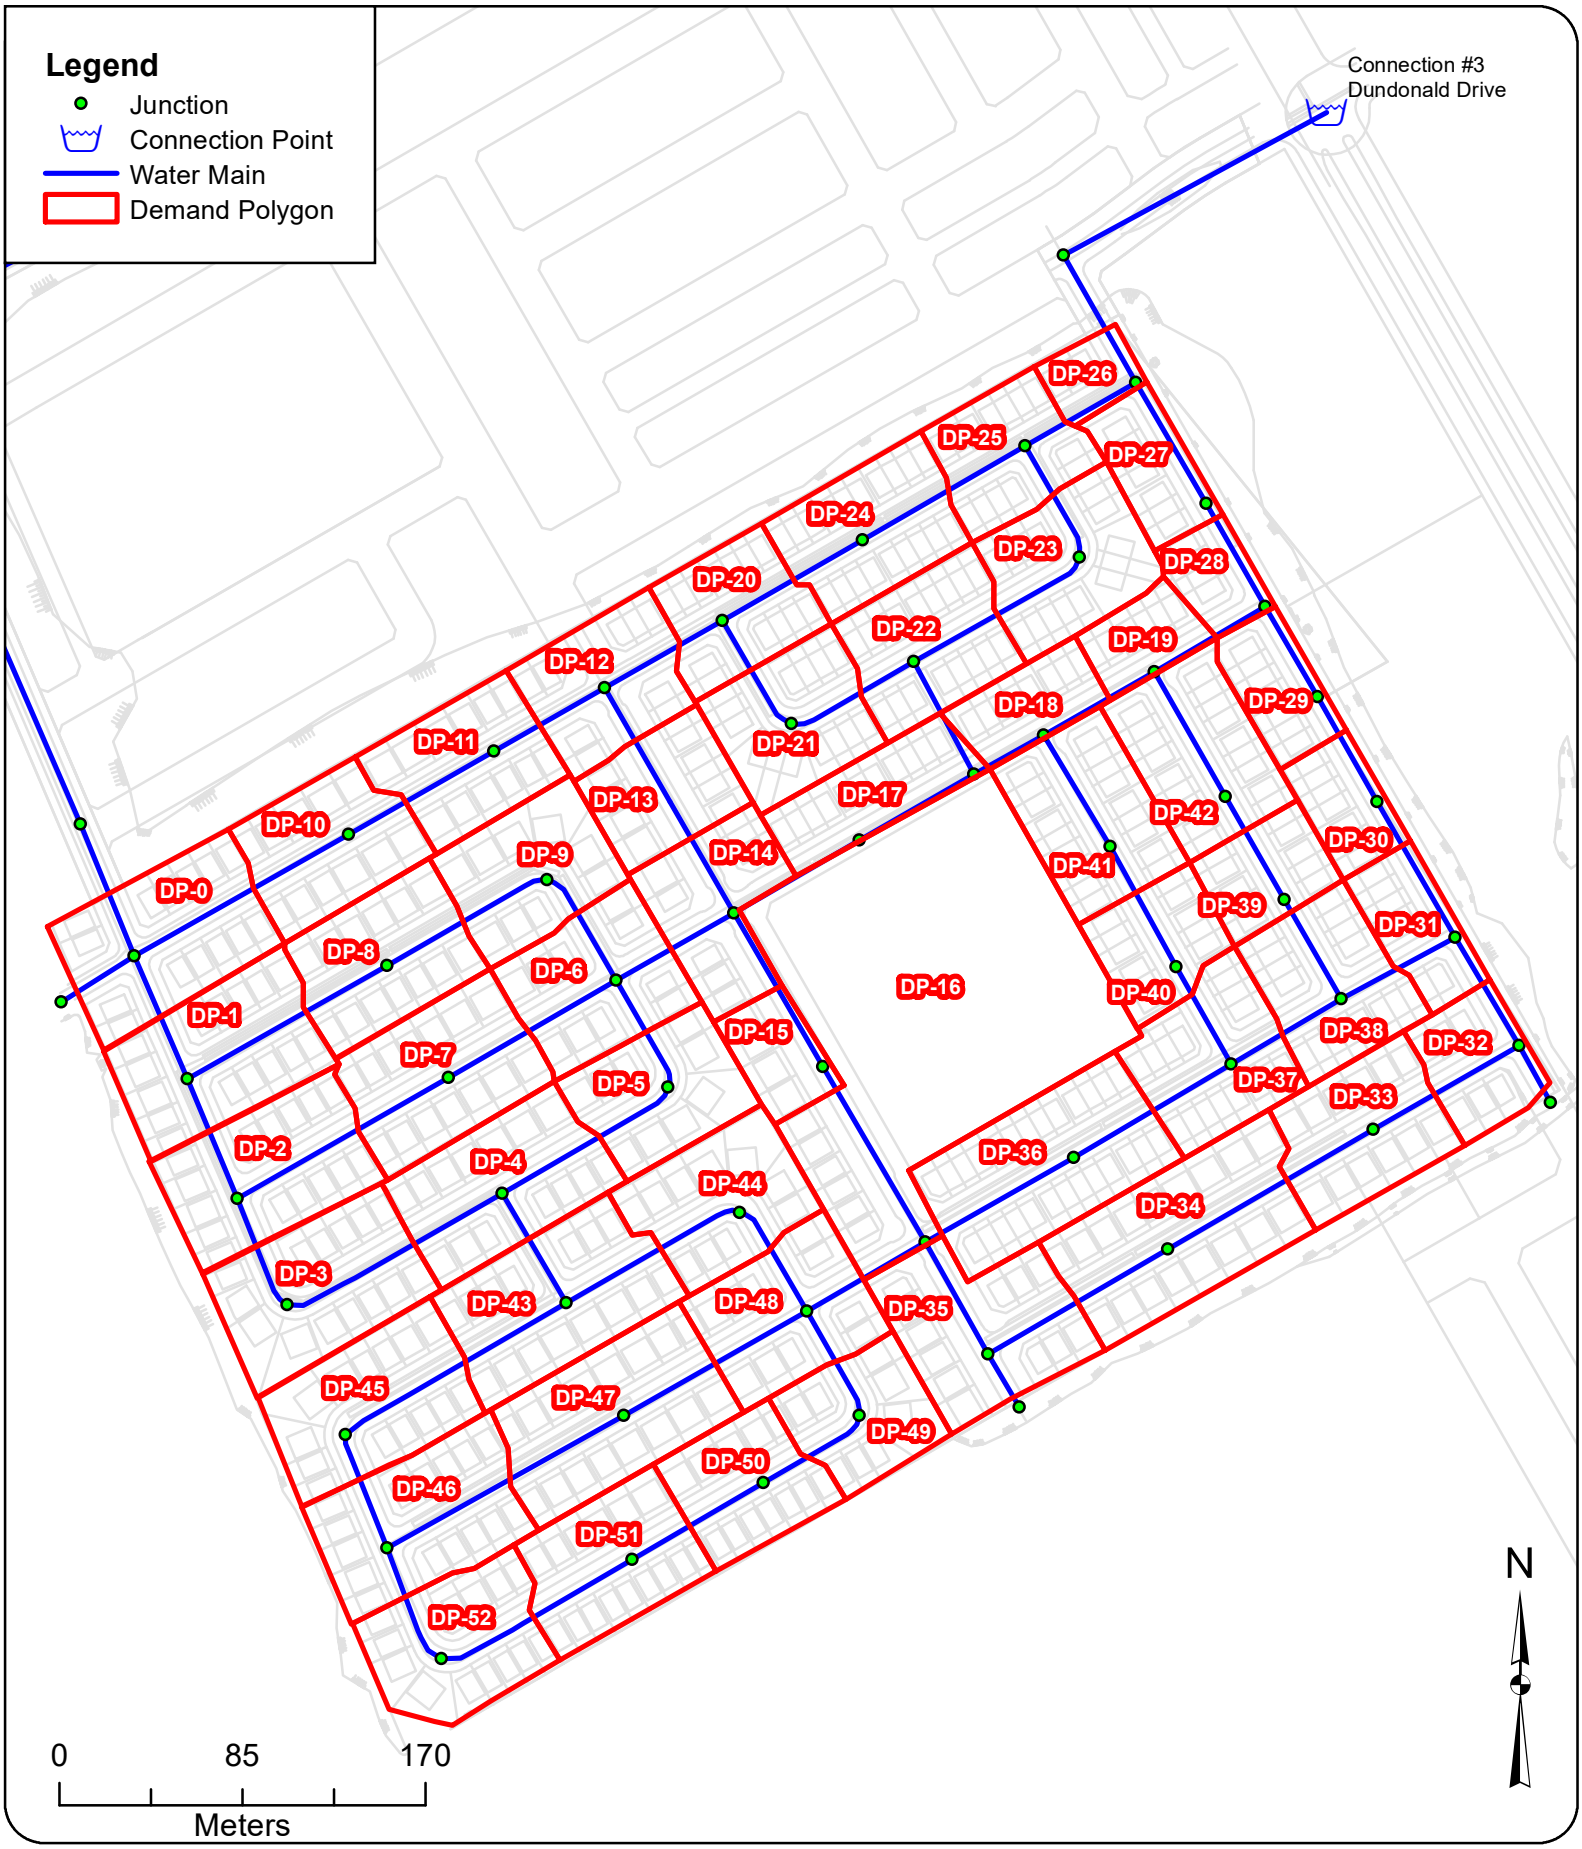


GeoAdvice Engineering Inc.

Project: **Hydraulic Capacity and Modeling Analysis of the Brazeau Lands**
Client: **David Schaeffer Engineering Ltd.**
Date: **June 2020**
Created by: **BL**
Reviewed by: **WdS**

DISCLAIMER: GeoAdvice does not warrant in any way the accuracy and completeness of the information shown on this map. Field verification of the accuracy and completeness of the information shown on this map is the sole responsibility of the user.

# Demand Allocation Phases 1&2

**Figure A.1**

## Consumer Water Demands

**Phase 1 Residential Demands**

| Dwelling Type | Number of Units | Population ** | | Average Day Demand | | | Max Day 2.5 x Avg. Day (L/s) | Fire Flow (L/s) | Peak Hour 2.2 x Max Day (L/s) | Min Hour 0.5 x Avg. Day (L/s) |
|---|---|---|---|---|---|---|---|---|---|---|
| | | Persons per Unit | Population Per Dwelling Type | (L/c/d) | (L/d) | (L/s) | | | | |
| Single Detached | 172 | 3.4 | 585 | 350 | 204,750 | 2.37 | 5.92 | 167* | 13.03 | 1.18 |
| Traditional Townhome | 133 | 2.7 | 360 | | 126,000 | 1.46 | 3.65 | 167* | 8.02 | 0.73 |
| **Subtotal** | **305** | | **945** | | **330,750** | **3.83** | **9.57** | | **21.05** | **1.91** |

**Phases 1&2 Residential Demands**

| Dwelling Type | Number of Units | Population ** | | Average Day Demand | | | Max Day 2.5 x Avg. Day (L/s) | Fire Flow (L/s) | Peak Hour 2.2 x Max Day (L/s) | Min Hour 0.5 x Avg. Day (L/s) |
|---|---|---|---|---|---|---|---|---|---|---|
| | | Persons per Unit | Population Per Dwelling Type | (L/c/d) | (L/d) | (L/s) | | | | |
| Single Detached | 347 | 3.4 | 1,180 | 350 | 413,000 | 4.78 | 11.95 | 167* | 26.29 | 2.39 |
| Traditional Townhome | 279 | 2.7 | 754 | | 263,900 | 3.05 | 7.64 | 167* | 16.80 | 1.53 |
| **Subtotal** | **626** | | **1,934** | | **676,900** | **7.83** | **19.59** | | **43.09** | **3.92** |

**Non Residential Demands**

| Property Type | Area (ha) | | Average Day Demand | | | Max Day 1.5 x Avg. Day (L/s) | Fire Flow (L/s) | Peak Hour 1.8 x Max Day (L/s) | Min Hour 0.5 x Avg. Day (L/s) |
|---|---|---|---|---|---|---|---|---|---|
| | | | ** (L/ha/d) | (L/d) | (L/s) | | | | |
| Park w/ Splash Pad | 1.72 | | 28,000 | 48,160 | 0.56 | 0.84 | 250** | 1.51 | 0.28 |
| **Subtotal** | **1.72** | | | **48,160** | **0.56** | **0.84** | | **1.51** | **0.28** |


| **The Meadows Phases 7/8** | | **ADD (L/s)** | **MDD (L/s)** | **PHD (L/s)** | **MHD (L/s)** |
|---|---|---|---|---|---|
| Total Demand: | | **6.20** | **13.50** | **28.50** | **3.10** |

| | | **ADD (L/s)** | **MDD (L/s)** | **PHD (L/s)** | **MHD (L/s)** |
|---|---|---|---|---|---|
| **Without the Meadows Phases 7/8 Demands** | Phase 1 | **4.39** | **10.41** | **22.56** | **2.19** |
| | Phases 1&2 | **8.39** | **20.42** | **44.59** | **4.20** |
| **With the Meadows Phases 7/8 Demands** | Phase 1 | **10.59** | **23.91** | **51.06** | **5.29** |
| | Phases 1&2 | **14.59** | **33.92** | **73.09** | **7.30** |

*Based on FUS fire flow calculation

**Assumed based on similar information from previously completed projects, as agreed upon with DSEL

# Appendix B FUS Fire Flow Calculations and Allocation

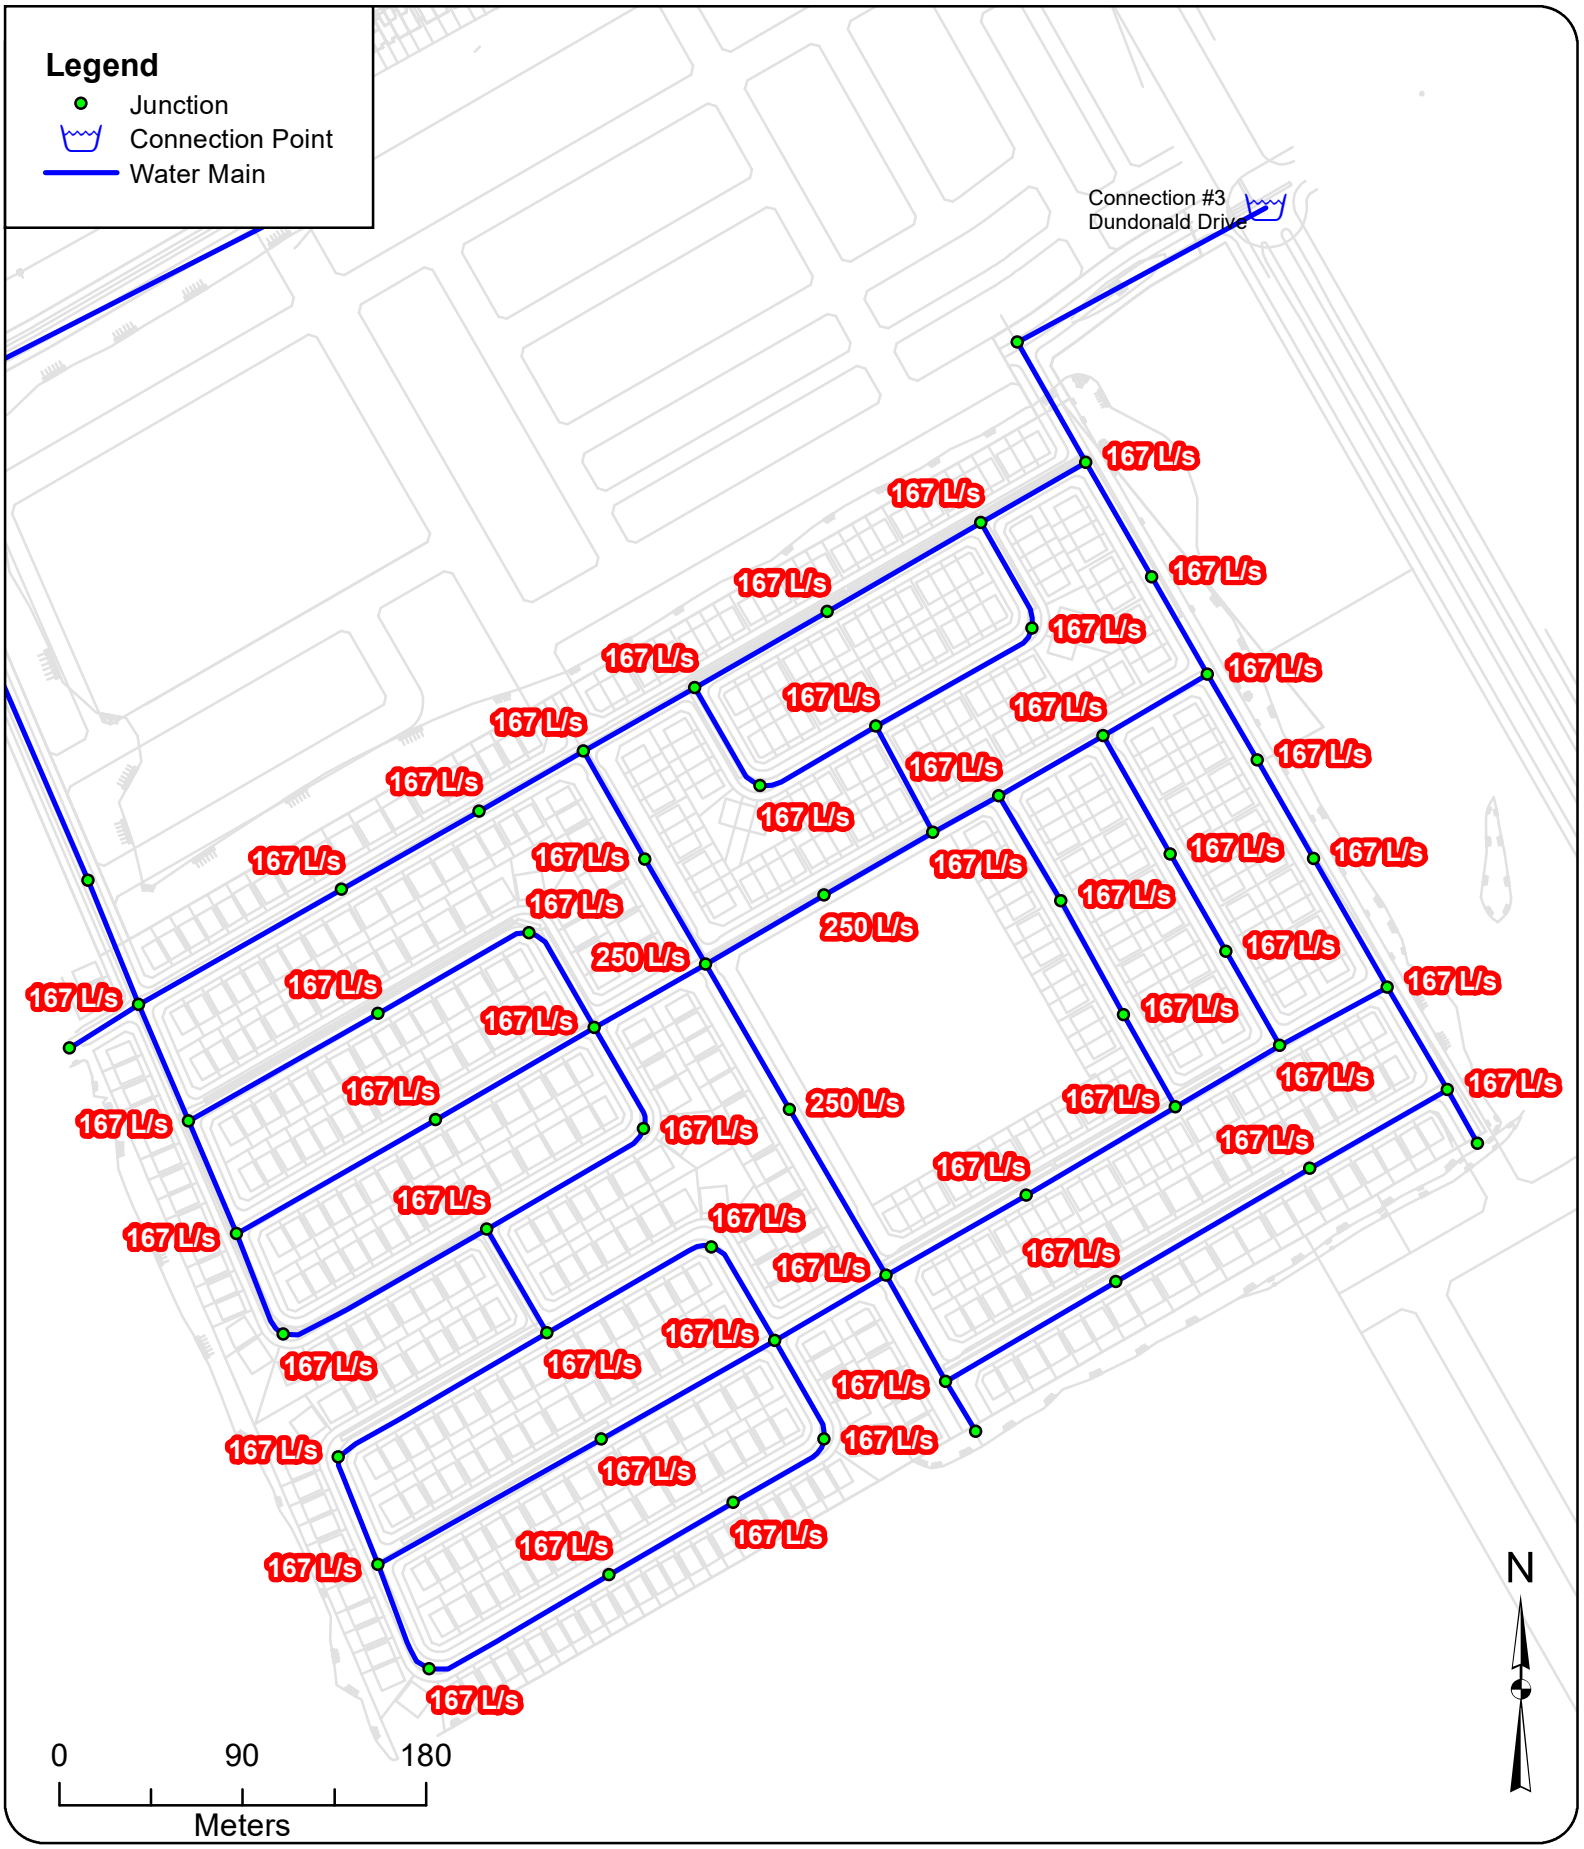


GeoAdvice Engineering Inc.

Project: **Hydraulic Capacity and Modeling Analysis of the Brazeau Lands**
Client: **David Schaeffer Engineering Ltd.**
Date: **June 2020**
Created by: **BL**
Reviewed by: **WdS**

DISCLAIMER: GeoAdvice does not warrant in any way the accuracy and completeness of the information shown on this map. Field verification of the accuracy and completeness of the information shown on this map is the sole responsibility of the user.

**Required Fire Flow Phases 1&2**

**Figure B.1**

# FUS Required Fire Flow Calculation

Client: David Schaeffer Engineering Ltd.
Project: 2019-091-DSE
Development: Brazeau Lands — Blocks 300-313, Single Detached
Zoning: Multi Family Residential
Date: November 6, 2019

Calculations Based on "Water Supply for Public Fire Protection", Fire Underwriters Survey, 1999.

**A. Type of Construction:** Wood Frame Construction

**B. Ground Floor Area:** 1927 $m^2$

**Note: ground floor area based on drawing provided to GeoAdvice on September 12, 2019.**

**C. Number of Storeys:** 2

**Note: all buildings, including adjacent buildings, assumed to be 2 storeys.**

Note: The single detached dwellings are separated by less than 3 m; therefore, they must be considered as one fire area. The combined area of 14 units is considered in this calculation.

**D. Required Fire Flow*:** $F = 220C\sqrt{A}$

C: Coefficient related to the type of construction — **C =** 1.5

A: Effective area — **A =** 3854 $m^2$ (Combined area of 14 units)

The total floor area in $m^2$ in the building being considered

**F = 20,486 L/min** **D = 20,000 L/min***

**E. Occupancy**

| | | | | | | |
|---|---|---|---|---|---|---|
| Occupancy content hazard | Limited Combustible | -15 | % of **D** | **-3,000** | **L/min** | **E = 17,000 L/min** |

**F. Sprinkler Protection**

| | | | | | | |
|---|---|---|---|---|---|---|
| Automatic sprinkler protection | None | 0 | % of **E** | **0** | **L/min** | **F = 17,000 L/min** |

**G. Exposures**

| Side | Separation Distance | Length-Height Factor - Adjacent Structure | Construction Type - Adjacent Structure | Exposure |
|---|---|---|---|---|
| **West** | 20.1 to 30 m | 0-30 m-storeys | Wood Frame or Non-Combustible | 8% |
| **East** | 20.1 to 30 m | 0-30 m-storeys | Wood Frame or Non-Combustible | 8% |
| **North** | 10.1 to 20 m | Over 120 m-storeys | Wood Frame or Non-Combustible | 15% |
| **South** | 20.1 to 30 m | Over 120 m-storeys | Wood Frame or Non-Combustible | 10% |
| | | | **Total** | **41%** |

% of **E** **+ 6,970 L/min** **G = 23,970 L/min**

**H. Wood Shake Charge** No — **0 L/min** **H = 23,970 L/min**

For wood shingle or shake roofs

The required fire flow exceeds the cap in the City of Ottawa Technical Bulletin ISDTB-2014-02 4.2. The single detached dwellings comply with the provisions of the Bulletin; therefore, the required fire flow is:

| | | |
|---|---|---|
| **Total Fire Flow Required** | **10,000** | **L/min*** |
| | **167** | **L/s** |
| **Required Duration of Fire Flow** | **2** | **Hrs** |
| **Required Volume of Fire Flow** | **1,200** | **$m^3$** |

*Rounded to the nearest 1,000 L/min

The Total Required Fire Flow for the Brazeau Lands development should be reviewed when drawings and site plans have been finalized. The Total Required Fire Flow may be reduced or increased depending on area, construction, occupancy, exposures, and level of sprinkler protection. If any of these items change the Total Required Fire Flow should be reviewed to determine the impact.

Consideration should be given for fire prevention during construction phases as the required fire flows during construction of buildings is substantially higher than after the buildings are occupied. This is due to exposed framing and inactive sprinkler systems. Fires starting in unprotected portion of buildings quickly become too strong for sprinkler systems in protected portion of buildings. As such, special precautions should be taken any time construction is occurring.

* The amount and rate of water application required in firefighting to confine and control the fires possible in a building or group of buildings which comprise essentially the same fire area by virtue of immediate exposure.

** Rounded to the nearest 1,000 L/min

## Notes to calculations

| Type of Construction | Coefficient | Unit |
|---|---|---|
| Wood Frame Construction | 1.5 | - |
| Ordinary Construction | 1 | - |
| Non-Combustible Construction | 0.8 | - |
| Fire Resistive Construction (< 2 hrs) | 0.7 | - |
| Fire Resistive Construction (> 2 hrs) | 0.6 | - |

| Occupancy Fire Hazard | Factor | Unit |
|---|---|---|
| Non-Combustible | -25 | % |
| Limited Combustible | -15 | % |
| Combustible | 0 | % |
| Free Burning | 15 | % |
| Rapid Burning | 25 | % |

| Sprinkler Protection | Factor | Unit |
|---|---|---|
| None | 0 | % |
| Automatic | -30 | % |
| Automatic + Standard Supply | -40 | % |
| Fully Supervised | -50 | % |
| Fully Supervised + Fire Resistive | -70 | % |

| Zoning |
|---|
| Single Family Residential |
| Multi Family Residential |
| Commercial |
| Institutional |
| Industrial |

| Wood Shake Charge | Factor | Unit |
|---|---|---|
| Yes | 4000 | L/min |
| No | 0 | L/min |

| Required Duration of Fire Flow | |
|---|---|
| Fire Flow Required (L/min) | Duration (hours) |
| 2,000 or less | 1.00 |
| 3000 | 1.25 |
| 4000 | 1.50 |
| 5000 | 1.75 |
| 6000 | 2.00 |
| 7000 | 2.00 |
| 8000 | 2.00 |
| 9000 | 2.00 |
| 10000 | 2.00 |
| 11000 | 2.25 |
| 12000 | 2.50 |
| 13000 | 2.75 |
| 14000 | 3.00 |
| 15000 | 3.25 |
| 16000 | 3.50 |
| 17000 | 3.75 |
| 18000 | 4.00 |
| 19000 | 4.25 |
| 20000 | 4.50 |
| 21000 | 4.75 |
| 22000 | 5.00 |
| 23000 | 5.25 |
| 24000 | 5.50 |
| 25000 | 5.75 |
| 26000 | 6.00 |
| 27000 | 6.25 |
| 28000 | 6.50 |
| 29000 | 6.75 |
| 30000 | 7.00 |
| 31000 | 7.25 |
| 32000 | 7.50 |
| 33000 | 7.75 |
| 34000 | 8.00 |
| 35000 | 8.25 |
| 36000 | 8.50 |
| 37000 | 8.75 |
| 38000 | 9.00 |
| 39000 | 9.25 |
| 40000 and over | 9.50 |

## Notes to calculations

| Separation Distance | Length-Height Factor of Exposed Wall of Adjacent Structure | Construction of Exposed Wall of Adjacent Structure | | | |
|---|---|---|---|---|---|
| | | Wood Frame or Non-Combustible | Ordinary or Fire-Resistive with Unprotected Openings | Ordinary or Fire-Resistive with Semi-Protected Openings | Ordinary or Fire-Resistive with Blank Wall |
| 0.0 to 3 m | 0-30 m-storeys | 22% | 21% | 16% | 0% |
| | 31-60 m-storeys | 23% | 22% | 17% | 0% |
| | 61-90 m-storeys | 24% | 23% | 18% | 0% |
| | 91-120 m-storeys | 25% | 24% | 19% | 0% |
| | Over 120 m-storeys | 25% | 25% | 20% | 0% |
| 3.1 to 10 m | 0-30 m-storeys | 17% | 15% | 11% | 0% |
| | 31-60 m-storeys | 18% | 16% | 12% | 0% |
| | 61-90 m-storeys | 19% | 18% | 14% | 0% |
| | 91-120 m-storeys | 20% | 19% | 15% | 0% |
| | Over 120 m-storeys | 20% | 19% | 15% | 0% |
| 10.1 to 20 m | 0-30 m-storeys | 12% | 10% | 7% | 0% |
| | 31-60 m-storeys | 13% | 11% | 8% | 0% |
| | 61-90 m-storeys | 14% | 13% | 10% | 0% |
| | 91-120 m-storeys | 15% | 14% | 11% | 0% |
| | Over 120 m-storeys | 15% | 15% | 12% | 0% |
| 20.1 to 30 m | 0-30 m-storeys | 8% | 6% | 4% | 0% |
| | 31-60 m-storeys | 8% | 7% | 5% | 0% |
| | 61-90 m-storeys | 9% | 8% | 6% | 0% |
| | 91-120 m-storeys | 10% | 9% | 7% | 0% |
| | Over 120 m-storeys | 10% | 10% | 8% | 0% |
| 30.1 to 45 m | 0-30 m-storeys | 5% | 5% | 5% | 0% |
| | 31-60 m-storeys | 5% | 5% | 5% | 0% |
| | 61-90 m-storeys | 5% | 5% | 5% | 0% |
| | 91-120 m-storeys | 5% | 5% | 5% | 0% |
| | Over 120 m-storeys | 5% | 5% | 5% | 0% |
| Beyond 45 m | 0-30 m-storeys | 0% | 0% | 0% | 0% |
| | 31-60 m-storeys | 0% | 0% | 0% | 0% |
| | 61-90 m-storeys | 0% | 0% | 0% | 0% |
| | 91-120 m-storeys | 0% | 0% | 0% | 0% |
| | Over 120 m-storeys | 0% | 0% | 0% | 0% |
| Fire Wall | 0-30 m-storeys | 10% | 10% | 10% | 10% |
| | 31-60 m-storeys | 10% | 10% | 10% | 10% |
| | 61-90 m-storeys | 10% | 10% | 10% | 10% |
| | 91-120 m-storeys | 10% | 10% | 10% | 10% |
| | Over 120 m-storeys | 10% | 10% | 10% | 10% |

## Brazeau Lands - FUS Required Fire Flow Summary

| Brazeau Lands | |
|---|---|
| **Type of Construction** | Wood Frame Construction |
| **Construction Coefficient** | 1.5 |
| **Effective Total Area ($m^2$)** | 3,854 |
| **Required Fire Flow (L/min)** | 20,000 |
| **Occupancy Charge** | -15 |
| **Sprinkler Protection Reduction** | 0 |
| **Exposure (%)** | |
| North (%) | 8% |
| East (%) | 8% |
| South (%) | 15% |
| West (%) | 10% |
| Total Exposure (%) | 41% |
| **Wood Shake Charge (L/min)** | 0 |
| **Total Required Fire Flow (L/min)** | 10,000 |
| **Total Required Fire Flow (L/s)** | 167 |

# FUS Required Fire Flow Calculation

Client: David Schaeffer Engineering Ltd.
Project: 2019-091-DSE
Development: Brazeau Lands — Blocks 173, Traditional Townhouse
Zoning: Multi Family Residential
Date: November 6, 2019

Calculations Based on "Water Supply for Public Fire Protection", Fire Underwriters Survey, 1999.

**A. Type of Construction:** Wood Frame Construction

**B. Ground Floor Area:** 474 $m^2$

**Note: ground floor area based on drawing provided to GeoAdvice on September 12, 2019.**

**C. Number of Storeys:** 2

**Note: all buildings, including adjacent buildings, assumed to be 2 storeys.**

Note: The townhouse dwellings are separated by less than 3 m; therefore, they must be considered as one fire area. The combined area of 5 units is considered in this calculation.

**D. Required Fire Flow*:** $F = 220C\sqrt{A}$

C: Coefficient related to the type of construction — **C =** 1.5

A: Effective area — **A =** 947 $m^2$ (Combined area of 5 units)

The total floor area in $m^2$ in the building being considered

**F = 10,156 L/min** **D = 10,000 L/min***

**E. Occupancy**

| | | | | | | |
|---|---|---|---|---|---|---|
| Occupancy content hazard | Limited Combustible | -15 | % of **D** | **-1,500** | **L/min** | **E = 8,500 L/min** |

**F. Sprinkler Protection**

| | | | | | | |
|---|---|---|---|---|---|---|
| Automatic sprinkler protection | None | 0 | % of **E** | **0** | **L/min** | **F = 8,500 L/min** |

**G. Exposures**

| Side | Separation Distance | Length-Height Factor - Adjacent Structure | Construction Type - Adjacent Structure | Exposure |
|---|---|---|---|---|
| **West** | 3.1 to 10 m | 0-30 m-storeys | Wood Frame or Non-Combustible | 17% |
| **East** | 3.1 to 10 m | 0-30 m-storeys | Wood Frame or Non-Combustible | 17% |
| **North** | 10.1 to 20 m | 61-90 m-storeys | Wood Frame or Non-Combustible | 14% |
| **South** | 20.1 to 30 m | 31-60 m-storeys | Wood Frame or Non-Combustible | 8% |
| | | | **Total** | **56%** |

% of **E** **+ 4,760 L/min** **G = 13,260 L/min**

**H. Wood Shake Charge** No — **0 L/min** **H = 13,260 L/min**

For wood shingle or shake roofs

The required fire flow exceeds the cap in the City of Ottawa Technical Bulletin ISDTB-2014-02 4.2. The townhouse dwellings comply with the provisions of the Bulletin; therefore, the required fire flow is:

| | | |
|---|---|---|
| **Total Fire Flow Required** | **10,000** | **L/min*** |
| | **167** | **L/s** |
| **Required Duration of Fire Flow** | **2** | **Hrs** |
| **Required Volume of Fire Flow** | **1,200** | **$m^3$** |

*Rounded to the nearest 1,000 L/min

The Total Required Fire Flow for the Brazeau Lands development should be reviewed when drawings and site plans have been finalized. The Total Required Fire Flow may be reduced or increased depending on area, construction, occupancy, exposures, and level of sprinkler protection. If any of these items change the Total Required Fire Flow should be reviewed to determine the impact.

Consideration should be given for fire prevention during construction phases as the required fire flows during construction of buildings is substantially higher than after the buildings are occupied. This is due to exposed framing and inactive sprinkler systems. Fires starting in unprotected portion of buildings quickly become too strong for sprinkler systems in protected portion of buildings. As such, special precautions should be taken any time construction is occurring.

* The amount and rate of water application required in firefighting to confine and control the fires possible in a building or group of buildings which comprise essentially the same fire area by virtue of immediate exposure.

** Rounded to the nearest 1,000 L/min

## Notes to calculations

| Type of Construction | Coefficient | Unit |
|---|---|---|
| Wood Frame Construction | 1.5 | - |
| Ordinary Construction | 1 | - |
| Non-Combustible Construction | 0.8 | - |
| Fire Resistive Construction (< 2 hrs) | 0.7 | - |
| Fire Resistive Construction (> 2 hrs) | 0.6 | - |

| Occupancy Fire Hazard | Factor | Unit |
|---|---|---|
| Non-Combustible | -25 | % |
| Limited Combustible | -15 | % |
| Combustible | 0 | % |
| Free Burning | 15 | % |
| Rapid Burning | 25 | % |

| Sprinkler Protection | Factor | Unit |
|---|---|---|
| None | 0 | % |
| Automatic | -30 | % |
| Automatic + Standard Supply | -40 | % |
| Fully Supervised | -50 | % |
| Fully Supervised + Fire Resistive | -70 | % |

| Zoning |
|---|
| Single Family Residential |
| Multi Family Residential |
| Commercial |
| Institutional |
| Industrial |

| Wood Shake Charge | Factor | Unit |
|---|---|---|
| Yes | 4000 | L/min |
| No | 0 | L/min |

| Required Duration of Fire Flow | |
|---|---|
| Fire Flow Required (L/min) | Duration (hours) |
| 2,000 or less | 1.00 |
| 3000 | 1.25 |
| 4000 | 1.50 |
| 5000 | 1.75 |
| 6000 | 2.00 |
| 7000 | 2.00 |
| 8000 | 2.00 |
| 9000 | 2.00 |
| 10000 | 2.00 |
| 11000 | 2.25 |
| 12000 | 2.50 |
| 13000 | 2.75 |
| 14000 | 3.00 |
| 15000 | 3.25 |
| 16000 | 3.50 |
| 17000 | 3.75 |
| 18000 | 4.00 |
| 19000 | 4.25 |
| 20000 | 4.50 |
| 21000 | 4.75 |
| 22000 | 5.00 |
| 23000 | 5.25 |
| 24000 | 5.50 |
| 25000 | 5.75 |
| 26000 | 6.00 |
| 27000 | 6.25 |
| 28000 | 6.50 |
| 29000 | 6.75 |
| 30000 | 7.00 |
| 31000 | 7.25 |
| 32000 | 7.50 |
| 33000 | 7.75 |
| 34000 | 8.00 |
| 35000 | 8.25 |
| 36000 | 8.50 |
| 37000 | 8.75 |
| 38000 | 9.00 |
| 39000 | 9.25 |
| 40000 and over | 9.50 |

## Notes to calculations

| Separation Distance | Length-Height Factor of Exposed Wall of Adjacent Structure | Construction of Exposed Wall of Adjacent Structure | | | |
|---|---|---|---|---|---|
| | | Wood Frame or Non-Combustible | Ordinary or Fire-Resistive with Unprotected Openings | Ordinary or Fire-Resistive with Semi-Protected Openings | Ordinary or Fire-Resistive with Blank Wall |
| 0.0 to 3 m | 0-30 m-storeys | 22% | 21% | 16% | 0% |
| | 31-60 m-storeys | 23% | 22% | 17% | 0% |
| | 61-90 m-storeys | 24% | 23% | 18% | 0% |
| | 91-120 m-storeys | 25% | 24% | 19% | 0% |
| | Over 120 m-storeys | 25% | 25% | 20% | 0% |
| 3.1 to 10 m | 0-30 m-storeys | 17% | 15% | 11% | 0% |
| | 31-60 m-storeys | 18% | 16% | 12% | 0% |
| | 61-90 m-storeys | 19% | 18% | 14% | 0% |
| | 91-120 m-storeys | 20% | 19% | 15% | 0% |
| | Over 120 m-storeys | 20% | 19% | 15% | 0% |
| 10.1 to 20 m | 0-30 m-storeys | 12% | 10% | 7% | 0% |
| | 31-60 m-storeys | 13% | 11% | 8% | 0% |
| | 61-90 m-storeys | 14% | 13% | 10% | 0% |
| | 91-120 m-storeys | 15% | 14% | 11% | 0% |
| | Over 120 m-storeys | 15% | 15% | 12% | 0% |
| 20.1 to 30 m | 0-30 m-storeys | 8% | 6% | 4% | 0% |
| | 31-60 m-storeys | 8% | 7% | 5% | 0% |
| | 61-90 m-storeys | 9% | 8% | 6% | 0% |
| | 91-120 m-storeys | 10% | 9% | 7% | 0% |
| | Over 120 m-storeys | 10% | 10% | 8% | 0% |
| 30.1 to 45 m | 0-30 m-storeys | 5% | 5% | 5% | 0% |
| | 31-60 m-storeys | 5% | 5% | 5% | 0% |
| | 61-90 m-storeys | 5% | 5% | 5% | 0% |
| | 91-120 m-storeys | 5% | 5% | 5% | 0% |
| | Over 120 m-storeys | 5% | 5% | 5% | 0% |
| Beyond 45 m | 0-30 m-storeys | 0% | 0% | 0% | 0% |
| | 31-60 m-storeys | 0% | 0% | 0% | 0% |
| | 61-90 m-storeys | 0% | 0% | 0% | 0% |
| | 91-120 m-storeys | 0% | 0% | 0% | 0% |
| | Over 120 m-storeys | 0% | 0% | 0% | 0% |
| Fire Wall | 0-30 m-storeys | 10% | 10% | 10% | 10% |
| | 31-60 m-storeys | 10% | 10% | 10% | 10% |
| | 61-90 m-storeys | 10% | 10% | 10% | 10% |
| | 91-120 m-storeys | 10% | 10% | 10% | 10% |
| | Over 120 m-storeys | 10% | 10% | 10% | 10% |

## Brazeau Lands - FUS Required Fire Flow Summary

| Brazeau Lands | |
|---|---|
| **Type of Construction** | Wood Frame Construction |
| **Construction Coefficient** | 1.5 |
| **Effective Total Area ($m^2$)** | 947 |
| **Required Fire Flow (L/min)** | 10,000 |
| **Occupancy Charge** | -15 |
| **Sprinkler Protection Reduction** | 0 |
| **Exposure (%)** | |
| North (%) | 17% |
| East (%) | 17% |
| South (%) | 14% |
| West (%) | 8% |
| Total Exposure (%) | 56% |
| **Wood Shake Charge (L/min)** | 0 |
| **Total Required Fire Flow (L/min)** | 10,000 |
| **Total Required Fire Flow (L/s)** | 167 |

# FUS Required Fire Flow Calculation

Client: David Schaeffer Engineering Ltd.
Project: 2019-091-DSE
Development: Brazeau Lands
Zoning: Multi Family Residential — Blocks 384, Traditional Townhouse
Date: November 6, 2019

Calculations Based on "Water Supply for Public Fire Protection", Fire Underwriters Survey, 1999.

**A. Type of Construction:** Wood Frame Construction

**B. Ground Floor Area:** 380 $m^2$

**Note: ground floor area based on drawing provided to GeoAdvice on September 12, 2019.**

**C. Number of Storeys:** 2

**Note: all buildings, including adjacent buildings, assumed to be 2 storeys.**

Note: The townhouse dwellings are separated by less than 3 m; therefore, they must be considered as one fire area. The combined area of 4 units is considered in this calculation.

**D. Required Fire Flow*:** $F = 220C\sqrt{A}$

C: Coefficient related to the type of construction — **C =** 1.5

A: Effective area — **A =** 760 $m^2$ (Combined area of 4 units)

The total floor area in $m^2$ in the building being considered

**F = 9,095 L/min** **D = 9,000 L/min***

**E. Occupancy**

Occupancy content hazard: Limited Combustible — -15 % of **D** **-1,350 L/min** **E = 7,650 L/min**

**F. Sprinkler Protection**

Automatic sprinkler protection: None — 0 % of **E** **0 L/min** **F = 7,650 L/min**

**G. Exposures**

| Side | Separation Distance | Length-Height Factor - Adjacent Structure | Construction Type - Adjacent Structure | Exposure |
|---|---|---|---|---|
| **West** | 10.1 to 20 m | 0-30 m-storeys | Wood Frame or Non-Combustible | 12% |
| **East** | Beyond 45 m | 0-30 m-storeys | Wood Frame or Non-Combustible | 0% |
| **North** | 3.1 to 10 m | 0-30 m-storeys | Wood Frame or Non-Combustible | 17% |
| **South** | 20.1 to 30 m | 0-30 m-storeys | Wood Frame or Non-Combustible | 8% |
| | | | **Total** | **37%** |

% of **E** **+ 2,831 L/min** **G = 10,481 L/min**

**H. Wood Shake Charge** — No — **0 L/min** **H = 10,481 L/min**

For wood shingle or shake roofs

The required fire flow exceeds the cap in the City of Ottawa Technical Bulletin ISDTB-2014-02 4.2. The townhouse dwellings **do not** comply with the provisions of the Bulletin; therefore, the required fire flow is:

| | | |
|---|---|---|
| **Total Fire Flow Required** | **10,000** | **L/min*** |
| | **167** | **L/s** |
| **Required Duration of Fire Flow** | **2** | **Hrs** |
| **Required Volume of Fire Flow** | **1,200** | **$m^3$** |

*Rounded to the nearest 1,000 L/min

The Total Required Fire Flow for the Brazeau Lands development should be reviewed when drawings and site plans have been finalized. The Total Required Fire Flow may be reduced or increased depending on area, construction, occupancy, exposures, and level of sprinkler protection. If any of these items change the Total Required Fire Flow should be reviewed to determine the impact.

Consideration should be given for fire prevention during construction phases as the required fire flows during construction of buildings is substantially higher than after the buildings are occupied. This is due to exposed framing and inactive sprinkler systems. Fires starting in unprotected portion of buildings quickly become too strong for sprinkler systems in protected portion of buildings. As such, special precautions should be taken any time construction is occurring.

* The amount and rate of water application required in firefighting to confine and control the fires possible in a building or group of buildings which comprise essentially the same fire area by virtue of immediate exposure.

** Rounded to the nearest 1,000 L/min

## Notes to calculations

| Type of Construction | Coefficient | Unit |
|---|---|---|
| Wood Frame Construction | 1.5 | - |
| Ordinary Construction | 1 | - |
| Non-Combustible Construction | 0.8 | - |
| Fire Resistive Construction (< 2 hrs) | 0.7 | - |
| Fire Resistive Construction (> 2 hrs) | 0.6 | - |

| Occupancy Fire Hazard | Factor | Unit |
|---|---|---|
| Non-Combustible | -25 | % |
| Limited Combustible | -15 | % |
| Combustible | 0 | % |
| Free Burning | 15 | % |
| Rapid Burning | 25 | % |

| Sprinkler Protection | Factor | Unit |
|---|---|---|
| None | 0 | % |
| Automatic | -30 | % |
| Automatic + Standard Supply | -40 | % |
| Fully Supervised | -50 | % |
| Fully Supervised + Fire Resistive | -70 | % |

| Zoning |
|---|
| Single Family Residential |
| Multi Family Residential |
| Commercial |
| Institutional |
| Industrial |

| Wood Shake Charge | Factor | Unit |
|---|---|---|
| Yes | 4000 | L/min |
| No | 0 | L/min |

| Required Duration of Fire Flow | |
|---|---|
| Fire Flow Required (L/min) | Duration (hours) |
| 2,000 or less | 1.00 |
| 3000 | 1.25 |
| 4000 | 1.50 |
| 5000 | 1.75 |
| 6000 | 2.00 |
| 7000 | 2.00 |
| 8000 | 2.00 |
| 9000 | 2.00 |
| 10000 | 2.00 |
| 11000 | 2.25 |
| 12000 | 2.50 |
| 13000 | 2.75 |
| 14000 | 3.00 |
| 15000 | 3.25 |
| 16000 | 3.50 |
| 17000 | 3.75 |
| 18000 | 4.00 |
| 19000 | 4.25 |
| 20000 | 4.50 |
| 21000 | 4.75 |
| 22000 | 5.00 |
| 23000 | 5.25 |
| 24000 | 5.50 |
| 25000 | 5.75 |
| 26000 | 6.00 |
| 27000 | 6.25 |
| 28000 | 6.50 |
| 29000 | 6.75 |
| 30000 | 7.00 |
| 31000 | 7.25 |
| 32000 | 7.50 |
| 33000 | 7.75 |
| 34000 | 8.00 |
| 35000 | 8.25 |
| 36000 | 8.50 |
| 37000 | 8.75 |
| 38000 | 9.00 |
| 39000 | 9.25 |
| 40000 and over | 9.50 |

## Notes to calculations

| Separation Distance | Length-Height Factor of Exposed Wall of Adjacent Structure | Construction of Exposed Wall of Adjacent Structure | | | |
|---|---|---|---|---|---|
| | | Wood Frame or Non-Combustible | Ordinary or Fire-Resistive with Unprotected Openings | Ordinary or Fire-Resistive with Semi-Protected Openings | Ordinary or Fire-Resistive with Blank Wall |
| 0.0 to 3 m | 0-30 m-storeys | 22% | 21% | 16% | 0% |
| | 31-60 m-storeys | 23% | 22% | 17% | 0% |
| | 61-90 m-storeys | 24% | 23% | 18% | 0% |
| | 91-120 m-storeys | 25% | 24% | 19% | 0% |
| | Over 120 m-storeys | 25% | 25% | 20% | 0% |
| 3.1 to 10 m | 0-30 m-storeys | 17% | 15% | 11% | 0% |
| | 31-60 m-storeys | 18% | 16% | 12% | 0% |
| | 61-90 m-storeys | 19% | 18% | 14% | 0% |
| | 91-120 m-storeys | 20% | 19% | 15% | 0% |
| | Over 120 m-storeys | 20% | 19% | 15% | 0% |
| 10.1 to 20 m | 0-30 m-storeys | 12% | 10% | 7% | 0% |
| | 31-60 m-storeys | 13% | 11% | 8% | 0% |
| | 61-90 m-storeys | 14% | 13% | 10% | 0% |
| | 91-120 m-storeys | 15% | 14% | 11% | 0% |
| | Over 120 m-storeys | 15% | 15% | 12% | 0% |
| 20.1 to 30 m | 0-30 m-storeys | 8% | 6% | 4% | 0% |
| | 31-60 m-storeys | 8% | 7% | 5% | 0% |
| | 61-90 m-storeys | 9% | 8% | 6% | 0% |
| | 91-120 m-storeys | 10% | 9% | 7% | 0% |
| | Over 120 m-storeys | 10% | 10% | 8% | 0% |
| 30.1 to 45 m | 0-30 m-storeys | 5% | 5% | 5% | 0% |
| | 31-60 m-storeys | 5% | 5% | 5% | 0% |
| | 61-90 m-storeys | 5% | 5% | 5% | 0% |
| | 91-120 m-storeys | 5% | 5% | 5% | 0% |
| | Over 120 m-storeys | 5% | 5% | 5% | 0% |
| Beyond 45 m | 0-30 m-storeys | 0% | 0% | 0% | 0% |
| | 31-60 m-storeys | 0% | 0% | 0% | 0% |
| | 61-90 m-storeys | 0% | 0% | 0% | 0% |
| | 91-120 m-storeys | 0% | 0% | 0% | 0% |
| | Over 120 m-storeys | 0% | 0% | 0% | 0% |
| Fire Wall | 0-30 m-storeys | 10% | 10% | 10% | 10% |
| | 31-60 m-storeys | 10% | 10% | 10% | 10% |
| | 61-90 m-storeys | 10% | 10% | 10% | 10% |
| | 91-120 m-storeys | 10% | 10% | 10% | 10% |
| | Over 120 m-storeys | 10% | 10% | 10% | 10% |

## Brazeau Lands - FUS Required Fire Flow Summary

| Brazeau Lands | |
|---|---|
| **Type of Construction** | Wood Frame Construction |
| **Construction Coefficient** | 1.5 |
| **Effective Total Area ($m^2$)** | 760 |
| **Required Fire Flow (L/min)** | 9,000 |
| **Occupancy Charge** | -15 |
| **Sprinkler Protection Reduction** | 0 |
| **Exposure (%)** | |
| North (%) | 12% |
| East (%) | 0% |
| South (%) | 17% |
| West (%) | 8% |
| Total Exposure (%) | 37% |
| **Wood Shake Charge (L/min)** | 0 |
| **Total Required Fire Flow (L/min)** | 10,000 |
| **Total Required Fire Flow (L/s)** | 167 |

# FUS Required Fire Flow Calculation

Client: David Schaeffer Engineering Ltd.
Project: 2019-091-DSE
Development: Brazeau Lands
Zoning: Multi Family Residential  Blocks 168, Traditional Townhouse
Date: November 6, 2019

Calculations Based on "Water Supply for Public Fire Protection", Fire Underwriters Survey, 1999.

**A. Type of Construction:** Wood Frame Construction

**B. Ground Floor Area:** 380 $m^2$

**Note: ground floor area based on drawing provided to GeoAdvice on September 12, 2019.**

**C. Number of Storeys:** 2

**Note: all buildings, including adjacent buildings, assumed to be 2 storeys.**

Note: The townhouse dwellings are separated by less than 3 m; therefore, they must be considered as one fire area. The combined area of 4 units is considered in this calculation.

**D. Required Fire Flow*:** $F = 220C\sqrt{A}$

C: Coefficient related to the type of construction — **C =** 1.5

A: Effective area — **A =** 760 $m^2$ (Combined area of 4 units)

The total floor area in $m^2$ in the building being considered

**F = 9,095 L/min** **D = 9,000 L/min***

**E. Occupancy**

Occupancy content hazard: Limited Combustible — -15 % of **D** **-1,350 L/min** **E = 7,650 L/min**

**F. Sprinkler Protection**

Automatic sprinkler protection: None — 0 % of **E** **0 L/min** **F = 7,650 L/min**

**G. Exposures**

| Side | Separation Distance | Length-Height Factor - Adjacent Structure | Construction Type - Adjacent Structure | Exposure |
|---|---|---|---|---|
| **West** | 30.1 to 45 m | 0-30 m-storeys | Wood Frame or Non-Combustible | 5% |
| **East** | 10.1 to 20 m | 0-30 m-storeys | Wood Frame or Non-Combustible | 12% |
| **North** | 3.1 to 10 m | 0-30 m-storeys | Wood Frame or Non-Combustible | 17% |
| **South** | Beyond 45 m | 31-60 m-storeys | Wood Frame or Non-Combustible | 0% |
| | | | **Total** | **34%** |

% of **E** **+ 2,601 L/min** **G = 10,251 L/min**

**H. Wood Shake Charge** No — **0 L/min** **H = 10,251 L/min**

For wood shingle or shake roofs

The required fire flow exceeds the cap in the City of Ottawa Technical Bulletin ISDTB-2014-02 4.2. The townhouse dwellings **do not** comply with the provisions of the Bulletin; therefore, the required fire flow is:

| | | |
|---|---|---|
| **Total Fire Flow Required** | **10,000** | **L/min*** |
| | **167** | **L/s** |
| **Required Duration of Fire Flow** | **2** | **Hrs** |
| **Required Volume of Fire Flow** | **1,200** | **$m^3$** |

*Rounded to the nearest 1,000 L/min

The Total Required Fire Flow for the Brazeau Lands development should be reviewed when drawings and site plans have been finalized. The Total Required Fire Flow may be reduced or increased depending on area, construction, occupancy, exposures, and level of sprinkler protection. If any of these items change the Total Required Fire Flow should be reviewed to determine the impact.

Consideration should be given for fire prevention during construction phases as the required fire flows during construction of buildings is substantially higher than after the buildings are occupied. This is due to exposed framing and inactive sprinkler systems. Fires starting in unprotected portion of buildings quickly become too strong for sprinkler systems in protected portion of buildings. As such, special precautions should be taken any time construction is occurring.

* The amount and rate of water application required in firefighting to confine and control the fires possible in a building or group of buildings which comprise essentially the same fire area by virtue of immediate exposure.

** Rounded to the nearest 1,000 L/min

## Notes to calculations

| Type of Construction | Coefficient | Unit |
|---|---|---|
| Wood Frame Construction | 1.5 | - |
| Ordinary Construction | 1 | - |
| Non-Combustible Construction | 0.8 | - |
| Fire Resistive Construction (< 2 hrs) | 0.7 | - |
| Fire Resistive Construction (> 2 hrs) | 0.6 | - |

| Occupancy Fire Hazard | Factor | Unit |
|---|---|---|
| Non-Combustible | -25 | % |
| Limited Combustible | -15 | % |
| Combustible | 0 | % |
| Free Burning | 15 | % |
| Rapid Burning | 25 | % |

| Sprinkler Protection | Factor | Unit |
|---|---|---|
| None | 0 | % |
| Automatic | -30 | % |
| Automatic + Standard Supply | -40 | % |
| Fully Supervised | -50 | % |
| Fully Supervised + Fire Resistive | -70 | % |

| Zoning |
|---|
| Single Family Residential |
| Multi Family Residential |
| Commercial |
| Institutional |
| Industrial |

| Wood Shake Charge | Factor | Unit |
|---|---|---|
| Yes | 4000 | L/min |
| No | 0 | L/min |

| Required Duration of Fire Flow | |
|---|---|
| Fire Flow Required (L/min) | Duration (hours) |
| 2,000 or less | 1.00 |
| 3000 | 1.25 |
| 4000 | 1.50 |
| 5000 | 1.75 |
| 6000 | 2.00 |
| 7000 | 2.00 |
| 8000 | 2.00 |
| 9000 | 2.00 |
| 10000 | 2.00 |
| 11000 | 2.25 |
| 12000 | 2.50 |
| 13000 | 2.75 |
| 14000 | 3.00 |
| 15000 | 3.25 |
| 16000 | 3.50 |
| 17000 | 3.75 |
| 18000 | 4.00 |
| 19000 | 4.25 |
| 20000 | 4.50 |
| 21000 | 4.75 |
| 22000 | 5.00 |
| 23000 | 5.25 |
| 24000 | 5.50 |
| 25000 | 5.75 |
| 26000 | 6.00 |
| 27000 | 6.25 |
| 28000 | 6.50 |
| 29000 | 6.75 |
| 30000 | 7.00 |
| 31000 | 7.25 |
| 32000 | 7.50 |
| 33000 | 7.75 |
| 34000 | 8.00 |
| 35000 | 8.25 |
| 36000 | 8.50 |
| 37000 | 8.75 |
| 38000 | 9.00 |
| 39000 | 9.25 |
| 40000 and over | 9.50 |

## Notes to calculations

| Separation Distance | Length-Height Factor of Exposed Wall of Adjacent Structure | Construction of Exposed Wall of Adjacent Structure | | | |
|---|---|---|---|---|---|
| | | Wood Frame or Non-Combustible | Ordinary or Fire-Resistive with Unprotected Openings | Ordinary or Fire-Resistive with Semi-Protected Openings | Ordinary or Fire-Resistive with Blank Wall |
| 0.0 to 3 m | 0-30 m-storeys | 22% | 21% | 16% | 0% |
| | 31-60 m-storeys | 23% | 22% | 17% | 0% |
| | 61-90 m-storeys | 24% | 23% | 18% | 0% |
| | 91-120 m-storeys | 25% | 24% | 19% | 0% |
| | Over 120 m-storeys | 25% | 25% | 20% | 0% |
| 3.1 to 10 m | 0-30 m-storeys | 17% | 15% | 11% | 0% |
| | 31-60 m-storeys | 18% | 16% | 12% | 0% |
| | 61-90 m-storeys | 19% | 18% | 14% | 0% |
| | 91-120 m-storeys | 20% | 19% | 15% | 0% |
| | Over 120 m-storeys | 20% | 19% | 15% | 0% |
| 10.1 to 20 m | 0-30 m-storeys | 12% | 10% | 7% | 0% |
| | 31-60 m-storeys | 13% | 11% | 8% | 0% |
| | 61-90 m-storeys | 14% | 13% | 10% | 0% |
| | 91-120 m-storeys | 15% | 14% | 11% | 0% |
| | Over 120 m-storeys | 15% | 15% | 12% | 0% |
| 20.1 to 30 m | 0-30 m-storeys | 8% | 6% | 4% | 0% |
| | 31-60 m-storeys | 8% | 7% | 5% | 0% |
| | 61-90 m-storeys | 9% | 8% | 6% | 0% |
| | 91-120 m-storeys | 10% | 9% | 7% | 0% |
| | Over 120 m-storeys | 10% | 10% | 8% | 0% |
| 30.1 to 45 m | 0-30 m-storeys | 5% | 5% | 5% | 0% |
| | 31-60 m-storeys | 5% | 5% | 5% | 0% |
| | 61-90 m-storeys | 5% | 5% | 5% | 0% |
| | 91-120 m-storeys | 5% | 5% | 5% | 0% |
| | Over 120 m-storeys | 5% | 5% | 5% | 0% |
| Beyond 45 m | 0-30 m-storeys | 0% | 0% | 0% | 0% |
| | 31-60 m-storeys | 0% | 0% | 0% | 0% |
| | 61-90 m-storeys | 0% | 0% | 0% | 0% |
| | 91-120 m-storeys | 0% | 0% | 0% | 0% |
| | Over 120 m-storeys | 0% | 0% | 0% | 0% |
| Fire Wall | 0-30 m-storeys | 10% | 10% | 10% | 10% |
| | 31-60 m-storeys | 10% | 10% | 10% | 10% |
| | 61-90 m-storeys | 10% | 10% | 10% | 10% |
| | 91-120 m-storeys | 10% | 10% | 10% | 10% |
| | Over 120 m-storeys | 10% | 10% | 10% | 10% |

## Brazeau Lands - FUS Required Fire Flow Summary

| Brazeau Lands | |
|---|---|
| **Type of Construction** | Wood Frame Construction |
| **Construction Coefficient** | 1.5 |
| **Effective Total Area ($m^2$)** | 760 |
| **Required Fire Flow (L/min)** | 9,000 |
| **Occupancy Charge** | -15 |
| **Sprinkler Protection Reduction** | 0 |
| **Exposure (%)** | |
| North (%) | 5% |
| East (%) | 12% |
| South (%) | 17% |
| West (%) | 0% |
| Total Exposure (%) | 34% |
| **Wood Shake Charge (L/min)** | 0 |
| **Total Required Fire Flow (L/min)** | 10,000 |
| **Total Required Fire Flow (L/s)** | 167 |

# Appendix C Boundary Conditions


# Boundary Conditions for HMB Phases 7 and 8 and Brazeau Lands

**Information Provided:**

Date provided: September 2019

| Scenario | Demand | |
|---|---|---|
| | L/min | L/s |
| Average Daily Demand | 846 | 14.10 |
| Maximum Daily Demand | 1961 | 32.69 |
| Peak Hour | 4224 | 70.40 |
| Fire Flow Demand #1 | 10000 | 166.67 |
| Fire Flow Demand #2 | 15000 | 250.00 |
| Fire Flow Demand #3 | 17000 | 283.33 |

## Location:

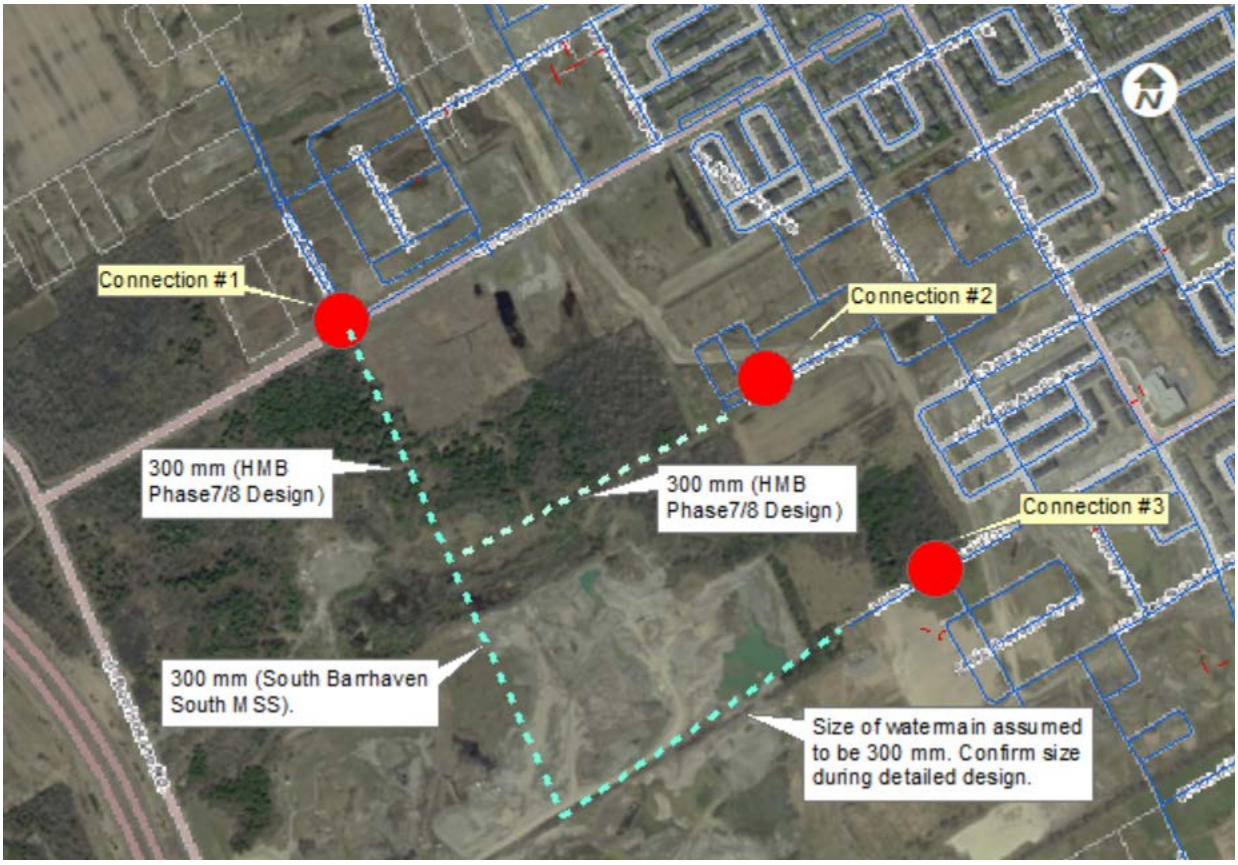

## Results

**Connection 1 - Cambrian Road**

| Demand Scenario | Existing Barrhaven PZ | | Future Zone 3C | |
|---|---|---|---|---|
| | Head (m) | Pressure[1] (psi) | Head (m) | Pressure[1] (psi) |
| Maximum HGL | 156.4 | 102.9 | 147.7 | 77.3 |
| Peak Hour | 135.7 | 60.4 | 142.8 | 70.4 |
| Max Day plus Fire (#1) | 144.0 | 72.2 | 140.0 | 66.4 |
| Max Day plus Fire (#2) | 135.4 | 59.9 | 134.9 | 59.2 |
| Max Day plus Fire (#3) | 133.7 | 57.4 | 132.5 | 55.7 |

[1] Ground Elevation = 93.3 m

**Connection 2 - Brambling Way**

| Demand Scenario | Existing Barrhaven PZ | | Future Zone 3C | |
|---|---|---|---|---|
| | Head (m) | Pressure[1] (psi) | Head (m) | Pressure[1] (psi) |
| Maximum HGL | 156.4 | 100.1 | 147.7 | 74.6 |
| Peak Hour | 135.6 | 57.4 | 142.7 | 67.5 |
| Max Day plus Fire (#1) | 141.2 | 65.4 | 139.9 | 63.5 |
| Max Day plus Fire (#2) | 129.9 | 49.4 | 134.6 | 56.0 |
| Max Day plus Fire (#3) | 126.6 | 44.7 | 132.1 | 52.4 |

[1] Ground Elevation = 95.2 m

**Connection 3 - Dundonald Drive**

| Demand Scenario | Existing Barrhaven PZ | | Future Zone 3C | |
|---|---|---|---|---|
| | Head (m) | Pressure[1] (psi) | Head (m) | Pressure[1] (psi) |
| Maximum HGL | 156.4 | 86.5 | 147.7 | 61.0 |
| Peak Hour | 135.7 | 43.9 | 142.6 | 53.7 |
| Max Day plus Fire (#1) | 142.0 | 52.9 | 138.6 | 48.1 |
| Max Day plus Fire (#2) | 131.5 | 38.0 | 132.2 | 38.9 |
| Max Day plus Fire (#3) | 128.7 | 34.0 | 128.9 | 34.3 |

[1] Ground Elevation = 104.8 m

## Notes:

1) As per the Ontario Building Code in areas that may be occupied, the static pressure at any fixture shall not exceed 552 kPa (80 psi.) Pressure control measures to be considered are as follows, in order of preference:
   a) If possible, systems to be designed to residual pressures of 345 to 552 kPa (50 to 80 psi) in all occupied areas outside of the public right-of-way without special pressure control equipment.

b) Pressure reducing valves to be installed immediately downstream of the isolation valve in the home/ building, located downstream of the meter so it is owner maintained.

2) A third pump was turned on during all fire simulations under Existing Barrhaven Pressure.
3) Future pipes were added to the water model as shown in the figure above.

**Disclaimer**

*The boundary condition information is based on current operation of the city water distribution system. The computer model simulation is based on the best information available at the time. The operation of the water distribution system can change on a regular basis, resulting in a variation in boundary conditions. The physical properties of watermains deteriorate over time, as such must be assumed in the absence of actual field test data. The variation in physical watermain properties can therefore alter the results of the computer model simulation. Fire Flow analysis is a reflection of available flow in the watermain; there may be additional restrictions that occur between the watermain and the hydrant that the model cannot take into account.*


# Appendix D Pipe and Junction Model Inputs

**Model Inputs - Phases 1 and 2**

| ID | From | To | Length (m) | Diameter (mm) | Roughness () |
|---|---|---|---|---|---|
| P-100 | J-82 | J-83 | 63.79 | 204 | 110 |
| P-101 | J-83 | J-46 | 60.03 | 204 | 110 |
| P-102 | J-79 | J-84 | 53.32 | 204 | 110 |
| P-103 | J-84 | J-85 | 55.04 | 204 | 110 |
| P-104 | J-85 | J-45 | 66.63 | 204 | 110 |
| P-105 | J-78 | J-86 | 72.81 | 297 | 120 |
| P-106 | J-86 | J-87 | 55.90 | 297 | 120 |
| P-107 | J-87 | J-88 | 48.49 | 297 | 120 |
| P-108 | J-45 | J-88 | 59.54 | 204 | 110 |
| P-109 | J-88 | J-89 | 55.04 | 297 | 120 |
| P-110 | J-89 | J-41 | 65.11 | 297 | 120 |
| P-111 | J-90 | J-47 | 61.51 | 204 | 110 |
| P-112 | J-43 | J-90 | 59.19 | 204 | 110 |
| P-42 | J-33 | J-34 | 40.11 | 297 | 120 |
| P-43 | J-33 | J-35 | 114.35 | 297 | 120 |
| P-44 | J-35 | J-36 | 77.83 | 297 | 120 |
| P-45 | J-36 | J-37 | 59.20 | 297 | 120 |
| P-46 | J-37 | J-38 | 62.88 | 297 | 120 |
| P-47 | J-38 | J-39 | 74.92 | 297 | 120 |
| P-48 | J-39 | J-40 | 87.18 | 297 | 120 |
| P-49 | J-40 | J-41 | 59.39 | 297 | 120 |
| P-50 | J-41 | J-60 | 67.93 | 297 | 120 |
| P-51 | J-60 | CONNECTION_3 | 138.92 | 297 | 120 |
| P-52 | J-40 | J-42 | 58.39 | 204 | 110 |
| P-53 | J-42 | J-43 | 83.72 | 204 | 110 |
| P-54 | J-43 | J-44 | 72.67 | 204 | 110 |
| P-55 | J-44 | J-38 | 58.67 | 204 | 110 |
| P-56 | J-45 | J-46 | 59.20 | 204 | 110 |
| P-57 | J-46 | J-90 | 81.24 | 204 | 110 |
| P-58 | J-47 | J-48 | 84.62 | 204 | 110 |
| P-59 | J-48 | J-61 | 59.65 | 297 | 120 |
| P-60 | J-61 | J-37 | 60.99 | 297 | 120 |
| P-61 | J-59 | J-58 | 94.07 | 297 | 120 |
| P-62 | J-58 | J-48 | 82.47 | 297 | 120 |
| P-63 | J-48 | J-49 | 63.07 | 204 | 110 |
| P-64 | J-49 | J-50 | 57.71 | 204 | 110 |
| P-65 | J-50 | J-51 | 84.62 | 204 | 110 |
| P-66 | J-51 | J-52 | 106.76 | 204 | 110 |
| P-67 | J-33 | J-52 | 62.05 | 204 | 110 |
| P-68 | J-52 | J-53 | 60.2 | 204 | 110 |
| P-69 | J-53 | J-54 | 112.78 | 204 | 110 |
| P-70 | J-54 | J-49 | 90 | 204 | 110 |
| P-71 | J-49 | J-57 | 56.32 | 204 | 110 |
| P-72 | J-57 | J-56 | 92.28 | 204 | 110 |
| P-73 | J-53 | J-55 | 55.27 | 204 | 110 |
| P-74 | J-55 | J-56 | 113.38 | 204 | 110 |
| P-75 | J-56 | J-62 | 58.69 | 204 | 110 |
| P-76 | J-62 | J-63 | 119.4 | 204 | 110 |
| P-77 | J-63 | J-64 | 56.35 | 204 | 110 |
| P-78 | J-64 | J-65 | 58.6 | 204 | 110 |
| P-79 | J-65 | J-66 | 100.76 | 204 | 110 |
| P-80 | J-66 | J-70 | 70.42 | 204 | 110 |
| P-81 | J-70 | J-71 | 55.7 | 204 | 110 |
| P-82 | J-71 | J-69 | 54.8 | 204 | 110 |
| P-83 | J-64 | J-67 | 125.85 | 204 | 110 |
| P-84 | J-67 | J-69 | 97.99 | 204 | 110 |
| P-85 | J-62 | J-68 | 92.12 | 204 | 110 |
| P-86 | J-68 | J-69 | 56.42 | 204 | 110 |
| P-87 | J-69 | J-59 | 63.46 | 204 | 110 |
| P-88 | J-59 | J-72 | 59.77 | 297 | 120 |
| P-89 | J-72 | J-73 | 28.67 | 297 | 120 |
| P-90 | J-72 | J-74 | 96.85 | 297 | 120 |
| P-91 | J-74 | J-75 | 110.13 | 297 | 120 |
| P-92 | J-75 | J-76 | 78.16 | 297 | 120 |
| P-93 | J-77 | J-76 | 30.34 | 297 | 120 |
| P-94 | J-76 | J-78 | 58.2 | 297 | 120 |
| P-95 | J-78 | J-79 | 59.97 | 204 | 110 |
| P-96 | J-79 | J-80 | 59.39 | 204 | 110 |
| P-97 | J-80 | J-81 | 85.15 | 204 | 110 |
| P-98 | J-81 | J-59 | 79.25 | 204 | 110 |
| P-99 | J-80 | J-82 | 51.74 | 204 | 110 |

| ID | Elevation (m) | ADD (L/s) |
|---|---|---|
| J-33 | 101.29 | 0.18 |
| J-34 | 101.41 | 0.00 |
| J-35 | 101.33 | 0.16 |
| J-36 | 101.25 | 0.16 |
| J-37 | 101.64 | 0.06 |
| J-38 | 101.46 | 0.14 |
| J-39 | 101.83 | 0.20 |
| J-40 | 101.96 | 0.14 |
| J-41 | 102.65 | 0.04 |
| J-42 | 101.87 | 0.16 |
| J-43 | 101.72 | 0.18 |
| J-44 | 101.59 | 0.16 |
| J-45 | 103.27 | 0.06 |
| J-46 | 102.38 | 0.08 |
| J-47 | 101.77 | 0.12 |
| J-48 | 101.83 | 0.06 |
| J-49 | 101.74 | 0.14 |
| J-50 | 101.40 | 0.12 |
| J-51 | 101.41 | 0.18 |
| J-52 | 101.35 | 0.20 |
| J-53 | 102.22 | 0.20 |
| J-54 | 101.87 | 0.20 |
| J-55 | 102.52 | 0.20 |
| J-56 | 103.00 | 0.20 |
| J-57 | 102.46 | 0.12 |
| J-58 | 102.95 | 0.06 |
| J-59 | 105.68 | 0.64 |
| J-60 | 102.80 | 0.00 |
| J-61 | 101.51 | 0.06 |
| J-62 | 104.21 | 0.00 |
| J-63 | 106.39 | 0.20 |
| J-64 | 106.74 | 0.20 |
| J-65 | 107.17 | 0.20 |
| J-66 | 107.78 | 0.18 |
| J-67 | 106.62 | 0.20 |
| J-68 | 106.00 | 0.22 |
| J-69 | 107.07 | 0.14 |
| J-70 | 108.43 | 0.14 |
| J-71 | 108.62 | 0.16 |
| J-72 | 107.85 | 0.12 |
| J-73 | 108.47 | 0.16 |
| J-74 | 107.68 | 0.00 |
| J-75 | 108.00 | 0.24 |
| J-76 | 108.27 | 0.16 |
| J-77 | 108.93 | 0.08 |
| J-78 | 106.17 | 0.00 |
| J-79 | 105.57 | 0.06 |
| J-80 | 105.54 | 0.18 |
| J-81 | 105.54 | 0.18 |
| J-82 | 104.30 | 0.28 |
| J-83 | 103.10 | 0.12 |
| J-84 | 104.73 | 0.20 |
| J-85 | 103.68 | 0.12 |
| J-86 | 105.81 | 0.20 |
| J-87 | 105.51 | 0.08 |
| J-88 | 104.78 | 0.08 |
| J-89 | 103.69 | 0.04 |
| J-90 | 102.07 | 0.08 |

# Appendix E MHD and PHD Model Results

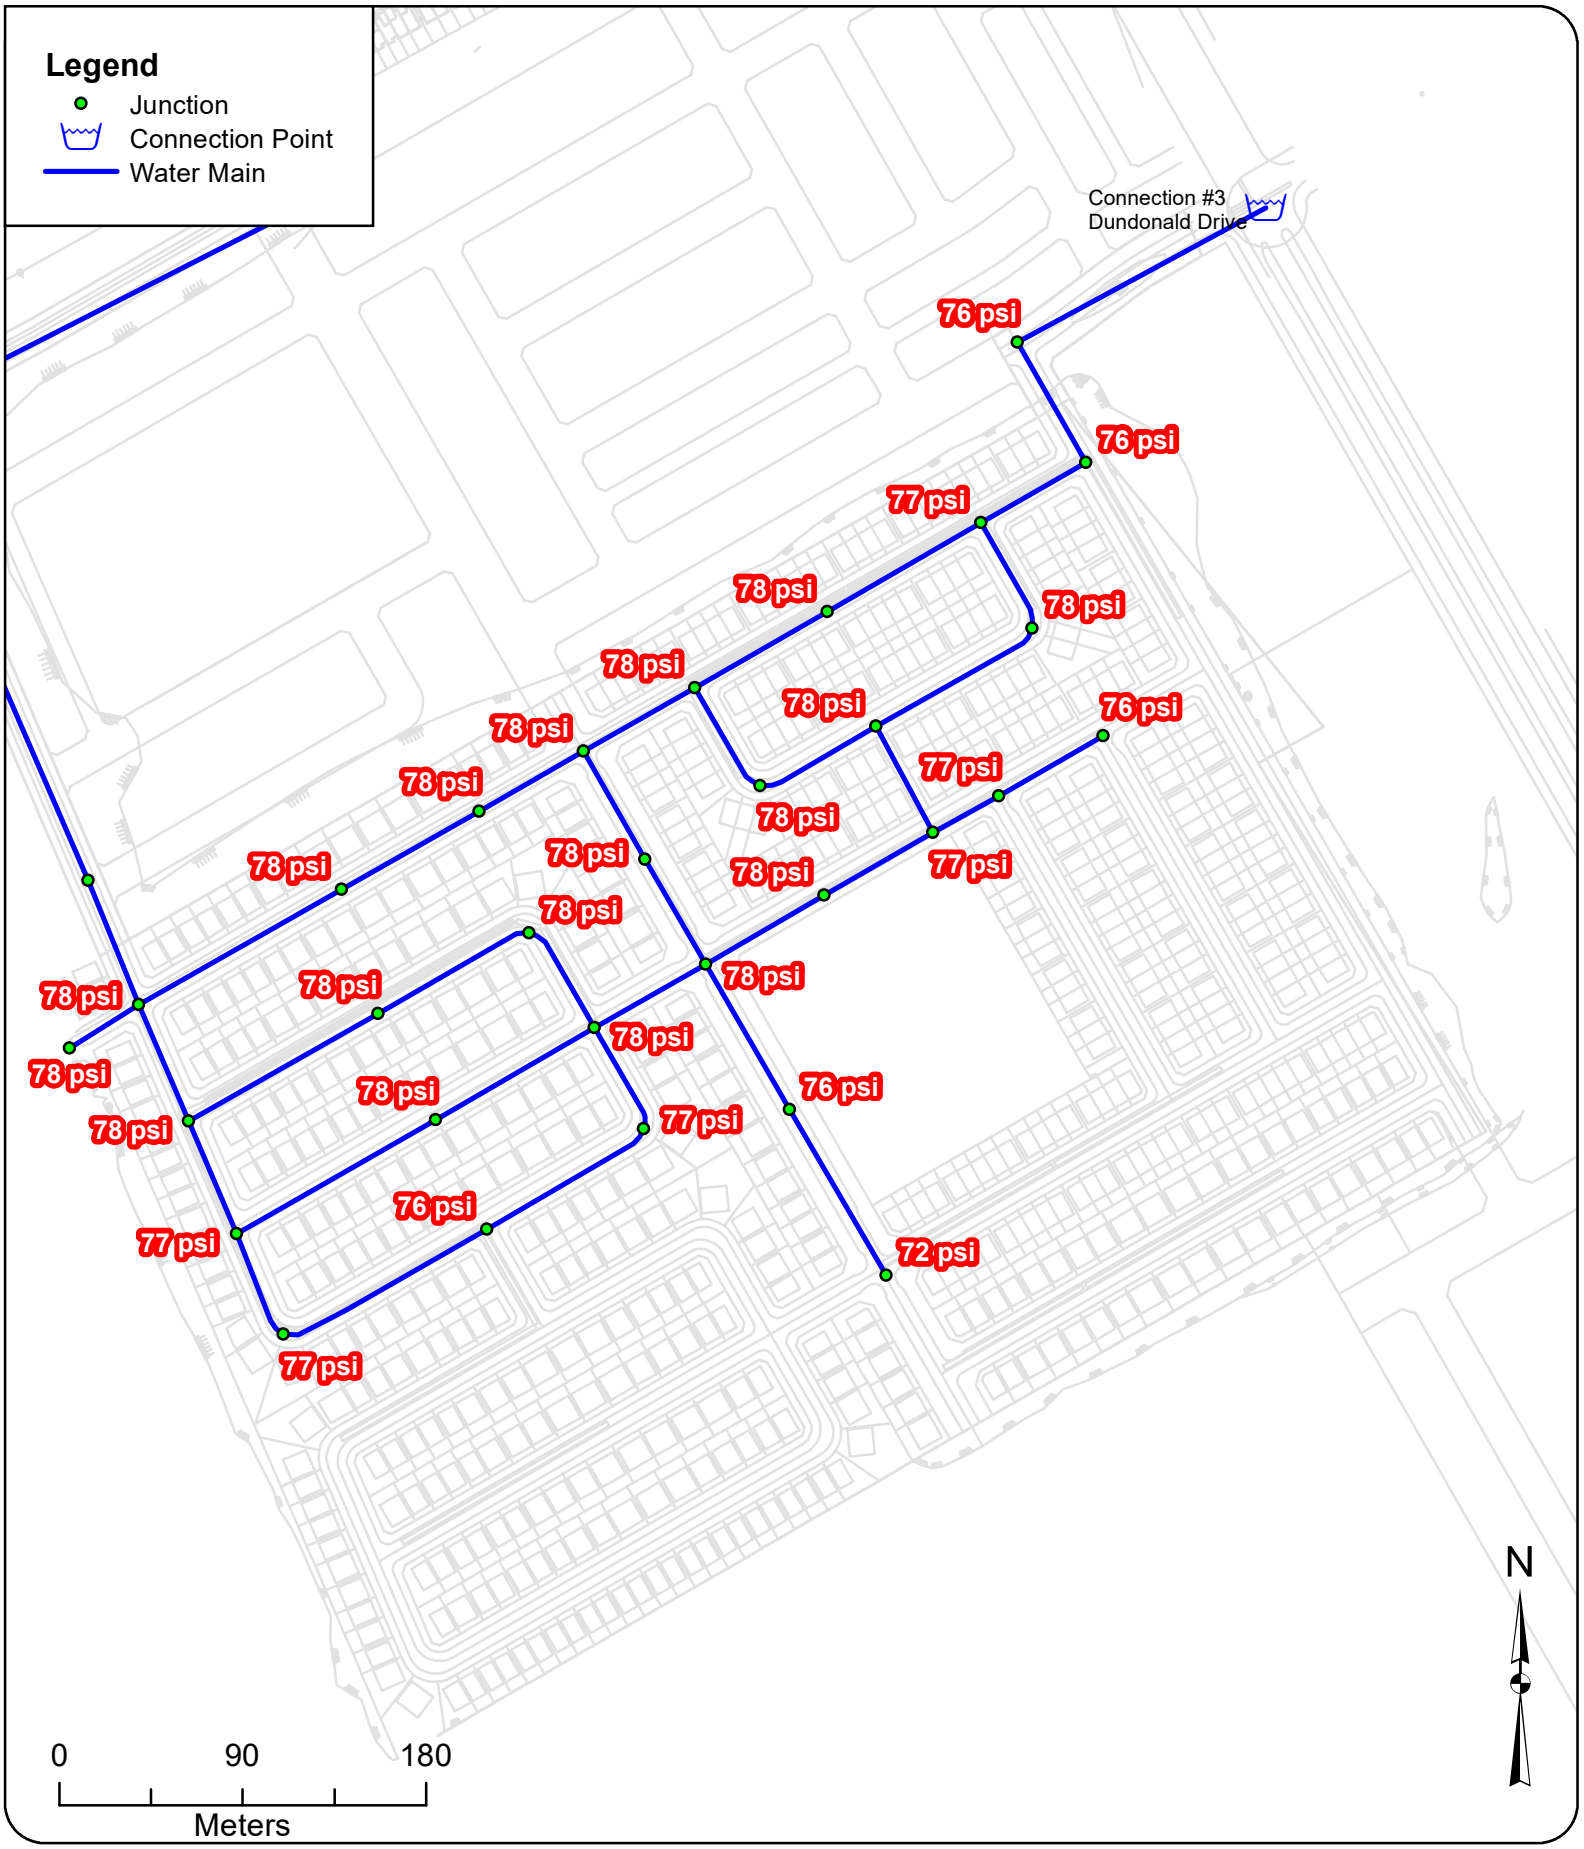


GeoAdvice Engineering Inc.

Project: **Hydraulic Capacity and Modeling Analysis of the Brazeau lands**
Client: **David Schaeffer Engineering Ltd.**
Date: **June 2020**
Created by: **BL**
Reviewed by: **WdS**

DISCLAIMER: GeoAdvice does not warrant in any way the accuracy and completeness of the information shown on this map. Field verification of the accuracy and completeness of the information shown on this map is the sole responsibility of the user.


# MHD Pressure Results - Phase 1

**Figure E.1**

**Minimum Hour Demand Modeling Results - Phase 1**

| ID | From Node | To Node | Length (m) | Diameter (mm) | Roughness | Flow (L/s) | Velocity (m/s) | Headloss (m) | HL/1000 (m/km) |
|---|---|---|---|---|---|---|---|---|---|
| P-42 | J-33 | J-34 | 40.11 | 297 | 120 | 0.00 | 0.00 | 0.00 | 0.00 |
| P-43 | J-33 | J-35 | 114.35 | 297 | 120 | -0.09 | 0.00 | 0.00 | 0.00 |
| P-44 | J-35 | J-36 | 77.83 | 297 | 120 | -0.16 | 0.00 | 0.00 | 0.00 |
| P-45 | J-36 | J-37 | 59.20 | 297 | 120 | -0.25 | 0.00 | 0.00 | 0.00 |
| P-46 | J-37 | J-38 | 62.88 | 297 | 120 | -0.88 | 0.01 | 0.00 | 0.00 |
| P-47 | J-38 | J-39 | 74.92 | 297 | 120 | -1.05 | 0.02 | 0.00 | 0.00 |
| P-48 | J-39 | J-40 | 87.18 | 297 | 120 | -1.15 | 0.02 | 0.00 | 0.00 |
| P-49 | J-40 | J-41 | 59.39 | 297 | 120 | -1.68 | 0.02 | 0.00 | 0.00 |
| P-50 | J-41 | J-60 | 67.93 | 297 | 120 | -1.69 | 0.02 | 0.00 | 0.00 |
| P-51 | J-60 | CONNECTION_3 | 138.92 | 297 | 120 | -1.69 | 0.02 | 0.00 | 0.00 |
| P-52 | J-40 | J-42 | 58.39 | 204 | 110 | 0.45 | 0.01 | 0.00 | 0.00 |
| P-53 | J-42 | J-43 | 91.90 | 204 | 110 | 0.37 | 0.01 | 0.00 | 0.00 |
| P-54 | J-43 | J-44 | 64.49 | 204 | 110 | -0.02 | 0.00 | 0.00 | 0.00 |
| P-55 | J-44 | J-38 | 58.67 | 204 | 110 | -0.10 | 0.00 | 0.00 | 0.00 |
| P-56 | J-45 | J-46 | 59.20 | 204 | 110 | -0.03 | 0.00 | 0.00 | 0.00 |
| P-57 | J-46 | J-90 | 37.06 | 204 | 110 | -0.08 | 0.00 | 0.00 | 0.00 |
| P-58 | J-47 | J-48 | 67.31 | 204 | 110 | 0.16 | 0.00 | 0.00 | 0.00 |
| P-59 | J-48 | J-61 | 59.65 | 297 | 120 | -0.58 | 0.01 | 0.00 | 0.00 |
| P-60 | J-61 | J-37 | 60.99 | 297 | 120 | -0.61 | 0.01 | 0.00 | 0.00 |
| P-61 | J-59 | J-58 | 94.07 | 297 | 120 | -0.32 | 0.00 | 0.00 | 0.00 |
| P-62 | J-58 | J-48 | 82.47 | 297 | 120 | -0.35 | 0.01 | 0.00 | 0.00 |
| P-63 | J-48 | J-49 | 63.07 | 204 | 110 | 0.36 | 0.01 | 0.00 | 0.00 |
| P-64 | J-49 | J-50 | 57.71 | 204 | 110 | 0.04 | 0.00 | 0.00 | 0.00 |
| P-65 | J-50 | J-51 | 84.62 | 204 | 110 | -0.02 | 0.00 | 0.00 | 0.00 |
| P-66 | J-51 | J-52 | 106.76 | 204 | 110 | -0.11 | 0.00 | 0.00 | 0.00 |
| P-67 | J-33 | J-52 | 62.05 | 204 | 110 | 0.42 | 0.01 | 0.00 | 0.00 |
| P-68 | J-52 | J-53 | 60.20 | 204 | 110 | 0.21 | 0.01 | 0.00 | 0.00 |
| P-69 | J-53 | J-54 | 112.78 | 204 | 110 | -0.01 | 0.00 | 0.00 | 0.00 |
| P-70 | J-54 | J-49 | 90.00 | 204 | 110 | -0.10 | 0.00 | 0.00 | 0.00 |
| P-71 | J-49 | J-57 | 56.32 | 204 | 110 | 0.14 | 0.00 | 0.00 | 0.00 |
| P-72 | J-57 | J-56 | 92.28 | 204 | 110 | 0.08 | 0.00 | 0.00 | 0.00 |
| P-73 | J-53 | J-55 | 55.27 | 204 | 110 | 0.12 | 0.00 | 0.00 | 0.00 |
| P-74 | J-55 | J-56 | 113.38 | 204 | 110 | 0.02 | 0.00 | 0.00 | 0.00 |
| P-111 | J-90 | J-47 | 61.51 | 204 | 110 | 0.22 | 0.01 | 0.00 | 0.00 |
| P-112 | J-43 | J-90 | 59.19 | 204 | 110 | 0.30 | 0.01 | 0.00 | 0.00 |

| ID | Demand (L/s) | Elevation (m) | Head (m) | Pressure (psi) |
|---|---|---|---|---|
| J-33 | 0.09 | 101.29 | 156 | 78 |
| J-34 | 0.00 | 101.41 | 156 | 78 |
| J-35 | 0.08 | 101.33 | 156 | 78 |
| J-36 | 0.08 | 101.25 | 156 | 78 |
| J-37 | 0.03 | 101.64 | 156 | 78 |
| J-38 | 0.07 | 101.46 | 156 | 78 |
| J-39 | 0.10 | 101.83 | 156 | 78 |
| J-40 | 0.07 | 101.96 | 156 | 77 |
| J-41 | 0.02 | 102.65 | 156 | 76 |
| J-42 | 0.08 | 101.87 | 156 | 78 |
| J-43 | 0.09 | 101.72 | 156 | 78 |
| J-44 | 0.08 | 101.59 | 156 | 78 |
| J-45 | 0.03 | 103.27 | 156 | 76 |
| J-46 | 0.04 | 102.38 | 156 | 77 |
| J-47 | 0.06 | 101.77 | 156 | 78 |
| J-48 | 0.03 | 101.83 | 156 | 78 |
| J-49 | 0.07 | 101.74 | 156 | 78 |
| J-50 | 0.06 | 101.40 | 156 | 78 |
| J-51 | 0.09 | 101.41 | 156 | 78 |
| J-52 | 0.10 | 101.35 | 156 | 78 |
| J-53 | 0.10 | 102.22 | 156 | 77 |
| J-54 | 0.10 | 101.87 | 156 | 78 |
| J-55 | 0.10 | 102.52 | 156 | 77 |
| J-56 | 0.10 | 103.00 | 156 | 76 |
| J-57 | 0.06 | 102.46 | 156 | 77 |
| J-58 | 0.03 | 102.95 | 156 | 76 |
| J-59 | 0.32 | 105.68 | 156 | 72 |
| J-60 | 0.00 | 102.80 | 156 | 76 |
| J-61 | 0.03 | 101.51 | 156 | 78 |
| J-90 | 0.00 | 102.07 | 156 | 77 |

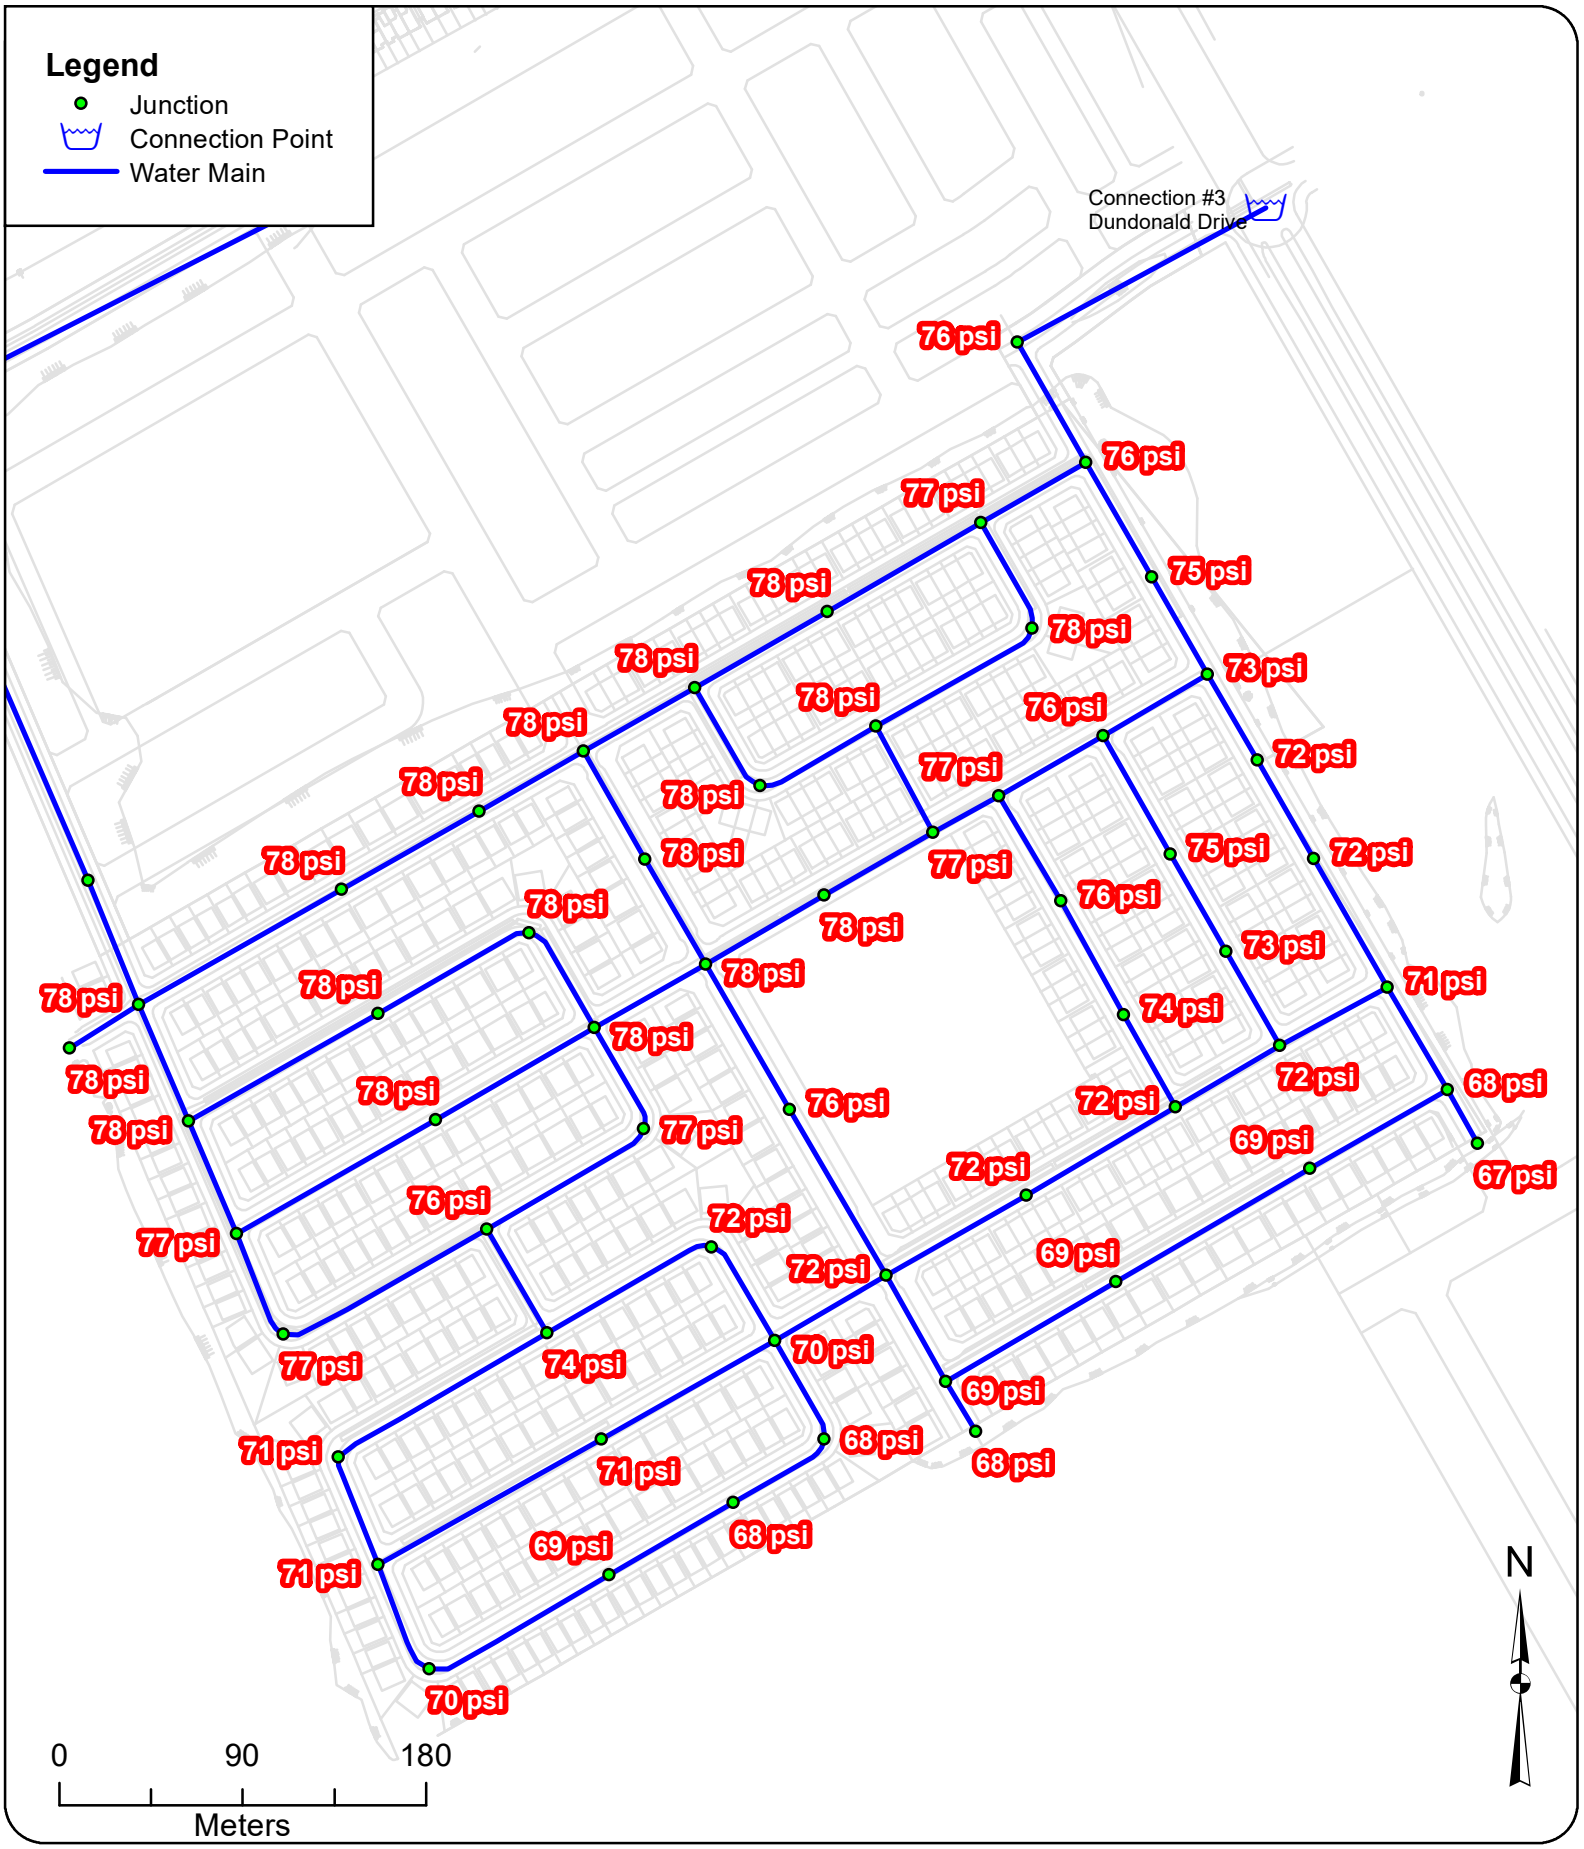


GeoAdvice Engineering Inc.

Project: **Hydraulic Capacity and Modeling Analysis of the Brazeau Lands**
Client: **David Schaeffer Engineering Ltd.**
Date: **June 2020**
Created by: **BL**
Reviewed by: **WdS**

DISCLAIMER: GeoAdvice does not warrant in any way the accuracy and completeness of the information shown on this map. Field verification of the accuracy and completeness of the information shown on this map is the sole responsibility of the user.


# MHD Pressure Results - Phases 1&2

**Figure E.2**

**Minimum Hour Demand Modeling Results - Phases 1 and 2**

| ID | From Node | To Node | Length (m) | Diameter (mm) | Roughness | Flow (L/s) | Velocity (m/s) | Headloss (m) | HL/1000 (m/km) |
|---|---|---|---|---|---|---|---|---|---|
| P-42 | J-33 | J-34 | 40.11 | 297 | 120 | 0.00 | 0.00 | 0.00 | 0.00 |
| P-43 | J-33 | J-35 | 114.35 | 297 | 120 | 0.35 | 0.01 | 0.00 | 0.00 |
| P-44 | J-35 | J-36 | 77.83 | 297 | 120 | 0.28 | 0.00 | 0.00 | 0.00 |
| P-45 | J-36 | J-37 | 59.20 | 297 | 120 | 0.20 | 0.00 | 0.00 | 0.00 |
| P-46 | J-37 | J-38 | 62.88 | 297 | 120 | -0.73 | 0.01 | 0.00 | 0.00 |
| P-47 | J-38 | J-39 | 74.92 | 297 | 120 | -0.95 | 0.01 | 0.00 | 0.00 |
| P-48 | J-39 | J-40 | 87.18 | 297 | 120 | -1.05 | 0.02 | 0.00 | 0.00 |
| P-49 | J-40 | J-41 | 59.39 | 297 | 120 | -1.56 | 0.02 | 0.00 | 0.00 |
| P-50 | J-41 | J-60 | 67.93 | 297 | 120 | -3.05 | 0.04 | 0.00 | 0.01 |
| P-51 | J-60 | CONNECTION_3 | 138.92 | 297 | 120 | -3.05 | 0.04 | 0.00 | 0.01 |
| P-52 | J-40 | J-42 | 58.39 | 204 | 110 | 0.44 | 0.01 | 0.00 | 0.00 |
| P-53 | J-42 | J-43 | 83.72 | 204 | 110 | 0.35 | 0.01 | 0.00 | 0.00 |
| P-54 | J-43 | J-44 | 72.67 | 204 | 110 | -0.07 | 0.00 | 0.00 | 0.00 |
| P-55 | J-44 | J-38 | 58.67 | 204 | 110 | -0.15 | 0.00 | 0.00 | 0.00 |
| P-56 | J-45 | J-46 | 59.20 | 204 | 110 | 0.21 | 0.01 | 0.00 | 0.00 |
| P-57 | J-46 | J-90 | 81.24 | 204 | 110 | -0.10 | 0.00 | 0.00 | 0.00 |
| P-58 | J-47 | J-48 | 84.62 | 204 | 110 | 0.18 | 0.01 | 0.00 | 0.00 |
| P-59 | J-48 | J-61 | 59.65 | 297 | 120 | -0.87 | 0.01 | 0.00 | 0.00 |
| P-60 | J-61 | J-37 | 60.99 | 297 | 120 | -0.90 | 0.01 | 0.00 | 0.00 |
| P-61 | J-59 | J-58 | 94.07 | 297 | 120 | -0.53 | 0.01 | 0.00 | 0.00 |
| P-62 | J-58 | J-48 | 82.47 | 297 | 120 | -0.56 | 0.01 | 0.00 | 0.00 |
| P-63 | J-48 | J-49 | 63.07 | 204 | 110 | 0.45 | 0.01 | 0.00 | 0.00 |
| P-64 | J-49 | J-50 | 57.71 | 204 | 110 | -0.03 | 0.00 | 0.00 | 0.00 |
| P-65 | J-50 | J-51 | 84.62 | 204 | 110 | -0.09 | 0.00 | 0.00 | 0.00 |
| P-66 | J-51 | J-52 | 106.76 | 204 | 110 | -0.18 | 0.01 | 0.00 | 0.00 |
| P-67 | J-33 | J-52 | 62.05 | 204 | 110 | 0.62 | 0.02 | 0.00 | 0.00 |
| P-68 | J-52 | J-53 | 60.20 | 204 | 110 | 0.33 | 0.01 | 0.00 | 0.00 |
| P-69 | J-53 | J-54 | 112.78 | 204 | 110 | -0.03 | 0.00 | 0.00 | 0.00 |
| P-70 | J-54 | J-49 | 90.00 | 204 | 110 | -0.13 | 0.00 | 0.00 | 0.00 |
| P-71 | J-49 | J-57 | 56.32 | 204 | 110 | 0.28 | 0.01 | 0.00 | 0.00 |
| P-72 | J-57 | J-56 | 92.28 | 204 | 110 | 0.22 | 0.01 | 0.00 | 0.00 |
| P-73 | J-53 | J-55 | 55.27 | 204 | 110 | 0.26 | 0.01 | 0.00 | 0.00 |
| P-74 | J-55 | J-56 | 113.38 | 204 | 110 | 0.17 | 0.01 | 0.00 | 0.00 |
| P-111 | J-90 | J-47 | 61.51 | 204 | 110 | 0.24 | 0.01 | 0.00 | 0.00 |
| P-112 | J-43 | J-90 | 59.19 | 204 | 110 | 0.33 | 0.01 | 0.00 | 0.00 |
| P-75 | J-56 | J-62 | 58.69 | 204 | 110 | 0.29 | 0.01 | 0.00 | 0.00 |
| P-76 | J-62 | J-63 | 119.4 | 204 | 110 | 0.19 | 0.01 | 0.00 | 0.00 |
| P-77 | J-63 | J-64 | 56.35 | 204 | 110 | 0.10 | 0.00 | 0.00 | 0.00 |
| P-78 | J-64 | J-65 | 58.6 | 204 | 110 | 0.09 | 0.00 | 0.00 | 0.00 |
| P-79 | J-65 | J-66 | 100.76 | 204 | 110 | 0.00 | 0.00 | 0.00 | 0.00 |
| P-80 | J-66 | J-70 | 70.42 | 204 | 110 | -0.10 | 0.00 | 0.00 | 0.00 |
| P-81 | J-70 | J-71 | 55.7 | 204 | 110 | -0.18 | 0.01 | 0.00 | 0.00 |
| P-82 | J-71 | J-69 | 54.8 | 204 | 110 | -0.24 | 0.01 | 0.00 | 0.00 |
| P-83 | J-64 | J-67 | 125.85 | 204 | 110 | -0.09 | 0.00 | 0.00 | 0.00 |
| P-84 | J-67 | J-69 | 97.99 | 204 | 110 | -0.20 | 0.01 | 0.00 | 0.00 |
| P-85 | J-62 | J-68 | 92.12 | 204 | 110 | 0.00 | 0.00 | 0.00 | 0.00 |
| P-86 | J-68 | J-69 | 56.42 | 204 | 110 | -0.07 | 0.00 | 0.00 | 0.00 |
| P-87 | J-69 | J-59 | 63.46 | 204 | 110 | -0.59 | 0.02 | 0.00 | 0.00 |
| P-88 | J-59 | J-72 | 59.77 | 297 | 120 | -0.29 | 0.00 | 0.00 | 0.00 |
| P-89 | J-72 | J-73 | 28.67 | 297 | 120 | 0.00 | 0.00 | 0.00 | 0.00 |
| P-90 | J-72 | J-74 | 96.85 | 297 | 120 | -0.37 | 0.01 | 0.00 | 0.00 |
| P-91 | J-74 | J-75 | 110.13 | 297 | 120 | -0.49 | 0.01 | 0.00 | 0.00 |
| P-92 | J-75 | J-76 | 78.16 | 297 | 120 | -0.57 | 0.01 | 0.00 | 0.00 |
| P-93 | J-77 | J-76 | 30.34 | 297 | 120 | 0.00 | 0.00 | 0.00 | 0.00 |
| P-94 | J-76 | J-78 | 58.2 | 297 | 120 | -0.61 | 0.01 | 0.00 | 0.00 |
| P-95 | J-78 | J-79 | 59.97 | 204 | 110 | 0.21 | 0.01 | 0.00 | 0.00 |
| P-96 | J-79 | J-80 | 59.39 | 204 | 110 | 0.22 | 0.01 | 0.00 | 0.00 |
| P-97 | J-80 | J-81 | 85.15 | 204 | 110 | 0.23 | 0.01 | 0.00 | 0.00 |
| P-98 | J-81 | J-59 | 79.25 | 204 | 110 | 0.09 | 0.00 | 0.00 | 0.00 |
| P-99 | J-80 | J-82 | 51.74 | 204 | 110 | -0.10 | 0.00 | 0.00 | 0.00 |
| P-100 | J-82 | J-83 | 63.79 | 204 | 110 | -0.16 | 0.00 | 0.00 | 0.00 |
| P-101 | J-83 | J-46 | 60.03 | 204 | 110 | -0.26 | 0.01 | 0.00 | 0.00 |
| P-102 | J-79 | J-84 | 53.32 | 204 | 110 | -0.09 | 0.00 | 0.00 | 0.00 |
| P-103 | J-84 | J-85 | 55.04 | 204 | 110 | -0.15 | 0.00 | 0.00 | 0.00 |
| P-104 | J-85 | J-45 | 66.63 | 204 | 110 | -0.25 | 0.01 | 0.00 | 0.00 |
| P-105 | J-78 | J-86 | 72.81 | 297 | 120 | -0.86 | 0.01 | 0.00 | 0.00 |
| P-106 | J-86 | J-87 | 55.9 | 297 | 120 | -0.89 | 0.01 | 0.00 | 0.00 |
| P-107 | J-87 | J-88 | 48.49 | 297 | 120 | -0.93 | 0.01 | 0.00 | 0.00 |
| P-108 | J-45 | J-88 | 59.54 | 204 | 110 | -0.49 | 0.01 | 0.00 | 0.00 |
| P-109 | J-88 | J-89 | 55.04 | 297 | 120 | -1.44 | 0.02 | 0.00 | 0.00 |
| P-110 | J-89 | J-41 | 65.11 | 297 | 120 | -1.48 | 0.02 | 0.00 | 0.00 |

| ID | Demand (L/s) | Elevation (m) | Head (m) | Pressure (psi) |
|---|---|---|---|---|
| J-33 | 0.09 | 101.29 | 156 | 78 |
| J-34 | 0.00 | 101.41 | 156 | 78 |
| J-35 | 0.08 | 101.33 | 156 | 78 |
| J-36 | 0.08 | 101.25 | 156 | 78 |
| J-37 | 0.03 | 101.64 | 156 | 78 |
| J-38 | 0.07 | 101.46 | 156 | 78 |
| J-39 | 0.10 | 101.83 | 156 | 78 |
| J-40 | 0.07 | 101.96 | 156 | 77 |
| J-41 | 0.02 | 102.65 | 156 | 76 |
| J-42 | 0.08 | 101.87 | 156 | 78 |
| J-43 | 0.09 | 101.72 | 156 | 78 |
| J-44 | 0.08 | 101.59 | 156 | 78 |
| J-45 | 0.03 | 103.27 | 156 | 76 |
| J-46 | 0.04 | 102.38 | 156 | 77 |
| J-47 | 0.06 | 101.77 | 156 | 78 |
| J-48 | 0.03 | 101.83 | 156 | 78 |
| J-49 | 0.07 | 101.74 | 156 | 78 |
| J-50 | 0.06 | 101.40 | 156 | 78 |
| J-51 | 0.09 | 101.41 | 156 | 78 |
| J-52 | 0.10 | 101.35 | 156 | 78 |
| J-53 | 0.10 | 102.22 | 156 | 77 |
| J-54 | 0.10 | 101.87 | 156 | 78 |
| J-55 | 0.10 | 102.52 | 156 | 77 |
| J-56 | 0.10 | 103.00 | 156 | 76 |
| J-57 | 0.06 | 102.46 | 156 | 77 |
| J-58 | 0.03 | 102.95 | 156 | 76 |
| J-59 | 0.32 | 105.68 | 156 | 72 |
| J-60 | 0.00 | 102.80 | 156 | 76 |
| J-61 | 0.03 | 101.51 | 156 | 78 |
| J-90 | 0.00 | 102.07 | 156 | 77 |
| J-62 | 0.10 | 104.21 | 156 | 74 |
| J-63 | 0.10 | 106.39 | 156 | 71 |
| J-64 | 0.10 | 106.74 | 156 | 71 |
| J-65 | 0.09 | 107.17 | 156 | 70 |
| J-66 | 0.10 | 107.78 | 156 | 69 |
| J-67 | 0.11 | 106.62 | 156 | 71 |
| J-68 | 0.07 | 106.00 | 156 | 72 |
| J-69 | 0.07 | 107.07 | 156 | 70 |
| J-70 | 0.08 | 108.43 | 156 | 68 |
| J-71 | 0.06 | 108.62 | 156 | 68 |
| J-72 | 0.08 | 107.85 | 156 | 69 |
| J-73 | 0.00 | 108.47 | 156 | 68 |
| J-74 | 0.12 | 107.68 | 156 | 69 |
| J-75 | 0.08 | 108.00 | 156 | 69 |
| J-76 | 0.04 | 108.27 | 156 | 68 |
| J-77 | 0.00 | 108.93 | 156 | 67 |
| J-78 | 0.03 | 106.17 | 156 | 71 |
| J-79 | 0.09 | 105.57 | 156 | 72 |
| J-80 | 0.09 | 105.54 | 156 | 72 |
| J-81 | 0.14 | 105.54 | 156 | 72 |
| J-82 | 0.06 | 104.30 | 156 | 74 |
| J-83 | 0.10 | 103.10 | 156 | 76 |
| J-84 | 0.06 | 104.73 | 156 | 73 |
| J-85 | 0.10 | 103.68 | 156 | 75 |
| J-86 | 0.04 | 105.81 | 156 | 72 |
| J-87 | 0.04 | 105.51 | 156 | 72 |
| J-88 | 0.02 | 104.78 | 156 | 73 |
| J-89 | 0.04 | 103.69 | 156 | 75 |

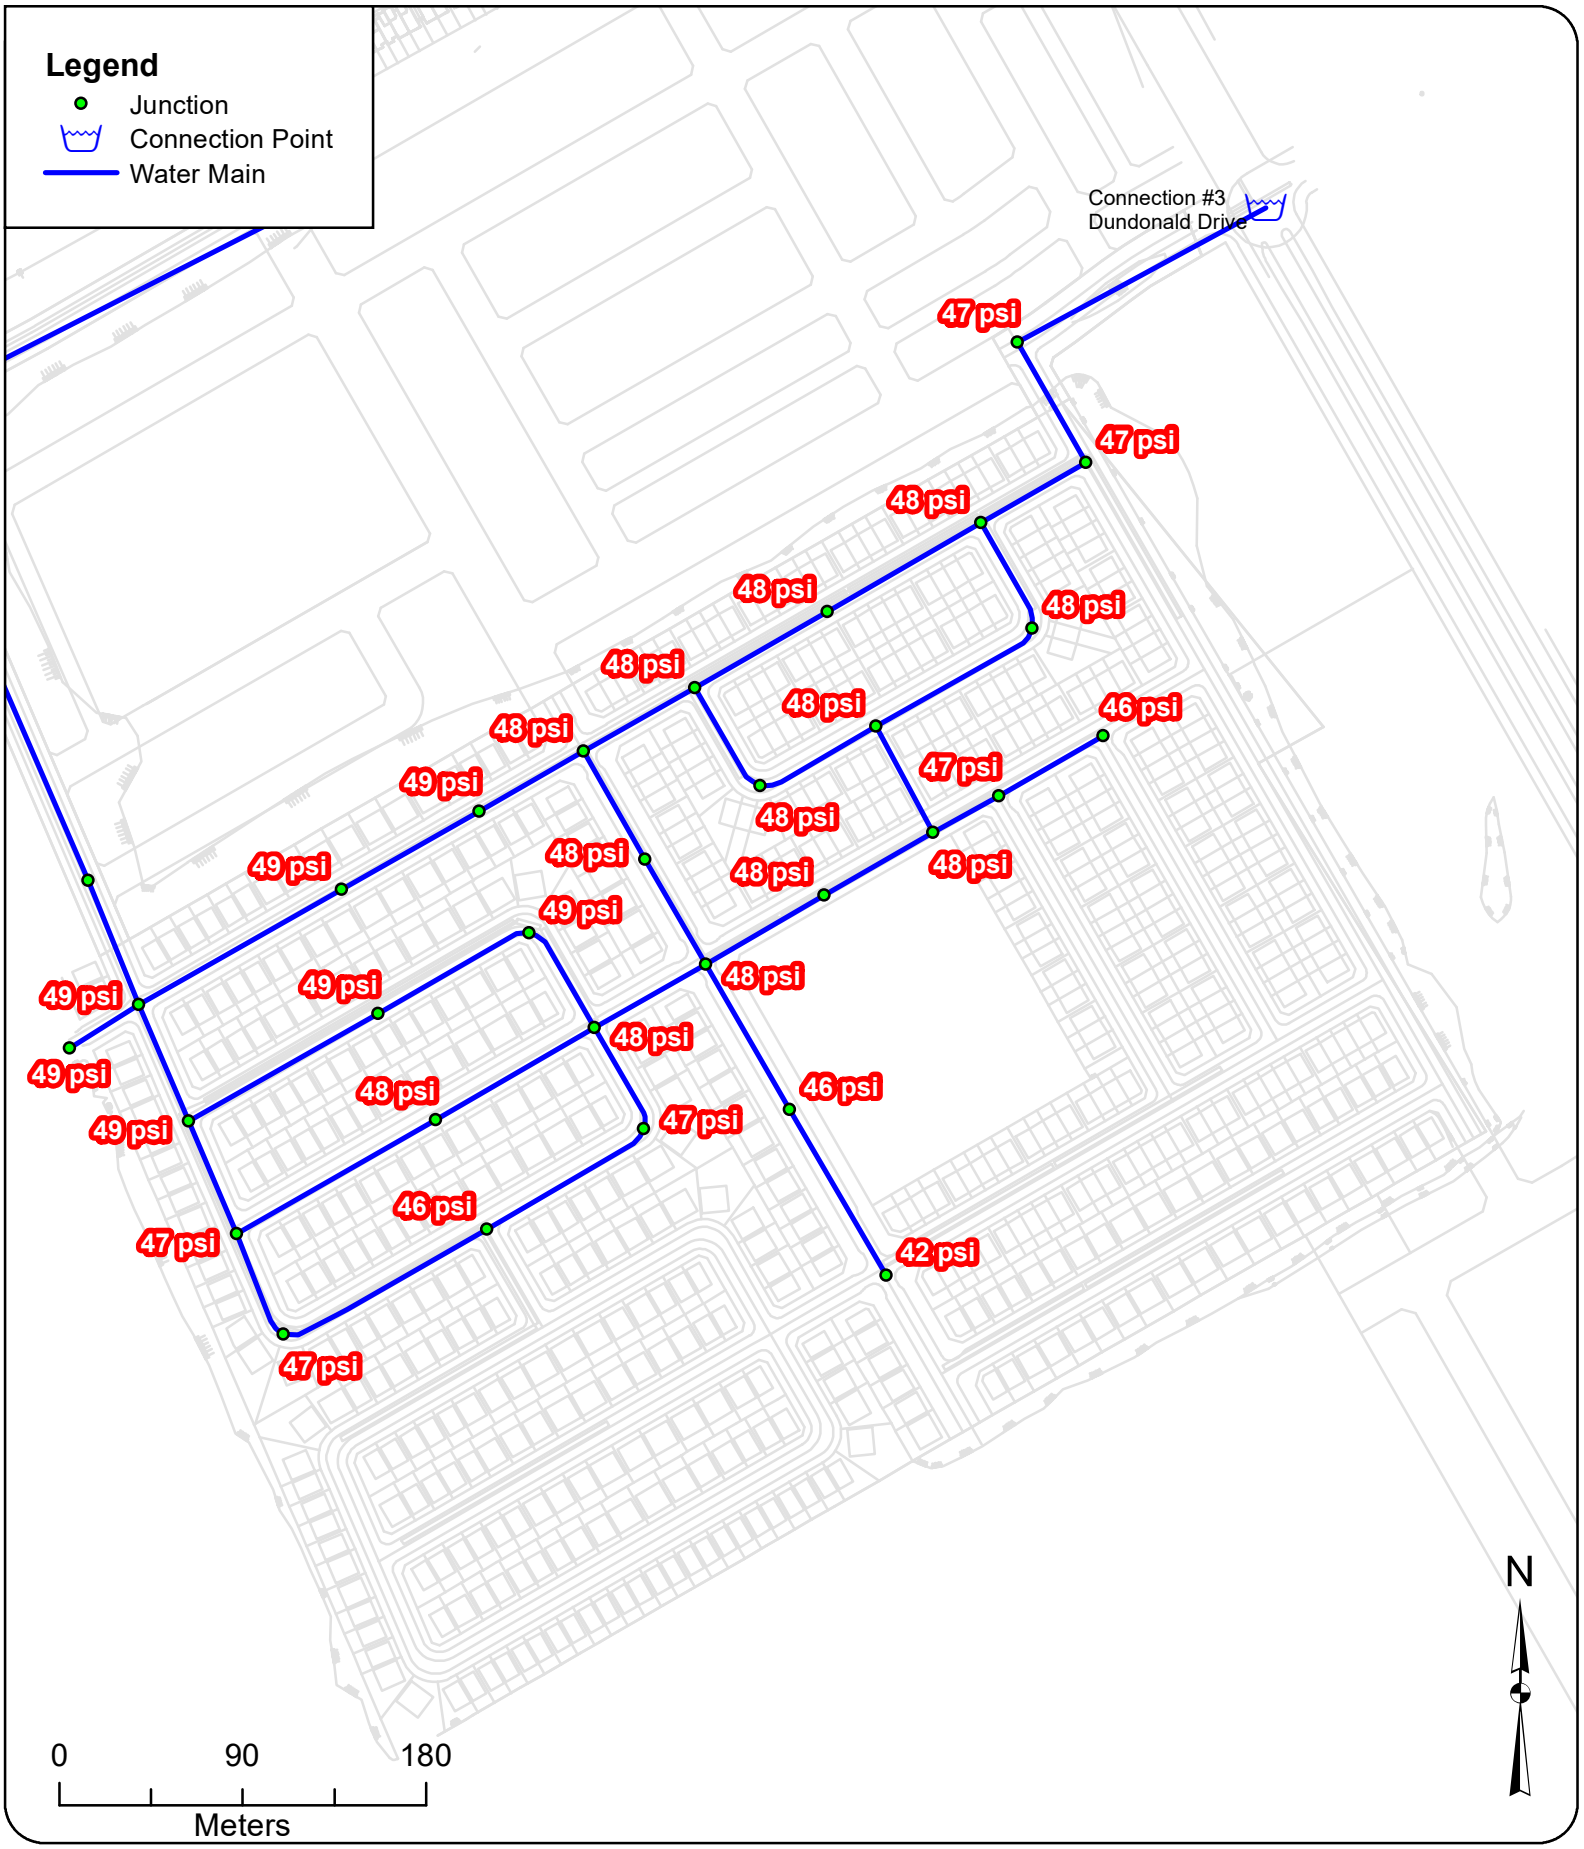


GeoAdvice Engineering Inc.

Project: **Hydraulic Capacity and Modeling Analysis of the Brazeau Lands**
Client: **David Schaeffer Engineering Ltd.**
Date: **June 2020**
Created by: **BL**
Reviewed by: **WdS**

DISCLAIMER: GeoAdvice does not warrant in any way the accuracy and completeness of the information shown on this map. Field verification of the accuracy and completeness of the information shown on this map is the sole responsibility of the user.


# PHD Pressure Results - Phase 1

**Figure E.3**

**Peak Hour Demand Modeling Results - Phase 1**

| ID | From Node | To Node | Length (m) | Diameter (mm) | Roughness | Flow (L/s) | Velocity (m/s) | Headloss (m) | HL/1000 (m/km) |
|---|---|---|---|---|---|---|---|---|---|
| P-42 | J-33 | J-34 | 40.11 | 297 | 120 | 0.00 | 0.00 | 0.00 | 0.00 |
| P-43 | J-33 | J-35 | 114.35 | 297 | 120 | -2.53 | 0.04 | 0.00 | 0.01 |
| P-44 | J-35 | J-36 | 77.83 | 297 | 120 | -3.36 | 0.05 | 0.00 | 0.01 |
| P-45 | J-36 | J-37 | 59.20 | 297 | 120 | -4.27 | 0.06 | 0.00 | 0.02 |
| P-46 | J-37 | J-38 | 62.88 | 297 | 120 | -10.16 | 0.15 | 0.01 | 0.11 |
| P-47 | J-38 | J-39 | 74.92 | 297 | 120 | -11.85 | 0.17 | 0.01 | 0.15 |
| P-48 | J-39 | J-40 | 87.18 | 297 | 120 | -13.00 | 0.19 | 0.02 | 0.18 |
| P-49 | J-40 | J-41 | 59.39 | 297 | 120 | -18.81 | 0.27 | 0.02 | 0.35 |
| P-50 | J-41 | J-60 | 67.93 | 297 | 120 | -18.99 | 0.27 | 0.02 | 0.36 |
| P-51 | J-60 | CONNECTION_3 | 138.92 | 297 | 120 | -18.99 | 0.27 | 0.05 | 0.36 |
| P-52 | J-40 | J-42 | 58.39 | 204 | 110 | 5.02 | 0.15 | 0.01 | 0.23 |
| P-53 | J-42 | J-43 | 91.90 | 204 | 110 | 4.12 | 0.13 | 0.01 | 0.16 |
| P-54 | J-43 | J-44 | 64.49 | 204 | 110 | -0.06 | 0.00 | 0.00 | 0.00 |
| P-55 | J-44 | J-38 | 58.67 | 204 | 110 | -0.91 | 0.03 | 0.00 | 0.01 |
| P-56 | J-45 | J-46 | 59.20 | 204 | 110 | -0.36 | 0.01 | 0.00 | 0.00 |
| P-57 | J-46 | J-90 | 37.06 | 204 | 110 | -0.84 | 0.03 | 0.00 | 0.01 |
| P-58 | J-47 | J-48 | 67.31 | 204 | 110 | 1.65 | 0.05 | 0.00 | 0.03 |
| P-59 | J-48 | J-61 | 59.65 | 297 | 120 | -5.28 | 0.08 | 0.00 | 0.03 |
| P-60 | J-61 | J-37 | 60.99 | 297 | 120 | -5.59 | 0.08 | 0.00 | 0.04 |
| P-61 | J-59 | J-58 | 94.07 | 297 | 120 | -1.96 | 0.03 | 0.00 | 0.01 |
| P-62 | J-58 | J-48 | 82.47 | 297 | 120 | -2.26 | 0.03 | 0.00 | 0.01 |
| P-63 | J-48 | J-49 | 63.07 | 204 | 110 | 4.29 | 0.13 | 0.01 | 0.17 |
| P-64 | J-49 | J-50 | 57.71 | 204 | 110 | 0.63 | 0.02 | 0.00 | 0.00 |
| P-65 | J-50 | J-51 | 84.62 | 204 | 110 | -0.06 | 0.00 | 0.00 | 0.00 |
| P-66 | J-51 | J-52 | 106.76 | 204 | 110 | -1.04 | 0.03 | 0.00 | 0.01 |
| P-67 | J-33 | J-52 | 62.05 | 204 | 110 | 4.28 | 0.13 | 0.01 | 0.17 |
| P-68 | J-52 | J-53 | 60.20 | 204 | 110 | 2.10 | 0.06 | 0.00 | 0.04 |
| P-69 | J-53 | J-54 | 112.78 | 204 | 110 | -0.21 | 0.01 | 0.00 | 0.00 |
| P-70 | J-54 | J-49 | 90.00 | 204 | 110 | -1.27 | 0.04 | 0.00 | 0.02 |
| P-71 | J-49 | J-57 | 56.32 | 204 | 110 | 1.63 | 0.05 | 0.00 | 0.03 |
| P-72 | J-57 | J-56 | 92.28 | 204 | 110 | 0.95 | 0.03 | 0.00 | 0.01 |
| P-73 | J-53 | J-55 | 55.27 | 204 | 110 | 1.17 | 0.04 | 0.00 | 0.02 |
| P-74 | J-55 | J-56 | 113.38 | 204 | 110 | 0.11 | 0.00 | 0.00 | 0.00 |
| P-111 | J-90 | J-47 | 61.51 | 204 | 110 | 2.31 | 0.07 | 0.00 | 0.05 |
| P-112 | J-43 | J-90 | 59.19 | 204 | 110 | 3.16 | 0.10 | 0.01 | 0.10 |

| ID | Demand (L/s) | Elevation (m) | Head (m) | Pressure (psi) |
|---|---|---|---|---|
| J-33 | 0.99 | 101.29 | 136 | 49 |
| J-34 | 0.00 | 101.41 | 136 | 49 |
| J-35 | 0.83 | 101.33 | 136 | 49 |
| J-36 | 0.91 | 101.25 | 136 | 49 |
| J-37 | 0.30 | 101.64 | 136 | 48 |
| J-38 | 0.78 | 101.46 | 136 | 49 |
| J-39 | 1.15 | 101.83 | 136 | 48 |
| J-40 | 0.78 | 101.96 | 136 | 48 |
| J-41 | 0.18 | 102.65 | 136 | 47 |
| J-42 | 0.90 | 101.87 | 136 | 48 |
| J-43 | 1.02 | 101.72 | 136 | 48 |
| J-44 | 0.84 | 101.59 | 136 | 48 |
| J-45 | 0.36 | 103.27 | 136 | 46 |
| J-46 | 0.48 | 102.38 | 136 | 47 |
| J-47 | 0.66 | 101.77 | 136 | 48 |
| J-48 | 0.38 | 101.83 | 136 | 48 |
| J-49 | 0.76 | 101.74 | 136 | 48 |
| J-50 | 0.68 | 101.40 | 136 | 49 |
| J-51 | 0.99 | 101.41 | 136 | 49 |
| J-52 | 1.14 | 101.35 | 136 | 49 |
| J-53 | 1.14 | 102.22 | 136 | 47 |
| J-54 | 1.06 | 101.87 | 136 | 48 |
| J-55 | 1.06 | 102.52 | 136 | 47 |
| J-56 | 1.06 | 103.00 | 136 | 46 |
| J-57 | 0.68 | 102.46 | 136 | 47 |
| J-58 | 0.30 | 102.95 | 136 | 46 |
| J-59 | 1.96 | 105.68 | 136 | 42 |
| J-60 | 0.00 | 102.80 | 136 | 47 |
| J-61 | 0.30 | 101.51 | 136 | 48 |
| J-90 | 0.00 | 102.07 | 136 | 48 |

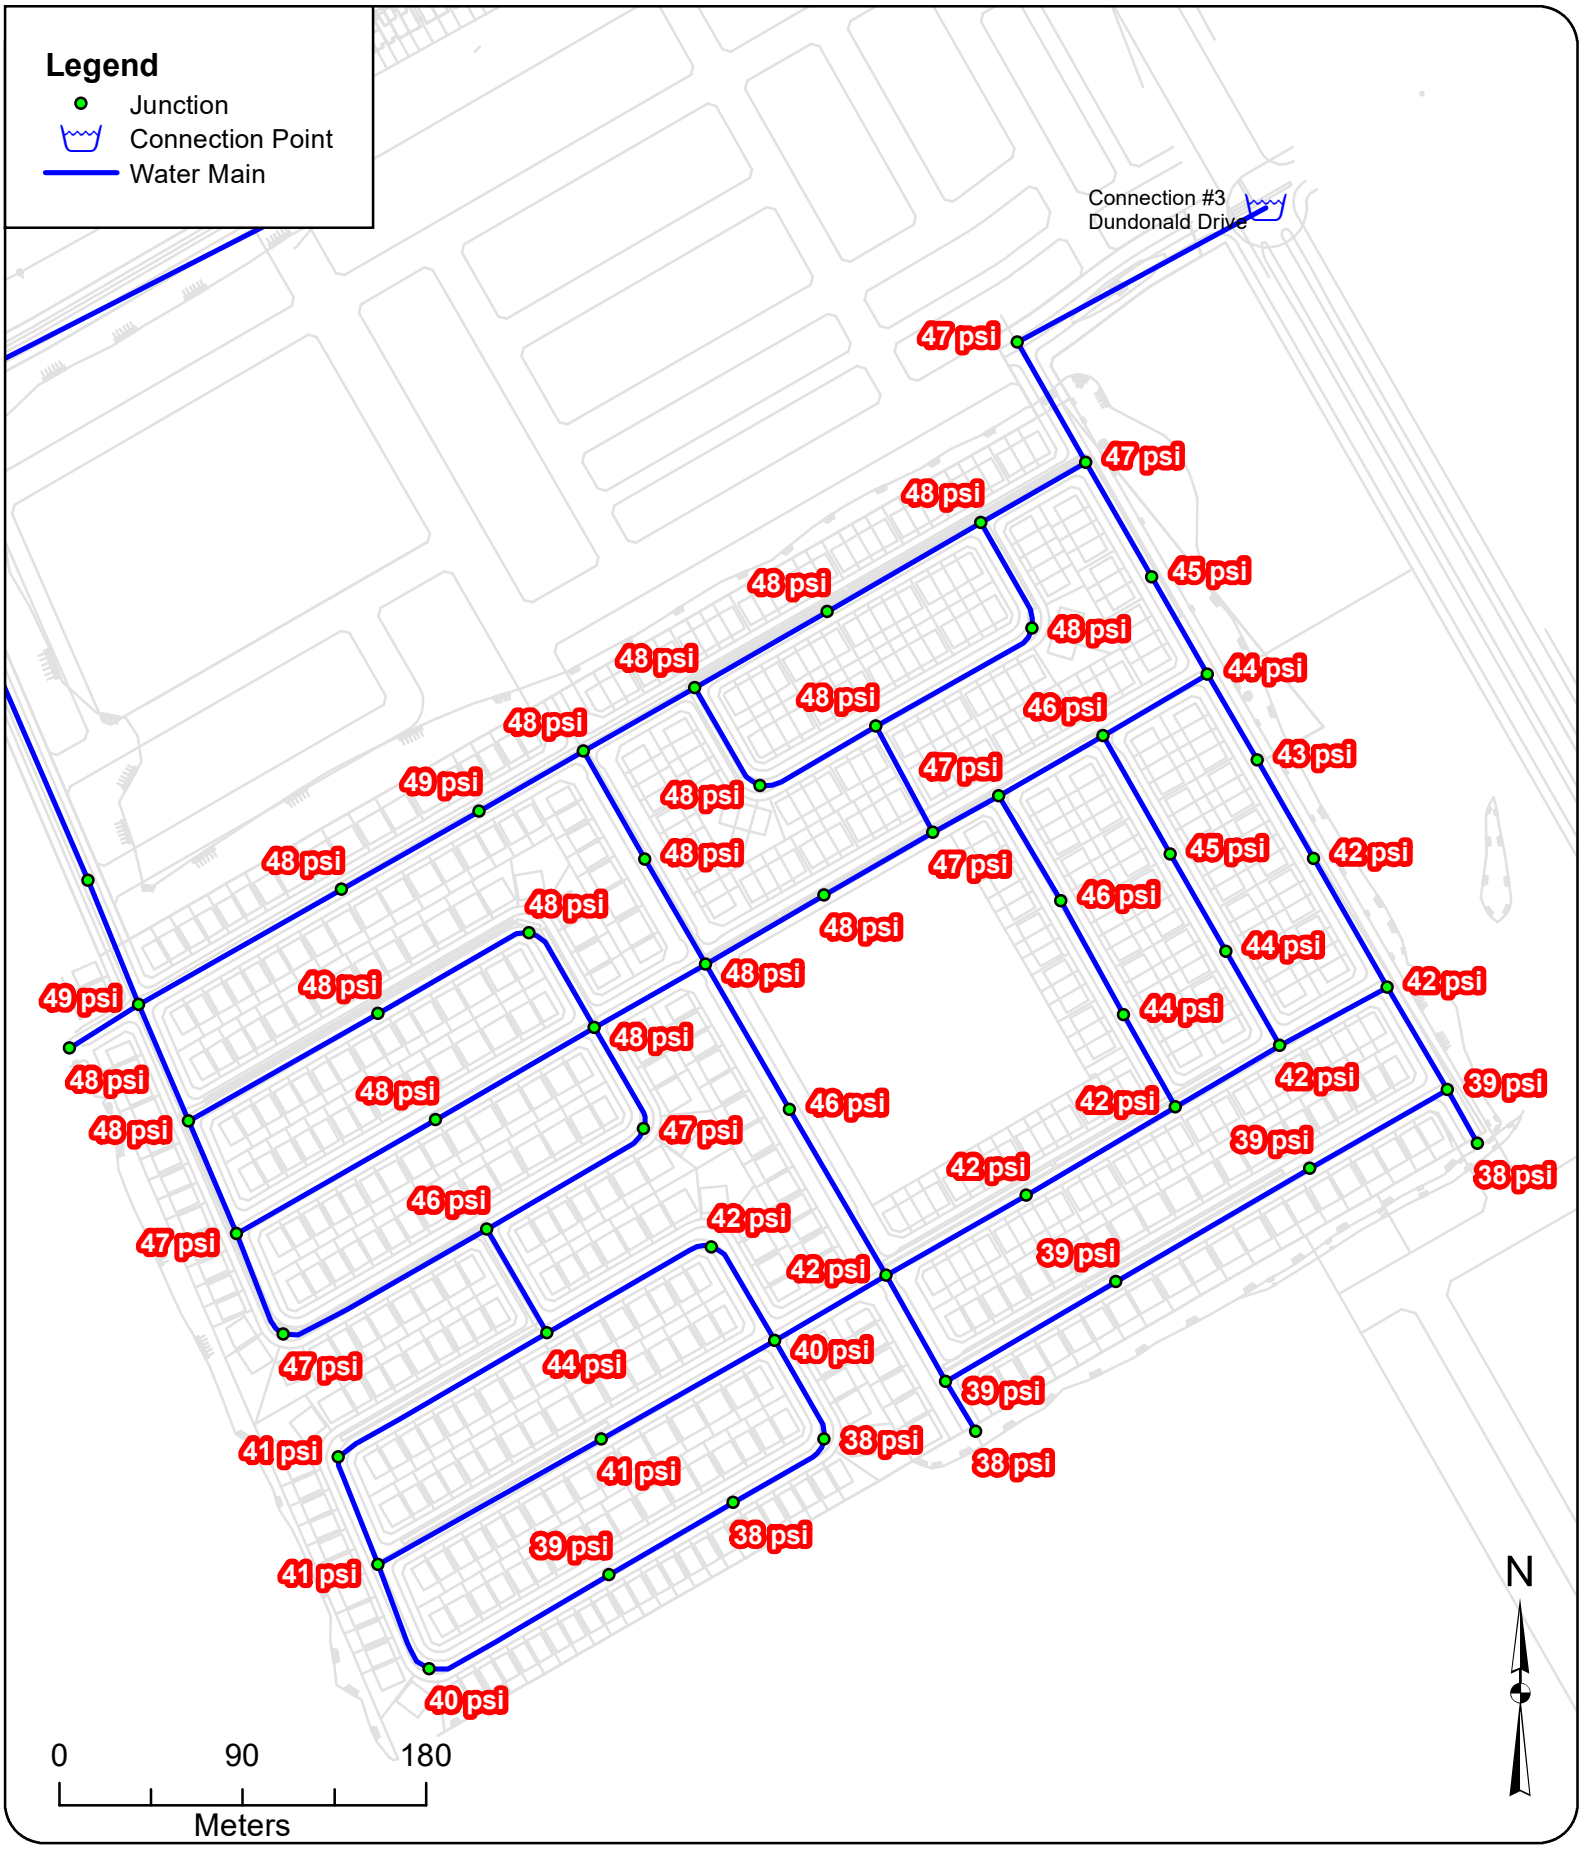


GeoAdvice Engineering Inc.

Project: **Hydraulic Capacity and Modeling Analysis of the Brazeau Lands**
Client: **David Schaeffer Engineering Ltd.**
Date: **June 2020**
Created by: **BL**
Reviewed by: **WdS**

DISCLAIMER: GeoAdvice does not warrant in any way the accuracy and completeness of the information shown on this map. Field verification of the accuracy and completeness of the information shown on this map is the sole responsibility of the user.

# PHD Pressure Results - Phases 1&2


**Figure E.4**

**Peak Hour Demand Modeling Results -Phases 1 and 2**

| ID | From Node | To Node | Length (m) | Diameter (mm) | Roughness | Flow (L/s) | Velocity (m/s) | Headloss (m) | HL/1000 (m/km) |
|---|---|---|---|---|---|---|---|---|---|
| P-42 | J-33 | J-34 | 40.11 | 297 | 120 | 0.00 | 0.00 | 0.00 | 0.00 |
| P-43 | J-33 | J-35 | 114.35 | 297 | 120 | 3.16 | 0.05 | 0.00 | 0.01 |
| P-44 | J-35 | J-36 | 77.83 | 297 | 120 | 2.33 | 0.03 | 0.00 | 0.01 |
| P-45 | J-36 | J-37 | 59.20 | 297 | 120 | 1.42 | 0.02 | 0.00 | 0.00 |
| P-46 | J-37 | J-38 | 62.88 | 297 | 120 | -8.04 | 0.12 | 0.00 | 0.07 |
| P-47 | J-38 | J-39 | 74.92 | 297 | 120 | -10.35 | 0.15 | 0.01 | 0.12 |
| P-48 | J-39 | J-40 | 87.18 | 297 | 120 | -11.49 | 0.17 | 0.01 | 0.14 |
| P-49 | J-40 | J-41 | 59.39 | 297 | 120 | -17.00 | 0.25 | 0.02 | 0.29 |
| P-50 | J-41 | J-60 | 67.93 | 297 | 120 | -33.05 | 0.48 | 0.07 | 1.01 |
| P-51 | J-60 | CONNECTION_3 | 138.92 | 297 | 120 | -33.05 | 0.48 | 0.14 | 1.01 |
| P-52 | J-40 | J-42 | 58.39 | 204 | 110 | 4.72 | 0.14 | 0.01 | 0.20 |
| P-53 | J-42 | J-43 | 83.72 | 204 | 110 | 3.82 | 0.12 | 0.01 | 0.14 |
| P-54 | J-43 | J-44 | 72.67 | 204 | 110 | -0.68 | 0.02 | 0.00 | 0.01 |
| P-55 | J-44 | J-38 | 58.67 | 204 | 110 | -1.52 | 0.05 | 0.00 | 0.02 |
| P-56 | J-45 | J-46 | 59.20 | 204 | 110 | 2.27 | 0.07 | 0.00 | 0.05 |
| P-57 | J-46 | J-90 | 81.24 | 204 | 110 | -0.92 | 0.03 | 0.00 | 0.01 |
| P-58 | J-47 | J-48 | 84.62 | 204 | 110 | 1.88 | 0.06 | 0.00 | 0.04 |
| P-59 | J-48 | J-61 | 59.65 | 297 | 120 | -8.86 | 0.13 | 0.01 | 0.09 |
| P-60 | J-61 | J-37 | 60.99 | 297 | 120 | -9.16 | 0.13 | 0.01 | 0.09 |
| P-61 | J-59 | J-58 | 94.07 | 297 | 120 | -4.98 | 0.07 | 0.00 | 0.03 |
| P-62 | J-58 | J-48 | 82.47 | 297 | 120 | -5.28 | 0.08 | 0.00 | 0.03 |
| P-63 | J-48 | J-49 | 63.07 | 204 | 110 | 5.08 | 0.16 | 0.01 | 0.23 |
| P-64 | J-49 | J-50 | 57.71 | 204 | 110 | -0.22 | 0.01 | 0.00 | 0.00 |
| P-65 | J-50 | J-51 | 84.62 | 204 | 110 | -0.90 | 0.03 | 0.00 | 0.01 |
| P-66 | J-51 | J-52 | 106.76 | 204 | 110 | -1.89 | 0.06 | 0.00 | 0.04 |
| P-67 | J-33 | J-52 | 62.05 | 204 | 110 | 6.57 | 0.20 | 0.02 | 0.37 |
| P-68 | J-52 | J-53 | 60.20 | 204 | 110 | 3.54 | 0.11 | 0.01 | 0.12 |
| P-69 | J-53 | J-54 | 112.78 | 204 | 110 | -0.41 | 0.01 | 0.00 | 0.00 |
| P-70 | J-54 | J-49 | 90.00 | 204 | 110 | -1.48 | 0.05 | 0.00 | 0.02 |
| P-71 | J-49 | J-57 | 56.32 | 204 | 110 | 3.06 | 0.09 | 0.01 | 0.09 |
| P-72 | J-57 | J-56 | 92.28 | 204 | 110 | 2.38 | 0.07 | 0.01 | 0.06 |
| P-73 | J-53 | J-55 | 55.27 | 204 | 110 | 2.82 | 0.09 | 0.00 | 0.08 |
| P-74 | J-55 | J-56 | 113.38 | 204 | 110 | 1.76 | 0.05 | 0.00 | 0.03 |
| P-111 | J-90 | J-47 | 61.51 | 204 | 110 | 2.55 | 0.08 | 0.00 | 0.06 |
| P-112 | J-43 | J-90 | 59.19 | 204 | 110 | 3.47 | 0.11 | 0.01 | 0.11 |
| P-75 | J-56 | J-62 | 58.69 | 204 | 110 | 3.08 | 0.09 | 0.01 | 0.09 |
| P-76 | J-62 | J-63 | 119.4 | 204 | 110 | 2.11 | 0.06 | 0.01 | 0.05 |
| P-77 | J-63 | J-64 | 56.35 | 204 | 110 | 1.05 | 0.03 | 0.00 | 0.01 |
| P-78 | J-64 | J-65 | 58.6 | 204 | 110 | 0.97 | 0.03 | 0.00 | 0.01 |
| P-79 | J-65 | J-66 | 100.76 | 204 | 110 | -0.01 | 0.00 | 0.00 | 0.00 |
| P-80 | J-66 | J-70 | 70.42 | 204 | 110 | -1.15 | 0.04 | 0.00 | 0.01 |
| P-81 | J-70 | J-71 | 55.7 | 204 | 110 | -2.06 | 0.06 | 0.00 | 0.04 |
| P-82 | J-71 | J-69 | 54.8 | 204 | 110 | -2.67 | 0.08 | 0.00 | 0.07 |
| P-83 | J-64 | J-67 | 125.85 | 204 | 110 | -1.06 | 0.03 | 0.00 | 0.01 |
| P-84 | J-67 | J-69 | 97.99 | 204 | 110 | -2.27 | 0.07 | 0.01 | 0.05 |
| P-85 | J-62 | J-68 | 92.12 | 204 | 110 | -0.17 | 0.01 | 0.00 | 0.00 |
| P-86 | J-68 | J-69 | 56.42 | 204 | 110 | -0.93 | 0.03 | 0.00 | 0.01 |
| P-87 | J-69 | J-59 | 63.46 | 204 | 110 | -6.63 | 0.20 | 0.02 | 0.38 |
| P-88 | J-59 | J-72 | 59.77 | 297 | 120 | -2.83 | 0.04 | 0.00 | 0.01 |
| P-89 | J-72 | J-73 | 28.67 | 297 | 120 | 0.00 | 0.00 | 0.00 | 0.00 |
| P-90 | J-72 | J-74 | 96.85 | 297 | 120 | -3.74 | 0.05 | 0.00 | 0.02 |
| P-91 | J-74 | J-75 | 110.13 | 297 | 120 | -5.03 | 0.07 | 0.00 | 0.03 |
| P-92 | J-75 | J-76 | 78.16 | 297 | 120 | -5.93 | 0.09 | 0.00 | 0.04 |
| P-93 | J-77 | J-76 | 30.34 | 297 | 120 | 0.00 | 0.00 | 0.00 | 0.00 |
| P-94 | J-76 | J-78 | 58.2 | 297 | 120 | -6.39 | 0.09 | 0.00 | 0.05 |
| P-95 | J-78 | J-79 | 59.97 | 204 | 110 | 2.36 | 0.07 | 0.00 | 0.06 |
| P-96 | J-79 | J-80 | 59.39 | 204 | 110 | 2.34 | 0.07 | 0.00 | 0.05 |
| P-97 | J-80 | J-81 | 85.15 | 204 | 110 | 2.34 | 0.07 | 0.00 | 0.05 |
| P-98 | J-81 | J-59 | 79.25 | 204 | 110 | 0.78 | 0.02 | 0.00 | 0.01 |
| P-99 | J-80 | J-82 | 51.74 | 204 | 110 | -0.96 | 0.03 | 0.00 | 0.01 |
| P-100 | J-82 | J-83 | 63.79 | 204 | 110 | -1.63 | 0.05 | 0.00 | 0.03 |
| P-101 | J-83 | J-46 | 60.03 | 204 | 110 | -2.71 | 0.08 | 0.00 | 0.07 |
| P-102 | J-79 | J-84 | 53.32 | 204 | 110 | -0.94 | 0.03 | 0.00 | 0.01 |
| P-103 | J-84 | J-85 | 55.04 | 204 | 110 | -1.54 | 0.05 | 0.00 | 0.03 |
| P-104 | J-85 | J-45 | 66.63 | 204 | 110 | -2.62 | 0.08 | 0.00 | 0.07 |
| P-105 | J-78 | J-86 | 72.81 | 297 | 120 | -9.11 | 0.13 | 0.01 | 0.09 |
| P-106 | J-86 | J-87 | 55.9 | 297 | 120 | -9.53 | 0.14 | 0.01 | 0.10 |
| P-107 | J-87 | J-88 | 48.49 | 297 | 120 | -9.95 | 0.14 | 0.01 | 0.11 |
| P-108 | J-45 | J-88 | 59.54 | 204 | 110 | -5.25 | 0.16 | 0.01 | 0.24 |
| P-109 | J-88 | J-89 | 55.04 | 297 | 120 | -15.45 | 0.22 | 0.01 | 0.25 |
| P-110 | J-89 | J-41 | 65.11 | 297 | 120 | -15.87 | 0.23 | 0.02 | 0.26 |

| ID | Demand (L/s) | Elevation (m) | Head (m) | Pressure (psi) |
|---|---|---|---|---|
| J-33 | 0.99 | 101.29 | 135 | 49 |
| J-34 | 0.00 | 101.41 | 135 | 48 |
| J-35 | 0.83 | 101.33 | 135 | 49 |
| J-36 | 0.91 | 101.25 | 135 | 49 |
| J-37 | 0.30 | 101.64 | 135 | 48 |
| J-38 | 0.78 | 101.46 | 135 | 48 |
| J-39 | 1.15 | 101.83 | 135 | 48 |
| J-40 | 0.78 | 101.96 | 135 | 48 |
| J-41 | 0.18 | 102.65 | 135 | 47 |
| J-42 | 0.90 | 101.87 | 135 | 48 |
| J-43 | 1.02 | 101.72 | 135 | 48 |
| J-44 | 0.84 | 101.59 | 135 | 48 |
| J-45 | 0.36 | 103.27 | 135 | 46 |
| J-46 | 0.48 | 102.38 | 135 | 47 |
| J-47 | 0.66 | 101.77 | 135 | 48 |
| J-48 | 0.38 | 101.83 | 135 | 48 |
| J-49 | 0.76 | 101.74 | 135 | 48 |
| J-50 | 0.68 | 101.40 | 135 | 48 |
| J-51 | 0.99 | 101.41 | 135 | 48 |
| J-52 | 1.14 | 101.35 | 135 | 48 |
| J-53 | 1.14 | 102.22 | 135 | 47 |
| J-54 | 1.06 | 101.87 | 135 | 48 |
| J-55 | 1.06 | 102.52 | 135 | 47 |
| J-56 | 1.06 | 103.00 | 135 | 46 |
| J-57 | 0.68 | 102.46 | 135 | 47 |
| J-58 | 0.30 | 102.95 | 135 | 46 |
| J-59 | 1.96 | 105.68 | 135 | 42 |
| J-60 | 0.00 | 102.80 | 136 | 47 |
| J-61 | 0.30 | 101.51 | 135 | 48 |
| J-90 | 0.00 | 102.07 | 135 | 47 |
| J-62 | 1.14 | 104.21 | 135 | 44 |
| J-63 | 1.06 | 106.39 | 135 | 41 |
| J-64 | 1.14 | 106.74 | 135 | 41 |
| J-65 | 0.98 | 107.17 | 135 | 40 |
| J-66 | 1.14 | 107.78 | 135 | 39 |
| J-67 | 1.21 | 106.62 | 135 | 41 |
| J-68 | 0.76 | 106.00 | 135 | 42 |
| J-69 | 0.76 | 107.07 | 135 | 40 |
| J-70 | 0.91 | 108.43 | 135 | 38 |
| J-71 | 0.61 | 108.62 | 135 | 38 |
| J-72 | 0.91 | 107.85 | 135 | 39 |
| J-73 | 0.00 | 108.47 | 135 | 38 |
| J-74 | 1.29 | 107.68 | 135 | 39 |
| J-75 | 0.91 | 108.00 | 135 | 39 |
| J-76 | 0.45 | 108.27 | 135 | 39 |
| J-77 | 0.00 | 108.93 | 135 | 38 |
| J-78 | 0.36 | 106.17 | 135 | 42 |
| J-79 | 0.96 | 105.57 | 135 | 42 |
| J-80 | 0.96 | 105.54 | 135 | 43 |
| J-81 | 1.56 | 105.54 | 135 | 42 |
| J-82 | 0.66 | 104.30 | 135 | 44 |
| J-83 | 1.08 | 103.10 | 135 | 46 |
| J-84 | 0.60 | 104.73 | 135 | 44 |
| J-85 | 1.08 | 103.68 | 135 | 45 |
| J-86 | 0.42 | 105.81 | 135 | 42 |
| J-87 | 0.42 | 105.51 | 135 | 43 |
| J-88 | 0.24 | 104.78 | 135 | 44 |
| J-89 | 0.42 | 103.69 | 135 | 45 |

# Appendix F MDD+FF Model Results

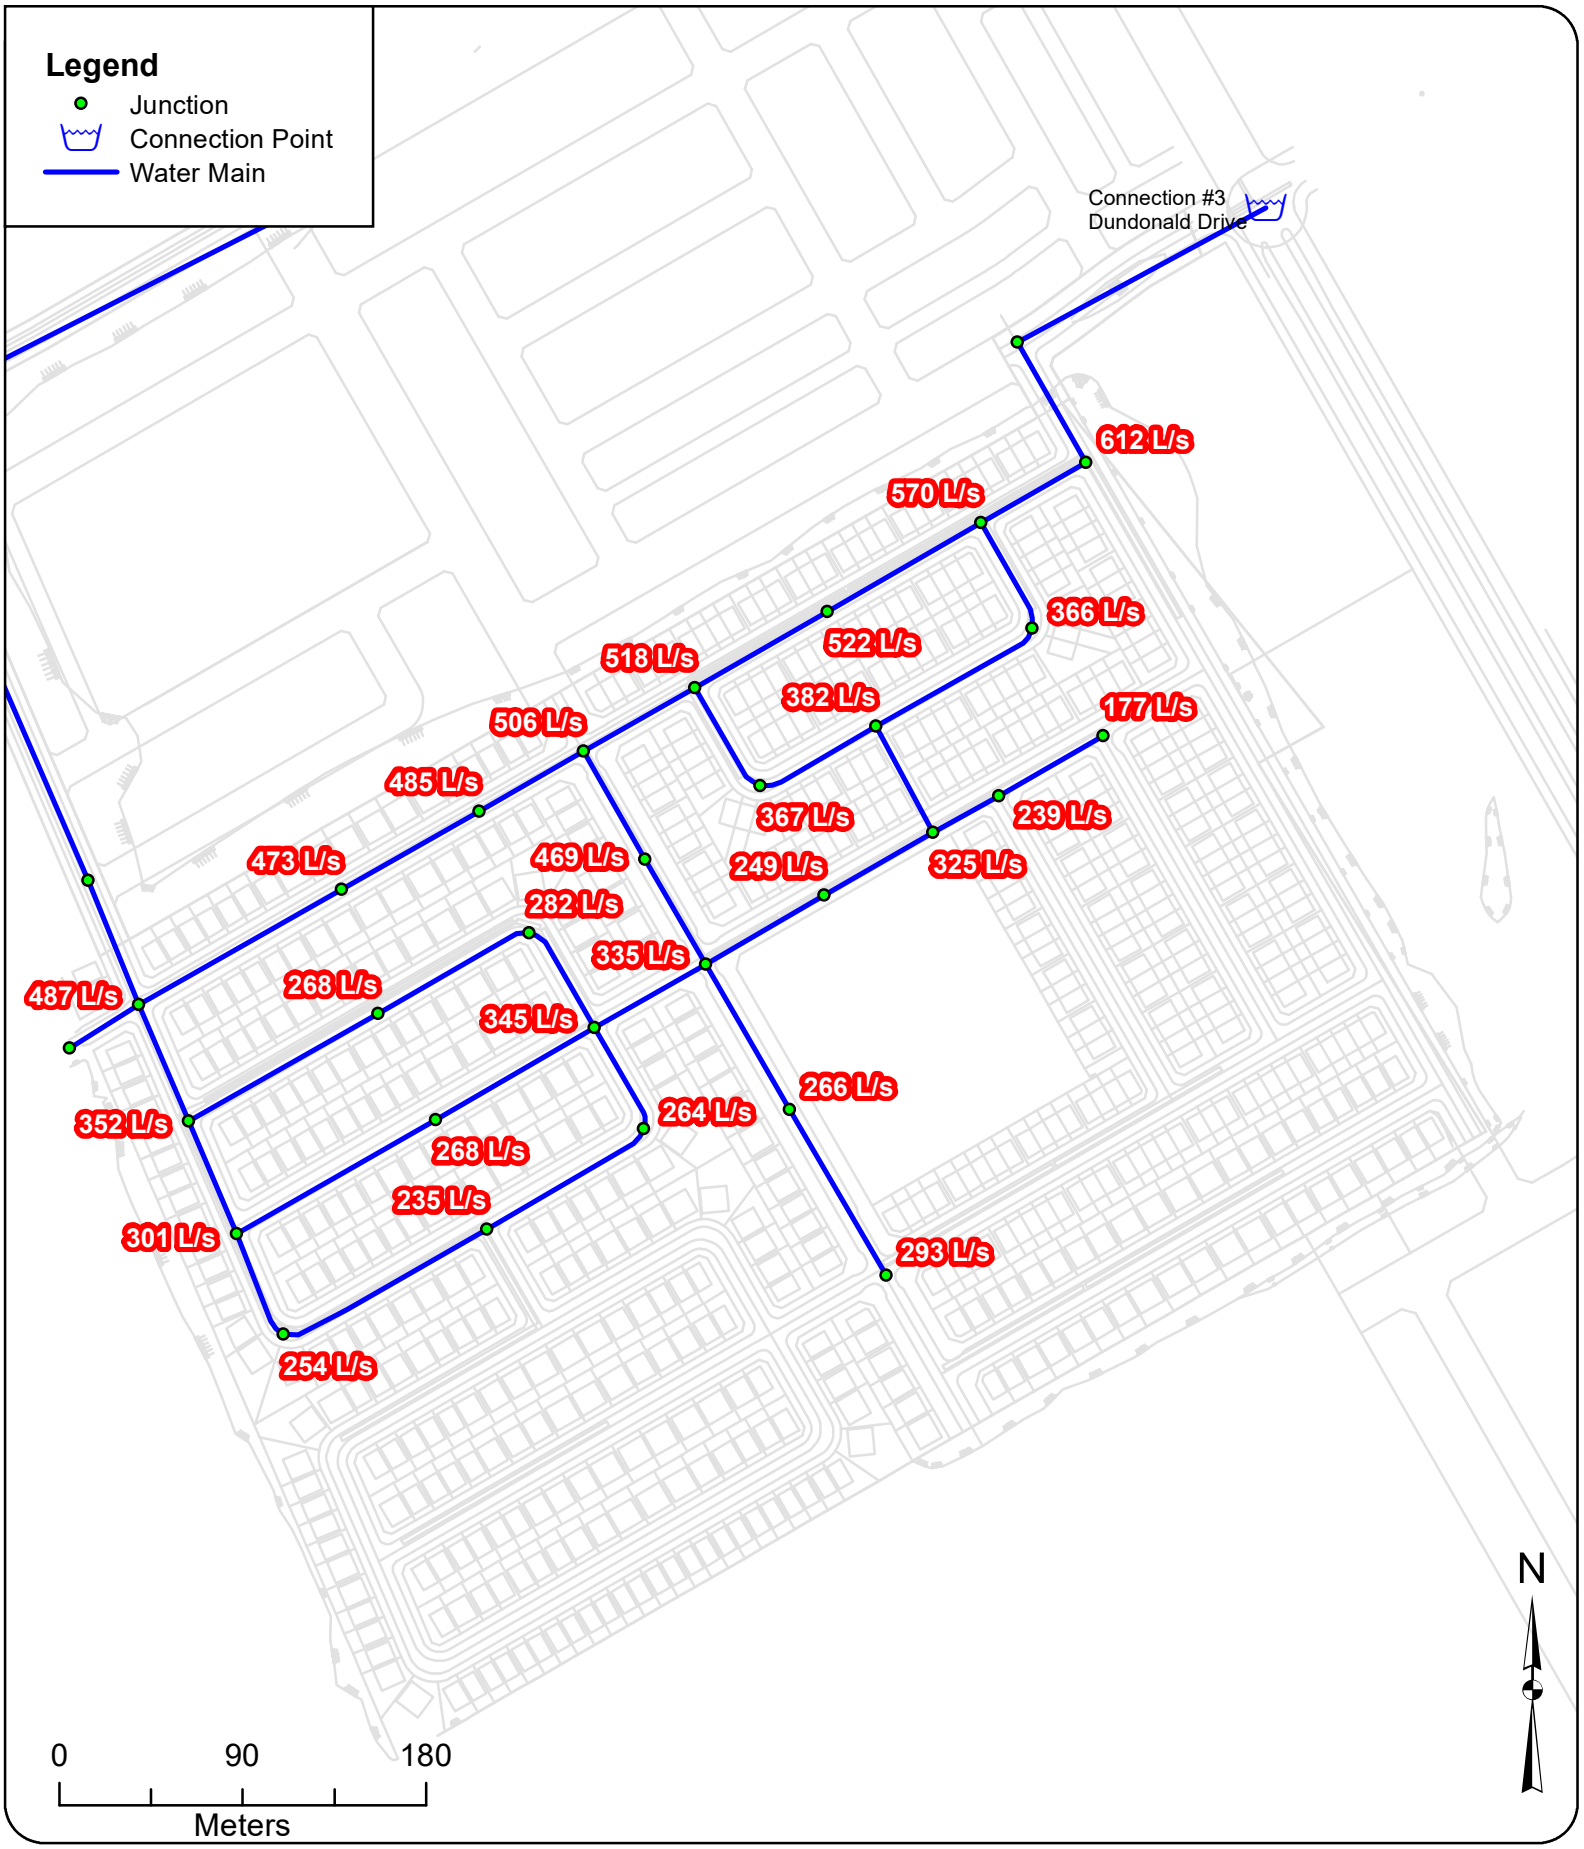



GeoAdvice Engineering Inc.

Project: **Hydraulic Capacity and Modeling Analysis of the Brazeau Lands**
Client: **David Schaeffer Engineering Ltd.**
Date: **June 2020**
Created by: **BL**
Reviewed by: **WdS**

DISCLAIMER: GeoAdvice does not warrant in any way the accuracy and completeness of the information shown on this map. Field verification of the accuracy and completeness of the information shown on this map is the sole responsibility of the user.

**Available Fire Flow @ 20 psi - Phase 1**

**Figure F.1**

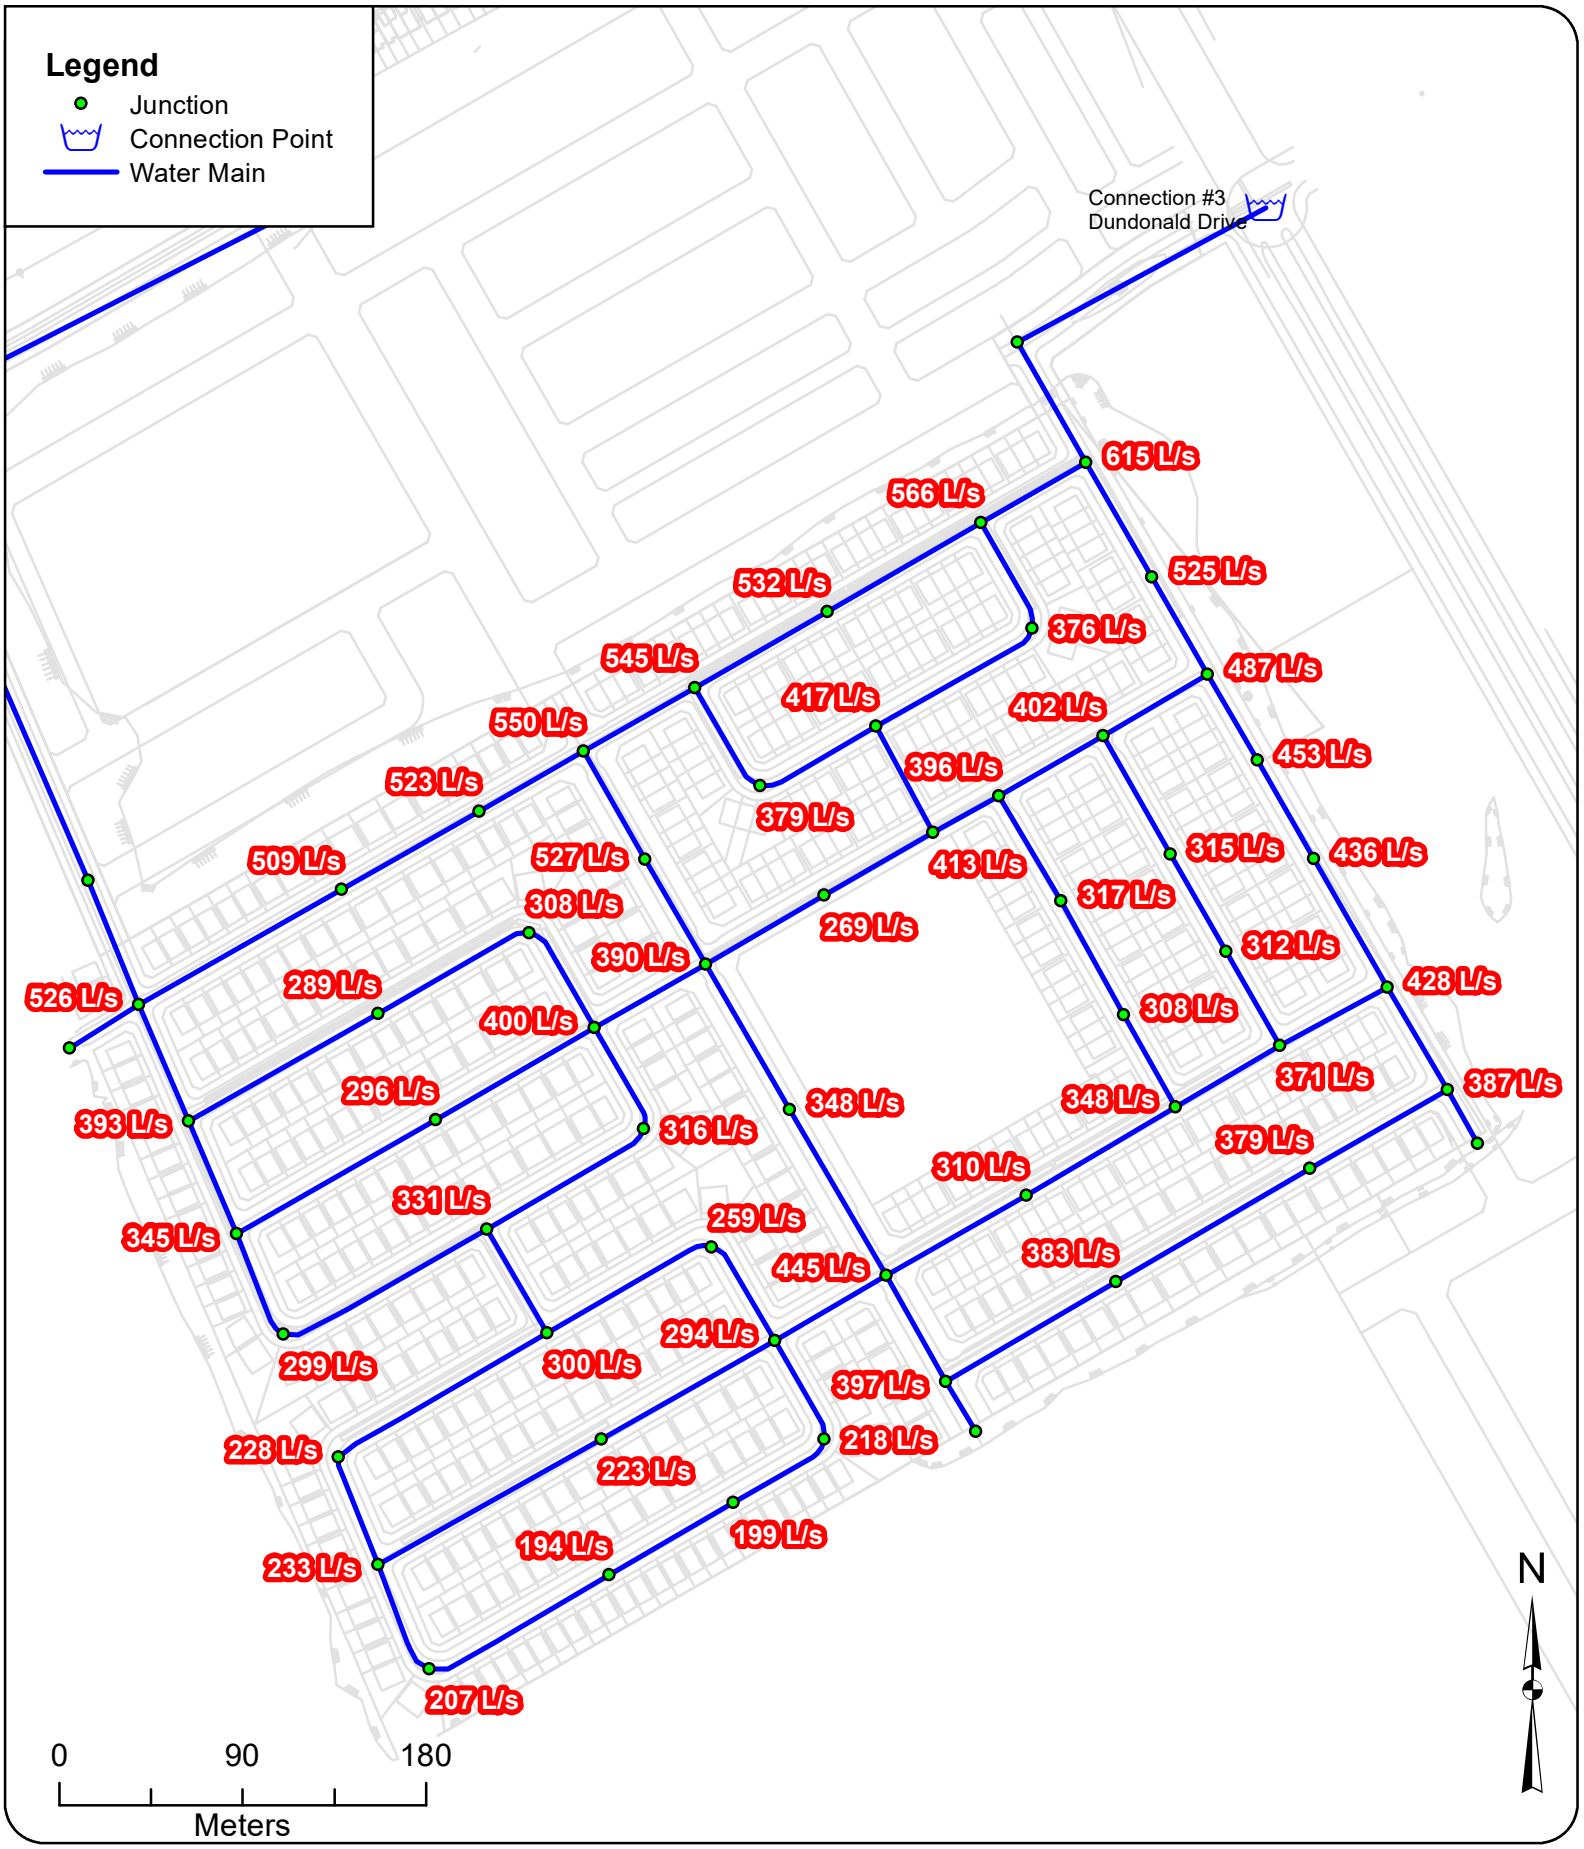



GeoAdvice Engineering Inc.

Project: **Hydraulic Capacity and Modeling Analysis of the Brazeau Lands**
Client: **David Schaeffer Engineering Ltd.**
Date: **June 2020**
Created by: **BL**
Reviewed by: **WdS**

DISCLAIMER: GeoAdvice does not warrant in any way the accuracy and completeness of the information shown on this map. Field verification of the accuracy and completeness of the information shown on this map is the sole responsibility of the user.

# Available Fire Flow @ 20 psi - Phases 1&2

**Figure F.2**

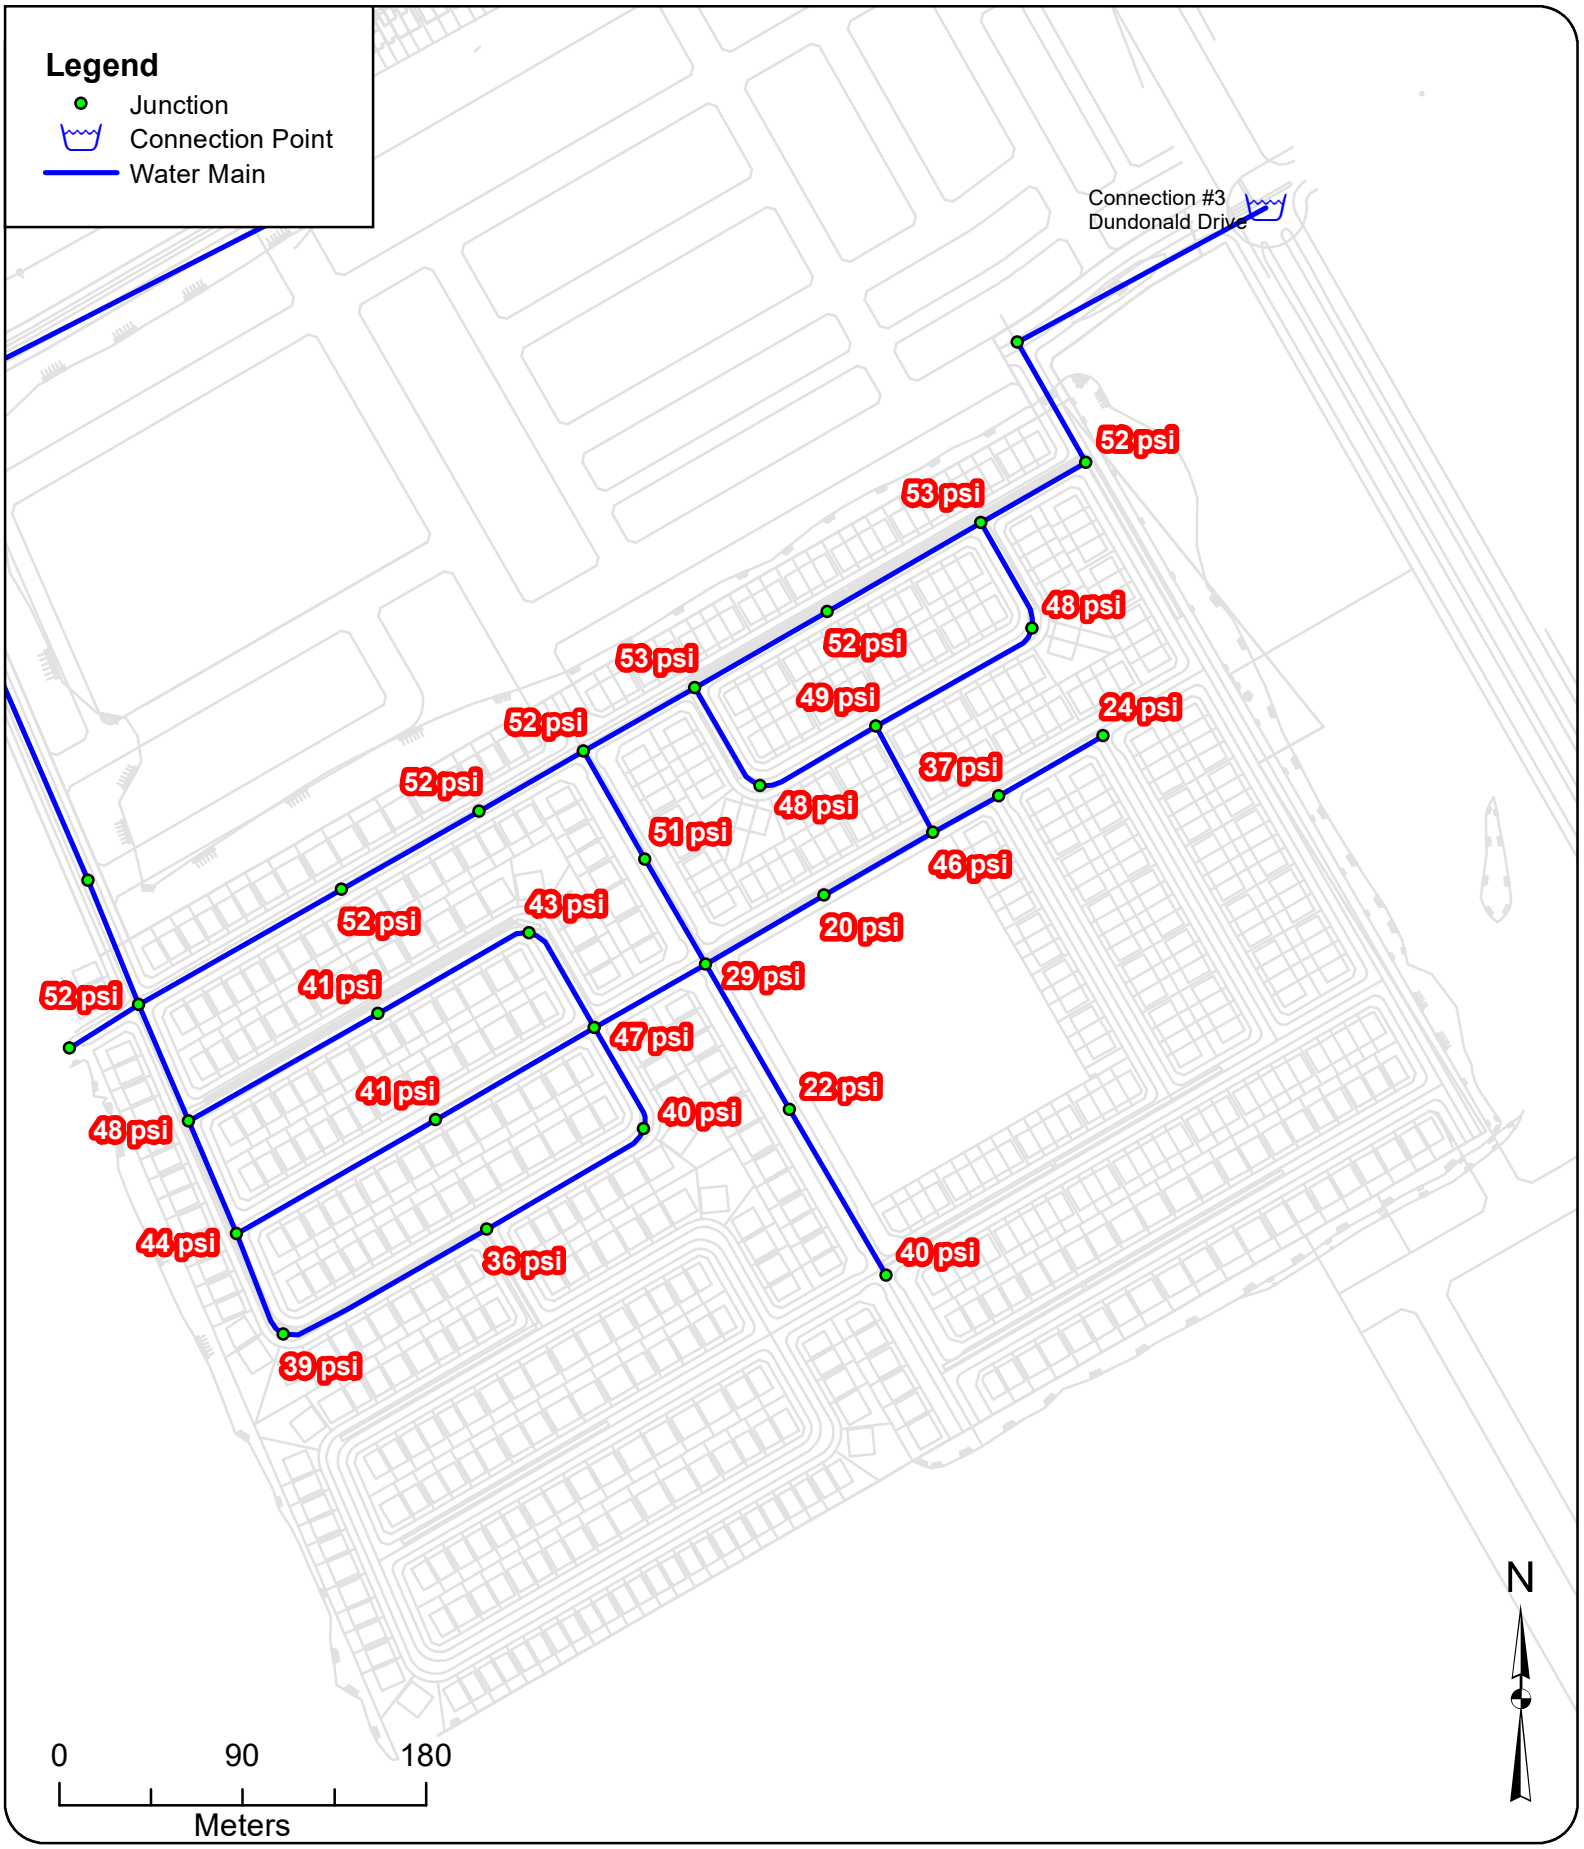



GeoAdvice Engineering Inc.

Project: **Hydraulic Capacity and Modeling Analysis of the Brazeau Lands**
Client: **David Schaeffer Engineering Ltd.**
Date: **June 2020**
Created by: **BL**
Reviewed by: **WdS**

DISCLAIMER: GeoAdvice does not warrant in any way the accuracy and completeness of the information shown on this map. Field verification of the accuracy and completeness of the information shown on this map is the sole responsibility of the user.

# Residual Pressure @ Required Fire Flow - Phase 1

**Figure F.3**

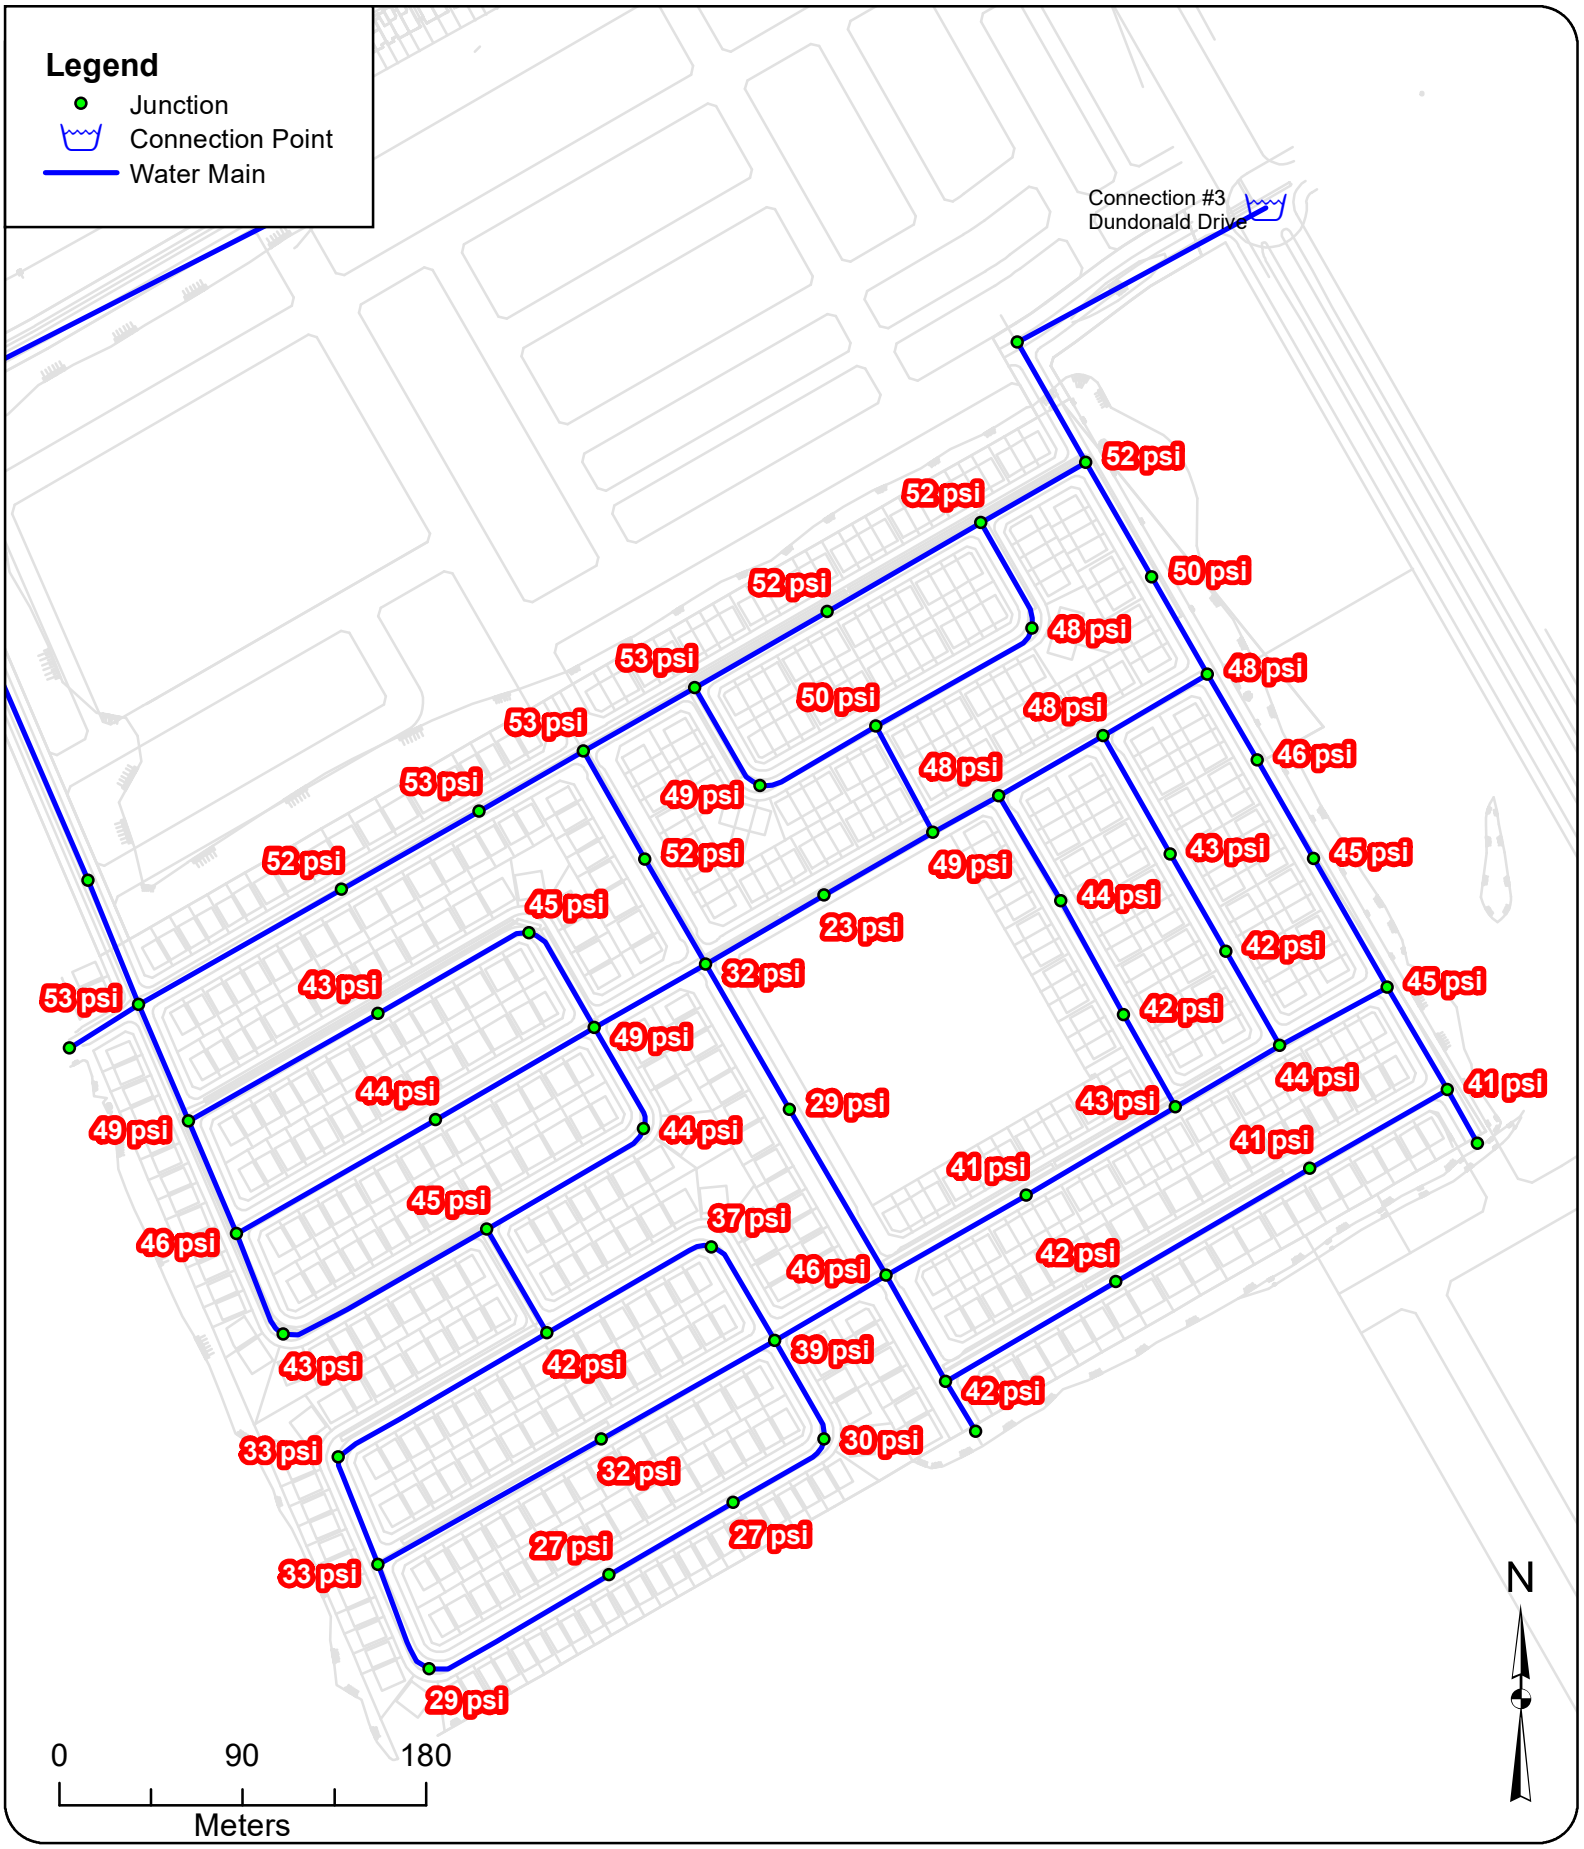


GeoAdvice Engineering Inc.

Project: **Hydraulic Capacity and Modeling Analysis of the Brazeau Lands**
Client: **David Schaeffer Engineering Ltd.**
Date: **June 2020**
Created by: **BL**
Reviewed by: **WdS**

DISCLAIMER: GeoAdvice does not warrant in any way the accuracy and completeness of the information shown on this map. Field verification of the accuracy and completeness of the information shown on this map is the sole responsibility of the user.

# Residual Pressure @ Required Fire Flow - Phases 1&2

**Figure F.4**

**Fire Flow Modeling Results - Phase 1**


| ID | Static Demand (L/s) | Fire-Flow Demand (L/s) | Residual Pressure (psi) | Available Flow at Hydrant (L/s) | Available Flow Pressure (psi) |
|---|---|---|---|---|---|
| J-33 | 0.45 | 167 | 52 | 487 | 20 |
| J-35 | 0.38 | 167 | 52 | 473 | 20 |
| J-36 | 0.41 | 167 | 52 | 485 | 20 |
| J-37 | 0.14 | 167 | 52 | 506 | 20 |
| J-38 | 0.36 | 167 | 53 | 518 | 20 |
| J-39 | 0.52 | 167 | 52 | 522 | 20 |
| J-40 | 0.36 | 167 | 53 | 570 | 20 |
| J-41 | 0.08 | 167 | 52 | 612 | 20 |
| J-42 | 0.41 | 167 | 48 | 366 | 20 |
| J-43 | 0.47 | 167 | 49 | 382 | 20 |
| J-44 | 0.38 | 167 | 48 | 367 | 20 |
| J-45 | 0.16 | 167 | 24 | 177 | 20 |
| J-46 | 0.22 | 167 | 37 | 239 | 20 |
| J-49 | 0.34 | 167 | 47 | 345 | 20 |
| J-50 | 0.31 | 167 | 43 | 282 | 20 |
| J-51 | 0.45 | 167 | 41 | 268 | 20 |
| J-52 | 0.52 | 167 | 48 | 352 | 20 |
| J-53 | 0.52 | 167 | 44 | 301 | 20 |
| J-54 | 0.48 | 167 | 41 | 268 | 20 |
| J-55 | 0.48 | 167 | 39 | 254 | 20 |
| J-56 | 0.48 | 167 | 36 | 235 | 20 |
| J-57 | 0.31 | 167 | 40 | 264 | 20 |
| J-59 | 1.04 | 167 | 40 | 293 | 20 |
| J-61 | 0.14 | 167 | 51 | 469 | 20 |
| J-90 | 0.00 | 167 | 46 | 325 | 20 |
| J-47 | 0.30 | 250 | 20 | 249 | 20 |
| J-48 | 0.17 | 250 | 29 | 335 | 20 |
| J-58 | 0.14 | 250 | 22 | 266 | 20 |

**Fire Flow Modeling Results - Phases 1 and 2**

| ID | Static Demand (L/s) | Fire-Flow Demand (L/s) | Residual Pressure (psi) | Available Flow at Hydrant (L/s) | Available Flow Pressure (psi) |
|---|---|---|---|---|---|
| J-33 | 0.45 | 167 | 53 | 526 | 20 |
| J-35 | 0.38 | 167 | 52 | 509 | 20 |
| J-36 | 0.41 | 167 | 53 | 523 | 20 |
| J-37 | 0.14 | 167 | 53 | 550 | 20 |
| J-38 | 0.36 | 167 | 53 | 545 | 20 |
| J-39 | 0.52 | 167 | 52 | 532 | 20 |
| J-40 | 0.36 | 167 | 52 | 566 | 20 |
| J-41 | 0.08 | 167 | 52 | 615 | 20 |
| J-42 | 0.41 | 167 | 48 | 376 | 20 |
| J-43 | 0.47 | 167 | 50 | 417 | 20 |
| J-44 | 0.38 | 167 | 49 | 379 | 20 |
| J-45 | 0.16 | 167 | 48 | 402 | 20 |
| J-46 | 0.22 | 167 | 48 | 396 | 20 |
| J-49 | 0.34 | 167 | 49 | 400 | 20 |
| J-50 | 0.31 | 167 | 45 | 308 | 20 |
| J-51 | 0.45 | 167 | 43 | 289 | 20 |
| J-52 | 0.52 | 167 | 49 | 393 | 20 |
| J-53 | 0.52 | 167 | 46 | 345 | 20 |
| J-54 | 0.48 | 167 | 44 | 296 | 20 |
| J-55 | 0.48 | 167 | 43 | 299 | 20 |
| J-56 | 0.48 | 167 | 45 | 331 | 20 |
| J-57 | 0.31 | 167 | 44 | 316 | 20 |
| J-59 | 1.04 | 167 | 46 | 445 | 20 |
| J-61 | 0.14 | 167 | 52 | 527 | 20 |
| J-62 | 0.52 | 167 | 42 | 300 | 20 |
| J-63 | 0.48 | 167 | 33 | 228 | 20 |
| J-64 | 0.52 | 167 | 33 | 233 | 20 |
| J-65 | 0.45 | 167 | 29 | 207 | 20 |
| **J-66** | 0.52 | 167 | 27 | 194 | 20 |
| J-67 | 0.55 | 167 | 32 | 223 | 20 |
| J-68 | 0.34 | 167 | 37 | 259 | 20 |
| J-69 | 0.34 | 167 | 39 | 294 | 20 |
| J-70 | 0.41 | 167 | 27 | 199 | 20 |
| J-71 | 0.28 | 167 | 30 | 218 | 20 |
| J-72 | 0.41 | 167 | 42 | 397 | 20 |
| J-74 | 0.58 | 167 | 42 | 383 | 20 |
| J-75 | 0.41 | 167 | 41 | 379 | 20 |
| J-76 | 0.21 | 167 | 41 | 387 | 20 |
| J-78 | 0.16 | 167 | 45 | 428 | 20 |
| J-79 | 0.44 | 167 | 44 | 371 | 20 |
| J-80 | 0.44 | 167 | 43 | 349 | 20 |
| J-81 | 0.71 | 167 | 41 | 310 | 20 |
| J-82 | 0.30 | 167 | 42 | 308 | 20 |
| J-83 | 0.49 | 167 | 44 | 317 | 20 |
| J-84 | 0.27 | 167 | 42 | 312 | 20 |
| J-85 | 0.49 | 167 | 43 | 315 | 20 |
| J-86 | 0.19 | 167 | 45 | 436 | 20 |
| J-87 | 0.19 | 167 | 46 | 453 | 20 |
| J-88 | 0.11 | 167 | 48 | 487 | 20 |
| J-89 | 0.19 | 167 | 50 | 525 | 20 |
| J-90 | 0.00 | 167 | 49 | 413 | 20 |
| J-47 | 0.30 | 250 | 23 | 269 | 20 |
| J-48 | 0.17 | 250 | 32 | 390 | 20 |
| J-58 | 0.14 | 250 | 29 | 348 | 20 |

**Connection point 1: Existing watermain node off Haiku/ Obsidian street intersection fronting Block 1.**

**Connection point 2: Existing watermain node on Obsidian street**

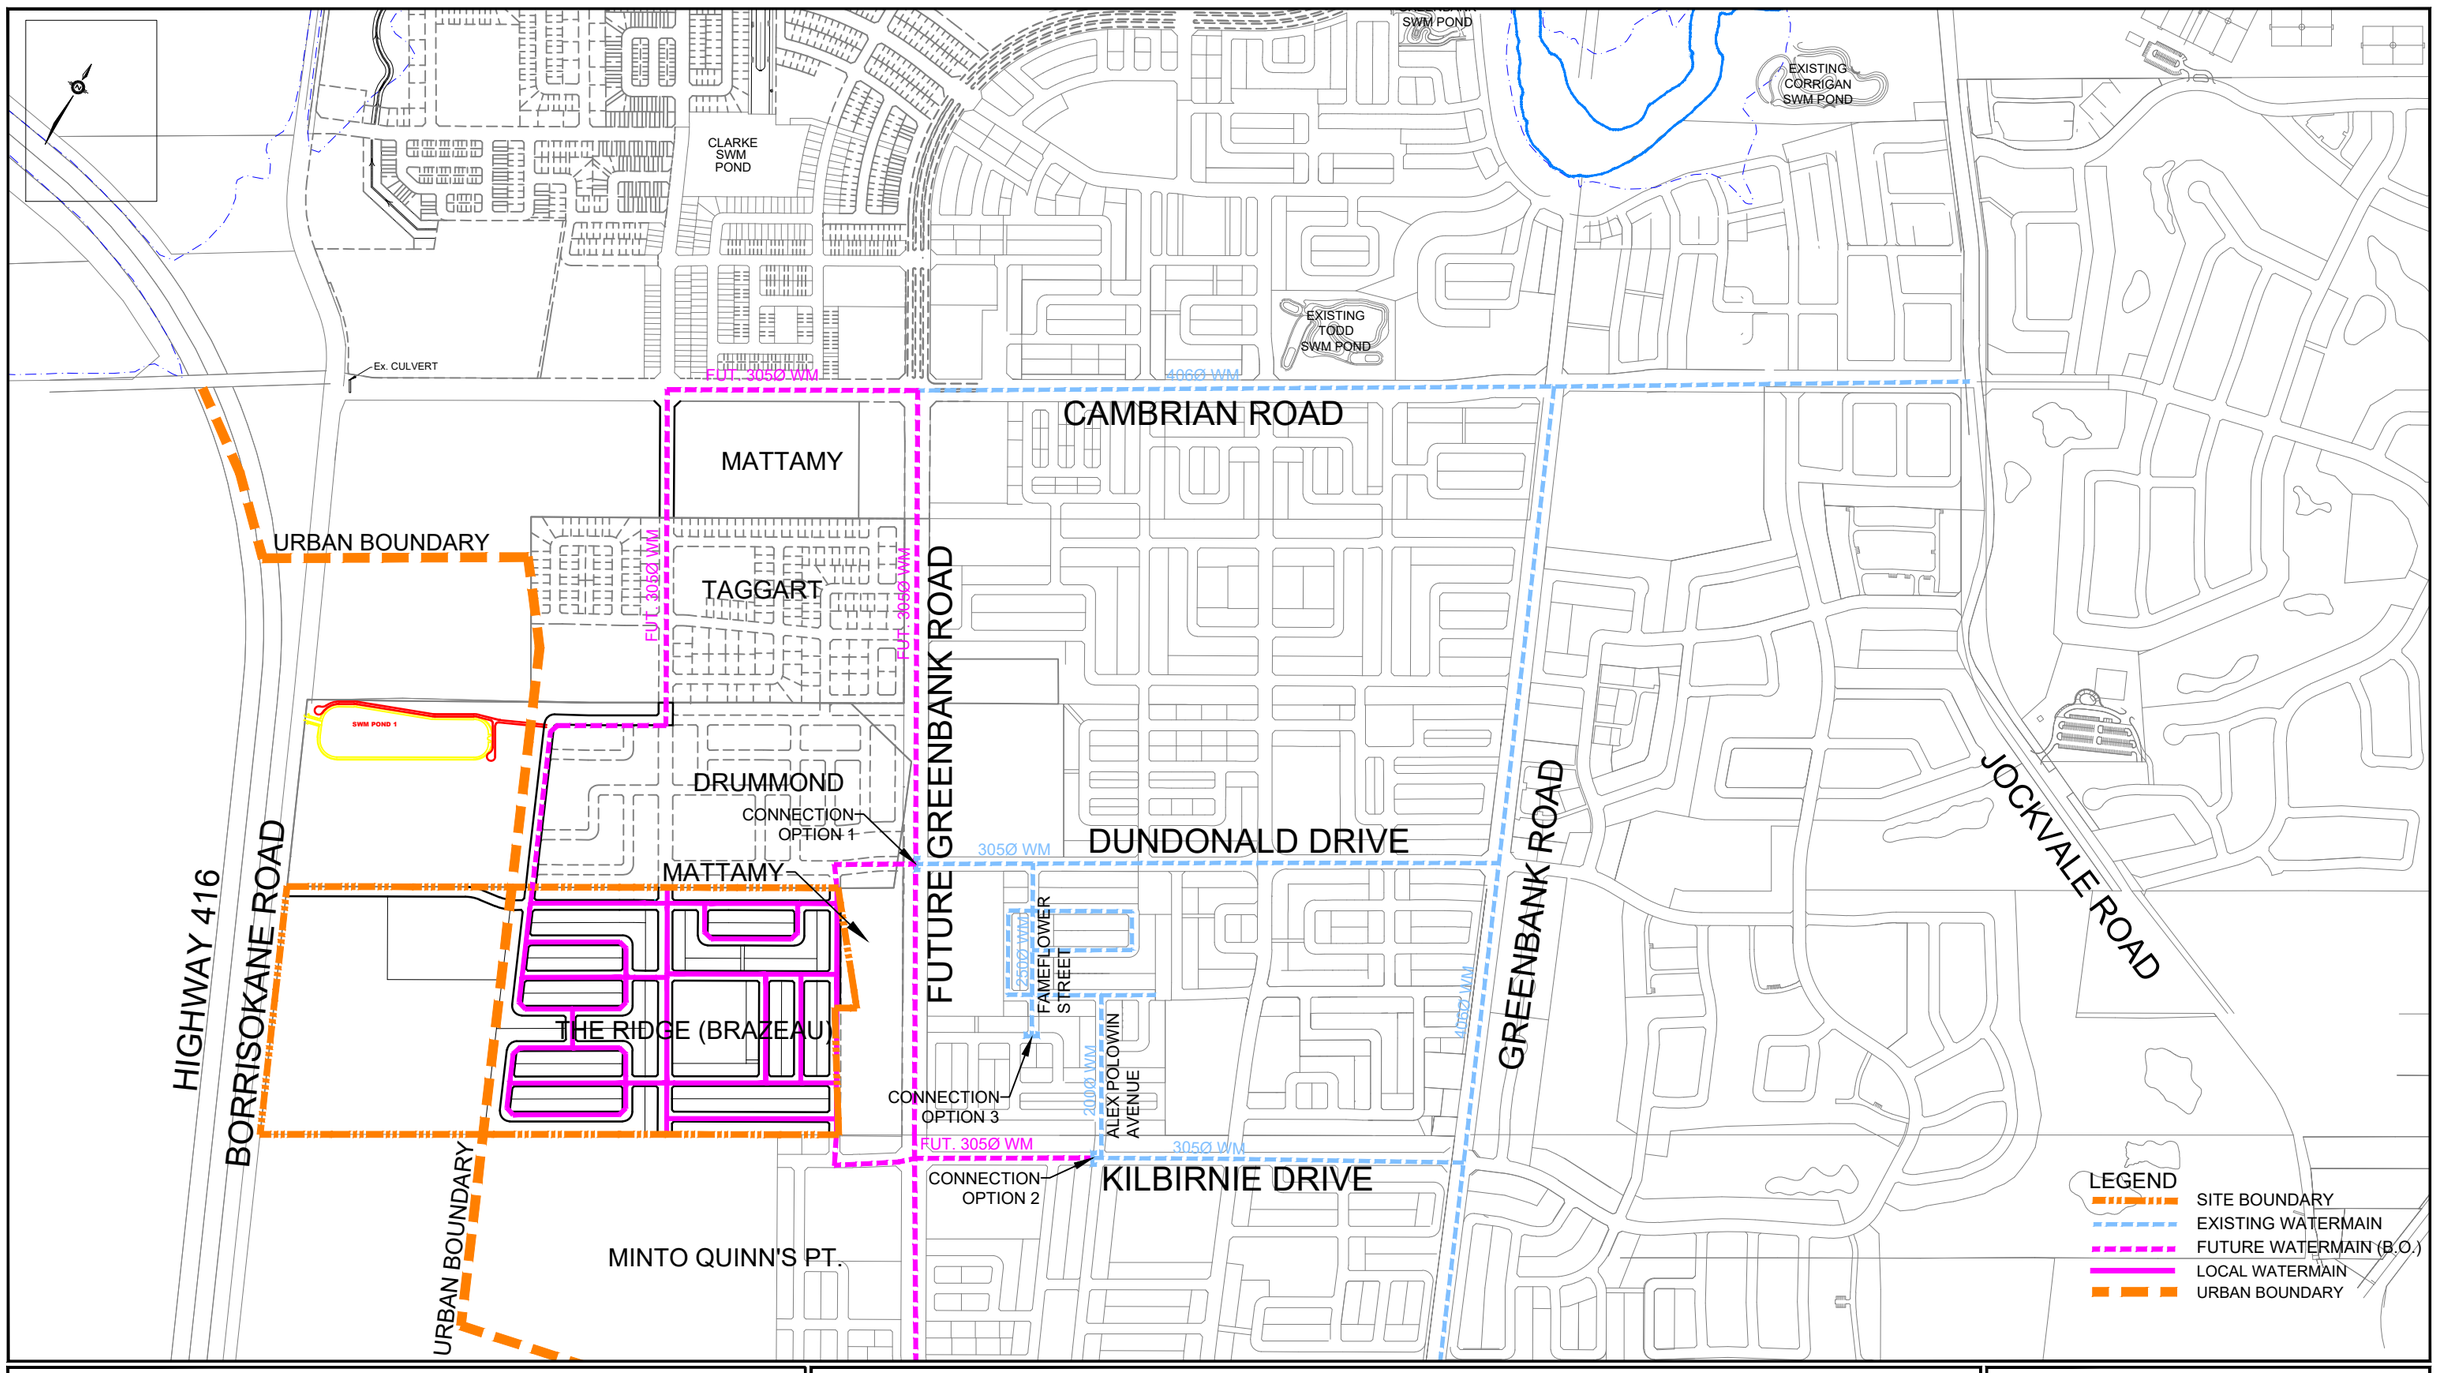




david schaeffer engineering ltd

120 Iber Road, Unit 103
Stittsville, ON K2S 1E9
TEL: (613) 836-0856
FAX: (613) 836-7183
www.DSEL.ca


# CAIVAN - BRAZEAU
## WATERMAIN SERVICING PLAN
## CITY OF OTTAWA

| | |
|---|---|
| PROJECT No.: | 18-1030 |
| SCALE: | 1:10,000 |
| DATE: | APRIL 2020 |
| FIGURE: | WAT-1 |

# APPENDIX C

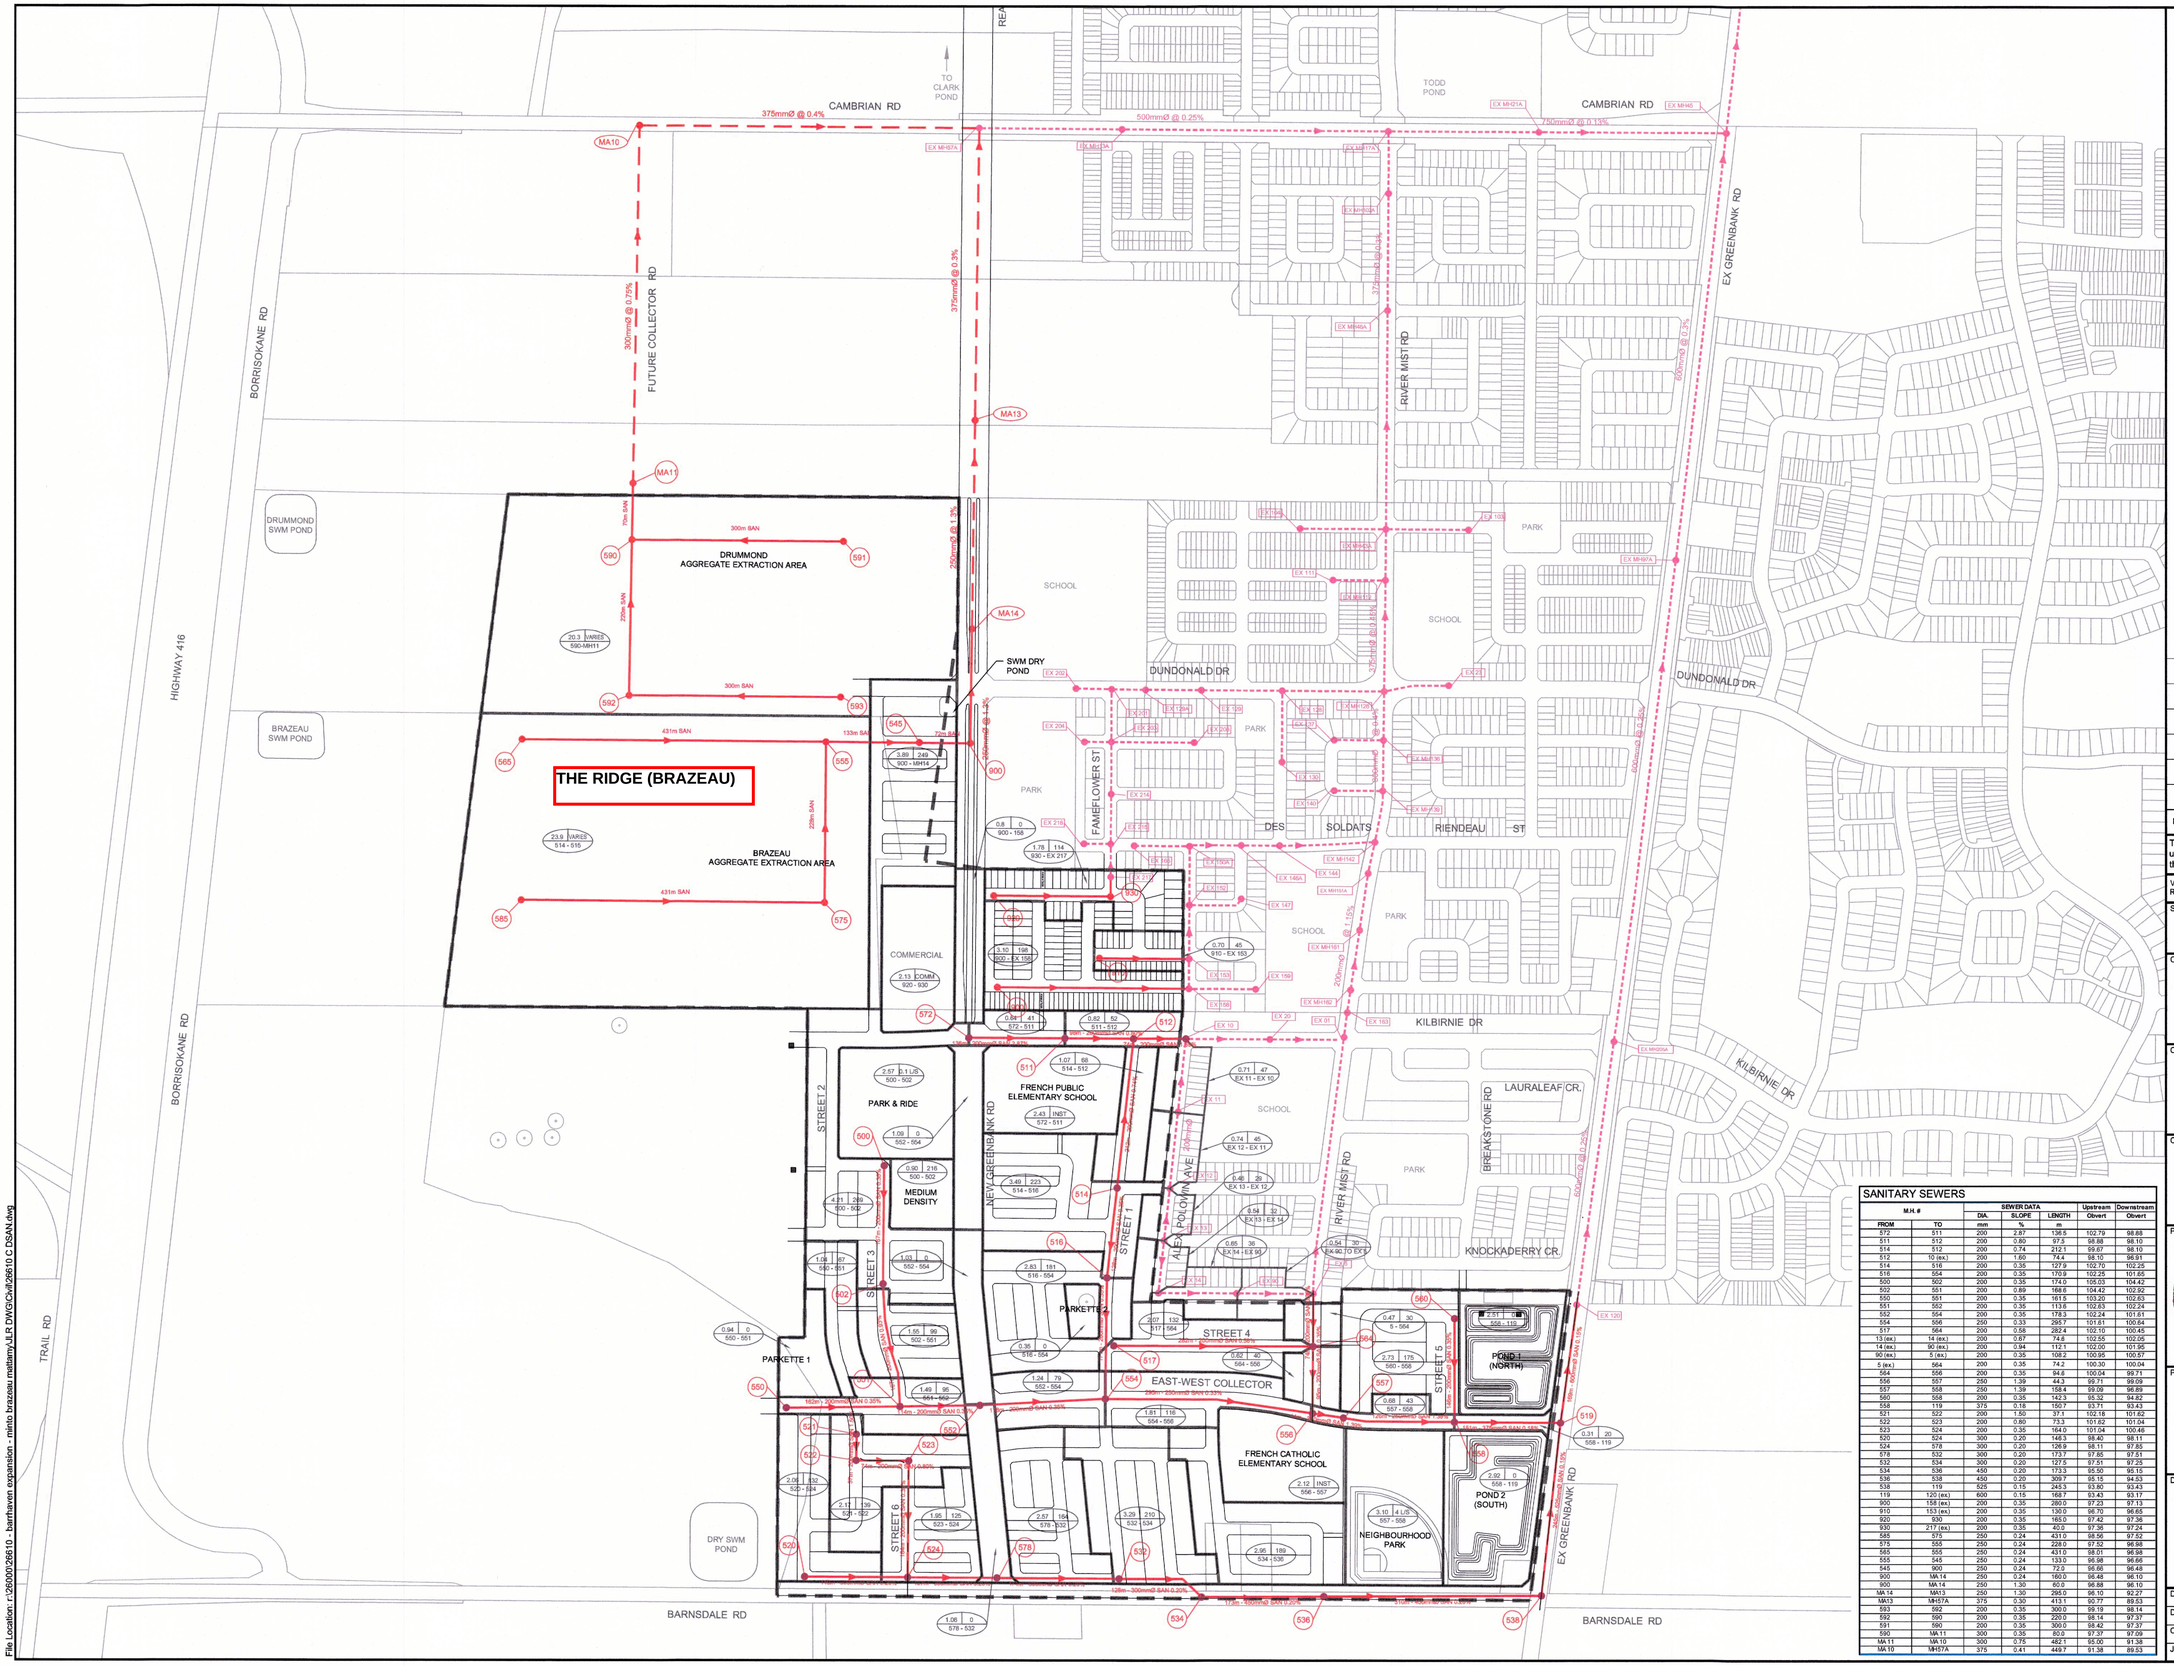
CAMBRIAN RD
TO CLARK POND
375mmØ @ 0.4%
500mmØ @ 0.25%
EX MH21A
750mmØ @ 0.13%
EX MH40
MA10
EX MH57A
EX MH57B
EX MH57C
EX MH58A
EX MH58B
EX MH46A
EX MH46B
EX MH46C
EX MH46D
EX MH46E
EX MH46F
EX MH46G
EX MH46H
EX MH46I
EX MH46J
EX MH46K
EX MH46L
EX MH46M
EX MH46N
EX MH46O
EX MH46P
EX MH46Q
EX MH46R
EX MH46S
EX MH46T
EX MH46U
EX MH46V
EX MH46W
EX MH46X
EX MH46Y
EX MH46Z
EX MH47A
EX MH47B
EX MH47C
EX MH47D
EX MH47E
EX MH47F
EX MH47G
EX MH47H
EX MH47I
EX MH47J
EX MH47K
EX MH47L
EX MH47M
EX MH47N
EX MH47O
EX MH47P
EX MH47Q
EX MH47R
EX MH47S
EX MH47T
EX MH47U
EX MH47V
EX MH47W
EX MH47X
EX MH47Y
EX MH47Z
EX MH48A
EX MH48B
EX MH48C
EX MH48D
EX MH48E
EX MH48F
EX MH48G
EX MH48H
EX MH48I
EX MH48J
EX MH48K
EX MH48L
EX MH48M
EX MH48N
EX MH48O
EX MH48P
EX MH48Q
EX MH48R
EX MH48S
EX MH48T
EX MH48U
EX MH48V
EX MH48W
EX MH48X
EX MH48Y
EX MH48Z
EX MH49A
EX MH49B
EX MH49C
EX MH49D
EX MH49E
EX MH49F
EX MH49G
EX MH49H
EX MH49I
EX MH49J
EX MH49K
EX MH49L
EX MH49M
EX MH49N
EX MH49O
EX MH49P
EX MH49Q
EX MH49R
EX MH49S
EX MH49T
EX MH49U
EX MH49V
EX MH49W
EX MH49X
EX MH49Y
EX MH49Z
EX MH50A
EX MH50B
EX MH50C
EX MH50D
EX MH50E
EX MH50F
EX MH50G
EX MH50H
EX MH50I
EX MH50J
EX MH50K
EX MH50L
EX MH50M
EX MH50N
EX MH50O
EX MH50P
EX MH50Q
EX MH50R
EX MH50S
EX MH50T
EX MH50U
EX MH50V
EX MH50W
EX MH50X
EX MH50Y
EX MH50Z
EX MH51A
EX MH51B
EX MH51C
EX MH51D
EX MH51E
EX MH51F
EX MH51G
EX MH51H
EX MH51I
EX MH51J
EX MH51K
EX MH51L
EX MH51M
EX MH51N
EX MH51O
EX MH51P
EX MH51Q
EX MH51R
EX MH51S
EX MH51T
EX MH51U
EX MH51V
EX MH51W
EX MH51X
EX MH51Y
EX MH51Z
EX MH52A
EX MH52B
EX MH52C
EX MH52D
EX MH52E
EX MH52F
EX MH52G
EX MH52H
EX MH52I
EX MH52J
EX MH52K
EX MH52L
EX MH52M
EX MH52N
EX MH52O
EX MH52P
EX MH52Q
EX MH52R
EX MH52S
EX MH52T
EX MH52U
EX MH52V
EX MH52W
EX MH52X
EX MH52Y
EX MH52Z
EX MH53A
EX MH53B
EX MH53C
EX MH53D
EX MH53E
EX MH53F
EX MH53G
EX MH53H
EX MH53I
EX MH53J
EX MH53K
EX MH53L
EX MH53M
EX MH53N
EX MH53O
EX MH53P
EX MH53Q
EX MH53R
EX MH53S
EX MH53T
EX MH53U
EX MH53V
EX MH53W
EX MH53X
EX MH53Y
EX MH53Z
EX MH54A
EX MH54B
EX MH54C
EX MH54D
EX MH54E
EX MH54F
EX MH54G
EX MH54H
EX MH54I
EX MH54J
EX MH54K
EX MH54L
EX MH54M
EX MH54N
EX MH54O
EX MH54P
EX MH54Q
EX MH54R
EX MH54S
EX MH54T
EX MH54U
EX MH54V
EX MH54W
EX MH54X
EX MH54Y
EX MH54Z
EX MH55A
EX MH55B
EX MH55C
EX MH55D
EX MH55E
EX MH55F
EX MH55G
EX MH55H
EX MH55I
EX MH55J
EX MH55K
EX MH55L
EX MH55M
EX MH55N
EX MH55O
EX MH55P
EX MH55Q
EX MH55R
EX MH55S
EX MH55T
EX MH55U
EX MH55V
EX MH55W
EX MH55X
EX MH55Y
EX MH55Z
EX MH56A
EX MH56B
EX MH56C
EX MH56D
EX MH56E
EX MH56F
EX MH56G
EX MH56H
EX MH56I
EX MH56J
EX MH56K
EX MH56L
EX MH56M
EX MH56N
EX MH56O
EX MH56P
EX MH56Q
EX MH56R
EX MH56S
EX MH56T
EX MH56U
EX MH56V
EX MH56W
EX MH56X
EX MH56Y
EX MH56Z
EX MH57A
EX MH57B
EX MH57C
EX MH57D
EX MH57E
EX MH57F
EX MH57G
EX MH57H
EX MH57I
EX MH57J
EX MH57K
EX MH57L
EX MH57M
EX MH57N
EX MH57O
EX MH57P
EX MH57Q
EX MH57R
EX MH57S
EX MH57T
EX MH57U
EX MH57V
EX MH57W
EX MH57X
EX MH57Y
EX MH57Z
EX MH58A
EX MH58B
EX MH58C
EX MH58D
EX MH58E
EX MH58F
EX MH58G
EX MH58H
EX MH58I
EX MH58J
EX MH58K
EX MH58L
EX MH58M
EX MH58N
EX MH58O
EX MH58P
EX MH58Q
EX MH58R
EX MH58S
EX MH58T
EX MH58U
EX MH58V
EX MH58W
EX MH58X
EX MH58Y
EX MH58Z
EX MH59A
EX MH59B
EX MH59C
EX MH59D
EX MH59E
EX MH59F
EX MH59G
EX MH59H
EX MH59I
EX MH59J
EX MH59K
EX MH59L
EX MH59M
EX MH59N
EX MH59O
EX MH59P
EX MH59Q
EX MH59R
EX MH59S
EX MH59T
EX MH59U
EX MH59V
EX MH59W
EX MH59X
EX MH59Y
EX MH59Z
EX MH60A
EX MH60B
EX MH60C
EX MH60D
EX MH60E
EX MH60F
EX MH60G
EX MH60H
EX MH60I
EX MH60J
EX MH60K
EX MH60L
EX MH60M
EX MH60N
EX MH60O
EX MH60P
EX MH60Q
EX MH60R
EX MH60S
EX MH60T
EX MH60U
EX MH60V
EX MH60W
EX MH60X
EX MH60Y
EX MH60Z
EX MH61A
EX MH61B
EX MH61C
EX MH61D
EX MH61E
EX MH61F
EX MH61G
EX MH61H
EX MH61I
EX MH61J
EX MH61K
EX MH61L
EX MH61M
EX MH61N
EX MH61O
EX MH61P
EX MH61Q
EX MH61R
EX MH61S
EX MH61T
EX MH61U
EX MH61V
EX MH61W
EX MH61X
EX MH61Y
EX MH61Z
EX MH62A
EX MH62B
EX MH62C
EX MH62D
EX MH62E
EX MH62F
EX MH62G
EX MH62H
EX MH62I
EX MH62J
EX MH62K
EX MH62L
EX MH62M
EX MH62N
EX MH62O
EX MH62P
EX MH62Q
EX MH62R
EX MH62S
EX MH62T
EX MH62U
EX MH62V
EX MH62W
EX MH62X
EX MH62Y
EX MH62Z
EX MH63A
EX MH63B
EX MH63C
EX MH63D
EX MH63E
EX MH63F
EX MH63G
EX MH63H
EX MH63I
EX MH63J
EX MH63K
EX MH63L
EX MH63M
EX MH63N
EX MH63O
EX MH63P
EX MH63Q
EX MH63R
EX MH63S
EX MH63T
EX MH63U
EX MH63V
EX MH63W
EX MH63X
EX MH63Y
EX MH63Z
EX MH64A
EX MH64B
EX MH64C
EX MH64D
EX MH64E
EX MH64F
EX MH64G
EX MH64H
EX MH64I
EX MH64J
EX MH64K
EX MH64L
EX MH64M
EX MH64N
EX MH64O
EX MH64P
EX MH64Q
EX MH64R
EX MH64S
EX MH64T
EX MH64U
EX MH64V
EX MH64W
EX MH64X
EX MH64Y
EX MH64Z
EX MH65A
EX MH65B
EX MH65C
EX MH65D
EX MH65E
EX MH65F
EX MH65G
EX MH65H
EX MH65I
EX MH65J
EX MH65K
EX MH65L
EX MH65M
EX MH65N
EX MH65O
EX MH65P
EX MH65Q
EX MH65R
EX MH65S
EX MH65T
EX MH65U
EX MH65V
EX MH65W
EX MH65X
EX MH65Y
EX MH65Z
EX MH66A
EX MH66B
EX MH66C
EX MH66D
EX MH66E
EX MH66F
EX MH66G
EX MH66H
EX MH66I
EX MH66J
EX MH66K
EX MH66L
EX MH66M
EX MH66N
EX MH66O
EX MH66P
EX MH66Q
EX MH66R
EX MH66S
EX MH66T
EX MH66U
EX MH66V
EX MH66W
EX MH66X
EX MH66Y
EX MH66Z
EX MH67A
EX MH67B
EX MH67C
EX MH67D
EX MH67E
EX MH67F
EX MH67G
EX MH67H
EX MH67I
EX MH67J
EX MH67K
EX MH67L
EX MH67M
EX MH67N
EX MH67O
EX MH67P
EX MH67Q
EX MH67R
EX MH67S
EX MH67T
EX MH67U
EX MH67V
EX MH67W
EX MH67X
EX MH67Y
EX MH67Z
EX MH68A
EX MH68B
EX MH68C
EX MH68D
EX MH68E
EX MH68F
EX MH68G
EX MH68H
EX MH68I
EX MH68J
EX MH68K
EX MH68L
EX MH68M
EX MH68N
EX MH68O
EX MH68P
EX MH68Q
EX MH68R
EX MH68S
EX MH68T
EX MH68U
EX MH68V
EX MH68W
EX MH68X
EX MH68Y
EX MH68Z
EX MH69A
EX MH69B
EX MH69C
EX MH69D
EX MH69E
EX MH69F
EX MH69G
EX MH69H
EX MH69I
EX MH69J
EX MH69K
EX MH69L
EX MH69M
EX MH69N
EX MH69O
EX MH69P
EX MH69Q
EX MH69R
EX MH69S
EX MH69T
EX MH69U
EX MH69V
EX MH69W
EX MH69X
EX MH69Y
EX MH69Z
EX MH70A
EX MH70B
EX MH70C
EX MH70D
EX MH70E
EX MH70F
EX MH70G
EX MH70H
EX MH70I
EX MH70J
EX MH70K
EX MH70L
EX MH70M
EX MH70N
EX MH70O
EX MH70P
EX MH70Q
EX MH70R
EX MH70S
EX MH70T
EX MH70U
EX MH70V
EX MH70W
EX MH70X
EX MH70Y
EX MH70Z
EX MH71A
EX MH71B
EX MH71C
EX MH71D
EX MH71E
EX MH71F
EX MH71G
EX MH71H
EX MH71I
EX MH71J
EX MH71K
EX MH71L
EX MH71M
EX MH71N
EX MH71O
EX MH71P
EX MH71Q
EX MH71R
EX MH71S
EX MH71T
EX MH71U
EX MH71V
EX MH71W
EX MH71X
EX MH71Y
EX MH71Z
EX MH72A
EX MH72B
EX MH72C
EX MH72D
EX MH72E
EX MH72F
EX MH72G
EX MH72H
EX MH72I
EX MH72J
EX MH72K
EX MH72L
EX MH72M
EX MH72N
EX MH72O
EX MH72P
EX MH72Q
EX MH72R
EX MH72S
EX MH72T
EX MH72U
EX MH72V
EX MH72W
EX MH72X
EX MH72Y
EX MH72Z
EX MH73A
EX MH73B
EX MH73C
EX MH73D
EX MH73E
EX MH73F
EX MH73G
EX MH73H
EX MH73I
EX MH73J
EX MH73K
EX MH73L
EX MH73M
EX MH73N
EX MH73O
EX MH73P
EX MH73Q
EX MH73R
EX MH73S
EX MH73T
EX MH73U
EX MH73V
EX MH73W
EX MH73X
EX MH73Y
EX MH73Z
EX MH74A
EX MH74B
EX MH74C
EX MH74D
EX MH74E
EX MH74F
EX MH74G
EX MH74H
EX MH74I
EX MH74J
EX MH74K
EX MH74L
EX MH74M
EX MH74N
EX MH74O
EX MH74P
EX MH74Q
EX MH74R
EX MH74S
EX MH74T
EX MH74U
EX MH74V
EX MH74W
EX MH74X
EX MH74Y
EX MH74Z
EX MH75A
EX MH75B
EX MH75C
EX MH75D
EX MH75E
EX MH75F
EX MH75G
EX MH75H
EX MH75I
EX MH75J
EX MH75K
EX MH75L
EX MH75M
EX MH75N
EX MH75O
EX MH75P
EX MH75Q
EX MH75R
EX MH75S
EX MH75T
EX MH75U
EX MH75V
EX MH75W
EX MH75X
EX MH75Y
EX MH75Z
EX MH76A
EX MH76B
EX MH76C
EX MH76D
EX MH76E
EX MH76F
EX MH76G
EX MH76H
EX MH76I
EX MH76J
EX MH76K
EX MH76L
EX MH76M
EX MH76N
EX MH76O
EX MH76P
EX MH76Q
EX MH76R
EX MH76S
EX MH76T
EX MH76U
EX MH76V
EX MH76W
EX MH76X
EX MH76Y
EX MH76Z
EX MH77A
EX MH77B
EX MH77C
EX MH77D
EX MH77E
EX MH77F
EX MH77G
EX MH77H
EX MH77I
EX MH77J
EX MH77K
EX MH77L
EX MH77M
EX MH77N
EX MH77O
EX MH77P
EX MH77Q
EX MH77R
EX MH77S
EX MH77T
EX MH77U
EX MH77V
EX MH77W
EX MH77X
EX MH77Y
EX MH77Z
EX MH78A
EX MH78B
EX MH78C
EX MH78D
EX MH78E
EX MH78F
EX MH78G
EX MH78H
EX MH78I
EX MH78J
EX MH78K
EX MH78L
EX MH78M
EX MH78N
EX MH78O
EX MH78P
EX MH78Q
EX MH78R
EX MH78S
EX MH78T
EX MH78U
EX MH78V
EX MH78W
EX MH78X
EX MH78Y
EX MH78Z
EX MH79A
EX MH79B
EX MH79C
EX MH79D
EX MH79E
EX MH79F
EX MH79G
EX MH79H
EX MH79I
EX MH79J
EX MH79K
EX MH79L
EX MH79M
EX MH79N
EX MH79O
EX MH79P
EX MH79Q
EX MH79R
EX MH79S
EX MH79T
EX MH79U
EX MH79V
EX MH79W
EX MH79X
EX MH79Y
EX MH79Z
EX MH80A
EX MH80B
EX MH80C
EX MH80D
EX MH80E
EX MH80F
EX MH80G
EX MH80H
EX MH80I
EX MH80J
EX MH80K
EX MH80L
EX MH80M
EX MH80N
EX MH80O
EX MH80P
EX MH80Q
EX MH80R
EX MH80S
EX MH80T
EX MH80U
EX MH80V
EX MH80W
EX MH80X
EX MH80Y
EX MH80Z
EX MH81A
EX MH81B
EX MH81C
EX MH81D
EX MH81E
EX MH81F
EX MH81G
EX MH81H
EX MH81I
EX MH81J
EX MH81K
EX MH81L
EX MH81M
EX MH81N
EX MH81O
EX MH81P
EX MH81Q
EX MH81R
EX MH81S
EX MH81T
EX MH81U
EX MH81V
EX MH81W
EX MH81X
EX MH81Y
EX MH81Z
EX MH82A
EX MH82B
EX MH82C
EX MH82D
EX MH82E
EX MH82F
EX MH82G
EX MH82H
EX MH82I
EX MH82J
EX MH82K
EX MH82L
EX MH82M
EX MH82N
EX MH82O
EX MH82P
EX MH82Q
EX MH82R
EX MH82S
EX MH82T
EX MH82U
EX MH82V
EX MH82W
EX MH82X
EX MH82Y
EX MH82Z
EX MH83A
EX MH83B
EX MH83C
EX MH83D
EX MH83E
EX MH83F
EX MH83G
EX MH83H
EX MH83I
EX MH83J
EX MH83K
EX MH83L
EX MH83M
EX MH83N
EX MH83O
EX MH83P
EX MH83Q
EX MH83R
EX MH83S
EX MH83T
EX MH83U
EX MH83V
EX MH83W
EX MH83X
EX MH83Y
EX MH83Z
EX MH84A
EX MH84B
EX MH84C
EX MH84D
EX MH84E
EX MH84F
EX MH84G
EX MH84H
EX MH84I
EX MH84J
EX MH84K
EX MH84L
EX MH84M
EX MH84N
EX MH84O
EX MH84P
EX MH84Q
EX MH84R
EX MH84S
EX MH84T
EX MH84U
EX MH84V
EX MH84W
EX MH84X
EX MH84Y
EX MH84Z
EX MH85A
EX MH85B
EX MH85C
EX MH85D
EX MH85E
EX MH85F
EX MH85G
EX MH85H
EX MH85I
EX MH85J
EX MH85K
EX MH85L
EX MH85M
EX MH85N
EX MH85O
EX MH85P
EX MH85Q
EX MH85R
EX MH85S
EX MH85T
EX MH85U
EX MH85V
EX MH85W
EX MH85X
EX MH85Y
EX MH85Z
EX MH86A
EX MH86B
EX MH86C
EX MH86D
EX MH86E
EX MH86F
EX MH86G
EX MH86H
EX MH86I
EX MH86J
EX MH86K
EX MH86L
EX MH86M
EX MH86N
EX MH86O
EX MH86P
EX MH86Q
EX MH86R
EX MH86S
EX MH86T
EX MH86U
EX MH86V
EX MH86W
EX MH86X
EX MH86Y
EX MH86Z
EX MH87A
EX MH87B
EX MH87C
EX MH87D
EX MH87E
EX MH87F
EX MH87G
EX MH87H
EX MH87I
EX MH87J
EX MH87K
EX MH87L
EX MH87M
EX MH87N
EX MH87O
EX MH87P
EX MH87Q
EX MH87R
EX MH87S
EX MH87T
EX MH87U
EX MH87V
EX MH87W
EX MH87X
EX MH87Y
EX MH87Z
EX MH88A
EX MH88B
EX MH88C
EX MH88D
EX MH88E
EX MH88F
EX MH88G
EX MH88H
EX MH88I
EX MH88J
EX MH88K
EX MH88L
EX MH88M
EX MH88N
EX MH88O
EX MH88P
EX MH88Q
EX MH88R
EX MH88S
EX MH88T
EX MH88U
EX MH88V
EX MH88W
EX MH88X
EX MH88Y
EX MH88Z
EX MH89A
EX MH89B
EX MH89C
EX MH89D
EX MH89E
EX MH89F
EX MH89G
EX MH89H
EX MH89I
EX MH89J
EX MH89K
EX MH89L
EX MH89M
EX MH89N
EX MH89O
EX MH89P
EX MH89Q
EX MH89R
EX MH89S
EX MH89T
EX MH89U
EX MH89V
EX MH89W
EX MH89X
EX MH89Y
EX MH89Z
EX MH90A
EX MH90B
EX MH90C
EX MH90D
EX MH90E
EX MH90F
EX MH90G
EX MH90H
EX MH90I
EX MH90J
EX MH90K
EX MH90L
EX MH90M
EX MH90N
EX MH90O
EX MH90P
EX MH90Q
EX MH90R
EX MH90S
EX MH90T
EX MH90U
EX MH90V
EX MH90W
EX MH90X
EX MH90Y
EX MH90Z
EX MH91A
EX MH91B
EX MH91C
EX MH91D
EX MH91E
EX MH91F
EX MH91G
EX MH91H
EX MH91I
EX MH91J
EX MH91K
EX MH91L
EX MH91M
EX MH91N
EX MH91O
EX MH91P
EX MH91Q
EX MH91R
EX MH91S
EX MH91T
EX MH91U
EX MH91V
EX MH91W
EX MH91X
EX MH91Y
EX MH91Z
EX MH92A
EX MH92B
EX MH92C
EX MH92D
EX MH92E
EX MH92F
EX MH92G
EX MH92H
EX MH92I
EX MH92J
EX MH92K
EX MH92L
EX MH92M
EX MH92N
EX MH92O
EX MH92P
EX MH92Q
EX MH92R
EX MH92S
EX MH92T
EX MH92U
EX MH92V
EX MH92W
EX MH92X
EX MH92Y
EX MH92Z
EX MH93A
EX MH93B
EX MH93C
EX MH93D
EX MH93E
EX MH93F
EX MH93G
EX MH93H
EX MH93I
EX MH93J
EX MH93K
EX MH93L
EX MH93M
EX MH93N
EX MH93O
EX MH93P
EX MH93Q
EX MH93R
EX MH93S
EX MH93T
EX MH93U
EX MH93V
EX MH93W
EX MH93X
EX MH93Y
EX MH93Z
EX MH94A
EX MH94B
EX MH94C
EX MH94D
EX MH94E
EX MH94F
EX MH94G
EX MH94H
EX MH94I
EX MH94J
EX MH94K
EX MH94L
EX MH94M
EX MH94N
EX MH94O
EX MH94P
EX MH94Q
EX MH94R
EX MH94S
EX MH94T
EX MH94U
EX MH94V
EX MH94W
EX MH94X
EX MH94Y
EX MH94Z
EX MH95A
EX MH95B
EX MH95C
EX MH95D
EX MH95E
EX MH95F
EX MH95G
EX MH95H
EX MH95I
EX MH95J
EX MH95K
EX MH95L
EX MH95M
EX MH95N
EX MH95O
EX MH95P
EX MH95Q
EX MH95R
EX MH95S
EX MH95T
EX MH95U
EX MH95V
EX MH95W
EX MH95X
EX MH95Y
EX MH95Z
EX MH96A
EX MH96B
EX MH96C
EX MH96D
EX MH96E
EX MH96F
EX MH96G
EX MH96H
EX MH96I
EX MH96J
EX MH96K
EX MH96L
EX MH96M
EX MH96N
EX MH96O
EX MH96P
EX MH96Q
EX MH96R
EX MH96S
EX MH96T
EX MH96U
EX MH96V
EX MH96W
EX MH96X
EX MH96Y
EX MH96Z
EX MH97A
EX MH97B
EX MH97C
EX MH97D
EX MH97E
EX MH97F
EX MH97G
EX MH97H
EX MH97I
EX MH97J
EX MH97K
EX MH97L
EX MH97M
EX MH97N
EX MH97O
EX MH97P
EX MH97Q
EX MH97R
EX MH97S
EX MH97T
EX MH97U
EX MH97V
EX MH97W
EX MH97X
EX MH97Y
EX MH97Z
EX MH98A
EX MH98B
EX MH98C
EX MH98D
EX MH98E
EX MH98F
EX MH98G
EX MH98H
EX MH98I
EX MH98J
EX MH98K
EX MH98L
EX MH98M
EX MH98N
EX MH98O
EX MH98P
EX MH98Q
EX MH98R
EX MH98S
EX MH98T
EX MH98U
EX MH98V
EX MH98W
EX MH98X
EX MH98Y
EX MH98Z
EX MH99A
EX MH99B
EX MH99C
EX MH99D
EX MH99E
EX MH99F
EX MH99G
EX MH99H
EX MH99I
EX MH99J
EX MH99K
EX MH99L
EX MH99M
EX MH99N
EX MH99O
EX MH99P
EX MH99Q
EX MH99R
EX MH99S
EX MH99T
EX MH99U
EX MH99V
EX MH99W
EX MH99X
EX MH99Y
EX MH99Z
EX MH100A
EX MH100B
EX MH100C
EX MH100D
EX MH100E
EX MH100F
EX MH100G
EX MH100H
EX MH100I
EX MH100J
EX MH100K
EX MH100L
EX MH100M
EX MH100N
EX MH100O
EX MH100P
EX MH100Q
EX MH100R
EX MH100S
EX MH100T
EX MH100U
EX MH100V
EX MH100W
EX MH100X
EX MH100Y
EX MH100Z
EX MH101A
EX MH101B
EX MH101C
EX MH101D
EX MH101E
EX MH101F
EX MH101G
EX MH101H
EX MH101I
EX MH101J
EX MH101K
EX MH101L
EX MH101M
EX MH101N
EX MH101O
EX MH101P
EX MH101Q
EX MH101R
EX MH101S
EX MH101T
EX MH101U
EX MH101V
EX MH101W
EX MH101X
EX MH101Y
EX MH101Z
EX MH102A
EX MH102B
EX MH102C
EX MH102D
EX MH102E
EX MH102F
EX MH102G
EX MH102H
EX MH102I
EX MH102J
EX MH102K
EX MH102L
EX MH102M
EX MH102N
EX MH102O
EX MH102P
EX MH102Q
EX MH102R
EX MH102S
EX MH102T
EX MH102U
EX MH102V
EX MH102W
EX MH102X
EX MH102Y
EX MH102Z
EX MH103A
EX MH103B
EX MH103C
EX MH103D
EX MH103E
EX MH103F
EX MH103G
EX MH103H
EX MH103I
EX MH103J
EX MH103K
EX MH103L
EX MH103M
EX MH103N
EX MH103O
EX MH103P
EX MH103Q
EX MH103R
EX MH103S
EX MH103T
EX MH103U
EX MH103V
EX MH103W
EX MH103X
EX MH103Y
EX MH103Z
EX MH104A
EX MH104B
EX MH104C
EX MH104D
EX MH104E
EX MH104F
EX MH104G
EX MH104H
EX MH104I
EX MH104J
EX MH104K
EX MH104L
EX MH104M
EX MH104N
EX MH104O
EX MH104P
EX MH104Q
EX MH104R
EX MH104S
EX MH104T
EX MH104U
EX MH104V
EX MH104W
EX MH104X
EX MH104Y
EX MH104Z
EX MH105A
EX MH105B
EX MH105C
EX MH105D
EX MH105E
EX MH105F
EX MH105G
EX MH105H
EX MH105I
EX MH105J
EX MH105K
EX MH105L
EX MH105M
EX MH105N
EX MH105O
EX MH105P
EX MH105Q
EX MH105R
EX MH105S
EX MH105T
EX MH105U
EX MH105V
EX MH105W
EX MH105X
EX MH105Y
EX MH105Z
EX MH106A
EX MH106B
EX MH106C
EX MH106D
EX MH106E
EX MH106F
EX MH106G
EX MH106H
EX MH106I
EX MH106J
EX MH106K
EX MH106L
EX MH106M
EX MH106N
EX MH106O
EX MH106P
EX MH106Q
EX MH106R
EX MH106S
EX MH106T
EX MH106U
EX MH106V
EX MH106W
EX MH106X
EX MH106Y
EX MH106Z
EX MH107A
EX MH107B
EX MH107C
EX MH107D
EX MH107E
EX MH107F
EX MH107G
EX MH107H
EX MH107I
EX MH107J
EX MH107K
EX MH107L
EX MH107M
EX MH107N
EX MH107O
EX MH107P
EX MH107Q
EX MH107R
EX MH107S
EX MH107T
EX MH107U
EX MH107V
EX MH107W
EX MH107X
EX MH107Y
EX MH107Z
EX MH108A
EX MH108B
EX MH108C
EX MH108D
EX MH108E
EX MH108F
EX MH108G
EX MH108H
EX MH108I
EX MH108J
EX MH108K
EX MH108L
EX MH108M
EX MH108N
EX MH108O
EX MH108P
EX MH108Q
EX MH108R
EX MH108S
EX MH108T
EX MH108U
EX MH108V
EX MH108W
EX MH108X
EX MH108Y
EX MH108Z
EX MH109A
EX MH109B
EX MH109C
EX MH109D
EX MH109E
EX MH109F
EX MH109G
EX MH109H
EX MH109I
EX MH109J
EX MH109K
EX MH109L
EX MH109M
EX MH109N
EX MH109O
EX MH109P
EX MH109Q
EX MH109R
EX MH109S
EX MH109T
EX MH109U
EX MH109V
EX MH109W
EX MH109X
EX MH109Y
EX MH109Z
EX MH110A
EX MH110B
EX MH110C
EX MH110D
EX MH110E
EX MH110F
EX MH110G
EX MH110H
EX MH110I
EX MH110J
EX MH110K
EX MH110L
EX MH110M
EX MH110N
EX MH110O
EX MH110P
EX MH110Q
EX MH110R
EX MH110S
EX MH110T
EX MH110U
EX MH110V
EX MH110W
EX MH110X
EX MH110Y
EX MH110Z
EX MH111A
EX MH111B
EX MH111C
EX MH111D
EX MH111E
EX MH111F
EX MH111G
EX MH111H
EX MH111I
EX MH111J
EX MH111K
EX MH111L
EX MH111M
EX MH111N
EX MH111O
EX MH111P
EX MH111Q
EX MH111R
EX MH111S
EX MH111T
EX MH111U
EX MH111V
EX MH111W
EX MH111X
EX MH111Y
EX MH111Z
EX MH112A
EX MH112B
EX MH112C
EX MH112D
EX MH112E
EX MH112F
EX MH112G
EX MH112H
EX MH112I
EX MH112J
EX MH112K
EX MH112L
EX MH112M
EX MH112N
EX MH112O
EX MH112P
EX MH112Q
EX MH112R
EX MH112S
EX MH112T
EX MH112U
EX MH112V
EX MH112W
EX MH112X
EX MH112Y
EX MH112Z
EX MH113A
EX MH113B
EX MH113C
EX MH113D
EX MH113E
EX MH113F
EX MH113G
EX MH113H
EX MH113I
EX MH113J
EX MH113K
EX MH113L
EX MH113M
EX MH113N
EX MH113O
EX MH113P
EX MH113Q
EX MH113R
EX MH113S
EX MH113T
EX MH113U
EX MH113V
EX MH113W
EX MH113X
EX MH113Y
EX MH113Z
EX MH114A
EX MH114B
EX MH114C
EX MH114D
EX MH114E
EX MH114F
EX MH114G
EX MH114H
EX MH114I
EX MH114J
EX MH114K
EX MH114L
EX MH114M
EX MH114N
EX MH114O
EX MH114P
EX MH114Q
EX MH114R
EX MH114S
EX MH114T
EX MH114U
EX MH114V
EX MH114W
EX MH114X
EX MH114Y
EX MH114Z
EX MH115A
EX MH115B
EX MH115C
EX MH115D
EX MH115E
EX MH115F
EX MH115G
EX MH115H
EX MH115I
EX MH115J
EX MH115K
EX MH115L
EX MH115M
EX MH115N
EX MH115O
EX MH115P
EX MH115Q
EX MH115R
EX MH115S
EX MH115T
EX MH115U
EX MH115V
EX MH115W
EX MH115X
EX MH115Y
EX MH115Z
EX MH116A
EX MH116B
EX MH116C
EX MH116D
EX MH116E
EX MH116F
EX MH116G
EX MH116H
EX MH116I
EX MH116J
EX MH116K
EX MH116L
EX MH116M
EX MH116N
EX MH116O
EX MH116P
EX MH116Q
EX MH116R
EX MH116S
EX MH116T
EX MH116U
EX MH116V
EX MH116W
EX MH116X
EX MH116Y
EX MH116Z
EX MH117A
EX MH117B
EX MH117C
EX MH117D
EX MH117E
EX MH117F
EX MH117G
EX MH117H
EX MH117I
EX MH117J
EX MH117K
EX MH117L
EX MH117M
EX MH117N
EX MH117O
EX MH117P
EX MH117Q
EX MH117R
EX MH117S
EX MH117T
EX MH117U
EX MH117V
EX MH117W
EX MH117X
EX MH117Y
EX MH117Z
EX MH118A
EX MH118B
EX MH118C
EX MH118D
EX MH118E
EX MH118F
EX MH118G
EX MH118H
EX MH118I
EX MH118J
EX MH118K
EX MH118L
EX MH118M
EX MH118N
EX MH118O
EX MH118P
EX MH118Q
EX MH118R
EX MH118S
EX MH118T
EX MH118U
EX MH118V
EX MH118W
EX MH118X
EX MH118Y
EX MH118Z
EX MH119A
EX MH119B
EX MH119C
EX MH119D
EX MH119E
EX MH119F
EX MH119G
EX MH119H
EX MH119I
EX MH119J
EX MH119K
EX MH119L
EX MH119M
EX MH119N
EX MH119O
EX MH119P
EX MH119Q
EX MH119R
EX MH119S
EX MH119T
EX MH119U
EX MH119V
EX MH119W
EX MH119X
EX MH119Y
EX MH119Z
EX MH120A
EX MH120B
EX MH120C
EX MH120D
EX MH120E
EX MH120F
EX MH120G
EX MH120H
EX MH120I
EX MH120J
EX MH120K
EX MH120L
EX MH120M
EX MH120N
EX MH120O
EX MH120P
EX MH120Q
EX MH120R
EX MH120S
EX MH120T
EX MH120U
EX MH120V
EX MH120W
EX MH120X
EX MH120Y
EX MH120Z
EX MH121A
EX MH121B
EX MH121C
EX MH121D
EX MH121E
EX MH121F
EX MH121G
EX MH121H
EX MH121I
EX MH121J
EX MH121K
EX MH121L
EX MH121M
EX MH121N
EX MH121O
EX MH121P
EX MH121Q
EX MH121R
EX MH121S
EX MH121T
EX MH121U
EX MH121V
EX MH121W
EX MH121X
EX MH121Y
EX MH121Z
EX MH122A
EX MH122B
EX MH122C
EX MH122D
EX MH122E
EX MH122F
EX MH122G
EX MH122H
EX MH122I
EX MH122J
EX MH122K
EX MH122L
EX MH122M
EX MH122N
EX MH122O
EX MH122P
EX MH122Q
EX MH122R
EX MH122S
EX MH122T
EX MH122U
EX MH122V
EX MH122W
EX MH122X
EX MH122Y
EX MH122Z
EX MH123A
EX MH123B
EX MH123C
EX MH123D
EX MH123E
EX MH123F
EX MH123G
EX MH123H
EX MH123I
EX MH123J
EX MH123K
EX MH123L
EX MH123M
EX MH123N
EX MH123O
EX MH123P
EX MH123Q
EX MH123R
EX MH123S
EX MH123T
EX MH123U
EX MH123V
EX MH123W
EX MH123X
EX MH123Y
EX MH123Z
EX MH124A
EX MH124B
EX MH124C
EX MH124D
EX MH124E
EX MH124F
EX MH124G
EX MH124H
EX MH124I
EX MH124J
EX MH124K
EX MH124L
EX MH124M
EX MH124N
EX MH124O
EX MH124P
EX MH124Q
EX MH124R
EX MH124S
EX MH124T
EX MH124U
EX MH124V
EX MH124W
EX MH124X
EX MH124Y
EX MH124Z
EX MH125A
EX MH125B
EX MH125C
EX MH125D
EX MH125E
EX MH125F
EX MH125G
EX MH125H
EX MH125I
EX MH125J
EX MH125K
EX MH125L
EX MH125M
EX MH125N
EX MH125O
EX MH125P
EX MH125Q
EX MH125R
EX MH125S
EX MH125T
EX MH125U
EX MH125V
EX MH125W
EX MH125X
EX MH125Y
EX MH125Z
EX MH126A
EX MH126B
EX MH126C
EX MH126D
EX MH126E
EX MH126F
EX MH126G
EX MH126H
EX MH126I
EX MH126J
EX MH126K
EX MH126L
EX MH126M
EX MH126N
EX MH126O
EX MH126P
EX MH126Q
EX MH126R
EX MH126S
EX MH126T
EX MH126U
EX MH126V
EX MH126W
EX MH126X
EX MH126Y
EX MH126Z
EX MH127A
EX MH127B
EX MH127C
EX MH127D
EX MH127E
EX MH127F
EX MH127G
EX MH127H
EX MH127I
EX MH127J
EX MH127K
EX MH127L
EX MH127M
EX MH127N
EX MH127O
EX MH127P
EX MH127Q
EX MH127R
EX MH127S
EX MH127T
EX MH127U
EX MH127V
EX MH127W
EX MH127X
EX MH127Y
EX MH127Z
EX MH128A
EX MH128B
EX MH128C
EX MH128D
EX MH128E
EX MH128F
EX MH128G
EX MH128H
EX MH128I
EX MH128J
EX MH128K
EX MH128L
EX MH128M
EX MH128N
EX MH128O
EX MH128P
EX MH128Q
EX MH128R
EX MH128S
EX MH128T
EX MH128U
EX MH128V
EX MH128W
EX MH128X
EX MH128Y
EX MH128Z
EX MH129A
EX MH129B
EX MH129C
EX MH129D
EX MH129E
EX MH129F
EX MH129G
EX MH129H
EX MH129I
EX MH129J
EX MH129K
EX MH129L
EX MH129M
EX MH129N
EX MH129O
EX MH129P
EX MH129Q
EX MH129R
EX MH129S
EX MH129T
EX MH129U
EX MH129V
EX MH129W
EX MH129X
EX MH129Y
EX MH129Z
EX MH130A
EX MH130B
EX MH130C
EX MH130D
EX MH130E
EX MH130F
EX MH130G
EX MH130H
EX MH130I
EX MH130J
EX MH130K
EX MH130L
EX MH130M
EX MH130N
EX MH130O
EX MH130P
EX MH130Q
EX MH130R
EX MH130S
EX MH130T
EX MH130U
EX MH130V
EX MH130W
EX MH130X
EX MH130Y
EX MH130Z
EX MH131A
EX MH131B
EX MH131C
EX MH131D
EX MH131E
EX MH131F
EX MH131G
EX MH131H
EX MH131I
EX MH131J
EX MH131K
EX MH131L
EX MH131M
EX MH131N
EX M

was assumed to have 4 washbasins that deliver 375 L/d and four (4) water closets that generate 150 L/hr for 10 hr/day resulting in a total flow of 7500 L/day.

**Table 6-3: Land Use and Theoretical Wastewater Flows**

| Land Use | Flow Rate | Area (ha) | Units | Pop. | Average Flow (L/S) | Peak Factor | Infiltration | Total Flows (L/s) |
|---|---|---|---|---|---|---|---|---|
| **Minto and Mattamy Lands** | | | | | | | | |
| Schools | 28,000 L/ha/d | 4.55 | | | 1.50 | 1.5 | 1.50 | 3.8 |
| Park Block | 4 L/s | 4.39 | | | 4.0 | 1 | 1.45 | 5.5 |
| Commercial | 28,000 L/ha/d | 2.13 | | | 0.70 | 1.5 | 0.70 | 1.8 |
| Low-Medium density Residential | 280 l/c/d | 35.26 | 1080 | 3378 | 11.0 | 2.92 | 11.64 | 43.6 |
| High Density Residential | 280 l/c/d | 0.90 | 120 | 216 | 0.7 | 3.51 | 0.30 | 2.8 |
| Roads | - | 27.00 | | | | 1 | 8.91 | 8.9 |
| Park and Ride | | 2.57 | | | 0.1 | 1 | 0.85 | 1.0 |
| **Total** | | **76.8** | **1200** | **3594** | **17.95** | | **25.35** | **67.4** |
| **Brazeau Aggregate Extraction Area** | | | | | | | | |
| Schools | 28,000 L/ha/d | 1.47 | | | 0.48 | 1.5 | 0.49 | 1.2 |
| Commercial | 28,000 L/ha/d | 0.67 | | | 0.22 | 1.5 | 0.22 | 0.6 |
| Low-Medium Density Residential | 280 l/c/d | 10.27 | 360 | 1126 | 3.65 | 3.21 | 3.39 | 15.1 |
| High Density Residential | 280 l/c/d | 0.28 | 38 | 68 | 0.22 | 3.63 | 0.09 | 0.9 |
| Roads | - | 7.95 | | | | 1 | 2.62 | 2.6 |
| Park Block | - | 1.48 | | | | 1 | 0.49 | 0.5 |
| Pond Blocks | - | 1.78 | | | | 1 | 0.59 | 0.6 |
| **Total** | | **23.9** | | **1194** | **4.57** | | **7.89** | **21.5** |
| **Drummond Aggregate Extraction Area** | | | | | | | | |
| Schools | 28,000 L/ha/d | 1.25 | | | 0.41 | 1.5 | 0.41 | 1.0 |
| Commercial | 28,000 L/ha/d | 0.57 | | | 0.18 | 1.5 | 0.19 | 0.5 |
| Low-Medium Density Residential | 280 l/c/d | 8.72 | 288 | 900 | 2.92 | 3.26 | 2.88 | 12.4 |
| High Density Residential | 280 l/c/d | 0.24 | 32 | 58 | 0.19 | 3.64 | 0.08 | 0.8 |
| Roads | - | 6.75 | | | | 1 | 2.23 | 2.2 |

| Land Use | Flow Rate | Area (ha) | Units | Pop. | Average Flow (L/S) | Peak Factor | Infiltration | Total Flows (L/s) |
|---|---|---|---|---|---|---|---|---|
| Park Blocks | - | 1.26 | | | | 1 | 0.42 | 0.4 |
| Pond Blocks | - | 1.51 | | | | 1 | 0.50 | 0.5 |
| **Total** | | **20.3** | | **958** | **3.70** | | **6.71** | **17.8** |
| **Barrhaven South Urban Expansion Area Totals** | | | | | | | | |
| **Total** | | **121.0** | | **5746** | **26.22** | | **40.0** | **106.7** |

Based on the land uses presented on the Demonstration Plan (Figure 4-2), the BSUEA would generate a peak wastewater flow of approximately 106.7 L/s.


## 6.3 Wastewater Collection System Strategy

### 6.3.1 Proposed Sewer System Layout and Sizing

A trunk sanitary sewer system layout was developed based on the ROW corridors identified on the BSUEA Demonstration Plan for the purposes of demonstrating the feasibility of providing wastewater servicing for the BSUEA lands, refer to the Key Servicing Plans. Proposed trunk sanitary sewers were sized based on the aforementioned design criteria and the drainage areas depicted on the Master Sanitary Drainage Area Drawing MSAN, refer to the BSUEA Sanitary Sewer Design Sheet (Appendix J) for detailed calculations. Final configuration and sizing of the wastewater collection system will be confirmed at detailed design of each subdivision stage. At such time, refinements may be implemented.

The proposed BSUEA trunk sanitary sewers will discharge to existing/planned sanitary sewers at the following six (6) locations, as shown on Figure 6-2:

1. The Future Collector Road
2. New Greenbank Road
3. Flameflower Street
4. Alex Polowin Avenue
5. Kilbirnie Drive
6. Greenbank Road

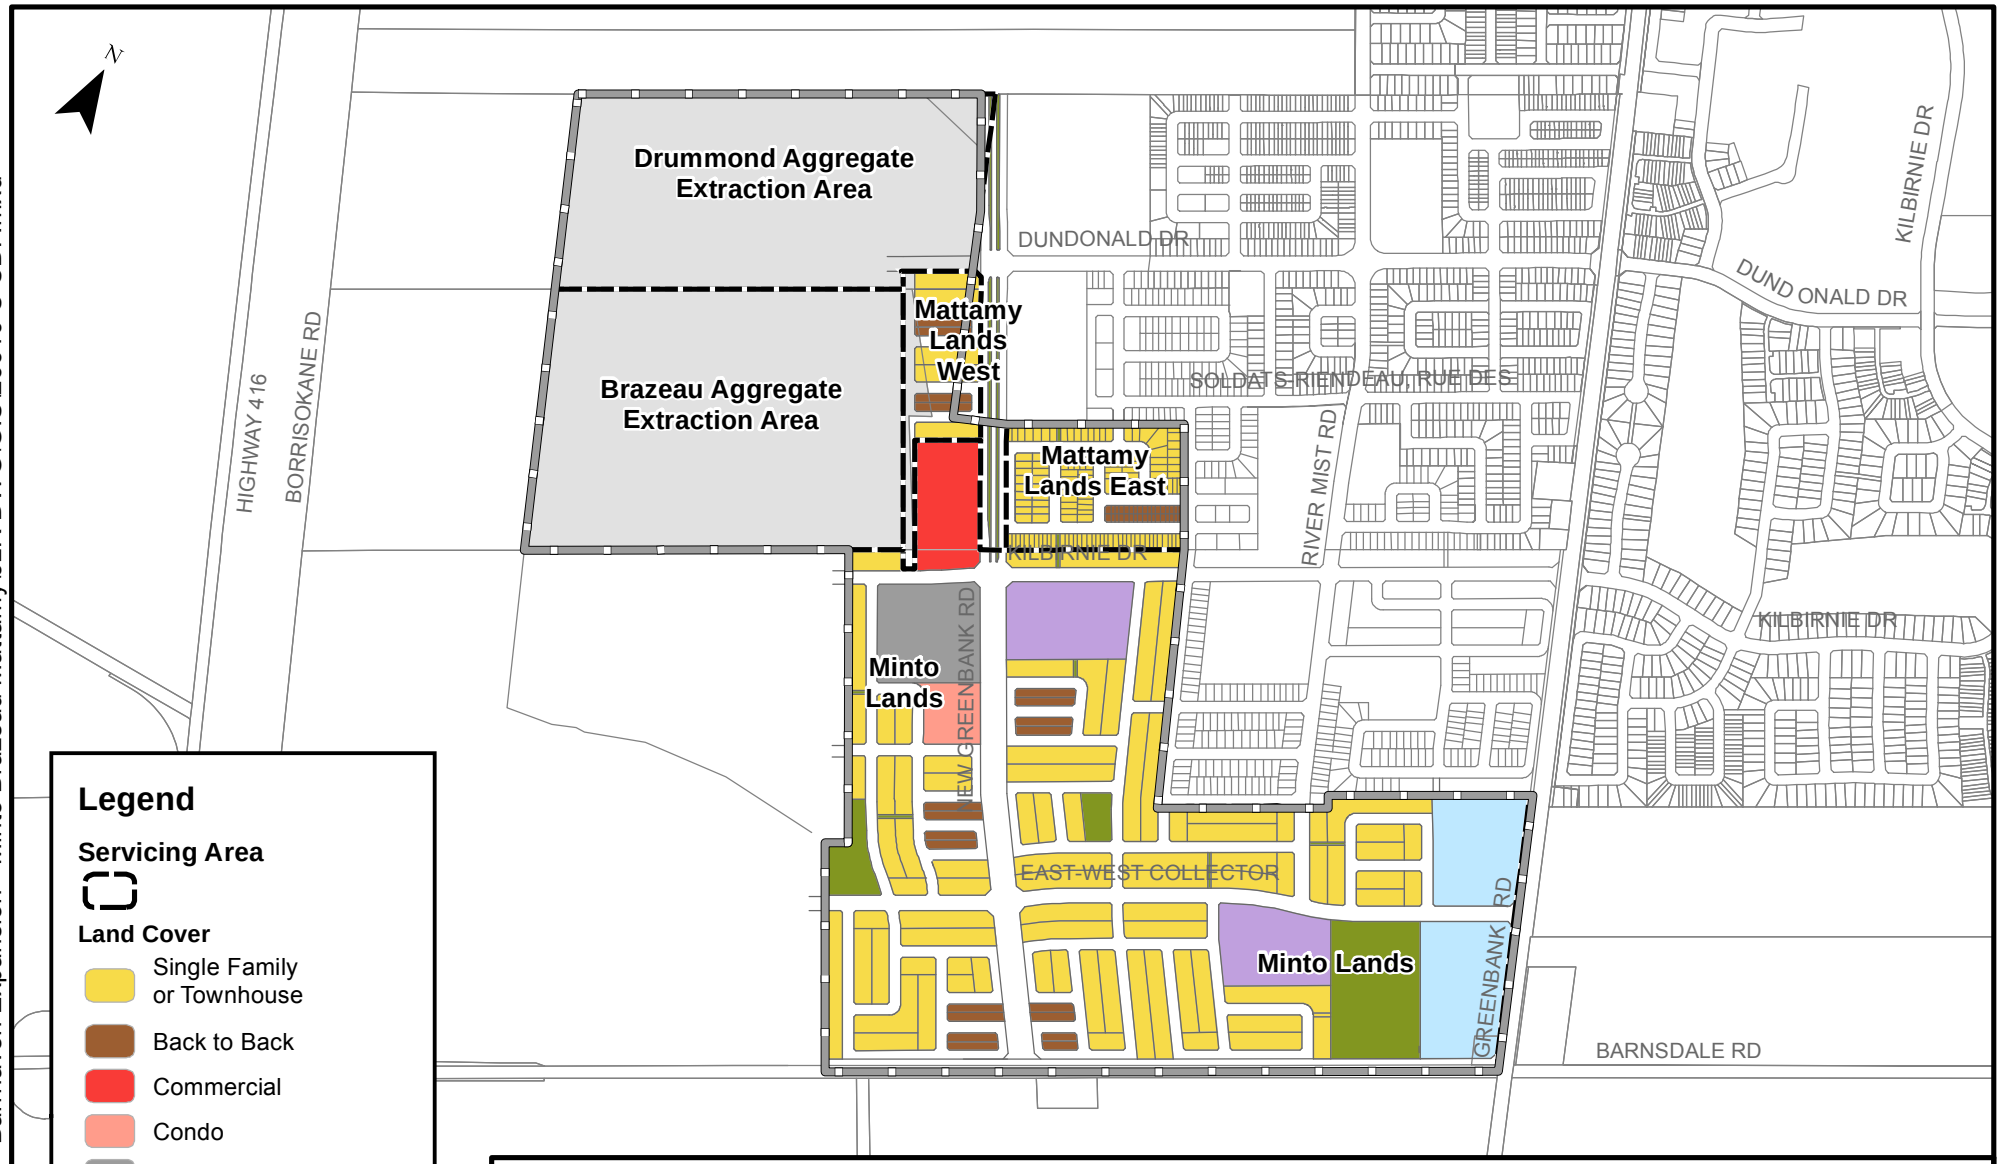


PROJECT:

BARRHAVEN SOUTH URBAN EXPANSION AREA
OTTAWA, ONTARIO

DRAWING:

CDP DEMONSTRATION PLAN AND SERVICING AREAS

J.L.Richards
ENGINEERS · ARCHITECTS · PLANNERS
www.jlrichards.ca

This drawing is copyright protected and may not be reproduced or used for purposes other than execution of the described work without the express written consent of J.L. Richards & Associates Limited.

| | |
|---|---|
| DESIGN: | BP |
| DRAWN: | KTK |
| CHECKED: | GF |
| JLR #: | 26610 |

DRAWING #:

FIGURE 4-2

File Location: R:\26000\26610 - Barrhaven Expansion - Minto Brazeau Mattamy\JLR DWG\GIS\26610 C CDP.mxd

Plot Date: April 30, 2018 3:27:45 PM

It is noted that the residual capacity in the River Mist Road trunk sanitary sewer has in fact increased with the addition of the BSUEA peak flows. This is the result of adding a relatively small tributary area while reducing the average daily residential flow from 350 L/cap to 280 L/cap combined with diverting some existing drainage areas, located in Quinn's Pointe, away from the outlet.

**Table 6-4: Residual Capacity Comparison in the BSC Trunk Sanitary Sewers**

| Existing Trunk Sanitary Sewer | Limiting Pipe reach | Current Minimum Residual Capacity | Proposed BSUEA Tributary Lands | Proposed BSUEA Tributary Area | Revised Minimum Residual Capacity with inclusion of BSUEA Peak Flow |
|---|---|---|---|---|---|
| Cambrian Road | MH 13A to MH15A | 51.4 L/s | Drummond, Brazeau, Mattamy West (Residential only) | 48 ha | 52.9 L/s |
| River Mist Road | MH 102A to MH 17A | 14.4 L/s | Mattamy East, Mattamy West (Commercial only), Northwest corner of Minto | 12 ha | 30.5 L/s |
| River Mist Road | MH 1 to MH 163 | 5.58 L/s | Minto | 5 ha | 4.63 L/s |
| Greenbank Road | MH 45 to MH 435A | 295.4 L/s | Minto | 60 ha | 283.2 L/s |

With the addition of the BSUEA lands, a total theoretical peak wastewater flow of 403.7 L/s was calculated at the most downstream maintenance hole in the BSC (MH 501A on Greenbank Road), as indicated in the Sanitary Sewer Design Sheet in Appendix J. This calculated theoretical peak flow is less than the 590 L/s allocated for all of the BSC in Stantec's City-wide 2013 Wastewater Collection System Assessment. In this assessment, Stantec created a hydrodynamic model of trunk sanitary sewers (450 mm in diameter and greater) which demonstrated that the existing downstream trunk system could accommodate the theoretical flow of 590 L/s generated by the BSC with no risk of surcharging or basement flooding. Consequently, Stantec concluded that system upgrades were not required to accommodate the anticipated growth in the BSC. Since the Stantec assessment considered a peak flow that was 186 L/s greater than that calculated for the BSC and the BSUEA combined, it is understood that the existing trunk sanitary sewers located downstream of the BSC can accommodate the additional flows generated by the BSUEA.

J.L.Richards
ENGINEERS · ARCHITECTS · PLANNERS

# BARRHAVEN SOUTH URBAN EXPANSION (BSUEA)

**CITY OF OTTAWA**
**MINTO COMMUNITIES INC.**
**JLR NO. 26610**

**BSUEA SANITARY SEWER DESIGN SHEET**

Designed by: A.T
Checked by: H.M
Date : February 2018

| DESIGN PARAMETERS | | | | | |
|---|---|---|---|---|---|
| Single Family | 3.4 | pers/unit | q = | 280 | L/cap/day |
| Semi-Detached/Townhouse (row) | 2.7 | pers/unit | I = | 0.330 | L/s/ha |
| Apt Units | 1.8 | pers/unit | Inst. = | 28000 | L/ha/day |
| Manning's Coeff. N = | 0.013 | | ICI Peaking Factor* = | 1.0/1.5 | |

*ICI Peaking Factor = 1.5 if ICI in contributing area is >20%, 1.0 if ICI in contributing area is <20%

| STREET | M.H. # | | RESIDENTIAL | | | | | | | | COMMERCIAL | | | INSTITUTIONAL | | | (Infiltration) | | | SEWER DATA | | | | | RESIDUAL | UPSTREAM | | | | DOWNSTREAM | | | | ICI Peaking Factor | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | NUMBER OF UNITS | | | | | CUMULATIVE | | PEAKING | POPUL. | | | | | | PEAK EXTR. | PLUG | PEAK DES. | DIA. | SLOPE | CAPAC. | VEL. | LENGTH | CAP. | Center | Obvert | Invert | Cover | Center | Obvert | Invert | Cover | ICI/ | P.F |
| | FROM | TO | SING. | MULT. | APT. | AREA ha | POPUL. peop. | POPUL. peop. | AREA ha | FACTOR | FLOW l/s | AREA ha | CUMM. AREA ha | INST. FLOW l/s | AREA ha | CUMM. AREA ha | INST. FLOW l/s | FLOW l/s | FLOW l/s | FLOW l/s | mm | % | l/s | m/s | m | l/s | Line | | | | Line | | | | TOTAL | |
| **MINTO LANDS WITHIN BSUEA (OUTLETS TO RIVER MIST.)** | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Kilbirnie Dr. | 572 | 511 | | 10 | | 0.64 | 27 | 27 | 0.64 | 3.69 | 0.32 | | 0.00 | 0.00 | 2.43 | 2.43 | 1.18 | 1.01 | | 2.52 | 200 | 2.87 | 57.9 | 1.79 | 136.50 | 55.40 | 107.40 | 102.79 | 102.59 | 4.61 | 103.50 | 98.88 | 98.68 | 4.62 | 0.79 | 1.50 |
| Kilbirnie Dr. | 511 | 512 | | 27 | | 0.82 | 73 | 100 | 1.46 | 3.59 | 1.16 | 0.00 | 0.00 | 0.00 | 0.00 | 2.43 | 0.79 | 1.28 | | 3.24 | 200 | 0.80 | 30.6 | 0.94 | 97.52 | 27.37 | 103.50 | 98.88 | 98.68 | 4.62 | 103.40 | 98.10 | 97.90 | 5.30 | 0.00 | 1.00 |
| Street 1 | 514 | 512 | 21 | | | 1.07 | 71 | 71 | 1.07 | 3.62 | 0.84 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.35 | | 1.19 | 200 | 0.74 | 29.4 | 0.91 | 212.06 | 28.24 | 105.60 | 99.67 | 99.47 | 5.93 | 103.40 | 98.10 | 97.90 | 5.30 | 0.00 | 1.00 |
| Kilbirnie Dr. | 512 | 10 (ex.) | | | | | 0 | 171 | 2.53 | 3.54 | 1.96 | 0.00 | 0.00 | 0.00 | 0.00 | 2.43 | 0.79 | 1.64 | | 4.39 | 200 | 1.60 | 43.3 | 1.33 | 74.41 | 38.89 | 103.40 | 98.10 | 97.90 | 5.30 | 101.18 | 96.91 | 96.71 | 4.27 | 0.00 | 1.00 |
| **MINTO LANDS WITHIN BSUEA (OUTLETS TO EXISTING GREENBANK)** | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Street 1 | 514 | 516 | 14 | 104 | | 3.49 | 328 | 328 | 3.49 | 3.45 | 3.67 | | 0.00 | 0.00 | | 0.00 | 0.00 | 1.15 | | 4.82 | 200 | 0.35 | 20.2 | 0.62 | 127.86 | 15.42 | 105.60 | 102.70 | 102.50 | 2.90 | 105.40 | 102.25 | 102.05 | 3.15 | 0.00 | 1.00 |
| Street 1 | 516 | 554 | 20 | 54 | | 3.18 | 214 | 542 | 6.67 | 3.36 | 5.91 | | 0.00 | 0.00 | | 0.00 | 0.00 | 2.20 | | 8.11 | 200 | 0.35 | 20.2 | 0.62 | 170.90 | 12.13 | 105.40 | 102.25 | 102.05 | 3.15 | 105.20 | 101.65 | 101.45 | 3.55 | 0.00 | 1.00 |
| Street 3 | 500 | 502 | 25 | 70 | 115 | 7.16 | 481 | 481 | 7.16 | 3.39 | 5.28 | | 0.00 | 0.00 | | 0.00 | 0.00 | 2.36 | 0.10 | 7.74 | 200 | 0.35 | 20.2 | 0.62 | 174.02 | 12.50 | 108.10 | 105.03 | 104.827 | 3.07 | 107.90 | 104.42 | 104.218 | 3.48 | 0.00 | 1.00 |
| Street 3 | 502 | 551 | 8 | 44 | | 1.55 | 146 | 627 | 8.71 | 3.34 | 6.78 | | 0.00 | 0.00 | | 0.00 | 0.00 | 2.87 | | 9.76 | 200 | 0.89 | 32.3 | 1.00 | 168.60 | 22.52 | 107.90 | 104.42 | 104.218 | 3.48 | 105.90 | 102.92 | 102.717 | 2.98 | 0.00 | 1.00 |
| East-West Collector | 550 | 551 | 20 | | | 1.98 | 68 | 68 | 1.98 | 3.63 | 0.80 | | 0.00 | 0.00 | | 0.00 | 0.00 | 0.65 | | 1.45 | 200 | 0.35 | 20.2 | 0.62 | 161.54 | 18.79 | 105.50 | 103.20 | 103.00 | 2.30 | 105.90 | 102.63 | 102.43 | 3.27 | 0.00 | 1.00 |
| East-West Collector | 551 | 552 | 22 | | | 1.49 | 75 | 770 | 12.18 | 3.30 | 8.23 | | 0.00 | 0.00 | | 0.00 | 0.00 | 4.02 | | 12.34 | 200 | 0.35 | 20.2 | 0.62 | 113.56 | 7.90 | 105.90 | 102.63 | 102.43 | 3.27 | 106.15 | 102.24 | 102.03 | 3.91 | 0.00 | 1.00 |
| East-West Collector | 552 | 554 | 12 | 20 | | 3.36 | 95 | 865 | 15.54 | 3.27 | 9.17 | | 0.00 | 0.00 | | 0.00 | 0.00 | 5.13 | | 14.40 | 200 | 0.35 | 20.2 | 0.62 | 178.26 | 5.84 | 106.15 | 102.24 | 102.03 | 3.91 | 105.20 | 101.61 | 101.41 | 3.59 | 0.00 | 1.00 |
| East-West Collector | 554 | 556 | 11 | 34 | | 1.81 | 129 | 1536 | 24.02 | 3.14 | 15.62 | | 0.00 | 0.00 | | 0.00 | 0.00 | 7.93 | | 23.65 | 250 | 0.33 | 35.6 | 0.70 | 295.67 | 11.99 | 105.20 | 101.61 | 101.36 | 3.59 | 103.55 | 100.64 | 100.38 | 2.91 | 0.00 | 1.00 |
| Street 4 | 517 | 564 | 20 | 35 | | 2.07 | 163 | 163 | 2.07 | 3.54 | 1.87 | | 0.00 | 0.00 | | 0.00 | 0.00 | 0.68 | | 2.55 | 200 | 0.58 | 26.2 | 0.81 | 282.43 | 23.60 | 105.30 | 102.10 | 101.90 | 3.20 | 103.65 | 100.45 | 100.25 | 3.20 | 0.00 | 1.00 |
| Alex Polowin Ave. | 13 (ex.) | 14 (ex.) | 12 | | | 0.54 | 41 | 41 | 0.54 | 3.67 | 0.49 | | 0.00 | 0.00 | | 0.00 | 0.00 | 0.18 | | 0.67 | 200 | 0.67 | 28.0 | 0.86 | 74.56 | 27.34 | 105.00 | 102.55 | 102.35 | 2.45 | 105.52 | 102.05 | 101.85 | 3.47 | 0.00 | 1.00 |
| Alex Polowin Ave. | 14 (ex.) | 90 (ex.) | 13 | | | 0.65 | 44 | 85 | 1.19 | 3.61 | 0.99 | | 0.00 | 0.00 | | 0.00 | 0.00 | 0.39 | | 1.39 | 200 | 0.94 | 33.2 | 1.02 | 112.06 | 31.79 | 105.00 | 102.00 | 101.80 | 3.00 | 103.96 | 101.95 | 101.75 | 2.01 | 0.00 | 1.00 |
| Russet Terrace | 90 (ex.) | 5 (ex.) | 6 | | | 0.54 | 20 | 105 | 1.73 | 3.59 | 1.22 | | 0.00 | 0.00 | | 0.00 | 0.00 | 0.57 | | 1.79 | 200 | 0.35 | 20.2 | 0.62 | 108.16 | 18.45 | 103.93 | 100.95 | 100.75 | 2.98 | 103.80 | 100.57 | 100.37 | 3.23 | 0.00 | 1.00 |
| River Mist Rd. | 5 (ex.) | 564 | 8 | | | 0.47 | 27 | 132 | 2.20 | 3.57 | 1.53 | | 0.00 | 0.00 | | 0.00 | 0.00 | 0.73 | | 2.25 | 200 | 0.35 | 20.2 | 0.62 | 74.22 | 17.99 | 103.90 | 100.30 | 100.10 | 3.60 | 103.80 | 100.04 | 99.84 | 3.76 | 0.00 | 1.00 |
| River Mist Rd. | 564 | 556 | 7 | 9 | | 0.64 | 48 | 343 | 4.91 | 3.44 | 3.83 | | 0.00 | 0.00 | | 0.00 | 0.00 | 1.62 | | 5.55 | 200 | 0.35 | 20.2 | 0.62 | 94.59 | 14.70 | 103.65 | 100.04 | 99.84 | 3.61 | 103.55 | 99.71 | 99.51 | 3.84 | 0.00 | 1.00 |
| East-West Collector | 556 | 557 | | | | | 0 | 1879 | 28.93 | 3.09 | 18.79 | | 0.00 | 0.00 | 2.20 | 2.20 | 0.71 | 10.27 | | 29.87 | 250 | 1.39 | 73.1 | 1.44 | 44.25 | 43.27 | 103.55 | 99.71 | 99.46 | 3.84 | 102.78 | 99.09 | 98.84 | 3.69 | 0.07 | 1.00 |
| East-West Collector | 557 | 558 | 6 | | | 1.12 | 20 | 1899 | 30.05 | 3.08 | 18.97 | | 0.00 | 0.00 | 2.86 | 5.06 | 1.64 | 11.59 | 4.00 | 36.30 | 250 | 1.39 | 73.1 | 1.44 | 158.35 | 36.85 | 102.78 | 99.09 | 98.84 | 3.69 | 99.90 | 96.89 | 96.64 | 3.01 | 0.09 | 1.00 |
| Street 5 | 560 | 558 | 50 | | | 3.09 | 170 | 170 | 3.09 | 3.54 | 1.95 | | 0.00 | 0.00 | | 0.00 | 0.00 | 1.02 | | 2.97 | 200 | 0.35 | 20.2 | 0.62 | 142.27 | 17.27 | 98.80 | 95.32 | 95.12 | 3.48 | 99.90 | 94.82 | 94.62 | 5.08 | 0.00 | 1.00 |
| East-West Collector | 558 | 119 | | | | 5.74 | 0 | 2069 | 38.88 | 3.06 | 20.51 | | 0.00 | 0.00 | | 5.06 | 1.64 | 14.50 | | 40.75 | 375 | 0.18 | 77.6 | 0.68 | 150.71 | 36.85 | 99.90 | 93.71 | 93.32 | 6.20 | 99.55 | 93.43 | 93.05 | 6.12 | 0.00 | 1.00 |
| Street 6 | 521 | 522 | 24 | 33 | | 2.17 | 171 | 171 | 2.17 | 3.54 | 1.96 | | 0.00 | 0.00 | | 0.00 | 0.00 | 0.72 | | 2.68 | 200 | 1.50 | 41.9 | 1.29 | 37.09 | 39.23 | 105.18 | 102.18 | 101.98 | 3.00 | 104.50 | 101.62 | 101.42 | 2.88 | 0.00 | 1.00 |
| | 522 | 523 | | | | | 0 | 171 | 2.17 | 3.54 | 1.96 | | 0.00 | 0.00 | | 0.00 | 0.00 | 0.72 | | 2.68 | 200 | 0.80 | 30.6 | 0.94 | 73.27 | 27.93 | 104.50 | 101.62 | 101.42 | 2.88 | 105.11 | 101.04 | 100.83 | 4.07 | 0.00 | 1.00 |
| | 523 | 524 | | 71 | | 1.95 | 192 | 363 | 4.12 | 3.43 | 4.04 | | 0.00 | 0.00 | | 0.00 | 0.00 | 1.36 | | 5.40 | 200 | 0.35 | 20.2 | 0.62 | 164.00 | 14.84 | 105.11 | 101.04 | 100.83 | 4.07 | 103.50 | 100.46 | 100.26 | 3.04 | 0.00 | 1.00 |
| Adjacent to Barnsdale Rd | 520 | 524 | 41 | | | 2.06 | 139 | 139 | 2.06 | 3.56 | 1.60 | | 0.00 | 0.00 | | 0.00 | 0.00 | 0.68 | | 2.28 | 300 | 0.20 | 45.1 | 0.62 | 146.25 | 42.83 | 102.80 | 98.40 | 98.10 | 4.40 | 103.50 | 98.11 | 97.80 | 5.39 | 0.00 | 1.00 |
| Adjacent to Barnsdale Rd | 524 | 578 | | | | | 0 | 502 | 6.18 | 3.38 | 5.50 | | 0.00 | 0.00 | | 0.00 | 0.00 | 2.04 | | 7.54 | 300 | 0.20 | 45.1 | 0.62 | 126.92 | 37.58 | 103.50 | 98.11 | 97.80 | 5.39 | 104.92 | 97.85 | 97.55 | 7.07 | 0.00 | 1.00 |
| Adjacent to Barnsdale Rd | 578 | 532 | | 87 | | 3.63 | 235 | 737 | 9.81 | 3.31 | 7.89 | | 0.00 | 0.00 | | 0.00 | 0.00 | 3.24 | | 11.13 | 300 | 0.20 | 45.1 | 0.62 | 173.72 | 33.98 | 104.92 | 97.85 | 97.55 | 7.07 | 103.80 | 97.51 | 97.20 | 6.29 | 0.00 | 1.00 |
| Adjacent to Barnsdale Rd | 532 | 534 | 50 | 26 | | 3.29 | 240 | 977 | 13.10 | 3.25 | 10.27 | | 0.00 | 0.00 | | 0.00 | 0.00 | 4.32 | | 14.60 | 300 | 0.20 | 45.1 | 0.62 | 127.45 | 30.52 | 103.80 | 97.51 | 97.20 | 6.29 | 103.00 | 97.25 | 96.95 | 5.75 | 0.00 | 1.00 |
| Adjacent to Barnsdale Rd | 534 | 536 | 55 | | | 2.96 | 187 | 1164 | 16.06 | 3.21 | 12.09 | | 0.00 | 0.00 | | 0.00 | 0.00 | 5.30 | | 17.39 | 450 | 0.20 | 133.0 | 0.81 | 173.27 | 115.63 | 103.00 | 95.50 | 95.04 | 7.50 | 101.56 | 95.15 | 94.70 | 6.41 | 0.00 | 1.00 |
| Easement (Barnsdale to E-W Collector) | 536 | 538 | | | | | 0 | 1164 | 16.06 | 3.21 | 12.09 | | 0.00 | 0.00 | | 0.00 | 0.00 | 5.30 | | 17.39 | 450 | 0.20 | 133.0 | 0.81 | 309.73 | 115.63 | 101.56 | 95.15 | 94.70 | 6.41 | 99.75 | 94.53 | 94.08 | 5.22 | 0.00 | 1.00 |
| | 538 | 119 | | | | | 0 | 1164 | 16.06 | 3.21 | 12.09 | | 0.00 | 0.00 | | 0.00 | 0.00 | 5.30 | | 17.39 | 525 | 0.15 | 173.8 | 0.78 | 245.34 | 156.37 | 99.75 | 93.80 | 93.26 | 5.95 | 99.55 | 93.43 | 92.89 | 6.12 | 0.00 | 1.00 |
| Ex. Greenbank Rd. | 119 | 120 (ex.) | | | | | 0 | 3233 | 54.94 | 2.93 | 30.72 | | 0.00 | 0.00 | | 5.06 | 1.64 | 19.80 | | 56.26 | 600 | 0.15 | 248.1 | 0.85 | 168.66 | 191.83 | 99.55 | 93.43 | 92.82 | 6.12 | | 93.17 | 92.57 | | 0.00 | 1.00 |
| | | | | | | | | | | | | | | | | | | | | | 600 | 0.25 | | | | | | | | | | | | |
| **MATTAMY LANDS EAST OUTLETS TO DUNDONALD DR. & DES SOLDATS** | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 900 | 158 (ex.) | 31 | 51 | | 3.10 | 243 | 243 | 3.10 | 3.49 | 2.75 | 0.00 | 0.00 | 0.00 | | 0.00 | 0.00 | 1.02 | | 3.77 | 200 | 0.35 | 20.2 | 0.62 | 280.00 | 16.47 | 106.62 | 97.23 | 97.02 | 9.39 | 101.03 | 97.13 | 97.13 | 3.90 | 0.00 | 1.00 |
| | 910 | 153 (ex.) | | 28 | | 0.71 | 76 | 76 | 0.71 | 3.62 | 0.89 | 0.00 | 0.00 | 0.00 | | 0.00 | 0.00 | 0.23 | | 1.12 | 200 | 0.35 | 20.2 | 0.62 | 130.00 | 19.12 | 104.00 | 96.70 | 96.49 | 7.30 | 100.35 | 96.65 | 96.65 | 3.70 | 0.00 | 1.00 |
| | 920 | 930 | 36 | | | 1.81 | 122 | 122 | 1.81 | 3.57 | 1.42 | 2.13 | 2.13 | 1.04 | | 0.00 | 0.00 | 1.30 | | 3.75 | 200 | 0.35 | 20.2 | 0.62 | 165.00 | 16.49 | 106.07 | 97.42 | 97.21 | 8.65 | 101.70 | 97.36 | 97.16 | 4.34 | 0.54 | 1.50 |
| | 930 | 217 (ex.) | | | | | | 122 | 1.81 | 3.57 | 1.42 | 0.00 | 2.13 | 1.04 | | 0.00 | 0.00 | 1.30 | | 3.75 | 200 | 0.35 | 20.2 | 0.62 | 40.00 | 16.49 | 101.70 | 97.36 | 97.16 | 4.34 | 101.70 | 97.24 | 97.04 | 4.46 | 0.54 | 1.50 |
| **BRAZEAU AGGREGATE EXTRACTION AREA OUTLETS TO NEW GREENBANK ROAD*** | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 585 | 575 | 178 | 236 | 37 | 21.77 | 1309 | 1309 | 21.77 | 3.18 | 13.48 | 0.68 | 0.68 | 0.22 | 1.45 | 1.45 | 0.47 | 7.89 | | 22.06 | 250 | 0.24 | 30.4 | 0.60 | 431.00 | 8.34 | | 98.56 | 98.30 | | | 97.52 | 97.27 | | 0.09 | 1.00 |
| | 575 | 555 | | | | | 0 | 1309 | 21.77 | | 0.00 | | 0.68 | 0.22 | | 1.45 | 0.47 | 7.89 | | 8.58 | 250 | 0.24 | 30.4 | 0.60 | 228.00 | 21.82 | | 97.52 | 97.27 | | | 96.98 | 96.72 | | 0.03 | 1.00 |
| | 565 | 555 | | | | | 0 | 0 | 0.00 | | 0.00 | | 0.00 | 0.00 | | 0.00 | 0.00 | 0.00 | | 0.00 | 250 | 0.24 | 30.4 | 0.60 | 431.00 | 30.39 | | 98.01 | 97.76 | | | 96.98 | 96.72 | | 0.00 | 1.00 |
| | 555 | 545 | | | | | 0 | 1309 | 21.77 | | 0.00 | | 0.68 | 0.22 | | 1.45 | 0.47 | 7.89 | | 8.58 | 250 | 0.24 | 30.4 | 0.60 | 133.00 | 21.82 | | 96.98 | 96.72 | | | 96.66 | 96.40 | | 0.03 | 1.00 |
| | 545 | 900 | | | | | 0 | 1309 | 21.77 | | 0.00 | | 0.68 | 0.22 | | 1.45 | 0.47 | 7.89 | | 8.58 | 250 | 0.24 | 30.4 | 0.60 | 72.00 | 21.82 | 104.31 | 96.66 | 96.40 | 7.65 | 103.00 | 96.48 | 96.23 | 6.52 | 0.03 | 1.00 |
| | 900 | MA 14 | | | | | | | | | | | | | | | | | | | 250 | 0.24 | 30.4 | 0.60 | 160.00 | 30.39 | | 96.48 | 96.23 | | | 96.10 | 95.85 | | | |
| **MATTAMY LANDS WEST OUTLETS TO NEW GREENBANK RD** | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Realigned Greenbank Rd. | 900 | MA 14 | 8 | 102 | | 3.89 | 303 | 1612 | 25.66 | 3.13 | 16.32 | 0.00 | 0.68 | 0.22 | 0.00 | 1.45 | 0.47 | 9.17 | | 26.18 | 250 | 1.30 | 70.7 | 1.40 | 60.00 | 44.55 | 104.31 | 96.88 | 96.63 | 7.43 | 103.00 | 96.10 | 95.85 | 6.90 | 0.03 | 1.00 |
| | MA 14 | MA13 | | | | 0.00 | 0 | 1612 | 25.66 | 3.13 | 16.32 | 0.00 | 0.68 | 0.22 | 0.00 | 1.45 | 0.47 | 9.17 | | 26.18 | 250 | 1.30 | 70.7 | 1.40 | 295.00 | 44.50 | 103.00 | 96.10 | 95.85 | 6.90 | 95.20 | 92.27 | 92.02 | 2.93 | 0.03 | 1.00 |
| | MA13 | MH57A | | | | | | 1612 | 25.66 | 3.13 | 16.32 | | 0.68 | 0.22 | | 1.45 | 0.47 | 9.17 | | 26.18 | 375 | 0.30 | 100.2 | 0.88 | 413.10 | 74.00 | 92.27 | 90.77 | 90.39 | 1.50 | 93.60 | 89.53 | 89.15 | 4.07 | 0.03 | 1.00 |
| **DRUMMOND AGGREGATE EXTRACTION AREA OUTLETS TO PROPOSED COLLECTOR RD.*** | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 593 | 592 | | | | | | | | | | | | | | | | | | | 200 | 0.35 | 20.2 | 0.62 | 300.00 | 20.24 | | 99.19 | 98.99 | | | 98.14 | 97.94 | | | 1.00 |
| | 592 | 590 | | | | | | | | | | | | | | | | | | | 200 | 0.35 | 20.2 | 0.62 | 220.00 | 20.24 | | 98.14 | 97.94 | | | 97.37 | 97.17 | | | 1.00 |
| | 591 | 590 | | | | | | | | | | | | | | | | | | | 200 | 0.35 | 20.2 | 0.62 | 300.00 | 20.24 | | 98.42 | 98.22 | | | 97.37 | 97.17 | | | 1.00 |
| | 590 | MA 11 | 151 | 226 | 31 | 18.48 | 1179 | 1179 | 18.48 | 3.20 | 12.24 | 0.58 | 0.58 | 0.19 | 0.40 | 0.40 | 0.13 | 6.42 | | 18.98 | 300 | 0.35 | 59.7 | 0.82 | 80.00 | 40.70 | | 97.37 | 97.07 | | 100.00 | 97.09 | 96.79 | 2.91 | 0.05 | 1.00 |
| | MA 11 | MA 10 | | | | | 0 | 1179 | 18.48 | 3.20 | 12.24 | | 0.58 | 0.19 | | 0.40 | | 6.42 | | 18.85 | 300 | 0.75 | 87.4 | 1.20 | 482.10 | 68.52 | 100.00 | 95.00 | 94.69 | 5.00 | 93.50 | 91.38 | 91.08 | 2.12 | 0.03 | 1.00 |
| | MA 10 | MH57A | | | | | 0 | 1179 | 18.48 | 3.20 | 12.24 | | 0.58 | 0.19 | | 0.40 | | 6.42 | | 18.85 | 375 | 0.41 | 117.3 | 1.03 | 449.70 | 98.47 | 93.50 | 91.38 | 91.00 | 2.12 | 93.60 | 89.53 | 89.15 | 4.07 | | 1.00 |
| | | | | | | | 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | |

*ONLY FLOW CONTRIBUTIONS FROM BSUEA ARE SHOWN, FOR SANITARY FLOWS FROM OTHER CONTRIBUTING AREAS TRIBUTARY TO CAMBRIAN ROAD, SEE OVERALL SANITARY SPREADSHEET

# BARRHAVEN SOUTH URBAN EXPANSION AREA (BSUEA)

CITY OF OTTAWA
MINTO COMMUNITIES INC.
JLR NO. 26610

## BARRHAVEN SOUTH SANITARY SEWER DESIGN SHEET

Designed by: AT
Checked by:HM
Date: February 2018

| PROPOSED AND BSUEA DESIGN PARAMETERS | | | | | |
|---|---|---|---|---|---|
| Single Family | 3.4 | pers/unit | q = | 280 | L/cap/day |
| Semi-Detached/Townhouse (row) | 2.7 | pers/unit | I = | 0.330 | L/s/ha |
| Apt Units | 1.8 | pers/unit | Inst./Comm. = | 28000 | L/ha/day |
| Manning's Coeff. N = | 0.013 | | Commerial PF*= | 1.0/1.5 | |

*1.5 if ICI in contributing area is >20%, 1.0 if ICI in contributing area is <20%

| Sources: | |
|---|---|
| | Half Moon Bay South Subdivision - Phase 4 - Excluding Arterials- Sanitary sewer design sheet prepared by Stantec (2015) |
| | Quinn's Pointe - Excluding Arterials-Sanitary sewer design sheet prepared by J.L Richards (2015) |
| | Barrhaven South Master Servicing Study Addendum - Sanitary sewer design sheet prepared Stantec (2014) |

Legend

| | |
|---|---|
| | Proposed |
| | Proposed by Others |
| | Existing |

TOTAL PEAK FLOW TO MH57A = 112.80 L/s
(USING CUMULATIVE AREAS, POPULATIONS AND PEAK FACTORS)

| STREET | SOURCE | M.H. # | | RESIDENTIAL | | | | | | | | COMMERCIAL | | | INSTITUTIONAL | | | GREEN/UNUSED | | | | | SEWER DATA | | | | | | RESIDUAL | | ICI* |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | NUMBER OF UNITS | | | AREA | POPULATION | CUMULATIVE | | PEAKING FACTOR | POPUL. FLOW | AREA | CUMM. AREA | INST. FLOW | AREA | CUMM. AREA | INST. FLOW | AREA | CUMM. AREA | PEAK EXTR. FLOW | PLUG FLOW | PEAK DES. FLOW | DIA. | SLOPE | CAPAC. | VEL. | LENGTH | CAP. | ICI/ TOTAL | Peaking Factor |
| | | FROM | TO | SING. | MULT. | APT. | TOTAL ha | TOTAL peop. | POPUL. peop. | AREA ha | | l/s | ha | ha | l/s | ha | ha | l/s | ha | ha | l/s | l/s | l/s | mm | % | l/s | m/s | m | l/s | | |
| **CAMBRIAN ROAD OUTLET VIA FUTURE REALIGNED GREENBANK AND FUTURE COLLECTOR** | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Drummond Aggregate Extraction Area | | 545 | MA11 | 151 | 226 | 31.00 | 18.48 | 1179 | 1179 | 18.48 | 3.20 | 12.24 | 0.58 | 0.58 | 0.19 | 1.23 | 1.23 | 0.40 | | 0.00 | 6.70 | | 19.5 | 300 | 0.75 | 87.4 | 1.20 | 300.00 | 67.85 | 0.09 | 1.00 |
| Future Collector Road | Stantec (2014) | MA11 | MA10 | | | | 14.23 | 1523 | 2702 | 32.71 | 2.98 | 26.13 | | 0.58 | 0.19 | 2.80 | 4.03 | 1.31 | 2.50 | 2.50 | 13.14 | | 40.77 | 300 | 0.75 | 87.4 | 1.20 | 482.10 | 46.60 | 0.12 | 1.00 |
| Cambrian Rd. | Stantec (2014) | MA10 | MH57A | | | | 12.81 | 1371 | 4073 | 45.52 | 2.86 | 37.76 | | 0.58 | 0.19 | 7.22 | 11.25 | 3.65 | 14.49 | 16.99 | 24.53 | | 66.13 | 375 | 0.40 | 115.7 | 1.01 | 449.70 | 49.55 | 0.16 | 1.00 |
| Brazeau Aggregate Extraction Area + Mattamy Lands | | 900 | MA14 | 186 | 368 | 37.00 | 25.66 | 1693 | 1693 | 25.66 | 3.11 | 17.08 | 0.68 | 0.68 | 0.22 | 1.45 | 1.45 | 0.47 | | 0.00 | 9.17 | | 26.9 | 250 | 1.30 | 70.7 | 1.40 | 350.00 | 43.80 | 0.08 | 1.00 |
| New Greenbank Road | Stantec (2014) | MA14 | MA13 | | | | 4.79 | 513 | 2206 | 30.45 | 3.04 | 21.75 | | 0.68 | 0.33 | 7.45 | 8.90 | 4.33 | | 0.00 | 13.21 | | 39.61 | 250 | 1.30 | 70.7 | 1.40 | 295.00 | 31.12 | 0.24 | 1.50 |
| New Greenbank Road | Stantec (2014) | MA13 | MH57A | | | | 10.99 | 1176 | 3382 | 41.44 | 2.92 | 31.98 | | 0.68 | 0.22 | | 8.90 | 2.88 | 0.53 | 0.53 | 17.01 | | 52.10 | 375 | 0.30 | 100.2 | 0.88 | 413.10 | 48.09 | 0.19 | 1.00 |
| Cambrian Road | Stantec | MH57A | MH13A | | | | 4.29 | 458 | 7913 | 91.25 | 2.64 | 67.80 | 3.44 | 4.70 | 1.52 | 0.00 | 20.15 | 6.53 | | 17.52 | 44.09 | | 119.95 | 500 | 0.25 | 197.0 | 0.97 | 216.50 | 77.01 | 0.19 | 1.00 |
| Cambrian Road | Stantec | MH13A | MH15A | | | | 6.21 | 634 | 8547 | 97.46 | 2.62 | 72.51 | | 4.70 | 1.52 | 0.00 | 20.15 | 6.53 | | 17.52 | 46.14 | | 126.70 | 500 | 0.20 | 176.2 | 0.87 | 165.20 | 49.46 | 0.18 | 1.00 |
| Cambrian Road | Stantec | MH15A | MH17A | | | | 5.61 | 870 | 9417 | 103.07 | 2.58 | 78.87 | | 4.70 | 1.52 | 0.00 | 20.15 | 6.53 | | 17.52 | 48.00 | | 134.92 | 600 | 0.13 | 231.0 | 0.79 | 202.00 | 96.04 | 0.17 | 1.00 |
| **QUINN'S POINTE OUTLET TO MH163 RIVER MIST RD.** | | | | | | | 103.07 | | 9417 | | | | | | | | | | | | | | | | | | | | | | |
| Kilbirnie Drive | | 572 | 511 | | 10 | | 0.64 | 27 | 27 | 0.64 | 3.69 | 0.32 | | 0.00 | 0.00 | 2.43 | 2.43 | 1.18 | | 0.00 | 1.01 | | 2.52 | 200 | 2.87 | 57.9 | 1.79 | 136.50 | 55.38 | 0.79 | 1.50 |
| Kilbirnie Drive | | 511 | 512 | | 27 | | 0.82 | 73 | 100 | 1.46 | 3.59 | 1.17 | | 0.00 | 0.00 | | 2.43 | 1.18 | | 0.00 | 1.28 | | 3.63 | 200 | 0.80 | 30.6 | 0.94 | 97.50 | 26.97 | 0.62 | 1.50 |
| Future Collector Road | | 514 | 512 | 21 | | | 1.07 | 71 | 71 | 1.07 | 3.63 | 0.83 | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | 0.35 | | 1.19 | 200 | 0.74 | 29.4 | 0.91 | 212.10 | 28.25 | 0.00 | 1.00 |
| Kilbirnie Drive | | 512 | EX10 | | | | 0.00 | 0 | 171 | 2.53 | 3.54 | 1.96 | | 0.00 | 0.00 | | 2.43 | 1.18 | | 0.00 | 1.64 | | 4.78 | 200 | 1.60 | 43.3 | 1.33 | 74.00 | 38.50 | 0.49 | 1.50 |
| River Mist Road | | EX5 | EX4 | 12 | | | 0.55 | 41 | 41 | 0.55 | 3.67 | 0.49 | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | 0.18 | | 0.67 | 200 | 0.33 | 19.8 | 0.61 | 74.90 | 19.10 | 0.00 | 1.00 |
| Boddington Street | | EX101 | EX100 | 14 | | | 0.72 | 48 | 48 | 0.72 | 3.65 | 0.57 | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | 0.24 | | 0.81 | 200 | 0.98 | 33.8 | 1.04 | 90.13 | 33.00 | 0.00 | 1.00 |
| Boddington Street | | EX100 | EX4 | 8 | | | 0.44 | 27 | 75 | 1.16 | 3.62 | 0.88 | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | 0.38 | | 1.26 | 200 | 0.91 | 32.6 | 1.01 | 91.40 | 31.34 | 0.00 | 1.00 |
| River Mist Road | | EX4 | EX3 | 12 | | | 0.53 | 41 | 157 | 2.24 | 3.55 | 1.81 | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | 0.74 | | 2.54 | 200 | 0.32 | 19.4 | 0.60 | 74.95 | 16.82 | 0.00 | 1.00 |
| Clonfadda Terrace | | EX111 | EX110 | 13 | | | 0.62 | 44 | 44 | 0.62 | 3.66 | 0.52 | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | 0.20 | | 0.73 | 200 | 1.04 | 34.8 | 1.07 | 76.25 | 34.10 | 0.00 | 1.00 |
| Clonfadda Terrace | | EX110 | EX3 | 15 | | | 0.64 | 51 | 95 | 1.26 | 3.60 | 1.11 | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | 0.42 | | 1.52 | 200 | 0.83 | 31.2 | 0.96 | 108.32 | 29.67 | 0.00 | 1.00 |
| River Mist Road | | EX3 | EX2 | 3 | | | 0.32 | 10 | 262 | 3.82 | 3.48 | 2.96 | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | 1.26 | | 4.22 | 200 | 0.35 | 20.2 | 0.62 | 100.22 | 16.00 | 0.00 | 1.00 |
| River Mist Road | | EX2 | EX1 | | 14 | | 0.55 | 38 | 300 | 4.37 | 3.46 | 3.37 | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | 1.44 | | 4.81 | 200 | 1.77 | 45.5 | 1.40 | 112.11 | 40.65 | 0.00 | 1.00 |
| Alex Polowin Avenue | | EX13 | EX12 | 11 | | | 0.46 | 37 | 37 | 0.46 | 3.67 | 0.44 | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | 0.15 | | 0.59 | 200 | 1.01 | 34.4 | 1.06 | 74.36 | 33.77 | 0.00 | 1.00 |
| Alex Polowin Avenue | | EX12 | EX11 | 24 | | | 0.74 | 82 | 119 | 1.20 | 3.58 | 1.38 | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | 0.40 | | 1.78 | 200 | 2.14 | 50.1 | 1.54 | 107.77 | 48.32 | 0.00 | 1.00 |
| Alex Polowin Avenue | | EX11 | EX10 | 17 | | | 0.71 | 58 | 177 | 1.91 | 3.53 | 2.03 | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | 0.63 | | 2.66 | 200 | 1.65 | 44.0 | 1.36 | 103.97 | 41.35 | 0.00 | 1.00 |
| Kilbirnie Drive | | EX10 | EX20 | | 14 | | 0.57 | 38 | 386 | 5.01 | 3.42 | 4.28 | | 0.00 | 0.00 | | 2.43 | 1.18 | | 0.00 | 2.46 | | 7.92 | 200 | 0.32 | 19.3 | 0.60 | 118.98 | 11.42 | 0.33 | 1.50 |
| Block 251 (School) | | Stub | EX20 | | | | 0.00 | 0 | 0 | 0.00 | 3.80 | 0.00 | | 0.00 | 0.00 | 2.83 | 2.83 | 1.38 | | 0.00 | 0.93 | | 2.31 | 200 | 0.32 | 19.3 | 0.60 | 11.00 | 16.99 | 1.00 | 1.50 |
| Kilbirnie Drive | | EX20 | EX1 | | 15 | | 0.54 | 41 | 427 | 5.55 | 3.41 | 4.71 | | 0.00 | 0.00 | | 5.26 | 2.56 | | 0.00 | 3.57 | | 10.84 | 200 | 0.32 | 19.4 | 0.60 | 106.01 | 8.52 | 0.49 | 1.50 |
| River Mist Road | | EX1 | MH163 | | | | 0.08 | 0 | 727 | 10.00 | 3.31 | 7.79 | | 0.00 | 0.00 | | 5.26 | 2.56 | | 0.00 | 5.04 | | 15.39 | 200 | 0.32 | 19.3 | 0.60 | 39.41 | 3.96 | 0.34 | 1.50 |
| **MH163 TO MH17A RIVERMIST ROAD OUTLETS VIA CAMBRIAN ROAD** | | | | | | | 10.00 | | 727 | | | | | | | | | | | | | | | | | | | | | | |
| River Mist Road | Stantec (2015) | MH163 | EX162 | | | | 0.08 | 0 | 727 | 10.08 | 3.31 | 7.79 | | 0.00 | 0.00 | | 5.26 | 2.56 | | 0.00 | 5.06 | | 15.41 | 250 | 0.85 | 57.2 | 1.13 | 36.30 | 41.78 | 0.34 | 1.50 |
| River Mist Road | | EX162 | EX161 | | | | 0.20 | 0 | 727 | 10.28 | 3.31 | 7.79 | | 0.00 | 0.00 | | 5.26 | 2.56 | | 0.00 | 5.13 | | 15.48 | 250 | 1.15 | 66.5 | 1.31 | 44.40 | 51.05 | 0.34 | 1.50 |
| River Mist Road | | EX161A | EX161 | | | | 0.00 | 0 | 0 | 0.00 | 3.80 | 0.00 | | 0.00 | 0.00 | | 0.00 | 0.00 | 0.91 | 0.91 | 0.30 | | 0.30 | 150 | 1.00 | 15.9 | 0.87 | 14.00 | 15.59 | 0.00 | 1.00 |
| River Mist Road | | EX161 | 151 | | | | 0.19 | 0 | 727 | 10.47 | 3.31 | 7.79 | | 0.00 | 0.00 | | 5.26 | 2.56 | | 0.91 | 5.49 | | 15.84 | 250 | 1.15 | 66.5 | 1.31 | 57.70 | 50.69 | 0.32 | 1.50 |
| River Mist Road | | EX151A | 151 | | | | 0.00 | 0 | 0 | 0.00 | 3.80 | 0.00 | | 0.00 | 0.00 | 2.77 | 2.77 | 1.35 | | 0.00 | 0.91 | | 2.26 | 150 | 1.00 | 15.9 | 0.87 | 12.70 | 13.63 | 1.00 | 1.50 |
| River Mist Road | | 151 | EX151 | | | | 0.09 | 0 | 727 | 10.56 | 3.31 | 7.79 | | 0.00 | 0.00 | | 8.03 | 3.90 | | 0.91 | 6.44 | | 18.13 | 300 | 1.40 | 119.4 | 1.64 | 17.90 | 101.23 | 0.41 | 1.50 |
| River Mist Road | ↓ | EX151 | MH142 | | | | 0.00 | 0 | 727 | 10.56 | 3.31 | 7.79 | | 0.00 | 0.00 | | 8.03 | 3.90 | | 0.91 | 6.44 | | 18.13 | 300 | 1.40 | 119.4 | 1.64 | 44.40 | 101.23 | 0.41 | 1.50 |
| Buffalograss Cres. | Stantec (2015) | EX159 | EX158 | | 24 | | 0.56 | 65 | 65 | 0.56 | 3.63 | 0.77 | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | 0.18 | | 0.95 | 200 | 0.40 | 21.6 | 0.67 | 95.50 | 20.69 | 0.00 | 1.00 |
| Mattamy Lands East | | 900 | EX158 | 31 | 51 | | 3.10 | 243 | 243 | 3.10 | 3.49 | 2.75 | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | 1.02 | | 3.77 | 200 | 0.35 | 20.2 | 0.62 | 280.00 | 16.46 | 0.00 | 1.00 |
| Alex Polowin ave. | | EX158 | EX153 | 0 | 0 | | 0.13 | 0 | 308 | 3.79 | 3.46 | 3.45 | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | 1.25 | | 4.70 | 200 | 0.40 | 21.6 | 0.67 | 45.00 | 16.94 | 0.00 | 1.00 |
| Mattamy Lands East | | 910 | EX153 | | 28 | | 0.71 | 76 | 76 | 0.71 | 3.62 | 0.89 | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | 0.23 | | 1.13 | 200 | 0.35 | 20.2 | 0.62 | 130.00 | 19.12 | 0.00 | 1.00 |
| Alex Polowin ave. | | EX153 | EX152 | | | | 0.12 | 0 | 384 | 4.62 | 3.42 | 4.26 | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | 1.52 | | 5.79 | 200 | 0.80 | 30.6 | 0.94 | 70.00 | 24.82 | 0.00 | 1.00 |
| Alex Polowin ave. | | EX152 | EX150 | | | | 0.00 | 0 | 384 | 4.62 | 3.42 | 4.26 | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | 1.52 | | 5.79 | 200 | 0.80 | 30.6 | 0.94 | 85.70 | 24.82 | 0.00 | 1.00 |
| Rue Des Soldats Riendeau St. | | EX165 | EX150 | 17 | | | 0.67 | 58 | 58 | 0.67 | 3.64 | 0.68 | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | 0.22 | | 0.91 | 200 | 1.50 | 41.9 | 1.29 | 101.20 | 41.00 | 0.00 | 1.00 |
| Rue Des Soldats Riendeau St. | Stantec (2015) | EX150 | EX146 | 6 | | | 0.30 | 20 | 462 | 5.59 | 3.39 | 5.08 | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | 1.84 | | 6.93 | 200 | 0.80 | 30.6 | 0.94 | 72.00 | 23.68 | 0.00 | 1.00 |

# BARRHAVEN SOUTH URBAN EXPANSION AREA (BSUEA)

CITY OF OTTAWA
MINTO COMMUNITIES INC.
JLR NO. 26610

## BARRHAVEN SOUTH SANITARY SEWER DESIGN SHEET

Designed by: AT
Checked by:HM

| PROPOSED AND BSUEA DESIGN PARAMETERS | | | | | |
|---|---|---|---|---|---|
| Single Family | 3.4 | pers/unit | q = | 280 | L/cap/day |
| Semi-Detached/Townhouse (row) | 2.7 | pers/unit | I = | 0.330 | L/s/ha |
| Apt Units | 1.8 | pers/unit | Inst./Comm. = | 28000 | L/ha/day |
| Manning's Coeff. N = | 0.013 | | Commerial PF*= | 1.0/1.5 | |

*1.5 if ICI in contributing area is >20%, 1.0 if ICI in contributing area is <20%

| Sources: | |
|---|---|
| | Half Moon Bay South Subdivision - Phase 4 - Excluding Arterials- Sanitary sewer design sheet prepared by Stantec (2015) |
| | Quinn's Pointe - Excluding Arterials-Sanitary sewer design sheet prepared by J.L Richards (2015) |
| | Barrhaven South Master Servicing Study Addendum - Sanitary sewer design sheet prepared Stantec (2014) |

| Legend | |
|---|---|
| | Proposed |
| | Proposed by Others |
| | Existing |

Date: February 2018

| STREET | SOURCE | M.H. # | | RESIDENTIAL | | | | | | | | COMMERCIAL | | | INSTITUTIONAL | | | GREEN/UNUSED | | PEAK EXTR. | PLUG | PEAK DES. | SEWER DATA | | | | | RESIDUAL | | ICI* |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | NUMBER OF UNITS | | | AREA | POPULATION | CUMULATIVE | | PEAKING | POPUL. | AREA | CUMM. | INST. | AREA | CUMM. | INST. | AREA | CUMM. | | | | | | | | | | |
| | | FROM | TO | SING. | MULT. | APT. | TOTAL ha | TOTAL peop. | POPUL. peop. | AREA ha | FACTOR | FLOW l/s | ha | AREA ha | FLOW l/s | ha | AREA ha | FLOW l/s | ha | AREA ha | FLOW l/s | FLOW l/s | FLOW l/s | DIA. mm | SLOPE % | CAPAC. l/s | VEL. m/s | LENGTH m | CAP. l/s | ICI/ TOTAL | Peaking Factor |
| Remora Way | | EX147 | EX146 | 20 | | | 0.94 | 68 | 68 | 0.94 | 3.63 | 0.80 | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | 0.31 | | 1.11 | 200 | 1.00 | 34.2 | 1.06 | 78.20 | 33.11 | 0.00 | 1.00 |
| Rue Des Soldats Riendeau St. | | EX146 | EX145 | 2 | | | 0.08 | 7 | 537 | 6.61 | 3.37 | 5.86 | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | 2.18 | | 8.04 | 200 | 0.50 | 24.2 | 0.75 | 19.30 | 16.15 | 0.00 | 1.00 |
| Rue Des Soldats Riendeau St. | | EX145 | EX144 | | | | 0.07 | 0 | 537 | 6.68 | 3.37 | 5.86 | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | 2.20 | | 8.06 | 200 | 0.50 | 24.2 | 0.75 | 35.90 | 16.13 | 0.00 | 1.00 |
| Rue Des Soldats Riendeau St. | | EX144 | EX143 | 9 | | | 0.54 | 31 | 568 | 7.22 | 3.36 | 6.18 | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | 2.38 | | 8.56 | 200 | 0.50 | 24.2 | 0.75 | 114.90 | 15.63 | 0.00 | 1.00 |
| Rue Des Soldats Riendeau St. | | EX143 | MH142 | | | | 0.00 | 0 | 568 | 7.22 | 3.36 | 6.18 | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | 2.38 | | 8.56 | 200 | 0.40 | 21.6 | 0.67 | 21.50 | 13.08 | 0.00 | 1.00 |
| River Mist Road | | MH142 | EX139 | 3 | | | 0.26 | 10 | 1305 | 18.04 | 3.18 | 13.44 | | 0.00 | 0.00 | | 8.03 | 3.90 | | 0.91 | 8.90 | | 26.25 | 300 | 0.40 | 63.8 | 0.87 | 74.80 | 37.56 | 0.30 | 1.50 |
| | | EX140 | EX139 | 7 | | | 0.40 | 24 | 24 | 0.40 | 3.70 | 0.29 | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | 0.13 | | 0.42 | 200 | 0.65 | 27.6 | 0.85 | 67.70 | 27.17 | 0.00 | 1.00 |
| River Mist Road | | EX139 | EX136 | 10 | | | 0.47 | 34 | 1363 | 18.91 | 3.17 | 13.99 | | 0.00 | 0.00 | | 8.03 | 3.90 | | 0.91 | 9.19 | | 27.08 | 300 | 0.41 | 64.6 | 0.89 | 64.70 | 37.51 | 0.29 | 1.50 |
| | | EX137 | EX136 | 15 | | | 0.84 | 51 | 51 | 0.84 | 3.65 | 0.60 | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | 0.28 | | 0.88 | 200 | 0.65 | 27.6 | 0.85 | 67.80 | 26.71 | 0.00 | 1.00 |
| River Mist Road | | EX136 | MH126 | 4 | | | 0.29 | 14 | 1428 | 20.04 | 3.16 | 14.60 | | 0.00 | 0.00 | | 8.03 | 3.90 | | 0.91 | 9.56 | | 28.07 | 300 | 0.41 | 64.6 | 0.89 | 78.90 | 36.52 | 0.28 | 1.50 |
| Mattamy Lands East | | 920 | 930 | 36 | | | 1.83 | 122 | 122 | 1.83 | 3.58 | 1.41 | 2.13 | 2.13 | 1.04 | | 0.00 | 0.00 | | 0.00 | 1.31 | | 3.76 | 200 | 0.35 | 20.2 | 0.62 | 165.00 | 15.50 | 0.54 | 1.50 |
| Mattamy Lands East | | 930 | EX217 | | | | | 0 | 122 | 1.83 | 3.58 | 1.41 | | 2.13 | 1.04 | | 0.00 | 0.00 | | 0.00 | 1.31 | | 3.76 | 200 | 0.36 | 20.5 | 0.63 | 40.00 | 15.50 | 0.54 | 1.50 |
| Flameflower St. | | EX217 | EX215 | | | | 0.05 | 0 | 122 | 1.88 | 3.58 | 1.41 | | 2.13 | 1.04 | | 0.00 | 0.00 | | 0.00 | 1.32 | | 3.77 | 200 | 2.00 | 48.4 | 1.49 | 34.50 | 44.62 | 0.53 | 1.50 |
| Flameflower St. | Stantec (2015) | EX216 | EX215 | | 5 | | 0.19 | 14 | 14 | 0.19 | 3.72 | 0.17 | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | 0.06 | | 0.23 | 200 | 0.65 | 27.6 | 0.85 | 45.20 | 27.35 | 0.00 | 1.00 |
| Flameflower St. | | EX215 | EX214 | | 15 | | 0.34 | 41 | 177 | 2.41 | 3.53 | 2.03 | | 2.13 | 1.04 | | 0.00 | 0.00 | | 0.00 | 1.50 | | 4.56 | 200 | 2.00 | 48.4 | 1.49 | 72.00 | 43.83 | 0.47 | 1.50 |
| Flameflower St. | | EX214 | EX203 | | 15 | | 0.35 | 41 | 218 | 2.76 | 3.51 | 2.48 | | 2.13 | 1.04 | | 0.00 | 0.00 | | 0.00 | 1.61 | | 5.13 | 200 | 2.00 | 48.4 | 1.49 | 73.50 | 43.26 | 0.44 | 1.50 |
| Devario Cres. | | EX204 | EX203 | | | | 0.54 | 62 | 62 | 0.54 | 3.64 | 0.73 | | 0.00 | 0.00 | | 0.00 | 0.00 | 3.10 | 3.10 | 1.20 | | 1.93 | 200 | 1.50 | 41.9 | 1.29 | 36.50 | 39.97 | 0.00 | 1.00 |
| Devario Cres. | | EX208 | EX203 | | | | 2.50 | 187 | 187 | 2.50 | 3.53 | 2.14 | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | 0.83 | | 2.96 | 200 | 0.40 | 21.6 | 0.67 | 120.00 | 18.68 | 0.00 | 1.00 |
| Flameflower St. | | EX203 | EX201 | | | | 0.12 | 0 | 467 | 5.92 | 3.39 | 5.13 | | 2.13 | 0.69 | | 0.00 | 0.00 | | 3.10 | 3.68 | | 9.50 | 200 | 0.40 | 21.6 | 0.67 | 73.70 | 12.14 | 0.19 | 1.00 |
| Dundonald Dr. | | EX202 | EX201 | 4 | | | 0.53 | 14 | 14 | 0.53 | 3.72 | 0.17 | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | 0.17 | | 0.34 | 200 | 3.25 | 61.7 | 1.90 | 50.00 | 61.34 | 0.00 | 1.00 |
| Dundonald Dr. | | EX201 | EX129A | 3 | | | 0.21 | 10 | 491 | 6.66 | 3.38 | 5.38 | | 2.13 | 0.69 | | 0.00 | 0.00 | | 3.10 | 3.92 | | 10.00 | 200 | 0.40 | 21.6 | 0.67 | 47.80 | 11.64 | 0.18 | 1.00 |
| Dundonald Dr. | | EX129A | EX129 | 18 | | | 0.75 | 61 | 552 | 7.41 | 3.36 | 6.01 | | 2.13 | 0.69 | | 0.00 | 0.00 | | 3.10 | 4.17 | | 10.87 | 200 | 0.40 | 21.6 | 0.67 | 100.90 | 10.77 | 0.17 | 1.00 |
| Dundonald Dr. | | EX129 | EX128 | 11 | | | 0.58 | 37 | 589 | 7.99 | 3.35 | 6.39 | | 2.13 | 0.69 | | 0.00 | 0.00 | | 3.10 | 4.36 | | 11.45 | 200 | 0.40 | 21.6 | 0.67 | 91.70 | 10.19 | 0.16 | 1.00 |
| Lamprey St. | | EX130 | EX128 | | | | 1.16 | 85 | 85 | 1.16 | 3.61 | 0.99 | | 0.00 | 0.00 | | 0.00 | 0.00 | 0.40 | 0.40 | 0.51 | | 1.51 | 200 | 0.50 | 24.2 | 0.75 | 96.50 | 22.69 | 0.00 | 1.00 |
| Dundonald Dr. | | EX128 | EX127 | 9 | | | 0.37 | 31 | 705 | 9.52 | 3.31 | 7.57 | | 2.13 | 0.69 | | 0.00 | 0.00 | | 3.50 | 5.00 | | 13.26 | 200 | 0.50 | 24.2 | 0.75 | 49.80 | 10.93 | 0.14 | 1.00 |
| Dundonald Dr. | | EX127 | MH126 | 13 | | | 0.66 | 44 | 749 | 10.18 | 3.30 | 8.01 | | 2.13 | 0.69 | | 0.00 | 0.00 | | 3.50 | 5.22 | | 13.92 | 200 | 0.32 | 19.4 | 0.60 | 97.80 | 5.43 | 0.13 | 1.00 |
| Dundonald Dr. | | EX23 | MH126 | | | | 1.06 | 71 | 71 | 1.06 | 3.63 | 0.83 | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | 0.35 | | 1.18 | 200 | 1.47 | 41.5 | 1.28 | 89.30 | 40.30 | 0.00 | 1.00 |
| School | | EX123A | EX123 | | | | 0.00 | 0 | 0 | 0.00 | 3.80 | 0.00 | | 0.00 | 0.00 | 2.06 | 2.06 | 1.00 | | 0.00 | 0.68 | | 1.68 | 250 | 0.89 | 58.5 | 1.16 | 15.80 | 56.85 | 1.00 | 1.50 |
| River Mist. Dr. | | MH126 | EX123 | | 5 | | 0.29 | 14 | 2262 | 31.57 | 3.03 | 22.25 | | 2.13 | 1.04 | | 8.03 | 3.90 | | 4.41 | 15.23 | | 42.41 | 375 | 0.45 | 122.7 | 1.08 | 122.00 | 80.29 | 0.22 | 1.50 |
| River Mist. Rd. | | EX123 | MH112 | | 7 | | 0.34 | 19 | 2281 | 31.91 | 3.03 | 22.42 | | 2.13 | 1.04 | | 10.09 | 4.90 | | 4.41 | 16.02 | | 44.38 | 375 | 0.42 | 118.5 | 1.04 | 90.30 | 74.16 | 0.25 | 1.50 |
| White Arctic Ave. | | EX111 | MH112 | | | | 3.39 | 378 | 378 | 3.39 | 3.43 | 4.20 | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | 1.12 | | 5.32 | 200 | 0.32 | 19.4 | 0.60 | 74.80 | 14.04 | 0.00 | 1.00 |

# BARRHAVEN SOUTH URBAN EXPANSION AREA (BSUEA)

CITY OF OTTAWA
MINTO COMMUNITIES INC.
JLR NO. 26610

## BARRHAVEN SOUTH SANITARY SEWER DESIGN SHEET

Designed by: AT
Checked by:HM

| PROPOSED AND BSUEA DESIGN PARAMETERS | | | | | |
|---|---|---|---|---|---|
| Single Family | 3.4 | pers/unit | q = | 280 | L/cap/day |
| Semi-Detached/Townhouse (row) | 2.7 | pers/unit | I = | 0.330 | L/s/ha |
| Apt Units | 1.8 | pers/unit | Inst./Comm. = | 28000 | L/ha/day |
| Manning's Coeff. N = | 0.013 | | Commerial PF*= | 1.0/1.5 | |

*1.5 if ICI in contributing area is >20%, 1.0 if ICI in contributing area is <20%

Sources:
- Half Moon Bay South Subdivision - Phase 4 - Excluding Arterials- Sanitary sewer design sheet prepared by Stantec (2015)
- Quinn's Pointe - Excluding Arterials-Sanitary sewer design sheet prepared by J.L Richards (2015)
- Barrhaven South Master Servicing Study Addendum - Sanitary sewer design sheet prepared Stantec (2014)

Legend
- Proposed
- Proposed by Others
- Existing

Date: February 2018

| STREET | SOURCE | M.H. # | | RESIDENTIAL NUMBER OF UNITS | | | RESIDENTIAL AREA | RESIDENTIAL POPULATION | RESIDENTIAL CUMULATIVE | | PEAKING FACTOR | POPUL. FLOW | COMMERCIAL | | | INSTITUTIONAL | | | GREEN/UNUSED | | | PEAK EXTR. FLOW | PLUG FLOW | PEAK DES. FLOW | SEWER DATA | | | | | RESIDUAL | ICI | ICI* |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | | | | | AREA | CUMM. AREA | INST. FLOW | AREA | CUMM. AREA | INST. FLOW | AREA | CUMM. AREA | | | | DIA. | SLOPE | CAPAC. | VEL. | LENGTH | CAP. | | Peaking |
| | | FROM | TO | SING. | MULT. | APT. | TOTAL ha | TOTAL peop. | POPUL. peop. | AREA ha | | l/s | ha | ha | l/s | ha | ha | l/s | ha | ha | l/s | l/s | l/s | mm | % | l/s | m/s | m | l/s | TOTAL | Factor |
| River Mist. Rd. | | MH112 | EX102 | | | | 0.14 | 0 | 2659 | 35.44 | 2.99 | 25.76 | | 2.13 | 1.04 | | 10.09 | 4.90 | | 4.41 | | 17.18 | | 48.88 | 375 | 0.31 | 101.8 | 0.89 | 68.00 | 52.96 | 0.23 | 1.50 |
| Dutchmans Way | | EX103 | EX102 | 18 | | | 0.80 | 61 | 61 | 0.80 | 3.64 | 0.72 | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | | 0.26 | | 0.98 | 200 | 2.02 | 48.6 | 1.50 | 120.00 | 47.65 | 0.00 | 1.00 |
| Song Sparrow St. | | EX104 | EX102 | | | | 3.83 | 386 | 386 | 3.83 | 3.42 | 4.28 | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | | 1.26 | | 5.55 | 200 | 0.44 | 22.7 | 0.70 | 114.60 | 17.15 | 0.00 | 1.00 |
| River Mist Road | Stantec (2015) | EX102 | EX101 | | | | 0.07 | 0 | 3106 | 40.14 | 2.94 | 29.63 | | 2.13 | 1.04 | | 10.09 | 4.90 | | 4.41 | | 18.73 | | 54.30 | 375 | 0.29 | 98.5 | 0.86 | 34.00 | 44.20 | 0.22 | 1.50 |
| | Stantec (2014) | EX101 | MH43A | | | | 0.00 | 0 | 3106 | 40.14 | 2.94 | 29.63 | | 2.13 | 1.04 | | 10.09 | 4.90 | | 4.41 | | 18.73 | | 54.30 | 375 | 0.30 | 100.2 | 0.88 | 38.00 | 45.88 | 0.22 | 1.50 |
| | | MH43A | MH44A | | | | 6.56 | 352 | 3458 | 46.70 | 2.91 | 32.63 | | 2.13 | 0.69 | | 10.09 | 3.27 | | 4.41 | | 20.90 | | 57.49 | 375 | 0.30 | 100.2 | 0.88 | 81.00 | 42.70 | 0.19 | 1.00 |
| | | MH44A | MH45A | | | | 0.00 | 0 | 3458 | 46.70 | 2.91 | 32.63 | | 2.13 | 0.69 | | 10.09 | 3.27 | | 4.41 | | 20.90 | | 57.49 | 375 | 0.30 | 100.2 | 0.88 | 64.00 | 42.70 | 0.19 | 1.00 |
| | | MH45A | MH46A | | | | 0.00 | 0 | 3458 | 46.70 | 2.91 | 32.63 | | 2.13 | 0.69 | | 10.09 | 3.27 | | 4.41 | | 20.90 | | 57.49 | 375 | 0.30 | 100.2 | 0.88 | 85.00 | 42.70 | 0.19 | 1.00 |
| | | MH46A | MH47A | | | | 8.40 | 562 | 4020 | 55.10 | 2.87 | 37.33 | | 2.13 | 0.69 | | 10.09 | 3.27 | 1.60 | 6.01 | | 24.20 | | 65.49 | 375 | 0.30 | 100.2 | 0.88 | 41.00 | 34.70 | 0.17 | 1.00 |
| | | MH47A | MH101A | | | | 0.00 | 0 | 4020 | 55.10 | 2.87 | 37.33 | | 2.13 | 0.69 | | 10.09 | 3.27 | | 6.01 | | 24.20 | | 65.49 | 375 | 0.30 | 100.2 | 0.88 | 64.00 | 34.70 | 0.17 | 1.00 |
| | | MH101A | MH102A | | | | 0.00 | 0 | 4020 | 55.10 | 2.87 | 37.33 | | 2.13 | 0.69 | | 10.09 | 3.27 | | 6.01 | | 24.20 | | 65.49 | 375 | 0.30 | 100.2 | 0.88 | 64.00 | 34.70 | 0.17 | 1.00 |
| River Mist Road | Stantec (2014) | MH102A | MH17A | | | | 5.24 | 420 | 4440 | 60.34 | 2.83 | 40.78 | | 2.13 | 0.69 | | 10.09 | 3.27 | | 6.01 | | 25.93 | | 70.67 | 375 | 0.30 | 100.2 | 0.88 | 81.00 | 29.52 | 0.16 | 1.00 |
| **CAMBRIAN RD. FROM MH17A TO MH45A** | | | | | | | 60.34 | 4440 | | | | | | | | | | | | | | | | | | | | | | | |
| Cambrian Rd. | Stantec (2014) | MH17A | MH21A | | | | 26.01 | 1956 | 15813 | 189.42 | 2.76 | 141.19 | | 6.83 | 2.21 | 2.96 | 33.20 | 10.76 | 5.10 | 28.63 | | 75.72 | | 229.88 | 750 | 0.13 | 419.5 | 0.92 | 204.30 | 189.62 | 0.16 | 1.00 |
| Cambrian Rd. | Stantec (2014) | MH21A | MH45 | | | | 7.04 | 408 | 16221 | 196.46 | 2.74 | 144.25 | | 6.83 | 2.21 | | 33.20 | 10.76 | 0.00 | 28.63 | | 78.04 | | 235.26 | 750 | 0.13 | 419.5 | 0.92 | 277.80 | 184.24 | 0.15 | 1.00 |
| **MINTO LANDS WITHIN BSUEA OUTLETS TO 120 (QUINN'S POINTE) EXISTING GREENBANK RD.** | | | | | | | 196.46 | | | | | | | | | | | | | | | | | | | | | | | | |
| Future Collector | | 514 | 516 | 16 | 104 | | 3.49 | 335 | 335 | 3.49 | 3.45 | 3.74 | | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | 0.00 | | 1.15 | | 4.89 | 200 | 0.35 | 20.2 | 0.62 | 127.90 | 15.35 | 0.00 | 1.00 |
| Future Collector | | 516 | 554 | 20 | 54 | | 3.18 | 214 | 549 | 6.67 | 3.36 | 5.98 | | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | 0.00 | | 2.20 | | 8.18 | 200 | 0.35 | 20.2 | 0.62 | 170.90 | 12.06 | 0.00 | 1.00 |
| Future Collector | | | | | | | | | | | | | | | | 0.00 | | | | | | | | | | | | | | | |
| Future Collector | | 500 | 502 | 25 | 70 | 115 | 7.16 | 481 | 481 | 7.16 | 3.39 | 5.28 | | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | 0.00 | | 2.36 | 0.10 | 7.74 | 200 | 0.35 | 20.2 | 0.62 | 174.00 | 11.41 | 0.00 | 1.00 |
| Future Collector | | 502 | 551 | 8 | 44 | | 1.55 | 146 | 627 | 8.71 | 3.34 | 6.78 | | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | 0.00 | | 2.87 | | 9.76 | 200 | 0.88 | 32.1 | 0.99 | 171.30 | 20.22 | 0.00 | 1.00 |
| East-West Collector | | 550 | 551 | 20 | | | 1.98 | 68 | 68 | 1.98 | 3.63 | 0.80 | | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | 0.00 | | 0.65 | | 1.45 | 200 | 0.35 | 20.2 | 0.62 | 99.90 | 18.73 | 0.00 | 1.00 |
| East-West Collector | | 551 | 552 | 22 | 0 | | 1.49 | 75 | 770 | 12.18 | 3.30 | 8.23 | | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | 0.00 | | 4.02 | | 12.34 | 200 | 0.35 | 20.2 | 0.62 | 175.00 | 7.90 | 0.00 | 1.00 |
| East-West Collector | | 552 | 554 | 12 | 20 | | 3.36 | 95 | 865 | 15.54 | 3.27 | 9.17 | | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | 0.00 | | 5.13 | | 14.40 | 200 | 0.35 | 20.2 | 0.62 | 178.30 | 3.37 | 0.00 | 1.00 |
| East-West Collector | | 554 | 556 | 11 | 34 | | 1.81 | 129 | 1543 | 24.02 | 3.14 | 15.68 | | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | 0.00 | | 7.93 | | 23.71 | 250 | 0.33 | 35.6 | 0.70 | 295.60 | 9.15 | 0.00 | 1.00 |
| Future Collector | | 517 | 564 | 20 | 35 | | 2.07 | 163 | 163 | 2.07 | 3.54 | 1.87 | | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | 0.00 | | 0.68 | | 2.55 | 200 | 0.59 | 26.3 | 0.81 | 280.00 | 23.71 | 0.00 | 1.00 |
| Alex Polowin Ave. | | 13 | 14 | 12 | 0 | | 0.54 | 41 | 41 | 0.54 | 3.67 | 0.49 | | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | 0.00 | | 0.00 | | 0.49 | 200 | 0.67 | 28.0 | 0.86 | 74.56 | 27.53 | 0.00 | 1.00 |
| Alex Polowin Ave. | | 14 | 90 | 13 | 0 | | 0.65 | 44 | 85 | 1.19 | 3.61 | 0.99 | | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | 0.00 | | 0.00 | | 0.99 | 200 | 0.94 | 33.1 | 1.02 | 112.06 | 32.13 | 0.00 | 1.00 |
| Alex Polowin Ave. | | 90 | 5 | 11 | 0 | | 0.54 | 37 | 122 | 1.73 | 3.58 | 1.41 | | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | 0.00 | | 0.00 | | 1.41 | 200 | 0.35 | 20.3 | 0.63 | 108.16 | 18.87 | 0.00 | 1.00 |
| River Mist Road | | 5 | 563 | 0 | | | 0.00 | 0 | 122 | 1.73 | 3.58 | 1.41 | | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | 0.00 | | 0.00 | | 1.41 | 200 | 0.42 | 22.2 | 0.68 | 80.00 | 20.76 | 0.00 | 1.00 |
| River Mist Road | | 563 | 564 | 8 | | | 0.47 | 27 | 149 | 2.20 | 3.55 | 1.72 | | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | 0.00 | | 0.73 | | 2.44 | 200 | 0.42 | 22.2 | 0.68 | 50.00 | 19.73 | 0.00 | 1.00 |
| River Mist Road | | 564 | 556 | 7 | 9 | | 0.64 | 48 | 360 | 4.91 | 3.43 | 4.01 | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | | 1.62 | | 5.63 | 200 | 0.35 | 20.2 | 0.62 | 95.00 | 14.62 | 0.00 | 1.00 |
| East-West Collector | | 556 | 557 | | | | | | 1903 | 28.93 | 3.08 | 19.01 | | 0.00 | 0.00 | 2.20 | 2.20 | 0.71 | | 0.00 | | 10.27 | | 30.09 | 300 | 1.39 | 118.9 | 1.63 | 44.30 | 84.53 | 0.07 | 1.00 |
| East-West Collector | | 557 | 558 | 6 | | | 1.12 | 20 | 1923 | 30.05 | 3.08 | 19.19 | | 0.00 | 0.00 | 2.86 | 5.06 | 1.64 | | 0.00 | | 11.59 | 4.00 | 36.42 | 300 | 1.39 | 118.9 | 1.63 | 158.40 | 80.38 | 0.14 | 1.00 |
| Future Collector | | 560 | 558 | 50 | 0 | | 3.09 | 170 | 170 | 3.09 | 3.54 | 1.95 | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | | 1.02 | | 2.97 | 200 | 0.35 | 20.2 | 0.62 | 150.00 | 17.27 | 0.00 | 1.00 |
| East-West Collector | | 558 | 119 | | | | 5.74 | 0 | 2093 | 38.88 | 3.06 | 20.73 | | 0.00 | 0.00 | | 5.06 | 1.64 | | 0.00 | | 14.50 | | 40.97 | 450 | 0.13 | 107.2 | 0.65 | 150.00 | 63.75 | 0.12 | 1.00 |
| Future Collector | | 521 | 522 | 24 | 33 | | 2.17 | 171 | 171 | 2.17 | 3.54 | 1.96 | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | | 0.72 | | 2.68 | 200 | 1.26 | 38.4 | 1.18 | 230.00 | 35.74 | 0.00 | 1.00 |
| | | 522 | 523 | | | | | | 171 | 2.17 | | | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | | | | | | | | | | | | |
| | | 523 | 524 | | 71 | | 1.95 | 192 | 363 | 4.12 | | | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | | | | | | | | | | | 0.00 | 1.00 |
| Future Collector | | 520 | 524 | 41 | | | 2.06 | 139 | 139 | 2.06 | 3.56 | 1.60 | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | | 0.68 | | 2.28 | 200 | 0.26 | 17.4 | 0.54 | 72.20 | 15.16 | 0.00 | 1.00 |
| Future Collector | | 524 | 578 | | 0 | | 0.00 | 0 | 502 | 6.18 | 3.38 | 5.50 | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | | 2.04 | | 7.54 | 300 | 0.20 | 45.1 | 0.62 | 200.90 | 37.58 | 0.00 | 1.00 |
| Future Collector | | 578 | 532 | | 87 | | 3.63 | 235 | 737 | 9.81 | 3.31 | 7.89 | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | | 3.24 | | 11.13 | 300 | 0.20 | 45.1 | 0.62 | 173.70 | 33.98 | 0.00 | 1.00 |
| Future Collector | | 532 | 534 | 50 | 26 | | 3.29 | 240 | 977 | 13.10 | 3.25 | 10.27 | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | | 4.32 | | 14.60 | 300 | 0.20 | 45.1 | 0.62 | 127.45 | 30.52 | 0.00 | 1.00 |
| Future Collector | | 534 | 536 | 55 | | | 2.96 | 187 | 1164 | 16.06 | 3.21 | 12.09 | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | | 5.30 | | 17.39 | 450 | 0.20 | 133.0 | 0.81 | 173.27 | 115.63 | 0.00 | 1.00 |
| Future Collector | | 536 | 538 | | | | 0.00 | 0 | 1164 | 16.06 | 3.21 | 12.09 | | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | 0.00 | | 5.30 | | 17.39 | 450 | 0.20 | 133.0 | 0.81 | 309.73 | 115.63 | 0.00 | 1.00 |
| | | 538 | 119 | 0 | | | 0.00 | 0 | 1164 | 16.06 | 3.21 | 12.09 | | 0.00 | 0.00 | | 0.00 | 0.00 | | 0.00 | | 5.30 | | 17.39 | 525 | 0.15 | 173.8 | 0.78 | 245.34 | 156.37 | 0.00 | 1.00 |
| Greenbank Rd. | | 119 | EX120 | | | | | 0 | 3257 | 54.94 | 2.93 | 30.92 | | 0.00 | 0.00 | | 5.06 | 1.64 | | 0.00 | | 19.80 | | 56.46 | 600 | 0.15 | 248.1 | 0.85 | 168.66 | 187.53 | 0.08 | 1.00 |
| **QUINN'S POINTE OUTLETS TO MH205A EXISTING GREENBANK RD.** | | | | | | | 54.94 | 3257 | | | | | | | | | | | | | | | | | | | | | | | |
| Greenbank Road | | EX120 | EX121 | | | | 0.22 | 0 | 3257 | 55.16 | 2.93 | 30.92 | | 0.00 | 0.00 | 0.00 | 5.06 | 1.64 | | 0.00 | | 19.87 | | 56.53 | 600 | 0.16 | 259.0 | 0.89 | 58.09 | 202.51 | 0.08 | 1.00 |
| Greenbank Road | | EX121 | EX122 | | | | 0.28 | 0 | 3640 | 61.99 | 2.90 | 34.16 | | 0.00 | 0.00 | 0.00 | 6.63 | 2.15 | | 0.00 | | 22.64 | | 63.05 | 600 | 0.33 | 369.2 | 1.27 | 75.27 | 306.17 | 0.10 | 1.00 |

# BARRHAVEN SOUTH URBAN EXPANSION AREA (BSUEA)

CITY OF OTTAWA
MINTO COMMUNITIES INC.
JLR NO. 26610

## BARRHAVEN SOUTH SANITARY SEWER DESIGN SHEET

Designed by: AT
Checked by:HM

| PROPOSED AND BSUEA DESIGN PARAMETERS | | | | | |
|---|---|---|---|---|---|
| Single Family | 3.4 | pers/unit | q = | 280 | L/cap/day |
| Semi-Detached/Townhouse (row) | 2.7 | pers/unit | I = | 0.330 | L/s/ha |
| Apt Units | 1.8 | pers/unit | Inst./Comm. = | 28000 | L/ha/day |
| Manning's Coeff. N = | 0.013 | | Commerial PF*= | 1.0/1.5 | |

*1.5 if ICI in contributing area is >20%, 1.0 if ICI in contributing area is <20%

| Sources: | |
|---|---|
| | Half Moon Bay South Subdivision - Phase 4 - Excluding Arterials- Sanitary sewer design sheet prepared by Stantec (2015) |
| | Quinn's Pointe - Excluding Arterials-Sanitary sewer design sheet prepared by J.L Richards (2015) |
| | Barrhaven South Master Servicing Study Addendum - Sanitary sewer design sheet prepared Stantec (2014) |

| Legend | |
|---|---|
| | Proposed |
| | Proposed by Others |
| | Existing |

Date: February 2018

| STREET | SOURCE | M.H. # | | RESIDENTIAL | | | | | | | | COMMERCIAL | | | INSTITUTIONAL | | | GREEN/UNUSED | | | | | | SEWER DATA | | | | | RESIDUAL | | ICI* |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | NUMBER OF UNITS | | | AREA | POPULATION | CUMULATIVE | | PEAKING | POPUL. | AREA | CUMM. | INST. | AREA | CUMM. | INST. | AREA | CUMM. | PEAK EXTR. | PLUG | PEAK DES. | DIA. | SLOPE | CAPAC. | VEL. | LENGTH | CAP. | ICI/ | Peaking |
| | | FROM | TO | SING. | MULT. | APT. | TOTAL ha | TOTAL peop. | POPUL. peop. | AREA ha | FACTOR | FLOW l/s | ha | ha | l/s | ha | ha | l/s | ha | ha | FLOW l/s | FLOW l/s | FLOW l/s | mm | % | l/s | m/s | m | l/s | TOTAL | Factor |
| Greenbank Road | | EX122 | EX123R | | | | 0.45 | 0 | 3640 | 62.44 | 2.90 | 34.16 | | 0.00 | 0.00 | 0.00 | 6.63 | 2.15 | | 0.00 | 22.79 | | 63.20 | 600 | 0.21 | 291.1 | 1.00 | 121.02 | 227.90 | 0.10 | 1.00 |
| Easement | | EX44 | EX123R | | | | 0.00 | 0 | 259 | 2.62 | 3.48 | 2.93 | | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | 0.00 | 0.86 | | 3.79 | 300 | 0.35 | 59.9 | 0.82 | 19.00 | 56.12 | 0.00 | 1.00 |
| Greenbank Road | | EX123R | MH205A | | | | 0.43 | 0 | 3899 | 65.49 | 2.87 | 36.32 | | 0.00 | 0.00 | 0.00 | 6.63 | 2.15 | | 0.00 | 23.80 | | 66.37 | 600 | 0.25 | 319.2 | 1.09 | 120.80 | 252.85 | 0.09 | 1.00 |
| Kilbirnie Drive | JLR (2016) | EX24 | MH205A | | 3 | | 0.11 | 8 | 224 | 2.15 | 3.50 | 2.54 | | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | 0.00 | 0.71 | | 3.25 | 200 | 0.71 | 28.8 | 0.89 | 28.70 | 25.59 | 0.00 | 1.00 |
| Existing Greenbank Road | | MH205A | EX98A | | | | | 0 | 4123 | 67.64 | 2.86 | 38.18 | | 0.00 | 0.00 | 0.00 | 6.63 | 2.15 | | 0.00 | 24.51 | | 73.94 | 600 | 0.25 | 320.3 | 1.10 | 126.00 | 246.34 | 0.09 | 1.00 |
| **EXISTING GREENBANK RD. FROM MH 98A TO MH45A** | | | | | | | 6.15 | 484 | | | | | | | | | | | | | | | | | | | | | | |
| Existing Greenbank Road | IBI | EX98A | MH99A | | | | 0.00 | 0 | 4123 | 67.64 | 2.86 | 38.18 | | 0.00 | 0.00 | | 6.63 | 2.15 | | 0.00 | 24.51 | | 73.94 | 600 | 0.25 | 320.3 | | 125.00 | 246.34 | 0.09 | 1.00 |
| Existing Greenbank Road | IBI | MH99A | MH100A | | | | 0.00 | 0 | 4123 | 67.64 | 2.86 | 38.18 | | 0.00 | 0.00 | | 6.63 | 2.15 | | 0.00 | 24.51 | | 73.94 | 600 | 0.25 | 320.3 | | 108.00 | 246.34 | 0.09 | 1.00 |
| Existing Greenbank Road | IBI | MH100A | MH204A | | | | 0.00 | 0 | 4123 | 67.64 | 2.86 | 38.18 | | 0.00 | 0.00 | | 6.63 | 2.15 | | 0.00 | 24.51 | | 73.94 | 600 | 0.25 | 320.3 | | 105.00 | 246.34 | 0.09 | 1.00 |
| Existing Greenbank Road | IBI | MH204A | MH206A | | | | 0.00 | 0 | 4123 | 67.64 | 2.86 | 38.18 | | 0.00 | 0.00 | | 6.63 | 2.15 | | 0.00 | 24.51 | | 73.94 | 600 | 0.25 | 320.3 | | 103.00 | 246.34 | 0.09 | 1.00 |
| Existing Greenbank Road | IBI | MH206A | MH97A | | | | 0.00 | 0 | 4123 | 67.64 | 2.86 | 38.18 | | 0.00 | 0.00 | | 6.63 | 2.15 | | 0.00 | 24.51 | | 73.94 | 600 | 0.25 | 320.3 | | 125.00 | 246.34 | 0.09 | 1.00 |
| Existing Greenbank Road | IBI | MH97A | MH96A | | | | 19.95 | 1631 | 5754 | 87.59 | 2.75 | 51.29 | | 0.00 | 0.00 | | 6.63 | 2.15 | 0.81 | 0.81 | 31.36 | | 93.90 | 600 | 0.30 | 350.8 | | 98.00 | 256.95 | 0.07 | 1.00 |
| Existing Greenbank Road | IBI | MH96A | MH95A | | | | 0.00 | 0 | 5754 | 87.59 | 2.75 | 51.29 | | 0.00 | 0.00 | | 6.63 | 2.15 | | 0.81 | 31.36 | | 93.90 | 600 | 0.30 | 350.8 | | 129.00 | 256.95 | 0.07 | 1.00 |
| Existing Greenbank Road | IBI | MH95A | MH201A | | | | 0.00 | 0 | 5754 | 87.59 | 2.75 | 51.29 | | 0.00 | 0.00 | | 6.63 | 2.15 | | 0.81 | 31.36 | | 93.90 | 600 | 0.30 | 350.8 | | 123.00 | 256.95 | 0.07 | 1.00 |
| Existing Greenbank Road | IBI | MH201A | MH201B | | | | 12.13 | 787 | 6541 | 99.72 | 2.71 | 57.40 | | 0.00 | 0.00 | | 6.63 | 2.15 | | 0.81 | 35.36 | | 104.01 | 600 | 0.30 | 350.8 | | 124.00 | 246.83 | 0.06 | 1.00 |
| Existing Greenbank Road | IBI | MH201B | MH200A | | | | 0.00 | 0 | 6541 | 99.72 | 2.71 | 57.40 | | 0.00 | 0.00 | | 6.63 | 2.15 | | 0.81 | 35.36 | | 104.01 | 600 | 0.30 | 350.8 | | 68.00 | 246.83 | 0.06 | 1.00 |
| Existing Greenbank Road | IBI | MH200A | MH200C | | | | 0.00 | 0 | 6541 | 99.72 | 2.71 | 57.40 | | 0.00 | 0.00 | | 6.63 | 2.15 | | 0.81 | 35.36 | | 104.01 | 600 | 0.50 | 452.9 | | 48.00 | 348.93 | 0.06 | 1.00 |
| Existing Greenbank Road | IBI | MH200C | MH45 | | | | 0.00 | 0 | 6541 | 99.72 | 2.71 | 57.40 | | 0.00 | 0.00 | | 6.63 | 2.15 | | 0.81 | 35.36 | | 104.01 | 600 | 0.12 | 221.9 | | 26.00 | 117.88 | 0.06 | 1.00 |
| Existing Greenbank Road North | Stantec (2014) | MH45 | MH435A | | | | 5.12 | 548 | 23310 | 301.30 | 2.27 | 171.38 | | 6.83 | 2.21 | | 39.83 | 12.91 | 0.00 | 29.44 | 124.54 | | 320.14 | 900 | 0.10 | 597.2 | | 296.00 | 277.08 | 0.12 | 1.00 |
| | ↓ | MA9 | MA8 | | | | 22.23 | 2378 | 2378 | 22.23 | 3.02 | 23.28 | 0.00 | 0.00 | 0.00 | 2.45 | 2.45 | 0.79 | 9.54 | 9.54 | 11.29 | | 35.37 | 450 | 0.11 | 98.4 | | 507.50 | 63.03 | 0.07 | 1.00 |
| | | MA8 | MA7 | | | | 2.88 | 308 | 2686 | 25.11 | 2.99 | 25.99 | 0.00 | 0.00 | 0.00 | 0.00 | 2.45 | 0.79 | 0.78 | 10.32 | 12.50 | | 39.29 | 450 | 0.11 | 98.4 | | 317.10 | 59.11 | 0.06 | 1.00 |
| | | MA7 | MA6 | | | | 18.50 | 1979 | 4665 | 43.61 | 2.82 | 42.61 | 0.00 | 0.00 | 0.00 | 0.00 | 2.45 | 0.79 | 0.00 | 10.32 | 18.61 | | 62.01 | 450 | 0.11 | 98.4 | | 573.10 | 36.39 | 0.04 | 1.00 |
| Realigned Greenbank Road | | MA6 | MA5 | | | | 21.68 | 2320 | 6985 | 65.29 | 2.69 | 60.80 | 0.00 | 0.00 | 0.00 | 0.00 | 2.45 | 0.79 | 0.00 | 10.32 | 25.76 | | 87.36 | 525 | 0.10 | 140.5 | | 473.90 | 53.14 | 0.03 | 1.00 |
| Realigned Greenbank Road | | MA5 | MA4 | | | | 9.53 | 1020 | 8005 | 74.82 | 2.64 | 68.49 | 0.00 | 0.00 | 0.00 | 0.00 | 2.45 | 0.79 | 0.00 | 10.32 | 28.90 | | 98.19 | 525 | 0.10 | 140.5 | | 439.40 | 42.31 | 0.03 | 1.00 |
| Realigned Greenbank Road | | MA4 | MH521A | | | | 8.07 | 863 | 8868 | 82.89 | 2.61 | 74.87 | 0.00 | 0.00 | 0.00 | 0.00 | 2.45 | 0.79 | 2.42 | 12.74 | 32.37 | | 108.03 | 525 | 0.10 | 140.5 | | 530.70 | 32.47 | 0.02 | 1.00 |
| | | MH521A | MH522A | | | | 3.80 | 231 | 9099 | 86.69 | 2.60 | 76.56 | 0.00 | 0.00 | 0.00 | 0.00 | 2.45 | 0.79 | 0.02 | 12.76 | 33.63 | | 110.98 | 600 | 0.10 | 201.5 | | 49.90 | 90.52 | 0.02 | 1.00 |
| | ↓ | MH522A | MH435A | | | | 0.00 | 0 | 9099 | 86.69 | 2.60 | 76.56 | 0.00 | 0.00 | 0.00 | 0.00 | 2.45 | 0.79 | 0.00 | 12.76 | 33.63 | | 110.98 | 600 | 0.10 | 201.5 | | 11.10 | 90.52 | 0.02 | 1.00 |
| | | MH435A | MH501A | | | | 0.00 | 0 | 32409 | 387.99 | 2.16 | 226.39 | 0.00 | 6.83 | 2.21 | 0.00 | 42.28 | 13.70 | 0.00 | 42.20 | 158.17 | | 409.57 | 900 | 0.10 | 597.0 | | 13.30 | 187.43 | 0.10 | 1.00 |

Sanitary design calculation for the proposed HMB phase 8 site by DSEL (2020)

# SANITARY SEWER CALCULATION SHEET

Manning's n=0.013

| LOCATION | | | RESIDENTIAL AREA AND POPULATION | | | | | | | | | COMM | | INSTIT | | PARK | | C+I+I | INFILTRATION | | | | PIPE | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| STREET | FROM M.H. | TO M.H. | AREA (ha) | UNITS | UNITS Singles | UNITS Townhouse | POP. | CUMULATIVE AREA (ha) | CUMULATIVE POP. | PEAK FACT. | PEAK FLOW (l/s) | AREA (ha) | ACCU. AREA (ha) | AREA (ha) | ACCU. AREA (ha) | AREA (ha) | ACCU. AREA (ha) | PEAK FLOW (l/s) | TOTAL AREA (ha) | ACCU. AREA (ha) | INFILT. FLOW (l/s) | TOTAL FLOW (l/s) | DIST (m) | DIA (mm) | SLOPE (%) | CAP. (FULL) (l/s) | RATIO Q act/Q cap | VEL. (FULL) (m/s) | VEL. (ACT.) (m/s) |
| **Drummond Future Road** | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Plug | 305A | 0.89 | | | | 67 | 0.89 | 67 | 3.63 | 0.79 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.89 | 0.89 | 0.29 | 1.08 | 8.0 | 200 | 0.35 | 19.40 | 0.06 | 0.62 | 0.33 |
| To Expansion Road, Pipe 305A - 306A | | | | | | | | 0.89 | 67 | | | | 0.00 | | 0.00 | | 0.00 | | | 0.89 | | | | | | | | | |
| **Future Residential** | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Ctrl 3A | 109A | 1.90 | | | | 162 | 1.90 | 162 | 3.54 | 1.86 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 1.90 | 1.90 | 0.63 | 2.49 | 11.0 | 200 | 0.35 | 19.40 | 0.13 | 0.62 | 0.42 |
| To Obsidian Street, Pipe 109A - 400A | | | | | | | | 1.90 | 162 | | | | 0.00 | | 0.00 | | 0.00 | | | 1.90 | | | | | | | | | |
| **Focality Crescent** | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 107A | 108A | 0.14 | 3 | | 3 | 9 | 0.14 | 9 | 3.74 | 0.11 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.14 | 0.14 | 0.05 | 0.16 | 12.5 | 200 | 2.45 | 51.34 | 0.00 | 1.63 | 0.36 |
| | 108A | 110A | 0.17 | 5 | | 5 | 14 | 0.31 | 23 | 3.70 | 0.28 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.17 | 0.31 | 0.10 | 0.38 | 50.5 | 200 | 0.35 | 19.40 | 0.02 | 0.62 | 0.24 |
| To Haiku Street, Pipe 110A - 1100A | | | | | | | | 0.31 | 23 | | | | 0.00 | | 0.00 | | 0.00 | | | 0.31 | | | | | | | | | |
| | 107A | 112A | 0.45 | 18 | | 18 | 49 | 0.45 | 49 | 3.65 | 0.58 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.45 | 0.45 | 0.15 | 0.73 | 73.5 | 200 | 0.70 | 27.44 | 0.03 | 0.87 | 0.37 |
| | 112A | 113A | 0.43 | 16 | | 16 | 44 | 0.88 | 93 | 3.60 | 1.09 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.43 | 0.88 | 0.29 | 1.38 | 70.5 | 200 | 0.35 | 19.40 | 0.07 | 0.62 | 0.36 |
| | 113A | 114A | 0.12 | 3 | | 3 | 9 | 1.00 | 102 | 3.59 | 1.19 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.12 | 1.00 | 0.33 | 1.52 | 12.5 | 200 | 0.35 | 19.40 | 0.08 | 0.62 | 0.36 |
| | 114A | 115A | 0.18 | 5 | | 5 | 14 | 1.18 | 116 | 3.58 | 1.35 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.18 | 1.18 | 0.39 | 1.74 | 50.5 | 200 | 0.40 | 20.74 | 0.08 | 0.66 | 0.40 |
| To Haiku Street, Pipe 115A - 111A | | | | | | | | 1.18 | 116 | | | | 0.00 | | 0.00 | | 0.00 | | | 1.18 | | | | | | | | | |
| **Sturnidae Street** | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 124A | 125A | 0.60 | 18 | 18 | | 62 | 0.60 | 62 | 3.64 | 0.73 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.60 | 0.60 | 0.20 | 0.93 | 101.0 | 200 | 0.65 | 26.44 | 0.04 | 0.84 | 0.39 |
| | 125A | 126A | 0.50 | 12 | 12 | | 41 | 1.10 | 103 | 3.59 | 1.20 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.50 | 1.10 | 0.36 | 1.56 | 91.0 | 200 | 0.35 | 19.40 | 0.08 | 0.62 | 0.37 |
| Contribution From Montology Way, Pipe 123A - 126A | | | | | | | | 0.81 | 63 | | | | 0.00 | | 0.00 | | 0.00 | | 0.81 | 1.91 | | | | | | | | | |
| | 126A | 106A | | | | | | 1.91 | 166 | 3.54 | 1.91 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.00 | 1.91 | 0.63 | 2.54 | 63.0 | 200 | 0.35 | 19.40 | 0.13 | 0.62 | 0.42 |
| To Elevation Road, Pipe 106A - 116A | | | | | | | | 1.91 | 166 | | | | 0.00 | | 0.00 | | 0.00 | | | 1.91 | | | | | | | | | |
| **Park** | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Ctrl 4A | 104A | | | | | | 0.00 | | | | | 0.00 | | 0.00 | 1.72 | 1.72 | 0.19 | 1.72 | 1.72 | 0.57 | 0.75 | 10.5 | 200 | 0.35 | 19.40 | 0.04 | 0.62 | 0.29 |
| To Chillerton Drive, Pipe 104A - 106A | | | | | | | | 0.00 | 0 | | | | 0.00 | | 0.00 | | 1.72 | | | 1.72 | | | | | | | | | |
| **Canadensis Lane** | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 229A | 230A | 0.42 | 15 | | 15 | 41 | 0.42 | 41 | 3.67 | 0.49 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.42 | 0.42 | 0.14 | 0.63 | 73.5 | 200 | 2.00 | 46.38 | 0.01 | 1.48 | 0.51 |
| | 230A | 103A | 0.48 | 18 | | 18 | 49 | 0.90 | 90 | 3.60 | 1.05 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.48 | 0.90 | 0.30 | 1.35 | 90.0 | 200 | 3.00 | 56.81 | 0.02 | 1.81 | 0.75 |
| To Chillerton Drive, Pipe 103A - 104A | | | | | | | | 0.90 | 90 | | | | 0.00 | | 0.00 | | 0.00 | | | 0.90 | | | | | | | | | |
| **Surface Lane** | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 227A | 228A | 0.47 | 18 | | 18 | 49 | 0.47 | 49 | 3.65 | 0.58 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.47 | 0.47 | 0.16 | 0.74 | 72.5 | 200 | 2.00 | 46.38 | 0.02 | 1.48 | 0.53 |
| | 228A | 102A | 0.48 | 18 | | 18 | 49 | 0.95 | 98 | 3.60 | 1.14 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.48 | 0.95 | 0.31 | 1.46 | 90.0 | 200 | 0.85 | 30.24 | 0.05 | 0.96 | 0.49 |
| To Chillerton Drive, Pipe 102A - 103A | | | | | | | | 0.95 | 98 | | | | 0.00 | | 0.00 | | 0.00 | | | 0.95 | | | | | | | | | |
| **Chillerton Drive** | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 101A | 102A | 0.14 | 3 | | 3 | 9 | 0.14 | 9 | 3.74 | 0.11 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.14 | 0.14 | 0.05 | 0.16 | 25.5 | 200 | 2.60 | 52.89 | 0.00 | 1.68 | 0.34 |
| Contribution From Surface Lane, Pipe 228A - 102A | | | | | | | | 0.95 | 98 | | | | 0.00 | | 0.00 | | 0.00 | | 0.95 | 1.09 | | | | | | | | | |
| | 102A | 103A | 0.22 | 7 | | 7 | 19 | 1.31 | 126 | 3.57 | 1.46 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.22 | 1.31 | 0.43 | 1.89 | 59.0 | 200 | 1.70 | 42.76 | 0.04 | 1.36 | 0.67 |
| Contribution From Canadensis Lane, Pipe 230A - 103A | | | | | | | | 0.90 | 90 | | | | 0.00 | | 0.00 | | 0.00 | | 0.90 | 2.21 | | | | | | | | | |
| | 103A | 104A | 0.46 | 14 | | 14 | 38 | 2.67 | 254 | 3.49 | 2.87 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.46 | 2.67 | 0.88 | 3.75 | 120.0 | 200 | 0.50 | 23.19 | 0.16 | 0.74 | 0.54 |
| Contribution From Park, Pipe 4A - 104A | | | | | | | | 0.00 | 0 | | | | 0.00 | | 0.00 | | 1.72 | | 1.72 | 4.39 | | | | | | | | | |
| | 104A | 106A | 0.08 | 1 | | 1 | 3 | 2.75 | 257 | 3.49 | 2.90 | | 0.00 | | 0.00 | | 1.72 | 0.19 | 0.08 | 4.47 | 1.48 | 4.56 | 45.5 | 200 | 0.35 | 19.40 | 0.24 | 0.62 | 0.50 |
| To Elevation Road, Pipe 106A - 116A | | | | | | | | 2.75 | 257 | | | | 0.00 | | 0.00 | | 1.72 | | | 4.47 | | | | | | | | | |

DESIGN PARAMETERS

| | | | | | | |
|---|---|---|---|---|---|---|
| Park Flow = | 9300 | L/ha/da | 0.10764 | l/s/Ha | | |
| Average Daily Flow = | 280 | l/p/day | | | | |
| Comm/Inst Flow = | 28000 | L/ha/da | 0.3241 | l/s/Ha | | |
| Industrial Flow = | 35000 | L/ha/da | 0.40509 | l/s/Ha | | |
| Max Res. Peak Factor = | 3.80 | | | | | |
| Commercial/Inst./Park Peak Factor = | 1.00 | | | | | |
| Institutional = | 0.32 | l/s/Ha | | | | |

Industrial Peak Factor = as per MOE Graph

| | | | | |
|---|---|---|---|---|
| Extraneous Flow = | 0.330 | L/s/ha | | |
| Minimum Velocity = | 0.600 | m/s | | |
| Manning's n = | (Conc) | 0.013 | (Pvc) | 0.013 |
| Townhouse coeff= | 2.7 | | | |
| Single house coeff= | 3.4 | | | |

Designed: SLM

Checked: ADF

Dwg. Reference:
Sanitary Drainage Plan, Dwgs. No. 80-83

PROJECT: **Ciavan Communities - Brazeau Phase 1**

LOCATION: **City of Ottawa**

File Ref: 18-1030

Date: **27 Jul 2020**

Sheet No. 1 of 6

# SANITARY SEWER CALCULATION SHEET

Manning's n=0.013

| LOCATION | | | RESIDENTIAL AREA AND POPULATION | | | | | | | | | COMM | | INSTIT | | PARK | | C+I+I | INFILTRATION | | | | PIPE | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| STREET | FROM M.H. | TO M.H. | AREA (ha) | UNITS | UNITS Singles | UNITS Townhouse | POP. | CUMULATIVE AREA (ha) | CUMULATIVE POP. | PEAK FACT. | PEAK FLOW (l/s) | AREA (ha) | ACCU. AREA (ha) | AREA (ha) | ACCU. AREA (ha) | AREA (ha) | ACCU. AREA (ha) | PEAK FLOW (l/s) | TOTAL AREA (ha) | ACCU. AREA (ha) | INFILT. FLOW (l/s) | TOTAL FLOW (l/s) | DIST (m) | DIA (mm) | SLOPE (%) | CAP. (FULL) (l/s) | RATIO Q act/Q cap | VEL. (FULL) (m/s) | VEL. (ACT.) (m/s) |
| **Epoch Street** | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 220A | 221A | 0.42 | 10 | | 10 | 27 | 0.42 | 27 | 3.69 | 0.32 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.42 | 0.42 | 0.14 | 0.46 | 77.5 | 200 | 0.95 | 31.97 | 0.01 | 1.02 | 0.35 |
| | 221A | 222A | 0.49 | 18 | | 18 | 49 | 0.91 | 76 | 3.62 | 0.89 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.49 | 0.91 | 0.30 | 1.19 | 93.0 | 200 | 0.35 | 19.40 | 0.06 | 0.62 | 0.34 |
| | 222A | 223A | 0.52 | 20 | | 20 | 54 | 1.43 | 130 | 3.57 | 1.50 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.52 | 1.43 | 0.47 | 1.98 | 100.5 | 200 | 0.35 | 19.40 | 0.10 | 0.62 | 0.40 |
| To Elevation Road, Pipe 223A - 105A | | | | | | | | 1.43 | 130 | | | | 0.00 | | 0.00 | | 0.00 | | | 1.43 | | | | | | | | | |
| **Eminence Street** | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 215A | 216A | 0.49 | 12 | 12 | | 41 | 0.49 | 41 | 3.67 | 0.49 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.49 | 0.49 | 0.16 | 0.65 | 75.5 | 200 | 0.85 | 30.24 | 0.02 | 0.96 | 0.39 |
| | 216A | 217A | 0.72 | 17 | 17 | | 58 | 1.21 | 99 | 3.60 | 1.15 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.72 | 1.21 | 0.40 | 1.55 | 113.5 | 200 | 0.35 | 19.40 | 0.08 | 0.62 | 0.37 |
| | 217A | 219A | 0.45 | 12 | 12 | | 41 | 1.66 | 140 | 3.56 | 1.62 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.45 | 1.66 | 0.55 | 2.16 | 83.5 | 200 | 0.35 | 19.40 | 0.11 | 0.62 | 0.41 |
| To Elevation Road, Pipe 219A - 223A | | | | | | | | 1.66 | 140 | | | | 0.00 | | 0.00 | | 0.00 | | | 1.66 | | | | | | | | | |
| **Elevation Road** | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 218A | 219A | 0.13 | 2 | 2 | | 7 | 0.13 | 7 | 3.74 | 0.08 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.13 | 0.13 | 0.04 | 0.13 | 24.0 | 200 | 2.65 | 53.39 | 0.00 | 1.70 | 0.35 |
| Contribution From Eminence Street, Pipe 217A - 219A | | | | | | | | 1.66 | 140 | | | | 0.00 | | 0.00 | | 0.00 | | 1.66 | 1.79 | | | | | | | | | |
| | 219A | 223A | 0.23 | 4 | 4 | | 14 | 2.02 | 161 | 3.54 | 1.85 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.23 | 2.02 | 0.67 | 2.52 | 59.0 | 200 | 0.85 | 30.24 | 0.08 | 0.96 | 0.58 |
| Contribution From Epoch Street, Pipe 222A - 223A | | | | | | | | 1.43 | 130 | | | | 0.00 | | 0.00 | | 0.00 | | 1.43 | 3.45 | | | | | | | | | |
| | 223A | 105A | 0.42 | 6 | 6 | | 21 | 3.87 | 312 | 3.46 | 3.50 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.42 | 3.87 | 1.28 | 4.77 | 82.5 | 200 | 0.70 | 27.44 | 0.17 | 0.87 | 0.65 |
| | 105A | 106A | 0.42 | 7 | 7 | | 24 | 4.29 | 336 | 3.45 | 3.75 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.42 | 4.29 | 1.42 | 5.17 | 94.0 | 200 | 1.30 | 37.40 | 0.14 | 1.19 | 0.83 |
| Contribution From Chillerton Drive, Pipe 104A - 106A | | | | | | | | 2.75 | 257 | | | | 0.00 | | 0.00 | | 1.72 | | 4.47 | 8.76 | | | | | | | | | |
| Contribution From Sturnidae Street, Pipe 126A - 106A | | | | | | | | 1.91 | 166 | | | | 0.00 | | 0.00 | | 0.00 | | 1.91 | 10.67 | | | | | | | | | |
| | | | 0.35 | 11 | | 11 | 30 | 9.30 | 789 | | | | 0.00 | | 0.00 | | 1.72 | | 0.35 | 11.02 | | | | | | | | | |
| | 106A | 116A | 0.35 | 8 | 8 | | 28 | 9.65 | 817 | 3.28 | 8.69 | | 0.00 | | 0.00 | | 1.72 | 0.19 | 0.35 | 11.37 | 3.75 | 12.63 | 118.0 | 200 | 0.35 | 19.40 | 0.65 | 0.62 | 0.66 |
| To Haiku Street, Pipe 116A - 1160A | | | | | | | | 9.65 | 817 | | | | 0.00 | | 0.00 | | 1.72 | | | 11.37 | | | | | | | | | |
| | | | 1.57 | | | | 118 | 1.57 | 118 | | | | 0.00 | | 0.00 | | 0.00 | | 1.57 | 1.57 | | | | | | | | | |
| | 309A | 310A | 5.67 | | | | 595 | 7.24 | 713 | 3.31 | 7.65 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 5.67 | 7.24 | 2.39 | 10.04 | 15.0 | 250 | 0.25 | 29.73 | 0.34 | 0.61 | 0.55 |
| To Expansion Road, Pipe 310A - 1311A | | | | | | | | 7.24 | 713 | | | | 0.00 | | 0.00 | | 0.00 | | | 7.24 | | | | | | | | | |
| **Drummond Future Road** | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 301A | 302A | 1.27 | | | | 95 | 1.27 | 95 | 3.60 | 1.11 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 1.27 | 1.27 | 0.42 | 1.53 | 94.5 | 200 | 0.35 | 19.40 | 0.08 | 0.62 | 0.36 |
| To Expansion Road, Pipe 302A - 1180A | | | | | | | | 1.27 | 95 | | | | 0.00 | | 0.00 | | 0.00 | | | 1.27 | | | | | | | | | |
| **Drummond Future Road** | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | 0.22 | | | | 23 | 0.22 | 23 | | | | 0.00 | | 0.00 | 1.45 | 1.45 | | 1.67 | 1.67 | | | | | | | | | |
| | 1303A | 3031A | 0.61 | | | | 46 | 0.83 | 69 | 3.63 | 0.81 | | 0.00 | | 0.00 | | 1.45 | 0.16 | 0.61 | 2.28 | 0.75 | 1.72 | 108.0 | 200 | 0.35 | 19.40 | 0.09 | 0.62 | 0.38 |
| To Expansion Road, Pipe 3031A - 302A | | | | | | | | 0.83 | 69 | | | | 0.00 | | 0.00 | | 1.45 | | | 2.28 | | | | | | | | | |
| **Expansion Road** | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | 0.16 | | | | 17 | 0.16 | 17 | | | | 0.00 | | 0.00 | | 0.00 | | 0.16 | 0.16 | | | | | | | | | |
| | 303A | 3031A | 0.19 | | | | 14 | 0.35 | 31 | 3.68 | 0.37 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.19 | 0.35 | 0.12 | 0.49 | 65.0 | 200 | 0.65 | 26.44 | 0.02 | 0.84 | 0.32 |
| Contribution From Drummond Future Road, Pipe 1303A - 3031A | | | | | | | | 0.83 | 69 | | | | 0.00 | | 0.00 | | 1.45 | | 2.28 | 2.63 | | | | | | | | | |
| | 3031A | 302A | 0.22 | | | | 17 | 1.40 | 117 | 3.58 | 1.36 | | 0.00 | | 0.00 | | 1.45 | 0.16 | 0.22 | 2.85 | 0.94 | 2.45 | 59.0 | 200 | 0.35 | 19.40 | 0.13 | 0.62 | 0.42 |
| Contribution From Expansion Road, Pipe 301A - 302A | | | | | | | | 1.27 | 95 | | | | 0.00 | | 0.00 | | 0.00 | | 1.27 | 4.12 | | | | | | | | | |
| | 302A | 1180A | 0.20 | | | | 15 | 2.87 | 227 | 3.50 | 2.58 | | 0.00 | | 0.00 | | 1.45 | 0.16 | 0.20 | 4.32 | 1.43 | 4.16 | 49.5 | 200 | 0.35 | 19.40 | 0.21 | 0.62 | 0.49 |
| | 1180A | 118A | | | | | | 2.87 | 227 | 3.50 | 2.58 | | 0.00 | | 0.00 | | 1.45 | 0.16 | 0.00 | 4.32 | 1.43 | 4.16 | 11.0 | 200 | 0.35 | 19.40 | 0.21 | 0.62 | 0.49 |
| To Haiku Street, Pipe 118A - 117A | | | | | | | | 2.87 | 227 | | | | 0.00 | | 0.00 | | 1.45 | | | 4.32 | | | | | | | | | |

DESIGN PARAMETERS

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| Park Flow = | 9300 | L/ha/da | 0.10764 | l/s/Ha | | | |
| Average Daily Flow = | 280 | l/p/day | | | Industrial Peak Factor = as per MOE Graph | | |
| Comm/Inst Flow = | 28000 | L/ha/da | 0.3241 | l/s/Ha | Extraneous Flow = | 0.330 | L/s/ha |
| Industrial Flow = | 35000 | L/ha/da | 0.40509 | l/s/Ha | Minimum Velocity = | 0.600 | m/s |
| Max Res. Peak Factor = | 3.80 | | | | Manning's n = (Conc) | 0.013 (Pvc) | 0.013 |
| Commercial/Inst./Park Peak Factor = | 1.00 | | | | Townhouse coeff= | 2.7 | |
| Institutional = | 0.32 | l/s/Ha | | | Single house coeff= | 3.4 | |

Designed: SLM

Checked: ADF

Dwg. Reference: Sanitary Drainage Plan, Dwgs. No. 80-83

PROJECT: **Ciavan Communities - Brazeau Phase 1**

LOCATION: **City of Ottawa**

File Ref: 18-1030

Date: **27 Jul 2020**

Sheet No. 2 of 6

# SANITARY SEWER CALCULATION SHEET

Manning's n=0.013

| LOCATION | | | RESIDENTIAL AREA AND POPULATION | | | | | | | | | COMM | | INSTIT | | PARK | | C+I+I | INFILTRATION | | | | PIPE | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| STREET | FROM M.H. | TO M.H. | AREA (ha) | UNITS | UNITS Singles | UNITS Townhouse | POP. | CUMULATIVE AREA (ha) | CUMULATIVE POP. | PEAK FACT. | PEAK FLOW (l/s) | AREA (ha) | ACCU. AREA (ha) | AREA (ha) | ACCU. AREA (ha) | AREA (ha) | ACCU. AREA (ha) | PEAK FLOW (l/s) | TOTAL AREA (ha) | ACCU. AREA (ha) | INFILT. FLOW (l/s) | TOTAL FLOW (l/s) | DIST (m) | DIA (mm) | SLOPE (%) | CAP. (FULL) (l/s) | RATIO Q act/Q cap | VEL. (FULL) (m/s) | VEL. (ACT.) (m/s) |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | 0.19 | | | | 20 | 0.19 | 20 | | | | 0.00 | | 0.00 | | 0.00 | | 0.19 | 0.19 | | | | | | | | | |
| | 303A | 305A | 0.21 | | | | 16 | 0.40 | 36 | 3.67 | 0.43 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.21 | 0.40 | 0.13 | 0.56 | 69.5 | 200 | 2.45 | 51.34 | 0.01 | 1.63 | 0.52 |
| Contribution From Drummond Future Road, Pipe 1305A - 305A | | | | | | | | 0.89 | 67 | | | | 0.00 | | 0.00 | | 0.00 | | 0.89 | 1.29 | | | | | | | | | |
| | | | 0.13 | | | | 14 | 1.42 | 117 | | | | 0.00 | | 0.00 | | 0.00 | | 0.13 | 1.42 | | | | | | | | | |
| | 305A | 306A | 0.16 | | | | 12 | 1.58 | 129 | 3.57 | 1.49 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.16 | 1.58 | 0.52 | 2.01 | 53.5 | 200 | 0.35 | 19.40 | 0.10 | 0.62 | 0.40 |
| | 306A | 307A | 0.13 | | | | 10 | 1.71 | 139 | 3.56 | 1.60 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.13 | 1.71 | 0.56 | 2.17 | 10.5 | 200 | 0.35 | 19.40 | 0.11 | 0.62 | 0.41 |
| | 307A | 308A | 0.41 | | | | 31 | 2.12 | 170 | 3.54 | 1.95 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.41 | 2.12 | 0.70 | 2.65 | 78.0 | 200 | 0.35 | 19.40 | 0.14 | 0.62 | 0.43 |
| | 308A | 3033A | 0.39 | | | | 29 | 2.51 | 199 | 3.52 | 2.27 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.39 | 2.51 | 0.83 | 3.10 | 67.0 | 200 | 0.35 | 19.40 | 0.16 | 0.62 | 0.45 |
| | 3033A | 310A | 0.31 | | | | 23 | 2.82 | 222 | 3.50 | 2.52 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.31 | 2.82 | 0.93 | 3.45 | 62.0 | 200 | 0.40 | 20.74 | 0.17 | 0.66 | 0.49 |
| Contribution From Drummond Future Road, Pipe 309A - 310A | | | | | | | | 7.24 | 713.00 | | | | 0.00 | | 0.00 | | 0.00 | | 0.00 | 7.24 | | | | | | | | | |
| | | | 0.07 | | | | 5 | 10.13 | 940 | | | | 0.00 | | 0.00 | | 0.00 | | 0.07 | 10.13 | | | | | | | | | |
| | 310A | 1311A | 1.22 | | | | 128 | 11.35 | 1068 | 3.23 | 11.16 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 1.22 | 11.35 | 3.75 | 14.91 | 111.5 | 250 | 0.25 | 29.73 | 0.50 | 0.61 | 0.61 |
| | 1311A | 1312A | | | | | | 11.35 | 1068 | 3.23 | 11.16 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.00 | 11.35 | 3.75 | 14.91 | 111.0 | 250 | 0.25 | 29.73 | 0.50 | 0.61 | 0.61 |
| | 1312A | 1313A | 4.04 | | | | 424 | 15.39 | 1492 | 3.14 | 15.21 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 4.04 | 15.39 | 5.08 | 20.29 | 108.5 | 250 | 0.25 | 29.73 | 0.68 | 0.61 | 0.65 |
| | 1313A | 405A | | | | | | 15.39 | 1492 | 3.14 | 15.21 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.00 | 15.39 | 5.08 | 20.29 | 89.0 | 250 | 0.25 | 29.73 | 0.68 | 0.61 | 0.65 |
| To Future Greenbank Road, Pipe 405A - 406A | | | | | | | | 15.39 | 1492 | | | | 0.00 | | 0.00 | | 0.00 | | | 15.39 | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| **Drummond Commercial** | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 1321A | 3211A | | | | | | 0.00 | | | | 7.40 | 7.40 | | 0.00 | | 0.00 | 2.40 | 7.40 | 7.40 | 2.44 | 4.84 | 11.0 | 200 | 0.50 | 23.19 | 0.21 | 0.74 | 0.58 |
| To Haiku Street, Pipe 3211A - 133A | | | | | | | | 0.00 | 0 | | | | 7.40 | | 0.00 | | 0.00 | | | 7.40 | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| **Brazeau Commercial** | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Ctrl 1A | 132A | | | | | | 0.00 | | | | 13.83 | 13.83 | | 0.00 | | 0.00 | 4.48 | 13.83 | 13.83 | 4.56 | 9.05 | 15.5 | 200 | 0.35 | 19.40 | 0.47 | 0.62 | 0.60 |
| To Haiku Street, Pipe 132A - 3211A | | | | | | | | 0.00 | 0 | | | | 13.83 | | 0.00 | | 0.00 | | | 13.83 | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| **Haiku Street** | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Contribution From Brazeau Commercial, Pipe 1A - 132A | | | | | | | | 0.00 | 0 | | | | 13.83 | | 0.00 | | 0.00 | | 13.83 | 13.83 | | | | | | | | | |
| | 132A | 3211A | 0.69 | | | | 0 | 0.69 | 0 | | | | 13.83 | | 0.00 | | 0.00 | 4.48 | 0.69 | 14.52 | 4.79 | 9.27 | 63.5 | 200 | 0.35 | 19.40 | 0.48 | 0.62 | 0.61 |
| Contribution From Drummond Commercial, Pipe 1321A - 3211A | | | | | | | | 0.00 | 0 | | | | 7.40 | | 0.00 | | 0.00 | | 7.40 | 21.92 | | | | | | | | | |
| | 3211A | 133A | | | | | | 0.69 | 0 | | | | 21.23 | | 0.00 | | 0.00 | 6.88 | 0.00 | 21.92 | 7.23 | 14.11 | 9.5 | 200 | 0.35 | 19.40 | 0.73 | 0.62 | 0.67 |
| | 133A | 134A | 0.16 | | | | 0 | 0.85 | 0 | | | | 21.23 | | 0.00 | | 0.00 | 6.88 | 0.16 | 22.08 | 7.29 | 14.17 | 61.5 | 200 | 0.35 | 19.40 | 0.73 | 0.62 | 0.67 |
| | 134A | 135A | 0.06 | | | | 0 | 0.91 | 0 | | | | 21.23 | | 0.00 | | 0.00 | 6.88 | 0.06 | 22.14 | 7.31 | 14.19 | 39.5 | 200 | 0.35 | 19.40 | 0.73 | 0.62 | 0.67 |
| To Haiku Street, Pipe 135A - 118A | | | | | | | | 0.91 | 0 | | | | 21.23 | | 0.00 | | 0.00 | | | 22.14 | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| **Montology Way** | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 1260A | 127A | 0.24 | 3 | 3 | | 11 | 0.24 | 11 | 3.73 | 0.13 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.24 | 0.24 | 0.08 | 0.21 | 37.5 | 200 | 0.65 | 26.44 | 0.01 | 0.84 | 0.24 |
| | 127A | 128A | 0.13 | 2 | 2 | | 7 | 0.37 | 18 | 3.71 | 0.22 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.13 | 0.37 | 0.12 | 0.34 | 12.5 | 200 | 0.35 | 19.40 | 0.02 | 0.62 | 0.23 |
| | 128A | 129A | 0.48 | 12 | 12 | | 41 | 0.85 | 59 | 3.64 | 0.70 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.48 | 0.85 | 0.28 | 0.98 | 76.5 | 200 | 0.35 | 19.40 | 0.05 | 0.62 | 0.32 |
| | 129A | 130A | 0.60 | 17 | 17 | | 58 | 1.45 | 117 | 3.58 | 1.36 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.60 | 1.45 | 0.48 | 1.84 | 102.0 | 200 | 0.35 | 19.40 | 0.09 | 0.62 | 0.39 |
| | 130A | 131A | | | | | | 1.45 | 117 | 3.58 | 1.36 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.00 | 1.45 | 0.48 | 1.84 | 7.5 | 200 | 0.35 | 19.40 | 0.09 | 0.62 | 0.39 |
| To Montology Way, Pipe 131A - 135A | | | | | | | | 1.45 | 117 | | | | 0.00 | | 0.00 | | 0.00 | | | 1.45 | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| **Rugosa Street** | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 211A | 204A | 0.49 | 12 | 12 | | 41 | 0.49 | 41 | 3.67 | 0.49 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.49 | 0.49 | 0.16 | 0.65 | 89.0 | 200 | 0.80 | 29.34 | 0.02 | 0.93 | 0.37 |
| | 204A | 205A | 0.74 | 19 | 19 | | 65 | 1.23 | 106 | 3.59 | 1.23 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.74 | 1.23 | 0.41 | 1.64 | 120.0 | 200 | 0.35 | 19.40 | 0.08 | 0.62 | 0.37 |
| | 205A | 206A | | | | | | 1.23 | 106 | 3.59 | 1.23 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.00 | 1.23 | 0.41 | 1.64 | 13.5 | 200 | 0.35 | 19.40 | 0.08 | 0.62 | 0.37 |
| To Appalachian Circle, Pipe 206A - 207A | | | | | | | | 1.23 | 106 | | | | 0.00 | | 0.00 | | 0.00 | | | 1.23 | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

DESIGN PARAMETERS

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| Park Flow = | 9300 | L/ha/da | 0.10764 | l/s/Ha | Industrial Peak Factor = as per MOE Graph | | |
| Average Daily Flow = | 280 | l/p/day | | | Extraneous Flow = | 0.330 | L/s/ha |
| Comm/Inst Flow = | 28000 | L/ha/da | 0.3241 | l/s/Ha | Minimum Velocity = | 0.600 | m/s |
| Industrial Flow = | 35000 | L/ha/da | 0.40509 | l/s/Ha | Manning's n = (Conc) | 0.013 (Pvc) | 0.013 |
| Max Res. Peak Factor = | 3.80 | | | | Townhouse coeff= | 2.7 | |
| Commercial/Inst./Park Peak Factor = | 1.00 | | | | Single house coeff= | 3.4 | |
| Institutional = | 0.32 | l/s/Ha | | | | | |

Designed: SLM

Checked: ADF

Dwg. Reference: Sanitary Drainage Plan, Dwgs. No. 80-83

PROJECT: **Ciavan Communities - Brazeau Phase 1**

LOCATION: **City of Ottawa**

File Ref: 18-1030

Date: **27 Jul 2020**

Sheet No. 3 of 6

# SANITARY SEWER CALCULATION SHEET

Manning's n=0.013

| LOCATION | | | RESIDENTIAL AREA AND POPULATION | | | | | | | | | COMM | | INSTIT | | PARK | | C+I+I | INFILTRATION | | | | PIPE | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| STREET | FROM M.H. | TO M.H. | AREA (ha) | UNITS | UNITS Singles | UNITS Townhouse | POP. | CUMULATIVE AREA (ha) | CUMULATIVE POP. | PEAK FACT. | PEAK FLOW (l/s) | AREA (ha) | ACCU. AREA (ha) | AREA (ha) | ACCU. AREA (ha) | AREA (ha) | ACCU. AREA (ha) | PEAK FLOW (l/s) | TOTAL AREA (ha) | ACCU. AREA (ha) | INFILT. FLOW (l/s) | TOTAL FLOW (l/s) | DIST (m) | DIA (mm) | SLOPE (%) | CAP. (FULL) (l/s) | RATIO Q act/Q cap | VEL. (FULL) (m/s) | VEL. (ACT.) (m/s) |
| **Appalachian Circle** | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 209A | 210A | 0.08 | 1 | 1 | | 4 | 0.08 | 4 | 3.76 | 0.05 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.08 | 0.08 | 0.03 | 0.08 | 12.5 | 200 | 2.95 | 56.33 | 0.00 | 1.79 | 0.29 |
| | 210A | 211A | 0.20 | 4 | 4 | | 14 | 0.28 | 18 | 3.71 | 0.22 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.20 | 0.28 | 0.09 | 0.31 | 50.5 | 200 | 3.80 | 63.94 | 0.00 | 2.04 | 0.52 |
| | 211A | 212A | 0.19 | 4 | 4 | | 14 | 0.47 | 32 | 3.68 | 0.38 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.19 | 0.47 | 0.16 | 0.54 | 50.0 | 200 | 0.45 | 22.00 | 0.02 | 0.70 | 0.29 |
| | 212A | 213A | 0.09 | 1 | 1 | | 4 | 0.56 | 36 | 3.67 | 0.43 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.09 | 0.56 | 0.18 | 0.61 | 12.5 | 200 | 1.55 | 40.83 | 0.02 | 1.30 | 0.47 |
| | 213A | 214A | 0.53 | 14 | 14 | | 48 | 1.09 | 84 | 3.61 | 0.98 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.53 | 1.09 | 0.36 | 1.34 | 86.5 | 200 | 2.35 | 50.28 | 0.03 | 1.60 | 0.68 |
| To Foundation Lane, Pipe 214A - 119A | | | | | | | | 1.09 | 84 | | | | 0.00 | | 0.00 | | 0.00 | | | 1.09 | | | | | | | | | |
| | 209A | 201A | 0.58 | 18 | 18 | | 62 | 0.58 | 62 | 3.64 | 0.73 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.58 | 0.58 | 0.19 | 0.92 | 93.5 | 200 | 0.65 | 26.44 | 0.03 | 0.84 | 0.39 |
| | 201A | 202A | 0.69 | 22 | 22 | | 75 | 1.27 | 137 | 3.56 | 1.58 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.69 | 1.27 | 0.42 | 2.00 | 116.5 | 200 | 0.95 | 31.97 | 0.06 | 1.02 | 0.56 |
| | 202A | 203A | 0.18 | 3 | 3 | | 11 | 1.45 | 148 | 3.55 | 1.70 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.18 | 1.45 | 0.48 | 2.18 | 13.5 | 200 | 0.80 | 29.34 | 0.07 | 0.93 | 0.54 |
| | 203A | 206A | 0.17 | 4 | 4 | | 14 | 1.62 | 162 | 3.54 | 1.86 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.17 | 1.62 | 0.53 | 2.40 | 50.5 | 200 | 1.10 | 34.40 | 0.07 | 1.09 | 0.62 |
| Contribution From Rugosa Street, Pipe 205A - 206A | | | | | | | | 1.23 | 106 | | | | 0.00 | | 0.00 | | 0.00 | | 1.23 | 2.85 | | | | | | | | | |
| | 206A | 207A | 0.20 | 5 | 5 | | 17 | 3.05 | 285 | 3.47 | 3.21 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.20 | 3.05 | 1.01 | 4.21 | 50.5 | 200 | 0.35 | 19.40 | 0.22 | 0.62 | 0.49 |
| | 207A | 208A | 0.12 | 2 | 2 | | 7 | 3.17 | 292 | 3.47 | 3.28 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.12 | 3.17 | 1.05 | 4.33 | 12.0 | 200 | 0.35 | 19.40 | 0.22 | 0.62 | 0.50 |
| | 208A | 214A | 0.65 | 18 | 18 | | 62 | 3.82 | 354 | 3.44 | 3.94 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.65 | 3.82 | 1.26 | 5.20 | 112.5 | 200 | 1.90 | 45.21 | 0.12 | 1.44 | 0.95 |
| To Unknown Road1 - 07, Pipe 214A - 119A | | | | | | | | 3.82 | 354 | | | | 0.00 | | 0.00 | | 0.00 | | | 3.82 | | | | | | | | | |
| **Foundation Lane** | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Contribution From Appalachian Circle, Pipe 208A - 214A | | | | | | | | 3.82 | 354 | | | | 0.00 | | 0.00 | | 0.00 | | 3.82 | 3.82 | | | | | | | | | |
| Contribution From Appalachian Circle, Pipe 213A - 214A | | | | | | | | 1.09 | 84 | | | | 0.00 | | 0.00 | | 0.00 | | 1.09 | 4.91 | | | | | | | | | |
| | 214A | 119A | 0.08 | | | | 0 | 4.99 | 438 | 3.40 | 4.83 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.08 | 4.99 | 1.65 | 6.48 | 59.0 | 200 | 0.35 | 19.40 | 0.33 | 0.62 | 0.55 |
| To Montology Way, Pipe 119A - 120A | | | | | | | | 4.99 | 438 | | | | 0.00 | | 0.00 | | 0.00 | | | 4.99 | | | | | | | | | |
| **Travertine Way** | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 119A | 122A | 0.52 | 13 | 13 | | 45 | 0.52 | 45 | 3.66 | 0.53 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.52 | 0.52 | 0.17 | 0.71 | 86.5 | 200 | 0.65 | 26.44 | 0.03 | 0.84 | 0.36 |
| | 122A | 123A | 0.09 | 1 | 1 | | 4 | 0.61 | 49 | 3.65 | 0.58 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.09 | 0.61 | 0.20 | 0.78 | 12.5 | 200 | 1.50 | 40.17 | 0.02 | 1.28 | 0.50 |
| | 123A | 126A | 0.20 | 4 | 4 | | 14 | 0.81 | 63 | 3.63 | 0.74 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.20 | 0.81 | 0.27 | 1.01 | 50.0 | 200 | 3.20 | 58.67 | 0.02 | 1.87 | 0.70 |
| To Sturnidae Street, Pipe 126A - 106A | | | | | | | | 0.81 | 63 | | | | 0.00 | | 0.00 | | 0.00 | | | 0.81 | | | | | | | | | |
| Contribution From Foundation Lane, Pipe 214A - 119A | | | | | | | | 4.99 | 438 | | | | 0.00 | | 0.00 | | 0.00 | | 4.99 | 4.99 | | | | | | | | | |
| | 119A | 120A | 0.60 | 17 | 17 | | 58 | 5.59 | 496 | 3.38 | 5.43 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.60 | 5.59 | 1.84 | 7.28 | 103.5 | 200 | 0.35 | 19.40 | 0.38 | 0.62 | 0.57 |
| | 120A | 121A | 0.14 | 2 | 2 | | 7 | 5.73 | 503 | 3.38 | 5.51 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.14 | 5.73 | 1.89 | 7.40 | 13.5 | 200 | 0.35 | 19.40 | 0.38 | 0.62 | 0.57 |
| | 121A | 131A | 0.43 | 10 | 10 | | 34 | 6.16 | 537 | 3.37 | 5.86 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.43 | 6.16 | 2.03 | 7.89 | 110.0 | 200 | 0.90 | 31.12 | 0.25 | 0.99 | 0.82 |
| Contribution From Montology Way, Pipe 130A - 131A | | | | | | | | 1.45 | 117 | | | | 0.00 | | 0.00 | | 0.00 | | 1.45 | 7.61 | | | | | | | | | |
| | 131A | 135A | 0.19 | 4 | 4 | | 14 | 7.80 | 668 | 3.32 | 7.20 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.19 | 7.80 | 2.57 | 9.77 | 58.5 | 200 | 0.35 | 19.40 | 0.50 | 0.62 | 0.62 |
| To Haiku Street, Pipe 135A - 118A | | | | | | | | 7.80 | 668 | | | | 0.00 | | 0.00 | | 0.00 | | | 7.80 | | | | | | | | | |
| **Haiku Street** | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Contribution From Montology Way, Pipe 131A - 135A | | | | | | | | 7.80 | 668 | | | | 0.00 | | 0.00 | | 0.00 | | 7.80 | 7.80 | | | | | | | | | |
| Contribution From Haiku Street, Pipe 134A - 135A | | | | | | | | 0.91 | 0 | | | | 21.23 | | 0.00 | | 0.00 | | 22.14 | 29.94 | | | | | | | | | |
| | 135A | 118A | | | | | | 8.71 | 668 | 3.32 | 7.20 | | 21.23 | | 0.00 | | 0.00 | 6.88 | 0.00 | 29.94 | 9.88 | 23.96 | 6.5 | 250 | 0.25 | 29.73 | 0.81 | 0.61 | 0.67 |
| Contribution From Expansion Road, Pipe 1180A - 118A | | | | | | | | 2.87 | 227 | | | | 0.00 | | 0.00 | | 1.45 | | 4.32 | 34.26 | | | | | | | | | |
| | 118A | 117A | | | | | | 11.58 | 895 | 3.26 | 9.47 | | 21.23 | | 0.00 | | 1.45 | 7.04 | 0.00 | 29.94 | 9.88 | 26.38 | 119.0 | 300 | 0.20 | 43.25 | 0.61 | 0.61 | 0.64 |
| Contribution From Haiku Street - Local Sewer, Pipe 118A - 117A | | | | | | | | 0.70 | 65 | | | | 0.00 | | 0.00 | | 0.00 | | | 0.70 | | | | | | | | | |
| | 117A | 116A | | | | | | 12.28 | 960 | 3.25 | 10.11 | | 21.23 | | 0.00 | | 1.45 | 7.04 | 0.00 | 30.64 | 10.11 | 27.26 | 125.5 | 375 | 0.15 | 67.91 | 0.40 | 0.61 | 0.58 |
| Contribution From Elevation Road, Pipe 106A - 116A | | | | | | | | 9.65 | 817 | | | | 0.00 | | 0.00 | | 1.72 | | 11.37 | 42.01 | | | | | | | | | |
| | 116A | 1160A | | | | | | 21.93 | 1777 | 3.10 | 17.85 | | 21.23 | | 0.00 | | 3.17 | 7.22 | 0.00 | 42.01 | 13.86 | 38.94 | 17.0 | 375 | 0.15 | 67.91 | 0.57 | 0.61 | 0.63 |
| To Haiku Street, Pipe 1160A - 1150A | | | | | | | | 21.93 | 1777 | | | | 21.23 | | 0.00 | | 3.17 | | | 42.01 | | | | | | | | | |

DESIGN PARAMETERS

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| Park Flow = | 9300 | L/ha/da | 0.10764 | l/s/Ha | | | |
| Average Daily Flow = | 280 | l/p/day | | | Industrial Peak Factor = as per MOE Graph | | |
| Comm/Inst Flow = | 28000 | L/ha/da | 0.3241 | l/s/Ha | Extraneous Flow = | 0.330 | L/s/ha |
| Industrial Flow = | 35000 | L/ha/da | 0.40509 | l/s/Ha | Minimum Velocity = | 0.600 | m/s |
| Max Res. Peak Factor = | 3.80 | | | | Manning's n = (Conc) | 0.013 (Pvc) | 0.013 |
| Commercial/Inst./Park Peak Factor = | 1.00 | | | | Townhouse coeff= | 2.7 | |
| Institutional = | 0.32 | l/s/Ha | | | Single house coeff= | 3.4 | |

| | | | |
|---|---|---|---|
| Designed: SLM | PROJECT: **Ciavan Communities - Brazeau Phase 1** | | |
| Checked: ADF | LOCATION: **City of Ottawa** | | |
| Dwg. Reference: Sanitary Drainage Plan, Dwgs. No. 80-83 | File Ref: 18-1030 | Date: **27 Jul 2020** | Sheet No. 4 of 6 |

# SANITARY SEWER CALCULATION SHEET

Manning's n=0.013

| LOCATION | | | RESIDENTIAL AREA AND POPULATION | | | | | | | | | COMM | | INSTIT | | PARK | | C+I+I | INFILTRATION | | | | PIPE | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| STREET | FROM M.H. | TO M.H. | AREA (ha) | UNITS | UNITS Singles | UNITS Townhouse | POP. | CUMULATIVE AREA (ha) | CUMULATIVE POP. | PEAK FACT. | PEAK FLOW (l/s) | AREA (ha) | ACCU. AREA (ha) | AREA (ha) | ACCU. AREA (ha) | AREA (ha) | ACCU. AREA (ha) | PEAK FLOW (l/s) | TOTAL AREA (ha) | ACCU. AREA (ha) | INFILT. FLOW (l/s) | TOTAL FLOW (l/s) | DIST (m) | DIA (mm) | SLOPE (%) | CAP. (FULL) (l/s) | RATIO Q act/Q cap | VEL. (FULL) (m/s) | VEL. (ACT.) (m/s) |
| **Haiku Street - Local Sewer** | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 109A | 1100A | 0.20 | 6 | | 6 | 17 | 0.20 | 17 | 3.71 | 0.20 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.20 | 0.20 | 0.07 | 0.27 | 55.5 | 200 | 1.00 | 32.80 | 0.01 | 1.04 | 0.30 |
| To Haiku Street, Pipe 1100A - 109A | | | | | | | | 0.20 | 17 | | | | 0.00 | | 0.00 | | 0.00 | | | 0.20 | | | | | | | | | |
| | 1150A | 1160A | 0.24 | 6 | | 6 | 17 | 0.24 | 17 | 3.71 | 0.20 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.24 | 0.24 | 0.08 | 0.28 | 41.5 | 200 | 0.65 | 26.44 | 0.01 | 0.84 | 0.27 |
| To Haiku Street, Pipe 1160A - 115A | | | | | | | | 0.24 | 17 | | | | 0.00 | | 0.00 | | 0.00 | | | 0.24 | | | | | | | | | |
| | 110A | 111A | 0.41 | 16 | | 16 | 44 | 0.41 | 44 | 3.66 | 0.52 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.41 | 0.41 | 0.14 | 0.66 | 74.5 | 200 | 0.65 | 26.44 | 0.02 | 0.84 | 0.35 |
| To Haiku Street, Pipe 111A - 110A | | | | | | | | 0.41 | 44 | | | | 0.00 | | 0.00 | | 0.00 | | | 0.41 | | | | | | | | | |
| | 111A | 115A | 0.49 | 19 | | 19 | 52 | 0.49 | 52 | 3.65 | 0.61 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.49 | 0.49 | 0.16 | 0.78 | 87.5 | 200 | 0.65 | 26.44 | 0.03 | 0.84 | 0.37 |
| To Haiku Street, Pipe 115A - 111A | | | | | | | | 0.49 | 52 | | | | 0.00 | | 0.00 | | 0.00 | | | 0.49 | | | | | | | | | |
| | 118A | 117A | 0.70 | 19 | 19 | | 65 | 0.70 | 65 | 3.63 | 0.77 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.70 | 0.70 | 0.23 | 1.00 | 119.0 | 200 | 0.65 | 26.44 | 0.04 | 0.84 | 0.40 |
| To Haiku Street, Pipe 117A - 116A | | | | | | | | 0.70 | 65 | | | | 0.00 | | 0.00 | | 0.00 | | | 0.70 | | | | | | | | | |
| | 117A | 116A | 0.67 | 15 | 15 | | 51 | 0.67 | 51 | 3.65 | 0.60 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.67 | 0.67 | 0.22 | 0.82 | 125.5 | 200 | 0.65 | 26.44 | 0.03 | 0.84 | 0.38 |
| To Haiku Street, Pipe 116A - 1160A | | | | | | | | 0.67 | 51 | | | | 0.00 | | 0.00 | | 0.00 | | | 0.67 | | | | | | | | | |
| **Haiku Street** | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Contribution From Haiku Street, Pipe 116A - 1160A | | | | | | | | 22.60 | 1828 | | | | 21.23 | | 0.00 | | 3.17 | | 42.68 | 42.68 | | | | | | | | | |
| Contribution From Haiku Street - Local Sewer, Pipe 1150A - 1160A | | | | | | | | 0.24 | 17.00 | | | | 0.00 | | 0.00 | | 0.00 | | 0.00 | 0.24 | | | | | | | | | |
| | 1160A | 1150A | | | | | | 22.84 | 1845 | 3.09 | 18.48 | | 21.23 | | 0.00 | | 3.17 | 7.22 | 0.00 | 42.92 | 14.16 | 39.86 | 41.5 | 375 | 0.15 | 67.91 | 0.59 | 0.61 | 0.64 |
| | 1150A | 115A | | | | | | 22.84 | 1845 | 3.09 | 18.48 | | 21.23 | | 0.00 | | 3.17 | 7.22 | 0.00 | 42.92 | 14.16 | 39.86 | 4.5 | 375 | 0.15 | 67.91 | 0.59 | 0.61 | 0.64 |
| Contribution From Focality Crescent, Pipe 114A - 115A | | | | | | | | 1.18 | 116 | | | | 0.00 | | 0.00 | | 0.00 | | 1.18 | 44.10 | | | | | | | | | |
| Contribution From Haiku Street - Local Sewer, Pipe 111A - 115A | | | | | | | | 0.67 | 51.00 | | | | 0.00 | | 0.00 | | 0.00 | | 0.00 | 0.67 | | | | | | | | | |
| | 115A | 111A | | | | | | 24.69 | 2012 | 3.07 | 20.00 | | 21.23 | | 0.00 | | 3.17 | 7.22 | 0.00 | 44.77 | 14.77 | 41.99 | 87.5 | 375 | 0.15 | 67.91 | 0.62 | 0.61 | 0.65 |
| Contribution From Haiku Street - Local Sewer, Pipe 110A - 111A | | | | | | | | 0.70 | 65.00 | | | | 0.00 | | 0.00 | | 0.00 | | 0.00 | 0.70 | | | | | | | | | |
| | 111A | 110A | | | | | | 25.39 | 2077 | 3.06 | 20.59 | | 21.23 | | 0.00 | | 3.17 | 7.22 | 0.00 | 45.47 | 15.01 | 42.81 | 74.5 | 375 | 0.15 | 67.91 | 0.63 | 0.61 | 0.65 |
| Contribution From Focality Crescent, Pipe 108A - 110A | | | | | | | | 0.31 | 23 | | | | 0.00 | | 0.00 | | 0.00 | | 0.31 | 45.78 | | | | | | | | | |
| | 110A | 1100A | | | | | | 25.70 | 2100 | 3.06 | 20.79 | | 21.23 | | 0.00 | | 3.17 | 7.22 | 0.00 | 45.78 | 15.11 | 43.12 | 4.0 | 375 | 0.15 | 67.91 | 0.64 | 0.61 | 0.65 |
| Contribution From Haiku Street - Local Sewer, Pipe 109A - 1100A | | | | | | | | 0.20 | 17.00 | | | | 0.00 | | 0.00 | | 0.00 | | 0.00 | 0.20 | | | | | | | | | |
| | 1100A | 109A | | | | | | 25.90 | 2117 | 3.05 | 20.95 | | 21.23 | | 0.00 | | 3.17 | 7.22 | 0.00 | 45.98 | 15.17 | 43.34 | 55.5 | 375 | 0.15 | 67.91 | 0.64 | 0.61 | 0.65 |
| To Obsidian Street, Pipe 109A - 400A | | | | | | | | 25.90 | 2117 | | | | 21.23 | | 0.00 | | 3.17 | | | 45.98 | | | | | | | | | |
| **Future Commercial** | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2A | 2250A | | | | | | 0.00 | | | | 2.99 | 2.99 | | 0.00 | | 0.00 | 0.97 | 2.99 | 2.99 | 0.99 | 1.96 | 11.0 | 200 | 0.35 | 19.40 | 0.10 | 0.62 | 0.39 |
| To Obsidian Street, Pipe 2250A - 226A | | | | | | | | 0.00 | 0 | | | | 2.99 | | 0.00 | | 0.00 | | | 2.99 | | | | | | | | | |
| **Obsidian Street** | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 224A | 225A | 0.33 | 9 | | 9 | 25 | 0.33 | 25 | 3.69 | 0.30 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.33 | 0.33 | 0.11 | 0.41 | 75.0 | 200 | 0.65 | 26.44 | 0.02 | 0.84 | 0.30 |
| | 225A | 2250A | 0.27 | 8 | | 8 | 22 | 0.60 | 47 | 3.66 | 0.56 | | 0.00 | | 0.00 | | 0.00 | 0.00 | 0.27 | 0.60 | 0.20 | 0.75 | 67.5 | 200 | 0.90 | 31.12 | 0.02 | 0.99 | 0.41 |
| Contribution From Future Commercial, Pipe 2A - 2250A | | | | | | | | 0.00 | 0 | | | | 2.99 | | 0.00 | | 0.00 | | 2.99 | 3.59 | | | | | | | | | |
| | 2250A | 226A | 0.15 | 3 | | 3 | 9 | 0.75 | 56 | 3.64 | 0.66 | | 2.99 | | 0.00 | | 0.00 | 0.97 | 0.15 | 3.74 | 1.23 | 2.86 | 46.0 | 200 | 1.40 | 38.81 | 0.07 | 1.24 | 0.71 |
| | 226A | 109A | 0.34 | 9 | | 9 | 25 | 1.09 | 81 | 3.61 | 0.95 | | 2.99 | | 0.00 | | 0.00 | 0.97 | 0.34 | 4.08 | 1.35 | 3.26 | 92.0 | 200 | 1.60 | 41.49 | 0.08 | 1.32 | 0.78 |
| Contribution From Haiku Street, Pipe 1100A - 109A | | | | | | | | 25.90 | 2117 | | | | 21.23 | | 0.00 | | 3.17 | | 45.98 | 50.06 | | | | | | | | | |
| Contribution From Future Residential, Pipe 3A - 109A | | | | | | | | 1.90 | 162 | | | | 0.00 | | 0.00 | | 0.00 | | 1.90 | 51.96 | | | | | | | | | |
| | 109A | 400A | 0.09 | | | | 0 | 28.98 | 2360 | 3.02 | 23.12 | | 24.22 | | 0.00 | | 3.17 | 8.19 | 0.09 | 52.05 | 17.18 | 48.49 | 63.0 | 375 | 0.15 | 67.91 | 0.71 | 0.61 | 0.67 |
| To Drummond Future Road , Pipe 400A - 401A | | | | | | | | 28.98 | 2360 | | | | 24.22 | | 0.00 | | 3.17 | | | 52.05 | | | | | | | | | |

DESIGN PARAMETERS

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| Park Flow = | 9300 | L/ha/da | 0.10764 | l/s/Ha | | | |
| Average Daily Flow = | 280 | l/p/day | | | Industrial Peak Factor = as per MOE Graph | | |
| Comm/Inst Flow = | 28000 | L/ha/da | 0.3241 | l/s/Ha | Extraneous Flow = | 0.330 | L/s/ha |
| Industrial Flow = | 35000 | L/ha/da | 0.40509 | l/s/Ha | Minimum Velocity = | 0.600 | m/s |
| Max Res. Peak Factor = | 3.80 | | | | Manning's n = (Conc) | 0.013 (Pvc) | 0.013 |
| Commercial/Inst./Park Peak Factor = | 1.00 | | | | Townhouse coeff= | 2.7 | |
| Institutional = | 0.32 | l/s/Ha | | | Single house coeff= | 3.4 | |

| | | | |
|---|---|---|---|
| Designed: SLM | PROJECT: **Ciavan Communities - Brazeau Phase 1** | | |
| Checked: ADF | LOCATION: **City of Ottawa** | | |
| Dwg. Reference: Sanitary Drainage Plan, Dwgs. No. 80-83 | File Ref: 18-1030 | Date: **27 Jul 2020** | Sheet No. 5 of 6 |

# SANITARY SEWER CALCULATION SHEET

Manning's n=0.013

| LOCATION | | | | RESIDENTIAL AREA AND POPULATION | | | | | | | | | COMM | | INSTIT | | PARK | | C+I+I | INFILTRATION | | | | PIPE | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| STREET | FROM M.H. | TO M.H. | AREA (ha) | UNITS | UNITS Singles | UNITS Townhouse | POP. | CUMULATIVE AREA (ha) | CUMULATIVE POP. | PEAK FACT. | PEAK FLOW (l/s) | AREA (ha) | ACCU. AREA (ha) | AREA (ha) | ACCU. AREA (ha) | AREA (ha) | ACCU. AREA (ha) | PEAK FLOW (l/s) | TOTAL AREA (ha) | ACCU. AREA (ha) | INFILT. FLOW (l/s) | TOTAL FLOW (l/s) | DIST (m) | DIA (mm) | SLOPE (%) | CAP. (FULL) (l/s) | RATIO Q act/Q cap | VEL. (FULL) (m/s) | VEL. (ACT.) (m/s) |
| **Drummond Future Road** | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Contribution From Obsidian Street, Pipe 109A - 400A | | | | | | | | 28.98 | 2360 | | | | 24.22 | | 0.00 | | 3.17 | | 52.05 | 52.05 | | | | | | | | | | |
| | 400A | 401A | 0.24 | | | | 25 | 29.22 | 2385 | 3.02 | 23.34 | | 24.22 | | 0.00 | | 3.17 | 8.19 | 0.24 | 52.29 | 17.26 | 48.79 | 72.5 | 375 | 0.15 | 67.91 | 0.72 | 0.61 | 0.67 |
| | 401A | 402A | 0.14 | | | | 15 | 29.36 | 2400 | 3.02 | 23.48 | | 24.22 | | 0.00 | | 3.17 | 8.19 | 0.14 | 52.43 | 17.30 | 48.97 | 62.0 | 375 | 0.15 | 67.91 | 0.72 | 0.61 | 0.67 |
| To future Greenbank Road, Pipe 402A - 403A | | | | | | | | 29.36 | 2400 | | | | 24.22 | | 0.00 | | 3.17 | | | 52.43 | | | | | | | | | | |
| **Future Greenbank Road** | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Contribution From Drummond Future Road, Pipe 401A - 402A | | | | | | | | 29.36 | 2400 | | | | 24.22 | | 0.00 | | 3.17 | | 52.43 | 52.43 | | | | | | | | | | |
| | 402A | 403A | 0.38 | | | | 0 | 29.74 | 2400 | 3.02 | 23.48 | | 24.22 | | 0.00 | | 3.17 | 8.19 | 0.38 | 52.81 | 17.43 | 49.09 | 80.0 | 375 | 0.15 | 67.91 | 0.72 | 0.61 | 0.67 |
| | 403A | 404A | 0.33 | | | | 0 | 30.07 | 2400 | 3.02 | 23.48 | | 24.22 | | 0.00 | | 3.17 | 8.19 | 0.33 | 53.14 | 17.54 | 49.20 | 80.0 | 375 | 0.15 | 67.91 | 0.72 | 0.61 | 0.67 |
| | 404A | 405A | 0.33 | | | | 0 | 30.40 | 2400 | 3.02 | 23.48 | | 24.22 | | 0.00 | | 3.17 | 8.19 | 0.33 | 53.47 | 17.65 | 49.31 | 81.0 | 375 | 0.15 | 67.91 | 0.73 | 0.61 | 0.67 |
| Contribution From Expansion Road, Pipe 1313A - 405A | | | | | | | 0 | 15.39 | 1492 | | | | 0.00 | | 0.00 | | 0.00 | | 0.00 | 15.39 | | | | | | | | | | |
| | 405A | 406A | 0.25 | | | | 0 | 46.04 | 3892 | 2.88 | 36.26 | | 24.22 | | 0.00 | | 3.17 | 8.19 | 0.25 | 69.11 | 22.81 | 67.26 | 59.5 | 375 | 0.25 | 87.67 | 0.77 | 0.79 | 0.87 |
| | 406A | 407A | 0.35 | | | | 0 | 46.39 | 3892 | 2.88 | 36.26 | | 24.22 | 6.06 | 6.06 | | 3.17 | 10.15 | 6.41 | 75.52 | 24.92 | 71.34 | 83.5 | 375 | 0.30 | 96.03 | 0.74 | 0.87 | 0.95 |
| | 407A | 408A | 0.46 | | | | 0 | 46.85 | 3892 | 2.88 | 36.26 | | 24.22 | | 6.06 | | 3.17 | 10.15 | 0.46 | 75.98 | 25.07 | 71.49 | 110.0 | 375 | 0.30 | 96.03 | 0.74 | 0.87 | 0.95 |
| | 408A | 409A | 0.40 | | | | 0 | 47.25 | 3892 | 2.88 | 36.26 | | 24.22 | | 6.06 | | 3.17 | 10.15 | 0.40 | 76.38 | 25.21 | 71.62 | 96.5 | 375 | 0.30 | 96.03 | 0.75 | 0.87 | 0.95 |
| | 409A | 410A | 0.51 | | | | 0 | 47.76 | 3892 | 2.88 | 36.26 | | 24.22 | | 6.06 | | 3.17 | 10.15 | 0.51 | 76.89 | 25.37 | 71.79 | 120.0 | 375 | 0.30 | 96.03 | 0.75 | 0.87 | 0.95 |
| | 410A | 570A | 0.30 | | | | 0 | 48.06 | 3892 | 2.88 | 36.26 | | 24.22 | | 6.06 | | 3.17 | 10.15 | 0.30 | 77.19 | 25.47 | 71.89 | 63.0 | 375 | 0.30 | 96.03 | 0.75 | 0.87 | 0.95 |
| | 570A | 57A | | | | | | 48.06 | 3892 | 2.88 | 36.26 | | 24.22 | | 6.06 | | 3.17 | 10.15 | 0.00 | 77.19 | 25.47 | 71.89 | 15.0 | 375 | 0.50 | 123.98 | 0.58 | 1.12 | 1.16 |

DESIGN PARAMETERS

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| Park Flow = | 9300 | L/ha/da | 0.10764 | l/s/Ha | | | |
| Average Daily Flow = | 280 | l/p/day | | | Industrial Peak Factor = as per MOE Graph | | |
| Comm/Inst Flow = | 28000 | L/ha/da | 0.3241 | l/s/Ha | Extraneous Flow = | 0.330 | L/s/ha |
| Industrial Flow = | 35000 | L/ha/da | 0.40509 | l/s/Ha | Minimum Velocity = | 0.600 | m/s |
| Max Res. Peak Factor = | 3.80 | | | | Manning's n = (Conc) | 0.013 (Pvc) | 0.013 |
| Commercial/Inst./Park Peak Factor = | 1.00 | | | | Townhouse coeff= | 2.7 | |
| Institutional = | 0.32 | l/s/Ha | | | Single house coeff= | 3.4 | |

| | |
|---|---|
| Designed: SLM | PROJECT: **Ciavan Communities - Brazeau Phase 1** |
| Checked: ADF | LOCATION: **City of Ottawa** |
| Dwg. Reference: Sanitary Drainage Plan, Dwgs. No. 80-83 | File Ref: 18-1030 / Date: **27 Jul 2020** / Sheet No. 6 of 6 |

# E.2 STORMWATER MANAGEMENT REPORT FOR HALF MOON BAY SOUTH PHASE 8 BY STANTEC (JUNE, 2023)

# 3718 Greenbank Road: Servicing and Stormwater Management Report

Stantec Project No. 160401657

June 13, 2023

Prepared for:

Mattamy Homes Ltd.

Prepared by:

Stantec Consulting Ltd.
400-1331 Clyde Avenue
Ottawa ON K2C 3G4

| Revision | Description | Author | | Quality Check | | Independent Review | |
|---|---|---|---|---|---|---|---|
| 1 | Issued for Approval | NN | 2022-01-13 | NC | 2021-01-14 | DT | 2021-01-18 |
| 2 | Revised per City Comments | DT | 2023-03-20 | DT | 2023-03-24 | SG | 2023-03-24 |
| 3 | Revised per City Comments | DT | 2023-06-09 | DT | 2023-06-13 | SG | 2023-06-13 |

This document entitled 3718 Greenbank Road: Servicing and Stormwater Management Report was prepared by Stantec Consulting Ltd. (“Stantec”) for the account of Mattamy Homes Ltd. (the “Client”). Any reliance on this document by any third party is strictly prohibited. The material in it reflects Stantec’s professional judgment in light of the scope, schedule and other limitations stated in the document and in the contract between Stantec and the Client. The opinions in the document are based on conditions and information existing at the time the document was published and do not take into account any subsequent changes. In preparing the document, Stantec did not verify information supplied to it by others. Any use which a third party makes of this document is the responsibility of such third party. Such third party agrees that Stantec shall not be responsible for costs or damages of any kind, if any, suffered by it or any other third party as a result of decisions made or actions taken based on this document.

Prepared by _____

**Davide Milos, EIT**

Reviewed by  _____

**Neal Cody, P.Eng.**

Approved by  _____

**Dustin Thiffault, P.Eng.**

# Table of Contents

**1.0 INTRODUCTION ..... 1.1**
1.1 OBJECTIVE ..... 1.2

**2.0 REFERENCES ..... 2.1**

**3.0 POTABLE WATER SERVICING ..... 3.1**
3.1 BACKGROUND ..... 3.1
3.2 PROPOSED WATERMAIN SIZING AND LAYOUT ..... 3.1
3.2.1 Ground Elevations ..... 3.1
3.2.2 Domestic Water Demands ..... 3.2
3.3 LEVEL OF SERVICE ..... 3.2
3.3.1 Allowable Pressures ..... 3.2
3.3.2 Fire Flow ..... 3.2
3.4 HYDRAULIC MODEL ..... 3.3
3.4.1 System Layout ..... 3.3
3.4.2 Boundary Conditions ..... 3.4
3.4.3 Model Development ..... 3.4
3.4.4 Ground Elevations ..... 3.5
3.5 HYDRAULIC MODELING RESULTS ..... 3.5
3.5.1 Average Day (AVDY) ..... 3.5
3.5.2 Peak Hour (PKHR) ..... 3.6
3.5.3 Maximum Day Plus Fire Flow (MXDY+FF) ..... 3.7
3.6 POTABLE WATER SUMMARY ..... 3.8

**4.0 WASTEWATER SERVICING ..... 4.9**
4.1 BACKGROUND ..... 4.9
4.2 DESIGN CRITERIA ..... 4.9
4.3 SANITARY SERVICING DESIGN ..... 4.10

**5.0 STORMWATER MANAGEMENT AND SERVICING ..... 5.1**
5.1 PROPOSED CONDITIONS ..... 5.1
5.2 DESIGN CRITERIA AND CONSTRAINTS ..... 5.1
5.2.1 Minor System ..... 5.2
5.2.2 Major System ..... 5.2
5.2.3 Allowable Release Rate ..... 5.3
5.3 MODELING METHODOLOGY ..... 5.4
5.3.1 Modeling Rationale ..... 5.4
5.3.2 SWMM Dual Drainage Methodology ..... 5.4
5.3.3 Modified Dual Drainage Methodology to Support EES ..... 5.5
5.3.4 Model Input Parameters ..... 5.5
5.4 MODEL RESULTS AND DISCUSSION ..... 5.8
5.4.1 Hydrology ..... 5.8
5.4.2 Hydraulic Grade Line ..... 5.10
5.4.3 Overland Flow ..... 5.11

5.4.4 Peak System Outflows ..... 5.12
5.5 QUALITY CONTROL ..... 5.14
5.6 WATER BALANCE – ETOBICOKE EXFILTRATION SYSTEM ..... 5.14
5.6.1 Etobicoke Exfiltration System Monitoring ..... 5.17

**6.0 GEOTECHNICAL CONSIDERATIONS AND GRADING ..... 6.1**
6.1 GEOTECHNICAL INVESTIGATION ..... 6.1
6.1.1 Groundwater Control ..... 6.1
6.2 GRADING PLAN ..... 6.1

**7.0 APPROVALS ..... 7.1**

**8.0 EROSION CONTROL ..... 8.1**

**9.0 CONCLUSIONS AND RECOMMENDATIONS ..... 9.1**
9.1 POTABLE WATER SERVICING ..... 9.1
9.2 WASTEWATER SERVICING ..... 9.1
9.3 STORMWATER MANAGEMENT AND SERVICING ..... 9.1
9.4 GRADING ..... 9.2
9.5 APPROVALS/PERMITS ..... 9.2

## LIST OF TABLES

Table 3–1: Residential Water Demands ..... 3.2
Table 3–2: Boundary Conditions (SUC Zone Reconfiguration) ..... 3.4
Table 3–3: C-Factors Used in Watermain Hydraulic Model ..... 3.4
Table 4–1 Summary of Proposed Sanitary Peak Flows ..... 4.10
Table 5–1 Target Release Rate ..... 5.4
Table 5–2: General Subcatchment Parameters ..... 5.5
Table 5–3: Individual Subcatchment Parameters ..... 5.6
Table 5–4: Surface Storage Parameters ..... 5.7
Table 5–5: Surface Storage Parameters ..... 5.7
Table 5–6: Exit Loss Coefficients for Bends at Manholes ..... 5.8
Table 5–7 : Proposed ICD Schedule ..... 5.9
Table 5–8: Previously Approved Model Outflow – The Ridge Subdivision ..... 5.10
Table 5–9: Previously Approved Model HGL – The Ridge Subdivision ..... 5.10
Table 5–10: Hydraulic Grade Line Results ..... 5.11
Table 5–11: Maximum Static and Dynamic Water Depths ..... 5.12
Table 5–12: Peak Site Outflows ..... 5.13
Table 5–13: Proposed Downstream Flow Conditions ..... 5.13
Table 5–14: Proposed Downstream HGL ..... 5.13
Table 5–15: 22mm Event Simulated EES Volumes ..... 5.15
Table 5–16: Summary of Field Saturated Hydraulic Conductivity Values and Infiltration Rates ..... 5.16
Table 5–17: 22mm Event Estimated EES Drawdown Times ..... 5.16

## LIST OF FIGURES

Figure 1: Key Plan of 3718 Greenbank Road Development Area ..... 1.1
Figure 2: Watermain Model Nodes ..... 3.3
Figure 3: Ground Elevations (m) in Hydraulic Model ..... 3.5
Figure 4: Pressures (psi) Under AVDY Demand Scenario ..... 3.6
Figure 5: Pressures (psi) Under PKHR Demand Scenario ..... 3.7
Figure 6: Available Fire Flows (L/s) for MXDY+FF Demand Scenario ..... 3.8

## LIST OF APPENDICES

**APPENDIX A POTABLE WATER SERVICING ..... A.1**
A.1 Boundary Conditions - City of Ottawa ..... A.1
A.2 Domestic Water Demand Calculations ..... A.2
A.3 FUS (2020) Fire Flow Requirements ..... A.3
A.4 Hydraulic Capacity and Modeling Results ..... A.4

**APPENDIX B DRAFT SITE PLAN ..... B.1**

**APPENDIX C SANITARY SERVICING ..... C.1**
C.1 Sanitary Sewer Design Sheet ..... C.1

**APPENDIX D STORMWATER MANAGEMENT ..... D.1**
D.1 Storm Sewer Design Sheet ..... D.1
D.2 Sample PCSWMM Input (100yr Chicago) ..... D.2
D.3 Sample PCSWMM Output (100yr Chicago) ..... D.3

**APPENDIX E EXTERNAL REPORTS ..... E.1**
E.1 Design Brief (Site Servicing Study) for the Ridge (Brazeau Lands) By DSEL (July 2020) ..... E.1
E.2 Stormwater Management Report for the Ridge (Brazeau LANDS) BY JFSA (July 2020) ..... E.2
E.3 Geotechncial Investigation report by Paterson Inc. ..... E.3

# 1.0 INTRODUCTION

Mattamy Homes Ltd. has retained Stantec Consulting Ltd. to prepare this Stormwater and Servicing Report in support of a site plan control application for 3718 Greenbank Road (Half Moon Bay South Phase 8 - Residential). The subject site is located within the Brazeau Lands development area otherwise known as The Ridge, located at 3809 Borrisokane Road within the Barrhaven South Urban Expansion Area (BSUEA) in the City of Ottawa. It is bound by Dundonald Drive to the north, Obsidian Street to the west and Future Greenbank Road to the east as illustrated in **Figure 1** below.




**Figure 1: Key Plan of 3718 Greenbank Road Development Area**

The development land is approximately 3.09ha in area and comprising 19 blocks of townhouses with a total of 228 units. This servicing and stormwater management report will demonstrate that the subject site can be freely serviced by the existing municipal water, sanitary, and storm services while complying with established design criteria recommended in background studies and City of Ottawa guidelines. The proposed site plan is included in **Appendix B** for reference.

This parcel is currently zoned R4Z. The bulk of the current phase of the proposed development has been recently cleared of topsoil which has been stockpiled in several piles across the site. Generally, the ground surface across the subject site is relatively flat within the central portion of the development and sloping sharply towards the north and east property lines. It should be noted that parts of the subject site had undergone excavation and in-filling activities as part of a previous sand extraction operation. The property is within the Jock River watershed and is under the jurisdiction of the Rideau Valley Conservation Authority (RVCA).

## 1.1 OBJECTIVE

This Site Servicing and Stormwater Management Brief has been prepared to present a servicing scheme that is free of conflicts and presents the most suitable servicing approach that complies with the relevant City design guidelines. The use of the existing infrastructure as obtained from available as-built drawings has been determined in consultation with David Schaeffer Engineering Ltd. (DSEL), J. F. Sabourin and Associates Inc. (JFSA), City of Ottawa staff, and the adjoining property owners. Infrastructure requirements for water supply, sanitary sewer, and storm sewer services are presented in this report.

Criteria and constraints provided by Brazeau Lands (The Ridge) Design brief and the City of Ottawa with further iterations through the 3718 Greenbank Road Functional Servicing Report have been used as a basis for the servicing design of the proposed development. Specific elements and potential development constraints to be addressed are as follows:

- **Potable Water Servicing**
    - Estimate water demands to characterize the feed for the proposed development which will be serviced by an existing 300mm diameter PVC watermain fronting the site along Obsidian Street.
    - Watermain servicing for the development is to be able to provide average day and maximum day and peak hour demands (i.e., non-emergency conditions) at pressures within the allowable range of 40 to 80 psi (276 to 552 kPa).
    - Under fire flow (emergency) conditions with maximum day demands, the water distribution system is to maintain a minimum pressure greater than 20 psi (140 kPa).
- Prepare a grading plan in accordance with the proposed site plan and existing grades.
- **Stormwater Management and Servicing**
    - Define major and minor conveyance systems inline with guidelines used for the stormwater management of the Brazeau lands subdivision, as well as those provided in the October 2012 City

of Ottawa Sewer Design Guidelines and subsequent technical memorandums, and generally accepted stormwater management design guidelines.

- As documented in the Barrhaven South Urban Expansion Area Master Servicing Study, by J. L Richards 2018 and Stantec's 2022 Functional Servicing Report for the area, the development will also have Etobicoke Exfiltration Systems (EES) implemented within this subdivision. These EES will be installed within local roadways of the subdivision, to exfiltrate runoff from the development for the more frequent events.
- Connect to the existing storm maintenance hole structure at the intersection of Haiku and Obsidian Street.

- **Wastewater Servicing**
  - Estimate wastewater flows generated by the development and size sanitary sewers which will outlet to the existing sanitary sewer stub fronting the site, located off the Haiku and Obsidian Street intersection. The existing maintenance hole (SAN MH3A) will be relocated and cored into for the proposed connection.

The accompanying **Drawing SSP-1** illustrates the proposed internal servicing scheme for the site.

# 2.0 REFERENCES

The following documents were referenced in the preparation of this stormwater management and servicing report:


- *City of Ottawa Sewer Design Guidelines*, 2nd Edition, City of Ottawa, October 2012.
- *City of Ottawa Design Guidelines – Water Distribution*, First Edition, Infrastructure Services Department, City of Ottawa, July 2010.
- *Design Brief for Cavian Greenbank Development Corporation,* The Ridge (Brazeau Lands), David Schaeffer Engineering Ltd., July 2020.
- *Geotechnical Investigation,* Proposed Mixed Use Development Half Moon Bay South – Phase 8 3718 Greenbank Road - Ottawa, PG5690-1, Paterson Group, May 2023.
- *Hydraulic Capacity and Modeling Analysis Brazeau Lands*, Final Report, GeoAdvice Engineering Inc., July 2020.
- *Master Servicing Study – Barrhaven South Urban Expansion Area,* J.L. Richards & Associates Limited, Revision 2, May 2018.
- *Pond Design Brief for Brazeau Subdivision,* by J.F. Sabourin and Associates, July 2020.
- *Stormwater Management Report for Brazeau Subdivision,* by J.F. Sabourin and Associates (July 2020).
- *Stormwater Planning and Design Manual,* Ministry of the Environment, March 2003.
- *Technical Bulletin ISTB-2014-02 Revision to Ottawa Design Guidelines – Water*, City of Ottawa, May 2014.
- *Technical Bulletin PIEDTB-2016-01 Revisions to Ottawa Design Guidelines – Sewer,* City of Ottawa, September 2016.
- *3718 Greenbank Road – Functional Servicing Report*, Stantec Consulting Ltd., September 14, 2022.

# 3.0 POTABLE WATER SERVICING

## 3.1 BACKGROUND

The subject site is located within Zone 3SW of the City of Ottawa water distribution system. The proposed residential development will include 19 blocks with 228 townhome units. The subject site is within The Ridge (Brazeau lands) subdivision for which David Schaeffer Engineering Ltd. (DSEL) conducted a servicing and stormwater management study in July 2020.

The development will be serviced via two existing 200mm diameter private watermain services located within Obsidian Street and fed from the existing 300mm diameter watermain terminating at Dundonald Drive and the future New Greenbank Road alignment and a 400mm diameter watermain from the existing Cambrian Road forming part of the Tamarack Meadows, as shown in the design brief by DSEL in **Appendix E.1**.

In July 2020, GeoAdvice carried out a watermain analysis to determine the hydraulic capacity of the watermain network within Brazeau Lands which includes the residential portion of 3718 Greenbank Road. The GeoAdvice analysis was previously used to generate the hydraulic boundary conditions, however, the updated boundary conditions for the proposed development have been received from the City of Ottawa and are used in the updated hydraulic analysis. The City of Ottawa boundary conditions are included in **Appendix A.1**.

## 3.2 PROPOSED WATERMAIN SIZING AND LAYOUT

The proposed watermain alignment and sizing for the development is demonstrated on **Drawing SSP-1**. A 250 mm diameter watermain is proposed to loop within the street fronting Block 1 and extend southeast/southwest fronting Block 17 to the connection within Obsidian, and 200 mm diameter watermains will extend from the main distribution line to service blocks not fronting the 250 mm diameter distribution loop. The connection points are as follows:

- A 250mm diameter watermain will loop and connect to the existing 200mm stub at Haiku Street via 45º horizontal bend.
- A 250mm diameter watermain will loop and connect to the existing 300mm watermain along Obsidian Street via existing 200mm stub connection at the southwest boundary of the site.

### 3.2.1 Ground Elevations

The proposed ground elevations within the development range from approximately 103.1 m to 106.5 m, with the ground elevations highest in the southeast corner of the site. This significant variation in ground elevations was largely dictated by the original topography of the site, and to suit tie-in elevations at Obsidian Street.

### 3.2.2 Domestic Water Demands

The 3718 Greenbank Road development will contain a total of 19 blocks with 228 townhome units and outdoor amenity areas having a total estimated population of 616 persons. Refer to **Appendix A.2** for detailed domestic water demand calculations.

Water demands for the development were calculated using the City of Ottawa's Water Distribution Design Guidelines. For residential developments, the average day (AVDY) per capita water demand is 280L/cap/d. For maximum day (MXDY) demand, AVDY was multiplied by a factor of 2.5 and for peak hour (PKHR) demand, MXDY was multiplied by a factor of 2.2. For maximum day (MXDY) demand of amenity areas, AVDY was multiplied by a factor of 1.5 and for peak hour (PKHR) demand, MXDY was multiplied by a factor of 1.8. The calculated residential water consumption is represented in **Table 3-1** below:

**Table 3–1: Residential Water Demands**

| Unit Type | Units/ Amenity areas ($m^2$) | Persons/Unit | Population | AVDY (L/s) | MXDY (L/s) | PKHR (L/s) |
|---|---|---|---|---|---|---|
| Townhome | 228 units | 2.7 | 616 | 1.99 | 4.99 | 10.97 |
| | | **Total** | **616** | **1.99** | **4.99** | **10.97** |

## 3.3 LEVEL OF SERVICE

### 3.3.1 Allowable Pressures

The City of Ottawa Water Distribution Design Guidelines state that the desired range of system pressures under normal demand conditions (i.e. basic day, maximum day, and peak hour) should be in the range of 350 to 552 kPa (50 to 80 psi) and no less than 275 kPa (40 psi) at the ground elevation in the streets (i.e. at hydrant level). The maximum pressure at any point in the distribution system is to be no higher than 552 kPa (80 psi). As per the Ontario Building Code & Guide for Plumbing, if pressures greater than 552 kPa (80 psi) are anticipated, pressure relief measures (such as pressure reducing valves) are required. Under emergency fire flow conditions, the minimum pressure in the distribution system is allowed to drop to 138 kPa (20 psi).

### 3.3.2 Fire Flow

The FUS fire flow calculation spreadsheets for the governing fire flow demand scenarios (see **Appendix A.3**) were generated to calculate the expected fire flow demands from the proposed site.

The ground floor area of a single storey of each block was estimated to be 476 $m^2$ based on the building footprints shown on the site plan. For assessment of the worst-case fire flow requirement, building exposures were reviewed on a block-by-block basis. Blocks 1, Blocks 4-15, and Blocks 18-19 were determined to be the critical units for assessment given exposures from adjacent units on all sides. The



remaining blocks maintain exposures on at most three sides. Blocks 1 and 8 were selected for assessment as they are generally representative of these two site conditions. Fire flow calculations were performed and for the specified configurations the maximum required fire flow for most blocks was estimated to be 250 L/s.

Based on the site plan updates, fire separation via firewalls will no longer be required to keep the maximum ground floor area of residential blocks below 600m$^2$ as per building code requirements, and the 250 L/s fire flow requirement will govern the hydraulic analysis and design.


## 3.4 HYDRAULIC MODEL

A hydraulic model for the site was constructed using the H2OMap Water program developed by Innovyze to provide an accurate network analysis of the proposed water distribution system. The results are presented and discussed in the following sections.

### 3.4.1 System Layout

The proposed watermain alignment including model node IDs, reservoirs (representing boundary conditions at connections to the existing watermain network), and pipe sizing for the proposed development is shown in **Figure 2** below. Proposed 250 mm and 200 mm diameter watermains are identified in teal and blue, respectively.

**Figure 2: Watermain Model Nodes**

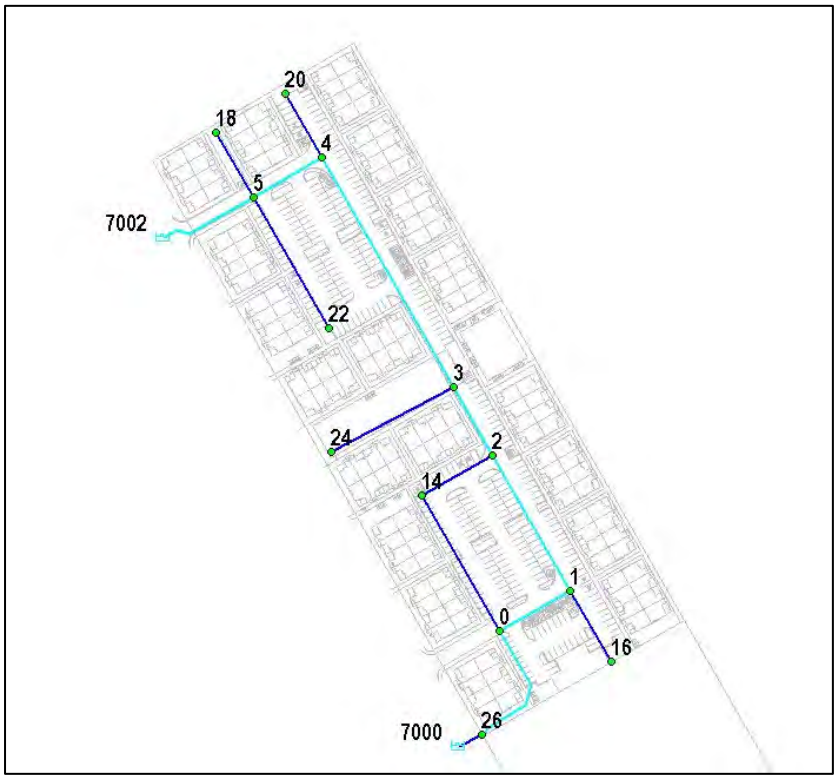

### 3.4.2 Boundary Conditions

The updated hydraulic boundary conditions provided by the City of Ottawa dated June 22, 2022, are based on the anticipated domestic water demands and a fire flow demand of 15,000 L/min (250 L/s). Two fixed head reservoirs simulating the boundary conditions were placed for the watermain connection points at the Haiku Street/Obsidian Street (North) intersection and Obsidian Street (South) in the hydraulic model. A summary of the boundary conditions is provided in **Table 2** which shows the ground elevation at the proposed connections and the HGLs for average day, peak hour, and maximum day plus fire flow demand scenarios that have been used in the hydraulic model. The boundary conditions are included in **Appendix A.1**.

**Table 3–2: Boundary Conditions (SUC Zone Reconfiguration)**

| Location | Ground Elevation (m) | AVDY (m) | PKHR (m) | MXDY+FF (15,000 L/min) (m) |
|---|---|---|---|---|
| Connection 1 - Obsidian North | 98.68 | 148.1 | 143.0 | 131.2 |
| Connection 2 - Obsidian South | 105.14 | 148.1 | 143.0 | 129.7 |

### 3.4.3 Model Development

New watermains were added to the hydraulic model to simulate the proposed distribution system. A 250 mm and 200 mm dia. watermain network is used throughout the site with the main 250 mm diameter distribution line following the locations of proposed hydrants. Hazen-Williams coefficients (C-factors) were applied to the proposed watermain in accordance with the City of Ottawa's Water Distribution Design Guidelines. The C-factors used are given in **Table 3-3** below.

**Table 3–3: C-Factors Used in Watermain Hydraulic Model**


| Pipe Diameter (mm) | C-Factor |
|---|---|
| 150 | 100 |
| 200 to 250 | 110 |
| 300 to 600 | 120 |
| Over 600 | 130 |

The labelling of the watermain junctions and reservoirs (representing boundary conditions at connections to the existing watermain network) is shown in **Figure 2**.

### 3.4.4 Ground Elevations

The ground elevations used at each node along the watermain model network are shown in **Figure 3** below. These elevations were interpolated from the detailed grading plan for the site (**Drawing GP-1**, included in **Appendix E**).

**Figure 3: Ground Elevations (m) in Hydraulic Model**

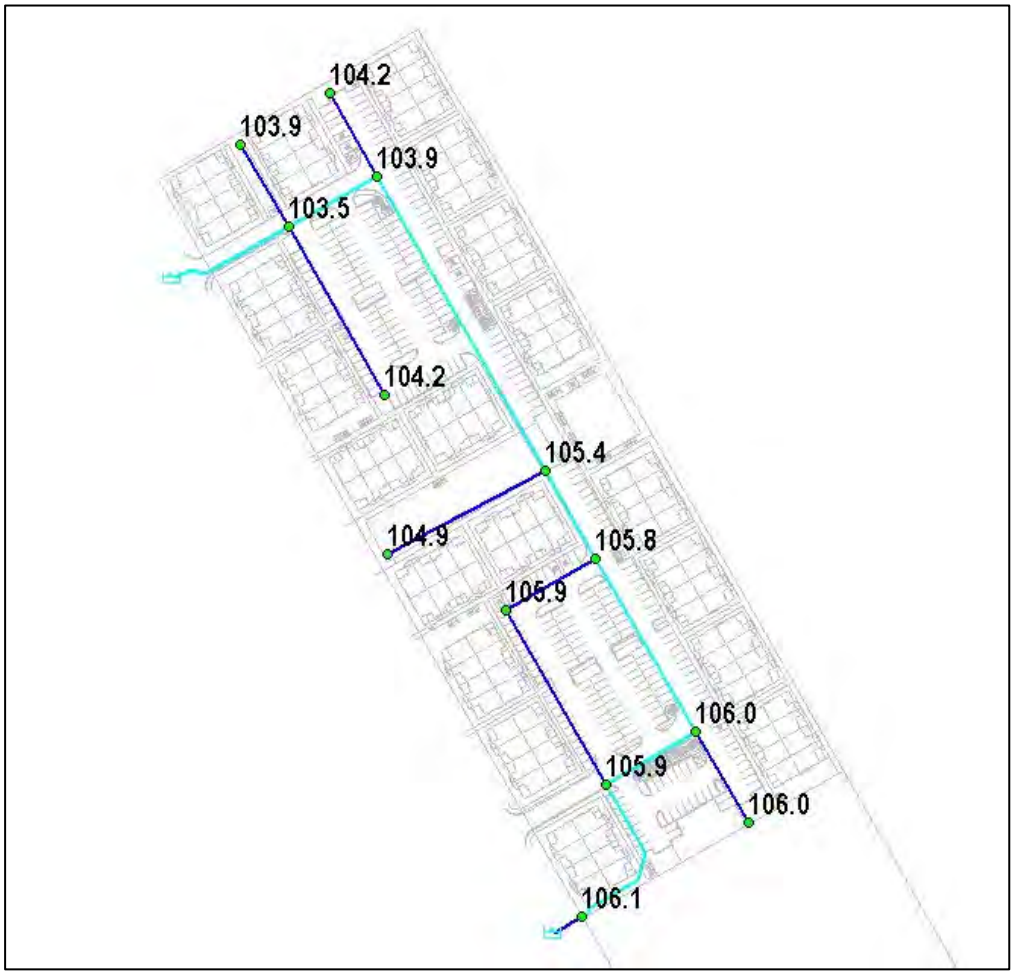



## 3.5 HYDRAULIC MODELING RESULTS

### 3.5.1 Average Day (AVDY)

The hydraulic modeling results show that under basic day demands the pressure in the distribution network falls between 412 kPa (59.7 psi) and 436 kPa (63.3 psi). Hydraulic modeling results for the average day demand scenario is illustrated in **Figure 4**.


**Figure 4: Pressures (psi) Under AVDY Demand Scenario**

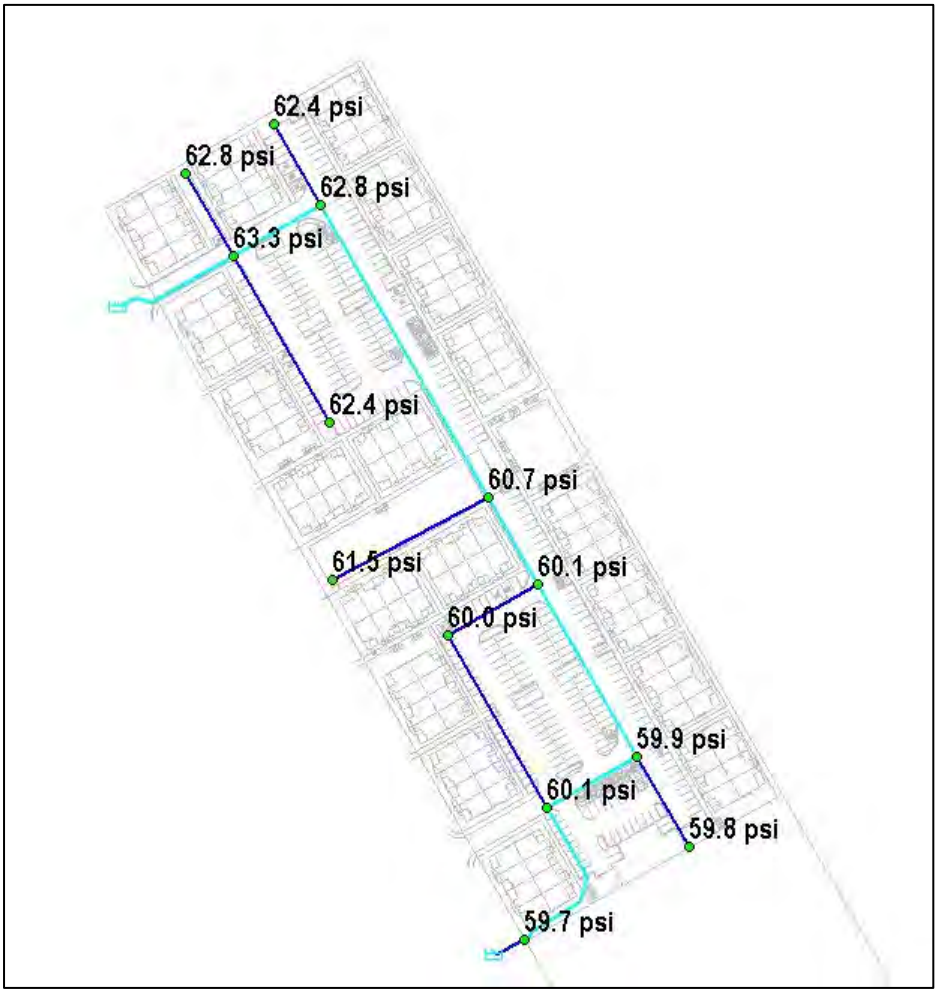


## 3.5.2 Peak Hour (PKHR)

The hydraulic modeling results show that under peak hour demands the pressure in the distribution network ranges between 362 kPa (52.5 psi) and 387 kPa (56.1 psi). Hydraulic modeling results for the peak hour demand scenario is illustrated in **Figure 5.**


**Figure 5: Pressures (psi) Under PKHR Demand Scenario**

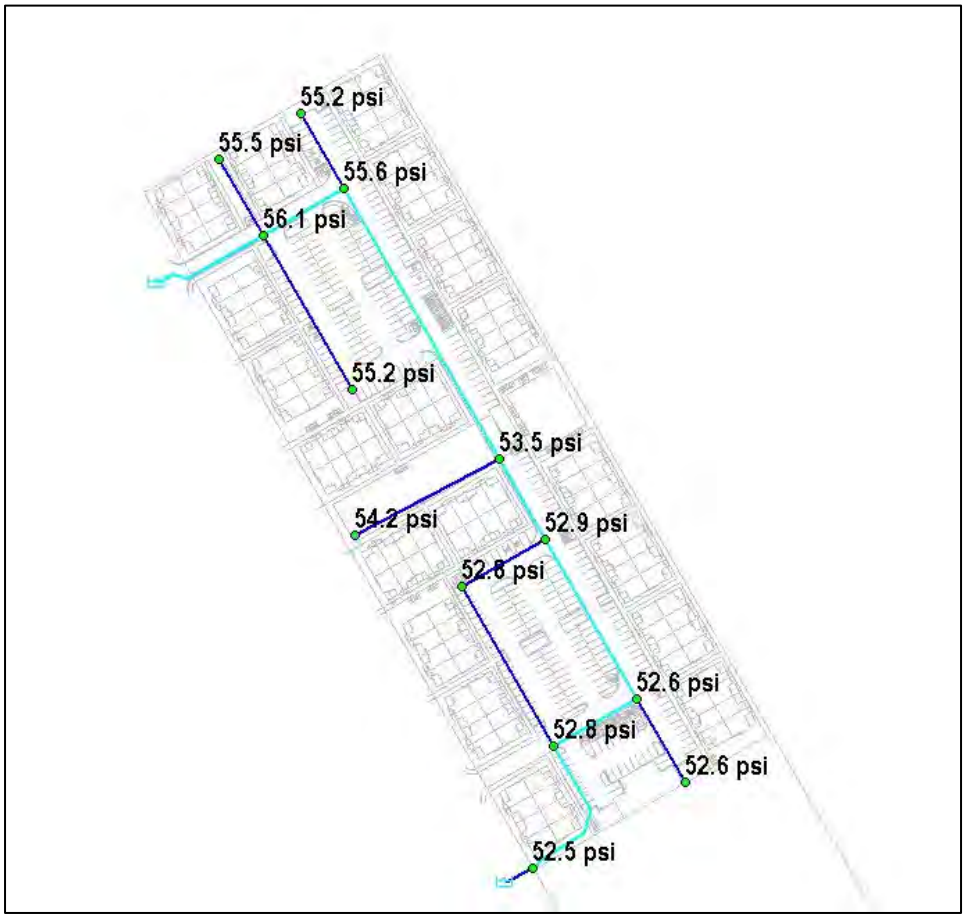


### 3.5.3 Maximum Day Plus Fire Flow (MXDY+FF)

A hydraulic analysis using the H2OMap Water model was conducted to determine if the proposed water distribution network can achieve the required FUS fire flow requirement while maintaining a residual pressure of at least 138 kPa (20 psi), per City Water Distribution Design Guidelines. This was accomplished using a steady-state maximum day demand scenario along with the automated fire flow simulation feature of the software. Hydraulic modeling results for the maximum day plus fire flow scenario is shown on **Figure 6**.

**Figure 6: Available Fire Flows (L/s) for MXDY+FF Demand Scenario**

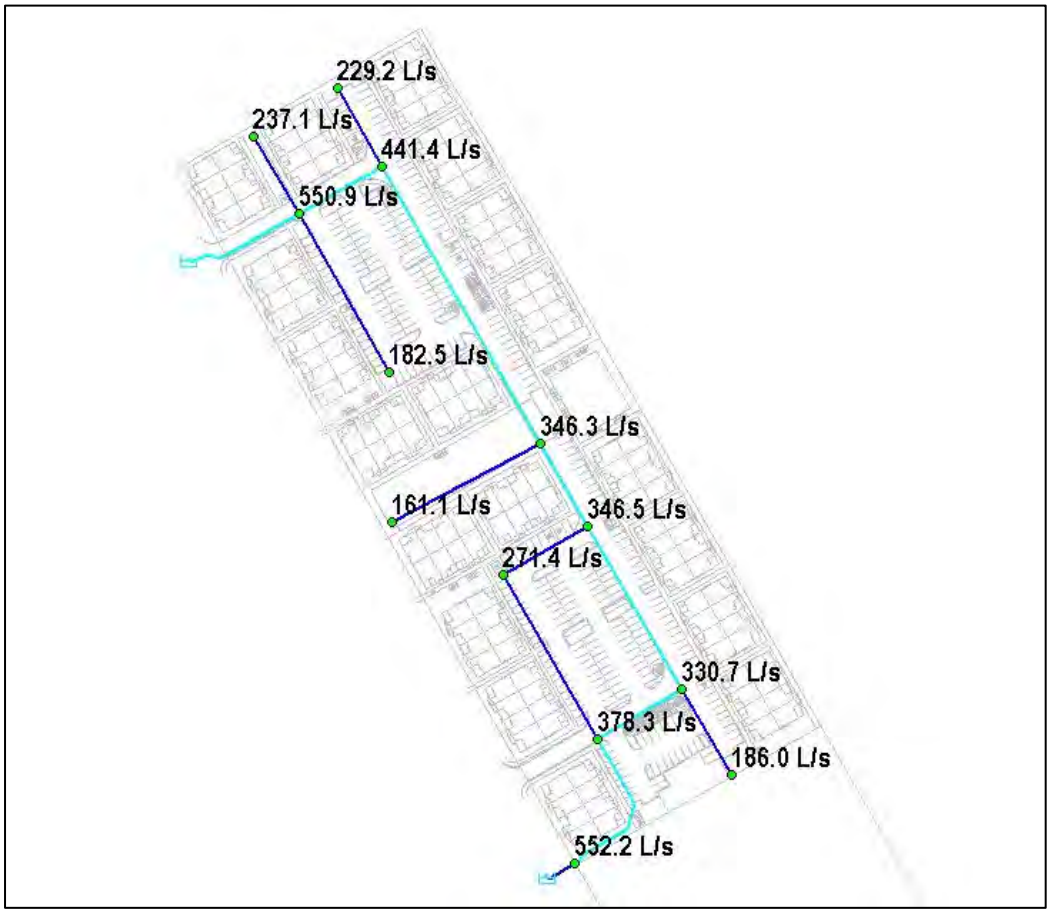


A fire flow of 15,000 L/min (250 L/s) was achieved at all serviced nodes (see **Appendix A.4** for details). Sufficient fire flows for each block can be provided at every point within the distribution network for the proposed development.

## 3.6 POTABLE WATER SUMMARY

The proposed watermain alignment and sizing can achieve the required level of service throughout the development. Based on the hydraulic analysis conducted using H2OMap Water, the following conclusions were made:

- The proposed water distribution system consists of a combination of 250 mm and 200mm diameter distribution mains.
- During peak hour conditions, the proposed system is capable of operating above the minimum pressure objective of 276 kPa (40 psi).
- During fire conditions, the proposed system can provide 15,000 L/min fire flows at all modeled nodes, which are sufficient based on FUS calculations for the units within the proposed site.

# 4.0 WASTEWATER SERVICING

## 4.1 BACKGROUND

The subject site is located within the study of the Barrhaven South Urban Expansion Area (BSUEA) for which JLR associates prepared a Master Servicing Study in 2018. The study at conceptual level, provided design data for wastewater servicing and estimated residual capacities for sanitary trunk sewer in the area, as shown in the MSS extract in **Appendix E.1.** The subject site is referred to as Mattamy West (Residential) in this study. DSEL relied on this study to prepare a design brief for adjacent The Ridge subdivision (Brazeau Lands).

There is an existing 375mm diameter sanitary sewer collecting wastewater from the Ridge (Brazeau lands), which includes 3718 Greenbank Road, and flows into the sanitary sewer on Greenbank Road. Refer to **Appendix E.1** for The Ridge site servicing study by DSEL (2020). The estimated peak sanitary flows for the subject site were originally determined as 4.45L/s (for a residential area of 1.90ha and a commercial area of 2.99ha) using City of Ottawa design criteria. DSEL estimated the subject site (referred to as Mattamy West (residential) area) to be 1.90ha with a projected population of 162 persons, peak factor of 3.54 and total flow of 2.49L/s which is 13% of the sanitary sewer full capacity. The residential area has subsequently been expanded to 3.09 ha for this site plan application with a corresponding reduction in the future commercial lands.

The proposed development will be serviced by the existing sanitary sewer stub fronting the site, located off the Haiku and Obsidian Street intersection. The existing maintenance hole (SAN MH3A) will be relocated and cored into for the future connection. The wastewater contributions from the site will tie-in to this structure via a 200mm diameter PVC pipe.

## 4.2 DESIGN CRITERIA

As outlined in the City's Sewer Design Guidelines, the following design parameters were used to calculate estimated wastewater flow rates and to preliminarily size on-site sanitary sewers for the subject site:

- Minimum Full Flow Velocity – 0.6 m/s
- Maximum Full Flow Velocity – 3.0 m/s
- Manning's roughness coefficient for all smooth-walled pipes – 0.013
- Townhouse persons per unit – 2.7
- Extraneous Flow Allowance – 0.33 L/s/ha
- Residential Average Flows – 280 L/cap/day
- Maintenance Hole Spacing – 120 m
- Minimum Cover – 2.5m
- Harmon Correction Factor – 0.8

In addition, a residential peak factor based on Harmon's Equation was used to determine the peak design flows per Ottawa's Sewer Design Guidelines. Refer to **Appendix C.1** for the sanitary sewer design sheet for 3718 Greenbank Road

## 4.3 SANITARY SERVICING DESIGN

200 mm diameter sanitary sewers are proposed along the private roadways of the subject site. All sanitary sewers within the site ultimately outlet to existing SAN MH 3A located off Haiku/Obsidian Street at the intersection fronting Block 1. Existing MH SAN 3A is proposed to be relocated slightly closer to the site and cored to allow for connection to the property.

The proposed layout of the sanitary infrastructure is shown on **Drawing SA-1.** Sanitary peak flows will be directed to the 200mm diameter sanitary sewer on Obsidian Street which discharges to a 375mm diameter PVC sanitary sewer at Dundonald Drive which is ultimately directed to the sanitary sewer on Future Greenbank road. The connections to the existing sanitary sewer network and the associated peak flows are summarized in **Table 4–1** below.

**Table 4–1 Summary of Proposed Sanitary Peak Flows**

| Area ID Number | Total area (ha) | No. Units | Population | Total Peak Flow (L/s) |
|---|---|---|---|---|
| Total Site | 3.09 | 228 | 616 | 7.8 |

A population density of 2.7ppu was applied to the residential townhouse units on site. A residential peak factor based on Harmon Equation was used to determine the peak design flows. An allowance of 0.33 L/s/effective gross ha (for all areas) was used to generate peak extraneous flows.

The total design peak flow for the subject site to be conveyed to the connections at the Obsidian street sewer is 7.8L/s. This value is slightly higher than the previous estimate of 2.49L/s by DSEL based on a service area of 1.9 ha and population of 162 people. The difference (4.68L/s) can be accommodated by the 200mm receiving sewer in Obsidian Street. Estimated peak flows roughly coincide with that previously identified under the approved 3718 Greenbank Road Functional Servicing Report.

JLR Associates identified in its MSS for the BSUEA that there is residual capacity within the sanitary sewers draining Mattamy lands west to new Greenbank road based on a Stantec (2015) hydrodynamic model of trunk sanitary sewers (450 mm in diameter and greater), which in turn demonstrated that the existing downstream trunk system could accommodate the flows generated with no risk of surcharging or basement flooding. Consequently, Stantec concluded that system upgrades were not required. The residual capacity in the sanitary sewer downstream of Greenbank road was estimated as 74.0L/s (Refer to **Appendix E.1** for details).

# 5.0 STORMWATER MANAGEMENT AND SERVICING

The following sections describe the stormwater management (SWM) design for 3718 Greenbank Road in accordance with the background documents and governing criteria.

## 5.1 PROPOSED CONDITIONS

The proposed residential development encompasses approximately 3.09 ha of land and consists of 228 back-to-back townhomes and outdoor amenity areas. J.F. Sabourin and Associates Inc. (JFSA) were retained by David Schaeffer Engineering Ltd. (DSEL) to prepare a Stormwater Management (SWM) Plan for the adjacent Ridge (Brazeau) Subdivision.

The storm sewer collection system for the proposed site will discharge to an existing manhole (existing MH 109 within Obsidian Street) located near the northwest corner of the site, at the intersection of Obsidian Street and Haiku Street. This manhole is part of The Ridge's stormwater collections system which eventually discharges to a dry pond (referred to as the Drummond Pond) located in the northwest corner of the subdivision. This pond provides stormwater quantity control for the subdivision. OGS units upstream of the pond provide stormwater quality control for the subdivision.

Detailed grading of the site has been designed to direct emergency overland flows above the 100-year event to Obsidian Street, which runs along the west side of the subject site.

Minor grassed and roof areas at the boundary of the subject site cannot be graded to drain internally and as such will sheet drain uncontrolled offsite. The uncontrolled areas on the west side of the site will drain to the existing Obsidian Street ROW and those on the east side of the site will drain to the Future Greenbank Road ROW.

## 5.2 DESIGN CRITERIA AND CONSTRAINTS

The design criteria and guidelines used for the stormwater management of the subject subdivision are those that were developed in the background documents by JFSA, DSEL and JLR in the BSUEA MSS with iterations as noted in the 3718 Greenbank Road Functional Servicing Report, as well as those provided in the October 2012 *City of Ottawa Sewer Design Guidelines* and subsequent technical memorandums and generally accepted stormwater management design guidelines.

The SWM design will ensure that the majority of storm runoff within the site be controlled, and site release restricted to the peak flow rate of 402 L/s for the 2-Year storm event and peak flow rate of 437 L/s for the 100-Year storm as calculated using a proportional method for the site. Details can be found in Section 5.3.1. No improvements to downstream infrastructure will be required to service the site, however, a revision in catch basin configuration and inlet control device (ICD) sizing is required for catch basins along the east side of Obsidian Street to account for uncontrolled roof drainage from within the development, and to ensure a 2-year level of service is provided with respect to elimination of surface ponding within downstream roadways.

Storm runoff within the site will be controlled and directed to an existing storm control point identified as MH 3 in the JFSA SWM model. MH 3 has a maximum upstream Hydraulic Grade Line of 99.716m based on JFSA's simulation under the 100-year 3-hour Chicago storm, 100-year 24-hour SCS Type II storm, and the three historical events.

As identified by the approved FSR and the City of Ottawa's Sewer Design Guidelines, the minor and major system stormwater management design criteria and constraints will consist of:

### 5.2.1 Minor System

a) Storm sewers are to be designed to provide a minimum 2-year level of service.

b) The 100-year hydraulic grade line (HGL) within the development minor systems must be maintained at least 0.3 m below the underside of footing elevation where gravity house connections are installed.

c) For less frequent storms (i.e. larger than 1:2 year), the minor system shall, if required, be limited with the use of inlet control devices to prevent excessive hydraulic surcharges and to maximize the use of surface storage on the road where desired.

d) Catchbasins on the road are to be equipped with City standard type S19 (fish) grates or City standard type S22 side inlets, and grates for catchbasins in rear yards, park and open spaces with pedestrian traffic are to be City standard type S19, S30 and S31.

e) Single catchbasins are to be equipped with 200 mm minimum lead pipes, and double catchbasins are to be equipped with 250 mm minimum lead pipes.

f) Rear yard catchbasins are to be equipped with 250 mm minimum lead pipes. Catchbasins installed on the street, where rear yard catchbasins connect to the main storm sewer through the catchbasin, are to be equipped with 250 mm minimum lead pipes for both single and double catchbasins.

g) Under full flow conditions, the allowable velocity in storm sewers is to be no less than 0.80 m/s and no greater than 3.0 m/s. Where velocities over 3.0 m/s are proposed, provisions shall be made to protect against displacement of sewers by sudden jarring or movement. Velocities greater than 6 m/s are not permitted.

h) City of Ottawa staff have indicated a requirement to ensure no storage is considered within the EES system for modeling of peak runoff.

### 5.2.2 Major System

a) The major system shall be designed with enough road surface storage to allow the excess runoff of a 100-year storm to be retained within road ponding areas where desired.

b) Inlet control devices would be sized such that they do not create surface ponding on the road during the 2-year design storm on local roads (5-year design storm on collector and 10-year design storm



on arterial roads); it should be noted that surface ponding over grates is present during rainfall under any design, as an appropriate depth of water is required for runoff to enter the grate.

c) Roof leaders shall be installed to direct the runoff to splash pads and on to grassed areas.

d) For the 100-year storm, the maximum total depth of water (static + dynamic) on all roads shall not exceed 35 cm at the gutter.

e) During the 100-year + 20% stress test, the maximum extent of surface water on streets, rear yards, public space and parking areas shall not touch the building envelope.

f) When catchbasins are installed in rear yards, safe overland flow routes are to be provided to allow the release of excess flows from such areas.

g) The product of the maximum flow depths on streets and maximum flow velocity must be less than 0.60 $m^2/s$ on all roads.

h) The excess major system flows up to the 100-year return period are to be retained on-site in development blocks such as the proposed development.

i) There must be at least 15 cm of vertical clearance between the spill elevation on the street and the ground elevation at the nearest building envelope that is in the proximity of the flow route or ponding area.

j) There must be at least 30 cm of vertical clearance between the rear yard spill elevation and the ground elevation at the adjacent building envelope.

k) Provide adequate emergency overflow conveyance off-site to ensure water will spill to downstream rights-of-way in the event of a blockage.

### 5.2.3 Allowable Release Rate

Based on JFSA's Stormwater Management Plan for the Ridge (Brazeau) subdivision and iterated within the 3718 Greenbank Road Functional Servicing Study, the subject site is to control the 100-year flow on site and the minor system for the total site will be restricted to the 100-year storm event release rate of 437 L/s. The 2-year minor system outflow is to be controlled to 402 L/s. The noted flow rates are exclusively for the 3.09ha residential component of the development. The previously identified target release rates for the future 1.22ha commercial development parcel remain unchanged as per the FSR.



**Table 5–1 Target Release Rate**

| Study | Storm Event | Subcatchment A109RES | Subcatchment A2260COM | Total |
|---|---|---|---|---|
| 3718 Greenbank FSR (Residential) | 2-Year Flow Rate (L/s) | 201 | 201 | **402** |
| | 100-Year Flow Rate (L/s) | 230 | 207 | **437** |

## 5.3 MODELING METHODOLOGY

### 5.3.1 Modeling Rationale

A hydrologic/hydraulic model was completed with PCSWMM for the sewers and roadways/parking areas within the proposed development, accounting for the estimated major and minor systems to evaluate the storm sewer infrastructure and ensure release rates meet the previously defined target criteria. The use of PCSWMM for modeling of the site hydrology and hydraulics allowed for an analysis of the system response during various storm events. The following assumptions were applied to the model:

- Hydrologic parameters as per Ottawa Sewer Design Guidelines, including Horton infiltration, Manning's 'n', and depression storage values.
- 3-hour Chicago distributions and 12-hour SCS Type II distributions for 2-year and 100-year storm events were used to evaluate the urban component of the dual drainage (i.e. minor system capture rates, total overland flow depth, hydraulic grade line (HGL), etc.).
- A 22 mm, 4-hour Chicago storm was used to evaluate the performance of the proposed Etobicoke exfiltration system.
- The 'climate change' scenarios created by adding 20% of the individual intensity values of the 100-year 3-hour Chicago storm and the 100-year 12-hour SCS Type II storm at their specified time step were used as an analytical tool to establish the function of the system under extreme events.
- Minor system capture rates within the proposed development were restricted to the 2-year peak runoff rate.

### 5.3.2 SWMM Dual Drainage Methodology

The proposed development is modeled in one PCSWMM model as a dual conduit system, where:

1) The minor system consists of storm sewers, represented by circular conduits, and manholes, represented by storage nodes;

2) The major system consists of overland spills, represented by weirs and irregular conduits using street-shaped cross-sections to represent the assumed overland road network with streets at varying slopes, and catch basins with surface ponding areas, represented by storage nodes.

The two systems are connected by outlet/orifice link objects, which represent inlet control devices (ICDs), that connect storage nodes representing catch basins to storage nodes representing manholes. Subcatchments are linked to the nodes representing catch basins and ponding areas so that generated hydrographs are directed there firstly.

### 5.3.3 Modified Dual Drainage Methodology to Support EES

To account for the presence of the proposed Etobicoke exfiltration system, the PCSWMM model was modified to include additional rectangular conduits in parallel to the conventional sewer lines. Rectangular conduits have been used to simulate drainage properties and dimensions of the clear stone media and perforated pipe but use a width equal to 40% of the actual trench width to simulate the porosity of the trench media. Inverts and obverts of the conduit can therefore still be consistent with design drawings, yet allow hydraulic modeling performed by PCSWMM to simulate hydraulic grade lines within the trench as it slopes upwards to follow traditional sewer grades. In such a manner, unused portions of the EES can be identified and minimized to ensure that an appropriate level of volume control is still provided for the site overall. Additional “dummy” manholes with zero storage were added to the upstream ends of EES conduits in the model to create dead ends. This was done to represent the fact that EES pipes will be capped at their upstream ends and will not convey stormwater through the minor system.

The simulation described above was repeated with varying EES trench depths, lengths, and widths to ensure complete capture of the 22 mm event as described in **Section 5.6** below.

### 5.3.4 Model Input Parameters

**Drawing SD-1** summarizes the discretized subcatchments used in the analysis of the proposed development. All parameters were assigned as per applicable Ottawa Sewer Design Guidelines (OSDG); Ontario Ministry of the Environment, Conservation, and Parks (MECP); and background report requirements.

#### 5.3.4.1 Hydrologic Parameters

Key parameters for the proposed development areas are summarized below, while example input files are provided for the 100-year, 3-hour Chicago storm in Appendix D which indicate all other parameters. For all other input files and results of storm scenarios, please examine the electronic model files located on the digital media provided with this report. This analysis was performed using PCSWMM, which is a front-end GUI to the EPA-SWMM engine. Model files can be examined in any program which can read EPA-SWMM files version 5.1.014.

**Table 5–2**: presents the general subcatchment parameters used for the proposed development.

**Table 5–2: General Subcatchment Parameters**

| Parameter | Value |
|---|---|
| Infiltration Method | Horton |
| Max. Infil. Rate (mm/hr) | 76.2 |

| | |
|---|---|
| Min. Infil. Rate (mm/hr) | 13.2 |
| Decay Constant (1/hr) | 4.14 |
| N Imperv | 0.013 |
| N Perv | 0.25 |
| Dstore Imperv (mm) | 1.57 |
| Dstore Perv (mm) | 4.67 |
| Zero Imperv (%) | 0 |

**Table 5–3** presents the individual parameters that vary for each of the proposed subcatchments in the model. Subcatchment width parameters were determined by multiplying each subcatchment's area in hectares by 225. Subcatchment imperviousness was measured directly from the site plan within AutoCAD considering all paved access, sidewalks, and roof areas as entirely impervious areas, and remaining grassed areas as entirely pervious. Weighted runoff 'C' coefficients were determined for each subcatchment considering impervious areas as C=0.90, and pervious as C=0.20.

**Table 5–3: Individual Subcatchment Parameters**

| Subcatchment ID | Area (ha) | Width (m) | Flow Length (m) | Slope (%) | % Impervious |
|---|---|---|---|---|---|
| COM | 1.220 | 274.5 | 44.4 | 0.5 | 90.00 |
| L100D | 0.095 | 21.4 | 44.4 | 3.0 | 72.86 |
| L101A | 0.021 | 4.7 | 44.4 | 3.0 | 60.00 |
| L102A | 0.437 | 98.3 | 44.4 | 3.0 | 84.29 |
| L103A | 0.132 | 29.8 | 44.4 | 3.0 | 80.00 |
| L104A | 0.658 | 148.0 | 44.4 | 3.0 | 78.57 |
| L105B | 0.198 | 44.5 | 44.4 | 3.0 | 54.29 |
| L105C | 0.105 | 23.7 | 44.4 | 3.0 | 25.71 |
| L108A | 0.339 | 76.3 | 44.4 | 3.0 | 85.71 |
| L110A | 0.153 | 34.5 | 44.4 | 3.0 | 70.00 |
| L110B | 0.053 | 11.8 | 44.4 | 3.0 | 71.43 |
| L110C | 0.316 | 71.0 | 44.4 | 3.0 | 88.57 |
| UNC-1 | 0.155 | 34.9 | 44.4 | 3.0 | 81.43 |
| UNC-2 | 0.159 | 35.9 | 44.4 | 3.0 | 81.43 |
| UNC-3 | 0.135 | 30.4 | 44.4 | 3.0 | 75.71 |
| UNC-4 | 0.132 | 29.7 | 44.4 | 3.0 | 78.57 |

### 5.3.4.2 Surface and Subsurface Storage Parameters

**Table 5-4** summarizes the storage node parameters used in the model. Storage nodes represent the depth of the proposed catch basin barrel plus an additional depth to represent the maximum allowable surface water ponding depth. Surface storage was estimated based on surface models created in AutoCAD for the proposed grading plan. See **Drawing SD-1** for surface storage depths, areas, and volumes.

**Table 5–4: Surface Storage Parameters**

| Subcatchment ID | Structure | Invert Elevation (m) | Rim Elevation (m) | CB Barrel Depth (m) | Ponding Depth at Spill (m) | Ponding Area (m2) | Ponding Volume (m3) |
|---|---|---|---|---|---|---|---|
| L101A | CB 101A | 101.89 | 103.30 | 1.41 | 0.05 | 10.9 | 0.2 |
| L102A | CB 102A | 101.99 | 103.37 | 1.38 | 0.35 | 552.6 | 64.5 |
| L103A | CB 103A | 102.23 | 103.60 | 1.37 | 0.25 | 328.9 | 27.4 |
| L104A | CB 104A | 102.66 | 104.00 | 1.34 | 0.35 | 773.2 | 90.2 |
| L105B | STM111 | 101.58 | 105.38 | 3.80 | - | - | - |
| L105C | CB 105C | 103.82 | 105.15 | 1.33 | 0.05 | 19.0 | 0.3 |
| L108A | CB 108A | 103.97 | 105.35 | 1.38 | 0.35 | 898.2 | 104.8 |
| L110A | CB 110A | 104.27 | 105.65 | 1.38 | 0.35 | 595.4 | 69.5 |
| L110B | CB 110B | 104.05 | 105.43 | 1.38 | 0.25 | 98.4 | 8.2 |
| L110C | CB 110C | 103.97 | 105.35 | 1.38 | 0.35 | 863.6 | 100.8 |
| L110D | CB 110D | 104.34 | 105.72 | 1.38 | 0.22 | 256.9 | 18.8 |

At several locations, underground storage was required to ensure there was no surface ponding during 2-year storm events. Big O or “umbilical” storage pipes were added to catch basin barrels to provide this storage. These were modeled using conduits to provide the required storage. Note that the EES system was not included in the 2-year, 100-year, or 100-year + 20% models. This was done at the request of the City of Ottawa which did not want the storage volume provided by the EES to be considered in these events.

Underground storage volumes are summarized in the table below:

**Table 5–5: Surface Storage Parameters**

| Subcatchment ID | Structure | Storage Pipe Diameter (mm) | Storage Pipe Length (m) | Available Storage Volume (m3) |
|---|---|---|---|---|
| L102A | CB 102A | 900 | 100 | 63.6 |
| L104A | CB 104A | 900 | 80 | 50.9 |
| L105B | STM 105B | 750 | 57.5 | 25.4 |
| L108A | CB 108A | 900 | 70 | 44.5 |

| | | | | |
|---|---|---|---|---|
| L110C | CB 110C | 900 | 48 | 30.5 |

### 5.3.4.3 Hydraulic Parameters

As per the October 2012 City of Ottawa Sewer Design Guidelines, Manning's roughness values of 0.013 were used for sewer modeling and overland flow corridors representing roadways. Flow over grassed areas were modeled using a Manning's roughness value of 0.25. The storm sewers within the proposed development were modeled to estimate flow capacities and hydraulic grade lines (HGLs) in the proposed condition. The proposed storm sewer design sheet is included in **Appendix D**.

Exit losses at manholes were set for all pipe segments based on the flow angle through the structure. Exit losses were assigned as per City guidelines (Appendix 6b of the guidelines), see **Table 5-6** below.

**Table 5–6: Exit Loss Coefficients for Bends at Manholes**

| Degrees | Coefficient |
|---|---|
| 11 | 0.060 |
| 22 | 0.140 |
| 30 | 0.210 |
| 45 | 0.390 |
| 60 | 0.640 |
| 90 | 1.320 |
| 180 | 0.020 |

The proposed development's storm sewers were sized to convey runoff from a 2-Year storm using rational method calculations. The rational method design sheet can be found in **Appendix D**.

## 5.4 MODEL RESULTS AND DISCUSSION

The following section summarizes the key hydrologic and hydraulic model results. For detailed model results or inputs please refer to the example input files in **Appendix D** and the PCSWMM model on the enclosed digital files.

### 5.4.1 Hydrology

**Table 5–7** summarizes the orifice link maximum flow rates and heads across the proposed development under the 2-year and 100-year storm scenarios. Discharge curves are as provided by the manufacturer for the selected IPEX Tempest ICDs.



**Table 5–7 : Proposed ICD Schedule**

| Structure | Invert | ICD Type | 100yr Head (m) | 100yr Flow (L/s) | Storm Dist. | 2yr Head (m) | 2yr Flow (L/s) | Storm Dist. |
|---|---|---|---|---|---|---|---|---|
| CB 101A | 101.89 | IPEX TEMPEST LMF 90 | 0.99 | 7.2 | Chicago | 0.15 | 2.7 | Chicago |
| CB 102A | 101.99 | IPEX TEMPEST HF 127mm | 1.65 | 40.5 | Chicago | 0.70 | 25.6 | SCS |
| CB 103A | 102.23 | IPEX TEMPEST HF 102mm | 1.54 | 25.2 | Chicago | 1.21 | 22.3 | Chicago |
| CB 104A | 102.66 | IPEX TEMPEST HF 154mm | 1.68 | 59.9 | Chicago | 0.94 | 44.0 | Chicago |
| STM 111 | 101.58 | IPEX TEMPEST HF 127mm | 1.91 | 43.6 | SCS | 0.32 | 16.4 | Chicago |
| CB 105C | 103.82 | IPEX TEMPEST LMF 105 | 1.46 | 11.8 | SCS | 0.35 | 5.8 | Chicago |
| CB 108A | 103.97 | IPEX TEMPEST HF 108mm | 1.58 | 28.7 | Chicago | 0.88 | 21.2 | Chicago |
| CB 110A | 104.27 | IPEX TEMPEST HF 127mm | 1.50 | 38.4 | Chicago | 0.57 | 22.9 | Chicago |
| CB 110B | 104.05 | IPEX TEMPEST LMF 90 | 1.56 | 9.0 | Chicago | 1.01 | 7.2 | Chicago |
| CB 110C | 103.97 | IPEX TEMPEST HF 108mm | 1.60 | 28.9 | Chicago | 0.90 | 21.4 | SCS |
| CB 110D | 104.34 | IPEX TEMPEST HF 102mm | 1.49 | 24.8 | Chicago | 0.56 | 14.8 | Chicago |

#### 5.4.1.1 Uncontrolled Area

Due to grading restrictions, four subcatchments has been designed without a storage component. The catchment areas discharge off-site uncontrolled to the adjacent streets surrounding the proposed site. Peak discharges from uncontrolled areas UNC-1 and UNC-2 are directed to the future Greenbank Roda ROW, whereas areas UNC-3 and UNC-4 are directed to the Obsidian Street ROW. As noted in the SWM Reports for The Ridge and Drummond Subdivisions (JFSA 2020 and 2022), drainage to Greenbank Road is tributary the Clarke wet pond SWMF, whereas drainage to Obsidian (as well as the site minor system outlet) discharges to a downstream dry pond SWMF and oil/grit separator at Borrisokane Road. Both facilities ultimately outlet to the Jock River. As identified in the JFSA report for the Drummond Subdivision, a substantial flow reduction is proposed for peak flows to the Clarke Pond via the Half Moon Bay Trunk Sewer (approximately 2610L/s during the 100-Year 3hr Chicago event, and 1380L/s during the 100yr 24hr SCS event). Per report excerpts within **Appendix E**, it can be seen that the Clarke Pond can receive peak flows and volumes from the minor uncontrolled areas along the future realigned Greenbank Road (estimated as 149L/s and 196m3 during the 100-Year 3hr Chicago event and 108.4L/s and 260m3 during the 100-Year 24hr SCS event) without further need for flow control.

It was originally noted within the Functional Servicing Report for 3718 Greenbank Road that catch basin ICDs within the existing Obsidian Street would be reassessed based on peak discharge from uncontrolled areas adjacent to Obsidian. On further review, it was noted that the PCSWMM model for The Ridge Subdivision containing Obsidian Street considered all catch basins along Obsidian to be along a continuous grade, and controlled by catch basin grate openings rather than installed ICDs. The PCSWMM model for The Ridge had also assumed that catch basin CB72 (located at the eastern side of Obsidian at the intersection with Haiku Street to the west) would also be located at a segment of continuous road grade to



Dundonald Drive north of the proposed site. The current design for the Drummond Subdivision now considers a sag at Haiku/Obsidian, although the supplied PCSWMM model for The Ridge was not adjusted to correct this change.

As such, contributing road major system segments as noted in the drainage area plan for the Drummond Subdivision as well as all upstream contributions to minor and major systems along Obsidian Street from The Ridge Subdivision have been included in the PCSWMM model for the proposed 3718 Greenbank Road development both to ensure road ponding depths and flow spread do not exceed City of Ottawa criteria during design storm events, but also to consider the effect of peak discharge from uncontrolled areas along Obsidian on downstream infrastructure as reported in JFSA's Stormwater Management Report for The Ridge (Brazeau) Subdivision. Modeled minor system segments include all contributing flows to existing MH109, and major system segments include all contributing flows to the approach to existing CB109, located west of the intersection of Obsidian and Haiku Street.

Report excerpts from SWM report noted above (see **Appendix E**) identify the following peak outflow rates:

**Table 5–8: Previously Approved Model Outflow – The Ridge Subdivision**

| Location | Design Storm | Discharge (L/s) |
|---|---|---|
| Minor System – MH109 | 100-Year 3hr Chicago | 790 |
| | 100-Year 24hr SCS | 770 |
| | 100-Year 3hr Chicago + 20% | 900 |
| | | |
| Major System – CB109 | 100-Year 3hr Chicago | 152 |

**Table 5–9: Previously Approved Model HGL – The Ridge Subdivision**

| Location | Design Storm | HGL (m) |
|---|---|---|
| MH109 | 100-Year 3hr Chicago | 99.961 |
| | 100-Year 24hr SCS | 99.681 |
| | 100-Year 3hr Chicago + 20% | 100.231 |

### 5.4.2 Hydraulic Grade Line

A design sheet has been prepared for the proposed storm sewer in **Appendix D.1** demonstrating all on-site sewers remain free-flowing (HGLs within the sewer) using an uncontrolled 2-year rate.

**Table 5–10** below summarizes the hydraulic grade line (HGL) results for the subject site's proposed minor system using the worst case storm event distribution. Per the City of Ottawa Sewer Design Guidelines (2012), a building's underside of footing (USF) must be a minimum 300 mm above the 100-year HGL in the nearest upstream storm manhole. In addition, the buildings USF must also be above the HGL resulting from the 100-year + 20% stress test event.

**Table 5–10: Hydraulic Grade Line Results**

| Block # | USF (m) | Adjacent Upstream MH ID | Adjacent 100-Year HGL (m) | Freeboard (m) | Adjacent 100-Year +20% HGL (m) | Freeboard (m) |
|---|---|---|---|---|---|---|
| 1 | 101.73 | 101 | 99.74 | 1.99 | 99.77 | 1.96 |
| 2 | 101.83 | 101 | 99.74 | 2.09 | 99.77 | 2.06 |
| 3 | 102.43 | 103 | 100.13 | 2.30 | 100.14 | 2.29 |
| 4 | 102.83 | 104 | 100.92 | 1.91 | 100.94 | 1.89 |
| 5 | 103.18 | 104 | 100.92 | 2.26 | 100.94 | 2.24 |
| 6 | 102.18 | 102 | 100.80 | 1.38 | 100.80 | 1.38 |
| 7 | 102.51 | 102 | 100.80 | 1.71 | 100.80 | 1.71 |
| 8 | 103.03 | 106 | 101.50 | 1.53 | 101.50 | 1.53 |
| 9 | 103.09 | 106 | 101.50 | 1.59 | 101.50 | 1.59 |
| 10 | 103.43 | 105 | 101.39 | 2.04 | 101.41 | 2.02 |
| 11 | 103.80 | 106 | 101.50 | 2.30 | 101.50 | 2.30 |
| 12 | 103.80 | 106 | 101.50 | 2.30 | 101.50 | 2.30 |
| 13 | 103.98 | 107 | 101.82 | 2.16 | 101.82 | 2.16 |
| 14 | 104.08 | 109 | 102.11 | 1.97 | 102.11 | 1.97 |
| 15 | 104.18 | 109 | 102.11 | 2.07 | 102.11 | 2.07 |
| 16 | 104.23 | 109 | 102.11 | 2.12 | 102.11 | 2.12 |
| 17 | 104.03 | 110 | 102.44 | 1.59 | 102.44 | 1.59 |
| 18 | 103.77 | 110 | 102.44 | 1.33 | 102.44 | 1.33 |
| 19 | 103.74 | 110 | 102.44 | 1.30 | 102.44 | 1.30 |
| | | EXMH109 | 99.68 | | 99.70 | |

Model results indicate that there is sufficient clearance between the 100-year and 100-year +20% stress test HGLs and the proposed USFs. Additionally, HGL at the downstream existing MH109 does not exceed the previously assumed values per approved background reports (99.69 and 100.23 in the 100-year and 100-year +20% events respectively).

### 5.4.3 Overland Flow

**Table 5-11** below presents the total surface water depths (static ponding depth + dynamic flow) on the proposed roads/parking areas for the worst case 2-year and 100-year design storm distribution and the 100-year +20% climate change storm. In no case do surface water depths on roadways exceed 0.35m during the design storm events. Table rows for CB66, CB68, CB70 and CB72 refer to existing catch basins within Obsidian Street. The noted 2-year water depths for these rows refer to anticipated flow spread at each catch basin along a continuous grade to ensure that modeled flow spreads do not exceed ½ of the associated travel lane per the OSDG (approximate depth of 0.06m). 2-year storm runoff is entirely captured



at sag CB72 without presence of surface ponding. The existing CB72 is proposed to be replaced with a double catch basin inlet complete with a 250mm CB lead to convey the required level of surface runoff.

**Table 5–11: Maximum Static and Dynamic Water Depths**

| Storage Node ID | Top of Grate Elevation (m) | Lowest Adjacent Building Opening (m) | 2-Year | | 100-Year | | 100-Year + 20% | |
|---|---|---|---|---|---|---|---|---|
| | | | Max Surface HGL (m) | Total Surface Ponding Depth (m) | Max Surface HGL (m) | Total Surface Ponding Depth (m) | Max Surface HGL (m) | Total Surface Ponding Depth (m) |
| 101A | 103.30 | 103.55 | 102.04 | 0.00 | 102.88 | 0.00 | 103.39 | 0.09 |
| 102A | 103.37 | 103.85 | 102.69 | 0.00 | 103.64 | 0.27 | 103.76 | 0.39 |
| 103A | 103.60 | 104.05 | 103.44 | 0.00 | 103.77 | 0.17 | 103.80 | 0.20 |
| 104A | 104.00 | 104.64 | 103.60 | 0.00 | 104.34 | 0.34 | 104.39 | 0.39 |
| 105B | 104.66 | 104.87 | 101.90 | 0.00 | 102.78 | 0.00 | 104.64 | 0.00 |
| 105C | 105.15 | 105.42 | 104.17 | 0.00 | 105.28 | 0.13 | 105.28 | 0.13 |
| 108A | 105.35 | 105.95 | 104.85 | 0.00 | 105.55 | 0.20 | 105.61 | 0.26 |
| 110A | 105.65 | 106.24 | 104.84 | 0.00 | 105.77 | 0.12 | 105.81 | 0.16 |
| 110B | 105.43 | 105.92 | 105.06 | 0.00 | 105.61 | 0.18 | 105.66 | 0.23 |
| 110C | 105.35 | 105.95 | 104.87 | 0.00 | 105.57 | 0.22 | 105.61 | 0.26 |
| 110D | 105.72 | 106.25 | 104.90 | 0.00 | 105.83 | 0.11 | 105.87 | 0.15 |
| CB72 | 102.85 | 102.97 | 101.82 | 0.00 | 103.01 | 0.16 | 103.03 | 0.18 |
| CB70 | 104.21 | 104.38 | 104.25 | 0.04 | 104.28 | 0.07 | 104.29 | 0.08 |
| CB68 | 104.59 | 104.89 | 104.64 | 0.05 | 104.68 | 0.09 | 104.69 | 0.10 |
| CB66 | 105.77 | 106.00 | 105.80 | 0.03 | 105.82 | 0.05 | 105.84 | 0.07 |

*Occurs within a managed landscaped area - not subject to road surface ponding.

Proposed site grading is such that should catch basin discharge orifices become blocked, flows will spill from catch basin grates overland to the site accesses in the northwest and southwest corners of the property, and out to Obsidian Street. Overland flows progress from Obsidian westward along existing Haiku Street.

### 5.4.4 Peak System Outflows

As identified in section 5.4.1.1 above, peak runoff from areas tributary to the realigned Greenbank Road proceed to a separate outfall designed with available capacity to receive such flows, and as such do not contribute directly to the allowable release rate to Obsidian Street. Remaining peak discharge from the development is summarized in the table below:

**Table 5–12: Peak Site Outflows**

| Area/ Location | 2-Year | | 100-Year | | 100-Year + 20% | |
|---|---|---|---|---|---|---|
| | SCS | Chicago | SCS | Chicago | SCS | Chicago |
| Minor System | 183.4 | 195.4 | 324.3 | 317.7 | 333.4 | 333.5 |
| Major System | 0 | 0 | 0 | 0 | 14.4 | 47.9 |
| UNC-3 | 17.6 | 21.9 | 46.1 | 62.4 | 55.7 | 76.6 |
| UNC-4 | 17.8 | 22.2 | 45.3 | 61.9 | 54.6 | 75.6 |
| **Total** | **218.8** | **239.5** | **415.7** | **442.0** | **458.1** | **533.6** |
| **Allowable** | **402** | | **437** | | **-** | |

Peak discharge from the development slightly exceeds the allowable rate for the 100-year storm event. As additional storage and adjusted ICDs within Obsidian Street have been considered beyond that originally included in the PCSWMM model for the approved The Ridge Subdivision, downstream flow conditions within the receiving minor and major system along Haiku were assessed based on previously approved reported HGLs and flow rates. Comparison of the current modeled rates to that originally assumed is detailed in the tables below, and underscores that no negative impacts to downstream infrastructure are anticipated based on the proposed development:

**Table 5–13: Proposed Downstream Flow Conditions**

| Location | Design Storm | Previously Approved Discharge (L/s) | Revised Model Discharge (L/s) |
|---|---|---|---|
| Minor System – MH109 | 100-Year 3hr Chicago | 790 | 765.3 |
| | 100-Year 24hr SCS | 770 | 757.5 |
| | 100-Year 3hr Chicago + 20% | 900 | 816.4 |
| | | | |
| Major System – CB109 | 100-Year 3hr Chicago | 152 | 138.5 |

**Table 5–14: Proposed Downstream HGL**

| Location | Design Storm | Previously Approved HGL (m) | Revised Model HGL (m) |
|---|---|---|---|
| MH109 | 100-Year 3hr Chicago | 99.961 | 99.67 |
| | 100-Year 24hr SCS | 99.681 | 99.67 |
| | 100-Year 3hr Chicago + 20% | 100.231 | 99.70 |

## 5.5 QUALITY CONTROL

Quality treatment of runoff will be partially provided through installation of an Etobicoke Exfiltration System (EES) as highlighted in **Section 5.6** below. This system has been sized to collect and infiltrate runoff from first flush rainfall events up to and including the 22mm rainfall event to meet water balance requirements noted below. In addition, further quality control for the overall development will be provided by the existing downstream oil-grit separator (OGS) for The Ridge subdivision located downstream of the proposed development and discharging to the Jock River via an existing ditch on the west side of Borrisokane Road. The oil-and-grit separator has previously been sized to ensure 80% Total Suspended Solids (TSS) removal for the development inclusive of the proposed site. For more details regarding the OGS units within the downstream development, please refer to JFSA's July 2020, Pond Design Brief for the Ridge (Brazeau) Subdivision.

Based on assumptions made during design of the downstream phases, Phase 8 lands were assumed to contribute at an overall average imperviousness of 68%, and the OGS was sufficiently sized to provide the appropriate level of control at this value. The Phase 8 residential development lands encompass 3.09ha. At the previously assumed imperviousness of 68%, this equates to an impervious area of 2.10ha. Based on subcatchment parameters listed above, and excluding uncontrolled runoff to the realigned Greenbank Road discharging to Clarke Pond, the proposed development overall imperviousness is 76.7%, with a treatable impervious area of 2.13ha.

According to Table 3.2 of the MOE Stormwater Management Planning and Design Manual, the storage volume required to achieve 80% long-term S.S. removal in an infiltration type system such as the proposed EES is about 38 m3/impervious ha. The proposed development would then require approximately 81m3 of storage to provide quality control for the region. Per **Table 5-15** below, the proposed development provides approximately 442m3 of storage.

It is anticipated that the high level of treatment provided by implementation of the proposed on-site EES system (22mm of the required 25mm first flush storm event) in conjunction with the existing OGS via treatment train will provide more than adequate quality control to meet design criteria for the development despite the marginal increase in impervious area to the downstream OGS.

## 5.6 WATER BALANCE – ETOBICOKE EXFILTRATION SYSTEM

As a Best Management Practices (BMP) approach the Barrhaven South Urban Expansion Area (J.L. Richards & Associates, 2018) MSS requires the capture and infiltration of stormwater via exfiltration system installed on local roads, such as the private roads within the subject site, where the surface runoff is not impacted by the City's winter road salting program to meet pre-development water balance criteria. To avoid groundwater contamination, only salt-free agents may be used on site for winter maintenance of snow and ice. This includes, but is not limited to, all drive aisles, parking areas, sidewalks, and pathways..

The City and RVCA determined that predevelopment infiltration levels should be maintained under post development conditions and that the infiltration should be provided across the development and not simply concentrated to one or two locations. JFSA determined the infiltration target for the site to be of the average



simulated annual rainfall volume (552.0 mm), which is calculated to be 220.8mm annually as reported by JFSA in **Appendix E.2.** Similar to the BSUEA MSS, a 22mm storm event was selected for application within the current site plan to conservatively address post-development infiltration targets and water balance concerns.

An Etobicoke Exfiltration System (EES) has been proposed to be located below the storm sewer of the subject site (on sewer sections not identified as catch basin leads), the proposed locations of which are highlighted on **Drawing SD-1**.

For this exercise, the EES has been conservatively sized assuming no infiltration during rain events (seepage = 0 mm/hr). The EES units will be installed underneath storm sewers in specific areas and will consist of a 300 mm diameter perforated pipe surrounded by a clear stone trench with varying dimensions as identified on **Drawing SSP-1**. Minimum 600mm deep sumps (as per City of Ottawa standards) will be installed in upstream catchbasins in order to prevent/mitigate debris and potential oils from entering the perforated pipe system. ICDs within proposed catch basins are proposed as Ipex Tempest models equipped with floatable controls to mitigate oil/debris incursion to the EES.

**Table 5–15: 22mm Event Simulated EES Volumes**

| Pipe ID | Length (m) | Trench Height (m) | Trench Width (m) | Available Volume ($m^3$) | Used Volume ($m^3$)[3] |
|---|---|---|---|---|---|
| 101-100-E | 36.2 | 1.7 | 1.575 | 38.8 | 28.6 |
| 102-101-E | 62.9 | 1.6 | 1.20 | 48.3 | 35.5 |
| 103-101-E | 32.0 | 1.6 | 1.425 | 29.2 | 27.3 |
| 104-103-E | 70.3 | 1.6 | 1.425 | 64.1 | 51.5 |
| 105-104-E | 44.7 | 1.7 | 1.35 | 41.0 | 37.2 |
| 107-105-E | 45.4 | 1.7 | 1.35 | 41.6 | 36.7 |
| 108-107-E | 36.1 | 1.7 | 1.425 | 35.0 | 30.7 |
| 109-107-E | 70.5 | 1.7 | 1.20 | 57.5 | 45.3 |
| 110-108-E | 79.9 | 2.0 | 1.35 | 86.3 | 80.4 |
| **Total** | **477.9** | | | **441.9** | **373.2** |

1. Trench widths in the PCSWMM model are set at 40% of the values provided in this table to account for 40% clear stone porosity.
2. The available volume for each trench section was calculated based on the above dimensions and assuming 40% clear stone porosity.
3. Volumes used incorporate storage volume provided via 300mm perforated pipe within the EES.

As can be seen in the above table, approximately 84.5% of the available volume in the overall EES system will be used in the 22mm event. In sections where the used volume is greater than the available volume, water spills into the next downstream segment, however there is no outflow from controlled areas of the site during the 22mm event.

The Geotechnical Investigation for the proposed residential development prepared by Paterson Group (May 2023) identifies hydraulic conductivity and infiltration values for the site. Table 2 on the Paterson report outlines infiltration rates determined through Pask Permeameter testing completed within six test pits for general coverage of the site (see table duplicated from the Paterson report below for reference).

**Table 5–16: Summary of Field Saturated Hydraulic Conductivity Values and Infiltration Rates**

| Test Hole ID | Ground Surface Elevation (m) | Depth of Testing (m) | Kfs (m/sec) | Infiltration Rate (mm/hr) | Soil Type |
|---|---|---|---|---|---|
| TP1-23 | 103.01 | 2.7 | Too Fast to Test | | Silty to Medium Sand |
| | | 3.2 | $3.2x10^{-4}$ | 216 | |
| TP2-23 | 103.87 | 2.6 | $9.6x10^{-5}$ | 156 | Silty Sand |
| | | 3.2 | Too Fast to Test | | |
| TP3-23 | 104.37 | 2.5 | $4.3x10^{-5}$ | 126 | Silty Sand |
| | | 3.0 | $9.6x10^{-5}$ | 156 | |
| TP4-23 | 104.50 | 2.5 | $9.6x10^{-5}$ | 156 | Silty Sand |
| | | 3.0 | $9.6x10^{-5}$ | 156 | |
| TP5-23 | 104.70 | 2.5 | $3.2x10^{-4}$ | 216 | Silty Sand with Gravel, Cobbles, and Occasional Boulders |
| | | 3.3 | Too Fast to Test | | |
| TP6-23 | 104.94 | 2.5 | $1.9x10^{-4}$ | 188 | Silty to Medium Sand |
| | | 3.2 | $2.2x10^{-4}$ | 195 | |

Infiltration rate testing at the lowest depth was used to assess inter-event drawdown times for the EES. A safety factor of 3.5 was applied to the minimum infiltration rate at the lower elevation (156mm/hr) per suggestion of the *Low Impact Development Stormwater Management Planning and Design Guide* (Credit Valley Conservation, 2010), and was determined to be approximately 44.6mm/hr. Based on this rate, the known bottom area of the EES, as well as anticipated volume retained per **Table 5-15** above, estimated drawdown rates have been determined for each EES segment in the table below:

**Table 5–17: 22mm Event Estimated EES Drawdown Times**

| Pipe ID | Length (m) | Trench Width (m) | Used Volume $(m^3)^3$ | Infiltration Rate (mm/hr) | Drawdown Time (hr) |
|---|---|---|---|---|---|
| 101-100-E | 36.2 | 1.575 | 28.6 | 44.6 | 11.2 |
| 102-101-E | 62.9 | 1.20 | 35.5 | 44.6 | 10.5 |
| 103-101-E | 32.0 | 1.425 | 27.3 | 44.6 | 13.4 |
| 104-103-E | 70.3 | 1.425 | 51.5 | 44.6 | 11.5 |
| 105-104-E | 44.7 | 1.35 | 37.2 | 44.6 | 138 |

| Pipe ID | Length (m) | Trench Width (m) | Used Volume $(m^3)^3$ | Infiltration Rate (mm/hr) | Drawdown Time (hr) |
|---|---|---|---|---|---|
| 107-105-E | 45.4 | 1.35 | 36.7 | 44.6 | 13.4 |
| 108-107-E | 36.1 | 1.425 | 30.7 | 44.6 | 13.4 |
| 109-107-E | 70.5 | 1.20 | 45.3 | 44.6 | 12.0 |
| 110-108-E | 79.9 | 1.35 | 80.4 | 44.6 | 16.7 |

In all cases, drawdown times are less than the required 48 hours.

### 5.6.1 Etobicoke Exfiltration System Monitoring

Due to the unique nature of the proposed site stormwater management plan, monitoring requirements have been included for construction stages in addition to the post-construction criteria. In order to ensure the stormwater infrastructure is functioning as designed, the following maintenance and monitoring is recommended for the site. Monitoring described below is in addition to groundwater quality monitoring requirements described further within the BSUEA Environmental Management Plan.

### 5.6.2 Monitoring During Construction

The following practices are recommended during construction:

- Surface flows to be directed away from EES clear stone bedding as it is being installed prior to backfill;
- Fueling of machinery to be done at designated locations away from proposed EES locations;
- Storage of machinery and material, fill, etc. to be done in designated areas away proposed EES locations;
- Equipment movement through proposed EES locations to be controlled;
- Regular inspection and maintenance of erosion control features corresponding to catch basins, catch basin manholes, and perforated subdrains.
- The EES system is to be jet flushed and inspected via CCTV upon construction completion prior to activation.

### 5.6.3 Monitoring Post Construction

The post-construction monitoring program is recommended to be phased into two periods as follows:

Stage 1 – years 1 to 2: frequent monitoring and inspection following significant rainfall events >22mm or at least twice per year from May to October (inclusive)

Stage 2 – after year 2: annual monitoring and inspection in the spring to identify any maintenance needed as a result of winter weather/operations.

Monitoring during stage 1 will be required to provide sufficient evidence of compliant performance of the LID features as required by the City of Ottawa for LID projects. Monitoring during stage 2 will be required

to ensure the system continues to operate properly and is in compliance with assumed criteria outlined in the MECP ECA to be established for the development.

Monitoring locations are to be within manholes located immediately upstream of City rights-of-way to limit requirements for access easements/agreements, as well as to minimize requirements for additional infrastructure and related costs. The proposed monitoring location for the development is manhole STM 100.

Monitoring wells are to be installed at the base of these manholes for groundwater monitoring, and pressure transducers for continuous water level monitoring are to be installed within the adjacent clear stone media of the EES at the upstream perforated pipe connection to monitor water levels within the EES system. Flow monitoring is to be completed for the outgoing traditional storm sewer to identify EES overflows. Grab samples for quality (TSS% sampling) can be attempted within the same manhole locations and are to occur once per year following significant rainfall events (>22mm) during potential EES overflow events, or as determined through continuous water level monitoring. The monitoring program is expected to continue for the entirety of Stage 1.

Monitoring data is to confirm that the facility is able to drawdown to below the invert level of the perforated pipe connection within 48 hours after a significant rainfall event. Significant increase in drawdown time identifies the need for maintenance flushing of the EES system.

During stage 2, annual inspections of the system at the manholes is to visually confirm that drawdown is occurring within the manhole sump to the invert level of the upstream perforated pipe of the EES within 48 hours of a rainfall event.

### 5.6.4 Annual Maintenance

Annual maintenance of the EES is to occur during both Stages 1 and 2, and is to include:

- Removal of accumulated trash and debris from sumps and grates
- Removal of accumulated sediment depth in manholes / catch basins

Preventative maintenance via jet pressure washing of the conventional and EES system perforated pipes is to occur every 20 years, or as identified through annual drawdown inspections

# 6.0 GEOTECHNICAL CONSIDERATIONS AND GRADING

## 6.1 GEOTECHNICAL INVESTIGATION

A geotechnical investigation report for the development was completed by Paterson Group on March 30, 2021, and revised in May 2023. The geotechnical investigation report is included in **Appendix E.3**.

The objective of the investigation was to determine the subsoil and groundwater conditions at this site by means of a borehole program and to provide geotechnical recommendations for the design of the proposed development based on the results on the results of the boreholes and other soil information available.

Based on the Paterson's report, the subject site is a former agricultural land. The bulk of the current phase of the proposed development has been recently cleared of topsoil which has been stockpiled in several piles across the site. Generally, the ground surface across the subject site is relatively flat within the central portion and slopes up towards the edges. It should be noted that parts of the subject site had undergone excavation and in-filling activities as part of a previous sand extraction operation.

Generally, the subsurface profile across the subject site consists of varying amounts of fill consisting of silty sand mixed with occasional silty clay, gravel and cobbles. Practical refusal to augering was encountered at a range between 4.6 m and 8.3 m below existing ground surface.

### 6.1.1 Groundwater Control

It is anticipated that groundwater infiltration into the excavations should be low to moderate and controllable using open sumps. The contractor should be prepared to direct water away from all bearing surfaces and subgrades, regardless of the source, to prevent disturbance to the founding medium.

A temporary Ministry of the Environment, Conservation and Parks (MECP) permit to take water (PTTW) may be required for this project if more than 400,000 L/day of ground and/or surface water is to be pumped during the construction phase. A minimum of 4 to 5 months should be allowed for completion of the PTTW application package and issuance of the permit by the MECP.

For typical ground or surface water volumes being pumped during the construction phase, between 50,000 to 400,000 L/day, it is required to register on the Environmental Activity and Sector Registry (EASR). A minimum of two to four weeks should be allotted for completion of the EASR registration and the Water Taking and Discharge Plan to be prepared by a Qualified Person as stipulated under O.Reg. 63/16. Requirements for a PTTW or EASR registration are to be identified by the geotechnical consultant.

## 6.2 GRADING PLAN

The proposed development site measures 3.09ha in area. The topography across the site includes a moderate grade change with site grades on the east side of the property measuring approximately three (3) metres higher than the western property line. A detailed Grading Plan (**Drawing GP-1)** has been

provided to satisfy the stormwater management requirements, adhere to permissible grade raise restrictions, and provide for minimum cover requirements for the storm and sanitary sewers where possible. Site grading has been established to provide emergency overland flow routes required for stormwater management in accordance with City of Ottawa requirements.

The site maintains emergency overland flow routes for flows in excess of major system storm events to Obsidian Street in accordance with the subdivision design report. A primary grading consideration for this development is the interface between the subject lands and the future Greenbank Road ROW. The proposed elevations along the property line shared with the future Greenbank Road ROW have been coordinated with the design team for Greenbank Road for this submission. As the design for Greenbank Road is currently ongoing, further communication with the City of Ottawa and the design team for Greenbank Road will be required throughout the design stage to ensure the proposed site development utilizes the latest Greenbank Road profiles and resulting property line elevations.



# 7.0 APPROVALS

An Environmental Compliance Approval (ECA) may be required from the Ontario Ministry of the Environment, Conservation and Parks (MECP) for the proposed works. If the site remains under single ownership, it will comply with the exemptions from O.Reg. 525/98 and an ECA for traditional storm and sanitary sewers as well as the EES system would not be required. These exemptions require that the site is not on industrial land or for industrial use, would drain to an approved outlet and would be under single ownership. If, however, the land will be divided into separate legal properties either through severance or through the condominium process an ECA would then be required for traditional storm and sanitary sewers in addition to the EES. The Rideau Valley Conservation Authority will need to be consulted in order to obtain municipal approval for site development.

An MECP Permit to Take Water (PTTW) or registration on the Environmental Activity and Sector Registry may be required as noted in **Section 6.0** above.

No other approval requirements from other regulatory agencies have been identified at the time of this report.

# 8.0 EROSION CONTROL

In order to protect downstream water quality and prevent sediment build up in catch basins and storm sewers, erosion and sediment control measures must be implemented during construction. The following recommendations will be included in the contract documents and communicated to the Contractor.

1. Implement best management practices to provide appropriate protection of the existing and proposed drainage system and the receiving water course(s).
2. Limit the extent of the exposed soils at any given time.
3. Re-vegetate exposed areas as soon as possible.
4. Minimize the area to be cleared and grubbed.
5. Protect exposed slopes with geotextiles, geogrid, or synthetic mulches.
6. Provide sediment traps and basins during dewatering works.
7. Install sediment traps (such as SiltSack® by Terrafix) between catch basins and frames.
8. Schedule the construction works at times which avoid flooding due to seasonal rains.

The Contractor will also be required to complete inspections and guarantee the proper performance of their erosion and sediment control measures at least after every rainfall. The inspections are to include:

- Verification that water is not flowing under silt barriers.
- Cleaning and changing the sediment traps placed on catch basins.

# 9.0 CONCLUSIONS AND RECOMMENDATIONS

## 9.1 POTABLE WATER SERVICING

The H2OMAP Water model demonstrates that the pressures in the proposed development's watermain stubs fall within the range of target system pressures with a maximum basic day pressure of 70.2 psi and 61.1 psi at Obsidian Street North (Connection 1) and Obsidian Street South (Connection 2), respectively.

The subject lands can be adequately serviced by the 300mm watermain along Haiku Street and 300mm diameter watermain on Obsidian Street. The private distribution network, consisting of 200 mm and 250 mm diameter watermains, will provide sufficient fire flow to meet FUS requirements. System pressures will fall within the City of Ottawa Water Distribution Guidelines.

## 9.2 WASTEWATER SERVICING

The total design peak flow for the subject site to be conveyed to the connections at the Obsidian Street. Design flows are slightly higher than the previous estimate of 2.49L/s by DSEL based on a service area of 1.9 ha and population of 162 people. The difference (4.68L/s) can be accommodated by the 200mm receiving sewer in Obsidian Street.

JLR Associates identified in its MSS for BSUEA stated that there is residual capacity within the sanitary sewers draining Mattamy lands west to new Greenbank Road based on a Stantec (2015) hydrodynamic model of trunk sanitary sewers (450 mm in diameter and greater), which in turn demonstrated that the existing downstream trunk system could accommodate the flows generated with no risk of surcharging or basement flooding.

## 9.3 STORMWATER MANAGEMENT AND SERVICING

The following summarizes the stormwater management conclusions for the proposed development:

- All storm runoff within the site will be controlled and directed to an existing storm control point identified as MH 109 in JFSA SWM model.
- The proposed stormwater management plan is in compliance with the objectives specified in the City of Ottawa Sewer Design Guidelines and in the background reports for the site.
- The minor system (storm sewers) is sized to convey the 2-year storm event under free-flow conditions using City of Ottawa I-D-F parameters.
- ICDs installed on the proposed catch basins force flows in excess of the 2-year event to be conveyed by overland paved areas and stored within proposed parking and access regions.
- Quality control for the development has been provided by an existing downstream oil-grit separator in conjunction with installation of an on-site Etobicoke Exfiltration System.



An Etobicoke Exfiltration System has been proposed to be located below the storm sewer on private roads of the subject site to meet water balance requirements of the BSUEA. The stormwater drainage plan has been designed to achieve stormwater servicing that is free of conflict with other services, respects the stormwater management requirement listed in background studies and in conformity with the City of Ottawa guidelines.

## 9.4 GRADING

The topography across the site includes a moderate grade change with site grades on the east side of the property measuring three (3) metres higher than the western property line. A detailed Grading Plan has been provided to satisfy the stormwater management requirements, adhere to permissible grade raise restrictions, and provide for minimum cover requirements for the storm and sanitary sewers where possible. A primary grading consideration for this development is the interface between the subject lands and the future Greenbank Road ROW.

## 9.5 APPROVALS/PERMITS

An Environmental Compliance Approval (ECA) will be required from the Ontario Ministry of the Environment, Conservation and Parks (MECP) for the proposed works. An MECP Permit to Take Water (PTTW) or registration on the Environmental Activity and Sector Registry may be required as noted in Section 6.0 above. No other approval requirements from other regulatory agencies were identified at the time of this report. The Rideau Valley Conservation Authority will need to be consulted to obtain municipal approval for site development.

# E.3 GEOTECHNCIAL INVESTIGATION REPORT BY PATERSON INC.

PATERSON GROUP

# Geotechnical Investigation

## Proposed Residential Development

Half Moon Bay South – Phase 8
3718 Greenbank Road - Ottawa

Prepared for Mattamy Homes

**Report PG5690-1 Revision 4 dated May 9, 2023**

# Table of Contents

**PAGE**

**1.0 Introduction ..... 1**
**2.0 Proposed Development ..... 1**
**3.0 Method of Investigation ..... 2**
3.1 Field Investigation ..... 2
3.2 Field Survey ..... 3
3.3 Laboratory Testing ..... 4
3.4 Analytical Testing ..... 4
3.5 Permeameter Testing ..... 4
**4.0 Observations ..... 5**
4.1 Surface Conditions ..... 5
4.2 Subsurface Profile ..... 5
4.3 Groundwater ..... 6
4.4 Low Impact Development Review ..... 7
**5.0 Discussion ..... 9**
5.1 Geotechnical Assessment ..... 9
5.2 Site Grading and Preparation ..... 10
5.3 Foundation Design ..... 11
5.4 Design for Earthquakes ..... 12
5.5 Basement Slab ..... 12
5.6 Basement Wall ..... 12
5.7 Pavement Structure ..... 14
**6.0 Design and Construction Precautions ..... 16**
6.1 Foundation Drainage and Backfill ..... 16
6.2 Protection Against Frost Action ..... 16
6.3 Excavation Side Slopes ..... 16
6.4 Pipe Bedding and Backfill ..... 17
6.5 Groundwater Control ..... 18
6.6 Winter Construction ..... 18
6.7 Corrosion Potential and Sulphate ..... 19
**7.0 Recommendations ..... 20**
**8.0 Statement of Limitations ..... 21**

# Appendices

**Appendix 1** Soil Profile and Test Data Sheets
Symbols and Terms
Grain Size Distribution Testing Results
Analytical Testing Results

**Appendix 2** Figure 1 – Key Plan
Figure 2 to 5 – Aerial Photographs
Drawing PG5690-1 – Test Hole Location Plan

# 1.0 Introduction

Paterson Group (Paterson) was commissioned by Mattamy Homes to conduct a geotechnical investigation for the proposed development located at 3718 Greenbank Road, in the City of Ottawa (refer to Figure 1 - Key Plan presented in Appendix 2).

The objectives of the geotechnical investigation were to:

- Determine the subsoil and groundwater conditions at this site by means of borehole and test pit program.
- Provide geotechnical recommendations for the design of the proposed development based on the results of the boreholes and other soil information available.

The following report has been prepared specifically and solely for the aforementioned project which is described herein. It contains our findings and includes geotechnical recommendations pertaining to the design and construction of the subject development as they are understood at the time of writing this report.

# 2.0 Proposed Development

It is understood that the current phase of the proposed development will consist of residential condominium blocks with or without basements and a commercial block. Associated driveways, local roadways and landscaping areas are also anticipated as part of the proposed development. Specific details of the commercial block were not available at the time of issuance of this report. Therefore, our present recommendations should not be considered for the commercial block development until review of the block details can be completed by Paterson.

It is further understood that the proposed development will be serviced by future municipal water, sanitary and storm services.

# 3.0 Method of Investigation

## 3.1 Field Investigation

### Field Program

The initial field program for the current geotechnical investigation was carried out between February 17 and 23, 2021 and consisted of advancing a total of 12 boreholes to a maximum depth of 9.8 m below the existing grade.

A supplemental field program for the current geotechnical investigation was carried out between July 11 and 12, 2021 and consisted of advancing a total of 7 boreholes to a maximum depth of 8.2 m below the existing grade. The scope of the supplemental field program was to further delineate the fill material placed throughout the south and southwest portions of the site.

An additional test pitting program was recently conducted on April 25, 2023 and consisted of advancing 6 test pits to a maximum depth of 5.0 m below the existing grade. The scope of the additional field program was to determine the hydraulic conductivity and infiltration rates of the native soils below the inverts of the proposed Low Impact Design (LID) system.

Previous investigations were completed within the general area and surroundings of the subject site and consisted of a series of boreholes and test pits advanced to a maximum depth of 9.1 m below ground surface. The borehole locations were distributed in a manner to provide general coverage of the subject site and taking into consideration current site conditions. The test holes locations and fill locations are shown on Drawings PG5690-1 - Test Hole Location Plan and PG5690-2 - Fill Delineation Plan, respectively, included in Appendix 2.

The test holes were completed using a track mounted drill operated by a two-person crew. All fieldwork was conducted under the full-time supervision of Paterson personnel under the direction of a senior engineer. The drilling procedure consisted of drilling to the required depths at the selected locations, and sampling and testing the overburden.

### Sampling and In Situ Testing

Soil samples were collected from the boreholes by sampling directly from the auger flights (AU) or collected using a 50 mm diameter split- spoon (SS) sampler. Grab samples (G) from the test pits were recovered from the side walls of the open excavation. The depths at which the auger, and split-spoon samples were

recovered from the test holes are shown as AU, SS, and G, respectively, on the Soil Profile and Test Data sheets presented in Appendix 1.

All soil samples were visually inspected and initially classified on site. The auger, split-spoon and grab samples were placed in sealed plastic bags and transported to the our laboratory for examination and classification.

A Standard Penetration Test (SPT) was conducted in conjunction with the recovery of the split-spoon samples. The SPT results are recorded as "N" values on the Soil Profile and Test Data sheets. The "N" value is the number of blows required to drive the split-spoon sampler 300 mm into the soil after a 150 mm initial penetration using a 63.5 kg hammer falling from a height of 760 mm.

The thickness of the silty sand deposit was evaluated by a dynamic cone penetration testing (DCPT) completed at BH 7-21. The DCPT consists of driving a steel drill rod, equipped with a 50 mm diameter cone at the tip, using a 63.5 kg hammer falling from a height of 760 mm. The number of blows required to drive the cone into the soil is recorded for each 300 mm increment.

The subsurface conditions observed at the test hole locations were recorded in detail in the field. Our findings are presented in the Soil Profile and Test Data sheets in Appendix 1.

**Groundwater Monitoring**

Boreholes BH 1-21 to BH 12-21 were fitted with flexible piezometers to allow groundwater level monitoring. The groundwater observations are discussed in Subsection 4.3 and presented in the Soil Profile and Test Data sheets in Appendix 1.

**Sample Storage**

All samples from the supplemental field program will be stored in the laboratory for a period of one month after issuance of this report. They will then be discarded unless we are otherwise directed.

## 3.2 Field Survey

The test hole locations were determined by Paterson personnel and surveyed in the field by Paterson using a handheld, high precision GPS. The ground surface elevation at each test hole location is referenced to a geodetic datum. The locations of the boreholes are presented on Drawing PG5690-1 - Test Hole Location Plan in Appendix 2.

## 3.3 Laboratory Testing

Soil samples were collected from the subject site during the investigations and were visually examined in our laboratory to review the results of the field logging. A total of five (5) grain size distribution analyses were completed on selected soil samples as part of the initial and additional field programs. The results of our testing are presented in Subsection 4.2 and on Grain Size Distribution Analysis sheets presented in Appendix 1.

## 3.4 Analytical Testing

One (1) soil sample was submitted for analytical testing to assess the corrosion potential for exposed ferrous metals and the potential of sulphate attacks against subsurface concrete structures. The sample was submitted to determine the concentration of sulphate and chloride, the resistivity and the pH of the sample. The results are presented in Appendix 1 and are discussed further in Subsection 6.7

## 3.5 Permeameter Testing

In-situ permeameter testing was conducted using a Pask (Constant Head Well) Permeameter to confirm infiltration rates of the surficial soils at the subject site. At each location, two (2) 83 mm holes, located approximately 1.5 m away each other, were excavated using a Riverside/Bucket auger to approximate depths ranging from 2.5 to 2.7 and 3.0 to 3.2 m below the existing ground surface. All soils from the auger flights were visually inspected and initially classified on-site. The permeameter reservoir was filled with water and inverted into the hole, ensuring that it was relatively vertical and rested on the bottom of the hole. As the water infiltrated into the soil, the water level of the reservoir was monitored at various time intervals until the rate of fall reached equilibrium, known as *"quasi steady state"* flow rate. Quasi steady state flow can be considered to have been obtained after measuring 3 to 5 consecutive rate of fall readings with identical values. The values for the steady state rate of fall were recorded for each location.

The results of testing are further discussed in Subsection 4.4.

# 4.0 Observations

## 4.1 Surface Conditions

The subject site is former agricultural land. The bulk of the current phase of the proposed development has been recently cleared of topsoil, peat and fill which has been stockpiled in several piles across the site.

The ground surface across the condominium block is currently flat and gradually slopes down in a northern direction from an approximate geodetic elevation of 105 to 103 m and is about 1.5 m lower than the adjacent areas. The commercial block (southern portion) is observed to contain piles of fill material to an approximate elevation of 106 to 109 m.

It should be noted that parts of the subject site had undergone excavation and in-filling activities as part of a previous sand extraction operation. Historical aerial photographs of the site indicating fill movement activities since 1976 are presented in Appendix 2.

The site is bordered to the north and south by vacant land, to the west by existing residential development, and the east by the future Greenbank Road.

## 4.2 Subsurface Profile

Generally, the subsurface profile across the subject site consisted of a fill layer and/or a deep deposit of brown silty sand.

Fill, consisting of brown silty sand with varying amounts of gravel, crushed stone, cobble, clay and topsoil, were generally observed in test holes across the subject site with an approximate thickness ranging between 0.2 and 2.9 m. The fill layers extended deep to maximum depths of 4.6, 8.2, 8.2 and 6.7 m in boreholes BH 9-21, BH 10-21, BH 11-21, and BH 19-21, respectively. A significant amount of fill material was present above the existing surface within the proposed commercial block (southern portion) with a thickness of 4.6 to 8.2 m and an approximate minimum geodetic elevation of 97.8 m.

The deep deposit of compact to very dense, brown silty sand was observed underlying the fill layer, or at ground surface. Gravel and cobbles were occasionally encountered within the silty sand layer. The silty sand was observed to be underlain by a glacial till deposit composed of dense, brown sandy silt to silty sand with gravel, cobbles and boulders within borehole BH 3-21.

Practical refusal to augering was encountered at a range between 4.6 and 9.0 m below ground surface. Practical refusal to DCPT was encountered at 9.8 m below existing ground surface at borehole BH 7-21.

Reference should be made to the Soil Profile and Test Data sheets in Appendix 1 for specific details of the soil profiles encountered at each test hole location.

**Bedrock**

Based on available geological mapping, the bedrock in the subject area consists of Paleozoic interbedded Sandstone and Dolomite from the March formation, with an overburden drift thickness of 10 to 15 m depth.

**Grain Size Distribution and Hydrometer Testing**

Grain size distribution (sieve and hydrometer analysis) testing was completed on three selected soil samples. The results of the grain size analysis are summarized in Table 1 and presented on the Grain-Size Distribution and Hydrometer Testing Results sheets in Appendix 1.

**Table 1- Grain Size Distribution**

| Test Hole | Sample | Depth (m) | Gravel (%) | Sand (%) | Silt (%) | Clay (%) |
|---|---|---|---|---|---|---|
| BH2-21 | SS3 & SS4 | 1.5-2.9 | 1.8 | 89.4 | 8.8 | |
| BH4-21 | SS4 & SS5 | 2.3-3.7 | 0.0 | 88.9 | 11.1 | |
| BH8-21 | SS4 & SS5 | 2.3-3.7 | 46.9 | 43.1 | 10.0 | |
| TP2-23 | G4 | 2.4-2.7 | 0.0 | 94.6 | 5.4 | |
| TP5-23 | G4 | 2.2-2.5 | 31.3 | 67.2 | 1.5 | |

## 4.3 Groundwater

Groundwater levels were measured in piezometers on March 4, 2021. The piezometers in BH 7-21, BH 11-21 and BH 12-21 were damaged or buried and could not be recorded. The remaining boreholes were dry upon completion. Also, no groundwater was observed during the 2023 test pit program.

Long-term groundwater levels can also be estimated based on the observed moisture levels, colour and consistency of the recovered soil samples. Based on these observations, the long-term groundwater table can be expected well below 8 m below existing ground surface. It should be noted that groundwater levels

are subject to seasonal fluctuations. Therefore, the groundwater level could vary at the time of construction.

## 4.4 Low Impact Development Review

Based on the latest Site Servicing Plan prepared by Stantec Consulting Ltd. dated January 14, 2022, it is our understanding that Low Impact Development (LID) measures are being considered for the current phase of the proposed development. It is further understood that the proposed LID will incorporate a treatment train approach that includes an Etobicoke Exfiltration System (EES) along select roadways within the proposed development.

Upon reviewing the subsurface profile across the subject site and the site servicing plan details, it is anticipated that the subsoil below the proposed exfiltration system will generally consist of either a deep silty sand deposit with varying amounts of gravel, or fill material comprised of silty sand with varying amounts of silty clay, gravel and cobbles. The silty sand deposit has been identified within the north and central portion of the current phase, while the fill material has been generally observed within the south portion of the development.

**Hydraulic Conductivity and Infiltration Values (Permeameter Tests)**

Permeameter tests were conducted at 6 locations (2 tests at each location) to provide general coverage of the subject site on April 25, 2023. Preparation and testing of this investigation are in accordance with the Canadian Standards Association (CSA) B65-12-Annex E. Field saturated hydraulic conductivity ($K_{fs}$) values and estimated infiltration values are presented in Table 2 below.

Field saturated hydraulic conductivity values were determined using the Engineering Technologies Canada (ETC) Ltd. Reference tables provided in the most recent ETC Past Permeameter User Guide dated July 2018. Infiltration rates have been determined based on approximate relationships provided by the Ontario Ministry of Municipal Affairs and Housing – Supplementary Guidelines to the Ontario Building Code, 1997 – SG-6 – Percolation Time and Soil Descriptions.

**Table 2 – Summary of field saturated hydraulic conductivity values and infiltration rates**

| Test Hole ID | Ground Surface Elevation (m) | Depth of Permeameter Testing (m) | $K_{fs}$ (m/sec) | Infiltration Rate (mm/hr) | Soil Type |
|---|---|---|---|---|---|
| TP 1-23 | 103.01 | 2.7 | Too fast to test | | Silty to medium sand |
| | | 3.2 | $3.2x10^{-4}$ | 216 | |

| Table 2 – Summary of field saturated hydraulic conductivity values and infiltration rates | | | | | |
|---|---|---|---|---|---|
| **Test Hole ID** | **Ground Surface Elevation (m)** | **Depth of Permeameter Testing (m)** | **$K_{fs}$ (m/sec)** | **Infiltration Rate (mm/hr)** | **Soil Type** |
| TP 2-23 | 103.87 | 2.6 | $9.6x10^{-5}$ | 156 | Silty sand |
| | | 3.2 | Too fast to test | | |
| TP 3-23 | 104.37 | 2.5 | $4.3x10^{-5}$ | 126 | Silty sand |
| | | 3.0 | $9.6x10^{-5}$ | 156 | |
| TP 4-23 | 104.50 | 2.5 | $9.6x10^{-5}$ | 156 | Silty sand |
| | | 3.0 | $9.6x10^{-5}$ | 156 | |
| TP 5-23 | 104.70 | 2.5 | $3.2x10^{-4}$ | 216 | Silty sand with gravel, cobbles and occasional boulders |
| | | 3.3 | Too fast to test | | |
| TP 6-23 | 104.94 | 2.5 | $1.9x10^{-4}$ | 188 | Silty to medium sand |
| | | 3.2 | $2.2x10^{-4}$ | 195 | |

## Suitability of LID's

Given the measured field saturated hydraulic conductivity and infiltration rates noted in Table 2, both the native silty sand deposit and fill material anticipated below the proposed exfiltration system are considered suitable for the use of LIDs.

Across the majority of the site, infiltration rates ranged from 126 to 216 mm/hr. Therefore, the proposed EES is considered suitable from a geotechnical perspective. However, it is important to note that the infiltration rates derived from the $K_{fs}$ values in the table above are unfactored. Prior to use for design purposes, a minimum safety correction factor of 2.5 will need to be applied to the above infiltration rates to account for a number of factors including variations in soil composition and anticipated accumulation of fine-grained material over time. It should also be noted that for most LID measures, the bottom of the facility should be separated at least 1 m from the highest groundwater table.

## Groundwater

Based on the groundwater levels and physical soil parameters that were measured during the field investigations, the long-term groundwater table is expected at a depth greater than 8 to 9 m below existing ground surface. As such, sufficient separation between the proposed exfiltration system and the groundwater table is anticipated at the subject site.

# 5.0 Discussion

## 5.1 Geotechnical Assessment

From a geotechnical perspective, the subject site is suitable for the proposed residential development. It is anticipated that the proposed buildings will be founded over conventional footings placed over an undisturbed compact to dense silty sand or dense glacial till bearing surface or an engineered fill pad over an approved fill subgrade bearing medium.

To adequately distribute the foundation loads in areas where the existing fill is encountered below the building footprint, a woven geotextile liner, such as Terratrack 200 or equivalent, should be placed 500 mm below design underside of footing level and extend at least 1 m horizontally beyond the footing face. A biaxial geogrid, such as Terrafix TBX2500 or equivalent, should be placed over the woven geotextile liner. A minimum 500 mm thick pad, consisting of a Granular B Type II, compacted to 98% of its SPMDD should be placed up to design underside of footing level. Prior to placement of the above noted engineered fill pad, it is recommended that a proof-rolling program be completed by a vibratory roller making several passes and approved by Paterson personnel over the sub-excavated area below the proposed footings.

For areas where a fill layer is encountered below the granular layer for the floor slab, it is recommended to sub-excavate 500 mm below the underside of floor slab granulars and place a woven geotextile liner, such as Terratrack 200W or equivalent, and a biaxial geogrid, such as Terrafix TBX2500 or equivalent. It is recommended that a proof-rolling program be completed by a vibratory roller making several passes and approved by Paterson personnel prior to placement of the geotextile liner and biaxial geogrid. Any poor performing areas should be removed and reinstated with a select subgrade fill compacted to 98% of its SPMDD under dry and above freezing temperatures.

The proof-rolling program should also be completed across paved areas to ensure that any poor performing soils are removed prior to pavement structure placement.

Due to the absence of a silty clay deposit, the aforementioned site will not be subjected to permissible grade raise restrictions. Also, no tree planting setback restrictions are required for the subject phase of the proposed development due to the absence of a silty clay deposit.

The above and other considerations are further discussed in the following sections.

## 5.2 Site Grading and Preparation

### Stripping Depth

Topsoil and deleterious fill, such as those containing organic materials, should be stripped from under any buildings, paved areas, pipe bedding and other settlement sensitive structures.

### Fill Placement

Fill used for grading beneath the proposed building areas should consist, unless otherwise specified, of clean imported granular fill, such as Ontario Provincial Standard Specifications (OPSS) Granular A or Granular B Type II. The fill should be placed in lifts of 300 mm thick or less and compacted using suitable compaction equipment for the lift thickness. Fill placed beneath the building areas should be compacted to at least 99% of the Standard Proctor Maximum Dry Density (SPMDD).

Non-specified existing fill along with site-excavated soil can be used as general landscaping fill and beneath parking areas where settlement of the ground surface is of minor concern. In landscaped areas, these materials should be spread in thin lifts and at least compacted by the tracks of the spreading equipment to minimize voids. If these materials are to be used to build up the subgrade level for areas to be paved, they should be compacted in thin lifts to a minimum density of 95% of the SPMDD.

Non-specified existing fill and site-excavated soils are not suitable for use as backfill against foundation walls unless a composite drainage blanket connected to a perimeter drainage system is provided.

### Proof Rolling

Proof rolling of the subgrade is required in areas where the existing fill, free of significant amounts of organics and deleterious materials, is encountered. It is recommended that the subgrade surface be proof-rolled **under dry conditions and in above freezing temperatures** by an adequately sized roller making several passes to achieve optimum compaction levels. The compaction program should be reviewed and approved by the geotechnical consultant at the time of construction.

## 5.3 Foundation Design

### Conventional Spread Footing

Footings placed directly on an undisturbed, compact silty sand or glacial till bearing surface can be designed using a bearing resistance value at serviceability limit states (SLS) of **150 kPa** and a factored bearing resistance value at ultimate limit states (ULS) of **225 kPa**. A geotechnical resistance factor of 0.5 was applied to the above noted bearing resistance value at ULS.

Footings placed over a minimum 500 mm thick geogrid reinforced engineered pad, consisting of a Granular A or Granular B Type II or approved granular fill alternative placed in maximum 300 mm loose lifts and compacted to 98% of its SPMDD, placed over a subgrade soil approved by the Paterson personnel at the time of construction, can be designed using a bearing resistance value at SLS of **150 kPa** and a factored bearing resistance value at ULS of **250 kPa**.

An undisturbed soil bearing surface consists of a surface from which all topsoil and deleterious materials, such as loose, frozen or disturbed soil, whether in situ or not, have been removed, in the dry, prior to the placement of concrete for footings.

Footings placed on a soil bearing surface and designed using the bearing resistance values at SLS given above will be subjected to potential post construction total and differential settlements of 25 and 20 mm, respectively.

Where the silty sand subgrade is found to be in a loose state, the contractor should compact the subgrade under dry conditions and above freezing temperatures, using suitable compaction equipment, making several passes and approved by Paterson.

### Lateral Support

The bearing medium under footing-supported structures is required to be provided with adequate lateral support with respect to excavations and different foundation levels. Adequate lateral support is provided to the in-situ bearing medium soils above the groundwater table when a plane extending down and out from the bottom edge of the footing at a minimum of 1.5H:1V passes only through in situ soil of the same or higher capacity as the bearing medium soil.

## 5.4 Design for Earthquakes

The site class for seismic site response can be taken as **Class D**. Based on the current information, including the level of groundwater table and compactness of the underlying sand layer, the soil underlying the subject site is not susceptible to liquefaction. Reference should be made to the latest revision of the 2012 Ontario Building Code for a full discussion of the earthquake design requirements.

## 5.5 Basement Slab

With the removal of all topsoil and fill, containing significant amounts of deleterious or organic materials, the native soil and/or approved fill pad (placed as per Subsection 5.0) will be considered to be an acceptable subgrade surface on which to commence backfilling for the floor slab. Any poor performing areas should be removed and reinstated with an engineered fill, such as Granular B Type II.

For slab-on-grade areas, it is recommended that the upper 200 mm of sub-slab fill consist OPSS Granular A crushed stone. For basement slabs, it is recommended that the upper 200 mm of sub-floor fill consist of 19 mm clear crushed stone

## 5.6 Basement Wall

There are several combinations of backfill materials and retained soils that could be applicable for the basement walls of the subject structure. However, the conditions can be well-represented by assuming the retained soil consists of a material with an angle of internal friction of 30 degrees and a bulk (drained) unit weight of 18 kN/m$^3$.

Where undrained conditions are anticipated (i.e. below the groundwater level), the applicable effective (undrained) unit weight of the retained soil can be taken as 13 kN/m$^3$, where applicable. A hydrostatic pressure should be added to the total static earth pressure when using the effective unit weight.

### Lateral Earth Pressure

The static horizontal earth pressure ($p_o$) can be calculated using a triangular earth pressure distribution equal to $K_o \cdot \gamma \cdot H$ where:

$K_o$ = at-rest earth pressure coefficient of the applicable retained soil (0.5)
$\gamma$ = unit weight of fill of the applicable retained soil (kN/m$^3$)
H = height of the wall (m)

An additional pressure having a magnitude equal to $K_o \cdot q$ and acting on the entire height of the wall should be added to the above diagram for any surcharge loading, q (kPa), that may be placed at ground surface adjacent to the wall. The surcharge pressure will only be applicable for static analyses and should not be used in conjunction with the seismic loading case.

Actual earth pressures could be higher than the "at-rest" case if care is not exercised during the compaction of the backfill materials to maintain a minimum separation of 0.3 m from the walls with the compaction equipment.

**Seismic Earth Pressures**

The total seismic force ($P_{AE}$) includes both the earth force component ($P_o$) and the seismic component ($\Delta P_{AE}$).

The seismic earth force ($\Delta P_{AE}$) can be calculated using $0.375 a_c \cdot \gamma \cdot H^2/g$ where:

$a_c$ = $(1.45-a_{max}/g)a_{max}$
$\gamma$ = unit weight of fill of the applicable retained soil (kN/m$^3$)
H = height of the wall (m)
g = gravity, 9.81 m/s$^2$

The peak ground acceleration, ($a_{max}$), for the Ottawa area is 0.32g according to OBC 2012. Note that the vertical seismic coefficient is assumed to be zero.

The earth force component ($P_o$) under seismic conditions can be calculated using $P_o = 0.5\ K_o\ \gamma\ H^2$, where $K_o = 0.5$ for the soil conditions noted above.

The total earth force ($P_{AE}$) is considered to act at a height, h (m), from the base of the wall, where:

$h = \{P_o \cdot (H/3) + \Delta P_{AE} \cdot (0.6)$

## 5.7 Pavement Structure

Driveways, local residential roadways, heavy truck parking/loading areas and roadways with bus traffic are anticipated at this site. The proposed pavement structures are shown in Tables 3, 4 and 5 below.

Minimum Performance Graded (PG) 58-34 asphalt cement should be used for this project. If soft spots develop in the subgrade during compaction or due to construction traffic, the affected areas should be excavated and replaced with OPSS Granular B Type II material.

The pavement granular base and subbase should be placed in maximum 300 mm thick lifts and compacted to a minimum of 100% of the material's SPMDD using suitable vibratory equipment. Minimum Performance Graded (PG) 58-34 asphalt cement should be used for this project.

**Table 3 - Recommended Pavement Structure - Driveways and at-grade car parking areas**

| Thickness (mm) | Material Description |
|---|---|
| 50 | **Wear Course** - HL 3 or Superpave 12.5 Asphaltic Concrete |
| 150 | **BASE** - OPSS Granular A Crushed Stone |
| 300 | **SUBBASE** - OPSS Granular B Type II |
| **SUBGRADE** - Either fill, in situ soil or OPSS Granular B Type I or II material placed over in situ soil or fill | |

**Table 4 - Recommended Pavement Structure - Local Residential Roadways and Heavy Truck Parking / Loading Areas**

| Thickness (mm) | Material Description |
|---|---|
| 40 | **Wear Course -** Superpave 12.5 Asphaltic Concrete |
| 50 | **Binder Course -** Superpave 19.0 Asphaltic Concrete |
| 150 | **BASE** - OPSS Granular A Crushed Stone |
| 400 | **SUBBASE** - OPSS Granular B Type II |
| **SUBGRADE** - Either fill, in situ soil or OPSS Granular B Type I or II material placed over in situ soil | |

| Table 5 - Recommended Pavement Structure - Roadways with Bus Traffic | |
|---|---|
| **Thickness mm** | **Material Description** |
| 40 | **Wear Course -** Superpave 12.5 Asphaltic Concrete |
| 50 | **Upper Binder Course** - Superpave 19.0 Asphaltic Concrete |
| 50 | **Lower Binder Course** - Superpave 19.0 Asphaltic Concrete |
| 150 | **BASE** - OPSS Granular A Crushed Stone |
| 600 | **SUBBASE** - OPSS Granular B Type II |
| **SUBGRADE** - Either in situ soil or OPSS Granular B Type II material placed over in situ soil | |

# 6.0 Design and Construction Precautions

## 6.1 Foundation Drainage and Backfill

### Foundation Drainage

A perimeter foundation drainage system is recommended for proposed structures. The system should consist of a 100 to 150 mm diameter, geotextile-wrapped, perforated, corrugated, plastic pipe, surrounded on all sides by 150 mm of 10 mm clear crushed stone, placed at the footing level around the exterior perimeter of the structure. The pipe should have a positive outlet, such as a gravity connection to the storm sewer.

### Foundation Backfill

Backfill against the exterior sides of the foundation walls should consist of free-draining, non frost susceptible granular materials. The site materials will be frost susceptible and, as such, are not recommended for re-use as backfill unless a composite drainage system (such as system Delta Drain 6000 or Miradrain G100N) connected to a perimeter drainage system is provided.

## 6.2 Protection Against Frost Action

Perimeter footings of heated structures are required to be insulated against the deleterious effect of frost action. A minimum 1.5 m thick soil cover should be provided for adequate frost protection of heated structured, or an equivalent combination of soil cover and foundation insulation.

Exterior unheated footings, such as those for isolated exterior piers and loading docks, are more prone to deleterious movement associated with frost action than the exterior walls of the heated structure and require additional protection, such as soil cover of 2.1 m or an equivalent combination of soil cover and foundation insulation.

## 6.3 Excavation Side Slopes

The side slopes of the excavations in the soil and fill overburden materials should either be cut back at acceptable slopes or should be retained by shoring systems from the start of the excavation until the structure is backfilled. It is expected that sufficient room will be available for the greater part of the excavation to be undertaken by open- cut methods (i.e. unsupported excavations).

### Unsupported Excavations

The excavation side slopes above the groundwater level extending to a maximum depth of 3 m should be cut back at 1H:1V or shallower. The shallower slope is required for excavation below groundwater level. The subsoil at this site is considered to be mainly Type 2 and 3 soil according to the Occupational Health and Safety Act and Regulations for Construction Projects.

Excavated soil should not be stockpiled directly at the top of excavations and heavy equipment should be kept away from the excavation sides.

Slopes in excess of 3 m in height should be periodically inspected by the geotechnical consultant in order to detect if the slopes are exhibiting signs of distress.

It is recommended that a trench box be used at all times to protect personnel working in trenches with steep or vertical sides. It is expected that services will be installed by "cut and cover" methods and excavations will not be left open for extended periods of time.

## 6.4 Pipe Bedding and Backfill

Bedding and backfill materials should be in accordance with the most recent Material Specifications and Standard Detail Drawings from the Department of Public Works and Services, Infrastructure Services Branch of the City of Ottawa.

At least 150 mm of OPSS Granular A should be used for pipe bedding for sewer and water pipes. The bedding should extend to the spring line of the pipe. Cover material, from the spring line to at least 300 mm above the obvert of the pipe, should consist of OPSS Granular A or Granular B Type II with a maximum size of 25 mm. The bedding and cover materials should be placed in maximum 225 mm thick lifts compacted to 98% of the material's SPMDD.

It should generally be possible to re-use the site excavated materials above the cover material if the operations are carried out in dry weather conditions.

Where hard surface areas are considered above the trench backfill, the trench backfill material within the frost zone, (about 1.5 m below finished grade) and above the cover material should match the soils exposed at the trench walls to minimize differential frost heaving. The trench backfill should be placed in maximum 225 mm thick lifts and compacted to 95% of the materials SPMDD.

## 6.5 Groundwater Control

It is anticipated that groundwater infiltration into the excavations should be low to moderate and controllable using open sumps. The contractor should be prepared to direct water away from all bearing surfaces and subgrades, regardless of the source, to prevent disturbance to the founding medium.

**Permit to Take Water**

A temporary Ministry of the Environment, Conservation and Parks (MECP) permit to take water (PTTW) may be required for this project if more than 400,000 L/day of ground and/or surface water is to be pumped during the construction phase. A minimum of 4 to 5 months should be allowed for completion of the PTTW application package and issuance of the permit by the MECP.

For typical ground or surface water volumes being pumped during the construction phase, between 50,000 to 400,000 L/day, it is required to register on the Environmental Activity and Sector Registry (EASR). A minimum of two to four weeks should be allotted for completion of the EASR registration and the Water Taking and Discharge Plan to be prepared by a Qualified Person as stipulated under O.Reg. 63/16. If a project qualifies for a PTTW based upon anticipated conditions, an EASR will not be allowed as a temporary dewatering measure while awaiting the MECP review of the PTTW application.

## 6.6 Winter Construction

Precautions must be taken if winter construction is considered for this project, where excavations are completed in proximity of existing structures which may be adversely affected due to the freezing conditions.

In the event of construction during below zero temperatures, the founding stratum should be protected from freezing temperatures by the installation of straw, propane heaters and tarpaulins or other suitable means. The base of the excavations should be insulated from sub-zero temperatures immediately upon exposure and until such time as heat is adequately supplied to the building and the footings are protected with sufficient soil cover to prevent freezing at founding level.

Trench excavations and pavement construction are difficult activities to complete during freezing conditions without introducing frost in the subgrade or in the excavation walls and bottoms. Precautions should be considered if such activities are to be completed during freezing conditions. Additional information could be provided, if required.

## 6.7 Corrosion Potential and Sulphate

The results on analytical testing show that the sulphate content is less than 0.1%. The results are indicative that Type 10 Portland Cement (normal cement) would be appropriate for this site. The chloride content and the pH of the sample indicate that they are not significant factors in creating a corrosive environment for exposed ferrous metals at this site, whereas the resistivity is indicative of a very low to slightly aggressive corrosive environment.

# 7.0 Recommendations

It is recommended that the following be completed once the master plan and site development are determined.

- ❑ Review detailed grading plan(s) from a geotechnical perspective.
- ❑ Observation of all bearing surfaces prior to the placement of concrete.
- ❑ Sampling and testing of the concrete and fill materials.
- ❑ Periodic observation of the condition of unsupported excavation side slopes in excess of 3 m in height, if applicable.
- ❑ Observation of all subgrades prior to backfilling.
- ❑ Field density tests to determine the level of compaction achieved.
- ❑ Sampling and testing of the bituminous concrete including mix design reviews.

A report confirming that these works have been conducted in general accordance with Paterson's recommendations could be issued upon the completion of a satisfactory material testing and observation program by the geotechnical consultant.

# 8.0 Statement of Limitations

The recommendations made in this report are in accordance with Paterson's present understanding of the project. Paterson requests permission to review the grading plan once available. Paterson's recommendations should be reviewed when the drawings and specifications are complete.

The client should be aware that any information pertaining to soils and the test hole log are furnished as a matter of general information only. Test hole descriptions or logs are not to be interpreted as descriptive of conditions at locations other than those of the test holes.

A soils investigation is a limited sampling of a site. Should any conditions at the site be encountered which differ from those at the test locations, Paterson requests to be notified immediately in order to permit reassessment of the recommendations.

The present report applies only to the project described in this document. Use of this report for purposes other than those described herein or by person(s) other than Mattamy Homes, or their agents, is not authorized without review by Paterson for the applicability of our recommendations to the alternative use of the report.

**Paterson Group Inc.**








Sok Kim, EIT

Faisal I. Abou-Seido, P.Eng.



Michael Laflamme, P.Geo.

**Report Distribution:**

- ❑ Mattamy Homes (email copy)
- ❑ Paterson Group (1 copy)

# APPENDIX 1

SOIL PROFILE AND TEST DATA SHEETS

SYMBOLS AND TERMS

GRAIN SIZE DISTRIBUTION ANALYSIS

ANALYTICAL TESTING RESULTS

# patersongroup Consulting Engineers

9 Auriga Drive, Ottawa, Ontario K2E 7T9

## SOIL PROFILE AND TEST DATA

**Geotechnical Investigation**
**Half Moon Bay South-Phase 8 - 3718 Greenbank Road**
**Ottawa, Ontario**

**DATUM** Geodetic


**REMARKS**

**BORINGS BY** Backhoe **DATE** April 25, 2023

**FILE NO.** PG5690

**HOLE NO.** TP 1-23

| SOIL DESCRIPTION | STRATA PLOT | SAMPLE TYPE | SAMPLE NUMBER | SAMPLE % RECOVERY | SAMPLE N VALUE or RQD | DEPTH (m) | ELEV. (m) | Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone ○ Water Content % | Piezometer Construction |
|---|---|---|---|---|---|---|---|---|---|
| **Ground Surface** | | | | | | 0 | 103.01 | | |
| **FILL:** Brown silty sand, some gravel, crushed stone, wood and trash | | G | 1 | | | | | | |
| 0.40 | | | | | | | | | |
| | | G | 2 | | | 1 | 102.01 | | |
| Compact, brown **SILTY SAND,** trace gravel | | G | 3 | | | 2 | 101.01 | | |
| | | G | 4 | | | | | | |
| 3.00 | | | | | | 3 | 100.01 | | |
| End of Test Pit | | | | | | | | | |

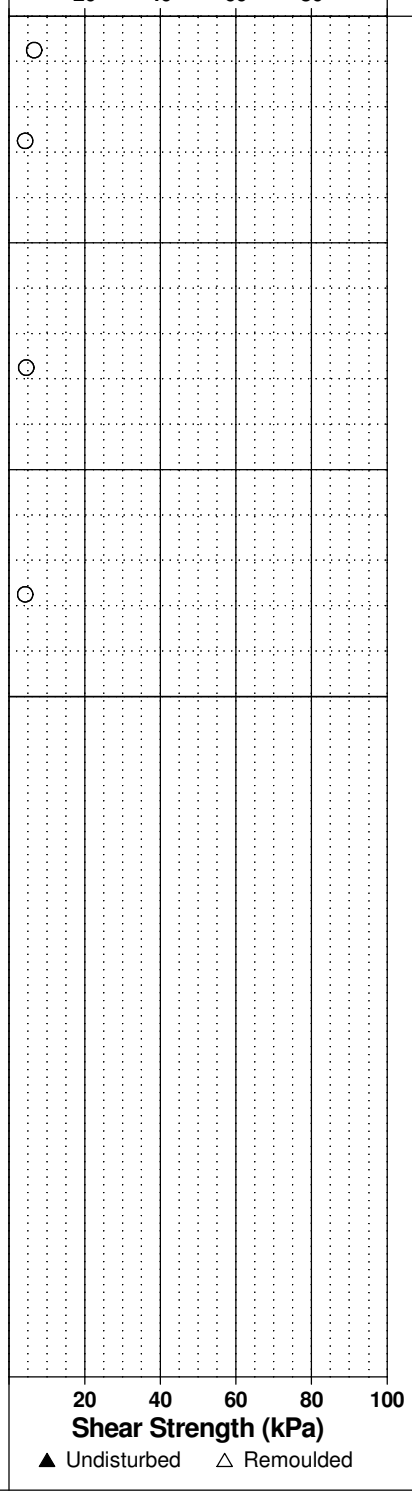

# patersongroup Consulting Engineers

9 Auriga Drive, Ottawa, Ontario K2E 7T9

## SOIL PROFILE AND TEST DATA

**Geotechnical Investigation**
**Half Moon Bay South-Phase 8 - 3718 Greenbank Road**
**Ottawa, Ontario**

**DATUM** Geodetic

**REMARKS**

**BORINGS BY** Backhoe **DATE** April 25, 2023

**FILE NO.** PG5690

**HOLE NO.** TP 2-23

| SOIL DESCRIPTION | STRATA PLOT | SAMPLE TYPE | SAMPLE NUMBER | SAMPLE % RECOVERY | SAMPLE N VALUE or RQD | DEPTH (m) | ELEV. (m) | Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone ○ Water Content % | Piezometer Construction |
|---|---|---|---|---|---|---|---|---|---|
| **Ground Surface** | | | | | | | | | |
| **FILL:** Brown silty sand, some gravel, crushed stone, wood and trash | | G | 1 | | | 0 | 103.87 | | |
| 0.20 | | G | 2 | | | | | | |
| | | | | | | 1 | 102.87 | | |
| Compact, brown **SILTY SAND** | | G | 3 | | | | | | |
| | | | | | | 2 | 101.87 | | |
| | | G | 4 | | | | | | |
| 3.00 | | | | | | 3 | 100.87 | | |
| End of Test Pit | | | | | | | | | |

Pen. Resist. Blows/0.3m: 20 40 60 80

Water Content %: 20 40 60 80

Shear Strength (kPa): 20 40 60 80 100

▲ Undisturbed △ Remoulded

# patersongroup Consulting Engineers

9 Auriga Drive, Ottawa, Ontario K2E 7T9

## SOIL PROFILE AND TEST DATA

**Geotechnical Investigation**
**Half Moon Bay South-Phase 8 - 3718 Greenbank Road**
**Ottawa, Ontario**

**DATUM** Geodetic

**REMARKS**

**BORINGS BY** Backhoe **DATE** April 25, 2023

**FILE NO.** PG5690

**HOLE NO.** TP 3-23

| SOIL DESCRIPTION | STRATA PLOT | SAMPLE TYPE | SAMPLE NUMBER | SAMPLE % RECOVERY | SAMPLE N VALUE or RQD | DEPTH (m) | ELEV. (m) | Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone ○ Water Content % | Piezometer Construction |
|---|---|---|---|---|---|---|---|---|---|
| **Ground Surface** | | | | | | 0 | 104.37 | | |
| **FILL:** Brown silty sand, some topsoil, gravel, crushed stone, cobbles, boulders, trace clay and organics | | G | 1 | | | | | | |
| 1.00 | | | | | | 1 | 103.37 | | |
| | | G | 2 | | | | | | |
| | | G | 3 | | | 2 | 102.37 | | |
| Compact, brown **SILTY SAND** | | G | 4 | | | 3 | 101.37 | | |
| | | | | | | 4 | 100.37 | | |
| 5.00 | | G | 5 | | | 5 | 99.37 | | |
| End of Test Pit | | | | | | | | | |

Pen. Resist. Blows/0.3m: ● 50 mm Dia. Cone; ○ Water Content %
20 40 60 80

Shear Strength (kPa)
20 40 60 80 100
▲ Undisturbed △ Remoulded

# patersongroup Consulting Engineers

9 Auriga Drive, Ottawa, Ontario K2E 7T9

## SOIL PROFILE AND TEST DATA

**Geotechnical Investigation**
**Half Moon Bay South-Phase 8 - 3718 Greenbank Road**
**Ottawa, Ontario**

**DATUM** Geodetic

**REMARKS**

**BORINGS BY** Backhoe **DATE** April 25, 2023

**FILE NO.** PG5690

**HOLE NO.** TP 4-23

| SOIL DESCRIPTION | STRATA PLOT | SAMPLE TYPE | SAMPLE NUMBER | SAMPLE % RECOVERY | SAMPLE N VALUE or RQD | DEPTH (m) | ELEV. (m) | Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone ○ Water Content % | Piezometer Construction |
|---|---|---|---|---|---|---|---|---|---|
| **Ground Surface** | | | | | | | | | |
| **FILL:** Brown silty sand, some gravel, crushed stone, trace organics | | G | 1 | | | 0 | 104.50 | | |
| 0.20 | | | | | | | | | |
| | | G | 2 | | | 1 | 103.50 | | |
| | | G | 3 | | | 2 | 102.50 | | |
| Compact, brown **SILTY SAND** | | | | | | | | | |
| | | G | 4 | | | 3 | 101.50 | | |
| | | | | | | 4 | 100.50 | | |
| | | G | 5 | | | | | | |
| 5.00 | | | | | | 5 | 99.50 | | |
| End of Test Pit | | | | | | | | | |

Pen. Resist. Blows/0.3m: ● 50 mm Dia. Cone; ○ Water Content %; 20 40 60 80

Shear Strength (kPa): 20 40 60 80 100; ▲ Undisturbed △ Remoulded

# patersongroup Consulting Engineers

9 Auriga Drive, Ottawa, Ontario K2E 7T9

## SOIL PROFILE AND TEST DATA

**Geotechnical Investigation**
**Half Moon Bay South-Phase 8 - 3718 Greenbank Road**
**Ottawa, Ontario**

**DATUM** Geodetic

**REMARKS**

**BORINGS BY** Backhoe **DATE** April 25, 2023

**FILE NO.** PG5690

**HOLE NO.** TP 5-23

| SOIL DESCRIPTION | STRATA PLOT | SAMPLE TYPE | SAMPLE NUMBER | SAMPLE % RECOVERY | SAMPLE N VALUE or RQD | DEPTH (m) | ELEV. (m) | Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone ○ Water Content % | Piezometer Construction |
|---|---|---|---|---|---|---|---|---|---|
| **Ground Surface** | | | | | | 0 | 104.70 | | |
| **FILL:** Brown silty sand, some gravel and crushed stone, occasional cobbles and boulders | | G | 1 | | | | | | |
| 0.20 | | | | | | | | | |
| Compact, brown **SILTY SAND,** trace gravel | | G | 2 | | | 1 | 103.70 | | |
| 1.20 | | | | | | | | | |
| | | G | 3 | | | | | | |
| | | | | | | 2 | 102.70 | | |
| | | G | 4 | | | | | | |
| Dense, brown **SILTY SAND** with gravel, cobbles and boulders | | | | | | 3 | 101.70 | | |
| | | G | 5 | | | | | | |
| | | | | | | 4 | 100.70 | | |
| 4.50 | | | | | | | | | |
| End of Test Pit | | | | | | | | | |

Shear Strength (kPa) 20 40 60 80 100

▲ Undisturbed △ Remoulded

# patersongroup Consulting Engineers

9 Auriga Drive, Ottawa, Ontario K2E 7T9

## SOIL PROFILE AND TEST DATA

**Geotechnical Investigation**
**Half Moon Bay South-Phase 8 - 3718 Greenbank Road**
**Ottawa, Ontario**

**DATUM** Geodetic


**REMARKS**

**BORINGS BY** Backhoe **DATE** April 25, 2023

**FILE NO.** PG5690

**HOLE NO.** TP 6-23

| SOIL DESCRIPTION | STRATA PLOT | SAMPLE TYPE | SAMPLE NUMBER | SAMPLE % RECOVERY | SAMPLE N VALUE or RQD | DEPTH (m) | ELEV. (m) | Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone ○ Water Content % | Piezometer Construction |
|---|---|---|---|---|---|---|---|---|---|
| **Ground Surface** | | | | | | | | | |
| **FILL:** Brown silty sand, trace gravel, crushed stone and organics | | G | 1 | | | 0 | 104.94 | | |
| 0.20 | | G | 2 | | | 1 | 103.94 | | |
| Compact, brown **SILTY SAND** | | G | 3 | | | 2 | 102.94 | | |
| | | G | 4 | | | 3 | 101.94 | | |
| | | G | 5 | | | 4 | 100.94 | | |
| 4.50 | | | | | | | | | |
| End of Test Pit | | | | | | | | | |

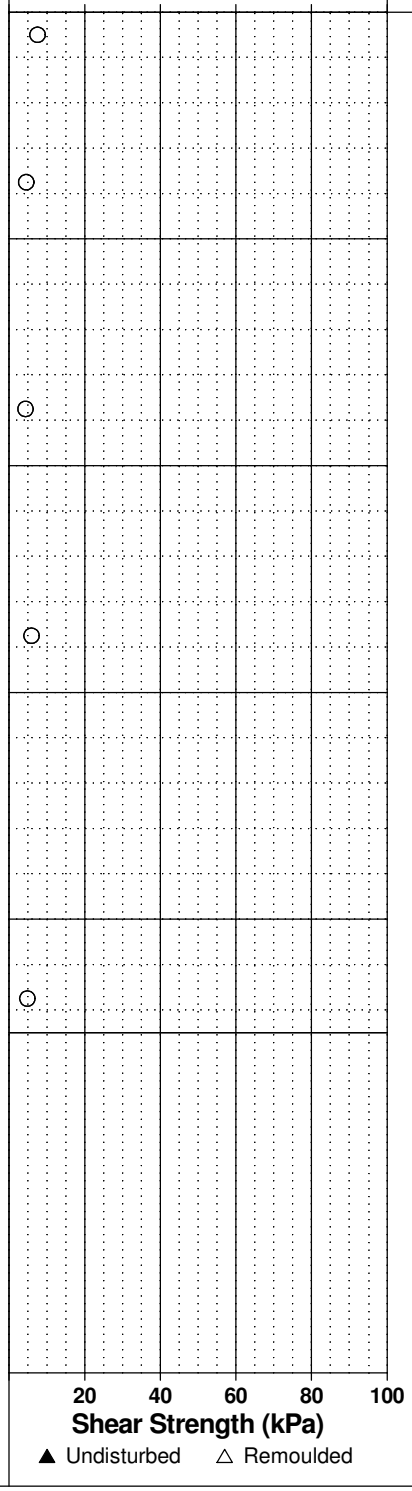

# patersongroup Consulting Engineers

154 Colonnade Road South, Ottawa, Ontario K2E 7J5

## SOIL PROFILE AND TEST DATA

**Geotechnical Investigation**
**Proposed Mixed Use Development**
**3718 Greenbank Road - Ottawa, Ontraio**

**DATUM** Geodetic


**FILE NO.** PG5690

**REMARKS**

**HOLE NO.** BH 1-21

**BORINGS BY** CME 55 Power Auger **DATE** 2021 February 17

| SOIL DESCRIPTION | STRATA PLOT | SAMPLE TYPE | SAMPLE NUMBER | SAMPLE % RECOVERY | SAMPLE N VALUE or RQD | DEPTH (m) | ELEV. (m) | Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone ○ Water Content % | Piezometer Construction |
|---|---|---|---|---|---|---|---|---|---|
| **GROUND SURFACE** | | | | | | 0 | 103.45 | | |
| Compact to dense, brown **SILTY SAND** | | AU | 1 | | | | | | |
| | | SS | 2 | 75 | 17 | 1 | 102.45 | | |
| | | SS | 3 | 75 | 14 | 2 | 101.45 | | |
| | | SS | 4 | 83 | 17 | | | | |
| - Trace gravel by 3.0 m depth | | SS | 5 | 83 | 13 | 3 | 100.45 | | |
| | | SS | 6 | 67 | 25 | 4 | 99.45 | | |
| | | SS | 7 | 75 | 11 | 5 | 98.45 | | |
| | | SS | 8 | 75 | 20 | 6 | 97.45 | | |
| | | SS | 9 | 83 | 27 | | | | |
| | | SS | 10 | 92 | 35 | 7 | 96.45 | | |
| | | SS | 11 | 83 | 24 | 8 | 95.45 | | |
| | | SS | 12 | 83 | 32 | | | | |
| 8.99 | | | | | | | | | |
| End of Borehole | | | | | | | | | |
| (Piezometer dry - March 4, 2021) | | | | | | | | | |

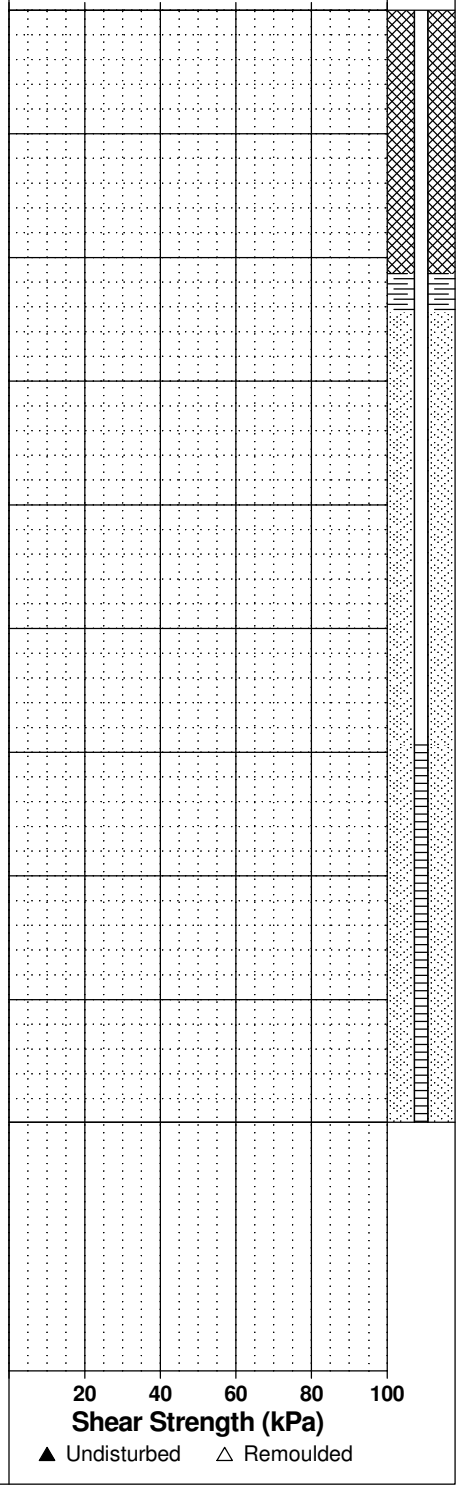

# patersongroup Consulting Engineers

154 Colonnade Road South, Ottawa, Ontario K2E 7J5

## SOIL PROFILE AND TEST DATA

**Geotechnical Investigation**
**Proposed Mixed Use Development**
**3718 Greenbank Road - Ottawa, Ontraio**

**DATUM** Geodetic

**FILE NO.** PG5690

**REMARKS**

**HOLE NO.** BH 2-21

**BORINGS BY** CME 55 Power Auger **DATE** 2021 February 17

| SOIL DESCRIPTION | STRATA PLOT | SAMPLE TYPE | SAMPLE NUMBER | SAMPLE % RECOVERY | SAMPLE N VALUE or RQD | DEPTH (m) | ELEV. (m) | Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone ○ Water Content % | Piezometer Construction |
|---|---|---|---|---|---|---|---|---|---|
| **GROUND SURFACE** | | | | | | 0 | 102.61 | | |
| Compact to dense, brown **SILTY SAND** | | AU | 1 | | | | | | |
| | | SS | 2 | 75 | 25 | 1 | 101.61 | | |
| | | SS | 3 | 75 | 19 | 2 | 100.61 | | |
| | | SS | 4 | 75 | 56 | | | | |
| | | SS | 5 | 83 | 32 | 3 | 99.61 | | |
| | | SS | 6 | 67 | 39 | 4 | 98.61 | | |
| | | SS | 7 | 75 | 28 | | | | |
| | | SS | 8 | 75 | 32 | 5 | 97.61 | | |
| | | SS | 9 | 75 | 33 | 6 | 96.61 | | |
| | | SS | 10 | 75 | 30 | | | | |
| - Trace gravel by 7.5 m depth | | SS | 11 | 75 | 37 | 7 | 95.61 | | |
| | | SS | 12 | 75 | 30 | 8 | 94.61 | | |
| 8.99 | | | | | | | | | |
| End of Borehole | | | | | | | | | |
| (Piezometer dry - March 4, 2021) | | | | | | | | | |

20 40 60 80 100
**Shear Strength (kPa)**
▲ Undisturbed △ Remoulded

# patersongroup Consulting Engineers

154 Colonnade Road South, Ottawa, Ontario K2E 7J5

## SOIL PROFILE AND TEST DATA

**Geotechnical Investigation**
**Proposed Mixed Use Development**
**3718 Greenbank Road - Ottawa, Ontraio**

**DATUM** Geodetic


**FILE NO.** PG5690

**REMARKS**

**HOLE NO.** BH 3-21

**BORINGS BY** CME 55 Power Auger **DATE** 2021 February 18

| SOIL DESCRIPTION | STRATA PLOT | SAMPLE TYPE | SAMPLE NUMBER | SAMPLE % RECOVERY | SAMPLE N VALUE or RQD | DEPTH (m) | ELEV. (m) |
|---|---|---|---|---|---|---|---|
| **GROUND SURFACE** | | | | | | 0 | 107.88 |
| **FILL:** Brown silty sand, some crushed stone and gravel | | AU | 1 | | | | |
| 0.61 | | | | | | | |
| Dense brown **SILTY SAND** some gravel | | SS | 2 | 33 | +50 | 1 | 106.88 |
| 1.07 | | | | | | | |
| **GLACIAL TILL:** Dense brown sandy silt to silty sand with gravel, cobbles and boulders | | SS | 3 | 25 | +50 | 2 | 105.88 |
| | | SS | 4 | 50 | +50 | 3 | 104.88 |
| | | SS | 5 | 50 | +50 | | |
| | | SS | 6 | 33 | +50 | 4 | 103.88 |
| | | SS | 7 | 42 | +50 | 5 | 102.88 |
| | | SS | 8 | 33 | +50 | | |
| | | SS | 9 | 42 | +50 | 6 | 101.88 |
| 6.86 | | | | | | | |
| End of Borehole | | | | | | | |
| Practical refusal to augering at 6.86 m depth | | | | | | | |
| (Piezometer dry - March 4, 2021) | | | | | | | |

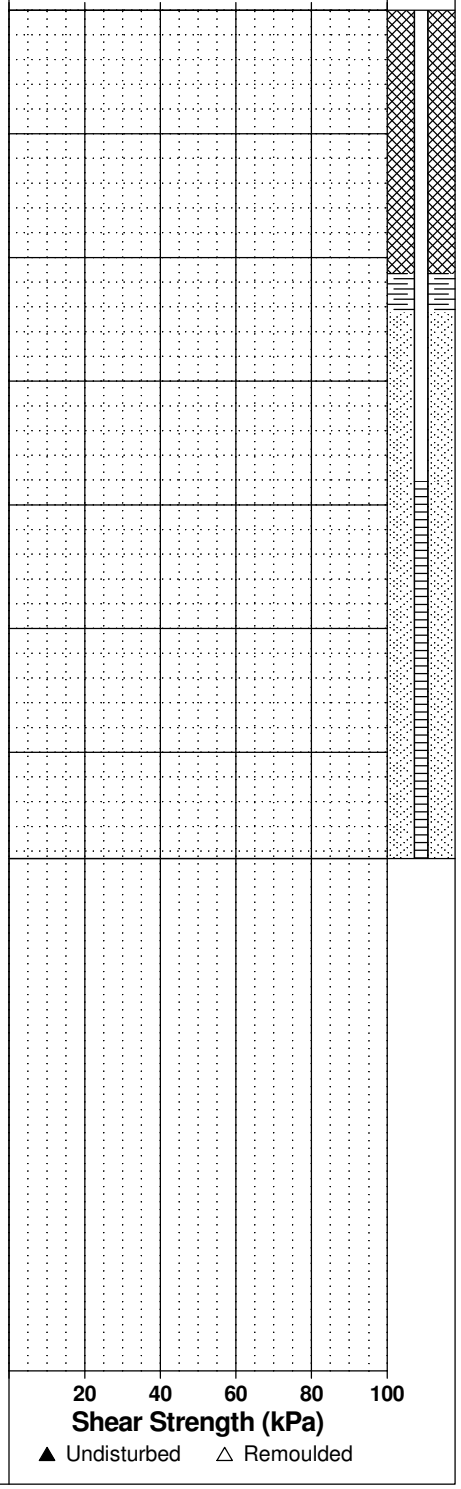

# patersongroup Consulting Engineers

154 Colonnade Road South, Ottawa, Ontario K2E 7J5

## SOIL PROFILE AND TEST DATA

**Geotechnical Investigation**
**Proposed Mixed Use Development**
**3718 Greenbank Road - Ottawa, Ontraio**

**DATUM** Geodetic


**FILE NO.** PG5690

**REMARKS**

**HOLE NO.** BH 4-21

**BORINGS BY** CME 55 Power Auger **DATE** 2021 February 18

| SOIL DESCRIPTION | STRATA PLOT | SAMPLE TYPE | SAMPLE NUMBER | SAMPLE % RECOVERY | SAMPLE N VALUE or RQD | DEPTH (m) | ELEV. (m) | Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone ○ Water Content % | Piezometer Construction |
|---|---|---|---|---|---|---|---|---|---|
| **GROUND SURFACE** | | | | | | 0 | 105.21 | | |
| **FILL:** Brown silty sand some clay, gravel, cobbles, trace topsoil | | AU | 1 | | | | | | |
| 0.76 | | | | | | | | | |
| Compact to dense, brown **SILTY SAND** | | SS | 2 | 50 | 14 | 1 | 104.21 | | |
| | | SS | 3 | 50 | 27 | 2 | 103.21 | | |
| | | SS | 4 | 83 | 28 | | | | |
| | | SS | 5 | 83 | 25 | 3 | 102.21 | | |
| | | SS | 6 | 83 | 30 | 4 | 101.21 | | |
| | | SS | 7 | 83 | 28 | | | | |
| | | SS | 8 | 83 | 34 | 5 | 100.21 | | |
| | | SS | 9 | 83 | 35 | 6 | 99.21 | | |
| | | SS | 10 | 83 | 29 | 7 | 98.21 | | |
| | | SS | 11 | 75 | 25 | | | | |
| | | SS | 12 | 58 | 31 | 8 | 97.21 | | |
| 8.99 | | | | | | | | | |
| End of Borehole | | | | | | | | | |
| (Piezometer dry - March 4, 2021) | | | | | | | | | |

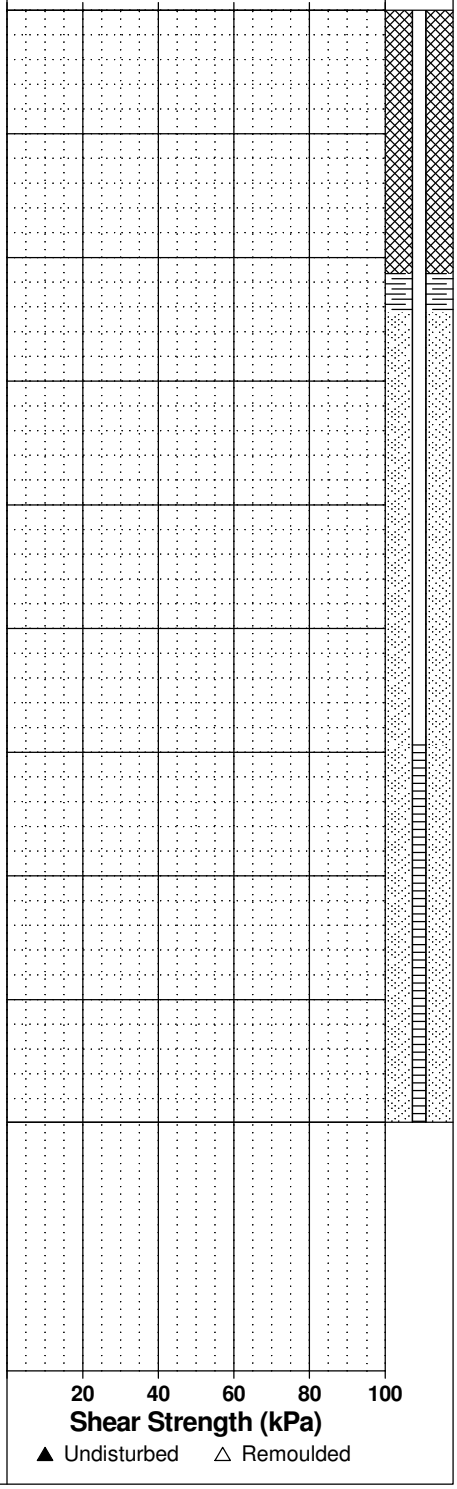

# patersongroup Consulting Engineers

154 Colonnade Road South, Ottawa, Ontario K2E 7J5

## SOIL PROFILE AND TEST DATA

**Geotechnical Investigation**
**Proposed Mixed Use Development**
**3718 Greenbank Road - Ottawa, Ontraio**

**DATUM** Geodetic


**FILE NO.** PG5690

**REMARKS**

**HOLE NO.** BH 5-21

**BORINGS BY** CME 55 Power Auger **DATE** 2021 February 18

| SOIL DESCRIPTION | STRATA PLOT | SAMPLE TYPE | SAMPLE NUMBER | SAMPLE % RECOVERY | SAMPLE N VALUE or RQD | DEPTH (m) | ELEV. (m) |
|---|---|---|---|---|---|---|---|
| **GROUND SURFACE** | | | | | | 0 | 105.57 |
| **FILL:** Brown silty sand with clay, gravel, trace topsoil | | AU | 1 | | | | |
| 0.81 | | | | | | | |
| Compact to dense, reddish brown **SILTY SAND** | | SS | 2 | 58 | 25 | 1 | 104.57 |
| | | SS | 3 | 58 | 7 | 2 | 103.57 |
| - Brown by 2.2 m depth | | SS | 4 | 83 | 14 | 3 | 102.57 |
| | | SS | 5 | 83 | 9 | | |
| | | SS | 6 | 58 | 18 | 4 | 101.57 |
| | | SS | 7 | 83 | 32 | 5 | 100.57 |
| | | SS | 8 | 100 | 16 | 6 | 99.57 |
| | | SS | 9 | 83 | 11 | | |
| | | SS | 10 | 75 | 19 | 7 | 98.57 |
| | | SS | 11 | 75 | 23 | 8 | 97.57 |
| | | SS | 12 | 75 | 24 | | |
| 8.99 | | | | | | | |
| End of Borehole | | | | | | | |
| (Piezometer dry - March 4, 2021) | | | | | | | |

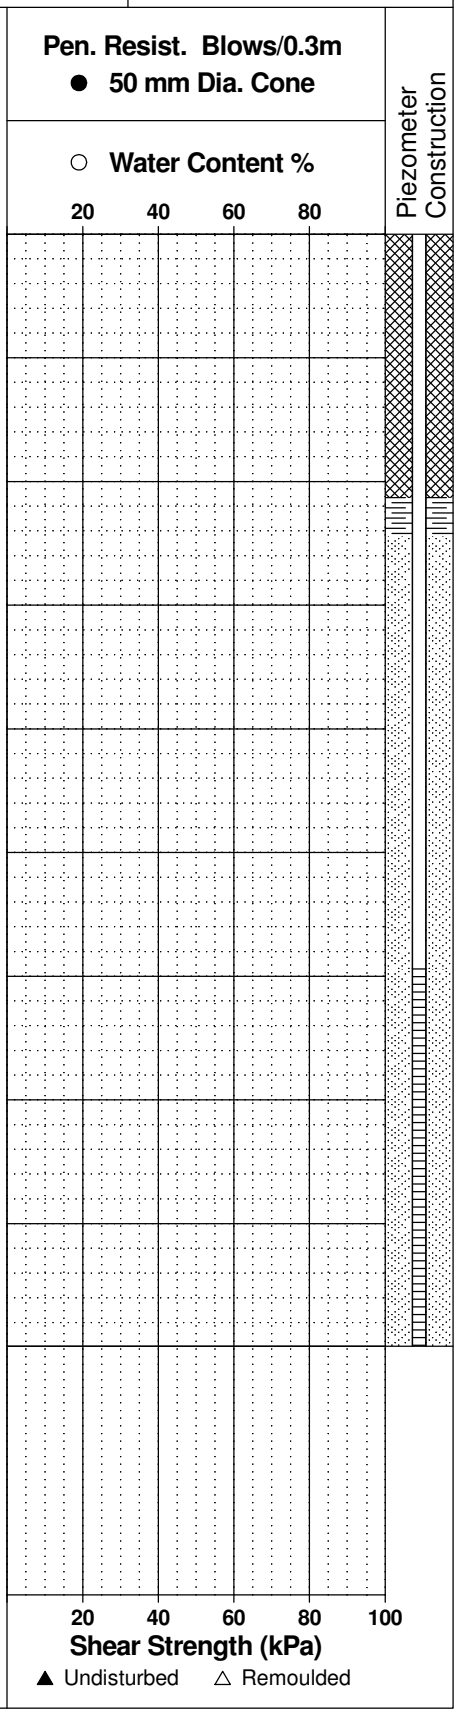

# patersongroup Consulting Engineers

154 Colonnade Road South, Ottawa, Ontario K2E 7J5

## SOIL PROFILE AND TEST DATA

**Geotechnical Investigation**
**Proposed Mixed Use Development**
**3718 Greenbank Road - Ottawa, Ontraio**

**DATUM** Geodetic

**FILE NO.** PG5690

**REMARKS**

**HOLE NO.** BH 6-21

**BORINGS BY** CME 55 Power Auger **DATE** 2021 February 19

| SOIL DESCRIPTION | STRATA PLOT | SAMPLE TYPE | SAMPLE NUMBER | SAMPLE % RECOVERY | SAMPLE N VALUE or RQD | DEPTH (m) | ELEV. (m) | Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone ○ Water Content % | Piezometer Construction |
|---|---|---|---|---|---|---|---|---|---|
| **GROUND SURFACE** | | | | | | 0 | 103.25 | | |
| **FILL:** Brown silty sand | | AU | 1 | | | | | | |
| 0.61 | | | | | | | | | |
| Compact to dense brown **SILTY SAND** | | SS | 2 | 75 | 46 | 1 | 102.25 | | |
| | | SS | 3 | 58 | 22 | 2 | 101.25 | | |
| | | SS | 4 | 75 | 25 | 3 | 100.25 | | |
| | | SS | 5 | 75 | 23 | 4 | 99.25 | | |
| | | SS | 6 | 67 | 29 | 5 | 98.25 | | |
| | | SS | 7 | 67 | 28 | 6 | 97.25 | | |
| | | SS | 8 | 67 | 26 | 7 | 96.25 | | |
| | | SS | 9 | 75 | 27 | 8 | 95.25 | | |
| | | SS | 10 | 67 | 22 | | | | |
| | | SS | 11 | 67 | 22 | | | | |
| | | SS | 12 | 67 | 20 | | | | |
| 8.99 | | | | | | | | | |
| End of Borehole | | | | | | | | | |
| (Piezoemter dry - March 4, 2021) | | | | | | | | | |

20 40 60 80

20 40 60 80 100

**Shear Strength (kPa)**

▲ Undisturbed △ Remoulded

# patersongroup Consulting Engineers

154 Colonnade Road South, Ottawa, Ontario K2E 7J5

## SOIL PROFILE AND TEST DATA

**Geotechnical Investigation**
**Proposed Mixed Use Development**
**3718 Greenbank Road - Ottawa, Ontraio**

**DATUM** Geodetic

**FILE NO.** PG5690

**REMARKS**

**HOLE NO.** BH 7-21

**BORINGS BY** CME 55 Power Auger **DATE** 2021 February 19

| SOIL DESCRIPTION | STRATA PLOT | SAMPLE TYPE | SAMPLE NUMBER | SAMPLE % RECOVERY | SAMPLE N VALUE or RQD | DEPTH (m) | ELEV. (m) | Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone ○ Water Content % | Piezometer Construction |
|---|---|---|---|---|---|---|---|---|---|
| **GROUND SURFACE** | | | | | | 0 | 103.78 | | |
| **FILL:** Brown silty sand, some gravel | | AU | 1 | | | | | | |
| 0.84 | | | | | | 1 | 102.78 | | |
| Compact to dense, brown **SILTY SAND** | | SS | 2 | 50 | 25 | | | | |
| | | SS | 3 | 75 | 28 | 2 | 101.78 | | |
| Dynamic Cone Penetration Test commenced at 2.13 m depth. | | SS | 4 | 75 | 17 | | | | |
| | | SS | 5 | 75 | 17 | 3 | 100.78 | 113 | |
| | | SS | 6 | 67 | 20 | 4 | 99.78 | | |
| - Trace gravel by 4.5 m depth | | SS | 7 | 67 | 53 | 5 | 98.78 | | |
| | | SS | 8 | 67 | 45 | 6 | 97.78 | | |
| | | SS | 9 | 67 | 23 | | | 120 | |
| - Some gravel by 6.7 m depth | | SS | 10 | 75 | 49 | 7 | 96.78 | | |
| | | SS | 11 | 67 | 83 | 8 | 95.78 | 189 167 197 148 175 | |
| | | SS | 12 | 75 | 57 | | | 143 | |
| Practical refusal to augering 8.99 m depth | | | | | | 9 | 94.78 | | |
| 9.75 | | | | | | | | | |
| End of Borehole | | | | | | | | | |
| Practical refusal to DCPT at 9.75 m depth | | | | | | | | | |

20 40 60 80 100
**Shear Strength (kPa)**
▲ Undisturbed △ Remoulded

# patersongroup Consulting Engineers

154 Colonnade Road South, Ottawa, Ontario K2E 7J5

## SOIL PROFILE AND TEST DATA

**Geotechnical Investigation**
**Proposed Mixed Use Development**
**3718 Greenbank Road - Ottawa, Ontraio**

**DATUM** Geodetic


**FILE NO.** PG5690

**REMARKS**

**HOLE NO.** BH 8-21

**BORINGS BY** CME 55 Power Auger **DATE** 2021 February 22

| SOIL DESCRIPTION | STRATA PLOT | SAMPLE TYPE | SAMPLE NUMBER | SAMPLE % RECOVERY | SAMPLE N VALUE or RQD | DEPTH (m) | ELEV. (m) |
|---|---|---|---|---|---|---|---|
| **GROUND SURFACE** | | | | | | 0 | 106.13 |
| **FILL:** Brown silty sand with gravel and crushed stone | | AU | 1 | | | | |
| 0.61 | | | | | | | |
| Compact to dense, brown **SILTY SAND** with gravel and cobbles | | SS | 2 | 75 | 47 | 1 | 105.13 |
| | | SS | 3 | 75 | 55 | 2 | 104.13 |
| | | SS | 4 | 50 | 45 | 3 | 103.13 |
| | | SS | 5 | 50 | 51 | 4 | 102.13 |
| | | SS | 6 | 50 | 56 | 5 | 101.13 |
| | | SS | 7 | 33 | 49 | 6 | 100.13 |
| | | SS | 8 | 50 | 61 | 7 | 99.13 |
| | | SS | 9 | 50 | 24 | 8 | 98.13 |
| | | SS | 10 | 33 | 31 | | |
| | | SS | 11 | 50 | 51 | | |
| 8.38 | | | | | | | |
| End of Borehole | | | | | | | |
| Practical refusal to augering at 8.38 m depth | | | | | | | |
| (Piezometer dry - March 4, 2021) | | | | | | | |

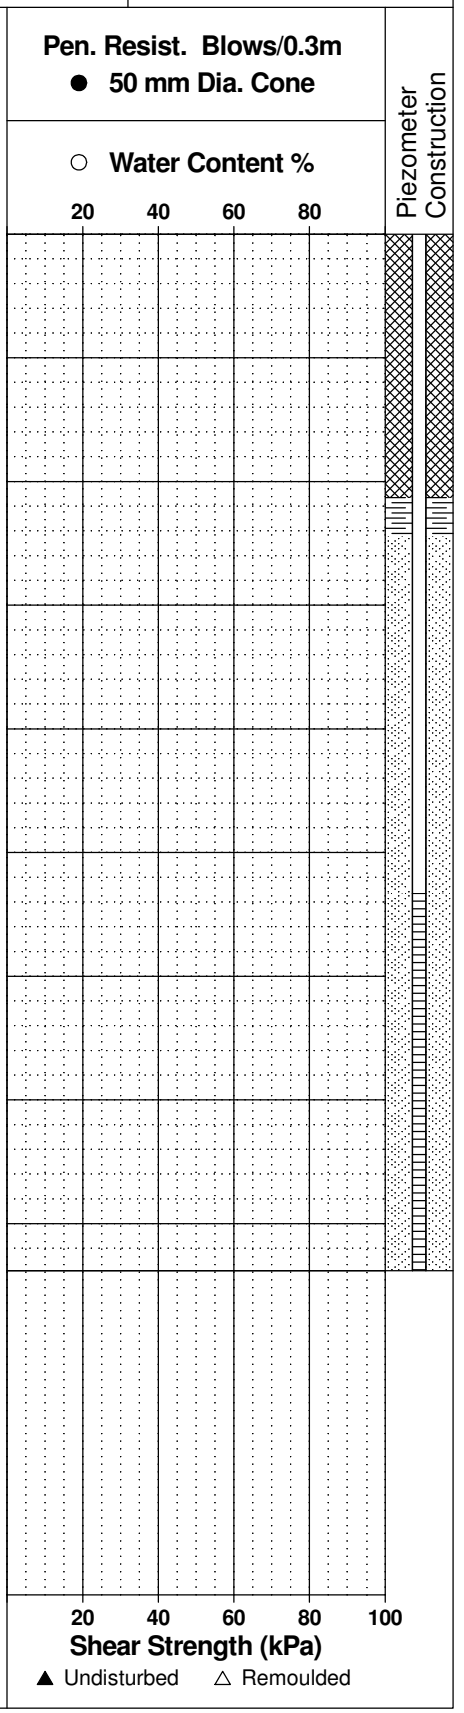

# patersongroup Consulting Engineers

154 Colonnade Road South, Ottawa, Ontario K2E 7J5

## SOIL PROFILE AND TEST DATA

**Geotechnical Investigation**
**Proposed Mixed Use Development**
**3718 Greenbank Road - Ottawa, Ontraio**

**DATUM** Geodetic


**FILE NO.** PG5690

**REMARKS**

**HOLE NO.** BH 9-21

**BORINGS BY** CME 55 Power Auger **DATE** 2021 February 22

| SOIL DESCRIPTION | STRATA PLOT | SAMPLE TYPE | SAMPLE NUMBER | SAMPLE % RECOVERY | SAMPLE N VALUE or RQD | DEPTH (m) | ELEV. (m) |
|---|---|---|---|---|---|---|---|
| **GROUND SURFACE** | | | | | | 0 | 109.17 |
| **ORGANICS** 0.05 | | | | | | | |
| **FILL:** Brown silty sand with gravel 0.69 | | AU | 1 | | | | |
| **FILL:** Brown silty clay with sand, gravel, cobbles, trace topsoil | | SS | 2 | 17 | 21 | 1 | 108.17 |
| | | SS | 3 | 25 | 11 | 2 | 107.17 |
| | | SS | 4 | 8 | 4 | 3 | 106.17 |
| | | SS | 5 | 50 | 7 | | |
| | | SS | 6 | 17 | 26 | 4 | 105.17 |
| 4.57 | | | | | | | |
| End of Borehole | | | | | | | |
| Practical refusal to augering at 4.57 m depth | | | | | | | |
| (Piezometer dry - March 4, 2021) | | | | | | | |

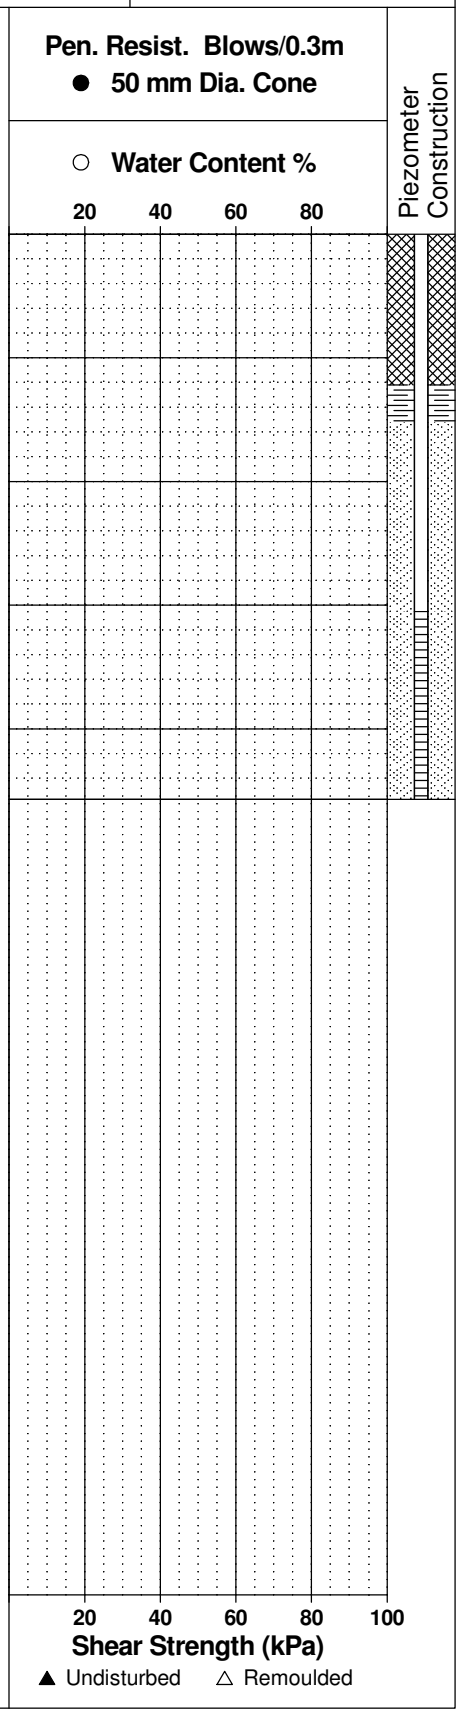

# patersongroup Consulting Engineers

154 Colonnade Road South, Ottawa, Ontario K2E 7J5

## SOIL PROFILE AND TEST DATA

**Geotechnical Investigation**
**Proposed Mixed Use Development**
**3718 Greenbank Road - Ottawa, Ontraio**

**DATUM** Geodetic

**FILE NO.** PG5690

**REMARKS**

**HOLE NO.** BH10-21

**BORINGS BY** CME 55 Power Auger **DATE** 2021 February 23

| SOIL DESCRIPTION | STRATA PLOT | SAMPLE TYPE | SAMPLE NUMBER | SAMPLE % RECOVERY | SAMPLE N VALUE or RQD | DEPTH (m) | ELEV. (m) |
|---|---|---|---|---|---|---|---|
| **GROUND SURFACE** | | | | | | 0 | 107.98 |
| **TOPSOIL** 0.05 | | AU | 1 | | | | |
| **FILL:** Brown to grey silty clay with sand, gravel, cobbles, trace topsoil | | SS | 2 | 42 | 12 | 1 | 106.98 |
| | | SS | 3 | 42 | 5 | 2 | 105.98 |
| | | SS | 4 | 17 | 3 | | |
| | | SS | 5 | 33 | 5 | 3 | 104.98 |
| | | SS | 6 | 25 | 5 | 4 | 103.98 |
| | | SS | 7 | 50 | 10 | 5 | 102.98 |
| 5.49 | | | | | | | |
| **FILL:** Brown silty sand, some gravel | | SS | 8 | 33 | 7 | | |
| 6.02 | | | | | | 6 | 101.98 |
| **FILL:** Brown to grey silty clay with sand, gravel, trace wood and organics | | SS | 9 | 42 | 8 | | |
| | | SS | 10 | 33 | 6 | 7 | 100.98 |
| | | SS | 11 | 4 | 9 | | |
| 8.23 | | | | | | 8 | 99.98 |
| End of Borehole | | | | | | | |
| (Piezometer dry - March 4, 2021) | | | | | | | |

Pen. Resist. Blows/0.3m
● 50 mm Dia. Cone
○ Water Content %
20 40 60 80

Piezometer Construction

20 40 60 80 100
Shear Strength (kPa)
▲ Undisturbed △ Remoulded

# patersongroup Consulting Engineers

154 Colonnade Road South, Ottawa, Ontario K2E 7J5

## SOIL PROFILE AND TEST DATA

**Geotechnical Investigation**
**Proposed Mixed Use Development**
**3718 Greenbank Road - Ottawa, Ontraio**

**DATUM** Geodetic

**FILE NO.** PG5690

**REMARKS**

**HOLE NO.** BH11-21

**BORINGS BY** CME 55 Power Auger **DATE** 2021 February 23

| SOIL DESCRIPTION | STRATA PLOT | SAMPLE TYPE | SAMPLE NUMBER | SAMPLE % RECOVERY | SAMPLE N VALUE or RQD | DEPTH (m) | ELEV. (m) | Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone ○ Water Content % | Piezometer Construction |
|---|---|---|---|---|---|---|---|---|---|
| **GROUND SURFACE** | | | | | | 0 | 105.87 | | |
| **TOPSOIL** 0.05 | | AU | 1 | | | | | | |
| **FILL:** Brown silty clay some sand, gravel, trace topsoil<br>- Wood fragments present at 0.9 m depth | | SS | 2 | 50 | 4 | 1 | 104.87 | | |
| | | SS | 3 | 33 | 5 | 2 | 103.87 | | |
| | | SS | 4 | 50 | 6 | 3 | 102.87 | | |
| 3.51 | | SS | 5 | 42 | 23 | | | | |
| **FILL:** Brown silty sand with gravel, trace clay | | SS | 6 | 8 | 28 | 4 | 101.87 | | |
| 5.03 | | SS | 7 | 33 | 21 | 5 | 100.87 | | |
| **FILL:** Brown silty clay with sand, gravel, cobbles, trace organics<br>- Increasing sand with depth | | SS | 8 | 25 | 11 | | | | |
| | | SS | 9 | 33 | 5 | 6 | 99.87 | | |
| | | SS | 10 | 17 | +50 | 7 | 98.87 | | |
| 7.54 | | | | | | | | | |
| **FILL:** Brown silty sand with gravel, trace topsoil | | SS | 11 | 42 | 28 | 8 | 97.87 | | |
| 8.23 | | | | | | | | | |
| Compact brown **SILTY SAND** with gravel, trace cobbles | | SS | 12 | 42 | 67 | | | | |
| 9.14 | | | | | | 9 | 96.87 | | |
| End of Borehole<br>(Piezometer destroyed - March 4, 2021) | | SS | 13 | 0 | +50 | | | | |

Pen. Resist. Blows/0.3m: 20 40 60 80

Water Content %: 20 40 60 80

Shear Strength (kPa): 20 40 60 80 100

▲ Undisturbed △ Remoulded

# patersongroup Consulting Engineers

154 Colonnade Road South, Ottawa, Ontario K2E 7J5

## SOIL PROFILE AND TEST DATA

**Geotechnical Investigation**
**Proposed Mixed Use Development**
**3718 Greenbank Road - Ottawa, Ontraio**

**DATUM** Geodetic

**FILE NO.** PG5690

**REMARKS**

**HOLE NO.** BH12-21

**BORINGS BY** CME 55 Power Auger **DATE** 2021 February 23

| SOIL DESCRIPTION | STRATA PLOT | SAMPLE TYPE | SAMPLE NUMBER | SAMPLE % RECOVERY | SAMPLE N VALUE or RQD | DEPTH (m) | ELEV. (m) | Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone ○ Water Content % | Piezometer Construction |
|---|---|---|---|---|---|---|---|---|---|
| **GROUND SURFACE** | | | | | | 0 | 101.30 | | |
| **FILL:** Brown silty sand with gravel, trace clay | | AU | 1 | | | | | | |
| | | SS | 2 | 50 | 64 | 1 | 100.30 | | |
| | | SS | 3 | 50 | 69 | | | | |
| | | SS | 4 | 42 | 28 | 2 | 99.30 | | |
| 2.90 | | | | | | | | | |
| End of Borehole | | | | | | | | | |
| (Piezometer destroyed - March 4, 2021) | | | | | | | | | |

Pen. Resist. Blows/0.3m: 20 40 60 80

Shear Strength (kPa): 20 40 60 80 100

▲ Undisturbed △ Remoulded

# patersongroup Consulting Engineers

154 Colonnade Road South, Ottawa, Ontario K2E 7J5

## SOIL PROFILE AND TEST DATA

**Geotechnical Investigation**
**Proposed Mixed Use Development**
**3718 Greenbank Road - Ottawa, Ontraio**

**DATUM** Geodetic

**FILE NO.** PG5690

**REMARKS**

**HOLE NO.** BH 13-21

**BORINGS BY** CME-55 Low Clearance Drill **DATE** July 12, 2021

| SOIL DESCRIPTION | STRATA PLOT | SAMPLE TYPE | SAMPLE NUMBER | SAMPLE % RECOVERY | SAMPLE N VALUE or RQD | DEPTH (m) | ELEV. (m) | Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone ○ Water Content % | Piezometer Construction |
|---|---|---|---|---|---|---|---|---|---|
| **GROUND SURFACE** | | | | | | | | | |
| **FILL:** Brown silty sand with gravel, occasional cobbles (0.13) | | AU | 1 | | | 0 | 101.59 | | |
| | | SS | 2 | 71 | 37 | 1 | 100.59 | | |
| Dense to compact, light brown **SILTY SAND,** trace gravel | | SS | 3 | 75 | 31 | 2 | 99.59 | | |
| | | SS | 4 | 83 | 23 | | | | |
| | | SS | 5 | | 27 | 3 | 98.59 | | |
| (3.66) End of Borehole | | | | | | | | | |
| (BH dry upon completion) | | | | | | | | | |

Pen. Resist. Blows/0.3m: 20 40 60 80

Water Content %: 20 40 60 80

Shear Strength (kPa): 20 40 60 80 100

▲ Undisturbed △ Remoulded

# patersongroup Consulting Engineers

154 Colonnade Road South, Ottawa, Ontario K2E 7J5

## SOIL PROFILE AND TEST DATA

**Geotechnical Investigation**
**Proposed Mixed Use Development**
**3718 Greenbank Road - Ottawa, Ontraio**

**DATUM** Geodetic

**FILE NO.** PG5690

**REMARKS**

**HOLE NO.** BH 14-21

**BORINGS BY** CME-55 Low Clearance Drill **DATE** July 12, 2021

| SOIL DESCRIPTION | STRATA PLOT | SAMPLE TYPE | SAMPLE NUMBER | SAMPLE % RECOVERY | SAMPLE N VALUE or RQD | DEPTH (m) | ELEV. (m) | Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone ○ Water Content % | Piezometer Construction |
|---|---|---|---|---|---|---|---|---|---|
| **GROUND SURFACE** | | | | | | 0 | 102.34 | | |
| **FILL:** Dark brown silty sand, trace crushed stone, gravel and topsoil | | AU | 1 | | | | | | |
| | | SS | 2 | 75 | 5 | 1 | 101.34 | | |
| 1.45 | | | | | | | | | |
| Loose to dense, light brown **SILTY SAND,** trace gravel | | SS | 3 | 83 | 4 | 2 | 100.34 | | |
| | | SS | 4 | 67 | 2 | | | | |
| | | SS | 5 | 67 | 1 | 3 | 99.34 | | |
| | | SS | 6 | 83 | 16 | 4 | 98.34 | | |
| | | SS | 7 | | 42 | | | | |
| 5.18 | | | | | | 5 | 97.34 | | |
| End of Borehole | | | | | | | | | |
| (BH dry upon completion) | | | | | | | | | |

20 40 60 80

20 40 60 80 100

**Shear Strength (kPa)**

▲ Undisturbed △ Remoulded

# patersongroup Consulting Engineers

154 Colonnade Road South, Ottawa, Ontario K2E 7J5

## SOIL PROFILE AND TEST DATA

**Geotechnical Investigation**
**Proposed Mixed Use Development**
**3718 Greenbank Road - Ottawa, Ontraio**

**DATUM** Geodetic

**FILE NO.** PG5690

**REMARKS**

**HOLE NO.** BH 15-21

**BORINGS BY** CME-55 Low Clearance Drill **DATE** July 12, 2021

| SOIL DESCRIPTION | STRATA PLOT | SAMPLE TYPE | SAMPLE NUMBER | SAMPLE % RECOVERY | SAMPLE N VALUE or RQD | DEPTH (m) | ELEV. (m) | Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone ○ Water Content % | Piezometer Construction |
|---|---|---|---|---|---|---|---|---|---|
| **GROUND SURFACE** | | | | | | | | | |
| **FILL:** Brown silty sand, some crushed stone, gravel, trace topsoil (0.30) | | SS | 1 | 83 | 11 | 0 | 102.82 | | |
| | | SS | 2 | 83 | 19 | 1 | 101.82 | | |
| | | SS | 3 | 79 | 31 | 2 | 100.82 | | |
| Compact, light brown **SILTY SAND** | | SS | 4 | 75 | 28 | 3 | 99.82 | | |
| | | SS | 5 | 75 | 17 | | | | |
| | | SS | 6 | 75 | 28 | 4 | 98.82 | | |
| (5.18) | | SS | 7 | 67 | 27 | 5 | 97.82 | | |
| End of Borehole | | | | | | | | | |
| (BH dry upon completion) | | | | | | | | | |

Water Content % scale: 20, 40, 60, 80

Shear Strength (kPa) scale: 20, 40, 60, 80, 100

▲ Undisturbed △ Remoulded

# patersongroup Consulting Engineers

154 Colonnade Road South, Ottawa, Ontario K2E 7J5

## SOIL PROFILE AND TEST DATA

**Geotechnical Investigation**
**Proposed Mixed Use Development**
**3718 Greenbank Road - Ottawa, Ontraio**

**DATUM** Geodetic


**FILE NO.** PG5690

**REMARKS**

**HOLE NO.** BH 16-21

**BORINGS BY** CME-55 Low Clearance Drill **DATE** July 12, 2021

| SOIL DESCRIPTION | STRATA PLOT | SAMPLE TYPE | SAMPLE NUMBER | SAMPLE % RECOVERY | SAMPLE N VALUE or RQD | DEPTH (m) | ELEV. (m) | Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone ○ Water Content % | Piezometer Construction |
|---|---|---|---|---|---|---|---|---|---|
| **GROUND SURFACE** | | | | | | 0 | 103.04 | | |
| **FILL:** Brown silty sand, some gravel, trace topsoil (0.15) | | SS | 1 | 92 | 10 | | | | |
| | | SS | 2 | 83 | 18 | 1 | 102.04 | | |
| | | SS | 3 | 75 | 29 | 2 | 101.04 | | |
| Compact, light brown **SILTY SAND** | | SS | 4 | 92 | 31 | 3 | 100.04 | | |
| | | SS | 5 | 83 | 24 | | | | |
| | | SS | 6 | 83 | 22 | 4 | 99.04 | | |
| | | SS | 7 | 75 | 24 | 5 | 98.04 | | |
| (5.18) End of Borehole | | | | | | | | | |
| (BH dry upon completion) | | | | | | | | | |

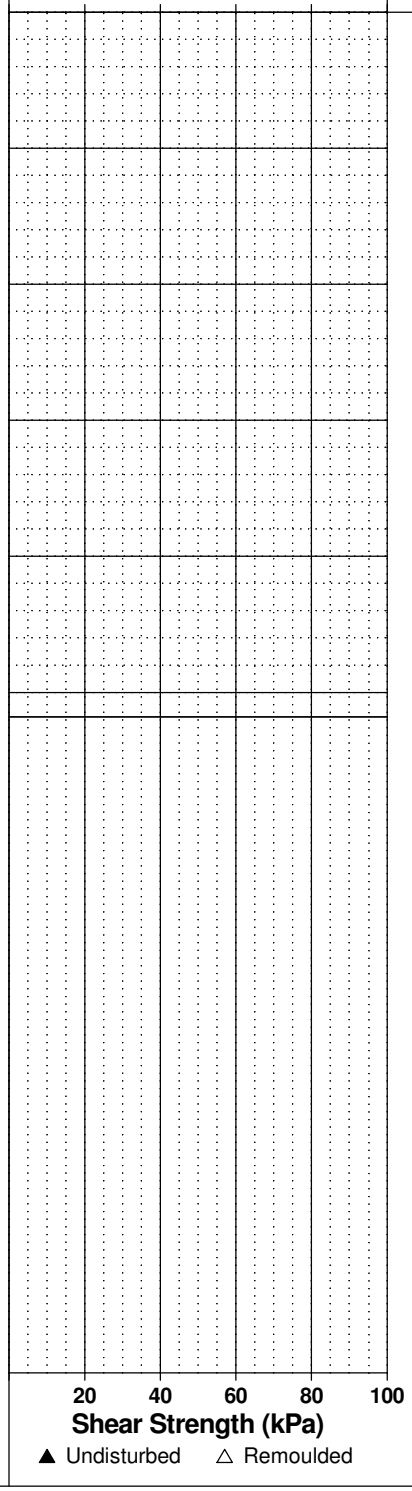

# patersongroup Consulting Engineers

154 Colonnade Road South, Ottawa, Ontario K2E 7J5

## SOIL PROFILE AND TEST DATA

**Geotechnical Investigation**
**Proposed Mixed Use Development**
**3718 Greenbank Road - Ottawa, Ontraio**

**DATUM** Geodetic

**FILE NO.** PG5690

**REMARKS**

**HOLE NO.** BH 17-21

**BORINGS BY** CME-55 Low Clearance Drill **DATE** July 12, 2021

| SOIL DESCRIPTION | STRATA PLOT | SAMPLE TYPE | SAMPLE NUMBER | SAMPLE % RECOVERY | SAMPLE N VALUE or RQD | DEPTH (m) | ELEV. (m) | Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone ○ Water Content % | Piezometer Construction |
|---|---|---|---|---|---|---|---|---|---|
| **GROUND SURFACE** | | | | | | 0 | 103.95 | | |
| **FILL:** Brown silty sand with gravel, occasional cobbles | | SS | 1 | 83 | 25 | | | | |
| 0.46 | | | | | | 1 | 102.95 | | |
| | | SS | 2 | 75 | 14 | | | | |
| | | SS | 3 | 75 | 15 | 2 | 101.95 | | |
| Compact to dense, light brown **SILTY SAND** | | SS | 4 | 67 | 18 | | | | |
| | | SS | 5 | 67 | 50+ | 3 | 100.95 | | |
| | | SS | 6 | | 37 | 4 | 99.95 | | |
| | | SS | 7 | | 50+ | | | | |
| 5.18 | | | | | | 5 | 98.95 | | |
| End of Borehole | | | | | | | | | |
| (BH dry upon completion) | | | | | | | | | |

Pen. Resist. Blows/0.3m: 20 40 60 80

Water Content %: 20 40 60 80

Shear Strength (kPa): 20 40 60 80 100

▲ Undisturbed △ Remoulded

# patersongroup Consulting Engineers

154 Colonnade Road South, Ottawa, Ontario K2E 7J5

## SOIL PROFILE AND TEST DATA

**Geotechnical Investigation**
**Proposed Mixed Use Development**
**3718 Greenbank Road - Ottawa, Ontraio**

**DATUM** Geodetic

**FILE NO.** PG5690

**REMARKS**

**HOLE NO.** BH 18-21

**BORINGS BY** CME-55 Low Clearance Drill **DATE** July 12, 2021

| SOIL DESCRIPTION | STRATA PLOT | SAMPLE TYPE | SAMPLE NUMBER | SAMPLE % RECOVERY | SAMPLE N VALUE or RQD | DEPTH (m) | ELEV. (m) | Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone ○ Water Content % | Piezometer Construction |
|---|---|---|---|---|---|---|---|---|---|
| **GROUND SURFACE** | | | | | | 0 | 105.86 | | |
| **FILL:** Brown silty and with gravel, cobbles, boudlers | | SS | 1 | 83 | 10 | | | | |
| 0.76 | | SS | 2 | 89 | 50+ | 1 | 104.86 | | |
| Very dense, brown **SILTY SAND** with gravel, cobbles, occasional boulders | | SS | 3 | 75 | 44 | 2 | 103.86 | | |
| | | SS | 4 | 75 | 87 | 3 | 102.86 | | |
| | | SS | 5 | 87 | 72 | | | | |
| 4.11 | | SS | 6 | 83 | 52 | 4 | 101.86 | | |
| Very dense, light brown **SILTY SAND,** trace gravel | | SS | 7 | 88 | 51 | 5 | 100.86 | | |
| | | SS | 8 | 100 | 50+ | | | | |
| 5.94 | | | | | | | | | |
| End of Borehole | | | | | | | | | |
| (BH dry upon completion) | | | | | | | | | |

Pen. Resist. Blows/0.3m: 20 40 60 80

Water Content %: 20 40 60 80

Shear Strength (kPa): 20 40 60 80 100

▲ Undisturbed △ Remoulded

# patersongroup Consulting Engineers

154 Colonnade Road South, Ottawa, Ontario K2E 7J5

## SOIL PROFILE AND TEST DATA

**Geotechnical Investigation**
**Proposed Mixed Use Development**
**3718 Greenbank Road - Ottawa, Ontraio**

**DATUM** Geodetic

**FILE NO.** PG5690

**REMARKS**

**HOLE NO.** BH 19-21

**BORINGS BY** CME-55 Low Clearance Drill **DATE** July 13, 2021

| SOIL DESCRIPTION | STRATA PLOT | SAMPLE TYPE | SAMPLE NUMBER | SAMPLE % RECOVERY | SAMPLE N VALUE or RQD | DEPTH (m) | ELEV. (m) | Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone ○ Water Content % | Piezometer Construction |
|---|---|---|---|---|---|---|---|---|---|
| **GROUND SURFACE** | | | | | | 0 | 112.43 | | |
| | | | | | | 1 | 111.43 | | |
| | | SS | 1 | 21 | 7 | 2 | 110.43 | | |
| **FILL:** Brown silty clay with sand, gravel, cobbles, trace topsoil | | SS | 2 | 33 | 6 | 3 | 109.43 | | |
| | | SS | 3 | 4 | 10 | 4 | 108.43 | | |
| | | SS | 4 | 18 | 50+ | 5 | 107.43 | | |
| 6.70 | | | | | | 6 | 106.43 | | |
| Compact, light brown **SILTY SAND** | | SS | 5 | 96 | 20 | 7 | 105.43 | | |
| | | SS | 6 | 96 | 15 | 8 | 104.43 | | |
| 8.23 | | | | | | | | | |
| End of Borehole | | | | | | | | | |
| (BH dry upon completion) | | | | | | | | | |

20 40 60 80 100
**Shear Strength (kPa)**
▲ Undisturbed △ Remoulded

# patersongroup Consulting Engineers

154 Colonnade Road South, Ottawa, Ontario K2E 7J5

# SOIL PROFILE AND TEST DATA

**Geotechnical Investigation**
**Barrhaven South Urban Expansion**
**Ottawa, Ontario**

**DATUM** Geodetic elevations interpolated from City of Ottawa basemap.

**FILE NO.** PG3607

**REMARKS**

**HOLE NO.** BH 5-15

**BORINGS BY** CME 75 Power Auger **DATE** December 10, 2015

| SOIL DESCRIPTION | STRATA PLOT | SAMPLE TYPE | SAMPLE NUMBER | SAMPLE % RECOVERY | SAMPLE N VALUE or RQD | DEPTH (m) | ELEV. (m) |
|---|---|---|---|---|---|---|---|
| **GROUND SURFACE** | | | | | | 0 | 108.75 |
| | | SS | 1 | 42 | 13 | 1 | 107.75 |
| | | SS | 2 | 25 | 21 | 2 | 106.75 |
| | | SS | 3 | 33 | 5 | 3 | 105.75 |
| | | SS | 4 | 42 | 4 | 4 | 104.75 |
| **FILL:** Grey silty sand with clay, gravel and wood | | SS | 5 | 42 | 3 | 5 | 103.75 |
| | | SS | 6 | 42 | 3 | 6 | 102.75 |
| | | SS | 7 | 17 | 5 | 7 | 101.75 |
| | | SS | 8 | 25 | 37 | 8 | 100.75 |
| | | SS | 9 | 0 | 50+ | 9 | 99.75 |
| | | SS | 10 | 58 | 9 | | |
| | | SS | 11 | 0 | 1 | | |
| 9.14 | | | | | | | |
| End of Borehole<br><br>(BH dry to 9.14m depth - July 28, 2016) | | | | | | | |

**Pen. Resist. Blows/0.3m**
**● 50 mm Dia. Cone**
**○ Water Content %**

20 40 60 80

Monitoring Well Construction

20 40 60 80 100
**Shear Strength (kPa)**
▲ Undisturbed △ Remoulded

# patersongroup Consulting Engineers

154 Colonnade Road South, Ottawa, Ontario K2E 7J5

## SOIL PROFILE AND TEST DATA

**Geotechnical Investigation**
**Barrhaven South Urban Expansion**
**Ottawa, Ontario**

**DATUM** Geodetic elevations interpolated from City of Ottawa basemap.

**FILE NO.** PG3607

**REMARKS**

**HOLE NO.** TP 1-15

**BORINGS BY** Backhoe **DATE** December 2, 2015

| SOIL DESCRIPTION | STRATA PLOT | SAMPLE TYPE | SAMPLE NUMBER | SAMPLE % RECOVERY | SAMPLE N VALUE or RQD | DEPTH (m) | ELEV. (m) | Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone ○ Water Content % | Piezometer Construction |
|---|---|---|---|---|---|---|---|---|---|
| **GROUND SURFACE** | | | | | | | | | |
| **TOPSOIL** 0.10 | | G | 1 | | | 0 | 105.10 | | |
| Compact, brown **SILTY SAND**, trace boulders and cobbles | | G | 2 | | | 1 | 104.10 | | |
| | | | | | | 2 | 103.10 | | |
| 3.00 End of Test Pit | | | | | | 3 | 102.10 | | |
| (TP dry upon completion) | | | | | | | | | |

Pen. Resist. Blows/0.3m: ● 50 mm Dia. Cone; ○ Water Content %; 20 40 60 80

Shear Strength (kPa): 20 40 60 80 100; ▲ Undisturbed △ Remoulded

# patersongroup Consulting Engineers

154 Colonnade Road South, Ottawa, Ontario K2E 7J5

## SOIL PROFILE AND TEST DATA

**Geotechnical Investigation**
**Barrhaven South Urban Expansion**
**Ottawa, Ontario**

**DATUM** Geodetic elevations interpolated from City of Ottawa basemap.

**FILE NO.** PG3607

**REMARKS**

**HOLE NO.** TP 2-15

**BORINGS BY** Backhoe **DATE** December 2, 2015

| SOIL DESCRIPTION | STRATA PLOT | SAMPLE TYPE | SAMPLE NUMBER | SAMPLE % RECOVERY | SAMPLE N VALUE or RQD | DEPTH (m) | ELEV. (m) | Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone ○ Water Content % | Piezometer Construction |
|---|---|---|---|---|---|---|---|---|---|
| **GROUND SURFACE** | | | | | | | | | |
| **TOPSOIL** 0.10 | | | | | | 0 | 106.80 | | |
| Compact, brown **SILTY SAND** | | G | 1 | | | 1 | 105.80 | | |
| | | G | 2 | | | 2 | 104.80 | | |
| 3.00 End of Test Pit | | | | | | 3 | 103.80 | | |
| (TP dry upon completion) | | | | | | | | | |

Pen. Resist. Blows/0.3m: 20 40 60 80

Water Content %: 20 40 60 80

Shear Strength (kPa): 20 40 60 80 100

▲ Undisturbed △ Remoulded

# patersongroup Consulting Engineers

154 Colonnade Road South, Ottawa, Ontario K2E 7J5

## SOIL PROFILE AND TEST DATA

**Geotechnical Investigation**
**Barrhaven South Urban Expansion**
**Ottawa, Ontario**

**DATUM** Geodetic elevations interpolated from City of Ottawa basemap.


**FILE NO.** PG3607

**REMARKS**

**HOLE NO.** TP 8-15

**BORINGS BY** Backhoe **DATE** December 1, 2015

| SOIL DESCRIPTION | STRATA PLOT | SAMPLE TYPE | SAMPLE NUMBER | SAMPLE % RECOVERY | SAMPLE N VALUE or RQD | DEPTH (m) | ELEV. (m) | Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone ○ Water Content % | Piezometer Construction |
|---|---|---|---|---|---|---|---|---|---|
| **GROUND SURFACE** | | | | | | 0 | 109.30 | | |
| | | G | 1 | | | 1 | 108.30 | | |
| Dense, brown **SILTY SAND** | | | | | | 2 | 107.30 | | |
| 3.00 | | G | 2 | | | 3 | 106.30 | | |
| End of Test Pit | | | | | | | | | |
| (TP dry upon completion) | | | | | | | | | |

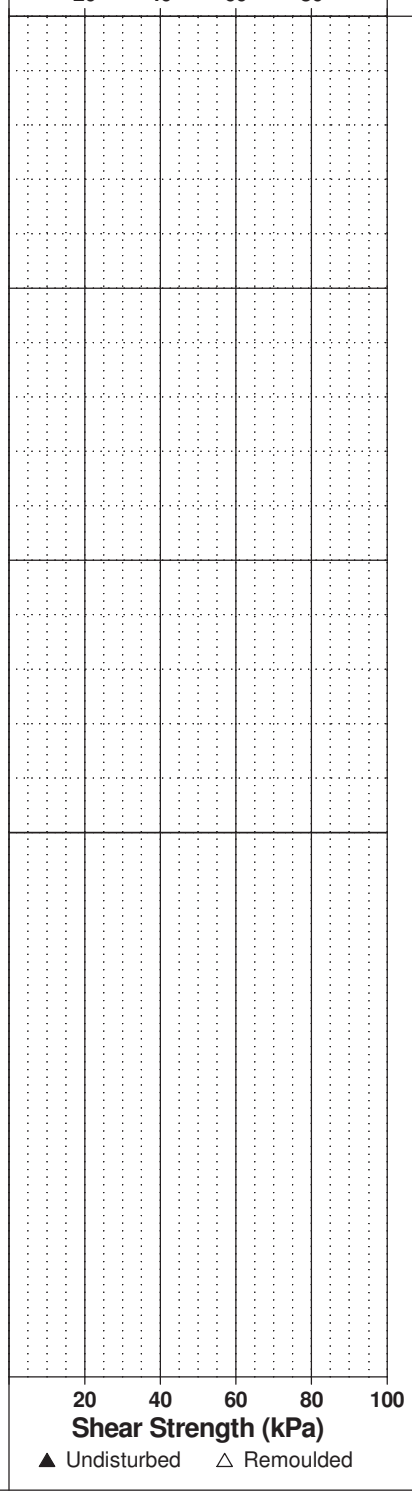

# patersongroup Consulting Engineers

154 Colonnade Road South, Ottawa, Ontario K2E 7J5

## SOIL PROFILE AND TEST DATA

**Geotechnical Investigation**
**Barrhaven South Urban Expansion**
**Ottawa, Ontario**

**DATUM** Geodetic elevations interpolated from City of Ottawa basemap.

**FILE NO.** PG3607

**REMARKS**

**HOLE NO.** TP 9-15

**BORINGS BY** Backhoe **DATE** December 2, 2015

| SOIL DESCRIPTION | STRATA PLOT | SAMPLE TYPE | SAMPLE NUMBER | SAMPLE % RECOVERY | SAMPLE N VALUE or RQD | DEPTH (m) | ELEV. (m) | Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone ○ Water Content % | Piezometer Construction |
|---|---|---|---|---|---|---|---|---|---|
| **GROUND SURFACE** | | | | | | 0 | 108.40 | | |
| **TOPSOIL** 0.20 | | | | | | | | | |
| Brown **SILTY SAND**, trace cobbles | | G | 1 | | | 1 | 107.40 | | |
| | | | | | | 2 | 106.40 | | |
| 3.00 End of Test Pit | | G | 2 | | | 3 | 105.40 | | |
| (TP dry upon completion) | | | | | | | | | |

Pen. Resist. Blows/0.3m: 20 40 60 80

Water Content %: 20 40 60 80

Shear Strength (kPa): 20 40 60 80 100

▲ Undisturbed △ Remoulded

# SYMBOLS AND TERMS

## SOIL DESCRIPTION

Behavioural properties, such as structure and strength, take precedence over particle gradation in describing soils. Terminology describing soil structure are as follows:

| | | |
|---|---|---|
| Desiccated | - | having visible signs of weathering by oxidation of clay minerals, shrinkage cracks, etc. |
| Fissured | - | having cracks, and hence a blocky structure. |
| Varved | - | composed of regular alternating layers of silt and clay. |
| Stratified | - | composed of alternating layers of different soil types, e.g. silt and sand or silt and clay. |
| Well-Graded | - | Having wide range in grain sizes and substantial amounts of all intermediate particle sizes (see Grain Size Distribution). |
| Uniformly-Graded | - | Predominantly of one grain size (see Grain Size Distribution). |

The standard terminology to describe the relative strength of cohesionless soils is the compactness condition, usually inferred from the results of the Standard Penetration Test (SPT) 'N' value. The SPT N value is the number of blows of a 63.5 kg hammer, falling 760 mm, required to drive a 51 mm O.D. split spoon sampler 300 mm into the soil after an initial penetration of 150 mm. An SPT N value of "P" denotes that the split-spoon sampler was pushed 300 mm into the soil without the use of a falling hammer.

| Compactness Condition | 'N' Value | Relative Density % |
|---|---|---|
| Very Loose | <4 | <15 |
| Loose | 4-10 | 15-35 |
| Compact | 10-30 | 35-65 |
| Dense | 30-50 | 65-85 |
| Very Dense | >50 | >85 |

The standard terminology to describe the strength of cohesive soils is the consistency, which is based on the undisturbed undrained shear strength as measured by the in situ or laboratory shear vane tests, unconfined compression tests, or occasionally by the Standard Penetration Test (SPT). Note that the typical correlations of undrained shear strength to SPT N value (tabulated below) tend to underestimate the consistency for sensitive silty clays, so Paterson reviews the applicable split spoon samples in the laboratory to provide a more representative consistency value based on tactile examination.

| Consistency | Undrained Shear Strength (kPa) | 'N' Value |
|---|---|---|
| Very Soft | <12 | <2 |
| Soft | 12-25 | 2-4 |
| Firm | 25-50 | 4-8 |
| Stiff | 50-100 | 8-15 |
| Very Stiff | 100-200 | 15-30 |
| Hard | >200 | >30 |

# SYMBOLS AND TERMS (continued)

## SOIL DESCRIPTION (continued)

Cohesive soils can also be classified according to their "sensitivity". The sensitivity, $S_t$, is the ratio between the undisturbed undrained shear strength and the remoulded undrained shear strength of the soil. The classes of sensitivity may be defined as follows:

| | |
|---|---|
| Low Sensitivity: | $S_t < 2$ |
| Medium Sensitivity: | $2 < S_t < 4$ |
| Sensitive: | $4 < S_t < 8$ |
| Extra Sensitive: | $8 < S_t < 16$ |
| Quick Clay: | $S_t > 16$ |

## ROCK DESCRIPTION

The structural description of the bedrock mass is based on the Rock Quality Designation (RQD).

The RQD classification is based on a modified core recovery percentage in which all pieces of sound core over 100 mm long are counted as recovery. The smaller pieces are considered to be a result of closely-spaced discontinuities (resulting from shearing, jointing, faulting, or weathering) in the rock mass and are not counted. RQD is ideally determined from NQ or larger size core. However, it can be used on smaller core sizes, such as BQ, if the bulk of the fractures caused by drilling stresses (called "mechanical breaks") are easily distinguishable from the normal in situ fractures.

| **RQD %** | **ROCK QUALITY** |
|---|---|
| 90-100 | Excellent, intact, very sound |
| 75-90 | Good, massive, moderately jointed or sound |
| 50-75 | Fair, blocky and seamy, fractured |
| 25-50 | Poor, shattered and very seamy or blocky, severely fractured |
| 0-25 | Very poor, crushed, very severely fractured |

## SAMPLE TYPES

| | | |
|---|---|---|
| SS | - | Split spoon sample (obtained in conjunction with the performing of the Standard Penetration Test (SPT)) |
| TW | - | Thin wall tube or Shelby tube, generally recovered using a piston sampler |
| G | - | "Grab" sample from test pit or surface materials |
| AU | - | Auger sample or bulk sample |
| WS | - | Wash sample |
| RC | - | Rock core sample (Core bit size BQ, NQ, HQ, etc.). Rock core samples are obtained with the use of standard diamond drilling bits. |

## SYMBOLS AND TERMS (continued)

### PLASTICITY LIMITS AND GRAIN SIZE DISTRIBUTION

| | | |
|---|---|---|
| WC% | - | Natural water content or water content of sample, % |
| LL | - | Liquid Limit, % (water content above which soil behaves as a liquid) |
| PL | - | Plastic Limit, % (water content above which soil behaves plastically) |
| PI | - | Plasticity Index, % (difference between LL and PL) |
| Dxx | - | Grain size at which xx% of the soil, by weight, is of finer grain sizes<br>These grain size descriptions are not used below 0.075 mm grain size |
| D10 | - | Grain size at which 10% of the soil is finer (effective grain size) |
| D60 | - | Grain size at which 60% of the soil is finer |
| Cc | - | Concavity coefficient = $(D30)^2$ / (D10 x D60) |
| Cu | - | Uniformity coefficient = D60 / D10 |

Cc and Cu are used to assess the grading of sands and gravels:
Well-graded gravels have: $1 < Cc < 3$ and $Cu > 4$
Well-graded sands have: $1 < Cc < 3$ and $Cu > 6$
Sands and gravels not meeting the above requirements are poorly-graded or uniformly-graded.
Cc and Cu are not applicable for the description of soils with more than 10% silt and clay
(more than 10% finer than 0.075 mm or the #200 sieve)

### CONSOLIDATION TEST


| | | |
|---|---|---|
| $p'_o$ | - | Present effective overburden pressure at sample depth |
| $p'_c$ | - | Preconsolidation pressure of (maximum past pressure on) sample |
| Ccr | - | Recompression index (in effect at pressures below $p'_c$) |
| Cc | - | Compression index (in effect at pressures above $p'_c$) |
| OC Ratio | | Overconsolidaton ratio = $p'_c / p'_o$ |
| Void Ratio | | Initial sample void ratio = volume of voids / volume of solids |
| Wo | - | Initial water content (at start of consolidation test) |

### PERMEABILITY TEST

| | | |
|---|---|---|
| k | - | Coefficient of permeability or hydraulic conductivity is a measure of the ability of water to flow through the sample. The value of k is measured at a specified unit weight for (remoulded) cohesionless soil samples, because its value will vary with the unit weight or density of the sample during the test. |


# SYMBOLS AND TERMS (continued)

## STRATA PLOT

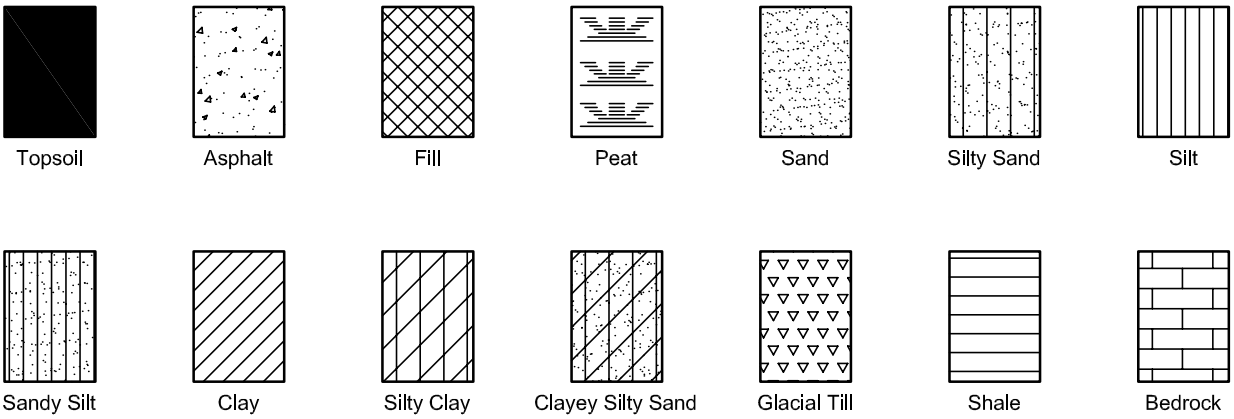



## MONITORING WELL AND PIEZOMETER CONSTRUCTION

MONITORING WELL CONSTRUCTION

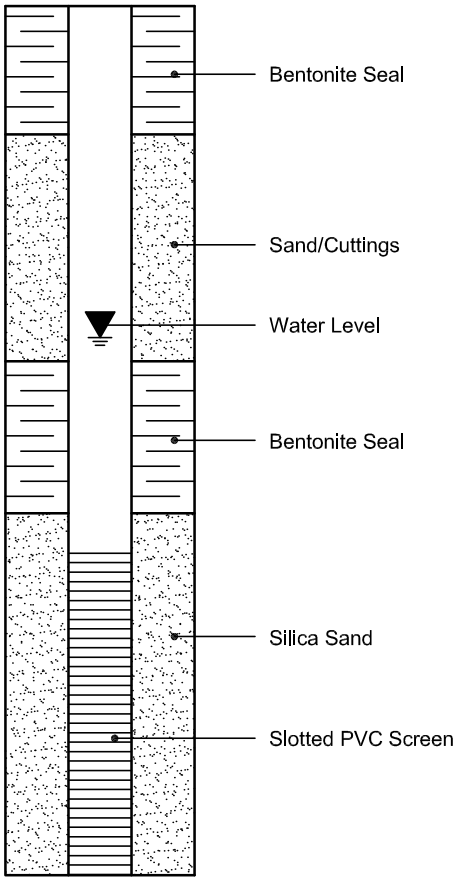



PIEZOMETER CONSTRUCTION

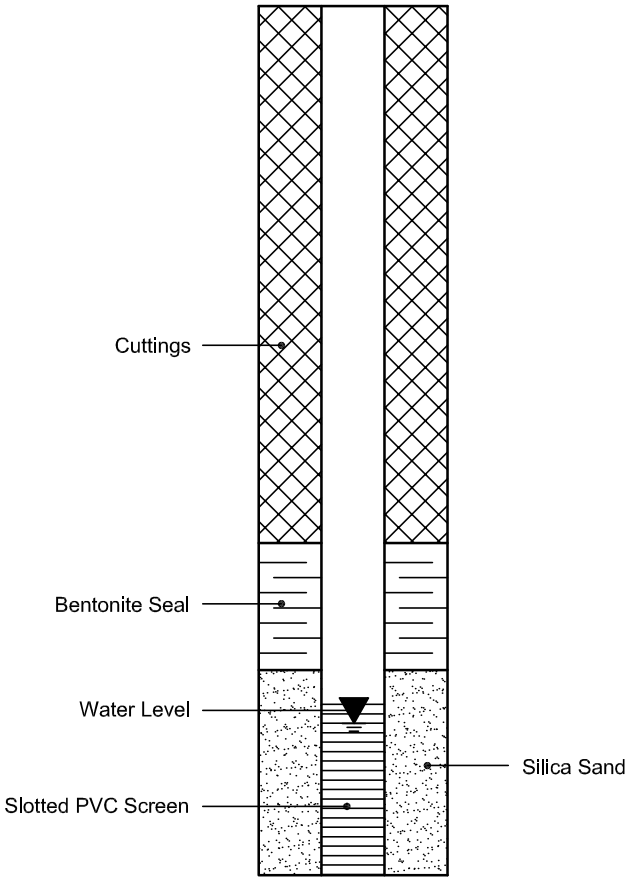

PATERSON GROUP

**SIEVE ANALYSIS** **ASTM C136**

| | | | | | |
|---|---|---|---|---|---|
| CLIENT: | Mattamy Homes | DESCRIPTION: | Fine Aggregate | FILE NO: | PG5690 |
| CONTRACT NO.: | - | SPECIFICATION: | **Sand** | LAB NO: | 42436 |
| PROJECT: | 3718 Greenbank Rd. | INTENDED USE: | - | DATE RECEIVED: | 3-May-23 |
| | | PIT OR QUARRY: | Pit | DATE TESTED: | 4-May-23 |
| DATE SAMPLED: | 25-Apr-23 | SOURCE LOCATION: | - | DATE REPORTED: | 9-May-23 |
| SAMPLED BY: | J.P | SAMPLE LOCATION: | TP2-23 G4 / 2.4-2.7m | TESTED BY: | C.P/A.L/M.O |

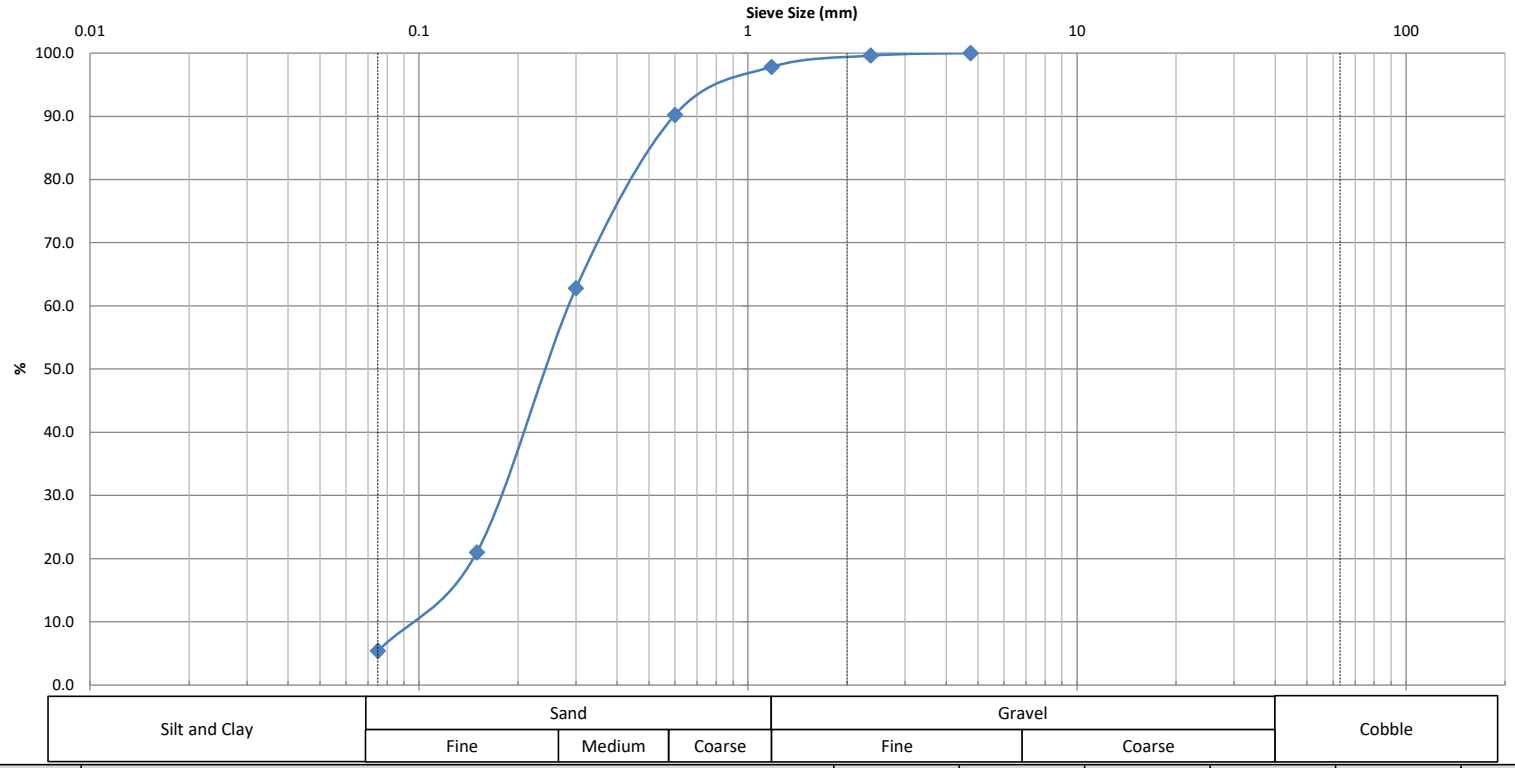


| Identification | Soil Classification | MC(%) | LL | PL | PI | Cc | Cu |
|---|---|---|---|---|---|---|---|
| | | | | | | 1.18 | 3.0 |

| D100 | D60 | D30 | D10 | Gravel (%) | Sand (%) | Silt (%) | Clay (%) |
|---|---|---|---|---|---|---|---|
| 4.75 | 0.295 | 0.185 | 0.098 | 0.0 | 94.6 | 5.4 | |


**Comments:**

| REVIEWED BY: | Curtis Beadow | Joe Fosyth, P. Eng. |
|---|---|---|

PATERSON GROUP

**SIEVE ANALYSIS** **ASTM C136**

| | | | | | |
|---|---|---|---|---|---|
| CLIENT: | Mattamy Homes | DESCRIPTION: | Fine Aggregate | FILE NO: | PG5690 |
| CONTRACT NO.: | - | SPECIFICATION: | **Sand/Gravel w Cobbles** | LAB NO: | 42437 |
| PROJECT: | 3718 Greenbank Rd. | INTENDED USE: | - | DATE RECEIVED: | 3-May-23 |
| | | PIT OR QUARRY: | Pit | DATE TESTED: | 4-May-23 |
| DATE SAMPLED: | 25-Apr-23 | SOURCE LOCATION: | - | DATE REPORTED: | 9-May-23 |
| SAMPLED BY: | J.P | SAMPLE LOCATION: | TP5-23 G4 / 2.2-2.5m | TESTED BY: | C.P/A.L/M.O |

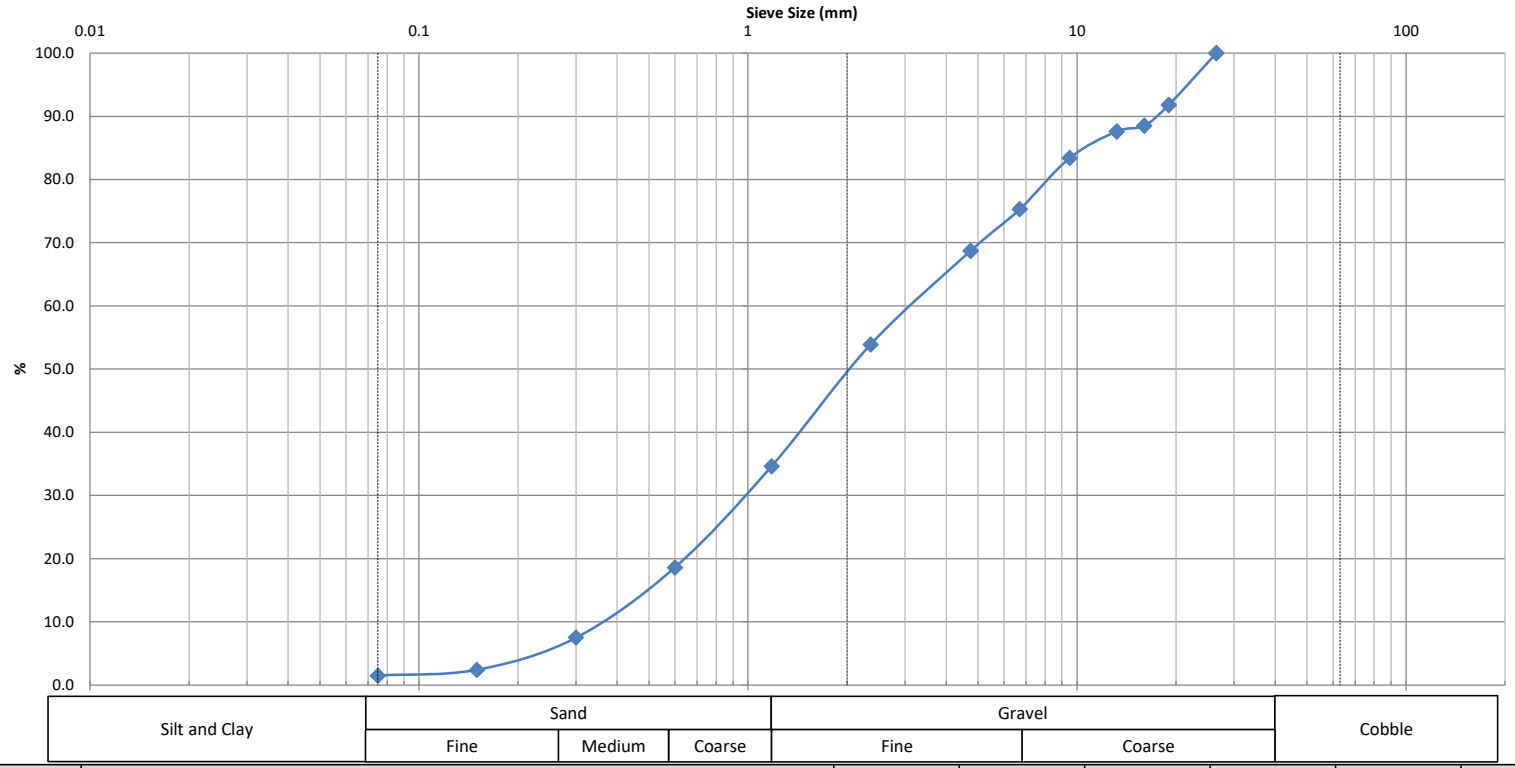


| Identification | Soil Classification | | | | | MC(%) | LL | PL | PI | Cc | Cu |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | | 0.83 | 8.4 |
| | D100 | D60 | D30 | D10 | Gravel (%) | Sand (%) | | Silt (%) | | Clay (%) | |
| | 26.5 | 3.12 | 0.98 | 0.37 | 31.3 | 67.2 | | 1.5 | | | |


**Comments:**

| REVIEWED BY: | Curtis Beadow | Joe Fosyth, P. Eng. |
|---|---|---|

**patersongroup**
consulting engineers

**SIEVE ANALYSIS**
**ASTM C136**

| | | | | | |
|---|---|---|---|---|---|
| CLIENT: | Mattamy Homes | DESCRIPTION: | Soil | FILE NO: | PG5690 |
| CONTRACT NO.: | - | SPECIFICATION: | **Silty Sand** | LAB NO: | 23721 |
| PROJECT: | 3718 Greenbank Road | INTENDED USE: | - | DATE RECEIVED: | 25-Mar-21 |
| | | PIT OR QUARRY: | in-Situ | DATE TESTED: | 26-Mar-21 |
| DATE SAMPLED: | 17-Feb-21 | SOURCE LOCATION: | BH2-21 SS3 & SS4 | DATE REPORTED: | 29-Mar-21 |
| SAMPLED BY: | G. Paterson | SAMPLE LOCATION: | 1.5 - 2.9 m | TESTED BY: | DK |

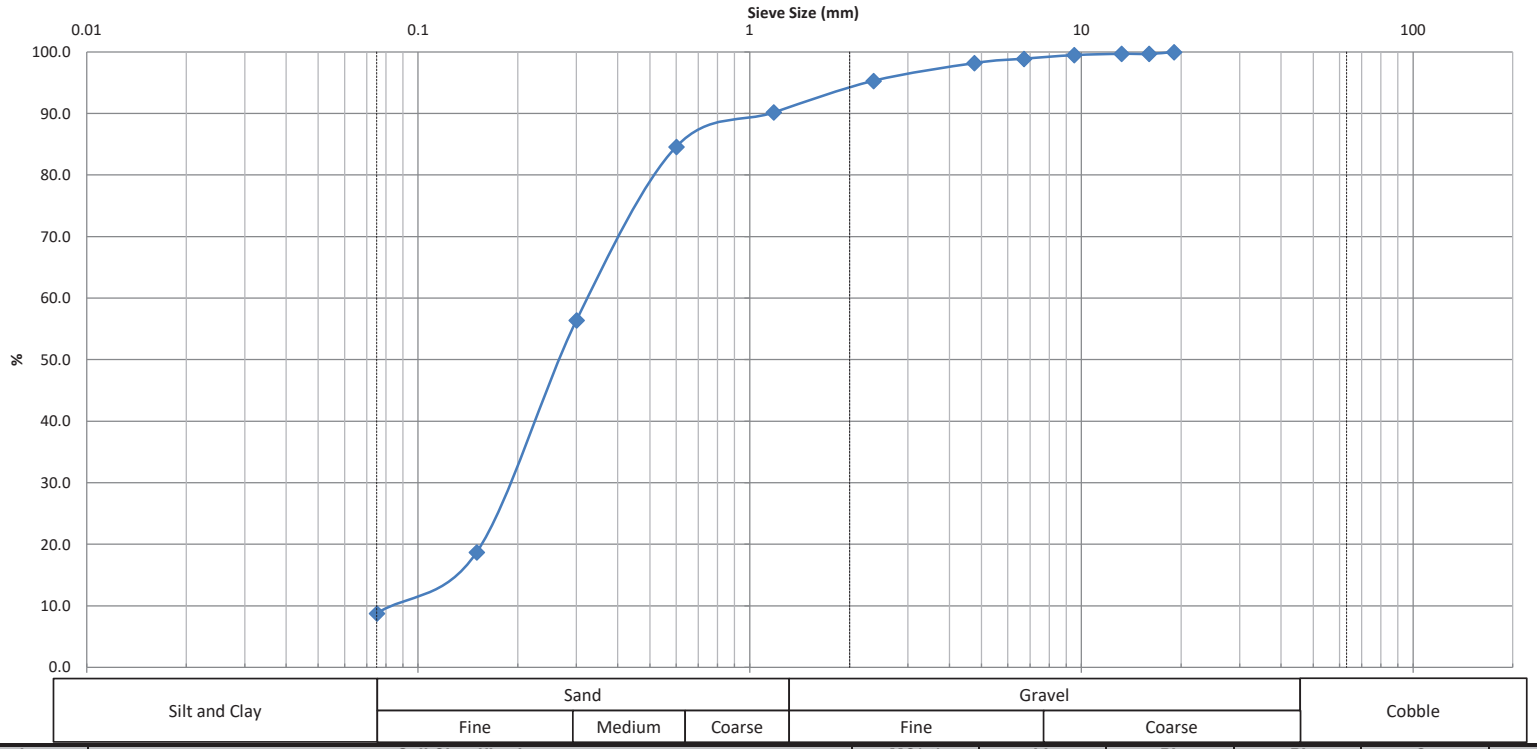


| Silt and Clay | Sand | | | Gravel | | Cobble |
|---|---|---|---|---|---|---|
| | Fine | Medium | Coarse | Fine | Coarse | |

| Identification | Soil Classification | | | | | MC(%) | LL | PL | PI | Cc | Cu |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | | 1.38 | 3.9 |
| | D100 | D60 | D30 | D10 | Gravel (%) | Sand (%) | | Silt (%) | | Clay (%) | |
| | 19.0 | 0.32 | 0.19 | 0.082 | 1.8 | 89.4 | | 8.8 | | | |


**Comments:**

| REVIEWED BY: | Curtis Beadow | Joe Fosyth, P. Eng. |
|---|---|---|

**patersongroup**
consulting engineers

**SIEVE ANALYSIS**
**ASTM C136**

| | | | | | |
|---|---|---|---|---|---|
| CLIENT: | Mattamy Homes | DESCRIPTION: | Soil | FILE NO: | PG5690 |
| CONTRACT NO.: | - | SPECIFICATION: | **Silty Sand** | LAB NO: | 23722 |
| PROJECT: | 3718 Greenbank Road | INTENDED USE: | - | DATE RECEIVED: | 25-Mar-21 |
| | | PIT OR QUARRY: | in-Situ | DATE TESTED: | 26-Mar-21 |
| DATE SAMPLED: | 17-Feb-21 | SOURCE LOCATION: | BH4-21 SS4 & SS5 | DATE REPORTED: | 29-Mar-21 |
| SAMPLED BY: | G. Paterson | SAMPLE LOCATION: | 2.29 - 3.66 m | TESTED BY: | DK |

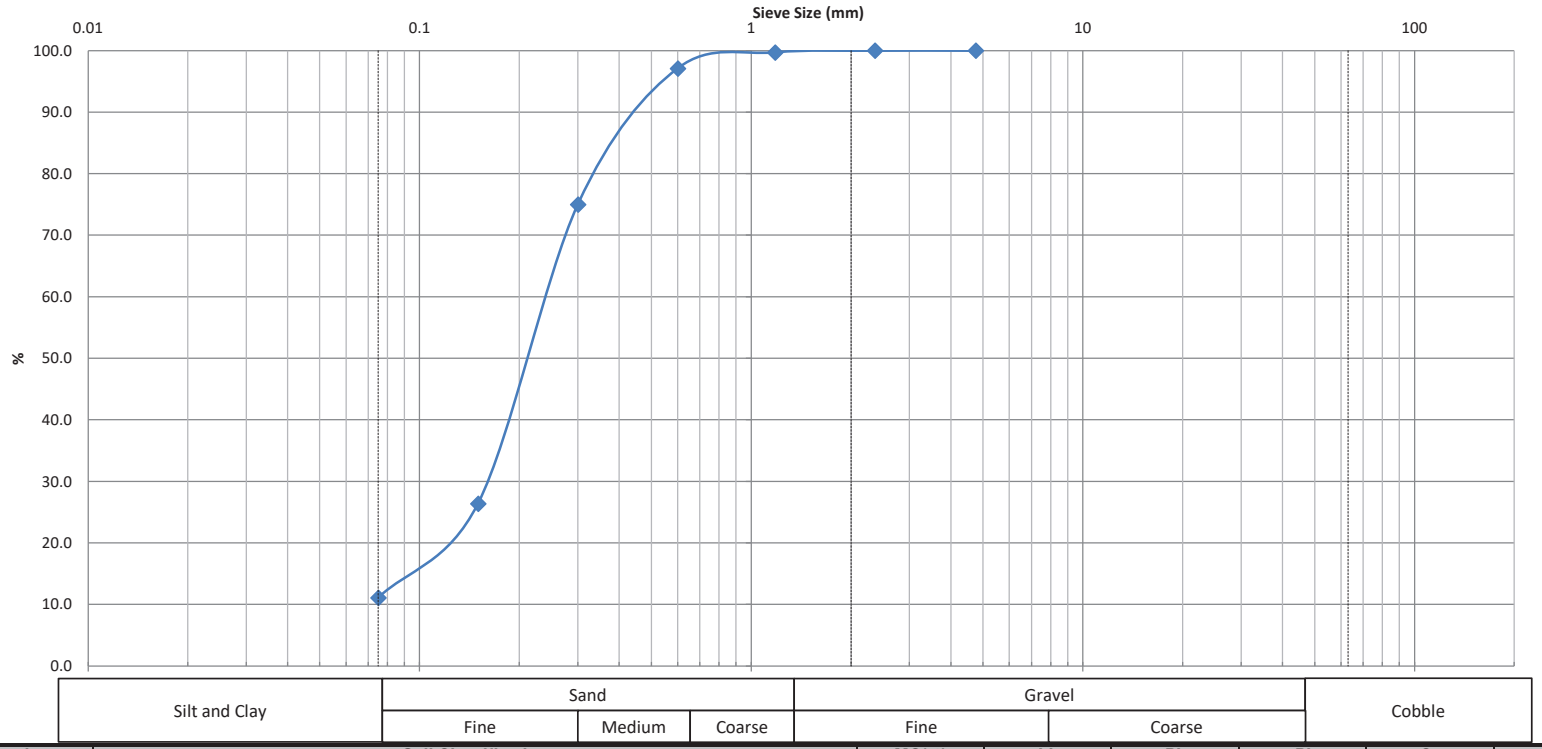


| Identification | Soil Classification | MC(%) | LL | PL | PI | Cc | Cu |
|---|---|---|---|---|---|---|---|
| | | | | | | 1.80 | 3.3 |

| D100 | D60 | D30 | D10 | Gravel (%) | Sand (%) | Silt (%) | Clay (%) |
|---|---|---|---|---|---|---|---|
| 4.8 | 0.23 | 0.17 | 0.07 | 0.0 | 88.9 | 11.1 | |


**Comments:**

**REVIEWED BY:** Curtis Beadow, Joe Fosyth, P. Eng.

**patersongroup**
consulting engineers

**SIEVE ANALYSIS**
**ASTM C136**

| | | | | | |
|---|---|---|---|---|---|
| CLIENT: | Mattamy Homes | DESCRIPTION: | Soil | FILE NO: | PG5690 |
| CONTRACT NO.: | - | SPECIFICATION: | **Silty Sand** | LAB NO: | 23723 |
| PROJECT: | 3718 Greenbank Road | INTENDED USE: | - | DATE RECEIVED: | 25-Mar-21 |
| | | PIT OR QUARRY: | in-Situ | DATE TESTED: | 26-Mar-21 |
| DATE SAMPLED: | 17-Feb-21 | SOURCE LOCATION: | BH8-21 SS4 & SS5 | DATE REPORTED: | 29-Mar-21 |
| SAMPLED BY: | G. Paterson | SAMPLE LOCATION: | 2.29 - 3.66 m | TESTED BY: | DK |

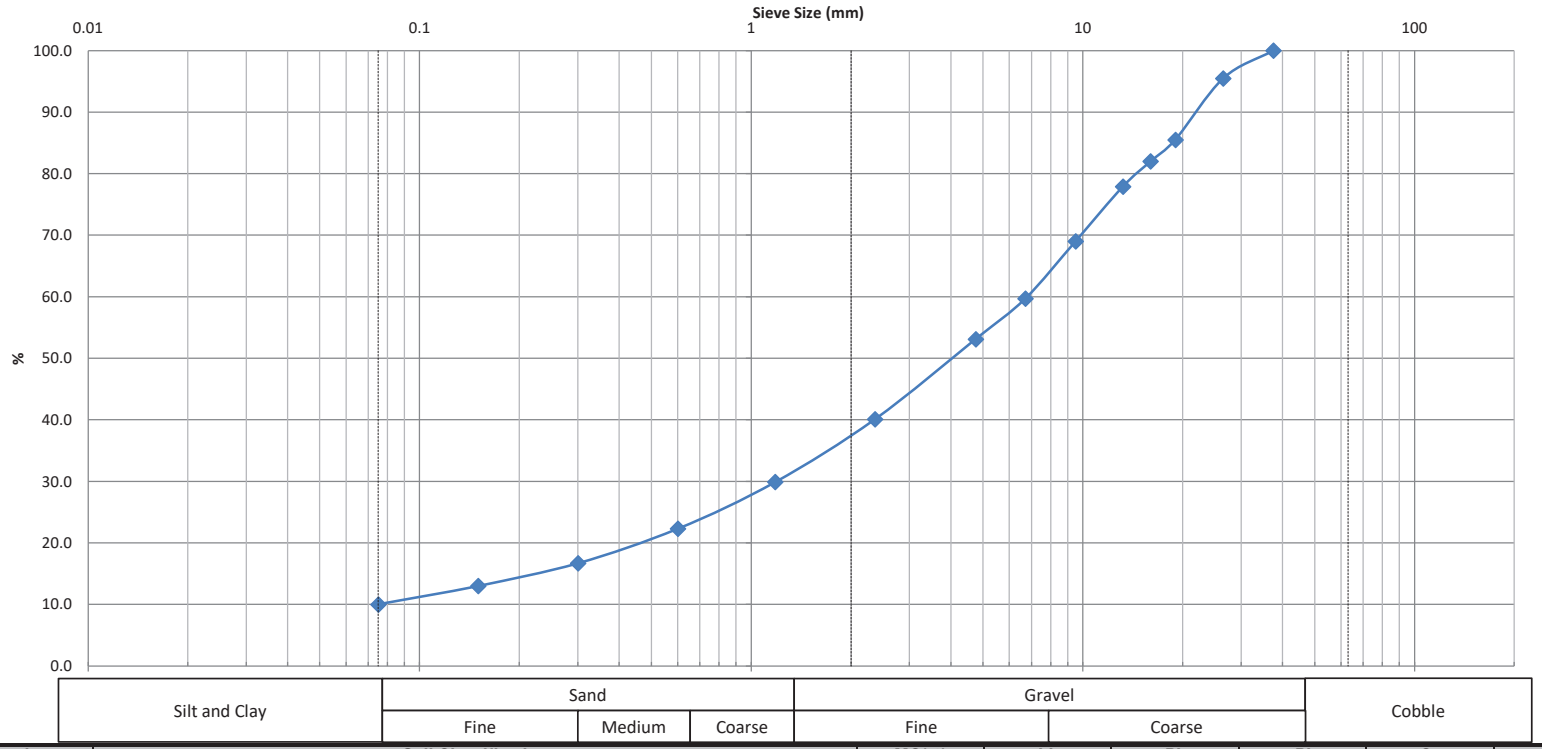


| Identification | Soil Classification | | | | | MC(%) | LL | PL | PI | Cc | Cu |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | | 3.54 | 104.6 |
| | D100 | D60 | D30 | D10 | Gravel (%) | Sand (%) | | Silt (%) | | Clay (%) | |
| | 37.5 | 6.8 | 1.25 | 0.065 | 46.9 | 43.1 | | 10.0 | | | |

**Comments:**

| REVIEWED BY: | Curtis Beadow | Joe Fosyth, P. Eng. |
|---|---|---|

Certificate of Analysis

Report Date: 25-Feb-2021

**Client: Paterson Group Consulting Engineers**

Order Date: 19-Feb-2021

**Client PO: 31927**

**Project Description: PG5690**

| | | | | | |
|---|---|---|---|---|---|
| | **Client ID:** | BH7-21-SS5 | - | - | - |
| | **Sample Date:** | 19-Feb-21 09:00 | - | - | - |
| | **Sample ID:** | 2108430-01 | - | - | - |
| | **MDL/Units** | Soil | - | - | - |
| **Physical Characteristics** | | | | | |
| % Solids | 0.1 % by Wt. | 95.7 | - | - | - |
| **General Inorganics** | | | | | |
| pH | 0.05 pH Units | 7.30 | - | - | - |
| Resistivity | 0.10 Ohm.m | 143 | - | - | - |
| **Anions** | | | | | |
| Chloride | 5 ug/g dry | 7 | - | - | - |
| Sulphate | 5 ug/g dry | <5 | - | - | - |

# APPENDIX 2

FIGURE 1 - KEY PLAN

FIGURE 2 TO 5 – AERIAL PHOTOGRAPHS

DRAWING PG5690-1 – TEST HOLE LOCATION PLAN





# FIGURE 1

## KEY PLAN




# FIGURE 2

**Aerial Photograph - 1976**

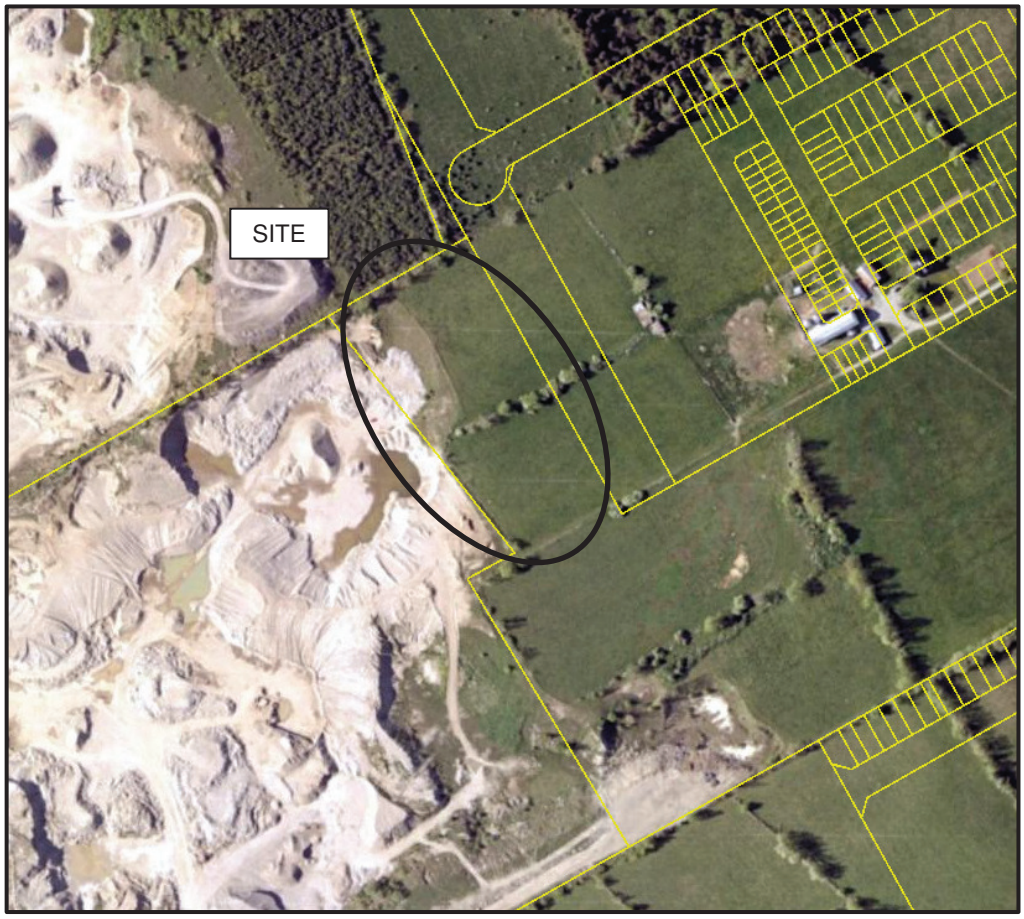


# FIGURE 3

## Aerial Photograph - 2002





# FIGURE 4

## Aerial Photograph - 2008




# FIGURE 5

## Aerial Photograph - 2019

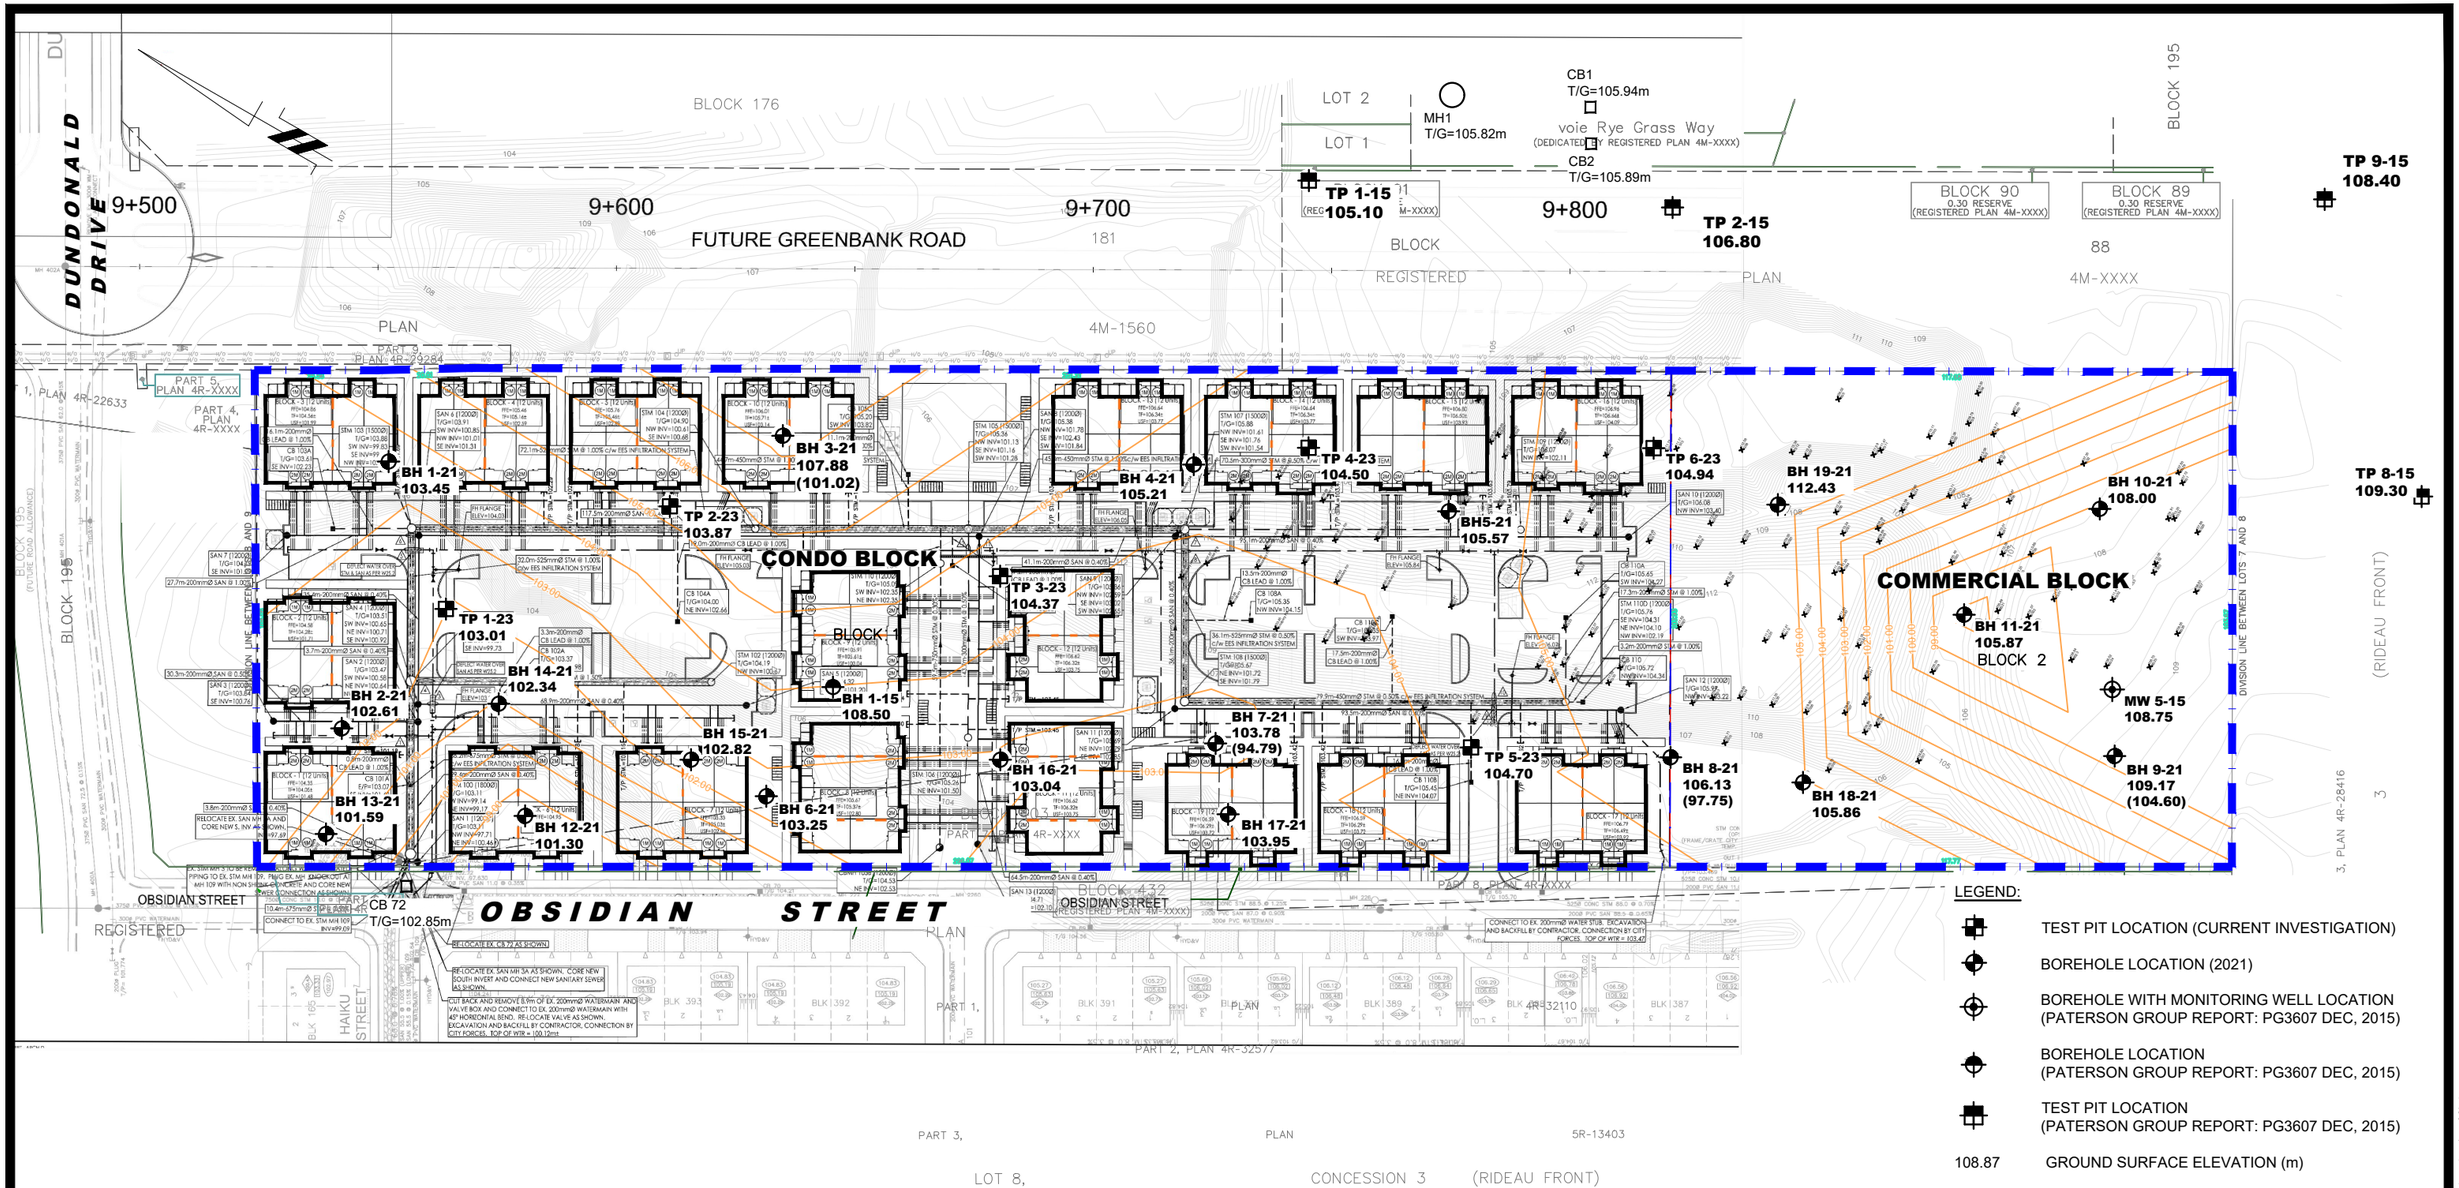


LEGEND:

- TEST PIT LOCATION (CURRENT INVESTIGATION)
- BOREHOLE LOCATION (2021)
- BOREHOLE WITH MONITORING WELL LOCATION (PATERSON GROUP REPORT: PG3607 DEC, 2015)
- BOREHOLE LOCATION (PATERSON GROUP REPORT: PG3607 DEC, 2015)
- TEST PIT LOCATION (PATERSON GROUP REPORT: PG3607 DEC, 2015)

108.87 GROUND SURFACE ELEVATION (m)

(104.63) PRACTICAL REFUSAL TO AUGERING ELEVATION (m)

104.0 FILL DELINEATION CONTOUR (m)

GROUND SURFACE ELEVATION AT BOREHOLE LOCATIONS ARE REFERENCED TO A GEODETIC DATUM.

0 5 10 15 20 25 50 75m

PATERSON GROUP
9 AURIGA DRIVE
OTTAWA, ON
K2E 7T9
TEL: (613) 226-7381

| NO. | REVISIONS | DATE | INITIAL |
|---|---|---|---|
| | | | |
| | | | |
| | | | |
| 2 | REVISED TO INCLUDE NEW 2023 TEST PITS UPDATED TO NEW CONCEPTUAL PLAN | 05/05/2023 | SK |
| 1 | REVISED TO INCLUDE NEW 2021 TEST PITS | 14/07/2021 | OC |

MATTAMY HOMES

GEOTECHNICAL INVESTIGATION
HALF MOON BAY - SOUTH - PHASE 8

OTTAWA, ONTARIO

Title:

# TEST HOLE LOCATION PLAN

| | |
|---|---|
| Scale: 1:1250 | Date: 03/2021 |
| Drawn by: YA | Report No.: PG5690-1 |
| Checked by: KP | Dwg No.: PG5690-1 |
| Approved by: DJG | Revision No.: 2 |

p:\autocad drawings\geotechnical\pg56xx\pg5690\pg5690-1-test hole location plan (rev.02).dwg