PATERSON GROUP

Geotechnical Investigation

Proposed Multi-Storey Building

178-200 Isabella Street and
205 Pretoria Avenue
Ottawa, Ontario

Isatoria Limited Partnership

Report PG5043-1 Revision 5 dated November 2, 2026

Table of Contents

PAGE

1.0 Introduction 1
2.0 Proposed Development 1
3.0 Method of Investigation 2
3.1 Field Investigation 2
3.2 Field Survey 4
3.3 Laboratory Testing 4
3.4 Analytical Testing 4
4.0 Observations 5
4.1 Surface Conditions 5
4.2 Subsurface Profile 5
4.3 Groundwater 6
5.0 Discussion 8
5.1 Geotechnical Assessment 8
5.2 Site Grading and Preparation 8
5.3 Foundation Design 12
5.4 Design for Earthquakes 17
5.5 Basement Slab 19
5.6 Basement Wall 19
5.7 Pavement Design 21
6.0 Design and Construction Precautions 24
6.1 Foundation Drainage 24
6.2 Protection of Footings Against Frost Action 27
6.3 Excavation Side Slopes 28
6.4 Pipe Bedding and Backfill 30
6.5 Groundwater Control 30
6.6 Winter Construction 31
6.7 Corrosion Potential and Sulphate 32
6.8 Landscaping Considerations 33
7.0 Recommendations 34
8.0 Statement of Limitations 35

Appendices

Appendix 1

Soil Profile and Test Data Sheets
Symbols and Terms
Unconfined Compressive Strength Testing Results
Analytical Testing Results
Hydraulic Conductivity Test Results

Appendix 2

Figure 1 - Key Plan
Figure 2 & 3 - Seismic Shear Wave Velocity Profiles
Drawing PG5043-2 - Test Hole Location Plan
Drawing PG5043-3 - Bedrock Contour Plan

1.0 Introduction

Paterson Group (Paterson) was commissioned by Isatoria Limited Partnership to conduct a geotechnical investigation for the proposed multi-storey building to be located at 178-200 Isabella Street in the City of Ottawa, Ontario (reference should be made to Figure 1 - Key Plan in Appendix 2 of this report).

The objectives of the geotechnical investigation were to:

- Determine the subsoil and groundwater conditions at this site by means of boreholes.
- Provide geotechnical recommendations based on subsoils information for the design of the proposed building, including construction considerations which may affect the design.

The following report has been prepared specifically and solely for the aforementioned project which is described herein. This report contains the geotechnical findings and includes recommendations pertaining to the design and construction of the proposed building as understood at the time of writing this report.

Investigating the presence or potential presence of contamination on the subject site was not part of the scope of work of this present investigation. A report addressing environmental issues has been prepared under a separate cover.

2.0 Proposed Development

Based on the available drawings, it is understood that the proposed development will consist of a multi-storey residential building with 2 levels of underground parking that will extend approximately over the entire property.

Associated landscaped areas are also anticipated as part of the development. It is expected that the proposed building will be municipally serviced.

3.0 Method of Investigation

3.1 Field Investigation

Field Program

The field program for the geotechnical investigation was completed at the subject site by Paterson between August 4 and August 6, 2026. At that time ten (10) boreholes were advanced to a maximum depth of 25.6 m below the ground surface. A previous investigation was undertaken by Paterson on October 7, 2016. At that time, three (3) boreholes were advanced to a maximum depth of 9.7 m below existing grade. A supplemental investigation was also completed by this firm on October 6 and October 7, 2020, which consisted of 2 boreholes advanced to a maximum depth of 19.0 m below ground surface.

All borehole locations were distributed in a manner to provide general coverage of the site and taking into consideration underground utilities and site features. The approximate locations of the boreholes are shown on Drawing PG5043-2 - Test Hole Location Plan included in Appendix 2.

The boreholes were drilled using a truck-mounted auger drill rig or a low clearance drill rig operated by a two-person crew. All fieldwork was conducted under the full-time supervision of our personnel under the direction of a senior engineer. The drilling procedure consisted of augering and coring to the required depths at the selected locations, and sampling and testing the overburden soils and bedrock.

Sampling and In Situ Testing

Soil samples were recovered from the auger flights or collected using a 50 mm diameter split-spoon sampler, or core recovery barrels. The split-spoon and auger samples were inspected and classified on site and placed in sealed plastic bags. Rock cores were placed in carboard boxes. All samples were transported to our laboratory for further examination. The depths at which the split-spoon, auger samples, and rock core samples were recovered from the boreholes are shown as SS, AU, and RC, respectively, on the Soil Profile and Test Data sheets in Appendix 1.

A Standard Penetration Test (SPT) was conducted in conjunction with the recovery of the split-spoon samples. The SPT results are recorded as “N” values on the Soil Profile and Test Data sheets. The “N” value is the number of blows required to drive the split-spoon sampler 300 mm into the soil after a 150 mm initial penetration using a 63.5 kg hammer falling from a height of 760 mm.

Undrained shear strength testing, using a vane apparatus, was carried out at regular intervals of depth in cohesive soils.

The overburden thickness was evaluated by a dynamic cone penetration test (DCPT) at two borehole locations. The DCPT consists of driving a steel drill rod, equipped with a 50 mm diameter cone at the tip, using a 63.5 kg hammer falling from a height of 760 mm. The number of blows required to drive the cone into the soil is recorded for each 300 mm increment.

Diamond drilling was completed at boreholes BH 1-26, BH 2-26, and BH 3-26 to confirm the bedrock quality. A recovery value and a Rock Quality Designation (RQD) value were calculated for each drilled section of bedrock and are presented as RC and RQD, respectively, on the Soil Profile and Test Data sheets in Appendix 1.

The recovery value is the ratio of the bedrock sample length recovered over the drilled section length, in percentage. The RQD value is the total length ratio of intact rock core length more than 100 mm in one drilled section over the length of the drilled section, in percentage. These values are indicative of the quality of the bedrock.

The subsurface conditions observed in the boreholes were recorded in detail in the field. The soil profiles are presented on the Soil Profile and Test Data sheets in Appendix 1 of this report.

Groundwater

Boreholes BH 4-26 and all boreholes from the previous investigation were fitted with monitoring wells to permit monitoring of the groundwater levels subsequent to the completion of the sampling program. Groundwater level observations are discussed in Section 4.3 and are presented in the Soil Profile and Test Data sheets in Appendix 1.

Monitoring Well Installation

Typical monitoring well construction details are described below:

- ❑ 3.0 m of slotted 51 mm diameter PVC screen at the base of each borehole.
- ❑ 51 mm diameter PVC riser pipe from the top of the screen to the ground surface.
- ❑ No.3 silica sand backfill within annular space around screen.
- ❑ 300 mm thick bentonite hole plug directly above PVC slotted screen.
- ❑ Clean backfill from top of bentonite plug to the ground surface.

3.2 Field Survey

The borehole locations and ground surface elevations at each test hole location were surveyed by Paterson field personnel using a handheld GPS. Ground surface elevations at the borehole locations were referenced to a geodetic datum. The location of the boreholes and the ground surface elevation at each borehole location are presented on Drawing PG5043-2 – Test Hole Location Plan in Appendix 2.

3.3 Laboratory Testing

Soil and bedrock samples were recovered from the subject site and were visually examined in our laboratory to review the results of the field logging. Unconfined compressive strength testing was carried out by Paterson on three (3) bedrock samples. The results of the testing are discussed in Subsection 4.2 and are provided in Appendix 1.

3.4 Analytical Testing

One (1) soil sample was submitted for analytical testing to assess the corrosion potential for exposed ferrous metals and the potential of sulphate attacks against subsurface concrete structures. The sample is analyzed to determine the concentrations of sulphate and chloride, the resistivity and the pH of the sample. The results are included in Appendix 1 and are further discussed in Subsection 6.7.

4.0 Observations

4.1 Surface Conditions

The subject site consists of multiple individual lots which were formerly occupied by several low-rise buildings. The east and west portions of this section of the site are currently paved and used for parking, while the middle portion of this section is covered with low vegetation and visible demolition debris.

The subject site has a moderate slope down towards Isabella Street, becoming approximately at grade with street level. It should be noted that a retaining wall is present along the west property boundary, with an approximately 1.5 m elevation difference above the adjacent property.

4.2 Subsurface Profile

Overburden

Generally, the subsurface profile at the borehole locations consists of topsoil, asphalt and/or fill material underlain by a thick silty clay deposit. The silty clay was underlain by a glacial till deposit and further underlain by bedrock.

Where encountered, the fill material was observed to generally consist of brown silty sand to silty clay, some gravel, cobbles, boulders, topsoil and construction debris extending to depths ranging between 1.4 and 2.3 m below the existing grade. A stiff brown to grey silty clay deposit was encountered below the above noted fill layer.

A compact glacial till layer was encountered below the silty clay deposit at BH 1-20 and BH 2-20 at 13.7 and 13.4 m depth, respectively.

Practical refusal to DCPT was encountered at the time of the investigations at depths ranging between 17.0 and 21.5 m below ground surface.

Reference should be made to the Soil Profile and Test Data sheets in Appendix 1 for details of the soil profiles encountered at each test hole location.

Bedrock

Bedrock was cored at boreholes BH 1-26, BH 2-26 and BH 3-26 with an average RQD value ranging between 76 and 100. The recovery values ranged between 95 and 100%. The quality of the bedrock is therefore considered to range from good to excellent. The bedrock was encountered at depths ranging from to below the ground surface.

It should also be noted that weathered bedrock was encountered during the previous investigation at 18.3 and 15.2 m below ground surface at the location of boreholes BH 1-20 and BH 2-20, respectively.

Based on available geological mapping, the bedrock in the subject area consists of shale of the Billings Formation with an approximate overburden drift thickness of 15 to 25 m depth. Shale bedrock was recovered from split-spoon samples advanced during the 2020 field program and the elevation of that surface was reported on Drawing PG5043-2 – Test Hole Location Plan in Appendix 1 of this report.

Reference can be made to Drawing PG5043-3 – Bedrock Contour Plan indicating the test hole locations and depth where bedrock and/or refusal to augering has been encountered. It should be understood that the bedrock contours depicted on the aforementioned contour plan are based on linear interpolation between test holes where bedrock had been confirmed by Paterson and is limited to that information. Actual site conditions and bedrock elevation may vary beyond the test hole locations and as inferred by the depicted contour lines.

Unconfined Compressive Strength Testing of Bedrock Core Samples

Three (3) bedrock cores obtained by Paterson as a part of the current investigation were tested for unconfined compressive strength. The samples consisted of shale with limestone bedrock as based on Paterson's observations. The results are summarized in Table 1 below and presented on Unconfined Compressive Strength Testing Results on Appendix 1.

Table 1 – Summary of Unconfined Bedrock Compressive Strength Testing Results

Borehole Number	Sample	Test Core Depth (m)	Test Core Elevation (m)	Unconfined Compressive Strength (MPa)
BH 1-26	RC2	19.8	47.8	21.7
BH 2-26	RC2	21.2	46.8	32.5
BH 3-26	RC4	24.2	44.1	46.7

4.3 Groundwater

Groundwater levels were recorded at each test hole location and presented in Table 2. The groundwater level readings are presented in the Soil Profile and Test Data sheets in Appendix 1.

Table 2 – Summary of Groundwater Levels

Borehole Number	Ground Surface Elevation (m)	Measured Groundwater Level		Date Recorded
		Depth (m)	Elevation (m)	
BH 4-26	68.16	5.53	62.63	August 17, 2026
BH 1-20	67.37	4.80	62.57	October 9, 2020
BH 2-20	68.14	5.40	62.74	
BH 1	67.45	2.52	64.93	October 14, 2016
BH 2	67.90	4.74	63.16	
BH 3	67.95	6.79	61.16	

Note: The ground surface elevation at each borehole location was surveyed using a handheld GPS using a geodetic datum.

Groundwater can also be estimated based on the colouring, consistency and moisture levels of the recovered samples. Therefore, it is expected that the long-term groundwater table will be at a depth ranging from 4.5 to 5.5 m below existing ground surface. It should be noted that groundwater levels are subject to seasonal fluctuations. Therefore, the groundwater levels could vary at the time of construction.

Groundwater monitoring wells were installed at BH 4-26, BH 1-20 and BH 2-20. A falling head slug test was completed at each monitoring well to confirm the hydraulic conductivity of the soils. The results of our testing are presented in the data sheets in Appendix 1.

5.0 Discussion

5.1 Geotechnical Assessment

From a geotechnical perspective, the subject site is considered acceptable for the proposed multi-storey building with two basement level parking garage. Based on our review, the building will be founded over a deep foundation consisting of end-bearing piles advanced to practical refusal or rock-socketed drill caissons.

Due to the presence of the silty clay layer, the subject site will have a permissible grade raise restriction. The permissible grade raise recommendations are discussed in Subsection 5.3.

The above and other considerations are further discussed in the following sections.

5.2 Site Grading and Preparation

Stripping Depth

Asphalt, topsoil, construction debris and any deleterious fill, such as those containing organic materials, should be removed from within the perimeter of the proposed buildings and other settlement sensitive structures.

Existing foundation walls and other construction debris should be entirely removed from within the building perimeters. Under paved areas, existing construction remnants such as foundation walls should be excavated to a minimum of 1 m below final grade.

Care should be taken not to disturb adequate bearing soils below the founding level during site preparation activities. Disturbance of the subgrade may result in having to sub-excavate the disturbed material and the placement of additional suitable fill material.

Fill Placement

Fill used for grading beneath the proposed building should consist of clean imported granular fill, such as Ontario Provincial Standard Specifications (OPSS) Granular A or Granular B Type II. This material should be tested and approved prior to delivery to the site. The fill should be placed in lifts no greater than 225 mm thick and compacted using suitable compaction equipment for the lift thickness unless specified otherwise.

Fill placed beneath the building and paved areas should be compacted to at least 98% of its standard Proctor maximum dry density (SPMDD).

Under winter conditions, if snow and ice is present within the imported fill placed below future lower-level basement slabs, higher than tolerable amounts of settlement of the fill should be expected and support of a future basement slab and/or temporary supports for suspended slab pours will be negatively impacted and would undergo settlement during spring and summer time conditions. Paterson personnel should complete periodic inspections during fill import and placement to ensure that snow and ice quantities are minimized.

Any soft or poor performing areas should be removed and replaced with engineered fill consisting of OPSS Granular A or Granular B Type II, with a maximum particle size of 50 mm. The engineered fill should be placed in maximum 300 mm loose lifts and compacted to 98% SPMDD using suitable vibratory equipment.

Site-generated soil can be used as general landscaping fill where settlement of the ground surface is of minor concern. These materials should be spread in thin lifts and at least compacted by the tracks of the spreading equipment to minimize voids. If these materials are to be used to build up the subgrade level for areas to be paved, they should be compacted in thin lifts to a minimum density of 95% of their respective SPMDD. Clayey workable fill must be compacted using a suitably sized vibratory sheepsfoot roller.

Non-specified fill and/or site-excavated soils are not suitable for use as backfill against foundation walls unless a composite drainage blanket connected to a perimeter drainage system or adequate frost protection in areas overlain by settlement sensitive structures or hardscaping.

Care will need to be taken during storage, placement and compaction of the excavated native soils to maintain them in an unfrozen state and at a moisture content which is suitable for compaction. Soils intended for re-use which become frozen and/or which have excessive moisture contents will not be considered suitable for reuse at the subject site. Placement of site-generated material during winter months increases the risk of placing frozen material which may result in future poor performing areas that will require repair. Paterson field personnel should complete periodic inspections during fill placement to ensure that snow and ice quantities are minimized.

Vibration Considerations

Overall Construction

Construction operations are the cause of vibrations, and possibly, sources of nuisance to the community.
Therefore, means to reduce the vibration levels as much as possible should be incorporated in the construction operations to maintain, as much as possible, a cooperative environment with the residents.

The following construction equipment could be the source of vibrations: pile driver, compactor, dozer, crane, truck traffic, etc. Vibrations, whether caused by pile diving operations or by construction operations, could be the source of detrimental vibrations on the nearby buildings and structures. Therefore, all vibrations are recommended to be limited. Two parameters are used to determine the permissible vibrations, namely, the maximum peak particle velocity and the frequency. For low frequency vibrations, the maximum allowable peak particle velocity is less than that for high frequency vibrations.

As a guideline, the peak particle velocity should be less than 15 mm/s between frequencies of 4 to 12 Hz, and 50 mm/s above a frequency of 40 Hz (interpolate between 12 and 40 Hz) and should comply to the City of Ottawa's S.P. No.: F-1201. The guidelines are for current construction standards. Considering that these guidelines are above perceptible human level and, in some cases, could be very disturbing to some people, a pre-construction survey is recommended be completed to minimize the risks of claims during or following the construction of the proposed buildings.

Isabella Street Watermain Upgrades

Paterson understands the 1,200 mm backbone watermain is located at a distance ranging from 8.6 m to 12.2 m, from west to east, respectively, from the property boundary. Similarly, the 1,500 mm combined sewer is located at a distance ranging from 10.6 m to 9.1 m, from west to east, respectively, from the property boundary. Based on this, it is expected the above-noted existing backbone watermain pipes are located beyond the zone of influence of the building's excavation.

Paterson also understands the 127 mm watermain, running within Isabella Street, will be upgraded to a larger diameter. Construction methodology details for this upgrade are not known at the time of issuance of this report, however, it is expected the roadwork will be facilitated via a temporary open-cut installation procedure as described in Section 6.3 of this report.

It is recommended that any excavation within 1 m of the backbone watermain or the combined sewer be completed using hydro-vac equipment, and as is expected to be advised by utility clearances. It is recommended that a vibration monitoring program be carried out during all construction within the right-of-way. The vibration monitoring program should consist of vibration monitoring installed along the backbone watermain and/or the combined sewer, whichever is in closer proximity to the upgraded service, with monitors.

The vibrational limits for this project should be set by the vibration consultant contracted during the pre-construction phase and documented within a Vibration Monitoring Control Plan prepared at that time. If the upgraded service will cross above or below the existing backbone watermain and/or combined sewer, it is understood that the existing services will be supported as outlined in the City of Ottawa Drawings W25, W25.2 and W28.

Compacted Granular Fill Working Platform for Pile Foundation

Since it is expected the proposed buildings may be supported on a deep foundation, the use of heavy equipment would be required to install piles (i.e., pile driving crane) or other deep foundation elements. It is conventional practice to install a compacted granular fill layer, at a convenient elevation, to allow the equipment to access the site without getting stuck and causing significant disturbance to the underlying soil.

It is recommended that a minimum 600 mm thick layer of OPSS Granular B Type II crushed stone or a combination of blast-rock and OPSS Granular B Type II crushed stone be placed as working platform throughout the building footprint which will support heavy equipment to facilitate deep foundation installations. The working pad granular should be compacted to a minimum of 98% of its standard Proctor maximum dry density (SPMDD) in maximum 300 mm thick lifts. The proposed granular pad should be reviewed and approved by Paterson prior to the installation to ensure that the load distribution of the heavy equipment is evenly distributed over the subgrade surface.

It is important to note that once the subgrade along the bottom of excavation is exposed, a woven geotextile such as Terrafix 200W or an approved equivalent, be placed directly on the silty clay subgrade prior to the placement of the granular pad. The subgrade should be protected from workers' foot traffic to ensure minimal disturbance to the subgrade material. Furthermore, the thickness of the granular pad should be re-assessed once the subgrade is exposed to ensure that the subgrade material will not be flexing during the compaction operations.

Once the piles have been driven and cut off, the working platform can be re-graded, and soil tracked in, or soil pumping up from the pile installation locations, can be bladed off and the surface can be topped up, if necessary, and re-compacted to act as the substrate for further fill placement for the slab structure.

5.3 Foundation Design

Deep Foundations – End Bearing Piles

A deep foundation method, such as end bearing piles, may be considered for the foundation support of the proposed building. For deep foundations, concrete-filled steel pipe piles are generally utilized in the Ottawa area. Applicable pile resistance at SLS values and factored pile resistance at ULS values are given in Table 3.

A resistance factor of 0.4 has been incorporated into the factored ULS values. Note that these are all geotechnical axial resistance values.

The geotechnical pile resistance values were estimated using the Hiley dynamic formula, to be confirmed during pile installation with a program of dynamic monitoring. For this project, the dynamic monitoring of 10% of the total number of piles would be recommended and as undertaken and measured by Paterson at the time of pile testing.

This is considered to be the minimum monitoring program, as the piles under shear walls may be required to be driven using the maximum recommended driving energy to achieve the greatest factored resistance at ULS values.

Re-striking of all piles, at least once, will also be required after at least 48 hours have elapsed since initial driving. A full-time field review program should be conducted by Paterson field personnel during the pile driving operations to record the pile lengths, ensure that the refusal criteria is met and that piles are driven within the location tolerances (within 75 mm of proper location and within 2% of vertical).

Table 3 - Pile Foundation Design Data

Pile Outside Diameter (mm)	Pile Wall Thickness (mm)	Geotechnical Axial Resistance		Final Set (blows/ 12 mm)	Transferred Hammer Energy (kJ)
		SLS (kN)	Factored at ULS (kN)		
245	9	925	1,100	6	27
245	11	1,050	1,260	6	31
245	13	1,200	1,440	6	35

The minimum recommended centre-to-centre pile spacing is 3 times the pile diameter. The closer the piles are spaced, however, the more potential that the driving of subsequent piles in a group could have influence on piles in the group that have already been driven. These effects, primarily consisting of uplift of previously driven piles, are checked as part of the field review of the pile driving operations.

Prior to the commencement of production pile driving, a limited number of indicator piles should be installed across the site. It is recommended that each indicator pile be dynamically load tested to evaluate pile stresses, hammer efficiency, pile load transfer, and end-of-driving criteria for end-bearing in the bedrock.

End-Bearing Caisson Foundations

For the building support, a caisson foundation could also be utilized. It is expected that the caissons could either end bearing on the bedrock surface or socketed into the bedrock.

For end bearing caissons, the bedrock surface should be free of deleterious materials, loose soils and approved by the geotechnical consultant. The caissons can be constructed by advancing casing through the overburden soil to the bedrock surface (by vibrator or augering in advance of the casing), and seating the casing in the bedrock. For end-bearing caissons, the following bearing resistance value can be used:

❑ ULS value of **2,000 kPa** can be used for clean sound shale interbedded with limestone. This value incorporates a geotechnical resistance value of 0.5.

The reinforcement for the caissons should be designed by the structural engineer. If caissons are to be left exposed during winter months, some form of frost protection will be required to prevent frost adhesion and jacking of the casings. Further guidelines can be provided on these measures at the time of construction, if required.

Rock Socketed Caisson Foundation

For socketed caissons, they can be constructed by advancing casing through the overburden soils to the bedrock surface (by vibrator or augering in advance of the casing), seating the casing in the bedrock and then continuing drilling to create a rock socket. Considering the expected difficulty in cleaning and verifying the cleanliness of the bases of the caissons, it is recommended that the capacity of the rock socketed caissons be based solely on side wall resistance or socket shear.

Based on this, a factored socket shear resistance at ULS value of **750 kPa/m** can be used for clean sound bedrock sockets extending up to 3 m below the clean, bedrock surface, free of significant fractures and voids. This value incorporates a geotechnical resistance value of 0.4.

It is recommended that the ratio of the length to diameter of the usable socket be at least 3 for the above-noted socket shear resistance values to be applicable. It is recommended that the specified concrete strength for the caissons be at least 35 MPa, in order that the socket shear values are not limited by the concrete strength.

The deformation modulus, E_r, of the sound intact rock material can be taken to be about 400 times the unconfined compressive strength, or approximately 16,000 MPa. However, considering the bedding planes and other discontinuities, the deformation modulus, E_m, of the rock mass is expected to be closer to about 100 times the unconfined compressive strength, or approximately 4,000 MPa.

Down Drag Loads

Due to the presence of the clay deposit below the subject site, and potential long-term degradation of organics within the clay deposit, down drag loads should be considered during the final design of the piles.

Based on the available subsurface information, it is expected that the piles will be driven through approximately 7 to 8 m of clay. Assigning an adhesion factor of 1.0 (as per the Canadian Foundation Engineering Manual), the clay can be taken to have an ultimate adhesion of 45 kPa against the sides of the piles.

The down drag load is effectively applied to each pile at the location of the “neutral plane,” where negative (i.e., down drag) skin friction becomes positive shaft resistance. In the case of the end-bearing piles at this site, the neutral plane will be located near the bedrock surface.

The down drag load is a structural pile capacity criterion and does not affect the geotechnical capacity of the piles. The structural axial capacity of the pile is governed by its structural strength at the neutral plane when subjected to the permanent load plus the down drag load. Transient live load is not to be included. At or below the pile cap, the structural strength of the embedded pile is determined as a short column subjected to the permanent load plus the transient live load, but down drag load is to be excluded.

At the depth of the neutral plane where the down drag load is applied, the pile structure is well confined. The 5th edition of the Canadian Foundation Engineering Manual recommends that the allowable structural axial capacity of piles at the neutral plane, for resisting permanent load plus the down drag load, can be determined by applying a factor of safety of 1.5 to the pile material strength (steel yield and concrete 28-day compressive strength).

Foundation Uplift Resistance

Uplift forces on the proposed foundations can be resisted using the dead weight of the concrete foundations, the weight of the materials overlying the foundations, and the submerged weight of the caissons, where utilized. Unit weights of materials are provided in Table 3.

For soil above the groundwater level, calculate using the “drained” unit weight and below groundwater level use the “effective” unit weight. Backfilled excavations in low permeability soils can be expected to fill with water and the use of the effective unit weights would be prudent if drainage of the anchor footings is not provided.

As noted above, piles and caissons would be located below the groundwater level, so the submerged, or effective, weight of the foundation will be available to contribute to the uplift resistance, if required. Considering that this is a reliable uplift resistance, and is really counteracting a dead load, it is our opinion that a resistance factor of 0.9 is applicable for the ULS weight component.

Should the foundation uplift resistance capacities be insufficient for the foundation uplift loads, rock anchors should be utilized. This is discussed further in Section 5.7. A sieve analysis and standard Proctor test should be completed on each of the fill materials proposed to obtain an accurate soil density to be expected, so the applicable unit weights can be estimated.

Table 4 - Geotechnical Parameters for Uplift and Lateral Resistance Design

Material Description	Internal Friction Angle (°) φ'	Unit Weigth (kN/m^3)		Friction Factor tan δ	Earth Pressure Coefficients		
		Drained (kN) γ_{dr}	Effective γ'		Active K_A	At-Rest K_O	Passive K_P
OPSS Granular A (Crushed Stone)	38	22.0	13.7	0.60	0.22	0.36	8.8
OPSS Granular B, Type II (Well-Graded Sand-Gravel)	36	21.5	13.4	0.55	0.26	0.41	7.5
In Situ Silty Clay	33	17.0	10.0	0.40	0.30	0.45	3.4

Notes:
- ❑ Properties for fill materials are for condition of 98% of standard Proctor maximum dry density.
- ❑ The earth pressure coefficients provided are for horizontal backfill profile.
- ❑ Passive pressure coefficients incorporate wall friction of 0.5 φ'.

Lateral Support

The bearing medium under footing-supported structures is required to be provided with adequate lateral support with respect to excavations and different foundation levels. Adequate lateral support is provided to a stiff silty clay bearing medium when a plane extending down and out from the bottom edge of the footing at a minimum of 1.5H:1V, passes only through in situ soil or engineered fill of the same or higher capacity as the soil.

Conventional Shallow Footings for Auxiliary Structures

The following bearing resistance values may be considered for auxiliary structures, such as for lightly loaded portions of the structure (i.e., canopies, parking garage wing-walls, etc.) and other potential external structures. These values are not considered applicable to the foundation support of the main structure at this time.

Strip footings, up to 2 m wide, and pad footings, up to 5 m wide, placed over an undisturbed, stiff brown silty clay bearing surface (and more than 1.5 m above the grey silty clay layer) can be designed using bearing resistance value at serviceability limit states (SLS) of **150 kPa** and a factored bearing resistance value at ultimate limit states (ULS) of **225 kPa**. A geotechnical resistance factor of 0.5 was applied to the reported bearing resistance values at ULS.

An undisturbed soil bearing surface consists of one from which all topsoil and deleterious materials, such as loose, frozen or disturbed soil, have been removed prior to the placement of concrete for footings. The bearing resistance value given for footings at SLS will be subjected to potential post construction total and differential settlements of 25 and 20 mm, respectively.

Bearing mediums are required to be provided with adequate lateral support with respect to excavations and different foundation levels. Above the groundwater level, adequate lateral support is provided to a stiff silty clay when a plane extending down and out from the bottom edge of the footing at a minimum of 1.5H:1V passes only through in situ soil or engineered fill.

Permissible Grade Raise Recommendations

While grade raises are not expected throughout the subject site due to the urban nature of the subject site and the building footprint taking up the majority of the subject site footprint, a permissible grade raise of **2.0 m** above existing ground surface is provided for design purposes for the subject site for areas beyond the deep foundation supported structure. It should be noted that a post-development long-term groundwater lowering of 0.5 m was conservatively applied to the permissible grade raise restriction.

5.4 Design for Earthquakes

Shear wave velocity testing was completed for the subject site to accurately determine the applicable seismic site designation for the proposed building according to the Ontario Building Code 2024. The shear wave velocity testing was completed by Paterson personnel. The results of the shear wave velocity test are provided in Figures 2 and 3 attached to the present report.

Field Program

The seismic array testing location was placed as presented in Drawing PG5043-2 - Test Hole Location Plan, attached to the present letter report. Paterson field personnel placed 18 horizontal 2.4 Hz. geophones mounted to the surface by means of two 75 mm ground spikes attached to the geophone land case. The geophones were spaced at 3 m intervals and connected by a geophone spread cable to a Geode 24 Channel seismograph.

The seismograph was also connected to a computer laptop and a hammer trigger switch attached to a 12-pound dead blow hammer. The hammer trigger switch sends a start signal to the seismograph.

The hammer is used to strike an I-Beam seated into the ground surface, which creates a polarized shear wave. The hammer shots are repeated between four (4) to eight (8) times at each shot location to improve signal to noise ratio.

The shot locations are also completed in forward and reverse directions (i.e.- striking both sides of the I-Beam seated parallel to the geophone array). The shot locations were located at 20, 4.5 and 3 m away from the first geophone and at the centre of the seismic array.

Data Processing and Interpretation

Interpretation for the shear wave velocity results was completed by Paterson personnel. Shear wave velocity measurement was made using reflection/refraction methods. The interpretation is performed by recovering arrival times from direct and refracted waves. The interpretation is repeated at each shot location to provide an average shear wave velocity, V_{s30}, of the upper 30 m profile. The layer intercept times, velocities from different layers, and critical distances are interpreted from the shear wave records to compute the bedrock depth at each location.

The bedrock velocity was interpreted using the main refractor wave velocity, which is considered a conservative estimate of the bedrock velocity due to the increasing quality of the bedrock with depth. It should be noted that as bedrock quality increases, the bedrock shear wave velocity also increases.

Based on our testing results, the average overburden shear wave velocity is **225 m/s**, while the bedrock shear wave velocity is **2,045 m/s**. Further, the testing results indicate the average overburden thickness to be approximately 20 m. Based on this, the V_{s30} was calculated using the standard equation for average shear wave velocity calculation from the Ontario Building Code 2024, as presented below.

$$V_{s30} = \frac{Depth_{of\ interest}(m)}{\left(\frac{Depth_{Layer1}(m)}{V_{S_{Layer1}}(m/s)} + \frac{Depth_{Layer2}(m)}{V_{S_{Layer2}}(m/s)}\right)}$$

$$V_{s30=} \frac{30\ m}{\left(\frac{20\ m}{225 m/s} + \frac{10\ m}{2{,}045\ m/s} +\right)}$$

$$V_{s30=}\ 320\ m/s$$

Based on the results of the shear wave velocity testing, the average shear wave velocity, V_{s30}, for foundations at the aforementioned site is **320 m/s**. Therefore, a **Site Designation X_{320}** is applicable for the design of the proposed building, as per OBC 2024.

The soils underlying the subject site are not considered susceptible to liquefaction or cyclic softening based on the methods outlined in the current edition of the Canadian Foundation Engineering Manual (specifically Section 18.6.3.7.3 and the methodologies presented by Idriss and Boulanger (2007, 2008, and 2014) referred in this section of the manual).

For cyclic softening, the cyclic resistance is based on the in-situ undrained shear strength values measured for the portion of the clay deposit that may be located below the proposed buildings' two basement levels. Further, the cyclic stresses are based on the seismic loading associated with the seismic site class identified in this section of this report. Based on this evaluation, the ratio of estimated cyclic resistance was estimated to be greater than the estimated cyclic stresses such that the proposed development is not considered susceptible to cyclic softening from a geotechnical perspective.

5.5 Basement Slab

With the removal of all topsoil and deleterious materials within the footprint of the proposed building, the native silty clay bearing surface, approved by Paterson personnel at the time of construction, is considered to be an acceptable subgrade surface on which to commence backfilling for the basement slab construction.

For a building founded on piles, it is recommended that the upper 200 mm of sub-slab fill consists of 19 mm clear crushed stone for areas located beyond the portions of the parking and access lane portions of the basement level (reference should be made to Section 5.7 of this report). All backfill material within the footprint of the proposed building should be placed in maximum 300 mm thick loose layers and compacted to at least 95% of its SPMDD.

A sub-floor drainage system, consisting of perforated drainage pipes connected to a positive outlet or to the building's sump pit, should be incorporated to drain any water that migrates within the sub-slab fill layer. The spacing of the sub-slab drainage pipes can be determined by Paterson during the design stage and prior to the pre-construction/tender phase, and as discussed in Section 6.1 of this report.

5.6 Basement Wall

There are several combinations of backfill materials and retained soils that could be applicable for the basement walls of the subject structure. However, the conditions can be well-represented by assuming the retained soil consists of a material with an angle of internal friction of 30 degrees and a dry unit weight of 20 kN/m^3.

Undrained conditions are anticipated (i.e. below the groundwater level). Therefore, the applicable effective unit weight of the retained soil can be taken as 13 kN/m^3, where applicable. A hydrostatic pressure should be added to the total static earth pressure when using the effective unit weight. However, if a full drainage system is being implemented and approved by Paterson at the time of construction, hydrostatic pressure can be omitted in the structural design.

Two distinct conditions, static and seismic, should be reviewed for design calculations. The parameters for design calculations for the two conditions are presented below.

Lateral Earth Pressures

The static horizontal earth pressure (P_o) can be calculated using a triangular earth pressure distribution equal to $K_o \cdot \gamma \cdot H$ where:

K_o = at-rest earth pressure coefficient of the applicable retained soil (0.5)
γ = unit weight of fill of the applicable retained soil (kN/m^3)
H = height of the wall (m)

An additional pressure having a magnitude equal to $K_o \cdot q$ and acting on the entire height of the wall should be added to the above diagram for any surcharge loading, q (kPa), that may be placed at ground surface adjacent to the wall. The surcharge pressure will only be applicable for static analyses and should not be used in conjunction with the seismic loading case.

Actual earth pressures could be higher than the “at-rest” case if care is not exercised during the compaction of the backfill materials to maintain a minimum separation of 0.3 m from the walls with the compaction equipment.

Seismic Earth Pressures

The total seismic force (P_{AE}) includes both the earth force component (P_o) and the seismic component (ΔP_{AE}).

The seismic earth force (ΔP_{AE}) can be calculated using $0.375 \cdot a_c \cdot \gamma \cdot H^2/g$ where:

a_c = $(1.45-a_{max}/g)a_{max}$
γ = unit weight of fill of the applicable retained soil (kN/m^3)
H = height of the wall (m)
g = gravity, 9.81 m/s^2

The peak ground acceleration, (a_{max}), for the subject site is 0.36 g according to OBC 2024. Note that the vertical seismic coefficient is assumed to be zero. The earth force component (P_o) under seismic conditions can be calculated using $P_o = 0.5\ K_o\ \gamma\ H^2$, where $K_o = 0.5$ for the soil conditions noted above.

The total earth force (P_{AE}) is considered to act at a height, h (m), from the base of the wall, where:

$$h = \{P_o \cdot (H/3) + \Delta P_{AE} \cdot (0.6 \cdot H)\} / P_{AE}$$

The earth forces calculated are unfactored. For the ULS case, the earth loads should be factored as live loads, as per the OBC 2024.

5.7 Pavement Design

Lowest Level of Underground Parking

For design purposes, it is recommended that the rigid pavement structure for the lowest underground parking level consist of Category C2, 32 MPa concrete at 28 days with air entrainment of 5 to 8%. The recommended rigid pavement structure is further presented in Table 5 below. The flexible pavement structure presented in Table 5 should be used for at-grade access lanes and heavy loading parking areas.

Table 5 – Recommended Rigid Pavement Structure – Lower Parking Level

Thickness (mm)	Material Description
150	**Exposure Class C2 – 32 MPa Concrete** (5 to 8% Air Entrainment)
300	**BASE –** OPSS Granular A Crushed Stone
SUBGRADE – Existing imported fill, or OPSS Granular B Type I or II material placed over bedrock.	

To control cracking due to shrinking of the concrete floor slab, it is recommended that strategically located saw cuts be used to create control joints within the concrete floor slab of the lower underground parking level. The control joints are generally recommended to be located at the center of the column lines and spaced at approximately 24 to 36 times the slab thickness (for example, a 0.15 m thick slab should have control joints spaced between 3.6 and 5.4 m).

The joints should be cut between 25 and 30% of the thickness of the concrete floor slab and completed as early as 4 hours after the concrete has been poured during warm temperatures and up to 12 hours during cooler temperatures.

Flexible Pavement Structure for Soil Subgrade

The recommended flexible pavement structures shown in Tables 6 and 7 would be applicable for portions of pavement supported directly upon soil subgrade.

Table 6 - Recommended Flexible Pavement Structure - Car Only Parking Areas

Thickness (mm)	Material Description
50	**Wear Course** - HL-3 or Superpave 12.5 Asphaltic Concrete
150	**BASE** - OPSS Granular A Crushed Stone
300	**SUBBASE** - OPSS Granular B Type II
SUBGRADE - Either in situ soil, fill or OPSS Granular B Type I or II material placed over in situ soil.	

Table 7 - Recommended Flexible Pavement Structure - Access Lanes and Heavy Truck Loading/Parking Areas

Thickness (mm)	Material Description
40	**Wear Course** - HL-3 or Superpave 12.5 Asphaltic Concrete
50	**Binder Course** - HL-8 or Superpave 19.0 Asphaltic Concrete
150	**BASE** - OPSS Granular A Crushed Stone
450	**SUBBASE** - OPSS Granular B Type II
SUBGRADE - Either in situ soil, fill or OPSS Granular B Type I or II material placed over in situ soil.	

Minimum Performance Graded (PG) 58-34 asphalt cement should be used for this project.

If soft spots develop in the subgrade during compaction or due to construction traffic, the affected areas should be excavated and replaced with OPSS Granular B Type II material. The pavement granular base and subbase should be placed in maximum 300 mm thick lifts and compacted to a minimum of 98% of the SPMDD using suitable vibratory equipment.

Pavement Joint Tie-in and Road-Cut Reinstatement

Where the proposed pavement structure meets an existing pavement structure, such as the existing road, or a road-cut is required to facilitate the connection to existing municipal services, the following recommendations should be followed:

- A 300 mm wide section of the existing asphalt roadway should be saw cut from the existing pavement edge to provide a sound surface to abut the proposed pavement structure.
- It is recommended to mill a 300 mm wide and 40 mm deep section of the existing asphalt at the saw cut edge.
- The proposed pavement structure subbase materials should be tapered no greater than 3H:1V to meet the existing subbase materials.
- Clean existing granular road subbase materials can be reused upon assessment by Paterson at the time of excavation (construction) as to its suitability.

Minimum Performance Graded (PG) 64-34 asphalt cement should be used for municipal right-of-way road-cut purposes. Cement asphalt should be compacted to a minimum average density of 93% and no more than 98%. The pavement granular base and subbase should be placed in maximum 300 mm thick lifts and compacted to a minimum of 100% of the material's SPMDD using suitable compaction equipment.

If soft spots develop in the subgrade during compaction or due to construction traffic, the affected areas should be excavated and replaced with OPSS Granular B Type II material. All reinstatement efforts must be undertaken in accordance with the City of Ottawa's *Standard Detail R10 – Standard Trench Reinstatement in Paved Surface* dated March 2023 and other pertinent details, specifications and requirements identified by the City of Ottawa.

All subgrade fill is recommended to be placed in 300 mm maximum thick loose lifts and compacted to a minimum of 95% of the materials SPMDD (or as otherwise advised by the City of Ottawa) and reviewed and approved by Paterson personnel at the time of construction. All reinstatement efforts are recommended to be reviewed and approved by Paterson at the time of construction.

6.0 Design and Construction Precautions

6.1 Foundation Drainage

The following recommendations may be considered for the architectural design of the building's foundation drainage system. Supplemental details, review of architectural design drawings and additional information may be provided by Paterson for these items for incorporation in the building design packages and associated tender documents during the detailed design and pre-construction phases. It is recommended that Paterson review all details associated with the foundation drainage system prior to tender.

Watertight Foundation/Groundwater Suppression Waterproofing Overview

It is recommended that a water-tight foundation waterproofing system be implemented for the proposed buildings foundation walls. This is recommended to mitigate potential long-term dewatering of the surrounding clay deposit that may occur if a conventional foundation drainage system with associated drainage at the footing level is considered. Additional measures are not required throughout the base of the excavation, however, a sub-slab drainage system is recommended to be provided throughout the basement level.

It is expected that foundations will be constructed in a blind-cast manner and against a wood-lagging and appropriately smooth and prepared surface (requirement to be confirmed by the manufacturer of the associated waterproofing membrane) to accept a waterproofing membrane. It is recommended that contractors provide approved manufacturer details for waterproofing at transition zones between lagging and soldier piles, at tieback locations and areas of pipe or conduit/utility penetrations.

For a blind-sided pour, a high-density polyethylene (HDPE) film and pressure sensitive adhesive face waterproofing membrane, such as *gcp PreProfe 275* or *Henry Blueskin Preseal 320* (or equivalent other reviewed and approved by Paterson) should be placed against the foundation walls between underside of footing level and extending to finished grade.

The membrane is recommended to overlap below the overlying perimeter foundation footprint by a minimum of 600 mm inwards towards the building footprint and from the face of the overlying foundation. This will allow construction to proceed without imposing groundwater lowering within the surrounding area of the proposed buildings in the short- and long-term conditions.

Where the foundation walls are constructed using a conventional double-sided pour, efforts will be required to be made to provide adequate bond conditions for the concrete foundation wall and proposed waterproofing membrane. Alternative membranes may be considered during the design phase, however, are not recommended to be coupled with a supplemental layer of composite foundation drainage board unless the drainage board layer may be permitted by the manufacturer to be non-drained (i.e., no connection to perimeter drainage system).

Additional Waterproofing Recommendations and Considerations

Where the membrane will be installed in contact with portions of the shoring system that would be removed in the future, it is recommended to install the membrane against a layer of pressure-treated timber sheathing, cement board or other flame-resistant material that will protect the membrane from being damaged by shoring removal efforts (anticipated to consist of the use of acetylene torches and excavation works). This should be completed for the entire height of the membrane that will be in contact with the pile shortening work.

Sufficient fasteners should be supplied to securely fasten the membrane to the substrate and promote a relatively taught application of the membrane to the substrate and minimize slack across the installed membrane. Sufficient manufacturer approved sealants and waterstops should be supplied to cover all protrusions, overlaps and fastener locations to provide an adequate seal from the intrusion of water onto and across the concrete foundation wall.

Where the membrane transitions from blind- to double-sided pours, it should not be folded onto the ground surface and restrained in place by the formwork since this will damage the integrity of the membrane and require remedial work/repairs.

If podium areas (i.e., foundation wall footprint does not align with overlying building footprint) will be considered in the design, additional details will be required to be prepared to mitigate the potential for water collected on the podium deck to migrate behind the waterproofing membrane. This should be verified by Paterson, the architect and associated design team members during the design stage.

A perimeter foundation drain may be implemented for the portion of the structure that would be backfilled and cast using a double-sided pour methodology. This would be beneficial for providing drainage to the upper backfill layers to minimize frost heave movement in frost-susceptible soils placed for backfill in the upper portion of the excavation. If considered, a perimeter drainage pipe consisting of a minimum 100 mm diameter corrugated perforated pipe outfit with a geosock placed no deeper than 2 m below finished grade and connected to a gravity outlet may be considered for this purpose.

Elevator Shaft and Additional Sub-Floor Structures Waterproofing

Elevator shafts located below the underslab drainage system should be provided full-depth positive-side waterproofing and provided with a PVC waterstop at the shaft wall and footing interface. This may be accomplished by the use of the above-noted waterproofing membranes and detailed by Paterson during the design stage.

Interior Perimeter and Underfloor Drainage

An interior perimeter and underfloor drainage system will be required to redirect water collected with the lowest level basement sub-slab fill layer to the building's sump pit(s) if it will not discharge to an exterior catch basin structure. For preliminary design purposes, it is recommended that several runs of underfloor drainage pipes should consist of minimum 100 mm diameter corrugated perforated plastic pipe sleeved with a geosock placed in a north-south and east-west orientation.

The invert of the system may be equivalent to the top of the perimeter pile cap and remain flat across its footprint provided a gravity connection to the dedicated sump pit is provided. The spacing of the underfloor drainage should be confirmed by Paterson during the design stage and at the time of excavation when water infiltration can be better assessed.

Foundation Backfill

Backfill against the exterior sides of the foundation walls should consist of free-draining, non-frost susceptible granular materials. The greater part of the site excavated materials will be frost susceptible and, as such, are not recommended for re-use as backfill against the foundation walls to preserve the integrity of the waterproofing membrane during freeze-thaw cycles.

Imported granular materials, such as clean sand or OPSS Granular B Type I granular material, should otherwise be used for this purpose. Provisions should be carried to adequately protect the waterproofing membrane during backfilling of double-sided pour areas.

Foundation backfill material should be compacted in maximum 300 mm thick loose lifts and with suitably sized vibratory compaction equipment (smooth-drum roller for crushed stone fill, sheepsfoot roller for soil fill).

Sidewalks and Walkways

Backfill material below sidewalk and walkway subgrade areas or other settlement sensitive structures which are not adjacent to the buildings should consist of free-draining, non-frost susceptible material. This material should be placed in maximum 300 mm thick loose lifts and compacted to at least 98% of its SPMDD under dry and above freezing conditions.

Finalized Drainage and Waterproofing Design

Paterson should be provided with the finalized structural and architectural drawings for the proposed building which includes the above noted recommendations. The design will provide recommendations for other items such as minimum pipe spacings, pipe mechanical connections below grade, transitioning from blind to double sided pours (if applicable), etc.

6.2 Protection of Footings Pile Caps and Grade Beams Against Frost Action

Footings, pile caps and grade beams of heated structures are required to be insulated against the deleterious effects of frost action. A minimum of 1.5 m of soil cover alone, or a minimum of 0.6 m of soil cover, in conjunction with foundation insulation, should be provided in this regard.

Exterior unheated footings, such as those for isolated exterior piers, are more prone to deleterious movement associated with frost action than the exterior walls of the structure proper and require additional protection, such as soil cover of 2.1 m or a combination of soil cover and foundation insulation.

Unheated structures, such as the access ramp, may be required to insulate against the deleterious effect of frost action. A minimum of 2.1 m of soil cover alone, or a minimum of 0.6 m of soil cover, in conjunction with foundation insulation, should be provided. The underground parking area should not require protection against frost action due to the founding depth.

Paterson should conduct a review of the ramp, footings located at the garage entrance and any footings not meeting the minimum frost cover requirements prior to construction to provide site specific frost protection/insulation recommendations.

6.3 Excavation Side Slopes

Temporary Side Slopes

The temporary excavation side slopes anticipated should either be excavated to acceptable slopes or retained by shoring systems from the beginning of the excavation until the structure is backfilled.

The excavation side slopes above the groundwater level extending to a maximum depth of 3 m should be cut back at 1H:1V or flatter. The flatter slope is required for excavation below groundwater level. The subsurface soil is considered to be mainly a Type 2 and Type 3 soil according to the Occupational Health and Safety Act and Regulations for Construction Projects. Excavated soil should not be stockpiled directly at the top of excavations and heavy equipment should maintain safe working distance from the excavation sides.

Slopes in excess of 3 m in height should be periodically inspected by the geotechnical consultant in order to detect if the slopes are exhibiting signs of distress.

Temporary Shoring

Temporary shoring may be required for the overburden soil to complete the required excavations where insufficient room is available for open cut methods. The shoring requirements designed by a structural engineer specializing in those works will depend on the depth of the excavation, the proximity of the adjacent structures and the elevation of the adjacent building foundations and underground services.

The design and implementation of these temporary systems will be the responsibility of the excavation contractor and their design team. Inspections and approval of the temporary system will also be the responsibility of the designer. Geotechnical information provided below is to assist the designer in completing a suitable and safe shoring system. The designer should take into account the impact of a significant precipitation event and designate design measures to ensure that a precipitation will not negatively impact the shoring system or soils supported by the system.

Any changes to the approved shoring design system should be reported immediately to the owner's structural design prior to implementation.

The temporary system could consist of soldier pile and lagging system or interlocking steel sheet piling. Any additional loading due to street traffic, construction equipment, adjacent structures and facilities, etc., should be included to the earth pressures described below. These systems could be cantilevered, anchored or braced.

Generally, it is expected that the shoring systems will be provided with tie-back rock anchors to ensure their stability. The shoring system is recommended to be adequately supported to resist toe failure and inspected to ensure that the sheet piles extend well below the excavation base. It should be noted if consideration is being given to utilizing a raker style support for the shoring system that lateral movements can occur and the structural engineer should ensure that the design selected minimizes these movements to tolerable levels.

The earth pressures acting on the shoring system may be calculated with the following parameters.

Table 8 - Soil Parameters for Calculating Earth Pressures Acting on Shoring System

Parameter	Value
Active Earth Pressure Coefficient (K_a)	0.33
Passive Earth Pressure Coefficient (K_p)	3
At-Rest Earth Pressure Coefficient (K_o)	0.5
Unit Weight (γ), kN/m^3	20
Submerged Unit Weight (γ'), kN/m^3	13

The active earth pressure should be calculated where wall movements are permissible while the at-rest pressure should be calculated if no movement is permissible. The dry unit weight should be calculated above the groundwater level while the effective unit weight should be calculated below the groundwater level.

The hydrostatic groundwater pressure should be included to the earth pressure distribution wherever the effective unit weight is calculated for earth pressures. If the groundwater level is lowered, the dry unit weight for the soil/bedrock should be calculated full weight, with no hydrostatic groundwater pressure component.

For design purposes, the minimum factor of safety of 1.5 should be calculated.

6.4 Pipe Bedding and Backfill

Bedding and backfill materials should be in accordance with the most recent Material Specifications and Standard Detail Drawings from the Department of Public Works and Services, Infrastructure Services Branch of the City of Ottawa.

The pipe bedding for sewer and water pipes should consist of at least 150 mm of OPSS Granular A material. The bedding layer thickness should be increased to a minimum thickness of 300 mm if the subgrade consists of grey silty clay. Clear stone is not recommended for use as bedding material. The material should be placed in maximum 300 mm thick lifts and compacted to a minimum of 99% of the SPMDD. The bedding material should extent at a minimum to the spring line of the pipe.

It should generally be possible to re-use the site materials above the cover material if the operations are carried out in dry weather conditions.

Where hard surface areas are considered above the trench backfill, the trench backfill material within the frost zone (about 1.8 m below finished grade) should consist of the soils exposed at the trench walls to minimize differential frost heaving. All trench backfill should be placed in maximum 300 mm thick loose lifts and compacted to a minimum of 95% of the SPMDD and is recommended to be reviewed and approved by Paterson field personnel at the time of construction.

Clay Seals

To reduce long-term lowering of the groundwater level at the subject site, clay seals should be provided in the service trenches. The seals should be at least 1.5 m long and should extend from trench wall to trench wall. Generally, the seals should extend from the frost line and fully penetrate the bedding, subbedding and cover material. The seals should consist of relatively dry and compactible brown or workable silty clay soil placed in maximum 225 mm thick loose layers and compacted to a minimum of 95% of the material's SPMDD. The clay seals should be placed at the site boundaries in the service trenches.

6.5 Groundwater Control

Groundwater Infiltration

It is anticipated that groundwater infiltration into the excavations should be low and controllable using open sumps. Pumping from open sumps should be sufficient to control the groundwater influx through the sides of shallow excavations.

The contractor should be prepared to direct water away from all bearing surfaces and subgrades, regardless of the source, to prevent disturbance to the founding medium.

Under the current regulations enacted by the Ministry of Environment, Conservation and Parks (MECP), any dewatering in excess of 50,000 L/day requires a registration on the Environmental Activity and Sector Registry (EASR), so long as that dewatering is related to construction. If the dewatering is not related to construction, a Permit to Take Water obtained from the MECP will be required.

In the event that an EASR is required to facilitate dewatering of the proposed development, a minimum of three to four weeks should be allotted for completion of the EASR registration and the Water Taking and Discharge Plan, to be prepared by a Qualified Person as stipulated under O.Reg. 63/16. Should a Permit to Take Water be required, a minimum of five to six months should be allotted for completion of the permit, due to the minimum review period imposed by the MECP.

Adverse Effects of Dewatering on Adjacent Properties

Since the proposed development will be founded below the long-term groundwater level, a groundwater suppression system has been recommended to mitigate the potential for long-term dewatering of the surrounding clay subsoils. Any long-term dewatering of the site will be minimal and should have no adverse effect to the surrounding buildings or structures. The short-term dewatering during the excavation program will be managed by the excavation contractor and is not anticipated to impact neighboring structures due to the low hydraulic conductivity of the in-situ soils and short-term nature of the temporary dewatering efforts.

6.6 Winter Construction

Precautions must be taken if winter construction is considered for this project.

Where excavations are completed in proximity to existing structures which may be adversely affected due to the freezing conditions. The subsurface conditions mostly consist of frost susceptible materials. In the presence of water and freezing conditions, ice could form within the soil mass. Heaving and settlement upon thawing could occur.

In particular, where a shoring system is constructed, the soil behind the shoring system will be subjected to freezing conditions and could result in heaving of the structure(s) placed within or above frozen soil. Provisions should be made in the contract documents to protect the walls of the excavations from freezing, if and where applicable.

The base of the excavations (especially where buildings will be founded upon soil) should be insulated from sub-zero temperatures immediately upon exposure and until such time as heat is adequately supplied to the buildings and the footings are protected with sufficient soil cover to prevent freezing at founding level.

In the event of construction during below zero temperatures, the founding stratum should be protected from freezing temperatures by the installation of straw, propane heaters and/or glycol lines and tarpaulins or other suitable means. The base of the excavations should be insulated from sub-zero temperatures immediately upon exposure and until such time as heat is adequately supplied to the building and the foundation is protected with sufficient soil cover to prevent freezing at founding level.

Trench excavations, foundation construction and pavement construction are difficult activities to complete during freezing conditions without introducing frost in the subgrade or in the excavation walls and bottoms. Precautions should be considered if such activities are to be completed during freezing conditions. Additional information could be provided, if required.

Under winter conditions, if snow and ice are present within imported fill below future basement slabs, then settlement of the fill should be expected and support of a future basement slab and/or temporary supports for slab pours will be negatively impacted and could undergo settlement during spring and summer time conditions. Paterson should complete periodic inspections during fill placement to ensure that snow and ice quantities are minimized in settlement-sensitive areas.

6.7 Corrosion Potential and Sulphate

One (1) sample was submitted for testing. The analytical test results of the soil sample indicate that the sulphate content is less than 0.01%. These results along with the chloride and pH value are indicative that Type 10 Portland cement (normal cement) would be appropriate for this site.

The results of the resistivity indicate the presence of a moderate environment for exposed ferrous metals at this site, which is typical of silty clay samples submitted for the subject area. It is anticipated that standard measures for corrosion protection are sufficient for services placed within the silty clay deposit.

6.8 Landscaping Considerations

Tree Planting Considerations

It is understood the proposed building will include two levels of underground parking. Given the depth of foundations proposed for the structure, it is expected that the support of the foundations derives from soil located below the depth that could be impacted by tree roots for trees located within the area of the subject site.

Therefore, foundation distress due to potential moisture depletion caused by trees is not expected to be experienced by the proposed structure. Since the proposed structure is not anticipated to be founded upon silty clay soils affected by the depth of root penetration, City approved trees within the subject site will not be subject to planting restrictions as based on the *City of Ottawa Tree Planting in Sensitive Marine Clay Soils (2017 Guidelines*) from a geotechnical perspective.

7.0 Recommendations

It is recommended that the following be carried out by Paterson once preliminary and future details of the proposed development have been prepared:

- ❑ Review preliminary and detailed grading, servicing, landscaping and structural plan(s) from a geotechnical perspective.
- ❑ Review of the geotechnical aspects of the excavation contractor's shoring design, if not design by Paterson, prior to construction, if applicable.
- ❑ Review of architectural plans pertaining to groundwater suppression system, underfloor drainage systems and waterproofing details for elevator shafts.

It is a requirement for the foundation design data provided herein to be applicable that a material testing and observation program be performed by the geotechnical consultant. The following aspects of the program should be performed by Paterson:

- ❑ Review and inspection of the installation of the foundation waterproofing and underfloor drainage systems.
- ❑ Dynamic load testing of select test piles prior to production piling.
- ❑ Observation of all bearing surfaces prior to the placement of concrete.
- ❑ Observation of driving and re-striking of all pile foundations.
- ❑ Sampling and testing of the concrete and fill materials.
- ❑ Periodic observation of the condition of unsupported excavation side slopes in excess of 3 m in height, if applicable.
- ❑ Observation of all subgrades prior to backfilling and follow-up field density tests to determine the level of compaction achieved.
- ❑ Field density tests to determine the level of compaction achieved.
- ❑ Sampling and testing of the bituminous concrete including mix design reviews.

A report confirming that these works have been conducted in general accordance with our recommendations could be issued upon the completion of a satisfactory inspection program by the geotechnical consultant.

All excess soil must be handled as per *Ontario Regulation 406/19: On-Site and Excess Soil Management*.

8.0 Statement of Limitations

The recommendations provided in the report are in accordance with Paterson's present understanding of the project. Paterson request permission to review the recommendations when the drawings and specifications are completed.

A geotechnical investigation is a limited sampling of a site. Should any conditions encountered during construction differ from the borehole locations, Paterson requests immediate notification to permit reassessment of the recommendations.

The recommendations provided should only be used by the design professionals associated with this project. The recommendations are not intended for contractors bidding on or constructing the project. The latter should evaluate the factual information provided in the report. The contractor should also determine the suitability and completeness for the intended construction schedule and methods. Additional testing may be required for the contractor's purpose.

The present report applies only to the project described in the report. The use of the report for purposes other than those described above or by person(s) other than Isatoria Limited Partnership or their agents is not authorized without review by Paterson.

Paterson Group Inc.



Fernanda Carozzi, PhD.Geop. Faisal I. Abou-Seido, P.Eng.

Report Distribution:

- ❑ Isatoria Limited Partnership (Email Copy)
- ❑ Paterson Group (1 Copy)

APPENDIX 1

SOIL PROFILE AND TEST DATA SHEETS

SYMBOLS AND TERMS

UNCONFINED COMPRESSIVE STRENGTH TESTING RESULTS

ANALYTICAL TESTING RESULTS

HYDRAULIC CONDUCTIVITY TEST RESULTS

SOIL PROFILE AND TEST DATA

Supplemental Geotechnical Investigation

178-200 Isabella Street, Ottawa, ON

COORD. SYS.: MTM ZONE 9 **EASTING:** 368160.61 **NORTHING:** 5030212.04 **ELEVATION:** 67.60

PROJECT: Proposed Multi-Storey Building

ADVANCED BY: CME-55 Low Clearance Drill

REMARKS: Datum: NAD1983 (Canada) Geoid: HT2-2010 **DATE:** August 4, 2026

FILE NO. : PG5043

HOLE NO. : BH 1-26

SAMPLE DESCRIPTION	STRATA PLOT	DEPTH (m)	SAMPLE TYPE AND NO.	SAMPLE RECOVERY (%)	SAMPLE N OR RQD	WATER CONTENT (%)	PEN. RESIST. (BLOWS/0.3m) DCPT (50mm DIA. CONE) 20 40 60 80 / REMOULDED SHEAR STRENGTH (kPa) ▲ UNDRAINED SHEAR STRENGTH (kPa) 20 40 60 80 / PL (%) WATER CONTENT (%) LL (%) 20 40 60 80	PIEZOMETER CONSTRUCTION	ELEVATION (m)
GROUND SURFACE									
FILL: Brown silty sand with topsoil and gravel		0	SS 1	25	2-2-7-5 9				67
1.45m [66.15m]		1	SS 2	4	5-2-1-2 3				66
OVERBURDEN		2	SS 3	42	2-1-1-1 2				65
		3							64
		4							63
		5							62
		6							61
		7							60
		8							59
		9							58
		10							57
		11							56
		12							55
		13							54
		14							53
		15							52
		16							

DISCLAIMER: THE DATA PRESENTED IN THIS SHEET IS THE PROPERTY OF PATERSON GROUP AND THE CLIENT FOR WHOM IT WAS PRODUCED. THIS SHEET SHOULD BE READ IN CONJUNCTION WITH ITS CORRESPONDING REPORT. PATERSON GROUP IS NOT RESPONSIBLE FOR THE UNAUTHORIZED USE OF THIS DATA.

P:/AutoCAD Drawings/Test Hole Data Files/PG50xx/PG5043/data.sqlite 2026-08-17, 16:17 Paterson_Template OA

SOIL PROFILE AND TEST DATA

Supplemental Geotechnical Investigation

178-200 Isabella Street, Ottawa, ON

COORD. SYS.: MTM ZONE 9 **EASTING:** 368160.61 **NORTHING:** 5030212.04 **ELEVATION:** 67.60

PROJECT: Proposed Multi-Storey Building

ADVANCED BY: CME-55 Low Clearance Drill

REMARKS: Datum: NAD1983 (Canada) Geoid: HT2-2010 **DATE:** August 4, 2026

FILE NO. : PG5043

HOLE NO. : BH 1-26

SAMPLE DESCRIPTION	STRATA PLOT	DEPTH (m)	SAMPLE TYPE AND NO.	SAMPLE RECOVERY (%)	SAMPLE N OR RQD	SAMPLE WATER CONTENT (%)	PEN. RESIST. (BLOWS/0.3m) DCPT (50mm DIA. CONE) 20 40 60 80 / REMOULDED SHEAR STRENGTH (kPa) ▲ UNDRAINED SHEAR STRENGTH (kPa) 20 40 60 80 / PL (%) WATER CONTENT (%) LL (%) 20 40 60 80	PIEZOMETER CONSTRUCTION	ELEVATION (m)
19.76m [47.84m]		16 17 18 19							51 50 49 48
BEDROCK: Good quality shale interbedded with limestone		20	RC 1	100	RQD 76				47
		21	RC 2	100	RQD 83				46
22.30m [45.30m]		22							45
End of Borehole		23 24 25 26 27 28 29 30 31 32							44 43 42 41 40 39 38 37 36

DISCLAIMER: THE DATA PRESENTED IN THIS SHEET IS THE PROPERTY OF PATERSON GROUP AND THE CLIENT FOR WHOM IT WAS PRODUCED. THIS SHEET SHOULD BE READ IN CONJUNCTION WITH ITS CORRESPONDING REPORT. PATERSON GROUP IS NOT RESPONSIBLE FOR THE UNAUTHORIZED USE OF THIS DATA.

P:/AutoCAD Drawings/Test Hole Data Files/PG50xx/PG5043/data.sqlite 2026-08-17, 16:17 Paterson_Template OA

SOIL PROFILE AND TEST DATA

Supplemental Geotechnical Investigation

178-200 Isabella Street, Ottawa, ON

COORD. SYS.: MTM ZONE 9 **EASTING:** 368163.28 **NORTHING:** 5030201.89 **ELEVATION:** 68.06

PROJECT: Proposed Multi-Storey Building

ADVANCED BY: CME-55 Low Clearance Drill

REMARKS: Datum: NAD1983 (Canada) Geoid: HT2-2010 **DATE:** August 4, 2026

FILE NO. : PG5043

HOLE NO. : BH 2-26

SAMPLE DESCRIPTION	STRATA PLOT	DEPTH (m)	SAMPLE: TYPE AND NO.	SAMPLE: RECOVERY (%)	SAMPLE: N OR RQD	SAMPLE: WATER CONTENT (%)	PEN. RESIST. (BLOWS/0.3m) DCPT (50mm DIA. CONE) 20 40 60 80 / REMOULDED SHEAR STRENGTH (kPa) / UNDRAINED SHEAR STRENGTH (kPa) 20 40 60 80 / PL (%) WATER CONTENT (%) LL (%) 20 40 60 80	PIEZOMETER CONSTRUCTION	ELEVATION (m)
GROUND SURFACE									
OVERBURDEN		0							68
		1							67
		2							66
		3							65
		4							64
		5							63
		6							62
		7							61
		8							60
		9							59
		10							58
		11							57
		12							56
		13							55
		14							54
		15							53
		16							

DISCLAIMER: THE DATA PRESENTED IN THIS SHEET IS THE PROPERTY OF PATERSON GROUP AND THE CLIENT FOR WHOM IT WAS PRODUCED. THIS SHEET SHOULD BE READ IN CONJUNCTION WITH ITS CORRESPONDING REPORT. PATERSON GROUP IS NOT RESPONSIBLE FOR THE UNAUTHORIZED USE OF THIS DATA.

P:/AutoCAD Drawings/Test Hole Data Files/PG50xx/PG5043/data.sqlite 2026-08-17, 16:17 Paterson_Template OA

SOIL PROFILE AND TEST DATA

Supplemental Geotechnical Investigation

178-200 Isabella Street, Ottawa, ON

COORD. SYS.: MTM ZONE 9 **EASTING:** 368163.28 **NORTHING:** 5030201.89 **ELEVATION:** 68.06

PROJECT: Proposed Multi-Storey Building

ADVANCED BY: CME-55 Low Clearance Drill

REMARKS: Datum: NAD1983 (Canada) Geoid: HT2-2010 **DATE:** August 4, 2026

FILE NO. : PG5043

HOLE NO. : BH 2-26

SAMPLE DESCRIPTION	STRATA PLOT	DEPTH (m)	SAMPLE TYPE AND NO.	SAMPLE RECOVERY (%)	SAMPLE N OR RQD	SAMPLE WATER CONTENT (%)	PEN. RESIST. (BLOWS/0.3m) DCPT (50mm DIA. CONE) 20 40 60 80 / REMOULDED SHEAR STRENGTH (kPa) ▲ UNDRAINED SHEAR STRENGTH (kPa) 20 40 60 80 / PL (%) WATER CONTENT (%) LL (%) 20 40 60 80	PIEZOMETER CONSTRUCTION	ELEVATION (m)
20.57m [47.49m]		16							52
BEDROCK: Excellent quality shale interbedded with limestone		17							51
		18							50
		19							49
		20							48
		21	RC 1	100	RQD 100				47
		22	RC 2	100	RQD 100				46
22.73m [45.33m]		23							45
End of Borehole		24							44
		25							43
		26							42
		27							41
		28							40
		29							39
		30							38
		31							37
		32							

DISCLAIMER: THE DATA PRESENTED IN THIS SHEET IS THE PROPERTY OF PATERSON GROUP AND THE CLIENT FOR WHOM IT WAS PRODUCED. THIS SHEET SHOULD BE READ IN CONJUNCTION WITH ITS CORRESPONDING REPORT. PATERSON GROUP IS NOT RESPONSIBLE FOR THE UNAUTHORIZED USE OF THIS DATA.

P:/AutoCAD Drawings/Test Hole Data Files/PG50xx/PG5043/data.sqlite 2026-08-17, 16:17 Paterson_Template OA

SOIL PROFILE AND TEST DATA

Supplemental Geotechnical Investigation

178-200 Isabella Street, Ottawa, ON

COORD. SYS.: MTM ZONE 9 **EASTING:** 368196.89 **NORTHING:** 5030209.08 **ELEVATION:** 68.36

PROJECT: Proposed Multi-Storey Building

ADVANCED BY: CME-55 Low Clearance Drill

REMARKS: Datum: NAD1983 (Canada) Geoid: HT2-2010 **DATE:** August 4, 2026

FILE NO. : PG5043

HOLE NO. : BH 3-26

SAMPLE DESCRIPTION	STRATA PLOT	DEPTH (m)	SAMPLE TYPE AND NO.	SAMPLE RECOVERY (%)	SAMPLE N OR RQD	SAMPLE WATER CONTENT (%)	PEN. RESIST. (BLOWS/0.3m) DCPT (50mm DIA. CONE) 20 40 60 80 / REMOULDED SHEAR STRENGTH (kPa) ▲ UNDRAINED SHEAR STRENGTH (kPa) 20 40 60 80 / PL (%) WATER CONTENT (%) LL (%) 20 40 60 80	PIEZOMETER CONSTRUCTION	ELEVATION (m)
GROUND SURFACE									
ASPHALT 0.05m [68.31m]		0	SS 1	29	2-6-4-4 10				68
FILL: Brown silty sand with crushed stone and gravel 1.45m [66.91m]		1	SS 2	46	5-5-8-5 13				67
OVERBURDEN		2	SS 3	100	4-2-3-3 5				66
		3	SS 4	100	2-1-1-1 2				65
		4							64
		5							63
		6							62
		7							61
		8							60
		9							59
		10							58
		11							57
		12							56
		13							55
		14							54
		15							53
		16							

DISCLAIMER: THE DATA PRESENTED IN THIS SHEET IS THE PROPERTY OF PATERSON GROUP AND THE CLIENT FOR WHOM IT WAS PRODUCED. THIS SHEET SHOULD BE READ IN CONJUNCTION WITH ITS CORRESPONDING REPORT. PATERSON GROUP IS NOT RESPONSIBLE FOR THE UNAUTHORIZED USE OF THIS DATA.

P:/AutoCAD Drawings/Test Hole Data Files/PG50xx/PG5043/data.sqlite 2026-08-17, 16:17 Paterson_Template OA

SOIL PROFILE AND TEST DATA

Supplemental Geotechnical Investigation

178-200 Isabella Street, Ottawa, ON

COORD. SYS.: MTM ZONE 9 **EASTING:** 368196.89 **NORTHING:** 5030209.08 **ELEVATION:** 68.36

PROJECT: Proposed Multi-Storey Building

ADVANCED BY: CME-55 Low Clearance Drill

REMARKS: Datum: NAD1983 (Canada) Geoid: HT2-2010 **DATE:** August 4, 2026

FILE NO. : PG5043

HOLE NO. : BH 3-26

SAMPLE DESCRIPTION	STRATA PLOT	DEPTH (m)	SAMPLE TYPE AND NO.	SAMPLE RECOVERY (%)	SAMPLE N OR RQD	SAMPLE WATER CONTENT (%)	PEN. RESIST. (BLOWS/0.3m) DCPT (50mm DIA. CONE) 20 40 60 80 / REMOULDED SHEAR STRENGTH (kPa) ▲ UNDRAINED SHEAR STRENGTH (kPa) 20 40 60 80 / PL (%) WATER CONTENT (%) LL (%) 20 40 60 80	PIEZOMETER CONSTRUCTION	ELEVATION (m)
- Boulders at 17.07 m depth		16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32	RC 1	36	RQD 0				52 51 50 49 48 47 46 45 44 43 42 41 40 39 38 37
			RC 2	53	RQD 42				
22.35m [46.01m]									
BEDROCK: Excellent quality shale interbedded with limestone			RC 3	88	RQD 100				
			RC 4	100	RQD 95				
25.68m [42.68m]									
End of Borehole									

DISCLAIMER: THE DATA PRESENTED IN THIS SHEET IS THE PROPERTY OF PATERSON GROUP AND THE CLIENT FOR WHOM IT WAS PRODUCED. THIS SHEET SHOULD BE READ IN CONJUNCTION WITH ITS CORRESPONDING REPORT. PATERSON GROUP IS NOT RESPONSIBLE FOR THE UNAUTHORIZED USE OF THIS DATA.

P:/AutoCAD Drawings/Test Hole Data Files/PG50xx/PG5043/data.sqlite 2026-08-17, 16:17 Paterson_Template OA

SOIL PROFILE AND TEST DATA

Supplemental Geotechnical Investigation

178-200 Isabella Street, Ottawa, ON

COORD. SYS.: MTM ZONE 9 **EASTING:** 368147.48 **NORTHING:** 5030193.15 **ELEVATION:** 68.16

PROJECT: Proposed Multi-Storey Building

ADVANCED BY: CME-55 Low Clearance Drill

REMARKS: Datum: NAD1983 (Canada) Geoid: HT2-2010 **DATE:** August 4, 2026

FILE NO. : PG5043

HOLE NO. : BH 4-26

SAMPLE DESCRIPTION	STRATA PLOT	DEPTH (m)	SAMPLE TYPE AND NO.	SAMPLE RECOVERY (%)	SAMPLE N OR RQD	SAMPLE WATER CONTENT (%)	PEN. RESIST. (BLOWS/0.3m) DCPT (50mm DIA. CONE) 20 40 60 80	REMOULDED SHEAR STRENGTH (kPa) / UNDRAINED SHEAR STRENGTH (kPa) 20 40 60 80	PL (%) WATER CONTENT (%) LL (%) 20 40 60 80	MONITORING WELL CONSTRUCTION	ELEVATION (m)
GROUND SURFACE											68
ASPHALT 0.05m [68.11m]											
FILL: Loose, brown silty sand with silty clay and gravel 1.45m [66.71m]		1	SS 1	12	4-7-3-2 10						67
			SS 2	50	2-2-2-3 4						
OVERBURDEN		2	SS 3	100	1-4-4-4 8						66
		3									65
		4									64
		5								4.58m 5.53 m 2026-08-17	63
		6								6.10m	62
		7									61
		8									60
		9									59
		10									58
		11									57
		12									56
13.11m [55.05m] Dynamic Cone Penetration Test commenced at 13.11 m depth		13					8				55
		14					9 7 6	45			54
		15					13	45			53
		16					20 22				

DISCLAIMER: THE DATA PRESENTED IN THIS SHEET IS THE PROPERTY OF PATERSON GROUP AND THE CLIENT FOR WHOM IT WAS PRODUCED. THIS SHEET SHOULD BE READ IN CONJUNCTION WITH ITS CORRESPONDING REPORT. PATERSON GROUP IS NOT RESPONSIBLE FOR THE UNAUTHORIZED USE OF THIS DATA.

P:/AutoCAD Drawings/Test Hole Data Files/PG50xx/PG5043/data.sqlite 2026-08-17, 16:17 Paterson_Template OA

SOIL PROFILE AND TEST DATA

Supplemental Geotechnical Investigation

178-200 Isabella Street, Ottawa, ON

COORD. SYS.: MTM ZONE 9 **EASTING:** 368147.48 **NORTHING:** 5030193.15 **ELEVATION:** 68.16

PROJECT: Proposed Multi-Storey Building

ADVANCED BY: CME-55 Low Clearance Drill

REMARKS: Datum: NAD1983 (Canada) Geoid: HT2-2010 **DATE:** August 4, 2026

FILE NO. : PG5043

HOLE NO. : BH 4-26

SAMPLE DESCRIPTION	STRATA PLOT	DEPTH (m)	SAMPLE: TYPE AND NO.	SAMPLE: RECOVERY (%)	SAMPLE: N OR RQD	SAMPLE: WATER CONTENT (%)	PEN. RESIST. (BLOWS/0.3m) DCPT (50mm DIA. CONE) 20 40 60 80 / REMOULDED SHEAR STRENGTH (kPa) / UNDRAINED SHEAR STRENGTH (kPa) 20 40 60 80 / PL (%) WATER CONTENT (%) LL (%) 20 40 60 80	MONITORING WELL CONSTRUCTION	ELEVATION (m)
17.53m [50.63m]		16					33		52
End of Borehole		17					43		51
Practical refusal to DCPT at 17.53 m depth		18					61		50
(GWL at 5.53 m depth - August 17, 2026)		19					45		49
		20					44		48
		21							47
		22							46
		23							45
		24							44
		25							43
		26							42
		27							41
		28							40
		29							39
		30							38
		31							37
		32					100		

DISCLAIMER: THE DATA PRESENTED IN THIS SHEET IS THE PROPERTY OF PATERSON GROUP AND THE CLIENT FOR WHOM IT WAS PRODUCED. THIS SHEET SHOULD BE READ IN CONJUNCTION WITH ITS CORRESPONDING REPORT. PATERSON GROUP IS NOT RESPONSIBLE FOR THE UNAUTHORIZED USE OF THIS DATA.

P:/AutoCAD Drawings/Test Hole Data Files/PG50xx/PG5043/data.sqlite 2026-08-17, 16:17 Paterson_Template OA

SOIL PROFILE AND TEST DATA

Supplemental Geotechnical Investigation

178-200 Isabella Street, Ottawa, ON

COORD. SYS.: MTM ZONE 9 **EASTING:** 368182.53 **NORTHING:** 5030202.00 **ELEVATION:** 68.39

PROJECT: Proposed Multi-Storey Building

ADVANCED BY: CME-55 Low Clearance Drill

REMARKS: Datum: NAD1983 (Canada) Geoid: HT2-2010 **DATE:** August 5, 2026

FILE NO. : PG5043

HOLE NO. : BH 5-26

SAMPLE DESCRIPTION	STRATA PLOT	DEPTH (m)	SAMPLE: TYPE AND NO.	SAMPLE: RECOVERY (%)	SAMPLE: N OR RQD	SAMPLE: WATER CONTENT (%)	PEN. RESIST. (BLOWS/0.3m) DCPT (50mm DIA. CONE) 20 40 60 80 / REMOULDED SHEAR STRENGTH (kPa) / UNDRAINED SHEAR STRENGTH (kPa) 20 40 60 80 / PL (%) WATER CONTENT (%) LL (%) 20 40 60 80	PIEZOMETER CONSTRUCTION	ELEVATION (m)
GROUND SURFACE									
Dynamic Cone Penetration Test commenced at Ground Surface and pushed to 14.33 m depth		0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16					18 13 17 12 13		68 67 66 65 64 63 62 61 60 59 58 57 56 55 54 53

DISCLAIMER: THE DATA PRESENTED IN THIS SHEET IS THE PROPERTY OF PATERSON GROUP AND THE CLIENT FOR WHOM IT WAS PRODUCED. THIS SHEET SHOULD BE READ IN CONJUNCTION WITH ITS CORRESPONDING REPORT. PATERSON GROUP IS NOT RESPONSIBLE FOR THE UNAUTHORIZED USE OF THIS DATA.

P:/AutoCAD Drawings/Test Hole Data Files/PG50xx/PG5043/data.sqlite 2026-08-17, 16:17 Paterson_Template OA

SOIL PROFILE AND TEST DATA

Supplemental Geotechnical Investigation

178-200 Isabella Street, Ottawa, ON

COORD. SYS.: MTM ZONE 9 **EASTING:** 368182.53 **NORTHING:** 5030202.00 **ELEVATION:** 68.39

PROJECT: Proposed Multi-Storey Building

ADVANCED BY: CME-55 Low Clearance Drill

REMARKS: Datum: NAD1983 (Canada) Geoid: HT2-2010 **DATE:** August 5, 2026

FILE NO. : PG5043

HOLE NO. : BH 5-26

SAMPLE DESCRIPTION	STRATA PLOT	DEPTH (m)	SAMPLE: TYPE AND NO.	SAMPLE: RECOVERY (%)	SAMPLE: N OR RQD	SAMPLE: WATER CONTENT (%)	PEN. RESIST. (BLOWS/0.3m) DCPT (50mm DIA. CONE) 20 40 60 80 / REMOULDED SHEAR STRENGTH (kPa) / UNDRAINED SHEAR STRENGTH (kPa) 20 40 60 80 / PL (%) WATER CONTENT (%) LL (%) 20 40 60 80	PIEZOMETER CONSTRUCTION	ELEVATION (m)
20.04m [48.35m]		16					13		52
End of Borehole		17					75		51
Practical refusal to DCPT at 20.04 m depth		18					55		50
		19					40		49
		20					40		48
		21					26		47
		22					31		46
		23					45		45
		24					40		44
		25					47		43
		26					88		42
		27					75		41
		28					84		40
		29					100		39
		30							38
		31							37
		32							

DISCLAIMER: THE DATA PRESENTED IN THIS SHEET IS THE PROPERTY OF PATERSON GROUP AND THE CLIENT FOR WHOM IT WAS PRODUCED. THIS SHEET SHOULD BE READ IN CONJUNCTION WITH ITS CORRESPONDING REPORT. PATERSON GROUP IS NOT RESPONSIBLE FOR THE UNAUTHORIZED USE OF THIS DATA.

P:/AutoCAD Drawings/Test Hole Data Files/PG50xx/PG5043/data.sqlite 2026-08-17, 16:17 Paterson_Template OA

SOIL PROFILE AND TEST DATA

Supplemental Geotechnical Investigation

178-200 Isabella Street, Ottawa, ON

COORD. SYS.: MTM ZONE 9 **EASTING:** 368163.81 **NORTHING:** 5030191.63 **ELEVATION:** 68.29

PROJECT: Proposed Multi-Storey Building

ADVANCED BY: CME-55 Low Clearance Drill

REMARKS: Datum: NAD1983 (Canada) Geoid: HT2-2010 **DATE:** August 6, 2026

FILE NO. : PG5043

HOLE NO. : BH 6-26

SAMPLE DESCRIPTION	STRATA PLOT	DEPTH (m)	SAMPLE: TYPE AND NO.	SAMPLE: RECOVERY (%)	SAMPLE: N OR RQD	SAMPLE: WATER CONTENT (%)	PEN. RESIST. (BLOWS/0.3m) DCPT (50mm DIA. CONE) 20 40 60 80 / REMOULDED SHEAR STRENGTH (kPa) / UNDRAINED SHEAR STRENGTH (kPa) 20 40 60 80 / PL (%) WATER CONTENT (%) LL (%) 20 40 60 80	PIEZOMETER CONSTRUCTION	ELEVATION (m)
GROUND SURFACE									
Dynamic Cone Penetration Test commenced at Ground Surface and pushed to 13.41 m depth		0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16					8 58 22 19 17 17 21 37		68 67 66 65 64 63 62 61 60 59 58 57 56 55 54 53

DISCLAIMER: THE DATA PRESENTED IN THIS SHEET IS THE PROPERTY OF PATERSON GROUP AND THE CLIENT FOR WHOM IT WAS PRODUCED. THIS SHEET SHOULD BE READ IN CONJUNCTION WITH ITS CORRESPONDING REPORT. PATERSON GROUP IS NOT RESPONSIBLE FOR THE UNAUTHORIZED USE OF THIS DATA.

P:/AutoCAD Drawings/Test Hole Data Files/PG50xx/PG5043/data.sqlite 2026-08-17, 16:17 Paterson_Template OA

SOIL PROFILE AND TEST DATA

Supplemental Geotechnical Investigation

178-200 Isabella Street, Ottawa, ON

COORD. SYS.: MTM ZONE 9 **EASTING:** 368163.81 **NORTHING:** 5030191.63 **ELEVATION:** 68.29

PROJECT: Proposed Multi-Storey Building

ADVANCED BY: CME-55 Low Clearance Drill

REMARKS: Datum: NAD1983 (Canada) Geoid: HT2-2010 **DATE:** August 6, 2026

FILE NO. : PG5043

HOLE NO. : BH 6-26

SAMPLE DESCRIPTION	STRATA PLOT	DEPTH (m)	SAMPLE: TYPE AND NO.	SAMPLE: RECOVERY (%)	SAMPLE: N OR RQD	SAMPLE: WATER CONTENT (%)	PEN. RESIST. (BLOWS/0.3m) DCPT (50mm DIA. CONE)	REMOULDED SHEAR STRENGTH (kPa) / UNDRAINED SHEAR STRENGTH (kPa)	PL (%) / WATER CONTENT (%) / LL (%)	PIEZOMETER CONSTRUCTION	ELEVATION (m)
20.65m [47.64m]		16					23				52
End of Borehole		17					22				51
Practical refusal to DCPT at 20.65 m depth		18					29				50
		19					48				49
		20					64				48
		21					46				47
		22					46				46
		23					53				45
		24					47				44
		25					60				43
		26					62				42
		27					70				41
		28					69				40
		29					80				39
		30					85				38
		31					100				37
		32									

DISCLAIMER: THE DATA PRESENTED IN THIS SHEET IS THE PROPERTY OF PATERSON GROUP AND THE CLIENT FOR WHOM IT WAS PRODUCED. THIS SHEET SHOULD BE READ IN CONJUNCTION WITH ITS CORRESPONDING REPORT. PATERSON GROUP IS NOT RESPONSIBLE FOR THE UNAUTHORIZED USE OF THIS DATA.

P:/AutoCAD Drawings/Test Hole Data Files/PG50xx/PG5043/data.sqlite 2026-08-17, 16:17 Paterson_Template OA

SOIL PROFILE AND TEST DATA

Supplemental Geotechnical Investigation

178-200 Isabella Street, Ottawa, ON

COORD. SYS.: MTM ZONE 9 **EASTING:** 368135.10 **NORTHING:** 5030187.02 **ELEVATION:** 68.14

PROJECT: Proposed Multi-Storey Building

ADVANCED BY: CME-55 Low Clearance Drill

REMARKS: Datum: NAD1983 (Canada) Geoid: HT2-2010 **DATE:** August 6, 2026

FILE NO. : PG5043

HOLE NO. : BH 7-26

SAMPLE DESCRIPTION	STRATA PLOT	DEPTH (m)	SAMPLE: TYPE AND NO.	SAMPLE: RECOVERY (%)	SAMPLE: N OR RQD	SAMPLE: WATER CONTENT (%)	PEN. RESIST. (BLOWS/0.3m) DCPT (50mm DIA. CONE) 20 40 60 80 / REMOULDED SHEAR STRENGTH (kPa) / UNDRAINED SHEAR STRENGTH (kPa) 20 40 60 80 / PL (%) WATER CONTENT (%) LL (%) 20 40 60 80	PIEZOMETER CONSTRUCTION	ELEVATION (m)
GROUND SURFACE									
Dynamic Cone Penetration Test commenced at Ground Surface and pushed to 15.85 m depth		1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16							68 67 66 65 64 63 62 61 60 59 58 57 56 55 54 53

DISCLAIMER: THE DATA PRESENTED IN THIS SHEET IS THE PROPERTY OF PATERSON GROUP AND THE CLIENT FOR WHOM IT WAS PRODUCED. THIS SHEET SHOULD BE READ IN CONJUNCTION WITH ITS CORRESPONDING REPORT. PATERSON GROUP IS NOT RESPONSIBLE FOR THE UNAUTHORIZED USE OF THIS DATA.

P:/AutoCAD Drawings/Test Hole Data Files/PG50xx/PG5043/data.sqlite 2026-08-17, 16:17 Paterson_Template OA

SOIL PROFILE AND TEST DATA

Supplemental Geotechnical Investigation

178-200 Isabella Street, Ottawa, ON

COORD. SYS.: MTM ZONE 9 **EASTING:** 368135.10 **NORTHING:** 5030187.02 **ELEVATION:** 68.14

PROJECT: Proposed Multi-Storey Building

ADVANCED BY: CME-55 Low Clearance Drill

REMARKS: Datum: NAD1983 (Canada) Geoid: HT2-2010 **DATE:** August 6, 2026

FILE NO. : PG5043

HOLE NO. : BH 7-26

SAMPLE DESCRIPTION	STRATA PLOT	DEPTH (m)	SAMPLE: TYPE AND NO.	SAMPLE: RECOVERY (%)	SAMPLE: N OR RQD	SAMPLE: WATER CONTENT (%)	PEN. RESIST. (BLOWS/0.3m) DCPT (50mm DIA. CONE) 20 40 60 80 / △ REMOULDED SHEAR STRENGTH (kPa) / ▲ UNDRAINED SHEAR STRENGTH (kPa) 20 40 60 80 / PL (%) WATER CONTENT (%) LL (%) 20 40 60 80	PIEZOMETER CONSTRUCTION	ELEVATION (m)
19.48m [48.66m]		16					36		52
End of Borehole		17					36		51
		18					34		50
Practical refusal to DCPT at 19.48 m depth		19					30		49
		20					40		48
		21					40		47
		22					33		46
		23					31		45
		24					42		44
		25					73		43
		26					80		42
		27					100		41
		28							40
		29							39
		30							38
		31							37
		32							

DISCLAIMER: THE DATA PRESENTED IN THIS SHEET IS THE PROPERTY OF PATERSON GROUP AND THE CLIENT FOR WHOM IT WAS PRODUCED. THIS SHEET SHOULD BE READ IN CONJUNCTION WITH ITS CORRESPONDING REPORT. PATERSON GROUP IS NOT RESPONSIBLE FOR THE UNAUTHORIZED USE OF THIS DATA.

P:/AutoCAD Drawings/Test Hole Data Files/PG50xx/PG5043/data.sqlite 2026-08-17, 16:17 Paterson_Template OA

SOIL PROFILE AND TEST DATA

Supplemental Geotechnical Investigation

178-200 Isabella Street, Ottawa, ON

COORD. SYS.: MTM ZONE 9 **EASTING:** 368145.01 **NORTHING:** 5030203.18 **ELEVATION:** 67.56

PROJECT: Proposed Multi-Storey Building

ADVANCED BY: CME-55 Low Clearance Drill

REMARKS: Datum: NAD1983 (Canada) Geoid: HT2-2010 **DATE:** August 6, 2026

FILE NO. : PG5043

HOLE NO. : BH 8-26

SAMPLE DESCRIPTION	STRATA PLOT	DEPTH (m)	SAMPLE TYPE AND NO.	SAMPLE RECOVERY (%)	SAMPLE N OR RQD	SAMPLE WATER CONTENT (%)	PEN. RESIST. (BLOWS/0.3m) DCPT (50mm DIA. CONE) 20 40 60 80 / REMOULDED SHEAR STRENGTH (kPa) / UNDRAINED SHEAR STRENGTH (kPa) 20 40 60 80 / PL (%) WATER CONTENT (%) LL (%) 20 40 60 80	PIEZOMETER CONSTRUCTION	ELEVATION (m)
GROUND SURFACE									
Dynamic Cone Penetration Test commenced at Ground Surface and pushed to 14.91 m depth		0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16					38 43 45		67 66 65 64 63 62 61 60 59 58 57 56 55 54 53 52
14.91m [52.65m]									

DISCLAIMER: THE DATA PRESENTED IN THIS SHEET IS THE PROPERTY OF PATERSON GROUP AND THE CLIENT FOR WHOM IT WAS PRODUCED. THIS SHEET SHOULD BE READ IN CONJUNCTION WITH ITS CORRESPONDING REPORT. PATERSON GROUP IS NOT RESPONSIBLE FOR THE UNAUTHORIZED USE OF THIS DATA.

P:/AutoCAD Drawings/Test Hole Data Files/PG50xx/PG5043/data.sqlite 2026-08-17, 16:17 Paterson_Template OA

SOIL PROFILE AND TEST DATA

Supplemental Geotechnical Investigation

178-200 Isabella Street, Ottawa, ON

COORD. SYS.: MTM ZONE 9 **EASTING:** 368145.01 **NORTHING:** 5030203.18 **ELEVATION:** 67.56

PROJECT: Proposed Multi-Storey Building

ADVANCED BY: CME-55 Low Clearance Drill

REMARKS: Datum: NAD1983 (Canada) Geoid: HT2-2010 **DATE:** August 6, 2026

FILE NO. : PG5043

HOLE NO. : BH 8-26

SAMPLE DESCRIPTION	STRATA PLOT	DEPTH (m)	SAMPLE: TYPE AND NO.	SAMPLE: RECOVERY (%)	SAMPLE: N OR RQD	SAMPLE: WATER CONTENT (%)	PEN. RESIST. (BLOWS/0.3m) DCPT (50mm DIA. CONE) 20 40 60 80 / REMOULDED SHEAR STRENGTH (kPa) / UNDRAINED SHEAR STRENGTH (kPa) 20 40 60 80 / PL (%) WATER CONTENT (%) LL (%) 20 40 60 80	PIEZOMETER CONSTRUCTION	ELEVATION (m)
17.07m [50.49m]		16					42, 45, 46, 100		51
End of Borehole		17							50
Practical refusal to DCPT at 17.07 m depth		18							49
		19							48
		20							47
		21							46
		22							45
		23							44
		24							43
		25							42
		26							41
		27							40
		28							39
		29							38
		30							37
		31							36
		32							

DISCLAIMER: THE DATA PRESENTED IN THIS SHEET IS THE PROPERTY OF PATERSON GROUP AND THE CLIENT FOR WHOM IT WAS PRODUCED. THIS SHEET SHOULD BE READ IN CONJUNCTION WITH ITS CORRESPONDING REPORT. PATERSON GROUP IS NOT RESPONSIBLE FOR THE UNAUTHORIZED USE OF THIS DATA.

P:/AutoCAD Drawings/Test Hole Data Files/PG50xx/PG5043/data.sqlite 2026-08-17, 16:17 Paterson_Template OA

SOIL PROFILE AND TEST DATA

Supplemental Geotechnical Investigation

178-200 Isabella Street, Ottawa, ON

COORD. SYS.: MTM ZONE 9 **EASTING:** 368175.79 **NORTHING:** 5030220.42 **ELEVATION:** 67.56

PROJECT: Proposed Multi-Storey Building

ADVANCED BY: CME-55 Low Clearance Drill

REMARKS: Datum: NAD1983 (Canada) Geoid: HT2-2010 **DATE:** August 6, 2026

FILE NO. : PG5043

HOLE NO. : BH 9-26

SAMPLE DESCRIPTION	STRATA PLOT	DEPTH (m)	SAMPLE: TYPE AND NO.	SAMPLE: RECOVERY (%)	SAMPLE: N OR RQD	SAMPLE: WATER CONTENT (%)	PEN. RESIST. (BLOWS/0.3m) DCPT (50mm DIA. CONE) 20 40 60 80 / REMOULDED SHEAR STRENGTH (kPa) / UNDRAINED SHEAR STRENGTH (kPa) 20 40 60 80 / PL (%) WATER CONTENT (%) LL (%) 20 40 60 80	PIEZOMETER CONSTRUCTION	ELEVATION (m)
GROUND SURFACE									
Dynamic Cone Penetration Test commenced at Ground Surface and pushed to 13.14 m depth		0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16					33 35 15 16 17 15 34 32		67 66 65 64 63 62 61 60 59 58 57 56 55 54 53 52

DISCLAIMER: THE DATA PRESENTED IN THIS SHEET IS THE PROPERTY OF PATERSON GROUP AND THE CLIENT FOR WHOM IT WAS PRODUCED. THIS SHEET SHOULD BE READ IN CONJUNCTION WITH ITS CORRESPONDING REPORT. PATERSON GROUP IS NOT RESPONSIBLE FOR THE UNAUTHORIZED USE OF THIS DATA.

P:/AutoCAD Drawings/Test Hole Data Files/PG50xx/PG5043/data.sqlite 2026-08-17, 16:17 Paterson_Template OA

SOIL PROFILE AND TEST DATA

Supplemental Geotechnical Investigation

178-200 Isabella Street, Ottawa, ON

COORD. SYS.: MTM ZONE 9 **EASTING:** 368175.79 **NORTHING:** 5030220.42 **ELEVATION:** 67.56

PROJECT: Proposed Multi-Storey Building

ADVANCED BY: CME-55 Low Clearance Drill

REMARKS: Datum: NAD1983 (Canada) Geoid: HT2-2010 **DATE:** August 6, 2026

FILE NO. : PG5043

HOLE NO. : BH 9-26

SAMPLE DESCRIPTION	STRATA PLOT	DEPTH (m)	SAMPLE: TYPE AND NO.	SAMPLE: RECOVERY (%)	SAMPLE: N OR RQD	SAMPLE: WATER CONTENT (%)	PEN. RESIST. (BLOWS/0.3m) DCPT (50mm DIA. CONE) 20 40 60 80 / REMOULDED SHEAR STRENGTH (kPa) ▲ UNDRAINED SHEAR STRENGTH (kPa) 20 40 60 80 / PL (%) WATER CONTENT (%) LL (%) 20 40 60 80	PIEZOMETER CONSTRUCTION	ELEVATION (m)
19.20m [48.36m]		16					24		51
End of Borehole		17					22		50
		18					25		49
Practical refusal to DCPT at 19.20 m depth		19					21		48
		20					20		47
		21					27		46
		22					27		45
		23					31		44
		24					43		43
		25					86		42
		26					100		41
		27							40
		28							39
		29							38
		30							37
		31							36
		32							

DISCLAIMER: THE DATA PRESENTED IN THIS SHEET IS THE PROPERTY OF PATERSON GROUP AND THE CLIENT FOR WHOM IT WAS PRODUCED. THIS SHEET SHOULD BE READ IN CONJUNCTION WITH ITS CORRESPONDING REPORT. PATERSON GROUP IS NOT RESPONSIBLE FOR THE UNAUTHORIZED USE OF THIS DATA.

P:/AutoCAD Drawings/Test Hole Data Files/PG50xx/PG5043/data.sqlite 2026-08-17, 16:17 Paterson_Template OA

SOIL PROFILE AND TEST DATA

Supplemental Geotechnical Investigation

178-200 Isabella Street, Ottawa, ON

COORD. SYS.: MTM ZONE 9 **EASTING:** 368187.77 **NORTHING:** 5030214.47 **ELEVATION:** 67.91

PROJECT: Proposed Multi-Storey Building

ADVANCED BY: CME-55 Low Clearance Drill

REMARKS: Datum: NAD1983 (Canada) Geoid: HT2-2010 **DATE:** August 6, 2026

FILE NO. : **PG5043**

HOLE NO. : **BH10-26**

SAMPLE DESCRIPTION	STRATA PLOT	DEPTH (m)	SAMPLE: TYPE AND NO.	SAMPLE: RECOVERY (%)	SAMPLE: N OR RQD	SAMPLE: WATER CONTENT (%)	PEN. RESIST. (BLOWS/0.3m) DCPT (50mm DIA. CONE) 20 40 60 80 / REMOULDED SHEAR STRENGTH (kPa) / UNDRAINED SHEAR STRENGTH (kPa) 20 40 60 80 / PL (%) WATER CONTENT (%) LL (%) 20 40 60 80	PIEZOMETER CONSTRUCTION	ELEVATION (m)
GROUND SURFACE									
Dynamic Cone Penetration Test commenced at Ground Surface and pushed to 16.46 m depth		1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16							67 66 65 64 63 62 61 60 59 58 57 56 55 54 53 52

DISCLAIMER: THE DATA PRESENTED IN THIS SHEET IS THE PROPERTY OF PATERSON GROUP AND THE CLIENT FOR WHOM IT WAS PRODUCED. THIS SHEET SHOULD BE READ IN CONJUNCTION WITH ITS CORRESPONDING REPORT. PATERSON GROUP IS NOT RESPONSIBLE FOR THE UNAUTHORIZED USE OF THIS DATA.

P:/AutoCAD Drawings/Test Hole Data Files/PG50xx/PG5043/data.sqlite 2026-08-17, 16:17 Paterson_Template OA

SOIL PROFILE AND TEST DATA

Supplemental Geotechnical Investigation

178-200 Isabella Street, Ottawa, ON

COORD. SYS.: MTM ZONE 9 **EASTING:** 368187.77 **NORTHING:** 5030214.47 **ELEVATION:** 67.91

PROJECT: Proposed Multi-Storey Building

ADVANCED BY: CME-55 Low Clearance Drill

REMARKS: Datum: NAD1983 (Canada) Geoid: HT2-2010 **DATE:** August 6, 2026

FILE NO. : PG5043

HOLE NO. : BH10-26

SAMPLE DESCRIPTION	STRATA PLOT	DEPTH (m)	SAMPLE: TYPE AND NO.	SAMPLE: RECOVERY (%)	SAMPLE: N OR RQD	SAMPLE: WATER CONTENT (%)	PEN. RESIST. (BLOWS/0.3m) DCPT (50mm DIA. CONE) 20 40 60 80 / REMOULDED SHEAR STRENGTH (kPa) / UNDRAINED SHEAR STRENGTH (kPa) 20 40 60 80 / PL (%) WATER CONTENT (%) LL (%) 20 40 60 80	PIEZOMETER CONSTRUCTION	ELEVATION (m)
21.51m [46.40m]		16					28		51
End of Borehole		17					13		51
							12		
Practical refusal to DCPT at 21.51 m depth		18					30		50
							21		
							22		
		19					32		49
							30		
							60		
		20					77		48
							44		
							60		
		21					81		47
							70		
							76		
							90		
							100		
		22							46
		23							45
		24							44
		25							43
		26							42
		27							41
		28							40
		29							39
		30							38
		31							37
		32							36

DISCLAIMER: THE DATA PRESENTED IN THIS SHEET IS THE PROPERTY OF PATERSON GROUP AND THE CLIENT FOR WHOM IT WAS PRODUCED. THIS SHEET SHOULD BE READ IN CONJUNCTION WITH ITS CORRESPONDING REPORT. PATERSON GROUP IS NOT RESPONSIBLE FOR THE UNAUTHORIZED USE OF THIS DATA.

P:/AutoCAD Drawings/Test Hole Data Files/PG50xx/PG5043/data.sqlite 2026-08-17, 16:17 Paterson_Template OA

patersongroup Consulting Engineers

154 Colonnade Road South, Ottawa, Ontario K2E 7J5

SOIL PROFILE AND TEST DATA

Supplemental Geotechnical Investigation
Prop. Multi-Storey Building - 178-200 Isabella Street
Ottawa, Ontario

DATUM Geodetic


REMARKS

BORINGS BY Track-Mount Power Auger **DATE** October 6, 2020

FILE NO. PG5043

HOLE NO. BH 1-20

SOIL DESCRIPTION	STRATA PLOT	SAMPLE TYPE	SAMPLE NUMBER	SAMPLE % RECOVERY	SAMPLE N VALUE or RQD	DEPTH (m)	ELEV. (m)
GROUND SURFACE						0	67.37
TOPSOIL 0.25		AU	1			1	66.37
Stiff, brown **SILTY CLAY,** trace sand		SS	2	100	7	2	65.37
3.05		SS	3	100	2	3	64.37
Stiff, grey **SILTY CLAY**						4	63.37
						5	62.37
						6	61.37
						7	60.37
						8	59.37
						9	58.37
						10	57.37
						11	56.37
						12	55.37
13.72						13	54.37
		SS	4	67	20	14	53.37
		SS	5	17	7	15	52.37
GLACIAL TILL: Compact, grey silty sand, trace gravel, cobbles and boulders		SS	6	50	10	16	51.37
		SS	7	33	11	17	50.37
		SS	8	42	19	18	49.37
18.30		SS	9	0	13	19	48.37
Weathered **BEDROCK**		SS	10	67	51		
19.05							
End of Borehole							
Practical DCPT refusal at 19.05m depth							
(GWL @ 4.80m - Oct. 9, 2020)							

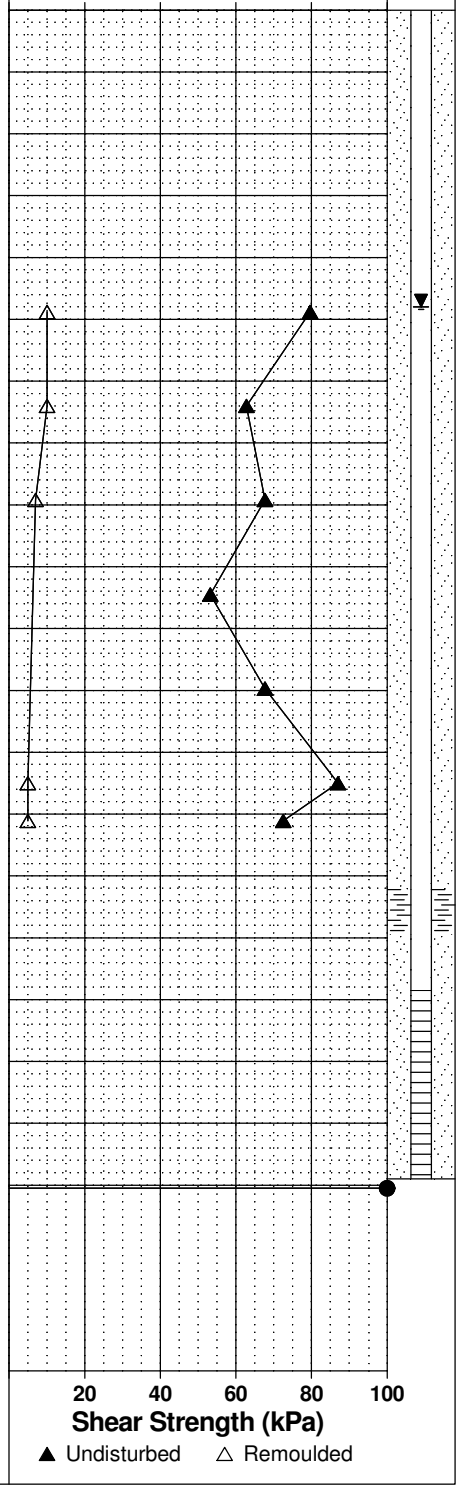

patersongroup Consulting Engineers

154 Colonnade Road South, Ottawa, Ontario K2E 7J5

SOIL PROFILE AND TEST DATA

Supplemental Geotechnical Investigation
Prop. Multi-Storey Building - 178-200 Isabella Street
Ottawa, Ontario

DATUM Geodetic


FILE NO. PG5043

REMARKS

HOLE NO. BH 2-20

BORINGS BY Track-Mount Power Auger **DATE** October 7, 2020

SOIL DESCRIPTION	STRATA PLOT	SAMPLE TYPE	SAMPLE NUMBER	SAMPLE % RECOVERY	SAMPLE N VALUE or RQD	DEPTH (m)	ELEV. (m)
GROUND SURFACE						0	68.14
Concrete pavement 0.07		AU	1				
FILL: Brown silty sand with gravel 0.60						1	67.14
Stiff, brown **SILTY CLAY**		SS	2	100	5	2	66.14
3.05						3	65.14
Stiff to firm, grey **SILTY CLAY**						4	64.14
						5	63.14
						6	62.14
						7	61.14
						8	60.14
						9	59.14
						10	58.14
						11	57.14
						12	56.14
13.36		SS	3	100	17	13	55.14
GLACIAL TILL: Grey silty sand, trace clay, gravel, cobbles and boudlers		SS	4	33	6	14	54.14
15.18		SS	5	100	3	15	53.14
Weathered **BEDROCK**		SS	6	42	23	16	52.14
16.18							
End of Borehole							
Practical DCPT refusal at 16.18m depth							
(GWL @ 5.40m - Oct. 9, 2020)							

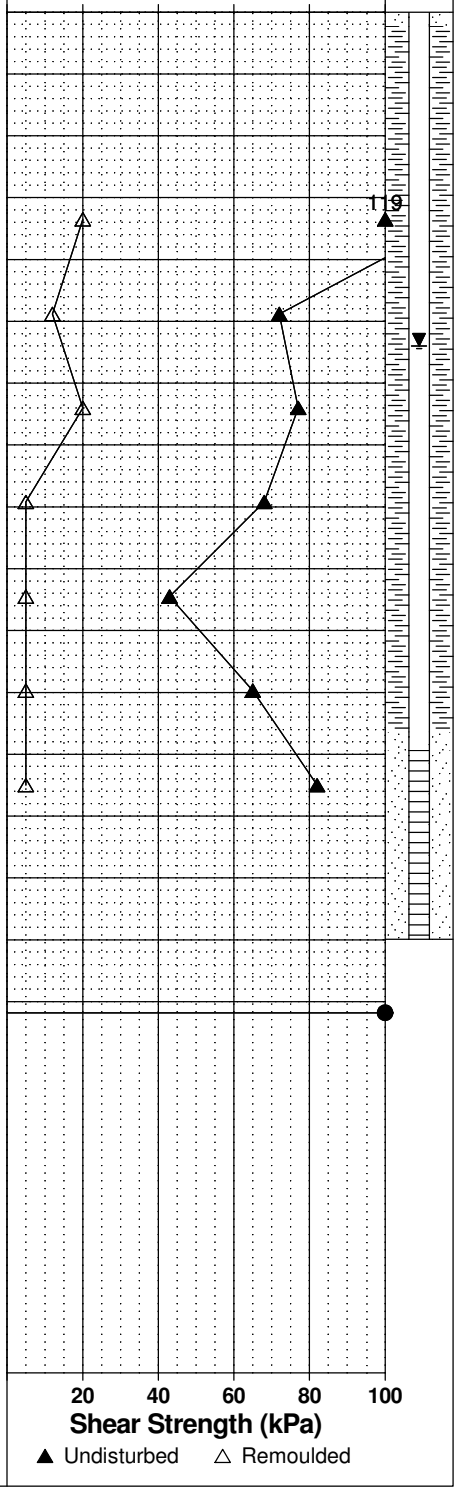

patersongroup Consulting Engineers

154 Colonnade Road South, Ottawa, Ontario K2E 7J5

SOIL PROFILE AND TEST DATA

Geotechnical Investigation
Proposed Building - 178-200 Isabella Street
Ottawa, Ontario

DATUM Geodetic


FILE NO. PG3944

REMARKS

HOLE NO. BH 1

BORINGS BY CME-55 Low Clearance Drill **DATE** October 7, 2016

SOIL DESCRIPTION	STRATA PLOT	SAMPLE TYPE	SAMPLE NUMBER	SAMPLE % RECOVERY	SAMPLE N VALUE or RQD	DEPTH (m)	ELEV. (m)
GROUND SURFACE						0	67.45
25mm Asphaltic concrete over brown silty sand with crushed stone, some clay, trace organics 0.60		SS	1	83	10		
FILL: Brown silty clay with sand 1.37		SS	2	67	4	1	66.45
		SS	3	79	3	2	65.45
		SS	4	92	1		
Stiff, brown **SILTY CLAY**		SS	5	100	W	3	64.45
- grey by 3.7m depth		SS	6	100	W	4	63.45
		G	1			5	62.45
						6	61.45
		G	2			7	60.45
						8	59.45
		G	3			9	58.45
9.45							
Dynamic Cone Penetration Test commenced at 9.45m depth. Cone pushed to 12.6m depth.						10	57.45
						11	56.45



patersongroup Consulting Engineers

154 Colonnade Road South, Ottawa, Ontario K2E 7J5

SOIL PROFILE AND TEST DATA

Geotechnical Investigation
Proposed Building - 178-200 Isabella Street
Ottawa, Ontario

DATUM Geodetic


FILE NO. PG3944

REMARKS

HOLE NO. BH 1

BORINGS BY CME-55 Low Clearance Drill **DATE** October 7, 2016

SOIL DESCRIPTION	STRATA PLOT	SAMPLE TYPE	SAMPLE NUMBER	SAMPLE % RECOVERY	SAMPLE N VALUE or RQD	DEPTH (m)	ELEV. (m)	Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone ○ Water Content %	Monitoring Well Construction
GROUND SURFACE									
						11	56.45		
						12	55.45		
						13	54.45		
						14	53.45		
						15	52.45		
						16	51.45		
						17	50.45		
17.93									
End of Borehole Practical DCPT refusal at 17.93m depth (GWL @ 2.52m-October 14, 2016)									

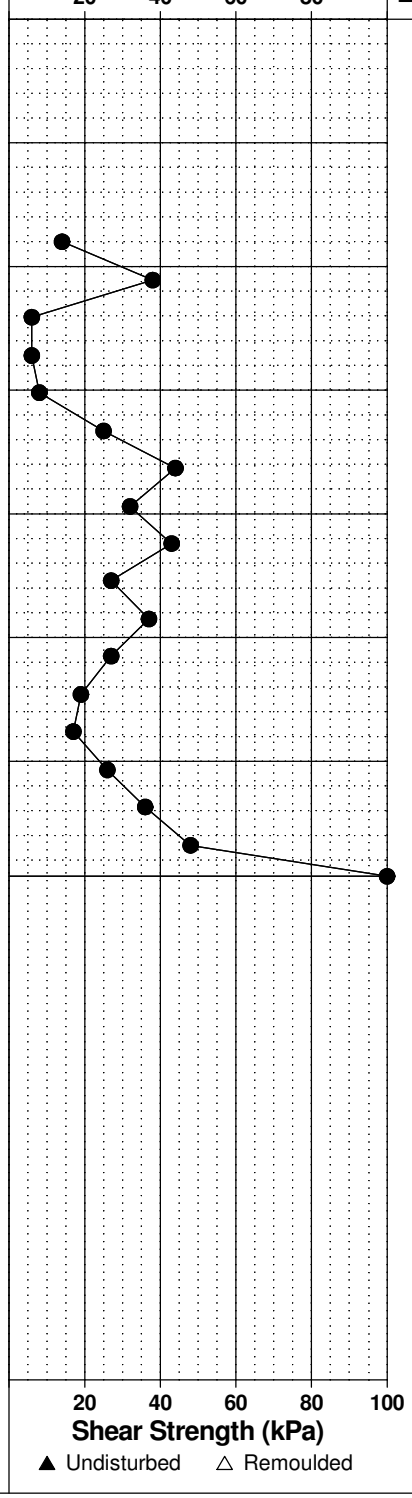

patersongroup Consulting Engineers

154 Colonnade Road South, Ottawa, Ontario K2E 7J5

SOIL PROFILE AND TEST DATA

Geotechnical Investigation
Proposed Building - 178-200 Isabella Street
Ottawa, Ontario

DATUM Geodetic


FILE NO. PG3944

REMARKS

HOLE NO. BH 2

BORINGS BY CME-55 Low Clearance Drill **DATE** October 7, 2016

SOIL DESCRIPTION	STRATA PLOT	SAMPLE TYPE	SAMPLE NUMBER	SAMPLE % RECOVERY	SAMPLE N VALUE or RQD	DEPTH (m)	ELEV. (m)
GROUND SURFACE						0	67.90
		AU	1				
FILL: Brown silty sand with crushed stone and construction debris		SS	2	58	36	1	66.90
		SS	3	42	45	2	65.90
2.18							
		SS	4	4	4	3	64.90
Stiff, brown **SILTY CLAY,** trace sand		SS	5	100	2		
- grey by 3.8m depth		SS	6	100	2	4	63.90
		SS	7	100	2	5	62.90
						6	61.90
						7	60.90
						8	59.90
						9	58.90
9.45							
Dynamic Cone Penetration Test commenced at 9.45m depth. Cone pushed to 13.7m depth.						10	57.90
						11	56.90

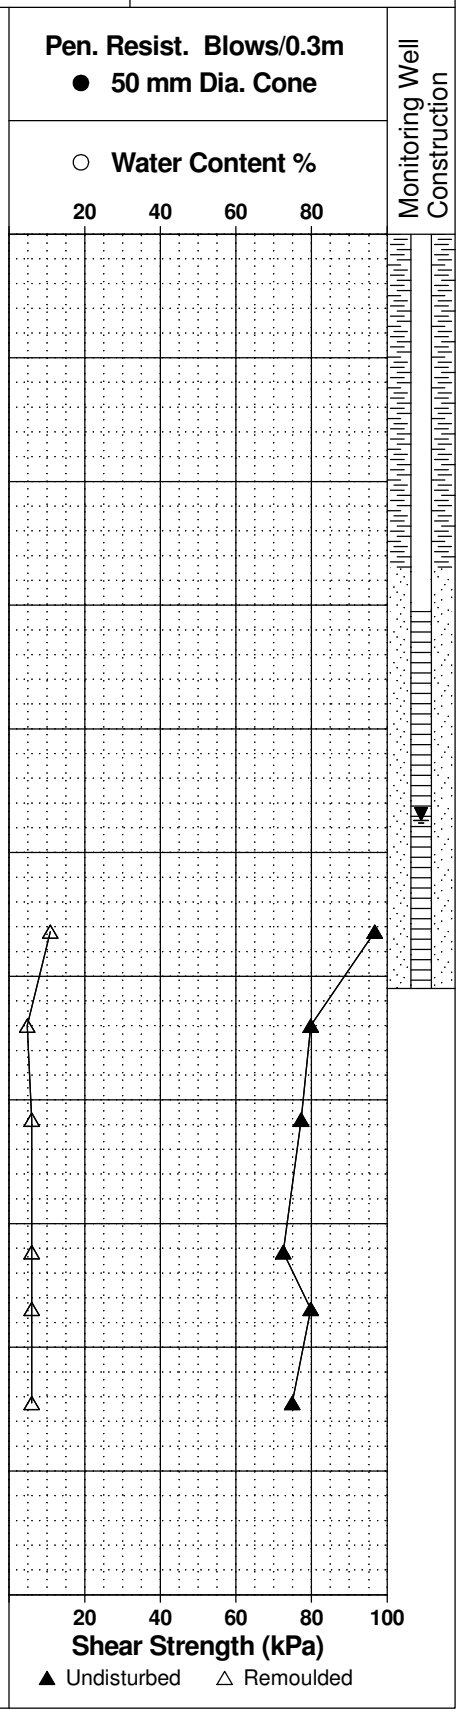

patersongroup Consulting Engineers

154 Colonnade Road South, Ottawa, Ontario K2E 7J5

SOIL PROFILE AND TEST DATA

Geotechnical Investigation
Proposed Building - 178-200 Isabella Street
Ottawa, Ontario

DATUM Geodetic


FILE NO. PG3944

REMARKS

HOLE NO. BH 2

BORINGS BY CME-55 Low Clearance Drill **DATE** October 7, 2016

SOIL DESCRIPTION	STRATA PLOT	SAMPLE TYPE	SAMPLE NUMBER	SAMPLE % RECOVERY	SAMPLE N VALUE or RQD	DEPTH (m)	ELEV. (m)	Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone ○ Water Content %	Monitoring Well Construction
GROUND SURFACE									
						11	56.90		
						12	55.90		
						13	54.90		
						14	53.90		
						15	52.90		
						16	51.90		
						17	50.90		
						18	49.90		
						19	48.90		
19.20									
End of Borehole									
Practical DCPT refusal at 19.20m depth									
(GWL @ 4.74m-October 14, 2016)									

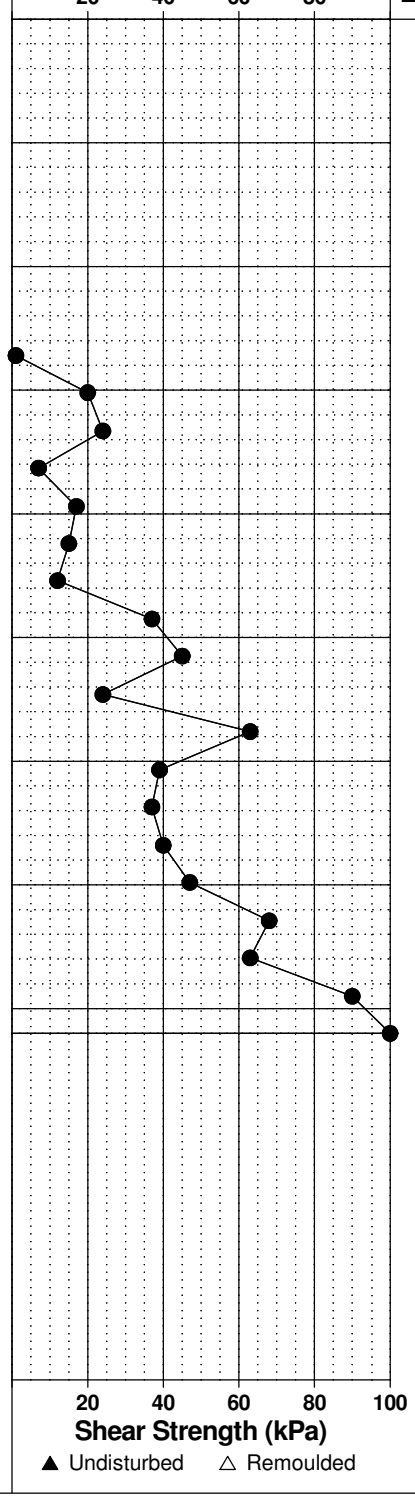

patersongroup Consulting Engineers

154 Colonnade Road South, Ottawa, Ontario K2E 7J5

SOIL PROFILE AND TEST DATA

Geotechnical Investigation
Proposed Building - 178-200 Isabella Street
Ottawa, Ontario

DATUM Geodetic


FILE NO. PG3944

REMARKS

HOLE NO. BH 3

BORINGS BY CME-55 Low Clearance Drill **DATE** October 7, 2016

SOIL DESCRIPTION	STRATA PLOT	SAMPLE TYPE	SAMPLE NUMBER	SAMPLE % RECOVERY	SAMPLE N VALUE or RQD	DEPTH (m)	ELEV. (m)
GROUND SURFACE						0	67.95
		AU	1				
FILL: Brown silty clay with construction debris, some sand and gravel, trace organics		SS	2	4	2	1	66.95
- styrofoam at 1.7m depth		SS	3	46	4	2	65.95
2.29							
		SS	4	100	4	3	64.95
		SS	5	100	2		
Stiff, brown **SILTY CLAY,** trace organics		SS	6	100	1	4	63.95
- grey by 4.1m depth						5	62.95
						6	61.95
						7	60.95
						8	59.95
						9	58.95
9.75							
End of Borehole							
(GWL @ 6.79m-October 14, 2016)							

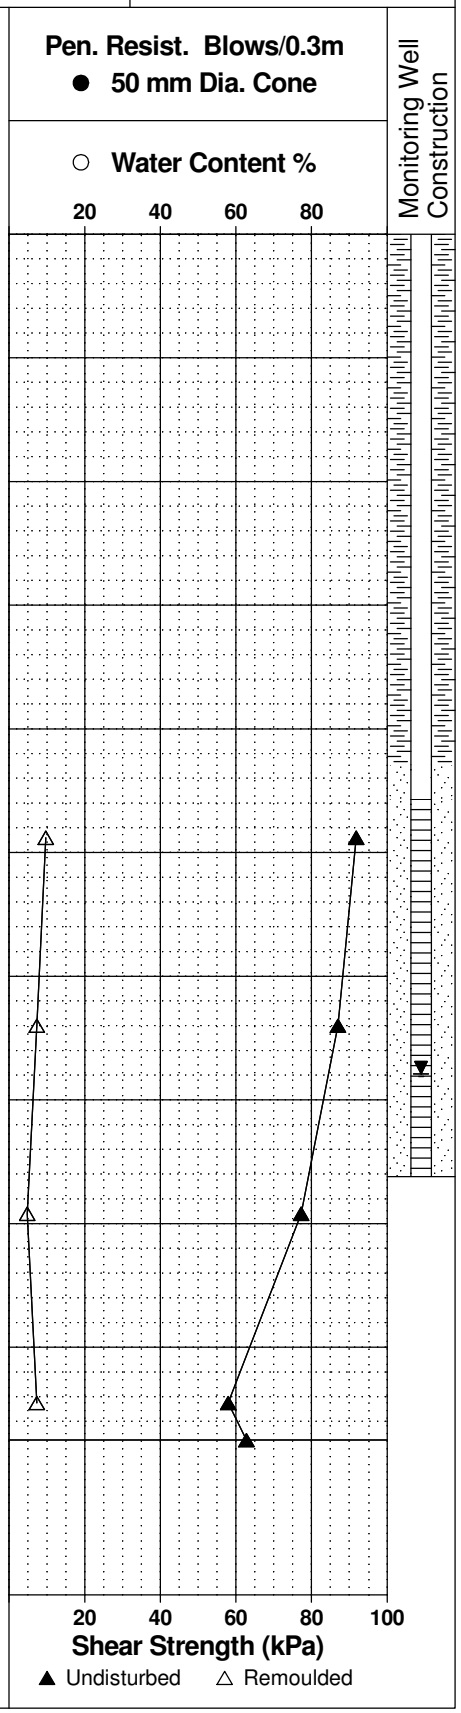

SYMBOLS AND TERMS

SOIL DESCRIPTION

Behavioural properties, such as structure and strength, take precedence over particle gradation in describing soils. Terminology describing soil structure are as follows:

Desiccated	-	having visible signs of weathering by oxidation of clay minerals, shrinkage cracks, etc.
Fissured	-	having cracks, and hence a blocky structure.
Varved	-	composed of regular alternating layers of silt and clay.
Stratified	-	composed of alternating layers of different soil types, e.g. silt and sand or silt and clay.
Well-Graded	-	Having wide range in grain sizes and substantial amounts of all intermediate particle sizes (see Grain Size Distribution).
Uniformly-Graded	-	Predominantly of one grain size (see Grain Size Distribution).

The standard terminology to describe the strength of cohesionless soils is the relative density, usually inferred from the results of the Standard Penetration Test (SPT) 'N' value. The SPT N value is the number of blows of a 63.5 kg hammer, falling 760 mm, required to drive a 51 mm O.D. split spoon sampler 300 mm into the soil after an initial penetration of 150 mm.

Relative Density	'N' Value	Relative Density %
Very Loose	<4	<15
Loose	4-10	15-35
Compact	10-30	35-65
Dense	30-50	65-85
Very Dense	>50	>85

The standard terminology to describe the strength of cohesive soils is the consistency, which is based on the undisturbed undrained shear strength as measured by the in situ or laboratory vane tests, penetrometer tests, unconfined compression tests, or occasionally by Standard Penetration Tests.

Consistency	Undrained Shear Strength (kPa)	'N' Value
Very Soft	<12	<2
Soft	12-25	2-4
Firm	25-50	4-8
Stiff	50-100	8-15
Very Stiff	100-200	15-30
Hard	>200	>30

SYMBOLS AND TERMS (continued)

SOIL DESCRIPTION (continued)

Cohesive soils can also be classified according to their “sensitivity”. The sensitivity is the ratio between the undisturbed undrained shear strength and the remoulded undrained shear strength of the soil.

Terminology used for describing soil strata based upon texture, or the proportion of individual particle sizes present is provided on the Textural Soil Classification Chart at the end of this information package.

ROCK DESCRIPTION

The structural description of the bedrock mass is based on the Rock Quality Designation (RQD).

The RQD classification is based on a modified core recovery percentage in which all pieces of sound core over 100 mm long are counted as recovery. The smaller pieces are considered to be a result of closely-spaced discontinuities (resulting from shearing, jointing, faulting, or weathering) in the rock mass and are not counted. RQD is ideally determined from NXL size core. However, it can be used on smaller core sizes, such as BX, if the bulk of the fractures caused by drilling stresses (called “mechanical breaks”) are easily distinguishable from the normal in situ fractures.

RQD %	ROCK QUALITY
90-100	Excellent, intact, very sound
75-90	Good, massive, moderately jointed or sound
50-75	Fair, blocky and seamy, fractured
25-50	Poor, shattered and very seamy or blocky, severely fractured
0-25	Very poor, crushed, very severely fractured

SAMPLE TYPES

SS	-	Split spoon sample (obtained in conjunction with the performing of the Standard Penetration Test (SPT))
TW	-	Thin wall tube or Shelby tube
PS	-	Piston sample
AU	-	Auger sample or bulk sample
WS	-	Wash sample
RC	-	Rock core sample (Core bit size AXT, BXL, etc.). Rock core samples are obtained with the use of standard diamond drilling bits.

SYMBOLS AND TERMS (continued)

GRAIN SIZE DISTRIBUTION

MC%	-	Natural moisture content or water content of sample, %
LL	-	Liquid Limit, % (water content above which soil behaves as a liquid)
PL	-	Plastic limit, % (water content above which soil behaves plastically)
PI	-	Plasticity index, % (difference between LL and PL)
Dxx	-	Grain size which xx% of the soil, by weight, is of finer grain sizes These grain size descriptions are not used below 0.075 mm grain size
D10	-	Grain size at which 10% of the soil is finer (effective grain size)
D60	-	Grain size at which 60% of the soil is finer
Cc	-	Concavity coefficient = $(D30)^2$ / (D10 x D60)
Cu	-	Uniformity coefficient = D60 / D10

Cc and Cu are used to assess the grading of sands and gravels:
Well-graded gravels have: $1 < Cc < 3$ and $Cu > 4$
Well-graded sands have: $1 < Cc < 3$ and $Cu > 6$
Sands and gravels not meeting the above requirements are poorly-graded or uniformly-graded.
Cc and Cu are not applicable for the description of soils with more than 10% silt and clay
(more than 10% finer than 0.075 mm or the #200 sieve)

CONSOLIDATION TEST


p'_o	-	Present effective overburden pressure at sample depth
p'_c	-	Preconsolidation pressure of (maximum past pressure on) sample
Ccr	-	Recompression index (in effect at pressures below p'_c)
Cc	-	Compression index (in effect at pressures above p'_c)
OC Ratio		Overconsolidaton ratio = p'_c / p'_o
Void Ratio		Initial sample void ratio = volume of voids / volume of solids
Wo	-	Initial water content (at start of consolidation test)

PERMEABILITY TEST

k	-	Coefficient of permeability or hydraulic conductivity is a measure of the ability of water to flow through the sample. The value of k is measured at a specified unit weight for (remoulded) cohesionless soil samples, because its value will vary with the unit weight or density of the sample during the test.


SYMBOLS AND TERMS (continued)

STRATA PLOT

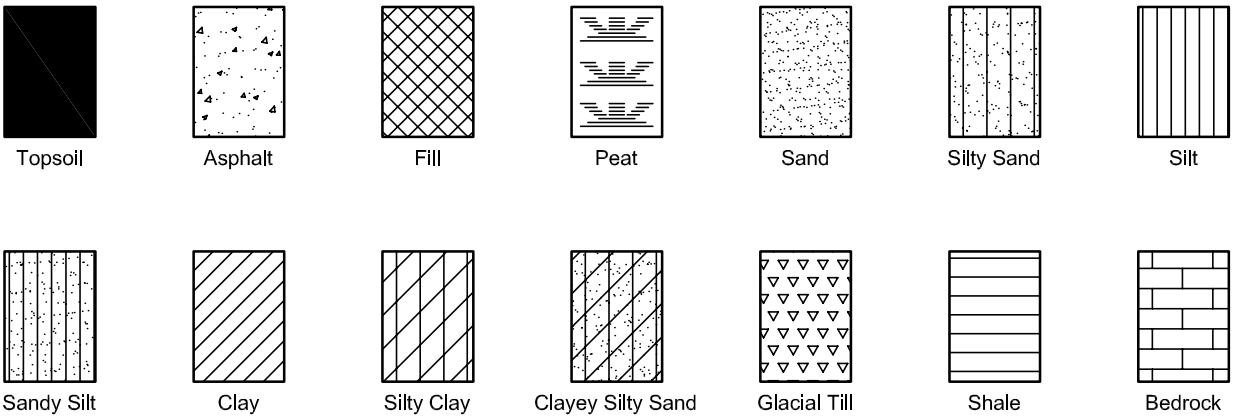


MONITORING WELL AND PIEZOMETER CONSTRUCTION

MONITORING WELL CONSTRUCTION

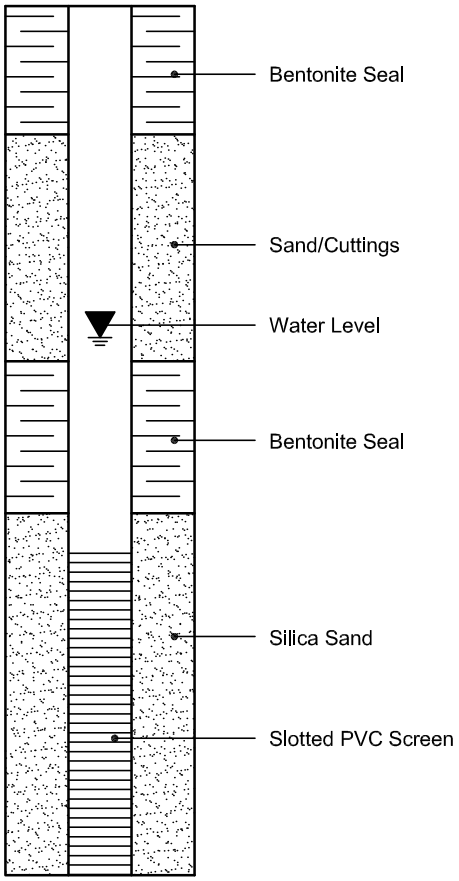

PIEZOMETER CONSTRUCTION

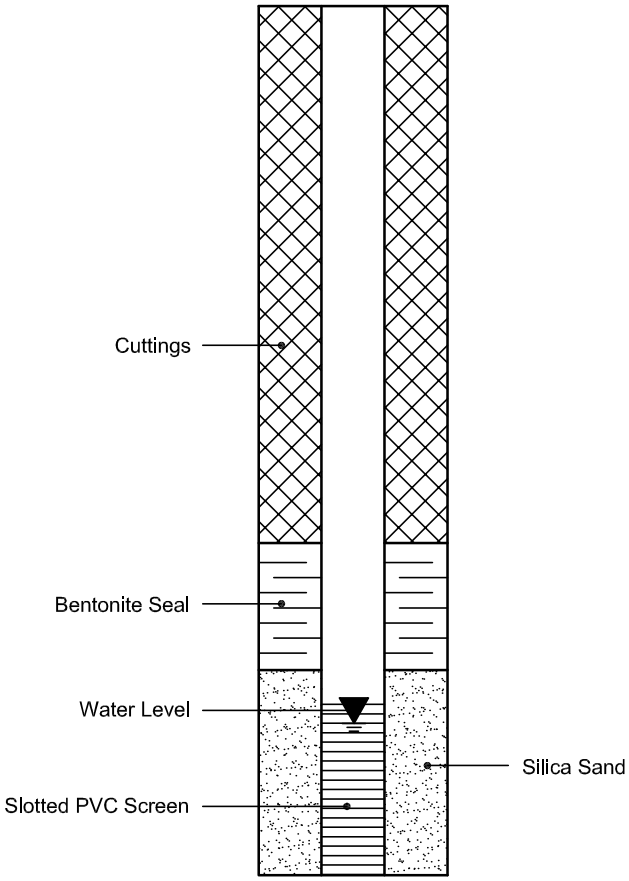

PATERSON GROUP

CONCRETE CORE COMPRESSIVE STRENGTH CSA A23.2-14C

CLIENT:	**Minto**		FILE No.: **PG5043**
PROJECT:	Isabella & Pretoria		REPORT No.: 1
SITE ADDRESS	**Isabella Street**		DATE REPT'D: 01-Sep-26
STRUCTURE TYPE & LOCATION:	Shale With Limestone		
SAMPLE INFORAMTION			
LAB NO.:	**69101**	**69102**	**69103**
SAMPLE NO.:	BH1-26 RC2	BH2-26 RC2	BH3-26 RC4
LOCATION:	70'7" - 71'10"	71' - 72.2"	81'7" - 83'2"
SAMPLE DATES			
DATE CAST	-	-	-
DATE CORED	-	-	-
DATE RECEIVED	17-Aug-26	17-Aug-26	17-Aug-26
DATE TESTED	31-Aug-26	31-Aug-26	31-Aug-26
SAMPLE DIMENSIONS			
AVERAGE DIAMETER (mm)	47.00	47.00	47.00
HEIGHT (mm)	110.00	112.00	111.00
WEIGHT (g)	520	520	520
AREA (mm^2)	1735	1735	1735
VOLUME (cm^3)	191	194	193
UNIT WEIGHT (kg/m^3)	**2725**	**2676**	**2700**
TEST RESULTS			
H / D RATIO	2.34	2.38	2.36
CORRECTION FACTOR	1.000	1.000	1.000
LOAD (lbs)	8450	12680	18200
GROSS Mpa	21.7	32.5	46.7
MPa CORRECTED	**21.7**	**32.5**	**46.7**
FORM OF BREAK	**A**	**A**	**A**
DIRECTION OF LOADING	Parallel	Parallel	Parallel
CURING CONDITIONS	SITE→→→

Certificate of Analysis

Client: Paterson Group Consulting Engineers

Client PO: 20955

Report Date: 14-Oct-2016


Order Date: 12-Oct-2016

Project Description: PG3944

	Client ID:	BH2-SS5	-	-	-
	Sample Date:	07-Oct-16	-	-	-
	Sample ID:	1642177-01	-	-	-
	MDL/Units	Soil	-	-	-
Physical Characteristics					
% Solids	0.1 % by Wt.	59.2	-	-	-
General Inorganics					
pH	0.05 pH Units	8.43	-	-	-
Resistivity	0.10 Ohm.m	23.1	-	-	-
Anions					
Chloride	5 ug/g dry	41	-	-	-
Sulphate	5 ug/g dry	112	-	-	-

Hvorslev Hydraulic Conductivity Analysis

Project: Minto Communities - 178-200 Isabella Street
Test Location: BH1-20
Test: Falling Head
Date: October 9, 2020

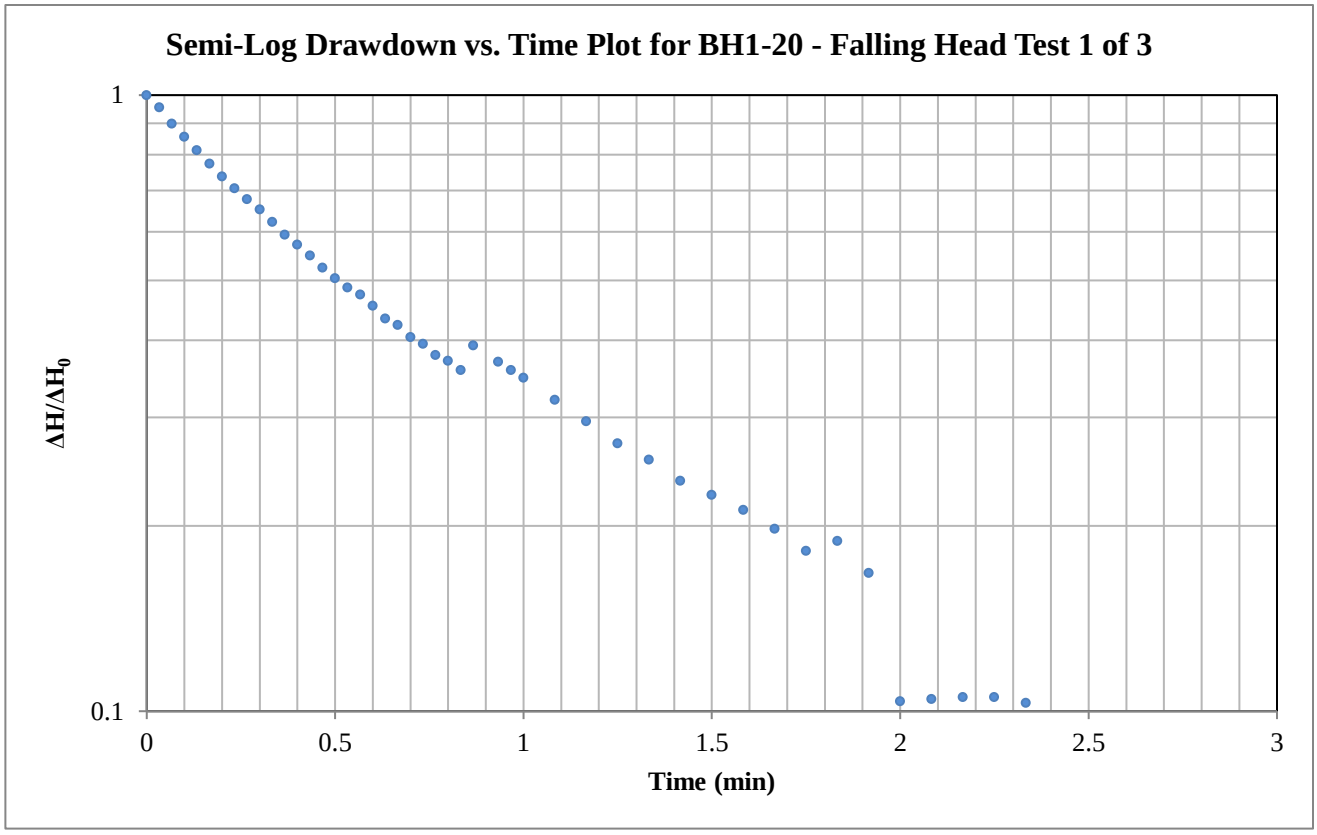

Hvorslev Horizontal Hydraulic Conductivity

$$K = \frac{\pi r_c^2}{F}\frac{1}{t^*}\ln\left(\frac{\Delta H^*}{\Delta H_0}\right)$$

Hvorslev Shape Factor

$$F = \frac{2\pi L}{\ln\left(\frac{2L}{D}\right)}$$

Valid for L>>D

Hvorslev Shape Factor F: 3.60152

Well Parameters:

L	3	m	Saturated length of screen or open hole
D	0.032	m	Diameter of well
r_c	0.016	m	Radius of well

Data Points (from plot):


t*: 0.802 minutes $\Delta H^*/\Delta H_0$: 0.37

Horizontal Hydraulic Conductivity
K = 4.62E-06 m/sec

Report: PG5043-1

Hvorslev Hydraulic Conductivity Analysis

Project: Minto Communities - 178-200 Isabella Street
Test Location: BH2-20
Test: Falling Head
Date: October 9, 2020

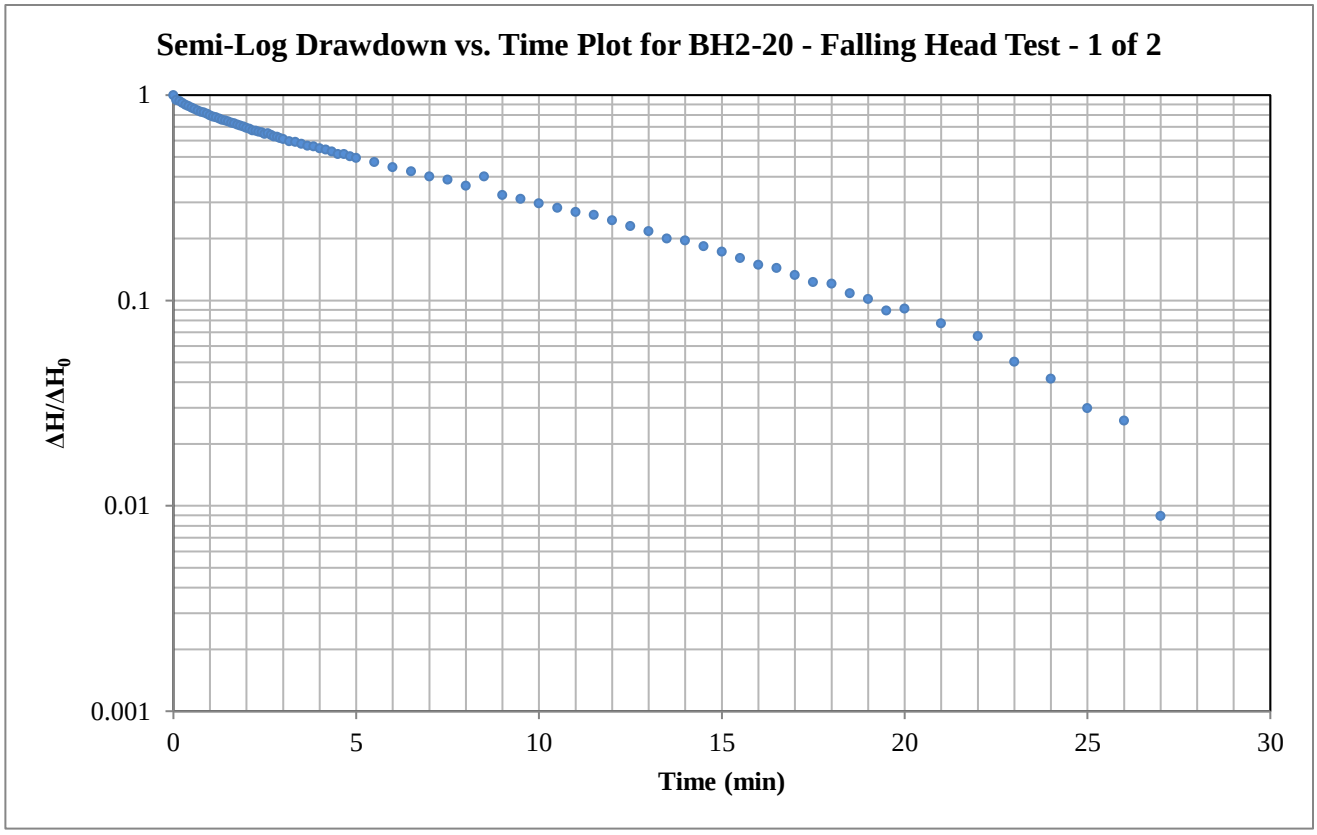

Hvorslev Horizontal Hydraulic Conductivity

$$K = \frac{\pi r_c^2}{F}\frac{1}{t^*}\ln\left(\frac{\Delta H^*}{\Delta H_0}\right)$$

Hvorslev Shape Factor

$$F = \frac{2\pi L}{\ln\left(\frac{2L}{D}\right)}$$

Valid for L>>D

Hvorslev Shape Factor F: 3.60152

Well Parameters:

L	3	m	Saturated length of screen or open hole
D	0.032	m	Diameter of well
r_c	0.016	m	Radius of well

Data Points (from plot):

t*: 7.815 minutes $\Delta H^*/\Delta H_0$: 0.37

Horizontal Hydraulic Conductivity
K = 4.74E-07 m/sec

APPENDIX 2

FIGURE 1 - KEY PLAN

FIGURE 2 & FIGURE 3 - SEISMIC SHEAR WAVE VELOCITY PROFILES

DRAWING PG5043-2 - TEST HOLE LOCATION PLAN

DRAWING PG5043-3 - BEDROCK CONTOUR PLAN

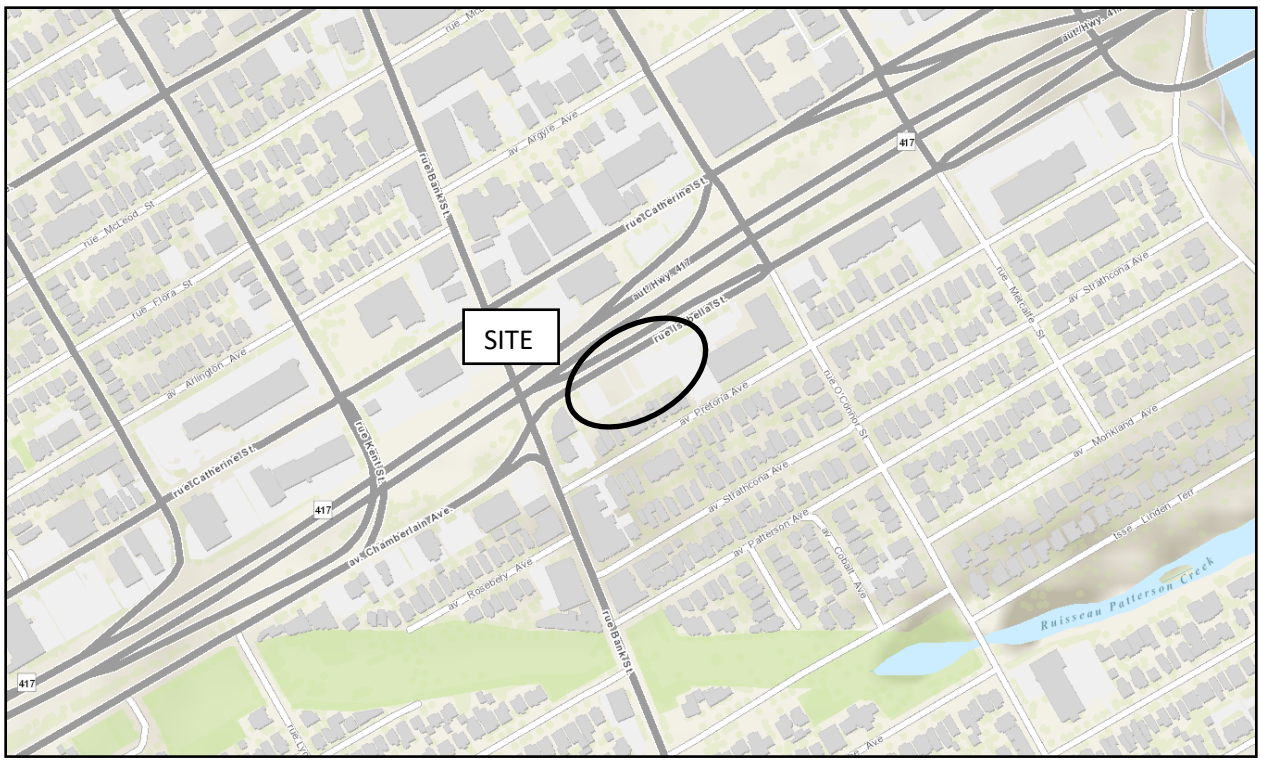


FIGURE 1

KEY PLAN

PATERSON GROUP

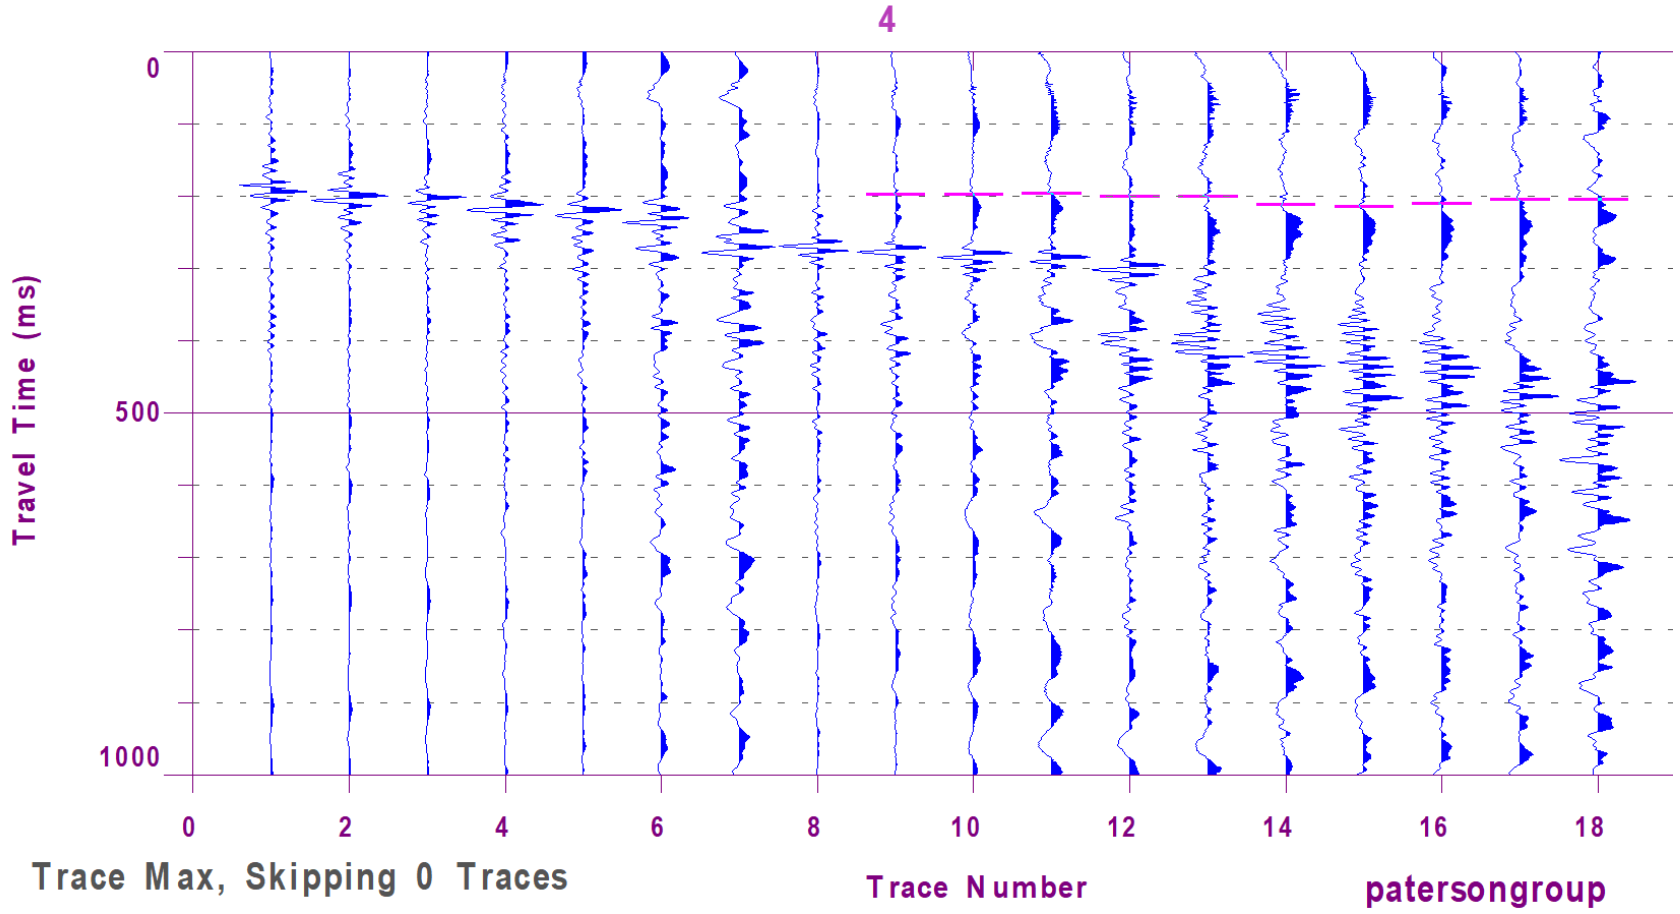


Figure 2 – Shear Wave Velocity Profile at Shot Location -20 m


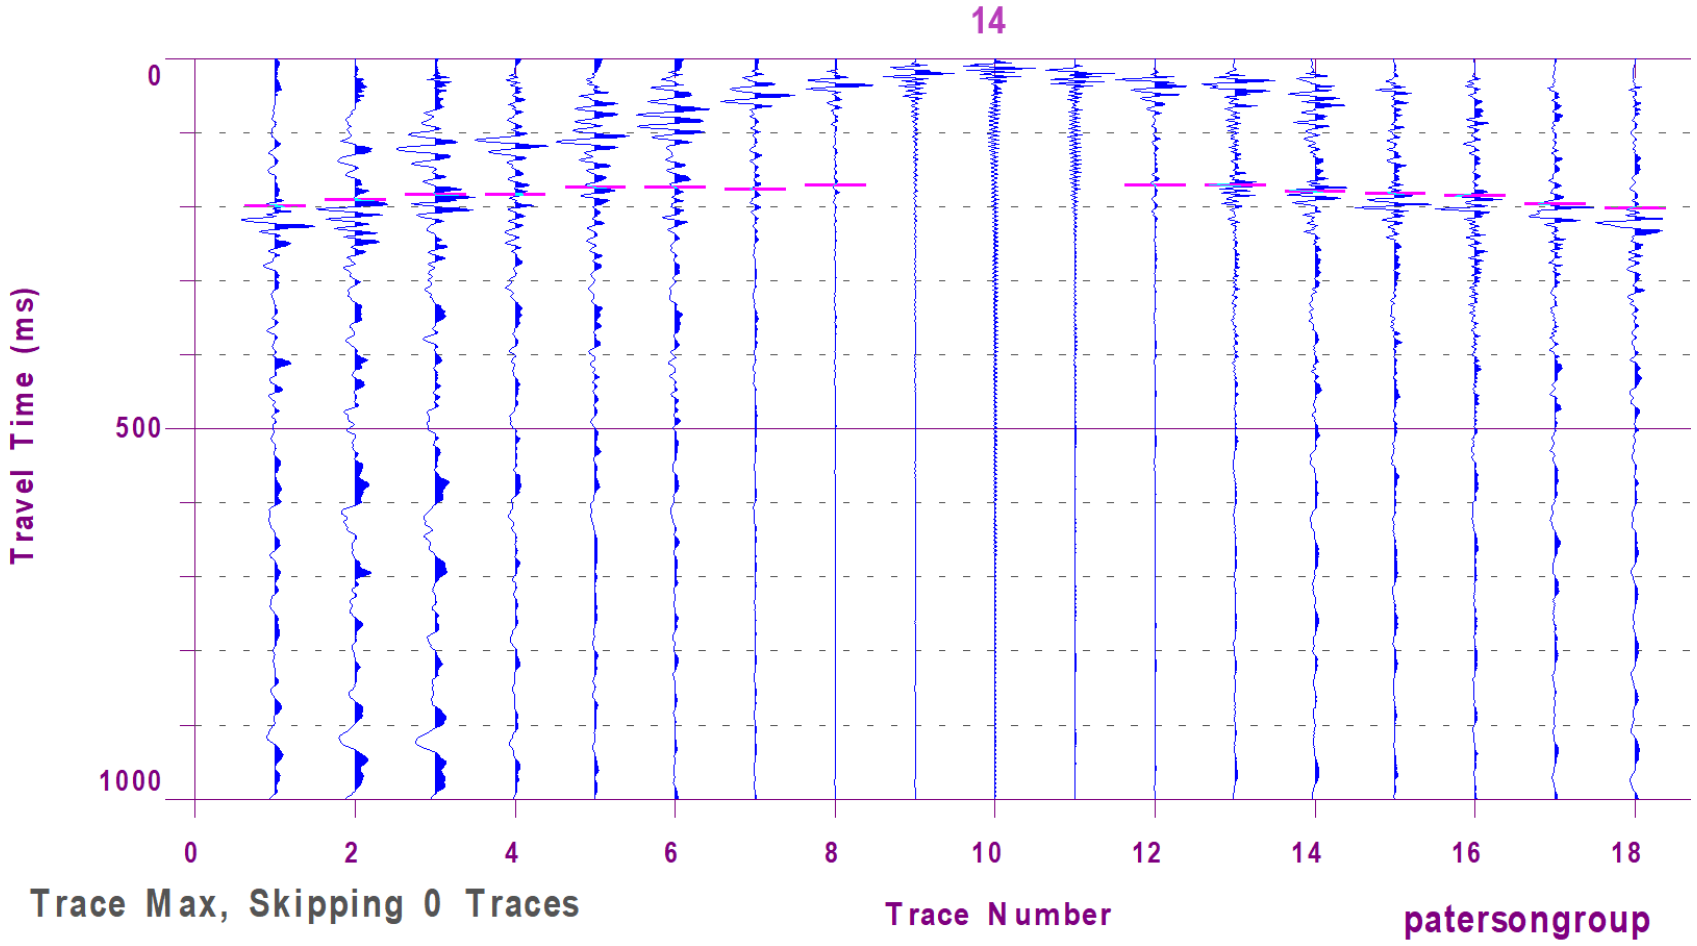


Figure 3 – Shear Wave Velocity Profile at Shot Location 25.5 m

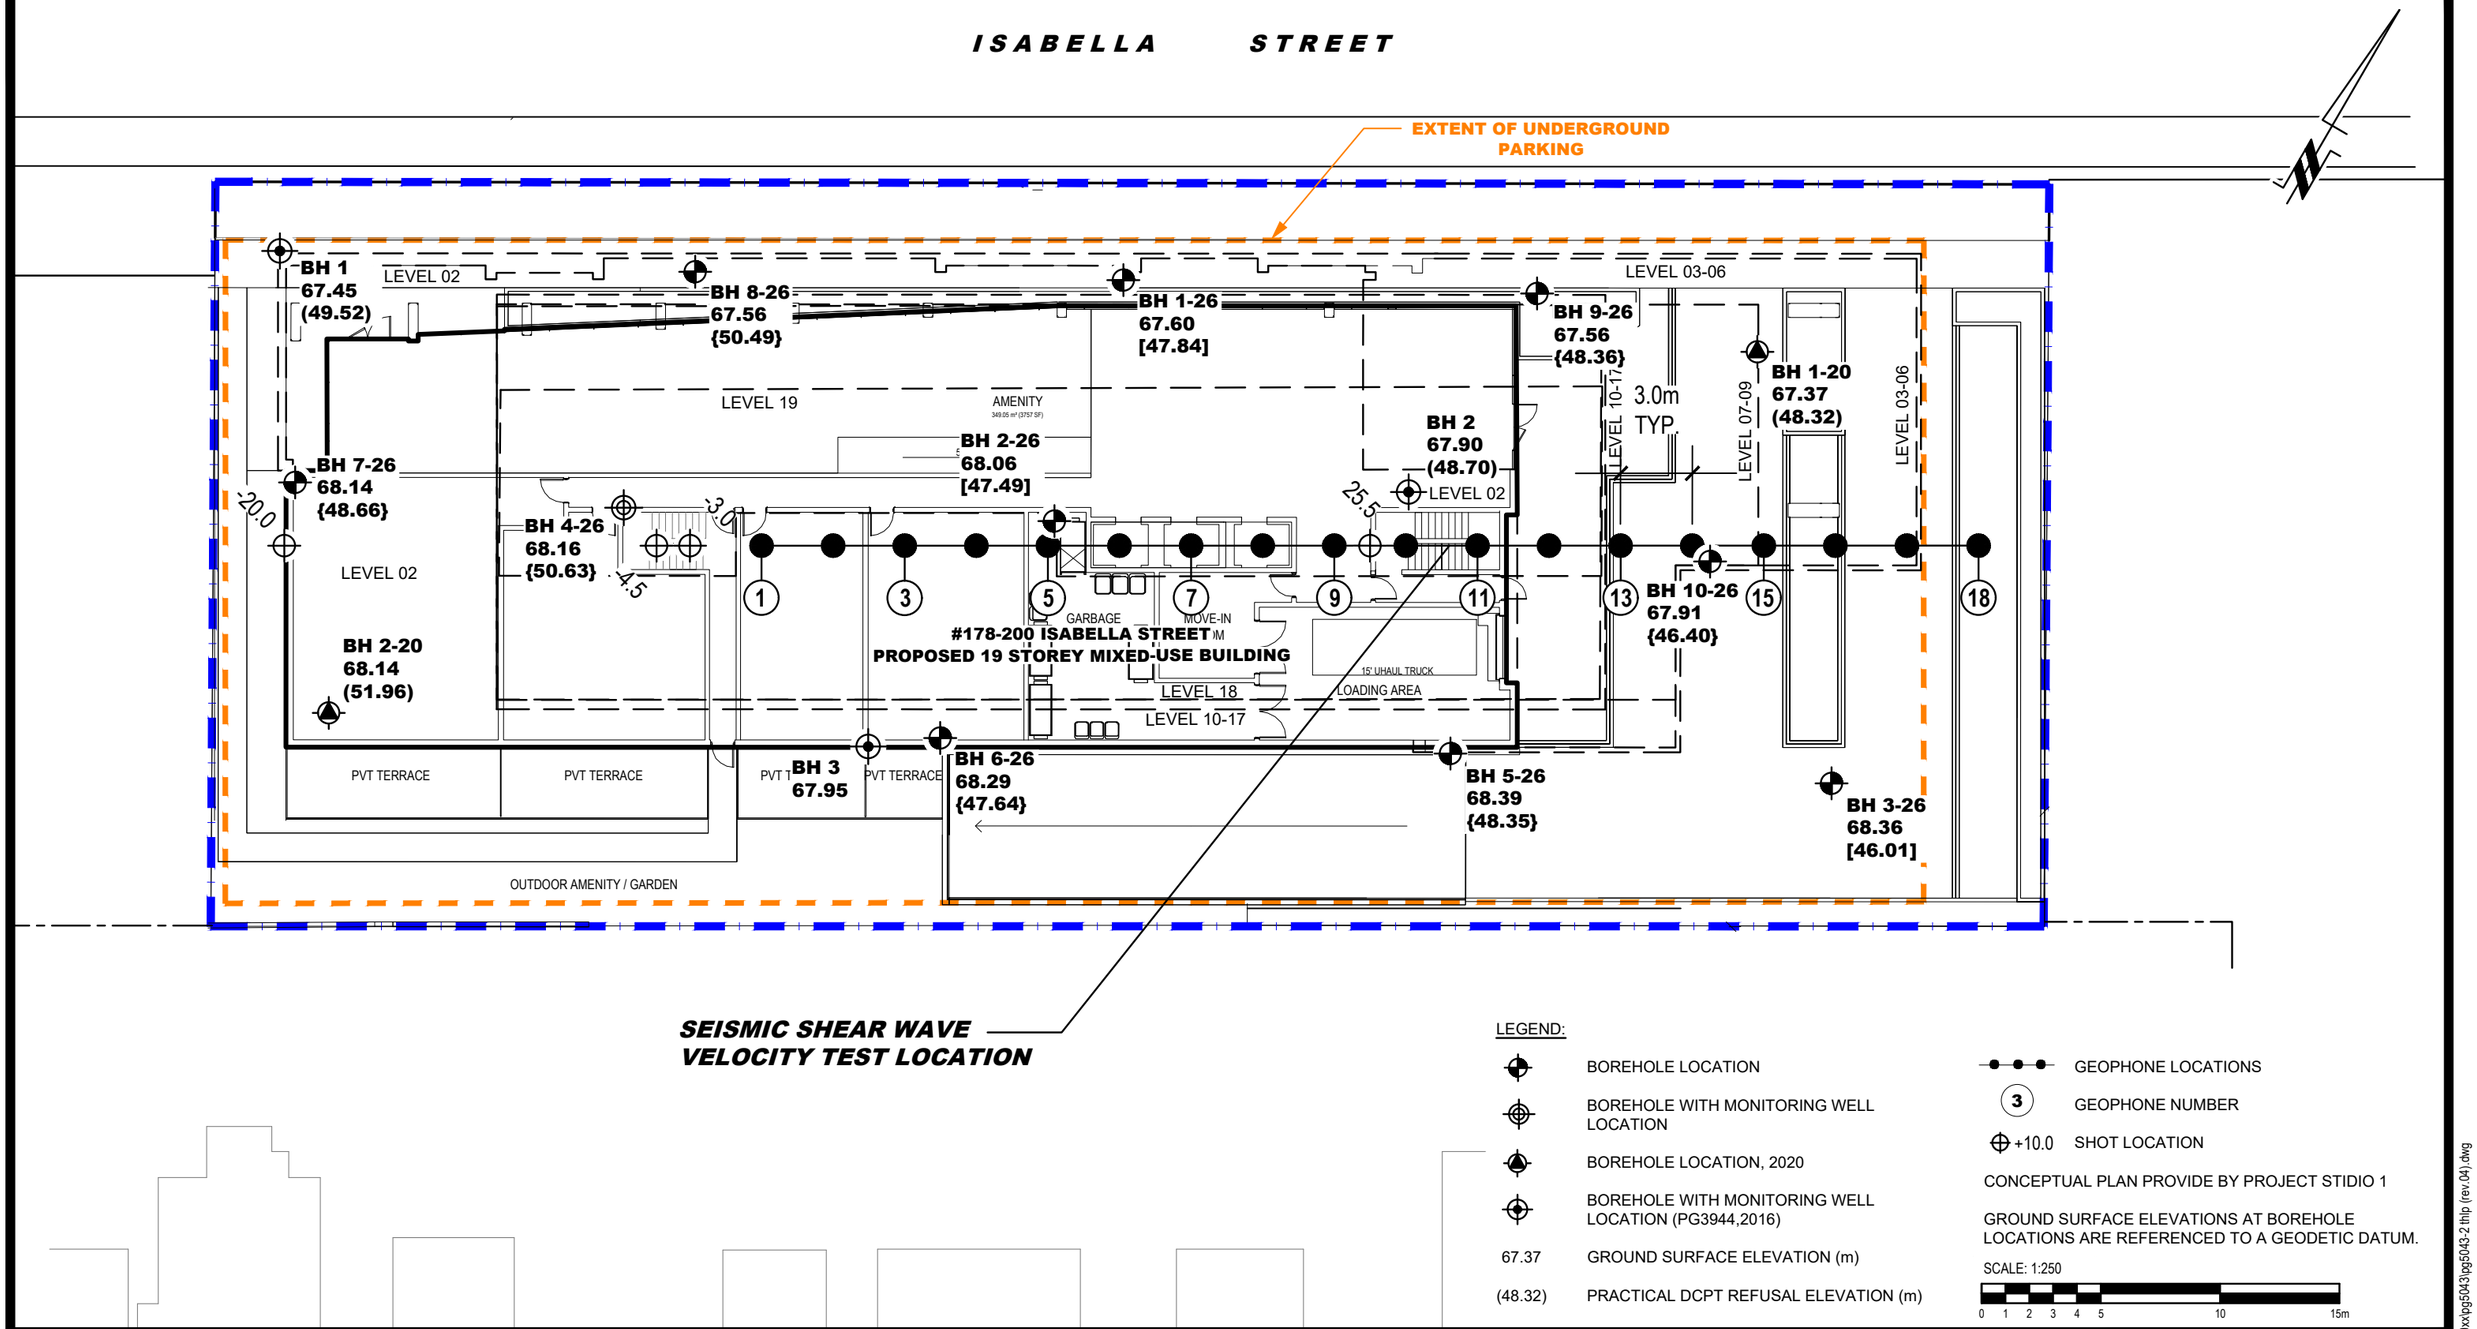

LEGEND:

- BOREHOLE LOCATION
- BOREHOLE WITH MONITORING WELL LOCATION
- BOREHOLE LOCATION, 2020
- BOREHOLE WITH MONITORING WELL LOCATION (PG3944,2016)
- 67.37 GROUND SURFACE ELEVATION (m)
- (48.32) PRACTICAL DCPT REFUSAL ELEVATION (m)
- GEOPHONE LOCATIONS
- 3 GEOPHONE NUMBER
- +10.0 SHOT LOCATION

CONCEPTUAL PLAN PROVIDE BY PROJECT STIDIO 1

GROUND SURFACE ELEVATIONS AT BOREHOLE LOCATIONS ARE REFERENCED TO A GEODETIC DATUM.

SCALE: 1:250

0 1 2 3 4 5 10 15m

PATERSON GROUP
9 AURIGA DRIVE
OTTAWA, ON
K2E 7T9
TEL: (613) 226-7381

NO.	REVISIONS	DD/MM/YYYY	INITIAL
4	ADDED 2026 BOREHOLE LOCATION BH 1-26 TO BH 10-26	12/08/2026	FC
3	AS PER CONCEPTUAL SITE PLAN	28/11/2025	FC
2	AS PER CONCEPTUAL SITE PLAN	28/07/2023	NP
1	SEISMIC SHEAR WAVE VELOCITY TEST ADDED TO PLAN	02/01/2022	FC

ISATORIA PARTNERSHIP LIMITED

GEOTECHNICAL INVESTIGATION
178-200 ISABELLA STREET & 205 PRETORIA AVENUE
OTTAWA, ONTARIO


Title:

TEST HOLE LOCATION PLAN

Scale: 1:250	Date: 10/2020
Drawn by: YA	Report No.: PG5043-2
Checked by: KP	Dwg. No.: PG5043-2
Approved by: DJG	Revision No.: 4

11x17

p:\autocad drawings\geotechnical\pg50xx\pg5043\pg5043-2.thtp (rev.04).dwg

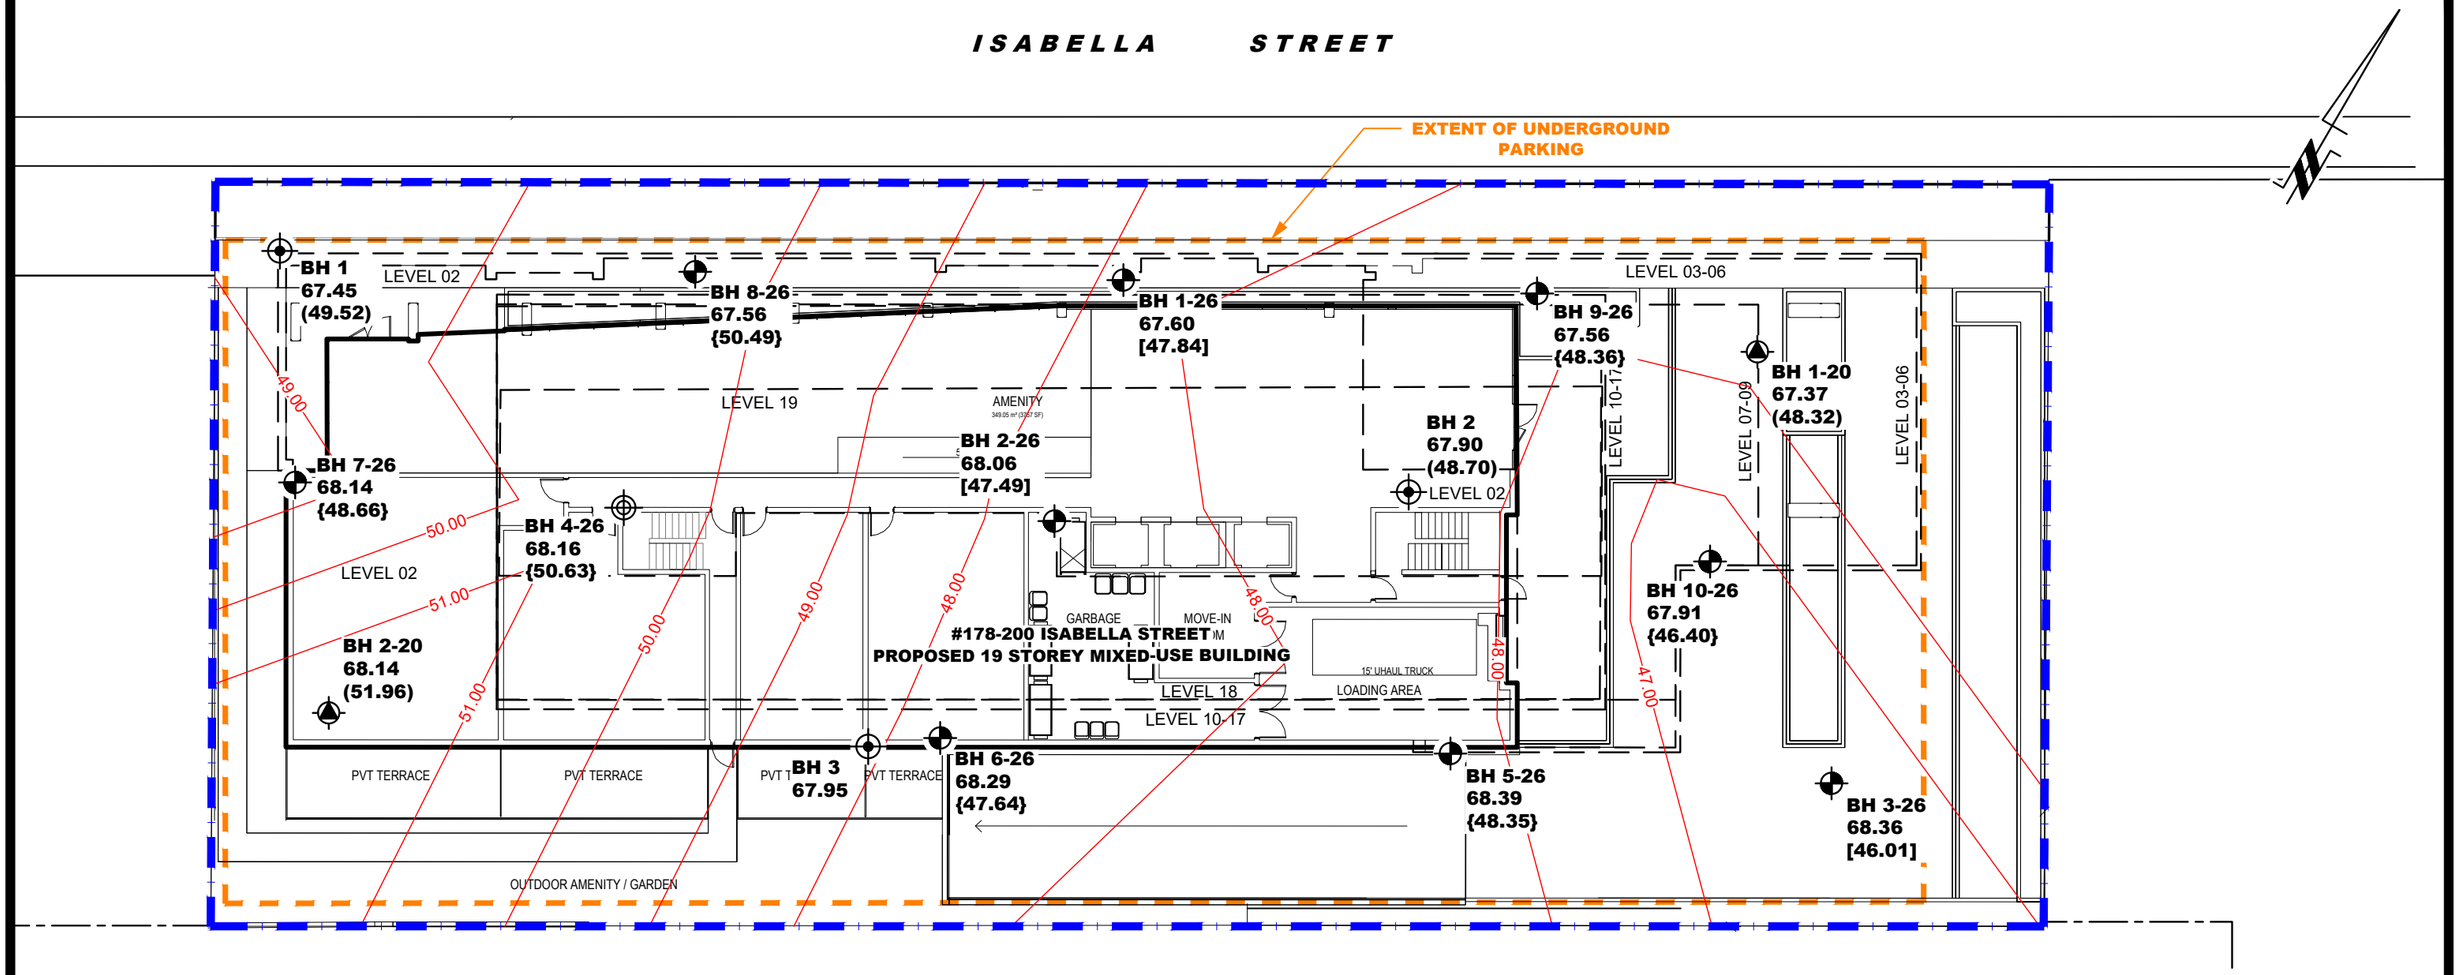

NOTES:

- BEDROCK CONTOURS DEPICTED HEREIN ARE BASED ON LINEAR INTERPOLATION BETWEEN TEST HOLES WHERE BEDROCK HAS BEEN ENCOUNTERED BY PATERSON THROUGHOUT THE SUBJECT SITE AND IS LIMITED TO THAT INFORMATION, AND INTERPRETATION WHERE REQUIRED.
- DUE TO THE VARIABILITY OF THE QUALITY OF THE BEDROCK WITHIN ITS UPPER PORTION, THICKNESS OF THE WEATHERED PORTION OF THE BEDROCK IS NOT BEING DEPICTED. THEREFORE, SOLID OR GOOD QUALITY BEDROCK ELEVATION COULD BE ENCOUNTERED AT DIFFERENT ELEVATIONS THAT THE ONES DEPICTED HEREIN.
- ACTUAL SITE CONDITIONS AND BEDROCK DEPTHS/ELEVATIONS MAY VARY BEYOND TEST HOLE LOCATIONS AND AS DEPICTED BY THE CONTOUR LINES.

LEGEND:

- BOREHOLE LOCATION
- BOREHOLE WITH MONITORING WELL LOCATION
- BOREHOLE LOCATION, 2020
- BOREHOLE WITH MONITORING WELL LOCATION (PG3944,2016)
- 67.37 GROUND SURFACE ELEVATION (m)
- (48.32) PRACTICAL DCPT REFUSAL ELEVATION (m)
- —48.00— BEDROCK CONTOURS (m)

CONCEPTUAL PLAN PROVIDE BY PROJECT STIDIO 1

GROUND SURFACE ELEVATIONS AT BOREHOLE LOCATIONS ARE REFERENCED TO A GEODETIC DATUM.

SCALE: 1:250

0 1 2 3 4 5 10 15m

PATERSON GROUP
9 AURIGA DRIVE
OTTAWA, ON
K2E 7T9
TEL: (613) 226-7381

NO.	REVISIONS	DD/MM/YYYY	INITIAL

ISATORIA PARTNERSHIP LIMITED

GEOTECHNICAL INVESTIGATION
178-200 ISABELLA STREET & 205 PRETORIA AVENUE
OTTAWA, ONTARIO

Title:

BEDROCK CONTOUR PLAN

Scale: 1:250	Date: 10/2026
Drawn by: ZS	Report No.: PG5043-2
Checked by: FC	Dwg. No.: PG5043-3
Approved by: DJG	Revision No.:

11x17

p:\autocad drawings\geotechnical\pg50xx\pg5043\pg5043-2 thlp (rev.04).dwg