### 3640 Greenbank Road Transportation Impact Assessment

Step 1 Screening Report

Step 2 Scoping Report

Step 3 Forecasting Report

Step 4 Analysis Report

### Prepared for:

Tamarack Homes & Taggart Investments 3187 Albion Road South Ottawa, ON K1V 8Y3

Prepared by:

CGH Transportation Inc. 13 Markham Avenue Nepean, ON K2G 3Z1

December 2018

PN: 2018-05

### Table of Contents

1	Scre	ening	1
2	Scop	ning	1
	2.1	Existing and Planned Conditions	1
	2.1.1	Proposed Development	1
	2.1.2	2 Existing Conditions	3
	2.1.3	B Planned Conditions	6
	2.2	Study Area and Time Periods	6
	2.2.1	L Study Area	6
	2.2.2	2 Time Periods	6
	2.2.3	B Horizon Years	7
	2.3	Exemption Review	7
3	Fore	casting	7
	3.1	Development-Generated Travel Demand	7
	3.1.1	Trip Generation and Mode Shares	7
	3.1.2	2 Trip Distribution	9
	3.1.3	3 Trip Assignment	9
	3.2	Background Network Travel Demands	. 11
	3.2.1	Transportation Network Plans	. 11
	3.2.2	2 Background Growth	. 11
	3.2.3	3 Other Developments	. 11
	3.3	Demand Rationalization	. 14
4	Anal	ysis	. 14
	4.1	Development Design	. 14
	4.1.1	L Design for Sustainable Modes	. 14
	4.1.2	2 Circulation and Access	. 15
	4.1.3		
	4.2	Parking	. 15
	4.3	Boundary Street Design	. 15
	4.4	Access Intersections	. 17
	4.4.1	L Location and Design of Access	. 17
	4.4.2	2 Intersection Control	. 17
	4.5	Transportation Demand Management	. 18
	4.6	Neighbourhood Traffic Management	. 18
	4.7	Transit	. 18
	4.8	Review of Network Concept	
	4.9	Intersection Design	. 19
	4.9.1	•	
	4.9.2	2 Intersection Design	. 19
5	Cond	rlusions	25

### List of Figures

Figure 1: Area Context Plan	
Figure 2: Concept Plan	2
Figure 3: Intersection of Cambrian Road at Borrisokane Road	3
Figure 4: Existing Transit Service	4
Figure 5: 2018 Traffic Counts	5
Figure 6: Traffic Assignment (%)	10
Figure 7: Assignment (Volumes)	10
Figure 8: 2022 Future Background Traffic Volumes	11
Figure 9: 2027 Future Background Traffic Volumes	12
Figure 10: 2022 Future Total Traffic Volumes	
Figure 11: 2027 Future Total Traffic Volumes	14
Figure 12: Transit Walking Distance	16
List of Tables	
Table 1:Collision Summary - Cambrian Road @ Borrisokane Road	5
Table 2: Exemption Review	
Table 3: TRANS Trip Generation Person Trip Rates	
Table 4: Total Person Trip Generation	
Table 5: OD Survey Existing Mode Share - South Nepean	
Table 6: OD Survey Existing Mode Share - Adjusted	
Table 7: Trip Generation by Mode	
Table 8: OD Survey Existing Mode Share - South Nepean	9
Table 9: Trip Generation by Transit Mode	
Table 10: 2031 Screenline Capacity	19
Table 11: 2018 Existing Conditions Operational Analysis	
Table 12: 2022 Future Background Conditions Operational Analysis	20
Table 13: 2027 Future Background Conditions Operational Analysis	20
Table 14: 2022 Total Future Conditions Operational Analysis	21
Table 15: 2027 Total Future Conditions Operational Analysis	
Table 16: PETSI Score	23
Table 17: Bicycle LOS Criteria	23

### List of Appendices

Appendix A – TIA Screening Form and Certification Form

Appendix B – Turning Movement Count Data

Appendix C – Collision Data

Appendix D – Traffic Signal Warrant Sheet

Appendix E – TDM Measures Checklist

Appendix F – 2018 Existing Synchro

Appendix G - 2022 Future Background Synchro

Appendix H - 2027 Future Background Synchro

Appendix I – 2022 Total Future Synchro

Appendix J – 2027 Total Future Synchro



### 1 Screening

This study has been prepared according to the City of Ottawa's 2017 Transportation Impact Assessment (TIA) Guidelines. Accordingly, a Step 1 Screening Form has been prepared and is included as Appendix A, along with the Certification Form for TIA Study PM. As shown in the Screening Form, a TIA is required. Both the Design Review Component and the Network Impact Component will be completed.

### 2 Scoping


### 2.1 Existing and Planned Conditions

### 2.1.1 Proposed Development

The proposed development, located at 3640 Greenbank Road, is currently a greenfield property within the Barrhaven South CDP Area. The site is in an area that is currently zoned DR Development Reserve Zone. The proposed residential development will consist of a mix of detached homes and townhouses. The concept plan considers a total of approximately 350 units, split between townhouse and detached units (221 townhouses and 125 detached homes). Access to the proposed development will be via the adjacent developments, and ultimately will be accessed via realigned Greenbank Road. The realigned Greenbank Road access configuration will be determined once that road is completed. The development will also have connections to the adjacent developments to allow access to shared community services (i.e. parks, schools, etc.). The development traffic will primarily use the main access (Street 1) to reach the transportation network. The anticipated full build-out and occupancy horizon is 2022, built in two phases, referred to herein as Phase 7 and Phase 8. Figure 1 illustrates the Study Area Context. Figure 2 illustrates the proposed concept plan.



Figure 1: Area Context Plan

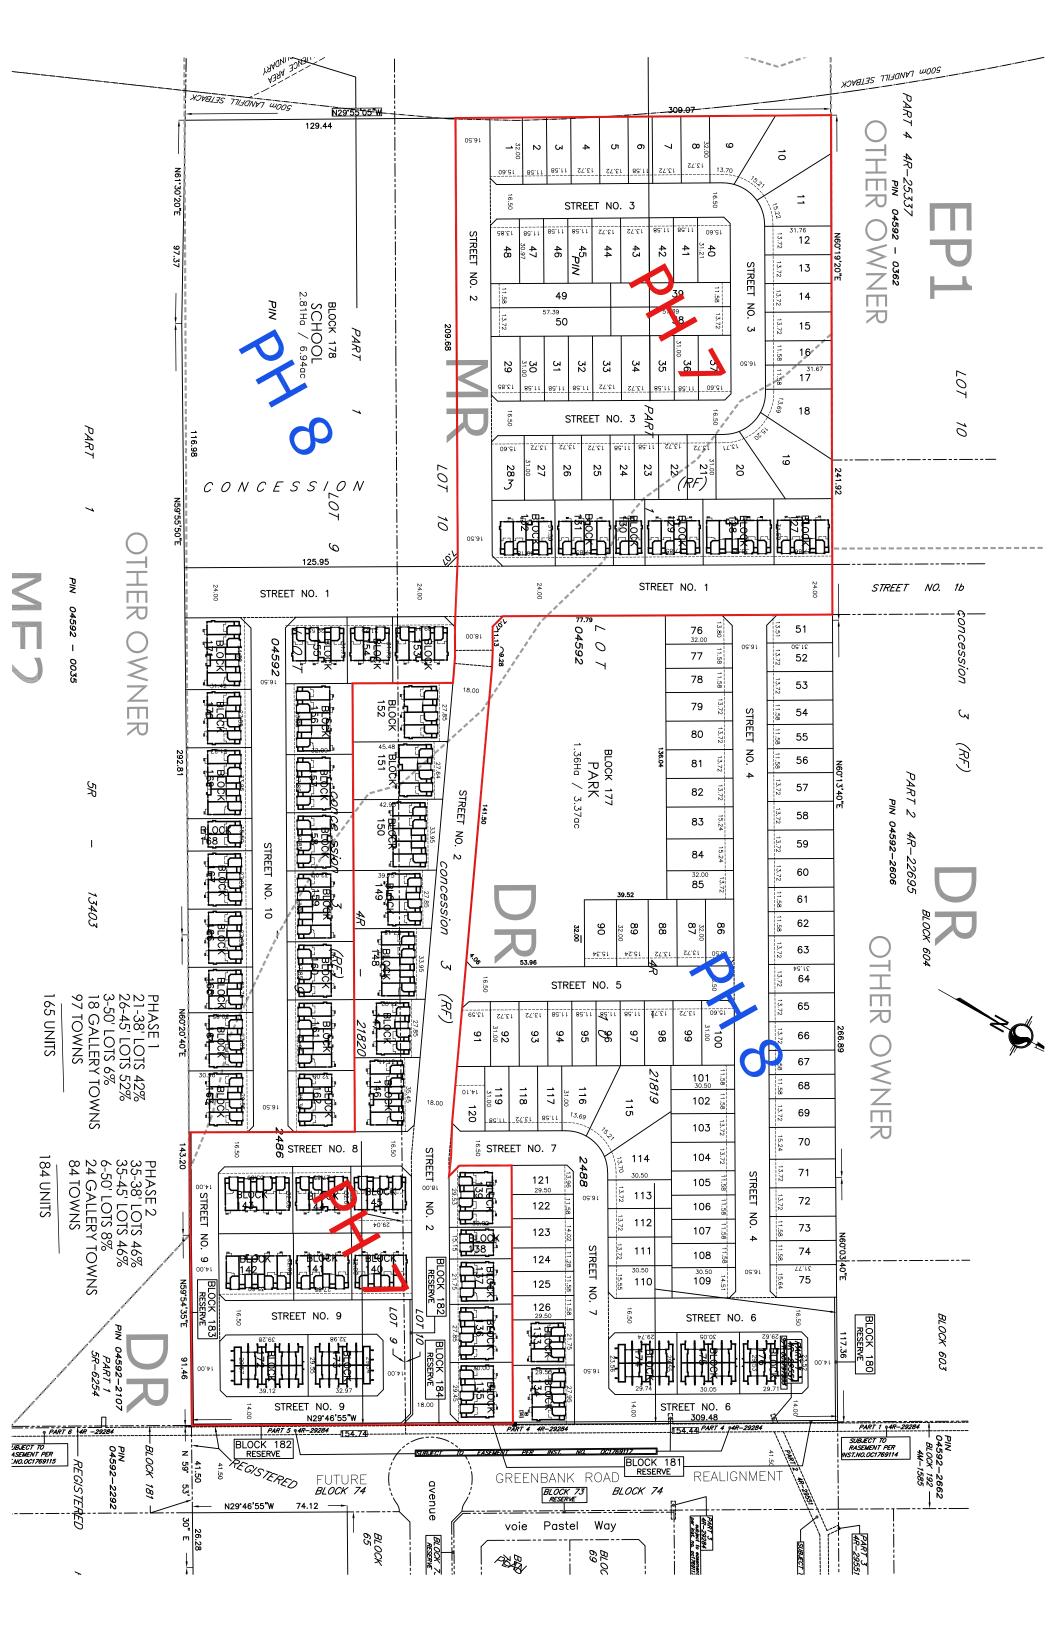

### 2.1.2 Existing Conditions

### 2.1.2.1 Area Road Network

### Borrisokane Road

Borrisokane Road is a City of Ottawa collector road with a two-lane rural cross-section including gravel shoulders and an 80 km/h posted speed limit. North of Cambrian Road, Borrisokane Road becomes an Arterial Road, the cross section does not change. The Ottawa Official Plan reserves a 24-metre right-of-way (ROW) south of Cambrian Road, north of Cambrian Road a 37.5 ROW is reserved.

### Cambrian Road

Cambrian Road is a City of Ottawa arterial road with a two-lane rural cross-section including gravel shoulders and a 70 km/h posted speed limit. The Ottawa Official Plan reserves a 37.5 metre ROW from Cedarview (now Borrisokane Road) to Jockvale Road.

### 2.1.2.2 Existing Intersections

### Cambrian Road at Borrisokane Road

The intersection of Cambrian Road at Borrisokane Road is an unsignalized intersection with no auxiliary lanes. The intersection is stop controlled on the Cambrian Road (minor) leg of the road. No crosswalks are present, and none of the legs of the intersection have sidewalks. No cycling facilities are present on any of the legs of the intersection. No turn restrictions are present. Figure 3 illustrates the intersection of Cambrian Road at Borrisokane Road.

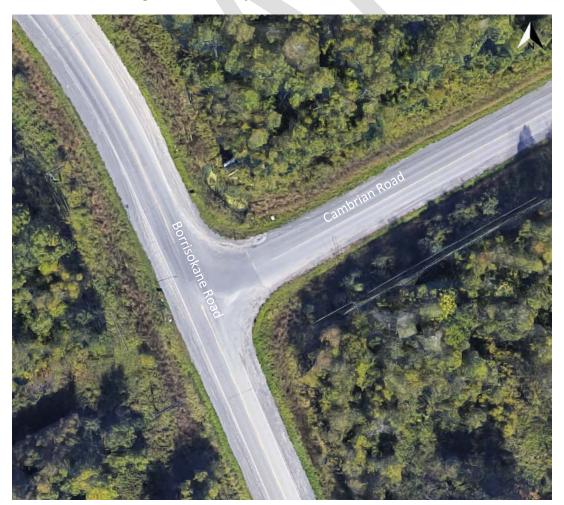


Figure 3: Intersection of Cambrian Road at Borrisokane Road

New Greenbank Road does not yet exist and therefore, no intersections along this road exists. A 41.5 metre ROW is protected for New Greenbank Road for in the Official Plan, north of the South Urban Community – south limit. The adjacent street network has been prepared in concept but does not exist.

### 2.1.2.3 Existing Driveways

There are no existing driveways within 200 metres of the potential future access.

### 2.1.2.4 Cycling and Pedestrian Facilities

No cycling facilities currently exist along Borrisokane Road or Cambrian Road, and no future cycling facilities are included in the Cycling Plan. Similarly, no existing or planned pedestrian facilities are shown on Borrisokane Road. As New Greenbank Road has not yet been constructed, no cycling or pedestrian facilities currently exist. The future cross-section has not been determined for New Greenbank Road (South of the urban boundary limit), but it is assumed that it would include pedestrian and cycling facilities, like the cross-section contemplated within the Urban Boundary.

### 2.1.2.5 Existing Transit

There is no existing transit service along the boundary roads. East of the subject development on Cambrian Road Route 95 runs along River Mist Road and Cambrian Road. Figure 4 illustrates the existing transit service.

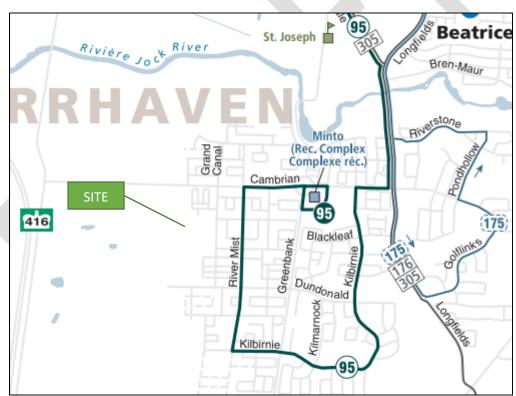


Figure 4: Existing Transit Service


### 2.1.2.6 Existing Area Traffic Management Measures

There are no existing area traffic management measures within the Study Area.

### 2.1.2.7 Existing Peak Hour Travel Demand

AM and PM two-way traffic volumes at the intersection of Cambrian Road at Borrisokane Road have been documented in Figure 5 below. Appendix B includes excerpts from the Meadows Phase 5 TIA by others, detailing the turning movement counts.

Figure 5: 2018 Traffic Counts

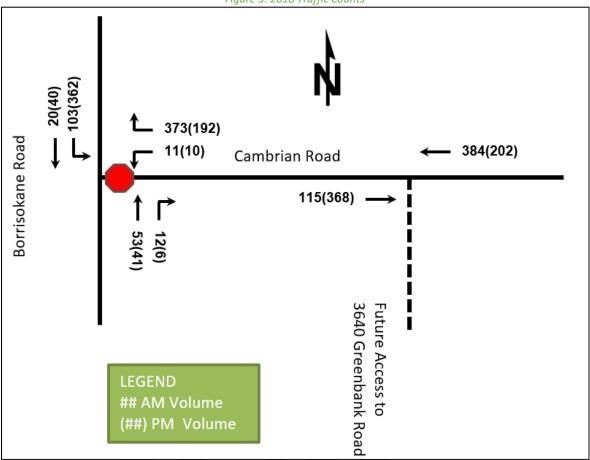

### 2.1.2.8 Collision Analysis

Collision data has been acquired from the City of Ottawa for five years prior to the commencement of this TIA at each of the Study Area intersections. Table 1 summarizes the collisions at the intersection of Cambrian Road at Borrisokane Road.

Table 1:Collision Summary - Cambrian Road @ Borrisokane Road

		Number	%
<b>Total Collisions</b>		9	100%
Classification	Fatality	0	0%
	Non-Fatal Injury	2	22%
	Property Damage Only	7	78%
Initial Impact	Angle	0	0%
Туре	Rear end	4	44%
	Sideswipe	0	0%
	Turning Movement	0	0%
	SMV Other	5	56%
	Other	0	0%
Road Surface	Dry	6	67%
Condition	Wet	1	11%
	Loose Snow	0	0%
	Slush	0	0%
	Packed Snow	0	0%
	Ice	2	22%
Pedestrian Invol	ved	0	0%

Collisions at the intersection of Cambrian Road at Borrisokane Road were primarily on the westbound leg. The collisions were only single motor vehicle and rear end type collisions. It was also noted that 80% of the collisions only involved property damage, indicating low speed collisions, with no fatalities. Collision data is included in Appendix C.

### 2.1.3 Planned Conditions

### 2.1.3.1 Changes to the Area Transportation Network

#### Greenbank Road

The future New Greenbank Road extension, south of Cambrian Road, will pass just east of the proposed development, providing Arterial Road connectivity. However, the timing of this extension is unknown as it is not included in the City of Ottawa's Transportation Master Plan 2031 Affordable Road Network.

#### Cambrian Road

The Cambrian Road Widening Environmental Assessment includes a four-lane cross-section along Cambrian Road from Longfields Drive to the future Realigned Greenbank Road. This EA has been approved by Transportation Committee and City Council, but the widening is not considered in the City of Ottawa's Transportation Master Plan 2031 Affordable Road Network and therefore the timing of this widening is unknown.

### 2.1.3.2 Other Study Area Developments

### Half Moon Bay West

North of the proposed development is the Mattamy Development of Half Moon Bay West. This development will include 518 detached homes and 427 townhouses. Construction has not commenced on this subdivision. The site trips generated by this site will be accounted for in the traffic projections.

### Half Moon Bay South

Southeast of the proposed development is the Mattamy Development of Half Moon Bay South. This development is nearing completion and only the final phases remain. It is assumed that any traffic generated by this development is either captured in the existing count or would be so minimal at the Study Area intersections that it would have a negligible impact on the operational analysis. Therefore, no additional traffic has been added to the network to account for this development.

### The Meadows Phase 4

East of the proposed development is the Tamarack Development of the Meadows. Phase 4 has a current development application. This development will not have shared accesses or traffic cross-over but will impact the Study Area intersections. This development will include 50 detached homes and 136 townhouses. The site trips generated by this site will be accounted for in the traffic projections.

### 2.2 Study Area and Time Periods

### 2.2.1 Study Area

The Study Area will include examining Borrisokane Road as a Boundary Road and will focus on the access intersection on Cambrian Road and the intersection of Borrisokane Road at Cambrian Road.

### 2.2.2 Time Periods

As the proposed development is composed entirely of residential units the AM and PM peak hours will be examined.

### 2.2.3 Horizon Years

The anticipated build-out year is 2022. As a result, the full build-out plus five years horizon year is 2027.

### 2.3 Exemption Review

Table 2 summarizes the exemptions for this TIA.

Table 2: Exemption Review

Module	Element	Explanation	Exempt/Required
Design Review Com	ponent		
4.1 Development Design	4.1.2 Circulation and Access	Only required for site plans	Exempt
	4.2.3 New Street Networks	Only required for plans of subdivision	Required
4.2 Parking	4.2.1 Parking Supply	Only required for site plans	Exempt
	4.2.2 Spillover Parking	Only required for site plans where parking supply is 15% below unconstrained demand	Exempt
<b>Network Impact Cor</b>	nponent		
4.5 Transportation Demand Management	All Elements	Not required for site plans expected to have fewer than 60 employees and/or students on location at any given time	Required
4.6 Neighbourhood Traffic Management	4.6.1 Adjacent Neighbourhoods	Only required when the development relies on local or collector streets for access and total volumes exceed ATM capacity thresholds	Required
4.8 Network Concept		Only required when proposed development generates more than 200 person-trips during the peak hour in excess of equivalent volume permitted by established zoning	Required

### 3 Forecasting

### 3.1 Development-Generated Travel Demand

### 3.1.1 Trip Generation and Mode Shares

The 2009 TRANS Trip Generation Study (TRANS Study) has been reviewed to determine the appropriate residential trip generation rates. Both single detached and townhouse style dwellings are proposed within the subject development. Vehicle trip rates have been determined using Table 6.3 of the TRANS Study. The initial mode share associated with these trips has been determined using Table 3.13 of the TRANS Study. Using this information, the person trip rate has been calculated. Table 3 below summarizes the vehicle trip rates, initial mode shares, and person trip rates, for each land use this study will consider.

Table 3: TRANS Trip Generation Person Trip Rates

	ITE LUC	Dools	Vohiele		Mode Share		Dougon Trin
Dwelling Type		Peak Hour	Vehicle Trip Rate	Vehicle	Transit	Non- Motorized	Person Trip Rates
Cinala Datashad	210	AM	0.70	55%	25%	9%	1.27
Single Detached	210	PM	0.90	64%	19%	6%	1.41
Townhouse	220	AM	0.54	55%	27%	8%	0.98
	220	PM	0.71	61%	22%	6%	1.16

LUC - Land Use Code

Using the above Person Trip rates, the total person trip generation has been estimates. Table 4 below illustrates the total person trip generation by dwelling type.

Table 4: Total Person Trip Generation

Land Use	Lleite	AM Peak Hour			PM Peak Hour			
Land Ose	Units	In	Out	Total	ln	Out	Total	
Single Detached	125	47	113	160	108	69	177	
Townhouse	221	78	138	216	136	121	257	
Total Person Trips		125	251	376	244	190	434	

Using the most recent National Capital Region Origin-Destination survey (OD Survey), the existing mode shares for South Nepean have been determined. Table 5 summarizes the existing mode share.

Table 5: OD Survey Existing Mode Share - South Nepean

Travel Mode	AM Mode Share	PM Mode Share
Auto Driver	61%	63%
Auto Passenger	8%	11%
Transit	27%	24%
Non-Auto	4%	2%
Total	100%	100%

As per the direction from the City of Ottawa the Transit mode share has been adjusted to lower the transit share for this development. Table 6 summarizes the adjusted mode shares.

Table 6: OD Survey Existing Mode Share - Adjusted

Travel Mode	AM Mode Share	PM Mode Share
Auto Driver	78%	77%
Auto Passenger	8%	11%
Transit	10%	10%
Non-Auto	4%	2%
Total	100%	100%

Using the above mode shares and person trip rates the person trips by mode have been projected. Table 7 summarizes the trip generation by mode.

Table 7: Trip Generation by Mode

Travel Mode	Mode Share	In	Out	Total	Mode Share	ln	Out	Total
<b>Auto Driver</b>	78%	98	196	294	77%	188	146	334
Auto Passenger	8%	10	20	30	11%	27	21	48
Transit	10%	13	25	38	10%	24	19	43
Non-Auto Modes	4%	5	10	15	2%	5	4	9
Total	100%	125	251	376	100%	244	190	434

As shown above, 294 AM and 334 PM peak hour two-way vehicle trips are projected as a result of the proposed development.

No trip reductions factors (i.e. synergy, pass-by, etc.) have been applied as the subject development is composed entirely of residential units.

### 3.1.2 Trip Distribution

To understand the travel patterns of the subject development the OD Survey has been reviewed to determine the existing travel patterns. Table 8 below summarizes the distribution.

Table 8: OD Survey Existing Mode Share - South Nepean

To/From	Percent of Trips
North	60%
South	5%
East	35%
West	0%
Total	100%

### 3.1.3 Trip Assignment

Using the distribution outlined above, turning movement splits, and access to major transportation infrastructure, the trips generated by the site have been assigned to the Study Area road network. Figure 6 illustrates the percent traffic assignment. Figure 7 illustrates the volume traffic assignment.


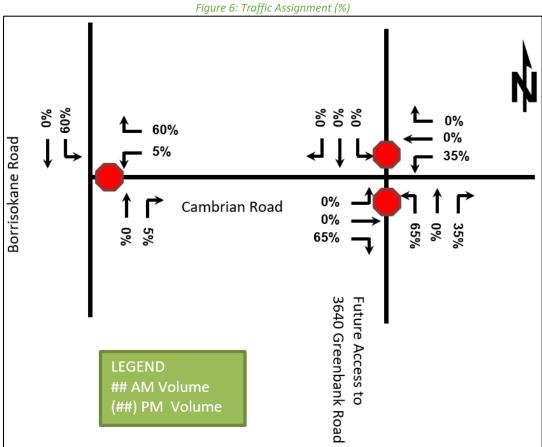


Figure 7: Assignment (Volumes)

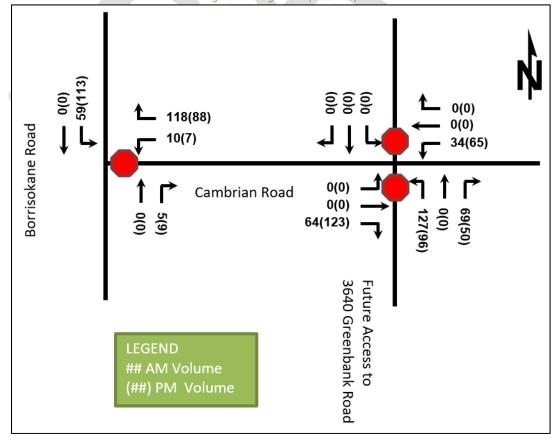

### 3.2 Background Network Travel Demands

### 3.2.1 Transportation Network Plans

There are no planned changes to the Study Area Transportation Network within the Study Horizons that would influence the Study Area.

### 3.2.2 Background Growth

A large amount of background traffic has been accounted for through the other developments that have been documented in Section 2.1.3.2. To account for background growth along this corridor a 2%/annum background growth rate has been applied along Cambrian Road and Borrisokane Road.

### 3.2.3 Other Developments

As detailed in Section 2.1.3.2, the following developments have been included in the background traffic forecasts:

- Half Moon Bay West
- The Meadows Phase 4

Figure 8 illustrates the 2022 future background traffic volumes. Figure 9 illustrates the 2027 future background traffic volumes. Figure 10 illustrates 2022 total future traffic, including the site generated traffic. Figure 11 illustrates the 2027 total future traffic, including the site generated traffic.

(£6)211 → Future Access to
3640 Greenbank Road

EGEND
## AM Volume

## AM Volume

(##) PM Volume

Figure 8: 2022 Future Background Traffic Volumes

Figure 9: 2027 Future Background Traffic Volumes

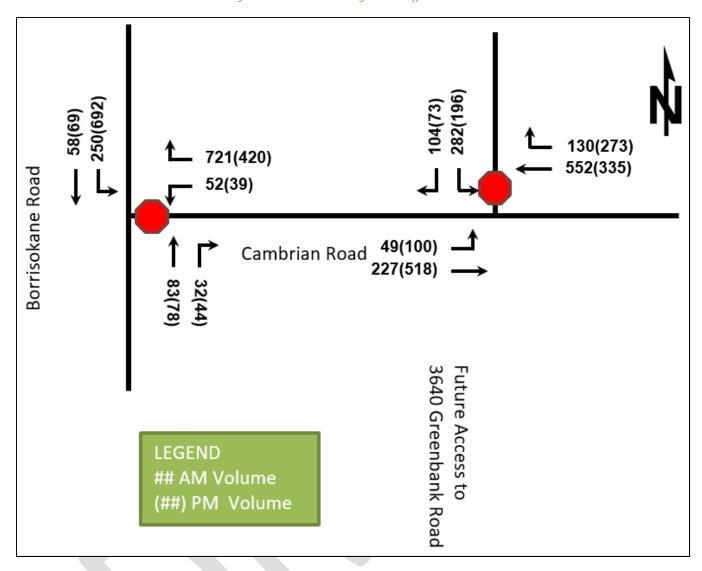


Figure 10: 2022 Future Total Traffic Volumes


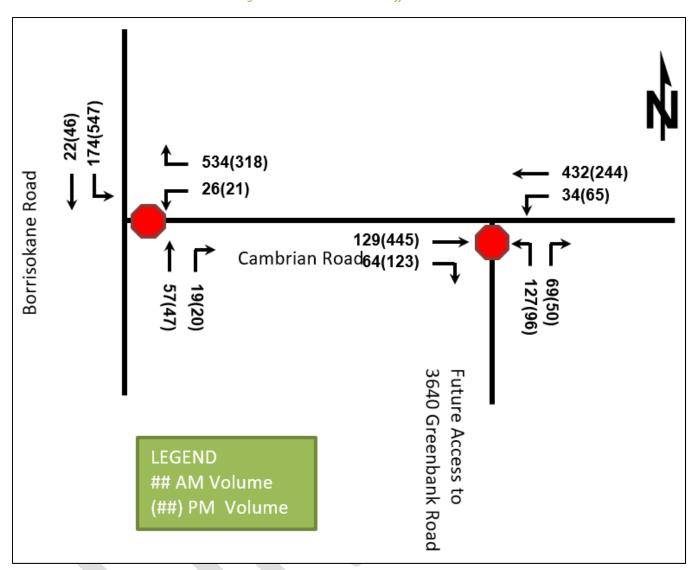


Figure 11: 2027 Future Total Traffic Volumes

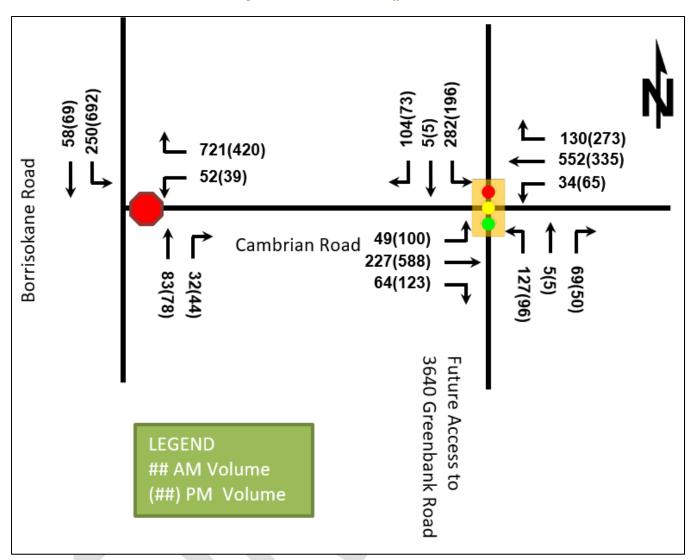

### 3.3 Demand Rationalization

No major capacity issues were noted in the TIAs for nearby developments and the development generated traffic volumes are of a magnitude that is not anticipated to create capacity issues at the Study Area intersections. Therefore, no adjustments have been made to the development generated traffic.

### 4 Analysis

### 4.1 Development Design

### 4.1.1 Design for Sustainable Modes

An existing bus stop is currently located at the intersection of Seeley's Bay Street and Cambrian Road. This bus stop would be beyond the 400-metre maximum walking distance to a transit stop prescribed by the City of Ottawa. It is recommended that transit service be extended west to the proposed Street 1 access, including a turn-around area at the southern edge of the subject site. By providing transit service in this manner 85% of the subject development would be within the 400-metre walking distance to a transit stop. The remaining 15% would be within 500-metre walking distance to a transit stop. This calculation assumes that Realigned Greenbank Road has not been constructed. Upon completion of Realigned Greenbank Road, it is assumed that transit service would be

extended along the corridor (as per the TMP) and would put all areas of the subject development within 400 metres walking distance to transit.

Bike lanes are to be provided along Street No. 1, the main collector road serving the proposed development.

Sidewalks are included as needed to provide access to transit, local amenities, and the adjacent road network.

Figure 12 illustrates the transit walking distance and the sidewalk locations.

### 4.1.2 Circulation and Access

This TIA is exempt from this element (see Table 2).

### 4.1.3 New Street Networks

The proposed development is anticipated to connect to both the Meadows Phase 4 (to the east) and the Half Moon Bay West development (to the north). Street 5 will connect to the east and is a local collector road with an 18-metre ROW. This road starts at Street 1 (north-south collector) and continues east to the future Realigned Greenbank Road Corridor. Prior to the construction of that facility Street 5 will connect directly to the development to the east (Meadows Phase 4). Street 1 will be a north-south collector with a 24-metre ROW. This street will connect through the development to the north (Half Moon Bay West) to Cambrian Road, forming the primary access to the proposed development. All other roads serving lots on both sides will have a 16.5-metre ROW. Roads serving lots on a single side will have a 14.5-metre ROW.

With the proposed cycling lanes Street 1 would have a BLOS A. Figure 13 illustrates the proposed 24 metre collector road cross-section.

### 4.2 Parking

This TIA is exempt from this Module (see Table 2).

### 4.3 Boundary Street Design

The subject development is surrounded on three sides by future development lands. On the east side is the future corridor for Realigned Greenbank Road. As the timing of this section of Realigned Greenbank Road is unknown, and the section along the frontage of the site will be constructed beyond the development horizon for The Meadows Phase 7 and Phase 8, it has been assumed that the City will determine the appropriate design elements through a future Environmental Assessment and the cross section will be similar to that proposed in the Cambrian Road EA completed for the section between New Greenbank Road and Longfields (formerly Jockvale). For the purposes of this TIA Cambrian Road will be considered as a boundary street and the Segment Multi-Modal Level of Service (MMLOS) will be recorded.

Dood Comment	Havisan	MMLOS					
Road Segment	Horizon	PLOS	BLOS	TLOS	TkLOS		
Combuing Dood	Existing & 2022	F	F	D	В		
Cambrian Road	2027	В	F	D	В		

It has been assumed that by the 2027 that a sidewalk would be built along Cambrian Road along the Half Moon Bay West frontage. This will improve the pedestrian level of service from a PLOS F to a PLOS B. The BLOS is primarily limited by the posted speed. If the speed limit on Cambrian Road were lowered to 50 km/h the BLOS would improve to a BLOS D. East of the subject section Cambrian Road widens to four-lanes and includes an at grade cycling facility on each side. Carrying this cross-section east through the subject section could increase the BLOS to a BLOS B or better.

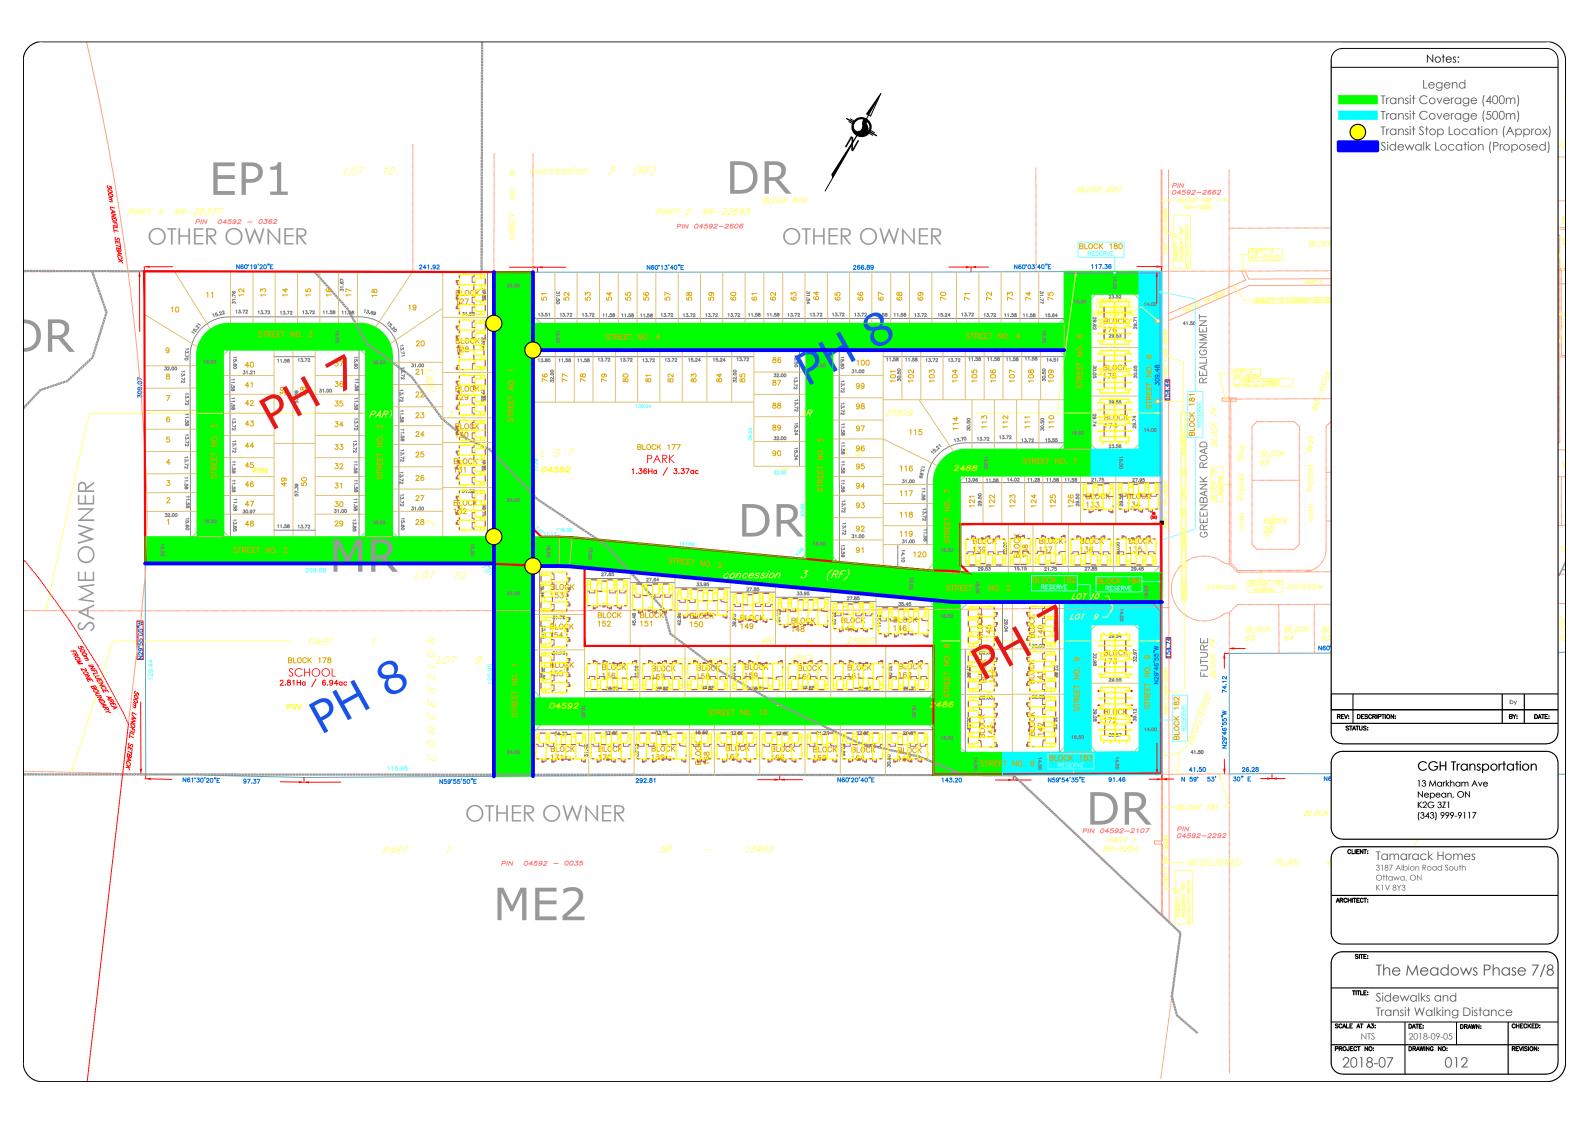


Figure 13: Proposed Collector Road Cross-section



### 4.4 Access Intersections

### 4.4.1 Location and Design of Access

The proposed main access to the site will be through the adjacent Half Moon Bay West development (to the north) and onto Cambrian Road via Street 1. An additional, secondary access is proposed through the adjacent Meadows Phase 4 to the west via Street 5. The operational analysis focuses on the intersection of Street 1 and Cambrian Road as it is anticipated that traffic generated by this site will primarily use this intersection to access the arterial road network. Given the size and unit type of the adjacent Meadows Phase 4 development, it is anticipated that any cross-traffic between the developments would be minor and likely balance out, and therefore have no impact on the operational analysis.

### 4.4.2 Intersection Control

#### Street 1 / HMBW Access at Cambrian Road

The intersection of Cambrian Road at Street 1 / HMBW Access has been examined using 2022 and 2027 traffic volumes to determine if signals are warranted. Ontario Traffic Manual (OTM) Book 12 traffic signal warrants have been used, specifically Justification #7. This warrant was shown to reach 107% of the criteria for 2022 volumes and 151% for 2027 volumes. However, when using the Justification 7 warrant for future new intersections, it is required to meet 150% to be considered justified. It is also noted that where the warrant meets 100%, the necessary underground provisions should be made as part of the road works. The warrant is met for the 2027 total future traffic conditions and therefore, signals will be examined in the 2027 future total horizon. Appendix D contains the traffic signal warrant analysis sheets.

In addition to Traffic Signal Justification Warrants, the City of Ottawa's Roundabout Screening Tool has been used to determine the appropriate traffic control for the intersection of Cambrian Road at Street 1 / HMBW Access. Using this tool, it was found that there were no contra-indications. It was found that there was only one suitability factor, that traffic signals are warranted. Therefore, a roundabout is not considered technically feasible at this location.

### Borrisokane Road at Cambrian Road

The intersection of Cambrian Road at Borrisokane Road has been examined using 2022 and 2027 traffic volumes to determine if signals are warranted. Ontario Traffic Manual (OTM) Book 12 traffic signals warrants have been

CGH Transportation Inc. Page 17

used, specifically Justification #7. This warrant was shown to reach 119% of the criteria for 2022 volumes and 110% for 2027 volumes. However, when using the Justification 7 warrant for future volumes at existing intersections, it is required to meet 120% to be considered justified. It is also noted that where the warrant meets 100%, the necessary underground provisions should be made during construction of the intersection. Therefore, signals will not be considered in the operational analysis. However, if this intersection is reconstructed underground provisions for signals should be included. Appendix D contains the traffic signal warrant analysis sheets.

In addition to Traffic Signal Justification Warrants, the City of Ottawa's Roundabout Screening Tool has been used to determine the appropriate traffic control for the intersection of Cambrian Road at Street 1 / HMBW Access. Using this tool, it was found that there were no contra-indications. It was found that there were no suitability factors.

### 4.5 Transportation Demand Management

Transportation Demand Management measures are implemented to encourage the use of non-auto modes of travel. This is aimed at reducing the reliance on single occupant auto trips in the City of Ottawa. The proposed development adheres to the City's TDM principles by providing direct connections to adjacent pedestrian, cycling, and transit facilities. The existing mode share for South Nepean has been used for all study horizons. The TDM Measures Checklist has been included in Appendix E. Note that this has been completed at a conceptual level and is subject to change.

### 4.6 Neighbourhood Traffic Management

The significant access routes to the development include Street 1, through the adjacent development to the north to Cambrian Road. It is assumed that 100% of the site traffic will utilize this route to access the Arterial Road Network. Additional access is provided through the adjacent development to the west via Street 5, however, as this route forces vehicles to travel along a circuitous route to get to Cambrian Road it is assumed that a negligible amount of traffic will use this route.

Local roads within the development are not expected to exceed the 120 vehicle per hour threshold as the local roads will feed the collector road (Street 1), which experiences approximately 200 peak hour peak direction trips. The traffic volumes on all roads are anticipated to be within the volume thresholds outlined in the City of Ottawa TIA Guidelines.

At the intersection of Street No. 1 and Street No. 2 it is recommended that appropriately designed bulb-outs be used on Street No. 2 to calm traffic along Street No. 1.

### 4.7 Transit

In Section 3.1 the trip generation by mode was estimated, including an estimate of the number of transit trips that will be generated by the proposed development. Table 9 summarizes the transit trip generation.

Mode Mode **Travel Mode** In Out Total In Out Total Share Share 10% 38 10% Transit 13 25 24 19 43

Table 9: Trip Generation by Transit Mode

The anticipated increase in travel demand is anticipated to be minimal. It is recommended that OC Transpo provide additional transit capacity only as needed once the development is completed. It is expected that once realigned Greenbank Road is constructed, including an upgraded transit facility, that the transit mode share, and therefore the transit trips generated by the proposed development would increase.

### 4.8 Review of Network Concept

A screenline is a tool used to evaluate the adequacy of traffic capacity at a broad network level. To develop a screenline, an imaginary line is drawn, generally along a relevant geographic feature (i.e. major roadway, river, greenbelt, etc.). Each road that crosses this imaginary line forms a station within that screenline. The traffic volumes and traffic capacity at each of the stations is tabulated. The NCR Trans Committee maintains a database of traffic data for various established screenlines across the City of Ottawa. Two screenlines have been examined to determine if the network can accommodate the proposed development, SL 42 Rideau River and SL 49 Jock River. The 2031 Base scenario and 2031 Network Concept have been summarized in Table 10.

Caraanlina	AM	2031 Inbound (B	ase) AM 2031 Inbound (Network Cond			
Screenline	Demand	Capacity	V/C Ratio	Demand	Capacity	V/C Ratio
SL 42 Rideau River (Manotick)	2928	3800	0.77	2596	3800	0.68
SL 49 Jock River	6405	10200	0.63	6642	13200	0.50

Table 10: 2031 Screenline Capacity

The proposed development does not generate enough traffic to impact the V/C ratio of the above screenlines. Future road projects should proceed on schedule to prevent local traffic issues. These projects include the Cambrian Road widening, Strandherd Drive (currently in the design stage), and realigned Greenbank Road.

### 4.9 Intersection Design

### 4.9.1 Intersection Control

As discussed in Section 4.4.2 signals will be analyzed at the intersection of Street 1 at Cambrian Road for the 2027 Future Total Horizon. As roundabouts have been screened out no roundabout analysis will be included.

### 4.9.2 Intersection Design

To understand the intersection design, an MMLOS analysis of existing, future background, and future total travel demands is required. The existing and future segment MMLOS has been discussed in Section 4.3. The following sections will discuss the vehicle LOS at the Study Area intersections, followed by a discussion of the intersection MMLOS for other modes.

### 4.9.2.1 Existing Conditions

The existing intersection volumes have been analyzed to establish a baseline condition to compare all future horizons to and determine the impact of the subject development on the Study Area road network. Table 11 summarizes the operational analysis of 2018 existing conditions. Appendix F contains the 2018 Existing Conditions Synchro sheets.

Interception I amo		AM Peak Hour				PM Peak Hour			
Intersection	Lane	LOS	Delay	V/C	Q (95 <sup>th</sup> )	LOS	Delay	V/C	Q (95 <sup>th</sup> )
Borrisokane	WBL/R	В	12	0.44	2	В	11	0.26	1
Road & Cambrian Road	NBT/R	-	-	-	-	-	-	-	-
Unsignalized	SBL/T	Α	6	0.08	0	Α	7	0.26	1

Table 11: 2018 Existing Conditions Operational Analysis

The existing intersection has been shown to operate with good LOS, and no operational concerns. No mitigation measures are required or recommended.

CGH Transportation Inc.

### 4.9.2.2 2022 Future Background

The 2022 future background intersection volumes have been analyzed to allow a comparison between the future volumes with and without the proposed development. Table 12 summarizes the operational analysis of 2022 future background conditions.

lata and ation			AM Peak Hour				PM Peak Hour			
Intersection	Lane	LOS	Delay	V/C	Q (95 <sup>th</sup> )	LOS	Delay	V/C	Q (95 <sup>th</sup> )	
Borrisokane	WBL/R	В	12	0.44	2	В	11	0.27	1	
Road & Cambrian Road	NBT/R	-	-	-	-	-	-	-	-	
Unsignalized	SBL/T	Α	8	0.08	0	Α	8	0.26	1	

Table 12: 2022 Future Background Conditions Operational Analysis

With the addition of background growth to reflect the 2022 horizon, the existing intersection is anticipated to operate with similar operational characteristics to the existing conditions, and well within City of Ottawa operational thresholds. Appendix G contains the 2022 Future Background Synchro Sheets.

### 4.9.2.3 2027 Future Background

The 2027 future background intersection volumes have been analyzed to allow a comparison between the future volumes with and without the proposed development. Table 13 summarizes the operational analysis of 2027 future background conditions

Intonoction	Lama	AM Peak Hour			PM Peak Hour				
Intersection	Lane	LOS	Delay	V/C	Q (95 <sup>th</sup> )	LOS	Delay	V/C	Q (95 <sup>th</sup> )
Borrisokane	WBL/R	D	34	0.9	13	F	87	1.05	15
Road & Cambrian Road	NBT/R	-	-	-	-	_	-	-	-
Unsignalized	SBL/T	А	6	0.17	1	Α	9	0.47	3
Half Moon Bay	EBT/R	Α	2	0.05	0	Α	9	0.10	0
West Access & Cambrian Road Unsignalized	WBL/T	-	-		-	-	-	-	-
	SBL/R	F	168	1.24	18	F	181	1.23	14

Table 13: 2027 Future Background Conditions Operational Analysis

With the addition of background growth to reflect the 2027 horizon, including Half Moon Bay North, the existing intersection is anticipated to operate with poor LOS in the PM peak hour. The new access to Half Moon Bay West is anticipated to operate with high delays and poor LOS in the AM and PM peak hour. The signal warrant was found to be met for the full intersection including the access to Meadows Phase 7 and 8. This will be examined further in the 2027 total future conditions. Appendix H contains the 2027 Future Background Synchro sheets.

#### 4.9.2.4 2022 Total Future

The 2022 total future intersection volumes, including the site generated traffic, have been analyzed to understand the impact of the subject development on the Study Area intersections. Table 14 summarizes the operational analysis of 2022 total future conditions.

### 3640 Greenbank Road Transportation Impact Assessment

Table 14: 2022 Total Future Conditions Operational Analysis

lutous stieus	Lana	AM Peak Hour				PM Peak Hour			
Intersection	Lane	LOS	Delay	V/C	Q (95 <sup>th</sup> )	LOS	Delay	V/C	Q (95 <sup>th</sup> )
Borrisokane	WBL/R	В	14	0.59	4	В	14	0.43	2
Road & Cambrian Road	NBT/R	-	-	-	-		-	-	-
Unsignalized	SBL/T	Α	7	0.11	0	Α	8	0.34	2
Meadows Phase	EBL/T	Α	0	-	-	Α	0	0.39	2
7 and 8 Access & Cambrian Road	WBT/R	Α	1	0.03	0	А	2	-	-
Unsignalized	NBL/R	В	16	0.38	2	С	21	0.06	0

With the addition of site generated traffic, the existing intersection of Borrisokane Road at Cambrian Road is anticipated to operate with similar LOS and delay as 2022 future background conditions. The access intersection to Meadows Phase 7 and 8 is anticipated to operate with minimal delays as a stop-controlled intersection. Appendix I contains the 2022 Total Future Synchro sheets.



#### 4.9.2.5 2027 Total Future

The 2027 total future intersection volumes, including the site generated traffic, have been analyzed to understand the impact of the subject development on the Study Area intersections.

Table 15: 2027 Total Future Conditions Operational Analysis

!			AM Pea	AM Peak Hour			PM Peak Hour			
Intersection	Lane	LOS	Delay	V/C	Q (95 <sup>th</sup> )	LOS	Delay	V/C	Q (95 <sup>th</sup> )	
Borrisokane	WBL/R	D	34	0.9	13	F	87	1.05	15	
Road & Cambrian Road	NBT/R	-	-	-	-	-	-	-	-	
Unsignalized	SBL/T	Α	6	0.17	1	А	9	0.47	3	
Meadows Phase 7 and 8	EBL/T/R	Α	1	0.05	0	Α	1	0.10	0	
Access/Half Moon Bay West	WBL/T/R	Α	0	0.03	0	А	1	0.07	0	
& Cambrian	NBL/T/R	F	129	1.05	9	F	588	2.07	17	
Road <i>Unsignalized</i>	SBL/T/R	F	501	1.99	29	F	1071	3.15	27	
	EBL	Α	12	0.18	9	А	10	0.18	13	
	EBT	Α	11	0.24	25	Α	16	0.55	75	
	EBR	Α	3	0.08	4	Α	5	0.13	9	
Meadows Phase 7 and 8	WBL	Α	9	0.06	6	Α	12	0.21	11	
Access/Half Moon Bay West	WBT	Α	18	0.59	70	А	11	0.31	36	
& Cambrian	WBR	Α	6	0.16	11	Α	6	0.28	18	
Road Signalized	NBL	Α	15	0.32	17	Α	14	0.24	15	
	NBT/R	А	8	0.08	9	Α	10	0.07	8	
	SBL	Α	21	0.58	36	Α	17	0.46	28	
	SBT/R	Α	8	0.11	11	Α	9	0.09	10	

By 2027 The unsignalized intersection of Borrisokane Road and Cambrian Road is projected to operate at or slightly above the theoretical capacity of a stop-controlled intersection. However, as shown in Section 4.4.2, this intersection does not meet the warrant for traffic control signals for future volumes at an existing intersection. Given the projected capacity deficiencies the City of Ottawa should monitor this intersection in the future to ensure that, at the time when the eight-hour traffic count volumes meet the traffic signal warrant, signals are implemented.

It is anticipated that by 2027 both Meadows Phase 7/8 and Half Moon Bay North will be complete. As shown in Section 4.4.2, the future intersection of the proposed access intersection on Cambrian Road will meet the warrant for signalization. The signalized intersection operates with good LOS, low delays, and no movements over capacity. Appendix J contains the 2027 Total Future Synchro sheets.

#### 4.9.2.6 Intersection MMLOS

Intersection MMLOS is only undertaken at signalized intersections. There is only one signalized intersection considered in this study, the future intersection of Meadows Phase 7/8 and Half Moon Bay North onto Cambrian Road.

Pedestrian LOS (PLOS) is evaluated using the PETSI score methodology which evaluates various intersection geometry elements and assigns those values a score. Table 16 summarizes the PETSI score evaluation for the proposed signalized intersection of Street 1 at Cambrian Road.

**Crossing East West Crossing North South Element** Condition **Points** Condition **Points Crossing Distance** 3 Lanes No Median 4 Lanes No Median 105 88 **Island Refuge** -4 -4 Signal Phasing / Timing Protected / Permissive **Left Turn Type** -8 Permissive -8 **Right Turn Conflict** Permissive -5 Permissive -5 Right Turn on Red Allowed -3 Allowed -3 Leading Ped. Interval No -2 No -2 **Corner Radius** 10m to 15m -6 10m to 15m -6 Crosswalk Standard Transverse -7 Standard Transverse -7 C Actual 70 Actual 53 D **PETSI LOS** C C Target Target

Table 16: PETSI Score

The east-west pedestrian crossing meets the target PLOS C for a collector road in a development community. The north-south pedestrian crossing does not meet the target PLOS C for an arterial road in a developing community. To improve the PLOS, the signal timing could be adjusted to only allow protected left turns. Alternatively, the right turn lanes on the eastbound and westbound lanes could be removed to reduce the crossing distance. Removing the permissive left turn phase on the eastbound and westbound approaches will reduce the vehicle LOS and create an awkward signal timing for motorists. Removing the right turn lanes is not recommended as this can increase the number of rear-end collisions at a signalized intersection. Therefore, in this case the LOS D should be tolerated as it is not reasonable to achieve the target PLOS.

Bicycle LOS (BLOS) is evaluated by examining elements that impact the level of traffic stress (LTS). For the proposed intersection it has been assumed that the "Mixed Traffic on a Signalized Intersection Approach" would apply. Table 17 summarizes the elements that impact the BLOS, the worst of these is taken as the intersection BLOS.

	East-West		North-South	
Right-turn Lane and Turning Speed of Motorists	Right-turn lane 25 to 50 m long, turning speed ≤ 25 km/h (based on curb radii and angle of intersection)	D	No Right Turn Lanes	N/A
Cyclist Making a Left-turn and Operating Speed of Motorists	No lane crossed, ≤ 50 km/h	В	No lane crossed, ≤ 50 km/h	В

Table 17: Bicycle LOS Criteria

The BLOS for the east-west approaches is governed by the right turn lanes on the eastbound and westbound approaches would operate at a BLOS D. This would not meet the target BLOS for the east-west approaches. The north south approaches of the intersection would operate at a BLOS B, meeting the target for this Local Route in a Development Community. As discussed previously in Section 4.3, the segment BLOS is not anticipated to meet the target for the north-south collector (Street 1).

Transit LOS (TLOS) is evaluated by examining the average signal delay and the relative attractiveness of transit compared to automobile trips. While local transit service is anticipated to be extended to the subject development, the TMP Ultimate Network does not include higher order transit facilities or transit signal priority (TSP) measures. Therefore, the TLOS for this intersection is F. Based on the definition of TLOS there are no improvements, aside from adding TSP along the corridor, which is not recommended as Cambrian Road is an arterial road serving developments and only extends from Borrisokane Road to Longfields Drive (2.75km), making it a poor candidate for a rapid transit facility.

Truck LOS (TkLOS) is evaluated for Developing Communities only along Arterial and Collector Truck Routes. The Street 1 collector is not anticipated to be a Truck Route and therefore no TkLOS has been evaluated at the proposed signalized intersection.

### 4.9.2.7 Access Intersection Design

The signalized intersection of Street 1 at Cambrian Road has been evaluated using the MMLOS methodology, OTM Book 12 Traffic Warrants, and TAC Geometric Standards to determine the appropriate intersection configuration.

### **Auxiliary Right Turn Lanes**

The vehicle LOS has been completed assuming that eastbound and westbound right turn lanes are provided. However, the BLOS at the intersection of Street 1 and Cambrian Road is governed by the presence of these auxiliary lanes. Based on the traffic volumes the vehicle LOS would not be significantly impacted by not including right turn lanes at the subject intersection. As it will improve the BLOS consideration should be given to not including right turn lanes. This should be balanced against the potential increase in rear-end collisions due to the high volume of right turning vehicles in a shared through-right-turn lane configuration. If they are included the eastbound right turn lane (accessing the Meadows Phase 7/8) does not require significant storage space, the 95<sup>th</sup> percentile queue is projected to be less than 10 metres in either peak hour. Therefore, minimum geometry requirements will dictate the intersection configuration.

### **Auxiliary Left Turn Lanes**

The vehicle LOS has been completed assuming that left turn lanes are provided on all approaches. The left turn lanes into and out of the north leg have been assumed to be consistent with the Half Moon Bay West Community Transportation Study Addendum No. 1, as follows:

- Eastbound Left-turn storage lane 40m
- Southbound Left-turn storage lane 70m

These have been included to show a fulsome description of the intersection and have not been reconfirmed through the analysis herein. The westbound left-turn lane and northbound left-turn lane provide access into and out of the proposed development. The operational analysis of the proposed intersection has indicated that left-turn lane storage should be provided as follows:

- Westbound Left-turn storage lane 15m
- Northbound Left-turn storage lane 20m

These storage lengths would accommodate the anticipated queue lengths, but the actual storage length should be calculated using geometric design principles including applicable minimums, deceleration length, and taper lengths. The recommended auxiliary left-turn lane storage and taper lengths should be confirmed during the detailed design of the proposed intersection.

### 4.9.2.8 Design Context

It is understood that development applications are underway for adjacent properties to the north. This TIA has included the traffic forecasts to reflect the growth associated with these adjacent developments. These forecasts will be refined through upcoming TIAs for those properties. Once those projections are available the design of the access intersection can be refined to ensure the appropriate lane geometry and signal timing is provided. In advance of that, this application should be allowed to proceed and be deemed complete, with the understanding that the developers of the adjacent properties have agreed to enter into cost sharing agreements to complete the construction of shared elements, such as the access intersection.

### 5 Conclusions

This Transportation Impact Assessment has documented the existing and future transportation conditions, for all travel modes, in the Study Area. The following conclusions can be offered based on the foregoing:

- A. The proposed development, located at 3640 Greenbank Road, is a greenfield development that will include approximately 350 residential units with a mix of townhouses and detached homes (221 townhouses and 125 detached homes).
- B. Access to the proposed development will be via the future realigned Greenbank Road once opened. Prior to that, and for the foreseeable future, the development will access Cambrian Road through the adjacent development to the north. Connections will be provided to the development to the east (Meadows Phase 4) but this is not anticipated to be the primary route for access to the development.
- C. The existing development is not currently served by transit. However, Route 95 currently serves the adjacent developments to the west and could be easily re-routed / extended to also serve Meadows Phase 7/8.
- D. The previous five years of collision history at the existing intersection of Borrisokane Road at Cambrian Road has been reviewed. No patterns emerged that indicated that mitigation measures or further monitoring was required.
- E. Using the TRANS Study the residential trip generation rates were calculated. The existing mode shares from the OD Survey were reviewed. City of Ottawa Staff indicated that the mode share should be adjusted to reflect a lower initial transit share for the proposed development. Using these factors, the person trip by mode was calculated. It was found that the proposed development can be anticipated to generate 376 AM and 434 PM peak hour two-way person trips.
- F. By providing transit stops at appropriate locations along Street 1 it was shown that 85% of the proposed development units would be within a 400m walking distance to transit, with the remaining 15% no more than 500m from transit. While it is typically desired that all residents would be within 400m of transit, in this case the units beyond 400m walking distance would be serviced by very close transit once realigned Greenbank Road is constructed.
- G. It was found that the road segment of Cambrian Road closest to the subject development would meet nearly all of the target MMLOS levels. The major exception is the BLOS, which was found to be BLOS F, whereas the target BLOS is B along Cambrian Road. East of the subject section of Cambrian Road, the road widens to four lanes and includes an at-grade cycling facility. Extending this cross-section along the subject section would increase the BLOS to B, meeting the target for this corridor.
- H. The proposed collector road cross-section would provide cycling lanes along each side, which would provide a BLOS A along Street No. 1.

- Traffic signal control warrants have been examined for the intersection of Street 1 / Half Moon Bay West
  Access at Cambrian Road. Using OTM Book 12 Justification 7, it was found that the 2027 traffic volumes
  would meet the volume threshold, and traffic control signals are warranted.
- J. Traffic signal control warrants have been examined for the intersection of Borrisokane Road at Cambrian Road. Using OTM Book 12 Justification 7, signals were not warranted. However, it was found that the volumes would warrant the inclusion of underground provisions for signals if the intersection is reconstructed.
- K. A review of screenline volumes indicated that there exists adequate network capacity to support the proposed development.
- L. Auxiliary right turn lanes have been examined on both the eastbound and westbound approaches of the intersection of Street 1 / HMBW Access at Cambrian Road. It was found that both approaches exceed the 10% of approach volume and are therefore warranted. However, consideration should be given to excluding these lanes as the BLOS at the intersection is reduced to below the minimum desirable MMLOS. The operational analysis projected that the signalized intersection will operate very well, with LOS A on all approaches, and therefore the right turn lanes are not required to address vehicle LOS constraints. As a result, it is recommended that these lanes be excluded from the intersection configuration.
- M. Given the low through volumes on the northbound and southbound approaches of the Street 1 / HMBW Access at Cambrian Road intersection, and confirmed through the operational analysis, the shared through-right-turn lane will provide adequate capacity to serve both approaches and no auxiliary right turn lanes are needed northbound or southbound.
- N. Auxiliary left turn lanes are proposed on all four legs of the proposed signalized intersection of Street 1 / HMBW Access at Cambrian Road. The geometry of these lanes should be confirmed as part of the functional design process.
- O. 3640 Greenbank Road Road is one of several proposed developments that are being put forward in similar timelines. This development application is proceeding prior to TIAs being completed for the proposed development across Cambrian Road. While the traffic projections for the adjacent developments have been included herein, these projections will be refined through upcoming TIAs for those properties. Therefore, while the access intersection has been examined herein, the design of the intersection will have to be refined once traffic projections for the north leg of the intersection have been finalized. Proceeding with a functional design in advance of the availability of these projections will create unnecessary duplication of design efforts. It is recommended that this duplication be avoided by allowing the development application for 3640 Greenbank Road to be deemed complete and all reports be circulated in advance of the preparation of an RMA or functional design for the subject intersection. Construction of this intersection will not proceed until such time as a functional design that satisfies City Staff is prepared and approved. Tamarack and CGH Transportation are committed to working with Mattamy and their consultant, Stantec, to develop an appropriate RMA for the intersection configuration.

The proposed development, with the proposed intersection control, will function within the Study Area Road Network. It is recommended that, from a transportation perspective, the proposed development application proceed.

### Prepared By:



Mark Crockford, P. Eng.
Director
905-251-4070
Mark.Crockford@CGHTransportation.com



Christopher Gordon, P. Eng.
Director
343-999-9117
Christopher.Gordon@CGHTransportation.com

## Appendix A

TIA Screening Form and PM Certification Form



### **CGH TRANSPORTATION INC.**

City of Ottawa 2017 TIA Guidelines Step 1 - Screening Form Date: 29-Aug-18
Project Number: Jul-18
Project Reference: Meadows Phase 7/8

1.1 Description of Proposed Development	
Municipal Address	3640 Greenbank Road
Description of Location	Greenfield Development
Land Use Classification	Residential
Development Size	125 Detached / 221 Townhomes
Accesses	Two accesses through adjacent developments
Phase of Development	Single Phase
Buildout Year	2022
TIA Requirement	Full TIA Required

1.2 Trip Generation Trigger	
Land Use Type	Townhomes or apartments
Development Size	221 Units
Trip Generation Trigger	Yes

1.3 Location Triggers	
Does the development propose a new driveway to a boundary street that is designated as part of the City's Transit Priority, Rapid Transit	No
or Spine Bicycle Networks?	INO
Is the development in a Design Priority Area (DPA) or Transit- oriented Development (TOD) zone?	No
Location Trigger	No

1.4. Safety Triggers	
Are posted speed limits on a boundary street are 80 km/hr or	No
greater?	NO
Are there any horizontal/vertical curvatures on a boundary street	No
limits sight lines at a proposed driveway?	INO
Is the proposed driveway within the area of influence of an adjacent	
traffic signal or roundabout (i.e. within 300 m of intersection in rural	No
conditions, or within 150 m of intersection in urban/ suburban	140
conditions)?	
Is the proposed driveway within auxiliary lanes of an intersection?	No
Does the proposed driveway make use of an existing median break	No
that serves an existing site?	NO
Is there is a documented history of traffic operations or safety	No
concerns on the boundary streets within 500 m of the development?	
Does the development include a drive-thru facility?	No
Safety Trigger	No



### **TIA Plan Reports**

On 14 June 2017, the Council of the City of Ottawa adopted new Transportation Impact Assessment (TIA) Guidelines. In adopting the guidelines, Council established a requirement for those preparing and delivering transportation impact assessments and reports to sign a letter of certification.

Individuals submitting TIA reports will be responsible for all aspects of development-related transportation assessment and reporting, and undertaking such work, in accordance and compliance with the City of Ottawa's Official Plan, the Transportation Master Plan and the Transportation Impact Assessment (2017) Guidelines.

By submitting the attached TIA report (and any associated documents) and signing this document, the individual acknowledges that s/he meets the four criteria listed below.

### **CERTIFICATION**

- 1. I have reviewed and have a sound understanding of the objectives, needs and requirements of the City of Ottawa's Official Plan, Transportation Master Plan and the Transportation Impact Assessment (2017) Guidelines;
- 2. I have a sound knowledge of industry standard practice with respect to the preparation of transportation impact assessment reports, including multi modal level of service review;
- 3. I have substantial experience (more than 5 years) in undertaking and delivering transportation impact studies (analysis, reporting and geometric design) with strong background knowledge in transportation planning, engineering or traffic operations; and
- 4. I am either a licensed<sup>1</sup> or registered<sup>2</sup> professional in good standing, whose field of expertise [check  $\sqrt{\text{appropriate field(s)}}$ ] is either transportation engineering  $\sqrt{\text{or}}$  or transportation planning  $\square$ .
- 1,2 License of registration body that oversees the profession is required to have a code of conduct and ethics guidelines that will ensure appropriate conduct and representation for transportation planning and/or transportation engineering works.

Dated at <u>Newmark</u>	<u>ket</u> this <u>27</u> day of <u>August</u>	<u>,</u> 2018.
(City)		
Name:	Mark Crockford(Please Print)	
Professional Title:	Professional Engineer	
	Madhad	
Signature	of Individual certifier that s/he meets the above four criteria	-

Office Contact Information (Please Print)
Address: 628 Haines Road
City / Postal Code: Newmarket / L3Y 6V5
Telephone / Extension: (905) 251-4070
E-Mail Address: Mark.Crockford@CGHTransportation.com



# Appendix B Turning Movement Counts



Survey Date: Tuesday February 15 2018
Weather: Cloudy

### TURNING MOVEMENT COUNT SUMMARY - ALL MODES

IBI

AADT FACTOR: 1.0

 AM Peak Hour:
 7:30 AM
 to
 8:30 AM

 MD Peak Hour:
 11:30 AM
 to
 12:30 PM

 PM Peak Hour:
 4:45 PM
 to
 5:45 PM

 E II Cu al Carrona Daniel (Validae)	

							Turnin	g Mov	/emer	nt Coun	t - Ful	ll Stud	y Sum	mary F	Report	(Vehic	les)							
			Bor	risokane R	oad			Воі	rrisokane f	Road		N/S			0				C	Cambrian Ro	ad		E/W	
Time	Period		1	Northbound	1				Southbour	nd		STREET			Eastbound					Westbound	d		STREET	Grand
Time	Teriou	LT	ST	RT	U-Turns	NB TOTAL	LT	ST	RT	U-Turns	SB TOTAL	TOTAL	LT	ST	RT	U-Turns	EB TOTAL	LT	ST	RT	U-Turns	WB TOTAL	TOTAL	TOTAL
7:00	8:00	0	28	10	0	38	72	15	0	0	87	125	0	0	0	0	0	8	0	350	0	358	358	483
8:00	9:00	0	48	13	0	61	123	22	0	0	145	206	0	0	0	0	0	5	0	346	0	351	351	557
9:00	10:00	0	24	1	0	25	60	22	0	0	82	107	0	0	0	0	0	1	0	209	0	210	210	317
AVG AI	M Pk HR	0	33	8	0	41	85	20	0	0	105	146	0	0	0	0	0	5	0	302	0	306	306	452
11:30	12:30	0	54	9	0	63	105	26	0	0	131	194	0	0	0	0	0	4	0	139	0	143	143	337
12:30	13:30	0	48	6	0	54	87	23	0	0	110	164	0	0	0	0	0	2	0	117	0	119	119	283
	ID Pk HR	0	51	8	0	59	96	25	0	0	121	179	0	0	0	0	0	3	0	128	0	131	131	310
15:00	16:00	0	40	1	0	41	58	51	0	0	109	150	0	0	0	0	0	13	0	159	0	172	172	322
16:00	17:00	0	25	0	0	25	344	43	0	0	387	412	0	0	0	0	0	11	0	162	0	173	173	585
17:00	18:00	0	22	0	0	22	352	36	0	0	388	410	0	0	0	0	0	14	0	198	0	212	212	622
	M Pk HR	0	29	0	0	29	251	43	0	0	295	324	0	0	0	0	0	13	0	173	0	186	186	510
то	TAL	0	373	56	0	429	1,382	282	0	0	1,664	2,093	0	0	0	0	0	66	0	2,110	0	2,175	2,175	4,268
EQ	12Hr	0	519	77	0	596	1921	392	0	0	2313	2909	0	0	0	0	0	91	0	2932	0	3024	3024	5933
	Note:	These volum	nes are calcul	lated by mu	ıltiplying the t	otals by the	appropriat	e expansio	n factor.	Ţ	1.39	ī												
AVG	i 12Hr	0	519	77	0	596	1921	392	0	0	2313	2909	0	0	0	0	0	91	0	2932	0	3024	3024	5933
	Note:	These volum	nes are calcul	lated by mu	ıltiplying the E	quivalent 1	2 hr. totals	by the AAD	T factor.		1.0	ı												
AVG	i 24Hr	0	680	101	0	781	2516	514	0	0	3030	3811	0	0	0	0	0	120	0	3841	0	3961	3961	7772
	Note:	These volum	nes are calcul	lated by mu	ıltiplying the A	Average Dai	ly 12hr. tota	ils by the 1	2 to 24 exp	ansion facto	r.		1.31	_										

		1	urning Movement Count - Full	Study S	Summary Report (Pedestrians)			
		Borrisokane Road	Borrisokane Road	N/S	0	Cambrian Road	E/W	Grand
Time	Period	NB Approach (East or West Crossing)	SB Approach (East or West Crossing)	STREET TOTAL	EB Approach (North or South Crossing)	WB Approach (North or South Crossing)	TOTAL	TOTAL
7:00	8:00	0	0	0	0	0	0	0
8:00	9:00	0	0	0	0	0	0	0
9:00	10:00	0	0	0	0	1	1	1
11:30	12:30	0	0	0	0	0	0	0
12:30	13:30	0	0	0	0	0	0	0
15:00	16:00	0	0	0	0	0	0	0
16:00	17:00	0	228	228	0	0	0	228
17:00	18:00	0	0	0	0	0	0	0
TO	TAL:	0	228	228	0	1	1	229

			Turning Movement Count	- Full Study St	ummary Report (Cyclists)			
<b>T</b> :	D	Borrisokane Road	Borrisokane Road	N/S	0	Cambrian Road	E/W	Grand
Time	Period	Northbound	Southbound	STREET TOTAL	Eastbound	Westbound	STREET TOTAL	TOTAL
7:00	8:00	0	0	0	0	0	0	0
8:00	9:00	0	0	0	0	0	0	0
9:00	10:00	0	0	0	0	0	0	0
11:30	12:30	0	0	0	0	0	0	0
12:30	13:30	0	0	0	0	0	0	0
15:00	16:00	0	0	0	0	0	0	0
16:00	17:00	0	0	0	0	0	0	0
17:00	18:00	0	0	0	0	0	0	0
TO:	TAL:	n	n	0	0	ſ	0	0

						Tur	ning N	∕loven	nent C	Count -	Full St	udy Su	mmar	y Repo	ort (He	avy Ve	hicles							
				risokane Ro					rrisokane I			N/S			0					ambrian Ro			E/W	
Time F	Period			Northbound		NB			Southbour		SB	STREET			Eastbound		EB			Westboun	I	WB	STREET	Grand TOTAL
		LT	ST	RT	U-Turns	TOTAL	LT	ST	RT	U-Turns	TOTAL	TOTAL	LT	ST	RT	U-Turns	TOTAL	LT	ST	RT	U-Turns	TOTAL	TOTAL	
7:00	8:00	0	9	0	0	9	16	8	0	0	24	33	0	0	0	0	0	0	0	5	0	5	5	38
8:00	9:00	0	10	2	0	12	4	10	0	0	14	26	0	0	0	0	0	2	0	16	0	18	18	44
9:00	10:00	0	12	0	0	12	7	13	0	0	20	32	0	0	0	0	0	0	0	10	0	10	10	42
11:30	12:30	0	11	1	0	12	2	11	0	0	13	25	0	0	0	0	0	1	0	5	0	6	6	31
12:30	13:30	0	10	3	0	13	2	11	0	0	13	26	0	0	0	0	0	0	0	5	0	5	5	31
15:00	16:00	0	2	0	0	2	10	2	0	0	12	14	0	0	0	0	0	1	0	11	0	12	12	26
16:00	17:00	0	1	5	0	6	6	2	0	0	8	14	0	0	0	0	0	4	0	17	0	21	21	35
17:00	18:00	0	2	1	0	3	1	1	0	0	2	5	0	0	0	0	0	2	0	5	0	7	7	12
тот	AL:	0	57	12	0	69	48	58	0	0	106	175	0	0	0	0	0	10	0	74	0	84	84	259

# Appendix C

Collision Data





## **City Operations - Transportation Services**

## **Collision Details Report - Public Version**

From: January 1, 2014 To: Jan

**To:** January 1, 2016

Location: CAMBRIAN RD @ GREENBANK RD

Traffic Control: Yield sign Total Collisions: 2

Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuver Vehicle typ	First Event	No. Ped
2014-Jul-02, Wed,20:45	Clear	Rear end	Non-fatal injury	Dry	West	Slowing or stopping Automobile station was		
					West	Slowing or stopping Passenger	van Other motor vehicle	
2014-Aug-30, Sat,12:58	Clear	Sideswipe	Non-fatal injury	Dry	East	Going ahead Automobile station wa	•	
					East	Going ahead Bicycle	Other motor vehicle	

Location: CAMBRIAN RD @ REGATTA AVE

Traffic Control: Stop sign Total Collisions: 2

Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuve	r Vehicle type	First Event	No. Ped
2015-Jul-05, Sun,13:15	Clear	Turning movement	P.D. only	Dry	West	Turning left	Passenger van	Other motor vehicle	
					West	Overtaking	Automobile, station wagon	Other motor vehicle	
2015-Aug-11, Tue,22:06	Clear	Angle	P.D. only	Dry	West	Turning left	Pick-up truck	Other motor vehicle	
					North	Stopped	Pick-up truck	Other motor vehicle	

Tuesday, August 22, 2017 Page 1 of 2

Location: CAMBRIAN RD @ RIVER MIST RD

Traffic Control: Stop sign Total Collisions: 1

Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuve	er Vehicle type	First Event	No. Ped
2015-Sep-04, Fri,07:15	Clear	Angle	P.D. only	Dry	East	Going ahead	Automobile, station wagon	Other motor vehicle	
					North	Turning right	Automobile, station wagon	Other motor vehicle	

Location: CAMBRIAN RD btwn BORRISOKANE RD & GRAND CANAL ST

Traffic Control: No control

Total Collisions: 1

Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuve	r Vehicle type	First Event	No. Ped
2015-Oct-09, Fri,00:00	Clear	SMV unattended vehicle	P.D. only	Dry	West	Unknown	Unknown	Unattended vehicle	

Tuesday, August 22, 2017 Page 2 of 2



## **City Operations - Transportation Services**

## **Collision Details Report - Public Version**

From: January 1, 2014 To: Ja

**To:** January 1, 2016

Location: CAMBRIAN RD @ GREENBANK RD

Traffic Control: Yield sign Total Collisions: 2

Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuver Vehicle typ	First Event	No. Ped
2014-Jul-02, Wed,20:45	Clear	Rear end	Non-fatal injury	Dry	West	Slowing or stopping Automobile station was		
					West	Slowing or stopping Passenger	van Other motor vehicle	
2014-Aug-30, Sat,12:58	Clear	Sideswipe	Non-fatal injury	Dry	East	Going ahead Automobile station wa	•	
					East	Going ahead Bicycle	Other motor vehicle	

Location: DUNDONALD DR @ GREENBANK RD

Traffic Control: Stop sign Total Collisions: 6

Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuver	Vehicle type	First Event	No. Ped
2014-Jun-24, Tue,13:00	Rain	Turning movement	P.D. only	Wet	South	Going ahead	Pick-up truck	Other motor vehicle	
					North	Turning left	Automobile, station wagon	Other motor vehicle	
2014-Nov-05, Wed,18:20	Clear	Angle	P.D. only	Dry	East	Turning left	Automobile, station wagon	Other motor vehicle	
					South	Going ahead	Automobile, station wagon	Other motor vehicle	
2014-Sep-25, Thu,16:02	Clear	SMV other	Non-fatal injury	Dry	North	Turning left	Automobile, station wagon	Pedestrian	1

Tuesday, August 22, 2017 Page 1 of 2

2014-Jul-24, Thu,16:07	Clear	Turning movement	Non-fatal injury	Dry	North	Turning left	Automobile, station wagon	Other motor vehicle
					South	Going ahead	Pick-up truck	Other motor vehicle
2014-May-19, Mon,15:42	Clear	Angle	P.D. only	Dry	West	Going ahead	Pick-up truck	Other motor vehicle
					South	Going ahead	Automobile, station wagon	Other motor vehicle
2015 Oct 00 Fri 14:10	Claar	Angle	D.D. only	Dmr	\\/aat	Coing shood	Automobile	Other meter
2015-Oct-09, Fri,14:10	Clear	Angle	P.D. only	Dry	West	Going ahead	Automobile, station wagon	Other motor vehicle
					North	Going ahead	Automobile, station wagon	Other motor vehicle

Location: EGRET WAY @ GREENBANK RD

Traffic Control: Stop sign Total Collisions: 1

Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuv	er Vehicle type	First Event	No. Ped
2015-Feb-27, Fri,07:32	Clear	Angle	P.D. only	Dry	South	Turning right	Pick-up truck	Other motor vehicle	
					East	Stopped	Automobile, station wagon	Other motor vehicle	

Location: GREENBANK RD btwn CAMBRIAN RD & DUNDONALD DR

Traffic Control: No control

Total Collisions: 2

Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuver	Vehicle type	First Event	No. Ped
2015-Jan-10, Sat,10:40	Clear	Approaching	P.D. only	Wet	South	Going ahead	Unknown	Other motor vehicle	
					North	Going ahead	Pick-up truck	Other motor vehicle	
2015-Jan-30, Fri,06:09	Drifting Snow	SMV other	P.D. only	Ice	North	Going ahead	Pick-up truck	Ran off road	

Tuesday, August 22, 2017 Page 2 of 2



## **City Operations - Transportation Services**

## **Collision Details Report - Public Version**

From: January 1, 2014 To: Ja

**To:** January 1, 2016

Location: CAMBRIAN RD @ RIVER MIST RD

Traffic Control: Stop sign Total Collisions: 1

Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuve	er Vehicle type	First Event	No. Ped
2015-Sep-04, Fri,07:15	Clear	Angle	P.D. only	Dry	East	Going ahead	Automobile, station wagon	Other motor vehicle	
					North	Turning right	Automobile, station wagon	Other motor vehicle	

Location: RIVER MIST RD btwn BRAMBLING WAY & RIVER ROCK AVE

Traffic Control: No control

Total Collisions: 1

Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuve	er Vehicle type	First Event	No. Ped
2015-Jun-24, Wed,11:06	Clear	SMV unattended vehicle	P.D. only	Dry	East	Reversing	Automobile, station wagon	Unattended vehicle	

Tuesday, August 22, 2017 Page 1 of 1

#### **Collision Main Detail Summary**

OnTRAC Reporting System FROM: 2011-01-01 TO: 2014-01-01

#### CAMBRIAN RD, CEDARVIEW RD to GREENBANK RD

Former Municip	pality: Nepea	n			Traffic Co	ontrol: No cont	rol		Numb	er of Collisions: 5			
	DATE	DAY	TIME	ENV	LIGHT	IMPACT TYPE	CLASS	DIR	SURFACE COND'N	VEHICLE MANOEUVRE	VEHICLE TYPE	FIRST EVENT	No. PED
1	2011-05-1	6 Mo	16:00	Rain	Daylight	Rear end	P.D. only	V1 E V2 E	Wet Wet	Going ahead Stopped	Automobile, station School bus	Other motor vehicle Other motor vehicle	0
2	2012-03-0	5 Mo	21:00	Clear	Dark	Single vehicle	P.D. only		Dry	Unknown	Automobile, station	Unattended vehicle	0
3	2012-10-20	0 Sat	04:35	Clear	Dark	Single vehicle	P.D. only	V1 E	Wet	Going ahead	Automobile, station	Ran off road	0
4	2013-02-22	2 Fri	07:00	Unknow	Dawn	Single vehicle	P.D. only	V1 W	Slush	Going ahead	Unknown	Unattended vehicle	0
5 CAMBRIAN F	2013-11-1 RD & GREI		-		Daylight	Single vehicle	P.D. only	V1 W	Dry	Going ahead	Automobile, station	Animal - wild	0
Former Municip	ality: Nepea	n			Traffic Co	ontrol: Stop sig	gn		Numb	er of Collisions: 4			
6	<b>DATE</b> 2012-03-0		<b>TIME</b> 12:07		LIGHT Daylight	IMPACT TYPE Rear end	CLASS P.D. only	DIR V1 S V2 S	SURFACE COND'N Packed snow Packed snow	VEHICLE MANOEUVRE Going ahead Going ahead	VEHICLE TYPE Automobile, station Automobile, station	FIRST EVENT Skidding/Sliding Skidding/Sliding	No. PED 0
7 8	2013-02-14 2013-09-09					Single vehicle Sideswipe	Non-fatal P.D. only		Mud Dry Dry	Going ahead Changing lanes Going ahead	School bus Automobile, station Passenger van	Skidding/Sliding Other motor vehicle Other motor vehicle	0 0
9	2013-12-13	3 Fri	23:41	Clear	Dark	Single vehicle	P.D. only	_	Dry	Going ahead	Automobile, station	Pole (sign, parking	0
CAMBRIAN R Former Municip		_	NAL S		Traffic Co	ontrol: Stop sig	gn		Numb	er of Collisions: 2			
	DATE	DAY	TIME	ENV	LIGHT	IMPACT TYPE	CLASS	DIR	SURFACE COND'N	VEHICLE MANOEUVRE	VEHICLE TYPE	FIRST EVENT	No. PED
10	2012-12-2	1 Fri	07:36	Snow	Dawn	Angle	P.D. only	V1 W V2 S	Wet Wet	Slowing or Turning left	Automobile, station Automobile, station	Other motor vehicle Other motor vehicle	0
11	2013-11-0	3 Sun	12:41	Clear	Daylight	Turning	Non-fatal	V1 E V2 W	Dry Dry	Going ahead Turning left	Automobile, station Automobile, station	Other motor vehicle Other motor vehicle	0

(Note: Time of Day = "00:00" represents unknown collision time

Tuesday, August 22, 2017
Page 1 of 2

#### **Collision Main Detail Summary**

OnTRAC Reporting System

GREENBANK RD, BARNSDALE RD to CAMBRIAN RD

GREENBANK RD, BARNSDALE RI	to CAMBRIAN RD					
Former Municipality: Nepean	Traffic Control: No control		Number of Collisions: 3			
DATE DAY TIME 12 2011-02-10 Thu 07:48 13 2011-09-25 Sun 20:50	Clear Daylight Other P.D. o	SS DIR C only V1 S We V2 N Lo	URFACE VEHICLE COND'N MANOEUVRE et Going ahead cose snow Going ahead cose sand or Going ahead	VEHICLE TYPE Pick-up truck Automobile, station Automobile, station	FIRST EVENT Other Moveable Debris falling off Debris on road	No. PED 0
	-	offiny viria Lo	Jose Sand of Going anead	Automobile, station	Deblis on road	U
CAMBRIAN RD, SEELEY'S BAY ST	O GRAND CANAL ST					
Former Municipality: Nepean	Traffic Control: No control		Number of Collisions: 7			
DATE DAY TIME 14 2011-07-12 Tue 16:30 CAMBRIAN RD & REGATTA AVE		SS DIR C	URFACE VEHICLE COND'N MANOEUVRE  y Reversing	VEHICLE TYPE Farm tractor	FIRST EVENT Unattended vehicle	No. PED 0
Former Municipality: Nepean	Traffic Control: Stop sign		Number of Collisions: 8			
DATE DAY TIME 15 2011-11-17 Thu 17:09  DUNDONALD DR & GREENBANK R	Rain Dark Turning P.D. o	SS DIR C	3 - 1	VEHICLE TYPE Automobile, station Pick-up truck	FIRST EVENT Other motor vehicle Other motor vehicle	No. PED 0
Former Municipality: Nepean	_		Number of Collisions: 2			
DATE DAY TIME 16 2012-07-13 Fri 21:00		SS DIR C	URFACE VEHICLE COND'N MANOEUVRE  y Going ahead	VEHICLE TYPE Automobile, station Automobile, station	FIRST EVENT Other motor vehicle Other motor vehicle	No. PED 0
17 2012-12-13 Thu 09:42	Clear Daylight Angle P.D. o	only V1 E We	3	Pick-up truck Passenger van	Other motor vehicle Other motor vehicle	0

FROM: 2011-01-01 TO: 2014-01-01

Tuesday, August 22, 2017
Page 2 of 2

# Appendix D Traffic Signal Warrant Sheet



# Street 1 @ Cambrian Road 2022 Total Future

#### Justification #7

		Minimum R	Requirement	Minimum R	equirement		Compliance		
Justification	Description	1 Lane Highway		2 or More Lanes		Sectional		Entire %	
		Free Flow	Restr. Flow	Free Flow	Restr. Flow	Numerical	%	Entire %	Signal
	A. Vehicle volume, all approaches								
1. Minimum Vehicular	(average hour)	480	720	600	900	512	107%	107%	No
Volume	B. Vehicle volume, along minor	[						10776	NO
	streets (average hour)	120	170	120	170	128	107%		
	A. Vehicle volumes, major street	400	420	500	000	204	200/		
	(average hour)	480	420	600	900	384	80%		
Traffic	B. Combined vehicle and pedestrian volume crossing artery from minor							80%	No
	streets (average hour)	50	75	120	170	56	112%		

- 1. Refer to OTM Book 12, pg 88, Nov 2007
- 2. Lowest section percentage governs justification
- 3. Average hourly volumes estiamted from peak hour volumes, AHV = PM/2 or AHV = PM/2 or
- 4. Due to the increased uncertainty of volume projections for proposed new developments, an increased justification threshold is used in those cases. Justification 1 and Justification 2 are used only and the justification is required to be met to 120% in the case of an existing intersection and 150% in the case of a new intersection for traffic signals to be considered.

# Street 1 @ Cambrian Road 2027 Total Future

#### Justification #7

		Minimum R	Requirement	Minimum R	equirement		Compliance		
Justification	Description	1 Lane	Highway	2 or Mo	re Lanes	Sectional		Entire %	
		Free Flow	Restr. Flow	Free Flow	Restr. Flow	Numerical	%	LIILII 6 /0	Signal
	A. Vehicle volume, all approaches								
1. Minimum Vehicular		480	720	600	900	889	124%	124%	No
Volume	B. Vehicle volume, along minor							124/0	140
	streets (average hour)	120	170	120	170	254	150%		
	A. Vehicle volumes, major street	480	420	600	900	635	151%		
2.5.1.1.0	(average hour)	480	420	600	900	033	151%		
2. Delay to Cross Traffic	B. Combined vehicle and pedestrian volume crossing artery from minor							151%	Yes
	streets (average hour)	50	75	120	170	178	237%		

- 1. Refer to OTM Book 12, pg 88, Nov 2007
- 2. Lowest section percentage governs justification
- 3. Average hourly volumes estiamted from peak hour volumes, AHV = PM/2 or AHV = PM/2 or
- 4. Due to the increased uncertainty of volume projections for proposed new developments, an increased justification threshold is used in those cases. Justification 1 and Justification 2 are used only and the justification is required to be met to 120% in the case of an existing intersection and 150% in the case of a new intersection for traffic signals to be considered.

# Borrisokane Road @ Cambrian Road 2022 Total Future

#### Justification #7

		Minimum R	Requirement	Minimum R	equirement		Compliance		
Justification	Description	1 Lane Highway		2 or More Lanes		Sectional		Entire %	
		Free Flow	Restr. Flow	Free Flow	Restr. Flow	Numerical	%	Entire %	Signal
1. Minimum Vehicular	A. Vehicle volume, all approaches (average hour)	480	720	600	900	570	119%	1100/	Nie
Volume	B. Vehicle volume, along minor streets (average hour)	120	170	120	170	337	281%	119%	No
	A. Vehicle volumes, major street (average hour)	480	420	600	900	233	49%		
тапіс	B. Combined vehicle and pedestrian volume crossing artery from minor streets (average hour)	50	75	120	170	102	204%	49%	No

- 1. Refer to OTM Book 12, pg 88, Nov 2007
- 2. Lowest section percentage governs justification
- 3. Average hourly volumes estiamted from peak hour volumes, AHV = PM/2 or AHV = PM/2 or
- 4. Due to the increased uncertainty of volume projections for proposed new developments, an increased justification threshold is used in those cases. Justification 1 and Justification 2 are used only and the justification is required to be met to 120% in the case of an existing intersection and 150% in the case of a new intersection for traffic signals to be considered.

# Borrisokane Road @ Cambrian Road 2027 Total Future

#### Justification #7

		Minimum R	equirement	Minimum R	equirement		Compliance		
Justification	Description	1 Lane Highway		2 or More Lanes		Sectional		Entire %	
		Free Flow	Restr. Flow	Free Flow	Restr. Flow	Numerical	%	LIILII 6 /0	Signal
	A. Vehicle volume, all approaches								
1. Minimum Vehicular		480	720	600	900	789	110%	110%	No
Volume	B. Vehicle volume, along minor							110/0	NO
	streets (average hour)	120	170	120	170	462	272%		
	A. Vehicle volumes, major street								
	(average hour)	480	420	600	900	327	78%		
Traffic	B. Combined vehicle and pedestrian volume crossing artery from minor							78%	No
	streets (average hour)	50	75	120	170	141	187%		

- 1. Refer to OTM Book 12, pg 88, Nov 2007
- 2. Lowest section percentage governs justification
- 3. Average hourly volumes estiamted from peak hour volumes, AHV = PM/2 or AHV = PM/2 or
- 4. Due to the increased uncertainty of volume projections for proposed new developments, an increased justification threshold is used in those cases. Justification 1 and Justification 2 are used only and the justification is required to be met to 120% in the case of an existing intersection and 150% in the case of a new intersection for traffic signals to be considered.

# Appendix E TDM Measures Checklist



#### **TDM Measures Checklist:**

Residential Developments (multi-family, condominium or subdivision)

# Legend The measure is generally feasible and effective, and in most cases would benefit the development and its users The measure could maximize support for users of sustainable modes, and optimize development performance The measure is one of the most dependably effective tools to encourage the use of sustainable modes

	TDM	measures: Residential developments	Check if proposed & add descriptions
	1.	TDM PROGRAM MANAGEMENT	
	1.1	Program coordinator	
BASIC	★ 1.1.1	Designate an internal coordinator, or contract with an external coordinator	
	1.2	Travel surveys	
BETTER	1.2.1	Conduct periodic surveys to identify travel-related behaviours, attitudes, challenges and solutions, and to track progress	
	2.	WALKING AND CYCLING	
	2.1	Information on walking/cycling routes & des	tinations
BASIC	<b>2.1</b> 2.1.1		tinations
BASIC		Display local area maps with walking/cycling access routes and key destinations at major	tinations

	TDM	measures: Residential developments	Check if proposed & add descriptions
	3.	TRANSIT	
	3.1	Transit information	
BASIC	3.1.1	Display relevant transit schedules and route maps at entrances (multi-family, condominium)	
BETTER	3.1.2	Provide real-time arrival information display at entrances (multi-family, condominium)	
	3.2	Transit fare incentives	
BASIC	★ 3.2.1	Offer PRESTO cards preloaded with one monthly transit pass on residence purchase/move-in, to encourage residents to use transit	
BETTER	3.2.2	Offer at least one year of free monthly transit passes on residence purchase/move-in	
	3.3	Enhanced public transit service	
BETTER	★ 3.3.1	Contract with OC Transpo to provide early transit services until regular services are warranted by occupancy levels (subdivision)	
	3.4	Private transit service	
BETTER	3.4.1	Provide shuttle service for seniors homes or lifestyle communities (e.g. scheduled mall or supermarket runs)	
	4.	CARSHARING & BIKESHARING	
	4.1	Bikeshare stations & memberships	
BETTER	4.1.1	Contract with provider to install on-site bikeshare station ( <i>multi-family</i> )	
BETTER	4.1.2	Provide residents with bikeshare memberships, either free or subsidized (multi-family)	
	4.2	Carshare vehicles & memberships	
BETTER	4.2.1	Contract with provider to install on-site carshare vehicles and promote their use by residents	
BETTER	4.2.2	Provide residents with carshare memberships, either free or subsidized	
	5.	PARKING	
	5.1	Priced parking	
BASIC	★ 5.1.1	Unbundle parking cost from purchase price (condominium)	
BASIC	★ 5.1.2	Unbundle parking cost from monthly rent (multi-family)	

	TDM	measures: Residential developments  Check if proposed & add descriptions	
6	<b>3</b> .	TDM MARKETING & COMMUNICATIONS	
6	3.1	Multimodal travel information	
BASIC ★ 6	5.1.1	Provide a multimodal travel option information package to new residents	
6	6.2	Personalized trip planning	
BETTER ★ 6	5.2.1	Offer personalized trip planning to new residents	

# Appendix F 2018 Existing Synchro



	•	•	<b>†</b>	/	-	<b>↓</b>
Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	*Y*		₽			ની
Traffic Volume (vph)	11	373	53	12	103	20
Future Volume (vph)	11	373	53	12	103	20
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt	0.869		0.976			
Flt Protected	0.999					0.960
Satd. Flow (prot)	1549	0	1741	0	0	1713
Flt Permitted	0.999					0.960
Satd. Flow (perm)	1549	0	1741	0	0	1713
Link Speed (k/h)	70		80			80
Link Distance (m)	399.0		269.7			282.6
Travel Time (s)	20.5		12.1			12.7
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90
Adj. Flow (vph)	12	414	59	13	114	22
Shared Lane Traffic (%)						
Lane Group Flow (vph)	426	0	72	0	0	136
Sign Control	Stop		Free			Free
Intersection Summary						

Area Type: Other
Control Type: Unsignalized
Intersection Capacity Utilization 45.5%
Analysis Period (min) 15

ICU Level of Service A

**CGH Transportation** Meadows Phase 7/8 Page 1 MC

Intersection						
Int Delay, s/veh	9.1					
		14/55	NET	NES	051	05=
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	¥		₽			स
Traffic Vol, veh/h	11	373	53	12	103	20
Future Vol, veh/h	11	373	53	12	103	20
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	-	-
Veh in Median Storage	e, # 0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	12	414	59	13	114	22
WWW. From	12		07	10		
	Minor1		/lajor1		Major2	
Conflicting Flow All	316	66	0	0	72	0
Stage 1	66	-	-	-	-	-
Stage 2	250	-	-	-	-	-
Critical Hdwy	6.42	6.22	-	-	4.12	-
Critical Hdwy Stg 1	5.42	-	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-	-
Follow-up Hdwy	3.518	3.318	-	_	2.218	_
Pot Cap-1 Maneuver	677	998	_	_	1528	_
Stage 1	957	-	_	_	-	_
Stage 2	792	_	_	_	_	_
Platoon blocked, %	172		_	_		_
	626	998	-		1528	-
Mov Cap 2 Manager				-	1320	-
Mov Cap-2 Maneuver	626	-	-	-	-	-
Stage 1	884	-	-	-	-	-
Stage 2	792	-	-	-	-	-
Approach	WB		NB		SB	
HCM Control Delay, s	11.5		0		6.3	
HCM LOS	В				0.0	
TIOM EGG						
Minor Lane/Major Mvn	nt	NBT	NBRV	VBLn1	SBL	SBT
Capacity (veh/h)		-	-	981	1528	-
HCM Lane V/C Ratio		-	-	0.435	0.075	-
HCM Control Delay (s)	)	-	-	11.5	7.5	0
HCM Lane LOS		-	-	В	Α	Α
HCM 95th %tile Q(veh	)	-	-	2.2	0.2	-
1.01VI 70111 701110 Q(VCI	7			۷.۷	0.2	

	•	•	<b>†</b>	<i>&gt;</i>	<b>&gt;</b>	ļ
Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	W		ĵ.			ર્ન
Traffic Volume (vph)	10	192	41	6	362	40
Future Volume (vph)	10	192	41	6	362	40
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt	0.872		0.982			
Flt Protected	0.998					0.957
Satd. Flow (prot)	1536	0	1733	0	0	1689
Flt Permitted	0.998					0.957
Satd. Flow (perm)	1536	0	1733	0	0	1689
Link Speed (mph)	43		50			50
Link Distance (ft)	1309		885			927
Travel Time (s)	20.8		12.1			12.6
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90
Adj. Flow (vph)	11	213	46	7	402	44
Shared Lane Traffic (%)						
Lane Group Flow (vph)	224	0	53	0	0	446
Sign Control	Stop		Free			Free
Intersection Summary						
Area Type:	Other					

Area Type: Other
Control Type: Unsignalized
Intersection Capacity Utilization 49.8%
Analysis Period (min) 15

ICU Level of Service A

Meadows Phase 7/8 **CGH Transportation** Page 1 MC

Intersection						
Int Delay, s/veh	7.8					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	WDL	WDIX	Tabi	NDIX	JDL	<u>ુગા</u>
Traffic Vol, veh/h	<b>T</b> 10	192	41	6	362	<b>4</b> 0
Future Vol, veh/h	10	192	41	6	362	40
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	310p	None		None	-	None
Storage Length	0	NONE -	_	INUITE	-	NUITE
Veh in Median Storage		-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	11	213	46	7	402	44
WWITH FIOW	11	213	40	1	402	44
Major/Minor	Minor1	N	Najor1		Major2	
Conflicting Flow All	898	50	0	0	53	0
Stage 1	50	-	-	-	-	-
Stage 2	848	-	-	-	-	-
Critical Hdwy	6.42	6.22	-	-	4.12	-
Critical Hdwy Stg 1	5.42	-	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-	-
Follow-up Hdwy	3.518	3.318	-	-	2.218	-
Pot Cap-1 Maneuver	310	1018	-	-	1553	-
Stage 1	972	-	-	-	-	-
Stage 2	420	-	-	-	-	-
Platoon blocked, %			-	-		-
Mov Cap-1 Maneuver	228	1018	-	-	1553	-
Mov Cap-2 Maneuver	228	-	-	-	-	-
Stage 1	714	-	-	-	-	-
Stage 2	420	_	-		-	-
g						
A	WD		ND		CD	
Approach	WB		NB		SB	
HCM Control Delay, s	10.6		0		7.3	
HCM LOS	В					
Minor Lane/Major Mvn	nt	NBT	NBRV	VBLn1	SBL	SBT
Capacity (veh/h)		-	_		1553	-
HCM Lane V/C Ratio		_	_	0.258		_
HCM Control Delay (s)		-	-	10.6	8.1	0
HCM Lane LOS		_	_	В	A	A
HCM 95th %tile Q(veh	)	-	-	1	1	-
110111 70111 701110 Q(VCII	7					

# Appendix G 2022 Future Background Synchro



	•	•	<b>†</b>	~	<b>&gt;</b>	ļ
Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	***		f)			ર્ન
Traffic Volume (vph)	16	416	57	14	115	22
Future Volume (vph)	16	416	57	14	115	22
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt	0.870		0.973			
Flt Protected	0.998					0.960
Satd. Flow (prot)	1549	0	1736	0	0	1713
Flt Permitted	0.998					0.960
Satd. Flow (perm)	1549	0	1736	0	0	1713
Link Speed (k/h)	70		80			80
Link Distance (m)	509.6		269.7			282.6
Travel Time (s)	26.2		12.1			12.7
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00
Adj. Flow (vph)	16	416	57	14	115	22
Shared Lane Traffic (%)						
Lane Group Flow (vph)	432	0	71	0	0	137
Sign Control	Stop		Free			Free
Intersection Summary						
Area Type:	Other					

ICU Level of Service A

Control Type: Unsignalized Intersection Capacity Utilization 49.4% Analysis Period (min) 15

MDD	NDD	NDT	NDD	CDI	CDT
WBR	NRK	NBT	NBR	SBL	SBT
		f)			4
					22
					22
					0
				Free	Free
None	Vone	-	None	-	None
	-	-	-	-	-
-	-	0	-	-	0
	-	0	-	-	0
100	100	100	100	100	100
		2	2	2	2
					22
					==
_					
64	64	0	0	71	0
-	-	-	-	-	-
		-	-	-	-
6.22	6.22	-	-	4.12	-
-	-	-	-	-	-
-	-	-	-	-	-
3.318	.318	-	-	2.218	-
		-	-		-
		-	-	-	-
		-	-	-	-
		_	_		_
1000	1000	_		1520	
		-	-	1327	-
		-	-	-	
		-	-		-
-	-	-	-	-	-
		NB		SB	
		0			
				3.0	
NOT	NDT	NDD	(DL 4	051	OPT
NBT	MRI	NRKA			SBT
-	-				-
-	-	-			-
-	-	-	11.6	7.5	0
-	-	-	B 2.3	A 0.2	Α
		MHT	416   57   416   57   416   57   0   0   0   Stop   Free   None   -   -   0   100   100   2   2   416   57     Major1   64   0   -   -     6.22   -     -     6.22   -     -     6.22   -     -       6.22   -         6.22   -           6.22   -	416   57   14   416   57   14   14   0   0   0   0   0   0   0   0   0	Major1

	•	•	<b>†</b>	~	-	ţ
Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	W		₽			ની
Traffic Volume (vph)	13	214	44	11	404	43
Future Volume (vph)	13	214	44	11	404	43
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt	0.873		0.973			
Flt Protected	0.997					0.957
Satd. Flow (prot)	1553	0	1736	0	0	1708
Flt Permitted	0.997					0.957
Satd. Flow (perm)	1553	0	1736	0	0	1708
Link Speed (k/h)	70		80			80
Link Distance (m)	509.6		269.7			282.6
Travel Time (s)	26.2		12.1			12.7
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00
Adj. Flow (vph)	13	214	44	11	404	43
Shared Lane Traffic (%)						
Lane Group Flow (vph)	227	0	55	0	0	447
Sign Control	Stop		Free			Free
Intersection Summary						
Area Type:	Other					

Control Type: Unsignalized
Intersection Capacity Utilization 54.1%
Analysis Period (min) 15 ICU Level of Service A

**CGH Transportation** 2022 Future Background Page 1 MC

Intersection						
Int Delay, s/veh	7.9					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	¥		Þ			र्स
Traffic Vol, veh/h	13	214	44	11	404	43
Future Vol, veh/h	13	214	44	11	404	43
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	-	-
Veh in Median Storage	e, # 0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	100	100	100	100	100	100
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	13	214	44	11	404	43
		_				
	Minor1		/lajor1		Major2	
Conflicting Flow All	901	50	0	0	55	0
Stage 1	50	-	-	-	-	-
Stage 2	851	-	-	-	-	-
Critical Hdwy	6.42	6.22	-	-	4.12	-
Critical Hdwy Stg 1	5.42	-	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-	-
Follow-up Hdwy	3.518	3.318	-	-	2.218	-
Pot Cap-1 Maneuver	309	1018	-	-	1550	-
Stage 1	972	-	-	-	-	-
Stage 2	419	-	-	-	-	-
Platoon blocked, %			-	-		-
Mov Cap-1 Maneuver	226	1018	-	-	1550	-
Mov Cap-2 Maneuver	226	-	-	-	-	-
Stage 1	712	-	-	-	-	-
Stage 2	419	_	_	_		-
Jugo 2	117					
	1A/D		NB		SB	
Approach	WB				7 4	
HCM Control Delay, s	10.8		0		7.4	
					7.4	
HCM Control Delay, s	10.8				7.4	
HCM Control Delay, s HCM LOS	10.8 B	NIDT	0	VRI n1		СЪТ
HCM Control Delay, s HCM LOS Minor Lane/Major Mvr	10.8 B	NBT	0	VBLn1	SBL	SBT
HCM Control Delay, s HCM LOS  Minor Lane/Major Mvr Capacity (veh/h)	10.8 B	-	0 NBRV	848	SBL 1550	-
HCM Control Delay, s HCM LOS  Minor Lane/Major Mvr Capacity (veh/h) HCM Lane V/C Ratio	10.8 B nt	NBT - -	NBRV	848 0.268	SBL 1550 0.261	-
HCM Control Delay, s HCM LOS  Minor Lane/Major Mvr Capacity (veh/h) HCM Lane V/C Ratio HCM Control Delay (s)	10.8 B nt	- - -	NBRV - -	848 0.268 10.8	SBL 1550 0.261 8.1	- - 0
HCM Control Delay, s HCM LOS  Minor Lane/Major Mvr Capacity (veh/h) HCM Lane V/C Ratio	10.8 B	-	NBRV	848 0.268	SBL 1550 0.261	-

2022 Future Background CGH Transportation MC Page 2

# Appendix H 2027 Future Background Synchro



	•	•	<b>†</b>	~	<b>&gt;</b>	ļ
Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	W		f)			4
Traffic Volume (vph)	52	721	83	32	250	58
Future Volume (vph)	52	721	83	32	250	58
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt	0.874		0.962			
Flt Protected	0.997					0.961
Satd. Flow (prot)	1555	0	1717	0	0	1715
Flt Permitted	0.997					0.961
Satd. Flow (perm)	1555	0	1717	0	0	1715
Link Speed (k/h)	70		80			80
Link Distance (m)	509.6		269.7			282.6
Travel Time (s)	26.2		12.1			12.7
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00
Adj. Flow (vph)	52	721	83	32	250	58
Shared Lane Traffic (%)						
Lane Group Flow (vph)	773	0	115	0	0	308
Sign Control	Stop		Free			Free
Intersection Summary						
Area Type:	Other					

ICU Level of Service D

Control Type: Unsignalized Intersection Capacity Utilization 81.3% Analysis Period (min) 15

Intersection						
Int Delay, s/veh	23.4					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	WDL	WDIN	Tabi	NDIX	JDL	<u>ુુ</u>
Traffic Vol, veh/h	<b>'T'</b> 52	721	83	32	250	<b>64</b> 58
Future Vol, veh/h	52	721	83	32	250	58
Conflicting Peds, #/hr	0	0	0	0	250	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	310p	None		None	-	None
Storage Length	0	None -	_	INUITE	-	NUITE
Veh in Median Storage		-	0	_	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	100	100	100	100	100	100
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	52	721	83	32	250	58
WWITH FIOW	52	121	83	32	250	20
Major/Minor	Minor1	N	Najor1	ı	Major2	
Conflicting Flow All	657	99	0	0	115	0
Stage 1	99	-	-	-	-	-
Stage 2	558	-	-	-	-	-
Critical Hdwy	6.42	6.22	-	-	4.12	-
Critical Hdwy Stg 1	5.42	-	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-	-
Follow-up Hdwy	3.518	3.318	-	-	2.218	-
Pot Cap-1 Maneuver	430	957	-	-	1474	-
Stage 1	925	-	-	-	-	-
Stage 2	573	-	-	-	-	-
Platoon blocked, %			-	-		-
Mov Cap-1 Maneuver	355	957	-	-	1474	-
Mov Cap-2 Maneuver	355	-	-	-	-	-
Stage 1	763	-	-	-	-	-
Stage 2	573	_	_	_	-	_
olago 2	0.0					
	WD		ND		0.0	
Approach	WB		NB		SB	
HCM Control Delay, s	33.6		0		6.4	
HCM LOS	D					
Minor Lane/Major Mvn	nt	NBT	NBRV	VBLn1	SBL	SBT
Capacity (veh/h)		-	-	859	1474	-
HCM Lane V/C Ratio		_		0.9	0.17	_
HCM Control Delay (s)		_	-		7.9	0
HCM Lane LOS		-		D	Α	A
HCM 95th %tile Q(veh	)	-	-	12.5	0.6	-
HOW JOHN JOHNE Q(VEH	/			12.0	0.0	_

	•	-	•	•	-	4
Lane Group	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations		4	₽		W	
Traffic Volume (vph)	49	227	552	130	282	104
Future Volume (vph)	49	227	552	130	282	104
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.974		0.964	
Flt Protected		0.991			0.965	
Satd. Flow (prot)	0	1768	1738	0	1660	0
Flt Permitted		0.991			0.965	
Satd. Flow (perm)	0	1768	1738	0	1660	0
Link Speed (k/h)		70	70		50	
Link Distance (m)		509.6	247.9		283.1	
Travel Time (s)		26.2	12.7		20.4	
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00
Adj. Flow (vph)	49	227	552	130	282	104
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	276	682	0	386	0
Sign Control		Free	Free		Stop	
Intersection Summary						
A T	OII	<u> </u>		<u> </u>	<u> </u>	<u> </u>

Area Type: Other

Control Type: Unsignalized
Intersection Capacity Utilization 86.8%
Analysis Period (min) 15

ICU Level of Service E

CGH Transportation Meadows Phase 7/8 Page 3 MC

Intersection						
Int Delay, s/veh	48.5					
Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations		4	<b>1</b>		¥	
Traffic Vol, veh/h	49	227	552	130	282	104
Future Vol, veh/h	49	227	552	130	282	104
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	-	-	0	-
Veh in Median Storag	je,# -	0	0	-	0	-
Grade, %	-	0	0	-	0	-
Peak Hour Factor	100	100	100	100	100	100
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	49	227	552	130	282	104
N A a i a m/N Ai a a m	N/a!au1		1-!0		\	
Major/Minor	Major1		Major2		Minor2	/47
Conflicting Flow All	682	0	-	0	942	617
Stage 1	-	-	-	-	617	-
Stage 2	-	-	-	-	325	-
Critical Hdwy	4.12	-	-	-	6.42	6.22
Critical Hdwy Stg 1	-	-	-	-	5.42	-
Critical Hdwy Stg 2	-	-	-	-	5.42	-
Follow-up Hdwy	2.218	-	-		3.518	
Pot Cap-1 Maneuver	911	-	-	-	292	490
Stage 1	-	-	-	-	538	-
Stage 2	-	-	-	-	732	-
Platoon blocked, %		-	-	-		
Mov Cap-1 Maneuver		-	-		~ 274	490
Mov Cap-2 Maneuver	-	-	-	-	~ 274	-
Stage 1	-	-	-	-	505	-
Stage 2	-	-	-	-	732	-
Approach	EB		WB		SB	
HCM Control Delay, s			0		167.8	
HCM LOS	1.0		U		F	
HOW LOS					'	
Minor Lane/Major Mv	mt	EBL	EBT	WBT	WBR	SBLn1
Capacity (veh/h)		911	-	-	-	311
HCM Lane V/C Ratio		0.054	-	-		1.241
HCM Control Delay (s	s)	9.2	0	-	-	167.8
HCM Lane LOS		Α	Α	-	-	F
HCM 95th %tile Q(vel	h)	0.2	-	-	-	17.6
Notes						
	on o oitu	¢. Do	lov ove	anada 2	000	Comi
~: Volume exceeds ca	apacity	\$: D€	elay exc	ceeds 3	UUS	+: Com

	✓	•	<b>†</b>	~	-	<b>↓</b>
Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	W		f.			ર્ન
Traffic Volume (vph)	39	420	78	44	692	69
Future Volume (vph)	39	420	78	44	692	69
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt	0.876		0.951			
Flt Protected	0.996					0.957
Satd. Flow (prot)	1557	0	1697	0	0	1708
Flt Permitted	0.996					0.957
Satd. Flow (perm)	1557	0	1697	0	0	1708
Link Speed (k/h)	71		80			80
Link Distance (m)	509.6		269.7			282.6
Travel Time (s)	25.8		12.1			12.7
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00
Adj. Flow (vph)	39	420	78	44	692	69
Shared Lane Traffic (%)						
Lane Group Flow (vph)	459	0	122	0	0	761
Sign Control	Stop		Free			Free
Intersection Summary						
Area Type:	Other					

ICU Level of Service F

Control Type: Unsignalized
Intersection Capacity Utilization 91.1%
Analysis Period (min) 15

Intersection						
Int Delay, s/veh	34.8					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	W.		₽			4
Traffic Vol, veh/h	39	420	78	44	692	69
Future Vol, veh/h	39	420	78	44	692	69
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized		None	-	None	-	None
Storage Length	0	_	-	-	-	-
Veh in Median Storag		_	0	_	_	0
Grade, %	0	_	0	_	_	0
Peak Hour Factor	100	100	100	100	100	100
	2	2	2	2	2	2
Heavy Vehicles, %						
Mvmt Flow	39	420	78	44	692	69
Major/Minor	Minor1	N	/lajor1		Major2	
Conflicting Flow All	1553	100	0	0	122	0
Stage 1	100	-	-	-	122	-
Stage 2	1453	-	-	-	-	-
		6.22		-		
Critical Hdwy	6.42		-	-	4.12	-
Critical Hdwy Stg 1	5.42	-	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-	-
Follow-up Hdwy			-	-	2.218	-
Pot Cap-1 Maneuver	125	956	-	-	1465	-
Stage 1	924	-	-	-	-	-
Stage 2	215	-	-	-	-	-
Platoon blocked, %			-	-		-
Mov Cap-1 Maneuver	64	956	-	-	1465	-
Mov Cap-2 Maneuver		_	-	_	_	_
Stage 1	470	_	_	_	_	_
Stage 2	215	_	_	_	_	_
Stage 2	213					
Approach	WB		NB		SB	
HCM Control Delay, s	87.2		0		8.8	
HCM LOS	F					
		NDT	NDD	VDL 4	001	ODT
Minor Lane/Major Mvr	mt	NBT	NRKA	VBLn1	SBL	SBT
Capacity (veh/h)		-	-	438	1465	-
HCM Lane V/C Ratio		-	-	1.048	0.472	-
HCM Control Delay (s	5)	-	-	87.2	9.6	0
HCM Lane LOS		-	-	F	Α	Α
HCM 95th %tile Q(vel	n)	-	-	14.5	2.6	-
/ 5 / 6 6 4 ( 10	.,			. 1.5	2.0	

	•	-	<b>←</b>	•	-	4
Lane Group	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations		ર્ન	ĥ		W	
Traffic Volume (vph)	100	518	335	273	196	73
Future Volume (vph)	100	518	335	273	196	73
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.939		0.963	
Flt Protected		0.992			0.965	
Satd. Flow (prot)	0	1770	1675	0	1658	0
Flt Permitted		0.992			0.965	
Satd. Flow (perm)	0	1770	1675	0	1658	0
Link Speed (k/h)		48	71		48	
Link Distance (m)		509.6	247.9		283.1	
Travel Time (s)		38.2	12.6		21.2	
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00
Adj. Flow (vph)	100	518	335	273	196	73
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	618	608	0	269	0
Sign Control		Free	Free		Stop	
Intersection Summary						

Area Type: Other

Control Type: Unsignalized
Intersection Capacity Utilization 97.0%
Analysis Period (min) 15

ICU Level of Service F

CGH Transportation Meadows Phase 7/8 Page 3 MC

Intersection								
Int Delay, s/veh	33.2							
Movement	EBL	EBT	WBT	WBR	SBL	SBR		
Lane Configurations		4	ĵ.		W			
Traffic Vol, veh/h	100	518	335	273	196	73		
uture Vol, veh/h	100	518	335	273	196	73		
Conflicting Peds, #/hr		0	0	0	0	0		
Sign Control	Free	Free	Free	Free	Stop	Stop		
T Channelized	-					None		
Storage Length	_	-		-	0	-		
'eh in Median Storag	e.# -	0	0	_	0	_		
Grade, %		0	0	-	0	_		
eak Hour Factor	100	100	100	100	100	100		
eavy Vehicles, %	2	2	2	2	2	2		
Ivmt Flow	100	518	335	273	196	73		
		0.10	- 000		.,,			
lajor/Minor	Major1	<u> </u>	Major2		Minor2			
conflicting Flow All	608	0	-	0	1190	472		
Stage 1	-	-	-	_	472	-		
Stage 2	-	-	-	-	718	-		
ritical Hdwy	4.12	-	-	-	6.42	6.22		
itical Hdwy Stg 1	_	-	-	-	5.42	_		
itical Hdwy Stg 2	_	-	-	_	5.42	_		
ollow-up Hdwy	2.218	-		-	3.518	3.318		
ot Cap-1 Maneuver	970	-	-	-	207	592		
Stage 1	-	_	_	_	628	-		
Stage 2	-	-	-	-	483	-		
atoon blocked, %		-	_	_	.00			
lov Cap-1 Maneuver	970	-	-	-	~ 177	592		
lov Cap-2 Maneuver		-	_		~ 177	-		
Stage 1	-	_	-	-	537	-		
Stage 2	_	_	_	_	483	-		
- · · <b>y</b> / <u>-</u>					, , , ,			
pproach	EB		WB		SB			
CM Control Delay, s	1.5		0		181.1			
ICM LOS					F			
linor Lane/Major Mvr	nt	EBL	EBT	WBT	WBR	SBLn1		
apacity (veh/h)		970	-	-	-	219		
CM Lane V/C Ratio		0.103	-	-	-	1.228		
CM Control Delay (s	5)	9.1	0	-		181.1		
CM Lane LOS		А	A	-	-	F		
CM 95th %tile Q(veh	1)	0.3	-	-	-	13.6		
lotes								
Volume exceeds ca	nacity	¢. Da	lav ove	ceeds 3	ΛΛς	L. Com	putation Not Defined	*: All major volume in platoon
volume exceeds Ca	apacity	⊅; D€	eiay exc	Leeus 3	005	+. CUIII	putation not Delined	. Ali major volume in piatoon

## Appendix I 2022 Total Future Synchro



	•	•	<b>†</b>	~	<b>&gt;</b>	ļ
Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	W		₽			4
Traffic Volume (vph)	26	534	57	19	174	22
Future Volume (vph)	26	534	57	19	174	22
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt	0.871		0.966			
Flt Protected	0.998					0.957
Satd. Flow (prot)	1551	0	1724	0	0	1708
Flt Permitted	0.998					0.957
Satd. Flow (perm)	1551	0	1724	0	0	1708
Link Speed (k/h)	70		80			80
Link Distance (m)	509.6		269.7			282.6
Travel Time (s)	26.2		12.1			12.7
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00
Adj. Flow (vph)	26	534	57	19	174	22
Shared Lane Traffic (%)						
Lane Group Flow (vph)	560	0	76	0	0	196
Sign Control	Stop		Free			Free
Intersection Summary						
Area Type:	Other					

Control Type: Unsignalized
Intersection Capacity Utilization 61.1%
Analysis Period (min) 15

ICU Level of Service B

Meadows Phase 7/8 **CGH Transportation** Page 1 MC

Intersection						
Int Delay, s/veh	11					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	¥		<b>1</b>		UDL	4
Traffic Vol, veh/h	26	534	57	19	174	22
Future Vol, veh/h	26	534	57	19	174	22
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	-	-
Veh in Median Storage	e, # 0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	100	100	100	100	100	100
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	26	534	57	19	174	22
			-			
NA ' (NA'						
	Minor1		Major1		Major2	
Conflicting Flow All	437	67	0	0	76	0
Stage 1	67	-	-	-	-	-
Stage 2	370	-	-	-	-	-
Critical Hdwy	6.42	6.22	-	-	4.12	-
Critical Hdwy Stg 1	5.42	-	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-	-
Follow-up Hdwy	3.518		-	-	2.218	-
Pot Cap-1 Maneuver	577	997	-	-	1523	-
Stage 1	956	-	-	-	-	-
Stage 2	699	-	-	-	-	-
Platoon blocked, %			-	-		-
Mov Cap-1 Maneuver	510	997	-	-	1523	-
Mov Cap-2 Maneuver	510	-	-	-	-	-
Stage 1	845	-	-	-	-	-
Stage 2	699	-	-	-	-	-
,						
Approach	WB		NB		SB	
HCM Control Delay, s	14		0		6.8	
HCM LOS	В		U		0.0	
TOW LOS	U					
		NDT	NDD	NDL 4	001	ODT
Minor Lane/Major Mvm	nt	NBT		VBLn1	SBL	SBT
Capacity (veh/h)		-	-	,	1523	-
HCM Lane V/C Ratio		-		0.586		-
HCM Control Delay (s)		-	-	14	7.7	0
HCM Lane LOS		-	-	В	A	Α
HCM 95th %tile Q(veh)	)	-	-	3.9	0.4	-

	-	•	•	•	1	~	
Lane Group	EBT	EBR	WBL	WBT	NBL	NBR	
Lane Configurations	f)		ሻ	<b>†</b>	W		
Traffic Volume (vph)	129	64	34	432	127	69	
Future Volume (vph)	129	64	34	432	127	69	
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	
Storage Length (m)		0.0	15.0		0.0	0.0	
Storage Lanes		0	1		1	0	
Taper Length (m)			7.6		7.6		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	
Frt	0.955				0.952		
Flt Protected			0.950		0.969		
Satd. Flow (prot)	1704	0	1695	1784	1646	0	
Flt Permitted			0.950		0.969		
Satd. Flow (perm)	1704	0	1695	1784	1646	0	
Link Speed (k/h)	70			70	50		
Link Distance (m)	509.6			247.9	230.8		
Travel Time (s)	26.2			12.7	16.6		
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	
Adj. Flow (vph)	129	64	34	432	127	69	
Shared Lane Traffic (%)							
Lane Group Flow (vph)	193	0	34	432	196	0	
Sign Control	Free			Free	Stop		
Intersection Summary							
Area Type:	Other						
Control Type: Unsignalized							
Intersection Capacity Utiliz	zation 42.5%			IC	CU Level of	of Service	: A
Analysis Period (min) 15							

Intersection						
Int Delay, s/veh	4.1					
	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations	₽		1	<b>•</b>	. ₩	
Traffic Vol, veh/h	129	64	34	432	127	69
Future Vol, veh/h	129	64	34	432	127	69
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	150	-	0	_
Veh in Median Storage, #	# 0	-	-	0	0	-
Grade, %	0	_	_	0	0	_
Peak Hour Factor	100	100	100	100	100	100
Heavy Vehicles, %	2	2	2	2	2	2
Mymt Flow	129	64	34	432	127	69
IVIVIIIL FIOW	129	04	34	432	127	09
Major/Minor Ma	ajor1	N	Major2		Minor1	
Conflicting Flow All	0	0	193	0	661	161
Stage 1	_	_	-	-	161	-
Stage 2	_	_	_	_	500	_
Critical Hdwy	_	_	4.12	-	6.42	6.22
Critical Hdwy Stg 1	_		7.12	_	5.42	0.22
Critical Hdwy Stg 2	-	-	-	-	5.42	-
		-				
Follow-up Hdwy	-	-	2.218	-	3.518	
Pot Cap-1 Maneuver	-	-	1380	-	427	884
Stage 1	-	-	-	-	868	-
Stage 2	-	-	-	-	609	-
Platoon blocked, %	-	-		-		
Mov Cap-1 Maneuver	-	-	1380	-	416	884
Mov Cap-2 Maneuver	-	-	-	-	416	-
Stage 1	-	-	-	-	846	-
Stage 2	-	-	-	-	609	-
J						
Annraach	ΓD		WD		ND	
Approach	EB		WB		NB	
HCM Control Delay, s	0		0.6		16.4	
HCM LOS					С	
Minor Lane/Major Mvmt	N	NBLn1	EBT	EBR	WBL	WBT
						VVDI
Capacity (veh/h)		511	-	-	1380	-
HCM Cartral Dalay (a)		0.384	-		0.025	-
HCM Control Delay (s)		16.4	-	-	7.7	-
HCM Lane LOS		С	-	-	Α	-
HCM 95th %tile Q(veh)		1.8	_		0.1	_

	•	•	<b>†</b>	~	<b>\</b>	ļ
Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	W		ĵ.			ર્ન
Traffic Volume (vph)	20	302	44	20	517	43
Future Volume (vph)	20	302	44	20	517	43
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt	0.873		0.958			
Flt Protected	0.997					0.956
Satd. Flow (prot)	1553	0	1709	0	0	1706
Flt Permitted	0.997					0.956
Satd. Flow (perm)	1553	0	1709	0	0	1706
Link Speed (k/h)	70		80			80
Link Distance (m)	509.6		269.7			282.6
Travel Time (s)	26.2		12.1			12.7
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00
Adj. Flow (vph)	20	302	44	20	517	43
Shared Lane Traffic (%)						
Lane Group Flow (vph)	322	0	64	0	0	560
Sign Control	Stop		Free			Free
Intersection Summary						
Area Type:	Other					

Control Type: Unsignalized Intersection Capacity Utilization 66.8% Analysis Period (min) 15 ICU Level of Service C

Meadows Phase 7/8 **CGH Transportation** Page 1 MC

Intersection						
Int Delay, s/veh	9.3					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	Y		7>		UDL	4
Traffic Vol, veh/h	20	302	44	20	517	43
Future Vol, veh/h	20	302	44	20	517	43
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None		None	-	
Storage Length	0	-	-	-	-	-
Veh in Median Storage		-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	100	100	100	100	100	100
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	20	302	44	20	517	43
Major/Minor	Minor1	ı	Notor1		Majara	
	Minor1		Major1		Major2	^
Conflicting Flow All	1131	54	0	0	64	0
Stage 1	54	-	-	-	-	-
Stage 2	1077	-	-	-	-	-
Critical Hdwy	6.42	6.22	-	-	4.12	-
Critical Hdwy Stg 1	5.42 5.42	-	-	-	-	-
Critical Hdwy Stg 2	3.518	2 210	-	-	2.218	-
Follow-up Hdwy		1013	-	-	1538	-
Pot Cap-1 Maneuver	225 969	1013	-	-	1038	-
Stage 1	327	-	-	-	-	-
Stage 2 Platoon blocked, %	321	-	-	-	-	-
	148	1013	-	-	1538	
Mov Cap-1 Maneuver	148		-	-	1538	-
Mov Cap-2 Maneuver	636	-	-	-	-	-
Stage 1		-	-	-	-	-
Stage 2	327	-	-	-	-	-
Approach	WB		NB		SB	
HCM Control Delay, s	13.5		0		7.9	
HCM LOS	В					
Minor Lane/Major Mvm	n <del>t</del>	NBT	NIRDV	VBLn1	SBL	SBT
Capacity (veh/h)	IL		NDIN		1538	
HCM Lane V/C Ratio		-		0.433		-
HOW Lake V/C Railo		-			8.5	0
HCM Control Dolay (c)						
HCM Lang LOS		-	-			
HCM Control Delay (s) HCM Lane LOS HCM 95th %tile Q(veh		-	-	В	0.5 A 1.5	A

	<b>→</b>	$\rightarrow$	•	<b>←</b>	<b>1</b>	/
Lane Group	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations	ĥ		ሻ	<b>†</b>	W	
Traffic Volume (vph)	415	123	65	227	96	50
Future Volume (vph)	415	123	65	227	96	50
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800
Storage Length (m)		0.0	15.0		0.0	0.0
Storage Lanes		0	1		1	0
Taper Length (m)			7.6		7.6	
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt	0.969				0.954	
Flt Protected			0.950		0.968	
Satd. Flow (prot)	1729	0	1695	1784	1648	0
Flt Permitted			0.950		0.968	
Satd. Flow (perm)	1729	0	1695	1784	1648	0
Link Speed (k/h)	70			70	50	
Link Distance (m)	509.6			247.9	230.8	
Travel Time (s)	26.2			12.7	16.6	
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00
Adj. Flow (vph)	415	123	65	227	96	50
Shared Lane Traffic (%)	=					
Lane Group Flow (vph)	538	0	65	227	146	0
Sign Control	Free			Free	Stop	
Intersection Summary						
Area Type:	Other					
Control Type: Unsignalize	d					
Intersection Capacity Utiliz	zation 53.6%			IC	CU Level of	of Service
Analysis Period (min) 15						

Intersection						
Int Delay, s/veh	3.6					
Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations	-₽				W	
Traffic Vol, veh/h	415	123	65	227	96	50
Future Vol, veh/h	415	123	65	227	96	50
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	150	-	0	-
Veh in Median Storage,	# 0	-	-	0	0	-
Grade, %	0	_	_	0	0	_
Peak Hour Factor	100	100	100	100	100	100
Heavy Vehicles, %	2	2	2	2	2	2
Mymt Flow	415	123	65	227	96	50
IVIVIIIL I IOW	413	123	05	221	70	50
Major/Minor Major/Minor	ajor1	N	Major2	1	Minor1	
Conflicting Flow All	0	0	538	0	834	477
Stage 1	-	-	-	-	477	-
Stage 2	_	_	_	_	357	_
Critical Hdwy	_	_	4.12	-	6.42	6.22
Critical Hdwy Stg 1	_	_	7.12	_	5.42	0.22
Critical Hdwy Stg 2	-	-	-	_	5.42	-
		-	2.218		3.518	
Follow-up Hdwy	-	-		-		
Pot Cap-1 Maneuver	-	-	1030	-	338	588
Stage 1	-	-	-	-	624	-
Stage 2	-	-	-	-	708	-
Platoon blocked, %	-	-		-		
Mov Cap-1 Maneuver	-	-	1030	-	317	588
Mov Cap-2 Maneuver	-	-	-	-	317	-
Stage 1	-	-	-	-	585	-
Stage 2	-	-	-	-	708	-
J						
Annragah	EB		WB		ND	
Approach					NB	
HCM Control Delay, s	0		1.9		20.5	
HCM LOS					С	
Minor Lane/Major Mvmt	N	NBLn1	EBT	EBR	WBL	WBT
Capacity (veh/h)		376	-	-	1030	
HCM Lane V/C Ratio		0.388	_		0.063	-
HCM Control Delay (s)		20.5			8.7	-
HCM Lane LOS			-	-		
		C	-	-	A	-
HCM 95th %tile Q(veh)		1.8	-	-	0.2	-

## Appendix J 2027 Total Future Synchro



	•	•	<b>†</b>	~	<b>&gt;</b>	ļ
Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	W		f.			4
Traffic Volume (vph)	52	721	83	32	250	58
Future Volume (vph)	52	721	83	32	250	58
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt	0.874		0.962			
Flt Protected	0.997					0.961
Satd. Flow (prot)	1555	0	1717	0	0	1715
Flt Permitted	0.997					0.961
Satd. Flow (perm)	1555	0	1717	0	0	1715
Link Speed (k/h)	69		80			80
Link Distance (m)	509.6		269.7			282.6
Travel Time (s)	26.6		12.1			12.7
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00
Adj. Flow (vph)	52	721	83	32	250	58
Shared Lane Traffic (%)						
Lane Group Flow (vph)	773	0	115	0	0	308
Sign Control	Stop		Free			Free
Intersection Summary						
Area Type:	Other					

ICU Level of Service D

Control Type: Unsignalized Intersection Capacity Utilization 81.3% Analysis Period (min) 15

Intersection						
Int Delay, s/veh	23.4					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	N/		₽			र्स
Traffic Vol, veh/h	52	721	83	32	250	58
Future Vol, veh/h	52	721	83	32	250	58
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	<u>.</u>	None	-	None	-	None
Storage Length	0	-	-	-	-	-
Veh in Median Storage		-	0	_	_	0
Grade, %	0	_	0	_	_	0
Peak Hour Factor	100	100	100	100	100	100
Heavy Vehicles, %	2	2	2	2	2	2
Mymt Flow	52	721	83	32	250	58
IVIVIIIL I IOW	32	121	03	32	250	50
Major/Minor	Minor1	Λ	/lajor1	N	Major2	
Conflicting Flow All	657	99	0	0	115	0
Stage 1	99	-	-	-	-	-
Stage 2	558	-	-	-	-	-
Critical Hdwy	6.42	6.22	-	-	4.12	-
Critical Hdwy Stg 1	5.42	-	_	_	_	_
Critical Hdwy Stg 2	5.42	-	_	_	_	_
Follow-up Hdwy		3.318	_	_	2.218	_
Pot Cap-1 Maneuver	430	957	_	_	1474	_
Stage 1	925	-	_	_		_
Stage 2	573	_	_			_
Platoon blocked, %	3/3	-		-	-	-
	255	OE 7	-	-	1171	
Mov Cap-1 Maneuver	355	957	-	-	1474	-
Mov Cap-2 Maneuver	355	-	-	-	-	-
Stage 1	763	-	-	-	-	-
Stage 2	573	-	-	-	-	-
Approach	WB		NB		SB	
HCM Control Delay, s	33.6		0		6.4	
HCM LOS	D		U		0.1	
TIOWI EOO	U					
NA!		NET	NDD	VDL 4	CDI	CDT
Minor Lane/Major Mvm	nt	NBT	NBKV	VBLn1	SBL	SBT
Capacity (veh/h)		-	-	859	1474	-
HCM Lane V/C Ratio		-	-	0.9	0.17	-
HCM Control Delay (s)			-	33.6	7.9	0
HCM Lane LOS		-	-	D	Α	Α
HCM 95th %tile Q(veh	)	-	-	12.5	0.6	-

Lane Group         EBL         EBT         EBR         WBL         WBT         WBR         NBL         NBT         NBR         SBL         SBT           Lane Configurations         1 <t< th=""><th>104 104 1800 0.0</th></t<>	104 104 1800 0.0
Lane Configurations         1         2         2         2         2         2	104 104 1800
Traffic Volume (vph) 49 227 64 34 552 130 127 5 69 282 5	104 1800
	104 1800
	1800
Ideal Flow (vphpl) 1800 1800 1800 1800 1800 1800 1800 180	
Storage Length (m) 40.0 10.0 15.0 10.0 20.0 0.0 70.0	()()
Storage Lanes 1 1 1 1 0 1	0.0
Taper Length (m) 7.6 7.6 7.6 7.6	Ü
Lane Util. Factor 1.00 1.00 1.00 1.00 1.00 1.00 1.00 1.0	1.00
Frt 0.850 0.850 0.860 0.857	1.00
Flt Protected 0.950 0.950 0.950 0.950	
Satd. Flow (prot) 1695 1784 1517 1695 1784 1517 1695 1535 0 1695 1529	0
Flt Permitted 0.296 0.617 0.727 0.471	U
Satd. Flow (perm) 528 1784 1517 1101 1784 1517 1297 1535 0 840 1529	0
Right Turn on Red Yes Yes Yes	Yes
Satd. Flow (RTOR) 71 71 69 104	103
Link Speed (k/h) 69 69 50 50	
Link Distance (m) 509.6 247.9 230.8 283.1	
Travel Time (s) 26.6 12.9 16.6 20.4	
Peak Hour Factor 1.00 1.00 1.00 1.00 1.00 1.00 1.00 1.0	1.00
Adj. Flow (vph) 49 227 64 34 552 130 127 5 69 282 5	104
Shared Lane Traffic (%)	104
Lane Group Flow (vph) 49 227 64 34 552 130 127 74 0 282 109	0
Turn Type Perm NA Perm Perm NA Perm pm+pt NA pm+pt NA	U
Protected Phases 2 6 7 4 3 8	
Permitted Phases 2 2 6 6 4 8	
Detector Phase 2 2 2 6 6 6 7 4 3 8	
Switch Phase	
Minimum Initial (s) 10.0 10.0 10.0 10.0 10.0 5.0 10.0 5.0 10.0	
Minimum Split (s) 30.8 30.8 30.8 30.8 30.8 30.8 9.5 34.4 9.5 34.4	
Total Split (s) 31.0 31.0 31.0 31.0 31.0 9.5 34.4 9.6 34.5	
Total Split (%) 41.3% 41.3% 41.3% 41.3% 41.3% 12.7% 45.9% 12.8% 46.0%	
Maximum Green (s) 25.5 25.5 25.5 25.5 25.5 25.5 25.5 26.5 29.5 6.6 29.6	
Yellow Time (s) 3.3 3.3 3.3 3.3 3.3 3.0 3.0 3.0 3.0 3.0	
All-Red Time (s) 2.2 2.2 2.2 2.2 2.2 0.0 1.9 0.0 1.9	
Lost Time Adjust (s) 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.	
Total Lost Time (s) 5.5 5.5 5.5 5.5 5.5 3.0 4.9 3.0 4.9	
Lead/Lag Lead Lag Lead Lag	
Lead-Lag Optimize? Yes Yes Yes Yes	
Vehicle Extension (s) 3.0 3.0 3.0 3.0 3.0 3.0 3.0 3.0 3.0 3.0	
Recall Mode Min Min Min Min Min None None None None	
Walk Time (s) 7.0 7.0 7.0 7.0 7.0 7.0 7.0 7.0 7.0	
Flash Dont Walk (s) 18.0 18.0 18.0 18.0 18.0 21.0 21.0	
Pedestrian Calls (#/hr) 0 0 0 0 0 0 0 0 0	
Act Effet Green (s) 22.2 22.2 22.2 22.2 22.2 13.1 10.3 17.8 10.4	
Actuated g/C Ratio 0.44 0.44 0.44 0.44 0.44 0.26 0.20 0.35 0.21	
v/c Ratio 0.21 0.29 0.09 0.07 0.70 0.18 0.33 0.20 0.58 0.27	
Control Delay 11.9 10.6 2.8 9.0 17.6 5.5 15.1 8.4 20.5 7.8	
Queue Delay 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.	
Total Delay 11.9 10.6 2.8 9.0 17.6 5.5 15.1 8.4 20.5 7.8	

	ၨ	<b>-</b>	`	•	←	•	•	<b>†</b>	-	-	Ţ	4
											_	
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
LOS	В	В	Α	Α	В	Α	В	Α		С	Α	
Approach Delay		9.3			15.0			12.6			17.0	
Approach LOS		Α			В			В			В	
Queue Length 50th (m)	2.7	13.2	0.0	1.8	40.5	3.1	7.9	0.4		19.6	0.4	
Queue Length 95th (m)	8.6	24.9	4.4	5.6	69.8	10.5	17.2	8.9		#36.3	10.6	
Internal Link Dist (m)		485.6			223.9			206.8			259.1	
Turn Bay Length (m)	40.0		10.0	15.0		10.0	20.0			70.0		
Base Capacity (vph)	275	932	826	575	932	826	393	955		487	968	
Starvation Cap Reductn	0	0	0	0	0	0	0	0		0	0	
Spillback Cap Reductn	0	0	0	0	0	0	0	0		0	0	
Storage Cap Reductn	0	0	0	0	0	0	0	0		0	0	
Reduced v/c Ratio	0.18	0.24	0.08	0.06	0.59	0.16	0.32	0.08		0.58	0.11	

## **Intersection Summary**

Area Type: Other

Cycle Length: 75

Actuated Cycle Length: 50.4

Natural Cycle: 75

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.70


Intersection Signal Delay: 14.0 Intersection LOS: B
Intersection Capacity Utilization 74.8% ICU Level of Service D

Analysis Period (min) 15

# 95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 2: Street 23/Mattamy Site Access & Cambrian Road



	≯	<b>→</b>	•	•	<b>←</b>	•	•	†	~	<b>/</b>	<b>+</b>	
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	ň	<b>†</b>	7	7	<b>↑</b>	7	7	4î		7	f)	
Traffic Volume (veh/h)	49	227	64	34	552	130	127	5	69	282	5	104
Future Volume (veh/h)	49	227	64	34	552	130	127	5	69	282	5	104
Number	5	2	12	1	6	16	7	4	14	3	8	18
Initial Q, veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj (A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1765	1765	1765	1765	1765	1765	1765	1765	1800	1765	1765	1800
Adj Flow Rate, veh/h	49	227	64	34	552	130	127	5	69	282	5	104
Adj No. of Lanes	1	1	1	1	1	1	1	1	0	1	1	0
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Opposing Right Turn Influence		724	424	Yes	724	424	Yes	20	272	Yes	17	244
Cap, veh/h HCM Platoon Ratio	254 1.00	734 1.00	624 1.00	498 1.00	734 1.00	624 1.00	511 1.00	20 1.00	273 1.00	558 1.00	17 1.00	344 1.00
					0.42			0.19				0.24
Prop Arrive On Green	0.42 20.1	0.42 10.3	0.42 9.2	0.42 11.9	15.7	0.42 9.7	0.08 14.7	0.19	0.19 17.9	0.13 14.0	0.24	16.4
Ln Grp Delay, s/veh Ln Grp LOS	20.1 C	10.5 B	9.2 A	11.9 B	15.7 B	9.7 A	14.7 B	0.0	17.9 B	14.0 B	0.0	10.4 B
Approach Vol, veh/h	C	340	А	D	716	A	D	201	D	D	391	D
Approach Delay, s/veh		11.5			14.4			15.9			14.7	
Approach LOS		В			В			В			В	
			2	2		_	,		0			
Timer:		1	2	3	4	5	<u>6</u>	<u>7</u> 7	8			
Assigned Phs Case No			5.0	1.1	4.0		5.0	1.1	4.0			
Phs Duration (G+Y+Rc), s			26.8	9.6	14.8		26.8	7.3	17.1			
Change Period (Y+Rc), s			5.5	3.0	* 4.9		5.5	3.0	* 4.9			
Max Green (Gmax), s			25.5	6.6	* 30		25.5	6.5	* 30			
Max Allow Headway (MAH), s			7.8	5.2	9.2		7.9	5.2	9.2			
Max Q Clear (q_c+l1), s			18.6	8.6	4.1		15.6	5.0	5.0			
Green Ext Time (g_e), s			1.9	0.0	1.0		5.7	0.1	1.5			
Prob of Phs Call (p_c)			1.00	0.98	0.99		1.00	0.84	1.00			
Prob of Max Out (p_x)			1.00	1.00	0.00		0.88	1.00	0.01			
Left-Turn Movement Data												
Assigned Mvmt			5	3			1	7				
Mvmt Sat Flow, veh/h			756	1681			1084	1681				
Through Movement Data												
Assigned Mvmt			2		4		6		8			
Mvmt Sat Flow, veh/h			1765		102		1765		69			
Right-Turn Movement Data												
Assigned Mvmt			12		14		16		18			
Mvmt Sat Flow, veh/h			1500		1413		1500		1441			
Left Lane Group Data												
Assigned Mvmt		0	5	3	0	0	1	7	0			
Lane Assignment				(Pr/Pm)				(Pr/Pm)				
- United States												

Lanes in Grp	0	1	1	0	0	1	1	0	
Grp Vol (v), veh/h	0	49	282	0	0	34	127	0	
Grp Sat Flow (s), veh/h/ln	0	756	1681	0	0	1084	1681	0	
Q Serve Time (g_s), s	0.0	3.0	6.6	0.0	0.0	1.1	3.0	0.0	
Cycle Q Clear Time (g_c), s	0.0	16.6	6.6	0.0	0.0	5.5	3.0	0.0	
Perm LT Sat Flow (s_l), veh/h/ln	0	756	1320	0	0	1084	1279	0	
Shared LT Sat Flow (s_sh), veh/h/ln	0	0	0	0	0	0	0	0	
Perm LT Eff Green (q_p), s	0.0	21.3	11.2	0.0	0.0	21.3	9.9	0.0	
Perm LT Serve Time (g_u), s	0.0	7.7	7.8	0.0	0.0	16.9	9.2	0.0	
Perm LT Q Serve Time (g_ps), s	0.0	3.0	1.1	0.0	0.0	1.1	0.1	0.0	
Time to First Blk (g_f), s	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Serve Time pre Blk (g_fs), s	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Prop LT Inside Lane (P_L)	0.00	1.00	1.00	0.00	0.00	1.00	1.00	0.00	
Lane Grp Cap (c), veh/h	0	254	558	0	0	498	511	0	
V/C Ratio (X)	0.00	0.19	0.51	0.00	0.00	0.07	0.25	0.00	
Avail Cap (c_a), veh/h	0	317	558	0	0	588	584	0	
Upstream Filter (I)	0.00	1.00	1.00	0.00	0.00	1.00	1.00	0.00	
Uniform Delay (d1), s/veh	0.0	19.8	13.2	0.0	0.0	11.9	14.5	0.0	
Incr Delay (d2), s/veh	0.0	0.4	0.7	0.0	0.0	0.1	0.3	0.0	
Initial Q Delay (d3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Control Delay (d), s/veh	0.0	20.1	14.0	0.0	0.0	11.9	14.7	0.0	
1st-Term Q (Q1), veh/ln	0.0	0.6	3.0	0.0	0.0	0.3	1.4	0.0	
2nd-Term Q (Q2), veh/ln	0.0	0.0	0.1	0.0	0.0	0.0	0.0	0.0	
3rd-Term Q (Q3), veh/ln	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
%ile Back of Q Factor (f_B%)	0.00	1.00	1.00	0.00	0.00	1.00	1.00	0.00	
%ile Back of Q (50%), veh/ln	0.0	0.7	3.1	0.0	0.0	0.3	1.4	0.0	
%ile Storage Ratio (RQ%)	0.00	3.60	10.38	0.00	0.00	5.23	15.57	0.00	
Initial Q (Qb), veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Final (Residual) Q (Qe), veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Sat Delay (ds), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Sat Q (Qs), veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Sat Cap (cs), veh/h	0	0	0	0	0	0	0	0	
Initial Q Clear Time (tc), h	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Middle Lane Group Data									
Assigned Mvmt	0	2	0	4	0	6	0	8	
Lane Assignment	U		U	4	U	T	U	O	
Lanes in Grp	0	1	0	0	0	1	0	0	
Grp Vol (v), veh/h	0	227	0	0	0	552	0	0	
Grp Sat Flow (s), veh/h/ln	0	1765	0	0	0	1765	0	0	
Q Serve Time (q_s), s	0.0	4.4	0.0	0.0	0.0	13.6	0.0	0.0	
Cycle Q Clear Time (g_s), s	0.0	4.4	0.0	0.0	0.0	13.6	0.0	0.0	
Lane Grp Cap (c), veh/h	0.0	734	0.0	0.0	0.0	734	0.0	0.0	
V/C Ratio (X)	0.00	0.31	0.00	0.00	0.00	0.75	0.00	0.00	
Avail Cap (c_a), veh/h	0.00	880	0.00	0.00	0.00	880	0.00	0.00	
Upstream Filter (I)	0.00	1.00	0.00	0.00	0.00	1.00	0.00	0.00	
Uniform Delay (d1), s/veh	0.00	10.0	0.00	0.00	0.00	12.7	0.00	0.00	
Incr Delay (d2), s/veh	0.0	0.2	0.0	0.0	0.0	3.0	0.0	0.0	
Initial Q Delay (d3), s/veh	0.0	0.2	0.0	0.0	0.0	0.0	0.0	0.0	
Control Delay (d), s/veh	0.0	10.3	0.0	0.0	0.0	15.7	0.0	0.0	
1st-Term Q (Q1), veh/ln	0.0	2.1	0.0	0.0	0.0	6.6	0.0	0.0	
	0.0	۷.۱	0.0	0.0	0.0	0.0	0.0	0.0	

									_
2nd-Term Q (Q2), veh/ln	0.0	0.0	0.0	0.0	0.0	0.6	0.0	0.0	
3rd-Term Q (Q3), veh/ln	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
%ile Back of Q Factor (f_B%)	0.00	1.00	0.00	1.00	0.00	1.00	0.00	1.00	
%ile Back of Q (50%), veh/ln	0.0	2.2	0.0	0.0	0.0	7.2	0.0	0.0	
%ile Storage Ratio (RQ%)	0.00	1.05	0.00	0.00	0.00	7.14	0.00	0.00	
Initial Q (Qb), veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Final (Residual) Q (Qe), veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Sat Delay (ds), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Sat Q (Qs), veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Sat Cap (cs), veh/h	0	0	0	0	0	0	0	0	
Initial Q Clear Time (tc), h	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Right Lane Group Data									ĺ
Assigned Mvmt	0	12	0	14	0	16	0	18	
Lane Assignment		R		T+R		R		T+R	
Lanes in Grp	0	1	0	1	0	1	0	1	
Grp Vol (v), veh/h	0	64	0	74	0	130	0	109	
Grp Sat Flow (s), veh/h/ln	0	1500	0	1515	0	1500	0	1510	
Q Serve Time (g_s), s	0.0	1.3	0.0	2.1	0.0	2.8	0.0	3.0	
Cycle Q Clear Time (g_c), s	0.0	1.3	0.0	2.1	0.0	2.8	0.0	3.0	
Prot RT Sat Flow (s_R), veh/h/ln	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	١
Prot RT Eff Green (g_R), s	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Prop RT Outside Lane (P_R)	0.00	1.00	0.00	0.93	0.00	1.00	0.00	0.95	
Lane Grp Cap (c), veh/h	0	624	0	293	0	624	0	361	
V/C Ratio (X)	0.00	0.10	0.00	0.25	0.00	0.21	0.00	0.30	
Avail Cap (c_a), veh/h	0	748	0	874	0	748	0	874	
Upstream Filter (I)	0.00	1.00	0.00	1.00	0.00	1.00	0.00	1.00	
Uniform Delay (d1), s/veh	0.0	9.1	0.0	17.5	0.0	9.6	0.0	16.0	
Incr Delay (d2), s/veh	0.0	0.1	0.0	0.4	0.0	0.2	0.0	0.5	
Initial Q Delay (d3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Control Delay (d), s/veh	0.0	9.2	0.0	17.9	0.0	9.7	0.0	16.4	
1st-Term Q (Q1), veh/ln	0.0	0.6	0.0	0.9	0.0	1.2	0.0	1.2	
2nd-Term Q (Q2), veh/ln	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
3rd-Term Q (Q3), veh/ln	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
%ile Back of Q Factor (f_B%)	0.00	1.00	0.00	1.00	0.00	1.00	0.00	1.00	
%ile Back of Q (50%), veh/ln	0.0	0.6	0.0	0.9	0.0	1.2	0.0	1.3	
%ile Storage Ratio (RQ%)	0.00	10.87	0.00	1.00	0.00	22.85	0.00	1.12	
Initial Q (Qb), veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Final (Residual) Q (Qe), veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Sat Delay (ds), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Sat Q (Qs), veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Sat Cap (cs), veh/h	0.0	0	0	0	0.0	0	0	0	
Initial Q Clear Time (tc), h	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Intersection Summary									ĺ
HCM 2010 Ctrl Delay		14.1							
HCM 2010 Clif Delay		14.1 B							
		D							
Notes									

\* HCM 2010 computational engine requires equal clearance times for the phases crossing the barrier.

	۶	<b>→</b>	•	•	<b>←</b>	•	1	†	<b>/</b>	<b>/</b>	ţ	4
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	7	<b>↑</b>	7	*		7	ሻ	Դ		*	Դ	
Traffic Volume (veh/h)	49	227	64	34	552	130	127	5	69	282	5	104
Future Volume (veh/h)	49	227	64	34	552	130	127	5	69	282	5	104
Number	5	2	12	1	6	16	7	4	14	3	8	18
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1765	1765	1765	1765	1765	1765	1765	1765	1800	1765	1765	1800
Adj Flow Rate, veh/h	49	227	64	34	552	130	127	5	69	282	5	104
Adj No. of Lanes	1	1	1	1	1	1	1	1	0	1	1	0
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Cap, veh/h	254	734	624	498	734	624	511	20	273	558	17	344
Arrive On Green	0.42	0.42	0.42	0.42	0.42	0.42	0.08	0.19	0.19	0.13	0.24	0.24
Sat Flow, veh/h	756	1765	1500	1084	1765	1500	1681	102	1413	1681	69	1441
Grp Volume(v), veh/h	49	227	64	34	552	130	127	0	74	282	0	109
Grp Sat Flow(s), veh/h/ln	756	1765	1500	1084	1765	1500	1681	0	1515	1681	0	1510
Q Serve(g_s), s	3.0	4.4	1.3	1.1	13.6	2.8	3.0	0.0	2.1	6.6	0.0	3.0
Cycle Q Clear(g_c), s	16.6	4.4	1.3	5.5	13.6	2.8	3.0	0.0	2.1	6.6	0.0	3.0
Prop In Lane	1.00		1.00	1.00		1.00	1.00		0.93	1.00		0.95
Lane Grp Cap(c), veh/h	254	734	624	498	734	624	511	0	293	558	0	361
V/C Ratio(X)	0.19	0.31	0.10	0.07	0.75	0.21	0.25	0.00	0.25	0.51	0.00	0.30
Avail Cap(c_a), veh/h	317	880	748	588	880	748	584	0	874	558	0	874
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.00	1.00	1.00	0.00	1.00
Uniform Delay (d), s/veh	19.8	10.0	9.1	11.9	12.7	9.6	14.5	0.0	17.5	13.2	0.0	16.0
Incr Delay (d2), s/veh	0.4	0.2	0.1	0.1	3.0	0.2	0.3	0.0	0.4	0.7	0.0	0.5
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%),veh/ln	0.7	2.2	0.6	0.3	7.2	1.2	1.4	0.0	0.9	3.1	0.0	1.3
LnGrp Delay(d),s/veh	20.1	10.3	9.2	11.9	15.7	9.7	14.7	0.0	17.9	14.0	0.0	16.4
LnGrp LOS	С	В	А	В	В	А	В		В	В		В
Approach Vol, veh/h		340			716			201			391	
Approach Delay, s/veh		11.5			14.4			15.9			14.7	
Approach LOS		В			В			В			В	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs		2	3	4		6	7	8				
Phs Duration (G+Y+Rc), s		26.8	9.6	14.8		26.8	7.3	17.1				
Change Period (Y+Rc), s		5.5	3.0	* 4.9		5.5	3.0	* 4.9				
Max Green Setting (Gmax), s		25.5	6.6	* 30		25.5	6.5	* 30				
Max Q Clear Time (q_c+l1), s		18.6	8.6	4.1		15.6	5.0	5.0				
Green Ext Time (p_c), s		1.9	0.0	1.0		5.7	0.1	1.5				
Intersection Summary												
HCM 2010 Ctrl Delay			14.1									
HCM 2010 LOS			В									
Notes												

	•	•	<b>†</b>	~	-	<b>↓</b>
Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	W		ĵ,			ર્ન
Traffic Volume (vph)	39	420	78	44	692	69
Future Volume (vph)	39	420	78	44	692	69
Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt	0.876		0.951			
Flt Protected	0.996					0.957
Satd. Flow (prot)	1557	0	1697	0	0	1708
Flt Permitted	0.996					0.957
Satd. Flow (perm)	1557	0	1697	0	0	1708
Link Speed (k/h)	69		80			80
Link Distance (m)	509.6		269.7			282.6
Travel Time (s)	26.6		12.1			12.7
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00
Adj. Flow (vph)	39	420	78	44	692	69
Shared Lane Traffic (%)						
Lane Group Flow (vph)	459	0	122	0	0	761
Sign Control	Stop		Free			Free
Intersection Summary						
Area Type:	Other					

Control Type: Unsignalized
Intersection Capacity Utilization 91.1%
Analysis Period (min) 15 ICU Level of Service F

Meadows Phase 7/8 **CGH Transportation** Page 1 MC

Intersection						
	34.8					
Int Delay, s/veh						
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	144		f)			र्स
Traffic Vol, veh/h	39	420	78	44	692	69
Future Vol, veh/h	39	420	78	44	692	69
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	_	-	-	-
Veh in Median Storag		_	0	-	-	0
Grade, %	0	_	0	_	_	0
Peak Hour Factor	100	100	100	100	100	100
	2	2	2	2	2	2
Heavy Vehicles, %						
Mvmt Flow	39	420	78	44	692	69
Major/Minor	Minor1	N	/lajor1		Major2	
Conflicting Flow All	1553	100	0	0	122	0
Stage 1	100	-	-	-	-	-
Stage 2	1453	_	_	_	_	_
Critical Hdwy	6.42	6.22	_	_	4.12	_
Critical Hdwy Stg 1	5.42	0.22	-	-	4.12	
	5.42			-	-	
Critical Hdwy Stg 2		2 210	-	-	2 210	-
Follow-up Hdwy		3.318	-	-	2.218	-
Pot Cap-1 Maneuver	125	956	-	-	1465	-
Stage 1	924	-	-	-	-	-
Stage 2	215	-	-	-	-	-
Platoon blocked, %			-	-		-
Mov Cap-1 Maneuver		956	-	-	1465	-
Mov Cap-2 Maneuver		-	-	-	-	-
Stage 1	470	-	-	-	-	-
Stage 2	215	-	-	-	-	-
Approach	WB		NB		SB	
					8.8	
HCM Control Delay, s			0		8.8	
HCM LOS	F					
Minor Lane/Major Mvr	nt	NBT	NBRV	VBLn1	SBL	SBT
Capacity (veh/h)				438	1465	
HCM Lane V/C Ratio		_		1.048		-
HCM Control Delay (s	)	-		87.2	9.6	0
HCM Lane LOS	)	-	-	67.2 F	9.0 A	A
	2)	-	-			
HCM 95th %tile Q(veh	1)	-	-	14.5	2.6	-

Lane Contigurations		۶	<b>→</b>	•	•	<b>←</b>	•	4	†	<i>&gt;</i>	<b>/</b>	<b>↓</b>	4
Traffic Volume (γν)h   100   588   123   65   335   273   96   5   50   196   5   73	Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Traffic Yolume (ynh)   100   588   123   65   335   273   96   5   50   196   5   73	Lane Configurations	ች	<b>*</b>	7	ች	<b>*</b>	7	ሻ	ĵ.		ሻ	ĵ.	
Fulture Volume (vph)   100   588   123   65   335   273   96   5   50   106   5   73										50	196		73
Storage Length (m)	Future Volume (vph)	100	588	123	65	335	273	96	5	50	196	5	73
Storage Lanes	Ideal Flow (vphpl)	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
Storage Lanes	1 1 7			10.0	15.0		10.0	20.0		0.0	70.0		
Taper Length (m)		1		1	1		1	1		0	1		0
Lane Util. Factor		7.6			7.6			7.6			7.6		
File Protected		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Satd. Flow (prot)   1695   1784   1517   1695   1784   1517   1695   1784   1517   1695   1542   0   1695   1535   0   Fli Permitted	Frt			0.850			0.850		0.864			0.860	
Fit   Permitted   Satis   Fit   Satis   Sati	Flt Protected	0.950			0.950			0.950			0.950		
Fit Permitted   Satis   Sati	Satd. Flow (prot)	1695	1784	1517	1695	1784	1517	1695	1542	0	1695	1535	0
Right Turn on Red		0.531			0.292			0.755			0.482		
Right Turn on Red   Yes   Yes   Yes   Yes   Yes   Yes   Yes   Satd. Flow (RTOR)   76   69   69   50   50   50   50   100   1	Satd. Flow (perm)	947	1784	1517	521	1784	1517	1347	1542	0	860	1535	0
Satid. Flow (RTOR)				Yes			Yes			Yes			Yes
Link Speed (k/h)				76			149		50			73	
Link Distance (m)			69			69			50			50	
Travel Time (s)			509.6			247.9			230.8			283.1	
Adj. Flow (vph)         100         588         123         65         335         273         96         5         50         196         5         73           Shared Lane Traffic (%)         Lane Group Flow (vph)         100         588         123         65         335         273         96         55         0         196         78         0           Turn Type         Perm         NA         Perm			26.6			12.9			16.6			20.4	
Adj. Flow (vph)         100         588         123         65         335         273         96         5         50         196         5         73           Shared Lane Traffic (%)         Lane Group Flow (vph)         100         588         123         65         335         273         96         55         0         196         78         0           Turn Type         Perm         NA         Perm	` '	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Shared Lane Traffic (%)   Lane Group Flow (vph)   100   588   123   65   335   273   96   55   0   196   78   0   1   177   177   1   18   18   18   18													
Lane Group Flow (vph)   100   588   123   65   335   273   96   55   0   196   78   0     Turn Type	, , ,												
Turn Type	. ,	100	588	123	65	335	273	96	55	0	196	78	0
Protected Phases   2								pm+pt			pm+pt		
Detector Phase   2   2   2   6   6   6   7   4   3   8													
Detector Phase   2   2   2   6   6   6   7   4   3   8	Permitted Phases	2		2	6		6	4			8		
Minimum Initial (s)         10.0         10.0         10.0         10.0         10.0         10.0         10.0         5.0         10.0         5.0         10.0           Minimum Split (s)         34.4         34.4         34.4         34.4         34.4         34.4         34.4         9.5         30.8         9.5         30.8           Total Split (s)         34.7         34.7         34.7         34.7         34.7         34.7         9.5         30.8         9.5         30.8           Total Split (%)         46.3%         46.3%         46.3%         46.3%         46.3%         46.3%         12.7%         41.1%         12.7%         41.1%           Maximum Green (s)         29.5         29.5         29.5         29.5         29.5         29.5         29.5         25.6         6.5         25.6         6.5         25.6         72.0         72.0	Detector Phase		2		6	6	6	7	4		3	8	
Minimum Split (s)         34.4         34.4         34.4         34.4         34.4         34.4         34.4         9.5         30.8         9.5         30.8           Total Split (s)         34.7         34.7         34.7         34.7         34.7         9.5         30.8         9.5         30.8           Total Split (%)         46.3%         46.3%         46.3%         46.3%         46.3%         46.3%         46.3%         12.7%         41.1%         12.7%         41.1%           Maximum Green (s)         29.5         29.5         29.5         29.5         29.5         29.5         25.6         6.5         25.6           Yellow Time (s)         3.3         3.3         3.3         3.3         3.3         3.0         3.0         3.0         3.0           All-Red Time (s)         1.9         1.9         1.9         1.9         1.9         0.0         2.2         0.0         2.2           Lost Time Adjust (s)         0.0 </td <td>Switch Phase</td> <td></td>	Switch Phase												
Total Split (s)         34.7         34.7         34.7         34.7         34.7         34.7         34.7         9.5         30.8         9.5         30.8           Total Split (%)         46.3%         46.3%         46.3%         46.3%         46.3%         46.3%         12.7%         41.1%         12.7%         41.1%           Maximum Green (s)         29.5         29.5         29.5         29.5         29.5         29.5         29.6         6.5         25.6         6.5         25.6           Yellow Time (s)         3.3         3.3         3.3         3.3         3.3         3.0         3.0         3.0         3.0           All-Red Time (s)         1.9         1.9         1.9         1.9         1.9         0.0         2.2         0.0         2.2           Lost Time Adjust (s)         0.0<	Minimum Initial (s)	10.0	10.0	10.0	10.0	10.0	10.0	5.0	10.0		5.0	10.0	
Total Split (s)         34.7         34.7         34.7         34.7         34.7         34.7         9.5         30.8         9.5         30.8           Total Split (%)         46.3%         46.3%         46.3%         46.3%         46.3%         46.3%         46.3%         41.1%         12.7%         41.1%           Maximum Green (s)         29.5         29.5         29.5         29.5         29.5         25.6         6.5         25.6           Yellow Time (s)         3.3         3.3         3.3         3.3         3.3         3.0         3.0         3.0         3.0           All-Red Time (s)         1.9         1.9         1.9         1.9         0.0         2.2         0.0         2.2           Lost Time (s)         0.0	Minimum Split (s)	34.4	34.4	34.4	34.4	34.4	34.4	9.5	30.8		9.5	30.8	
Total Split (%)		34.7	34.7	34.7	34.7	34.7	34.7	9.5	30.8		9.5	30.8	
Yellow Time (s)         3.3         3.3         3.3         3.3         3.3         3.3         3.3         3.0         3.0         3.0         3.0           All-Red Time (s)         1.9         1.9         1.9         1.9         1.9         1.9         0.0         2.2         0.0         2.2           Lost Time Adjust (s)         0.0	Total Split (%)	46.3%	46.3%	46.3%	46.3%	46.3%	46.3%	12.7%	41.1%		12.7%	41.1%	
All-Red Time (s) 1.9 1.9 1.9 1.9 1.9 1.9 1.9 0.0 2.2 0.0 2.2   Lost Time Adjust (s) 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.	Maximum Green (s)	29.5	29.5	29.5	29.5	29.5	29.5	6.5	25.6		6.5	25.6	
Lost Time Adjust (s)         0.0	Yellow Time (s)	3.3	3.3	3.3	3.3	3.3	3.3	3.0	3.0		3.0	3.0	
Lost Time Adjust (s)         0.0	All-Red Time (s)	1.9	1.9	1.9	1.9	1.9	1.9	0.0	2.2		0.0	2.2	
Lead/Lag         Lead         Lag         Lead         Lag           Lead-Lag Optimize?         Yes         Yes         Yes         Yes           Vehicle Extension (s)         3.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		0.0	0.0	
Lead-Lag Optimize?         Yes	Total Lost Time (s)	5.2	5.2	5.2	5.2	5.2	5.2	3.0	5.2		3.0	5.2	
Lead-Lag Optimize?         Yes	Lead/Lag							Lead	Lag		Lead	Lag	
Recall Mode         Min         Min         Min         Min         Min         Min         Min         Mone         None         None         None           Walk Time (s)         7.0								Yes			Yes		
Recall Mode         Min         Min         Min         Min         Min         Min         Min         Mone         None         None         None           Walk Time (s)         7.0		3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0		3.0	3.0	
Walk Time (s)       7.0       7.0       7.0       7.0       7.0       7.0       7.0       7.0         Flash Dont Walk (s)       21.0       21.0       21.0       21.0       21.0       18.0       18.0         Pedestrian Calls (#/hr)       0       0       0       0       0       0       0         Act Effct Green (s)       25.1       25.1       25.1       25.1       25.1       13.1       10.4       16.2       10.4         Actuated g/C Ratio       0.49       0.49       0.49       0.49       0.49       0.25       0.20       0.32       0.20		Min	Min	Min	Min	Min	Min	None	None		None	None	
Flash Dont Walk (s)       21.0       21.0       21.0       21.0       21.0       21.0       18.0       18.0         Pedestrian Calls (#/hr)       0       0       0       0       0       0       0         Act Effct Green (s)       25.1       25.1       25.1       25.1       25.1       25.1       13.1       10.4       16.2       10.4         Actuated g/C Ratio       0.49       0.49       0.49       0.49       0.49       0.25       0.20       0.32       0.20	Walk Time (s)	7.0	7.0	7.0	7.0	7.0	7.0					7.0	
Pedestrian Calls (#/hr)       0       0       0       0       0       0       0         Act Effct Green (s)       25.1       25.1       25.1       25.1       25.1       25.1       13.1       10.4       16.2       10.4         Actuated g/C Ratio       0.49       0.49       0.49       0.49       0.49       0.25       0.20       0.32       0.20			21.0	21.0	21.0	21.0	21.0					18.0	
Act Effct Green (s) 25.1 25.1 25.1 25.1 25.1 25.1 13.1 10.4 16.2 10.4 Actuated g/C Ratio 0.49 0.49 0.49 0.49 0.49 0.25 0.20	Pedestrian Calls (#/hr)	0	0	0	0	0	0		0			0	
Actuated g/C Ratio 0.49 0.49 0.49 0.49 0.49 0.25 0.20 0.32 0.20			25.1	25.1	25.1	25.1	25.1	13.1	10.4		16.2	10.4	
	` ,			0.49								0.20	
vicinalio 0.22 0.00 0.10 0.20 0.30 0.33 0.23 0.10 0.40 0.21	v/c Ratio	0.22	0.68	0.16	0.26	0.38	0.33	0.25	0.16		0.46	0.21	
Control Delay 10.0 15.5 4.6 12.0 10.5 5.5 14.2 9.8 17.1 8.9													
Queue Delay 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.													
Total Delay 10.0 15.5 4.6 12.0 10.5 5.5 14.2 9.8 17.1 8.9	,												

	ၨ	-	•	1	←	•	4	<b>†</b>	~	-	ļ	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
LOS	А	В	А	В	В	А	В	А		В	А	
Approach Delay		13.1			8.6			12.6			14.8	
Approach LOS		В			Α			В			В	
Queue Length 50th (m)	5.7	44.3	2.5	3.8	20.8	6.8	5.9	0.4		12.7	0.4	
Queue Length 95th (m)	13.2	74.9	9.2	10.8	36.3	18.0	15.1	8.3		28.3	9.7	
Internal Link Dist (m)		485.6			223.9			206.8			259.1	
Turn Bay Length (m)	40.0		10.0	15.0		10.0	20.0			70.0		
Base Capacity (vph)	565	1064	936	310	1064	965	393	822		427	830	
Starvation Cap Reductn	0	0	0	0	0	0	0	0		0	0	
Spillback Cap Reductn	0	0	0	0	0	0	0	0		0	0	
Storage Cap Reductn	0	0	0	0	0	0	0	0		0	0	
Reduced v/c Ratio	0.18	0.55	0.13	0.21	0.31	0.28	0.24	0.07		0.46	0.09	

## **Intersection Summary**

Area Type: Other

Cycle Length: 75

Actuated Cycle Length: 51.4

Natural Cycle: 75


Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.68

Intersection Signal Delay: 11.7 Intersection LOS: B
Intersection Capacity Utilization 72.1% ICU Level of Service C

Analysis Period (min) 15

Splits and Phases: 2: Street 23/Mattamy Site Access & Cambrian Road



	≯	<b>→</b>	•	•	<b>←</b>	•	•	†	<i>&gt;</i>	<b>/</b>	<b></b>	
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	ň	<b>↑</b>	7	7	<b>↑</b>	7	7	<b>₽</b>		7	₽	
Traffic Volume (veh/h)	100	588	123	65	335	273	96	5	50	196	5	73
Future Volume (veh/h)	100	588	123	65	335	273	96	5	50	196	5	73
Number	5	2	12	1	6	16	7	4	14	3	8	18
Initial Q, veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj (A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1765	1765	1765	1765	1765	1765	1765	1765	1800	1765	1765	1800
Adj Flow Rate, veh/h	100	588	123	65	335	273	96	5	50	196	5	73
Adj No. of Lanes	1	1	1	1	1	1	1	1	0	1	1	0
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Opposing Right Turn Influence		011	400	Yes	011	400	Yes	24	245	Yes	22	220
Cap, veh/h HCM Platoon Ratio	401 1.00	811 1.00	689 1.00	271 1.00	811 1.00	689 1.00	482 1.00	24 1.00	245 1.00	528 1.00	22 1.00	320 1.00
								0.18				0.23
Prop Arrive On Green	0.46 14.2	0.46 14.3	0.46 8.8	0.46 20.2	0.46 10.2	0.46 10.1	0.07 16.6	0.18	0.18 19.6	0.12 14.6	0.23	17.6
Ln Grp Delay, s/veh Ln Grp LOS	14.2 B	14.5 B	0.0 A	20.2 C	10.2 B	В	10.0 B	0.0	19.0 B	14.0 B	0.0	17.0 B
Approach Vol, veh/h	D	811	А	C	673	D	D	151	D	D	274	D
Approach Delay, s/veh		13.5			11.2			17.7			15.5	
Approach LOS		В			В			В			В	
			2	2		_	,		0			
Timer:		1	2	3	4	5	<u>6</u>	<u>7</u> 7	8			
Assigned Phs Case No			5.0	1.1	4.0		5.0	1.1	4.0			
Phs Duration (G+Y+Rc), s			30.3	9.5	14.9		30.3	6.8	17.6			
Change Period (Y+Rc), s			* 5.2	3.0	* 5.2		* 5.2	3.0	* 5.2			
Max Green (Gmax), s			* 30	6.5	* 26		* 30	6.5	* 26			
Max Allow Headway (MAH), s			8.0	5.2	9.2		7.2	5.2	9.2			
Max Q Clear (g_c+l1), s			16.8	6.9	3.7		21.1	4.5	4.3			
Green Ext Time (g_e), s			7.6	0.0	0.6		4.1	0.1	0.9			
Prob of Phs Call (p_c)			1.00	0.95	0.97		1.00	0.77	0.99			
Prob of Max Out (p_x)			0.78	1.00	0.00		0.89	1.00	0.01			
Left-Turn Movement Data												
Assigned Mvmt			5	3			1	7				
Mvmt Sat Flow, veh/h			809	1681			736	1681				
Through Movement Data												
Assigned Mvmt			2		4		6		8			
Mvmt Sat Flow, veh/h			1765		138		1765		97			
Right-Turn Movement Data												
Assigned Mvmt			12		14		16		18			
Mvmt Sat Flow, veh/h			1500		1382		1500		1417			
Left Lane Group Data												
Assigned Mvmt		0	5	3	0	0	1	7	0			
Lane Assignment				(Pr/Pm)				(Pr/Pm)				

Lanes in Crp										
Grip Staf Flow (s), wehPhin O 809 1681 0 0 0 736 1681 0 0 OServe Time (g_C), s O 0 5.1 4.9 0.0 0.0 1.3 2.5 0.0  Cycle O Clear Time (g_C), s O 0 12.1 4.9 0.0 0.0 19.1 2.5 0.0  Perm LT Staf Flow (s_D), wehPhin O 809 1343 0 0 736 1316 0  Shared LT Staf Flow (s_D), wehPhin O 809 1343 0 0 736 1316 0  Perm LT Staf Flow (s_D), wehPhin O 809 1343 0 0 736 1316 0  Perm LT Staf Flow (s_D), wehPhin O 809 1343 0 0 736 1316 0  Perm LT Staf Flow (s_D), wehPhin O 809 1343 0 0 70 70 0  Perm LT Staf Flow (s_D), wehPhin O 800 1343 0 0 0 0 0 0 0  Perm LT Staf Flow (s_D), wehPhin O 801 11, 4 00 0 0 251 9, 7 00  Perm LT O Serve Time (g_D), s O 0 15.1 10.6 0 0 0 0 0 10.4 9,7 0 0  Perm LT O Serve Time (g_D), s O 0 10.0 0 0 0 0 0 0 0 0 0 0  Perm LT O Serve Time (g_D), s O 0 10.0 0 0 0 0 0 0 0 0 0 0 0  Perm LT O Serve Time (g_D), s O 0 10.0 0 0 0 0 0 0 0 0 0 0 0 0  Perm LT O Serve Time (g_D), s O 0 10.0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Lanes in Grp	0	1	1	0	0	1	1	0	
OSENDE TIME (GLS).s         0.0         5.1         4.9         0.0         0.0         43         2.5         0.0           Cycle Q Clear Time (g_C).s         0.0         12.1         4.9         0.0         0.0         19.1         2.5         0.0           Perm LT Saf Flow (s_Sh), verhi/nln         0         80         1343         0         0         736         1316         0           Perm LT Geren (Eng.), s         0         0         0         0         0         0         0         0           Perm LT Serve Time (g_D), s         0.0         18.2         8.0         0.0         0.0         10.4         9.7         0.0           Perm LT Geren Time (g_D), s         0.0         18.2         8.0         0.0         0.0         10.4         9.7         0.0           Perm LT Serve Time (g_D), s         0.0         1.0         1.0         0	Grp Vol (v), veh/h	0	100	196	0	0	65	96	0	
Cycle O Clear Time (g.c.) s         0.0         12.1         4.9         0.0         0.0         19.1         2.5         0.0           Perm LT Sat Flow (s., s), vehh/lin         0	Grp Sat Flow (s), veh/h/ln	0	809	1681	0	0	736	1681	0	
Perm LT Sat Flow (s_1), veh/hin   0   809   1343   0   0   736   1316   0	Q Serve Time (g_s), s	0.0	5.1	4.9	0.0	0.0	4.3	2.5	0.0	
Shared LT Sat Flow (s. sh.) vehlrhin	Cycle Q Clear Time (g_c), s	0.0	12.1	4.9	0.0	0.0	19.1	2.5	0.0	
Perm LT Ett Green (g _D), s	Perm LT Sat Flow (s_l), veh/h/ln	0	809	1343	0	0	736	1316	0	
Perm LT Serve Time (g_uy), s	Shared LT Sat Flow (s_sh), veh/h/ln	0	0	0	0	0	0	0	0	
Perm LT Q Serve Time* (q_ps), s	Perm LT Eff Green (g_p), s	0.0	25.1	11.4	0.0	0.0	25.1	9.7	0.0	
Time to First Blk (g_J), s  0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.	Perm LT Serve Time (g_u), s	0.0	18.2	8.0	0.0	0.0	10.4	9.7	0.0	
Serve Time pre Bik (g_fs) s	Perm LT Q Serve Time (g_ps), s	0.0	5.1	0.6	0.0	0.0	4.3	0.0	0.0	
Prop LT Inside Lane (P_L)         0.00         1.00         1.00         0.00         1.00         0.00           Lane Grp Cap (c), veh/h         0         401         528         0         0         271         482         0           V/C Ratio (X)         0.00         0.25         0.37         0.00         0.00         0.24         0.20         0.00           Avail Cap (c_a), veh/h         0         465         528         0         0         329         564         0           Uniform Delay (d1), siveh         0.0         1.00         1.00         0.00         0.0         1.07         1.00         0.00           Incr Delay (d2), siveh         0.0         0.3         0.4         0.0         0.0         0.5         0.2         0.0           Initial O Delay (d3), siveh         0.0<	Time to First Blk (g_f), s	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Lane Grp Cap (c), veh/h	Serve Time pre Blk (g_fs), s	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
V/C Ratio (X)         0.00         0.25         0.37         0.00         0.00         0.24         0.20         0.00           Avail Cap (c. a), veh/h         0         465         528         0         0         329         564         0           Upstream Filter (I)         0.00         1.00         1.00         0.00         0.00         1.00         1.00         0.00           Uniform Delay (d1), s/veh         0.0         13.9         14.2         0.0         0.0         19.7         16.4         0.0           Initial O Delay (d3), s/veh         0.0         0.0         0.0         0.0         0.0         0.0         0.0         0.0           Control Delay (d), s/veh         0.0         14.2         14.6         0.0         0.0         0.0         0.0         0.0           Control Delay (d2), s/veh/n         0.0         1.1         2.2         0.0	Prop LT Inside Lane (P_L)	0.00	1.00	1.00	0.00	0.00	1.00	1.00	0.00	
Avail Cap (C_a), veh/h Upstream Filter (I) Upstream Filter (I) Upstream Filter (I) Upstream Filter (I) Uniform Delay (d1), s/veh Uniform Delay (d2), s/veh Uniform Delay (d2), s/veh Uniform Delay (d2), s/veh Uniform Delay (d2), s/veh Uniform Delay (d3), s/veh Uniform Uni	Lane Grp Cap (c), veh/h	0	401	528	0	0	271	482	0	
Upstream Filter (I)	V/C Ratio (X)	0.00	0.25	0.37	0.00	0.00	0.24	0.20	0.00	
Uniform Delay (d1), s/veh	Avail Cap (c_a), veh/h	0	465	528	0	0	329	564	0	
Incr Delay (d2), s/veh	Upstream Filter (I)	0.00	1.00	1.00	0.00	0.00	1.00	1.00	0.00	
Initial O Delay (d3), s/veh         0.0		0.0	13.9	14.2	0.0	0.0	19.7	16.4	0.0	
Control Delay (d), s/veh	Incr Delay (d2), s/veh	0.0	0.3	0.4	0.0	0.0	0.5	0.2	0.0	
Ist-Term Q (Q1), veh/ln         0.0         1.1         2.2         0.0         0.0         0.9         1.1         0.0           2nd-Term Q (Q2), veh/ln         0.0         0.0         0.1         0.0	Initial Q Delay (d3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
2nd-Term Q (Q2), veh/ln         0.0         0.0         0.1         0.0	Control Delay (d), s/veh	0.0	14.2	14.6	0.0	0.0	20.2	16.6	0.0	
3rd-Term Q (Q3), veh/ln         0.0	1st-Term Q (Q1), veh/ln	0.0	1.1	2.2	0.0	0.0	0.9	1.1	0.0	
%ile Back of Q Factor (f_B%)         0.00         1.00         1.00         0.00         1.00         1.00         0.00           %ile Back of Q (50%), veh/ln         0.0         1.2         2.3         0.0         0.0         0.9         1.2         0.0           %ile Storage Ratio (RQ%)         0.00         6.48         7.71         0.00         0.0         13.91         12.94         0.00           Initial Q (Qb), veh         0.0	2nd-Term Q (Q2), veh/ln	0.0	0.0	0.1	0.0	0.0	0.0	0.0	0.0	
%ile Back of Q (50%), veh/ln         0.0         1.2         2.3         0.0         0.0         0.9         1.2         0.0           %ile Storage Ratio (RO%)         0.00         6.48         7.71         0.00         0.0         13.91         12.94         0.00           Initial Q (Ob), veh         0.0         0.0         0.0         0.0         0.0         0.0         0.0           Final (Residual) Q (Oe), veh         0.0         0.0         0.0         0.0         0.0         0.0         0.0         0.0           Sat Delay (ds), s/veh         0.0 <td>3rd-Term Q (Q3), veh/ln</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td></td>	3rd-Term Q (Q3), veh/ln	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
%ile Storage Ratio (RQ%)         0.00         6.48         7.71         0.00         0.00         13.91         12.94         0.00           Initial Q (Qb), veh         0.0<	, _ ,									
Initial Q (Ob), veh   0.0	, ,									
Final (Residual) Q (Qe), veh										
Sat Delay (ds), s/veh         0.0	, ,									
Sat Q (Qs), veh         0.0	, , , ,									
Sat Cap (cs), veh/h         0										
Initial Q Clear Time (tc), h										
Middle Lane Group Data           Assigned Mvmt         0         2         0         4         0         6         0         8           Lane Assignment         T         T         T         T         Lanes in Grp         0         1         0         0         0         1         0										
Assigned Mvmt  Lane Assignment  T  Lanes in Grp  0 1 0 0 0 0 1 0 0  Grp Vol (v), veh/h  0 588 0 0 0 335 0 0  Grp Sat Flow (s), veh/h/ln  0 1765 0 0 0 1765 0 0  Cycle Q Clear Time (g_s), s  0.0 14.8 0.0 0.0 0.0 6.9 0.0 0.0  Cycle Q Clear Time (g_c), s  0.0 14.8 0.0 0.0 0.0 6.9 0.0 0.0  Lane Grp Cap (c), veh/h  0 811 0 0 0 811 0 0  V/C Ratio (X)  0.00 0.73 0.00 0.00 0.00 0.41 0.00 0.00  Avail Cap (c_a), veh/h  0 951 0 0 0 951 0 0  Upstream Filter (I)  0.00 1.00 0.00 0.00 0.00 0.00  Uniform Delay (d1), s/veh  0.0 12.0 0.0 0.0 0.0 0.0 0.0 0.0  Initial Q Delay (d3), s/veh  0.0 14.3 0.0 0.0 0.0 0.0 0.0 0.0  Control Delay (d), s/veh  0.0 14.3 0.0 0.0 0.0 0.0 0.0  Control Delay (d), s/veh  0.0 14.3 0.0 0.0 0.0 0.0 0.0  O 0 0.0 0.0 0.0  Control Delay (d), s/veh  0.0 14.3 0.0 0.0 0.0 0.0 0.0  O 0 0.0 0.0 0.0  Control Delay (d), s/veh  0.0 14.3 0.0 0.0 0.0 0.0 0.0  O 0 0.0 0.0 0.0  Control Delay (d), s/veh  0.0 14.3 0.0 0.0 0.0 0.0 0.0  O 0 0 0.0 0.0 0.0  O 0 0 0.0 0.0 0.0  O 0 0.0 0.0 0.0	Initial Q Clear Time (tc), h	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Lane Assignment         T         T         T           Lanes in Grp         0         1         0         0         1         0         0           Grp Vol (v), veh/h         0         588         0         0         0         335         0         0           Grp Sat Flow (s), veh/h/ln         0         1765         0         0         0         1765         0         0           Q Serve Time (g_s), s         0.0         14.8         0.0         0.0         6.9         0.0         0.0           Cycle Q Clear Time (g_c), s         0.0         14.8         0.0         0.0         0.0         6.9         0.0         0.0           Lane Grp Cap (c), veh/h         0         811         0         0         0         811         0         0           V/C Ratio (X)         0.00         0.73         0.00         0.00         0.0         0.41         0.00         0.00           Avail Cap (c_a), veh/h         0         951         0         0         0         951         0         0           Upstream Filter (l)         0.00         1.00         0.00         0.00         0.0         0.0         0.0         0.0 <td>Middle Lane Group Data</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>	Middle Lane Group Data									
Lanes in Grp         0         1         0         0         1         0         0           Grp Vol (v), veh/h         0         588         0         0         0         335         0         0           Grp Sat Flow (s), veh/h/In         0         1765         0         0         0         1765         0         0           Q Serve Time (g_s), s         0.0         14.8         0.0         0.0         0.0         6.9         0.0         0.0           Cycle Q Clear Time (g_c), s         0.0         14.8         0.0         0.0         0.0         6.9         0.0         0.0           Lane Grp Cap (c), veh/h         0         811         0         0         0         811         0         0           V/C Ratio (X)         0.00         0.73         0.00         0.00         0.0         0.41         0.00         0.00           Avail Cap (c_a), veh/h         0         951         0         0         0         951         0         0           Upstream Filter (I)         0.00         1.00         0.00         0.0         0.0         0.0         0.0         0.0           Uniform Delay (d2), s/veh         0.0         2.	Assigned Mvmt	0	2	0	4	0	6	0	8	
Lanes in Grp         0         1         0         0         1         0         0           Grp Vol (v), veh/h         0         588         0         0         0         335         0         0           Grp Sat Flow (s), veh/h/In         0         1765         0         0         0         1765         0         0           Q Serve Time (g_s), s         0.0         14.8         0.0         0.0         0.0         6.9         0.0         0.0           Cycle Q Clear Time (g_c), s         0.0         14.8         0.0         0.0         0.0         6.9         0.0         0.0           Lane Grp Cap (c), veh/h         0         811         0         0         0         811         0         0           V/C Ratio (X)         0.00         0.73         0.00         0.00         0.0         0.41         0.00         0.00           Avail Cap (c_a), veh/h         0         951         0         0         0         951         0         0           Upstream Filter (I)         0.00         1.00         0.00         0.0         0.0         0.0         0.0         0.0           Uniform Delay (d2), s/veh         0.0         2.	Lane Assignment		T				T			
Grp Sat Flow (s), veh/h/ln         0         1765         0         0         1765         0         0           Q Serve Time (g_s), s         0.0         14.8         0.0         0.0         0.0         6.9         0.0         0.0           Cycle Q Clear Time (g_c), s         0.0         14.8         0.0         0.0         0.0         6.9         0.0         0.0           Lane Grp Cap (c), veh/h         0         811         0         0         0         811         0         0           V/C Ratio (X)         0.00         0.73         0.00         0.00         0.0         0.41         0.00         0.00           Avail Cap (c_a), veh/h         0         951         0         0         0         951         0         0           Upstream Filter (I)         0.00         1.00         0.00         0.00         1.00         0.00         0.00           Uniform Delay (d1), s/veh         0.0         12.0         0.0         0.0         0.0         9.9         0.0         0.0           Initial Q Delay (d3), s/veh         0.0         0.0         0.0         0.0         0.0         0.0         0.0         0.0           Control Delay (d), s/veh		0	1	0	0	0	1	0	0	
Q Serve Time (g_s), s       0.0       14.8       0.0       0.0       0.0       6.9       0.0       0.0         Cycle Q Clear Time (g_c), s       0.0       14.8       0.0       0.0       0.0       6.9       0.0       0.0         Lane Grp Cap (c), veh/h       0       811       0       0       0       811       0       0         V/C Ratio (X)       0.00       0.73       0.00       0.00       0.00       0.41       0.00       0.00         Avail Cap (c_a), veh/h       0       951       0       0       951       0       0         Upstream Filter (I)       0.00       1.00       0.00       0.00       1.00       0.00       0.00       0.00       0.00         Uniform Delay (d1), s/veh       0.0       12.0       0.0       0.0       0.0       9.9       0.0       0.0         Initial Q Delay (d2), s/veh       0.0       0.0       0.0       0.0       0.0       0.0       0.0       0.0         Control Delay (d), s/veh       0.0       14.3       0.0       0.0       0.0       0.0       0.0       0.0	Grp Vol (v), veh/h	0	588	0	0	0	335	0	0	
Cycle Q Clear Time (g_c), s         0.0         14.8         0.0         0.0         0.0         6.9         0.0         0.0           Lane Grp Cap (c), veh/h         0         811         0         0         0         811         0         0           V/C Ratio (X)         0.00         0.73         0.00         0.00         0.00         0.41         0.00         0.00           Avail Cap (c_a), veh/h         0         951         0         0         951         0         0           Upstream Filter (I)         0.00         1.00         0.00         0.00         1.00         0.00	Grp Sat Flow (s), veh/h/ln	0	1765	0	0	0	1765	0	0	
Lane Grp Cap (c), veh/h       0       811       0       0       0       811       0       0         V/C Ratio (X)       0.00       0.73       0.00       0.00       0.00       0.41       0.00       0.00         Avail Cap (c_a), veh/h       0       951       0       0       951       0       0         Upstream Filter (I)       0.00       1.00       0.00       0.00       1.00       0.00       0.00         Uniform Delay (d1), s/veh       0.0       12.0       0.0       0.0       0.0       9.9       0.0       0.0         Incr Delay (d2), s/veh       0.0       2.3       0.0       0.0       0.0       0.3       0.0       0.0         Initial Q Delay (d3), s/veh       0.0       0.0       0.0       0.0       0.0       0.0       0.0       0.0         Control Delay (d), s/veh       0.0       14.3       0.0       0.0       0.0       10.2       0.0       0.0	Q Serve Time (g_s), s	0.0	14.8	0.0	0.0	0.0	6.9	0.0	0.0	
V/C Ratio (X)       0.00       0.73       0.00       0.00       0.00       0.41       0.00       0.00         Avail Cap (c_a), veh/h       0       951       0       0       951       0       0         Upstream Filter (I)       0.00       1.00       0.00       0.00       1.00       0.00       0.00         Uniform Delay (d1), s/veh       0.0       12.0       0.0       0.0       0.0       9.9       0.0       0.0         Incr Delay (d2), s/veh       0.0       2.3       0.0       0.0       0.0       0.3       0.0       0.0         Initial Q Delay (d3), s/veh       0.0       0.0       0.0       0.0       0.0       0.0       0.0       0.0         Control Delay (d), s/veh       0.0       14.3       0.0       0.0       0.0       10.2       0.0       0.0	Cycle Q Clear Time (g_c), s	0.0	14.8	0.0	0.0	0.0	6.9	0.0	0.0	
Avail Cap (c_a), veh/h       0       951       0       0       951       0       0         Upstream Filter (I)       0.00       1.00       0.00       0.00       1.00       0.00       0.00         Uniform Delay (d1), s/veh       0.0       12.0       0.0       0.0       0.0       9.9       0.0       0.0         Incr Delay (d2), s/veh       0.0       2.3       0.0       0.0       0.0       0.3       0.0       0.0         Initial Q Delay (d3), s/veh       0.0       0.0       0.0       0.0       0.0       0.0       0.0       0.0         Control Delay (d), s/veh       0.0       14.3       0.0       0.0       0.0       10.2       0.0       0.0	Lane Grp Cap (c), veh/h	0	811	0	0	0	811	0	0	
Upstream Filter (I)         0.00         1.00         0.00 </td <td>V/C Ratio (X)</td> <td>0.00</td> <td>0.73</td> <td>0.00</td> <td>0.00</td> <td>0.00</td> <td>0.41</td> <td>0.00</td> <td>0.00</td> <td></td>	V/C Ratio (X)	0.00	0.73	0.00	0.00	0.00	0.41	0.00	0.00	
Uniform Delay (d1), s/veh       0.0       12.0       0.0       0.0       0.0       9.9       0.0       0.0         Incr Delay (d2), s/veh       0.0       2.3       0.0       0.0       0.0       0.3       0.0       0.0         Initial Q Delay (d3), s/veh       0.0       0.0       0.0       0.0       0.0       0.0       0.0       0.0         Control Delay (d), s/veh       0.0       14.3       0.0       0.0       10.2       0.0       0.0	Avail Cap (c_a), veh/h	0	951	0	0	0	951	0	0	
Incr Delay (d2), s/veh       0.0       2.3       0.0       0.0       0.0       0.0       0.0       0.0         Initial Q Delay (d3), s/veh       0.0       0.0       0.0       0.0       0.0       0.0       0.0       0.0       0.0       0.0         Control Delay (d), s/veh       0.0       14.3       0.0       0.0       0.0       10.2       0.0       0.0	Upstream Filter (I)	0.00		0.00	0.00	0.00			0.00	
Initial Q Delay (d3), s/veh 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.	Uniform Delay (d1), s/veh	0.0	12.0	0.0	0.0	0.0	9.9	0.0	0.0	
Control Delay (d), s/veh 0.0 14.3 0.0 0.0 10.2 0.0 0.0										
<b>,</b> , ,										
1st-Term Q (Q1), veh/ln 0.0 7.0 0.0 0.0 3.3 0.0 0.0	, , ,									
	1st-Term Q (Q1), veh/ln	0.0	7.0	0.0	0.0	0.0	3.3	0.0	0.0	

2nd-Term Q (Q2), veh/ln	0.0	0.5	0.0	0.0	0.0	0.1	0.0	0.0
3rd-Term Q (Q3), veh/ln	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile Back of Q Factor (f_B%)	0.00	1.00	0.00	1.00	0.00	1.00	0.00	1.00
%ile Back of Q (50%), veh/ln	0.0	7.5	0.0	0.0	0.0	3.4	0.0	0.0
%ile Storage Ratio (RQ%)	0.00	3.62	0.00	0.00	0.00	3.39	0.00	0.00
Initial Q (Qb), veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Final (Residual) Q (Qe), veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Sat Delay (ds), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Sat Q (Qs), veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Sat Cap (cs), veh/h	0	0	0	0	0	0	0	0
Initial Q Clear Time (tc), h	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Right Lane Group Data								
Assigned Mvmt	0	12	0	14	0	16	0	18
Lane Assignment		R		T+R		R		T+R
Lanes in Grp	0	1	0	1	0	1	0	1
Grp Vol (v), veh/h	0	123	0	55	0	273	0	78
Grp Sat Flow (s), veh/h/ln	0	1500	0	1521	0	1500	0	1515
Q Serve Time (g_s), s	0.0	2.6	0.0	1.7	0.0	6.6	0.0	2.3
Cycle Q Clear Time (g_c), s	0.0	2.6	0.0	1.7	0.0	6.6	0.0	2.3
Prot RT Sat Flow (s_R), veh/h/ln	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Prot RT Eff Green (g_R), s	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Prop RT Outside Lane (P_R)	0.00	1.00	0.00	0.91	0.00	1.00	0.00	0.94
Lane Grp Cap (c), veh/h	0	689	0	269	0	689	0	342
V/C Ratio (X)	0.00	0.18	0.00	0.20	0.00	0.40	0.00	0.23
Avail Cap (c_a), veh/h	0.00	808	0	711	0	808	0	708
Upstream Filter (I)	0.00	1.00	0.00	1.00	0.00	1.00	0.00	1.00
Uniform Delay (d1), s/veh	0.0	8.7	0.0	19.2	0.0	9.8	0.0	17.3
Incr Delay (d2), s/veh	0.0	0.1	0.0	0.4	0.0	0.4	0.0	0.3
Initial Q Delay (d3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Control Delay (d), s/veh	0.0	8.8	0.0	19.6	0.0	10.1	0.0	17.6
1st-Term Q (Q1), veh/ln	0.0	1.1	0.0	0.7	0.0	2.7	0.0	1.0
2nd-Term Q (Q2), veh/ln	0.0	0.0	0.0	0.0	0.0	0.1	0.0	0.0
3rd-Term Q (Q3), veh/ln	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile Back of Q Factor (f_B%)	0.00	1.00	0.00	1.00	0.00	1.00	0.00	1.00
%ile Back of Q (50%), veh/ln	0.0	1.1	0.0	0.7	0.0	2.7	0.0	1.0
%ile Storage Ratio (RQ%)	0.00	21.55	0.00	0.79	0.00	52.59	0.00	0.85
Initial Q (Qb), veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Final (Residual) Q (Qe), veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Sat Delay (ds), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Sat Q (Qs), veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Sat Cap (cs), veh/h	0.0	0	0	0	0	0	0	0.0
Initial Q Clear Time (tc), h	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Intersection Summary								
HCM 2010 Ctrl Delay		13.3						
HCM 2010 Cur Delay		13.3 B						
		D						
Notes								

\* HCM 2010 computational engine requires equal clearance times for the phases crossing the barrier.

	۶	<b>→</b>	•	•	<b>←</b>	•	•	†	<i>&gt;</i>	<b>&gt;</b>	<b>+</b>	4
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	7	<b>†</b>	7	ሻ	<b>↑</b>	7	ሻ	₽		ሻ	Դ	
Traffic Volume (veh/h)	100	588	123	65	335	273	96	5	50	196	5	73
Future Volume (veh/h)	100	588	123	65	335	273	96	5	50	196	5	73
Number	5	2	12	1	6	16	7	4	14	3	8	18
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1765	1765	1765	1765	1765	1765	1765	1765	1800	1765	1765	1800
Adj Flow Rate, veh/h	100	588	123	65	335	273	96	5	50	196	5	73
Adj No. of Lanes	1	1	1	1	1	1	1	1	0	1	1	0
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Cap, veh/h	401	811	689	271	811	689	482	24	245	528	22	320
Arrive On Green	0.46	0.46	0.46	0.46	0.46	0.46	0.07	0.18	0.18	0.12	0.23	0.23
Sat Flow, veh/h	809	1765	1500	736	1765	1500	1681	138	1382	1681	97	1417
Grp Volume(v), veh/h	100	588	123	65	335	273	96	0	55	196	0	78
Grp Sat Flow(s),veh/h/ln	809	1765	1500	736	1765	1500	1681	0	1521	1681	0	1515
Q Serve(g_s), s	5.1	14.8	2.6	4.3	6.9	6.6	2.5	0.0	1.7	4.9	0.0	2.3
Cycle Q Clear(g_c), s	12.1	14.8	2.6	19.1	6.9	6.6	2.5	0.0	1.7	4.9	0.0	2.3
Prop In Lane	1.00	044	1.00	1.00	044	1.00	1.00		0.91	1.00	•	0.94
Lane Grp Cap(c), veh/h	401	811	689	271	811	689	482	0	269	528	0	342
V/C Ratio(X)	0.25	0.73	0.18	0.24	0.41	0.40	0.20	0.00	0.20	0.37	0.00	0.23
Avail Cap(c_a), veh/h	465	951	808	329	951	808	564	0	711	528	0	708
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.00	1.00	1.00	0.00	1.00
Uniform Delay (d), s/veh	13.9	12.0	8.7	19.7	9.9 0.3	9.8	16.4	0.0	19.2	14.2	0.0	17.3 0.3
Incr Delay (d2), s/veh	0.3	2.3 0.0	0.1	0.5 0.0	0.0	0.4	0.2	0.0	0.4	0.4	0.0	0.0
Initial Q Delay(d3),s/veh %ile BackOfQ(50%),veh/ln	1.2	7.5	1.1	0.0	3.4	2.8	1.2	0.0	0.0	2.3	0.0	1.0
LnGrp Delay(d),s/veh	14.2	14.3	8.8	20.2	10.2	10.1	16.6	0.0	19.6	14.6	0.0	17.6
LnGrp LOS	14.2 B	14.3 B	0.0 A	20.2 C	10.2 B	В	10.0 B	0.0	19.0 B	14.0 B	0.0	17.0 B
	ь	811			673	D	D	151	D	ь	274	
Approach Vol, veh/h Approach Delay, s/veh		13.5			11.2			17.7			15.5	
Approach LOS		13.3 B			11.2 B			В			15.5 B	
		В			Ь			Ь			Ь	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs		2	3	4		6	7	8				
Phs Duration (G+Y+Rc), s		30.3	9.5	14.9		30.3	6.8	17.6				
Change Period (Y+Rc), s		* 5.2	3.0	* 5.2		* 5.2	3.0	* 5.2				
Max Green Setting (Gmax), s		* 30	6.5	* 26		* 30	6.5	* 26				
Max Q Clear Time (g_c+l1), s		16.8	6.9	3.7		21.1	4.5	4.3				
Green Ext Time (p_c), s		7.6	0.0	0.6		4.1	0.1	0.9				
Intersection Summary												
HCM 2010 Ctrl Delay			13.3									
HCM 2010 LOS			В									
Notes												