



**PHASE II ENVIRONMENTAL SITE ASSESSMENT**  
**2555 SHEFFIELD ROAD**  
**OTTAWA, ON**

**DST File No: 019037029.001**

**June 3<sup>rd</sup> , 2020**

Prepared for:  
**AIM Recycling Ottawa East**  
A division of American Iron & Metal Company Inc.  
2555 Sheffield Road  
Ottawa, Ontario  
K1B3V6

**DST Consulting Engineers Inc.**

A division of Englobe  
2150 Thurston Drive, Suite 203  
Ottawa, Ontario, K1G 5T9  
Tel.: 613-748-1415 Fax: 613-748-1356  
E-mail: [ottawa@dstgroup.com](mailto:ottawa@dstgroup.com)

## **EXECUTIVE SUMMARY**

DST Consulting Engineers Inc. (DST), a division of Englobe, conducted a Phase II Environmental Site Assessment (Phase II ESA) at AIM Recycling Ottawa East, located at 2555 Sheffield Road in Ottawa, Ontario (the “Site”), to evaluate if the soil and groundwater quality at the Site has been impacted due to the current Site operations.

The field program for the Phase II ESA consisted of the advancement of 18 boreholes. Five boreholes were instrumented with groundwater monitoring wells. The field program for the Phase II ESA was conducted in conjunction with an ongoing geotechnical investigation. The geotechnical investigation findings are reported under separate cover.

A total of 19 soil samples collected during the investigation were submitted for laboratory analysis of petroleum hydrocarbons Petroleum Hydrocarbons Compounds PHC (F1–F4), O.Reg.153 metals, volatile organic compounds (VOCs). Three groundwater samples plus a duplicate were submitted for laboratory analysis of PHC (F1–F4), O.Reg.153 metals, VOCs, and Polycyclic Aromatic Hydrocarbons (PAHs) in 2019. Four groundwater samples were collected and submitted for laboratory analysis of VOCs in 2020.

Soil and groundwater analytical results were compared against applicable provincial standards, as set out in the Ontario Ministry of the Environment Conservation and Parks (MECP) “Soil, Groundwater and Sediment Standards for Use under Part XV.1 of the Environmental Protection Act”, July 1, 2011. Table 3: Full Depth Generic Site Condition Standards for soil in a Non-Potable Groundwater Condition. Industrial/Commercial/Community Property Use for soil, and All Types of Property Use (fine textured soils).

Groundwater did not show any Table 3 exceedances.

The fill soils encountered in MW19-6, BH19-7, MW19-9, BH19-10B, BH19-11B, BH19-12, BH19-13 BH19-14 and BH19-15 were found to have Table 3 exceedances. Fill soils in the vicinity of these boreholes will need to be removed from Site as part of the upcoming construction. They will need to be disposed of at a licensed waste disposal facility.

The fill soils encountered in all boreholes except borehole BH19-2, BH19-5, BHMW20-1 and BHMW20-2 were found to have Table 1 exceedances. Soils which exceed Table 1 yet meet Table 3 may be re-used elsewhere on Site. If soils in the vicinity of these boreholes become excess and need to be removed from Site, then they will need to be disposed of at a licensed waste disposal facility.

The submitted TCLP soil sample from BH19-12 GS#1 and BH19-13 GS#1 meets the O. Reg 558/00 schedule 4 criteria. Therefore, the excess soils that need to be removed from Site and moved to a designated licensed landfill would be considered as non-hazardous solid waste as per the definition in O.Reg. 558/00.

## **TABLE OF CONTENTS**

<b>Section 1. INTRODUCTION .....</b>	<b>1</b>
1.1 General .....	1
1.2 Site Description.....	1
1.3 Property Ownership .....	2
1.4 Current and Proposed Future Uses.....	2
1.5 Applicable Site Condition Standard .....	2
<b>Section 2. BACKGROUND INFORMATION.....</b>	<b>4</b>
2.1 Physical Setting .....	4
2.1.1 Topography, Hydrology, and Geology.....	4
2.1.2 Fill Materials.....	5
2.1.3 Water Bodies and Area of Natural Significance .....	5
2.1.4 Well Records .....	5
2.2 Past Investigations.....	6
<b>Section 3. Scope of the Investigation.....</b>	<b>7</b>
<b>Section 4. Investigation Method .....</b>	<b>8</b>
4.1 Borehole Drilling .....	8
4.2 Soil Sampling .....	8
4.3 Field Screening Methods .....	9
4.4 Monitoring Well Installation.....	10
4.5 Groundwater Level Measurements .....	10
4.6 Groundwater Sampling .....	11
4.7 Analytical Testing.....	11
4.8 Quality Assurance / Quality Control (QA/QC) .....	11
<b>Section 5. REVIEW AND EVALUATION.....</b>	<b>13</b>
5.1 Stratigraphy .....	13
5.2 Field Observations.....	13
5.3 Groundwater Elevations .....	13
5.4 Soil Texture.....	14
5.5 Soil Quality compared to MECP Table 3 .....	14
5.6 Soil Quality compared to MECP Table 1 .....	14
5.7 Groundwater Quality.....	15
5.8 Leachate Quality.....	15
5.9 QA/QC Results .....	15
<b>Section 6. CONCLUSIONS AND RECOMMENDATIONS.....</b>	<b>17</b>
<b>Section 7. CLOSURE .....</b>	<b>19</b>
<b>Section 8. REFERENCES .....</b>	<b>20</b>

## **APPENDICES**

- Appendix A      Limitations of Report
- Appendix B      Figures
- Appendix C      Borehole Logs
- Appendix D      Laboratory Analytical Results
- Appendix E      Laboratory Certificates of Analysis

## **1. INTRODUCTION**

---

### **1.1 General**

DST Consulting Engineers Inc. (DST), a division of Englobe was retained by AIM Recycling Ottawa East, a division of American Iron & Metal Inc., to conduct a Limited Phase II Environmental Site Assessment (ESA) in conjunction with the geotechnical investigation at their recycling facility located at 2555 Sheffield Road in Ottawa, Ontario (herein referred to as the “Site”).

DST conducted the Limited Phase II ESA in general accordance with Canadian Standards Association (CSA) Standard Z769-00 Phase II Environmental Site Assessment (R2013). The purpose of this assessment was to evaluate if the soil and groundwater quality at the Site has been impacted by the current Site uses.

Authorization to proceed with this work provided by email from Mr. Christian Brisebois of AIM Recycling Ottawa East (herein referred to as the “Client”) on March 7, 2019 and DST provided Client with a proposal (DST Ref No: TS-S0-037209, dated March 13, 2019).

### **1.2 Site Description**

The Site is located at a municipal address of 2555 Sheffield Road in Ottawa, Ontario. The location of the Site is shown on the Site Location Map attached as Figure 1 in Appendix B.

The Site is an approximately rectangular property in an industrial part of the City. It is currently occupied by a metals recycling facility. There are two existing buildings on the Site. One is located on the south-west and the second on the north-west corners of the Site. The existing building at the south-west corner of the Site is a two-storey and one-story slab on grade structure mainly used as indoor recycling warehouse and offices. The existing building at the north-west corner of the Site is a one-story slab on grade structure mainly used as a garage and mechanical warehouse. The east side of the Site has an existing on-grade concrete pavement structure and is used as an outdoor recycling yard. The balance of the Site has gravel as surficial cover and is mainly used for storage and traffic circulation purpose.

DST's understanding of the Site and the proposed new development are based on the preliminary architectural drawings “Recycling Ontario Sheffield Road Layout Development” (Ref No: AIM-ONT-Sheffield-Lay, dated December 5, 2018) prepared Novatech Architects. The proposed new development is understood to include demolition of two existing buildings and the construction of

two new buildings, two new truck scales, a new parking lot and a new pavement structure for the outdoor recycling yard.

### **1.3 Property Ownership**

The Site is owned by AIM Recycling (the Client). The contact information for the property owner's/Client's representative is as follows:

Name	Christian Brisebois
Title	Director, Engineering & Construction
Telephone	514-494-2000 x 5975
Email	cbrisebois@aim-global.com
Business Address	2555 Sheffield Road, Ottawa, Ontario K1B 3V6

### **1.4 Current and Proposed Future Uses**

Based on a review of the Chain of Title, aerial photographs, city directories, and the interview, the Site was first developed in the early 1960s, with the 1965 aerial photograph showing the Site as developed with one building located in the southwest corner of the Site and a railway spur entering the Site at the southeast corner and continuing west across the Site. The earliest available aerial photograph for review (1965) shows the northern two-thirds of the Site and surrounding properties as primarily agricultural land. The 1976 aerial photograph shows portions of the Phase One Study Area developed. According to the available Chain of Title, city directories and observations at the time of the Site reconnaissance, the Site has been used as a metal scrap yard from the time of its first development to the present.

### **1.5 Applicable Site Condition Standard**

Based on Site conditions, the following Site Conditions Standards were considered applicable to the Site:

#### **Soils:**

MECP "Soil, Ground Water and Sediment Standards for Use under Part XV.1 of the Environmental Protection Act", July 1, 2011. Table 3: Full Depth Generic Site Condition Standards

in a Non-Potable Ground Water Condition. Industrial/Commercial/Community Property Use, Fine Textured Soils.

**Groundwater:**

MECP "Soil, Ground Water and Sediment Standards for Use under Part XV.1 of the Environmental Protection Act", July 1, 2011. Table 3: Full Depth Generic Site Condition Standards in a Non-Potable Ground Water Condition. All Types of Property Use, Fine Textured Soils.

**Management of Excess Soils:**

MECP "Soil, Ground Water and Sediment Standards for Use under Part XV.1 of the Environmental Protection Act", July 1, 2011. Table 1: Background, Fine Textured Soils.

MECP "General – Waste Management of soil and groundwater under Part XV.1 of the Environmental Protection Act ", October 2000: Schedule 4 to the Regulation, including the Leachate Extraction Procedure. Under O. Reg. 558/00.

The rationale for the selection of the above-referenced Site Condition Standards is as follows:

- The Site and surrounding properties are supplied with potable water through the City of Ottawa's municipal drinking water system;
- The northern and southern portions of the Site are occupied by other industrial buildings uses. Therefore, the most stringent property use that is applicable to the Site is Industrial/Commercial/Community Property Use;
- A fine grained soil texture was selected for comparison of analytical data to applicable provincial standards as this represents the 'worst-case' scenario;
- The Site is not considered a "shallow soil property" as defined by O. Reg. 153/04 (as amended); and,

The Site is not located within 30 metres of a surface water body.

## 2. BACKGROUND INFORMATION

---

### 2.1 Physical Setting

#### 2.1.1 Topography, Hydrology, and Geology

DST reviewed available maps to determine Site and surrounding features such as local geology, topography, hydrogeology and locations of nearby watercourses. The maps reviewed and a description of the noted Site and surrounding property features are described in the table below.

**Summary of Maps Reviewed**

Map Title	Source	Site and Surrounding Property Features
Ontario Base Mapping	geoOttawa (City of Ottawa GIS), 2019	<ul style="list-style-type: none"><li>The Site and surrounding properties are situated at an elevation of approximately 64 m above mean sea level (amsl).</li><li>The Phase One Study Area is situated at approximately 64 m amsl. Green's Creek is below 64 m amsl, but the land on either side is at a higher elevation.</li><li>The nearest surface water feature is Green's Creek, which is located approximately 45 m east of the Site.</li></ul>
Natural Heritage Information Centre	Ministry of Natural Resources, 2019	<ul style="list-style-type: none"><li>There are two wetlands within the Phase One Study Area: one to the north surrounding Green's Creek, and one to the west, at the west end of 2510 Sheffield Road.</li><li>There are no Areas of Natural and Scientific Interest (ANSIs) within the Phase One Study Area.</li></ul>
Ontario Geological Survey (OGS) Bedrock Geology of Ontario	Ministry of Northern Development and Mines, 2011	<ul style="list-style-type: none"><li>The bedrock geology in the area of the Site consists of shale, limestone, dolostone, and siltstone of the Georgian Bay Formation, Blue Mountain Formation, Billings formation, Collingwood Member, and Eastview Member.</li></ul>
OGS Earth Surficial Geology of Southern Ontario	Ministry of Northern Development and Mines, 2010	<ul style="list-style-type: none"><li>The Site consists of fine-textured glaciomarine deposits of silt and clay with minor sand and gravel, massive to well-laminated.</li></ul>

#### **2.1.2 Fill Materials**

There was evidence of fill material based upon review of the Golder Phase II ESA report and DST Phase II ESA report. Golder reported granular fill material to depths ranging from 0.8 to 1.4 m bgs. Imported fill was likely used when during the various stages of the development of the Site. No other evidence of imported fill materials was reported in the environmental records.

#### **2.1.3 Water Bodies and Area of Natural Significance**

There are three water bodies within the Phase One Study Area: Green's Creek, approximately 45 m east of the Site, a wetland around Green's Creek, approximately 130 m north of the Site, and a wetland on the west portion of 2510 Sheffield Road, approximately 205 m west of the Site. The closest waterbody to the Site is Green's Creek. There are no areas of natural significance in the Phase One Study Area.

#### **2.1.4 Well Records**

An online search of MECP well records was completed by DST, as well as the database search completed by ERIS for Water Well Information System (WWIS). One well record was identified for the Site, and 20 well records were identified within the Phase One Study Area.

The purpose for the well record on the Site was listed as industrial water supply. The well was installed in the shale bedrock at approximately 60 m bgs (200 ft) on May 17, 1972. The well was located approximately in the center of the Site. No record for this well abandonment can be found.

The stratigraphy identified in the well record for the on-Site well (Well ID No. 1511776 installed May 1972), was listed as follows:

- Fill from surface to 0.6 m bgs;
- Clay from 0.6 m bgs to 6.4 m bgs;
- Hardpan from 6.4 m to 9.4 m bgs; and
- Grey shale from approximately 9.4 m bgs to 61 m bgs.

The static water level was measured at 12 m bgs on June 19, 1972. However, from information gleaned from review of the Golder Phase II ESA report and DST Phase II ESA report, groundwater at the Site ranged from approximately 1.14 to 3.6 m bgs, and the groundwater flow direction was determined to be to the east. The groundwater values may seem inconsistent; however, the well installed in 1972 was in the bedrock aquifer, and the monitoring wells installed in 2008, 2019 and 2020 were in the shallow aquifer.

## **2.2 Past Investigations**

As the study Site is a metal recycling facility and that just the current uses would have triggered a Phase II ESA, it was decided by the Client to proceed directly with the Phase II ESA in conjunction with the geotechnical investigation. The intent was to field screen all samples recovered during the geotechnical investigation and submit representative samples to the laboratory to assist the Client in assessing how to manage excess soils generated as part of the upcoming development.

The Site is located in an industrial park and its current use is as a metals recycling facility. DST has also performed a historical Limited Phase II ESA of the adjacent Site for the same Client (DST Ref No: OE-OT-01857, dated July 2012). Based on the current Site use, the surrounding properties and the results of the previous investigation PHC(F1-F4), O.Reg. 153 metals, and VOCs were identified as the Contaminants of Concern (COCs) for soil in this assessment. In addition, PAH was added as a COC for water based on the water results of the previous investigation.

### **3. Scope of the Investigation**

---

DST's scope work to complete a Phase II ESA for this Site was performed at the same time as the geotechnical investigation. DST's scope of work is summarized as follows:

- Supervised the fieldwork and logged the soil conditions in the eighteen (18) boreholes, based on the samples that were recovered. All soil samples were field-screened using visual and olfactory observations, as well as the use of headspace testing for organic vapours;
- Installed five (5) monitoring wells;
- Purged and developed the five (5) monitoring wells;
- Submitted the soil and groundwater samples to the environmental laboratory for the following testing:
  - Bulk testing on 15 soil samples for PHC(F1-F4), O.Reg 153 Metals, and VOCs and 4 soil samples for VOCs only (2020 boreholes),
  - Analytical testing on three (3) groundwater samples for PHC(F1-F4), O. Reg 153 Metals, VOCs, and PAHs in 2019 and four (4) groundwater samples for VOCs in 2020 (2 from 2019 and 2 from 2020 monitoring wells), and
  - One soil sample for analysis using the Toxicity Characteristic Leaching Procedure (TCLP) procedure;
- Compared the laboratory analytical results for the submitted soil and groundwater samples to the applicable Ontario Ministry of the Environment, Conservation and Parks (MECP), "Soil, Ground Water and Sediment Standards for Use Under Part XV.1 of the Environmental Protection Act", dated July 1, 2011; and
- Completed this Phase II ESA report based on the findings of the laboratory testing.

## ***4. Investigation Method***

---

### **4.1 Borehole Drilling**

The drilling program took place between March 18th and 21st, 2019, and consisted of the advancement of 15 boreholes (BH19-1 to BH19-15) of which three of the boreholes were instrumented with groundwater monitoring wells. A second round of investigation was conducted on March 4, 2020, and consisted of the advancement of three (3) boreholes (MWBH20-1, MWBH20-2 and BH20-3) of which two (2) of the boreholes were instrumented with groundwater monitoring wells. Since the Phase II ESA and geotechnical investigation were conducted simultaneously, boreholes were advanced to various depths ranging from approximately 1.5 meter below ground surface (mbgs) to approximately 13.2 mbgs, into the bedrock. A total of 19 soil samples, one from each borehole, were submitted as part of this Phase II ESA.

George Downing Estate Drilling Ltd. was retained to perform the drilling in 2019 and Strata Soil was retained to perform the drilling in 2020. All boreholes were drilled using a truck mounted CME-55 drill rig in 2019 and a Geoprobe was used 2020. All the drilling activities were conducted under the supervision of DST field personnel.

The location of the boreholes is shown on the Borehole Location Plan attached as Figure 2 at the end of this report. The location and elevation of the boreholes was surveyed by Annis O'Sullivan Vollebekk Ltd (AOV) retained by Client. Boreholes done in 2020 were surveyed by DST personnel and tie-in the same geodetic benchmark used in 2019 by AOV.

### **4.2 Soil Sampling**

For the field work done in 2019, the overburden soil was drilled using hollow-stem continuous-flight augers. Soil samples from overburden were collected using a 50 mm diameter split-spoon sampler driven by an automatic Standard Penetration Test (SPT) hammer. As for the field work conducted in 2020, the overburden was drilled using a Geoprobe® 7822 D. Soil samples were collected by direct push using 1.5 inch dual tube liners system.

Representative soil samples were collected in intervals of approximately 0.75 m where possible. Field-screened soil samples were placed directly into laboratory sample jars and vials supplied by Paracel Laboratories Ltd for the field work conducted in 2019 and by Bureau Veritas Laboratories for the field work conducted in 2020. Samples to be submitted for laboratory analysis of non-volatile compounds PHC (F2–F4) and Metals were placed in unpreserved clear glass jars

with Teflon lids, while samples to be submitted to the laboratory for analysis of volatile compounds PHC(F1) BTEX, and VOCs were collected using disposable soil plug sample collectors supplied by the laboratory. The soil plugs were placed in laboratory-supplied vials charged with measured volumes of methanol for sample preservation.

Soil samples were logged in the field for texture, odour, moisture and visual appearance (staining). The borehole logs are provided in Appendix C.

#### **4.3 Field Screening Methods**

Where sample recovery was sufficient, a portion of each collected soil sample was placed in a polyethylene bag and was allowed to equilibrate in a warm environment prior to being screened for combustible vapour concentrations (CVCs). Combustible vapour concentrations of soil samples were measured using an RKI Eagle™ portable vapour meter equipped with a catalytic combustible gas detector (CCGD), with a detection limit of 500 parts per million (ppm). The vapour meter was operated in methane elimination mode and was calibrated by DST field personnel prior to use.

Based on visual and olfactory observations, CVC measurements, and the position of the collected soil samples with respect to the inferred groundwater table, soil samples were selected from each borehole, to be submitted for laboratory analysis of the COCs. Combustible vapour concentrations of the collected soil samples, as measured by the vapour meter, are provided in the borehole logs in Appendix C. Soil sample locations and analysis are presented in Table 4-1.

**Table 4-1: Soil Sample Locations and Analysis**

Sampling Date (d/m/y)	Sample ID/Location	Sample Depth (mbgs)	Analysis Performed
19-Mar-19	BH19-1 SS#5	3.8 - 4.4 Fill	PHC (F1–F4), Metals, VOCs
19-Mar-19	BH19-2 SS#2	0.8 - 1.4 Fill	PHC (F1–F4), Metals, VOCs
19-Mar-19	BH19-3 SS#2	0.8 - 1.4 Fill	PHC (F1–F4), Metals, VOCs
21-Mar-19	BH19-4 SS#2	0.8 - 1.4 Fill	PHC (F1–F4), Metals, VOCs
20-Mar-19	BH19-5 SS#1	0.8 - 1.4 Fill	PHC (F1–F4), Metals, VOCs
19-Mar-19	BH19-6 SS#2	0.8 - 1.4 Fill	PHC (F1–F4), Metals, VOCs
21-Mar-19	BH19-7 SS#4	2.3 - 2.9 Fill	PHC (F1–F4), Metals, VOCs
18-Mar-19	BH19-8 SS#4	2.3 - 2.9 Fill	PHC (F1–F4), Metals, VOCs
18-Mar-19	BH19-9 SS#4	2.3 - 2.9 Fill	PHC (F1–F4), Metals, VOCs

Sampling Date (d/m/y)	Sample ID/Location	Sample Depth (mbgs)	Analysis Performed
18-Mar-19	BH19-10 SS#2	0.8 - 1.4 Fill	PHC (F1–F4), Metals, VOCs
20-Mar-19	BH19-11B SS#3	1.5 - 2.1 Fill	PHC (F1–F4), Metals, VOCs
21-Mar-19	BH19-12 SS#2	0.8 - 1.4 Fill	PHC (F1–F4), Metals, VOCs
21-Mar-19	BH19-13 SS#2	0.8 - 1.4 Fill	PHC (F1–F4), Metals, VOCs
21-Mar-19	BH19-14 GS#1	0.2 - 0.6 Fill	PHC (F1–F4), Metals, VOCs
21-Mar-19	BH19-15 GS#1	0.2 - 0.6 Fill	PHC (F1–F4), Metals, VOCs
4-May-20	BHMW20-1 SS4	2.3 - 3.0 (Silty Clay)	VOCs
4-May-20	BHMW20-1 SS8	5.3 - 6.1 (Sandy Silt)	VOCs
4-May-20	BHMW20-2 SS4	2.3 - 3.0 (Fill Portion)	VOCs
4-May-20	BHMW20-2 SS7	4.6 - 5.3 (Silty Clay)	VOCs

#### **4.4 Monitoring Well Installation**

Monitoring wells were installed in five (5) of the advanced boreholes, MW19-4, MW19-6, MW19-9, BHMW20-1 and BHMW20-2 using the same drilling equipment described in Section 4.1. The monitoring wells were comprised of a 50 mm diameter polyvinyl chloride (PVC) pipe and a #10 slotted PVC well screen placed to intercept the inferred groundwater table. A sand-pack consisting of clean silica sand was placed within the annular space surrounding the screened section of the wells, and bentonite chips were added from the top of the sand layer to within 0.3 m of the surface to minimize the potential for cross-contamination. A PVC cap was placed at the top of each well pipe and a protective flush-mount steel casing was cemented at surface to protect each well. Refer to the borehole logs in Appendix C for the monitoring well installation details.

Following monitoring well installation activities, the wells were equipped with dedicated Waterra™ tubing (approximately 1.25 cm in diameter) and inertial lift foot valves for well development purposes. The monitoring wells were developed to remove any groundwater impacted by drilling activities and to reduce the amount of sediment within the wells.

#### **4.5 Groundwater Level Measurements**

DST field personnel collected groundwater level measurements from the installed monitoring wells prior to groundwater sampling activities. The water levels were measured using a Solinst Canada Ltd. Model 122 oil/water interface meter which is also used to confirm the presence/absence and thickness of free (petroleum) product that may potentially be residing on

the surface of the groundwater table. The electronic interface probe was decontaminated prior to the collection of each water level measurement.

#### **4.6 Groundwater Sampling**

In order to remove any stagnant groundwater prior to sampling, each monitoring well was purged of approximately three well volumes of groundwater, using dedicated Waterra™ tubing and inertial lift foot valves.

Groundwater samples were collected from monitoring wells on March 29<sup>th</sup>, 2019, using the dedicated Waterra™ tubing and inertial lift foot valves in each of the wells. The groundwater samples from the three monitoring wells were collected directly into laboratory-supplied containers, for laboratory analysis of COCs. Groundwater sample locations and analyses are presented in Table 4-2.

**Table 4-2: Groundwater Sample Locations and Analysis**

Sampling Date (dd/mm/y)	Sample ID/Location	Laboratory Analysis (2019)	Laboratory Analysis (2020)
19-Mar-29 and 20-May-08	MW19-4	PHC (F1 – F4), Metals, VOCs, PAHs	VOCs
19-Mar-29	MW19-6	PHC (F1 – F4), Metals, VOCs, PAHs	---
19-Mar-29 and 20-May-08	MW19-9	PHC (F1 – F4), Metals, VOCs, PAHs	VOCs
20-May-08	BHMW20-1	---	VOCs
20-May-08	BHMW20-2	---	VOCs

#### **4.7 Analytical Testing**

Soil and groundwater samples were submitted to Paracel Laboratories Ltd. (Paracel), of Ottawa, Ontario, for chemical analysis which is certified by Canadian Association for Laboratory Accreditation Inc. (CALA).

#### **4.8 Quality Assurance / Quality Control (QA/QC)**

DST maintains a standard Quality Assurance / Quality Control (QA/QC) program for environmental assessments. The field sampling and QA/QC program was completed in

accordance with the applicable Guidance on Sampling and Analytical Methods for Use at Contaminated Sites in Ontario (MECP, 1996). All project documentation was maintained and controlled by the appointed field supervisor. All borehole advancement and soil and groundwater sampling was completed in accordance with industry standards, and applicable provincial standards/guidelines.

Collected soil and groundwater samples during the investigation were placed in ice-packed coolers. Samples were shipped under a chain of custody protocol to a certified laboratory for chemical analyses.

The potential for cross-contamination between samples was minimized by, where applicable, washing sampling tools with phosphorous-free soap and water, followed by rinsing with distilled water, and by wearing new disposable nitrile gloves prior to the handling of each sample.

## 5. REVIEW AND EVALUATION

---

### 5.1 Stratigraphy

Based on the soil data collected, the general soil stratigraphy for the Site is characterized by a layer of granular fill underlain by a native silty clay, silt and till deposits to the extent of the advanced boreholes.

A detailed description of the soil stratigraphy in each borehole is provided in the borehole logs in Appendix C.

### 5.2 Field Observations

There was visual and olfactory evidence of petroleum noted the collected sample of fill soil retrieved from borehole MW19-4, MW19-6, BH19-7, BH19-8, MW19-9, BH19-10B, BH19-11B, BH19-12, BH19-13, BHMW20-1, BHMW20-2 and BH20-3.

No sheen, free phase liquid petroleum hydrocarbons, or odours were noted during the subsequent groundwater sampling activities.

### 5.3 Groundwater Elevations

Static groundwater level measurements were collected prior to groundwater purging and sampling activities, on March 29, 2019 and on May 8, 2020. The groundwater elevations in each monitoring well were calculated by subtracting the static water level depth from the elevation of the ground surface adjacent to each well.

Monitoring wells were installed in MW19-4, MW19-6, MW19-9, MW20-1 and MW20-2. Monitoring well and groundwater elevation data is presented in Table 5-1.

**Table 5-1: Monitoring Well and Groundwater Elevations**

Monitoring Well	Groundwater Depth (mbgs)		Groundwater Elevation (masl)	
	2019/03/29	2020/05/08	2019/03/29	2020/05/08
MW19-4	3.6	2.53	63.5	64.77
MW19-6	2.3	---	64.7	---
MW19-9	2.3	2.06	65.0	65.24

Monitoring Well	Groundwater Depth (mbgs)		Groundwater Elevation (masl)	
	2019/03/29	2020/05/08	2019/03/29	2020/05/08
MW20-1	---	2.38	---	64.20
MW20-2	---	5.40	---	61.35

Note: groundwater elevations are subject to seasonal fluctuations.

#### **5.4 Soil Texture**

DST conducted geotechnical laboratory testing on selected soil samples which are presented in geotechnical investigation report in a separate cover. Overburden soils collected during the investigation consisted mainly of granular fill soils underlain by a native silty clay, silt and till. The bedrock was encountered from approximately 9.0 mbgs to 10.2 mbgs. As noted in Section 3, a fine-grained soil texture was selected for comparison of analytical data to applicable provincial standards on the basis on sieve analysis conducted in the geotechnical investigation.

#### **5.5 Soil Quality compared to MECP Table 3**

Analytical results of the soil samples submitted for laboratory analyses were compared against the applicable MECP Table 3 standards for Industrial/Commercial/Community Property Use. Based on the laboratory analytical results nine (9) soil samples, MW19-6, BH19-7, MW19-9, BH19-10B, BH19-11B, BH19-12, BH19-13, BH19-14 and BH19-15, exceeded the applicable MECP Table 3 standards for PHC(F1-F4) and/or Metals.

#### **5.6 Soil Quality compared to MECP Table 1**

For the sole purpose of excess soil management, analytical results of the soil samples submitted for laboratory analyses were further compared against the applicable MECP Table 1 standards for Industrial/Commercial/Community Property Use. Based on the laboratory analytical results 13 soil samples, BH19-2, BH19-3, MW19-4, MW19-6, BH19-7, BH19-8, MW19-9, BH19-10B, BH19-11B, BH19-12, BH19-13, BH19-14, and BH19-15, exceeded the applicable MECP Table 1 standards for a combination of PHC (F1-F4), Metals, and/or VOCs.

Refer to Tables D-1, D-2 and D-3, in Appendix D, for the soil analytical results. The laboratory certificates of analysis are provided in Appendix E.

### **5.7 Groundwater Quality**

Analytical results of the groundwater samples submitted for laboratory analysis were compared against the applicable MOECC Table 3 standards for All Types of Property Use. Based on the laboratory analytical results, groundwater sample results were all below the applicable MOECC Table 3 standards for the all the COCs.

Refer to Tables D-4 and D-6, in Appendix D, for the groundwater analytical results. The laboratory certificates of analysis are provided in Appendix E.

### **5.8 Leachate Quality**

Analytical results of the soil samples submitted for laboratory Toxicity Characteristic Leaching Procedure (TCLP) testing analyses were compared against the applicable MECP. O. Reg. 588/00 Schedule 4 for excess soil management. Based on the laboratory analytical results the combined TCLP sample from boreholes BH19-12 and BH19-13, was in compliance with the applicable Schedule 4 of the regulation, and thus are considered as non-hazardous waste.

### **5.9 QA/QC Results**

The field program included the submission of one soil sample from every borehole and one field duplicate groundwater sample for laboratory analysis of PHC (F1 – F4), Metals and VOCs.

- Duplicate of groundwater sample was selected from MW19-9 monitoring well.

The analytical results of an original (parent) sample and its corresponding field duplicate are generally quantitatively comparable. Relative percent differences (RPDs) between analytical results from parent and field duplicate samples are calculated using the following formula:

$$\text{RPD} = \frac{(\text{Sample Result} - \text{Duplicate Result}) \times 100}{(\text{Sample Result} + \text{Duplicate Result}) / 2}$$

Relative percent differences are only calculated for a parameter when both sample concentrations (the original and the duplicate) are greater than five times the laboratory reportable detection limit (RDL). The average calculated RPDs was approximately 40% based on the analytical results of the collected groundwater duplicates for Metals and 9% for VOCs.

No quality control issues that would affect the reliability of the analytical results were identified by the laboratory. Therefore, based on this information, the analytical results are considered reproducible. Laboratory quality control data is included within the laboratory certificates of

analysis in Appendix E. Laboratory quality control data is included with the laboratory certificates of analysis in Appendix E.

## **6. CONCLUSIONS AND RECOMMENDATIONS**

---

DST has conducted a Phase II ESA at AIM Recycling Ottawa East, located at 2555 Sheffield Road in Ottawa, Ontario, to evaluate if the soil and groundwater quality at the Site has been impacted by the current Site use.

The field program for the Phase II ESA consisted of the advancement of 18 boreholes and five groundwater monitoring wells. 19 soil samples PHC(F1–F4), Metals and VOCs. In 2019, three groundwater samples collected during the investigation were submitted for PHC(F1–F4), Metals VOCs and PAHs. In 2020, after installing two new monitoring wells, four groundwater samples were collected and analysed for VOCs.

Groundwater did not show any Table 3 exceedances.

The fill soils encountered in MW19-6, BH19-7, MW19-9, BH19-10B, BH19-11B, BH19-12, BH19-13 BH19-14 and BH19-15 were found to have Table 3 exceedances. Fill soils in the vicinity of these boreholes will need to be removed from Site as part of the upcoming construction. They will need to be disposed of at a licensed waste disposal facility.

The fill soils encountered in all boreholes except borehole BH19-2, BH19-5, BHMW20-1 and BHMW20-2 were found to have Table 1 exceedances. Soils which exceed Table 1 yet meet Table 3 may be re-used elsewhere on Site. If soils in the vicinity of these boreholes become excess and need to be removed from Site, then they will need to be disposed of at a licensed waste disposal facility.

The submitted TCLP soil sample from BH19-12 GS#1 and BH19-13 GS#1 meets the O. Reg 558/00 schedule 4 criteria. Therefore, the excess soils that need to be removed from Site and moved to a designated licensed landfill would be considered as non-hazardous solid waste as per the definition in O.Reg. 558/00.

The Contractor and a Qualified Person should prepare a Soil Management Plan (SMP) at the outset of construction to discuss the handling of excess soils that are generated during the upcoming Site development.

As part of construction there will be excavation for the new garage building, the new parking area, and the two new truck scales. These are locations which have Table 3 Exceedances of the fill soils. For the new garage it is expected that excavations will be approximately 3.0 m deep, in order to reach native soil. For the new parking area it is expected that the excavation will be

approximately 0.7 m deep to accommodate the new pavement structure. For the new truck scales it is expected that the excavations will be approximately 2.5 m deep to reach native soils. Based on these anticipated excavation depths and the building footprints provided by the Client, approximately 3,750 m<sup>3</sup> of soils exceeding Table 3 will need to be removed from Site during construction of these structures.

As part of construction there will also be excavation for the new warehouse building. This location has Table 1 Exceedances of the fill soils. For the new warehouse building it is expected that excavations will be approximately 3.0 m deep, in order to reach native soil. Based on this anticipated excavation depths and the building footprints provided by the Client, approximately 11,150 m<sup>3</sup> of soils exceeding Table 1 will need to be removed from Site during construction.

It is important to note that the approximated volumes above includes the excavation of the perimeter footings only. It does not include for removal of the existing buildings, future civil services, delineation of impacted soils to find the limits, or clean up of the Site. It is understood that the Client is not currently intending to clean up the Site, and the estimates provided are to assess the removal of excess soils generated during construction only.

Based on the findings of this Phase II ESA additional delineation testing of the soil for the Site may be warranted in order to attempt to minimize soil disposal costs for this Project.

## 7. CLOSURE

This report was prepared for the exclusive use of the AIM Recycling Ottawa East. Any use of this report by any third party, or any reliance on or decisions to be made based on it, are the responsibility of such parties. DST accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

We trust the information herein meets your expectations. Should you have any questions, please do not hesitate to contact the undersigned at your convenience.

Yours truly,

**DST Consulting Engineers Inc.**



Eric Domingue, P.Eng., M.A.Sc., QP  
Director of Technical Services



## **8. REFERENCES**

---

1. DST Consulting Engineers Inc., "Limited Phase II Environmental Site Assessment, 2575/2585 Sheffield Road, Ottawa, Ontario". July 2012. DST File No: OE-OT-014857.
2. Ontario Ministry of the Environment, December 1996. *Guidance on Sampling and Analytical Methods for Use at Contaminated Sites in Ontario*.
3. Ontario Ministry of the Environment, 2011. *Soil, Ground Water and Sediment Standards for Use Under Part XV.I of the Environmental Protection Act*.
4. Ontario Ministry of the Environment, as amended January 2014. *Ontario Resources Act R.R.O. 1990, Regulation 903 – Wells*.

## **APPENDIX A**

### **Limitations of Report**

### **Limitations of Report**

The information, conclusions and recommendations given herein are specifically for this project and this Client only, and for the scope of work described herein. It may not be sufficient for other uses. DST does not accept responsibility for use by third parties.

The data, conclusions and recommendations which are presented in this report, and the quality thereof, are based on a scope of work authorized by the Client. Note, however, that no scope of work, no matter how exhaustive, can identify all contaminants or all conditions above and below ground. For example, conditions between test holes may differ from those encountered in the investigation and observed or measured conditions may change with time. This report therefore cannot warranty that all conditions on or off the site are represented by those identified at specific locations.

Any recommendations and conclusions provided that are based on conditions or assumptions reported herein will inherently include any uncertainty associated with those conditions or assumptions. In fact, many aspects involving professional judgement such as subsurface models and remediation criteria contain a degree of uncertainty which cannot be eliminated. This uncertainty should be managed by periodic review and refinement as additional information becomes available.

Note also that standards, guidelines and practices related to environmental investigations may change with time. Those which were applied at the time of this investigation may be obsolete or unacceptable at a later date. Any topographic benchmarks and elevations documented in this report are primarily to establish relative elevation differences between test locations and should not be used for other purposes such as grading, excavation, planning, development, etc.

Any comments given in this report on potential remediation problems and possible methods are intended only for the guidance of the designer. The scope of work may not be sufficient to determine all of the factors that may affect construction or clean-up methods and costs. Contractors bidding on this project or undertaking clean-ups should, therefore, make their own interpretation of the factual information presented and draw their own conclusions as to how the conditions may affect their work. Any results from an analytical laboratory, title searcher or other subcontractor reported herein have been carried out by others, and DST Consulting Engineers Inc. cannot warranty their accuracy. Similarly, DST cannot warranty the accuracy of information supplied by the Client.


Phase II Environmental Site Assessment  
AIM Recycling Ottawa East  
2555 Sheffield Road, Ottawa, Ontario  
DST File No.: 019037029.001

---

**APPENDIX B**  
**Site and Borehole Location Plans**



Client	Site	2555 Sheffield Road, Ottawa, ON	
AIM Recycling Ottawa East		Designed By	Date
<b>DST</b> consulting engineers a division of Englobe	Phase II Environmental Site Assessment	S.N.	April 2019
Drawing Title		Drawn By	Project No.
Site Location Plan		J.M.	TS-SO-37029
Approved By		Figure No.	
		S.D.	
Scale		As shown	1
2150 Thurston Drive, Suite 203, Ottawa, Ontario K1G 5T9 Tel: (613) 748-1415 Fax: (613) 748-1356 Website: www.dstgroup.com		Copyright © 2020 DST Consulting Engineers Inc.	

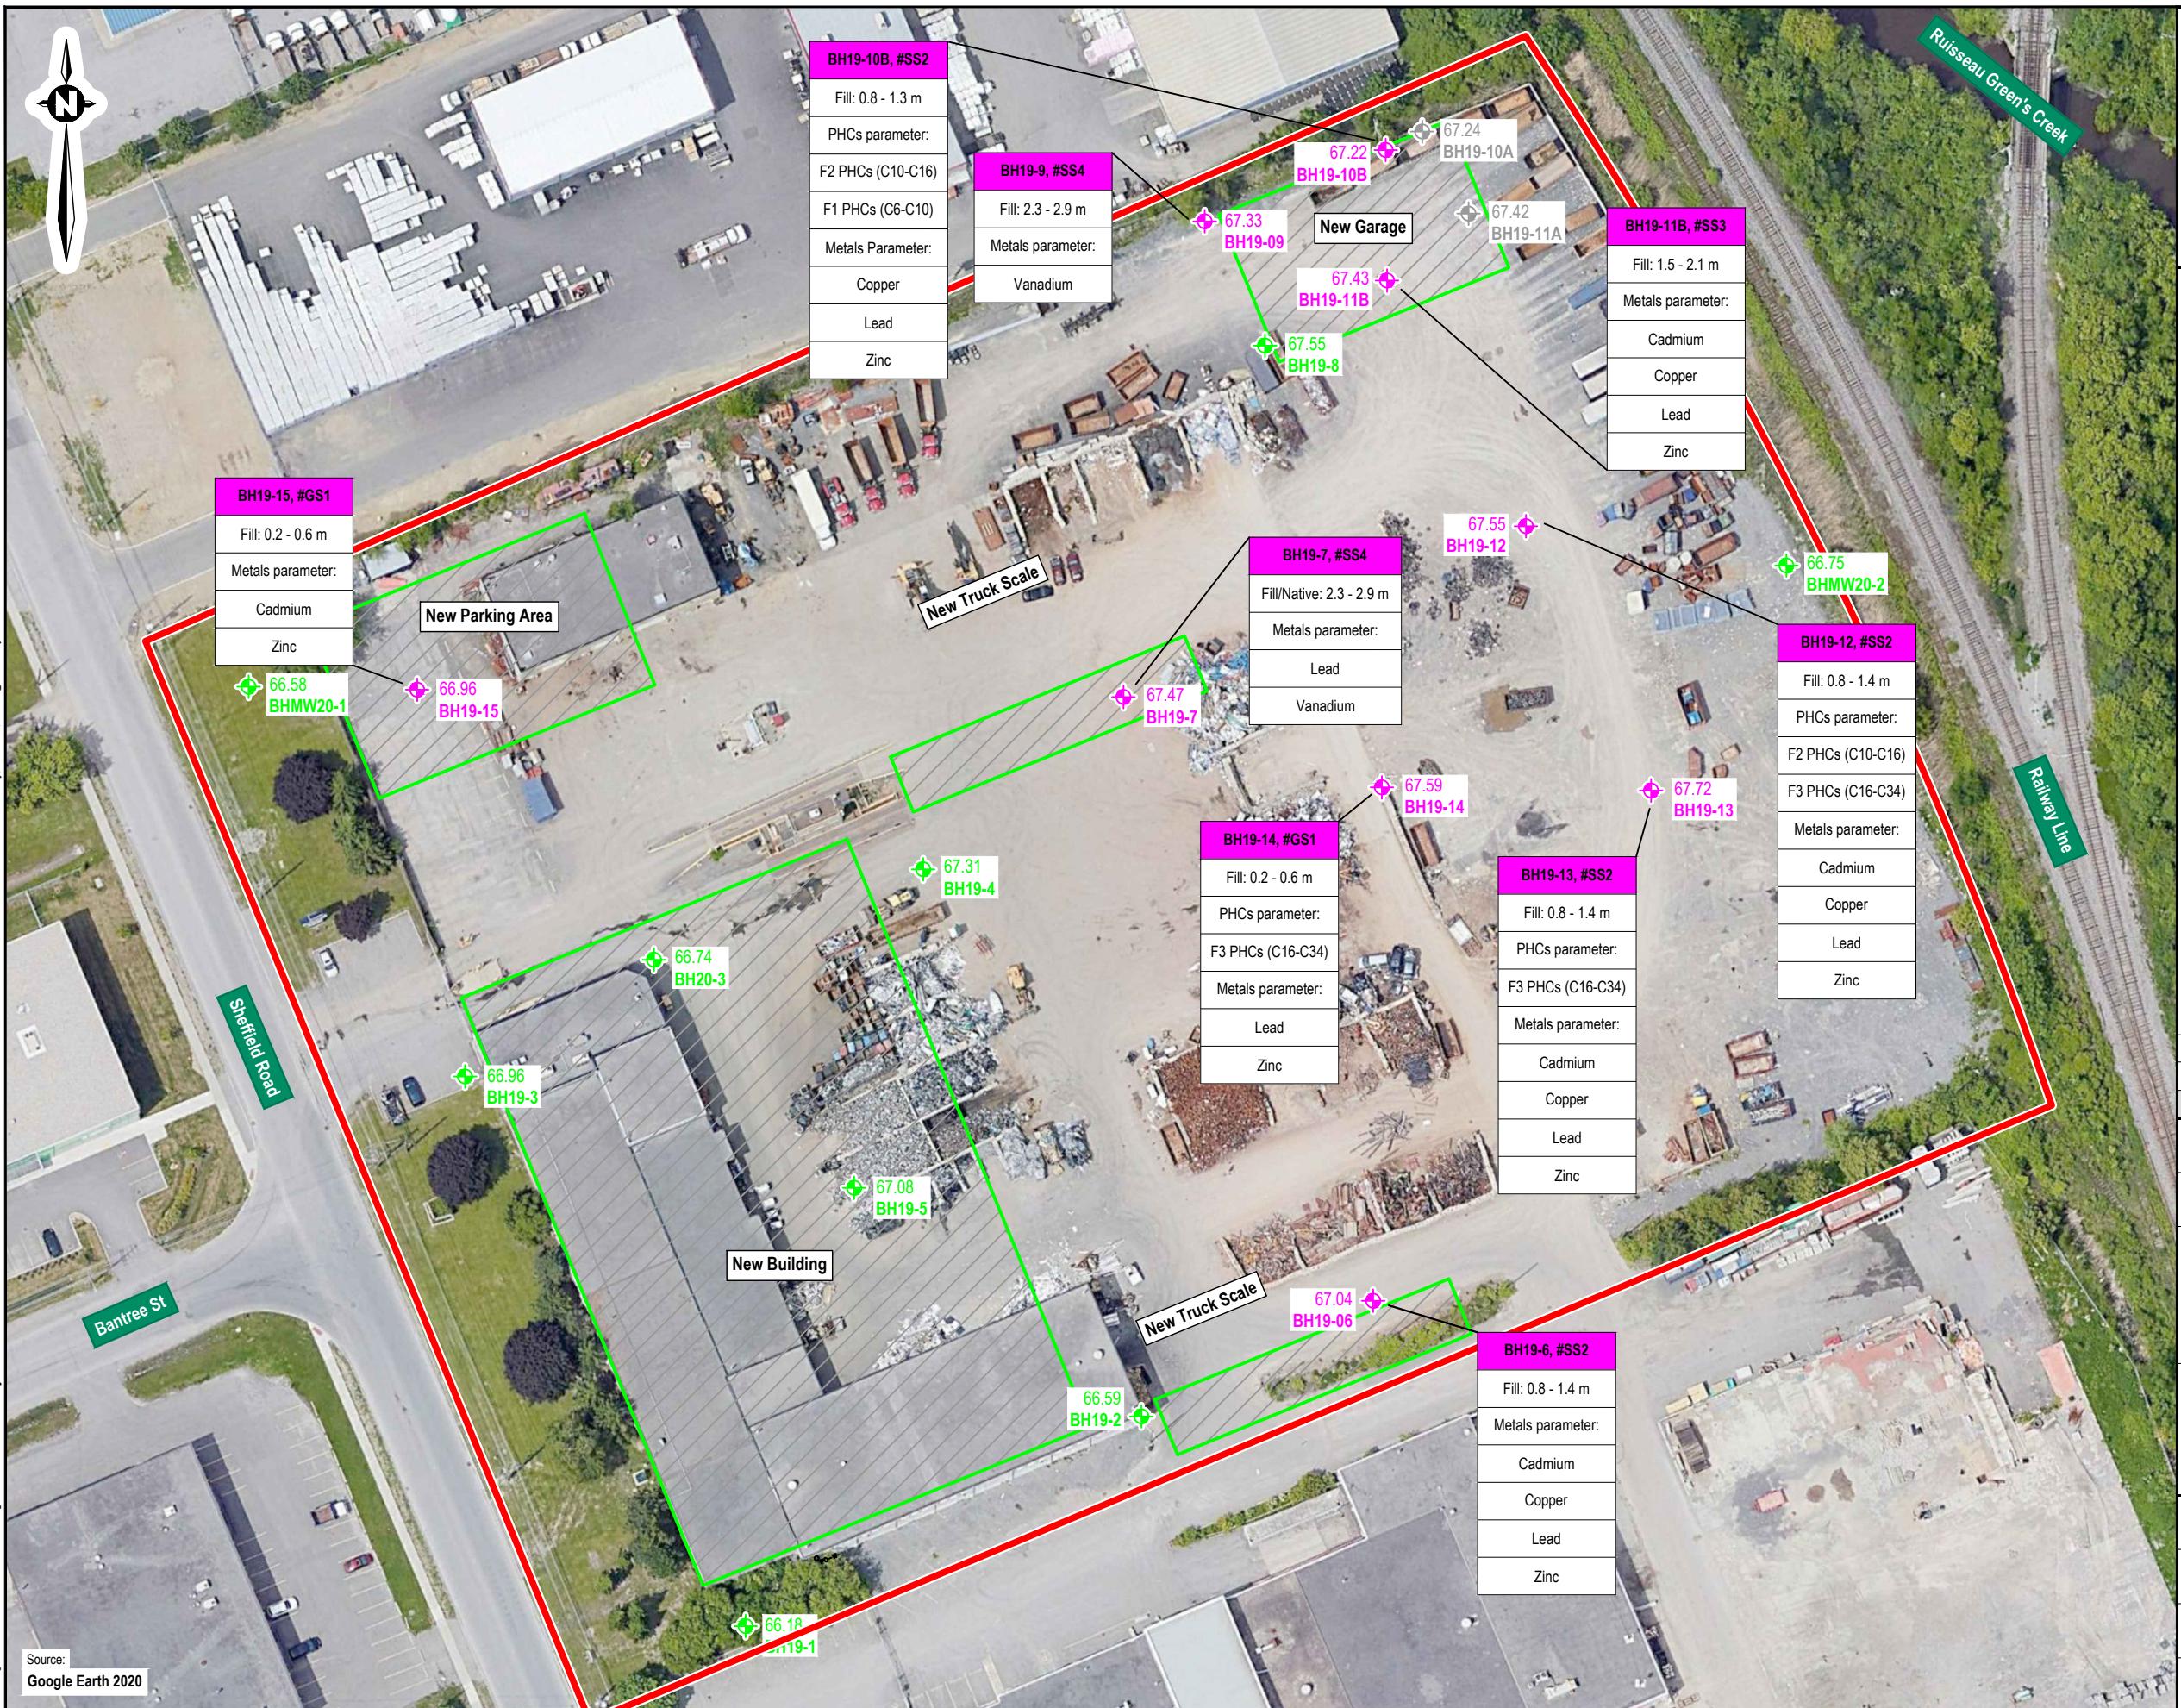


## Note

1. This drawing shall be read in conjunction with the associated technical report.

## Legend

- Site Boundary
-  Soil Sample Location Exceeds MECP Table 3 Standards  
Fine Soil Grain Texture
-  Soil Sample Location Meets MECP Table 3 Standards  
Fine Soil Grain Texture
-  Soil Sample Not Tested
-  Proposed New Site Features

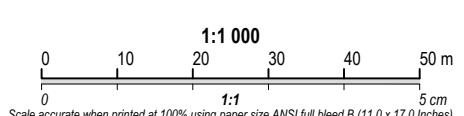

Audit accuracy when printed at 100% using paper size A4 (or half bleed B (11.0 x 17.0 inches)			
	6/5/2020	Rev 1	
	04/18/19	Original	
ion	Date	Issue	Approval

AIM Recycling Ottawa East

10000 EEEFEEF Sheffield Road, Ottawa, ON


4

## Phase II Environmental Site Assessment

100

## Borehole Location Plan and Soil Sample Exceedances

Entered By	<b>S.N.</b>	Scale	<b>As shown</b>
Entered By	<b>J.M.</b>	Date	<b>April 2019</b>
Entered By	<b>S.D.</b>	Project No.	<b>TS-SO-37029</b>
Entered By			

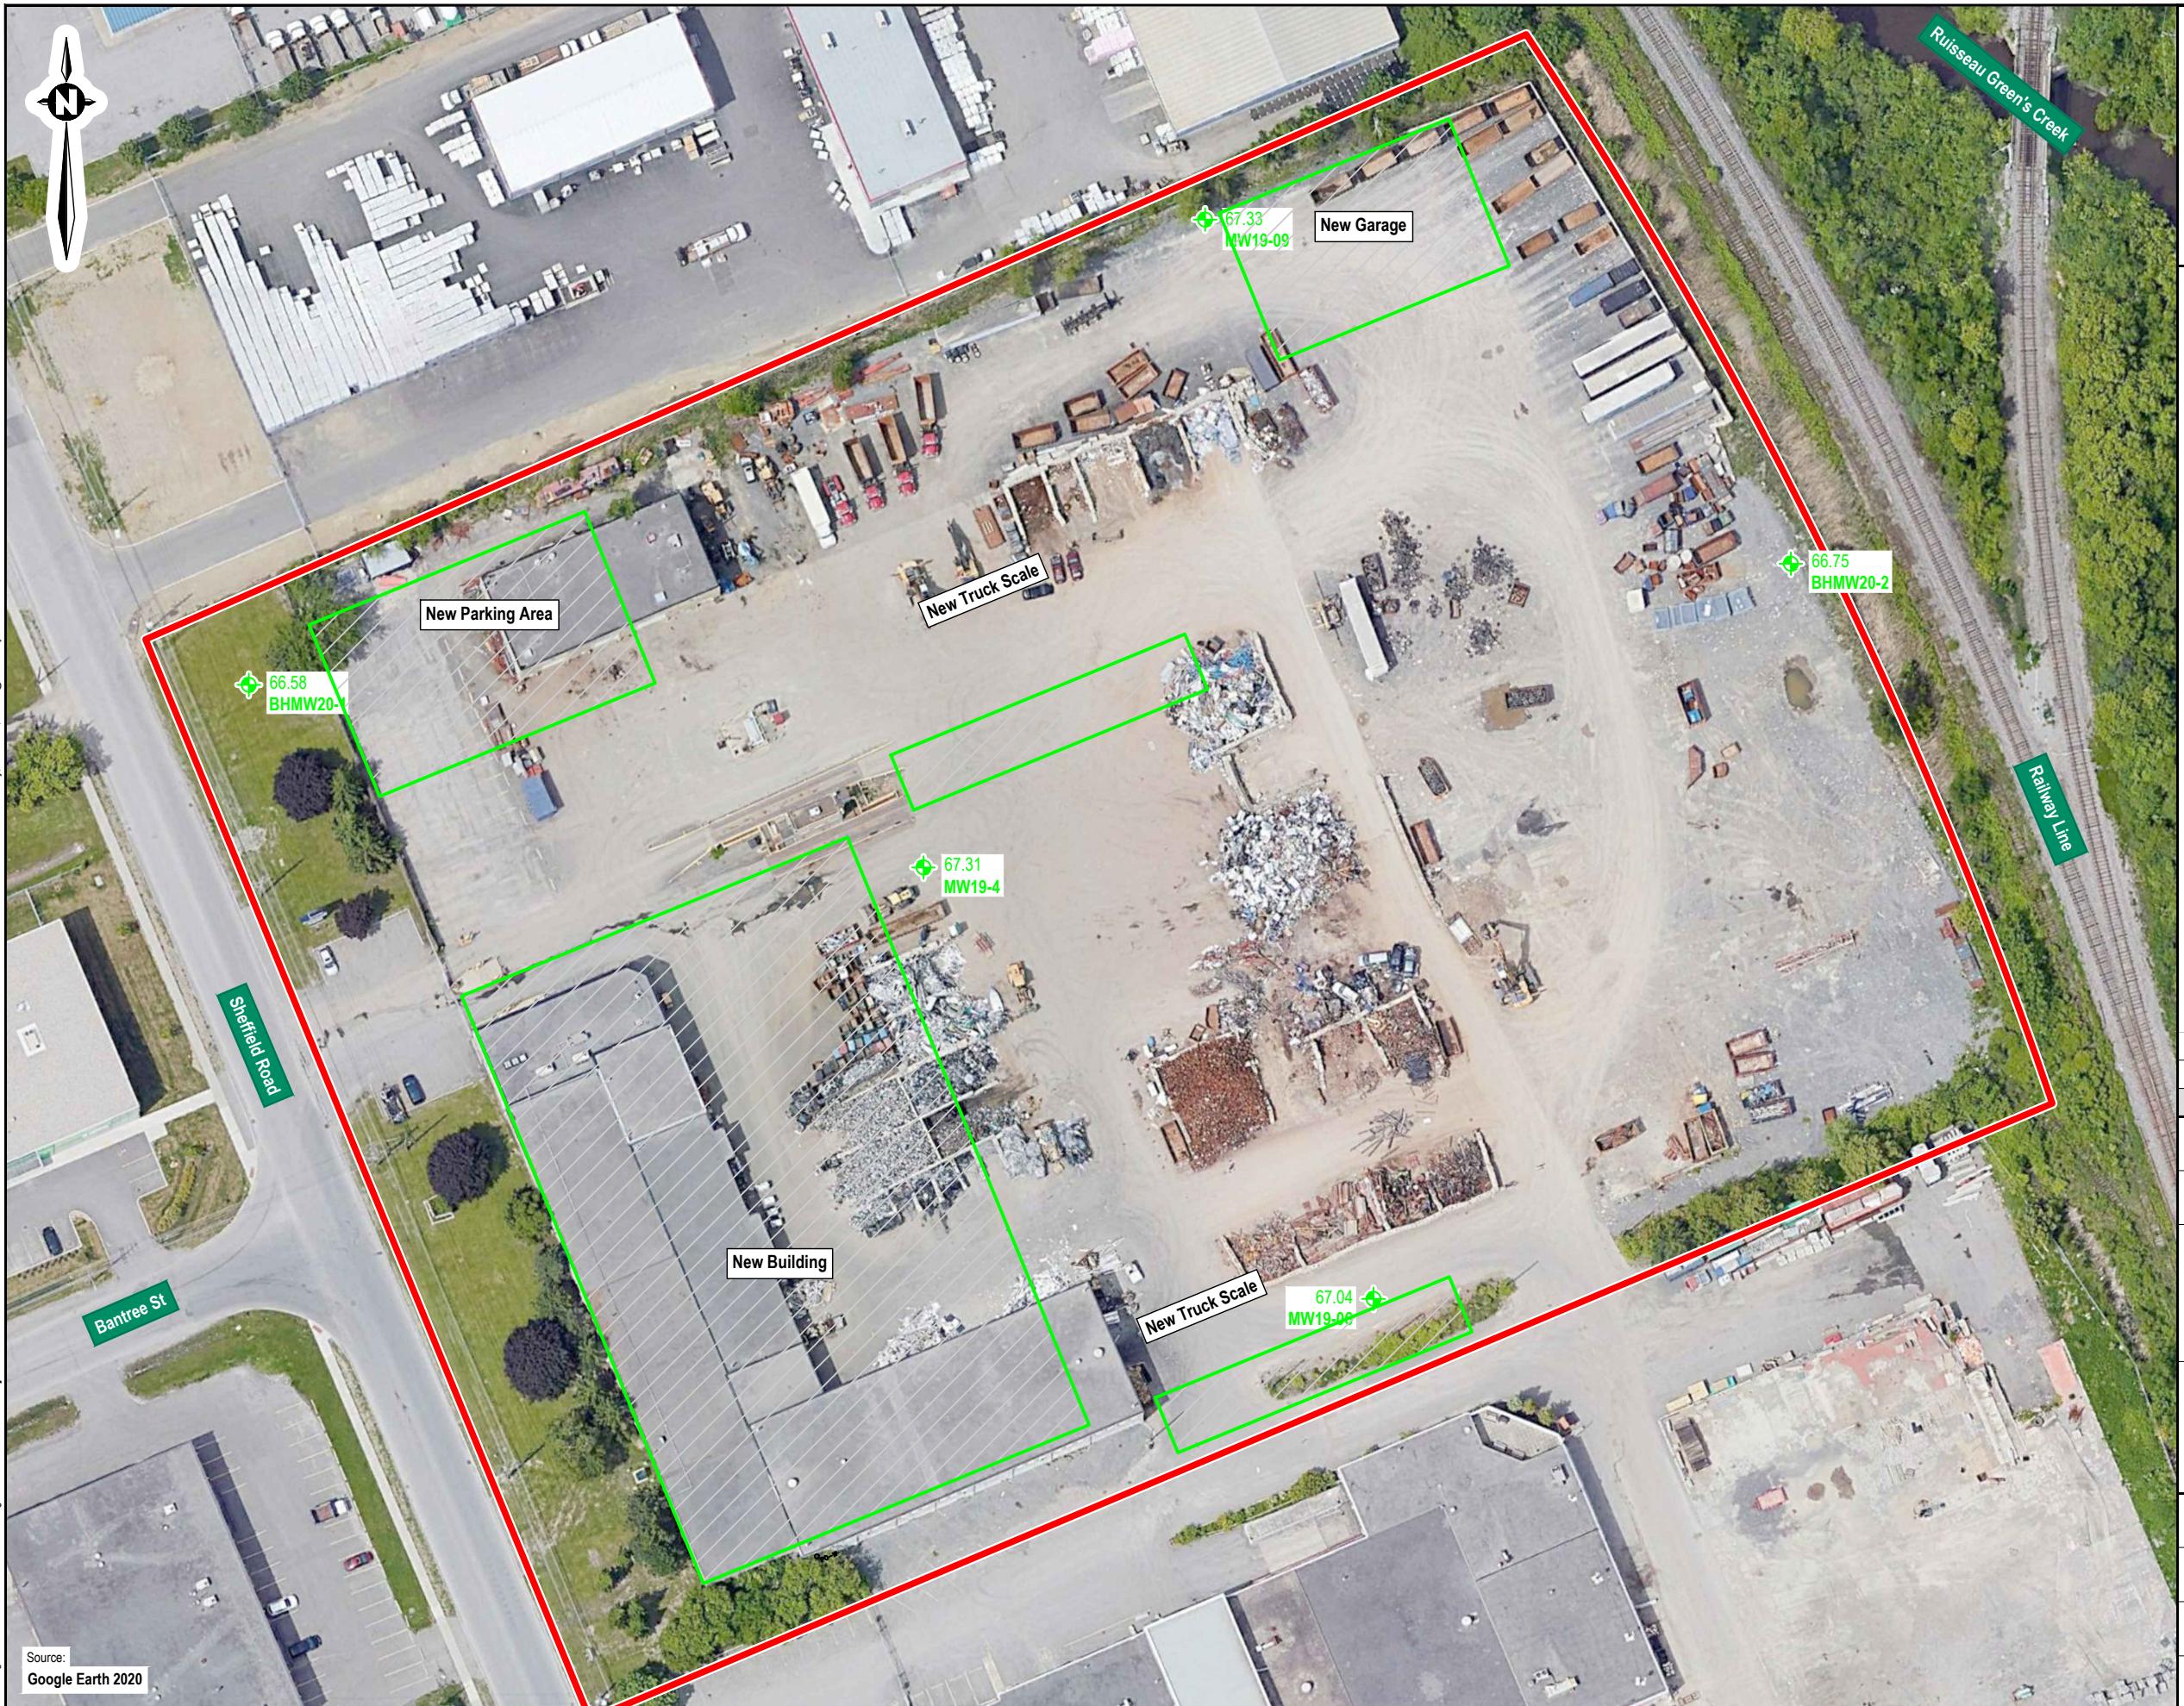

## **APPENDIX C**

### **List of Symbols and Definition for Geotechnical Soil Sampling Borehole Logs**

## LIST OF SYMBOLS AND DEFINITIONS FOR GEOTECHNICAL SAMPLING AND COMMON LITHOLOGIES

The following is a reference sheet for commonly used symbols and definitions within this report and in any figures or appendices, including borehole logs and test results. Symbols and definitions conform to the standard proposed by the International Society for Soil Mechanics and Geotechnical Engineering (ISSMGE) wherever possible. Discrepancies may exist when comparing to third-party results using the Unified Soil Classification System (USCS).

### PART A – SOILS

#### Standard Penetration Test (SPT) 'N'

The number of blows required to drive a 50-mm (2 in) split barrel sampler 300 mm (12 in). The standard hammer has a mass of 63.5 kg (140 lbs) and is dropped vertically from a height of 760 mm (30 in). Additional information can be found in ASTM D1586-11 and in §4.5.2 of the CFEM 4<sup>th</sup> Ed. For penetration less than 300 mm, 'N' is recorded with the penetration that was achieved.

#### Non-Cohesive Soils

The relative density of non-cohesive soils relates empirically to SPT 'N' as follows:

Relative Density	'N'
Very Loose	0 – 4
Loose	4 – 10
Compact	10 – 30
Dense	30 – 50
Very Dense	> 50

#### Cohesive Soils

The consistency and undrained shear strength of cohesive soils relates empirically to SPT 'N' as follows:

Consistency	Undrained Shear Strength (kPa)	'N'
Very Soft	< 12	0 – 2
Soft	12 – 25	2 – 4
Firm	25 – 50	4 – 8
Stiff	50 – 100	8 – 15
Very Stiff	100 – 200	15 – 30
Hard	> 200	> 30

### PART B – ROCK

The following parameters are used to describe core recovery and to infer the quality of a rockmass.

#### Total Core Recovery, TCR (%)

The total length of solid drill core recovered, regardless of the quality or length of the pieces, taken as a percentage of the length of the core run.

#### Solid Core Recovery, SCR (%)

The total length of solid, full-diameter drill core recovered, taken as a percentage of the length of the core run.

#### Rock Quality Designation, RQD (%)

The sum of the lengths of solid drill core greater than 100 mm long, taken as a percentage of the length of the core run. RQD is commonly used to infer the quality of the rockmass, as follows:

Rockmass Quality	RQD (%)
Very Poor	< 25
Poor	25 – 50
Fair	50 – 75
Good	75 – 90
Excellent	> 90

#### Weathering

The terminology used to describe the degree of weathering for recovered rock core is defined as follows, as suggested by the Geological Society of London:

**Completely weathered:** All rock material is decomposed and/or disintegrated to soil. The original mass structure is largely intact.

**Highly weathered:** More than half the rock material is decomposed and/or disintegrated to soil. Fresh or discolored rock is present either as a discontinuous framework or as core stone.

**Moderately weathered:** Less than half the rock material is decomposed and/or disintegrates to soil. Fresh or discolored rock is present either as a continuous framework or as core stone.

**Slightly weathered:** Discoloration indicates weathering of rock material and discontinuity of surfaces. All the rock material may be discolored by weathering and may be somewhat weaker than its fresh condition.

**Fresh:** No visible signs of weathering.

### PART C – SAMPLING SYMBOLS

Symbol	Description
SS	Split spoon sample
TW	Thin-walled (Shelby Tube) sample
PH	Sampler advanced by hydraulic pressure
WH	Sampler advanced by static weight
SC	Soil core

### PART D – IN-SITU AND LAB TESTING

#### SOIL NAMING CONVENTIONS

Particle sizes are described as follows:

Particle Size Descriptor	Size (mm)	
Boulder	> 300	
Cobble	75 – 300	
Gravel	Coarse Fine	19 – 75 4.75 – 19
Sand	Coarse Medium Fine	2.0 – 4.75 0.425 – 2.0 0.075 – 0.425
Silt	0.002 – 0.075	
Clay	< 0.002	

The principle constituent of a soil is written in uppercase. The minor constituents of a soil are written according to the following convention:


Descriptive Term	Proportion of Soil (%)
Trace	1 – 10
Some	10 – 20
(ey) or (y)	20 – 35
And	35 – 50

**Eg.:** A soil comprising 65% Silt, 21% Sand and 14% Clay would be described as a: Sandy SILT, Some Clay

# LOG OF BOREHOLE BH19-01

DST REF. No.: TS-SO-037029  
 CLIENT: AIM Recycling Ottawa East  
 PROJECT: Limited Phase II Environmental Site Assessment  
 LOCATION: 2555 Sheffield Road, Ottawa, ON  
 SURFACE ELEV.: 66.20 metres

Drilling Data  
 METHOD: Hollow Stem Auger  
 DIAMETER: 200 mm  
 DATE: March 19, 2019  
 COORDINATES: 5029984m N, 374710m E

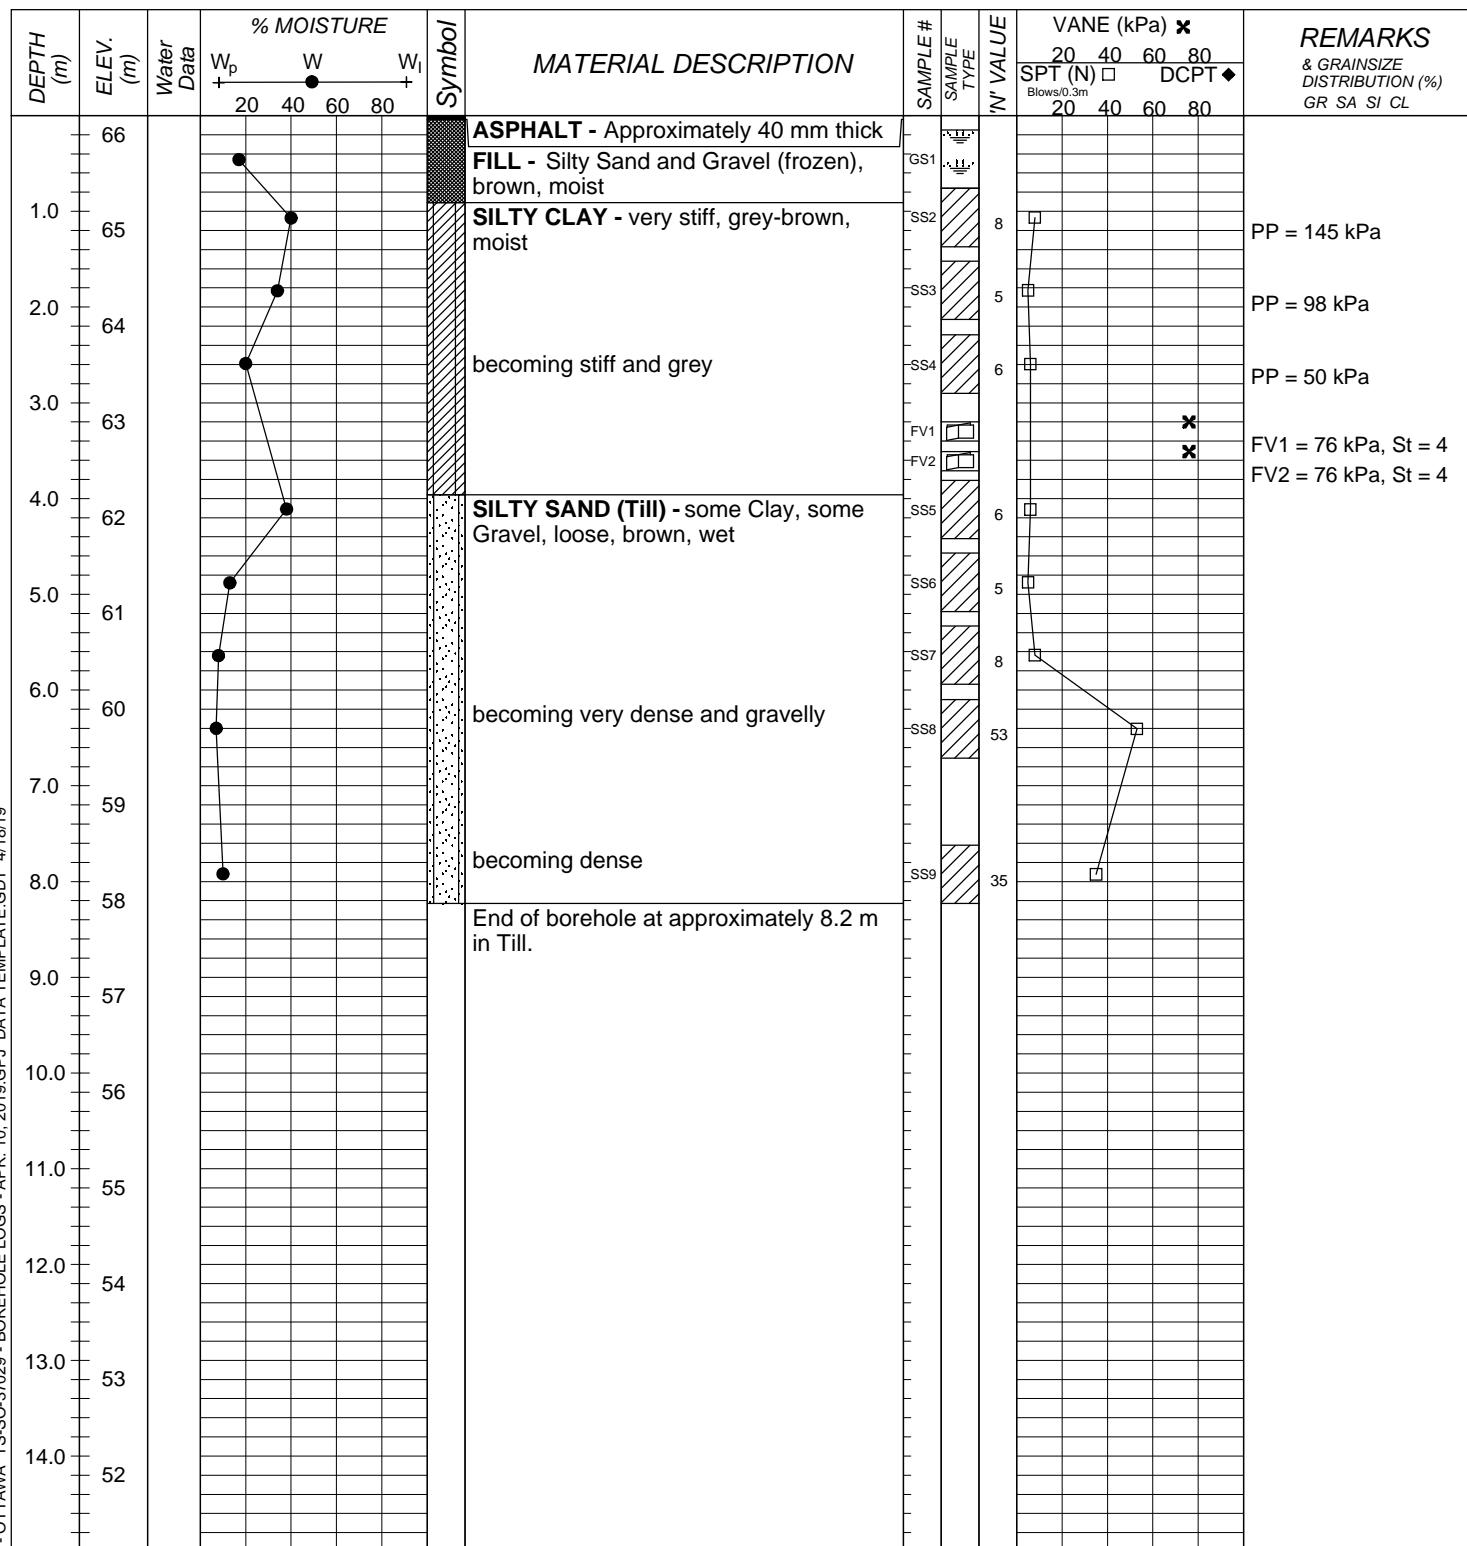

# LOG OF BOREHOLE BH19-02

DST REF. No.: TS-SO-037029

CLIENT: AIM Recycling Ottawa East

PROJECT: Limited Phase II Environmental Site Assessment

LOCATION: 2555 Sheffield Road, Ottawa, ON

SURFACE ELEV.: 66.60 metres


## Drilling Data

METHOD: Hollow Stem Auger

DIAMETER: 200 mm

DATE: March 19, 2019


COORDINATES: 5030015m N, 374771m E

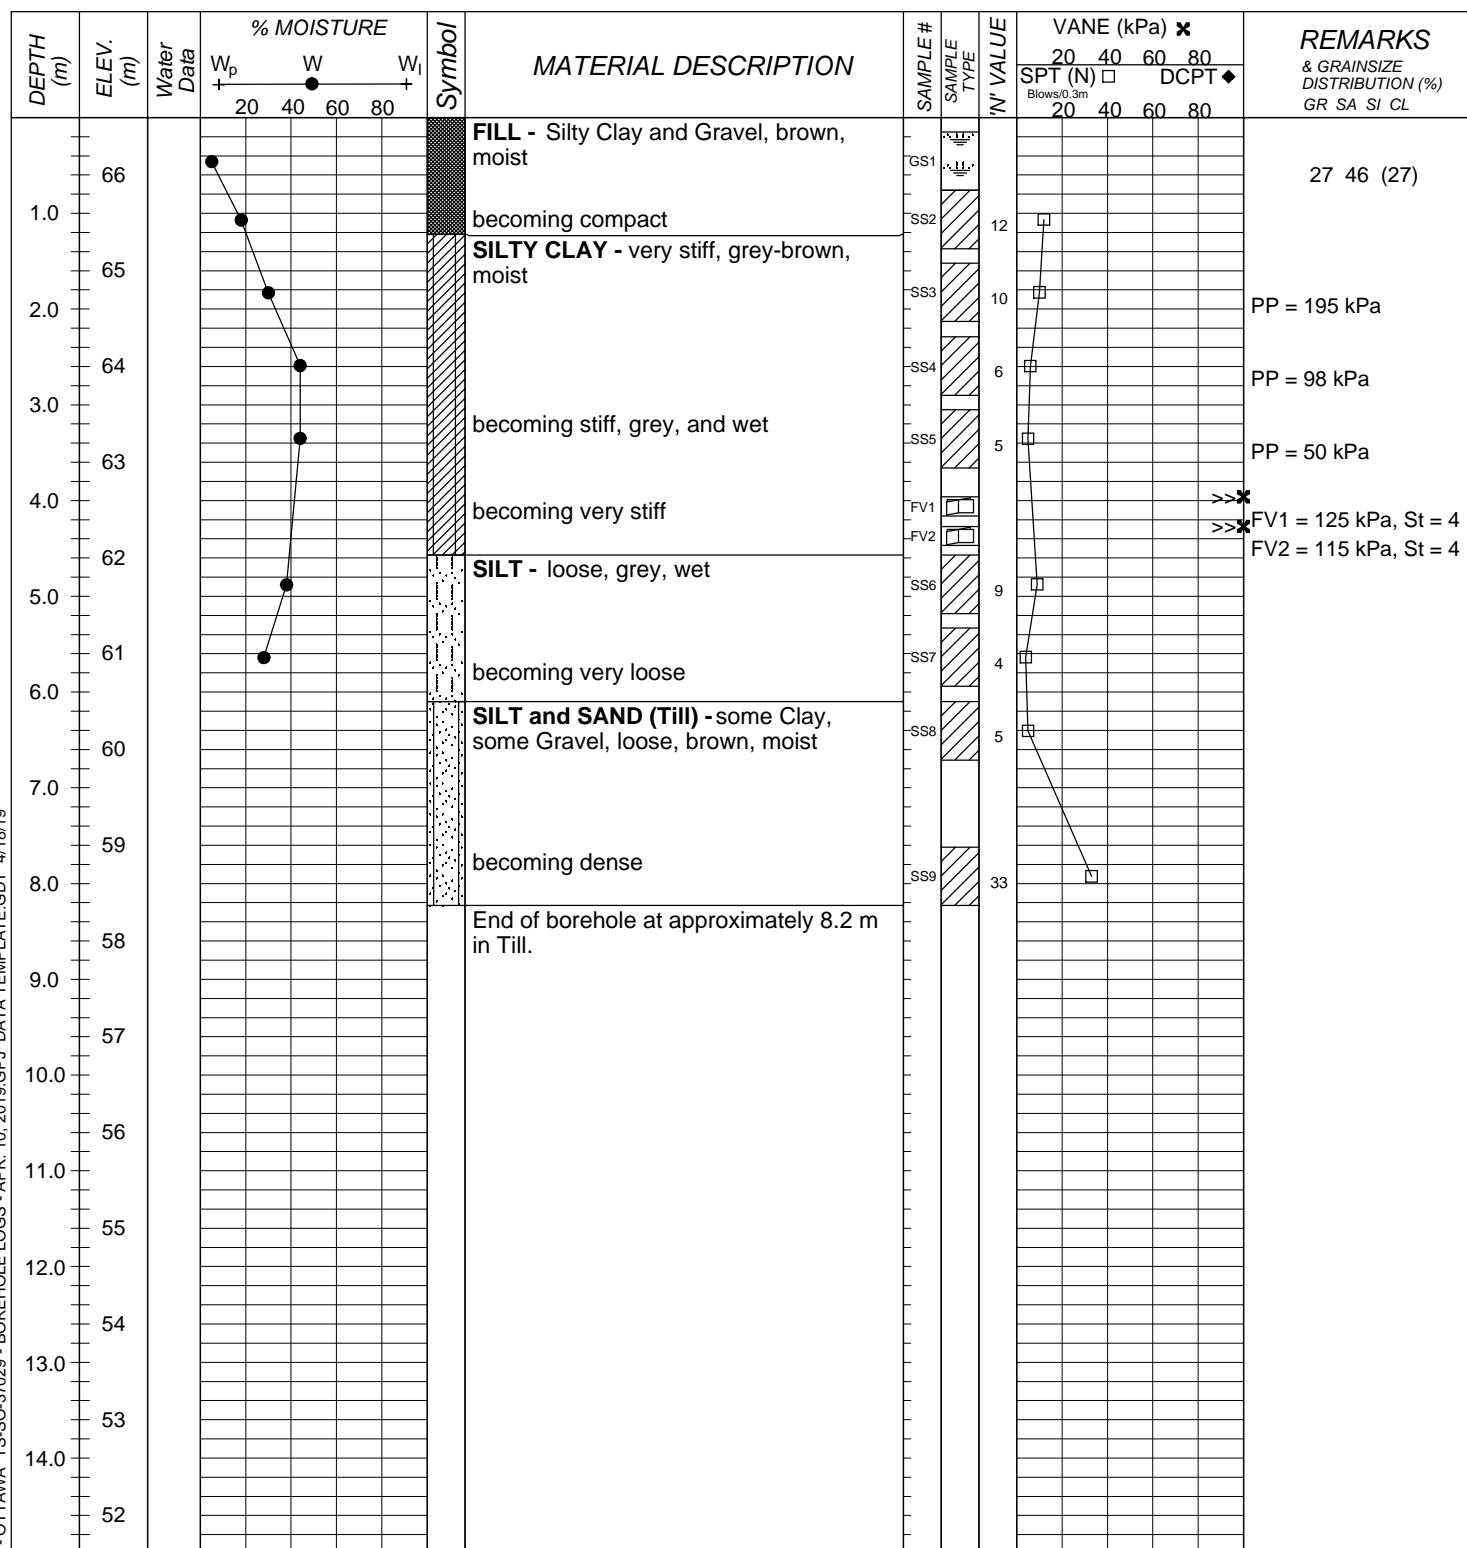

# LOG OF BOREHOLE BH19-03

DST REF. No.: TS-SO-037029  
 CLIENT: AIM Recycling Ottawa East  
 PROJECT: Limited Phase II Environmental Site Assessment  
 LOCATION: 2555 Sheffield Road, Ottawa, ON  
 SURFACE ELEV.: 67.00 metres


Drilling Data  
 METHOD: Hollow Stem Auger  
 DIAMETER: 200 mm  
 DATE: March 19, 2019  
 COORDINATES: 5030070m N, 374669m E

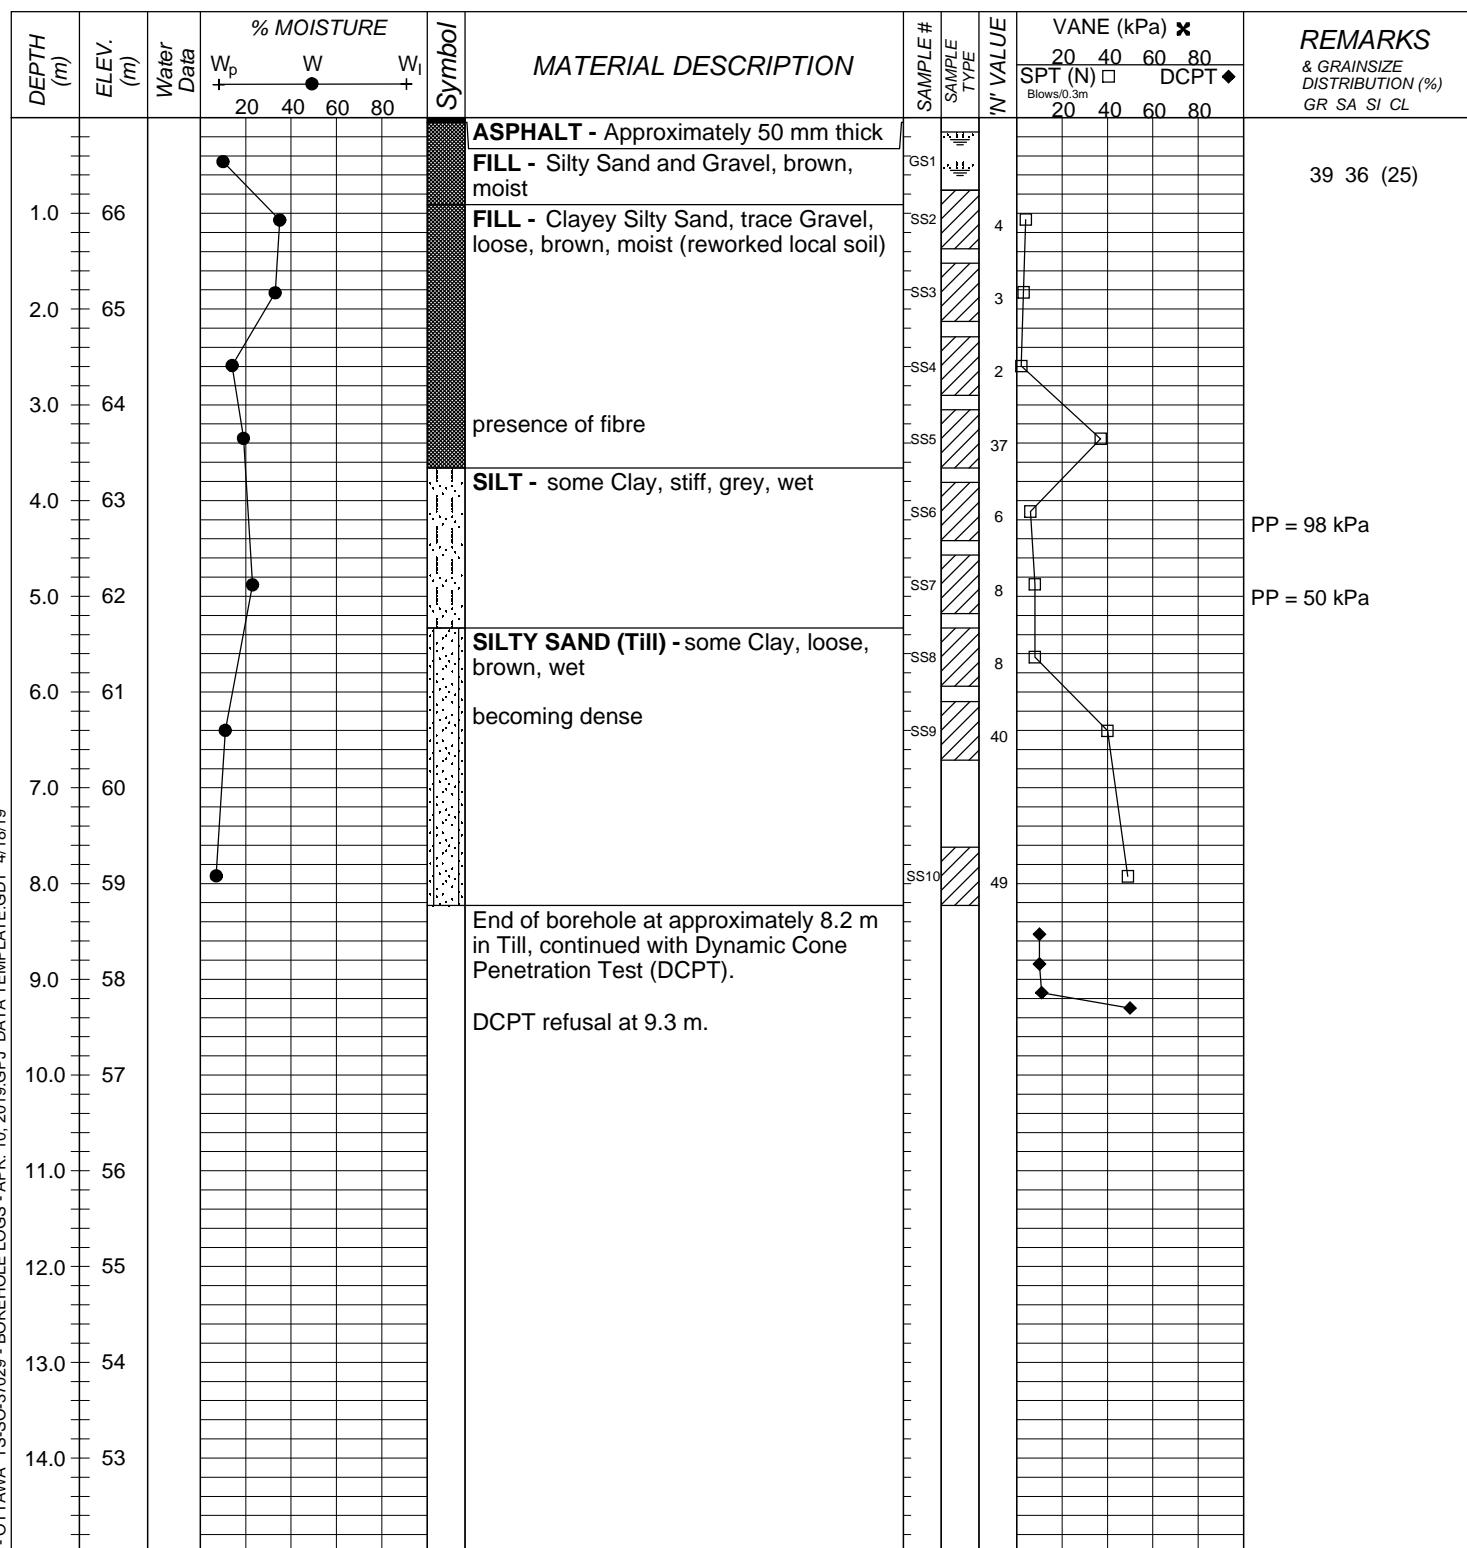

# LOG OF BOREHOLE BH19-05

DST REF. No.: TS-SO-037029  
 CLIENT: AIM Recycling Ottawa East  
 PROJECT: Limited Phase II Environmental Site Assessment  
 LOCATION: 2555 Sheffield Road, Ottawa, ON  
 SURFACE ELEV.: 67.10 metres


Drilling Data  
 METHOD: Hollow Stem Auger & Rock Coring  
 DIAMETER: 200 mm  
 DATE: March 20, 2019  
 COORDINATES: 5030051m N, 374727m E

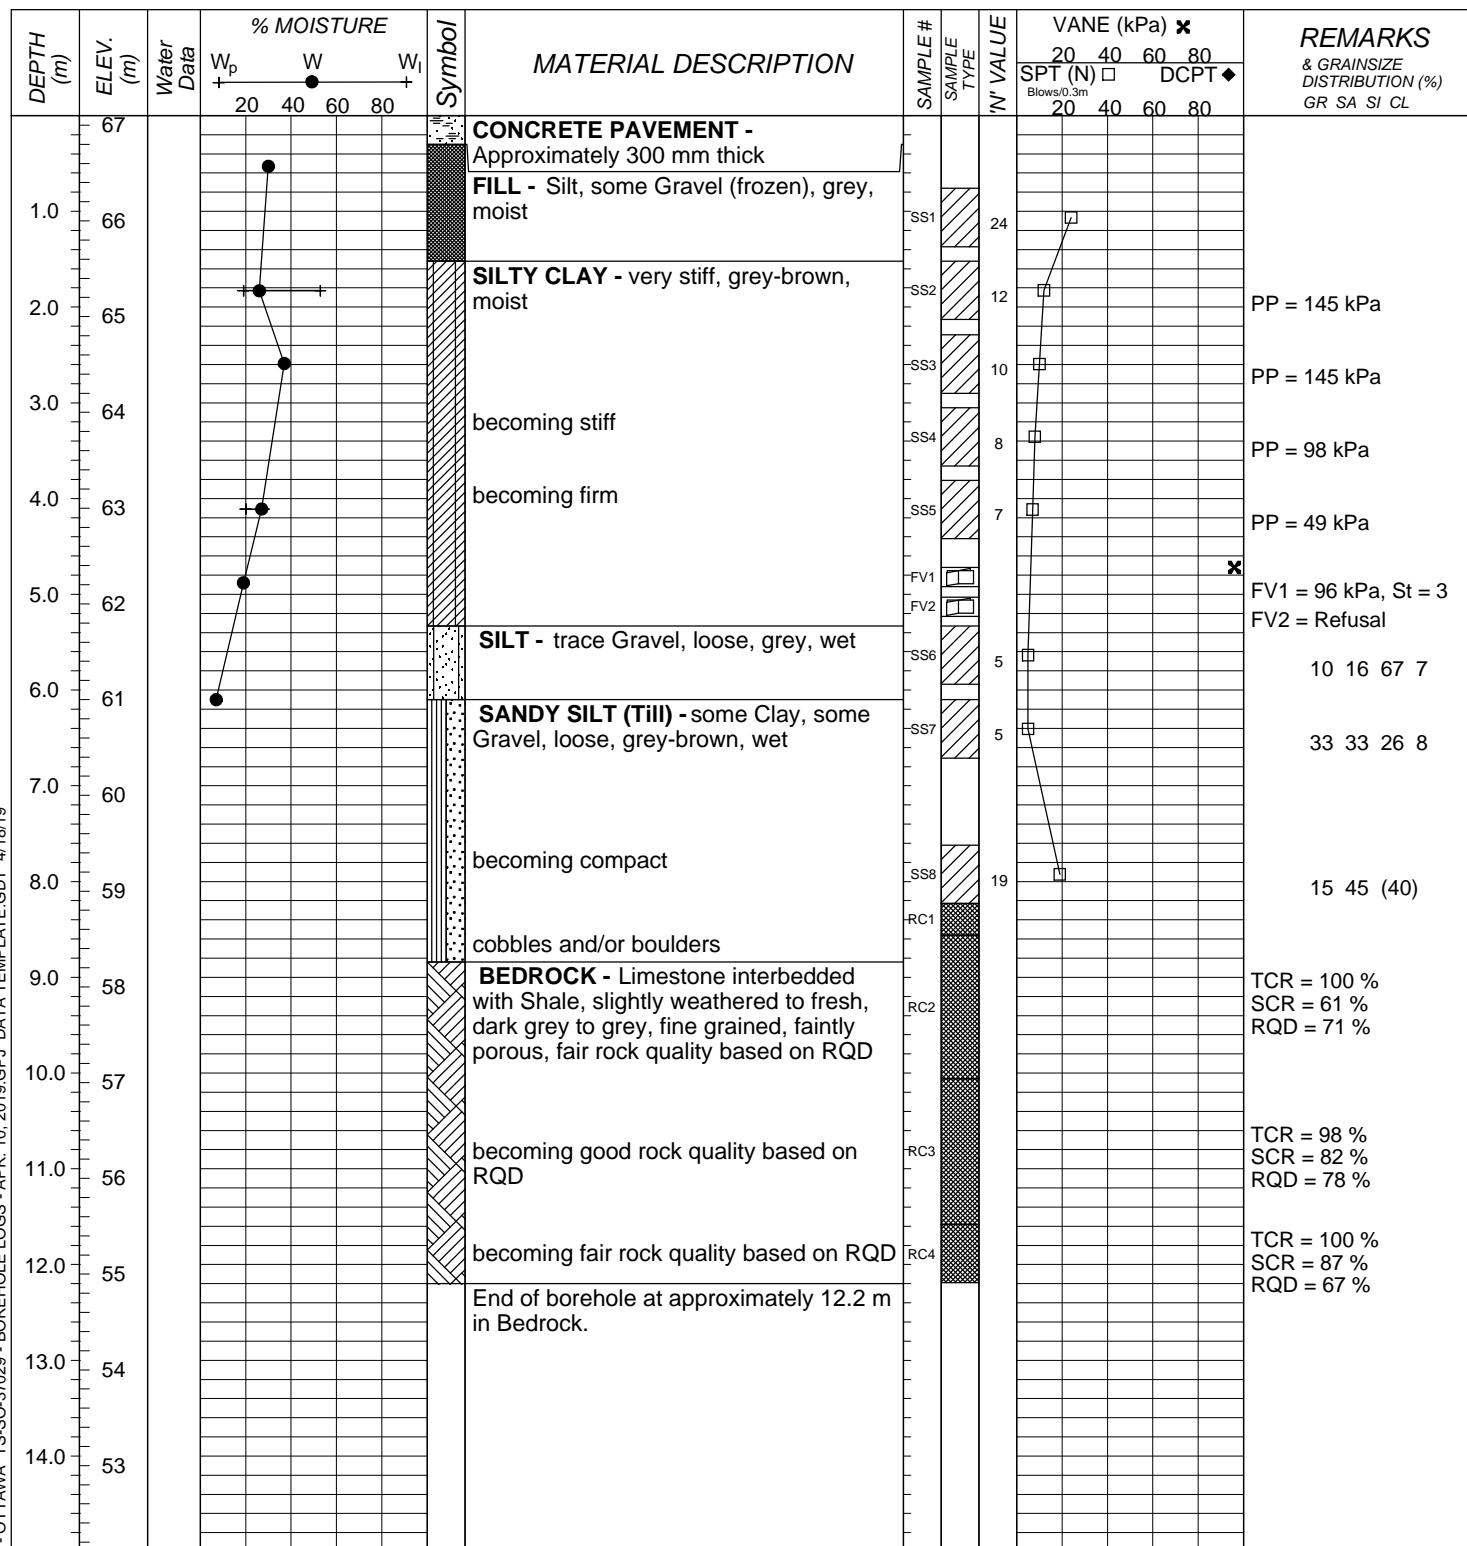

# LOG OF BOREHOLE BH19-07

DST REF. No.: TS-SO-037029  
 CLIENT: AIM Recycling Ottawa East  
 PROJECT: Limited Phase II Environmental Site Assessment  
 LOCATION: 2555 Sheffield Road, Ottawa, ON  
 SURFACE ELEV.: 67.50 metres


Drilling Data  
 METHOD: Hollow Stem Auger  
 DIAMETER: 200 mm  
 DATE: March 21, 2019  
 COORDINATES: 5030127m N, 374768m E

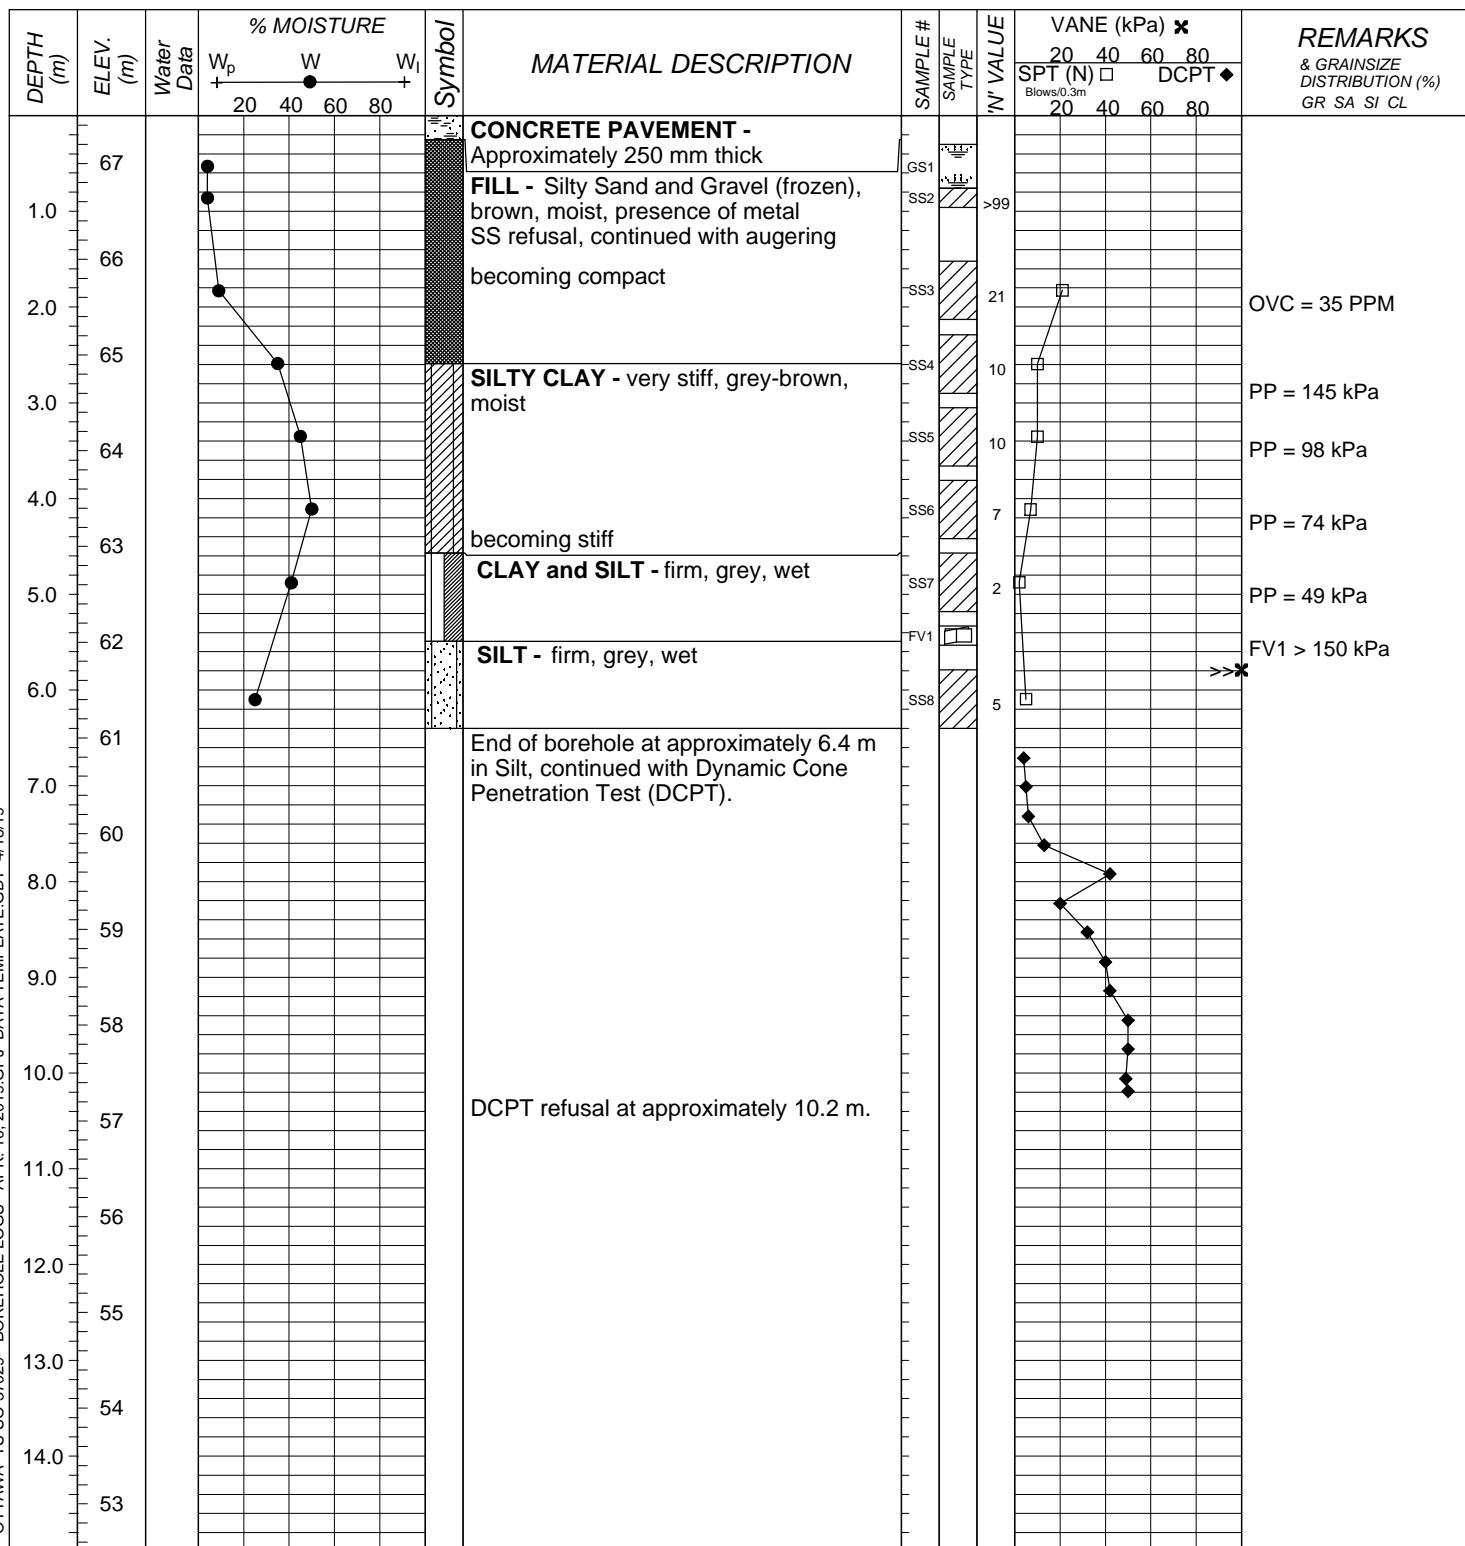

# LOG OF BOREHOLE BH19-08

DST REF. No.: TS-SO-037029  
 CLIENT: AIM Recycling Ottawa East  
 PROJECT: Limited Phase II Environmental Site Assessment  
 LOCATION: 2555 Sheffield Road, Ottawa, ON  
 SURFACE ELEV.: 67.60 metres

Drilling Data  
 METHOD: Hollow Stem Auger  
 DIAMETER: 200 mm  
 DATE: March 18, 2019  
 COORDINATES: 5030181m N, 374789m E

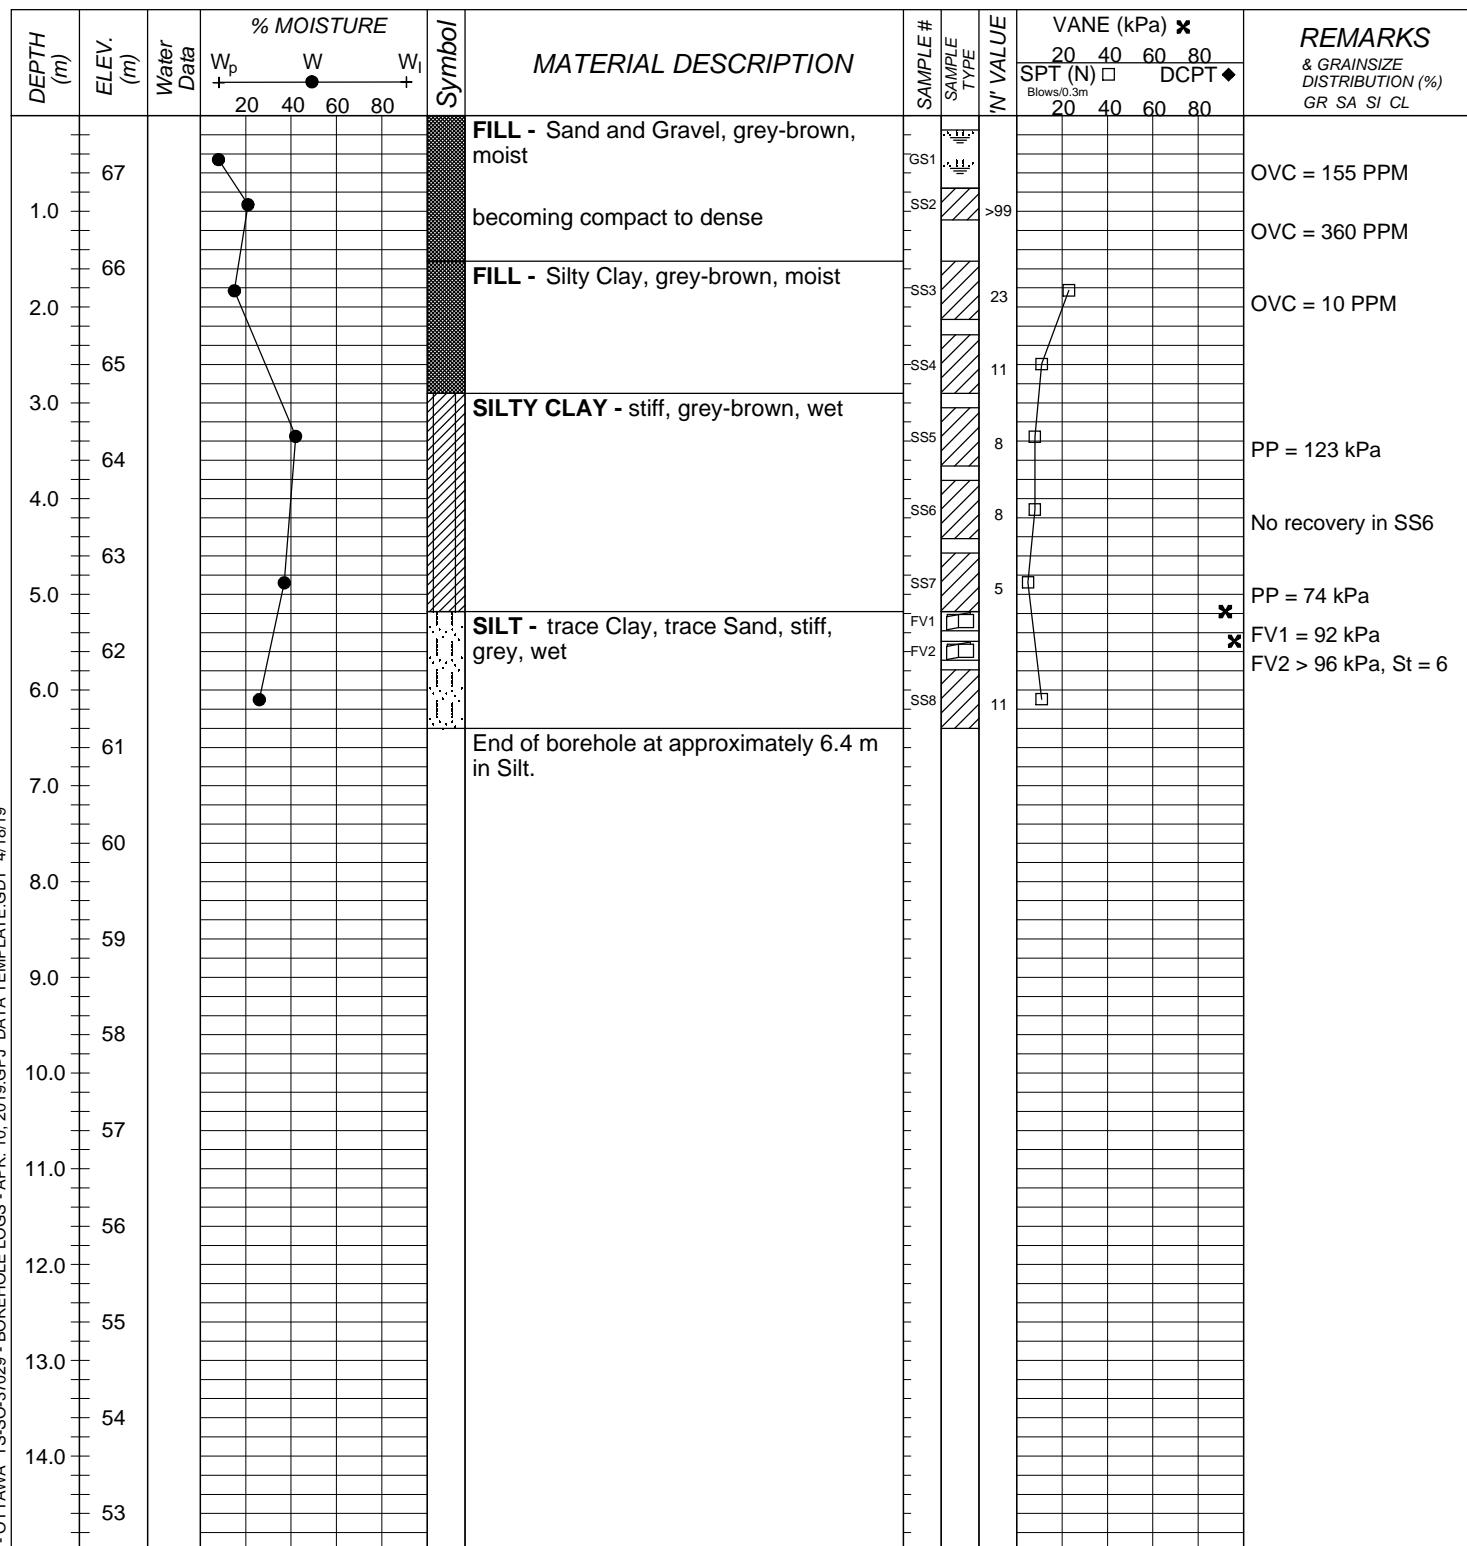

# LOG OF BOREHOLE BH19-10B

DST REF. No.: TS-SO-037029  
 CLIENT: AIM Recycling Ottawa East  
 PROJECT: Limited Phase II Environmental Site Assessment  
 LOCATION: 2555 Sheffield Road, Ottawa, ON  
 SURFACE ELEV.: 67.20 metres

Drilling Data  
 METHOD: Hollow Stem Auger  
 DIAMETER: 200 mm  
 DATE: March 18, 2019  
 COORDINATES: 5030211m N, 374808m E

DEPTH (m)	ELEV. (m)	Water Data	% MOISTURE	Symbol	MATERIAL DESCRIPTION	SAMPLE #	SAMPLE TYPE	N VALUE	VANE (kPa) X				REMARKS & GRAINSIZE DISTRIBUTION (%)
									20	40	60	80	
67			W <sub>p</sub> W W <sub>i</sub>	20 40 60 80									OVC = 35 PPM
1.0	66				FILL - Silty Sand and Gravel (frozen), grey-black, moist	GS1	Auger						
					SS refusal, continued with augering	SS2	Split Spoon	>99					OVC = 10 PPM
2.0	65				Auger refusal at 1.2 m in Fill.								
3.0	64												
4.0	63												
5.0	62												
6.0	61												
7.0	60												
8.0	59												
9.0	58												
10.0	57												
11.0	56												
12.0	55												
13.0	54												
14.0	53												

# LOG OF BOREHOLE BH19-11B

DST REF. No.: TS-SO-037029

CLIENT: AIM Recycling Ottawa East

PROJECT: Limited Phase II Environmental Site Assessment

LOCATION: 2555 Sheffield Road, Ottawa, ON

SURFACE ELEV.: 67.40 metres


## Drilling Data

METHOD: Hollow Stem Auger & Rock Coring

DIAMETER: 200 mm

DATE: March 20, 2019


COORDINATES: 5030191m N, 374808m E

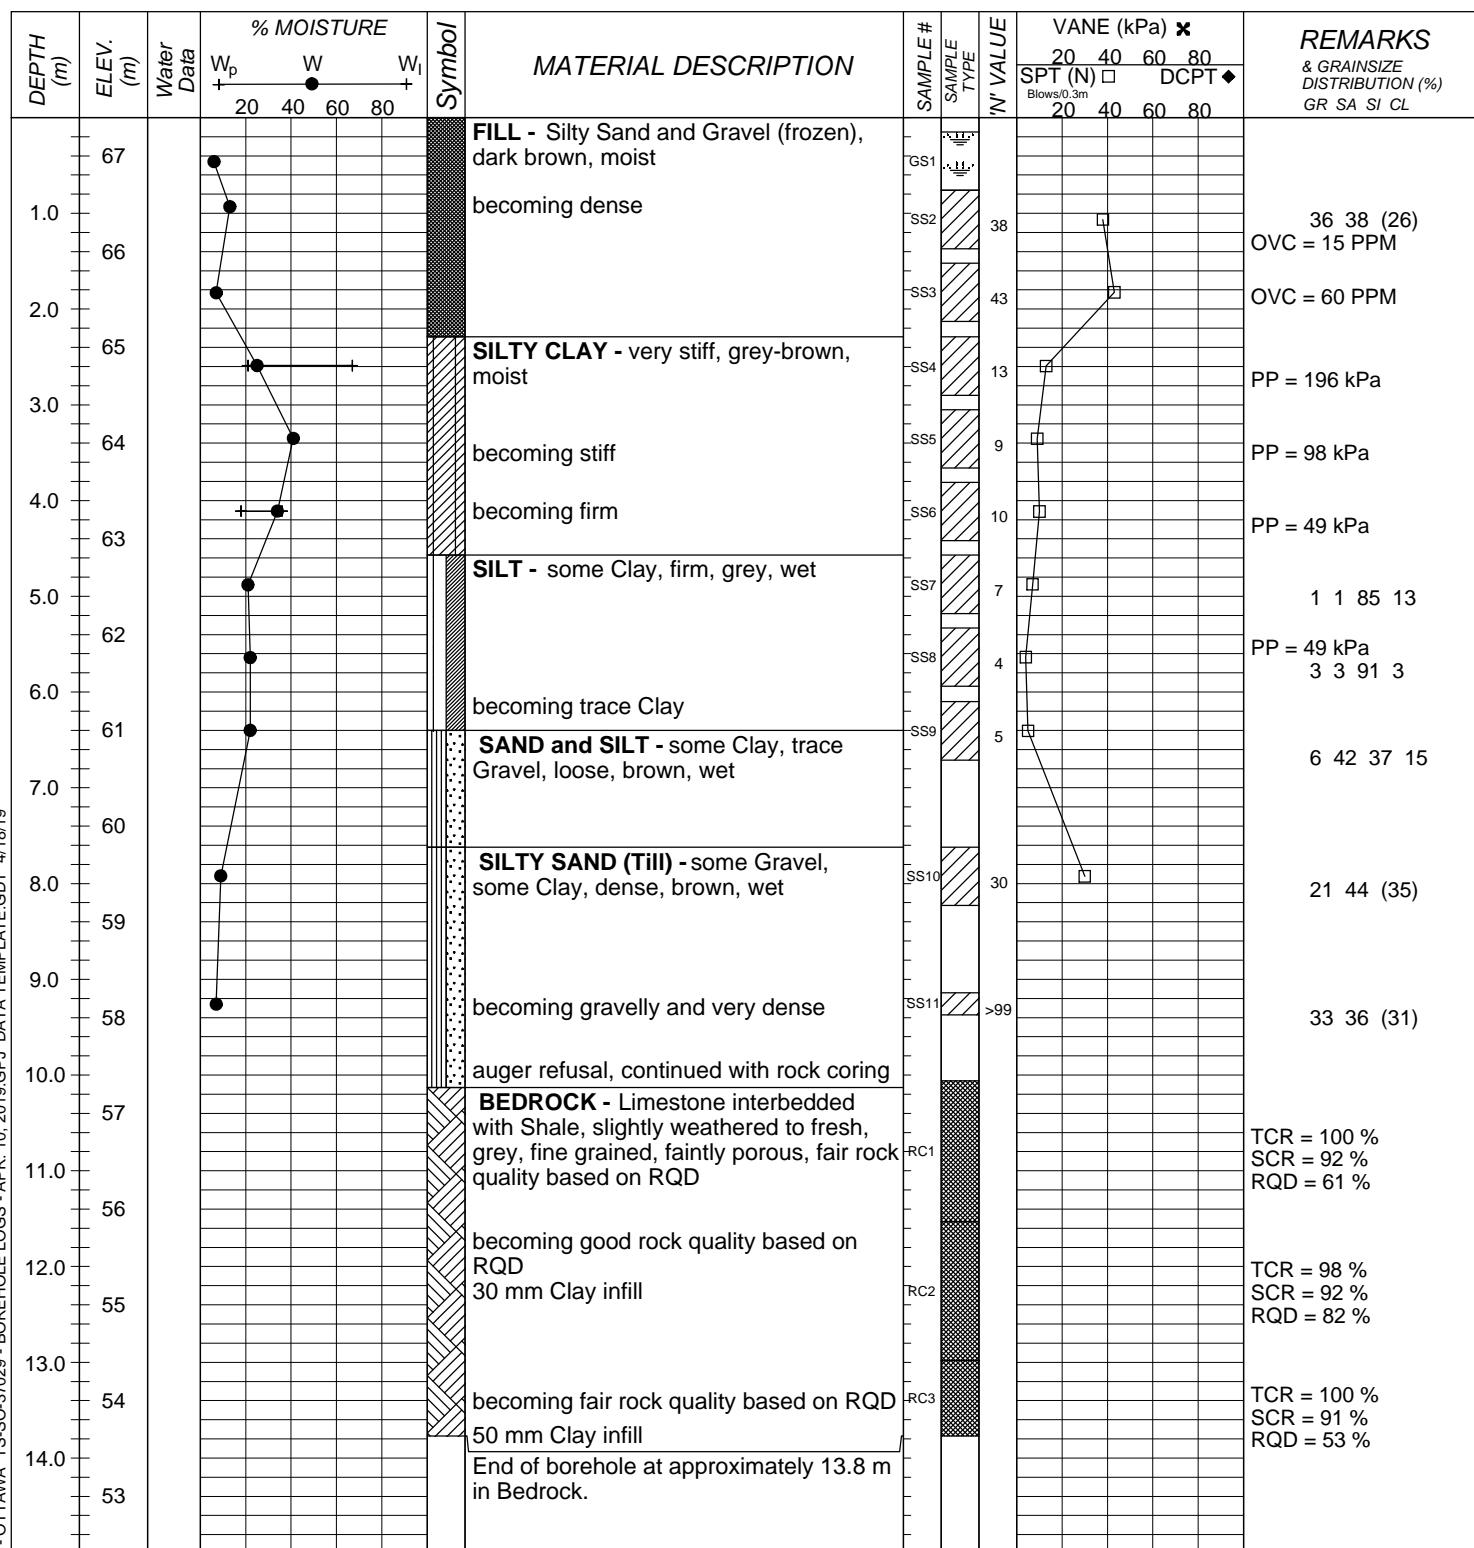

# LOG OF BOREHOLE BH19-12

DST REF. No.: TS-SO-037029  
 CLIENT: AIM Recycling Ottawa East  
 PROJECT: Limited Phase II Environmental Site Assessment  
 LOCATION: 2555 Sheffield Road, Ottawa, ON  
 SURFACE ELEV.: 67.60 metres


Drilling Data  
 METHOD: Hollow Stem Auger  
 DIAMETER: 200 mm  
 DATE: March 21, 2019  
 COORDINATES: 5030153m N, 374829m E

DEPTH (m)	ELEV. (m)	Water Data	% MOISTURE 	Symbol	MATERIAL DESCRIPTION	SAMPLE #	SAMPLE TYPE	'N' VALUE	VANE (kPa) X				REMARKS & GRAINSIZE DISTRIBUTION (%) GR SA SI CL
									20	40	60	80	
67.0	67.60				FILL - Silty Sand and Gravel (frozen), some cobbles, dark brown, moist, deleterious material (presence of metal)	GS1							OVC = 75 PPM
66.0					SS refusal, continued with augering	SS2		>99					OVC = 20 PPM
65.0					SS refusal, continued with augering	SS3		>99					OVC = 60 PPM
64.0					Auger refusal at 1.8 m in Fill.								
63.0													
62.0													
61.0													
7.0													
6.0													
5.0													
60.0													
59.0													
58.0													
57.0													
11.0													
56.0													
12.0													
55.0													
13.0													
54.0													
14.0													
53.0													

# LOG OF BOREHOLE BH19-13

DST REF. No.: TS-SO-037029  
 CLIENT: AIM Recycling Ottawa East  
 PROJECT: Limited Phase II Environmental Site Assessment  
 LOCATION: 2555 Sheffield Road, Ottawa, ON  
 SURFACE ELEV.: 67.70 metres

Drilling Data  
 METHOD: Hollow Stem Auger  
 DIAMETER: 200 mm  
 DATE: March 21, 2019  
 COORDINATES: 5030112m N, 374849m E

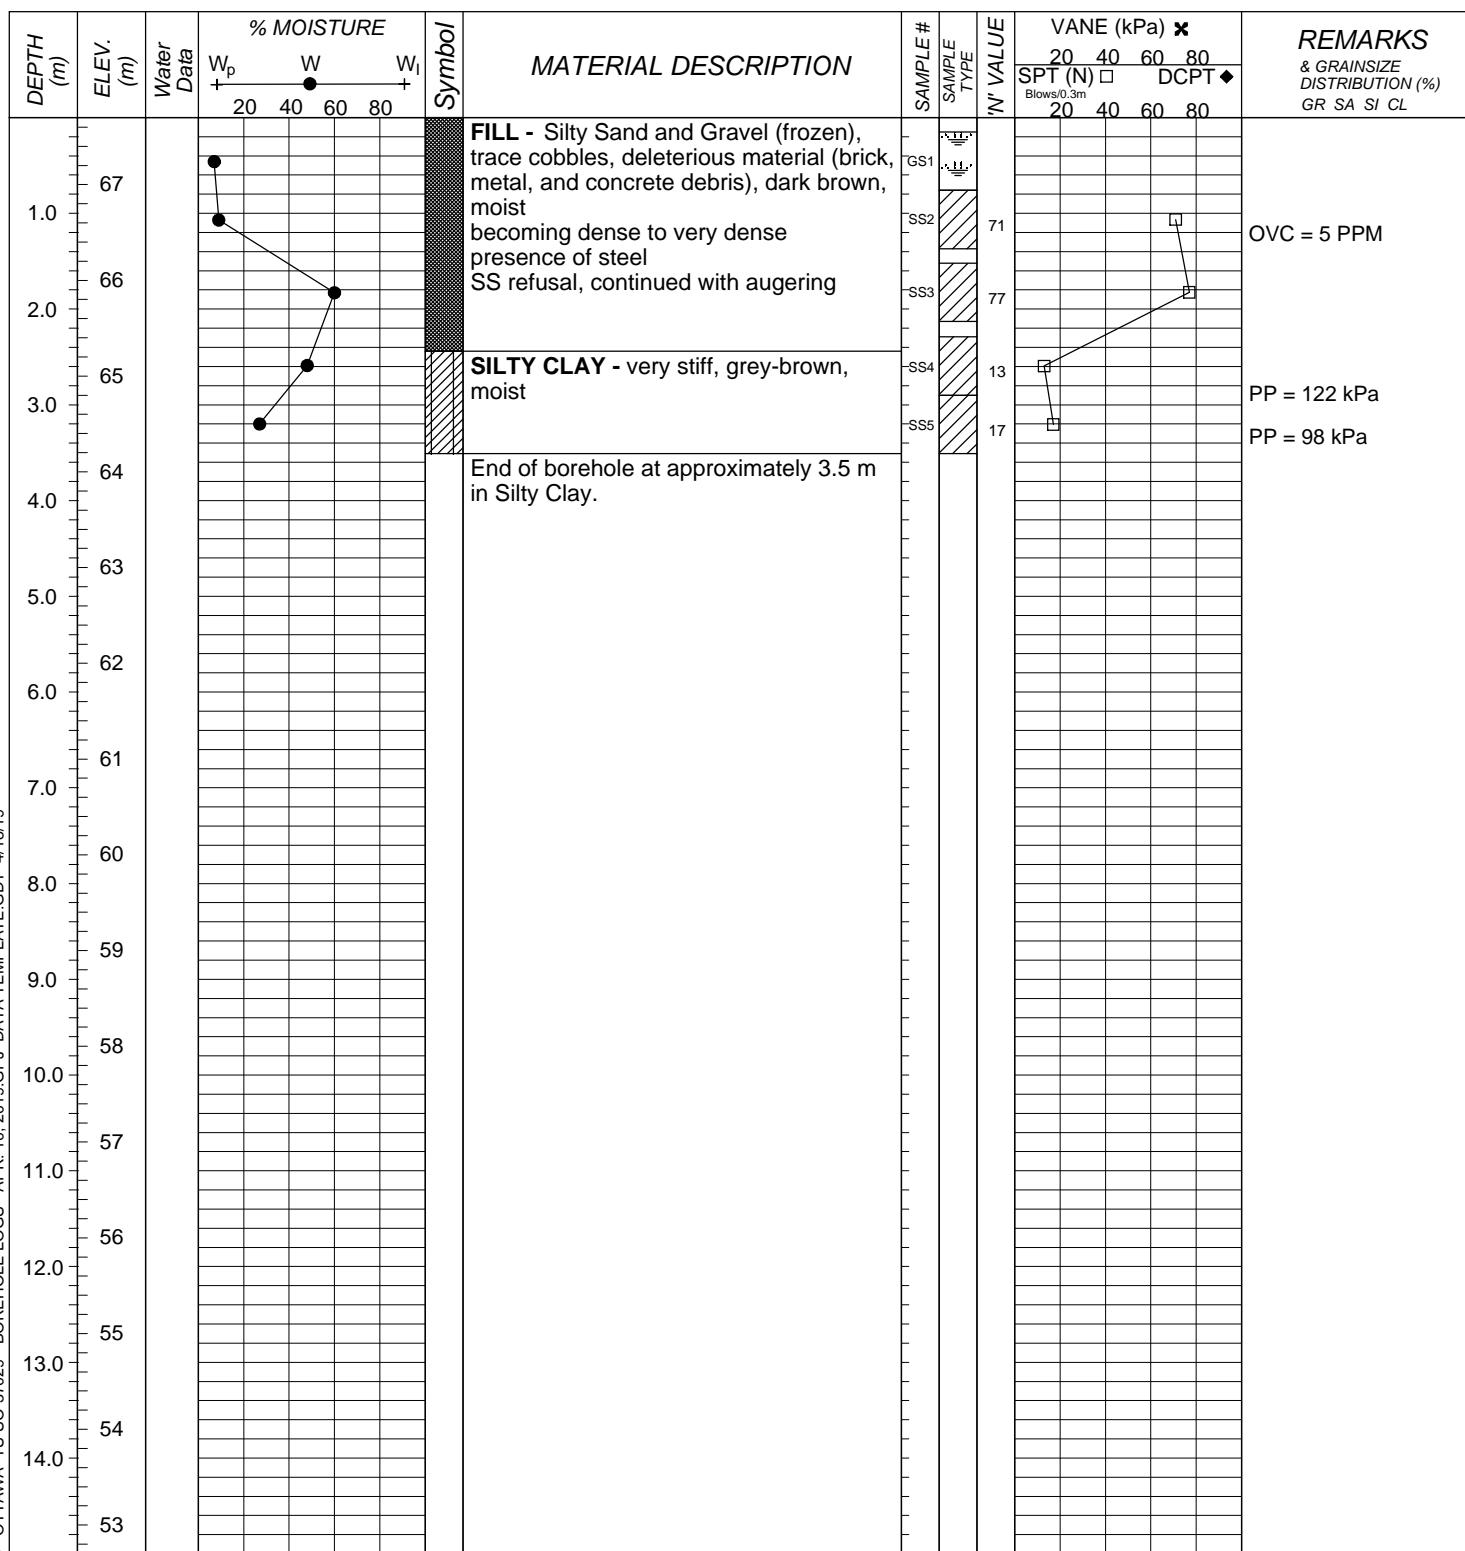

# LOG OF BOREHOLE BH19-14

DST REF. No.: **TS-SO-037029**  
 CLIENT: **AIM Recycling Ottawa East**  
 PROJECT: **Limited Phase II Environmental Site Assessment**  
 LOCATION: **2555 Sheffield Road, Ottawa, ON**  
 SURFACE ELEV.: **67.60 metres**

Drilling Data  
 METHOD: **Hollow Stem Auger**  
 DIAMETER: **200 mm**  
 DATE: **March 21, 2019**  
 COORDINATES: **5030113m N, 374810m E**

DEPTH (m)	ELEV. (m)	Water Data	% MOISTURE	Symbol	MATERIAL DESCRIPTION	SAMPLE #	SAMPLE TYPE	'N' VALUE	VANE (kPa) ×				REMARKS & GRAINSIZE DISTRIBUTION (%) GR SA SI CL
									20	40	60	80	
67			W <sub>p</sub> W      W <sub>f</sub>	●	FILL - Silty Sand and Gravel (frozen), cobbles, dark brown, moist, deleterious material (presence of bricks and metal) SS refusal, continued with augering	GS1	Auger						
66					Auger refusal at 1.2 m in Fill.	SS2	Auger	>99					
65													
64													
63													
62													
61													
7.0													
60													
8.0													
59													
9.0													
58													
10.0													
57													
11.0													
56													
12.0													
55													
13.0													
54													
14.0													
53													

# LOG OF BOREHOLE BH19-15

DST REF. No.: TS-SO-037029  
 CLIENT: AIM Recycling Ottawa East  
 PROJECT: Limited Phase II Environmental Site Assessment  
 LOCATION: 2555 Sheffield Road, Ottawa, ON  
 SURFACE ELEV.: 67.00 metres


Drilling Data  
 METHOD: Hollow Stem Auger  
 DIAMETER: 200 mm  
 DATE: March 21, 2019  
 COORDINATES: 5030128m N, 374659m E

DEPTH (m)	ELEV. (m)	Water Data	% MOISTURE	Symbol	MATERIAL DESCRIPTION	SAMPLE #	SAMPLE TYPE	'N' VALUE	VANE (kPa) X				REMARKS & GRAINSIZE DISTRIBUTION (%) GR SA SI CL
									20	40	60	80	
20	40	60	80										
1.0	66				ASPHALT - Approximately 40 mm thick	GS1	Auger						
					FILL - Silty Sand and Gravel (frozen), brown, damp	SS2	Split Spoon	21					
					SILTY CLAY - very stiff, grey-brown, moist	SS3	Split Spoon	10					
					End of borehole at approximately 2.1 m in Silty Clay.								PP = 145 kPa
3.0	64												
4.0	63												
5.0	62												
6.0	61												
7.0	60												
8.0	59												
9.0	58												
10.0	57												
11.0	56												
12.0	55												
13.0	54												
14.0	53												

# LOG OF BOREHOLE MW19-04

DST REF. No.: TS-SO-037029  
 CLIENT: AIM Recycling Ottawa East  
 PROJECT: Limited Phase II Environmental Site Assessment  
 LOCATION: 2555 Sheffield Road, Ottawa, ON  
 SURFACE ELEV.: 67.30 metres


Drilling Data  
 METHOD: Hollow Stem Auger  
 DIAMETER: 200 mm  
 DATE: March 21, 2019  
 COORDINATES: 5030100m N, 374737m E

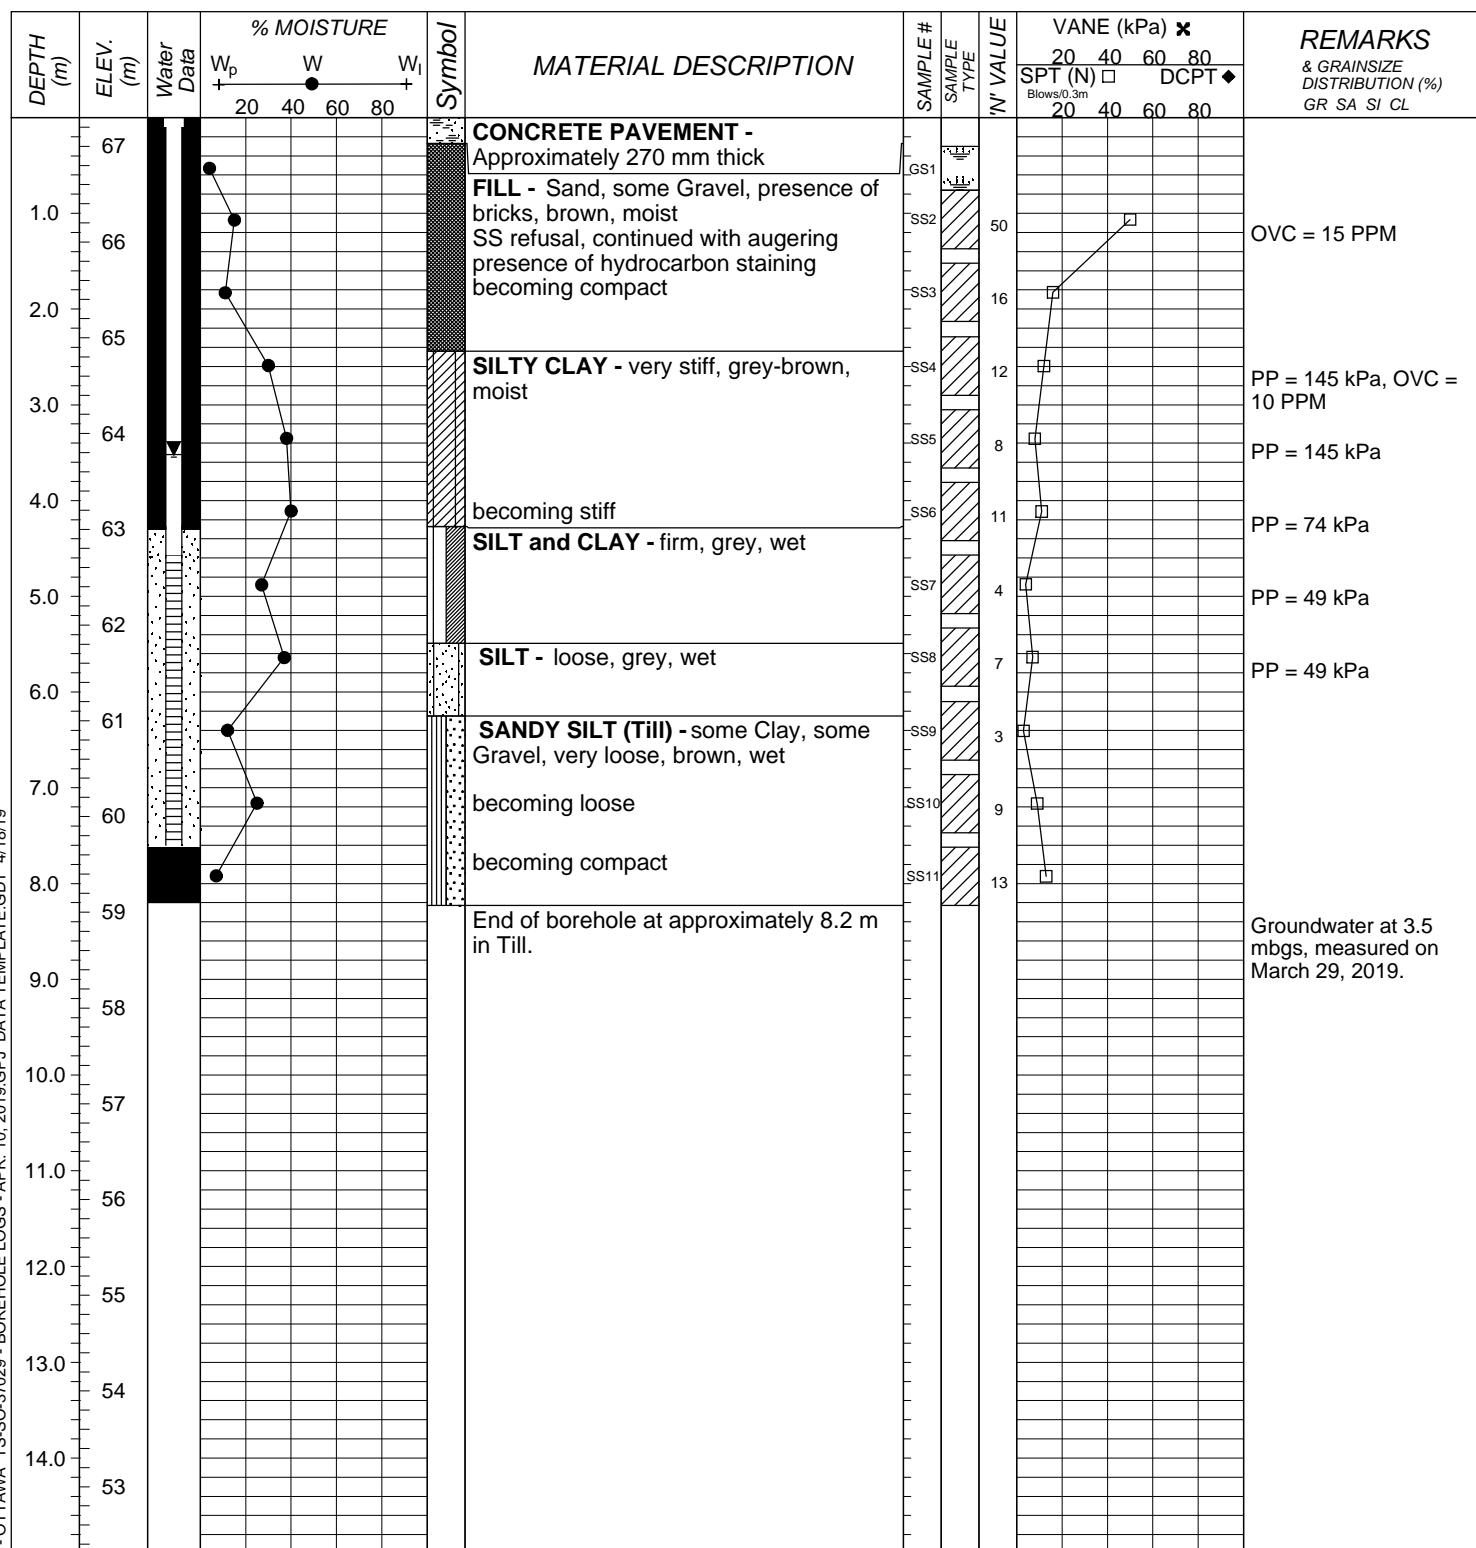

# LOG OF BOREHOLE MW19-06

DST REF. No.: TS-SO-037029  
 CLIENT: AIM Recycling Ottawa East  
 PROJECT: Limited Phase II Environmental Site Assessment  
 LOCATION: 2555 Sheffield Road, Ottawa, ON  
 SURFACE ELEV.: 67.00 metres

Drilling Data  
 METHOD: Hollow Stem Auger  
 DIAMETER: 200 mm  
 DATE: March 19, 2019  
 COORDINATES: 5030034m N, 374806m E

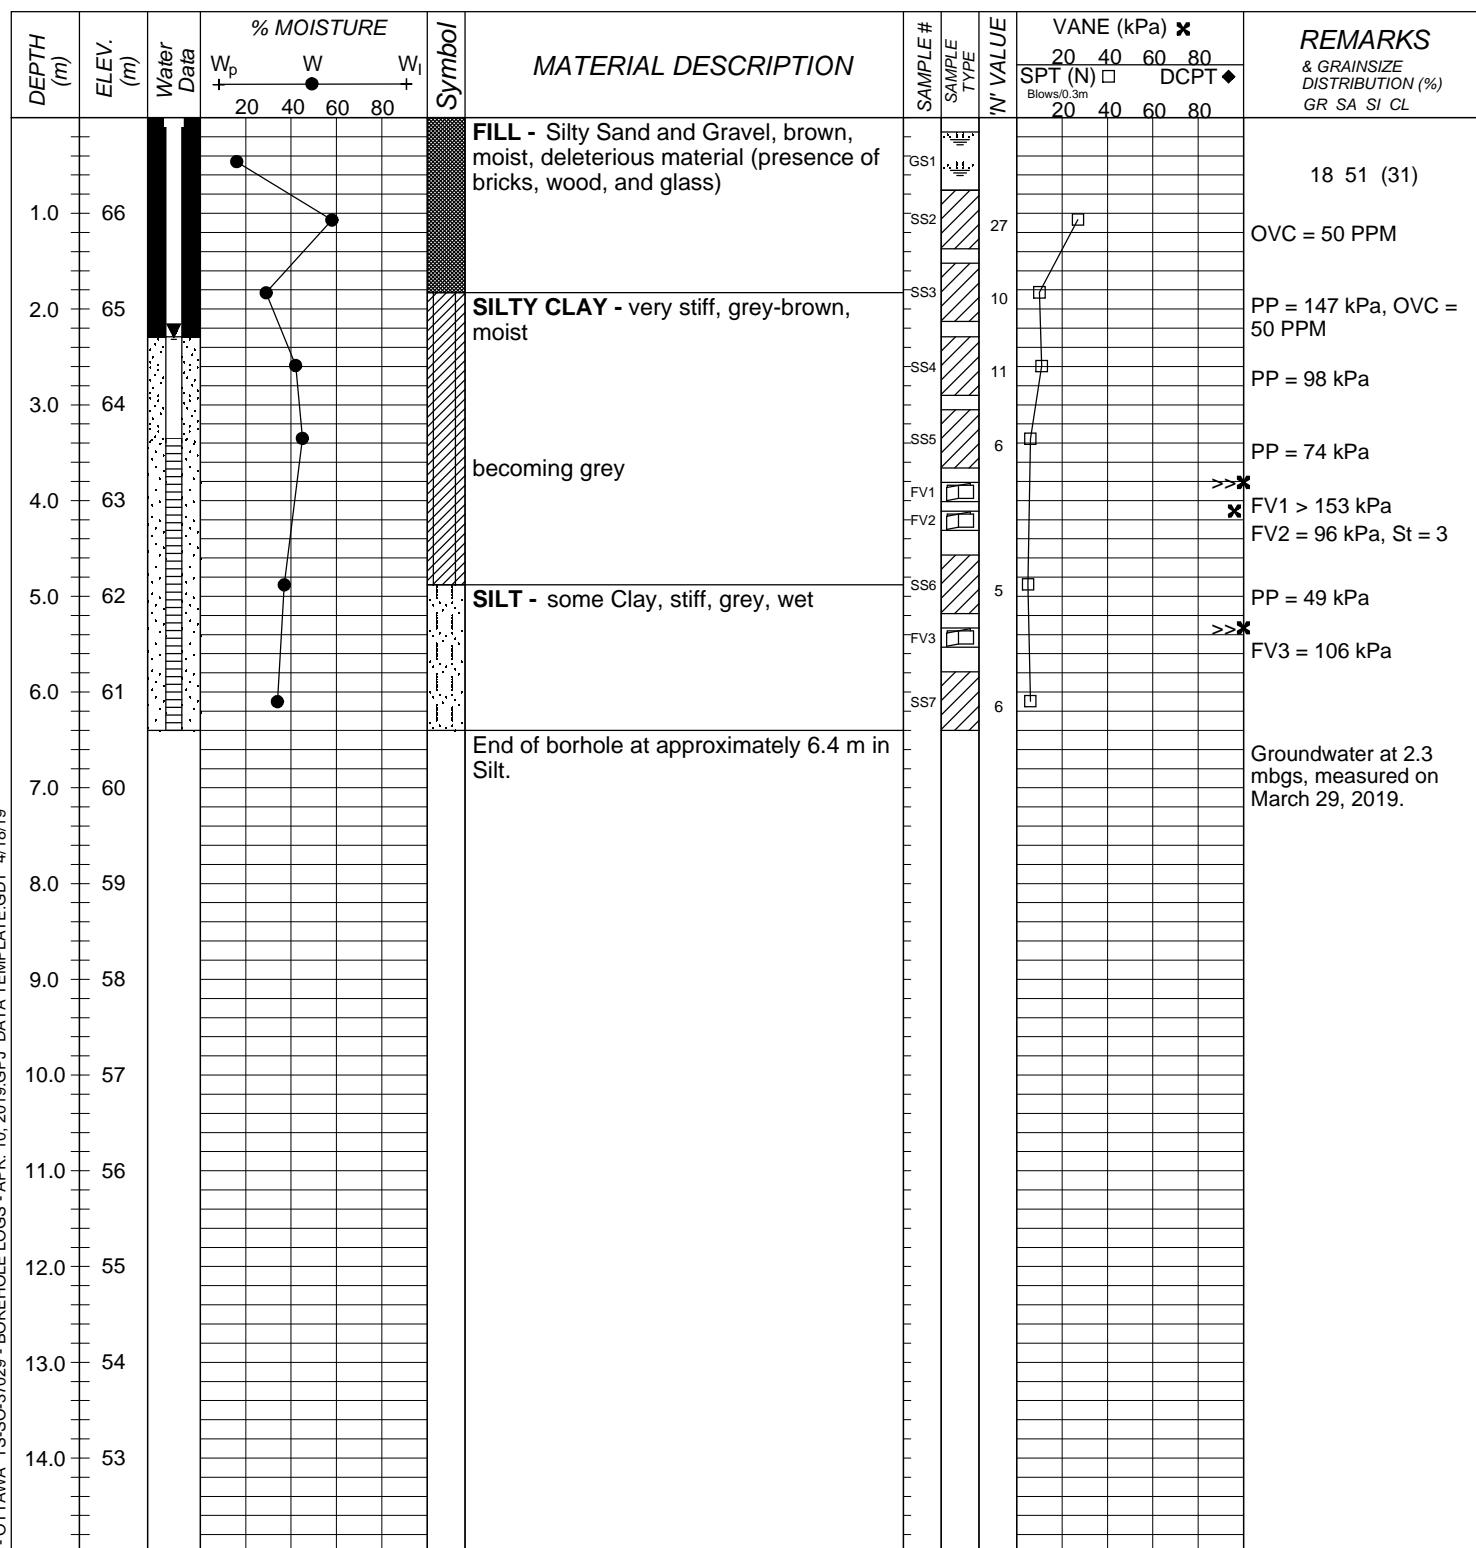

# LOG OF BOREHOLE MW19-09

DST REF. No.: TS-SO-037029

CLIENT: AIM Recycling Ottawa East

PROJECT: Limited Phase II Environmental Site Assessment

LOCATION: 2555 Sheffield Road, Ottawa, ON

SURFACE ELEV.: 67.30 metres


## Drilling Data

METHOD: Hollow Stem Auger

DIAMETER: 200 mm

DATE: March 18, 2019

COORDINATES: 5030200m N, 374780m E

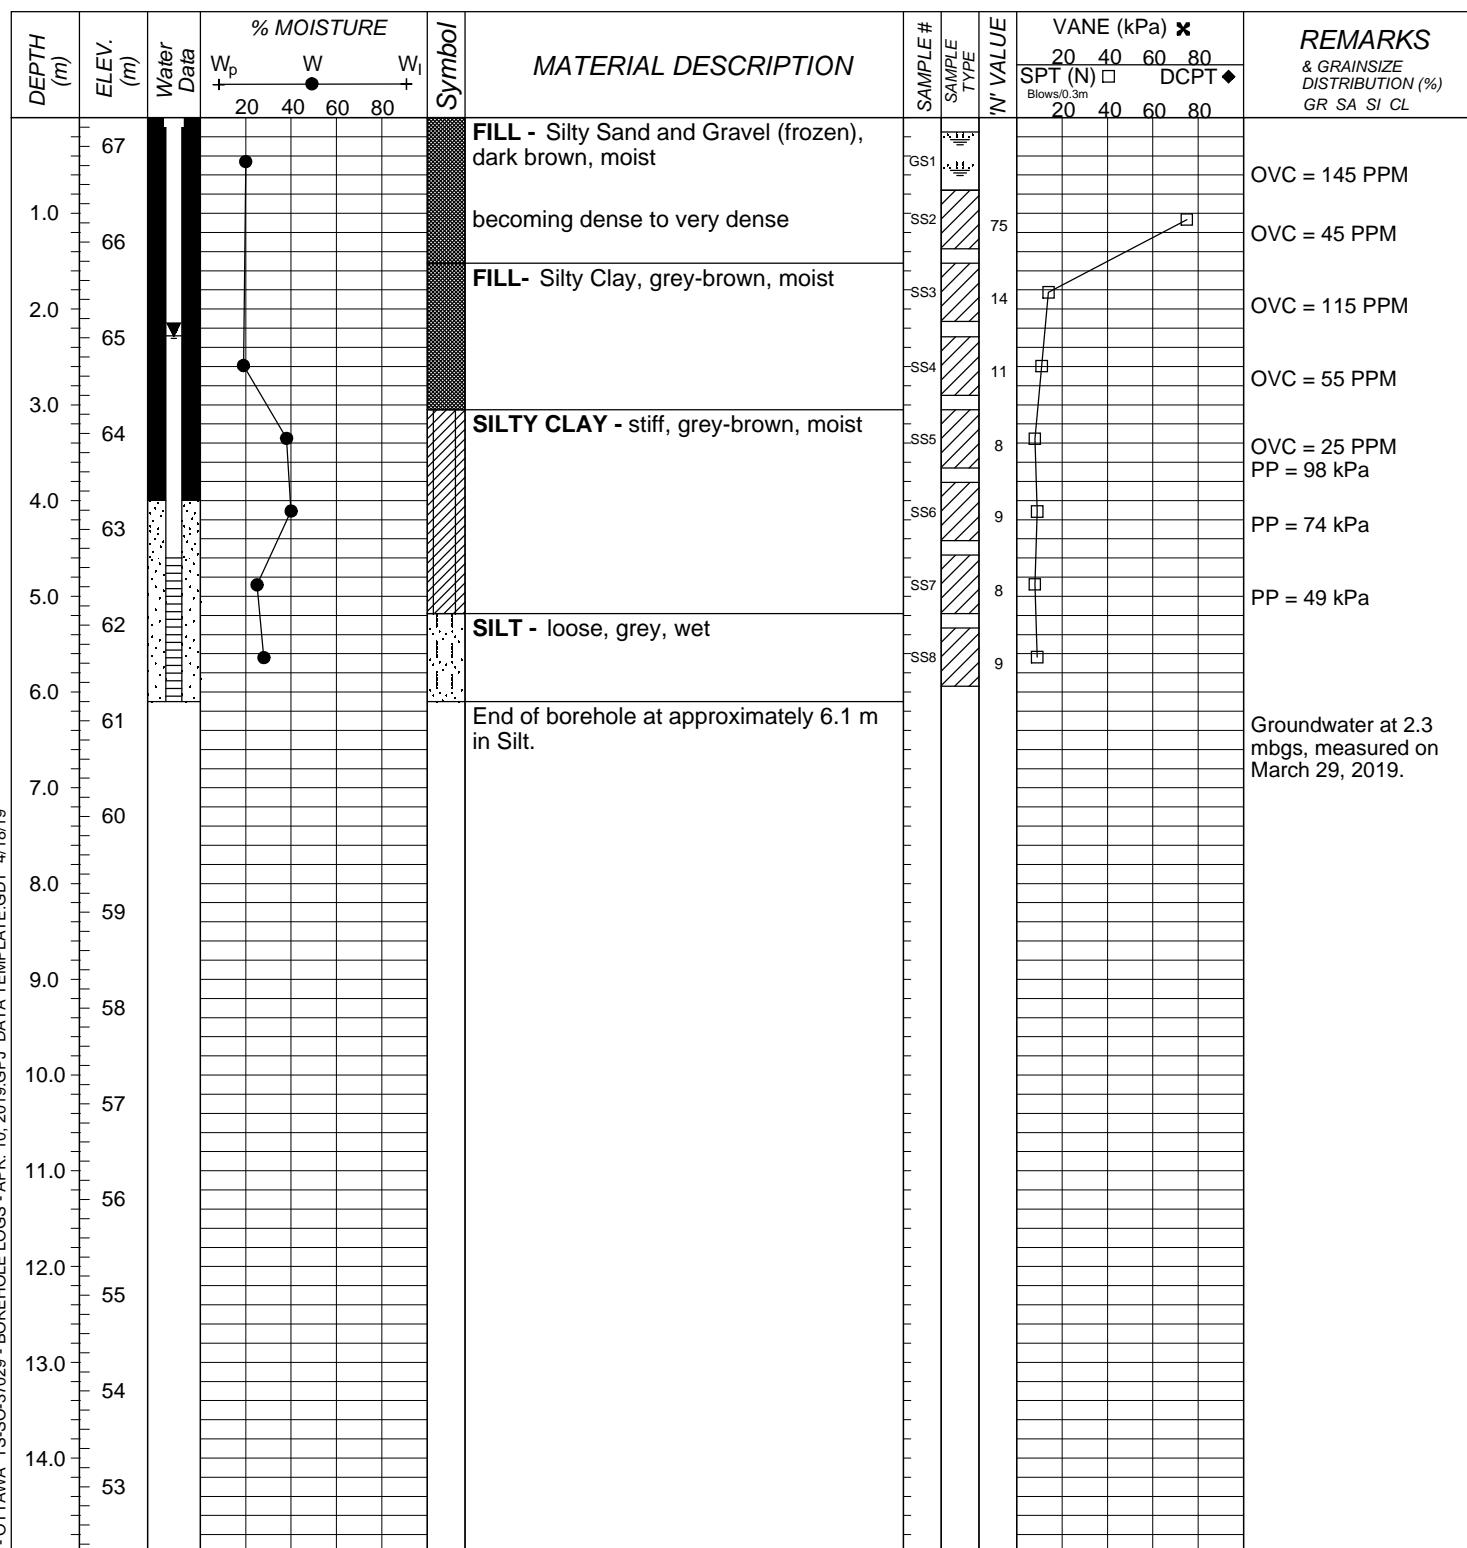

Page 1 of 1 **BHMW20-1**

DST Project No. **01937029.001**  
 Client **AIM Recycling Ottawa East**  
 Project **Phase II ESA Update**  
 Address **2555 Sheffield Road, Ottawa, ON**

Date **March 4, 2020**  
 Method **Direct Push**  
 Diameter **114 mm**  
 Coordinates **5028411.2 m N, 452429 m E**  
 Surface Elevation **66.58 m**

Depth (m)	Elevation (m)	Water level (m)	Well construction	Depth (m) Elevation (m)	Symbol	Material Description	Sample #	CCGD / PID Reading		Analysis		Remarks
								Sample Type	% Samp. Recov	CCGD	PID	
0.2	66.58			0 66.58		SANDY SILT - grass & organics	1		100	0 ppm	0 ppm	
0.2	66.38			0.2 66.38		SILTY CLAY - brown	2		100	0 ppm	1 ppm	
1.5	65.08					- softening	3		100	0 ppm	1 ppm	
2.4	64.20						4		100	0 ppm	0 ppm	
2.8							5		100	0 ppm	0 ppm	
3.4	63.23			3.35 63.23		- grey						
3.8	62.78			3.8 62.78		CLAYEY SILT - soft, some dark brown, organic seams	6		100	0 ppm	1 ppm	
4.6	61.98			4.6 61.98		SANDY SILT - trace clay, some gravel, brown to dark brown	7		100	0 ppm	0 ppm	
4.9	61.68			4.9 61.68		- very dark brown						
5.4	61.18			5.4 61.18		- wet, soft	8		100	0 ppm	0 ppm	
5.9	60.68			5.9 60.68		- some cobbles						
6.2						End of Borehole at 6.10 m.						
6.6												
7.0												
7.4												
7.6	59											

# Page 1 of 1 BHMW20-2


DST Project No. 01937029.001  
 Client AIM Recycling Ottawa East  
 Project Phase II ESA Update  
 Address 2555 Sheffield Road, Ottawa, ON

Date March 4, 2020  
 Method Direct Push  
 Diameter 114 mm  
 Coordinates 5028429.8 m N, 452665.6 m E  
 Surface Elevation 66.75 m

Depth (m)	Elevation (m)	Water level (m)	Well construction	Depth (m) Elevation (m)	Symbol	Material Description	Sample #	Sample Type	CCGD / PID Reading		Analysis				Remarks	
									% Samp. Recov	CCGD	PID	PAHs	PHCs	Metals	VOCs	
0.2				0 66.75	△	SAND & GRAVEL - FILL - some silty sand, debris (metal, glass), moist	1	Shaded	60 ppm	1 ppm						
0.4				0.8 65.95	△	- trace asphalt, dark grey/black, dry	2	Shaded	0 ppm	2 ppm						
0.6				1.5 65.25	△	- coarse, debris (glass, metal, brick), dark grey/black	3	Shaded	0 ppm	2 ppm						
0.8				2.8 63.95	△	SILTY CLAY - very stiff, trace gravel, dark grey/black	4	Shaded	0 ppm	2 ppm					✓	
1.0				3.1 63.65	△	- with sand, grey, moist	5	Shaded	0 ppm	0 ppm						
1.2				3.8 62.95	△	- trace gravel, soft, grey	6	Shaded	0 ppm	1 ppm						
1.4				4.6 62.15	△	- with sand, some debris (brick), some organics, soft, moist	7	Shaded	920 ppm	1 ppm					✓	
1.6				5.5 61.25	△	- trace gravel, grey	8	Shaded	0 ppm	0 ppm						
1.8				5.8 60.95	△	SILT - some organics, brown										
2.0				6.0		End of Borehole at 6.10 m.										
2.2				6.2												
2.4				6.4												
2.6				6.6												
2.8				6.8												
3.0				7.0												
3.2				7.2												
3.4				7.4												
3.6				7.6												
3.8				59												
4.0																
4.2																
4.4																
4.6																
4.8																
5.0																
5.2																
5.4																
5.6																
5.8																
6.0																
6.2																
6.4																
6.6																
6.8																
7.0																
7.2																
7.4																
7.6																
59																

# BH20-3

Page 1 of 1

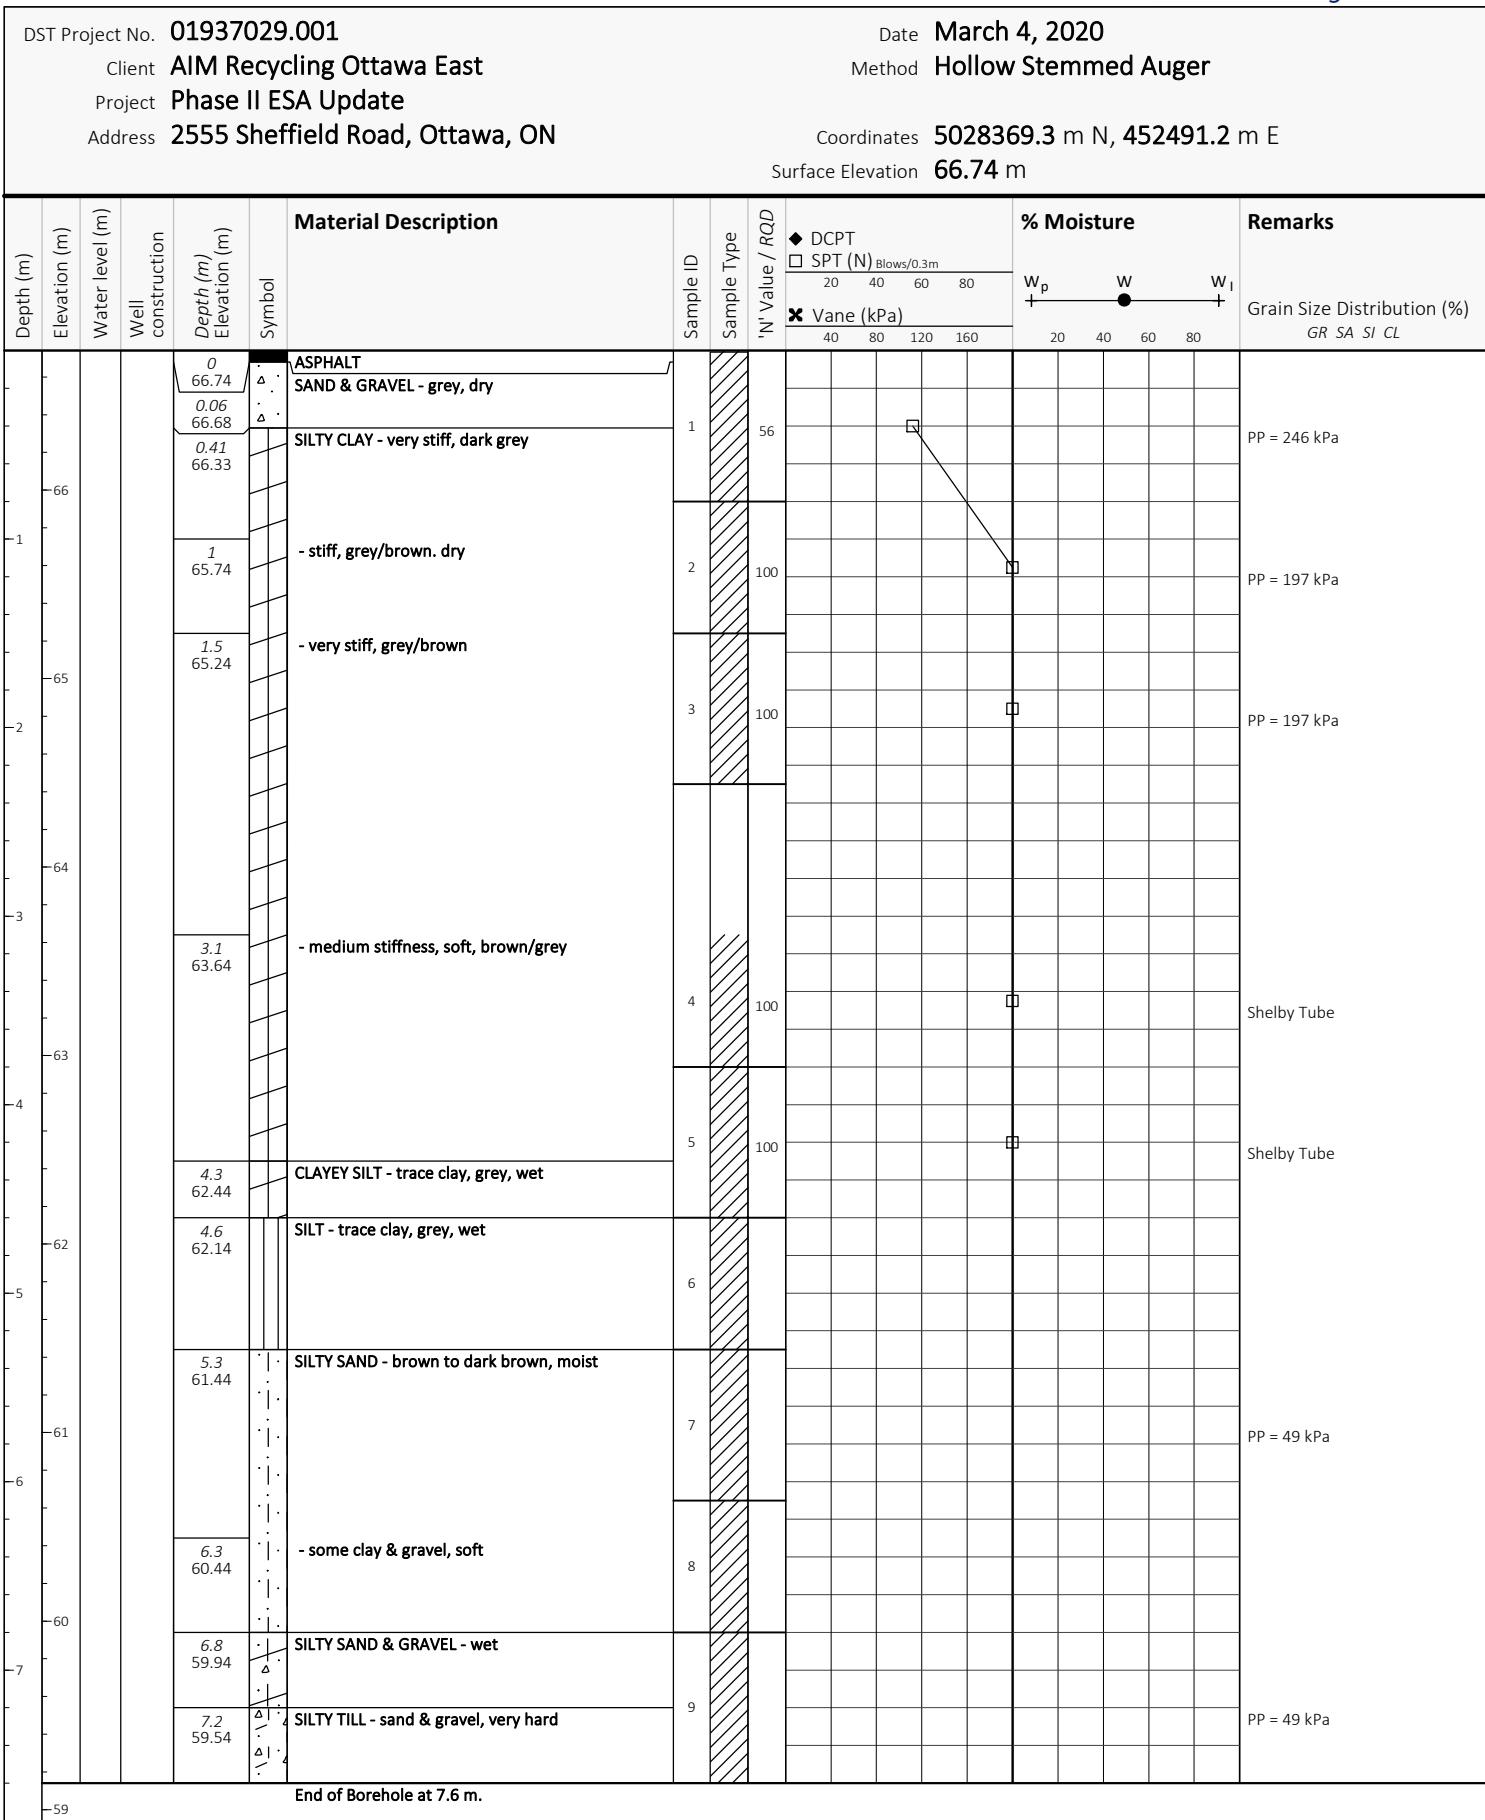

Phase II Environmental Site Assessment  
AIM Recycling Ottawa East  
2555 Sheffield Road, Ottawa, Ontario  
DST File No.: 019037029.001

---

## **APPENDIX D**

### **Laboratory Analytical Results**

TABLE D-1: SOIL ANALYTICAL RESULTS - HYDROCARBONS

Parameter Description	Standards	Standards	Analytical Results (µg/g) Sampling ID / Sampling Date / Depth Interval (m)														
	MOECC Table 1 <sup>(1)</sup>	MOECC Table 3 <sup>(1)</sup>	BH19-1 SS#1	BH19-2 SS#2	BH19-3 SS#2	BH19-4 SS#2	BH19-5 SS#1	BH19-6 SS#2	BH19-7 SS#4	BH19-8 SS#4	BH19-9 SS#4	BH19-10B SS#2	BH19-11B SS#3	BH19-12 SS#2	BH19-13 SS#2	BH19-14 GS#1	BH19-15 GS#1
			19/Mar/19	19/Mar/19	19/Mar/19	21/Mar/19	20/Mar/19	19/Mar/19	21/Mar/19	18/Mar/19	18/Mar/19	18/Mar/19	20/Mar/19	21/Mar/19	21/Mar/19	21/Mar/19	21/Mar/19
<b>BTEX</b>																	
Benzene	0.02	0.4	ND (0.02)	ND (0.02)	ND (0.02)	ND (0.02)	ND (0.02)	ND (0.02)	ND (0.02)	ND (0.02)	ND (0.02)	ND (0.02)	ND (0.02)	ND (0.02)	ND (0.02)	ND (0.02)	ND (0.02)
Toluene	0.2	78	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.14)	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)
Ethylbenzene	0.05	19	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.16)	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)
m,p-Xylene	NG	NG	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)	0.33	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)
o-Xylene	NG	NG	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)	0.22	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)
Xylenes, total	0.05	30	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.55)	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)
<b>PHCs</b>																	
F1 PHCs (C6-C10)	25	65	ND (7)	ND (7)	ND (7)	ND (7)	ND (7)	ND (7)	ND (7)	ND (7)	ND (7)	ND (7)	96	ND (7)	ND (7)	ND (7)	ND (7)
F2 PHCs (C10-C16)	10	250	ND (4)	ND (4)	ND (4)	9	ND (4)	ND (40)	ND (4)	ND (4)	ND (4)	ND (4)	265	81	829	65	121
F3 PHCs (C16-C34)	240	2500	ND (8)	28	ND (8)	193	22	1020	95	ND (8)	44	1630	1210	2970	2810	895	341
F4 PHCs (C34-C50)	120	6600	ND (6)	ND (6)	ND (6)	55	28	67	24	ND (6)	21	1230	452	1340	1610	358	415

**Notes:**

(1) Ministry of the Environment, Conservation and Parks (MECP), "Soil, Ground Water and Sediment Standards for Use Under Part XV.1 of the Environmental Protection Act", July 1, 2011. Table 3: Full Depth Generic Site Condition Standards in a Non-Potable Groundwater Condition, Industrial/Commercial/Community Property Use. Fine textured soils.

'NG' indicates that there is no guideline value under MECP Table 3.

All units are expressed in micrograms per gram (µg/g), unless otherwise specified.

'ND' indicates that a value is below the laboratory detection limit (value indicated).

Value 'Indicates that a value exceeds MECP Table 3 standards.

Value 'Indicates that a value exceeds MECP Table 1 standards.

TABLE D-2: SOIL ANALYTICAL RESULTS - VOLATILE ORGANIC COMPOUNDS (VOCs)

**Notes:**  
(1) Ministry of the Environment, Conservation and Parks (MECP), "Soil, Ground Water and Sediment Standards for Use Under Part XV.1 of the Environmental Protection Act," July 1, 2011. Table 3: Full Depth Generic Site Condition Standards in a Non-Potable Groundwater Condition. Industrial/Commercial/Community Property Use.

INCL indicates that there is no guideline value under MECR Table 3.

All units are expressed in micrograms per gram ( $\mu\text{g/g}$ ), unless otherwise specified.

All units are expressed in micrograms per gram (µg/g), unless otherwise specified.  
'ND' indicates that a value is below the laboratory detection limit (value indicated).

**Value** *Indicates that a value exceeds MECP Table 3 standards.*

**Value** Indicates that a value exceeds MECR Table 3 standards.

TABLE D-3: SOIL ANALYTICAL RESULTS - Metals

Parameter Description	Standards	Standards	Analytical Results ( $\mu\text{g/g}$ )															
			Sampling ID / Sampling Date / Depth Interval (m)															
	MECP Table 1 <sup>(1)</sup>	MECP Table 3 <sup>(1)</sup>	BH19-1 SS#5	BH19-2 SS#2	BH19-3 SS#2	BH19-4 SS#2	BH19-5 SS#1	BH19-6 SS#2	BH19-7 SS#4	BH19-8 SS#4	BH19-9 SS#4	BH19-10B SS#2	BH19-11B SS#3	BH19-12 SS#2	BH19-13 SS#2	BH19-14 GS#1	BH19-15 GS#1	
			19/Mar/19	19/Mar/19	19/Mar/19	21/Mar/19	20/Mar/19	19/Mar/19	21/Mar/19	18/Mar/19	18/Mar/19	18/Mar/19	20/Mar/19	21/Mar/19	21/Mar/19	21/Mar/19	21/Mar/19	
			3.8 - 4.4	0.8 - 1.4	0.8 - 1.4	0.8 - 1.4	0.8 - 1.4	0.8 - 1.4	2.3 - 2.9	2.3 - 2.9	0.8 - 1.2	1.5 - 2.1	0.8 - 1.4	0.8 - 1.4	0.2 - 0.6	0.2 - 0.6		
Chromium (VI)	0.66	10.0	ND (0.2)	ND (0.2)	ND (0.2)	ND (0.2)	ND (0.2)	ND (0.2)	ND (0.2)	ND (0.2)	ND (0.2)	ND (0.2)	ND (0.2)	ND (0.2)	ND (0.2)	ND (0.2)	ND (0.2)	
Mercury	0.27	3.9	ND (0.1)	ND (0.1)	ND (0.1)	0.2	ND (0.1)	1.1	ND (0.1)	ND (0.1)	ND (0.1)	1.6	1.4	0.9	0.7	1.1	ND (0.1)	
Antimony	1.3	50	ND (1.0)	ND (1.0)	ND (1.0)	1.1	ND (1.0)	8.8	2.1	ND (1.0)	ND (1.0)	2.1	8.1	11.2	7.3	6.0	1.9	
Arsenic	18	18.0	1.70	4.50	2.70	5.00	3.20	12.90	4.50	2.90	3.50	7.4	9.70	13.1	10.70	11.70	6.10	
Barium	220	670	150	239	161	272	151	490	306	105	328	114	490	557	374	116	200	
Beryllium	2.5	10.0	ND (0.5)	0.9	0.6	ND (0.5)	0.7	ND (0.5)	1.0	0.6	0.9	ND (0.5)	ND (0.5)	0.6	0.5	ND (0.5)	ND (0.5)	
Boron	36	120	5.3	11.4	6.2	14.7	9.6	26.4	10.8	11.6	6.8	24.6	31.1	59.2	27.6	17.3	9.4	
Cadmium	1.2	1.9	ND (0.5)	1.2	ND (0.5)	0.5	ND (0.5)	8.6	0.7	ND (0.5)	ND (0.5)	1.6	5.2	10.5	5.5	1.8	5.0	
Chromium	70	160	31.0	64.8	43.5	29.3	53.3	69.0	90.8	50.2	91.6	47.3	62.7	96.1	89.7	61.5	24.9	
Cobalt	21	100	7.8	17.0	11.3	14.7	12.3	13.7	19.0	10.1	20.3	8.8	10.8	17.3	12.8	10.8	7.3	
Copper	92	300	16.9	59.3	23.9	86.8	17.1	249	55.2	22.7	49.1	323	477	510	582	130	50.9	
Lead	120	120	4.4	24.3	7.2	91.1	8.1	485	162	8.5	12.5	135	591	681	517	237	112	
Molybdenum	2.0	40	ND (1.0)	4.3	ND (1.0)	2.6	ND (1.0)	9.5	1.1	ND (1.0)	ND (1.0)	9.3	10.5	13.1	16.0	8.0	2.2	
Nickel	82	340	16.2	35.4	24.3	19.0	24.7	226	52.7	25.7	47.9	48.7	96.2	122	104	43.6	38.7	
Selenium	1.5	5.5	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)	
Silver	0.5	50	ND (0.3)	ND (0.3)	ND (0.3)	ND (0.3)	1.3	ND (0.3)	1.5	0.7	5.6	1.0	0.4	ND (0.3)				
Thallium	1.0	3.3	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)	
Uranium	2.5	33	1.1	ND (1.0)	ND (1.0)	ND (1.0)	1.1	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)					
Vanadium	86	86	45.6	68.7	54.8	24.8	58.6	44.20	93.40	51.3	98.7	26.0	32.4	50.7	49.6	17.4	20.8	
Zinc	290	340	44.3	165	69.0	201	86.9	4140	291	78.7	176	579	1850	3740	1980	681	618	

**Notes:**

(1) Ministry of the Environment, Conservation and Parks (MECP), "Soil, Ground Water and Sediment Standards for Use Under Part XV.1 of the Environmental Protection Act", July 1, 2011. Table 3: Full Depth Generic Site Condition Standards in a Non-Potable Groundwater Condition, Industrial/Commercial/Community Property Use, Fine textured soils.

'NG' indicates that there is no guideline value under MECP Table 3.

All units are expressed in micrograms per gram ( $\mu\text{g/g}$ ), unless otherwise specified.

'ND' indicates that a value is below the laboratory detection limit (value indicated).

**Value** | Indicates that a value exceeds MECP Table 3 standards.

**Value** | Indicates that a value exceeds MECP Table 1 standards.

TABLE D-4: GROUNDWATER ANALYTICAL RESULTS - VOLATILE ORGANIC COMPOUNDS (VOCs)

Parameter Description	Standards	Standards	Analytical Results ( $\mu\text{g/L}$ ) (Sampling ID / Sampling Date)							
	MOECC Table 1 <sup>(1)</sup>	MOECC Table 3 <sup>(1)</sup>	MW19-4	MW19-6	MW19-9	MW19-9 (Duplicate)	MW19-4	MW19-09	BHMW20-1	BHMW20-2
			29/Mar/19	29/Mar/19	29/Mar/19	29/Mar/19	5/May/20	5/May/20	5/May/20	5/May/20
Acetone	2700	130000	ND (5.0)	ND (5.0)	ND (5.0)	ND (5.0)	ND (10)	ND (10)	ND (10)	120
Benzene	0.5	430	1.3	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.20)	ND (0.20)	ND (0.20)	ND (0.20)
Bromodichloromethane	2	85000	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.50)	ND (0.50)	ND (0.50)	ND (0.50)
Bromoform	5	770	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.5)	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)
Bromomethane	0.89	56	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.50)	ND (0.50)	ND (0.50)	ND (0.50)
Carbon Tetrachloride	0.2	8.4	ND (0.2)	ND (0.2)	ND (0.2)	ND (0.2)	ND (0.19)	ND (0.19)	ND (0.19)	ND (0.19)
Chlorobenzene	0.5	630	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.20)	ND (0.20)	ND (0.20)	ND (0.20)
Chloroform	2	22	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.20)	ND (0.20)	ND (0.20)	ND (0.20)
Dibromochloromethane	2	82000	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.50)	ND (0.50)	ND (0.50)	ND (0.50)
Dichlorodifluoromethane	590	4400	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)
1,2-Dichlorobenzene	0.5	9600	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.40)	ND (0.40)	ND (0.40)	ND (0.40)
1,3-Dichlorobenzene	0.5	9600	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.40)	ND (0.40)	ND (0.40)	ND (0.40)
1,4-Dichlorobenzene	0.5	67	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.40)	ND (0.40)	ND (0.40)	ND (0.40)
1,1-Dichloroethane	0.5	3100	0.5	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.20)	ND (0.20)	ND (0.20)	ND (0.20)
1,2-Dichloroethane	0.5	12	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.40)	ND (0.40)	ND (0.40)	ND (0.40)
1,1-Dichloroethylene	0.5	17	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.20)	ND (0.20)	ND (0.20)	ND (0.20)
cis-1,2-Dichloroethylene	1.6	17	4.1	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.50)	ND (0.50)	ND (0.50)	1.6
trans-1,2-Dichloroethylene	1.6	17	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.50)	ND (0.50)	ND (0.50)	ND (0.50)
1,2-Dichloropropane	0.5	140	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.20)	ND (0.20)	ND (0.20)	ND (0.20)
cis-1,3-Dichloropropylene	0.5	NG	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.30)	ND (0.30)	ND (0.30)	ND (0.30)
trans-1,3-Dichloropropylene	1.6	NG	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.40)	ND (0.40)	ND (0.40)	ND (0.40)
1,3-Dichloropropene, total	0.5	45	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.5)
Ethylbenzene	0.5	2300	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.2)	ND (0.2)	ND (0.2)	ND (0.2)
Ethylene dibromide (dibromoethane, 1,2-)	0.2	0.83	ND (0.2)	ND (0.2)	ND (0.2)	ND (0.2)	ND (0.19)	ND (0.19)	ND (0.19)	ND (0.19)
Hexane	5	520	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)
Methyl Ethyl Ketone (2-Butanone)	400	1500000	ND (5.0)	ND (5.0)	ND (5.0)	ND (5.0)	ND (10)	ND (10)	ND (10)	21
Methyl Isobutyl Ketone	640	580000	ND (5.0)	ND (5.0)	ND (5.0)	ND (5.0)	ND (5.0)	ND (5.0)	ND (5.0)	ND (5.0)
Methyl tert-butyl ether	15	1400	ND (2.0)	ND (2.0)	ND (2.0)	ND (2.0)	ND (0.50)	ND (0.50)	ND (0.50)	ND (0.50)
Methylene Chloride	5	610	ND (5.0)	ND (5.0)	ND (5.0)	ND (5.0)	ND (2.0)	ND (2.0)	ND (2.0)	ND (2.0)
Styrene	0.3	9100	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.40)	ND (0.40)	ND (0.40)	ND (0.40)
1,1,1,2-Tetrachloroethane	1.1	28	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.50)	ND (0.50)	ND (0.50)	ND (0.50)
1,1,2,2-Tetrachloroethane	0.5	15	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.40)	ND (0.40)	ND (0.40)	ND (0.40)
Tetrachloroethylene	0.5	17	1.1	1.5	3.3	3.6	ND (0.20)	ND (0.20)	ND (0.20)	0.3
Toluene	0.8	18000	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.20)	ND (0.20)	ND (0.20)	0.21
1,1,1-Trichloroethane	0.5	6700	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.20)	ND (0.20)	ND (0.20)	ND (0.20)
1,1,2-Trichloroethane	0.5	30	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.40)	ND (0.40)	ND (0.40)	ND (0.40)
Trichloroethylene	0.5	17	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.20)	ND (0.20)	ND (0.20)	0.86
Trichlorofluoromethane	150	2500	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)	ND (0.50)	ND (0.50)	ND (0.50)	ND (0.50)
Vinyl Chloride	0.5	1.7	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.20)	ND (0.20)	ND (0.20)	ND (0.20)
m,p-Xylene	NG	NG	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.20)	ND (0.20)	ND (0.20)	ND (0.20)
o-Xylene	NG	NG	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.20)	ND (0.20)	ND (0.20)	ND (0.20)
Xylenes, total	72	4200	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.20)	ND (0.20)	ND (0.20)	ND (0.20)

**Notes:**

(1) Ministry of the Environment, Conservation and Parks (MECP), "Soil, Ground Water and Sediment Standards for Use Under Part XV.1 of the Environmental Protection Act", July 1, 2011. Table 3: Full Depth Generic Site Condition Standards in a Non-Potable Groundwater Condition. Industrial/Commercial/Community Property Use. Fine textured soils.

'NG' indicates that there is no guideline value under MECP Table 3.

All units are expressed in micrograms per gram ( $\mu\text{g/L}$ ), unless otherwise specified.

'ND' indicates that a value is below the laboratory detection limit (value indicated).

**Value** Indicates that a value exceeds MECP Table 3 standards.

TABLE D-5: GROUNDWATER ANALYTICAL RESULTS - pH and PAHs

Parameter Description	Standards	Standards	Analytical Results (µg/L) (Sampling ID / Sampling Date)			
	MOECC Table 1 <sup>(1)</sup>	MOECC Table 3 <sup>(1)</sup>	MW19-4	MW19-6	MW19-9	MW19-9 (Duplicate)
			29/Mar/19	29/Mar/19	29/Mar/19	29/Mar/19
<b>General</b>						
pH	NG	NG	6.8	7.5	7.4	7.4
<b>PAHs</b>						
Acenaphthene	4.1	1700	ND (0.05)	ND (0.05)	0.38	ND (0.05)
Acenaphthylene	1	1.8	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)
Anthracene	0.1	2.4	ND (0.01)	ND (0.01)	0.05	ND (0.01)
Benz[a]anthracene	0.2	4.7	ND (0.01)	ND (0.01)	0.04	ND (0.01)
Benz[a]pyrene	0.01	0.81	ND (0.01)	ND (0.01)	0.03	ND (0.01)
Benz[b]fluoranthene	0.1	0.75	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)
Benz[g,h,i]perylene	0.2	0.2	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)
Benz[k]fluoranthene	0.1	0.4	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)
Chrysene	0.1	1	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)
Dibenz[a,h]anthracene	0.2	0.52	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)
Fluoranthene	0.4	130	ND (0.01)	ND (0.01)	0.08	ND (0.01)
Fluorene	120	400	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)
Indeno[1,2,3-cd]pyrene	0.2	0.2	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)
1-Methylnaphthalene	NG	1800	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)
2-Methylnaphthalene	NG	1800	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)
Methylnaphthalene (1&2)	2	1800	ND (0.10)	ND (0.10)	ND (0.10)	ND (0.10)
Naphthalene	7	6400	ND (0.05)	ND (0.05)	ND (0.05)	ND (0.05)
Phenanthrene	0.1	580	ND (0.05)	ND (0.05)	0.08	ND (0.05)
Pyrene	0.2	68	ND (0.01)	ND (0.01)	0.07	ND (0.01)
<b>PHCs</b>						
F1 PHCs (C6-C10)	420	750	ND (25)	ND (25)	ND (25)	ND (25)
F2 PHCs (C10-C16)	150	150	ND (100)	ND (100)	ND (100)	ND (100)
F3 PHCs (C16-C34)	500	500	ND (100)	ND (100)	ND (100)	ND (100)
F4 PHCs (C34-C50)	500	500	ND (100)	ND (100)	ND (100)	ND (100)

**Notes:**

(1) Ministry of the Environment, Conservation and Parks (MECP), "Soil, Ground Water and Sediment Standards for Use Under Part XV.1 of the Environmental Protection Act", July 1, 2011. Table 3: Full Depth Generic Site Condition Standards in a Non-Potable Groundwater Condition. Industrial/Commercial/Community Property Use. Fine textured soils.

'NG' indicates that there is no guideline value under MECP Table 3.

All units are expressed in micrograms per gram (µg/L), unless otherwise specified.

'ND' indicates that a value is below the laboratory detection limit (value indicated).

**Value** Indicates that a value exceeds MECP Table 3 standards.

TABLE D-6: GROUNDWATER ANALYTICAL RESULTS - Metals

Parameter Description	Standards	Standards	Analytical Results (µg/L) (Sampling ID / Sampling Date)			
	MOECC Table 1 <sup>(1)</sup>	MOECC Table 3 <sup>(1)</sup>	MW19-4	MW19-6	MW19-9	MW19-9 (Duplicate)
			29/Mar/19	29/Mar/19	29/Mar/19	29/Mar/19
Mercury	0.1	2.8	ND (0.1)	ND (0.1)	ND (0.1)	ND (0.1)
Antimony	1.5	2000	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.5)
Arsenic	13	1900	ND (1)	ND (1)	1	1
Barium	640	29000	187	184	975	993
Beryllium	0.5	67	ND (0.5)	ND (0.5)	ND (0.5)	ND (0.5)
Boron	1700	45000	836	35	27	27
Cadmium	0.5	2.7	ND (0.1)	ND (0.1)	ND (0.1)	ND (0.1)
Chromium	11	810	ND (1)	ND (1)	ND (1)	ND (1)
Chromium (VI)	25	140	ND (10)	ND (10)	ND (10)	ND (10)
Cobalt	3.8	66	3.6	1.0	1.4	1.5
Copper	5	87	1.1	ND (0.5)	0.6	8.7
Lead	1.9	25	0.2	ND (0.1)	0.2	1.3
Molybdenum	23	9200	1.8	1.6	2.3	2.2
Nickel	14	490	13	3	5	6
Selenium	5	63	ND (1)	ND (1)	ND (1)	ND (1)
Silver	0.3	1.5	ND (0.1)	ND (0.1)	ND (0.1)	ND (0.1)
Sodium	490000	2300000	198000	29100	36200	37200
Thallium	0.5	510	ND (0.1)	ND (0.1)	ND (0.1)	ND (0.1)
Uranium	8.9	420	0.9	0.5	3.0	3.3
Vanadium	3.9	250	0.8	0.5	1.4	1.7
Zinc	160	1100	22	ND (5)	11	35

**Notes:**

(1) Ministry of the Environment, Conservation and Parks (MECP), "Soil, Ground Water and Sediment Standards for Use Under Part XV.1 of the Environmental Protection Act", July 1, 2011. Table 3: Full Depth Generic Site Condition Standards in a Non-Potable Groundwater Condition. Industrial/Commercial/Community Property Use. Fine textured soils.

'NG' indicates that there is no guideline value under MECP Table 3.

All units are expressed in micrograms per gram (µg/L), unless otherwise specified.

'ND' indicates that a value is below the laboratory detection limit (value indicated).

**Value** *Indicates that a value exceeds MECP Table 3 standards.*

**Table D-7: Soil Analytical Results - Toxicity Characteristic Leaching Procedure (TCLP)**

Parameter Description	Guidelines/Standards	Guidelines/Standards	Analytical Results (Sampling Date)
	MECP Table 3	MECP Leachate Schedule 4	TCLP (Taken from BH20-3)
	Depth Interval: 0.2 to 0.8 m		
<b>TCLP Leachate Inorganics</b>			
Fluoride	NG	150	0.18
Nitrate as N	NG	1000	ND (1)
Nitrite as N	NG	1000	ND (0.1)
Cyanide, free	NG	20	ND (0.01)
<b>TCLP- Metals</b>			
Mercury	NG	0.1	ND (0.001)
Arsenic	NG	2.5	ND (0.2)
Barium	NG	100	0.3
Boron	NG	500	0.1
Cadmium	NG	0.5	ND (0.05)
Chromium	NG	5	ND (0.1)
Lead	NG	120	ND (0.1)
Selenium	NG	1	ND (0.1)
Silver	NG	5	ND (0.01)
Uranium	NG	10	ND (0.05)
<b>Semi-Volatiles</b>			
Benzo-a-pyrene	NG	0.0001	ND (0.10)
<b>TCLP - Volatiles</b>			
Benzene		0.5	ND (0.02)
Leachable Carbon Tetrachloride	NG	0.5	ND (0.02)
Leachable Chlorobenzene	NG	8	ND (0.02)
Leachable Chloroform	NG	10	ND (0.02)
Leachable 1,2-Dichlorobenzene	NG	20	ND (0.050)
Leachable 1,4-Dichlorobenzene	NG	0.5	ND (0.050)
Leachable 1,2-Dichloroethane	NG	0.5	ND (0.050)
Leachable 1,1-Dichloroethylene	NG	1.4	ND (0.02)
Leachable Methylene Chloride(Dichloromethane)	NG	5	ND (0.20)
Leachable Methyl Ethyl Ketone (2-Butanone)	NG	200	ND (1.0)
Leachable Tetrachloroethylene	NG	3	ND (0.02)
Leachable Trichloroethylene	NG	5	ND (0.02)
Leachable Vinyl Chloride	NG	0.2	ND (0.02)
<b>Bulk Petroleum Hydrocarbons (ug/g)</b>			
Benzene	0.32	0.5	ND (0.02)
Ethylbenzene	9.5	0.05	ND (0.02)
Toluene	68	NG	ND (0.02)
m/p-Xylene	NG	NG	ND (0.040)
o-Xylene	NG	NG	ND (0.02)
Xylenes, total	26	NG	ND (0.040)
<b>Hydrocarbons</b>			
F1 PHCs (C6-C10)	55	25	<10
F2 PHCs (C10-C16)	230	10	<10
F3 PHCs (C16-C34)	1700	240	<50
F4 PHCs (C34-C50)	3300	120	<50
F4G PHCs (gravimetric)	NG	NG	NA

Notes:

MECP Leachate Schedule 4

- All units are expressed in

(1) Ministry of the Environment, Conservation and Parks (MECP), "GENERAL – WASTE MANAGEMENT the Environmental Protection Act R.S.O. 1990, c. E.19 ", October 2000: Schedule 4 to the Regulation, including the Leachate Extraction Procedure.

MECP  
(1) Ministry of the Environment, Conservation and Parks (MECP), "Soil, Ground Water and Sediment Standards for Use Under Part XV.1 of the Environmental Protection Act", July 1, 2011. Table 3: Full Depth Generic Site Condition Standards in a Non-Potable Groundwater Condition.

Industrial/Commercial/Community Property Use. Coarse textured soils.

- Guideline value derived from Canadian Council of Ministers of the Environment (CCME), "Canadian

- No guideline/standard available

- Less than laboratory reportable

Value

- Sample result exceeds MECP Sched 4 standard

(3)  
NG  
<

Value

- Sample result exceeds CCME and MECP guideline.

Phase II Environmental Site Assessment  
AIM Recycling Ottawa East  
2555 Sheffield Road, Ottawa, Ontario  
DST File No.: 019037029.001

---

**APPENDIX E**  
**Laboratory Certificates of Analysis**

## Certificate of Analysis

**DST Consulting Engineers Inc. (Ottawa)**

203-2150 Thurston Dr.  
Ottawa, ON K1G 5T9  
Attn: Shahab Nowrozi

Client PO:

Project: TS SO 37029  
Custody: 46537

Report Date: 26-Mar-2019  
Order Date: 21-Mar-2019

**Order #: 1912587**

This Certificate of Analysis contains analytical data applicable to the following samples as submitted:

<b>Paracel ID</b>	<b>Client ID</b>
1912587-01	BH19-4 SS2
1912587-02	BH19-7 SS4
1912587-03	BH19-12 SS2
1912587-04	BH19-13 SS2
1912587-05	BH19-14 GS1
1912587-06	BH19-15 GS1

Approved By:



Dale Robertson, BSc  
Laboratory Director

Any use of these results implies your agreement that our total liability in connection with this work, however arising, shall be limited to the amount paid by you for this work, and that our employees or agents shall not under any circumstances be liable to you in connection with this work.

Certificate of Analysis

Report Date: 26-Mar-2019

Client: DST Consulting Engineers Inc. (Ottawa)

Order Date: 21-Mar-2019

Client PO:

Project Description: TS SO 37029

## Analysis Summary Table

Analysis	Method Reference/Description	Extraction Date	Analysis Date
Chromium, hexavalent - soil	MOE E3056 - Extraction, colourimetric	22-Mar-19	25-Mar-19
Mercury by CVAA	EPA 7471B - CVAA, digestion	26-Mar-19	26-Mar-19
PHC F1	CWS Tier 1 - P&T GC-FID	21-Mar-19	23-Mar-19
PHC F4G (gravimetric)	CWS Tier 1 - Extraction Gravimetric	25-Mar-19	26-Mar-19
PHCs F2 to F4	CWS Tier 1 - GC-FID, extraction	22-Mar-19	24-Mar-19
REG 153: Metals by ICP/MS, soil	EPA 6020 - Digestion - ICP-MS	26-Mar-19	26-Mar-19
REG 153: PAHs by GC-MS	EPA 8270 - GC-MS, extraction	22-Mar-19	24-Mar-19
REG 153: VOCs by P&T GC/MS	EPA 8260 - P&T GC-MS	21-Mar-19	24-Mar-19
Solids, %	Gravimetric, calculation	25-Mar-19	25-Mar-19

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 26-Mar-2019

Order Date: 21-Mar-2019

Project Description: TS SO 37029

Client ID:	BH19-4 SS2	Sample Date:	03/21/2019 00:00	BH19-7 SS4	03/21/2019 00:00	BH19-12 SS2	03/21/2019 00:00	BH19-13 SS2	03/21/2019 00:00		
Sample ID:	1912587-01	MDL/Units	Soil	Sample ID:	1912587-02	MDL/Units	Soil	Sample ID:	1912587-03	MDL/Units	Soil

**Physical Characteristics**

% Solids	0.1 % by Wt.	89.8	79.5	89.5	95.0
----------	--------------	------	------	------	------

**Metals**

Antimony	1.0 ug/g dry	1.1	2.1	11.2	7.3
Arsenic	1.0 ug/g dry	5.0	4.5	13.1	10.7
Barium	1.0 ug/g dry	272	306	557	374
Beryllium	0.5 ug/g dry	<0.5	1.0	0.6	0.5
Boron	5.0 ug/g dry	14.7	10.8	59.2	27.6
Cadmium	0.5 ug/g dry	0.5	0.7	10.5	5.5
Chromium	5.0 ug/g dry	29.3	90.8	96.1	89.7
Chromium (VI)	0.2 ug/g dry	<0.2	<0.2	<0.2	<0.2
Cobalt	1.0 ug/g dry	14.7	19.0	17.3	12.8
Copper	5.0 ug/g dry	86.8	55.2	510	582
Lead	1.0 ug/g dry	91.1	162	681	517
Mercury	0.1 ug/g dry	0.2	<0.1	0.9	0.7
Molybdenum	1.0 ug/g dry	2.6	1.1	13.1	16.0
Nickel	5.0 ug/g dry	19.0	52.7	122	104
Selenium	1.0 ug/g dry	<1.0	<1.0	<1.0	<1.0
Silver	0.3 ug/g dry	1.3	<0.3	5.6	1.0
Thallium	1.0 ug/g dry	<1.0	<1.0	<1.0	<1.0
Uranium	1.0 ug/g dry	<1.0	<1.0	<1.0	<1.0
Vanadium	10.0 ug/g dry	24.8	93.4	50.7	49.6
Zinc	20.0 ug/g dry	201	291	3740	1980

**Volatiles**

Acetone	0.50 ug/g dry	<0.50	<0.50	<0.50	<0.50
Benzene	0.02 ug/g dry	<0.02	<0.02	<0.02	<0.02
Bromodichloromethane	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
Bromoform	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
Bromomethane	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
Carbon Tetrachloride	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
Chlorobenzene	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
Chloroform	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
Dibromochloromethane	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
Dichlorodifluoromethane	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
1,2-Dichlorobenzene	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
1,3-Dichlorobenzene	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05

## Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 26-Mar-2019

Order Date: 21-Mar-2019

Project Description: TS SO 37029

	Client ID: Sample Date: Sample ID: <b>MDL/Units</b>	BH19-4 SS2 03/21/2019 00:00 1912587-01 Soil	BH19-7 SS4 03/21/2019 00:00 1912587-02 Soil	BH19-12 SS2 03/21/2019 00:00 1912587-03 Soil	BH19-13 SS2 03/21/2019 00:00 1912587-04 Soil
1,4-Dichlorobenzene	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
1,1-Dichloroethane	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
1,2-Dichloroethane	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
1,1-Dichloroethylene	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
cis-1,2-Dichloroethylene	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
trans-1,2-Dichloroethylene	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
1,2-Dichloropropane	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
cis-1,3-Dichloropropylene	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
trans-1,3-Dichloropropylene	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
1,3-Dichloropropene, total	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
Ethylbenzene	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
Ethylene dibromide (dibromoethan	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
Hexane	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
Methyl Ethyl Ketone (2-Butanone)	0.50 ug/g dry	<0.50	<0.50	<0.50	<0.50
Methyl Isobutyl Ketone	0.50 ug/g dry	<0.50	<0.50	<0.50	<0.50
Methyl tert-butyl ether	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
Methylene Chloride	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
Styrene	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
1,1,1,2-Tetrachloroethane	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
1,1,2,2-Tetrachloroethane	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
Tetrachloroethylene	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
Toluene	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
1,1,1-Trichloroethane	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
1,1,2-Trichloroethane	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
Trichloroethylene	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
Trichlorofluoromethane	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
Vinyl chloride	0.02 ug/g dry	<0.02	<0.02	<0.02	<0.02
m,p-Xylenes	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
o-Xylene	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
Xylenes, total	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
4-Bromofluorobenzene	Surrogate	103%	105%	100%	102%
Dibromofluoromethane	Surrogate	109%	112%	113%	109%
Toluene-d8	Surrogate	99.7%	102%	100%	98.0%

**Hydrocarbons**

F1 PHCs (C6-C10)	7 ug/g dry	<7	<7	<7	<7
F2 PHCs (C10-C16)	4 ug/g dry	9	<4	829	65

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 26-Mar-2019

Order Date: 21-Mar-2019

Project Description: TS SO 37029

	<b>Client ID:</b> BH19-4 SS2 03/21/2019 00:00 1912587-01 Soil	<b>Sample Date:</b> 03/21/2019 00:00 1912587-02 Soil	<b>Sample ID:</b> 03/21/2019 00:00 1912587-03 Soil	<b>MDL/Units</b> 03/21/2019 00:00 1912587-04 Soil
F3 PHCs (C16-C34)	8 ug/g dry	193	95	2970
F4 PHCs (C34-C50)	6 ug/g dry	55	24	1340 [1]
F4G PHCs (gravimetric)	50 ug/g dry	-	-	4600

**Semi-Volatiles**

Acenaphthene	0.02 ug/g dry	0.43	<0.02	0.20	0.23
Acenaphthylene	0.02 ug/g dry	0.03	<0.02	0.11	0.88
Anthracene	0.02 ug/g dry	0.95	<0.02	0.45	1.69
Benzo [a] anthracene	0.02 ug/g dry	1.80	<0.02	0.68	1.82
Benzo [a] pyrene	0.02 ug/g dry	1.23	<0.02	0.53	1.22
Benzo [b] fluoranthene	0.02 ug/g dry	1.80	<0.02	1.04	1.55
Benzo [g,h,i] perylene	0.02 ug/g dry	0.75	<0.02	0.34	0.66
Benzo [k] fluoranthene	0.02 ug/g dry	1.07	<0.02	0.82	1.04
Chrysene	0.02 ug/g dry	1.66	<0.02	0.65	1.88
Dibenzo [a,h] anthracene	0.02 ug/g dry	0.24	<0.02	0.10	0.22
Fluoranthene	0.02 ug/g dry	5.06	0.06	1.82	2.73
Fluorene	0.02 ug/g dry	0.50	0.02	0.34	1.33
Indeno [1,2,3-cd] pyrene	0.02 ug/g dry	0.65	<0.02	0.31	0.54
1-Methylnaphthalene	0.02 ug/g dry	0.06	<0.02	0.43	2.10
2-Methylnaphthalene	0.02 ug/g dry	0.08	<0.02	0.18	2.91
Methylnaphthalene (1&2)	0.04 ug/g dry	0.14	<0.04	0.61	5.01
Naphthalene	0.01 ug/g dry	0.36	0.03	0.39	2.88
Phenanthrene	0.02 ug/g dry	4.09	0.07	1.44	5.29
Pyrene	0.02 ug/g dry	3.80	0.04	1.65	3.45
2-Fluorobiphenyl	Surrogate	90.7%	57.7%	93.9%	92.3%
Terphenyl-d14	Surrogate	121%	70.3%	103%	42.1% [5]

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 26-Mar-2019

Order Date: 21-Mar-2019

Project Description: TS SO 37029

<b>Client ID:</b>	BH19-14 GS1	<b>BH19-15 GS1</b>	-	-
<b>Sample Date:</b>	03/21/2019 00:00	03/21/2019 00:00	-	-
<b>Sample ID:</b>	1912587-05	1912587-06	-	-
<b>MDL/Units</b>	Soil	Soil	-	-

**Physical Characteristics**

% Solids	0.1 % by Wt.	96.6	96.9	-	-
----------	--------------	------	------	---	---

**Metals**

Antimony	1.0 ug/g dry	6.0	1.9	-	-
Arsenic	1.0 ug/g dry	11.7	6.1	-	-
Barium	1.0 ug/g dry	116	200	-	-
Beryllium	0.5 ug/g dry	<0.5	<0.5	-	-
Boron	5.0 ug/g dry	17.3	9.4	-	-
Cadmium	0.5 ug/g dry	1.8	5.0	-	-
Chromium	5.0 ug/g dry	61.5	24.9	-	-
Chromium (VI)	0.2 ug/g dry	<0.2	<0.2	-	-
Cobalt	1.0 ug/g dry	10.8	7.3	-	-
Copper	5.0 ug/g dry	130	50.9	-	-
Lead	1.0 ug/g dry	237	112	-	-
Mercury	0.1 ug/g dry	1.1	<0.1	-	-
Molybdenum	1.0 ug/g dry	8.0	2.2	-	-
Nickel	5.0 ug/g dry	43.6	38.7	-	-
Selenium	1.0 ug/g dry	<1.0	<1.0	-	-
Silver	0.3 ug/g dry	0.4	<0.3	-	-
Thallium	1.0 ug/g dry	<1.0	<1.0	-	-
Uranium	1.0 ug/g dry	<1.0	<1.0	-	-
Vanadium	10.0 ug/g dry	17.4	20.8	-	-
Zinc	20.0 ug/g dry	681	618	-	-

**Volatiles**

Acetone	0.50 ug/g dry	<0.50	<0.50	-	-
Benzene	0.02 ug/g dry	<0.02	<0.02	-	-
Bromodichloromethane	0.05 ug/g dry	<0.05	<0.05	-	-
Bromoform	0.05 ug/g dry	<0.05	<0.05	-	-
Bromomethane	0.05 ug/g dry	<0.05	<0.05	-	-
Carbon Tetrachloride	0.05 ug/g dry	<0.05	<0.05	-	-
Chlorobenzene	0.05 ug/g dry	<0.05	<0.05	-	-
Chloroform	0.05 ug/g dry	<0.05	<0.05	-	-
Dibromochloromethane	0.05 ug/g dry	<0.05	<0.05	-	-
Dichlorodifluoromethane	0.05 ug/g dry	<0.05	<0.05	-	-
1,2-Dichlorobenzene	0.05 ug/g dry	<0.05	<0.05	-	-
1,3-Dichlorobenzene	0.05 ug/g dry	<0.05	<0.05	-	-

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 26-Mar-2019

Order Date: 21-Mar-2019

Project Description: TS SO 37029

	Client ID: Sample Date: Sample ID: MDL/Units	BH19-14 GS1 03/21/2019 00:00 1912587-05 Soil	BH19-15 GS1 03/21/2019 00:00 1912587-06 Soil	-	-
1,4-Dichlorobenzene	0.05 ug/g dry	<0.05	<0.05	-	-
1,1-Dichloroethane	0.05 ug/g dry	<0.05	<0.05	-	-
1,2-Dichloroethane	0.05 ug/g dry	<0.05	<0.05	-	-
1,1-Dichloroethylene	0.05 ug/g dry	<0.05	<0.05	-	-
cis-1,2-Dichloroethylene	0.05 ug/g dry	<0.05	<0.05	-	-
trans-1,2-Dichloroethylene	0.05 ug/g dry	<0.05	<0.05	-	-
1,2-Dichloropropane	0.05 ug/g dry	<0.05	<0.05	-	-
cis-1,3-Dichloropropylene	0.05 ug/g dry	<0.05	<0.05	-	-
trans-1,3-Dichloropropylene	0.05 ug/g dry	<0.05	<0.05	-	-
1,3-Dichloropropene, total	0.05 ug/g dry	<0.05	<0.05	-	-
Ethylbenzene	0.05 ug/g dry	<0.05	<0.05	-	-
Ethylene dibromide (dibromoethane)	0.05 ug/g dry	<0.05	<0.05	-	-
Hexane	0.05 ug/g dry	<0.05	<0.05	-	-
Methyl Ethyl Ketone (2-Butanone)	0.50 ug/g dry	<0.50	<0.50	-	-
Methyl Isobutyl Ketone	0.50 ug/g dry	<0.50	<0.50	-	-
Methyl tert-butyl ether	0.05 ug/g dry	<0.05	<0.05	-	-
Methylene Chloride	0.05 ug/g dry	<0.05	<0.05	-	-
Styrene	0.05 ug/g dry	<0.05	<0.05	-	-
1,1,1,2-Tetrachloroethane	0.05 ug/g dry	<0.05	<0.05	-	-
1,1,2,2-Tetrachloroethane	0.05 ug/g dry	<0.05	<0.05	-	-
Tetrachloroethylene	0.05 ug/g dry	<0.05	<0.05	-	-
Toluene	0.05 ug/g dry	<0.05	<0.05	-	-
1,1,1-Trichloroethane	0.05 ug/g dry	<0.05	<0.05	-	-
1,1,2-Trichloroethane	0.05 ug/g dry	<0.05	<0.05	-	-
Trichloroethylene	0.05 ug/g dry	<0.05	<0.05	-	-
Trichlorofluoromethane	0.05 ug/g dry	<0.05	<0.05	-	-
Vinyl chloride	0.02 ug/g dry	<0.02	<0.02	-	-
m,p-Xylenes	0.05 ug/g dry	<0.05	<0.05	-	-
o-Xylene	0.05 ug/g dry	<0.05	<0.05	-	-
Xylenes, total	0.05 ug/g dry	<0.05	<0.05	-	-
4-Bromofluorobenzene	Surrogate	100%	103%	-	-
Dibromofluoromethane	Surrogate	108%	109%	-	-
Toluene-d8	Surrogate	98.2%	97.0%	-	-
<b>Hydrocarbons</b>					
F1 PHCs (C6-C10)	7 ug/g dry	<7	<7	-	-

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 26-Mar-2019

Order Date: 21-Mar-2019

Project Description: TS SO 37029

	<b>Client ID:</b> BH19-14 GS1	<b>Sample Date:</b> 03/21/2019 00:00	<b>Sample ID:</b> 1912587-05	<b>MDL/Units</b> Soil	<b>BH19-15 GS1</b>	-	-
F2 PHCs (C10-C16)	4 ug/g dry	121		23	-	-	-
F3 PHCs (C16-C34)	8 ug/g dry	895		341	-	-	-
F4 PHCs (C34-C50)	6 ug/g dry	358 [1]		415 [1]	-	-	-
F4G PHCs (gravimetric)	50 ug/g dry	1430		1880	-	-	-

**Semi-Volatiles**

Acenaphthene	0.02 ug/g dry	0.05	0.34	-	-	-
Acenaphthylene	0.02 ug/g dry	0.07	0.26	-	-	-
Anthracene	0.02 ug/g dry	0.19	1.42	-	-	-
Benzo [a] anthracene	0.02 ug/g dry	0.36	1.59	-	-	-
Benzo [a] pyrene	0.02 ug/g dry	0.21	1.10	-	-	-
Benzo [b] fluoranthene	0.02 ug/g dry	0.80	1.57	-	-	-
Benzo [g,h,i] perylene	0.02 ug/g dry	0.15	0.70	-	-	-
Benzo [k] fluoranthene	0.02 ug/g dry	0.47	0.93	-	-	-
Chrysene	0.02 ug/g dry	0.33	1.36	-	-	-
Dibeno [a,h] anthracene	0.02 ug/g dry	0.05	0.22	-	-	-
Fluoranthene	0.02 ug/g dry	0.58	4.25	-	-	-
Fluorene	0.02 ug/g dry	0.12	0.52	-	-	-
Indeno [1,2,3-cd] pyrene	0.02 ug/g dry	0.14	0.70	-	-	-
1-Methylnaphthalene	0.02 ug/g dry	0.10	0.12	-	-	-
2-Methylnaphthalene	0.02 ug/g dry	0.15	0.13	-	-	-
Methylnaphthalene (1&2)	0.04 ug/g dry	0.25	0.25	-	-	-
Naphthalene	0.01 ug/g dry	0.13	0.17	-	-	-
Phenanthrene	0.02 ug/g dry	0.64	3.59	-	-	-
Pyrene	0.02 ug/g dry	0.60	3.39	-	-	-
2-Fluorobiphenyl	Surrogate	101%	119%	-	-	-
Terphenyl-d14	Surrogate	104%	131%	-	-	-

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 26-Mar-2019

Order Date: 21-Mar-2019

Project Description: TS SO 37029

**Method Quality Control: Blank**

Analyte	Result	Reporting Limit	Units	Source Result	%REC	%REC Limit	RPD	RPD Limit	Notes
<b>Hydrocarbons</b>									
F1 PHCs (C6-C10)	ND	7	ug/g						
F2 PHCs (C10-C16)	ND	4	ug/g						
F3 PHCs (C16-C34)	ND	8	ug/g						
F4 PHCs (C34-C50)	ND	6	ug/g						
F4G PHCs (gravimetric)	ND	50	ug/g						
<b>Metals</b>									
Antimony	ND	1.0	ug/g						
Arsenic	ND	1.0	ug/g						
Barium	ND	1.0	ug/g						
Beryllium	ND	0.5	ug/g						
Boron	ND	5.0	ug/g						
Cadmium	ND	0.5	ug/g						
Chromium (VI)	ND	0.2	ug/g						
Chromium	ND	5.0	ug/g						
Cobalt	ND	1.0	ug/g						
Copper	ND	5.0	ug/g						
Lead	ND	1.0	ug/g						
Mercury	ND	0.1	ug/g						
Molybdenum	ND	1.0	ug/g						
Nickel	ND	5.0	ug/g						
Selenium	ND	1.0	ug/g						
Silver	ND	0.3	ug/g						
Thallium	ND	1.0	ug/g						
Uranium	ND	1.0	ug/g						
Vanadium	ND	10.0	ug/g						
Zinc	ND	20.0	ug/g						
<b>Semi-Volatiles</b>									
Acenaphthene	ND	0.02	ug/g						
Acenaphthylene	ND	0.02	ug/g						
Anthracene	ND	0.02	ug/g						
Benzo [a] anthracene	ND	0.02	ug/g						
Benzo [a] pyrene	ND	0.02	ug/g						
Benzo [b] fluoranthene	ND	0.02	ug/g						
Benzo [g,h,i] perylene	ND	0.02	ug/g						
Benzo [k] fluoranthene	ND	0.02	ug/g						
Chrysene	ND	0.02	ug/g						
Dibeno [a,h] anthracene	ND	0.02	ug/g						
Fluoranthene	ND	0.02	ug/g						
Fluorene	ND	0.02	ug/g						
Indeno [1,2,3-cd] pyrene	ND	0.02	ug/g						
1-Methylnaphthalene	ND	0.02	ug/g						
2-Methylnaphthalene	ND	0.02	ug/g						
Methylnaphthalene (1&2)	ND	0.04	ug/g						
Naphthalene	ND	0.01	ug/g						
Phenanthrene	ND	0.02	ug/g						
Pyrene	ND	0.02	ug/g						
Surrogate: 2-Fluorobiphenyl	1.18		ug/g		88.3	50-140			
Surrogate: Terphenyl-d14	1.61		ug/g		121	50-140			
<b>Volatiles</b>									
Acetone	ND	0.50	ug/g						
Benzene	ND	0.02	ug/g						
Bromodichloromethane	ND	0.05	ug/g						
Bromoform	ND	0.05	ug/g						
Bromomethane	ND	0.05	ug/g						
Carbon Tetrachloride	ND	0.05	ug/g						
Chlorobenzene	ND	0.05	ug/g						
Chloroform	ND	0.05	ug/g						
Dibromochloromethane	ND	0.05	ug/g						

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 26-Mar-2019

Order Date: 21-Mar-2019

Project Description: TS SO 37029

**Method Quality Control: Blank**

Analyte	Result	Reporting Limit	Units	Source Result	%REC	%REC Limit	RPD	RPD Limit	Notes
Dichlorodifluoromethane	ND	0.05	ug/g						
1,2-Dichlorobenzene	ND	0.05	ug/g						
1,3-Dichlorobenzene	ND	0.05	ug/g						
1,4-Dichlorobenzene	ND	0.05	ug/g						
1,1-Dichloroethane	ND	0.05	ug/g						
1,2-Dichloroethane	ND	0.05	ug/g						
1,1-Dichloroethylene	ND	0.05	ug/g						
cis-1,2-Dichloroethylene	ND	0.05	ug/g						
trans-1,2-Dichloroethylene	ND	0.05	ug/g						
1,2-Dichloropropane	ND	0.05	ug/g						
cis-1,3-Dichloropropylene	ND	0.05	ug/g						
trans-1,3-Dichloropropylene	ND	0.05	ug/g						
1,3-Dichloropropene, total	ND	0.05	ug/g						
Ethylbenzene	ND	0.05	ug/g						
Ethylene dibromide (dibromoethane)	ND	0.05	ug/g						
Hexane	ND	0.05	ug/g						
Methyl Ethyl Ketone (2-Butanone)	ND	0.50	ug/g						
Methyl Isobutyl Ketone	ND	0.50	ug/g						
Methyl tert-butyl ether	ND	0.05	ug/g						
Methylene Chloride	ND	0.05	ug/g						
Styrene	ND	0.05	ug/g						
1,1,1,2-Tetrachloroethane	ND	0.05	ug/g						
1,1,2,2-Tetrachloroethane	ND	0.05	ug/g						
Tetrachloroethylene	ND	0.05	ug/g						
Toluene	ND	0.05	ug/g						
1,1,1-Trichloroethane	ND	0.05	ug/g						
1,1,2-Trichloroethane	ND	0.05	ug/g						
Trichloroethylene	ND	0.05	ug/g						
Trichlorofluoromethane	ND	0.05	ug/g						
Vinyl chloride	ND	0.02	ug/g						
m,p-Xylenes	ND	0.05	ug/g						
o-Xylene	ND	0.05	ug/g						
Xylenes, total	ND	0.05	ug/g						
Surrogate: 4-Bromofluorobenzene	9.04		ug/g		113	50-140			
Surrogate: Dibromofluoromethane	9.66		ug/g		121	50-140			
Surrogate: Toluene-d8	7.71		ug/g		96.3	50-140			

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 26-Mar-2019

Order Date: 21-Mar-2019

Project Description: TS SO 37029

**Method Quality Control: Duplicate**

Analyte	Result	Reporting Limit	Units	Source Result	%REC	%REC Limit	RPD	RPD Limit	Notes
<b>Hydrocarbons</b>									
F1 PHCs (C6-C10)	ND	7	ug/g dry	ND				40	
F2 PHCs (C10-C16)	13	4	ug/g dry	ND			0.0	30	
F3 PHCs (C16-C34)	60	8	ug/g dry	ND			0.0	30	
F4 PHCs (C34-C50)	17	6	ug/g dry	ND			0.0	30	
<b>Metals</b>									
Antimony	ND	1.0	ug/g dry	ND			0.0	30	
Arsenic	1.3	1.0	ug/g dry	1.4			2.3	30	
Barium	9.6	1.0	ug/g dry	10.4			7.4	30	
Beryllium	ND	0.5	ug/g dry	ND			0.0	30	
Boron	ND	5.0	ug/g dry	ND			0.0	30	
Cadmium	ND	0.5	ug/g dry	ND			0.0	30	
Chromium (VI)	ND	0.2	ug/g dry	ND				35	
Chromium	7.0	5.0	ug/g dry	7.1			2.1	30	
Cobalt	1.8	1.0	ug/g dry	1.8			1.6	30	
Copper	ND	5.0	ug/g dry	ND			0.0	30	
Lead	2.0	1.0	ug/g dry	1.8			8.6	30	
Mercury	ND	0.1	ug/g dry	ND			0.0	30	
Molybdenum	ND	1.0	ug/g dry	ND			0.0	30	
Nickel	ND	5.0	ug/g dry	ND			0.0	30	
Selenium	ND	1.0	ug/g dry	ND			0.0	30	
Silver	ND	0.3	ug/g dry	ND			0.0	30	
Thallium	ND	1.0	ug/g dry	ND			0.0	30	
Uranium	ND	1.0	ug/g dry	ND			0.0	30	
Vanadium	19.6	10.0	ug/g dry	18.8			3.9	30	
Zinc	ND	20.0	ug/g dry	ND			0.0	30	
<b>Physical Characteristics</b>									
% Solids	92.8	0.1	% by Wt.	93.3			0.5	25	
<b>Semi-Volatiles</b>									
Acenaphthene	0.249	0.02	ug/g dry	0.427			52.8	40	QR-04
Acenaphthylene	0.021	0.02	ug/g dry	0.030			34.4	40	
Anthracene	0.574	0.02	ug/g dry	0.947			49.0	40	QR-04
Benzo [a] anthracene	0.979	0.02	ug/g dry	1.80			59.1	40	QR-04
Benzo [a] pyrene	0.663	0.02	ug/g dry	1.23			60.0	40	QR-04
Benzo [b] fluoranthene	0.972	0.02	ug/g dry	1.80			59.6	40	QR-04
Benzo [g,h,i] perylene	0.399	0.02	ug/g dry	0.746			60.6	40	QR-04
Benzo [k] fluoranthene	0.624	0.02	ug/g dry	1.07			52.5	40	QR-04
Chrysene	1.06	0.02	ug/g dry	1.66			44.0	40	QR-04
Dibenzo [a,h] anthracene	0.128	0.02	ug/g dry	0.237			59.5	40	QR-04
Fluoranthene	2.76	0.02	ug/g dry	5.06			58.9	40	QR-04
Fluorene	0.312	0.02	ug/g dry	0.503			46.9	40	QR-04
Indeno [1,2,3-cd] pyrene	0.393	0.02	ug/g dry	0.650			49.2	40	QR-04
1-Methylnaphthalene	0.054	0.02	ug/g dry	0.060			10.8	40	
2-Methylnaphthalene	0.072	0.02	ug/g dry	0.082			12.3	40	
Naphthalene	0.251	0.01	ug/g dry	0.356			34.7	40	
Phenanthrene	2.32	0.02	ug/g dry	4.09			55.1	40	QR-04
Pyrene	2.13	0.02	ug/g dry	3.80			56.2	40	QR-04
Surrogate: 2-Fluorobiphenyl	1.40		ug/g dry	94.1	50-140				
Surrogate: Terphenyl-d14	1.74		ug/g dry	117	50-140				
<b>Volatiles</b>									
Acetone	ND	0.50	ug/g dry	ND				50	
Benzene	ND	0.02	ug/g dry	ND				50	
Bromodichloromethane	ND	0.05	ug/g dry	ND				50	
Bromoform	ND	0.05	ug/g dry	ND				50	
Bromomethane	ND	0.05	ug/g dry	ND				50	
Carbon Tetrachloride	ND	0.05	ug/g dry	ND				50	
Chlorobenzene	ND	0.05	ug/g dry	ND				50	

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 26-Mar-2019

Order Date: 21-Mar-2019

Project Description: TS SO 37029

**Method Quality Control: Duplicate**

Analyte	Result	Reporting Limit	Units	Source Result	%REC	%REC Limit	RPD	RPD Limit	Notes
Chloroform	ND	0.05	ug/g dry	ND			50	50	
Dibromochloromethane	ND	0.05	ug/g dry	ND			50	50	
Dichlorodifluoromethane	ND	0.05	ug/g dry	ND			50	50	
1,2-Dichlorobenzene	ND	0.05	ug/g dry	ND			50	50	
1,3-Dichlorobenzene	ND	0.05	ug/g dry	ND			50	50	
1,4-Dichlorobenzene	ND	0.05	ug/g dry	ND			50	50	
1,1-Dichloroethane	ND	0.05	ug/g dry	ND			50	50	
1,2-Dichloroethane	ND	0.05	ug/g dry	ND			50	50	
1,1-Dichloroethylene	ND	0.05	ug/g dry	ND			50	50	
cis-1,2-Dichloroethylene	ND	0.05	ug/g dry	ND			50	50	
trans-1,2-Dichloroethylene	ND	0.05	ug/g dry	ND			50	50	
1,2-Dichloropropane	ND	0.05	ug/g dry	ND			50	50	
cis-1,3-Dichloropropylene	ND	0.05	ug/g dry	ND			50	50	
trans-1,3-Dichloropropylene	ND	0.05	ug/g dry	ND			50	50	
Ethylbenzene	ND	0.05	ug/g dry	ND			50	50	
Ethylene dibromide (dibromoethane)	ND	0.05	ug/g dry	ND			50	50	
Hexane	ND	0.05	ug/g dry	ND			50	50	
Methyl Ethyl Ketone (2-Butanone)	ND	0.50	ug/g dry	ND			50	50	
Methyl Isobutyl Ketone	ND	0.50	ug/g dry	ND			50	50	
Methyl tert-butyl ether	ND	0.05	ug/g dry	ND			50	50	
Methylene Chloride	ND	0.05	ug/g dry	ND			50	50	
Styrene	ND	0.05	ug/g dry	ND			50	50	
1,1,1,2-Tetrachloroethane	ND	0.05	ug/g dry	ND			50	50	
1,1,2,2-Tetrachloroethane	ND	0.05	ug/g dry	ND			50	50	
Tetrachloroethylene	ND	0.05	ug/g dry	ND			50	50	
Toluene	ND	0.05	ug/g dry	ND			50	50	
1,1,1-Trichloroethane	ND	0.05	ug/g dry	ND			50	50	
1,1,2-Trichloroethane	ND	0.05	ug/g dry	ND			50	50	
Trichloroethylene	ND	0.05	ug/g dry	ND			50	50	
Trichlorofluoromethane	ND	0.05	ug/g dry	ND			50	50	
Vinyl chloride	ND	0.02	ug/g dry	ND			50	50	
m,p-Xylenes	ND	0.05	ug/g dry	ND			50	50	
o-Xylene	ND	0.05	ug/g dry	ND			50	50	
Surrogate: 4-Bromofluorobenzene	9.22		ug/g dry		102	50-140			
Surrogate: Dibromofluoromethane	9.29		ug/g dry		102	50-140			
Surrogate: Toluene-d8	8.82		ug/g dry		97.3	50-140			

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 26-Mar-2019

Order Date: 21-Mar-2019

Project Description: TS SO 37029

**Method Quality Control: Spike**

Analyte	Result	Reporting Limit	Units	Source Result	%REC	%REC Limit	RPD	RPD Limit	Notes
<b>Hydrocarbons</b>									
F1 PHCs (C6-C10)	182	7	ug/g		90.8	80-120			
F2 PHCs (C10-C16)	130	4	ug/g	ND	138	60-140			
F3 PHCs (C16-C34)	355	8	ug/g	ND	154	60-140			QM-06
F4 PHCs (C34-C50)	194	6	ug/g	ND	133	60-140			
F4G PHCs (gravimetric)	980	50	ug/g		98.0	80-120			
<b>Metals</b>									
Antimony	46.6		ug/L	ND	93.2	70-130			
Arsenic	51.6		ug/L	ND	102	70-130			
Barium	53.2		ug/L	4.2	98.1	70-130			
Beryllium	53.9		ug/L	ND	108	70-130			
Boron	49.0		ug/L	ND	95.4	70-130			
Cadmium	51.0		ug/L	ND	102	70-130			
Chromium (VI)	3.6	0.2	ug/g		72.5	70-130			
Chromium	52.5		ug/L	ND	99.2	70-130			
Cobalt	48.6		ug/L	ND	95.7	70-130			
Copper	52.5		ug/L	ND	103	70-130			
Lead	46.4		ug/L	ND	91.3	70-130			
Mercury	1.44	0.1	ug/g	ND	96.0	70-130			
Molybdenum	51.4		ug/L	ND	103	70-130			
Nickel	53.5		ug/L	ND	104	70-130			
Selenium	50.2		ug/L	ND	100	70-130			
Silver	47.1		ug/L	ND	94.1	70-130			
Thallium	47.1		ug/L	ND	94.2	70-130			
Uranium	48.1		ug/L	ND	95.9	70-130			
Vanadium	61.4		ug/L	ND	108	70-130			
Zinc	53.1		ug/L	ND	98.4	70-130			
<b>Semi-Volatiles</b>									
Acenaphthene	0.685	0.02	ug/g	0.427	139	50-140			
Acenaphthylene	0.212	0.02	ug/g	0.030	97.9	50-140			
Anthracene	1.20	0.02	ug/g	0.947	137	50-140			
Benzo [a] anthracene	1.98	0.02	ug/g	1.80	97.1	50-140			
Benzo [a] pyrene	1.37	0.02	ug/g	1.23	72.5	50-140			
Benzo [b] fluoranthene	1.90	0.02	ug/g	1.80	56.5	50-140			
Benzo [g,h,i] perylene	0.843	0.02	ug/g	0.746	52.2	50-140			
Benzo [k] fluoranthene	1.40	0.02	ug/g	1.07	177	50-140			QM-06
Chrysene	2.15	0.02	ug/g	1.66	265	50-140			QM-06
Dibenzo [a,h] anthracene	0.387	0.02	ug/g	0.237	80.7	50-140			
Fluoranthene	5.27	0.02	ug/g	5.06	117	50-140			
Fluorene	0.771	0.02	ug/g	0.503	144	50-140			
Indeno [1,2,3-cd] pyrene	0.810	0.02	ug/g	0.650	86.2	50-140			
1-Methylnaphthalene	0.233	0.02	ug/g	0.060	93.0	50-140			
2-Methylnaphthalene	0.282	0.02	ug/g	0.082	108	50-140			
Naphthalene	0.619	0.01	ug/g	0.356	141	50-140			QM-06
Phenanthrene	4.48	0.02	ug/g	4.09	211	50-140			QM-06
Pyrene	4.08	0.02	ug/g	3.80	152	50-140			QM-06
Surrogate: 2-Fluorobiphenyl	1.28		ug/g		86.1	50-140			
<b>Volatiles</b>									
Acetone	12.3	0.50	ug/g		123	50-140			
Benzene	3.84	0.02	ug/g		96.0	60-130			
Bromodichloromethane	4.09	0.05	ug/g		102	60-130			

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 26-Mar-2019

Order Date: 21-Mar-2019

Project Description: TS SO 37029

**Method Quality Control: Spike**

Analyte	Result	Reporting Limit	Units	Source Result	%REC	%REC Limit	RPD	RPD Limit	Notes
Bromoform	4.56	0.05	ug/g		114	60-130			
Bromomethane	3.47	0.05	ug/g		86.6	50-140			
Carbon Tetrachloride	3.87	0.05	ug/g		96.7	60-130			
Chlorobenzene	3.52	0.05	ug/g		88.1	60-130			
Chloroform	3.29	0.05	ug/g		82.3	60-130			
Dibromochloromethane	4.82	0.05	ug/g		120	60-130			
Dichlorodifluoromethane	5.13	0.05	ug/g		128	50-140			
1,2-Dichlorobenzene	2.89	0.05	ug/g		72.2	60-130			
1,3-Dichlorobenzene	3.31	0.05	ug/g		82.7	60-130			
1,4-Dichlorobenzene	3.16	0.05	ug/g		79.0	60-130			
1,1-Dichloroethane	4.94	0.05	ug/g		124	60-130			
1,2-Dichloroethane	4.11	0.05	ug/g		103	60-130			
1,1-Dichloroethylene	4.71	0.05	ug/g		118	60-130			
cis-1,2-Dichloroethylene	4.07	0.05	ug/g		102	60-130			
trans-1,2-Dichloroethylene	4.10	0.05	ug/g		102	60-130			
1,2-Dichloropropane	4.23	0.05	ug/g		106	60-130			
cis-1,3-Dichloropropylene	3.50	0.05	ug/g		87.6	60-130			
trans-1,3-Dichloropropylene	2.76	0.05	ug/g		69.1	60-130			
Ethylbenzene	3.74	0.05	ug/g		93.6	60-130			
Ethylene dibromide (dibromoethane)	4.33	0.05	ug/g		108	60-130			
Hexane	3.44	0.05	ug/g		85.9	60-130			
Methyl Ethyl Ketone (2-Butanone)	9.22	0.50	ug/g		92.2	50-140			
Methyl Isobutyl Ketone	9.70	0.50	ug/g		97.0	50-140			
Methyl tert-butyl ether	8.21	0.05	ug/g		82.1	50-140			
Methylene Chloride	3.71	0.05	ug/g		92.7	60-130			
Styrene	3.47	0.05	ug/g		86.8	60-130			
1,1,1,2-Tetrachloroethane	4.80	0.05	ug/g		120	60-130			
1,1,2,2-Tetrachloroethane	2.53	0.05	ug/g		63.3	60-130			
Tetrachloroethylene	4.30	0.05	ug/g		107	60-130			
Toluene	3.65	0.05	ug/g		91.2	60-130			
1,1,1-Trichloroethane	3.81	0.05	ug/g		95.2	60-130			
1,1,2-Trichloroethane	4.00	0.05	ug/g		100	60-130			
Trichloroethylene	4.90	0.05	ug/g		122	60-130			
Trichlorofluoromethane	3.72	0.05	ug/g		93.1	50-140			
Vinyl chloride	4.47	0.02	ug/g		112	50-140			
m,p-Xylenes	7.40	0.05	ug/g		92.5	60-130			
o-Xylene	3.94	0.05	ug/g		98.6	60-130			

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 26-Mar-2019

Order Date: 21-Mar-2019

Project Description: TS SO 37029

**Qualifier Notes:*****Sample Qualifiers :***

- 1 : GC-FID signal did not return to baseline by C50
- 5 : The surrogate recovery for this sample is outside of established control limits due to a sample matrix effect.

***QC Qualifiers :***

- QM-06 : Due to noted non-homogeneity of the QC sample matrix, the spike recoveries were out side the accepted range. Batch data accepted based on other QC.
- QR-04 : Duplicate results exceeds RPD limits due to non-homogeneous matrix.

**Sample Data Revisions**

None

**Work Order Revisions / Comments:**

None

**Other Report Notes:**

n/a: not applicable

ND: Not Detected

MDL: Method Detection Limit

Source Result: Data used as source for matrix and duplicate samples

%REC: Percent recovery.

RPD: Relative percent difference.

Soil results are reported on a dry weight basis when the units are denoted with 'dry'.

Where %Solids is reported, moisture loss includes the loss of volatile hydrocarbons.

**CCME PHC additional information:**

- The method for the analysis of PHCs complies with the Reference Method for the CWS PHC and is validated for use in the laboratory. All prescribed quality criteria identified in the method has been met.
- F1 range corrected for BTEX.
- F2 to F3 ranges corrected for appropriate PAHs where available.
- The gravimetric heavy hydrocarbons (F4G) are not to be added to C6 to C50 hydrocarbons.
- In the case where F4 and F4G are both reported, the greater of the two results is to be used for comparison to CWS PHC criteria.



TRUST  
RESPC  
RELIABLE



Bld.  
4JB

www.paracelos.com

Chain of Custody  
(Lab Use Only)

No 46537

Client Name: DST Group	Project Reference: TSSO-3FO29	Page ____ of ____
Contact Name: Shahab Nowruzi	Quote #	Turnaround Time:
Address:	PO #	<input type="checkbox"/> 1 Day <input type="checkbox"/> 3 Day
Telephone: 613-295-5622	Email Address: shahab.nowruzi@dstgroup.com	<input type="checkbox"/> 2 Day <input checked="" type="checkbox"/> Regular
Criteria: <input checked="" type="checkbox"/> O. Reg. 153/04 (As Amended) Table <input type="checkbox"/> RSC Filing <input checked="" type="checkbox"/> Reg 558/00 <input type="checkbox"/> PWQO <input type="checkbox"/> CCME <input type="checkbox"/> SUB (Storm) <input type="checkbox"/> SUB (Sanitary) Municipality: _____		Date Required: _____ <input type="checkbox"/> Other:

Matrix Type: S (Soil Sed.) GW (Ground Water) SW (Surface Water) SS (Storm Sanitary Sewer) P (Paint) A (Air) O (Other)

Paracel Order Number: 1912587-Bulk 1912588-TCLP	Matrix	Air Volume	# of Containers	Sample Taken		Required Analyses							
				Date	Time	BTEX	PAHs	VOCs	PHCs	METALS	Mercury	Lead	TCCP
1 BH19-4 SS2	S			21-March	6:14 AM	X	X	X	X	X	X	X	
2 BH19-7 SS4	S				AM	X	X	X	X	X	X	X	
3 BH19-12 SS2	S				PM	X	X	X	X	X	X	X	
4 BH19-13 SS2	S					X	X	X	X	X	X	X	
5 BH19-14 GS1	S					X	X	X	X	X	X	X	
6 BH19-15 GS1	S					X	X	X	X	X	X	X	
7 BH19-12/13 GS1	S			↓	↓	X	X	X	X	X	X	X	
8				21-March	PM.	X	X	X	X	X	X	X	
9													
10													

Comments:

Method of Delivery:

Relinquished By (Sign):	Received by Driver/Depot:	Received at: 2019	Verified By: Walkin
Relinquished By (Print): Shahab Nowruzi	Date/Time:	Date/Time: Mar 21/19	Date/Time: Mar 21/19
Date/Time: March 21, 2019 @ 1635	Temperature: °C	Temperature: 18.5 °C	pH Verified By: N/A

Chain of Custody (Blank) - Rev 0.4 Feb 2016

HR

4.5.2



TRUSTED.  
RESPONSIVE.  
RELIABLE.

300 - 2319 St. Laurent Blvd  
Ottawa, ON, K1G 4J8  
1-800-749-1947  
[www.paracellabs.com](http://www.paracellabs.com)

## Certificate of Analysis

### DST Consulting Engineers Inc. (Ottawa)

203-2150 Thurston Dr.  
Ottawa, ON K1G 5T9  
Attn: Shahab Nowrozi

Client PO:

Project: TS SO 37029  
Custody: 46534

Report Date: 22-Mar-2019  
Order Date: 18-Mar-2019

**Order #: 1912128**

This Certificate of Analysis contains analytical data applicable to the following samples as submitted:

Paracel ID	Client ID
1912128-01	BH19-10 SS2
1912128-02	BH19-9 SS4
1912128-03	BH19-8 SS4

Approved By:

A handwritten signature in blue ink that appears to read 'Dale Robertson'.

Dale Robertson, BSc  
Laboratory Director

Any use of these results implies your agreement that our total liability in connection with this work, however arising, shall be limited to the amount paid by you for this work, and that our employees or agents shall not under any circumstances be liable to you in connection with this work.

Certificate of Analysis

Report Date: 22-Mar-2019

Client: DST Consulting Engineers Inc. (Ottawa)

Order Date: 18-Mar-2019

Client PO:

Project Description: TS SO 37029

## Analysis Summary Table

Analysis	Method Reference/Description	Extraction Date	Analysis Date
Chromium, hexavalent - soil	MOE E3056 - Extraction, colourimetric	19-Mar-19	19-Mar-19
Mercury by CVAA	EPA 7471B - CVAA, digestion	21-Mar-19	21-Mar-19
PHC F1	CWS Tier 1 - P&T GC-FID	19-Mar-19	20-Mar-19
PHC F4G (gravimetric)	CWS Tier 1 - Extraction Gravimetric	21-Mar-19	21-Mar-19
PHCs F2 to F4	CWS Tier 1 - GC-FID, extraction	19-Mar-19	19-Mar-19
REG 153: Metals by ICP/MS, soil	EPA 6020 - Digestion - ICP-MS	20-Mar-19	20-Mar-19
REG 153: PAHs by GC-MS	EPA 8270 - GC-MS, extraction	19-Mar-19	20-Mar-19
REG 153: VOCs by P&T GC/MS	EPA 8260 - P&T GC-MS	19-Mar-19	20-Mar-19
Solids, %	Gravimetric, calculation	21-Mar-19	21-Mar-19

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 22-Mar-2019

Order Date: 18-Mar-2019

Project Description: TS SO 37029

Client ID:	BH19-10 SS2	BH19-9 SS4	BH19-8 SS4	-
Sample Date:	03/18/2019 00:00	03/18/2019 00:00	03/18/2019 00:00	-
Sample ID:	1912128-01	1912128-02	1912128-03	-
MDL/Units	Soil	Soil	Soil	-

**Physical Characteristics**

% Solids	0.1 % by Wt.	90.0	72.8	85.4	-
----------	--------------	------	------	------	---

**Metals**

Antimony	1.0 ug/g dry	2.1	<1.0	<1.0	-
Arsenic	1.0 ug/g dry	7.4	3.5	2.9	-
Barium	1.0 ug/g dry	114	328	105	-
Beryllium	0.5 ug/g dry	<0.5	0.9	0.6	-
Boron	5.0 ug/g dry	24.6	6.8	11.6	-
Cadmium	0.5 ug/g dry	1.6	<0.5	<0.5	-
Chromium	5.0 ug/g dry	47.3	91.6	50.2	-
Chromium (VI)	0.2 ug/g dry	<0.2	<0.2	<0.2	-
Cobalt	1.0 ug/g dry	8.8	20.3	10.1	-
Copper	5.0 ug/g dry	323	49.1	22.7	-
Lead	1.0 ug/g dry	135	12.5	8.5	-
Mercury	0.1 ug/g dry	1.6	<0.1	<0.1	-
Molybdenum	1.0 ug/g dry	9.3	<1.0	<1.0	-
Nickel	5.0 ug/g dry	48.7	47.9	25.7	-
Selenium	1.0 ug/g dry	<1.0	<1.0	<1.0	-
Silver	0.3 ug/g dry	1.5	<0.3	<0.3	-
Thallium	1.0 ug/g dry	<1.0	<1.0	<1.0	-
Uranium	1.0 ug/g dry	<1.0	<1.0	<1.0	-
Vanadium	10.0 ug/g dry	26.0	98.7	51.3	-
Zinc	20.0 ug/g dry	579	176	78.7	-

**Volatiles**

Acetone	0.50 ug/g dry	<0.50	<0.50	<0.50	-
Benzene	0.02 ug/g dry	<0.02	<0.02	<0.02	-
Bromodichloromethane	0.05 ug/g dry	<0.05	<0.05	<0.05	-
Bromoform	0.05 ug/g dry	<0.05	<0.05	<0.05	-
Bromomethane	0.05 ug/g dry	<0.05	<0.05	<0.05	-
Carbon Tetrachloride	0.05 ug/g dry	<0.05	<0.05	<0.05	-
Chlorobenzene	0.05 ug/g dry	<0.05	<0.05	<0.05	-
Chloroform	0.05 ug/g dry	<0.05	<0.05	<0.05	-
Dibromochloromethane	0.05 ug/g dry	<0.05	<0.05	<0.05	-
Dichlorodifluoromethane	0.05 ug/g dry	<0.05	<0.05	<0.05	-
1,2-Dichlorobenzene	0.05 ug/g dry	<0.05	<0.05	<0.05	-
1,3-Dichlorobenzene	0.05 ug/g dry	<0.05	<0.05	<0.05	-

## Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 22-Mar-2019

Order Date: 18-Mar-2019

Project Description: TS SO 37029

	Client ID: Sample Date: Sample ID: MDL/Units	BH19-10 SS2 03/18/2019 00:00 1912128-01 Soil	BH19-9 SS4 03/18/2019 00:00 1912128-02 Soil	BH19-8 SS4 03/18/2019 00:00 1912128-03 Soil	- - - -
1,4-Dichlorobenzene	0.05 ug/g dry	<0.05	<0.05	<0.05	-
1,1-Dichloroethane	0.05 ug/g dry	<0.05	<0.05	<0.05	-
1,2-Dichloroethane	0.05 ug/g dry	<0.05	<0.05	<0.05	-
1,1-Dichloroethylene	0.05 ug/g dry	<0.05	<0.05	<0.05	-
cis-1,2-Dichloroethylene	0.05 ug/g dry	<0.05	<0.05	<0.05	-
trans-1,2-Dichloroethylene	0.05 ug/g dry	<0.05	<0.05	<0.05	-
1,2-Dichloropropane	0.05 ug/g dry	<0.05	<0.05	<0.05	-
cis-1,3-Dichloropropylene	0.05 ug/g dry	<0.05	<0.05	<0.05	-
trans-1,3-Dichloropropylene	0.05 ug/g dry	<0.05	<0.05	<0.05	-
1,3-Dichloropropene, total	0.05 ug/g dry	<0.05	<0.05	<0.05	-
Ethylbenzene	0.05 ug/g dry	0.16	<0.05	<0.05	-
Ethylene dibromide (dibromoethan	0.05 ug/g dry	<0.05	<0.05	<0.05	-
Hexane	0.05 ug/g dry	0.13	<0.05	<0.05	-
Methyl Ethyl Ketone (2-Butanone)	0.50 ug/g dry	<0.50	<0.50	<0.50	-
Methyl Isobutyl Ketone	0.50 ug/g dry	<0.50	<0.50	<0.50	-
Methyl tert-butyl ether	0.05 ug/g dry	<0.05	<0.05	<0.05	-
Methylene Chloride	0.05 ug/g dry	<0.05	<0.05	<0.05	-
Styrene	0.05 ug/g dry	<0.05	<0.05	<0.05	-
1,1,1,2-Tetrachloroethane	0.05 ug/g dry	<0.05	<0.05	<0.05	-
1,1,2,2-Tetrachloroethane	0.05 ug/g dry	<0.05	<0.05	<0.05	-
Tetrachloroethylene	0.05 ug/g dry	<0.05	<0.05	1.74	-
Toluene	0.05 ug/g dry	0.14	<0.05	<0.05	-
1,1,1-Trichloroethane	0.05 ug/g dry	<0.05	<0.05	<0.05	-
1,1,2-Trichloroethane	0.05 ug/g dry	<0.05	<0.05	<0.05	-
Trichloroethylene	0.05 ug/g dry	<0.05	<0.05	<0.05	-
Trichlorofluoromethane	0.05 ug/g dry	<0.05	<0.05	<0.05	-
Vinyl chloride	0.02 ug/g dry	<0.02	<0.02	<0.02	-
m,p-Xylenes	0.05 ug/g dry	0.33	<0.05	<0.05	-
o-Xylene	0.05 ug/g dry	0.22	<0.05	<0.05	-
Xylenes, total	0.05 ug/g dry	0.55	<0.05	<0.05	-
4-Bromofluorobenzene	Surrogate	99.5%	111%	110%	-
Dibromofluoromethane	Surrogate	98.1%	90.3%	87.4%	-
Toluene-d8	Surrogate	120%	115%	116%	-

**Hydrocarbons**

F1 PHCs (C6-C10)	7 ug/g dry	96	<7	<7	-
F2 PHCs (C10-C16)	4 ug/g dry	265	<4	<4	-

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 22-Mar-2019

Order Date: 18-Mar-2019

Project Description: TS SO 37029

	Client ID: Sample Date: Sample ID: MDL/Units	BH19-10 SS2 03/18/2019 00:00 1912128-01 Soil	BH19-9 SS4 03/18/2019 00:00 1912128-02 Soil	BH19-8 SS4 03/18/2019 00:00 1912128-03 Soil	- - - -
F3 PHCs (C16-C34)	8 ug/g dry	1630	44	<8	-
F4 PHCs (C34-C50)	6 ug/g dry	1230 [1]	21	<6	-
F4G PHCs (gravimetric)	50 ug/g dry	2700	-	-	-

**Semi-Volatiles**

Acenaphthene	0.02 ug/g dry	0.04	<0.02	<0.02	-
Acenaphthylene	0.02 ug/g dry	0.03	<0.02	<0.02	-
Anthracene	0.02 ug/g dry	0.09	<0.02	<0.02	-
Benzo [a] anthracene	0.02 ug/g dry	0.18	<0.02	<0.02	-
Benzo [a] pyrene	0.02 ug/g dry	0.14	<0.02	<0.02	-
Benzo [b] fluoranthene	0.02 ug/g dry	0.29	<0.02	<0.02	-
Benzo [g,h,i] perylene	0.02 ug/g dry	0.11	<0.02	<0.02	-
Benzo [k] fluoranthene	0.02 ug/g dry	0.13	<0.02	<0.02	-
Chrysene	0.02 ug/g dry	0.18	<0.02	<0.02	-
Dibenzo [a,h] anthracene	0.02 ug/g dry	0.02	<0.02	<0.02	-
Fluoranthene	0.02 ug/g dry	0.46	0.02	<0.02	-
Fluorene	0.02 ug/g dry	0.07	<0.02	<0.02	-
Indeno [1,2,3-cd] pyrene	0.02 ug/g dry	0.09	<0.02	<0.02	-
1-Methylnaphthalene	0.02 ug/g dry	0.09	<0.02	<0.02	-
2-Methylnaphthalene	0.02 ug/g dry	0.13	<0.02	<0.02	-
Methylnaphthalene (1&2)	0.04 ug/g dry	0.22	<0.04	<0.04	-
Naphthalene	0.01 ug/g dry	0.09	<0.01	<0.01	-
Phenanthrene	0.02 ug/g dry	0.24	<0.02	<0.02	-
Pyrene	0.02 ug/g dry	0.46	0.03	<0.02	-
2-Fluorobiphenyl	Surrogate	92.5%	102%	88.4%	-
Terphenyl-d14	Surrogate	85.7%	98.4%	106%	-

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 22-Mar-2019

Order Date: 18-Mar-2019

Project Description: TS SO 37029

**Method Quality Control: Blank**

Analyte	Result	Reporting Limit	Units	Source Result	%REC	%REC Limit	RPD	RPD Limit	Notes
---------	--------	-----------------	-------	---------------	------	------------	-----	-----------	-------

**Hydrocarbons**

F1 PHCs (C6-C10)	ND	7	ug/g
F2 PHCs (C10-C16)	ND	4	ug/g
F3 PHCs (C16-C34)	ND	8	ug/g
F4 PHCs (C34-C50)	ND	6	ug/g
F4G PHCs (gravimetric)	ND	50	ug/g

**Metals**

Antimony	ND	1.0	ug/g
Arsenic	ND	1.0	ug/g
Barium	ND	1.0	ug/g
Beryllium	ND	0.5	ug/g
Boron	ND	5.0	ug/g
Cadmium	ND	0.5	ug/g
Chromium (VI)	ND	0.2	ug/g
Chromium	ND	5.0	ug/g
Cobalt	ND	1.0	ug/g
Copper	ND	5.0	ug/g
Lead	ND	1.0	ug/g
Mercury	ND	0.1	ug/g
Molybdenum	ND	1.0	ug/g
Nickel	ND	5.0	ug/g
Selenium	ND	1.0	ug/g
Silver	ND	0.3	ug/g
Thallium	ND	1.0	ug/g
Uranium	ND	1.0	ug/g
Vanadium	ND	10.0	ug/g
Zinc	ND	20.0	ug/g

**Semi-Volatiles**

Acenaphthene	ND	0.02	ug/g
Acenaphthylene	ND	0.02	ug/g
Anthracene	ND	0.02	ug/g
Benzo [a] anthracene	ND	0.02	ug/g
Benzo [a] pyrene	ND	0.02	ug/g
Benzo [b] fluoranthene	ND	0.02	ug/g
Benzo [g,h,i] perylene	ND	0.02	ug/g
Benzo [k] fluoranthene	ND	0.02	ug/g
Chrysene	ND	0.02	ug/g
Dibeno [a,h] anthracene	ND	0.02	ug/g
Fluoranthene	ND	0.02	ug/g
Fluorene	ND	0.02	ug/g
Indeno [1,2,3-cd] pyrene	ND	0.02	ug/g
1-Methylnaphthalene	ND	0.02	ug/g
2-Methylnaphthalene	ND	0.02	ug/g
Methylnaphthalene (1&2)	ND	0.04	ug/g
Naphthalene	ND	0.01	ug/g
Phenanthrene	ND	0.02	ug/g
Pyrene	ND	0.02	ug/g
Surrogate: 2-Fluorobiphenyl	1.48		ug/g
Surrogate: Terphenyl-d14	1.62		ug/g
		111	50-140
		122	50-140

**Volatiles**

Acetone	ND	0.50	ug/g
Benzene	ND	0.02	ug/g
Bromodichloromethane	ND	0.05	ug/g
Bromoform	ND	0.05	ug/g
Bromomethane	ND	0.05	ug/g
Carbon Tetrachloride	ND	0.05	ug/g
Chlorobenzene	ND	0.05	ug/g
Chloroform	ND	0.05	ug/g
Dibromochloromethane	ND	0.05	ug/g

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 22-Mar-2019

Order Date: 18-Mar-2019

Project Description: TS SO 37029

**Method Quality Control: Blank**

Analyte	Result	Reporting Limit	Units	Source Result	%REC	%REC Limit	RPD RPD	RPD Limit	Notes
Dichlorodifluoromethane	ND	0.05	ug/g						
1,2-Dichlorobenzene	ND	0.05	ug/g						
1,3-Dichlorobenzene	ND	0.05	ug/g						
1,4-Dichlorobenzene	ND	0.05	ug/g						
1,1-Dichloroethane	ND	0.05	ug/g						
1,2-Dichloroethane	ND	0.05	ug/g						
1,1-Dichloroethylene	ND	0.05	ug/g						
cis-1,2-Dichloroethylene	ND	0.05	ug/g						
trans-1,2-Dichloroethylene	ND	0.05	ug/g						
1,2-Dichloropropane	ND	0.05	ug/g						
cis-1,3-Dichloropropylene	ND	0.05	ug/g						
trans-1,3-Dichloropropylene	ND	0.05	ug/g						
1,3-Dichloropropene, total	ND	0.05	ug/g						
Ethylbenzene	ND	0.05	ug/g						
Ethylene dibromide (dibromoethane)	ND	0.05	ug/g						
Hexane	ND	0.05	ug/g						
Methyl Ethyl Ketone (2-Butanone)	ND	0.50	ug/g						
Methyl Isobutyl Ketone	ND	0.50	ug/g						
Methyl tert-butyl ether	ND	0.05	ug/g						
Methylene Chloride	ND	0.05	ug/g						
Styrene	ND	0.05	ug/g						
1,1,1,2-Tetrachloroethane	ND	0.05	ug/g						
1,1,2,2-Tetrachloroethane	ND	0.05	ug/g						
Tetrachloroethylene	ND	0.05	ug/g						
Toluene	ND	0.05	ug/g						
1,1,1-Trichloroethane	ND	0.05	ug/g						
1,1,2-Trichloroethane	ND	0.05	ug/g						
Trichloroethylene	ND	0.05	ug/g						
Trichlorofluoromethane	ND	0.05	ug/g						
Vinyl chloride	ND	0.02	ug/g						
m,p-Xylenes	ND	0.05	ug/g						
o-Xylene	ND	0.05	ug/g						
Xylenes, total	ND	0.05	ug/g						
Surrogate: 4-Bromofluorobenzene	8.88		ug/g		111	50-140			
Surrogate: Dibromofluoromethane	6.86		ug/g		85.8	50-140			
Surrogate: Toluene-d8	8.27		ug/g		103	50-140			

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 22-Mar-2019

Order Date: 18-Mar-2019

Project Description: TS SO 37029

**Method Quality Control: Duplicate**

Analyte	Result	Reporting Limit	Units	Source Result	%REC	%REC Limit	RPD	RPD Limit	Notes
<b>Hydrocarbons</b>									
F1 PHCs (C6-C10)	ND	7	ug/g dry	ND				40	
F2 PHCs (C10-C16)	288	4	ug/g dry	265			8.4	30	
F3 PHCs (C16-C34)	1780	8	ug/g dry	1630			9.4	30	
F4 PHCs (C34-C50)	965	6	ug/g dry	1230			24.1	30	
F4G PHCs (gravimetric)	3390	50	ug/g dry	2700			22.6	30	
<b>Metals</b>									
Antimony	1.2	1.0	ug/g dry	ND			0.0	30	
Arsenic	7.4	1.0	ug/g dry	8.0			7.9	30	
Barium	79.9	1.0	ug/g dry	91.0			12.9	30	
Beryllium	0.8	0.5	ug/g dry	0.8			10.1	30	
Boron	12.2	5.0	ug/g dry	13.4			9.4	30	
Cadmium	ND	0.5	ug/g dry	0.6			0.0	30	
Chromium (VI)	ND	0.2	ug/g dry	ND				35	
Chromium	19.6	5.0	ug/g dry	21.6			9.6	30	
Cobalt	8.2	1.0	ug/g dry	9.1			11.1	30	
Copper	16.4	5.0	ug/g dry	17.9			8.2	30	
Lead	11.1	1.0	ug/g dry	11.9			7.0	30	
Mercury	ND	0.1	ug/g dry	ND			0.0	30	
Molybdenum	2.6	1.0	ug/g dry	ND			0.0	30	
Nickel	20.7	5.0	ug/g dry	23.2			11.5	30	
Selenium	ND	1.0	ug/g dry	ND			0.0	30	
Silver	ND	0.3	ug/g dry	0.4			0.0	30	
Thallium	ND	1.0	ug/g dry	ND			0.0	30	
Uranium	1.1	1.0	ug/g dry	1.3			18.2	30	
Vanadium	29.6	10.0	ug/g dry	32.4			9.1	30	
Zinc	54.8	20.0	ug/g dry	60.1			9.1	30	
<b>Physical Characteristics</b>									
% Solids	93.8	0.1	% by Wt.	94.1			0.3	25	
<b>Semi-Volatiles</b>									
Acenaphthene	0.043	0.02	ug/g dry	0.043			0.6	40	
Acenaphthylene	0.031	0.02	ug/g dry	0.035			11.1	40	
Anthracene	0.076	0.02	ug/g dry	0.092			19.6	40	
Benzo [a] anthracene	0.162	0.02	ug/g dry	0.182			11.3	40	
Benzo [a] pyrene	0.128	0.02	ug/g dry	0.144			11.8	40	
Benzo [b] fluoranthene	0.217	0.02	ug/g dry	0.291			29.3	40	
Benzo [g,h,i] perylene	0.108	0.02	ug/g dry	0.110			2.1	40	
Benzo [k] fluoranthene	0.098	0.02	ug/g dry	0.129			26.7	40	
Chrysene	0.168	0.02	ug/g dry	0.181			7.7	40	
Dibeno [a,h] anthracene	0.027	0.02	ug/g dry	0.021			23.6	40	
Fluoranthene	0.415	0.02	ug/g dry	0.460			10.4	40	
Fluorene	0.067	0.02	ug/g dry	0.067			1.2	40	
Indeno [1,2,3-cd] pyrene	0.076	0.02	ug/g dry	0.089			15.0	40	
1-Methylnaphthalene	0.095	0.02	ug/g dry	0.091			4.0	40	
2-Methylnaphthalene	0.139	0.02	ug/g dry	0.133			4.8	40	
Naphthalene	0.102	0.01	ug/g dry	0.090			11.8	40	
Phenanthrene	0.228	0.02	ug/g dry	0.244			7.1	40	
Pyrene	0.432	0.02	ug/g dry	0.459			6.1	40	
Surrogate: 2-Fluorobiphenyl	1.49		ug/g dry		100	50-140			
Surrogate: Terphenyl-d14	1.47		ug/g dry		99.5	50-140			
<b>Volatiles</b>									
Acetone	ND	0.50	ug/g dry	ND				50	
Benzene	ND	0.02	ug/g dry	ND				50	
Bromodichloromethane	ND	0.05	ug/g dry	ND				50	
Bromoform	ND	0.05	ug/g dry	ND				50	
Bromomethane	ND	0.05	ug/g dry	ND				50	
Carbon Tetrachloride	ND	0.05	ug/g dry	ND				50	

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 22-Mar-2019

Order Date: 18-Mar-2019

Project Description: TS SO 37029

**Method Quality Control: Duplicate**

Analyte	Result	Reporting Limit	Units	Source Result	%REC	%REC Limit	RPD	RPD Limit	Notes
Chlorobenzene	ND	0.05	ug/g dry	ND				50	
Chloroform	ND	0.05	ug/g dry	ND				50	
Dibromochloromethane	ND	0.05	ug/g dry	ND				50	
Dichlorodifluoromethane	ND	0.05	ug/g dry	ND				50	
1,2-Dichlorobenzene	ND	0.05	ug/g dry	ND				50	
1,3-Dichlorobenzene	ND	0.05	ug/g dry	ND				50	
1,4-Dichlorobenzene	ND	0.05	ug/g dry	ND				50	
1,1-Dichloroethane	ND	0.05	ug/g dry	ND				50	
1,2-Dichloroethane	ND	0.05	ug/g dry	ND				50	
1,1-Dichloroethylene	ND	0.05	ug/g dry	ND				50	
cis-1,2-Dichloroethylene	ND	0.05	ug/g dry	ND				50	
trans-1,2-Dichloroethylene	ND	0.05	ug/g dry	ND				50	
1,2-Dichloropropane	ND	0.05	ug/g dry	ND				50	
cis-1,3-Dichloropropylene	ND	0.05	ug/g dry	ND				50	
trans-1,3-Dichloropropylene	ND	0.05	ug/g dry	ND				50	
Ethylbenzene	ND	0.05	ug/g dry	ND				50	
Ethylene dibromide (dibromoethane)	ND	0.05	ug/g dry	ND				50	
Hexane	ND	0.05	ug/g dry	ND				50	
Methyl Ethyl Ketone (2-Butanone)	ND	0.50	ug/g dry	ND				50	
Methyl Isobutyl Ketone	ND	0.50	ug/g dry	ND				50	
Methyl tert-butyl ether	ND	0.05	ug/g dry	ND				50	
Methylene Chloride	ND	0.05	ug/g dry	ND				50	
Styrene	ND	0.05	ug/g dry	ND				50	
1,1,1,2-Tetrachloroethane	ND	0.05	ug/g dry	ND				50	
1,1,2,2-Tetrachloroethane	ND	0.05	ug/g dry	ND				50	
Tetrachloroethylene	ND	0.05	ug/g dry	ND				50	
Toluene	ND	0.05	ug/g dry	ND				50	
1,1,1-Trichloroethane	ND	0.05	ug/g dry	ND				50	
1,1,2-Trichloroethane	ND	0.05	ug/g dry	ND				50	
Trichloroethylene	ND	0.05	ug/g dry	ND				50	
Trichlorofluoromethane	ND	0.05	ug/g dry	ND				50	
Vinyl chloride	ND	0.02	ug/g dry	ND				50	
m,p-Xylenes	ND	0.05	ug/g dry	ND				50	
o-Xylene	ND	0.05	ug/g dry	ND				50	
Surrogate: 4-Bromofluorobenzene	10.2		ug/g dry		112	50-140			
Surrogate: Dibromofluoromethane	8.78		ug/g dry		96.3	50-140			
Surrogate: Toluene-d8	9.97		ug/g dry		109	50-140			

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 22-Mar-2019

Order Date: 18-Mar-2019

Project Description: TS SO 37029

**Method Quality Control: Spike**

Analyte	Result	Reporting Limit	Units	Source Result	%REC	%REC Limit	RPD	RPD Limit	Notes
<b>Hydrocarbons</b>									
F1 PHCs (C6-C10)	187	7	ug/g		93.4	80-120			
F2 PHCs (C10-C16)	369	4	ug/g	265	117	60-140			
F3 PHCs (C16-C34)	215	8	ug/g		110	80-120			
F4 PHCs (C34-C50)	125	6	ug/g		100	80-120			
F4G PHCs (gravimetric)	940	50	ug/g		94.0	80-120			
<b>Metals</b>									
Antimony	43.5		ug/L	ND	87.0	70-130			
Arsenic	50.4		ug/L	3.2	94.4	70-130			
Barium	80.9		ug/L	36.4	89.0	70-130			
Beryllium	51.2		ug/L	ND	102	70-130			
Boron	49.5		ug/L	5.4	88.3	70-130			
Cadmium	45.1		ug/L	ND	89.8	70-130			
Chromium (VI)	3.8	0.2	ug/g		75.0	70-130			
Chromium	53.7		ug/L	8.6	90.1	70-130			
Cobalt	48.8		ug/L	3.7	90.3	70-130			
Copper	49.7		ug/L	7.1	85.0	70-130			
Lead	46.6		ug/L	4.8	83.7	70-130			
Mercury	1.60	0.1	ug/g	ND	107	70-130			
Molybdenum	48.1		ug/L	ND	96.2	70-130			
Nickel	56.4		ug/L	9.3	94.3	70-130			
Selenium	45.8		ug/L	ND	91.0	70-130			
Silver	42.5		ug/L	ND	84.7	70-130			
Thallium	42.7		ug/L	ND	84.9	70-130			
Uranium	43.3		ug/L	ND	85.5	70-130			
Vanadium	61.8		ug/L	13.0	97.7	70-130			
Zinc	67.2		ug/L	24.0	86.3	70-130			
<b>Semi-Volatiles</b>									
Acenaphthene	0.238	0.02	ug/g	0.043	105	50-140			
Acenaphthylene	0.201	0.02	ug/g	0.035	89.5	50-140			
Anthracene	0.276	0.02	ug/g	0.092	99.3	50-140			
Benzo [a] anthracene	0.348	0.02	ug/g	0.182	89.7	50-140			
Benzo [a] pyrene	0.274	0.02	ug/g	0.144	70.4	50-140			
Benzo [b] fluoranthene	0.489	0.02	ug/g	0.291	107	50-140			
Benzo [g,h,i] perylene	0.249	0.02	ug/g	0.110	75.1	50-140			
Benzo [k] fluoranthene	0.377	0.02	ug/g	0.129	134	50-140			
Chrysene	0.335	0.02	ug/g	0.181	83.3	50-140			
Dibenzo [a,h] anthracene	0.168	0.02	ug/g	0.021	79.1	50-140			
Fluoranthene	0.638	0.02	ug/g	0.460	95.9	50-140			
Fluorene	0.251	0.02	ug/g	0.067	99.4	50-140			
Indeno [1,2,3-cd] pyrene	0.211	0.02	ug/g	0.089	66.2	50-140			
1-Methylnaphthalene	0.305	0.02	ug/g	0.091	115	50-140			
2-Methylnaphthalene	0.329	0.02	ug/g	0.133	106	50-140			
Naphthalene	0.335	0.01	ug/g	0.090	132	50-140			
Phenanthrene	0.431	0.02	ug/g	0.244	101	50-140			
Pyrene	0.644	0.02	ug/g	0.459	99.7	50-140			
Surrogate: 2-Fluorobiphenyl	1.42		ug/g		96.2	50-140			
<b>Volatiles</b>									
Acetone	9.73	0.50	ug/g		97.3	50-140			
Benzene	4.32	0.02	ug/g		108	60-130			
Bromodichloromethane	4.01	0.05	ug/g		100	60-130			

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 22-Mar-2019

Order Date: 18-Mar-2019

Project Description: TS SO 37029

**Method Quality Control: Spike**

Analyte	Result	Reporting Limit	Units	Source Result	%REC	%REC Limit	RPD	RPD Limit	Notes
Bromoform	3.64	0.05	ug/g		91.1	60-130			
Bromomethane	2.79	0.05	ug/g		69.8	50-140			
Carbon Tetrachloride	3.71	0.05	ug/g		92.6	60-130			
Chlorobenzene	3.37	0.05	ug/g		84.2	60-130			
Chloroform	4.74	0.05	ug/g		118	60-130			
Dibromochloromethane	3.63	0.05	ug/g		90.8	60-130			
Dichlorodifluoromethane	2.98	0.05	ug/g		74.4	50-140			
1,2-Dichlorobenzene	3.68	0.05	ug/g		92.1	60-130			
1,3-Dichlorobenzene	3.62	0.05	ug/g		90.6	60-130			
1,4-Dichlorobenzene	3.55	0.05	ug/g		88.8	60-130			
1,1-Dichloroethane	4.60	0.05	ug/g		115	60-130			
1,2-Dichloroethane	4.21	0.05	ug/g		105	60-130			
1,1-Dichloroethylene	3.84	0.05	ug/g		96.1	60-130			
cis-1,2-Dichloroethylene	4.87	0.05	ug/g		122	60-130			
trans-1,2-Dichloroethylene	4.20	0.05	ug/g		105	60-130			
1,2-Dichloropropane	4.75	0.05	ug/g		119	60-130			
cis-1,3-Dichloropropylene	4.46	0.05	ug/g		111	60-130			
trans-1,3-Dichloropropylene	4.08	0.05	ug/g		102	60-130			
Ethylbenzene	3.46	0.05	ug/g		86.4	60-130			
Ethylene dibromide (dibromoethane)	3.95	0.05	ug/g		98.7	60-130			
Hexane	2.71	0.05	ug/g		67.8	60-130			
Methyl Ethyl Ketone (2-Butanone)	10.8	0.50	ug/g		108	50-140			
Methyl Isobutyl Ketone	11.7	0.50	ug/g		117	50-140			
Methyl tert-butyl ether	12.8	0.05	ug/g		128	50-140			
Methylene Chloride	3.91	0.05	ug/g		97.8	60-130			
Styrene	3.72	0.05	ug/g		93.0	60-130			
1,1,1,2-Tetrachloroethane	3.49	0.05	ug/g		87.3	60-130			
1,1,2,2-Tetrachloroethane	3.89	0.05	ug/g		97.3	60-130			
Tetrachloroethylene	3.51	0.05	ug/g		87.8	60-130			
Toluene	3.23	0.05	ug/g		80.6	60-130			
1,1,1-Trichloroethane	4.54	0.05	ug/g		114	60-130			
1,1,2-Trichloroethane	4.60	0.05	ug/g		115	60-130			
Trichloroethylene	4.52	0.05	ug/g		113	60-130			
Trichlorofluoromethane	3.56	0.05	ug/g		88.9	50-140			
Vinyl chloride	2.68	0.02	ug/g		66.9	50-140			
m,p-Xylenes	6.84	0.05	ug/g		85.5	60-130			
o-Xylene	3.47	0.05	ug/g		86.8	60-130			

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 22-Mar-2019

Order Date: 18-Mar-2019

Project Description: TS SO 37029

**Qualifier Notes:*****Sample Qualifiers :***

- 1 : GC-FID signal did not return to baseline by C50

**Sample Data Revisions**

None

**Work Order Revisions / Comments:**

None

**Other Report Notes:**

n/a: not applicable

ND: Not Detected

MDL: Method Detection Limit

Source Result: Data used as source for matrix and duplicate samples

%REC: Percent recovery.

RPD: Relative percent difference.

Soil results are reported on a dry weight basis when the units are denoted with 'dry'.

Where %Solids is reported, moisture loss includes the loss of volatile hydrocarbons.

***CCME PHC additional information:***

- The method for the analysis of PHCs complies with the Reference Method for the CWS PHC and is validated for use in the laboratory. All prescribed quality criteria identified in the method has been met.
- F1 range corrected for BTEX.
- F2 to F3 ranges corrected for appropriate PAHs where available.
- The gravimetric heavy hydrocarbons (F4G) are not to be added to C6 to C50 hydrocarbons.
- In the case where F4 and F4G are both reported, the greater of the two results is to be used for comparison to CWS PHC criteria.



TRI  
RE:  
REI

Paracel ID: 1912128



Laurent Blvd.  
K1G 4J8  
447  
acellabs.com

Chain of Custody

(Lab Use Only)

No 46534

Page 1 of 1

Client Name: DST Group	Project Reference: TSSC 37029	Turnaround Time:
Contact Name: Shahab Navrozi / Cameron Fischl	Quote #	<input type="checkbox"/> 1 Day <input type="checkbox"/> 3 Day
Address: 203 - 2150 Thurston Drive Ottawa, ON	PO #	<input type="checkbox"/> 2 Day <input checked="" type="checkbox"/> Regular
	Email Address: snavrozi@dstgroup.com cfischl@dstgroup.com	Date Required:
Telephone: 613-295-5622 / 613-402-0398		<input type="checkbox"/> Other:
Criteria: <input checked="" type="checkbox"/> O. Reg. 153/04 (As Amended) Table <input type="checkbox"/> RSC Filing <input type="checkbox"/> O. Reg. 558/00 <input type="checkbox"/> PWQO <input type="checkbox"/> CCME <input type="checkbox"/> SUB (Storm) <input type="checkbox"/> SUB (Sanitary) Municipality:		

Matrix Type: S (Soil/Sed.) GW (Ground Water) SW (Surface Water) SS (Storm/Sanitary Sewer) P (Paint) A (Air) O (Other)					Required Analyses							
Paracel Order Number:	Matrix	Air Volume	# of Containers	Sample Taken			BTEX	PAHs	VOCS	Metals	PHCs	Including
				Date	Time							
1 BH19-10 552	S		2	2019/03/18			X	X	X	X	X	Mercury, Chrome 6, Lead
2 BH19-9 554	S		2	↓			X	X	X	X	X	
3 BH19-8 55M	S		2	↓			X	X	X	X	X	
4												
5												
6												
7												
8												
9												
10												

Comments:

Method of Delivery

Walking

Relinquished By (Sign): <i>Cameron Fischl</i>	Received by Driver/Depot:	Received at Date: <i>2019/03/18 4:27 pm</i>	Verified By: <i>Mathew Andra</i>
Relinquished By (Print): <i>Cameron Fischl</i>	Date/Time:	<i>2019/03/18 4:27 pm</i>	Date/Time: <i>3/18/19 10:48</i>
Date/Time: <i>2019/03/18 4:27 pm</i>	Temperature: °C	Temperature: <i>15.3°C</i>	pH Verified By:

Chain of Custody (Blank) - Rev 0.4 Feb 2016



TRUSTED.  
RESPONSIVE.  
RELIABLE.

300 - 2319 St. Laurent Blvd  
Ottawa, ON, K1G 4J8  
1-800-749-1947  
[www.paracellabs.com](http://www.paracellabs.com)

## Certificate of Analysis

### DST Consulting Engineers Inc. (Ottawa)

203-2150 Thurston Dr.  
Ottawa, ON K1G 5T9  
Attn: Shahab Nowrozi

Client PO:

Project: TS SO 37029  
Custody: 47493

Report Date: 22-Mar-2019  
Order Date: 19-Mar-2019

**Order #: 1912273**

This Certificate of Analysis contains analytical data applicable to the following samples as submitted:

Paracel ID	Client ID
1912273-01	BH19-1 SS#5
1912273-02	BH19-3 SS#2
1912273-03	BH19-2 SS#2
1912273-04	BH19-6 SS#2

Approved By:

A handwritten signature in blue ink, appearing to read 'Dale Robertson'.

Dale Robertson, BSc  
Laboratory Director

Any use of these results implies your agreement that our total liability in connection with this work, however arising, shall be limited to the amount paid by you for this work, and that our employees or agents shall not under any circumstances be liable to you in connection with this work.

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 22-Mar-2019

Order Date: 19-Mar-2019

Project Description: TS SO 37029

## Analysis Summary Table

Analysis	Method Reference/Description	Extraction Date	Analysis Date
Chromium, hexavalent - soil	MOE E3056 - Extraction, colourimetric	19-Mar-19	21-Mar-19
Mercury by CVAA	EPA 7471B - CVAA, digestion	22-Mar-19	22-Mar-19
PHC F1	CWS Tier 1 - P&T GC-FID	20-Mar-19	21-Mar-19
PHCs F2 to F4	CWS Tier 1 - GC-FID, extraction	19-Mar-19	21-Mar-19
REG 153: Metals by ICP/MS, soil	EPA 6020 - Digestion - ICP-MS	21-Mar-19	21-Mar-19
REG 153: PAHs by GC-MS	EPA 8270 - GC-MS, extraction	20-Mar-19	21-Mar-19
REG 153: VOCs by P&T GC/MS	EPA 8260 - P&T GC-MS	20-Mar-19	21-Mar-19
Solids, %	Gravimetric, calculation	21-Mar-19	21-Mar-19

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 22-Mar-2019

Order Date: 19-Mar-2019

Project Description: TS SO 37029

Client ID:	BH19-1 SS#5	Sample Date:	03/19/2019 12:00	BH19-3 SS#2	03/19/2019 12:00	BH19-2 SS#2	03/19/2019 09:00	BH19-6 SS#2	03/19/2019 09:00		
Sample ID:	1912273-01	MDL/Units	Soil	Sample ID:	1912273-02	MDL/Units	Soil	Sample ID:	1912273-03	MDL/Units	Soil

**Physical Characteristics**

% Solids	0.1 % by Wt.	77.9	82.6	79.1	78.5
----------	--------------	------	------	------	------

**Metals**

Antimony	1.0 ug/g dry	<1.0	<1.0	<1.0	8.8
Arsenic	1.0 ug/g dry	1.7	2.7	4.5	12.9
Barium	1.0 ug/g dry	150	161	239	490
Beryllium	0.5 ug/g dry	<0.5	0.6	0.9	<0.5
Boron	5.0 ug/g dry	5.3	6.2	11.4	26.4
Cadmium	0.5 ug/g dry	<0.5	<0.5	1.2	8.6
Chromium	5.0 ug/g dry	31.0	43.5	64.8	69.0
Chromium (VI)	0.2 ug/g dry	<0.2	<0.2	<0.2	<0.2
Cobalt	1.0 ug/g dry	7.8	11.3	17.0	13.7
Copper	5.0 ug/g dry	16.9	23.9	59.3	249
Lead	1.0 ug/g dry	4.4	7.2	24.3	485
Mercury	0.1 ug/g dry	<0.1	<0.1	<0.1	1.1
Molybdenum	1.0 ug/g dry	<1.0	<1.0	4.3	9.5
Nickel	5.0 ug/g dry	16.2	24.3	35.4	226
Selenium	1.0 ug/g dry	<1.0	<1.0	<1.0	<1.0
Silver	0.3 ug/g dry	<0.3	<0.3	<0.3	<0.3
Thallium	1.0 ug/g dry	<1.0	<1.0	<1.0	<1.0
Uranium	1.0 ug/g dry	1.1	<1.0	<1.0	<1.0
Vanadium	10.0 ug/g dry	45.6	54.8	68.7	44.2
Zinc	20.0 ug/g dry	44.3	69.0	165	4140

**Volatiles**

Acetone	0.50 ug/g dry	<0.50	<0.50	<0.50	<0.50
Benzene	0.02 ug/g dry	<0.02	<0.02	<0.02	<0.02
Bromodichloromethane	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
Bromoform	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
Bromomethane	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
Carbon Tetrachloride	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
Chlorobenzene	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
Chloroform	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
Dibromochloromethane	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
Dichlorodifluoromethane	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
1,2-Dichlorobenzene	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
1,3-Dichlorobenzene	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05

## Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 22-Mar-2019

Order Date: 19-Mar-2019

Project Description: TS SO 37029

	Client ID: Sample Date: Sample ID: <b>MDL/Units</b>	BH19-1 SS#5 03/19/2019 12:00 1912273-01 Soil	BH19-3 SS#2 03/19/2019 12:00 1912273-02 Soil	BH19-2 SS#2 03/19/2019 09:00 1912273-03 Soil	BH19-6 SS#2 03/19/2019 09:00 1912273-04 Soil
1,4-Dichlorobenzene	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
1,1-Dichloroethane	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
1,2-Dichloroethane	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
1,1-Dichloroethylene	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
cis-1,2-Dichloroethylene	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
trans-1,2-Dichloroethylene	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
1,2-Dichloropropane	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
cis-1,3-Dichloropropylene	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
trans-1,3-Dichloropropylene	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
1,3-Dichloropropene, total	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
Ethylbenzene	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
Ethylene dibromide (dibromoethan	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
Hexane	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
Methyl Ethyl Ketone (2-Butanone)	0.50 ug/g dry	<0.50	<0.50	<0.50	<0.50
Methyl Isobutyl Ketone	0.50 ug/g dry	<0.50	<0.50	<0.50	<0.50
Methyl tert-butyl ether	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
Methylene Chloride	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
Styrene	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
1,1,1,2-Tetrachloroethane	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
1,1,2,2-Tetrachloroethane	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
Tetrachloroethylene	0.05 ug/g dry	<0.05	0.10	0.68	0.21
Toluene	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
1,1,1-Trichloroethane	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
1,1,2-Trichloroethane	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
Trichloroethylene	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
Trichlorofluoromethane	0.05 ug/g dry	<0.05	<0.05	<0.05	0.21
Vinyl chloride	0.02 ug/g dry	<0.02	<0.02	<0.02	<0.02
m,p-Xylenes	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
o-Xylene	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
Xylenes, total	0.05 ug/g dry	<0.05	<0.05	<0.05	<0.05
4-Bromofluorobenzene	Surrogate	115%	114%	109%	115%
Dibromofluoromethane	Surrogate	102%	102%	106%	98.2%
Toluene-d8	Surrogate	114%	107%	105%	115%

**Hydrocarbons**

F1 PHCs (C6-C10)	7 ug/g dry	<7	<7	<7	<7
F2 PHCs (C10-C16)	4 ug/g dry	<4	<4	<4	<40 [1]

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 22-Mar-2019

Order Date: 19-Mar-2019

Project Description: TS SO 37029

	Client ID: Sample Date: Sample ID: <b>MDL/Units</b>	BH19-1 SS#5 03/19/2019 12:00 1912273-01 Soil	BH19-3 SS#2 03/19/2019 12:00 1912273-02 Soil	BH19-2 SS#2 03/19/2019 09:00 1912273-03 Soil	BH19-6 SS#2 03/19/2019 09:00 1912273-04 Soil
F3 PHCs (C16-C34)	8 ug/g dry	<8	<8	28	1020
F4 PHCs (C34-C50)	6 ug/g dry	<6	<6	<6	67

**Semi-Volatiles**

Acenaphthene	0.02 ug/g dry	<0.02	<0.02	<0.02	0.03
Acenaphthylene	0.02 ug/g dry	<0.02	<0.02	<0.02	0.03
Anthracene	0.02 ug/g dry	<0.02	<0.02	<0.02	0.10
Benzo [a] anthracene	0.02 ug/g dry	<0.02	<0.02	<0.02	0.19
Benzo [a] pyrene	0.02 ug/g dry	<0.02	<0.02	<0.02	0.19
Benzo [b] fluoranthene	0.02 ug/g dry	<0.02	<0.02	<0.02	0.36
Benzo [g,h,i] perylene	0.02 ug/g dry	<0.02	<0.02	<0.02	0.29
Benzo [k] fluoranthene	0.02 ug/g dry	<0.02	<0.02	<0.02	0.16
Chrysene	0.02 ug/g dry	<0.02	<0.02	<0.02	0.18
Dibenzo [a,h] anthracene	0.02 ug/g dry	<0.02	<0.02	<0.02	0.03
Fluoranthene	0.02 ug/g dry	<0.02	<0.02	<0.02	0.39
Fluorene	0.02 ug/g dry	<0.02	<0.02	<0.02	0.03
Indeno [1,2,3-cd] pyrene	0.02 ug/g dry	<0.02	<0.02	<0.02	0.16
1-Methylnaphthalene	0.02 ug/g dry	<0.02	<0.02	<0.02	0.02
2-Methylnaphthalene	0.02 ug/g dry	<0.02	<0.02	<0.02	0.04
Methylnaphthalene (1&2)	0.04 ug/g dry	<0.04	<0.04	<0.04	0.06
Naphthalene	0.01 ug/g dry	<0.01	<0.01	<0.01	0.05
Phenanthrene	0.02 ug/g dry	<0.02	<0.02	<0.02	0.33
Pyrene	0.02 ug/g dry	<0.02	<0.02	<0.02	0.36
2-Fluorobiphenyl	Surrogate	74.8%	76.4%	69.6%	74.6%
Terphenyl-d14	Surrogate	110%	100%	84.6%	84.4%

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 22-Mar-2019

Order Date: 19-Mar-2019

Project Description: TS SO 37029

**Method Quality Control: Blank**

Analyte	Result	Reporting Limit	Units	Source Result	%REC	%REC Limit	RPD	RPD Limit	Notes
<b>Hydrocarbons</b>									
F1 PHCs (C6-C10)	ND	7	ug/g						
F2 PHCs (C10-C16)	ND	4	ug/g						
F3 PHCs (C16-C34)	ND	8	ug/g						
F4 PHCs (C34-C50)	ND	6	ug/g						
<b>Metals</b>									
Antimony	ND	1.0	ug/g						
Arsenic	ND	1.0	ug/g						
Barium	ND	1.0	ug/g						
Beryllium	ND	0.5	ug/g						
Boron	ND	5.0	ug/g						
Cadmium	ND	0.5	ug/g						
Chromium (VI)	ND	0.2	ug/g						
Chromium	ND	5.0	ug/g						
Cobalt	ND	1.0	ug/g						
Copper	ND	5.0	ug/g						
Lead	ND	1.0	ug/g						
Mercury	ND	0.1	ug/g						
Molybdenum	ND	1.0	ug/g						
Nickel	ND	5.0	ug/g						
Selenium	ND	1.0	ug/g						
Silver	ND	0.3	ug/g						
Thallium	ND	1.0	ug/g						
Uranium	ND	1.0	ug/g						
Vanadium	ND	10.0	ug/g						
Zinc	ND	20.0	ug/g						
<b>Semi-Volatiles</b>									
Acenaphthene	ND	0.02	ug/g						
Acenaphthylene	ND	0.02	ug/g						
Anthracene	ND	0.02	ug/g						
Benzo [a] anthracene	ND	0.02	ug/g						
Benzo [a] pyrene	ND	0.02	ug/g						
Benzo [b] fluoranthene	ND	0.02	ug/g						
Benzo [g,h,i] perylene	ND	0.02	ug/g						
Benzo [k] fluoranthene	ND	0.02	ug/g						
Chrysene	ND	0.02	ug/g						
Dibenzo [a,h] anthracene	ND	0.02	ug/g						
Fluoranthene	ND	0.02	ug/g						
Fluorene	ND	0.02	ug/g						
Indeno [1,2,3-cd] pyrene	ND	0.02	ug/g						
1-Methylnaphthalene	ND	0.02	ug/g						
2-Methylnaphthalene	ND	0.02	ug/g						
Methylnaphthalene (1&2)	ND	0.04	ug/g						
Naphthalene	ND	0.01	ug/g						
Phenanthrene	ND	0.02	ug/g						
Pyrene	ND	0.02	ug/g						
Surrogate: 2-Fluorobiphenyl	1.08		ug/g		80.7	50-140			
Surrogate: Terphenyl-d14	1.34		ug/g		101	50-140			
<b>Volatiles</b>									
Acetone	ND	0.50	ug/g						
Benzene	ND	0.02	ug/g						
Bromodichloromethane	ND	0.05	ug/g						
Bromoform	ND	0.05	ug/g						
Bromomethane	ND	0.05	ug/g						
Carbon Tetrachloride	ND	0.05	ug/g						
Chlorobenzene	ND	0.05	ug/g						
Chloroform	ND	0.05	ug/g						
Dibromochloromethane	ND	0.05	ug/g						
Dichlorodifluoromethane	ND	0.05	ug/g						

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 22-Mar-2019

Order Date: 19-Mar-2019

Project Description: TS SO 37029

**Method Quality Control: Blank**

Analyte	Result	Reporting Limit	Units	Source Result	%REC	%REC Limit	RPD RPD	RPD Limit	Notes
1,2-Dichlorobenzene	ND	0.05	ug/g						
1,3-Dichlorobenzene	ND	0.05	ug/g						
1,4-Dichlorobenzene	ND	0.05	ug/g						
1,1-Dichloroethane	ND	0.05	ug/g						
1,2-Dichloroethane	ND	0.05	ug/g						
1,1-Dichloroethylene	ND	0.05	ug/g						
cis-1,2-Dichloroethylene	ND	0.05	ug/g						
trans-1,2-Dichloroethylene	ND	0.05	ug/g						
1,2-Dichloropropane	ND	0.05	ug/g						
cis-1,3-Dichloropropylene	ND	0.05	ug/g						
trans-1,3-Dichloropropylene	ND	0.05	ug/g						
1,3-Dichloropropene, total	ND	0.05	ug/g						
Ethylbenzene	ND	0.05	ug/g						
Ethylene dibromide (dibromoethane)	ND	0.05	ug/g						
Hexane	ND	0.05	ug/g						
Methyl Ethyl Ketone (2-Butanone)	ND	0.50	ug/g						
Methyl Isobutyl Ketone	ND	0.50	ug/g						
Methyl tert-butyl ether	ND	0.05	ug/g						
Methylene Chloride	ND	0.05	ug/g						
Styrene	ND	0.05	ug/g						
1,1,1,2-Tetrachloroethane	ND	0.05	ug/g						
1,1,2,2-Tetrachloroethane	ND	0.05	ug/g						
Tetrachloroethylene	ND	0.05	ug/g						
Toluene	ND	0.05	ug/g						
1,1,1-Trichloroethane	ND	0.05	ug/g						
1,1,2-Trichloroethane	ND	0.05	ug/g						
Trichloroethylene	ND	0.05	ug/g						
Trichlorofluoromethane	ND	0.05	ug/g						
Vinyl chloride	ND	0.02	ug/g						
m,p-Xylenes	ND	0.05	ug/g						
o-Xylene	ND	0.05	ug/g						
Xylenes, total	ND	0.05	ug/g						
Surrogate: 4-Bromofluorobenzene	9.12		ug/g		114	50-140			
Surrogate: Dibromofluoromethane	7.38		ug/g		92.2	50-140			
Surrogate: Toluene-d8	8.07		ug/g		101	50-140			

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 22-Mar-2019

Order Date: 19-Mar-2019

Project Description: TS SO 37029

**Method Quality Control: Duplicate**

Analyte	Result	Reporting Limit	Units	Source Result	%REC	%REC Limit	RPD	RPD Limit	Notes
<b>Hydrocarbons</b>									
F1 PHCs (C6-C10)	ND	7	ug/g dry	ND				40	
F2 PHCs (C10-C16)	6	4	ug/g dry	5			9.2	30	
F3 PHCs (C16-C34)	14	8	ug/g dry	17			17.6	30	
F4 PHCs (C34-C50)	7	6	ug/g dry	14			66.5	30	QR-01
<b>Metals</b>									
Antimony	ND	1.0	ug/g dry	ND			0.0	30	
Arsenic	4.0	1.0	ug/g dry	3.9			1.9	30	
Barium	65.1	1.0	ug/g dry	66.4			2.0	30	
Beryllium	0.7	0.5	ug/g dry	0.8			3.3	30	
Boron	12.6	5.0	ug/g dry	11.6			8.2	30	
Cadmium	ND	0.5	ug/g dry	ND			0.0	30	
Chromium (VI)	ND	0.2	ug/g dry	ND				35	
Chromium	23.4	5.0	ug/g dry	23.3			0.4	30	
Cobalt	10.0	1.0	ug/g dry	10.1			1.0	30	
Copper	31.2	5.0	ug/g dry	31.3			0.2	30	
Lead	10.9	1.0	ug/g dry	10.8			0.5	30	
Mercury	ND	0.1	ug/g dry	ND			0.0	30	
Molybdenum	ND	1.0	ug/g dry	ND			0.0	30	
Nickel	23.6	5.0	ug/g dry	24.1			1.9	30	
Selenium	1.3	1.0	ug/g dry	1.3			0.8	30	
Silver	ND	0.3	ug/g dry	ND			0.0	30	
Thallium	ND	1.0	ug/g dry	ND			0.0	30	
Uranium	ND	1.0	ug/g dry	ND			0.0	30	
Vanadium	30.1	10.0	ug/g dry	30.5			1.2	30	
Zinc	62.8	20.0	ug/g dry	62.7			0.1	30	
<b>Physical Characteristics</b>									
% Solids	85.8	0.1	% by Wt.	86.0			0.2	25	
<b>Semi-Volatiles</b>									
Acenaphthene	ND	0.02	ug/g dry	ND				40	
Acenaphthylene	ND	0.02	ug/g dry	ND				40	
Anthracene	ND	0.02	ug/g dry	ND				40	
Benzo [a] anthracene	ND	0.02	ug/g dry	ND				40	
Benzo [a] pyrene	ND	0.02	ug/g dry	ND				40	
Benzo [b] fluoranthene	ND	0.02	ug/g dry	ND				40	
Benzo [g,h,i] perylene	ND	0.02	ug/g dry	ND				40	
Benzo [k] fluoranthene	ND	0.02	ug/g dry	ND				40	
Chrysene	ND	0.02	ug/g dry	ND				40	
Dibenzo [a,h] anthracene	ND	0.02	ug/g dry	ND				40	
Fluoranthene	ND	0.02	ug/g dry	ND				40	
Fluorene	ND	0.02	ug/g dry	ND				40	
Indeno [1,2,3-cd] pyrene	ND	0.02	ug/g dry	ND				40	
1-Methylnaphthalene	ND	0.02	ug/g dry	ND				40	
2-Methylnaphthalene	ND	0.02	ug/g dry	ND				40	
Naphthalene	ND	0.01	ug/g dry	ND				40	
Phenanthrene	ND	0.02	ug/g dry	ND				40	
Pyrene	ND	0.02	ug/g dry	ND				40	
Surrogate: 2-Fluorobiphenyl	1.51		ug/g dry		88.2	50-140			
Surrogate: Terphenyl-d14	2.15		ug/g dry		126	50-140			
<b>Volatiles</b>									
Acetone	ND	0.50	ug/g dry	ND				50	
Benzene	ND	0.02	ug/g dry	ND			0.0	50	
Bromodichloromethane	ND	0.05	ug/g dry	ND				50	
Bromoform	ND	0.05	ug/g dry	ND				50	
Bromomethane	ND	0.05	ug/g dry	ND				50	
Carbon Tetrachloride	ND	0.05	ug/g dry	ND				50	
Chlorobenzene	ND	0.05	ug/g dry	ND			0.0	50	

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 22-Mar-2019

Order Date: 19-Mar-2019

Project Description: TS SO 37029

**Method Quality Control: Duplicate**

Analyte	Result	Reporting Limit	Units	Source Result	%REC	%REC Limit	RPD	RPD Limit	Notes
Chloroform	ND	0.05	ug/g dry	ND			0.0	50	
Dibromochloromethane	ND	0.05	ug/g dry	ND				50	
Dichlorodifluoromethane	ND	0.05	ug/g dry	ND				50	
1,2-Dichlorobenzene	ND	0.05	ug/g dry	ND			0.0	50	
1,3-Dichlorobenzene	ND	0.05	ug/g dry	ND			0.0	50	
1,4-Dichlorobenzene	ND	0.05	ug/g dry	ND			0.0	50	
1,1-Dichloroethane	ND	0.05	ug/g dry	ND				50	
1,2-Dichloroethane	ND	0.05	ug/g dry	ND				50	
1,1-Dichloroethylene	ND	0.05	ug/g dry	ND				50	
cis-1,2-Dichloroethylene	ND	0.05	ug/g dry	ND				50	
trans-1,2-Dichloroethylene	ND	0.05	ug/g dry	ND				50	
1,2-Dichloropropane	ND	0.05	ug/g dry	ND				50	
cis-1,3-Dichloropropylene	ND	0.05	ug/g dry	ND				50	
trans-1,3-Dichloropropylene	ND	0.05	ug/g dry	ND				50	
Ethylbenzene	ND	0.05	ug/g dry	ND			0.0	50	
Ethylene dibromide (dibromoethane)	ND	0.05	ug/g dry	ND				50	
Hexane	ND	0.05	ug/g dry	ND				50	
Methyl Ethyl Ketone (2-Butanone)	ND	0.50	ug/g dry	ND				50	
Methyl Isobutyl Ketone	ND	0.50	ug/g dry	ND				50	
Methyl tert-butyl ether	ND	0.05	ug/g dry	ND				50	
Methylene Chloride	ND	0.05	ug/g dry	ND				50	
Styrene	ND	0.05	ug/g dry	ND				50	
1,1,1,2-Tetrachloroethane	ND	0.05	ug/g dry	ND				50	
1,1,2,2-Tetrachloroethane	ND	0.05	ug/g dry	ND				50	
Tetrachloroethylene	ND	0.05	ug/g dry	ND				50	
Toluene	ND	0.05	ug/g dry	ND			0.0	50	
1,1,1-Trichloroethane	ND	0.05	ug/g dry	ND				50	
1,1,2-Trichloroethane	ND	0.05	ug/g dry	ND			0.0	50	
Trichloroethylene	ND	0.05	ug/g dry	ND				50	
Trichlorofluoromethane	ND	0.05	ug/g dry	ND				50	
Vinyl chloride	ND	0.02	ug/g dry	ND			0.0	50	
m,p-Xylenes	ND	0.05	ug/g dry	ND			0.0	50	
o-Xylene	ND	0.05	ug/g dry	ND			0.0	50	
Surrogate: 4-Bromofluorobenzene	10.7		ug/g dry		57.3	50-140			
Surrogate: Dibromofluoromethane	11.6		ug/g dry		62.0	50-140			
Surrogate: Toluene-d8	13.0		ug/g dry		69.5	50-140			

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 22-Mar-2019

Order Date: 19-Mar-2019

Project Description: TS SO 37029

**Method Quality Control: Spike**

Analyte	Result	Reporting Limit	Units	Source Result	%REC	%REC Limit	RPD	RPD Limit	Notes
<b>Hydrocarbons</b>									
F1 PHCs (C6-C10)	178	7	ug/g		88.9	80-120			
F2 PHCs (C10-C16)	117	4	ug/g	5	119	60-140			
F3 PHCs (C16-C34)	321	8	ug/g	17	132	60-140			
F4 PHCs (C34-C50)	207	6	ug/g	14	132	60-140			
<b>Metals</b>									
Antimony	41.8		ug/L	ND	82.9	70-130			
Arsenic	47.1		ug/L	1.6	91.1	70-130			
Barium	70.1		ug/L	26.6	87.0	70-130			
Beryllium	49.6		ug/L	ND	98.6	70-130			
Boron	48.0		ug/L	ND	86.7	70-130			
Cadmium	43.2		ug/L	ND	86.3	70-130			
Chromium (VI)	0.2		mg/L	ND	78.0	70-130			
Chromium	52.9		ug/L	9.3	87.1	70-130			
Cobalt	47.0		ug/L	4.0	86.0	70-130			
Copper	52.8		ug/L	12.5	80.6	70-130			
Lead	46.4		ug/L	4.3	84.1	70-130			
Mercury	1.60	0.1	ug/g	ND	107	70-130			
Molybdenum	45.7		ug/L	ND	90.9	70-130			
Nickel	56.0		ug/L	9.6	92.7	70-130			
Selenium	44.6		ug/L	ND	88.1	70-130			
Silver	41.9		ug/L	ND	83.7	70-130			
Thallium	41.7		ug/L	ND	83.2	70-130			
Uranium	43.4		ug/L	ND	86.4	70-130			
Vanadium	60.7		ug/L	12.2	96.9	70-130			
Zinc	67.2		ug/L	25.1	84.3	70-130			
<b>Semi-Volatiles</b>									
Acenaphthene	0.267	0.02	ug/g	ND	125	50-140			
Acenaphthylene	0.220	0.02	ug/g	ND	103	50-140			
Anthracene	0.227	0.02	ug/g	ND	106	50-140			
Benzo [a] anthracene	0.225	0.02	ug/g	ND	105	50-140			
Benzo [a] pyrene	0.190	0.02	ug/g	ND	88.6	50-140			
Benzo [b] fluoranthene	0.259	0.02	ug/g	ND	121	50-140			
Benzo [g,h,i] perylene	0.194	0.02	ug/g	ND	90.8	50-140			
Benzo [k] fluoranthene	0.251	0.02	ug/g	ND	117	50-140			
Chrysene	0.217	0.02	ug/g	ND	102	50-140			
Dibenzo [a,h] anthracene	0.182	0.02	ug/g	ND	85.2	50-140			
Fluoranthene	0.236	0.02	ug/g	ND	110	50-140			
Fluorene	0.223	0.02	ug/g	ND	104	50-140			
Indeno [1,2,3-cd] pyrene	0.189	0.02	ug/g	ND	88.3	50-140			
1-Methylnaphthalene	0.178	0.02	ug/g	ND	83.4	50-140			
2-Methylnaphthalene	0.206	0.02	ug/g	ND	96.3	50-140			
Naphthalene	0.236	0.01	ug/g	ND	110	50-140			
Phenanthrene	0.231	0.02	ug/g	ND	108	50-140			
Pyrene	0.227	0.02	ug/g	ND	106	50-140			
Surrogate: 2-Fluorobiphenyl	1.39		ug/g		81.0	50-140			
<b>Volatiles</b>									
Acetone	7.70	0.50	ug/g		77.0	50-140			
Benzene	4.55	0.02	ug/g		114	60-130			
Bromodichloromethane	4.19	0.05	ug/g		105	60-130			
Bromoform	4.70	0.05	ug/g		117	60-130			

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 22-Mar-2019

Order Date: 19-Mar-2019

Project Description: TS SO 37029

**Method Quality Control: Spike**

Analyte	Result	Reporting Limit	Units	Source Result	%REC	%REC Limit	RPD	RPD Limit	Notes
Bromomethane	2.78	0.05	ug/g		69.4	50-140			
Carbon Tetrachloride	4.14	0.05	ug/g		104	60-130			
Chlorobenzene	4.68	0.05	ug/g		117	60-130			
Chloroform	4.72	0.05	ug/g		118	60-130			
Dibromochloromethane	3.87	0.05	ug/g		96.7	60-130			
Dichlorodifluoromethane	3.67	0.05	ug/g		91.8	50-140			
1,2-Dichlorobenzene	4.66	0.05	ug/g		117	60-130			
1,3-Dichlorobenzene	4.70	0.05	ug/g		118	60-130			
1,4-Dichlorobenzene	4.74	0.05	ug/g		118	60-130			
1,1-Dichloroethane	4.88	0.05	ug/g		122	60-130			
1,2-Dichloroethane	4.24	0.05	ug/g		106	60-130			
1,1-Dichloroethylene	3.99	0.05	ug/g		99.7	60-130			
cis-1,2-Dichloroethylene	4.71	0.05	ug/g		118	60-130			
trans-1,2-Dichloroethylene	4.63	0.05	ug/g		116	60-130			
1,2-Dichloropropane	4.67	0.05	ug/g		117	60-130			
cis-1,3-Dichloropropylene	4.05	0.05	ug/g		101	60-130			
trans-1,3-Dichloropropylene	4.93	0.05	ug/g		123	60-130			
Ethylbenzene	4.87	0.05	ug/g		122	60-130			
Ethylene dibromide (dibromoethane)	4.13	0.05	ug/g		103	60-130			
Hexane	3.49	0.05	ug/g		87.2	60-130			
Methyl Ethyl Ketone (2-Butanone)	11.8	0.50	ug/g		118	50-140			
Methyl Isobutyl Ketone	10.4	0.50	ug/g		104	50-140			
Methyl tert-butyl ether	12.0	0.05	ug/g		120	50-140			
Methylene Chloride	4.37	0.05	ug/g		109	60-130			
Styrene	4.71	0.05	ug/g		118	60-130			
1,1,1,2-Tetrachloroethane	4.81	0.05	ug/g		120	60-130			
1,1,2,2-Tetrachloroethane	4.45	0.05	ug/g		111	60-130			
Tetrachloroethylene	4.97	0.05	ug/g		124	60-130			
Toluene	3.88	0.05	ug/g		97.0	60-130			
1,1,1-Trichloroethane	4.72	0.05	ug/g		118	60-130			
1,1,2-Trichloroethane	4.03	0.05	ug/g		101	60-130			
Trichloroethylene	3.96	0.05	ug/g		98.9	60-130			
Trichlorofluoromethane	3.66	0.05	ug/g		91.4	50-140			
Vinyl chloride	3.51	0.02	ug/g		87.7	50-140			
m,p-Xylenes	9.79	0.05	ug/g		122	60-130			
o-Xylene	4.85	0.05	ug/g		121	60-130			

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 22-Mar-2019

Order Date: 19-Mar-2019

Project Description: TS SO 37029

**Qualifier Notes:*****Sample Qualifiers :***

1 : Elevated detection limits due to the nature of the sample matrix.

***QC Qualifiers :***

QR-01 : Duplicate RPD is high, however, the sample result is less than 10x the MDL.

**Sample Data Revisions**

None

**Work Order Revisions / Comments:**

None

**Other Report Notes:**

n/a: not applicable

ND: Not Detected

MDL: Method Detection Limit

Source Result: Data used as source for matrix and duplicate samples

%REC: Percent recovery.

RPD: Relative percent difference.

Soil results are reported on a dry weight basis when the units are denoted with 'dry'.

Where %Solids is reported, moisture loss includes the loss of volatile hydrocarbons.

***CCME PHC additional information:***

- The method for the analysis of PHCs complies with the Reference Method for the CWS PHC and is validated for use in the laboratory. All prescribed quality criteria identified in the method has been met.
- F1 range corrected for BTEX.
- F2 to F3 ranges corrected for appropriate PAHs where available.
- The gravimetric heavy hydrocarbons (F4G) are not to be added to C6 to C50 hydrocarbons.
- In the case where F4 and F4G are both reported, the greater of the two results is to be used for comparison to CWS PHC criteria.



TRUE  
REF  
RELI

Paracel ID: 1912273



1000 Blvd.  
1G 4J8  
ellabs.com

Chain of Custody  
(Lab Use Only)

No 47492

Page 1 of 1

Client Name:	DST Group	Project Reference:	TSSO-37029	Turnaround Time:
Contact Name:	Shahab Nowrozi / Cameron F	Quote #:		<input type="checkbox"/> 1 Day <input type="checkbox"/> 3 Day
Address:	203 - 2150 Thurston Drive	PO #:		<input type="checkbox"/> 2 Day <input checked="" type="checkbox"/> Regular
Telephone:	613-295-5622	Email Address:	snowrozi@dstgroup.com cfischl@dstgroup.com	Date Required:
Criteria		<input checked="" type="checkbox"/> O. Reg. 153/04 (As Amended) Table <input type="checkbox"/> RSC Filing <input type="checkbox"/> O. Reg. 558/00 <input type="checkbox"/> PWQO <input type="checkbox"/> CCME <input type="checkbox"/> SUB (Storm) <input type="checkbox"/> SUB (Sanitary) Municipality: _____ <input type="checkbox"/> Other: _____		

Matrix Type: S (Soil Sed.) GW (Ground Water) SW (Surface Water) SS (Storm Sanitary Sewer) P (Paint) A (Air) O (Other)				Required Analyses							
Paracel Order Number:		Matrix	Air Volume	Sample Taken		Date	Time	X VOCs	X Metals	X Inorganics (Mercury, Chromate, Lead, Zinc, etc.)	X PHCs
Sample ID/Location Name	# of Containers			Date	Time						
1 BH19-1 SS#5	S	2	March 19 PM	X	X	X	X	X	X	X	X
2 BH19-3 SS#2	S	2	↓ PM	X	X	X	X	X	X	X	X
3 BH19- 2 SS#2	S	2	↓ AM	X	X	X	X	X	X	X	X
4 BH19- 6 SS#2	S	2	↓ AM	X	X	X	X	X	X	X	X
5											
6											
7											
8											
9											
10											

Comments:	Method of Delivery
	Walk-in

Relinquished By (Sign):	Received by Driver/Depot:	Received at Lab:	Verified By:
Shahab Nowrozi		Kim Stewart	M&A
Date/Time: 2019/3/19 @ 16:12 HR	Date/Time: 19 March 19 16:12	Date/Time: 19/3/19 16:20	pH Verified [ ] By:

Chain of Custody (Blank) - Rev 0.4 Feb 2016



TRUSTED.  
RESPONSIVE.  
RELIABLE.

300 - 2319 St. Laurent Blvd  
Ottawa, ON, K1G 4J8  
1-800-749-1947  
[www.paracellabs.com](http://www.paracellabs.com)

## Certificate of Analysis

### DST Consulting Engineers Inc. (Ottawa)

203-2150 Thurston Dr.  
Ottawa, ON K1G 5T9  
Attn: Shahab Nowrozi

Client PO:

Project: TS SO 37029  
Custody: 47493

Report Date: 26-Mar-2019  
Order Date: 20-Mar-2019

**Order #: 1912428**

This Certificate of Analysis contains analytical data applicable to the following samples as submitted:

Paracel ID	Client ID
1912428-01	BH19-5 SS1
1912428-02	BH19-11B SS3

Approved By:

A handwritten signature in black ink that reads 'Mark Foto'.

Mark Foto, M.Sc.  
Lab Supervisor

Any use of these results implies your agreement that our total liability in connection with this work, however arising, shall be limited to the amount paid by you for this work, and that our employees or agents shall not under any circumstances be liable to you in connection with this work.

Certificate of Analysis

Report Date: 26-Mar-2019

Client: DST Consulting Engineers Inc. (Ottawa)

Order Date: 20-Mar-2019

Client PO:

Project Description: TS SO 37029

## Analysis Summary Table

Analysis	Method Reference/Description	Extraction Date	Analysis Date
Chromium, hexavalent - soil	MOE E3056 - Extraction, colourimetric	21-Mar-19	25-Mar-19
Mercury by CVAA	EPA 7471B - CVAA, digestion	22-Mar-19	22-Mar-19
PHC F1	CWS Tier 1 - P&T GC-FID	22-Mar-19	24-Mar-19
PHC F4G (gravimetric)	CWS Tier 1 - Extraction Gravimetric	22-Mar-19	22-Mar-19
PHCs F2 to F4	CWS Tier 1 - GC-FID, extraction	21-Mar-19	21-Mar-19
REG 153: Metals by ICP/MS, soil	EPA 6020 - Digestion - ICP-MS	22-Mar-19	22-Mar-19
REG 153: PAHs by GC-MS	EPA 8270 - GC-MS, extraction	23-Mar-19	23-Mar-19
REG 153: VOCs by P&T GC/MS	EPA 8260 - P&T GC-MS	22-Mar-19	24-Mar-19
Solids, %	Gravimetric, calculation	22-Mar-19	22-Mar-19

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 26-Mar-2019

Order Date: 20-Mar-2019

Project Description: TS SO 37029

Client ID:	BH19-5 SS1	BH19-11B SS3	-	-
Sample Date:	03/20/2019 12:00	03/20/2019 09:00	-	-
Sample ID:	1912428-01	1912428-02	-	-
MDL/Units	Soil	Soil	-	-

**Physical Characteristics**

% Solids	0.1 % by Wt.	78.8	90.2	-	-
----------	--------------	------	------	---	---

**Metals**

Antimony	1.0 ug/g dry	<1.0	8.1	-	-
Arsenic	1.0 ug/g dry	3.2	9.7	-	-
Barium	1.0 ug/g dry	151	490	-	-
Beryllium	0.5 ug/g dry	0.7	<0.5	-	-
Boron	5.0 ug/g dry	9.6	31.1	-	-
Cadmium	0.5 ug/g dry	<0.5	5.2	-	-
Chromium	5.0 ug/g dry	53.3	62.7	-	-
Chromium (VI)	0.2 ug/g dry	<0.2	<0.2	-	-
Cobalt	1.0 ug/g dry	12.3	10.8	-	-
Copper	5.0 ug/g dry	17.1	477	-	-
Lead	1.0 ug/g dry	8.1	591	-	-
Mercury	0.1 ug/g dry	<0.1	1.4	-	-
Molybdenum	1.0 ug/g dry	<1.0	10.5	-	-
Nickel	5.0 ug/g dry	24.7	96.2	-	-
Selenium	1.0 ug/g dry	<1.0	<1.0	-	-
Silver	0.3 ug/g dry	<0.3	0.7	-	-
Thallium	1.0 ug/g dry	<1.0	<1.0	-	-
Uranium	1.0 ug/g dry	1.1	<1.0	-	-
Vanadium	10.0 ug/g dry	58.6	32.4	-	-
Zinc	20.0 ug/g dry	86.9	1850	-	-

**Volatiles**

Acetone	0.50 ug/g dry	<0.50	<0.50	-	-
Benzene	0.02 ug/g dry	<0.02	<0.02	-	-
Bromodichloromethane	0.05 ug/g dry	<0.05	<0.05	-	-
Bromoform	0.05 ug/g dry	<0.05	<0.05	-	-
Bromomethane	0.05 ug/g dry	<0.05	<0.05	-	-
Carbon Tetrachloride	0.05 ug/g dry	<0.05	<0.05	-	-
Chlorobenzene	0.05 ug/g dry	<0.05	<0.05	-	-
Chloroform	0.05 ug/g dry	<0.05	<0.05	-	-
Dibromochloromethane	0.05 ug/g dry	<0.05	<0.05	-	-
Dichlorodifluoromethane	0.05 ug/g dry	<0.05	<0.05	-	-
1,2-Dichlorobenzene	0.05 ug/g dry	<0.05	<0.05	-	-
1,3-Dichlorobenzene	0.05 ug/g dry	<0.05	<0.05	-	-

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 26-Mar-2019

Order Date: 20-Mar-2019

Project Description: TS SO 37029

	Client ID: Sample Date: Sample ID: MDL/Units	BH19-5 SS1 03/20/2019 12:00 1912428-01 Soil	BH19-11B SS3 03/20/2019 09:00 1912428-02 Soil	-	-
1,4-Dichlorobenzene	0.05 ug/g dry	<0.05	<0.05	-	-
1,1-Dichloroethane	0.05 ug/g dry	<0.05	<0.05	-	-
1,2-Dichloroethane	0.05 ug/g dry	<0.05	<0.05	-	-
1,1-Dichloroethylene	0.05 ug/g dry	<0.05	<0.05	-	-
cis-1,2-Dichloroethylene	0.05 ug/g dry	<0.05	<0.05	-	-
trans-1,2-Dichloroethylene	0.05 ug/g dry	<0.05	<0.05	-	-
1,2-Dichloropropane	0.05 ug/g dry	<0.05	<0.05	-	-
cis-1,3-Dichloropropylene	0.05 ug/g dry	<0.05	<0.05	-	-
trans-1,3-Dichloropropylene	0.05 ug/g dry	<0.05	<0.05	-	-
1,3-Dichloropropene, total	0.05 ug/g dry	<0.05	<0.05	-	-
Ethylbenzene	0.05 ug/g dry	<0.05	<0.05	-	-
Ethylene dibromide (dibromoethan	0.05 ug/g dry	<0.05	<0.05	-	-
Hexane	0.05 ug/g dry	<0.05	<0.05	-	-
Methyl Ethyl Ketone (2-Butanone)	0.50 ug/g dry	<0.50	<0.50	-	-
Methyl Isobutyl Ketone	0.50 ug/g dry	<0.50	<0.50	-	-
Methyl tert-butyl ether	0.05 ug/g dry	<0.05	<0.05	-	-
Methylene Chloride	0.05 ug/g dry	<0.05	<0.05	-	-
Styrene	0.05 ug/g dry	<0.05	<0.05	-	-
1,1,1,2-Tetrachloroethane	0.05 ug/g dry	<0.05	<0.05	-	-
1,1,2,2-Tetrachloroethane	0.05 ug/g dry	<0.05	<0.05	-	-
Tetrachloroethylene	0.05 ug/g dry	<0.05	<0.05	-	-
Toluene	0.05 ug/g dry	<0.05	<0.05	-	-
1,1,1-Trichloroethane	0.05 ug/g dry	<0.05	<0.05	-	-
1,1,2-Trichloroethane	0.05 ug/g dry	<0.05	<0.05	-	-
Trichloroethylene	0.05 ug/g dry	<0.05	<0.05	-	-
Trichlorofluoromethane	0.05 ug/g dry	<0.05	<0.05	-	-
Vinyl chloride	0.02 ug/g dry	<0.02	<0.02	-	-
m,p-Xylenes	0.05 ug/g dry	<0.05	<0.05	-	-
o-Xylene	0.05 ug/g dry	<0.05	<0.05	-	-
Xylenes, total	0.05 ug/g dry	<0.05	<0.05	-	-
4-Bromofluorobenzene	Surrogate	93.6%	92.0%	-	-
Dibromofluoromethane	Surrogate	73.5%	75.7%	-	-
Toluene-d8	Surrogate	71.4%	71.0%	-	-

**Hydrocarbons**

F1 PHCs (C6-C10)	7 ug/g dry	<7	<7	-	-
F2 PHCs (C10-C16)	4 ug/g dry	<4	81	-	-

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 26-Mar-2019

Order Date: 20-Mar-2019

Project Description: TS SO 37029

	Client ID: Sample Date: Sample ID: MDL/Units	BH19-5 SS1 03/20/2019 12:00 1912428-01 Soil	BH19-11B SS3 03/20/2019 09:00 1912428-02 Soil	-	-
F3 PHCs (C16-C34)	8 ug/g dry	22	1210	-	-
F4 PHCs (C34-C50)	6 ug/g dry	28	452 [1]	-	-
F4G PHCs (gravimetric)	50 ug/g dry	-	1410	-	-

**Semi-Volatiles**

Acenaphthene	0.02 ug/g dry	<0.02	0.24	-	-
Acenaphthylene	0.02 ug/g dry	<0.02	0.08	-	-
Anthracene	0.02 ug/g dry	<0.02	0.60	-	-
Benzo [a] anthracene	0.02 ug/g dry	<0.02	1.01	-	-
Benzo [a] pyrene	0.02 ug/g dry	<0.02	0.76	-	-
Benzo [b] fluoranthene	0.02 ug/g dry	<0.02	0.90	-	-
Benzo [g,h,i] perylene	0.02 ug/g dry	<0.02	0.44	-	-
Benzo [k] fluoranthene	0.02 ug/g dry	<0.02	0.46	-	-
Chrysene	0.02 ug/g dry	<0.02	1.22	-	-
Dibenzo [a,h] anthracene	0.02 ug/g dry	<0.02	0.13	-	-
Fluoranthene	0.02 ug/g dry	<0.02	2.85	-	-
Fluorene	0.02 ug/g dry	<0.02	0.38	-	-
Indeno [1,2,3-cd] pyrene	0.02 ug/g dry	<0.02	0.35	-	-
1-Methylnaphthalene	0.02 ug/g dry	<0.02	0.17	-	-
2-Methylnaphthalene	0.02 ug/g dry	<0.02	0.18	-	-
Methylnaphthalene (1&2)	0.04 ug/g dry	<0.04	0.35	-	-
Naphthalene	0.01 ug/g dry	<0.01	0.30	-	-
Phenanthrene	0.02 ug/g dry	<0.02	2.29	-	-
Pyrene	0.02 ug/g dry	<0.02	2.87	-	-
2-Fluorobiphenyl	Surrogate	88.7%	72.2%	-	-
Terphenyl-d14	Surrogate	121%	66.3%	-	-

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 26-Mar-2019

Order Date: 20-Mar-2019

Project Description: TS SO 37029

**Method Quality Control: Blank**

Analyte	Result	Reporting Limit	Units	Source Result	%REC	%REC Limit	RPD	RPD Limit	Notes
<b>Hydrocarbons</b>									
F1 PHCs (C6-C10)	ND	7	ug/g						
F2 PHCs (C10-C16)	ND	4	ug/g						
F3 PHCs (C16-C34)	ND	8	ug/g						
F4 PHCs (C34-C50)	ND	6	ug/g						
F4G PHCs (gravimetric)	ND	50	ug/g						
<b>Metals</b>									
Antimony	ND	1.0	ug/g						
Arsenic	ND	1.0	ug/g						
Barium	ND	1.0	ug/g						
Beryllium	ND	0.5	ug/g						
Boron	ND	5.0	ug/g						
Cadmium	ND	0.5	ug/g						
Chromium (VI)	ND	0.2	ug/g						
Chromium	ND	5.0	ug/g						
Cobalt	ND	1.0	ug/g						
Copper	ND	5.0	ug/g						
Lead	ND	1.0	ug/g						
Mercury	ND	0.1	ug/g						
Molybdenum	ND	1.0	ug/g						
Nickel	ND	5.0	ug/g						
Selenium	ND	1.0	ug/g						
Silver	ND	0.3	ug/g						
Thallium	ND	1.0	ug/g						
Uranium	ND	1.0	ug/g						
Vanadium	ND	10.0	ug/g						
Zinc	ND	20.0	ug/g						
<b>Semi-Volatiles</b>									
Acenaphthene	ND	0.02	ug/g						
Acenaphthylene	ND	0.02	ug/g						
Anthracene	ND	0.02	ug/g						
Benzo [a] anthracene	ND	0.02	ug/g						
Benzo [a] pyrene	ND	0.02	ug/g						
Benzo [b] fluoranthene	ND	0.02	ug/g						
Benzo [g,h,i] perylene	ND	0.02	ug/g						
Benzo [k] fluoranthene	ND	0.02	ug/g						
Chrysene	ND	0.02	ug/g						
Dibeno [a,h] anthracene	ND	0.02	ug/g						
Fluoranthene	ND	0.02	ug/g						
Fluorene	ND	0.02	ug/g						
Indeno [1,2,3-cd] pyrene	ND	0.02	ug/g						
1-Methylnaphthalene	ND	0.02	ug/g						
2-Methylnaphthalene	ND	0.02	ug/g						
Methylnaphthalene (1&2)	ND	0.04	ug/g						
Naphthalene	ND	0.01	ug/g						
Phenanthrene	ND	0.02	ug/g						
Pyrene	ND	0.02	ug/g						
Surrogate: 2-Fluorobiphenyl	1.08		ug/g		80.7	50-140			
Surrogate: Terphenyl-d14	1.34		ug/g		101	50-140			
<b>Volatiles</b>									
Acetone	ND	0.50	ug/g						
Benzene	ND	0.02	ug/g						
Bromodichloromethane	ND	0.05	ug/g						
Bromoform	ND	0.05	ug/g						
Bromomethane	ND	0.05	ug/g						
Carbon Tetrachloride	ND	0.05	ug/g						
Chlorobenzene	ND	0.05	ug/g						
Chloroform	ND	0.05	ug/g						
Dibromochloromethane	ND	0.05	ug/g						

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 26-Mar-2019

Order Date: 20-Mar-2019

Project Description: TS SO 37029

**Method Quality Control: Blank**

Analyte	Result	Reporting Limit	Units	Source Result	%REC	%REC Limit	RPD RPD	RPD Limit	Notes
Dichlorodifluoromethane	ND	0.05	ug/g						
1,2-Dichlorobenzene	ND	0.05	ug/g						
1,3-Dichlorobenzene	ND	0.05	ug/g						
1,4-Dichlorobenzene	ND	0.05	ug/g						
1,1-Dichloroethane	ND	0.05	ug/g						
1,2-Dichloroethane	ND	0.05	ug/g						
1,1-Dichloroethylene	ND	0.05	ug/g						
cis-1,2-Dichloroethylene	ND	0.05	ug/g						
trans-1,2-Dichloroethylene	ND	0.05	ug/g						
1,2-Dichloropropane	ND	0.05	ug/g						
cis-1,3-Dichloropropylene	ND	0.05	ug/g						
trans-1,3-Dichloropropylene	ND	0.05	ug/g						
1,3-Dichloropropene, total	ND	0.05	ug/g						
Ethylbenzene	ND	0.05	ug/g						
Ethylene dibromide (dibromoethane)	ND	0.05	ug/g						
Hexane	ND	0.05	ug/g						
Methyl Ethyl Ketone (2-Butanone)	ND	0.50	ug/g						
Methyl Isobutyl Ketone	ND	0.50	ug/g						
Methyl tert-butyl ether	ND	0.05	ug/g						
Methylene Chloride	ND	0.05	ug/g						
Styrene	ND	0.05	ug/g						
1,1,1,2-Tetrachloroethane	ND	0.05	ug/g						
1,1,2,2-Tetrachloroethane	ND	0.05	ug/g						
Tetrachloroethylene	ND	0.05	ug/g						
Toluene	ND	0.05	ug/g						
1,1,1-Trichloroethane	ND	0.05	ug/g						
1,1,2-Trichloroethane	ND	0.05	ug/g						
Trichloroethylene	ND	0.05	ug/g						
Trichlorofluoromethane	ND	0.05	ug/g						
Vinyl chloride	ND	0.02	ug/g						
m,p-Xylenes	ND	0.05	ug/g						
o-Xylene	ND	0.05	ug/g						
Xylenes, total	ND	0.05	ug/g						
Surrogate: 4-Bromofluorobenzene	2.85		ug/g		89.0	50-140			
Surrogate: Dibromofluoromethane	3.82		ug/g		119	50-140			
Surrogate: Toluene-d8	2.73		ug/g		85.4	50-140			

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 26-Mar-2019

Order Date: 20-Mar-2019

Project Description: TS SO 37029

**Method Quality Control: Duplicate**

Analyte	Result	Reporting Limit	Units	Source Result	%REC	%REC Limit	RPD	RPD Limit	Notes
<b>Hydrocarbons</b>									
F1 PHCs (C6-C10)	225	7	ug/g dry	230			2.1	40	
F2 PHCs (C10-C16)	ND	4	ug/g dry	ND				30	
F3 PHCs (C16-C34)	ND	8	ug/g dry	ND				30	
F4 PHCs (C34-C50)	ND	6	ug/g dry	ND				30	
F4G PHCs (gravimetric)	3390	50	ug/g dry	2700			22.6	30	
<b>Metals</b>									
Antimony	1.3	1.0	ug/g dry	ND			0.0	30	
Arsenic	5.8	1.0	ug/g dry	4.8			18.7	30	
Barium	45.6	1.0	ug/g dry	38.4			17.1	30	
Beryllium	ND	0.5	ug/g dry	ND			0.0	30	
Boron	8.2	5.0	ug/g dry	6.8			17.8	30	
Cadmium	ND	0.5	ug/g dry	ND			0.0	30	
Chromium (VI)	ND	0.2	ug/g dry	ND				35	
Chromium	13.1	5.0	ug/g dry	10.5			22.0	30	
Cobalt	3.9	1.0	ug/g dry	3.2			20.0	30	
Copper	20.6	5.0	ug/g dry	17.3			17.5	30	
Lead	28.9	1.0	ug/g dry	24.4			16.9	30	
Mercury	ND	0.1	ug/g dry	ND			0.0	30	
Molybdenum	ND	1.0	ug/g dry	ND			0.0	30	
Nickel	8.5	5.0	ug/g dry	7.0			20.2	30	
Selenium	ND	1.0	ug/g dry	ND			0.0	30	
Silver	ND	0.3	ug/g dry	ND			0.0	30	
Thallium	ND	1.0	ug/g dry	ND			0.0	30	
Uranium	ND	1.0	ug/g dry	ND			0.0	30	
Vanadium	21.2	10.0	ug/g dry	16.3			26.2	30	
Zinc	87.1	20.0	ug/g dry	67.6			25.2	30	
<b>Physical Characteristics</b>									
% Solids	86.9	0.1	% by Wt.	88.7			2.0	25	
<b>Semi-Volatiles</b>									
Acenaphthene	ND	0.02	ug/g dry	ND				40	
Acenaphthylene	ND	0.02	ug/g dry	ND				40	
Anthracene	ND	0.02	ug/g dry	ND				40	
Benzo [a] anthracene	ND	0.02	ug/g dry	ND				40	
Benzo [a] pyrene	ND	0.02	ug/g dry	ND				40	
Benzo [b] fluoranthene	ND	0.02	ug/g dry	ND				40	
Benzo [g,h,i] perylene	ND	0.02	ug/g dry	ND				40	
Benzo [k] fluoranthene	ND	0.02	ug/g dry	ND				40	
Chrysene	ND	0.02	ug/g dry	ND				40	
Dibeno [a,h] anthracene	ND	0.02	ug/g dry	ND				40	
Fluoranthene	ND	0.02	ug/g dry	ND				40	
Fluorene	ND	0.02	ug/g dry	ND				40	
Indeno [1,2,3-cd] pyrene	ND	0.02	ug/g dry	ND				40	
1-Methylnaphthalene	ND	0.02	ug/g dry	ND				40	
2-Methylnaphthalene	ND	0.02	ug/g dry	ND				40	
Naphthalene	ND	0.01	ug/g dry	ND				40	
Phenanthrene	ND	0.02	ug/g dry	ND				40	
Pyrene	ND	0.02	ug/g dry	ND				40	
Surrogate: 2-Fluorobiphenyl	1.51		ug/g dry	88.2	50-140				
Surrogate: Terphenyl-d14	2.15		ug/g dry	126	50-140				
<b>Volatiles</b>									
Acetone	ND	0.50	ug/g dry	ND				50	
Benzene	ND	0.02	ug/g dry	ND				50	
Bromodichloromethane	ND	0.05	ug/g dry	ND				50	
Bromoform	ND	0.05	ug/g dry	ND				50	
Bromomethane	ND	0.05	ug/g dry	ND				50	
Carbon Tetrachloride	ND	0.05	ug/g dry	ND				50	

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 26-Mar-2019

Order Date: 20-Mar-2019

Project Description: TS SO 37029

**Method Quality Control: Duplicate**

Analyte	Result	Reporting Limit	Units	Source Result	%REC	%REC Limit	RPD	RPD Limit	Notes
Chlorobenzene	ND	0.05	ug/g dry	ND				50	
Chloroform	ND	0.05	ug/g dry	ND				50	
Dibromochloromethane	ND	0.05	ug/g dry	ND				50	
Dichlorodifluoromethane	ND	0.05	ug/g dry	ND				50	
1,2-Dichlorobenzene	ND	0.05	ug/g dry	ND				50	
1,3-Dichlorobenzene	ND	0.05	ug/g dry	ND				50	
1,4-Dichlorobenzene	ND	0.05	ug/g dry	ND				50	
1,1-Dichloroethane	ND	0.05	ug/g dry	ND				50	
1,2-Dichloroethane	ND	0.05	ug/g dry	ND				50	
1,1-Dichloroethylene	ND	0.05	ug/g dry	ND				50	
cis-1,2-Dichloroethylene	ND	0.05	ug/g dry	ND				50	
trans-1,2-Dichloroethylene	ND	0.05	ug/g dry	ND				50	
1,2-Dichloropropane	ND	0.05	ug/g dry	ND				50	
cis-1,3-Dichloropropylene	ND	0.05	ug/g dry	ND				50	
trans-1,3-Dichloropropylene	ND	0.05	ug/g dry	ND				50	
Ethylbenzene	0.836	0.05	ug/g dry	0.849			1.6	50	
Ethylene dibromide (dibromoethane)	ND	0.05	ug/g dry	ND				50	
Hexane	ND	0.05	ug/g dry	ND				50	
Methyl Ethyl Ketone (2-Butanone)	ND	0.50	ug/g dry	ND				50	
Methyl Isobutyl Ketone	ND	0.50	ug/g dry	ND				50	
Methyl tert-butyl ether	ND	0.05	ug/g dry	ND				50	
Methylene Chloride	ND	0.05	ug/g dry	ND				50	
Styrene	ND	0.05	ug/g dry	ND				50	
1,1,1,2-Tetrachloroethane	ND	0.05	ug/g dry	ND				50	
1,1,2,2-Tetrachloroethane	ND	0.05	ug/g dry	ND				50	
Tetrachloroethylene	ND	0.05	ug/g dry	ND				50	
Toluene	0.237	0.05	ug/g dry	0.237			0.1	50	
1,1,1-Trichloroethane	ND	0.05	ug/g dry	ND				50	
1,1,2-Trichloroethane	ND	0.05	ug/g dry	ND				50	
Trichloroethylene	ND	0.05	ug/g dry	ND			0.0	50	
Trichlorofluoromethane	ND	0.05	ug/g dry	ND				50	
Vinyl chloride	ND	0.02	ug/g dry	ND				50	
m,p-Xylenes	7.67	0.05	ug/g dry	7.85			2.3	50	
o-Xylene	2.48	0.05	ug/g dry	2.50			0.8	50	
Surrogate: 4-Bromofluorobenzene	3.89		ug/g dry	103	50-140				
Surrogate: Dibromofluoromethane	2.99		ug/g dry	79.1	50-140				
Surrogate: Toluene-d8	3.02		ug/g dry	79.9	50-140				

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 26-Mar-2019

Order Date: 20-Mar-2019

Project Description: TS SO 37029

**Method Quality Control: Spike**

Analyte	Result	Reporting Limit	Units	Source Result	%REC	%REC Limit	RPD	RPD Limit	Notes
<b>Hydrocarbons</b>									
F1 PHCs (C6-C10)	188	7	ug/g		94.1	80-120			
F2 PHCs (C10-C16)	120	4	ug/g	ND	123	60-140			
F3 PHCs (C16-C34)	305	8	ug/g	ND	127	60-140			
F4 PHCs (C34-C50)	184	6	ug/g	ND	122	60-140			
F4G PHCs (gravimetric)	940	50	ug/g		94.0	80-120			
<b>Metals</b>									
Antimony	45.8		ug/L	ND	91.2	70-130			
Arsenic	52.8		ug/L	1.9	102	70-130			
Barium	65.1		ug/L	15.4	99.4	70-130			
Beryllium	53.1		ug/L	ND	106	70-130			
Boron	49.1		ug/L	ND	92.8	70-130			
Cadmium	48.4		ug/L	ND	96.5	70-130			
Chromium (VI)	0.2		mg/L	ND	84.0	70-130			
Chromium	53.3		ug/L	ND	98.2	70-130			
Cobalt	49.2		ug/L	1.3	95.9	70-130			
Copper	52.6		ug/L	6.9	91.4	70-130			
Lead	53.3		ug/L	9.8	87.0	70-130			
Mercury	1.60	0.1	ug/g	ND	107	70-130			
Molybdenum	50.1		ug/L	ND	99.8	70-130			
Nickel	53.4		ug/L	ND	101	70-130			
Selenium	47.9		ug/L	ND	95.4	70-130			
Silver	45.5		ug/L	ND	90.9	70-130			
Thallium	46.4		ug/L	ND	92.7	70-130			
Uranium	48.5		ug/L	ND	96.7	70-130			
Vanadium	60.1		ug/L	ND	107	70-130			
Zinc	75.0		ug/L	27.0	96.0	70-130			
<b>Semi-Volatiles</b>									
Acenaphthene	0.267	0.02	ug/g	ND	125	50-140			
Acenaphthylene	0.220	0.02	ug/g	ND	103	50-140			
Anthracene	0.227	0.02	ug/g	ND	106	50-140			
Benzo [a] anthracene	0.225	0.02	ug/g	ND	105	50-140			
Benzo [a] pyrene	0.190	0.02	ug/g	ND	88.6	50-140			
Benzo [b] fluoranthene	0.259	0.02	ug/g	ND	121	50-140			
Benzo [g,h,i] perylene	0.194	0.02	ug/g	ND	90.8	50-140			
Benzo [k] fluoranthene	0.251	0.02	ug/g	ND	117	50-140			
Chrysene	0.217	0.02	ug/g	ND	102	50-140			
Dibenzo [a,h] anthracene	0.182	0.02	ug/g	ND	85.2	50-140			
Fluoranthene	0.236	0.02	ug/g	ND	110	50-140			
Fluorene	0.223	0.02	ug/g	ND	104	50-140			
Indeno [1,2,3-cd] pyrene	0.189	0.02	ug/g	ND	88.3	50-140			
1-Methylnaphthalene	0.178	0.02	ug/g	ND	83.4	50-140			
2-Methylnaphthalene	0.206	0.02	ug/g	ND	96.3	50-140			
Naphthalene	0.236	0.01	ug/g	ND	110	50-140			
Phenanthrene	0.231	0.02	ug/g	ND	108	50-140			
Pyrene	0.227	0.02	ug/g	ND	106	50-140			
Surrogate: 2-Fluorobiphenyl	1.39		ug/g		81.0	50-140			
<b>Volatiles</b>									
Acetone	8.49	0.50	ug/g		84.9	50-140			
Benzene	3.92	0.02	ug/g		98.0	60-130			
Bromodichloromethane	4.30	0.05	ug/g		107	60-130			

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 26-Mar-2019

Order Date: 20-Mar-2019

Project Description: TS SO 37029

**Method Quality Control: Spike**

Analyte	Result	Reporting Limit	Units	Source Result	%REC	%REC Limit	RPD	RPD Limit	Notes
Bromoform	4.25	0.05	ug/g		106	60-130			
Bromomethane	3.51	0.05	ug/g		87.8	50-140			
Carbon Tetrachloride	4.29	0.05	ug/g		107	60-130			
Chlorobenzene	3.38	0.05	ug/g		84.4	60-130			
Chloroform	3.81	0.05	ug/g		95.2	60-130			
Dibromochloromethane	4.29	0.05	ug/g		107	60-130			
Dichlorodifluoromethane	2.68	0.05	ug/g		67.0	50-140			
1,2-Dichlorobenzene	3.94	0.05	ug/g		98.4	60-130			
1,3-Dichlorobenzene	4.05	0.05	ug/g		101	60-130			
1,4-Dichlorobenzene	3.28	0.05	ug/g		82.1	60-130			
1,1-Dichloroethane	3.18	0.05	ug/g		79.5	60-130			
1,2-Dichloroethane	3.69	0.05	ug/g		92.2	60-130			
1,1-Dichloroethylene	4.24	0.05	ug/g		106	60-130			
cis-1,2-Dichloroethylene	3.79	0.05	ug/g		94.7	60-130			
trans-1,2-Dichloroethylene	3.70	0.05	ug/g		92.6	60-130			
1,2-Dichloropropane	3.95	0.05	ug/g		98.7	60-130			
cis-1,3-Dichloropropylene	3.53	0.05	ug/g		88.2	60-130			
trans-1,3-Dichloropropylene	3.63	0.05	ug/g		90.7	60-130			
Ethylbenzene	3.17	0.05	ug/g		79.2	60-130			
Ethylene dibromide (dibromoethane)	4.41	0.05	ug/g		110	60-130			
Hexane	3.42	0.05	ug/g		85.4	60-130			
Methyl Ethyl Ketone (2-Butanone)	8.27	0.50	ug/g		82.7	50-140			
Methyl Isobutyl Ketone	10.8	0.50	ug/g		108	50-140			
Methyl tert-butyl ether	8.10	0.05	ug/g		81.0	50-140			
Methylene Chloride	3.33	0.05	ug/g		83.3	60-130			
Styrene	4.16	0.05	ug/g		104	60-130			
1,1,1,2-Tetrachloroethane	3.79	0.05	ug/g		94.8	60-130			
1,1,2,2-Tetrachloroethane	2.40	0.05	ug/g		60.1	60-130			
Tetrachloroethylene	4.11	0.05	ug/g		103	60-130			
Toluene	3.12	0.05	ug/g		77.9	60-130			
1,1,1-Trichloroethane	3.99	0.05	ug/g		99.7	60-130			
1,1,2-Trichloroethane	4.29	0.05	ug/g		107	60-130			
Trichloroethylene	4.68	0.05	ug/g		117	60-130			
Trichlorofluoromethane	3.30	0.05	ug/g		82.5	50-140			
Vinyl chloride	2.99	0.02	ug/g		74.6	50-140			
m,p-Xylenes	9.32	0.05	ug/g		116	60-130			
o-Xylene	3.30	0.05	ug/g		82.5	60-130			

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 26-Mar-2019

Order Date: 20-Mar-2019

Project Description: TS SO 37029

**Qualifier Notes:*****Sample Qualifiers :***

- 1 : GC-FID signal did not return to baseline by C50

**Sample Data Revisions**

None

**Work Order Revisions / Comments:**

None

**Other Report Notes:**

n/a: not applicable

ND: Not Detected

MDL: Method Detection Limit

Source Result: Data used as source for matrix and duplicate samples

%REC: Percent recovery.

RPD: Relative percent difference.

Soil results are reported on a dry weight basis when the units are denoted with 'dry'.

Where %Solids is reported, moisture loss includes the loss of volatile hydrocarbons.

***CCME PHC additional information:***

- The method for the analysis of PHCs complies with the Reference Method for the CWS PHC and is validated for use in the laboratory. All prescribed quality criteria identified in the method has been met.
- F1 range corrected for BTEX.
- F2 to F3 ranges corrected for appropriate PAHs where available.
- The gravimetric heavy hydrocarbons (F4G) are not to be added to C6 to C50 hydrocarbons.
- In the case where F4 and F4G are both reported, the greater of the two results is to be used for comparison to CWS PHC criteria.

TF  
RE  
RE

Paracel ID: 1912428

Laurent Blvd.  
90 K1G 4J8  
1947  
parcellabs.comChain of Custody  
(Lab Use Only)

No 47493

Page \_\_\_\_ of \_\_\_\_

Turnaround Time:

 1 Day       3 Day 2 Day       Regular

Date Required:

Client Name: DST Group	Project Reference: TSSO-37029
Contact Name: Shahab Nowrozi / Cameron F.	Quote #:
Address: 203 - 2150 Thurston Drive, Burnaby, BC	PO #:
Telephone: 604-295-5622	Email Address: cnowrozi@shaw.ca
Criteria: <input type="checkbox"/> O. Reg 153/04 (As Amended) Table <input type="checkbox"/> RSC Filing <input type="checkbox"/> O. Reg 558/00 <input type="checkbox"/> PWQO <input type="checkbox"/> CCME <input type="checkbox"/> SUB (Storm) <input type="checkbox"/> SUB (Sanitary) Municipality: <input type="checkbox"/> Other:	

Matrix Type: S (Soil-Sed.) GW (Ground Water) SW (Surface Water) SS (Storm Sanitary Sewer) P (Paint) A (Air) O (Other)						Required Analyses								
Paracel Order Number:	Sample ID/Location Name	Matrix	Air Volume	# of Containers	Sample Taken		BTEX	PAHs	VOCs	METALS	Mercury	Chromite	Lead	PHCs
					Date	Time								
1 BH19-5 SS1	S	2		2	20.03.9 PM		X	X	X	X	X	X	X	X
2 BH19-11B SS3	S	2		2	20.03.6 AM		X	X	X	X	X	X	X	X
3														
4														
5														
6														
7														
8														
9														
10														

Comments:

Method of Delivery

Walking

Relinquished By (Sign):	Received by Driver/Depot:	Received at Lab:	Verified By:
Relinquished By (Print): Shahab Nowrozi	Date/Time:	Date/Time: March 20, 2019	Date/Time: March 20, 2019
Date/Time: March 20, 2019 @ 1600 HR	Temperature: °C	Temperature: 16.1°C	pH Verified   By:

Chain of Custody (Blank) - Rev 0.4 Feb 2016



TRUSTED.  
RESPONSIVE.  
RELIABLE.

300 - 2319 St. Laurent Blvd  
Ottawa, ON, K1G 4J8  
1-800-749-1947  
[www.paracellabs.com](http://www.paracellabs.com)

## Certificate of Analysis

### DST Consulting Engineers Inc. (Ottawa)

203-2150 Thurston Dr.  
Ottawa, ON K1G 5T9  
Attn: Cameron Fischl

Client PO:  
Project: TS SO 37029  
Custody: 120533

Report Date: 4-Apr-2019  
Order Date: 29-Mar-2019

**Order #: 1913648**

This Certificate of Analysis contains analytical data applicable to the following samples as submitted:

Paracel ID	Client ID
1913648-01	BH19-9
1913648-02	BH19-9 Dup
1913648-03	BH19-6
1913648-04	BH19-4

Approved By:

A handwritten signature in black ink that reads "Mark Foto".

Mark Foto, M.Sc.  
Lab Supervisor

Any use of these results implies your agreement that our total liability in connection with this work, however arising, shall be limited to the amount paid by you for this work, and that our employees or agents shall not under any circumstances be liable to you in connection with this work.

Certificate of Analysis

Report Date: 04-Apr-2019

Client: DST Consulting Engineers Inc. (Ottawa)

Order Date: 29-Mar-2019

Client PO:

Project Description: TS SO 37029

## Analysis Summary Table

Analysis	Method Reference/Description	Extraction Date	Analysis Date
Chromium, hexavalent - water	MOE E3056 - colourimetric	1-Apr-19	1-Apr-19
Mercury by CVAA	EPA 245.2 - Cold Vapour AA	1-Apr-19	1-Apr-19
Metals, ICP-MS	EPA 200.8 - ICP-MS	1-Apr-19	1-Apr-19
pH	EPA 150.1 - pH probe @25 °C	1-Apr-19	1-Apr-19
PHC F1	CWS Tier 1 - P&T GC-FID	30-Mar-19	1-Apr-19
PHCs F2 to F4	CWS Tier 1 - GC-FID, extraction	1-Apr-19	2-Apr-19
REG 153: PAHs by GC-MS	EPA 625 - GC-MS, extraction	3-Apr-19	4-Apr-19
REG 153: VOCs by P&T GC/MS	EPA 624 - P&T GC-MS	30-Mar-19	1-Apr-19

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 04-Apr-2019

Order Date: 29-Mar-2019

Project Description: TS SO 37029

Client ID:	BH19-9	Sample Date:	BH19-9 Dup	BH19-6	BH19-4
Sample ID:	03/29/2019 10:30	MDL/Units	03/29/2019 10:30	03/29/2019 12:30	03/29/2019 14:30
	1913648-01	Water	1913648-02	1913648-03	1913648-04

**General Inorganics**

pH	0.1 pH Units	7.4	7.4	6.8	7.5
----	--------------	-----	-----	-----	-----

**Metals**

Mercury	0.1 ug/L	<0.1	<0.1	<0.1	<0.1
Antimony	0.5 ug/L	<0.5	<0.5	<0.5	<0.5
Arsenic	1 ug/L	1	1	<1	<1
Barium	1 ug/L	975	993	187	184
Beryllium	0.5 ug/L	<0.5	<0.5	<0.5	<0.5
Boron	10 ug/L	27	27	836	35
Cadmium	0.1 ug/L	<0.1	<0.1	<0.1	<0.1
Chromium	1 ug/L	<1	<1	<1	<1
Chromium (VI)	10 ug/L	<10	<10	<10	<10
Cobalt	0.5 ug/L	1.4	1.5	3.6	1.0
Copper	0.5 ug/L	0.6	8.7	1.1	<0.5
Lead	0.1 ug/L	0.2	1.3	0.2	<0.1
Molybdenum	0.5 ug/L	2.3	2.2	1.8	1.6
Nickel	1 ug/L	5	6	13	3
Selenium	1 ug/L	<1	<1	<1	<1
Silver	0.1 ug/L	<0.1	<0.1	<0.1	<0.1
Sodium	200 ug/L	36200	37200	198000	29100
Thallium	0.1 ug/L	<0.1	<0.1	<0.1	<0.1
Uranium	0.1 ug/L	3.0	3.3	0.9	0.5
Vanadium	0.5 ug/L	1.4	1.7	0.8	0.5
Zinc	5 ug/L	11	35	22	<5

**Volatiles**

Acetone	5.0 ug/L	<5.0	<5.0	<5.0	<5.0
Benzene	0.5 ug/L	<0.5	<0.5	1.3	<0.5
Bromodichloromethane	0.5 ug/L	<0.5	<0.5	<0.5	<0.5
Bromoform	0.5 ug/L	<0.5	<0.5	<0.5	<0.5
Bromomethane	0.5 ug/L	<0.5	<0.5	<0.5	<0.5
Carbon Tetrachloride	0.2 ug/L	<0.2	<0.2	<0.2	<0.2
Chlorobenzene	0.5 ug/L	<0.5	<0.5	<0.5	<0.5
Chloroform	0.5 ug/L	<0.5	<0.5	<0.5	<0.5
Dibromochloromethane	0.5 ug/L	<0.5	<0.5	<0.5	<0.5
Dichlorodifluoromethane	1.0 ug/L	<1.0	<1.0	<1.0	<1.0
1,2-Dichlorobenzene	0.5 ug/L	<0.5	<0.5	<0.5	<0.5

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 04-Apr-2019

Order Date: 29-Mar-2019

Project Description: TS SO 37029

	Client ID: Sample Date: Sample ID: MDL/Units	BH19-9 03/29/2019 10:30 1913648-01 Water	BH19-9 Dup 03/29/2019 10:30 1913648-02 Water	BH19-6 03/29/2019 12:30 1913648-03 Water	BH19-4 03/29/2019 14:30 1913648-04 Water
1,3-Dichlorobenzene	0.5 ug/L	<0.5	<0.5	<0.5	<0.5
1,4-Dichlorobenzene	0.5 ug/L	<0.5	<0.5	<0.5	<0.5
1,1-Dichloroethane	0.5 ug/L	<0.5	<0.5	0.5	<0.5
1,2-Dichloroethane	0.5 ug/L	<0.5	<0.5	<0.5	<0.5
1,1-Dichloroethylene	0.5 ug/L	<0.5	<0.5	<0.5	<0.5
cis-1,2-Dichloroethylene	0.5 ug/L	<0.5	<0.5	4.1	<0.5
trans-1,2-Dichloroethylene	0.5 ug/L	<0.5	<0.5	<0.5	<0.5
1,2-Dichloropropane	0.5 ug/L	<0.5	<0.5	<0.5	<0.5
cis-1,3-Dichloropropylene	0.5 ug/L	<0.5	<0.5	<0.5	<0.5
trans-1,3-Dichloropropylene	0.5 ug/L	<0.5	<0.5	<0.5	<0.5
1,3-Dichloropropene, total	0.5 ug/L	<0.5	<0.5	<0.5	<0.5
Ethylbenzene	0.5 ug/L	<0.5	<0.5	<0.5	<0.5
Ethylene dibromide (dibromoethane)	0.2 ug/L	<0.2	<0.2	<0.2	<0.2
Hexane	1.0 ug/L	<1.0	<1.0	<1.0	<1.0
Methyl Ethyl Ketone (2-Butanone)	5.0 ug/L	<5.0	<5.0	<5.0	<5.0
Methyl Isobutyl Ketone	5.0 ug/L	<5.0	<5.0	<5.0	<5.0
Methyl tert-butyl ether	2.0 ug/L	<2.0	<2.0	<2.0	<2.0
Methylene Chloride	5.0 ug/L	<5.0	<5.0	<5.0	<5.0
Styrene	0.5 ug/L	<0.5	<0.5	<0.5	<0.5
1,1,1,2-Tetrachloroethane	0.5 ug/L	<0.5	<0.5	<0.5	<0.5
1,1,2,2-Tetrachloroethane	0.5 ug/L	<0.5	<0.5	<0.5	<0.5
Tetrachloroethylene	0.5 ug/L	3.3	3.6	1.1	1.5
Toluene	0.5 ug/L	<0.5	<0.5	<0.5	<0.5
1,1,1-Trichloroethane	0.5 ug/L	<0.5	<0.5	<0.5	<0.5
1,1,2-Trichloroethane	0.5 ug/L	<0.5	<0.5	<0.5	<0.5
Trichloroethylene	0.5 ug/L	<0.5	<0.5	<0.5	<0.5
Trichlorofluoromethane	1.0 ug/L	<1.0	<1.0	<1.0	<1.0
Vinyl chloride	0.5 ug/L	<0.5	<0.5	<0.5	<0.5
m,p-Xylenes	0.5 ug/L	<0.5	<0.5	<0.5	<0.5
o-Xylene	0.5 ug/L	<0.5	<0.5	<0.5	<0.5
Xylenes, total	0.5 ug/L	<0.5	<0.5	<0.5	<0.5
4-Bromofluorobenzene	Surrogate	117%	117%	117%	120%
Dibromofluoromethane	Surrogate	90.6%	92.7%	75.1%	74.5%
Toluene-d8	Surrogate	99.8%	99.2%	99.7%	99.9%

**Hydrocarbons**

F1 PHCs (C6-C10)	25 ug/L	<25	<25	<25	<25
------------------	---------	-----	-----	-----	-----

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 04-Apr-2019

Order Date: 29-Mar-2019

Project Description: TS SO 37029

	Client ID: Sample Date: Sample ID: MDL/Units	BH19-9 03/29/2019 10:30 1913648-01 Water	BH19-9 Dup 03/29/2019 10:30 1913648-02 Water	BH19-6 03/29/2019 12:30 1913648-03 Water	BH19-4 03/29/2019 14:30 1913648-04 Water
F2 PHCs (C10-C16)	100 ug/L	<100	<100	<100	<100
F3 PHCs (C16-C34)	100 ug/L	<100	<100	<100	<100
F4 PHCs (C34-C50)	100 ug/L	<100	<100	<100	<100

**Semi-Volatiles**

Acenaphthene	0.05 ug/L	<0.05	<0.05	0.38	<0.05
Acenaphthylene	0.05 ug/L	<0.05	<0.05	<0.05	<0.05
Anthracene	0.01 ug/L	<0.01	<0.01	0.05	<0.01
Benzo [a] anthracene	0.01 ug/L	<0.01	<0.01	0.04	<0.01
Benzo [a] pyrene	0.01 ug/L	<0.01	<0.01	0.03	<0.01
Benzo [b] fluoranthene	0.05 ug/L	<0.05	<0.05	<0.05	<0.05
Benzo [g,h,i] perylene	0.05 ug/L	<0.05	<0.05	<0.05	<0.05
Benzo [k] fluoranthene	0.05 ug/L	<0.05	<0.05	<0.05	<0.05
Chrysene	0.05 ug/L	<0.05	<0.05	<0.05	<0.05
Dibenzo [a,h] anthracene	0.05 ug/L	<0.05	<0.05	<0.05	<0.05
Fluoranthene	0.01 ug/L	<0.01	<0.01	0.08	<0.01
Fluorene	0.05 ug/L	<0.05	<0.05	<0.05	<0.05
Indeno [1,2,3-cd] pyrene	0.05 ug/L	<0.05	<0.05	<0.05	<0.05
1-Methylnaphthalene	0.05 ug/L	<0.05	<0.05	<0.05	<0.05
2-Methylnaphthalene	0.05 ug/L	<0.05	<0.05	<0.05	<0.05
Methylnaphthalene (1&2)	0.10 ug/L	<0.10	<0.10	<0.10	<0.10
Naphthalene	0.05 ug/L	<0.05	<0.05	<0.05	<0.05
Phenanthrene	0.05 ug/L	<0.05	<0.05	0.08	<0.05
Pyrene	0.01 ug/L	<0.01	<0.01	0.07	<0.01
2-Fluorobiphenyl	Surrogate	87.5%	98.5%	83.1%	87.5%
Terphenyl-d14	Surrogate	101%	116%	98.7%	115%

Certificate of Analysis

Report Date: 04-Apr-2019

Client: DST Consulting Engineers Inc. (Ottawa)

Order Date: 29-Mar-2019

Client PO:

Project Description: TS SO 37029

### Method Quality Control: Blank

Analyte	Result	Reporting Limit	Units	Source Result	%REC	%REC Limit	RPD	RPD Limit	Notes
<b>Hydrocarbons</b>									
F1 PHCs (C6-C10)	ND	25	ug/L						
F2 PHCs (C10-C16)	ND	100	ug/L						
F3 PHCs (C16-C34)	ND	100	ug/L						
F4 PHCs (C34-C50)	ND	100	ug/L						
<b>Metals</b>									
Mercury	ND	0.1	ug/L						
Antimony	ND	0.5	ug/L						
Arsenic	ND	1	ug/L						
Barium	ND	1	ug/L						
Beryllium	ND	0.5	ug/L						
Boron	ND	10	ug/L						
Cadmium	ND	0.1	ug/L						
Chromium (VI)	ND	10	ug/L						
Chromium	ND	1	ug/L						
Cobalt	ND	0.5	ug/L						
Copper	ND	0.5	ug/L						
Lead	ND	0.1	ug/L						
Molybdenum	ND	0.5	ug/L						
Nickel	ND	1	ug/L						
Selenium	ND	1	ug/L						
Silver	ND	0.1	ug/L						
Sodium	ND	200	ug/L						
Thallium	ND	0.1	ug/L						
Uranium	ND	0.1	ug/L						
Vanadium	ND	0.5	ug/L						
Zinc	ND	5	ug/L						
<b>Semi-Volatiles</b>									
Acenaphthene	ND	0.05	ug/L						
Acenaphthylene	ND	0.05	ug/L						
Anthracene	ND	0.01	ug/L						
Benzo [a] anthracene	ND	0.01	ug/L						
Benzo [a] pyrene	ND	0.01	ug/L						
Benzo [b] fluoranthene	ND	0.05	ug/L						
Benzo [g,h,i] perylene	ND	0.05	ug/L						
Benzo [k] fluoranthene	ND	0.05	ug/L						
Chrysene	ND	0.05	ug/L						
Dibenzo [a,h] anthracene	ND	0.05	ug/L						
Fluoranthene	ND	0.01	ug/L						
Fluorene	ND	0.05	ug/L						
Indeno [1,2,3-cd] pyrene	ND	0.05	ug/L						
1-Methylnaphthalene	ND	0.05	ug/L						
2-Methylnaphthalene	ND	0.05	ug/L						
Methylnaphthalene (1&2)	ND	0.10	ug/L						
Naphthalene	ND	0.05	ug/L						
Phenanthrene	ND	0.05	ug/L						
Pyrene	ND	0.01	ug/L						
Surrogate: 2-Fluorobiphenyl	16.9		ug/L		84.3	50-140			
Surrogate: Terphenyl-d14	20.6		ug/L		103	50-140			
<b>Volatiles</b>									
Acetone	ND	5.0	ug/L						
Benzene	ND	0.5	ug/L						
Bromodichloromethane	ND	0.5	ug/L						
Bromoform	ND	0.5	ug/L						
Bromomethane	ND	0.5	ug/L						
Carbon Tetrachloride	ND	0.2	ug/L						
Chlorobenzene	ND	0.5	ug/L						
Chloroform	ND	0.5	ug/L						
Dibromochloromethane	ND	0.5	ug/L						

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 04-Apr-2019

Order Date: 29-Mar-2019

Project Description: TS SO 37029

**Method Quality Control: Blank**

Analyte	Result	Reporting Limit	Units	Source Result	%REC	%REC Limit	RPD	RPD Limit	Notes
Dichlorodifluoromethane	ND	1.0	ug/L						
1,2-Dichlorobenzene	ND	0.5	ug/L						
1,3-Dichlorobenzene	ND	0.5	ug/L						
1,4-Dichlorobenzene	ND	0.5	ug/L						
1,1-Dichloroethane	ND	0.5	ug/L						
1,2-Dichloroethane	ND	0.5	ug/L						
1,1-Dichloroethylene	ND	0.5	ug/L						
cis-1,2-Dichloroethylene	ND	0.5	ug/L						
trans-1,2-Dichloroethylene	ND	0.5	ug/L						
1,2-Dichloropropane	ND	0.5	ug/L						
cis-1,3-Dichloropropylene	ND	0.5	ug/L						
trans-1,3-Dichloropropylene	ND	0.5	ug/L						
1,3-Dichloropropene, total	ND	0.5	ug/L						
Ethylbenzene	ND	0.5	ug/L						
Ethylene dibromide (dibromoethane,	ND	0.2	ug/L						
Hexane	ND	1.0	ug/L						
Methyl Ethyl Ketone (2-Butanone)	ND	5.0	ug/L						
Methyl Isobutyl Ketone	ND	5.0	ug/L						
Methyl tert-butyl ether	ND	2.0	ug/L						
Methylene Chloride	ND	5.0	ug/L						
Styrene	ND	0.5	ug/L						
1,1,1,2-Tetrachloroethane	ND	0.5	ug/L						
1,1,2,2-Tetrachloroethane	ND	0.5	ug/L						
Tetrachloroethylene	ND	0.5	ug/L						
Toluene	ND	0.5	ug/L						
1,1,1-Trichloroethane	ND	0.5	ug/L						
1,1,2-Trichloroethane	ND	0.5	ug/L						
Trichloroethylene	ND	0.5	ug/L						
Trichlorofluoromethane	ND	1.0	ug/L						
Vinyl chloride	ND	0.5	ug/L						
m,p-Xylenes	ND	0.5	ug/L						
o-Xylene	ND	0.5	ug/L						
Xylenes, total	ND	0.5	ug/L						
Surrogate: 4-Bromofluorobenzene	83.4		ug/L		104	50-140			
Surrogate: Dibromofluoromethane	86.4		ug/L		108	50-140			
Surrogate: Toluene-d8	90.3		ug/L		113	50-140			

Certificate of Analysis

Report Date: 04-Apr-2019

Client: DST Consulting Engineers Inc. (Ottawa)

Order Date: 29-Mar-2019

Client PO:

Project Description: TS SO 37029

**Method Quality Control: Duplicate**

Analyte	Result	Reporting Limit	Units	Source Result	%REC	%REC Limit	RPD	RPD Limit	Notes
<b>General Inorganics</b>									
pH	7.6	0.1	pH Units	7.6			0.8	10	
<b>Hydrocarbons</b>									
F1 PHCs (C6-C10)	ND	25	ug/L	ND				30	
<b>Metals</b>									
Mercury	ND	0.1	ug/L	ND			0.0	20	
Antimony	0.97	0.5	ug/L	0.71			31.7	20	QR-01
Arsenic	1.1	1	ug/L	1.1			3.6	20	
Barium	137	1	ug/L	138			0.7	20	
Beryllium	ND	0.5	ug/L	ND			0.0	20	
Boron	184	10	ug/L	183			0.3	20	
Cadmium	ND	0.1	ug/L	ND			0.0	20	
Chromium (VI)	ND	10	ug/L	ND				20	
Chromium	ND	1	ug/L	ND			0.0	20	
Cobalt	2.14	0.5	ug/L	2.15			0.4	20	
Copper	7.09	0.5	ug/L	7.11			0.2	20	
Lead	0.54	0.1	ug/L	0.54			0.1	20	
Molybdenum	125	0.5	ug/L	125			0.4	20	
Nickel	3.2	1	ug/L	3.2			2.5	20	
Selenium	ND	1	ug/L	ND			0.0	20	
Silver	ND	0.1	ug/L	ND			0.0	20	
Sodium	104000	200	ug/L	106000			2.6	20	
Thallium	ND	0.1	ug/L	ND			0.0	20	
Uranium	10.4	0.1	ug/L	10.4			0.6	20	
Vanadium	0.73	0.5	ug/L	0.70			4.5	20	
Zinc	7	5	ug/L	7			10.2	20	
<b>Volatiles</b>									
Acetone	ND	5.0	ug/L	ND				30	
Benzene	ND	0.5	ug/L	ND				30	
Bromodichloromethane	ND	0.5	ug/L	ND				30	
Bromoform	ND	0.5	ug/L	ND				30	
Bromomethane	ND	0.5	ug/L	ND				30	
Carbon Tetrachloride	ND	0.2	ug/L	ND				30	
Chlorobenzene	ND	0.5	ug/L	ND				30	
Chloroform	ND	0.5	ug/L	ND				30	
Dibromochloromethane	ND	0.5	ug/L	ND				30	
Dichlorodifluoromethane	ND	1.0	ug/L	ND				30	
1,2-Dichlorobenzene	ND	0.5	ug/L	ND				30	
1,3-Dichlorobenzene	ND	0.5	ug/L	ND				30	
1,4-Dichlorobenzene	ND	0.5	ug/L	ND				30	
1,1-Dichloroethane	ND	0.5	ug/L	ND				30	
1,2-Dichloroethane	ND	0.5	ug/L	ND				30	
1,1-Dichloroethylene	ND	0.5	ug/L	ND				30	
cis-1,2-Dichloroethylene	ND	0.5	ug/L	ND				30	
trans-1,2-Dichloroethylene	ND	0.5	ug/L	ND				30	
1,2-Dichloropropane	ND	0.5	ug/L	ND				30	
cis-1,3-Dichloropropylene	ND	0.5	ug/L	ND				30	
trans-1,3-Dichloropropylene	ND	0.5	ug/L	ND				30	
Ethylbenzene	ND	0.5	ug/L	ND				30	
Ethylene dibromide (dibromoethane,	ND	0.2	ug/L	ND				30	
Hexane	ND	1.0	ug/L	ND				30	
Methyl Ethyl Ketone (2-Butanone)	ND	5.0	ug/L	ND				30	
Methyl Isobutyl Ketone	ND	5.0	ug/L	ND				30	
Methyl tert-butyl ether	ND	2.0	ug/L	ND				30	
Methylene Chloride	ND	5.0	ug/L	ND				30	
Styrene	ND	0.5	ug/L	ND				30	
1,1,1,2-Tetrachloroethane	ND	0.5	ug/L	ND				30	
1,1,2,2-Tetrachloroethane	ND	0.5	ug/L	ND				30	

Certificate of Analysis

Report Date: 04-Apr-2019

Client: DST Consulting Engineers Inc. (Ottawa)

Order Date: 29-Mar-2019

Client PO:

Project Description: TS SO 37029

**Method Quality Control: Duplicate**

Analyte	Result	Reporting Limit	Units	Source Result	%REC	%REC Limit	RPD	RPD Limit	Notes
Tetrachloroethylene	ND	0.5	ug/L	ND				30	
Toluene	ND	0.5	ug/L	ND				30	
1,1,1-Trichloroethane	ND	0.5	ug/L	ND				30	
1,1,2-Trichloroethane	ND	0.5	ug/L	ND				30	
Trichloroethylene	ND	0.5	ug/L	ND				30	
Trichlorofluoromethane	ND	1.0	ug/L	ND				30	
Vinyl chloride	ND	0.5	ug/L	ND				30	
m,p-Xylenes	ND	0.5	ug/L	ND				30	
o-Xylene	ND	0.5	ug/L	ND				30	
Surrogate: 4-Bromofluorobenzene	82.8		ug/L		104	50-140			
Surrogate: Dibromofluoromethane	84.7		ug/L		106	50-140			
Surrogate: Toluene-d8	92.9		ug/L		116	50-140			

Certificate of Analysis

Report Date: 04-Apr-2019

Client: DST Consulting Engineers Inc. (Ottawa)

Order Date: 29-Mar-2019

Client PO:

Project Description: TS SO 37029

### Method Quality Control: Spike

Analyte	Result	Reporting Limit	Units	Source Result	%REC	%REC Limit	RPD	RPD Limit	Notes
<b>Hydrocarbons</b>									
F1 PHCs (C6-C10)	1950	25	ug/L		97.5	68-117			
F2 PHCs (C10-C16)	1590	100	ug/L		99.3	60-140			
F3 PHCs (C16-C34)	4150	100	ug/L		106	60-140			
F4 PHCs (C34-C50)	2140	100	ug/L		86.4	60-140			
<b>Metals</b>									
Mercury	2.89	0.1	ug/L	ND	96.5	70-130			
Antimony	47.2		ug/L	0.71	93.1	80-120			
Arsenic	56.3		ug/L	1.1	110	80-120			
Barium	178		ug/L	138	79.5	80-120			QM-07
Beryllium	52.8		ug/L	ND	105	80-120			
Boron	228		ug/L	183	90.1	80-120			
Cadmium	47.2		ug/L	ND	94.4	80-120			
Chromium (VI)	207	10	ug/L	ND	104	70-130			
Chromium	58.9		ug/L	ND	117	80-120			
Cobalt	51.1		ug/L	2.15	97.8	80-120			
Copper	58.9		ug/L	7.11	104	80-120			
Lead	45.7		ug/L	0.54	90.3	80-120			
Molybdenum	177		ug/L	125	104	80-120			
Nickel	55.3		ug/L	3.2	104	80-120			
Selenium	49.0		ug/L	ND	96.6	80-120			
Silver	44.3		ug/L	ND	88.7	80-120			
Sodium	63500		ug/L	51800	116	80-120			
Thallium	46.3		ug/L	ND	92.5	80-120			
Uranium	60.4		ug/L	10.4	100	80-120			
Vanadium	60.4		ug/L	0.70	119	80-120			
Zinc	54		ug/L	7	93.1	80-120			
<b>Semi-Volatiles</b>									
Acenaphthene	3.70	0.05	ug/L		74.0	50-140			
Acenaphthylene	3.55	0.05	ug/L		71.0	50-140			
Anthracene	4.05	0.01	ug/L		81.0	50-140			
Benzo [a] anthracene	4.54	0.01	ug/L		90.8	50-140			
Benzo [a] pyrene	4.53	0.01	ug/L		90.7	50-140			
Benzo [b] fluoranthene	5.47	0.05	ug/L		109	50-140			
Benzo [g,h,i] perylene	3.97	0.05	ug/L		79.3	50-140			
Benzo [k] fluoranthene	5.56	0.05	ug/L		111	50-140			
Chrysene	5.47	0.05	ug/L		109	50-140			
Dibenzo [a,h] anthracene	4.04	0.05	ug/L		80.8	50-140			
Fluoranthene	4.13	0.01	ug/L		82.7	50-140			
Fluorene	4.08	0.05	ug/L		81.6	50-140			
Indeno [1,2,3-cd] pyrene	4.31	0.05	ug/L		86.3	50-140			
1-Methylnaphthalene	5.10	0.05	ug/L		102	50-140			
2-Methylnaphthalene	5.57	0.05	ug/L		111	50-140			
Naphthalene	4.78	0.05	ug/L		95.6	50-140			
Phenanthrene	4.24	0.05	ug/L		84.9	50-140			
Pyrene	4.25	0.01	ug/L		84.9	50-140			
Surrogate: 2-Fluorobiphenyl	20.6		ug/L		103	50-140			
<b>Volatiles</b>									
Acetone	74.1	5.0	ug/L		74.1	50-140			
Benzene	35.6	0.5	ug/L		89.0	60-130			
Bromodichloromethane	35.4	0.5	ug/L		88.5	60-130			

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 04-Apr-2019

Order Date: 29-Mar-2019

Project Description: TS SO 37029

**Method Quality Control: Spike**

Analyte	Result	Reporting Limit	Units	Source Result	%REC	%REC Limit	RPD	RPD Limit	Notes
Bromoform	33.5	0.5	ug/L	83.7	60-130				
Bromomethane	31.4	0.5	ug/L	78.5	50-140				
Carbon Tetrachloride	37.1	0.2	ug/L	92.8	60-130				
Chlorobenzene	35.6	0.5	ug/L	89.0	60-130				
Chloroform	37.3	0.5	ug/L	93.2	60-130				
Dibromochloromethane	35.2	0.5	ug/L	88.0	60-130				
Dichlorodifluoromethane	35.3	1.0	ug/L	88.2	50-140				
1,2-Dichlorobenzene	33.5	0.5	ug/L	83.8	60-130				
1,3-Dichlorobenzene	34.9	0.5	ug/L	87.2	60-130				
1,4-Dichlorobenzene	34.9	0.5	ug/L	87.2	60-130				
1,1-Dichloroethane	38.2	0.5	ug/L	95.4	60-130				
1,2-Dichloroethane	39.6	0.5	ug/L	99.0	60-130				
1,1-Dichloroethylene	31.6	0.5	ug/L	79.1	60-130				
cis-1,2-Dichloroethylene	35.8	0.5	ug/L	89.5	60-130				
trans-1,2-Dichloroethylene	36.5	0.5	ug/L	91.2	60-130				
1,2-Dichloropropane	32.3	0.5	ug/L	80.8	60-130				
cis-1,3-Dichloropropylene	33.6	0.5	ug/L	83.9	60-130				
trans-1,3-Dichloropropylene	33.7	0.5	ug/L	84.3	60-130				
Ethylbenzene	34.8	0.5	ug/L	87.0	60-130				
Ethylene dibromide (dibromoethane,	38.8	0.2	ug/L	97.1	60-130				
Hexane	31.4	1.0	ug/L	78.5	60-130				
Methyl Ethyl Ketone (2-Butanone)	79.5	5.0	ug/L	79.5	50-140				
Methyl Isobutyl Ketone	77.0	5.0	ug/L	77.0	50-140				
Methyl tert-butyl ether	83.4	2.0	ug/L	83.4	50-140				
Methylene Chloride	35.2	5.0	ug/L	88.1	60-130				
Styrene	31.0	0.5	ug/L	77.4	60-130				
1,1,1,2-Tetrachloroethane	37.5	0.5	ug/L	93.6	60-130				
1,1,2,2-Tetrachloroethane	41.6	0.5	ug/L	104	60-130				
Tetrachloroethylene	43.0	0.5	ug/L	108	60-130				
Toluene	37.9	0.5	ug/L	94.6	60-130				
1,1,1-Trichloroethane	37.8	0.5	ug/L	94.6	60-130				
1,1,2-Trichloroethane	36.1	0.5	ug/L	90.2	60-130				
Trichloroethylene	34.4	0.5	ug/L	85.9	60-130				
Trichlorofluoromethane	35.1	1.0	ug/L	87.7	60-130				
Vinyl chloride	29.3	0.5	ug/L	73.3	50-140				
m,p-Xylenes	69.6	0.5	ug/L	87.0	60-130				
o-Xylene	35.4	0.5	ug/L	88.6	60-130				

Certificate of Analysis

Client: DST Consulting Engineers Inc. (Ottawa)

Client PO:

Report Date: 04-Apr-2019

Order Date: 29-Mar-2019

Project Description: TS SO 37029

**Qualifier Notes:*****QC Qualifiers :***

QM-07 : The spike recovery was outside acceptance limits for the MS and/or MSD. The batch was accepted based on other acceptable QC.

QR-01 : Duplicate RPD is high, however, the sample result is less than 10x the MDL.

**Sample Data Revisions**

None

**Work Order Revisions / Comments:**

None

**Other Report Notes:**

n/a: not applicable

ND: Not Detected

MDL: Method Detection Limit

Source Result: Data used as source for matrix and duplicate samples

%REC: Percent recovery.

RPD: Relative percent difference.

***CCME PHC additional information:***

- The method for the analysis of PHCs complies with the Reference Method for the CWS PHC and is validated for use in the laboratory. All prescribed quality criteria identified in the method has been met.
- F1 range corrected for BTEX.
- F2 to F3 ranges corrected for appropriate PAHs where available.
- The gravimetric heavy hydrocarbons (F4G) are not to be added to C6 to C50 hydrocarbons.
- In the case where F4 and F4G are both reported, the greater of the two results is to be used for comparison to CWS PHC criteria.



Paracel ID: 1913648



Head Office  
300-2319 St. Laurent Blvd.  
Ottawa, Ontario K1G 4J8  
p: 1-800-749-1947  
e: paracel@paracellabs.com

Chain of Custody

(Lab Use Only)

No 120533

Page 1 of 1

Client Name: DST Group	Project Reference: TSSD-37029	Turnaround Time:
Contact Name: Cameron Fischl	Quote #	<input type="checkbox"/> 1 Day <input type="checkbox"/> 3 Day
Address: 250 Thurston Drive Ottawa, On. K1G 5T9	PO #	<input type="checkbox"/> 2 Day <input checked="" type="checkbox"/> Regular
Telephone: 613-402-03913	Email Address: cfischl@dstgroup.com	Date Required:
Criteria: <input checked="" type="checkbox"/> O. Reg. 153/04 (As Amended) Table <input type="checkbox"/> RSC Filing <input type="checkbox"/> O. Reg. 558/00 <input type="checkbox"/> PWQO <input type="checkbox"/> CCME <input type="checkbox"/> SUB (Storm) <input type="checkbox"/> SUB (Sanitary) Municipality: <input type="checkbox"/> Other:		

Matrix Type: S (Soil/Sed.) GW (Ground Water) SW (Surface Water) SS (Storm/Sanitary Sewer) P (Paint) A (Air) O (Other)

Paracel Order Number:

1913648

	Sample ID/Location Name	Matrix	Air Volume	# of Containers	Sample Taken		Required Analyses							
					Date	Time	PHCs, F1-F4+BTEN	VOCs	PAHs	Metals by ICP	Hg	CrVI	B (HWS)	Pt
1	BH19-9	GW	8	1030	2019/03/29	X	X	X	X	X	X	X	X	
2	BH19-9 Dup	GW	8	1030			X	X	X	X	X	X	X	
3	BH19-6	GW	8	1230			X	X	X	X	X	X	X	
4	BH19-4	GW	8	1430			X	X	X	X	X	X	X	
5														
6														
7														
8														
9														
10														

Comments:

Method of Delivery:

Walk-in

Relinquished By (Sign):  Cameron Fischl/CamFischl	Received by Driver/Depot:  Date/Time: 2019/03/29 15:30	Received in Lab:  Date/Time: 2019/03/29 15:30	Verified By:  John ADP Date/Time: 2019/03/29 15:42
Relinquished By (Print): Cameron Fischl Date/Time: 2019/03/29 15:30	Date/Time: Temperature: 13.1 °C	Date/Time: 2019/03/29 15:30 Temperature: 13.1 °C	Date/Time: 2019/03/29 15:42 pH Verified By: MX