


## DETAIL FOR STREET CB SILT PROTECTION SCALE: NTS

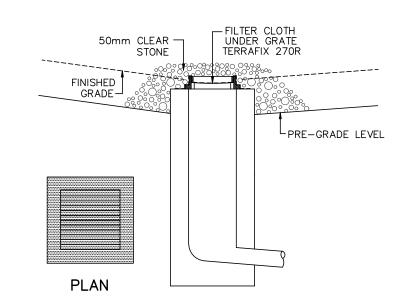

## DETAIL FOR RLCB/DICB SILT PROTECTION

FILTER CLOTH (INSERT) TO REMAIN ON OPEN SURFACE STRUCTURES SUCH AS MANHOLES AND CATCHBASINS UNTIL THESE STRUCTURES ARE COMMISSIONED AND PUT INTO USE, STREETS ARE ASPHALTED AND CURBED, AND THE SURROUNDING LANDSCAPE IS STABILIZED.

BULKHEAD BARRIERS TO BE INSTALLED OVER THE LOWER HALF OF THE OUTLETTING SEWERS (WHERE REQUIRED) TO

REDUCE SEDIMENT LOADINGS DURING CONSTRUCTION.

## EROSION AND SEDIMENT CONTROL NOTES:

PRIOR TO TOPSOIL STRIPPING, EARTHWORKS, OR UNDERGROUND CONSTRUCTION, EROSION AND SEDIMENT CONTROLS SHALL BE IMPLEMENTED TO THE SATISFACTION OF THE AUTHORITY HAVING JURISDICTION.

SEDIMENT CONTROL FENCE SHALL BE CLEANED AND MAINTAINED IN GOOD REPAIR BY CONTRACTOR.

SEDIMENT CONTROL FENCE TO REMAIN IN PLACE UNTIL THE WORKING AREA HAS BEEN STABILIZED AND REVEGETATED.

ACCUMULATED SEDIMENT TO BE REMOVED OFF SITE PRIOR TO THE REMOVAL OF SEDIMENT

CONTROL FENCE.

EROSION AND SEDIMENT CONTROL MEASURES MAY BE MODIFIED IN THE FIELD AT THE

DISCRETION OF THE CITY OF OTTAWA SITE INSPECTOR OR CONSERVATION AUTHORITY PERSONNEL.

CONTRACTOR MUST USE BEST MANAGEMENT PRACTICES (BMPS) FOR EROSION AND SEDIMENT

THE SILTATION CONTROL PLAN IS INTENDED TO ASSIST THE CONTRACTOR IN THE LAYOUT AND CONSTRUCTION OF THE SILTATION CONTROL FEATURES ONLY. THIS DRAWING SHALL

NOT BE USED FOR CONSTRUCTION OF SITE SERVICES.

MONITORING OF SEDIMENT AND EROSION CONTROLS
MONITORING AND REPORTING TO BE COMPLETED IN ACCORDANCE WITH THE
MINISTRY OF THE ENVIRONMENT AND CLIMATE CHANGE (MOECC) AND RIDEAU
VALLEY CONSERVATION AUTHORITY(RVCA) APPROVALS.

MAINTENANCE PROGRAM

ALL DAMAGED ESC MEASURES SHOULD BE REPAIRED AND/OR REPLACEMENT

MEASURES.

WITHIN 48 HOURS OF THE INSPECTION.

THE ENVIRONMENTAL MONITOR IS REQUIRED TO SUBMIT UPDATES TO THE TOWN/
REGION/ CONSERVATION AUTHORITY BY EMAIL IN A TIMELY MANNER.

SEDIMENT SHOULD BE REMOVED FROM THE SEDIMENT CONTROL FENCING
ONCE SEDIMENT HAS ACCUMULATED TO A LEVEL OF ONE-THIRD THE HEIGHT
OF FENCING OR TO A HEIGHT OF 30 cm. ANY AMOUNT OF ACCUMULATED
SEDIMENT SHOULD BE REMOVED PRIOR TO THE REMOVAL OF THE CONTROL

