EROSION AND SEDIMENT CONTROL NOTES

TEMPORARII Y OR PERMANENTLY CEASED.

1" REBAR FOR BAG REMOVAL FROM

EXPANSION RESTAINT

(1/4" NYLON ROPE, 2"

FLAT WASHERS)

BAG DETAIL

- 1. THE CONTRACTOR IS TO INSTALL LIGHT-DUTY SILT FENCE BARRIER PER OPSD 219.110 ON ALL LEGAL BOUNDARIES OF THE SITE, AND SHALL PROTECT ALL CATCHBASINS AND OTHER STORM INLETS ADJACENT TO THE SITE WITH SEDIMENT TRAPS AND GEOTEXTILE BETWEEN THE FRAMES AND GRATES. GEOTEXTILE FOR SILT FENCE PER OPSS
- 2. THE CONTRACTOR SHALL IMPLEMENT BEST MANAGEMENT PRACTICES, TO PROVIDE FOR PROTECTION OF THE AREA DRAINAGE SYSTEM AND THE RECEIVING WATERCOURSE, DURING CONSTRUCTION ACTIVITIES, THIS INCLUDES LIMITING THE AMOUNT OF EXPOSED SOIL, TEMPORARY SEDIMENT INLET CONTROL DEVICES TO BE IMPLEMENTED DURING CONSTRUCTION ON ALL PROPOSED ROAD CATCHBASINS, REARYARD CATCHBASINS AND CATCHBASIN MANHOLES AND OTHER SEDIMENT TRAPS. NO RECYCLED GEOSOCK MATERIAL SHALL BE PERMITTED FOR USE ON
- 3. AT THE DISCRETION OF THE PROJECT MANAGER OR CITY OF OTTAWA, ADDITIONAL SILT CONTROL DEVICES SHALL BE INSTALLED AT DESIGNATED LOCATIONS.
- 4. EXCEPT AS PROVIDED IN PARAGRAPHS 4.1., and 4.2. BELOW, STABILIZATION MEASURES SHALL BE INITIATED AS SOON AS FEASIBLE IN PORTIONS OF THE SITE WHERE CONSTRUCTION ACTIVITIES HAVE TEMPORARILY OR PERMANENTLY CEASED, BUT IN NO CASE MORE THAN 14 DAYS AFTER THE CONSTRUCTION ACTIVITY HAS
- 4.1. WHERE THE INITIATION OF STABILIZATION MEASURES BY THE 14TH DAY AFTER CONSTRUCTION ACTIVITY TEMPORARILY OR PERMANENTLY CEASE IS PRECLUDED BY SNOW COVER, STABILIZATION MEASURES SHALL BE 4.2. WHERE CONSTRUCTION ACTIVITY WILL RESUME ON A PORTION OF THE SITE WITHIN 21 DAYS FROM WHEN ACTIVITIES CEASED, (E.G. THE TOTAL TIME PERIOD THAT CONSTRUCTION ACTIVITY IS TEMPORARILY CEASED IS LESS THAN 21 DAYS) THEN STABILIZATION MEASURES DO NOT HAVE TO BE INITIATED ON THAT PORTION OF SITE BY THE 14TH DAY AFTER CONSTRUCTION ACTIVITY TEMPORARILY CEASED.
- 5. SEDIMENT THAT IS ACCUMULATED BY THE TEMPORARY EROSION AND SEDIMENT CONTROL MEASURES SHALL BE REMOVED IN A MANNER THAT AVOIDS ESCAPE OF THE SEDIMENT TO THE DOWNSTREAM SIDE OF THE CONTROL MEASURE AND AVOIDS DAMAGE TO THE CONTROL MEASURE. SEDIMENT SHALL BE REMOVED TO THE LEVEL OF HE GRADE EXISTING AT THE TIME THE CONTROL MEASURE WAS CONSTRUCTED AND BE ACCORDING TO THE


A DEPTH OF 300 MM IMMEDIATELY UPSTREAM OF THE CONTROL MEASURE


- FOR LIGHT-DUTY SEDIMENT BARRIERS, ACCUMULATED SEDIMENT SHALL BE REMOVED ONCE IT REACHES THE LESSER OF THE FOLLOWING: A DEPTH OF ONE-HALF THE EFFECTIVE HEIGHT OF THE CONTROL MEASURE.
- FOR ALL CONTROL MEASURES, ACCUMULATED SEDIMENT SHALL BE REMOVED AS NECESSARY TO PERFORM MAINTENANCE REPAIRS. ACCUMULATED SEDIMENT SHALL BE REMOVED PRIOR TO THE REMOVAL OF THE CONTROL MEASURE.
- ACCUMULATED SEDIMENT IS TO BE REMOVED AND DISPOSED OF AS PER OPSS 180. 6. ALL TEMPORARY EROSION AND SEDIMENT CONTROL MEASURES SHALL BE MONITORED TO ENSURE THEY ARE IN
- EFFECTIVE WORKING ORDER. THE CONDITION OF THE CONTROL MEASURES SHALL BE MONITORED PRIOR TO ANY FORECAST STORM EVENT AND FOLLOWING A STORM EVENT. 7. DUST CONTROL MEASURES SHOULD BE CONSIDERED PRIOR TO CLEARING AND GRADING. THE USE OF WATER, CALCIUM CHLORIDE FLAKES/SOLUTION OR MAGNESIUM CHLORIDE FLAKES/SOLUTION SHALL BE USED AS DUST
- SUPPRESSANTS AS PER OPS\$ 506. THIS IS TO LIMIT WIND EROSION OF SOILS WHICH MAY TRANSPORT SEDIMENTS OFFSITE, WHERE THEY MAY BE WASHED INTO THE RECEIVING WATER BY THE NEXT RAINSTORM.
- 8. ALL 'GREEN AREAS' TO BE TREATED WITH 150mm TOPSOIL AND SOD AS SOON AS FEASIBLE, AS PER OPSS 570. 9. TOPSOIL TO BE STRIPPED AND STOCKPILED FOR REHABILITATION. CLEAN FILL TO BE PLACED IN FILL AREAS AND
- 10. ALL DISTURBED AREAS TO BE RESTORED TO ORIGINAL CONDITION OR BETTER UNLESS OTHERWISE SPECIFIED. 11. STOCKPILED MATERIAL IS TO BE STORED AWAY FROM POTENTIAL RECEIVERS (E.G. STORM CATCHBASINS.
- MAINTENANCE HOLES), AND BE SURROUNDED BY EROSION CONTROL MEASURES WHERE MATERIAL IS LEFT IN PLACE IN EXCESS OF 14 DAYS. 12. IF REQUIRED, DEWATERING/SETTLING BASINS SHALL BE CONSTRUCTED AS PER OPSD 219.240 AND LOCATED ON
- FLAT GRADE UPSTREAM OF OTHER EXISTING MITIGATION MEASURES. WATERCOURSES SHALL NOT BE DIVERTED, OR BLOCKED, AND TEMPORARY WATERCOURSES CROSSINGS SHALL NOT BE CONSTRUCTED OR UTILIZED, UNLESS OTHERWISE SPECIFIED IN THE CONTRACT. IF CLOSURE OF ANY PERMANENT WATER PASSAGE IS NECESSARY. THE CONTRACTOR SHALL RELEASE ANY STRANDED FISH TO THE OPEN PORTION OF THE WATERCOURSE WITHOUT
- 13. ALL EROSION AND SEDIMENT CONTROL MEASURES SHALL CONFORM TO OPSS 577
- 14. WHERE DEWATERING IS REQUIRED, THE DISCHARGED WATER SHALL BE CONTROLLED IN ACCORDANCE WITH OPSS
- 15. ALL SETTLING/FILTRATION BASINS SHALL BE EQUIPPED WITH TERRAFIX 27 OR GEOTEXTILE (OR APPROVED EQUIVALENT) AND SHALL BE CLEANED AND REPLACED AS REQUIRED.

REMOVAL & REINSTATEMENT NOTES

COMPACTED TO 95% STANDARD PROCTOR DENSITY.

- 1. THE CONTRACTOR IS TO REVIEW ALL EXISTING SITE CONDITIONS AND USE THEIR PROFESSIONAL JUDGEMENT TO DETERMINE THE EXACT LIMITS OF REINSTATEMENT OUTSIDE OF THE SITE LIMIT. THE CONTRACTOR SHALL MINIMIZE DISTURBANCE TO ALL ADJACENT PROPERTIES. AND SHALL BE RESPONSIBLE TO REINSTATE ALL AREAS DISTURBED BY CONSTRUCTION TO PRE-CONSTRUCTION CONDITION OR BETTER, AND BEAR THE COST OF THE SAME. ANY ADDITIONAL DAMAGE TO ADJACENT PROPERTIES OR SITE FEATURES CAUSED BY CONSTRUCTION SHALL BE REPAIRED AT THE COST OF THE CONTRACTOR TO EXISTING CONDITIONS OR BETTER.
- 2. ALL ASPHALT, CONCRETE OR OTHER HARD SURFACES TO BE REMOVED SHALL BE NEATLY SAWCUT IN A STRAIGHT LINE PRIOR TO REMOVING WITH HEAVY EQUIPMENT
- 3. ROAD REINSTATEMENT WITHIN THE CITY ROW SHALL BE COMPLETED PER CITY OF OTTAWA DETAIL R10 COMPLETE WITH ASPHALT KEY. 3.1. ASPHALT SHALL BE REINSTATED WITH A MINIMUM OF
- 40mm SP12.5 TOP COURSE 3.3. 50mm SP19 BASE COURSE
- 150mm GRANULAR A 3.5. 450mm GRANULAR B
- 4. SHOULD THE ACTUAL PAVEMENT STRUCTURE BE GREATER THAN WHAT IS STATED IN NOTE 3, THE CONTRACTOR SHALL MATCH THE EXISTING THICKNESS.
- ALL GROUND SURFACES SHALL BE EVENLY GRADED WITHOUT PONDING AREAS AND WITHOUT LOW POINTS EXCEPT WHERE APPROVED SWALE OR CATCH BASIN OUTLETS ARE PROVIDED.
- 6. CONTRACTOR TO ADJUST EXISTING CATCH BASINS, MANHOLES, FIRE HYDRANTS, VALVE CHAMBERS AND VALVE BOXES TO FINAL GRADE AS REQUIRED.
- 7. GRADING IN GRASSED AREAS WILL BE BETWEEN 2% TO 7%. GRADES IN EXCESS OF 7% WILL REQUIRE A MAXIMUM
- 8. CONTRACTOR TO SECURE CONSTRUCTION SITE WITH MODULOC FENCING, HOARDING OR OTHER APPROPRIATE PROTECTION PRIOR TO, AND FOR THE DURATION OF CONSTRUCTION

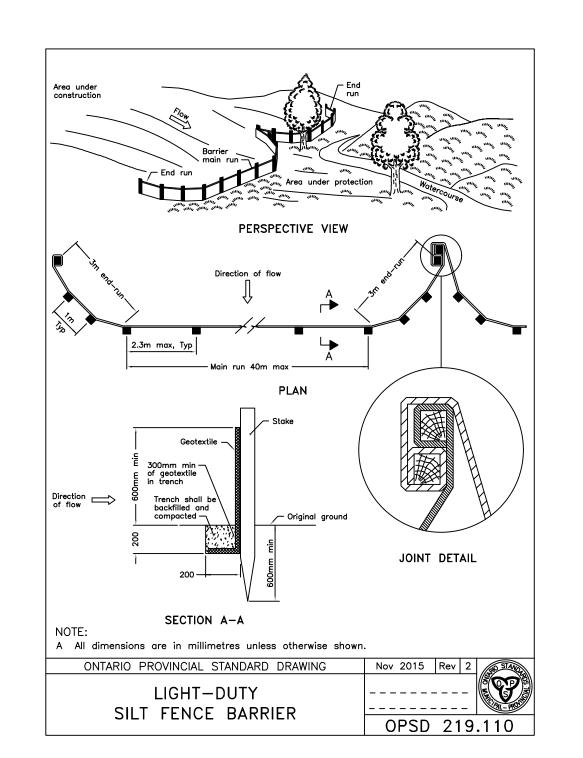

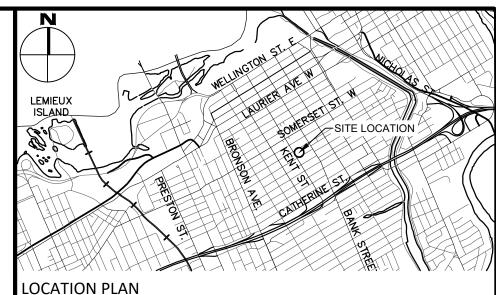

LEGEND


PROPERTY LINE EXISTING VALVE, VALVE CHAMBER & FIRE HYDRANT

EXISTING SEWER MAINTENANCE STRUCTURE

EXISTING CATCHBASIN

PROPOSED SEDIMENT PROTECTION FOR CATCHBASINS

PROPOSED LIGHT-DUTY SILT FENCE PER OPSD




PROPOSED PARTIAL OR FULL DEPTH REMOVAL OF ASPHALT, CONCRETE, OR INTERLOCKING BRICK PAVERS

02 REISSUED FOR SITE PLAN CONTROL AUG. 31/2023 ISSUED FOR SITE PLAN CONTROL FEB. 23/2023 Date Check and verify all dimensions


SCALE 1:200

McINTOSH PERRY 115 Walgreen Road, RR3, Carp, ON KOA 1L0

Tel: 613-836-2184 Fax: 613-836-3742 www.mcintoshperry.com



before proceeding with the work




Do not scale drawings

KATASA GROUPE + DÉVELOPPMENT 69 RUE JEAN-PROULX #301 GATINEAU, QC, J8Z 1W2

9-STOREY RESIDENTIAL MIXED USE BUILDING 381 KENT STREET, OTTAWA, ON

EXISTING CONDITIONS, REMOVALS AND **EROSION & SEDIMENT CONTROL PLAN**

1:200 CCO-23-3187 J.H. Orawing Number: R.F. C100 Designed By:

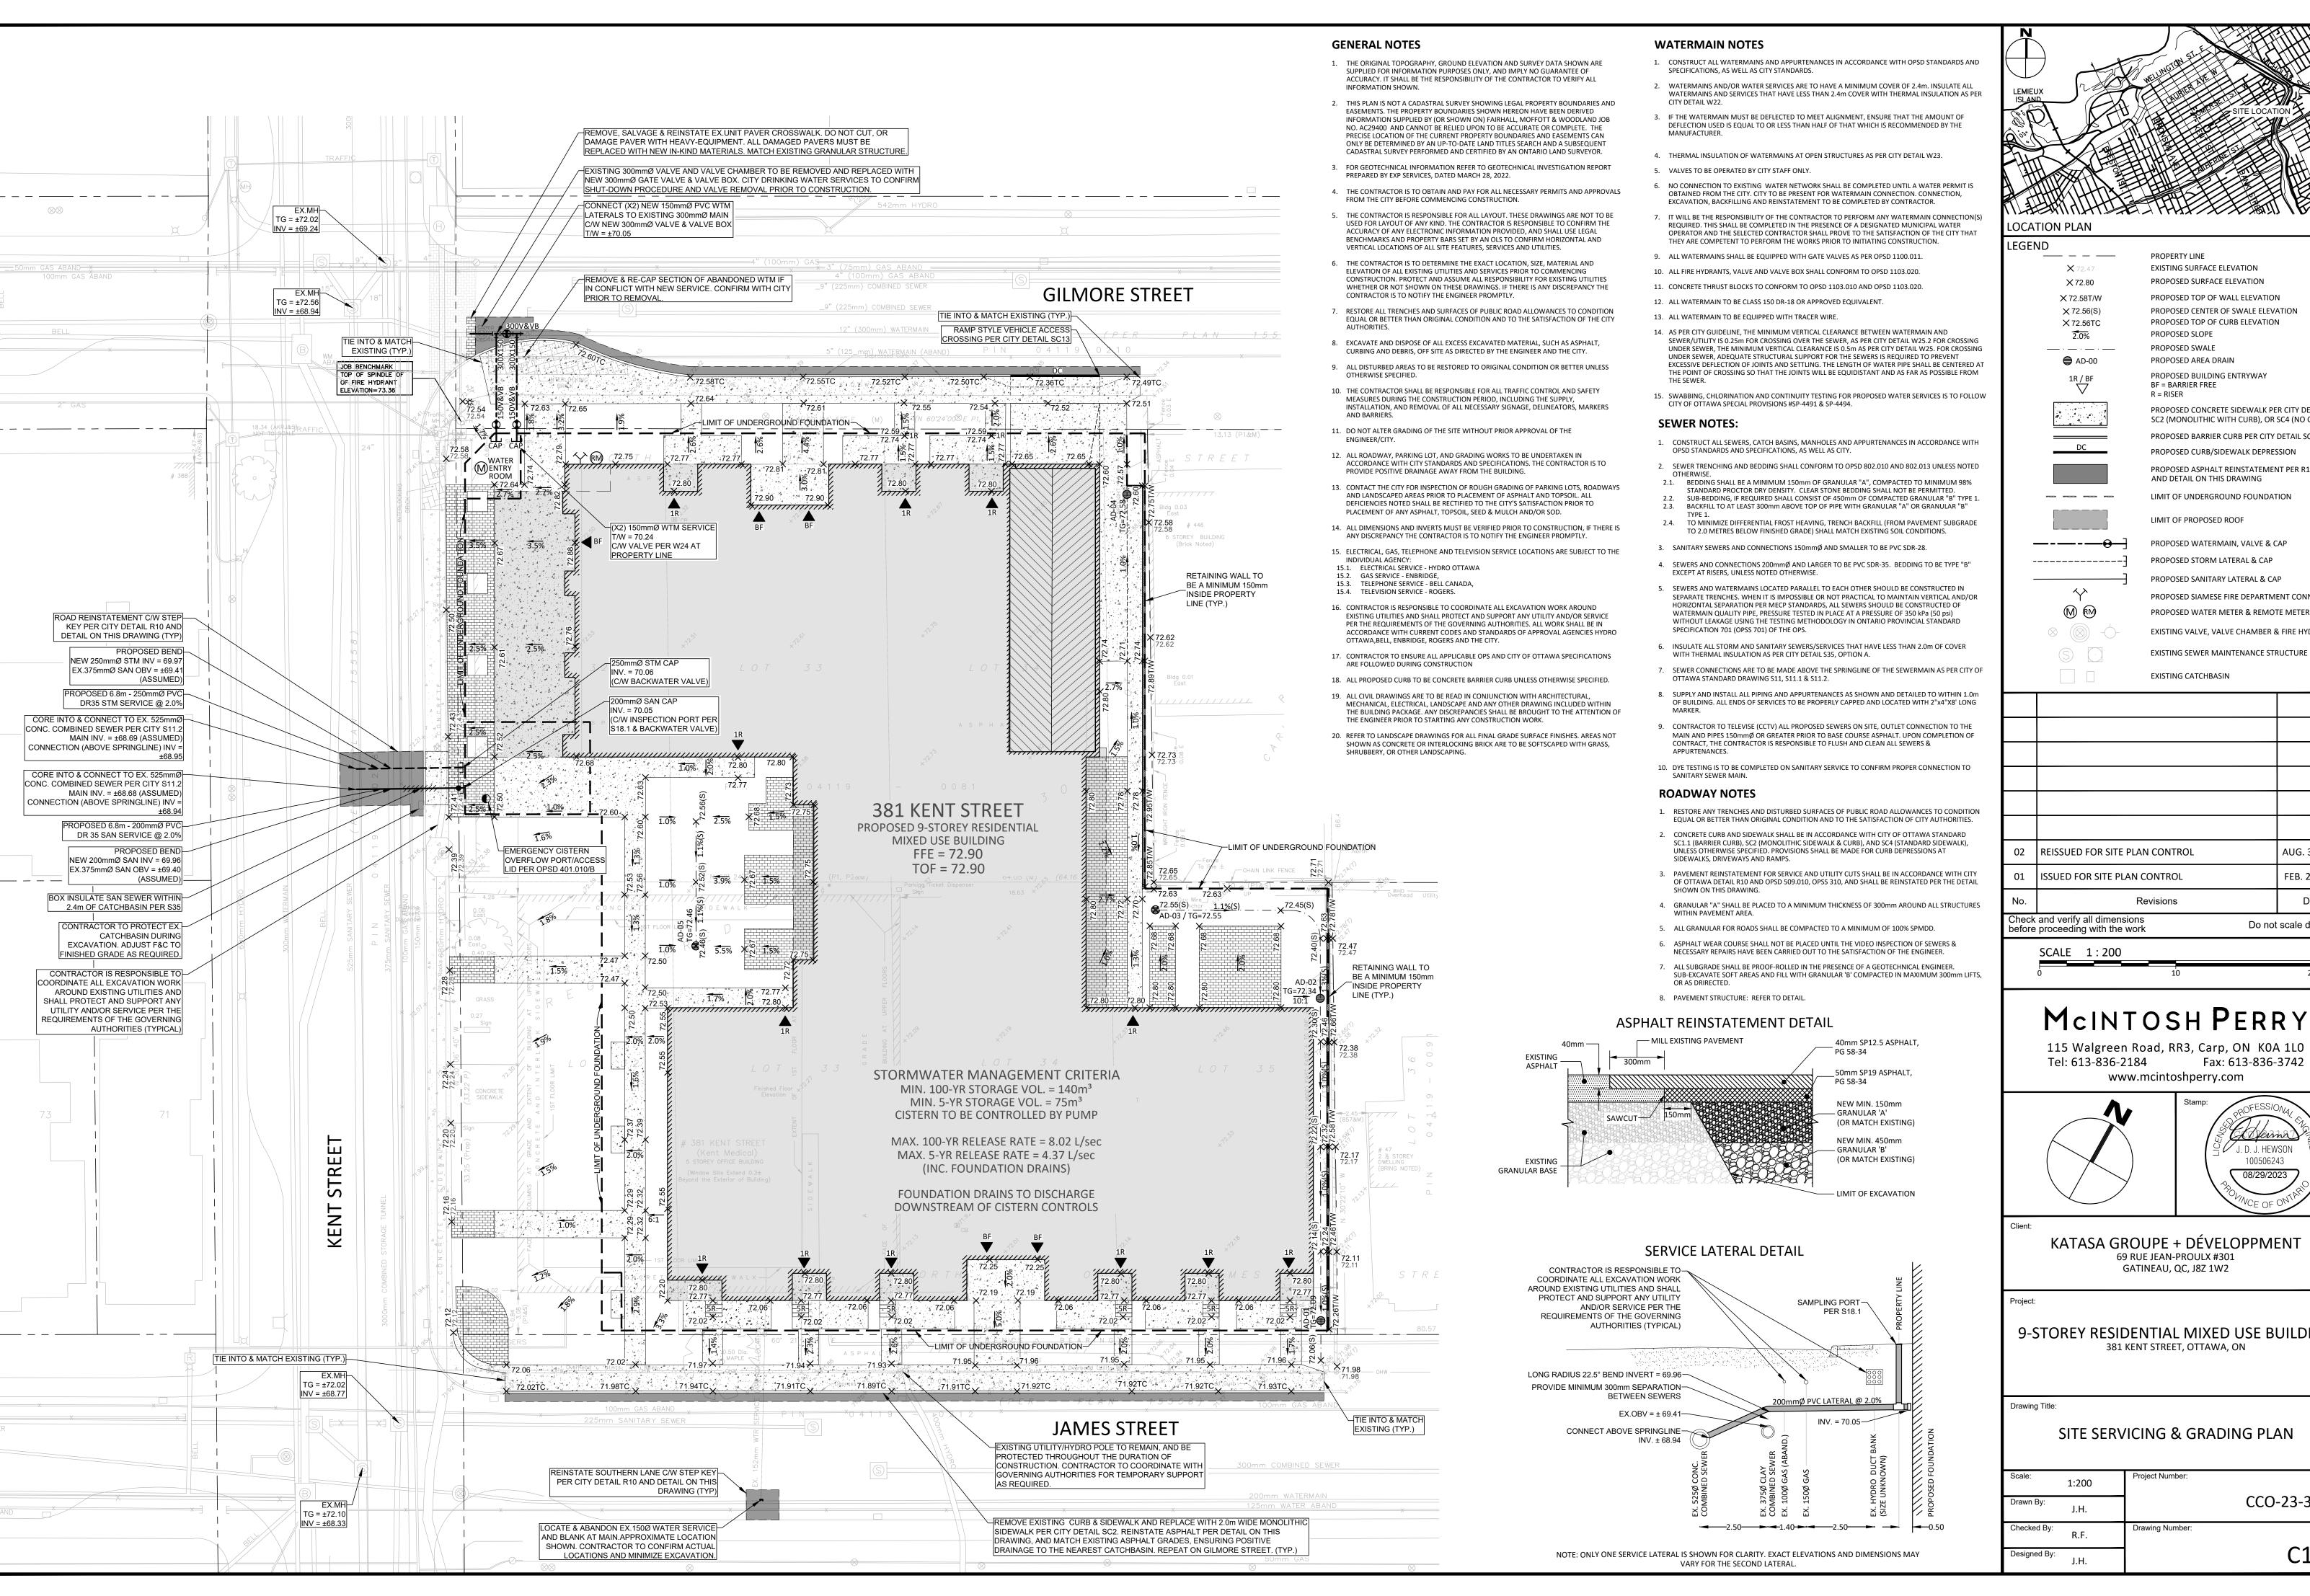





2.0%

AD-00

EXISTING SURFACE ELEVATION PROPOSED SURFACE ELEVATION PROPOSED TOP OF WALL ELEVATION X 72.58T/W X 72.56(S) PROPOSED CENTER OF SWALE ELEVATION PROPOSED TOP OF CURB ELEVATION X 72.56TC

PROPOSED SLOPE PROPOSED SWALE PROPOSED AREA DRAIN

LIMIT OF PROPOSED ROOF

EXISTING CATCHBASIN

PROPOSED WATERMAIN, VALVE & CAP

PROPOSED SANITARY LATERAL & CAP

PROPOSED SIAMESE FIRE DEPARTMENT CONNECTION

EXISTING VALVE, VALVE CHAMBER & FIRE HYDRANT

AUG. 31/2023

FEB. 23/2023

Date

Do not scale drawings

PROPOSED WATER METER & REMOTE METER

EXISTING SEWER MAINTENANCE STRUCTURE

PROPOSED STORM LATERAL & CAP

PROPOSED BUILDING ENTRYWAY BF = BARRIER FREE R = RISER


SC2 (MONOLITHIC WITH CURB), OR SC4 (NO CURB) PROPOSED BARRIER CURB PER CITY DETAIL SC1.1 PROPOSED CURB/SIDEWALK DEPRESSION

PROPOSED CONCRETE SIDEWALK PER CITY DETAIL

PROPOSED ASPHALT REINSTATEMENT PER R10,

AND DETAIL ON THIS DRAWING ---LIMIT OF UNDERGROUND FOUNDATION

> 115 Walgreen Road, RR3, Carp, ON KOA 1L0 Tel: 613-836-2184 Fax: 613-836-3742 www.mcintoshperry.com





KATASA GROUPE + DÉVELOPPMENT 69 RUE JEAN-PROULX #301 GATINEAU, QC, J8Z 1W2

9-STOREY RESIDENTIAL MIXED USE BUILDING 381 KENT STREET, OTTAWA, ON

Drawing Title:

SITE SERVICING & GRADING PLAN

1:200 CCO-23-3187 J.H. Checked By: Orawing Number: R.F. C101 Designed By: