





ROADSIDE CATCH BASIN PROTECTION DETAIL:TERRAFIX SILTSACK

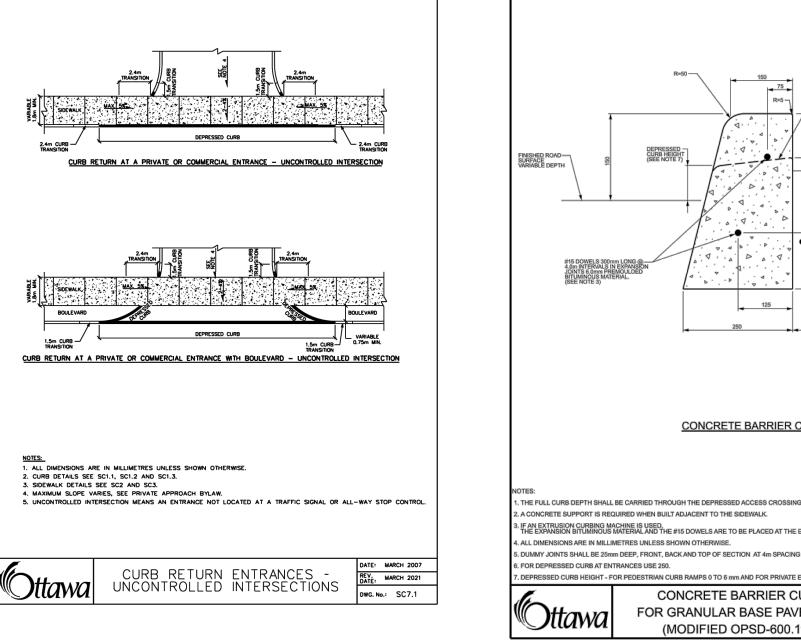

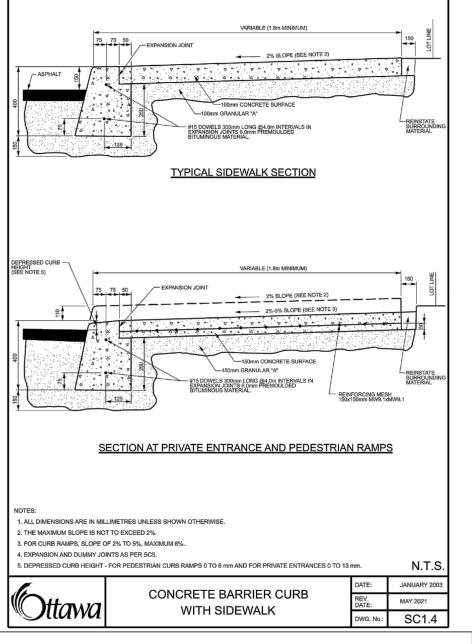

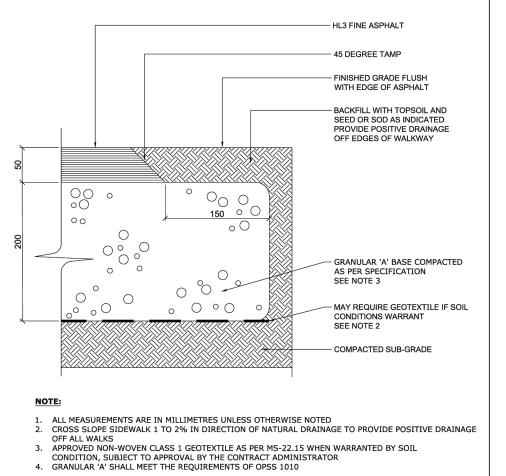

ASPHALT WALKWAY

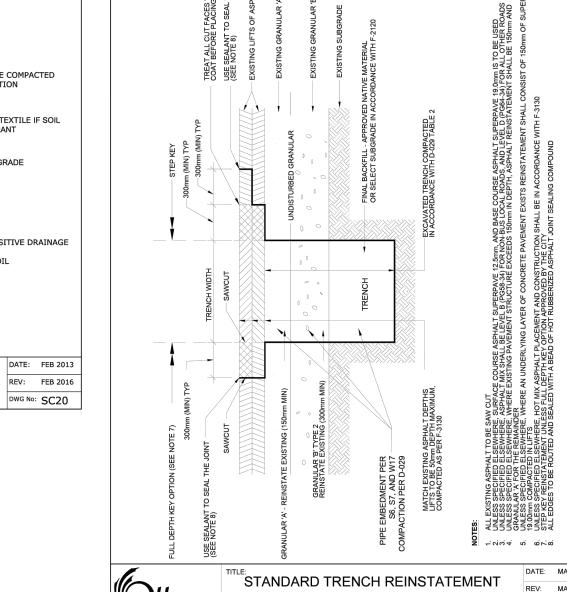

IN PAVED SURFACE



Stantec Consulting Ltd. 400 - 1331 Clyde Avenue Ottawa ON

Tel. 613.722.4420 www.stantec.com

Copyright Reserved

The Contractor shall verify and be responsible for all dimensions. DO NOT scale the drawing - any errors or omissions shall be reported to Stantec without delay The Copyrights to all designs and drawings are the property of Stantec. Reproduction or use for any purpose other than that

CONCRETE BARRIER CURB

FOR GRANULAR BASE PAVEMENT

(MODIFIED OPSD-600.110)

TYPICAL SIDEWALK SECTION

2% SLOPE (SEE NOTE 2) _______

SECTION AT PRIVATE ENTRANCE AND PEDESTRIAN RAMPS

N.T.S.

MAY 2021

DWG No: R10

DWG. No.: SC2

1. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS SHOWN OTHERWISE

5. DEPRESSED CURB HEIGHT - FOR PEDESTRIAN CURB RAMPS 0 TO 6 mm AND FOR PRIVATE ENTRANCES 0 TO 13 mm.

MONOLITHIC CONCRETE CURB

AND SIDEWALK

2. THE MAXIMUM SLOPE IS NOT TO EXCEED 2%.

4. EXPANSION AND DUMMY JOINTS AS PER SC5.

3. FOR CURB RAMPS, SLOPE OF 2% TO 5%, MAXIMUM 8%,

D s. . . D

PROPOSED SILT FENCE BOUNDARY AS PER OPSD 219.110

PROPOSED MUD MAT LOCATION

authorized by Stantec is forbidden.

PROPOSED CATCH BASIN PROTECTION AS PER DETAIL

EXISTING STORM MANHOLE

PROPOSED SANITARY MANHOLE

EXISTING SANITARY MANHOLE

EXISTING CATCH BASIN

Best Management Practices

CONTRACTOR TO PROVIDE EROSION AND SEDIMENT CONTROLS (BEST MANAGEMENT PRACTICES)

DURING CONSTRUCTION OF THIS PROJECT. EROSION MUST BE MINIMIZED AND SEDIMENTS MUST BE REMOVED FROM CONSTRUCTION SITE RUN-OFF IN ORDER TO PROTECT DOWNSTREAM AREAS. DURING ALL CONSTRUCTION, EROSION

- LIMIT THE EXTENT OF EXPOSED SOILS AT ANY GIVEN TIME.
- REVEGETATE EXPOSED AREAS AND SLOPES AS SOON AS POSSIBLE.
- MINIMIZE AREA TO BE CLEARED AND GRUBBED.

SANITARY SEWER SYSTEMS.

PROTECT EXPOSED SLOPES WITH PLASTIC OR SYNTHETIC MULCHES.

AND SEDIMENTATION SHOULD BE CONTROLLED BY THE FOLLOWING TECHNIQUES:

- INSTALL FILTER CLOTH BETWEEN FRAME AND COVER ON ALL PROPOSED CATCH BASINS AND CATCH BASIN MANHOLES AND ON ALL EXISTING CATCH BASINS THAT WILL RECEIVE RUN-OFF
- A SILT FENCE SHALL BE INSTALLED AROUND THE PERIMETER OF ALL AND ANY STOCKPILES
- OF MATERIAL TO BE USED OR REMOVED FROM SITE. (LOCATION TO BE DETERMINED)
- A VISUAL INSPECTION SHALL BE DONE DAILY ON SEDIMENT CONTROL MEASURES AND CLEANED OF ANY ACCUMULATED SILT AS REQUIRED. THE DEPOSITS WILL BE DISPOSED OFF SITE AS PER THE REQUIREMENTS OF THE CONTRACT.
- SEDIMENT CONTROL BARRIERS MAY ONLY BE REMOVED TEMPORARILY WITH APPROVAL OF CONTRACT ADMINISTRATOR TO ACCOMMODATE CONSTRUCTION OPERATIONS. ALL AFFECTED BARRIERS MUST BE REINSTATED AT NIGHT WHEN CONSTRUCTION IS COMPLETED NO REMOVAL WILL OCCUR IF THERE IS A SIGNIFICANT RAINFALL EVENT ANTICIPATED (>10mm) UNLESS A NEW DEVICE HAS BEEN INSTALLED TO PROTECT THE EXISTING STORM AND
- NO REFUELING OR CLEANING OF EQUIPMENT IS PERMITTED NEAR ANY EXISTING WATERWAY.
- THE CONTRACT ADMINISTRATOR. THE MEASURE(S) IS NO LONGER REQUIRED. NO CONTROL MEASURES SHALL BE PERMANENTLEY REMOVED WITHOUT PRIOR WRITTEN AUTHORIZATION FROM THE CONTRACT ADMINISTRATOR.
- THE CONTRACTOR SHALL PERIODICALLY, OR WHEN REQUESTED BY THE CONTRACT ADMINISTRATOR, CLEAN OUT ACCUMULATED SEDIMENTS AS REQUIRED.
- THE CONTRACTOR SHALL IMMEDIATELY REPORT TO THE ENGINEER ANY ACCIDENTAL DISCHARGES OF SEDIMENT MATERIAL INTO THE WATERCOURSE. APPROPRIATE RESPONSE MEASURES, INCLUDING ANY REPAIRS TO EXISTING CONTROL MEASURES OR THE IMPLEMENTATION OF ADDITIONAL CONTROL MEASURES, SHALL BE CARRIED OUT BY THE CONTRACTOR WITHOUT DELAY.
- 13. CONTRACTOR SHALL INSTALL MUD MATS AT ALL ENTRANCES TO THE SITE.

CONTRACTOR IS RESPONSIBLE TO KEEP THE ROADS FREE AND CLEAR OF MUD AND DEBRIS. 25.04.23 REVISED PER CITY COMMENTS DT WJ DT REVISED ROAD GEOMETRY 24.09.18 24.08.13 REVISED PER CITY COMMENTS DT 24.05.27 23.06.07 ISSUED FOR REVIEW

By Appd. YY.MM.DD

File Name: 160401786 DB.dwg

KK TM 23.03.15 Dwn. Chkd. Dsgn. YY.MM.DD Permit-Seal

Client/Project Project1 Studio

Revision

47 BEECHWOOD AVENUE

OTTAWA, ONTARIO, CANADA

EROSION CONTROL AND DETAILS SHEET

Project No. Scale 1604001786 Sheet Drawing No. Revision

PLAN # 19043

ORIGINAL SHEET - ARCH D

MUD MAT ENTRANCE DETAIL