Orange _ Construction #12 Gauge wire (Woven Fence at top of fence) 1.2m Min – FILTER FABRIC ATTACHED TO FENCE AND STAPLED (AS DIRECTED) FILTER FABRIC ONLY REQUIRED AS DIRECTED FENCING IS A PART OF EROSION CONTROL PLANS. DETAIL SILT FENCE SCALE N.T.S. CS301 - EXISTING PAVEMENT PROPOSED PAVEMENT — <u>3</u>00mm MIN. 40mm HL3 OVERLAY HL4 BASE COURSE 40/60mm

COLD PLANE / MILL EXISTING EDGE OF PAVEMENT MIN. 300mm WIDE BY 40mm DEEP

ASPHALT LAP JOINT CS301

SAW CUT PAVEMENT AND SHOULDER — WIDE. PLACE HL4 UP TO EX. ASPHALT


GRANULAR BASE


PAVEMENT DEPTHS:


- HL3 SURFACE COURSE 40mm


- HL4 BASE COURSE 40/60mm

GRANULAR BASE:
- 150mm GRANULAR 'A'
- 450mm GRANULAR 'B' OR TO MATCH EXISTING

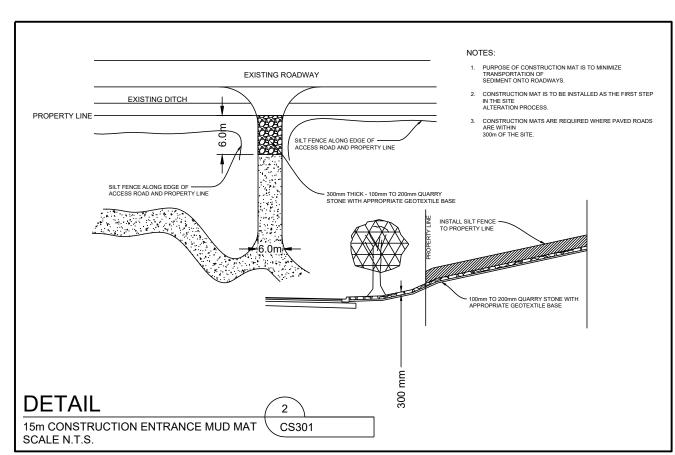

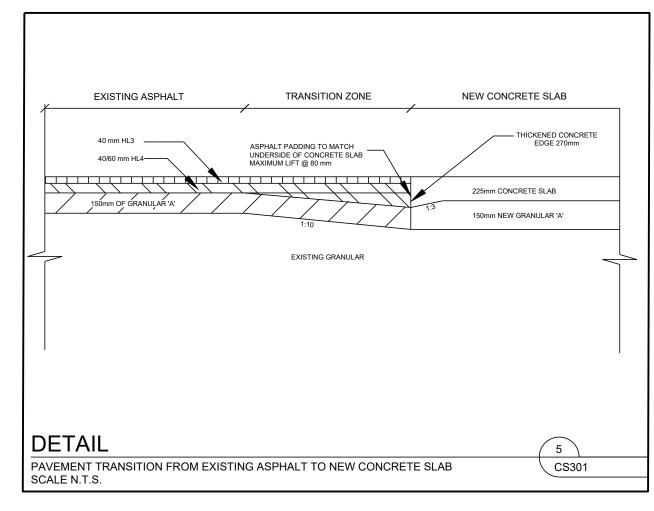

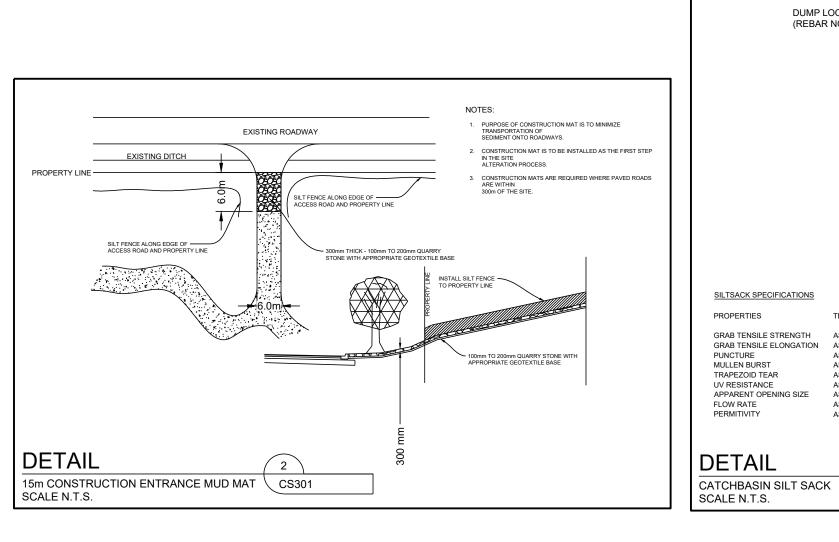

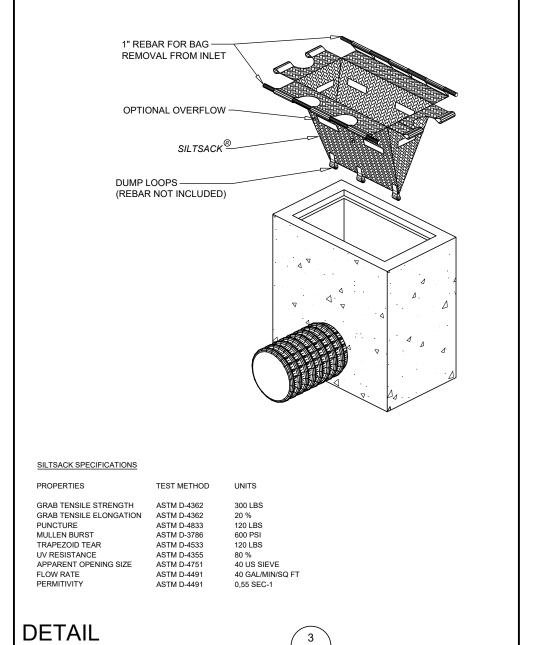

CS301



Chick-fil-A 5200 Buffington Road Atlanta, Georgia 30349-2998

exp Services Inc. t: +1,905,793,9800 | f: +1,905,793,0641 1595 Clark Boulevard Brampton, ON L6T 4V1 Canada

www.exp.com

• BUILDINGS • EARTH & ENVIRONMENT • ENERGY • • INDUSTRIAL • INFRASTRUCTURE • SUSTAINABILITY

10/04/2024

FSR#30038

XXXXXXXX

RELEASE:

REVISION SCHEDULE

NO. DATE DESCRIPTION A 2024-10-04 FOR SPA

CONSULTANT PROJECT #
BRM0023002042-H0 OCTOBER 2024

Information contained on this drawing and in all digital files produced for above named project may not be reproduced in any manner without express written or verbal consent from

eq

DETAILS