

NOTE: THIS DRAWING IS THE PROPERTY OF THE ARCHITECT AND MAY NOT BE REPRODUCED OR USED WITHOUT THE EXPRESSED CONSENT OF THE ARCHITECT. THE CONTRACTOR SHALL CHECK AND VERIFY ALL DIMENSIONS AND REPORT ANY OMISSIONS OR DISCREPANCIES TO THE ARCHITECT BEFORE PROCEEDING WITH THE WORK.

DO NOT SCALE THE DRAWINGS

RELEASE / REVISION RECORD

No.	Description	Date
1	ISSUED FOR PROGRESS MEETING	21-03-18
2	ISSUED FOR COORDINATION	21-04-14
3	ISSUED FOR COORDINATION	21-05-04
4	ISSUED FOR COORDINATION	21-09-09
5	ISSUED FOR SITE PLAN CONTROL	21-10-26
6	ISSUED FOR COORDINATION	22-02-25
7	ISSUED FOR COORDINATION	22-03-09
8	ISSUED FOR 151 RESPONSE TO SPC COMMENTS	22-04-07

LEGEND AND ABBREVIATIONS

- BUILDING EXIT
- DIRECTIONAL TRAFFIC ARROW
- UNIT EXIT DIRECTION ARROW
- BUILDING ABOVE, INCLUDING PERMITTED PROJECTIONS
- ASHPALT SIDEWALK, REFER TO CIVIL, LANDSCAPE
- EXISTING ADJACENT BUILDINGS
- CONCRETE SIDEWALK, REFER TO CIVIL, LANDSCAPE
- INTERLOCK, REFER TO CIVIL, LANDSCAPE
- BICYCLE PARKING
- F.Y.S FRONT YARD SETBACK
- R.Y.S REAR YARD SETBACK
- S.Y.S SIDE YARD SETBACK
- CB CATCH BASIN
- FH FIRE HYDRANT
- SHRUB, REFER TO LANDSCAPE

Zoning Information: MC16 H(20)
City of Ottawa Consolidated Zoning By-law 2008-250


Proposed 6 Storey Mixed-Use Building

Zone Provisions	Required	Proposed	Variance Required
Mixed-Use Centre Zone, Subzone 16 (Sections 191-192)			
Minimum Lot Area (m ²)	No minimum	724.7	No
Minimum Lot Width (m)	No minimum	22.86	No
Minimum Front Yard (m)	GF - 2m 4th floor, & above - 4m	GF - 3m 4th to 6th - 3m	Yes
Minimum Interior Side Yard Setback (m)	No minimum	0.2m on South & 0.1m on North	No
Minimum Rear Yard Setback (m)	Floors 1-3 - 3m Floors 4-8 - 7.5m	Floors 1-3 - 5.1m Floors 4-8 - 7m	Yes
Maximum Building Height (m)	20m	19.5m	No
Maximum Floor Space Index	No maximum	N/A	No
Parking Requirements (Section 100-114)			
Minimum Parking Space Rates (Area 2)	0	0	No
Visitor Parking (Below Grade, 0.1 spaces per unit after the first twelve units)	2	4	No
Bicycle Parking (Below Grade, 0.5 spaces per unit)	16	28	No
Amenity Area (Section 137)			
Minimum Total Amenity Area (sq.m) (6 sq.m. per dwelling unit)	192m ²	418m ²	No
Minimum Communal Amenity Area (sq.m) (50% of total required amenity)	96m ²	Communal = 190m ² Private = 238m ²	No

General Information


Unit Breakdown

Number of Studio Suites	0
Number of One Bedroom Suites	10
Number of One Bedroom plus Suites	0
Number of Two Bedroom Suites	22
TOTAL	32

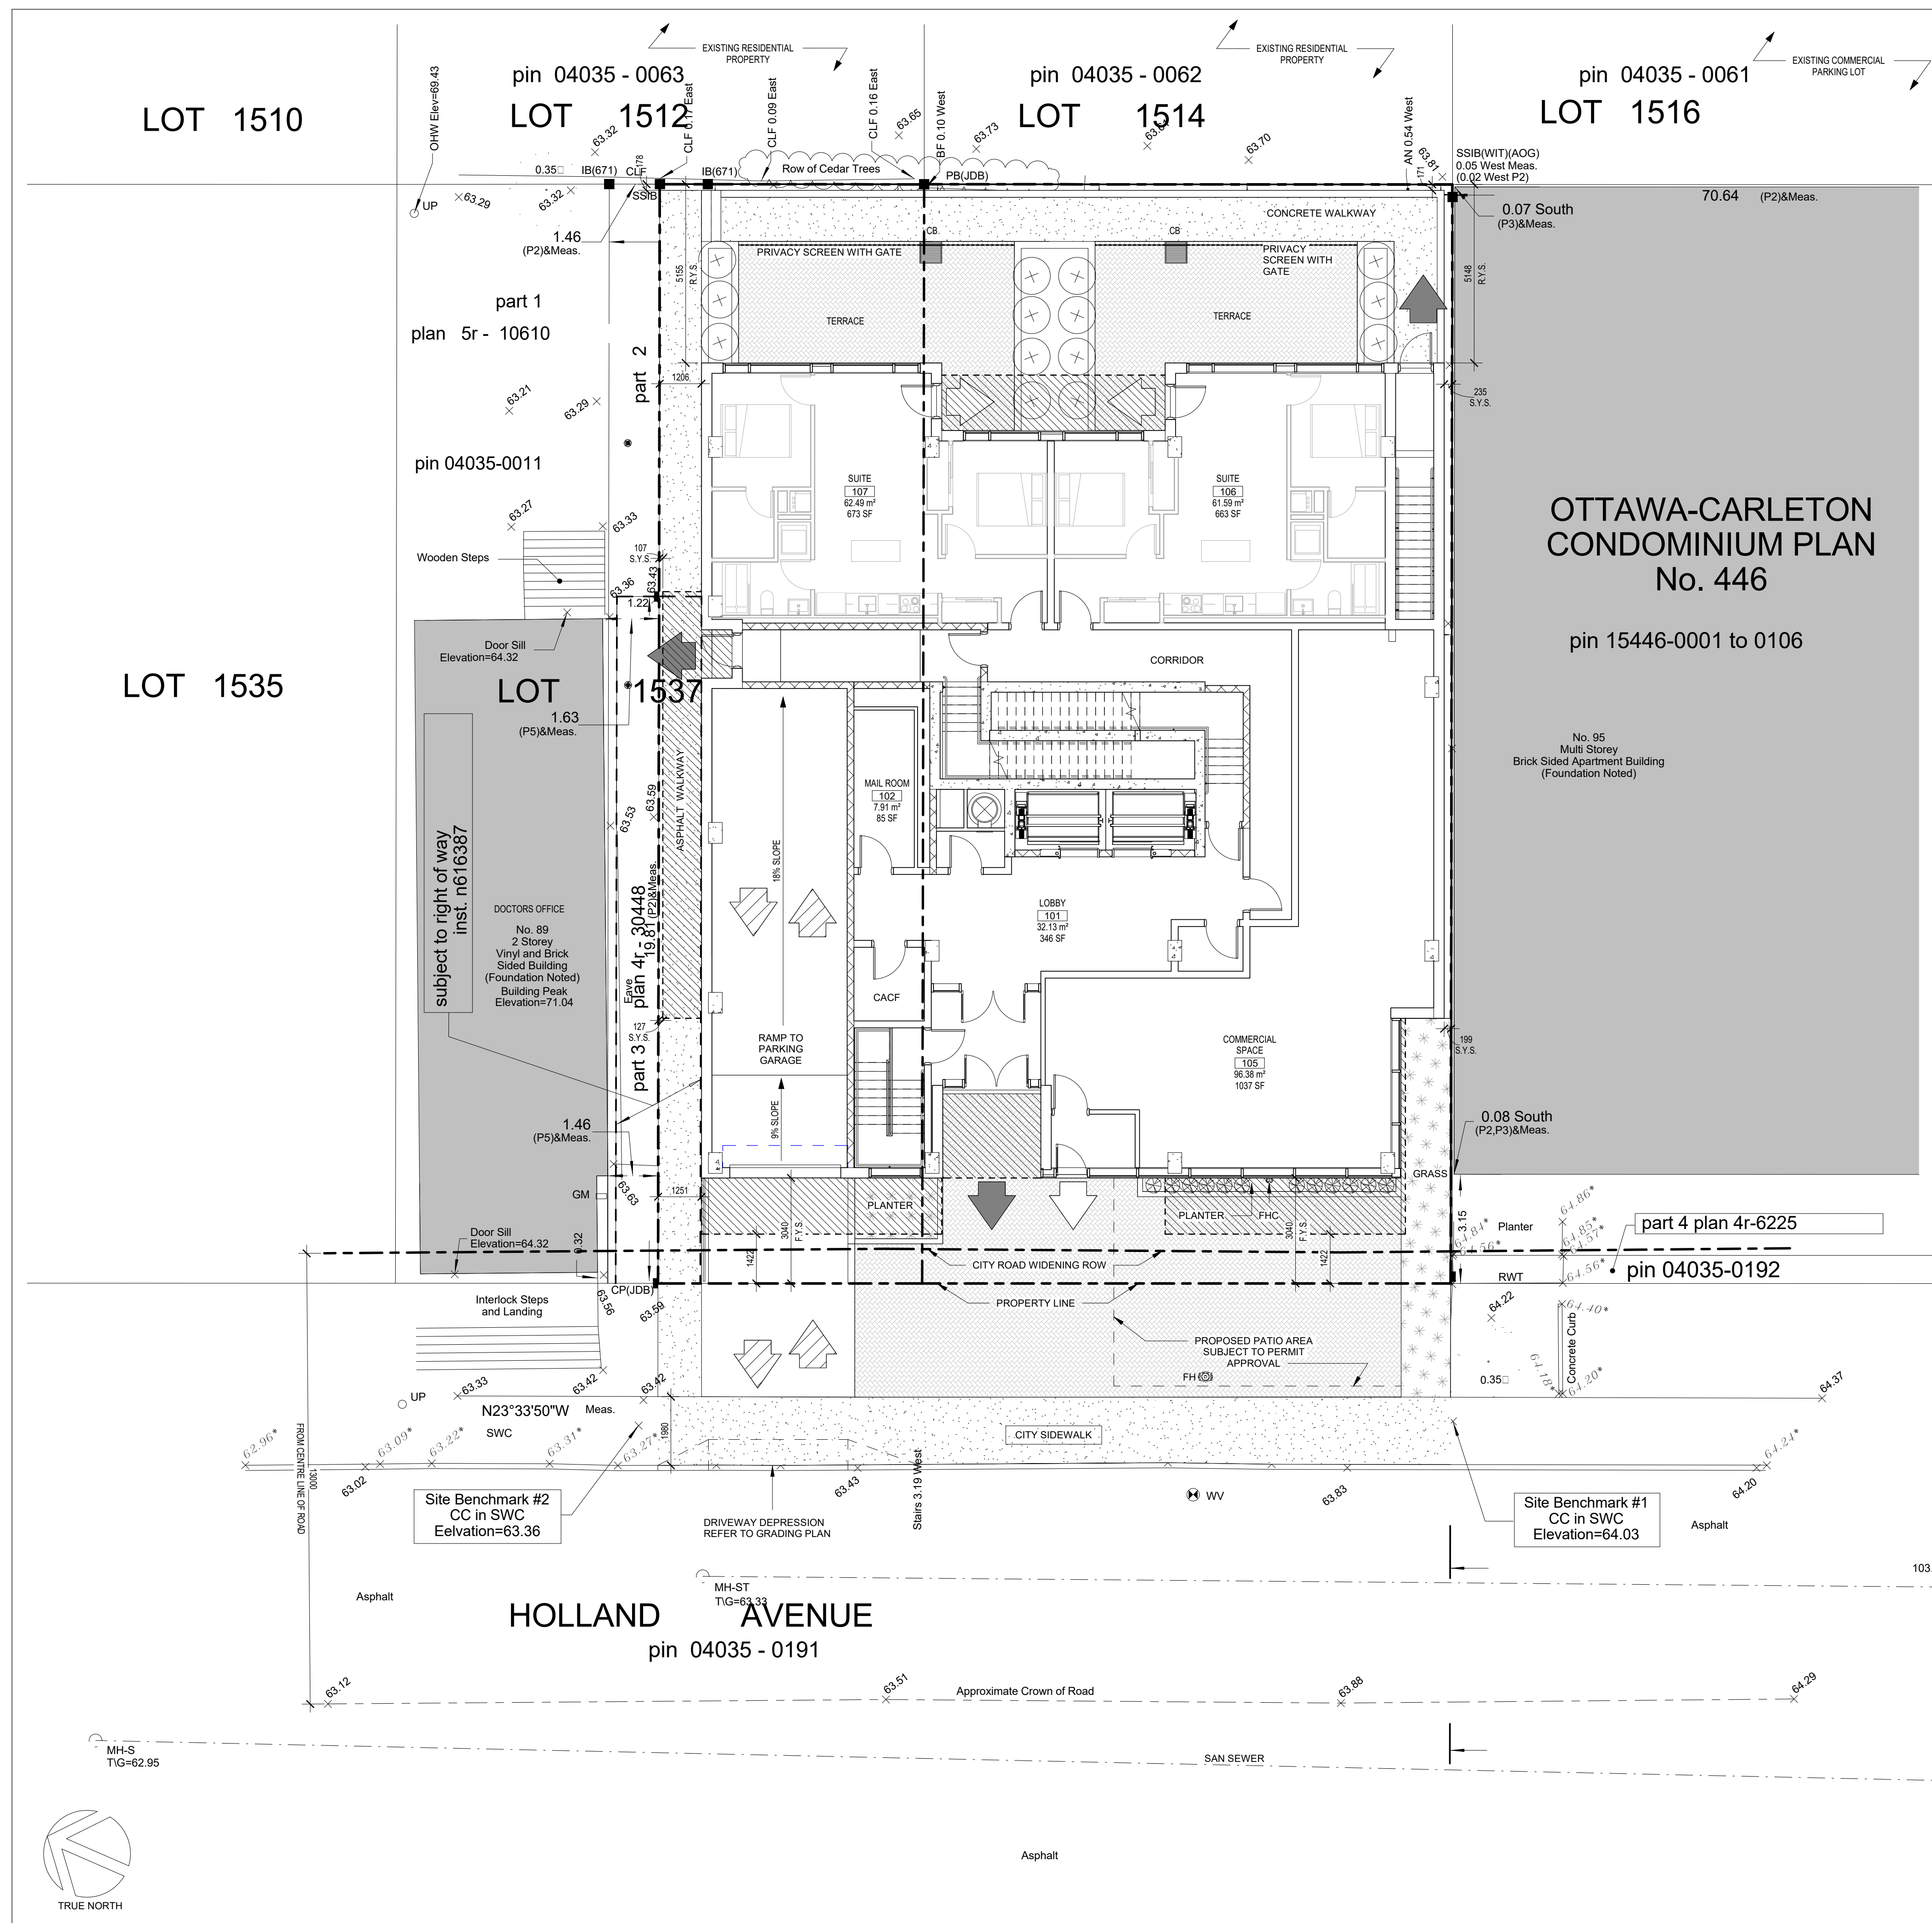

1 SITE AT GROUND LEVEL
SP-02 SCALE 1 : 100

OWNER
93 HOLLAND : 2364672 ONT. INC.
91 HOLLAND : 2546928 ONT. INC.
dnicholson@beamteam.com
613-277-7201

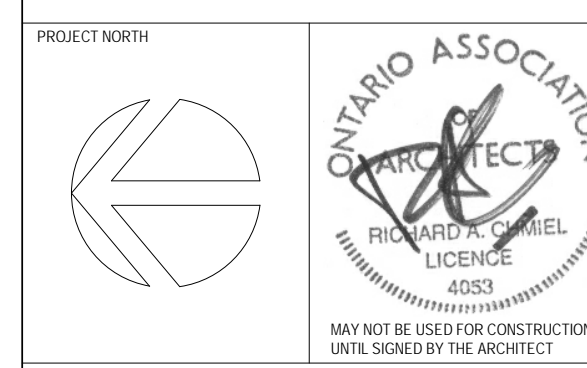

chmielarchitects
200 - 109 Bank Street
Ottawa, ON K1P 5N5
t (613) 234-3585
f (613) 234-6224

Six-Storey Residential on Holland
91-93 Holland Avenue

PROJECT NO.	DRAWN
20-1898	CG
SCALE	CHECKED
As indicated	RAC

DRAWING TITLE
SITE PLAN AT GROUND FLOOR LEVEL

DRAWING NO.

SP-02

#18605

D07-12-21-0180